

DDM Brands LLC

GSM Mobile Phone

Main Model: GALA P730
Serial Model: N/A

6th November, 2012
Report No.: 12070294-FCC-R3
(This report supersedes NONE)



Modifications made to the product : None

This Test Report is Issued Under the Authority of:

Back Huang Compliance Engineer	Alex Liu Technical Manager	

This test report may be reproduced in full only.
Test result presented in this test report is applicable to the representative sample only.

RF Test Report

SIEMIC, INC.
Accessing global markets

FCC Part 15.247: 2012

**SIEMIC, INC.**

Title: RF Test Report for GSM Mobile Phone
Main Model: GALA P730
Serial Model: N/A
To: FCC Part 15.247: 2012 (KDB 558074)

Serial#: 12070294-FCC-R3
Issue Date: 6th November, 2012
Page: 2 of 78
www.siemic.com.cn

Laboratory Introduction

SIEMIC, headquartered in the heart of Silicon Valley, with superior facilities in US and Asia, is one of the leading independent testing and certification facilities providing customers with one-stop shop services for Compliance Testing and Global Certifications.



In addition to testing and certification, SIEMIC provides initial design reviews and compliance management through out a project. Our extensive experience with China, Asia Pacific, North America, European, and international compliance requirements, assures the fastest, most cost effective way to attain regulatory compliance for the global markets.

Accreditations for Conformity Assessment

Country/Region	Accreditation Body	Scope
USA	FCC, A2LA	EMC , RF/Wireless , Telecom
Canada	IC, A2LA, NIST	EMC, RF/Wireless , Telecom
Taiwan	BSMI , NCC , NIST	EMC, RF, Telecom , Safety
Hong Kong	OFTA , NIST	RF/Wireless , Telecom
Australia	NATA, NIST	EMC, RF, Telecom , Safety
Korea	KCC/RRA, NIST	EMI, EMS, RF , Telecom, Safety
Japan	VCCI, JATE, TELEC, RFT	EMI, RF/Wireless, Telecom
Mexico	NOM, COFETEL, Caniety	Safety, EMC , RF/Wireless, Telecom
Europe	A2LA, NIST	EMC, RF, Telecom , Safety

Accreditations for Product Certifications

Country/Region	Accreditation Body	Scope
USA	FCC TCB, NIST	EMC , RF , Telecom
Canada	IC FCB , NIST	EMC , RF , Telecom
Singapore	iDA, NIST	EMC , RF , Telecom
EU	NB	EMC & R&TTE Directive
Japan	MIC, (RCB 208)	RF , Telecom
Hong Kong	OFTA (US002)	RF , Telecom



SIEMIC, INC.

Accessing global markets

Title: RF Test Report for GSM Mobile Phone
Main Model: GALA P730
Serial Model: N/A
To: FCC Part 15.247: 2012 (KDB 558074)

Serial#: 12070294-FCC-R3
Issue Date: 6th November, 2012
Page: 3 of 78
www.siemic.com.cn

This page has been left blank intentionally.

**SIEMIC, INC.**

Title: RF Test Report for GSM Mobile Phone
Main Model: GALA P730
Serial Model: N/A
To: FCC Part 15.247: 2012 (KDB 558074)

Serial#: 12070294-FCC-R3
Issue Date: 6th November, 2012
Page: 4 of 78
www.siemic.com.cn

CONTENTS

1	EXECUTIVE SUMMARY & EUT INFORMATION	5
2	TECHNICAL DETAILS.....	6
3	MODIFICATION.....	7
4	TEST SUMMARY.....	8
5	MEASUREMENTS, EXAMINATION AND DERIVED RESULTS.....	9
ANNEX A. TEST INSTRUMENT & METHOD		67
ANNEX B. EUT AND TEST SETUP PHOTOGRAPHS		72
ANNEX C. TEST SETUP AND SUPPORTING EQUIPMENT.....		73
ANNEX D. USER MANUAL / BLOCK DIAGRAM / SCHEMATICS / PART LIST		77
ANNEX E. DECLARATION OF SIMILARITY		78

**SIEMIC, INC.**

Title: RF Test Report for GSM Mobile Phone
Main Model: GALA P730
Serial Model: N/A
To: FCC Part 15.247: 2012 (KDB 558074)

Serial#: 12070294-FCC-R3
Issue Date: 6th November, 2012
Page: 5 of 78
www.siemic.com.cn

1 Executive Summary & EUT information

The purpose of this test programme was to demonstrate compliance of the DDM Brands LLC, GSM Mobile Phone and model: GALA P730 against the current Stipulated Standards. The GSM Mobile Phone has demonstrated compliance with the FCC Part 15.247: 2012 (KDB 558074).

EUT Information

EUT

Description : GSM Mobile Phone

Main Model : GALA P730

Serial Model : N/A

Antenna Gain :
GSM850: -1 dBi
PCS1900: -1 dBi
Bluetooth: 1 dBi
WIFI: 0 dBi

Li-ion Rechargeable Battery
Model: PB10-800
Capacity: 800mAh
Nominal Voltage: 3.7V
Charging Voltage Limit: 4.2V

Input Power :
Adapter
Model: PW10
Input: AC 100-240V 50/60Hz 150mA
Output: DC 5.0V 500mA

Classification

Per Stipulated Test Standard : FCC Part 15.247: 2012 (KDB 558074)



2 TECHNICAL DETAILS

Purpose	Compliance testing of GSM Mobile Phone with stipulated standard
Applicant / Client	DDM Brands LLC 1612 NW, 84 TH Ave. Miami, Florida, U.S.A 33126
Manufacturer	DDM Brands LLC B-602,HengYu Center, NanShan, ShenZhen, China518054
Laboratory performing the tests	SIEMIC Nanjing (China) Laboratories NO.2-1,Longcang Dadao, Yuhua Economic Development Zone, Nanjing, China Tel:+86(25)86730128/86730129 Fax:+86(25)86730127 Email: info@siemic.com
Test report reference number	12070294-FCC-R3
Date EUT received	19th October, 2012
Standard applied	FCC Part 15.247: 2012 (KDB 558074)
Dates of test (from – to)	1st November, 2012 to 5th November, 2012
No of Units :	#1
Equipment Category :	Spread Spectrum System/Device
Trade Name :	Parla
RF Operating Frequency (ies)	GSM850 TX : 824.2 ~ 848.8 MHz; RX : 869.2 ~ 893.8 MHz PCS1900 TX : 1850.2 ~ 1909.8 MHz; RX : 1930.2 ~ 1989.8 MHz WLAN(2.4GHz band) 802.11b/g/n : 2412-2462 MHz Bluetooth : 2402-2480 MHz
Number of Channels	299CH (PCS1900) and 124CH (GSM850) Bluetooth: 79CH WLAN: 11CH
Modulation	GSM/GPRS: GMSK Bluetooth: GFSK WLAN: DSSS/OFDM
GPRS Multi-slot class	8/10/12
FCC ID	A4JGALAP730



SIEMIC, INC.

Accessing global markets

Title: RF Test Report for GSM Mobile Phone
Main Model: GALA P730
Serial Model: N/A
To: FCC Part 15.247: 2012 (KDB 558074)

Serial#: 12070294-FCC-R3
Issue Date: 6th November, 2012
Page: 7 of 78
www.siemic.com.cn

3 MODIFICATION

NONE

**SIEMIC, INC.**

Title: RF Test Report for GSM Mobile Phone
Main Model: GALA P730
Serial Model: N/A
To: FCC Part 15.247: 2012 (KDB 558074)

Serial#: 12070294-FCC-R3
Issue Date: 6th November, 2012
Page: 8 of 78
www.siemic.com.cn

4 TEST SUMMARY

The product was tested in accordance with the following specifications.

All testing has been performed according to below product classification:

Spread Spectrum System/Device

Test Results Summary

FCC Rules	Description of Test	Result
§15.247 (i), §2.1093	RF Exposure	Compliance
§15.203	Antenna Requirement	Compliance
§15.247 (a)(2)	DTS (6 dB) CHANNEL BANDWIDTH	Compliance
§15.247(b)(3)	Conducted Maximum Output Power	Compliance
§15.247(e)	Power Spectral Density	Compliance
§15.247(d)	Band-Edge & Unwanted Emissions into Non-Restricted Frequency Bands	Compliance
§15.207 (a),	AC Power Line Conducted Emissions	Compliance
§15.205, §15.209, §15.247(d)	Radiated Spurious Emissions & Unwanted Emissions into Restricted Frequency Bands	Compliance

**SIEMIC, INC.**

Title: RF Test Report for GSM Mobile Phone
Main Model: GALA P730
Serial Model: N/A
To: FCC Part 15.247: 2012 (KDB 558074)

Serial#: 12070294-FCC-R3
Issue Date: 6th November, 2012
Page: 9 of 78
www.siemic.com.cn

5 MEASUREMENTS, EXAMINATION AND DERIVED RESULTS

5.1 §15.247 (i) and §2.1093 – RF Exposure

Applicable Standard

According to §15.247 (i) and §1.1307(b)(1), systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission's guidelines.

Table 2 – Summary of SAR Evaluation Requirements for a Cell Phone with Multiple Transmitters

	Individual Transmitter	Simultaneous Transmission
Licensed Transmitters	<u>Routine evaluation required</u>	<u>SAR not required:</u> <u>Unlicensed only</u> <ul style="list-style-type: none">○ when stand-alone 1-g SAR is not required and antenna is ≥ 5 cm from other antennas <u>Licensed & Unlicensed</u> <ul style="list-style-type: none">○ when the sum of the 1-g SAR is < 1.6 W/kg for all simultaneous transmitting antennas○ when SAR to peak location separation ratio of simultaneous transmitting antenna pair is < 0.3 <u>SAR required:</u> <u>Licensed & Unlicensed</u> <p>antenna pairs with SAR to peak location separation ratio ≥ 0.3; test is only required for the configuration that results in the highest SAR in stand-alone configuration for each wireless mode and exposure condition</p> <p>Note: simultaneous transmission exposure conditions for head and body can be different for different style phones; therefore, different test requirements may apply</p>
Unlicensed Transmitters	<u>When there is no simultaneous transmission –</u> <ul style="list-style-type: none">○ output $\leq 60/f$: SAR not required○ output $> 60/f$: stand-alone SAR required <u>When there is simultaneous transmission –</u> <u>Stand-alone SAR not required when</u> <ul style="list-style-type: none">○ output $\leq 2 \cdot P_{Ref}$ and antenna is ≥ 5.0 cm from other antennas○ output $\leq P_{Ref}$ and antenna is ≥ 2.5 cm from other antennas○ output $\leq P_{Ref}$ and antenna is < 2.5 cm from other antennas, each with either output power $\leq P_{Ref}$ or 1-g SAR < 1.2 W/kg <u>Otherwise stand-alone SAR is required</u> <u>When stand-alone SAR is required</u> <ul style="list-style-type: none">○ test SAR on highest output channel for each wireless mode and exposure condition○ if SAR for highest output channel is $> 50\%$ of SAR limit, evaluate all channels according to normal procedures	
Jaw, Mouth and Nose	<u>Flat phantom SAR required</u> <ul style="list-style-type: none">○ when measurement is required in tight regions of SAM and it is not feasible or the results can be questionable due to probe tilt, calibration, positioning and orientation issues○ position rectangular and clam-shell phones according to flat phantom procedures and conduct SAR measurements for these specific locations	When simultaneous transmission SAR testing is required, contact the FCC Laboratory for interim guidance.



SIEMIC, INC.

Accessing global markets

Title: RF Test Report for GSM Mobile Phone
Main Model: GALA P730
Serial Model: N/A
To: FCC Part 15.247: 2012 (KDB 558074)

Serial#: 12070294-FCC-R3
Issue Date: 6th November, 2012
Page: 10 of 78
www.siemic.com.cn

Routine SAR evaluation refers to that specifically required by § 2.1093, using measurements or computer simulation. When routine SAR evaluation is not required, portable transmitters with output power greater than the applicable low threshold require SAR evaluation to qualify for TCB approval.

Three antennas are available for the EUT, (GSM antenna, Bluetooth antenna and WIFI antenna).

BT and GSM Antenna separation is 0.5 cm<2.5 cm,

BT and WIFI Antenna separation is 1.5 cm<2.5 cm,

GSM and WIFI Antenna separation is 2.5cm<2.9 cm<5 cm and

the maximum output power of BT is 2.67 mW< Pref(12 mW), maximum output power for WiFi is 8.95 mW< Pref(12 mW)

and maximum 1-g SAR value is 1.145W/kg<1.2W/kg

According to KDB 648474, no stand-alone required for BT & WiFi antenna, so no simultaneous SAR measurement is required too.

Result:

The SAR measurement is exempt.



SIEMIC, INC.

Accessing global markets

Title: RF Test Report for GSM Mobile Phone
Main Model: GALA P730
Serial Model: N/A
To: FCC Part 15.247: 2012 (KDB 558074)

Serial#: 12070294-FCC-R3
Issue Date: 6th November, 2012
Page: 11 of 78
www.siemic.com.cn

5.2 §15.203 - ANTENNA REQUIREMENT

Applicable Standard

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

- a. Antenna must be permanently attached to the unit.
- b. Antenna must use a unique type of connector to attach to the EUT.

Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

And according to FCC 47 CFR section 15.247 (b), if the transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Antenna Connector Construction

The EUT has 3 antennas, one is a PIFA antenna for GSM, the gain are -1 dBi for GSM and -1 dBi for PCS, one is a PIFA antenna for WLAN, the gain is 0 dBi, other a monopole antenna for Bluetooth, the gain is 1 dBi, which in accordance to section 15.203, please refer to the internal photos.

Result: Compliant.



5.3 §15.247(a) (2) –DTS (6 dB) CHANNEL BANDWIDTH

1. Conducted Measurement

EUT was set for low, mid, high channel with modulated mode and highest RF output power. The spectrum analyzer was connected to the antenna terminal.

2. Environmental Conditions

Temperature	22°C
Relative Humidity	50%
Atmospheric Pressure	1019mbar

3. Conducted Emissions Measurement Uncertainty

All test measurements carried out are traceable to national standards. The uncertainty of the measurement at a confidence level of approximately 95% (in the case where distributions are normal), with a coverage factor of 2, in the range 30MHz – 40GHz is ± 1.5 dB.

4. Test date : 1st November , 2012

Tested By : Back Huang

Requirement(s): The minimum 6 dB bandwidth of a DTS transmission shall be at least 500 kHz. Within this document, this bandwidth is referred to as the DTS bandwidth. The procedures provided herein for measuring the maximum peak conducted output power assume the use of the DTS bandwidth.:.

Procedures:

1. Set resolution bandwidth (RBW) = 1-5% or DTS BW, not to exceed 100 kHz.
2. Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

Test Result: Pass.

Please refer to the following tables and plots.


Channel	Channel Frequency (MHz)	Data Rate (Mbps)	Measured 6dB Bandwidth (MHz)	FCC Part 15.247 Limit (kHz)
802.11b mode				
Low	2412	1	9.139	>500
Middle	2437	1	9.133	>500
High	2462	1	9.087	>500
802.11g mode				
Low	2412	6	16.456	>500
Middle	2437	6	16.466	>500
High	2462	6	16.502	>500
802.11n mode				
Low	2412	MCS0	17.098	>500
Middle	2437	MCS0	17.006	>500
High	2462	MCS0	17.240	>500

**SIEMIC, INC.**


Title: RF Test Report for GSM Mobile Phone
Main Model: GALA P730
Serial Model: N/A
To: FCC Part 15.247: 2012 (KDB 558074)

Serial#: 12070294-FCC-R3
Issue Date: 6th November, 2012
Page: 13 of 78
www.siemic.com.cn


802.11b Low Channel

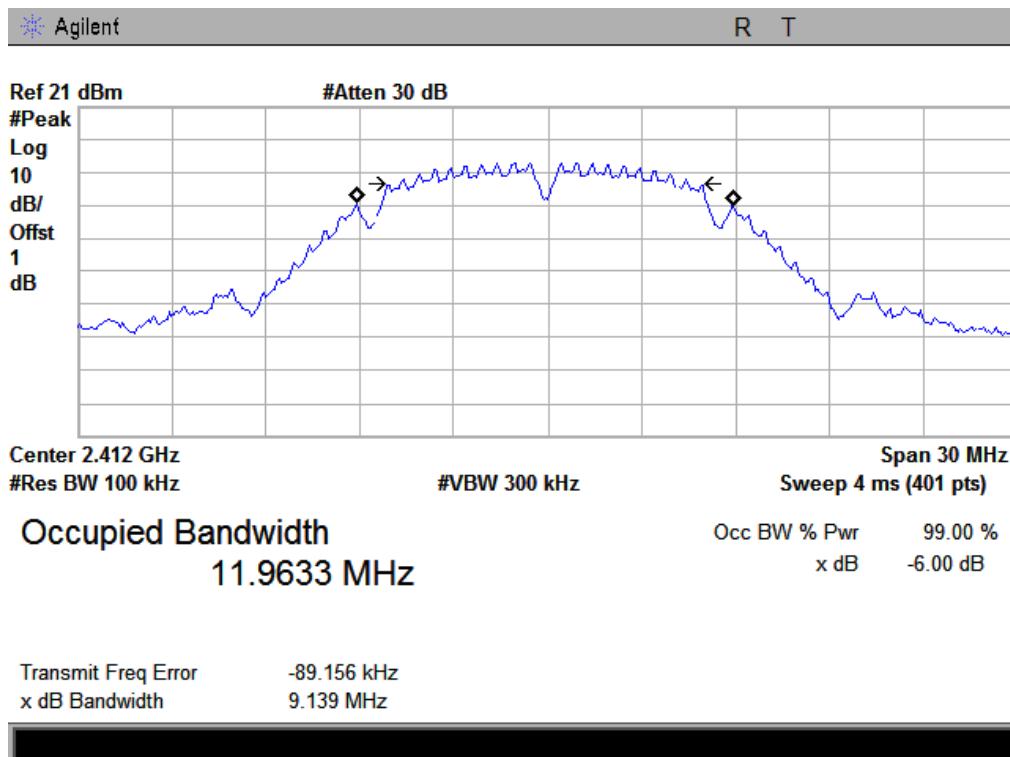


802.11b Middle Channel

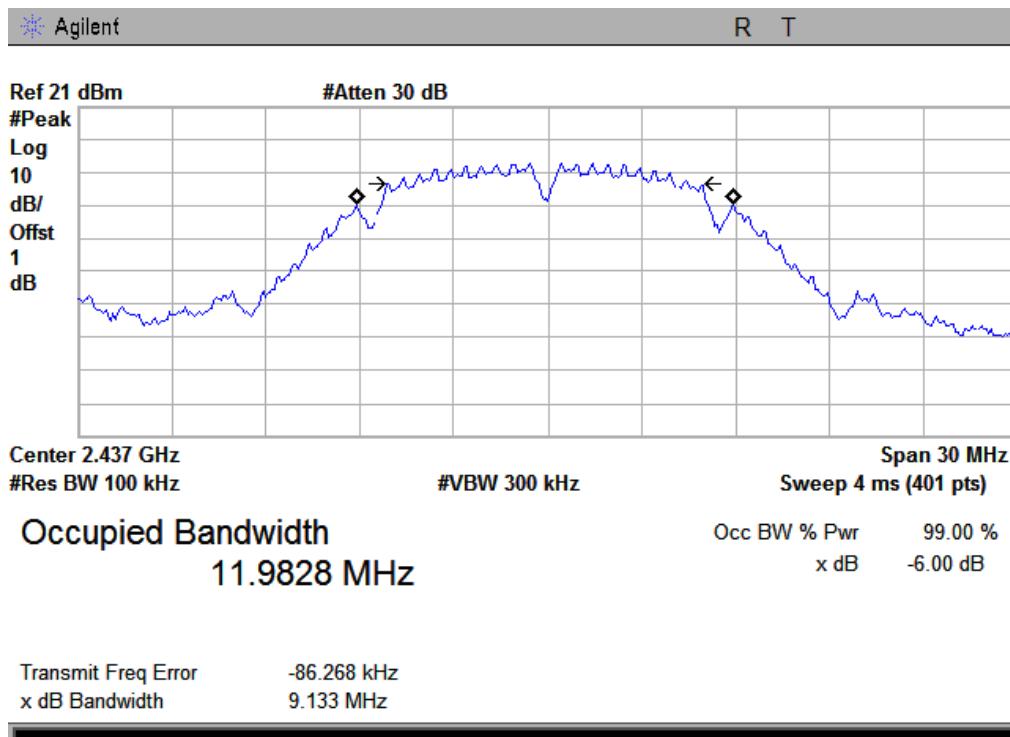

802.11b High Channel

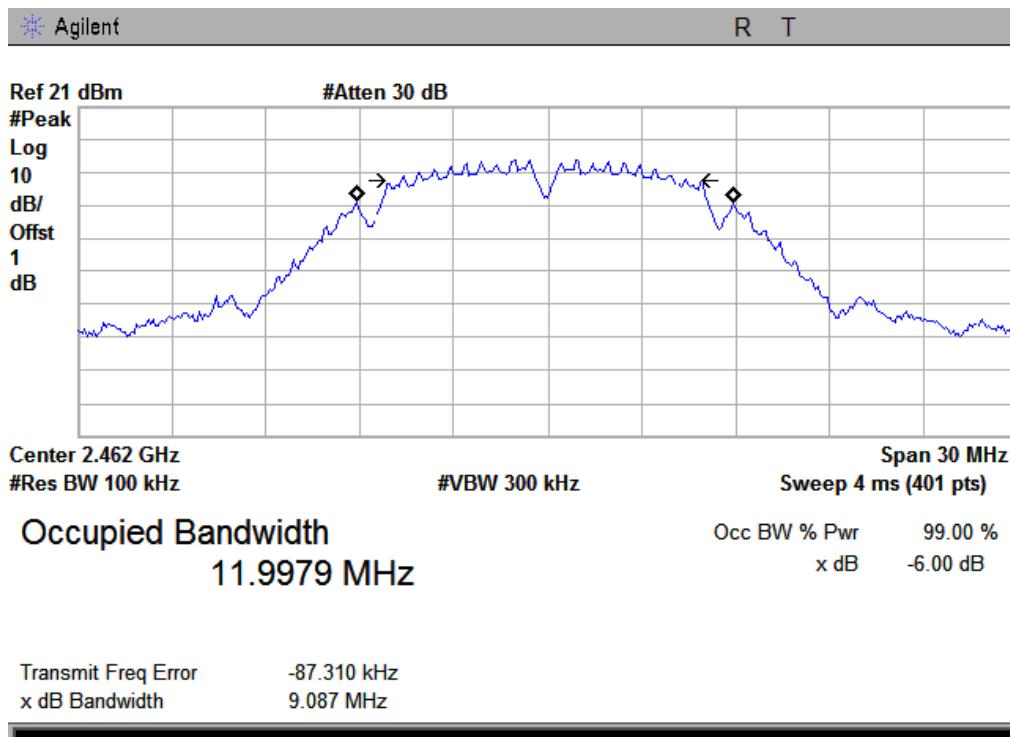

802.11g Low Channel

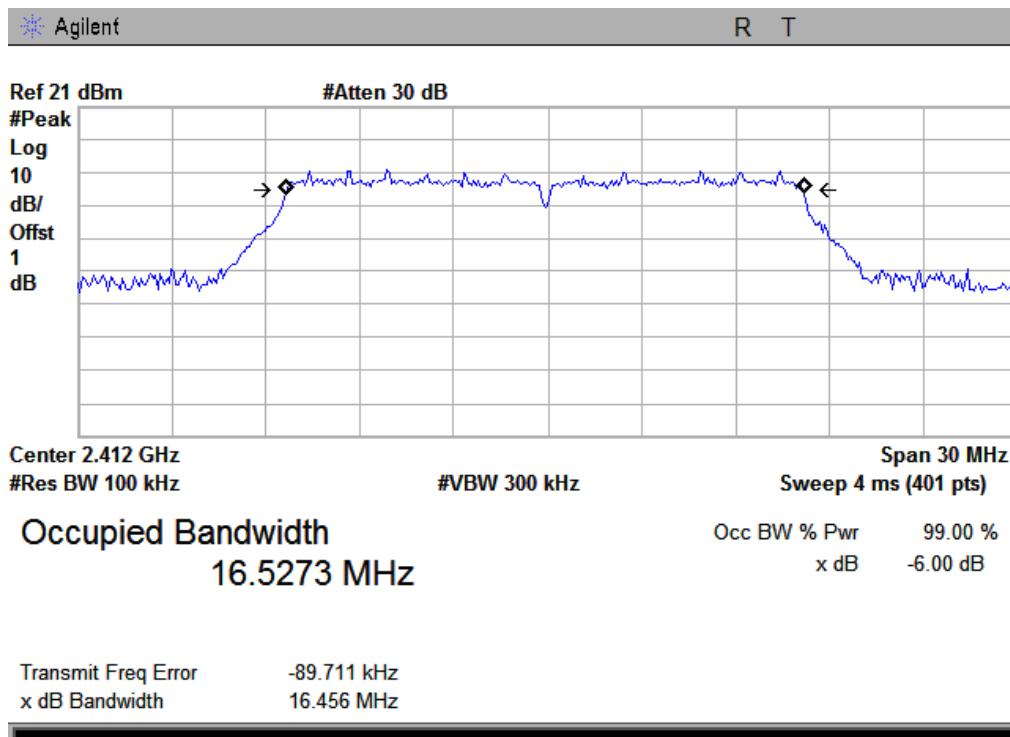


**SIEMIC, INC.**


Title: RF Test Report for GSM Mobile Phone
Main Model: GALA P730
Serial Model: N/A
To: FCC Part 15.247: 2012 (KDB 558074)

Serial#: 12070294-FCC-R3
Issue Date: 6th November, 2012
Page: 15 of 78
www.siemic.com.cn


802.11g Middle Channel

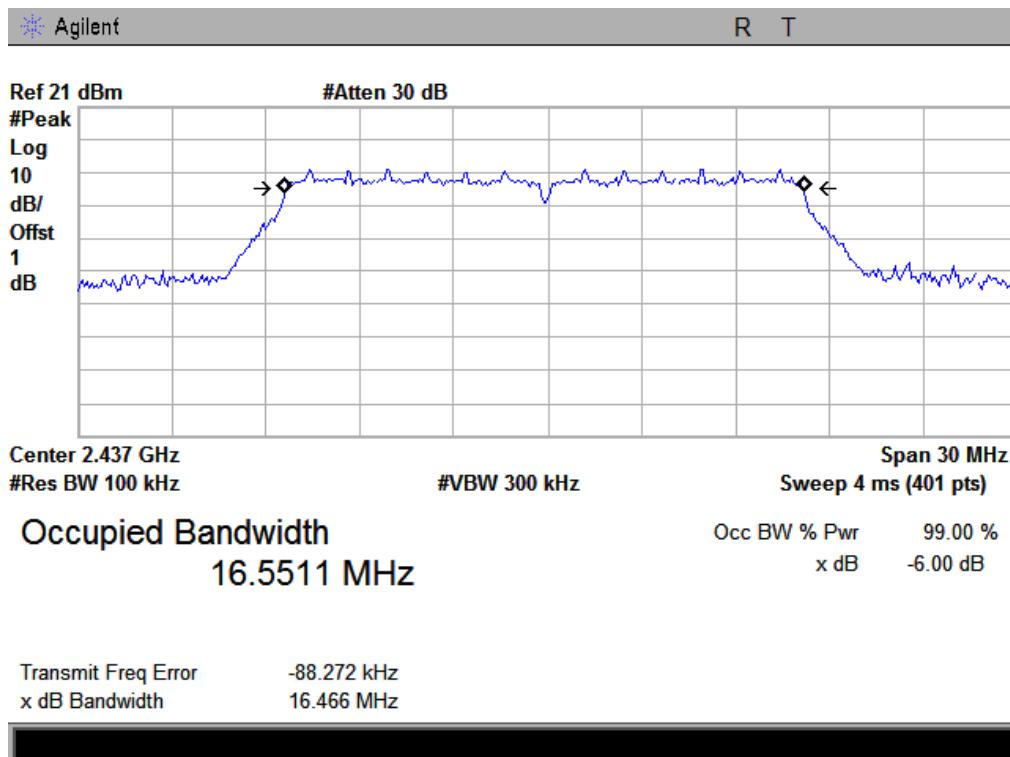


802.11g High Channel

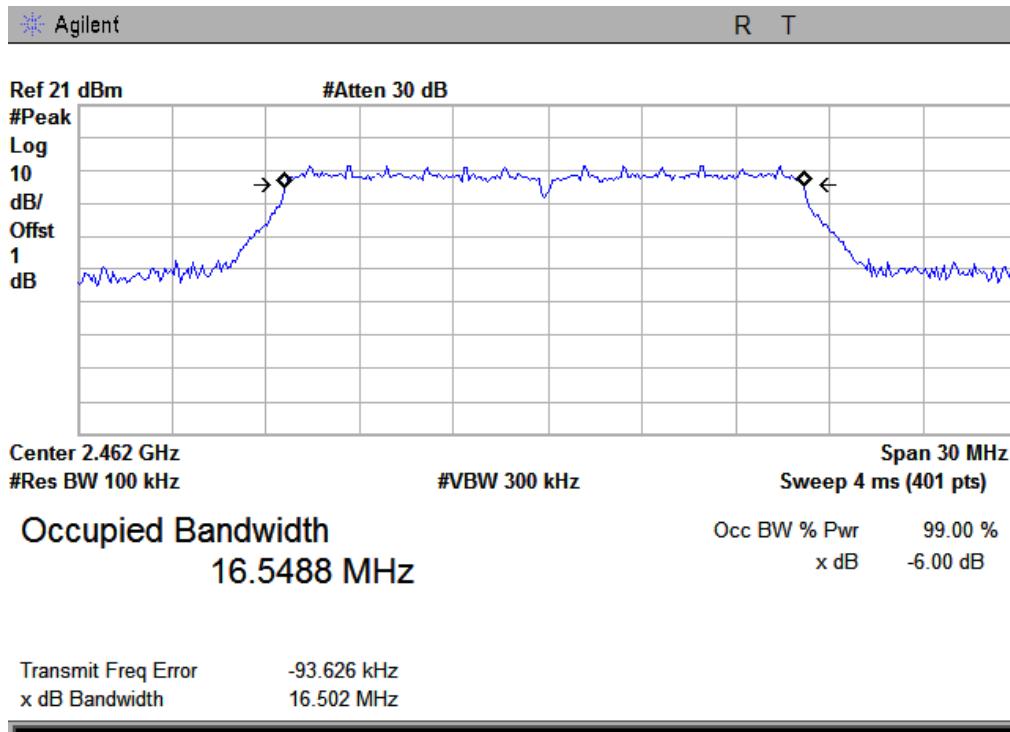

802.11n Low Channel

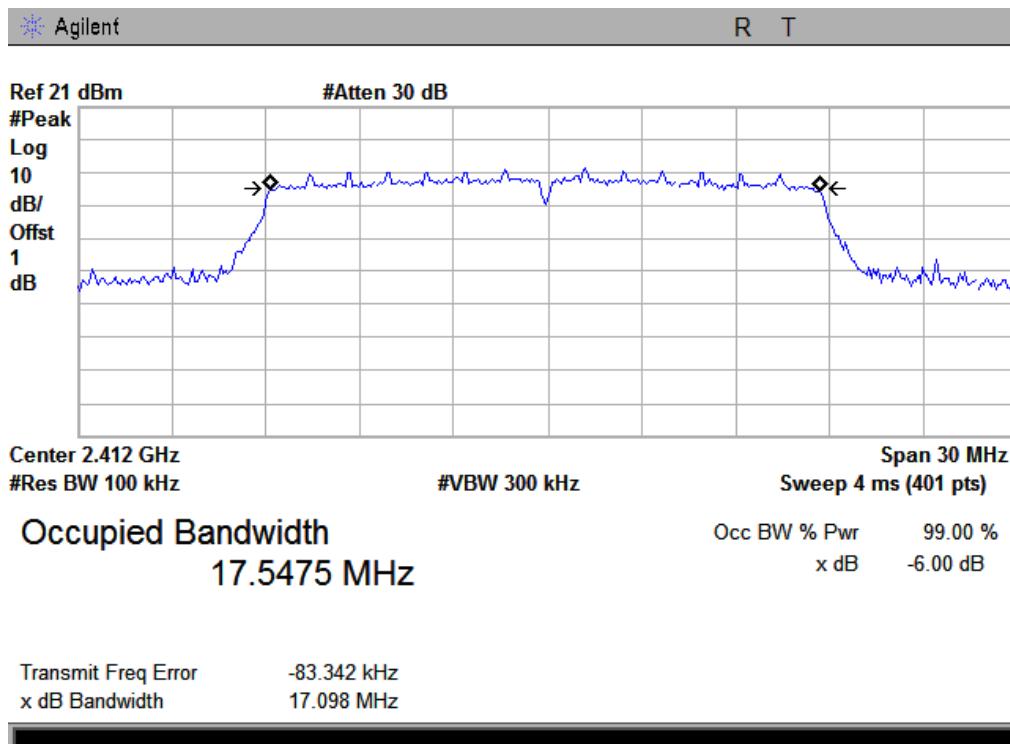


802.11n Middle Channel

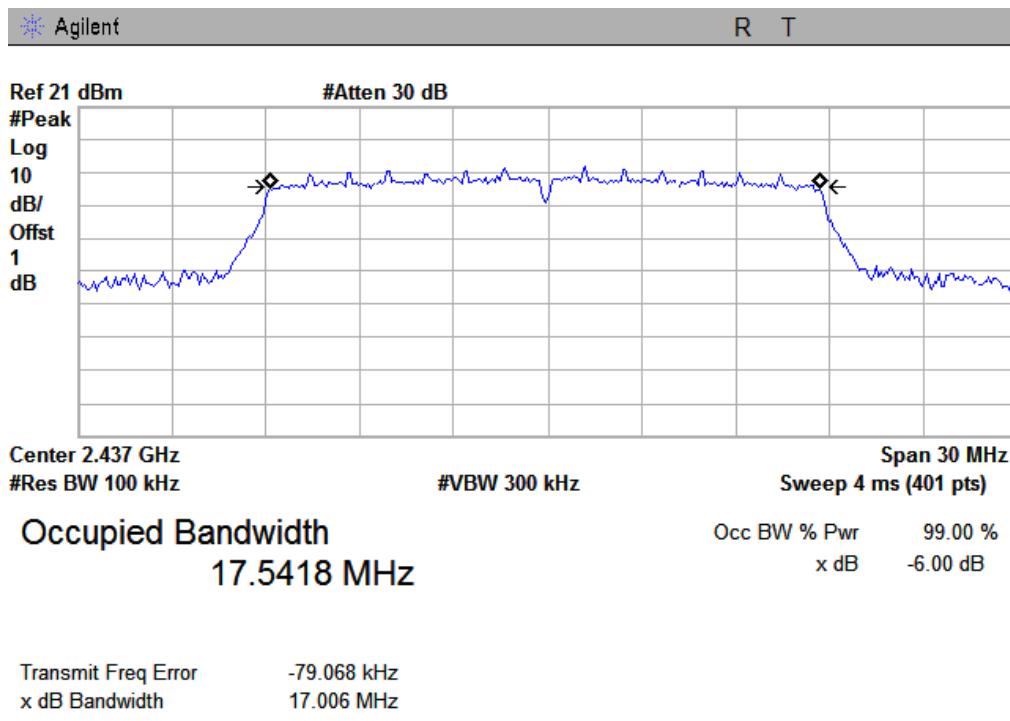

**SIEMIC, INC.**

Title: RF Test Report for GSM Mobile Phone
Main Model: GALA P730
Serial Model: N/A
To: FCC Part 15.247: 2012 (KDB 558074)

Serial#: 12070294-FCC-R3
Issue Date: 6th November, 2012
Page: 17 of 78
www.siemic.com.cn

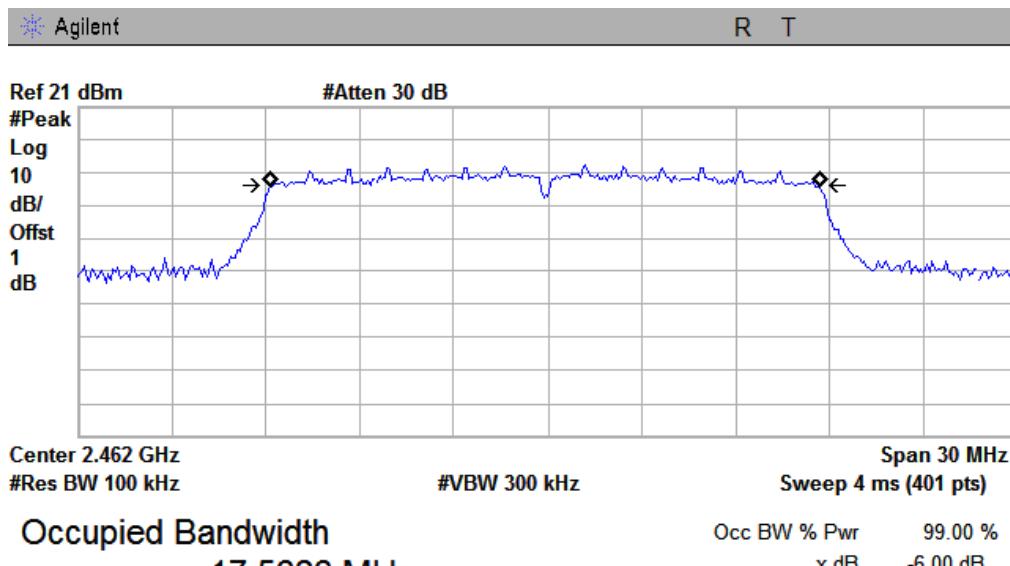802.11n High Channel

Transmit Freq Error -77.738 kHz
x dB Bandwidth 17.240 MHz





5.4 §15.247(b) (3) - Conducted Maximum Output Power

1. Conducted Measurement

EUT was set for low, mid, high channel with modulated mode and highest RF output power.

The spectrum analyzer was connected to the antenna terminal.

2. Conducted Emissions Measurement Uncertainty

All test measurements carried out are traceable to national standards. The uncertainty of the measurement at a confidence level of approximately 95% (in the case where distributions are normal), with a coverage factor of 2, in the range 30MHz – 40GHz is ± 1.5 dB.

3. Environmental Conditions

Temperature 16°C

Relative Humidity 50%

Atmospheric Pressure 1019mbar

4. Test date : 1st November , 2012

Tested By : Back Huang

Standard Requirement:

Maximum Peak Conducted Output Power

The following procedures can be used to determine the maximum peak conducted output power of a DTS EUT.

Maximum Conducted Output Power

§15.247(b)(3) permits the maximum (average) conducted output power to be measured as an alternative to the maximum peak conducted output power for demonstrating compliance to the limit. When these procedures are utilized, the power is referenced to the emission bandwidth (EBW) rather than the DTS bandwidth (see Section 2.0 for definitions).

When using a spectrum/signal analyzer to perform these measurements, it must be capable of utilizing a number of measurement points in each sweep that is greater than or equal to twice the span/RBW in order to ensure bin-to-bin spacing of \leq RBW/2 so that narrowband signals are not lost between frequency bins.

The ideal method for measuring the maximum (average) conducted output power is with the EUT is configured to transmit continuously (duty cycle $\geq 98\%$) at its maximum power control level. However, when this condition cannot be realized, video triggering or signal gating can be used to ensure that the measurements are performed only during periods when the EUT is transmitting at its maximum power control level. An option is also provided that can be used when none of the above requirements can be met with the available measurement instrumentation.

Procedures:

Measurement Procedure PK:

This procedure should only be used when the maximum available RBW of the spectrum/signal analyzer is less than the DTS bandwidth.

1. Set the RBW = maximum available (at least 1 MHz).
2. Set the VBW = $3 \times$ RBW or maximum available setting (must be \geq RBW).
3. Set the span to fully encompass the DTS bandwidth.
4. Detector = peak.
5. Sweep time = auto couple.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.
8. Use the spectrum analyzer's band/channel power measurement function with the band limits set equal to the DTS bandwidth edges (for some analyzers, this may require a manual override to ensure use of peak detector). If the spectrum analyzer does not have a band power function, sum the spectrum levels (in linear power units) at intervals equal to the RBW extending across the DTS channel bandwidth.

Measurement Procedure AVG:

This procedure should be used with an RMS power averaging detector; however, a sample detector can be used when an RMS detector is not available. This is the baseline method for measuring the maximum (average) conducted output power.

1. Set the analyzer span to a minimum of 1.5 times the EBW.
2. Set the RBW = 1 MHz.
3. Set the VBW \geq 3 MHz.
4. Ensure that the number of measurement points in the sweep $\geq 2 \times$ span/RBW.
5. Sweep time = auto couple.

**SIEMIC, INC.**

Title: RF Test Report for GSM Mobile Phone
Main Model: GALA P730
Serial Model: N/A
To: FCC Part 15.247: 2012 (KDB 558074)

Serial#: 12070294-FCC-R3
Issue Date: 6th November, 2012
Page: 19 of 78
www.siemic.com.cn

6. Detector = power averaging (RMS) or sample detector when RMS not available.
7. Employ trace averaging in power averaging (RMS) mode over a minimum of 100 traces.
8. Use the spectrum analyzer's band power measurement function with band limits set equal to the EBW band edges.

Note: If the analyzer does not have a band power function, sum the spectral levels (in linear power units) at 1 MHz intervals extending across the entire EBW.

Test Result: Pass.


Please refer to the following tables and plots.

Channel	Channel Frequency (MHz)	Data Rate (Mbps)	PK Output Power (dBm)	AVG Output Power (dBm)	Limit (dBm)
802.11b mode					
Low	2412	1	11.61	8.44	30
Middle	2437	1	11.96	9.04	30
High	2462	1	12.47	9.52	30
802.11g mode					
Low	2412	6	14.36	8.61	30
Middle	2437	6	14.72	8.86	30
High	2462	6	15.31	9.51	30
802.11n mode					
Low	2412	MCS0	14.42	8.61	30
Middle	2437	MCS0	14.60	8.70	30
High	2462	MCS0	15.28	9.41	30


**SIEMIC, INC.**

Title: RF Test Report for GSM Mobile Phone
Main Model: GALA P730
Serial Model: N/A
To: FCC Part 15.247: 2012 (KDB 558074)

Serial#: 12070294-FCC-R3
Issue Date: 6th November, 2012
Page: 20 of 78
www.siemic.com.cn

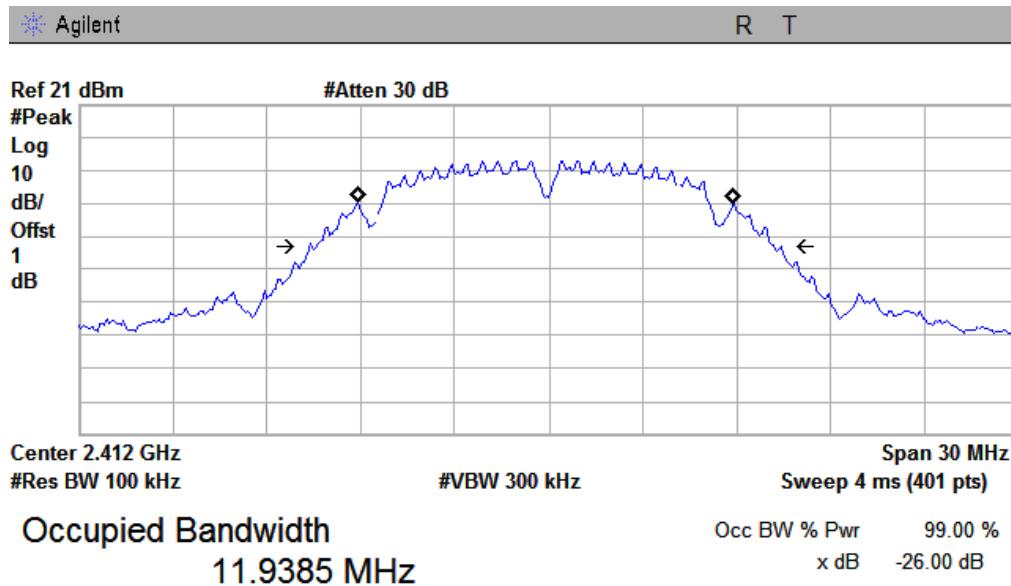26 dB bandwidth (EBW):**802.11b Low Channel**

Transmit Freq Error -95.186 kHz
x dB Bandwidth 15.055 MHz

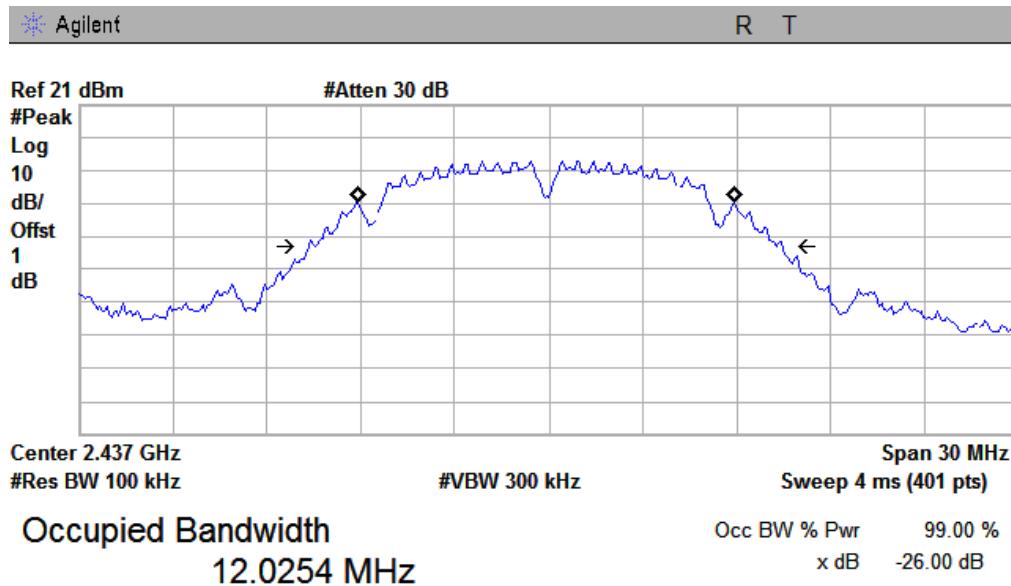802.11b Middle Channel


Transmit Freq Error -96.389 kHz
x dB Bandwidth 15.131 MHz

**SIEMIC, INC.**

Title: RF Test Report for GSM Mobile Phone
Main Model: GALA P730
Serial Model: N/A
To: FCC Part 15.247: 2012 (KDB 558074)


Serial#: 12070294-FCC-R3
Issue Date: 6th November, 2012
Page: 21 of 78
www.siemic.com.cn

802.11b High Channel

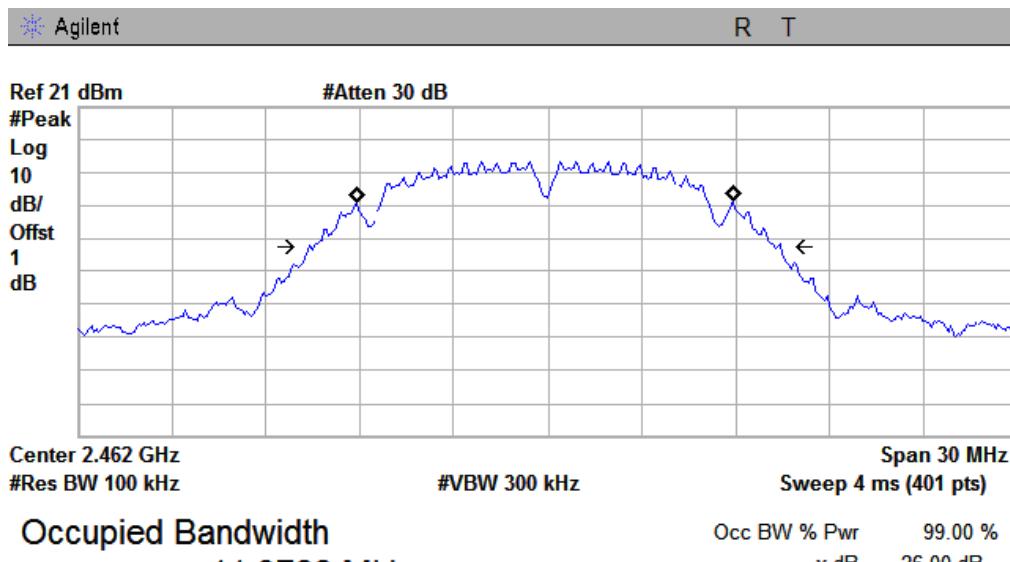

Transmit Freq Error -84.013 kHz
x dB Bandwidth 15.059 MHz

802.11g Low Channel

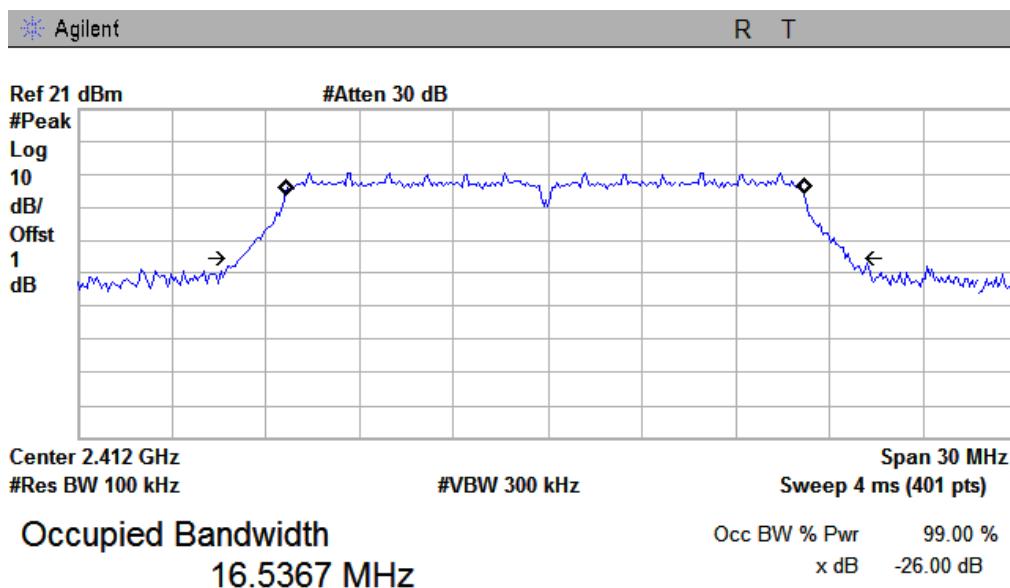


Transmit Freq Error -87.170 kHz
x dB Bandwidth 19.486 MHz

**SIEMIC, INC.**


Title: RF Test Report for GSM Mobile Phone
Main Model: GALA P730
Serial Model: N/A
To: FCC Part 15.247: 2012 (KDB 558074)

Serial#: 12070294-FCC-R3
Issue Date: 6th November, 2012
Page: 22 of 78
www.siemic.com.cn

802.11g Middle Channel

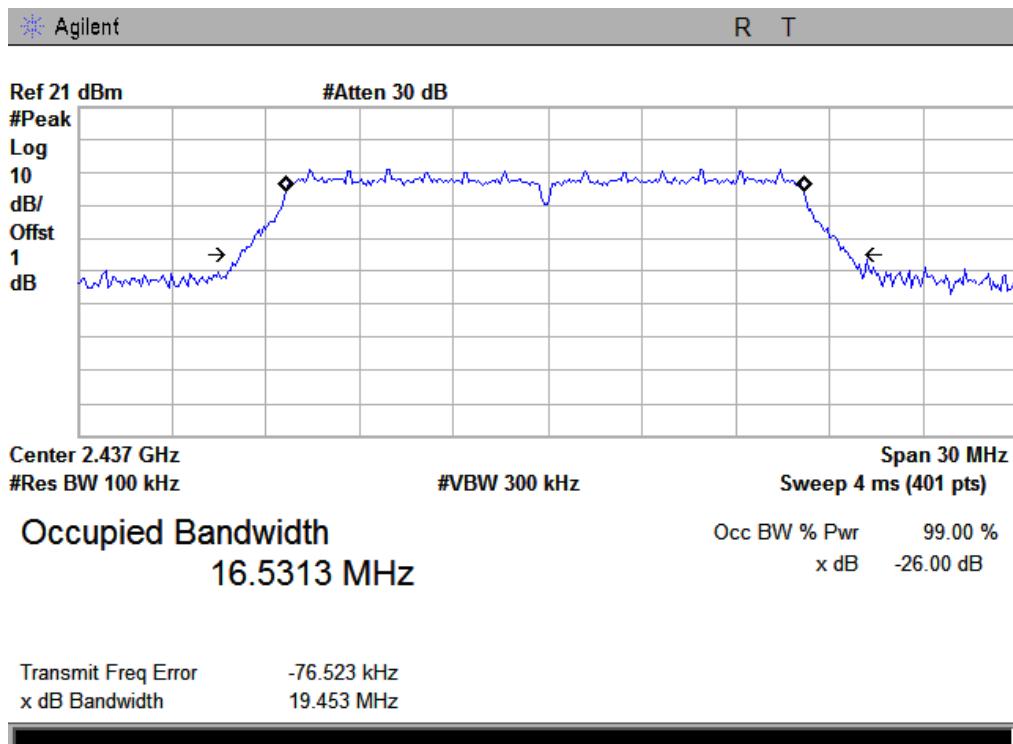

802.11g High Channel

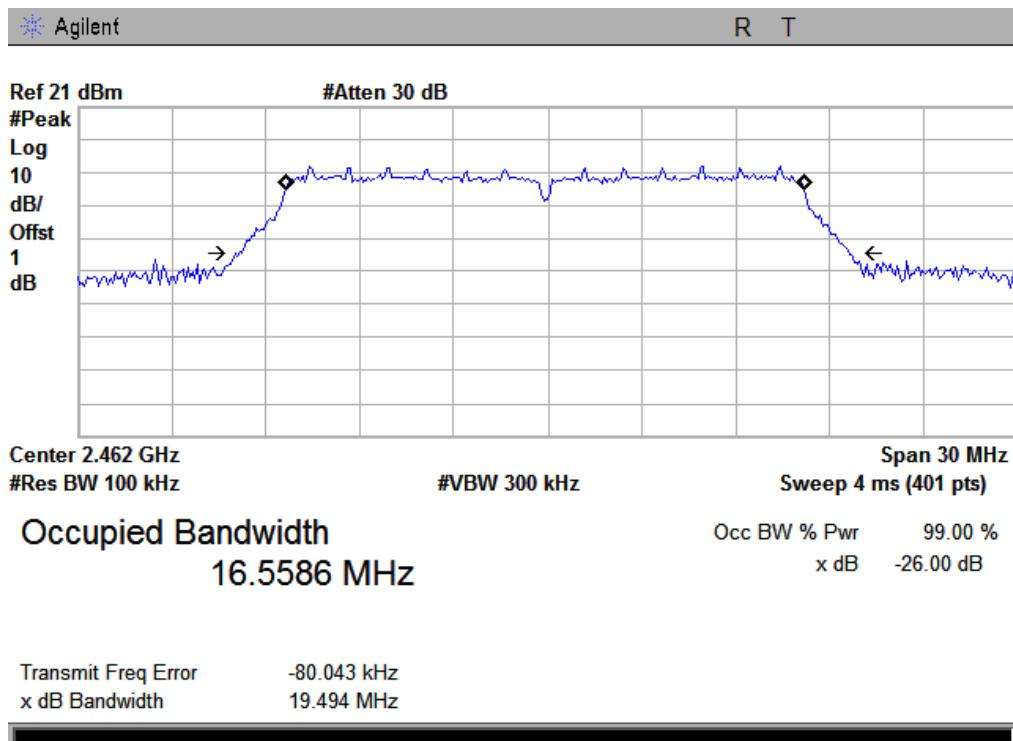


**SIEMIC, INC.**


Title: RF Test Report for GSM Mobile Phone
Main Model: GALA P730
Serial Model: N/A
To: FCC Part 15.247: 2012 (KDB 558074)

Serial#: 12070294-FCC-R3
Issue Date: 6th November, 2012
Page: 23 of 78
www.siemic.com.cn

802.11n Low Channel

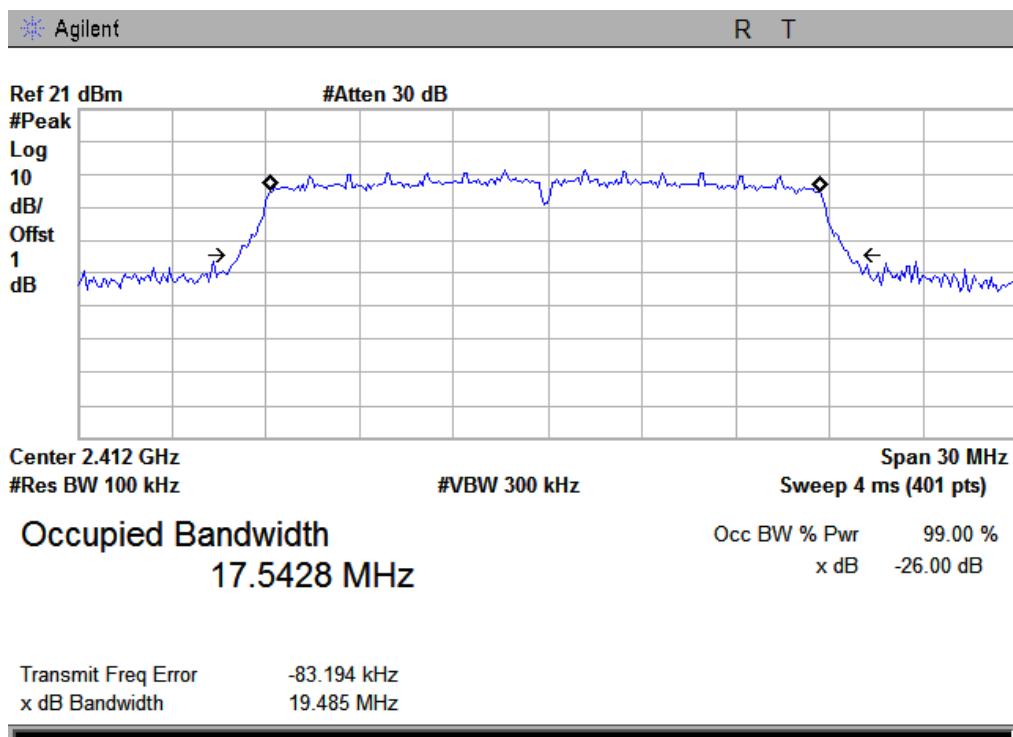

802.11n Middle Channel

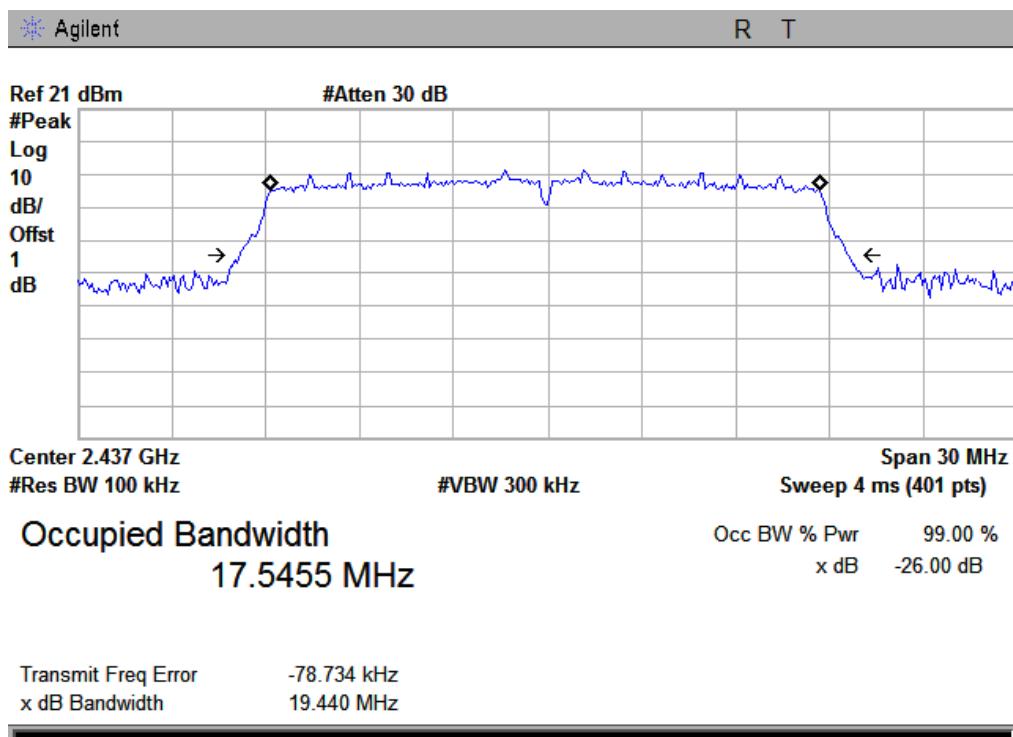


**SIEMIC, INC.**

Title: RF Test Report for GSM Mobile Phone
Main Model: GALA P730
Serial Model: N/A
To: FCC Part 15.247: 2012 (KDB 558074)


Serial#: 12070294-FCC-R3
Issue Date: 6th November, 2012
Page: 24 of 78
www.siemic.com.cn

802.11n High Channel

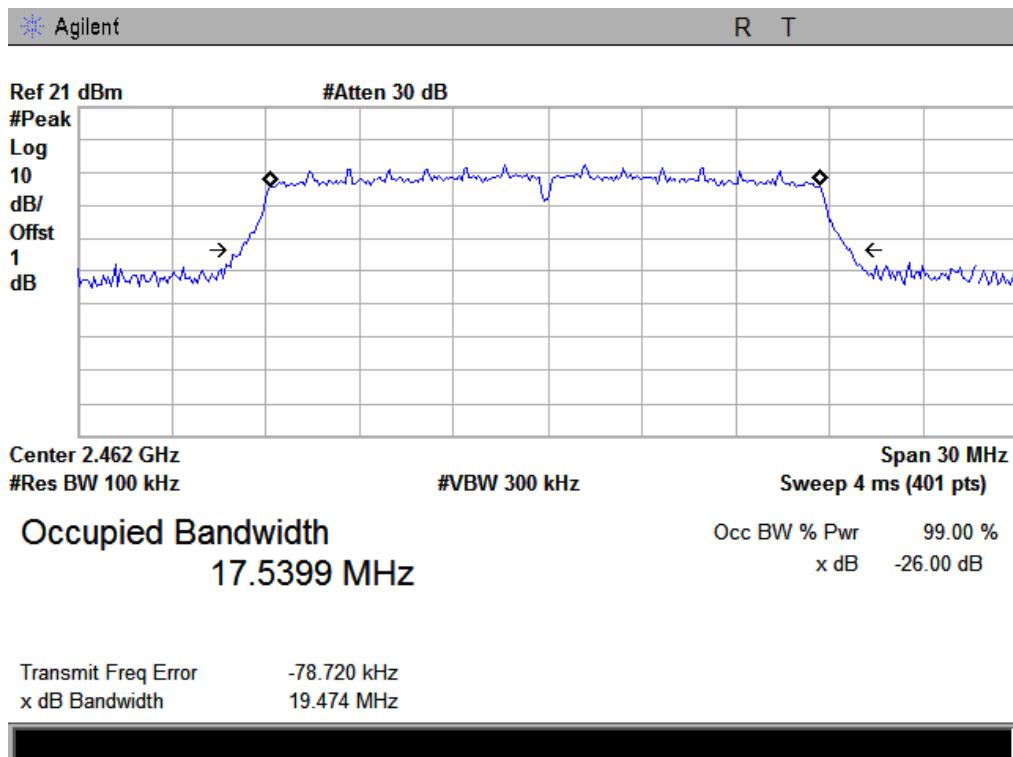

Maximum Peak Conducted Output Power:

802.11b Low Channel

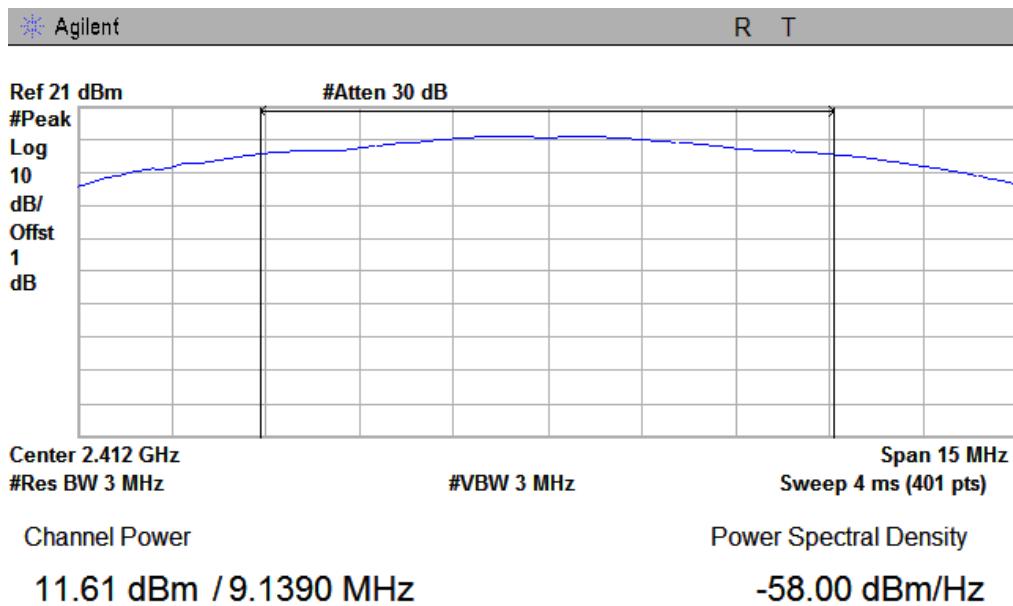





Title: RF Test Report for GSM Mobile Phone
Main Model: GALA P730
Serial Model: N/A
To: FCC Part 15.247: 2012 (KDB 558074)

Serial#: 12070294-FCC-R3
Issue Date: 6th November, 2012
Page: 25 of 78
www.siemic.com.cn


802.11b Middle Channel

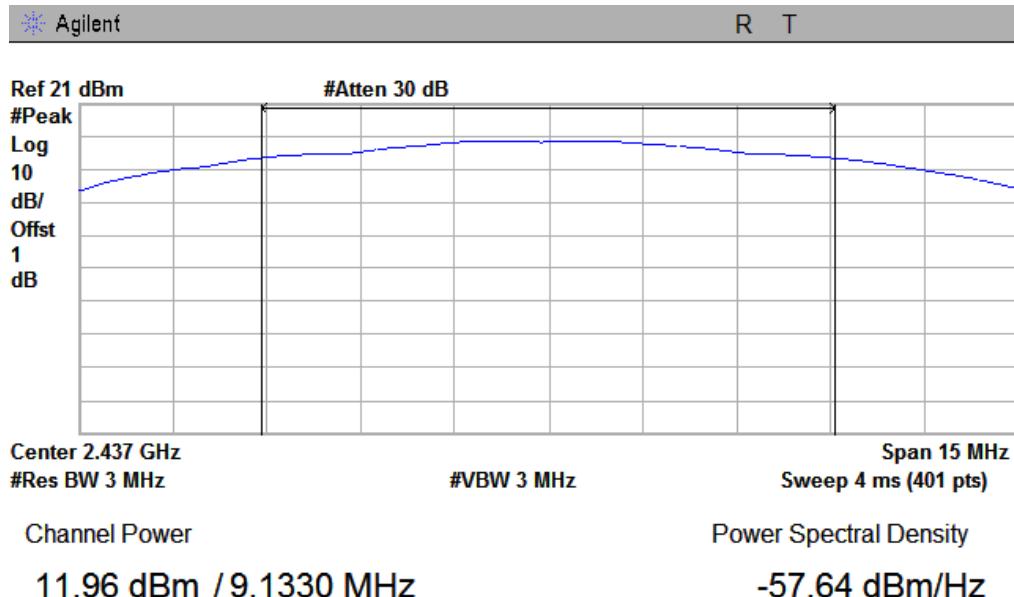


802.11b High Channel

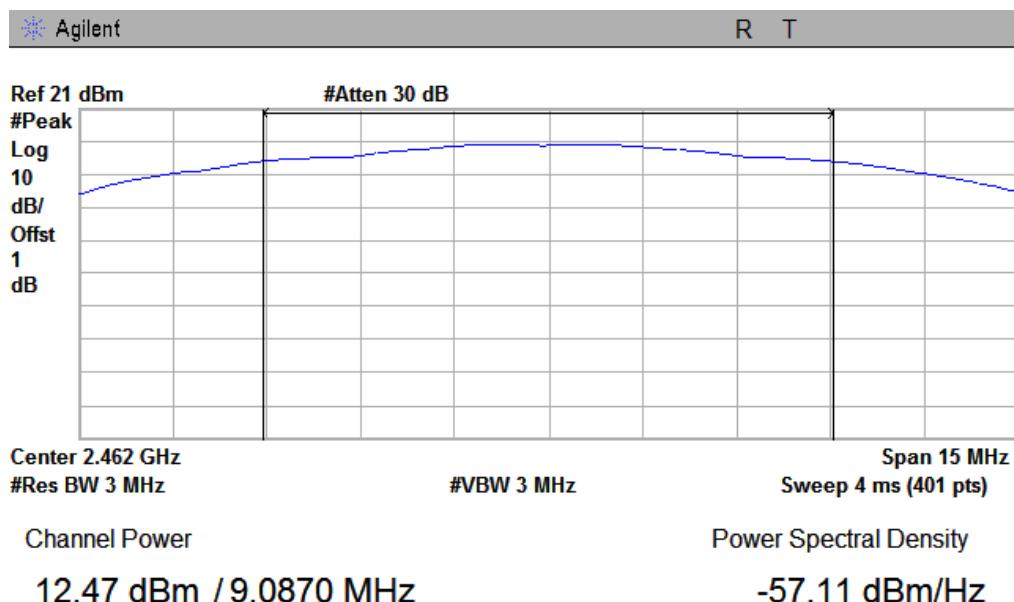

802.11g Low Channel

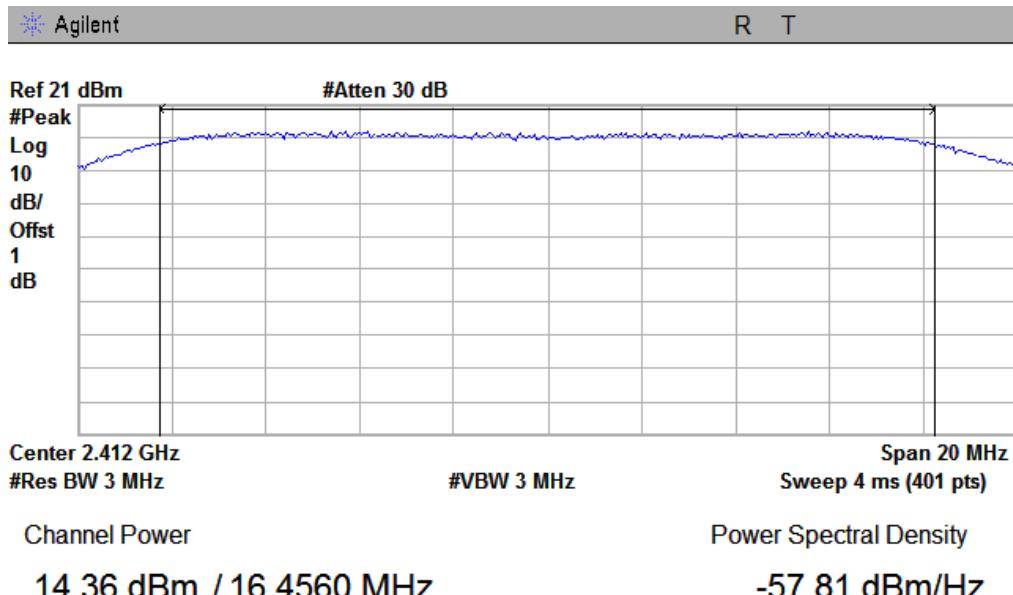

802.11g Middle Channel

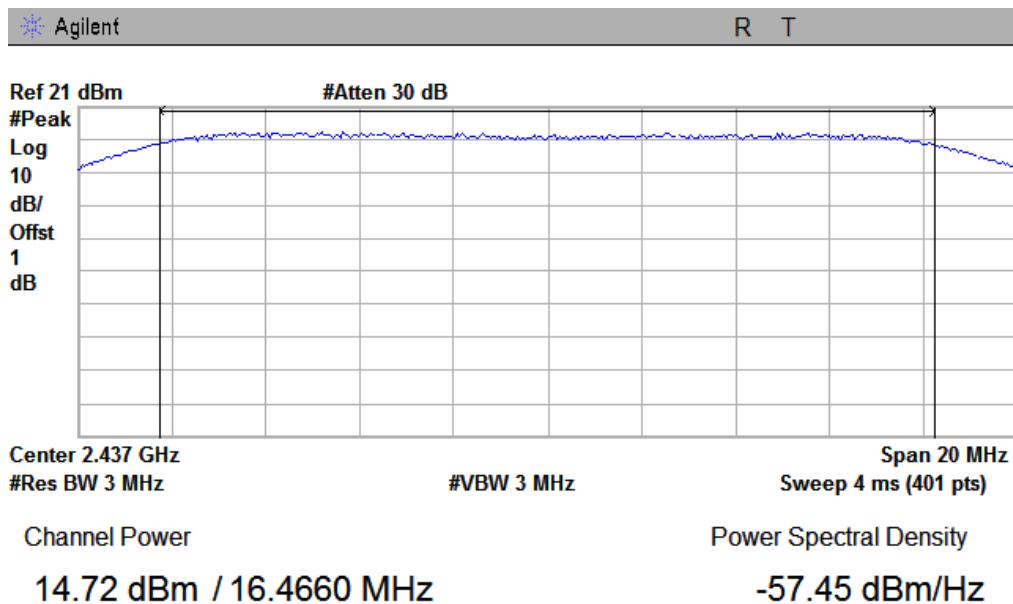


**SIEMIC, INC.**


Title: RF Test Report for GSM Mobile Phone
Main Model: GALA P730
Serial Model: N/A
To: FCC Part 15.247: 2012 (KDB 558074)

Serial#: 12070294-FCC-R3
Issue Date: 6th November, 2012
Page: 27 of 78
www.siemic.com.cn

802.11g High Channel

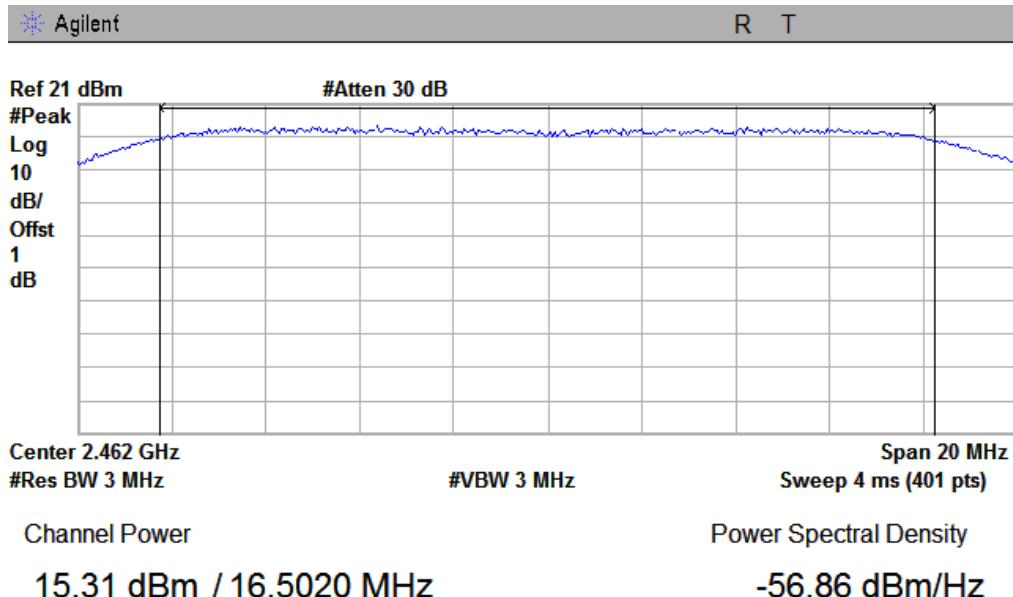

802.11n Low Channel

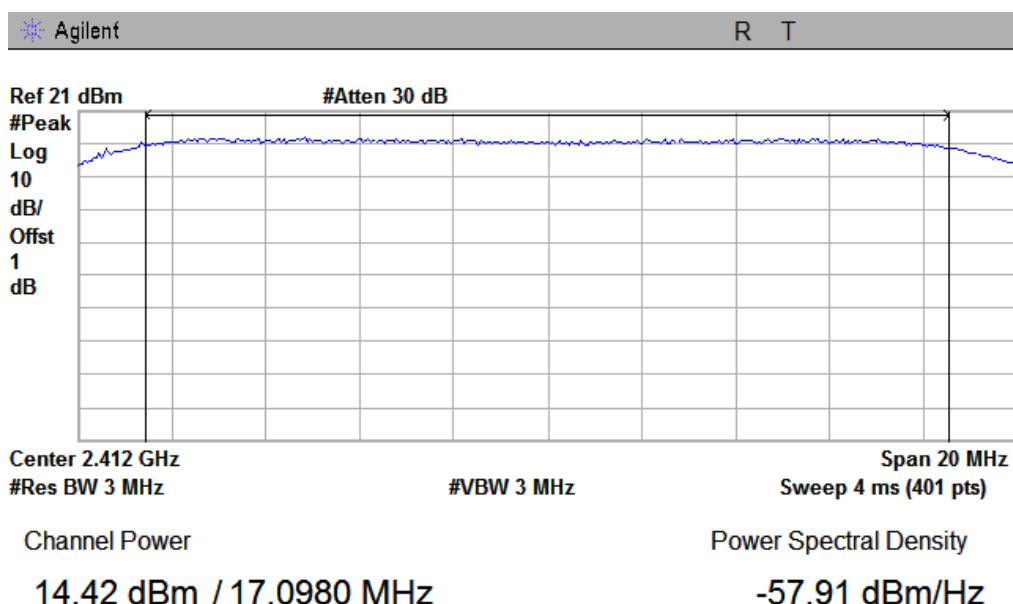


**SIEMIC, INC.**


Title: RF Test Report for GSM Mobile Phone
Main Model: GALA P730
Serial Model: N/A
To: FCC Part 15.247: 2012 (KDB 558074)

Serial#: 12070294-FCC-R3
Issue Date: 6th November, 2012
Page: 28 of 78
www.siemic.com.cn

802.11n Middle Channel

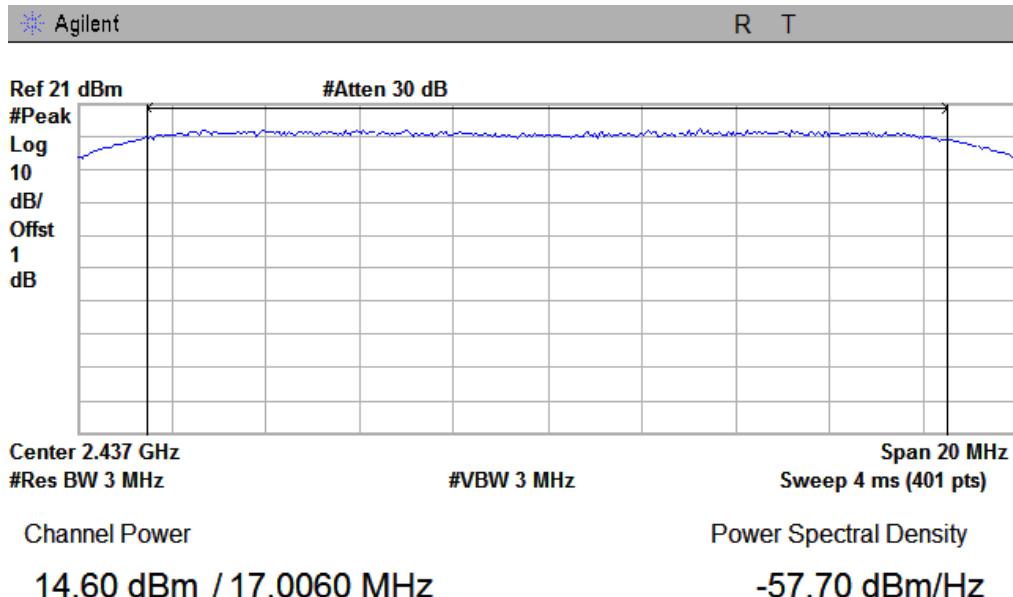

802.11n High Channel

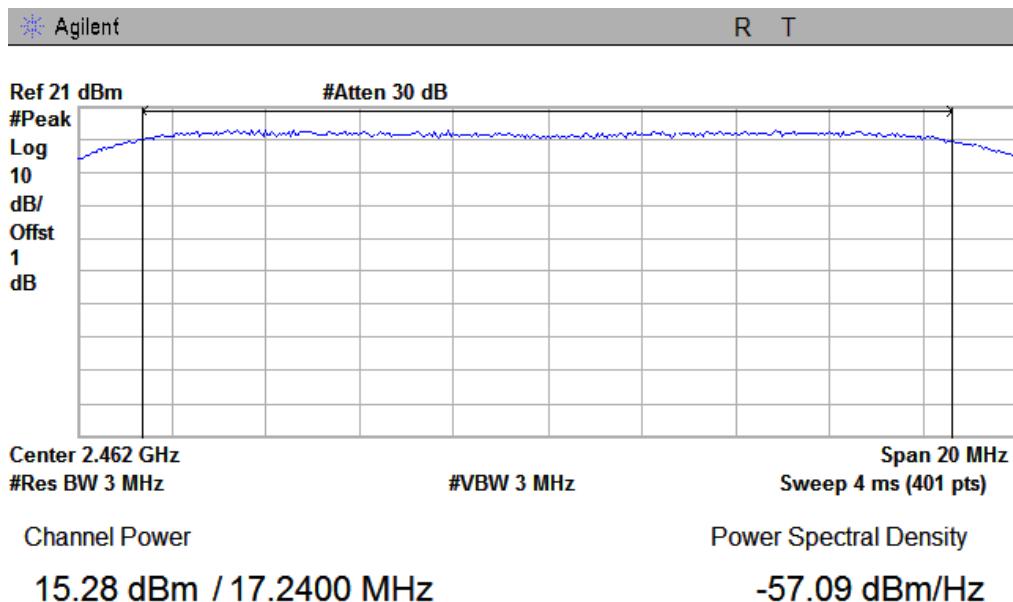




Title: RF Test Report for GSM Mobile Phone
Main Model: GALA P730
Serial Model: N/A
To: FCC Part 15.247: 2012 (KDB 558074)


Serial#: 12070294-FCC-R3
Issue Date: 6th November, 2012
Page: 29 of 78
www.siemic.com.cn

Maximum Conducted Output Power:


802.11b Low Channel

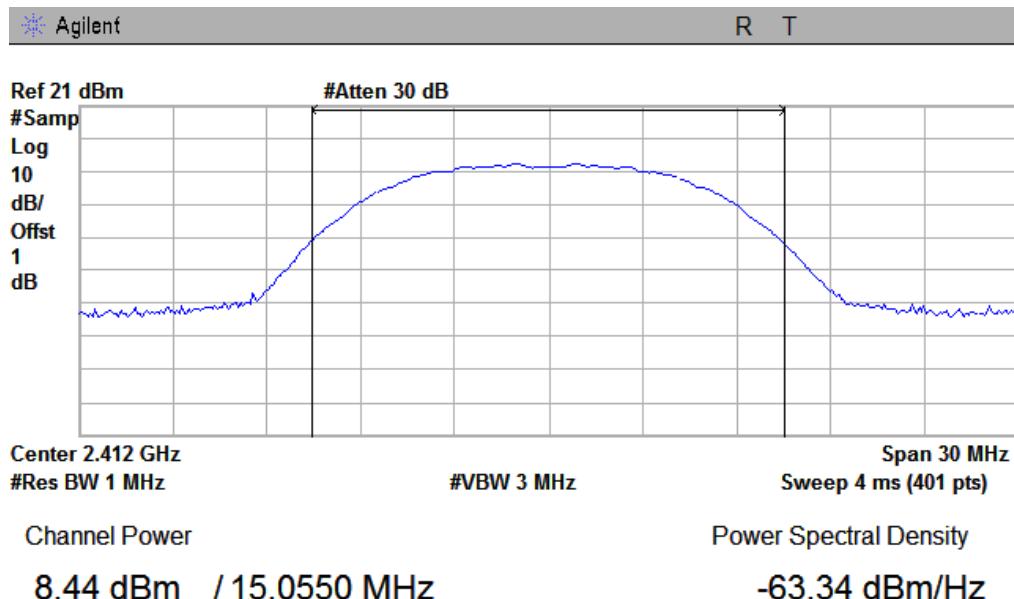


802.11b Middle Channel

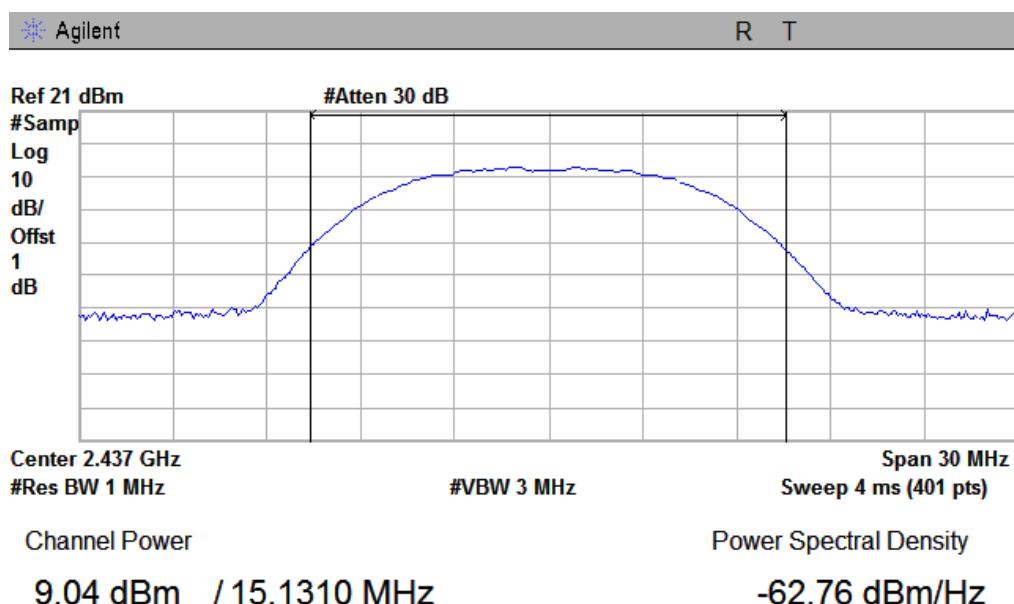


802.11b High Channel

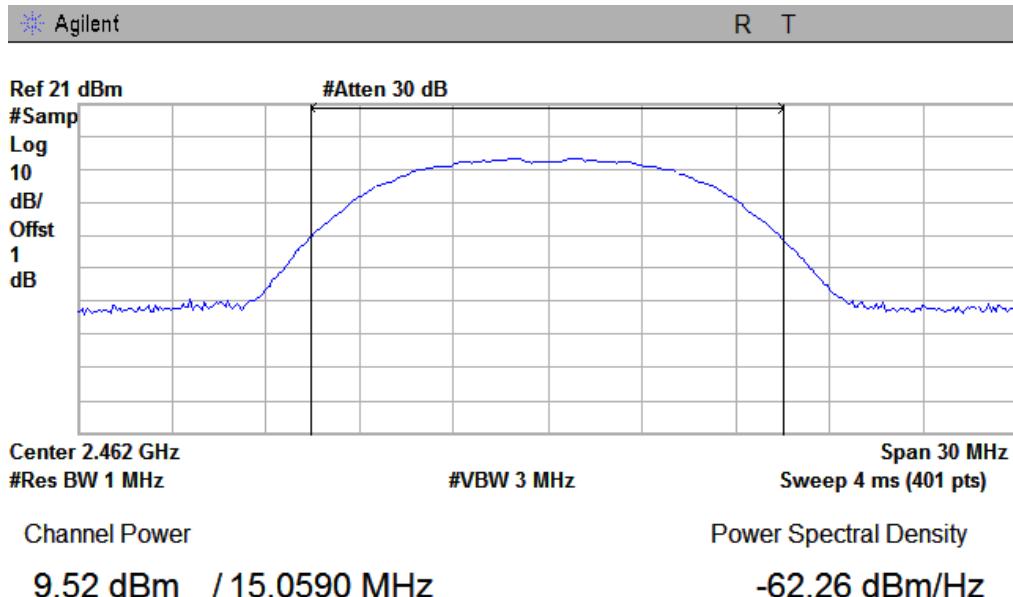


802.11g Low Channel

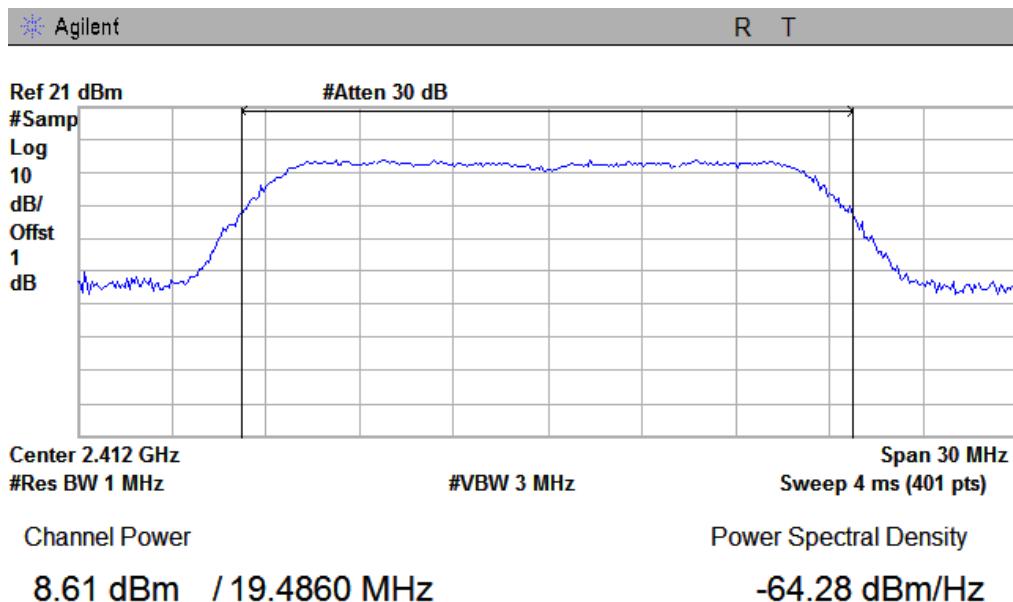

802.11g Middle Channel

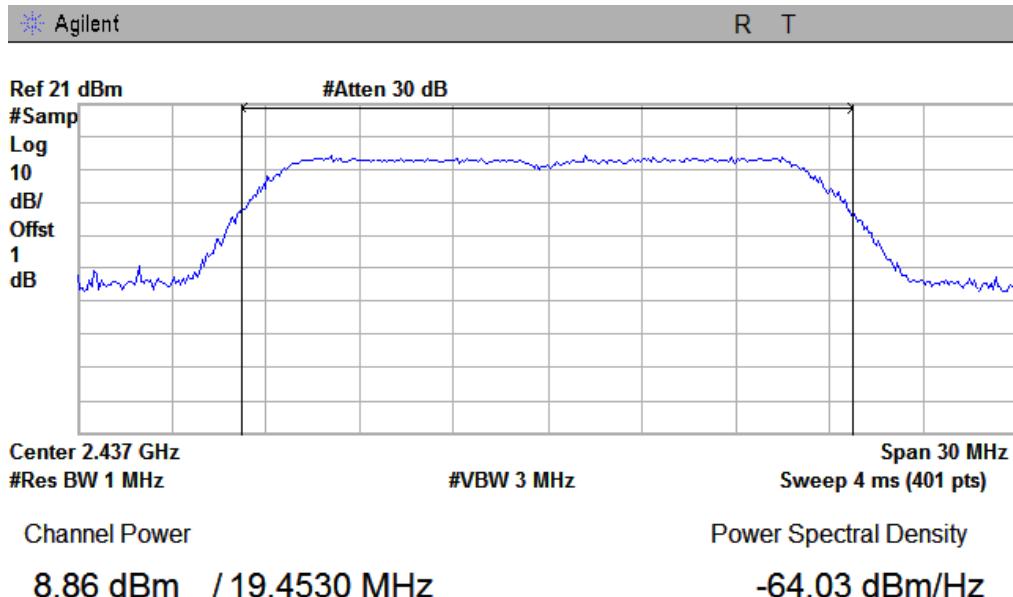

802.11g High Channel

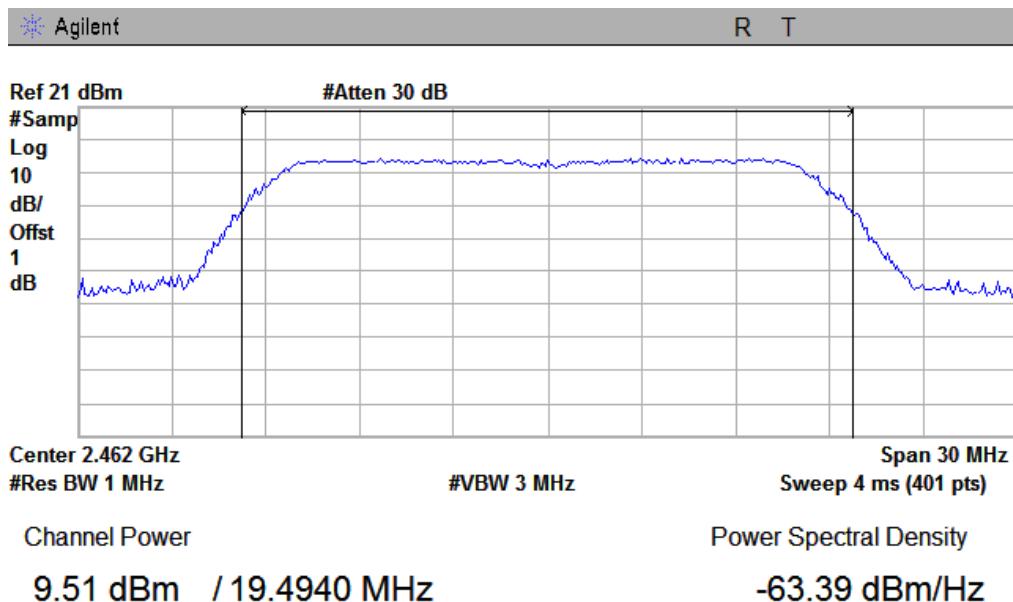


**SIEMIC, INC.**


Title: RF Test Report for GSM Mobile Phone
Main Model: GALA P730
Serial Model: N/A
To: FCC Part 15.247: 2012 (KDB 558074)

Serial#: 12070294-FCC-R3
Issue Date: 6th November, 2012
Page: 32 of 78
www.siemic.com.cn

802.11n Low Channel

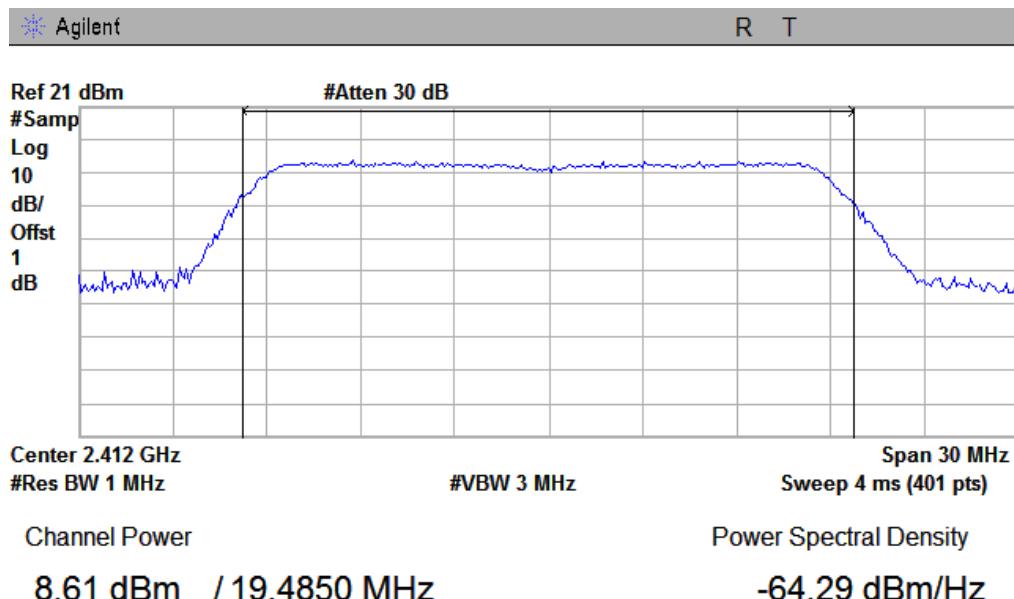


802.11n Middle Channel

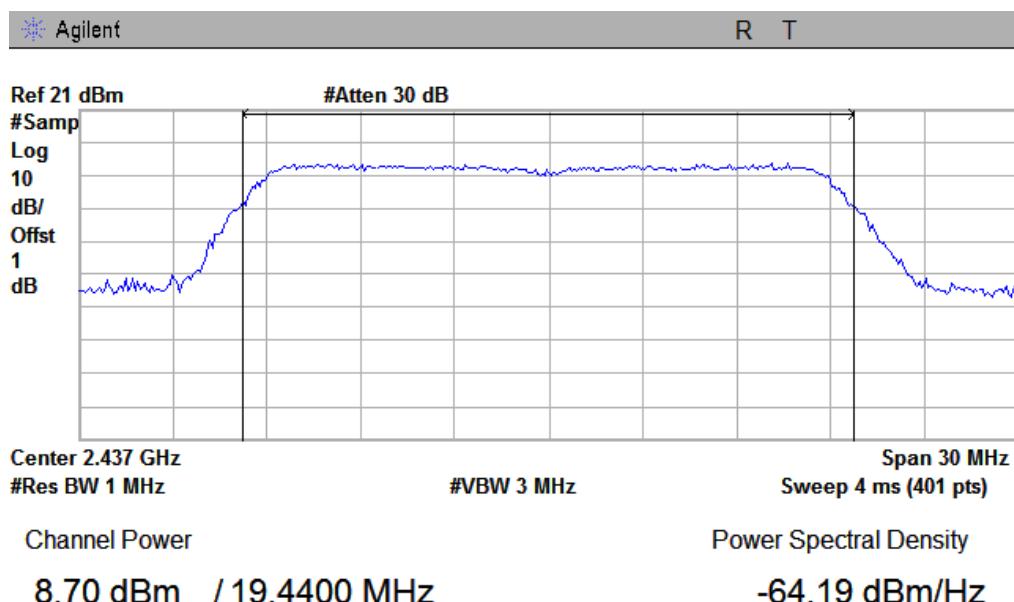

**SIEMIC, INC.**

Title: RF Test Report for GSM Mobile Phone
Main Model: GALA P730
Serial Model: N/A
To: FCC Part 15.247: 2012 (KDB 558074)

Serial#: 12070294-FCC-R3
Issue Date: 6th November, 2012
Page: 33 of 78
www.siemic.com.cn

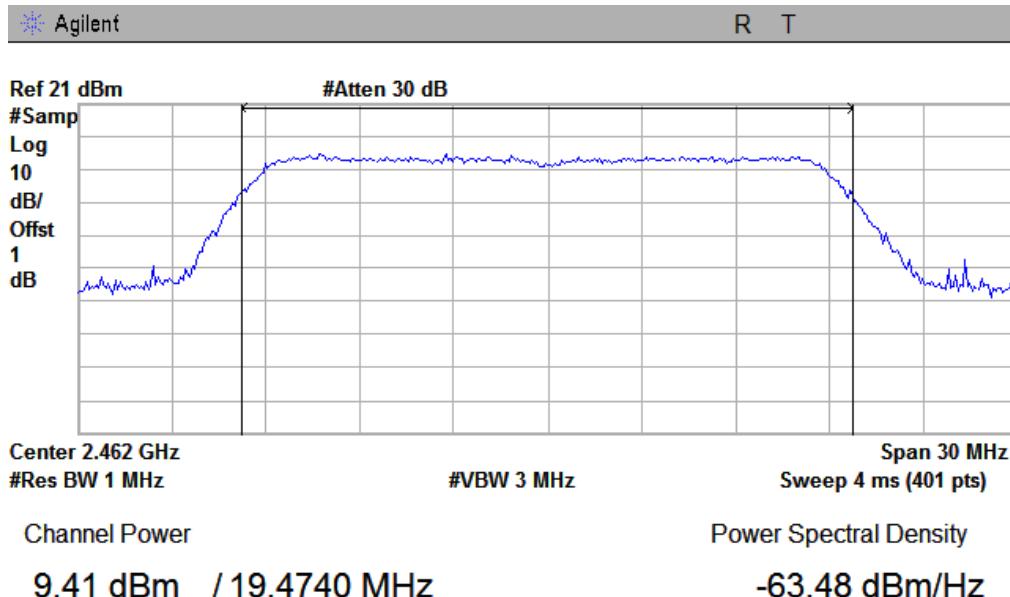802.11n High Channel



5.5 §15.247(e) - Power Spectral Density

1. Conducted Measurement

EUT was set for low, mid, high channel with modulated mode and highest RF output power.

The spectrum analyzer was connected to the antenna terminal.

2. Environmental Conditions

Temperature 22°C

Relative Humidity 50%

Atmospheric Pressure 1019mbar

3. Conducted Emissions Measurement Uncertainty

All test measurements carried out are traceable to national standards. The uncertainty of the measurement at a confidence level of approximately 95% (in the case where distributions are normal), with a coverage factor of 2, in the range 30MHz – 40GHz is ± 1.5 dB.

4. Test date : 2nd November , 2012

Tested By : Back Huang

Requirement(s):

A conducted power spectral density (PSD) limit of 8 dBm in any 3 kHz band segment within the DTS bandwidth is specified during any time interval of continuous transmission.⁴ By rule, the same method as used to determine the conducted output power shall be used to determine the power spectral density (i.e., if maximum peak conducted output power was measured then the peak PSD procedure shall be used and if maximum conducted output power was measured then the average PSD procedure shall be used).

If the average PSD is measured with a power averaging (RMS) detector or a sample detector, then the spectrum analyzer must be capable of utilizing a number of measurement points in each sweep that is greater than or equal to twice the span/RBW in order to ensure bin-to-bin spacing of \leq RBW/2 so that narrowband signals are not lost between frequency bins.

Procedures:

This procedure must be used if maximum peak conducted output power was used to demonstrate compliance to the fundamental output power limit, and is optional if the maximum (average) conducted output power was used to demonstrate compliance.

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS channel bandwidth.
3. Set the RBW \geq 3 kHz.
4. Set the VBW \geq 3 x RBW.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

Test Result: Pass.

**SIEMIC, INC.**

Title: RF Test Report for GSM Mobile Phone
Main Model: GALA P730
Serial Model: N/A
To: FCC Part 15.247: 2012 (KDB 558074)

Serial#: 12070294-FCC-R3
Issue Date: 6th November, 2012
Page: 35 of 78
www.siemic.com.cn

Please refer to the following tables and plots.

Channel	Frequency (MHz)	Data Rate	PSD (dBm)	Limit (dBm)
802.11b mode				
Low	2412	1	-11.70	8
Middle	2437	1	-11.73	8
High	2462	1	-11.09	8
802.11g mode				
Low	2412	6	-14.82	8
Middle	2437	6	-14.45	8
High	2462	6	-13.40	8
802.11n mode				
Low	2412	MCS0	-14.44	8
Middle	2437	MCS0	-14.65	8
High	2462	MCS0	-13.56	8




SIEMIC, INC.


Accessing global markets
Title: RF Test Report for GSM Mobile Phone
Main Model: GALA P730
Serial Model: N/A
To: FCC Part 15.247: 2012 (KDB 558074)

Serial#: 12070294-FCC-R3
Issue Date: 6th November, 2012
Page: 36 of 78
www.siemic.com.cn

Power Spectral Density, 802.11b Low Channel

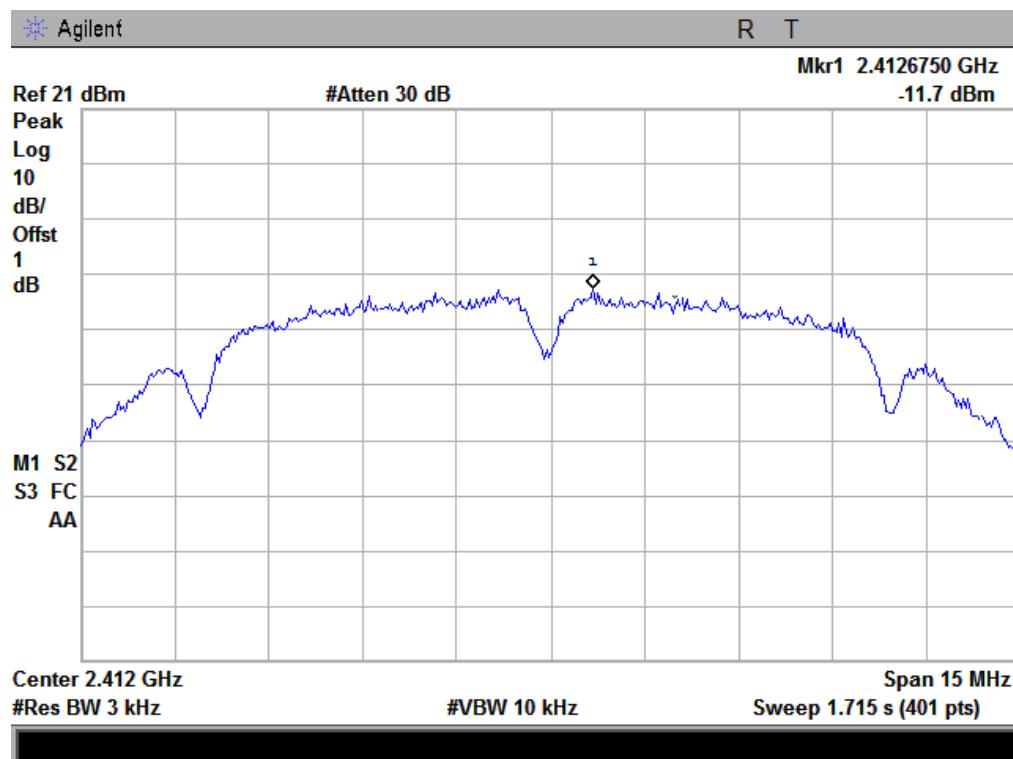

Power Spectral Density, 802.11b Middle Channel

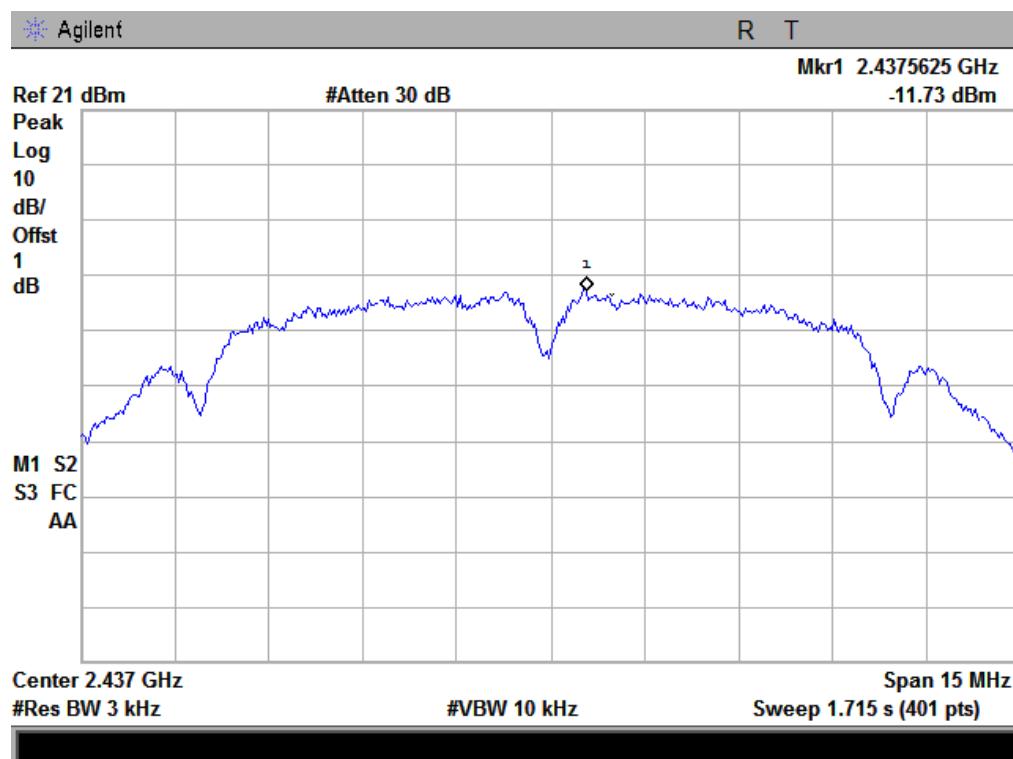


**SIEMIC, INC.**


Title: RF Test Report for GSM Mobile Phone
Main Model: GALA P730
Serial Model: N/A
To: FCC Part 15.247: 2012 (KDB 558074)

Serial#: 12070294-FCC-R3
Issue Date: 6th November, 2012
Page: 37 of 78
www.siemic.com.cn

Power Spectral Density, 802.11b High Channel

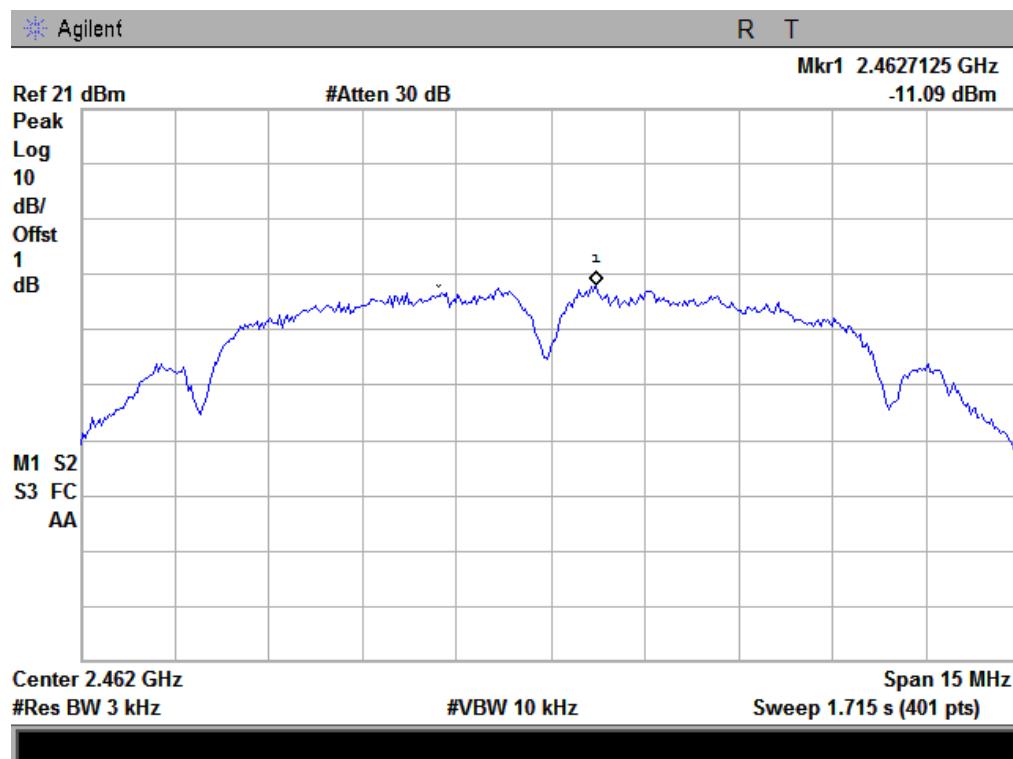

Power Spectral Density, 802.11g Low Channel

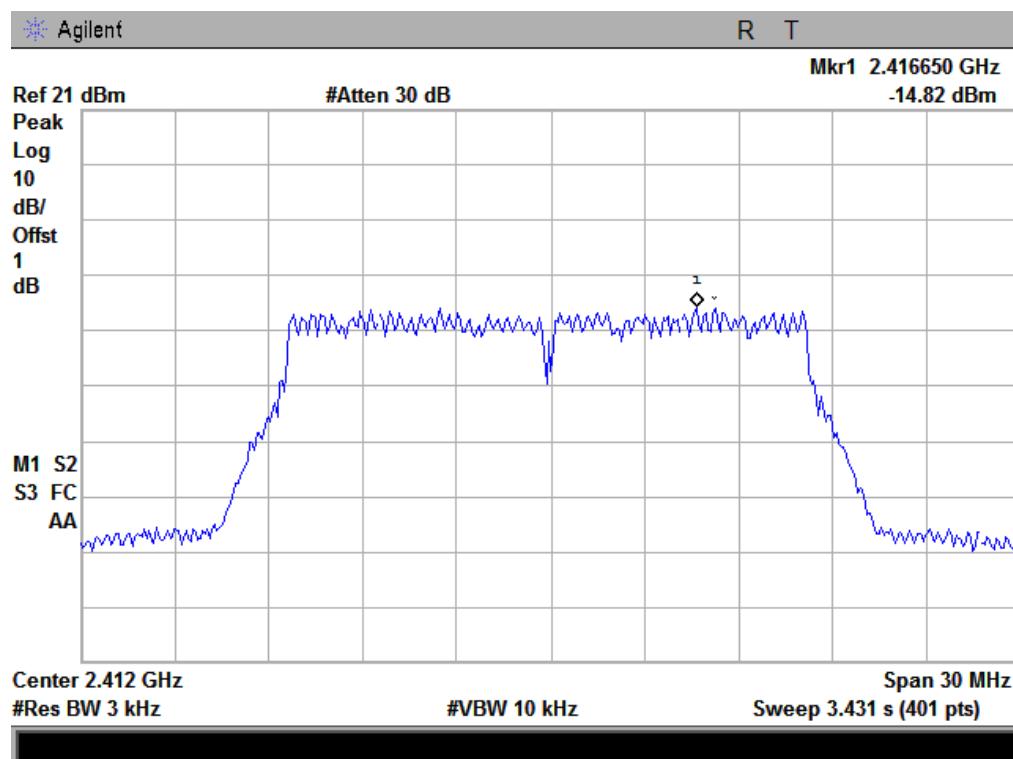


**SIEMIC, INC.**


Title: RF Test Report for GSM Mobile Phone
Main Model: GALA P730
Serial Model: N/A
To: FCC Part 15.247: 2012 (KDB 558074)

Serial#: 12070294-FCC-R3
Issue Date: 6th November, 2012
Page: 38 of 78
www.siemic.com.cn

Power Spectral Density, 802.11g Middle Channel

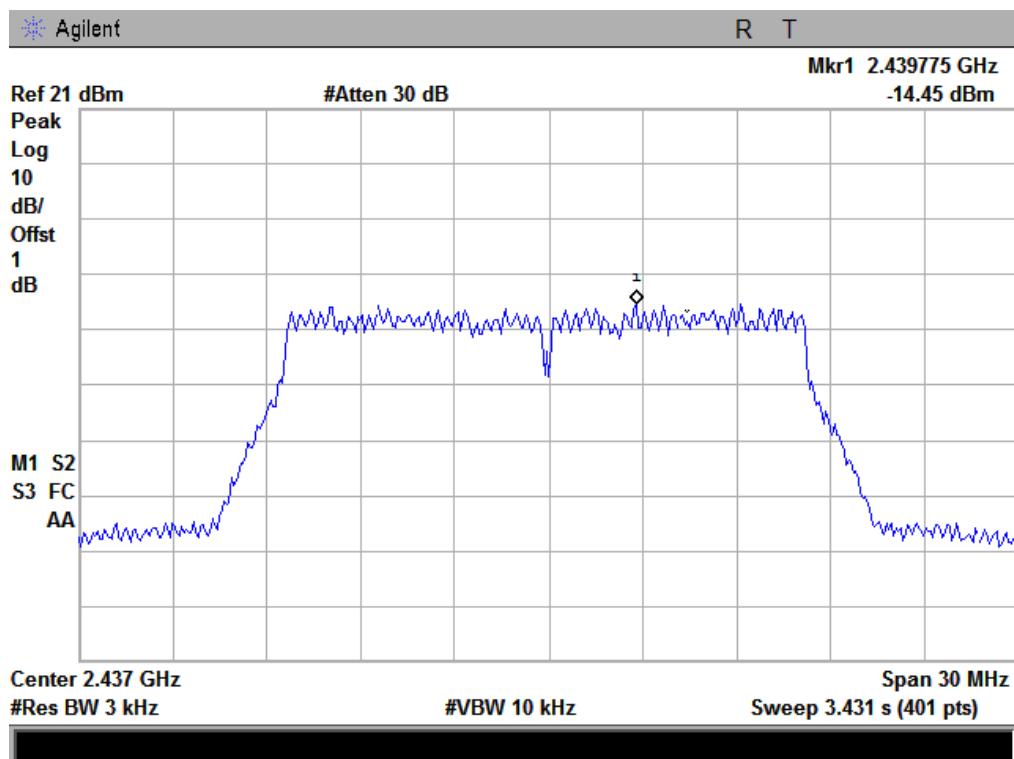

Power Spectral Density, 802.11g High Channel

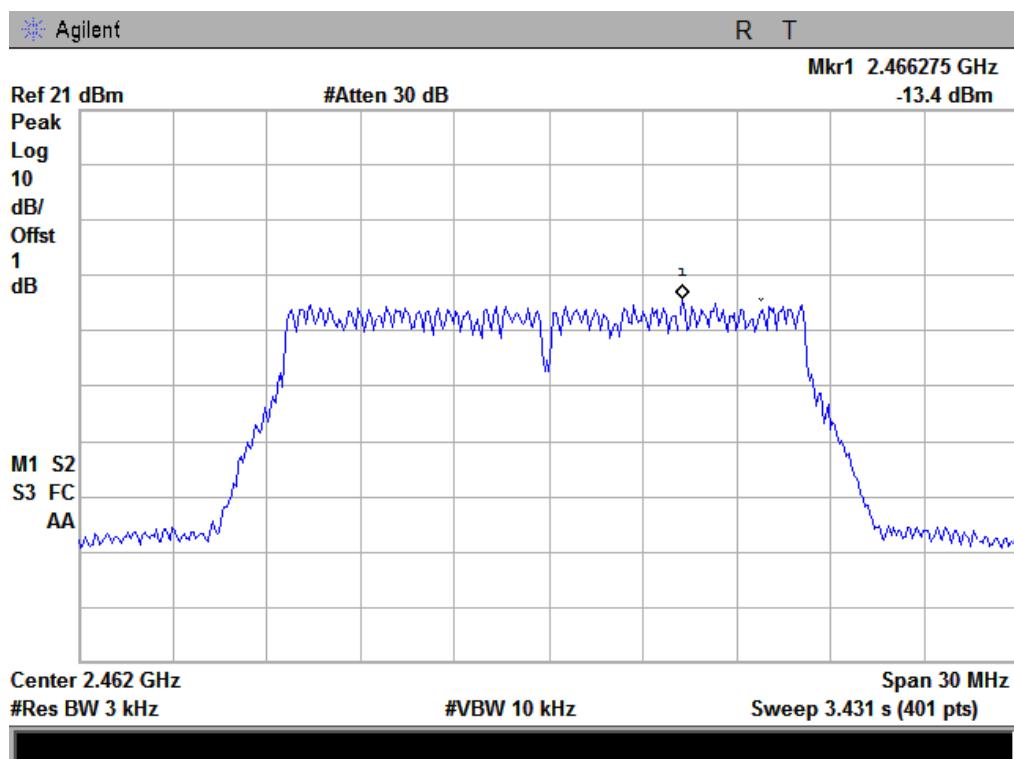


**SIEMIC, INC.**


Title: RF Test Report for GSM Mobile Phone
Main Model: GALA P730
Serial Model: N/A
To: FCC Part 15.247: 2012 (KDB 558074)

Serial#: 12070294-FCC-R3
Issue Date: 6th November, 2012
Page: 39 of 78
www.siemic.com.cn

Power Spectral Density, 802.11n Low Channel

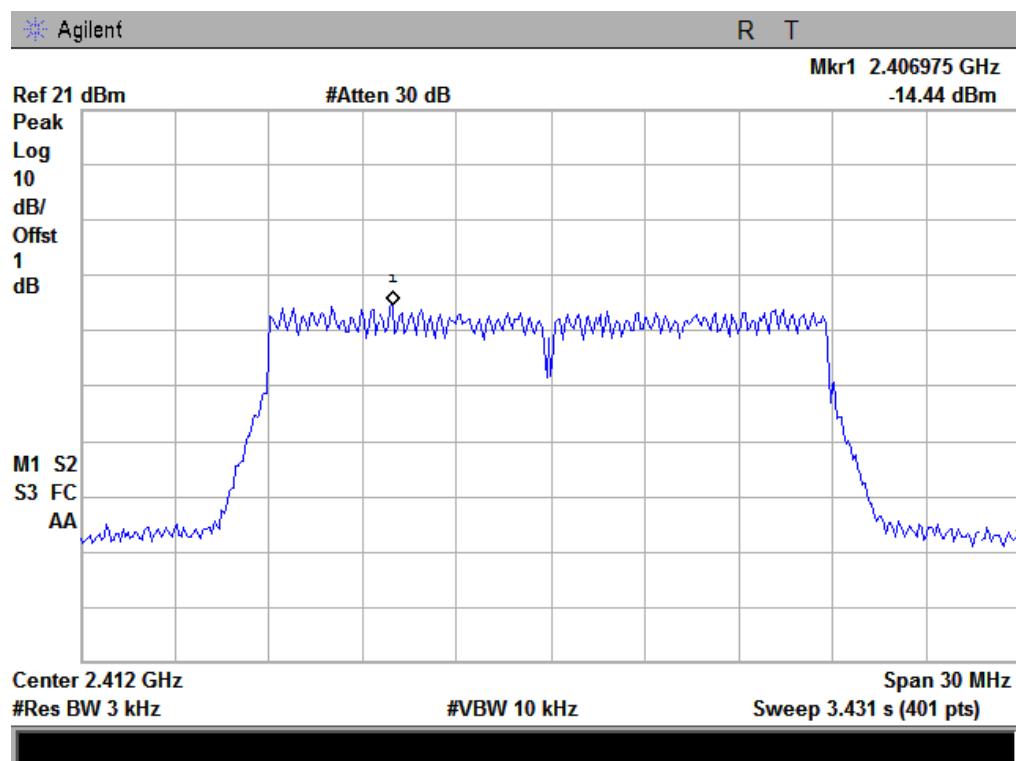

Power Spectral Density, 802.11n Middle Channel

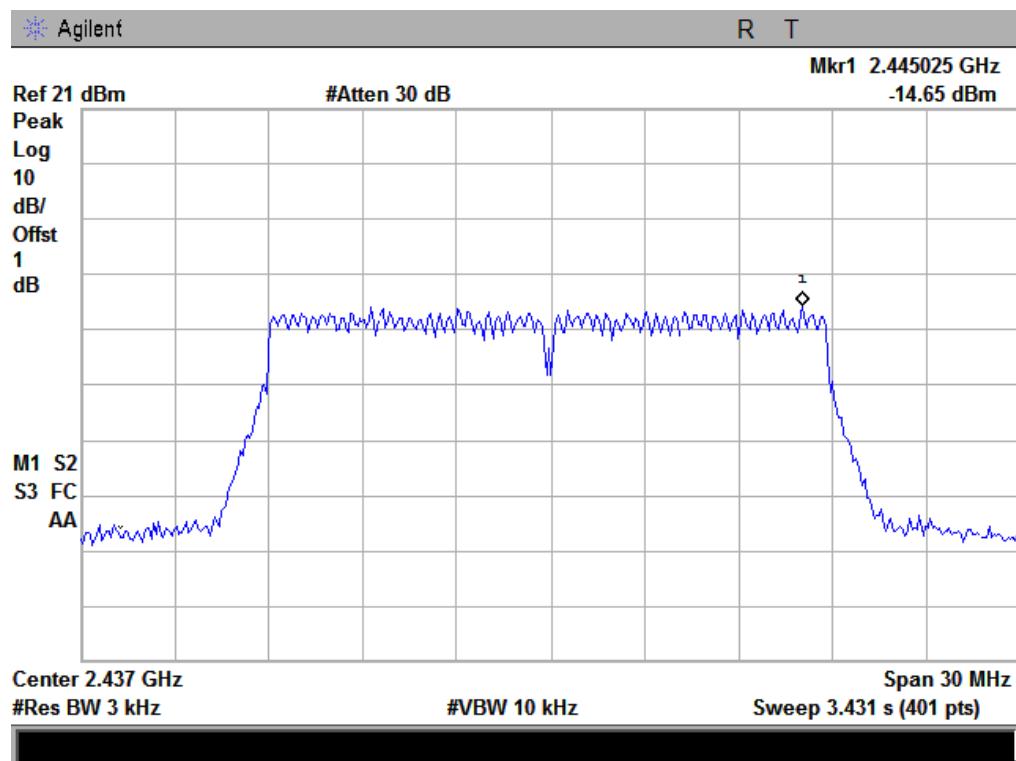


**SIEMIC, INC.**

Title: RF Test Report for GSM Mobile Phone
Main Model: GALA P730
Serial Model: N/A
To: FCC Part 15.247: 2012 (KDB 558074)

Serial#: 12070294-FCC-R3
Issue Date: 6th November, 2012
Page: 40 of 78
www.siemic.com.cn

Power Spectral Density, 802.11n High Channel

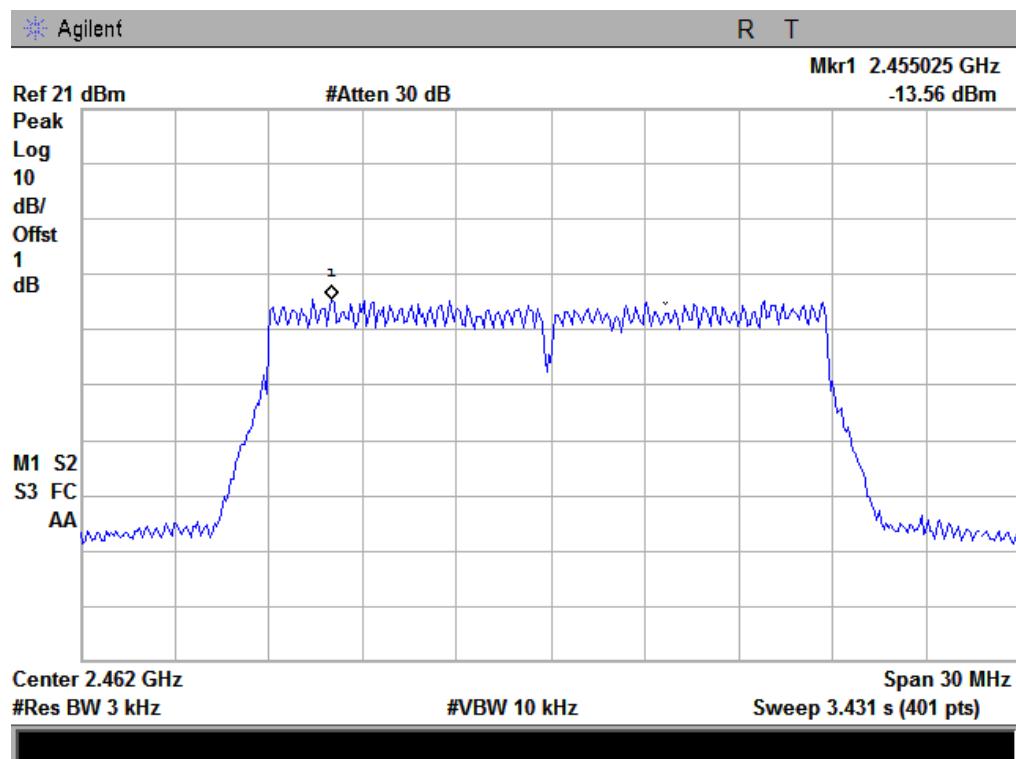

5.6 §15.247(d) – Band-Edge & Unwanted Emissions into Non-Restricted Frequency Bands

1. In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c))
2. Environmental Conditions Temperature 160C
 Relative Humidity 50%
 Atmospheric Pressure 1019mbar
3. Test date : 2nd November , 2012
Tested By : Peck Huang

Requirement(s):

Requirement(s):

Band-Edge Measurements

Band-Edge Measurements
The measurement of unwanted emissions at the edge of the authorized frequency bands can be complicated by the capture of RF energy from the fundamental emission within the RBW passband. The following techniques are permitted for use in performing a measurement of the unwanted emission level at the band edges.

Unwanted Emissions into Non-Restricted Frequency Bands

§15.247(d) specifies that in any 100 kHz bandwidth outside of the authorized frequency band, the power, based on either RF conducted or radiated measurements, shall be attenuated according to the following conditions:

1. If the maximum peak conducted output power procedure was used to demonstrate compliance to **15.247(b)(3)** requirements, then the peak output power measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz (i.e., 20 dBc).
2. If maximum (average) conducted output power was used to demonstrate compliance to **15.247(b)(3)** requirements, then the peak power in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 30 dB relative to the maximum in-band peak PSD level in 100 kHz (i.e., 30 dBc).
3. In either case, attenuation to levels below the general emission limits specified in **§15.209(a)** is not required.

3. In either case, attenuation to levels below the general emission limits specified in **§15.209**(4) is not required. The following procedures should be used to demonstrate compliance to these limits. Note that these procedures can be used in either an antenna-port conducted or radiated test set-up. Radiated tests must conform to the test site requirements and utilize maximization procedures defined in C63.10.

Procedures:

Band-Edge (Integrated Power Measurement)

A narrower resolution bandwidth can be used at the band edge to improve the measurement accuracy provided that the measurement is subsequently integrated to the relevant bandwidth specification (e.g., 100 kHz within non-restricted bands and 1 MHz within restricted frequency bands).

Unwanted Emissions Level Measurement

Measure the peak power in any 100 kHz bandwidth for all emissions outside of the authorized DTS frequency band as follows. This measurement must be performed over a frequency range that spans from the lowest frequency generated in the device up to and including the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.

1. Set start frequency to DTS channel edge frequency.
2. Set stop frequency so as to encompass the spectrum to be examined.
3. Set RBW = 100 kHz.
4. Set VBW \geq 300 kHz.
5. Detector = peak.
6. Trace Mode = max hold.
7. Sweep = auto couple.
8. Allow the trace to stabilize (this may take some time, depending on the extent of the span).
9. Use peak marker function to determine maximum amplitude of all unwanted emissions within any 100 kHz bandwidth.

**SIEMIC, INC.**

Title: RF Test Report for GSM Mobile Phone
Main Model: GALA P730
Serial Model: N/A
To: FCC Part 15.247: 2012 (KDB 558074)

Serial#: 12070294-FCC-R3
Issue Date: 6th November, 2012
Page: 42 of 78
www.siemic.com.cn

Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) are attenuated by at least the minimum requirements specified in 10.1. Report the three highest emissions relative to the limit.

Test Result: Pass.



Please refer to the following tables and plots.

Band Edge (MHz)	Delta Peak to band emission (dB)	Limit (dB)
802.11b mode		
2400.0	45.03	20
2483.5	50.70	20
802.11g mode		
2400.0	29.73	20
2483.5	34.34	20
802.11n mode		
2400.0	29.80	20
2483.5	35.55	20

**SIEMIC, INC.**

Title: RF Test Report for GSM Mobile Phone
Main Model: GALA P730
Serial Model: N/A
To: FCC Part 15.247: 2012 (KDB 558074)

Serial#: 12070294-FCC-R3
Issue Date: 6th November, 2012
Page: 43 of 78
www.siemic.com.cn

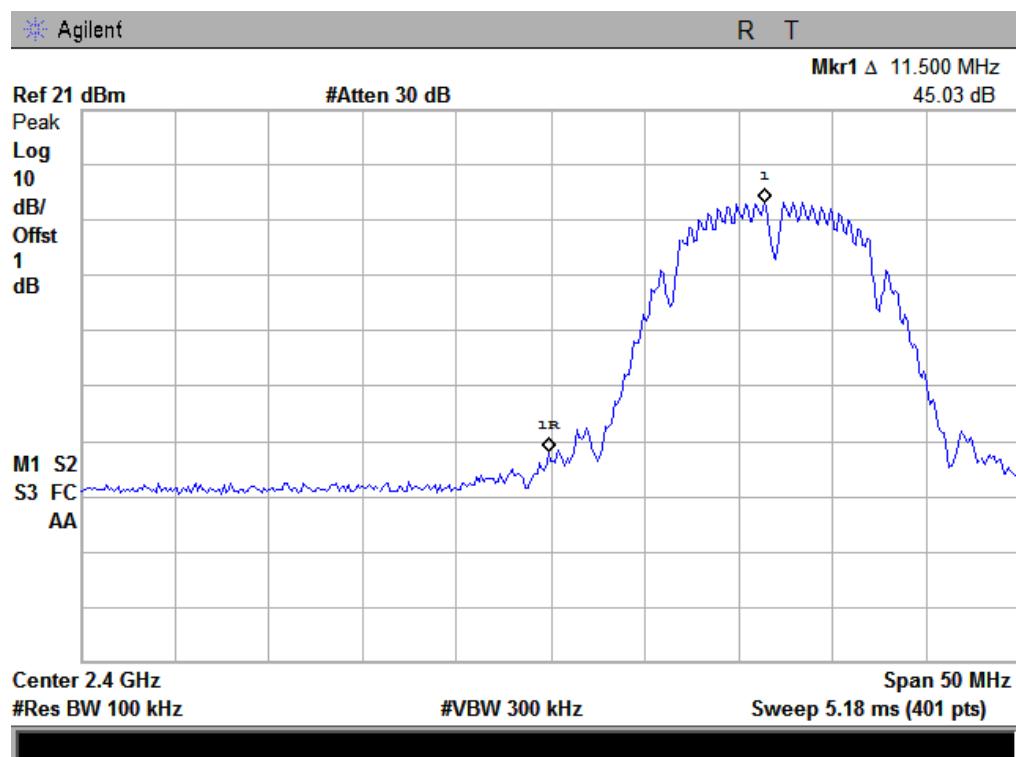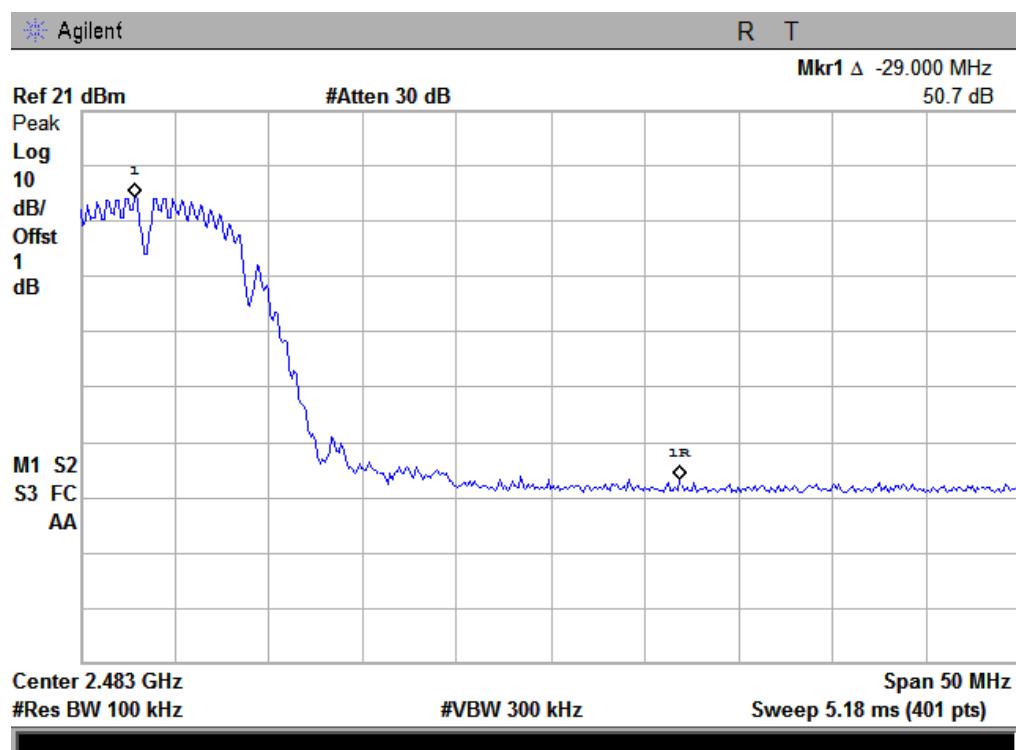
802.11b: Band Edge, Left Side**802.11b: Band Edge, Right Side**

**SIEMIC, INC.**


Title: RF Test Report for GSM Mobile Phone
Main Model: GALA P730
Serial Model: N/A
To: FCC Part 15.247: 2012 (KDB 558074)

Serial#: 12070294-FCC-R3
Issue Date: 6th November, 2012
Page: 44 of 78
www.siemic.com.cn

802.11g: Band Edge, Left Side

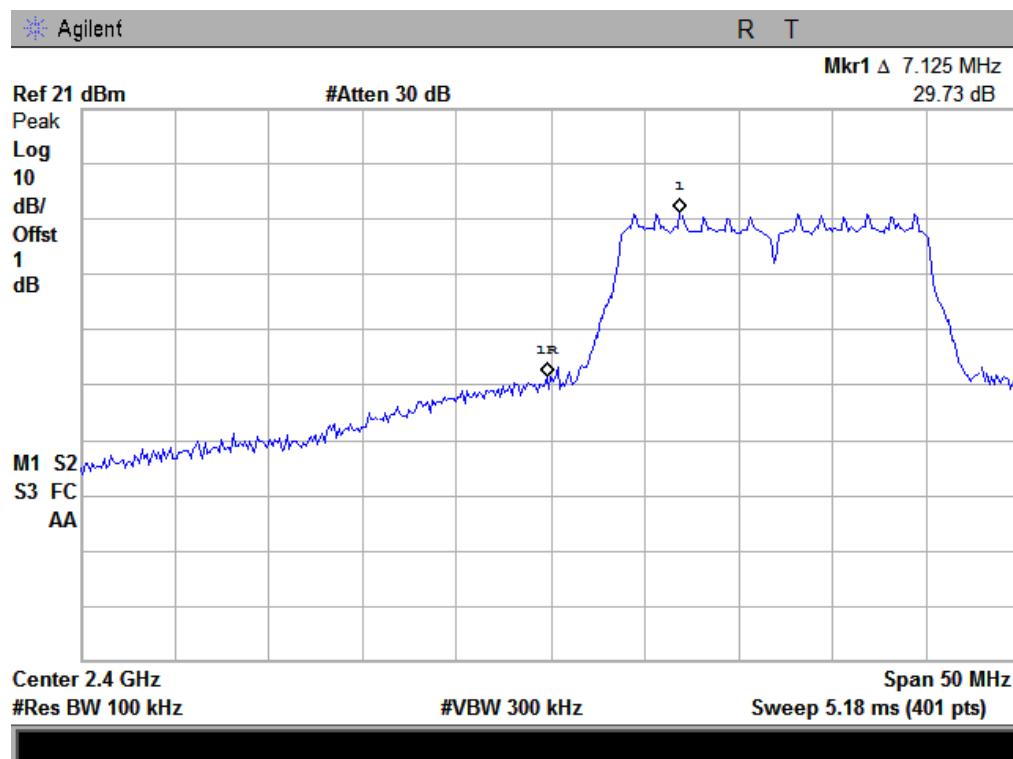



802.11g: Band Edge, Right Side

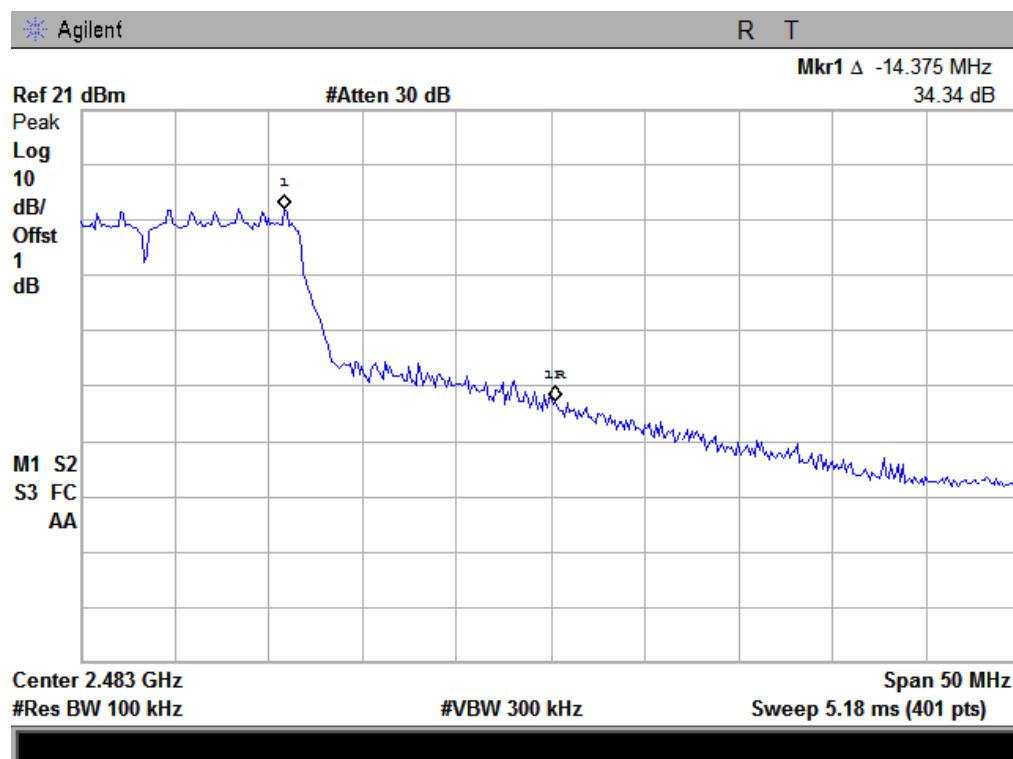

**SIEMIC, INC.**

Title: RF Test Report for GSM Mobile Phone
Main Model: GALA P730
Serial Model: N/A
To: FCC Part 15.247: 2012 (KDB 558074)

Serial#: 12070294-FCC-R3
Issue Date: 6th November, 2012
Page: 45 of 78
www.siemic.com.cn

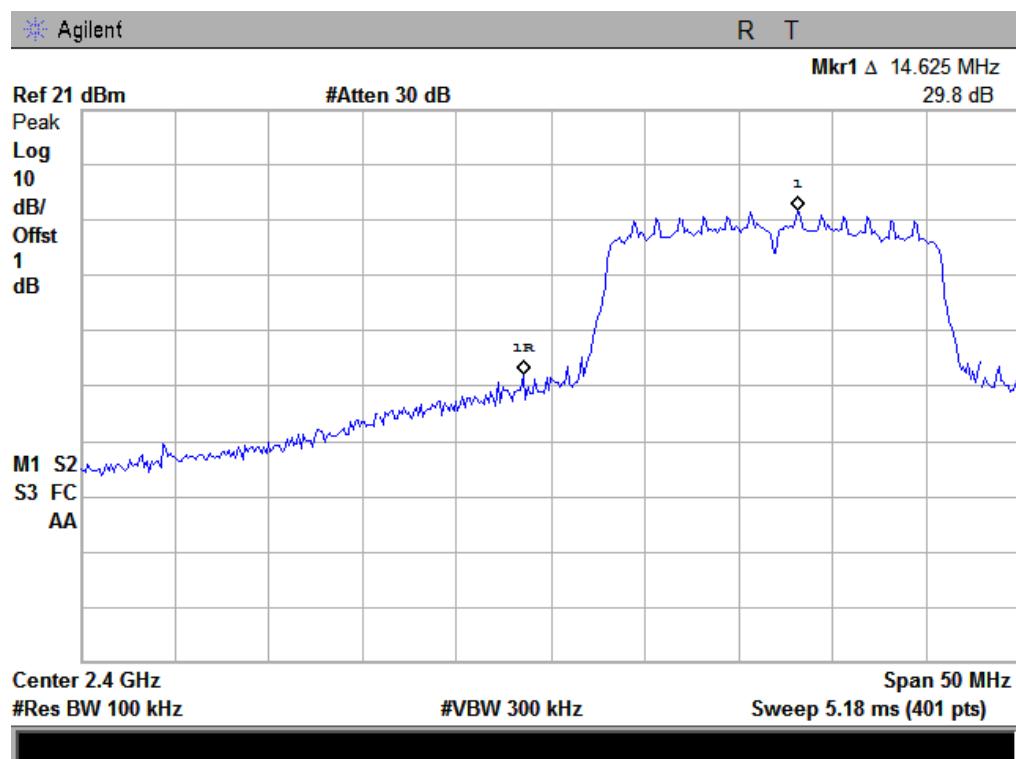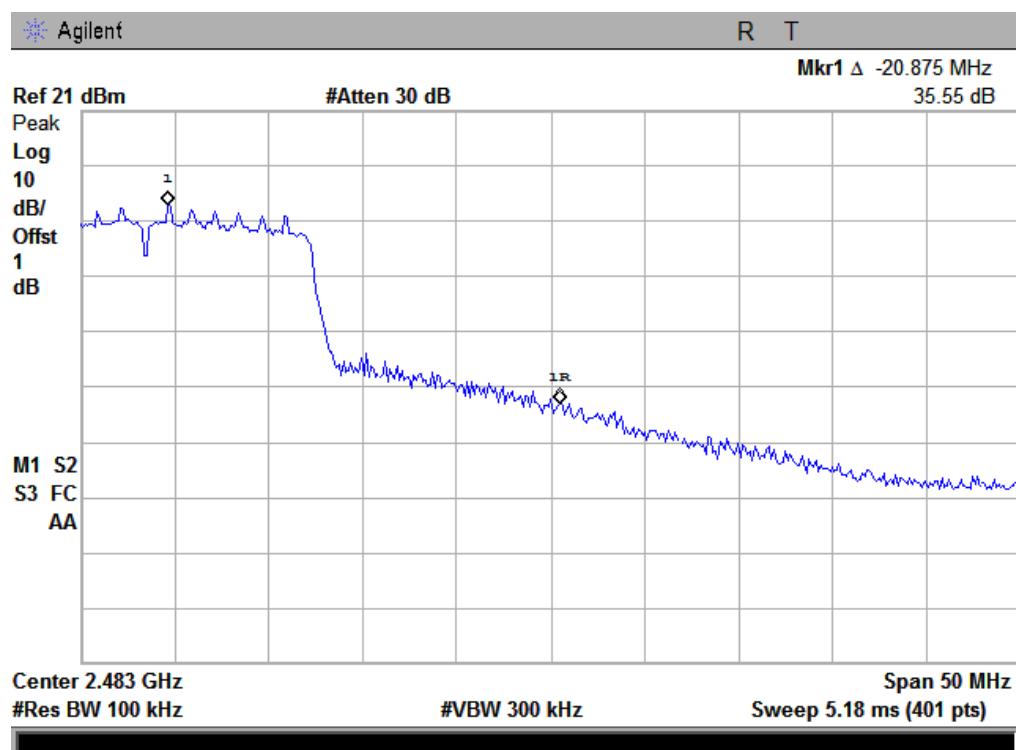802.11n: Band Edge, Left Side**802.11n: Band Edge, Right Side**

**SIEMIC, INC.**


Title: RF Test Report for GSM Mobile Phone
Main Model: GALA P730
Serial Model: N/A
To: FCC Part 15.247: 2012 (KDB 558074)

Serial#: 12070294-FCC-R3
Issue Date: 6th November, 2012
Page: 46 of 78
www.siemic.com.cn


Unwanted Emissions into Non-Restricted Frequency Bands

Please refer to the following plots.

802.11b Low Channel

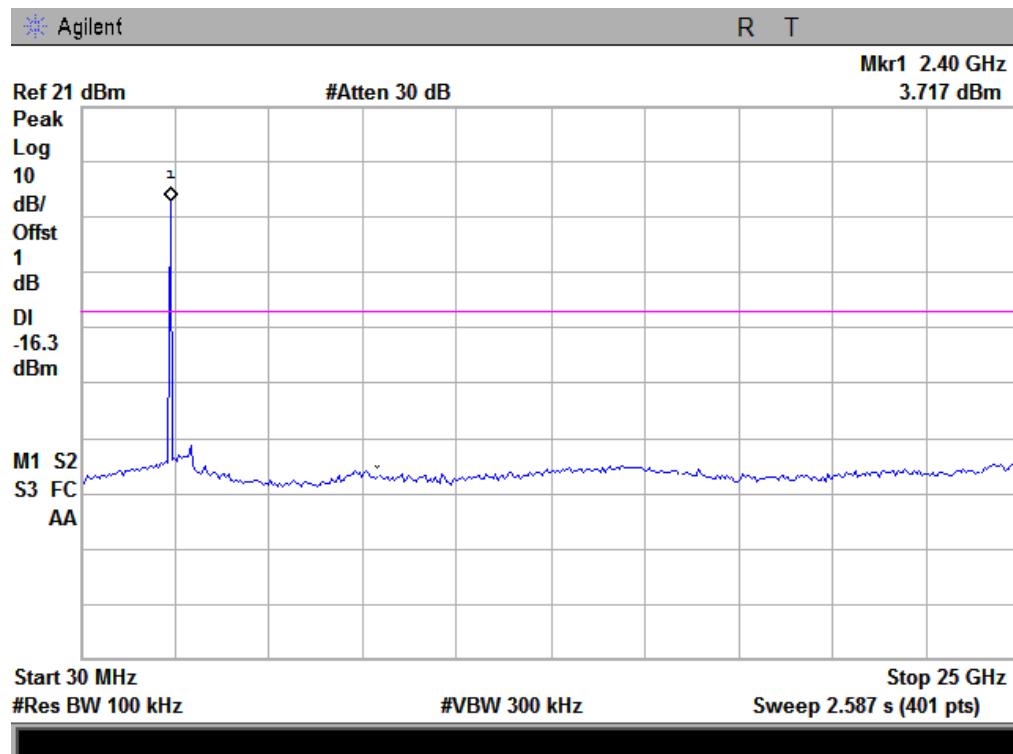

802.11b Middle Channel

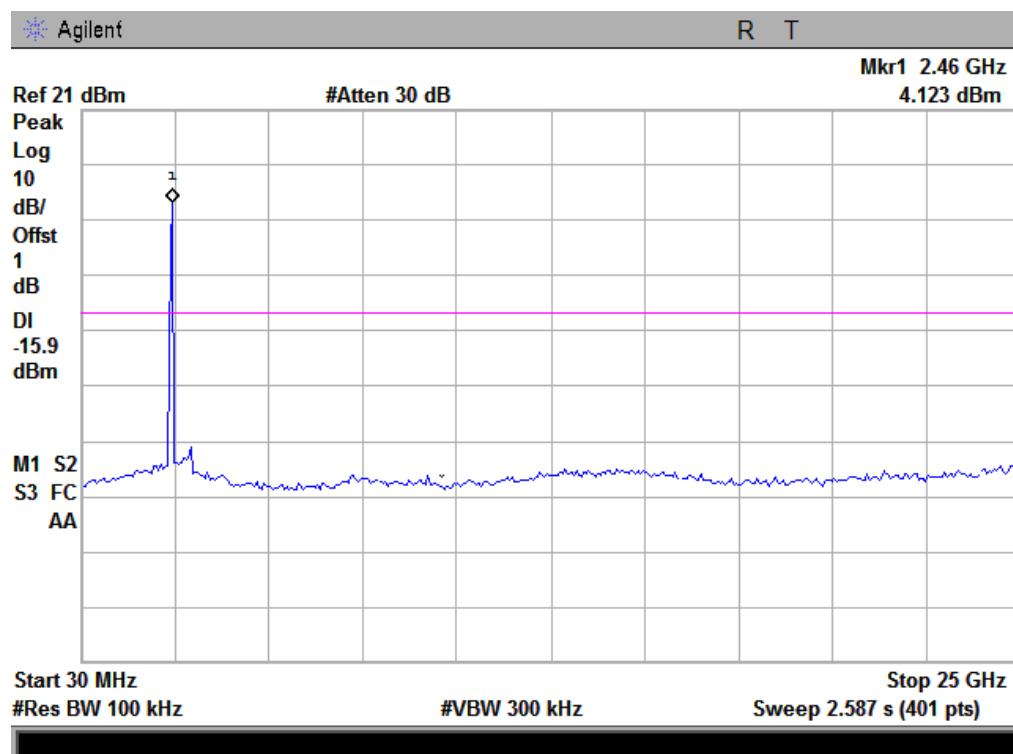


**SIEMIC, INC.**


Title: RF Test Report for GSM Mobile Phone
Main Model: GALA P730
Serial Model: N/A
To: FCC Part 15.247: 2012 (KDB 558074)

Serial#: 12070294-FCC-R3
Issue Date: 6th November, 2012
Page: 47 of 78
www.siemic.com.cn

802.11b High Channel

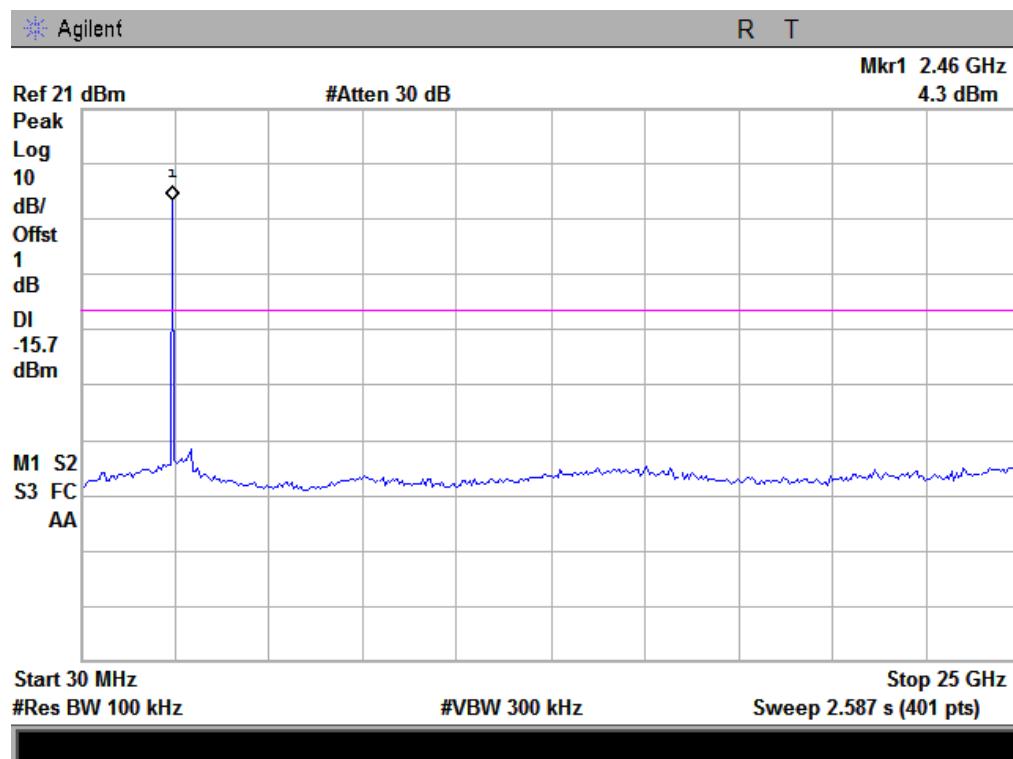

802.11g Low Channel

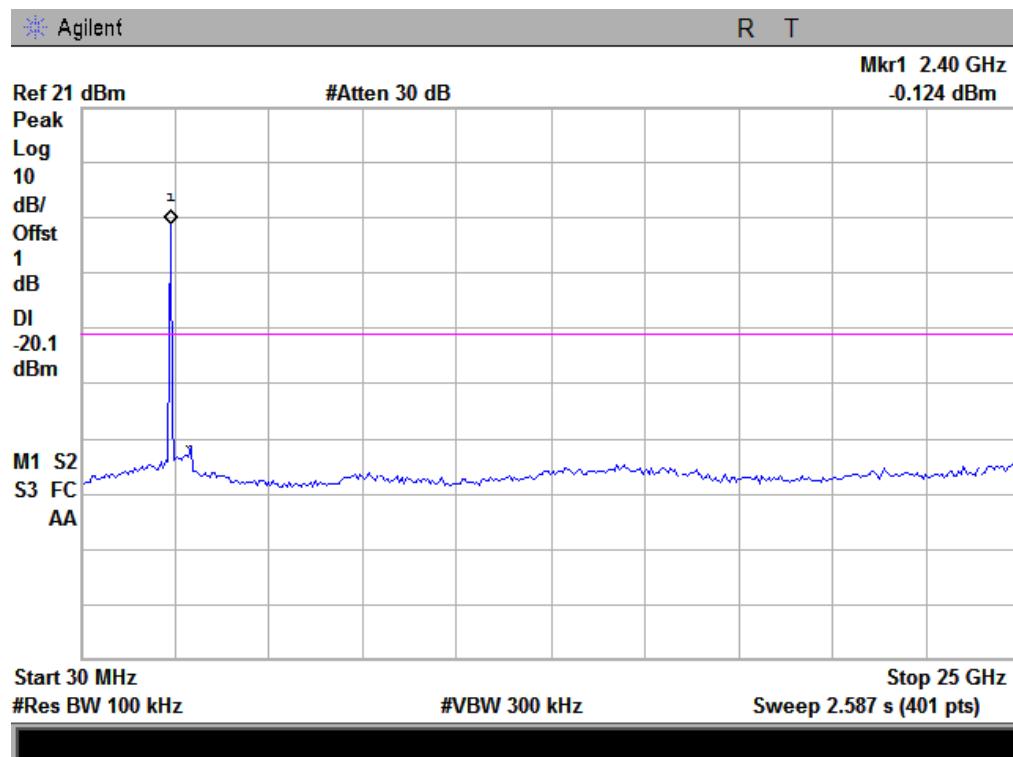


**SIEMIC, INC.**


Title: RF Test Report for GSM Mobile Phone
Main Model: GALA P730
Serial Model: N/A
To: FCC Part 15.247: 2012 (KDB 558074)

Serial#: 12070294-FCC-R3
Issue Date: 6th November, 2012
Page: 48 of 78
www.siemic.com.cn

802.11g Middle Channel

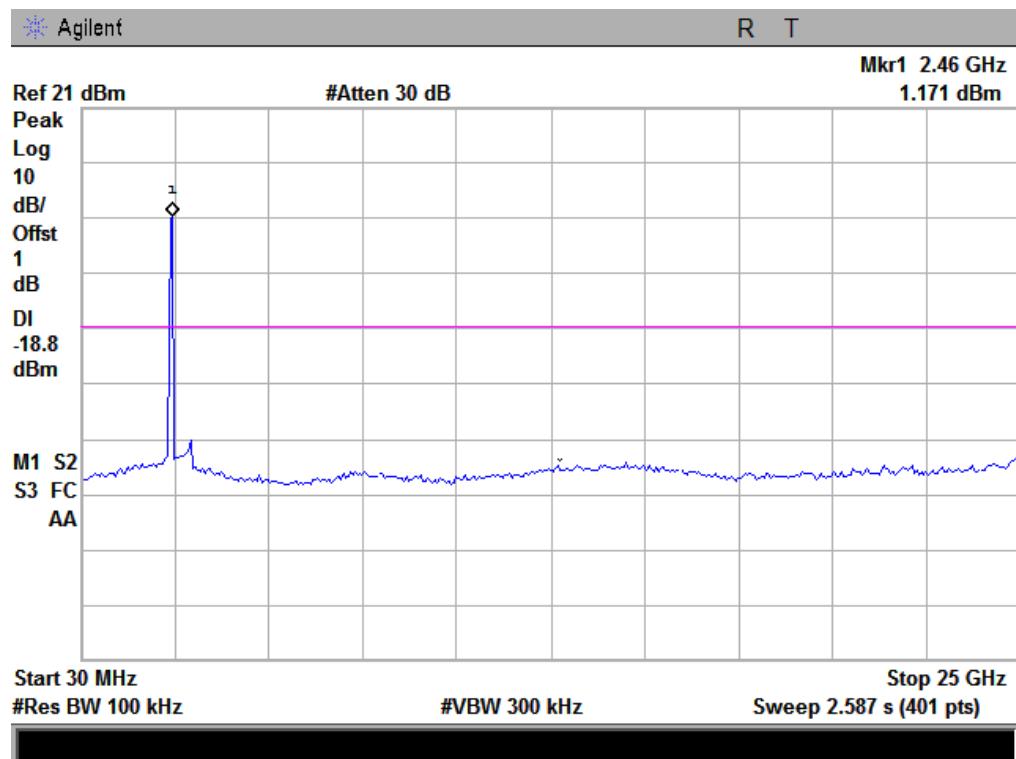

802.11g High Channel

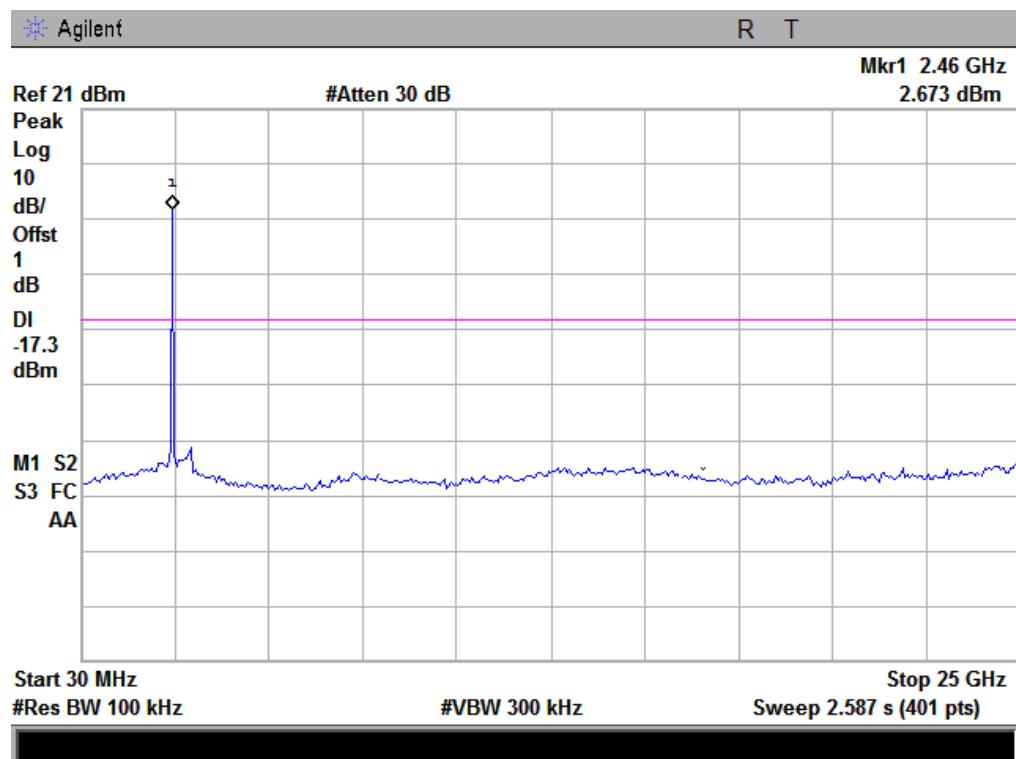


**SIEMIC, INC.**


Title: RF Test Report for GSM Mobile Phone
Main Model: GALA P730
Serial Model: N/A
To: FCC Part 15.247: 2012 (KDB 558074)

Serial#: 12070294-FCC-R3
Issue Date: 6th November, 2012
Page: 49 of 78
www.siemic.com.cn

802.11n Low Channel\

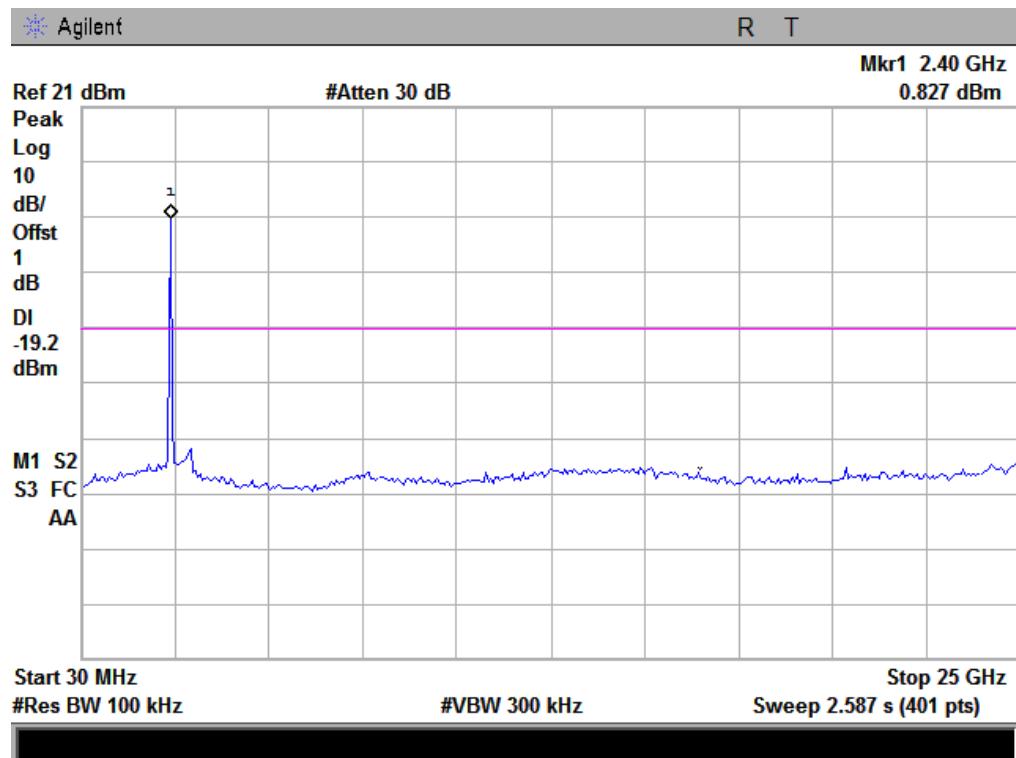

802.11n Middle Channel

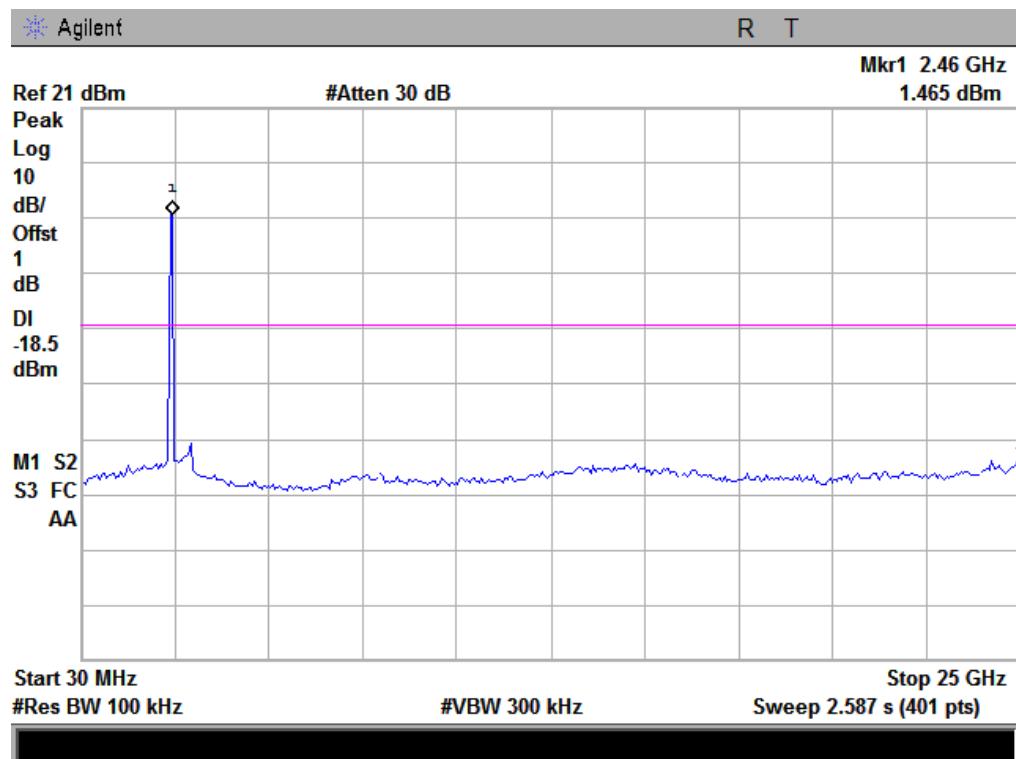


**SIEMIC, INC.**

Title: RF Test Report for GSM Mobile Phone
Main Model: GALA P730
Serial Model: N/A
To: FCC Part 15.247: 2012 (KDB 558074)

Serial#: 12070294-FCC-R3
Issue Date: 6th November, 2012
Page: 50 of 78
www.siemic.com.cn

802.11n High Channel

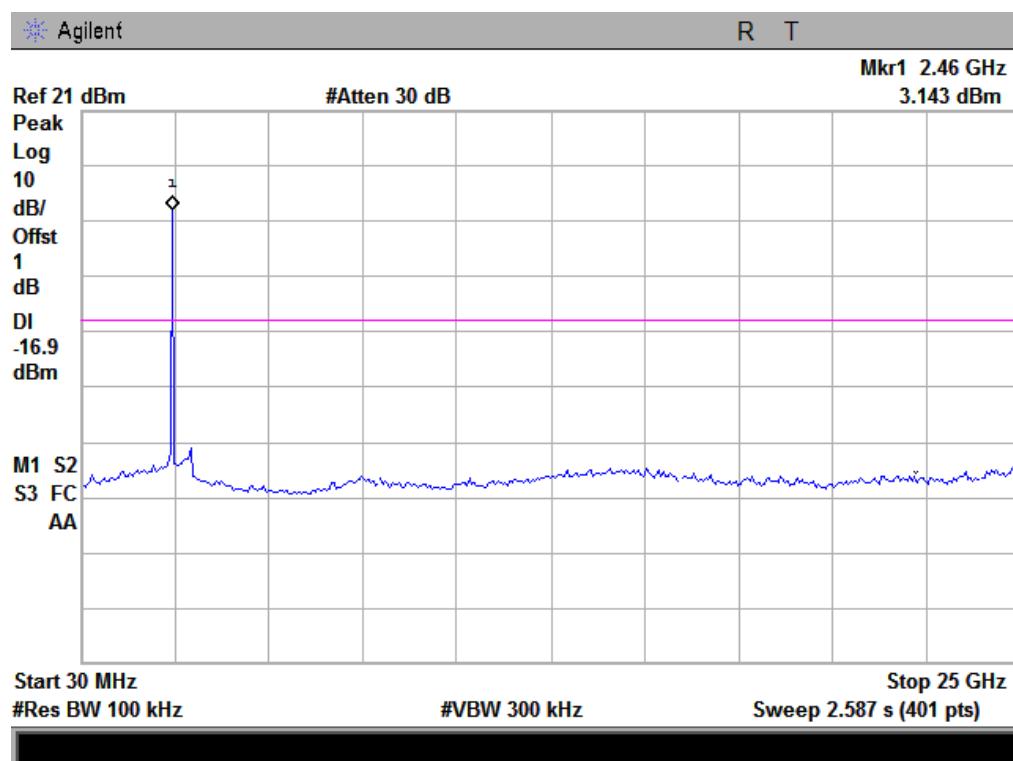



5.7 §15.207 (a) - AC Power Line Conducted Emissions

Requirement:

Frequency of emission (MHz)	Conducted limit (dBμV)	
	Quasi-peak	Average
0.15–0.5	66 to 56*	56 to 46*
0.5–5	56	46
5–30	60	50

*Decreases with the logarithm of the frequency.

Procedures:

1. All possible modes of operation were investigated. Only the 6 worst case emissions measured, using the correct CISPR and Average detectors, are reported. All other emissions were relatively insignificant.
2. A "-ve" margin indicates a PASS as it refers to the margin present below the limit line at the particular frequency.
3. Conducted Emissions Measurement Uncertainty
All test measurements carried out are traceable to national standards. The uncertainty of the measurement at a confidence level of approximately 95% (in the case where distributions are normal), with a coverage factor of 2, in the range 9kHz – 30MHz (Average & Quasi-peak) is ± 3.5 dB.
4. Environmental Conditions Temperature 22°C
 Relative Humidity 50%
 Atmospheric Pressure 1019mbar
5. Test date : 3rd November , 2012
Tested By : Back Huang

**SIEMIC, INC.**


Title: RF Test Report for GSM Mobile Phone
Main Model: GALA P730
Serial Model: N/A
To: FCC Part 15.247: 2012 (KDB 558074)

Serial#: 12070294-FCC-R3
Issue Date: 6th November, 2012
Page: 52 of 78
www.siemic.com.cn

Test Mode: Transmitting (worst case)

Mode:802.11b

Peak Detector
Average Detector

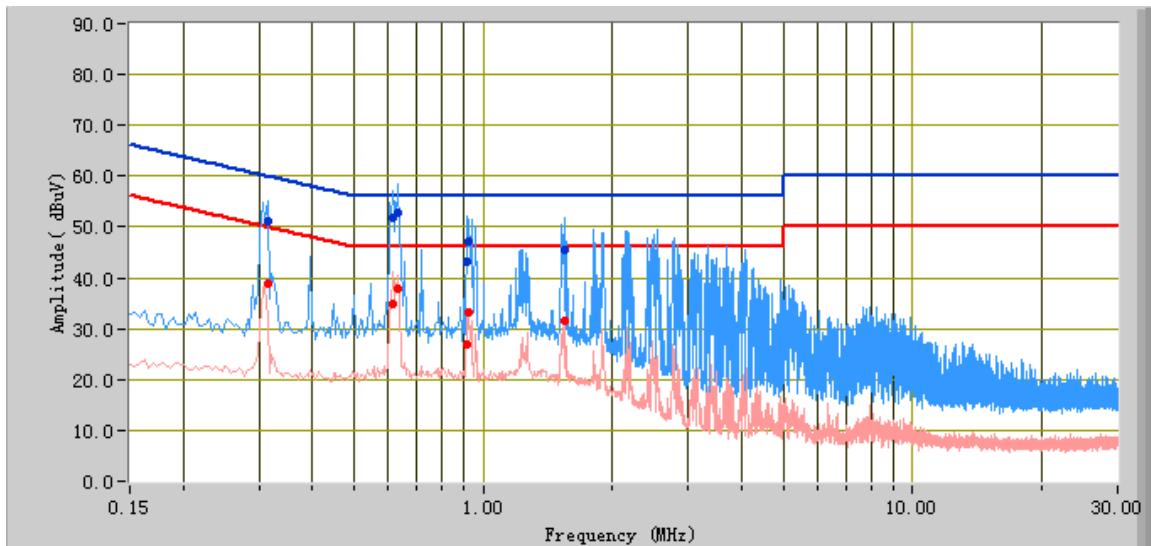**Test Data****Line**


Frequency (MHz)	Quasi Peak (dB μ V)	Limit (dB μ V)	Margin (dB)	Average (dB μ V)	Limit (dB μ V)	Margin (dB)	Factors (dB)
0.63	52.82	56.00	-3.18	37.80	46.00	-8.20	10.14
0.61	51.82	56.00	-4.18	34.81	46.00	-11.19	10.14
0.91	43.14	56.00	-12.86	26.94	46.00	-19.06	10.17
1.55	45.63	56.00	-10.37	31.57	46.00	-14.43	10.18
0.92	47.07	56.00	-8.93	33.18	46.00	-12.82	10.17
0.31	51.02	59.94	-8.92	39.00	49.94	-10.93	10.19

**SIEMIC, INC.**

Title: RF Test Report for GSM Mobile Phone
Main Model: GALA P730
Serial Model: N/A
To: FCC Part 15.247: 2012 (KDB 558074)

Serial#: 12070294-FCC-R3
Issue Date: 6th November, 2012
Page: 53 of 78
www.siemic.com.cn

Peak Detector Quasi Peak Limit
Average Detector Average Limit

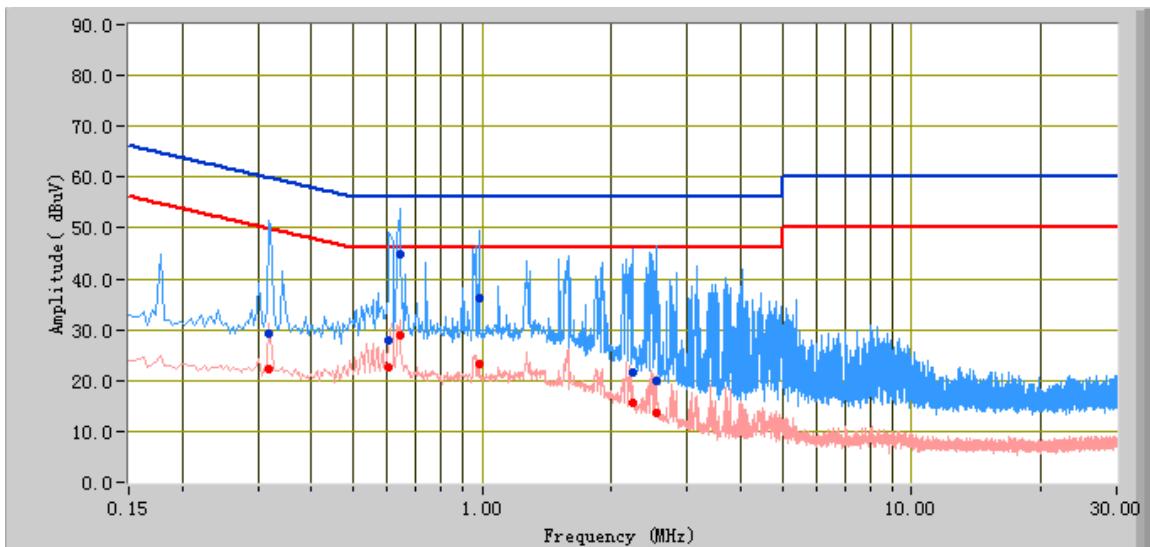

Test Data


Neutral

Frequency (MHz)	Quasi Peak (dB μ V)	Limit (dB μ V)	Margin (dB)	Average (dB μ V)	Limit (dB μ V)	Margin (dB)	Factors (dB)
0.64	44.94	56.00	-11.06	28.81	46.00	-17.19	10.14
0.98	36.17	56.00	-19.83	23.17	46.00	-22.83	10.16
0.61	28.03	56.00	-27.97	22.47	46.00	-23.53	10.15
0.32	29.36	59.83	-30.47	22.40	49.83	-27.43	10.19
2.54	20.02	56.00	-35.98	13.73	46.00	-32.27	10.20
2.23	21.63	56.00	-34.37	15.74	46.00	-30.26	10.20



Mode:802.11g

Peak Detector  Quasi Peak Limit 
Average Detector  Average Limit 

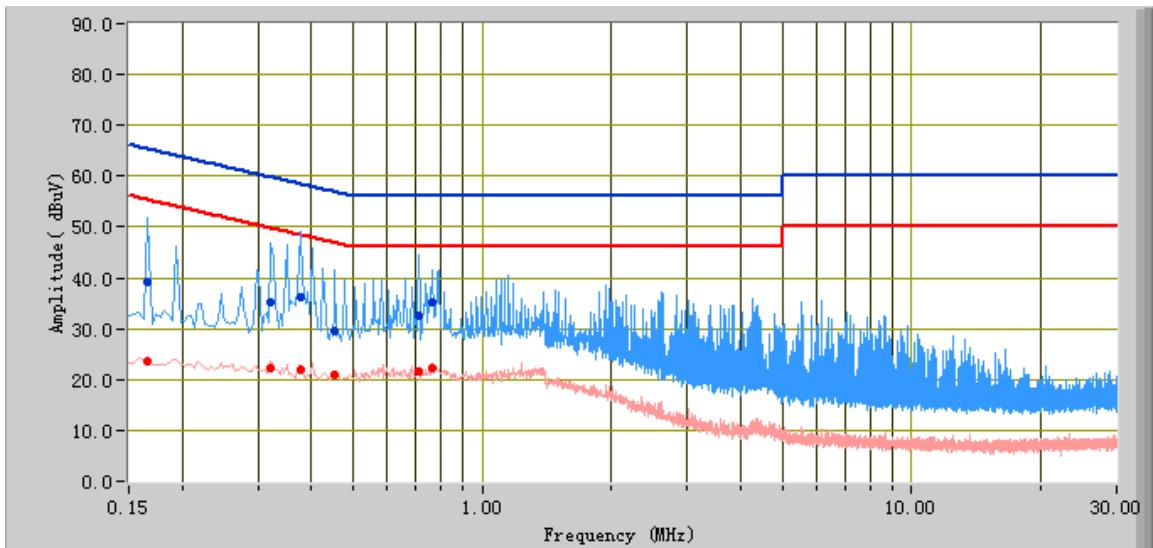


Test Data

Line

Frequency (MHz)	Quasi Peak (dB μ V)	Limit (dB μ V)	Margin (dB)	Average (dB μ V)	Limit (dB μ V)	Margin (dB)	Factors (dB)
0.38	36.31	58.36	-22.06	21.98	48.36	-26.39	10.17
0.71	32.63	56.00	-23.37	21.47	46.00	-24.53	10.12
0.32	35.32	59.72	-24.40	22.34	49.72	-27.38	10.19
0.17	39.26	65.33	-26.07	23.72	55.33	-31.62	10.37
0.77	35.25	56.00	-20.75	22.21	46.00	-23.79	10.15
0.45	29.64	56.81	-27.17	20.85	46.81	-25.97	10.17



Peak Detector Quasi Peak Limit
Average Detector Average Limit

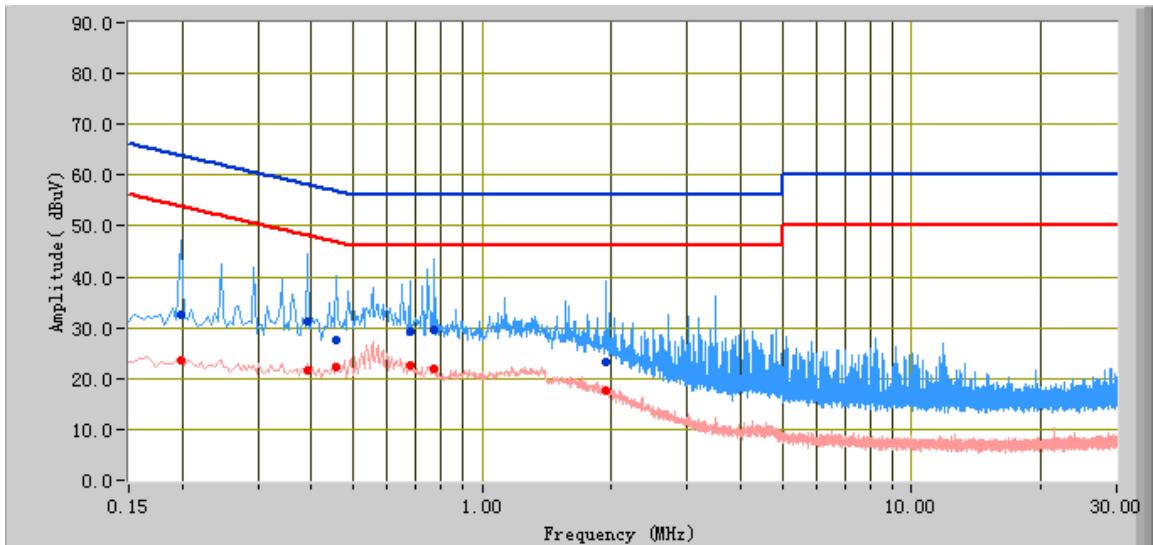

Test Data

Neutral

Frequency (MHz)	Quasi Peak (dB μ V)	Limit (dB μ V)	Margin (dB)	Average (dB μ V)	Limit (dB μ V)	Margin (dB)	Factors (dB)
0.77	29.72	56.00	-26.28	21.92	46.00	-24.08	10.15
0.39	31.25	58.10	-26.84	21.71	48.10	-26.39	10.17
0.46	27.72	56.74	-29.02	22.18	46.74	-24.55	10.17
0.20	32.54	63.84	-31.30	23.50	53.84	-30.34	10.29
1.94	23.18	56.00	-32.82	17.67	46.00	-28.33	10.20
0.68	29.10	56.00	-26.90	22.48	46.00	-23.52	10.13


**SIEMIC, INC.**

Title: RF Test Report for GSM Mobile Phone
Main Model: GALA P730
Serial Model: N/A
To: FCC Part 15.247: 2012 (KDB 558074)

Serial#: 12070294-FCC-R3
Issue Date: 6th November, 2012
Page: 56 of 78
www.siemic.com.cn

Mode:802.11n

Peak Detector  Quasi Peak Limit 
Average Detector  Average Limit 

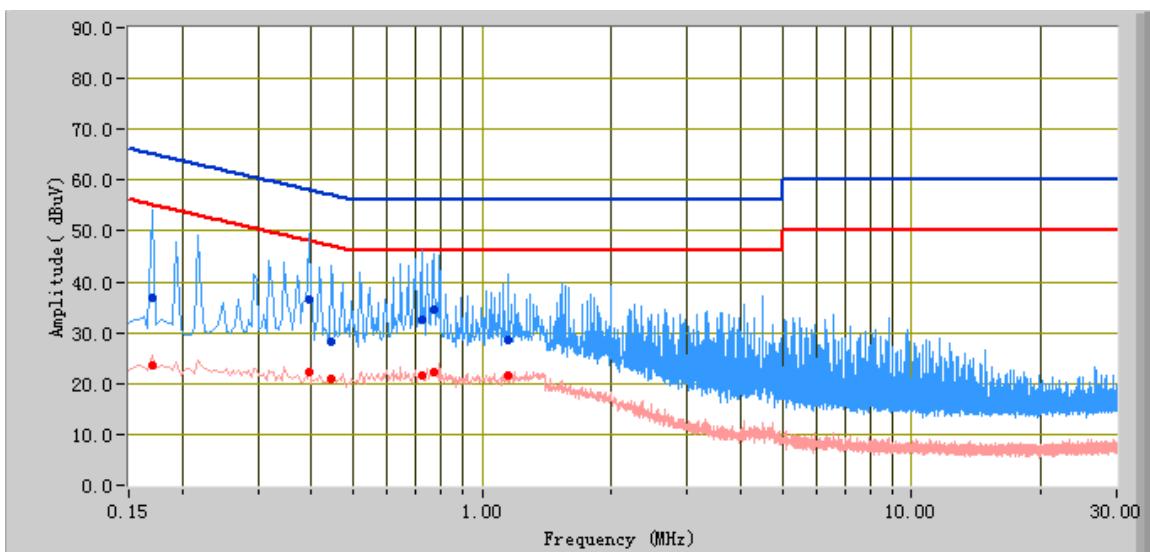**Test Data****Line**


Frequency (MHz)	Quasi Peak (dB μ V)	Limit (dB μ V)	Margin (dB)	Average (dB μ V)	Limit (dB μ V)	Margin (dB)	Factors (dB)
0.39	36.60	58.01	-21.42	22.10	48.01	-25.91	10.17
0.72	32.67	56.00	-23.33	21.60	46.00	-24.40	10.13
0.77	34.51	56.00	-21.49	22.24	46.00	-23.76	10.15
0.17	36.95	65.13	-28.18	23.73	55.13	-31.39	10.36
0.44	28.18	57.04	-28.86	20.77	47.04	-26.27	10.17
1.15	28.43	56.00	-27.57	21.44	46.00	-24.56	10.17

**SIEMIC, INC.**

Title: RF Test Report for GSM Mobile Phone
Main Model: GALA P730
Serial Model: N/A
To: FCC Part 15.247: 2012 (KDB 558074)

Serial#: 12070294-FCC-R3
Issue Date: 6th November, 2012
Page: 57 of 78
www.siemic.com.cn

Peak Detector Quasi Peak Limit
Average Detector Average Limit

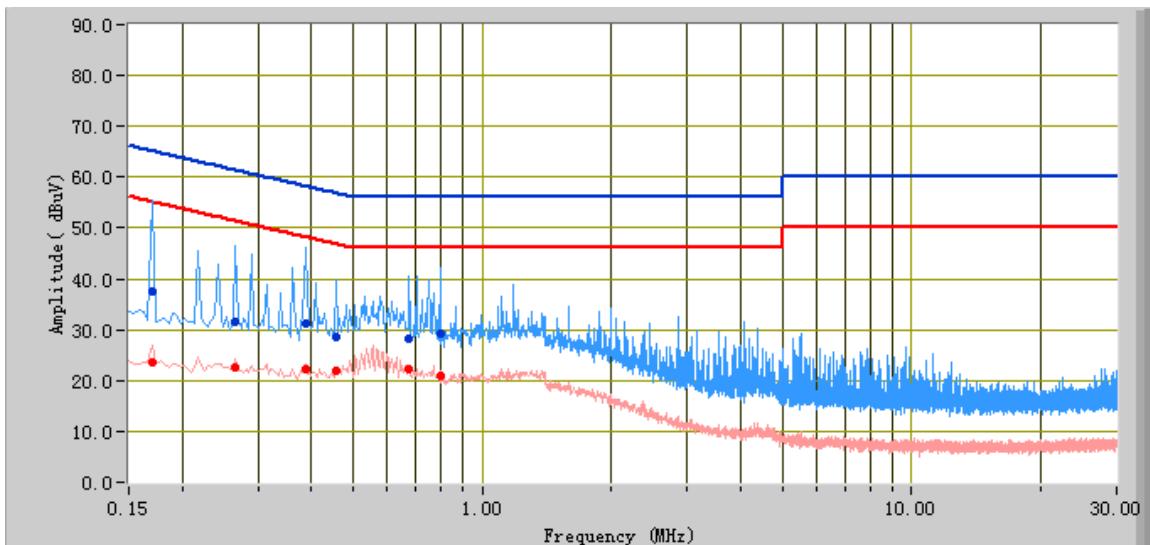

Test Data

Neutral

Frequency (MHz)	Quasi Peak (dBμV)	Limit (dBμV)	Margin (dB)	Average (dBμV)	Limit (dBμV)	Margin (dB)	Factors (dB)
0.17	37.47	65.13	-27.66	23.74	55.13	-31.39	10.36
0.39	31.25	58.19	-26.94	22.16	48.19	-26.03	10.17
0.80	29.38	56.00	-26.62	20.82	46.00	-25.18	10.16
0.27	31.44	61.34	-29.90	22.61	51.34	-28.73	10.22
0.67	28.24	56.00	-27.76	22.19	46.00	-23.81	10.13
0.46	28.42	56.74	-28.32	22.07	46.74	-24.67	10.17



5.8 §15.209, §15.205 & §15.247(d) - Radiated Spurious Emissions & Unwanted Emissions into Restricted Frequency Bands

1. All possible modes of operation were investigated. Only the 6 worst case emissions measured, using the correct CISPR detectors, are reported. All other emissions were relatively insignificant.
2. A "-ve" margin indicates a PASS as it refers to the margin present below the limit line at the particular frequency.
3. Radiated Emissions Measurement Uncertainty
All test measurements carried out are traceable to national standards. The uncertainty of the measurement at a confidence level of approximately 95% (in the case where distributions are normal), with a coverage factor of 2, in the range 30MHz – 1GHz & 1GHz above (3m & 10m) is +/-6dB.
4. Environmental Conditions Temperature 22°C
 Relative Humidity 50%
 Atmospheric Pressure 1019mbar
5. Test date : 5th November , 2012
Tested By : Back Huang

Requirement: §15.247(d) specifies that emissions which fall in the restricted bands, as defined in §15.205(a), must comply with the radiated emission limits specified in §15.209(a).

Procedures:

Radiated Spurious Emissions Measurement

An additional consideration when performing conducted measurements of restricted band emissions is that unwanted emissions radiating from the EUT cabinet, control circuits, power leads, or intermediate circuit elements will likely go undetected in a conducted measurement configuration. To address this concern, a radiated test shall be performed to ensure that emissions emanating from the EUT cabinet (rather than the antenna port) also comply with the applicable limits.

For these radiated spurious emission measurements the EUT transmit antenna may be replaced with a termination matching the nominal impedance of the antenna. Established procedures for performing radiated measurements shall be used (see C63.10). All detected emissions must comply with the applicable limits.

Measurement Detectors

§15.35(a) specifies that on frequencies less than and below 1000 MHz, the radiated emissions limits assume the use of a CISPR quasi-peak detector function and related measurement bandwidths. §15.35(b) specifies that on frequencies above 1000 MHz, the radiated emissions limits assume the use of an average detector and a minimum resolution bandwidth of 1 MHz. In addition, §15.35(b) that when average radiated emissions measurements are specified there is also a limit on the peak emissions level which is 20 dB above the applicable maximum permitted average emission limit. These specifications also apply to conducted emissions measurements.

1. CISPR Quasi-Peak Measurement

The specifications for the measuring instrument using the CISPR quasi-peak detector can be found in Publication 16 of the International Special Committee on Radio Frequency Interference (CISPR) of the International Electrotechnical Commission.

As an alternative to CISPR quasi-peak measurement, compliance can be demonstrated to the applicable emission limits using a peak detector.

2. Peak Power Measurement Procedure

Utilize the peak power measurement procedure specified in Section 8.1.1 with the following modifications:

Set analyzer center frequency to the frequency associated with the restricted band emission under examination.

Set RBW = 1 MHz.

Note that if the peak measured value complies with the average limit, it is not necessary to perform a separate average measurement. If this option is exercised, it should be so noted in the test report.

3. Average Power Measurement Procedures

The average restricted band emission levels must be measured with the EUT transmitting continuously ($\geq 98\%$ duty cycle) at its maximum power control level. Optionally, video triggering/signal gating can be used to ensure that measurements are performed only when the EUT is transmitting at its maximum power control level.

The average power measurement procedures described in Section 8.2 shall be used with the following modifications:

Set analyzer center frequency to the frequency associated with the restricted band emission.

Set span to at least 1 MHz.

Use peak marker function to determine the highest amplitude within the RBW (1 MHz).




Test Result: Pass

30-1000 MHz:


Test Mode: Transmitting

Mode: 802.11b

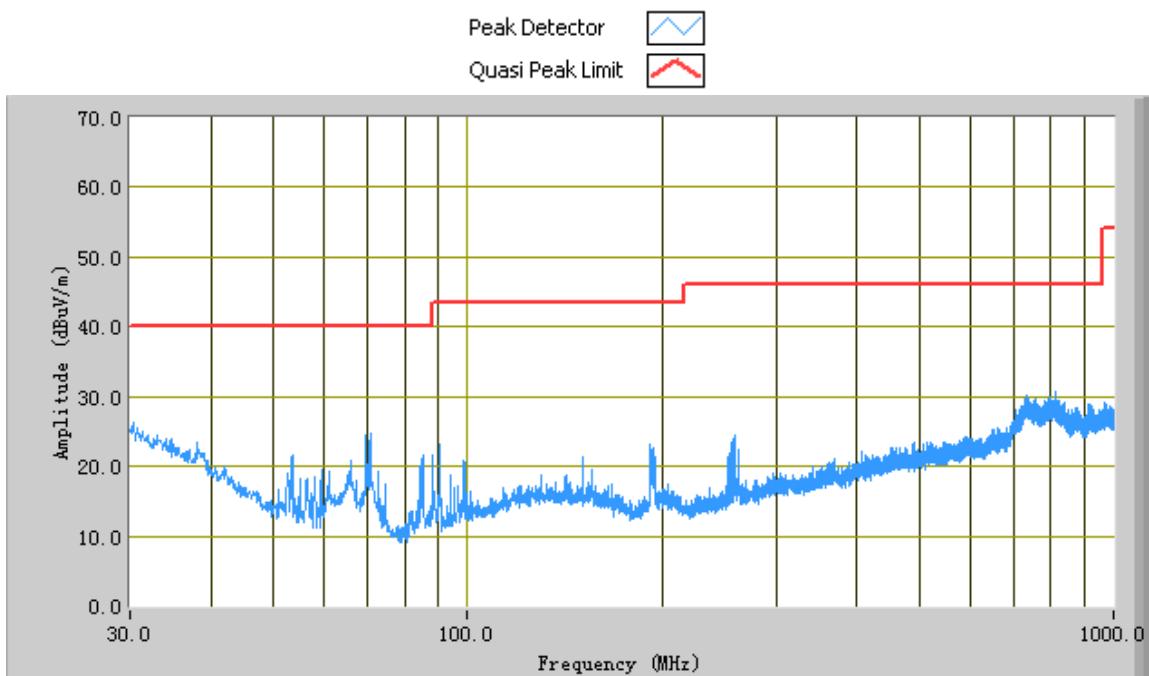

Note: The data of peak detector is much smaller than the limit, so the data was not recorded.

Mode: 802.11g

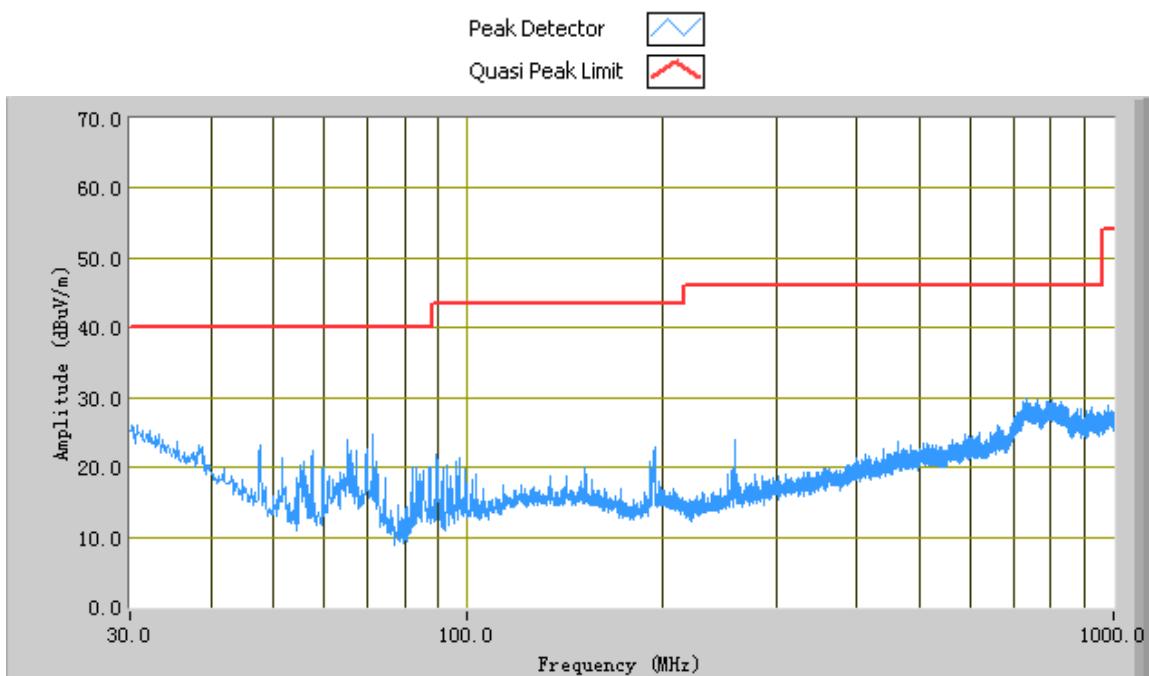

Note: The data of peak detector is much smaller than the limit, so the data was not recorded.




SIEMIC, INC.

Accessing global markets
Title: RF Test Report for GSM Mobile Phone
Main Model: GALA P730
Serial Model: N/A
To: FCC Part 15.247: 2012 (KDB 558074)

Serial#: 12070294-FCC-R3
Issue Date: 6th November, 2012
Page: 60 of 78
www.siemic.com.cn

Mode: 802.11n

Peak Detector 
Quasi Peak Limit 

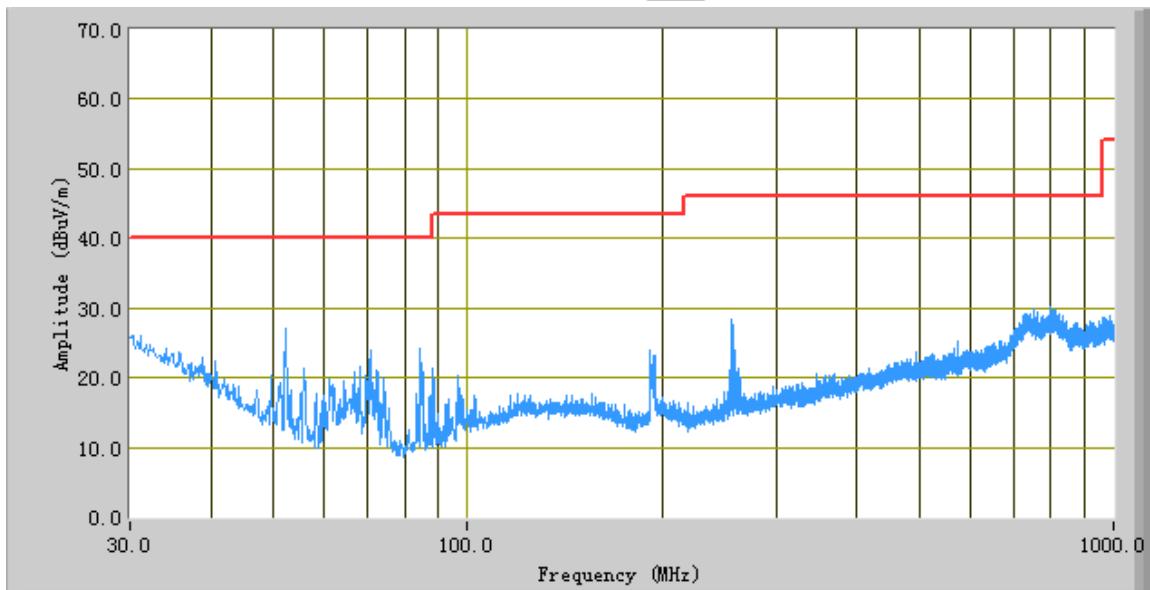

Note: The data of peak detector is much smaller than the limit, so the data was not recorded.

**SIEMIC, INC.**

Title: RF Test Report for GSM Mobile Phone
 Main Model: GALA P730
 Serial Model: N/A
 To: FCC Part 15.247: 2012 (KDB 558074)

Serial#: 12070294-FCC-R3
 Issue Date: 6th November, 2012
 Page: 61 of 78
www.siemic.com.cn

Above 1 GHz:*Test Mode: Transmitting***Note: Other modes were verified, only the result of worst case basic rate mode was presented.****Mode: 802.11b****Low Channel (2412 MHz)**

Frequency (MHz)	Substituted level (dBm)	Detector (PK/AV)	Direction (degree)	Height (m)	Polarity (H/V)	Ant. Factor (dB/m)	Cable Loss (dB)	Pre-Amp. Gain (dB)	Cord. Amp. (dB μ V/m)	Limit (dBm)	Margin (dB)
4824	57.43	AV	175	1.1	V	32.7	8.3	55.0	43.4	54	-10.6
4824	56.65	AV	287	1.2	H	32.7	8.3	55.0	42.7	54	-11.4
4824	78.31	PK	175	1.1	V	32.7	8.3	55.0	64.3	74	-9.7
4824	76.73	PK	287	1.2	H	32.7	8.3	55.0	62.7	74	-11.3
1557.33	53.32	AV	110	1.1	V	25.7	2.2	55.0	26.2	54	-27.8
1557.33	55.13	AV	339	1.1	H	25.7	2.2	55.0	28.0	54	-26.0
1557.33	75.54	PK	110	1.1	V	25.7	2.2	55.0	48.4	74	-25.6
1557.33	76.15	PK	339	1.1	H	25.7	2.2	55.0	49.1	74	-25.0

Middle Channel (2437 MHz)

Frequency (MHz)	Substituted level (dBm)	Detector (PK/AV)	Direction (degree)	Height (m)	Polarity (H/V)	Ant. Factor (dB/m)	Cable Loss (dB)	Pre-Amp. Gain (dB)	Cord. Amp. (dB μ V/m)	Limit (dBm)	Margin (dB)
4874	57.86	AV	101	1.0	V	32.8	8.9	55.0	44.6	54	-9.4
4874	56.21	AV	256	1.1	H	32.8	8.9	55.0	42.9	54	-11.1
4874	71.25	PK	101	1.0	V	32.8	8.9	55.0	58.0	74	-16.1
4874	75.63	PK	256	1.1	H	32.8	8.9	55.0	62.3	74	-11.7
1776.45	56.54	AV	121	1.0	V	26.2	2.5	55.0	30.2	54	-23.8
1776.45	57.69	AV	274	1.1	H	26.2	2.5	55.0	31.4	54	-22.6
1776.45	79.17	PK	121	1.0	V	26.2	2.5	55.0	52.9	74	-21.1
1776.45	78.97	PK	274	1.1	H	26.2	2.5	55.0	52.7	74	-21.3

High Channel (2462 MHz)

Frequency (MHz)	Substituted level (dBm)	Detector (PK/AV)	Direction (degree)	Height (m)	Polarity (H/V)	Ant. Factor (dB/m)	Cable Loss (dB)	Pre-Amp. Gain (dB)	Cord. Amp. (dB μ V/m)	Limit (dBm)	Margin (dB)
4924	56.67	AV	158	1.2	V	32.9	10.02	55.0	44.6	54	-9.4
4924	56.03	AV	221	1.1	H	32.9	10.02	55.0	44.0	54	-10.1
4924	71.47	PK	158	1.2	V	32.9	10.02	55.0	59.4	74	-14.6
4924	69.71	PK	221	1.1	H	32.9	10.02	55.0	57.6	74	-16.4
1389.18	52.67	AV	139	1.1	V	25.3	2.1	55.0	25.1	54	-28.9
1389.18	51.94	AV	229	1.3	H	25.3	2.1	55.0	24.3	54	-29.7
1389.18	80.13	PK	139	1.1	V	25.3	2.1	55.0	52.5	74	-21.5
1389.18	79.69	PK	229	1.3	H	25.3	2.1	55.0	52.1	74	-21.9

**SIEMIC, INC.**

Title: RF Test Report for GSM Mobile Phone
Main Model: GALA P730
Serial Model: N/A
To: FCC Part 15.247: 2012 (KDB 558074)

Serial#: 12070294-FCC-R3
Issue Date: 6th November, 2012
Page: 62 of 78
www.siemic.com.cn

Spurious emission in restricted band:

Frequency (MHz)	Substituted level (dBm)	Detector (PK/AV)	Direction (degree)	Height (m)	Polarity (H/V)	Ant. Factor (dB/m)	Cable Loss (dB)	Pre- Amp. Gain (dB)	Cord. Amp. (dB μ V/m)	Limit (dBm)	Margin (dB)
2367.69	58.45	AV	160	1.2	V	28.1	5.5	55.0	37.1	54	-17.0
2488.54	58.82	AV	215	1.1	V	28.6	5.7	55.0	38.1	54	-15.9
2367.69	73.24	AV	160	1.2	H	28.1	5.5	55.0	51.8	74	-22.2
2488.54	73.19	AV	215	1.1	H	28.6	5.7	55.0	52.5	74	-21.5
2367.69	59.38	PK	104	1.3	V	28.1	5.5	55.0	38.0	54	-16.0
2488.54	58.18	PK	198	1.2	V	28.6	5.7	55.0	37.5	54	-16.5
2367.69	75.72	PK	104	1.3	H	28.1	5.5	55.0	54.3	74	-19.7
2488.54	75.67	PK	198	1.2	H	28.6	5.7	55.0	55.0	74	-19.0

**SIEMIC, INC.**

Title: RF Test Report for GSM Mobile Phone
 Main Model: GALA P730
 Serial Model: N/A
 To: FCC Part 15.247: 2012 (KDB 558074)

Serial#: 12070294-FCC-R3
 Issue Date: 6th November, 2012
 Page: 63 of 78
www.siemic.com.cn

Mode: 802.11g

Low Channel (2412 MHz)

Frequency (MHz)	Substituted level (dBm)	Detector (PK/AV)	Direction (degree)	Height (m)	Polarity (H/V)	Ant. Factor (dB/m)	Cable Loss (dB)	Pre-Amp. Gain (dB)	Cord. Amp. (dB μ V/m)	Limit (dBm)	Margin (dB)
4824	53.32	AV	133	1.1	V	32.7	8.3	55.0	39.3	54	-14.7
4824	51.67	AV	320	1.1	H	32.7	8.3	55.0	37.7	54	-16.3
4824	70.25	PK	133	1.1	V	32.7	8.3	55.0	56.3	74	-17.8
4824	68.71	PK	320	1.1	H	32.7	8.3	55.0	54.7	74	-19.3
1184.12	53.46	AV	120	1.2	V	24.9	2.0	55.0	25.4	54	-28.6
1184.12	52.75	AV	175	1.1	H	24.9	2.0	55.0	24.7	54	-29.4
1184.12	71.63	PK	120	1.2	V	24.9	2.0	55.0	43.5	74	-30.5
1184.12	72.96	PK	175	1.1	H	24.9	2.0	55.0	44.9	74	-29.1

Middle Channel (2437 MHz)

Frequency (MHz)	Substituted level (dBm)	Detector (PK/AV)	Direction (degree)	Height (m)	Polarity (H/V)	Ant. Factor (dB/m)	Cable Loss (dB)	Pre-Amp. Gain (dB)	Cord. Amp. (dB μ V/m)	Limit (dBm)	Margin (dB)
4874	56.06	AV	189	1.1	V	32.8	8.9	55.0	42.8	54	-11.2
4874	55.13	AV	156	1.1	H	32.8	8.9	55.0	41.8	54	-12.2
4874	71.15	PK	189	1.1	V	32.8	8.9	55.0	57.9	74	-16.2
4874	76.09	PK	156	1.1	H	32.8	8.9	55.0	62.8	74	-11.2
1307.21	58.39	AV	242	1.1	V	25.3	2.1	55.0	30.8	54	-23.2
1307.21	58.13	AV	134	1.0	H	25.3	2.1	55.0	30.5	54	-23.5
1307.21	74.47	PK	242	1.1	V	25.3	2.1	55.0	46.9	74	-27.1
1307.21	75.34	PK	134	1.0	H	25.3	2.1	55.0	47.7	74	-26.3

High Channel (2462 MHz)

Frequency (MHz)	Substituted level (dBm)	Detector (PK/AV)	Direction (degree)	Height (m)	Polarity (H/V)	Ant. Factor (dB/m)	Cable Loss (dB)	Pre-Amp. Gain (dB)	Cord. Amp. (dB μ V/m)	Limit (dBm)	Margin (dB)
4924	55.22	AV	253	1.1	V	32.9	10.02	55.0	43.1	54	-10.9
4924	54.83	AV	135	1.3	H	32.9	10.02	55.0	42.8	54	-11.3
4924	69.44	PK	253	1.1	V	32.9	10.02	55.0	57.4	74	-16.6
4924	68.14	PK	135	1.3	H	32.9	10.02	55.0	56.1	74	-17.9
1243.51	70.06	AV	168	1.1	V	25.2	2.1	55.0	42.4	54	-11.6
1243.51	71.21	AV	287	1.1	H	25.2	2.1	55.0	43.5	54	-10.5
1243.51	74.55	PK	168	1.1	V	25.2	2.1	55.0	46.9	74	-27.2
1243.51	75.32	PK	287	1.1	H	25.2	2.1	55.0	47.6	74	-26.4

**SIEMIC, INC.**

Title: RF Test Report for GSM Mobile Phone
Main Model: GALA P730
Serial Model: N/A
To: FCC Part 15.247: 2012 (KDB 558074)

Serial#: 12070294-FCC-R3
Issue Date: 6th November, 2012
Page: 64 of 78
www.siemic.com.cn

Spurious emission in restricted band:

Frequency (MHz)	Substituted level (dBm)	Detector (PK/AV)	Direction (degree)	Height (m)	Polarity (H/V)	Ant. Factor (dB/m)	Cable Loss (dB)	Pre- Amp. Gain (dB)	Cord. Amp. (dB μ V/m)	Limit (dBm)	Margin (dB)
2381.74	60.34	AV	155	1.1	V	28.2	5.6	55.0	39.1	54	-14.9
2485.63	61.83	AV	180	1.1	V	28.5	5.7	55.0	41.0	54	-13.0
2381.74	73.87	AV	155	1.1	H	28.2	5.6	55.0	52.7	74	-21.3
2485.63	73.92	AV	180	1.1	H	28.5	5.7	55.0	53.1	74	-20.9
2381.74	63.13	PK	110	1.7	V	28.2	5.6	55.0	41.9	54	-12.1
2485.63	62.94	PK	174	1.7	V	28.5	5.7	55.0	42.1	54	-11.9
2381.74	76.04	PK	110	1.7	H	28.2	5.6	55.0	54.8	74	-19.2
2485.63	76.85	PK	174	1.7	H	28.5	5.7	55.0	56.1	74	-18.0

**SIEMIC, INC.**

Title: RF Test Report for GSM Mobile Phone
 Main Model: GALA P730
 Serial Model: N/A
 To: FCC Part 15.247: 2012 (KDB 558074)

Serial#: 12070294-FCC-R3
 Issue Date: 6th November, 2012
 Page: 65 of 78
www.siemic.com.cn

Mode: 802.11n

Low Channel (2412 MHz)

Frequency (MHz)	Substituted level (dBm)	Detector (PK/AV)	Direction (degree)	Height (m)	Polarity (H/V)	Ant. Factor (dB/m)	Cable Loss (dB)	Pre-Amp. Gain (dB)	Cord. Amp. (dB μ V/m)	Limit (dBm)	Margin (dB)
4824	51.25	AV	117	1.0	V	32.7	8.3	55.0	37.3	54	-16.8
4824	50.75	AV	131	1.1	H	32.7	8.3	55.0	36.8	54	-17.3
4824	70.24	PK	117	1.0	V	32.7	8.3	55.0	56.2	74	-17.8
4824	68.33	PK	131	1.1	H	32.7	8.3	55.0	54.3	74	-19.7
1145.37	53.17	AV	120	1.2	V	24.9	2.0	55.0	25.1	54	-28.9
1145.37	52.69	AV	105	1.1	H	24.9	2.0	55.0	24.6	54	-29.4
1145.37	71.57	PK	120	1.2	V	24.9	2.0	55.0	43.5	74	-30.5
1145.37	72.27	PK	105	1.1	H	24.9	2.0	55.0	44.2	74	-29.8

Middle Channel (2437 MHz)

Frequency (MHz)	Substituted level (dBm)	Detector (PK/AV)	Direction (degree)	Height (m)	Polarity (H/V)	Ant. Factor (dB/m)	Cable Loss (dB)	Pre-Amp. Gain (dB)	Cord. Amp. (dB μ V/m)	Limit (dBm)	Margin (dB)
4874	55.47	AV	189	1.2	V	32.8	8.9	55.0	42.2	54	-11.8
4874	54.28	AV	112	1.1	H	32.8	8.9	55.0	41.0	54	-13.0
4874	72.10	PK	189	1.2	V	32.8	8.9	55.0	58.8	74	-15.2
4874	75.00	PK	112	1.1	H	32.8	8.9	55.0	61.7	74	-12.3
1307.97	58.79	AV	227	1.1	V	25.3	2.1	55.0	31.2	54	-22.8
1307.97	58.97	AV	155	1.3	H	25.3	2.1	55.0	31.4	54	-22.6
1307.97	75.20	PK	227	1.1	V	25.3	2.1	55.0	47.6	74	-26.4
1307.97	76.09	PK	155	1.3	H	25.3	2.1	55.0	48.5	74	-25.5

High Channel (2462 MHz)

Frequency (MHz)	Substituted level (dBm)	Detector (PK/AV)	Direction (degree)	Height (m)	Polarity (H/V)	Ant. Factor (dB/m)	Cable Loss (dB)	Pre-Amp. Gain (dB)	Cord. Amp. (dB μ V/m)	Limit (dBm)	Margin (dB)
4924	51.02	AV	130	1.1	V	32.9	10.02	55.0	38.9	54	-15.1
4924	52.61	AV	157	1.3	H	32.9	10.02	55.0	40.5	54	-13.5
4924	69.64	PK	130	1.1	V	32.9	10.02	55.0	57.6	74	-16.4
4924	68.99	PK	157	1.3	H	32.9	10.02	55.0	56.9	74	-17.1
1964.62	60.06	AV	168	1.4	V	27.5	3.1	55.0	35.7	54	-18.3
1964.62	61.21	AV	287	1.4	H	27.5	3.1	55.0	36.8	54	-17.2
1964.62	74.64	PK	168	1.4	V	27.5	3.1	55.0	50.2	74	-23.8
1964.62	75.94	PK	287	1.4	H	27.5	3.1	55.0	51.5	74	-22.5

**SIEMIC, INC.**

Title: RF Test Report for GSM Mobile Phone
Main Model: GALA P730
Serial Model: N/A
To: FCC Part 15.247: 2012 (KDB 558074)

Serial#: 12070294-FCC-R3
Issue Date: 6th November, 2012
Page: 66 of 78
www.siemic.com.cn

Spurious emission in restricted band:

Frequency (MHz)	Substituted level (dBm)	Detector (PK/AV)	Direction (degree)	Height (m)	Polarity (H/V)	Ant. Factor (dB/m)	Cable Loss (dB)	Pre- Amp. Gain (dB)	Cord. Amp. (dB μ V/m)	Limit (dBm)	Margin (dB)
2325.82	59.34	AV	175	1.1	V	28.3	5.6	55.0	38.2	54	-15.8
2493.33	56.53	AV	180	1.1	V	28.7	5.7	55.0	35.9	54	-18.1
2381.82	75.67	AV	175	1.1	H	28.3	5.6	55.0	54.6	74	-19.4
2493.33	76.91	AV	180	1.1	H	28.7	5.7	55.0	56.3	74	-17.7
2325.82	56.53	PK	110	1.7	V	28.3	5.6	55.0	35.4	54	-18.6
2493.33	55.92	PK	174	1.7	V	28.7	5.7	55.0	35.3	54	-18.7
2381.82	71.37	PK	110	1.7	H	28.3	5.6	55.0	50.3	74	-23.7
2493.33	72.07	PK	174	1.7	H	28.7	5.7	55.0	51.5	74	-22.5

**SIEMIC, INC.**

Title: RF Test Report for GSM Mobile Phone
Main Model: GALA P730
Serial Model: N/A
To: FCC Part 15.247: 2012 (KDB 558074)

Serial#: 12070294-FCC-R3
Issue Date: 6th November, 2012
Page: 67 of 78
www.siemic.com.cn

Annex A. TEST INSTRUMENT & METHOD

Annex A.i. TEST INSTRUMENTATION & GENERAL PROCEDURES


Instrument	Model	Serial #	Calibration Date	Calibration Due Date
RF Conducted Test				
Agilent ESA-E SERIES SPECTRUM ANALYZER	E4407B	CFG038	10/25/2012	10/24/2013
DC Power Supply	PS-305D	010943059	02/22/2012	02/21/2013
AC Line Conducted Emissions				
R&S EMI Test Receiver	ESPI3	101216	08/26/2012	08/25/2013
Com-Power LISN	LI-115	241090	05/26/2012	05/25/2013
Com-Power Transient Limiter	LIT-153	531021	05/26/2012	05/25/2013
Universal Radio Communication Tester	CMU200	104031	03/01/2012	02/28/2013
A- INFOMW Antenna (1 ~18GHz)	JXTXLB-10180	J2031081120 092	06/25/2012	06/24/2013
Radiated Emissions				
Hp Spectrum Analyzer	8563E	3821A09023	01/10/2012	01/09/2013
R&S EMI Receiver	ESPI3	101216	08/26/2012	08/25/2013
Antenna (30MHz~6GHz)	JB6	A121411	12/28/2011	12/27/2012
ETS-Lindgren Antenna(1 ~18GHz)	3115	N/A	10/04/2012	10/03/2013
A- INFOMW Antenna (1 ~18GHz)	JXTXLB-10180	J2031081120 092	06/25/2012	06/24/2013
Horn Antenna (18~40GHz)	AH-840	N/A	07/23/2012	07/22/2013
Microwave Pre-Amp (18~40GHz)	PA-840	N/A	Every 2000 Hours	
Hp Agilent Pre-Amplifier	8447F	1937A01160	05/25/2012	05/24/2013
MITEQ Pre-Amplifier (0.1 ~ 18GHz)	AMF-7D-00101800-30-10P	1451710	05/26/2012	05/25/2013
Universal Radio Communication Tester	CMU200	104031	03/01/2012	02/28/2013
Chamber	3m	N/A	04/13/2012	04/12/2013



Annex A.ii. CONDUCTED EMISSIONS TEST DESCRIPTION

Test Set-up

1. The EUT and supporting equipment were set up in accordance with the requirements of the standard on top of a 1.5m x 1m x 0.8m high, non-metallic table, as shown in Annex B.
2. The power supply for the EUT was fed through a $50\Omega/50\mu\text{H}$ EUT LISN, connected to filtered mains.
3. The RF OUT of the EUT LISN was connected to the EMI test receiver via a low-loss coaxial cable.
4. All other supporting equipments were powered separately from another main supply.

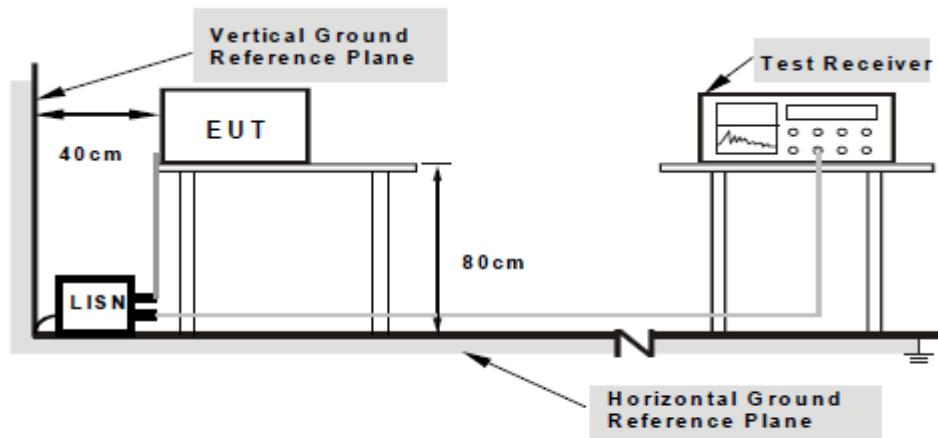

Note: 1. Support units were connected to second LISN.
2. Both of LISNs (AMN) are 80cm from EUT and at least 80cm from other units and other metal planes support units.

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration1.

Test Method

1. The EUT was switched on and allowed to warm up to its normal operating condition.
2. A scan was made on the NEUTRAL line (for AC mains) or Earth line (for DC power) over the required frequency range using an EMI test receiver.
3. High peaks, relative to the limit line, were then selected.
4. The EMI test receiver was then tuned to the selected frequencies and the necessary measurements made with a receiver bandwidth setting of 10 KHz. For FCC tests, only Quasi-peak measurements were made; while for CISPR/EN tests, both Quasi-peak and Average measurements were made.
5. Steps 2 to 4 were then repeated for the LIVE line (for AC mains) or DC line (for DC power).

Description of Conducted Emission Program

This EMC Measurement software run LabView automation software and offers a common user interface for electromagnetic interference (EMI) measurements. This software is a modern and powerful tool for controlling and monitoring EMI test receivers and EMC test systems. It guarantees reliable collection, evaluation, and documentation of measurement results. Basically, this program will run a pre-scan measurement before it proceeds with the final measurement. The pre-scan routine will run the common scan range from 150 kHz to 30 MHz; the program will first start a peak and average scan on selectable measurement time and step size. After the program complete the pre-scan, this program will perform the Quasi Peak and Average measurement, based on the pre-scan peak data reduction result.



SIEMIC, INC.

Accessing global markets

Title: RF Test Report for GSM Mobile Phone
Main Model: GALA P730
Serial Model: N/A
To: FCC Part 15.247: 2012 (KDB 558074)

Serial#: 12070294-FCC-R3
Issue Date: 6th November, 2012
Page: 69 of 78
www.siemic.com.cn

Sample Calculation Example

At 20 MHz

limit = 250 μ V = 47.96 dB μ V

Transducer factor of LISN, pulse limiter & cable loss at 20 MHz = 11.20 dB

Q-P reading obtained directly from EMI Receiver = 40.00 dB μ V
(Calibrated for system losses)

Therefore, Q-P margin = 47.96 – 40.00 = 7.96

i.e. **7.96 dB below limit**



Annex A. iii RADIATED EMISSIONS TEST DESCRIPTION


EUT Characterisation

EUT characterisation, over the frequency range from 30MHz to 10th Harmonic, was done in order to minimise radiated emissions testing time while still maintaining high confidence in the test results.

The EUT was placed in the chamber, at a height of about 0.8m on a turntable. Its radiated emissions frequency profile was observed, using a spectrum analyzer / receiver with the appropriate broadband antenna placed 3m away from the EUT. Radiated emissions from the EUT were maximised by rotating the turntable manually, changing the antenna polarisation and manipulating the EUT cables while observing the frequency profile on the spectrum analyzer / receiver. Frequency points at which maximum emissions occurred, clock frequencies and operating frequencies were then noted for the formal radiated emissions test at the Open Area Test Site (OATS).

Test Set-up

1. The EUT and supporting equipment were set up in accordance with the requirements of the standard on top of a 1.5m X 1.0m X 0.8m high, non-metallic table.
2. The filtered power supply for the EUT and supporting equipment were tapped from the appropriate power sockets located on the turntable.
3. The relevant broadband antenna was set at the required test distance away from the EUT and supporting equipment boundary.

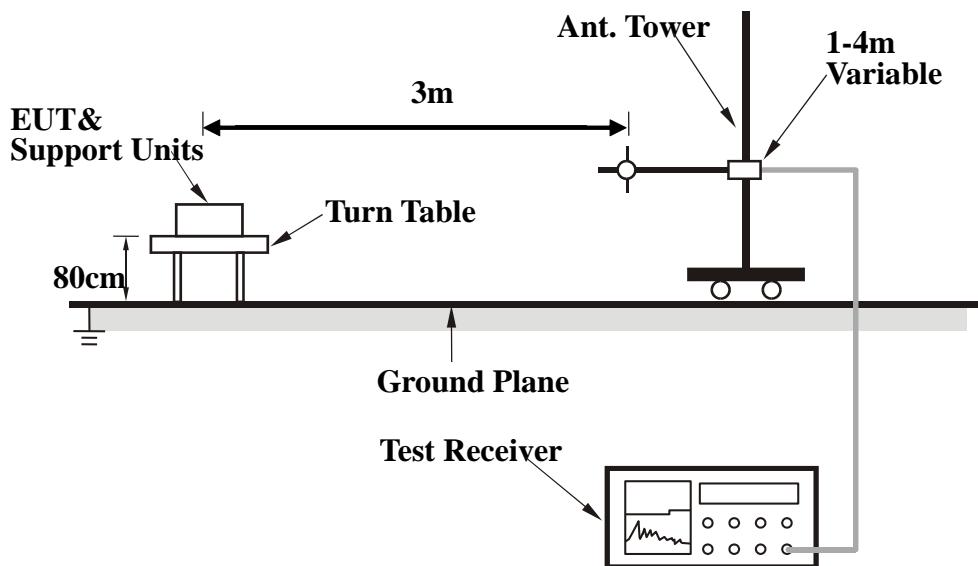

**SIEMIC, INC.**

Title: RF Test Report for GSM Mobile Phone
Main Model: GALA P730
Serial Model: N/A
To: FCC Part 15.247: 2012 (KDB 558074)

Serial#: 12070294-FCC-R3
Issue Date: 6th November, 2012
Page: 71 of 78
www.siemic.com.cn

Test Method

The following procedure was performed to determine the maximum emission axis of EUT:

1. With the receiving antenna is H polarization, rotate the EUT in turns with three orthogonal axes to determine the axis of maximum emission.
2. With the receiving antenna is V polarization, rotate the EUT in turns with three orthogonal axes to determine the axis of maximum emission.
3. Compare the results derived from above two steps. So, the axis of maximum emission from EUT was determined and the configuration was used to perform the final measurement.

Final Radiated Emission Measurement

1. Setup the configuration according to figure 1. Turn on EUT and make sure that it is in normal function.
2. For emission frequencies measured below 1 GHz, a pre-scan is performed in a shielded chamber to determine the accurate frequencies of higher emissions will be checked on a open test site. As the same purpose, for emission frequencies measured above 1 GHz, a pre-scan also be performed with a 1 meter measuring distance before final test.
3. For emission frequencies measured below and above 1 GHz, set the spectrum analyzer on a 100 kHz and 1 MHz resolution bandwidth respectively for each frequency measured in step 2.
4. The search antenna is to be raised and lowered over a range from 1 to 4 meters in horizontally polarized orientation. Position the highness when the highest value is indicated on spectrum analyzer, then change the orientation of EUT on test table over a range from 0 ° to 360 ° with a speed as slow as possible, and keep the azimuth that highest emission is indicated on the spectrum analyzer. Vary the antenna position again and record the highest value as a final reading.
5. Repeat step 4 until all frequencies need to be measured were complete.
6. Repeat step 5 with search antenna in vertical polarized orientations.

During the radiated emission test, the Spectrum Analyzer was set with the following configurations:

Frequency Band (MHz)	Function	Resolution bandwidth	Video Bandwidth
30 to 1000	Peak	100 kHz	100 kHz
Above 1000	Peak	1 MHz	1 MHz
	Average	1 MHz	10 Hz

Sample Calculation Example

The field strength is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain (if any) from the measured reading. For the limit is employed average value, therefore the peak value can be transferred to average value by subtracting the duty factor. The basic equation with a sample calculation is as follows:

$$\text{Peak} = \text{Reading} + \text{Corrected Factor}$$

where

$$\text{Corr. Factor} = \text{Antenna Factor} + \text{Cable Factor} - \text{Amplifier Gain (if any)}$$

And the average value is

$$\text{Average} = \text{Peak Value} + \text{Duty Factor} \text{ or}$$
$$\text{Set RBW} = 1\text{MHz}, \text{VBW} = 10\text{Hz}.$$

Note :

If the measured frequencies are fall in the restricted frequency band, the limit employed must be quasi peak value when frequencies are below or equal to 1 GHz. And the measuring instrument is set to quasi peak detector function.



SIEMIC, INC.

Accessing global markets

Title: RF Test Report for GSM Mobile Phone
Main Model: GALA P730
Serial Model: N/A
To: FCC Part 15.247: 2012 (KDB 558074)

Serial#: 12070294-FCC-R3
Issue Date: 6th November, 2012
Page: 72 of 78
www.siemic.com.cn

Annex B. EUT AND TEST SETUP PHOTOGRAPHS

Please see attachment

**SIEMIC, INC.**

Title: RF Test Report for GSM Mobile Phone
Main Model: GALA P730
Serial Model: N/A
To: FCC Part 15.247: 2012 (KDB 558074)

Serial#: 12070294-FCC-R3
Issue Date: 6th November, 2012
Page: 73 of 78
www.siemic.com.cn

Annex C. TEST SETUP AND SUPPORTING EQUIPMENT

EUT TEST CONDITIONS

Annex C. i. SUPPORTING EQUIPMENT DESCRIPTION

The following is a description of supporting equipment and details of cables used with the EUT.

Equipment Description (Including Brand Name)	Model & Serial Number	Cable Description (List Length, Type & Purpose)
Gateway Laptop	MS2288 & LXWHF02013951C3CA92200	N/A




SIEMIC, INC.

Title: RF Test Report for GSM Mobile Phone
Main Model: GALA P730
Serial Model: N/A
To: FCC Part 15.247: 2012 (KDB 558074)

Serial#: 12070294-FCC-R3
Issue Date: 6th November, 2012
Page: 74 of 78
www.siemic.com.cn

Block Configuration Diagram for Conducted Emissions

Note: Before Testing, the EUT must be set up for transmitting by laptop.

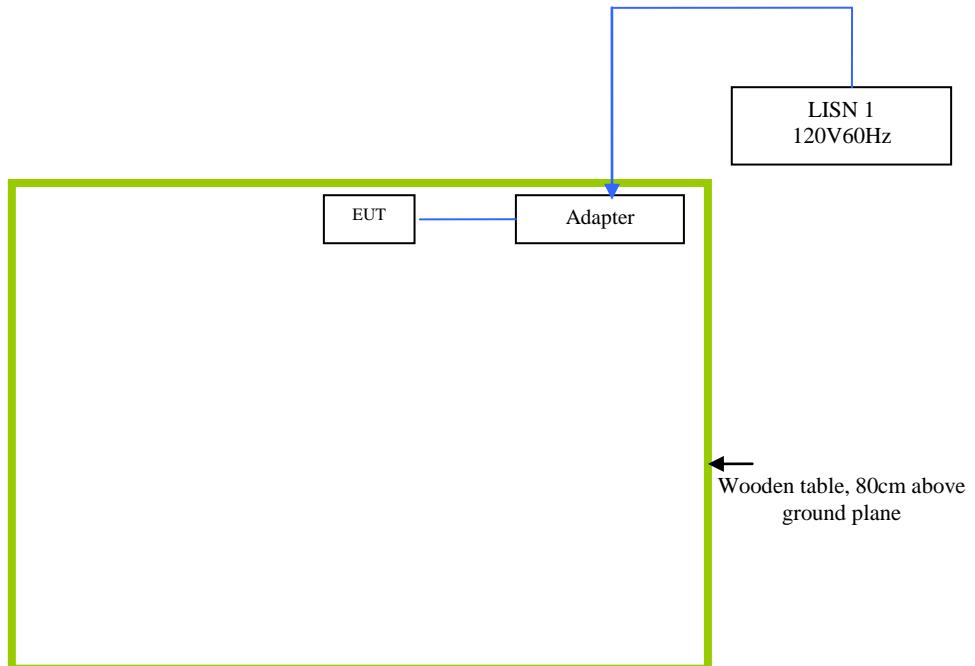




SIEMIC, INC.

Accessing global markets
Title: RF Test Report for GSM Mobile Phone
Main Model: GALA P730
Serial Model: N/A
To: FCC Part 15.247: 2012 (KDB 558074)

Serial#: 12070294-FCC-R3
Issue Date: 6th November, 2012
Page: 75 of 78
www.siemic.com.cn

Block Configuration Diagram for Radiated Emissions

Note: Before Testing, the EUT must be set up for transmitting by laptop.

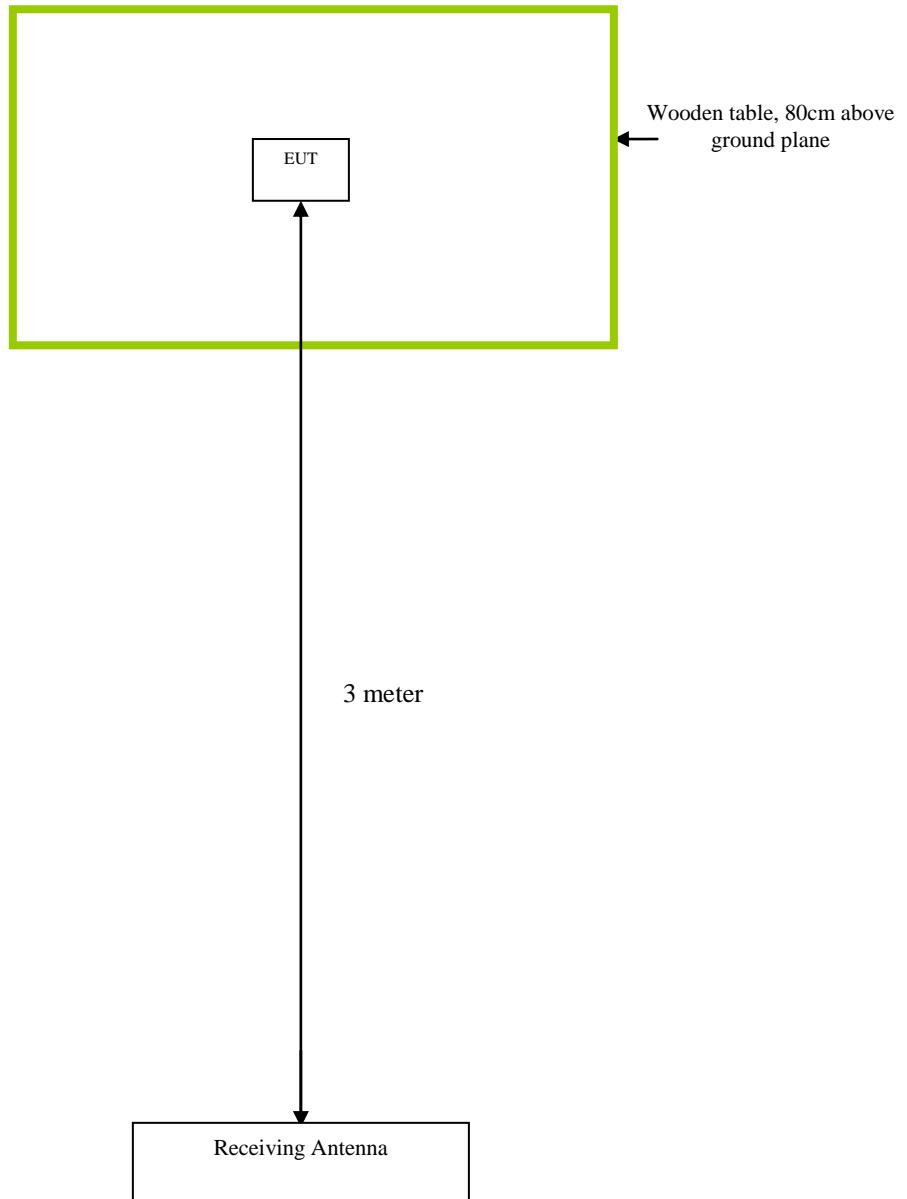

**SIEMIC, INC.**

Accessing global markets

Title: RF Test Report for GSM Mobile Phone
Main Model: GALA P730
Serial Model: N/A
To: FCC Part 15.247: 2012 (KDB 558074)

Serial#: 12070294-FCC-R3
Issue Date: 6th November, 2012
Page: 76 of 78
www.siemic.com.cn

Annex C.ii. EUT OPERATING CONDITIONS

The following is the description of how the EUT is exercised during testing.

Test	Description Of Operation
Emissions Testing	The EUT was continuously transmitting to stimulate the worst case.



SIEMIC, INC.

Accessing global markets

Title: RF Test Report for GSM Mobile Phone
Main Model: GALA P730
Serial Model: N/A
To: FCC Part 15.247: 2012 (KDB 558074)

Serial#: 12070294-FCC-R3
Issue Date: 6th November, 2012
Page: 77 of 78
www.siemic.com.cn

Annex D. USER MANUAL / BLOCK DIAGRAM / SCHEMATICS / PART LIST

Please see attachment



SIEMIC, INC.

Accessing global markets
Title: RF Test Report for GSM Mobile Phone
Main Model: GALA P730
Serial Model: N/A
To: FCC Part 15.247: 2012 (KDB 558074)

Serial#: 12070294-FCC-R3
Issue Date: 6th November, 2012
Page: 78 of 78
www.siemic.com.cn

Annex E. DECLARATION OF SIMILARITY



To: SIEMIC , 775 Montague Expressway , Milpitas, CA 95035 USA

Declaration letter

Dear Sir,

We have two models GSM mobile phone need to apply for FCC certification , The Model No. are SPRIZ P430 and GALA P730.The two models have same GSM Module ,Bluetooth module and PCB layout , GALA P730 only add WIFI module on the basis of SPRIZ P430.Please kindly handle on the project.

Thank you!

Client's signature :

Client's name / title: Luis Sosa/CEO

Contact information / address : 1612 NW, 84TH Ave. Miami, Florida, U.S.A 33126