



# FCC RF Test Report

**APPLICANT** : Google Inc.  
**EQUIPMENT** : Wireless Device  
**MODEL NAME** : D9SCA  
**FCC ID** : A4R-D9SCA  
**STANDARD** : FCC Part 15 Subpart C §15.247  
**CLASSIFICATION** : (DTS) Digital Transmission System

The product was received on Jun. 21, 2016 and testing was completed on Aug. 11, 2016. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.

Reviewed by: Joseph Lin / Supervisor

Approved by: Jones Tsai / Manager



**SPORTON INTERNATIONAL INC.**  
No. 52, Hwa Ya 1<sup>st</sup> Rd., Hwa Ya Technology Park, Kwei-Shan District, Tao Yuan City, Taiwan, R.O.C.



## TABLE OF CONTENTS

<b>REVISION HISTORY.....</b>	<b>3</b>
<b>SUMMARY OF TEST RESULT .....</b>	<b>4</b>
<b>1 GENERAL DESCRIPTION.....</b>	<b>5</b>
1.1    Applicant .....	5
1.2    Product Feature of Equipment Under Test.....	5
1.3    Product Specification of Equipment Under Test.....	5
1.4    Modification of EUT .....	5
1.5    Testing Location .....	6
1.6    Applicable Standards.....	6
<b>2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST.....</b>	<b>7</b>
2.1    Descriptions of Test Mode .....	7
2.2    Test Mode.....	7
2.3    Connection Diagram of Test System.....	8
2.4    Support Unit used in test configuration and system .....	9
2.5    EUT Operation Test Setup .....	10
2.6    Measurement Results Explanation Example.....	10
<b>3 TEST RESULT .....</b>	<b>11</b>
3.1    6dB and 99% Bandwidth Measurement .....	11
3.2    Peak Output Power Measurement .....	16
3.3    Power Spectral Density Measurement .....	18
3.4    Conducted Band Edges and Spurious Emission Measurement .....	23
3.5    Radiated Band Edges and Spurious Emission Measurement .....	28
3.6    AC Conducted Emission Measurement.....	53
3.7    Antenna Requirements .....	57
<b>4 LIST OF MEASURING EQUIPMENT.....</b>	<b>58</b>
<b>5 UNCERTAINTY OF EVALUATION.....</b>	<b>59</b>



# REVISION HISTORY



## SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.247(a)(2)	6dB Bandwidth	$\geq 0.5\text{MHz}$	Pass	-
3.1	-	99% Bandwidth	-	Pass	-
3.2	15.247(b)(3)	Peak Output Power	$\leq 30\text{dBm}$	Pass	-
3.3	15.247(e)	Power Spectral Density	$\leq 8\text{dBm/3kHz}$	Pass	-
3.4	15.247(d)	Conducted Band Edges and Spurious Emission	$\leq 20\text{dBc}$	Pass	-
3.5	15.247(d)	Radiated Band Edges and Spurious Emission	15.209(a) & 15.247(d)	Pass	Under limit 4.39 dB at 4880.000 MHz
3.6	15.207	AC Conducted Emission	15.207(a)	Pass	Under limit 6.70 dB at 0.174 MHz
3.7	15.203 & 15.247(b)	Antenna Requirement	N/A	Pass	-



## 1 General Description

### 1.1 Applicant

Google Inc.

1600 Amphitheatre Parkway Mountain View California United States 94043

### 1.2 Product Feature of Equipment Under Test

Product Feature	
Equipment	Wireless Device
Model Name	D9SCA
FCC ID	A4R-D9SCA
EUT supports Radios application	Bluetooth v4.2 LE

**Remark:** The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

### 1.3 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx/Rx Frequency Range	2402 MHz ~ 2480 MHz
Number of Channels	40
Carrier Frequency of Each Channel	40 Channel(37 hopping + 3 advertising channel)
Maximum Output Power to Antenna	-0.02 dBm (0.0010 W)
99% Occupied Bandwidth	1.06 MHz
Antenna Type	Monopole Antenna type with gain 1.23 dBi
Type of Modulation	Bluetooth LE : GFSK

### 1.4 Modification of EUT

No modifications are made to the EUT during all test items.



## 1.5 Testing Location

Sportun Lab is accredited to ISO 17025 by Taiwan Accreditation Foundation (TAF code : 1190) and the FCC designation No. TW1022 under the FCC 2.948(e) by Mutual Recognition Agreement (MRA) in FCC Test.

<b>Test Site</b>	SPORTON INTERNATIONAL INC.		
<b>Test Site Location</b>	No. 52, Hwa Ya 1 <sup>st</sup> Rd., Hwa Ya Technology Park, Kwei-Shan District, Tao Yuan City, Taiwan, R.O.C. TEL: +886-3-327-3456 FAX: +886-3-328-4978		
<b>Test Site No.</b>	<b>Sportun Site No.</b>		
	TH02-HY	CO05-HY	03CH06-HY

**Note:** The test site complies with ANSI C63.4 2014 requirement.

## 1.6 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart C §15.247
- ♦ FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r05
- ♦ ANSI C63.10-2013

**Remark:**

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



## 2 Test Configuration of Equipment Under Test

### 2.1 Descriptions of Test Mode

The RF output power was recorded in the following table:

Channel	Frequency	Bluetooth 4.2 – LE RF Output Power
		Data Rate / Modulation
		GFSK
		1Mbps
Ch00	2402MHz	-0.02 dBm
Ch19	2440MHz	-0.17 dBm
Ch39	2480MHz	-0.32 dBm

- The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction (150 kHz to 30 MHz), radiation (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). Pre-scanned tests, X, Y, Z in three orthogonal panels to determine the final configuration (X plane as worst plane) from all possible combinations.
- AC power line Conducted Emission was tested under maximum output power.

### 2.2 Test Mode


The following summary table is showing all test modes to demonstrate in compliance with the standard.

Summary table of Test Cases	
Test Item	Data Rate / Modulation
	Bluetooth 4.2 – LE / GFSK
Conducted TCs	Mode 1: Bluetooth Tx CH00_2402 MHz_1Mbps Mode 2: Bluetooth Tx CH19_2440 MHz_1Mbps Mode 3: Bluetooth Tx CH39_2480 MHz_1Mbps
Radiated TCs	Mode 1: Bluetooth Tx CH00_2402 MHz_1Mbps Mode 2: Bluetooth Tx CH19_2440 MHz_1Mbps Mode 3: Bluetooth Tx CH39_2480 MHz_1Mbps
AC Conducted Emission	Mode 1: Bluetooth Link + USB Cable (Charging from Adapter) Mode 2: Bluetooth Link + USB Cable (Charging from Notebook)


**Remark:** The worst case of conducted emission is mode 2; only the test data of it was reported.

## 2.3 Connection Diagram of Test System


<Bluetooth 4.2 – LE Tx Mode>

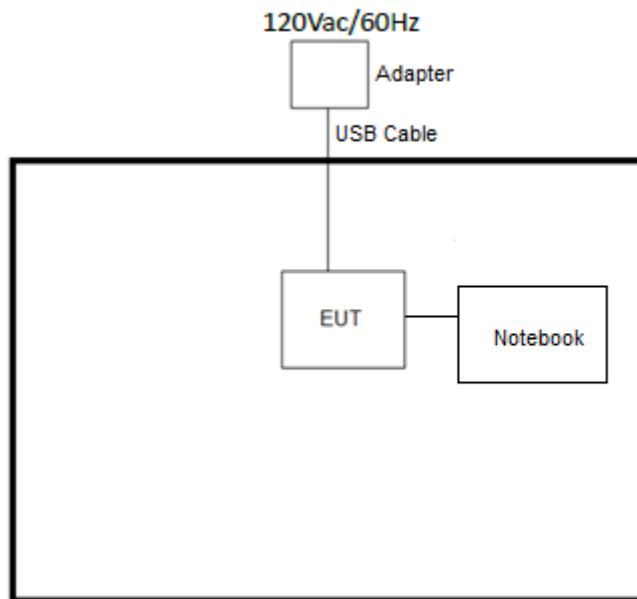

< AC Conducted Emission Mode (EUT with Adapter)>

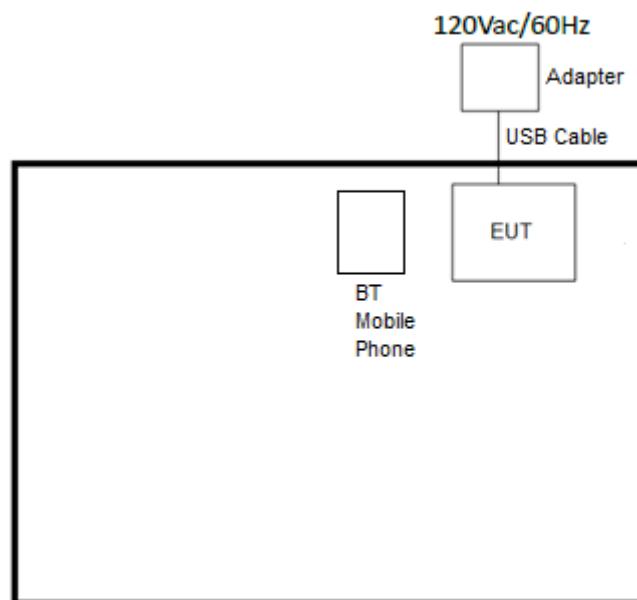

## &lt;AC Conducted Emission Mode (EUT with Notebook)&gt;

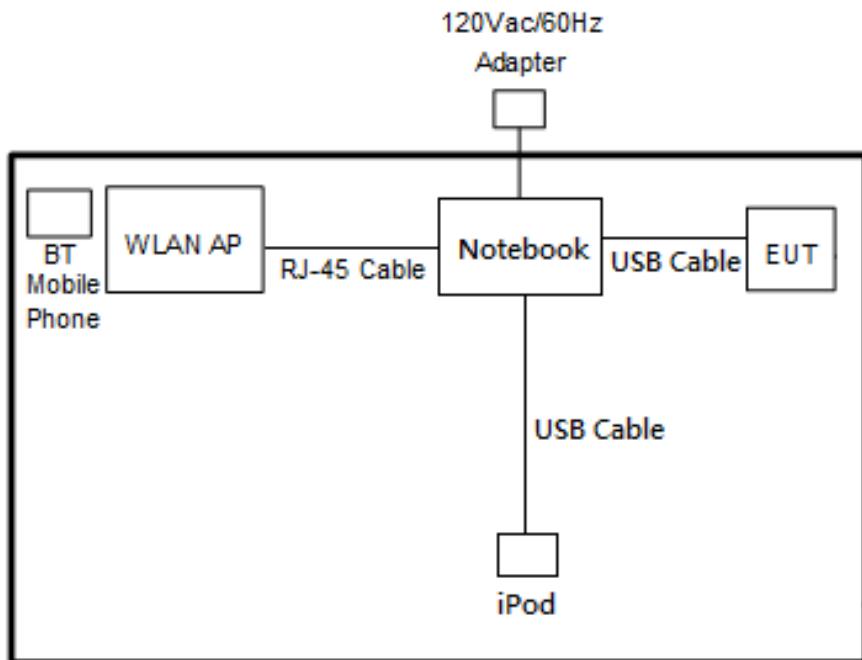

## 2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	BT Mobile Phone	HTC	HTC Butterfly S	N/A	N/A	N/A
2.	WLAN AP	ASUS	RT-AC66U	MSQ-RTAC66U	N/A	Unshielded, 1.8 m
3.	iPod	Apple	A1285	FCC DoC	Shielded, 1.0 m	N/A
4.	Notebook	DELL	Latitude E6320	FCC DoC/ Contains FCC ID: QDS-BRCM1054	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m
5.	Adapter	N/A	N/A	N/A	N/A	N/A
6.	USB cable	N/A	N/A	N/A	N/A	N/A



## 2.5 EUT Operation Test Setup

For Bluetooth 4.2 – LE test items, an engineering test program (realterm) was provided and enabled to make EUT continuous transmitting and receiving signals.

## 2.6 Measurement Results Explanation Example

### For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

*Offset = RF cable loss + attenuator factor.*

Following shows an offset computation example with cable loss 4.2 dB and 10dB attenuator.

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)} \\ &= 4.2 + 10 = 14.2 \text{ (dB)} \end{aligned}$$

### 3 Test Result

#### 3.1 6dB and 99% Bandwidth Measurement

##### 3.1.1 Limit of 6dB and 99% Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.


##### 3.1.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

##### 3.1.3 Test Procedures

1. The testing follows FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r05.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6 dB bandwidth must be greater than 500 kHz.
5. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set 30kHz and set the Video bandwidth (VBW) = 100kHz.
6. Measure and record the results in the test report.

##### 3.1.4 Test Setup

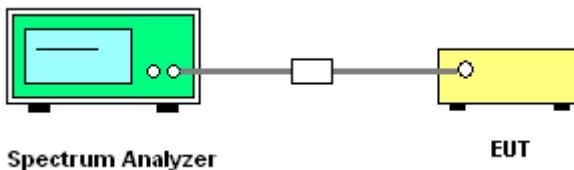


## 3.1.5 Test Result of 6dB Bandwidth

Test Mode :	Bluetooth 4.2 - LE	Temperature :	21~25°C
Test Engineer :	Derek Hsu and William Liao	Relative Humidity :	51~54%


Channel	Frequency (MHz)	6dB Bandwidth (MHz)	6dB Bandwidth Min. Limit (MHz)	Pass/Fail
00	2402	0.71	0.5	Pass
19	2440	0.71	0.5	Pass
39	2480	0.71	0.5	Pass

## 6 dB Bandwidth Plot on Channel 00

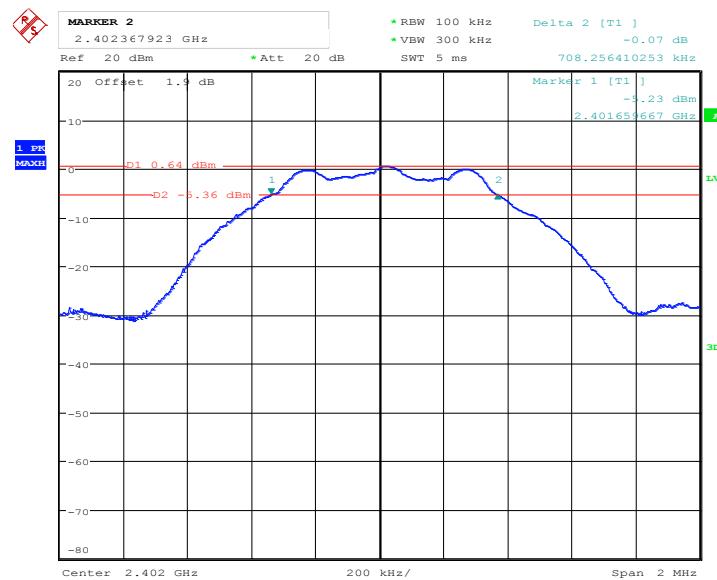


Date: 17.JUN.2016 03:55:33

## 6 dB Bandwidth Plot on Channel 19

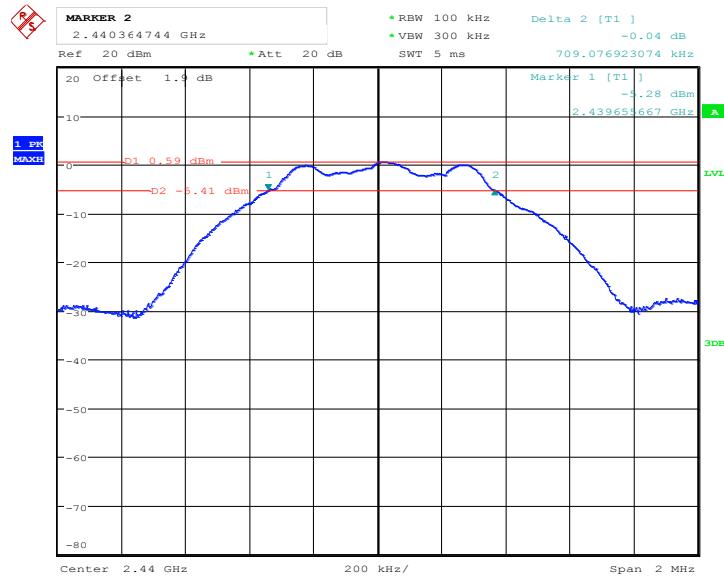

## 6 dB Bandwidth Plot on Channel 39

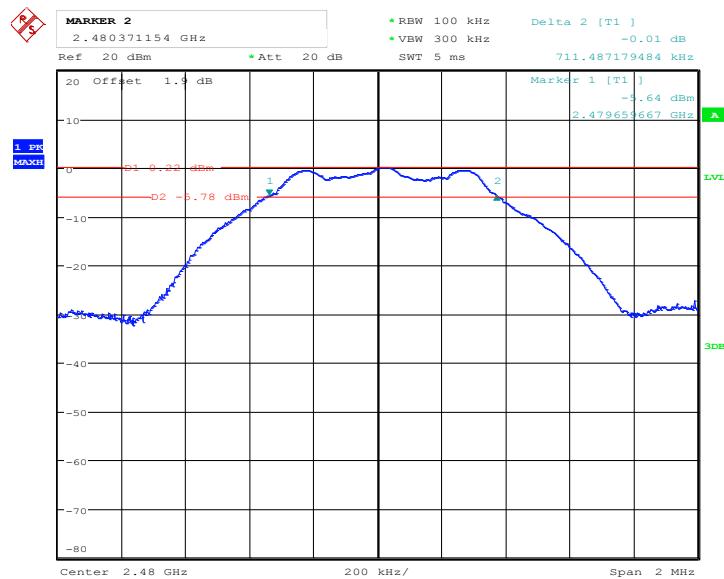


### 3.1.6 Test Result of 99% Occupied Bandwidth

<b>Test Mode :</b>	Bluetooth 4.2 - LE	<b>Temperature :</b>	21~25°C
<b>Test Engineer :</b>	Derek Hsu and William Liao	<b>Relative Humidity :</b>	51~54%


Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)
00	2402	1.06
19	2440	1.06
39	2480	1.05

99% Occupied Bandwidth Plot on Channel 00

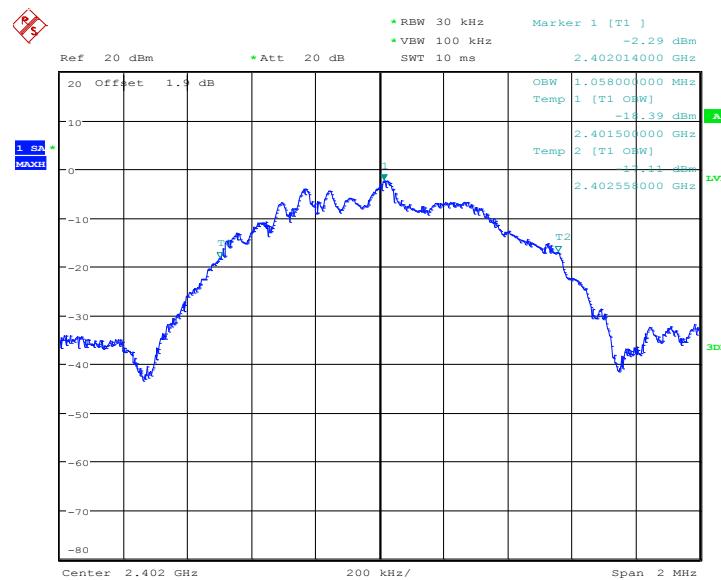


Date: 17.JUN.2016 04:34:49

## 99% Occupied Bandwidth Plot on Channel 19

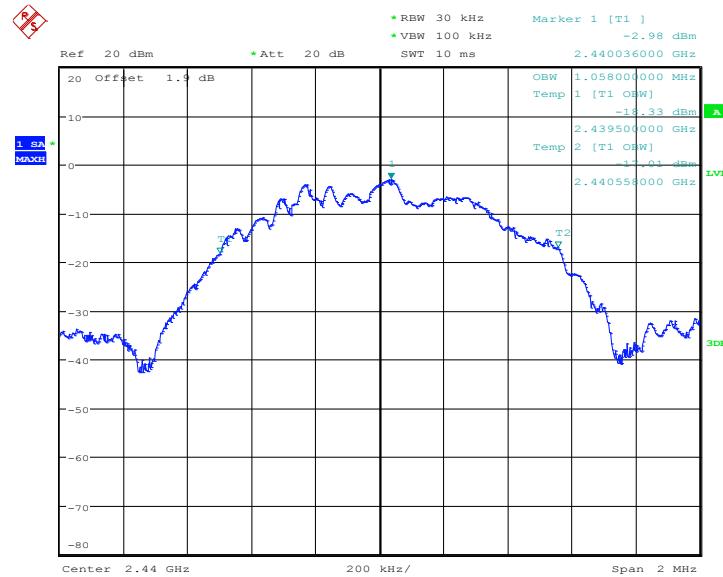

Date: 17.JUN.2016 04:33:56

## 99% Occupied Bandwidth Plot on Channel 39

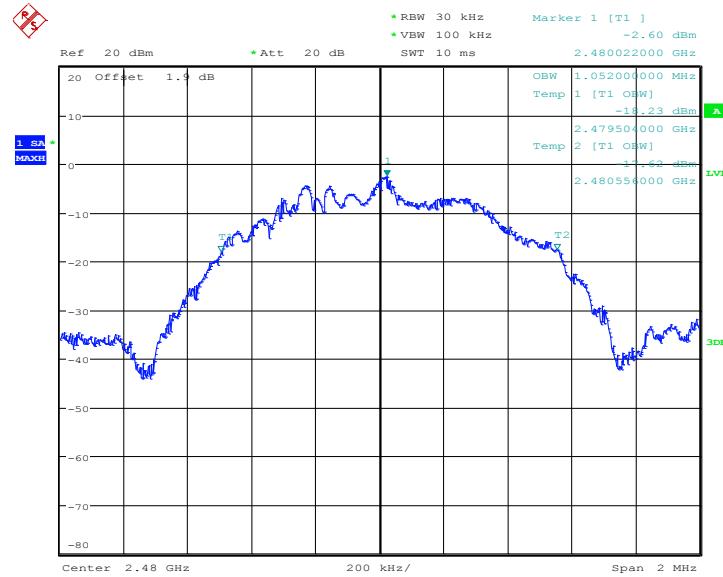

Date: 17.JUN.2016 04:28:30

**Note :** The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

## 3.2 Peak Output Power Measurement

### 3.2.1 Limit of Peak Output Power

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm. If transmitting antenna of directional gain greater than 6dBi is used, the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.


### 3.2.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

### 3.2.3 Test Procedures

1. The testing follows the Measurement Procedure of FCC KDB No. 558074 DTS D01 Meas. Guidance v03r05 section 9.1.2 PKPM1 Peak power meter method.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power and record the results in the test report.

### 3.2.4 Test Setup

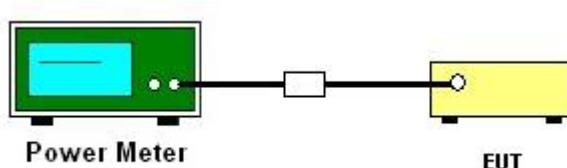



### 3.2.6 Test Result of Peak Output Power

<b>Test Mode :</b>	Bluetooth 4.2 - LE	<b>Temperature :</b>	21~25°C	
<b>Test Engineer :</b>	Derek Hsu and William Liao	<b>Relative Humidity :</b>	51~54%	
Channel	Frequency (MHz)	RF Power (dBm)		
		GFSK	Max. Limits (dBm)	Pass/Fail
		1 Mbps		
00	2402	-0.02	30.00	Pass
19	2440	-0.17	30.00	Pass
39	2480	-0.32	30.00	Pass

### 3.3 Power Spectral Density Measurement

#### 3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8dBm in any 3kHz band at any time interval of continuous transmission.


#### 3.3.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

#### 3.3.3 Test Procedures

1. The testing follows Measurement Procedure 10.2 Method PKPSD of FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r05
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth VBW = 10 kHz In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6dB BW)
5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
6. Measure and record the results in the test report.
7. The Measured power density (dBm)/ 100kHz is a reference level and used as 20dBc down limit line for Conducted Band Edges and Conducted Spurious Emission.

#### 3.3.4 Test Setup

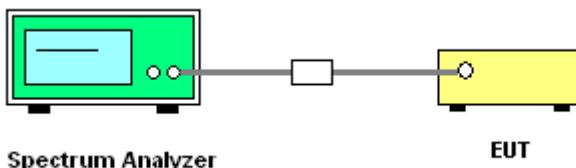

### 3.3.5 Test Result of Power Spectral Density


Test Mode :	Bluetooth 4.2 - LE	Temperature :	21~25°C
Test Engineer :	Derek Hsu and William Liao	Relative Humidity :	51~54%

Channel	Frequency (MHz)	Power Density		Max. Limits (dBm/3kHz)	Pass/Fail
		PSD/100kHz (dBm)	PSD/3kHz (dBm)		
00	2402	0.56	-14.36	8	Pass
19	2440	0.58	-14.89	8	Pass
39	2480	0.23	-14.32	8	Pass

**Note:**

1. Measured power density (dBm) has offset with cable loss.
2. The Measured power density (dBm)/ 100kHz is reference level and used as 20dBc down for Conducted Band Edges and Conducted Spurious Emission limit line.


### 3.3.6 Test Result of Power Spectral Density Plots (100kHz)

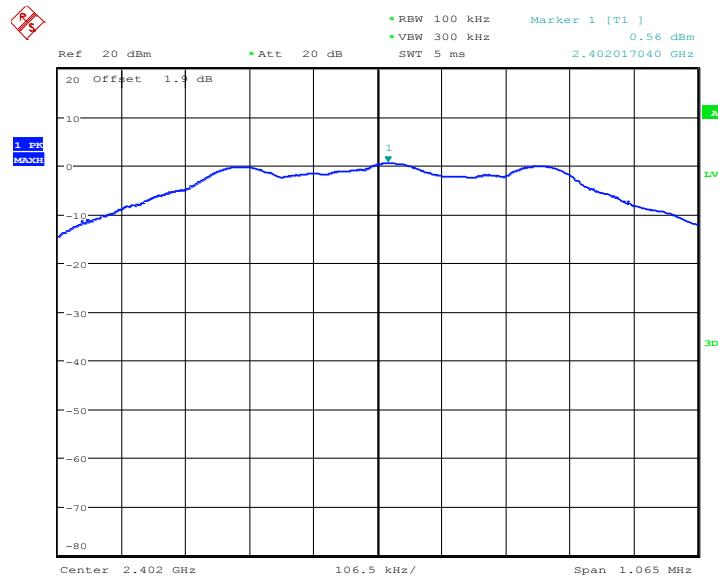**PSD 100kHz Plot on Channel 00**

Date: 17.JUN.2016 03:57:58




## PSD 100kHz Plot on Channel 19

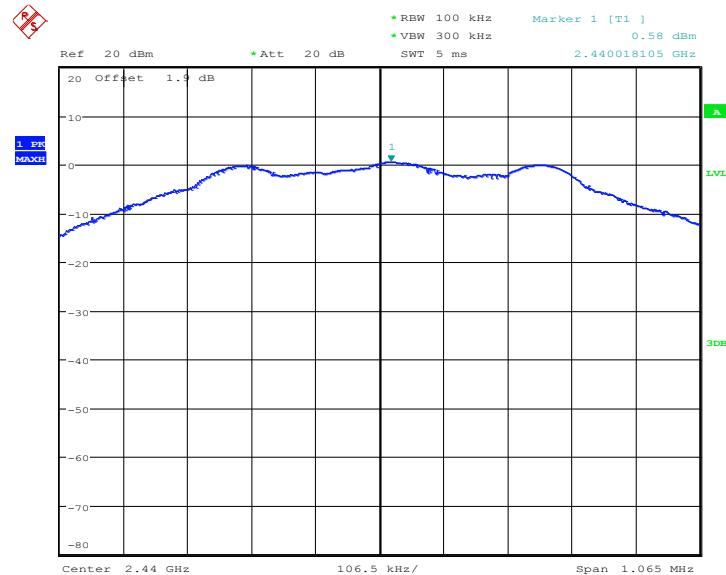

Date: 17.JUN.2016 04:33:19

## PSD 100kHz Plot on Channel 39

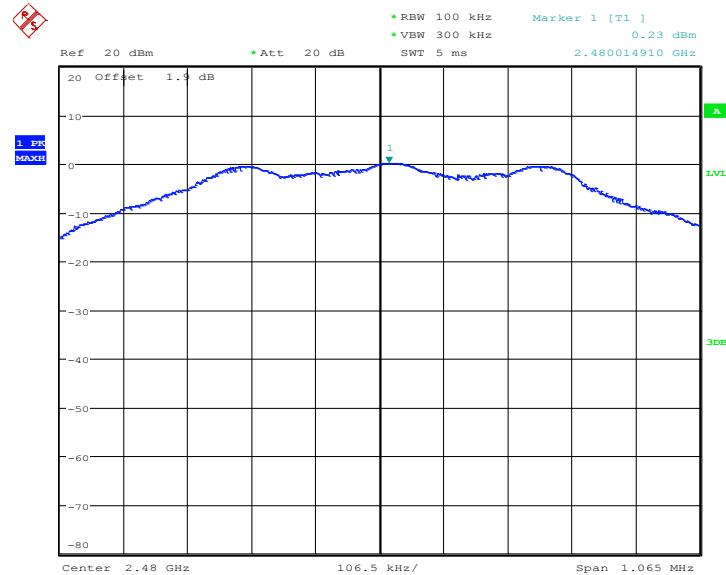


Date: 17.JUN.2016 04:27:56



### 3.3.7 Test Result of Power Spectral Density Plots (3kHz)


PSD 3kHz Plot on Channel 00

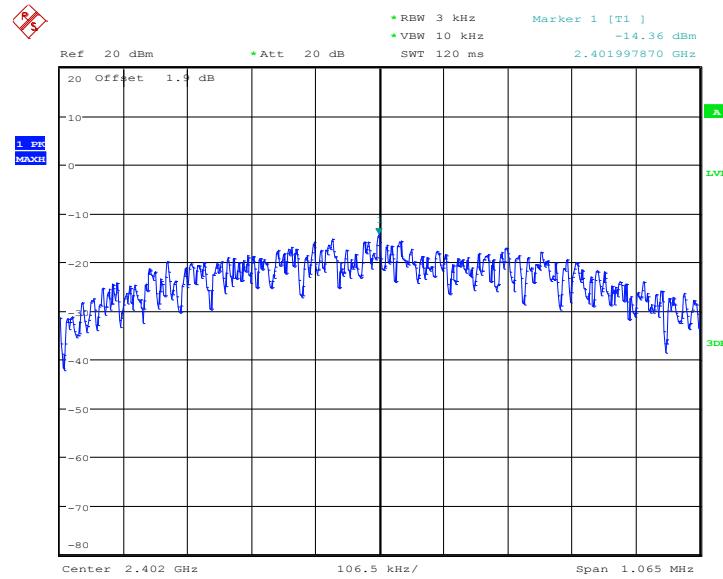

Date: 17.JUN.2016 03:57:30




## PSD 3kHz Plot on Channel 19

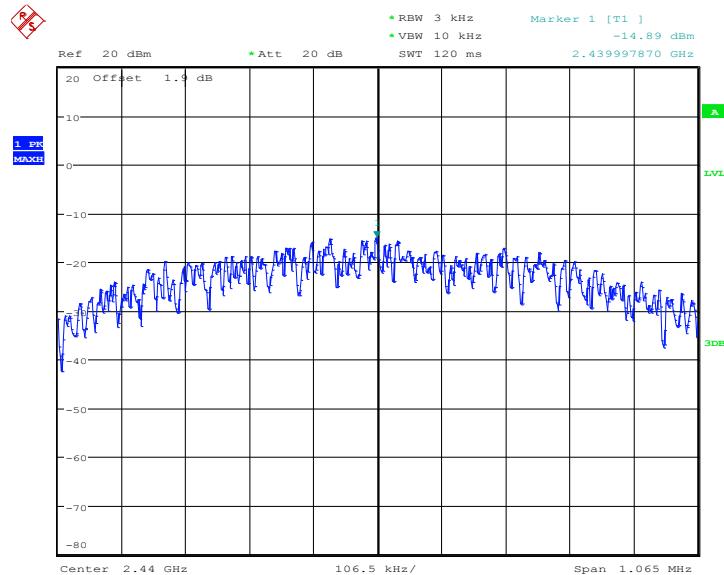

Date: 17.JUN.2016 04:33:10

## PSD 3kHz Plot on Channel 39

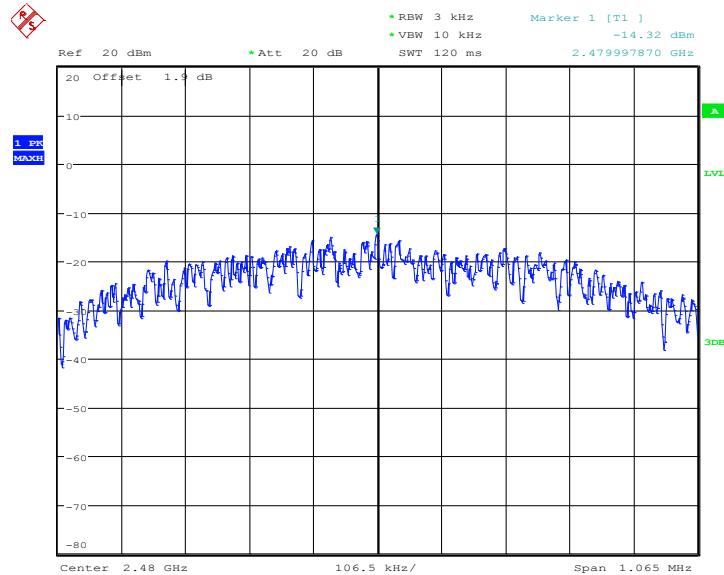

Date: 17.JUN.2016 04:27:45

### 3.4 Conducted Band Edges and Spurious Emission Measurement

#### 3.4.1 Limit of Conducted Band Edges and Spurious Emission

All harmonics/spurious must be at least 20 dB down from the highest emission level within the authorized band.


#### 3.4.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

#### 3.4.3 Test Procedure

1. The testing follows FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r05.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 kHz, VBW=300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB per 15.247(d).
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.


#### 3.4.4 Test Setup

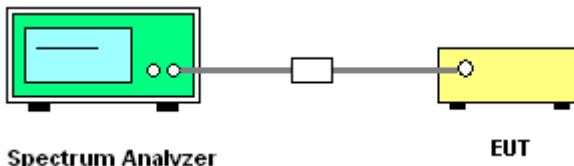

### 3.4.5 Test Result of Conducted Band Edges Plots


Test Mode :	Bluetooth 4.2 - LE	Temperature :	21~25°C
Test Channel :	00 and 39	Relative Humidity :	51~54%
		Test Engineer :	Derek Hsu and William Liao

Low Band Edge Plot on Channel 00

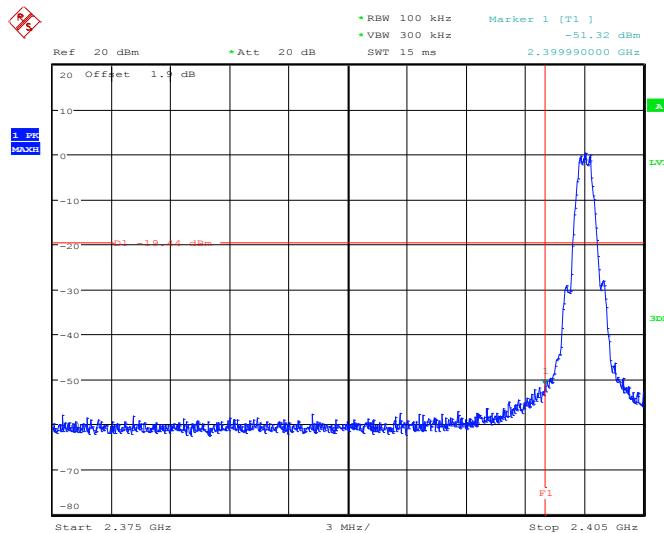

Date: 17.JUN.2016 03:58:37

High Band Edge Plot on Channel 39

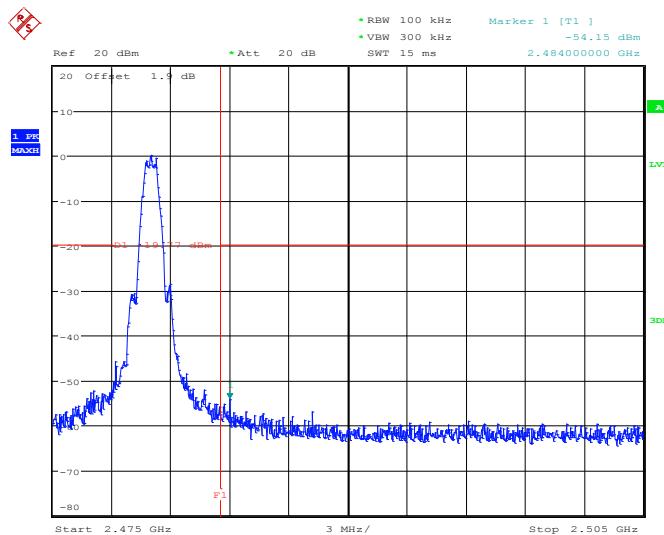


Date: 17.JUN.2016 04:28:03

### 3.4.6 Test Result of Conducted Spurious Emission Plots

<b>Test Mode :</b>	Bluetooth 4.2 - LE	<b>Temperature :</b>	21~25°C
<b>Test Channel :</b>	00	<b>Relative Humidity :</b>	51~54%
		<b>Test Engineer :</b>	Derek Hsu and William Liao

#### Conducted Spurious Emission Plot on Bluetooth LE 1Mbps


##### GFSK Channel 00

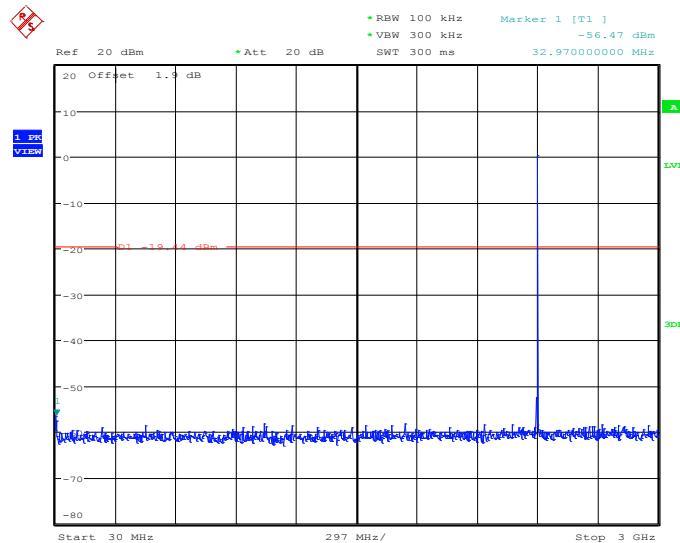

Date: 17.JUN.2016 03:58:47

#### Conducted Spurious Emission Plot on Bluetooth LE 1Mbps


##### GFSK Channel 00

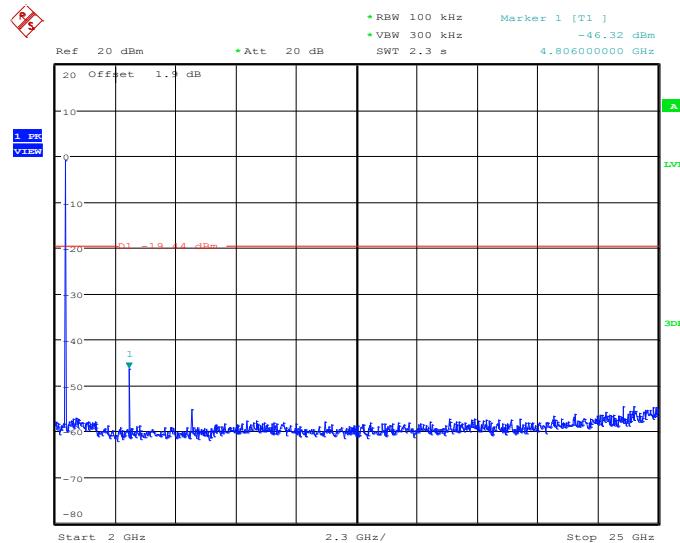


Date: 17.JUN.2016 03:58:55



<b>Test Mode :</b>	Bluetooth 4.2 - LE	<b>Temperature :</b>	21~25°C
<b>Test Channel :</b>	19	<b>Relative Humidity :</b>	51~54%
		<b>Test Engineer :</b>	Derek Hsu and William Liao

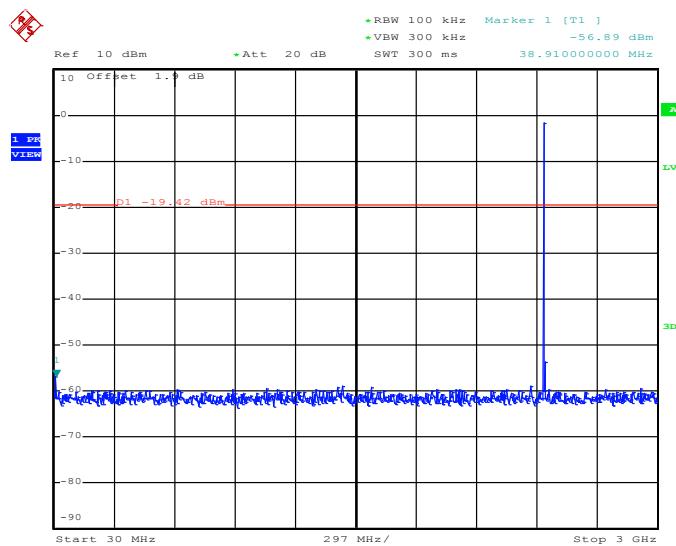**Conducted Spurious Emission Plot on Bluetooth LE 1Mbps****GFSK Channel 19**


Date: 17.JUN.2016 23:30:50

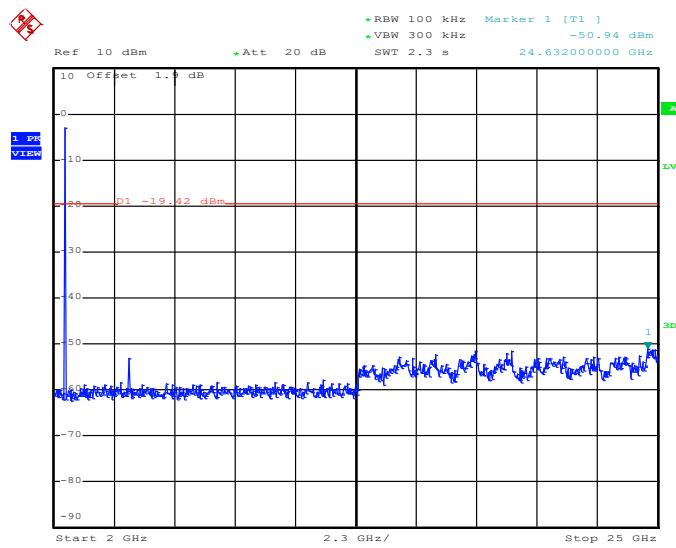**Conducted Spurious Emission Plot on Bluetooth LE 1Mbps****GFSK Channel 19**


Date: 17.JUN.2016 23:30:59



<b>Test Mode :</b>	Bluetooth 4.2 - LE	<b>Temperature :</b>	21~25°C
<b>Test Channel :</b>	39	<b>Relative Humidity :</b>	51~54%
		<b>Test Engineer :</b>	Derek Hsu and William Liao

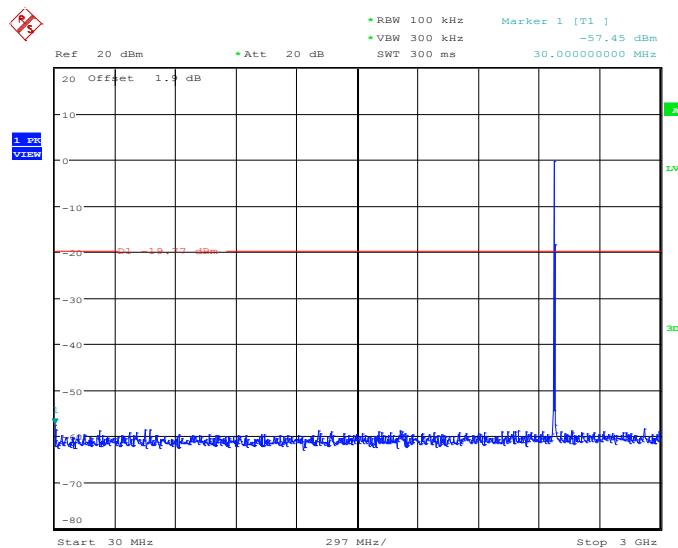**Conducted Spurious Emission Plot on Bluetooth LE 1Mbps****GFSK Channel 39**

Date: 17.JUN.2016 04:28:13

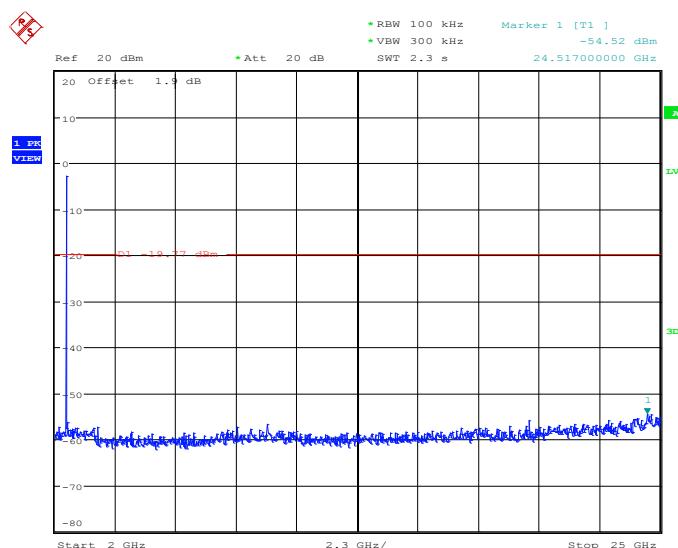**Conducted Spurious Emission Plot on Bluetooth LE 1Mbps****GFSK Channel 39**

Date: 17.JUN.2016 04:28:21



### 3.5 Radiated Band Edges and Spurious Emission Measurement

#### 3.5.1 Limit of Radiated Band Edges and Spurious Emission

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the FCC section 15.209 limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

#### 3.5.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.



### 3.5.3 Test Procedures

1. The testing follows FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r05.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. For measurement below 1GHz, If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.
7. Use the following spectrum analyzer settings:
  - (1) Span shall wide enough to fully capture the emission being measured;
  - (2) Set RBW=100 kHz for  $f < 1$  GHz; VBW  $\geq$  RBW; Sweep = auto; Detector function = peak; Trace = max hold;
  - (3) Set RBW = 1 MHz, VBW= 3MHz for  $f \geq 1$  GHz for peak measurement.


For average measurement:

- VBW = 10 Hz, when duty cycle is no less than 98 percent.
- $VBW \geq 1/T$ , when duty cycle is less than 98 percent where  $T$  is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

Band	Duty Cycle(%)	T(μs)	1/T(kHz)	VBW Setting
Bluetooth 4.2 - LE	63.057	396	2.53	3kHz




## Duty Cycle Plots

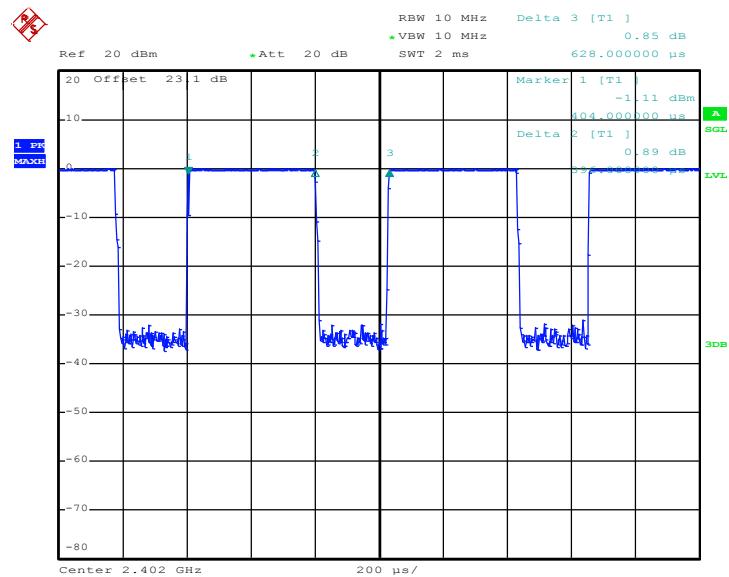


Date: 10.AUG.2016 18:22:59

### 3.5.4 Test Setup


For radiated emissions below 30MHz

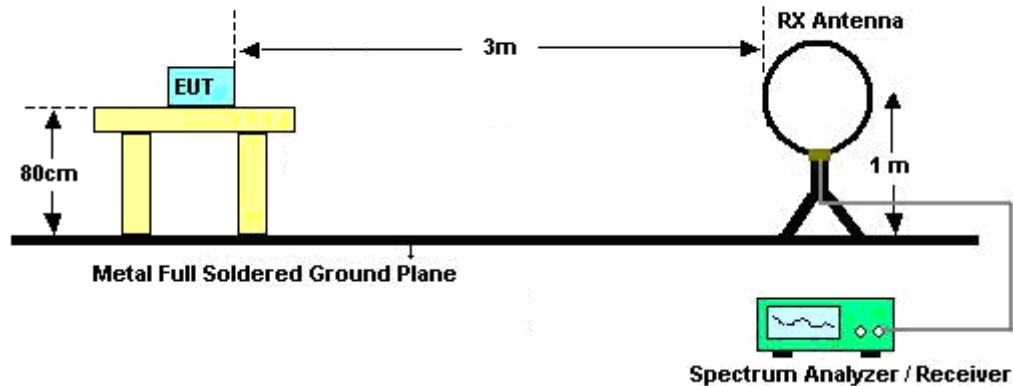

For radiated emissions from 30MHz to 1GHz

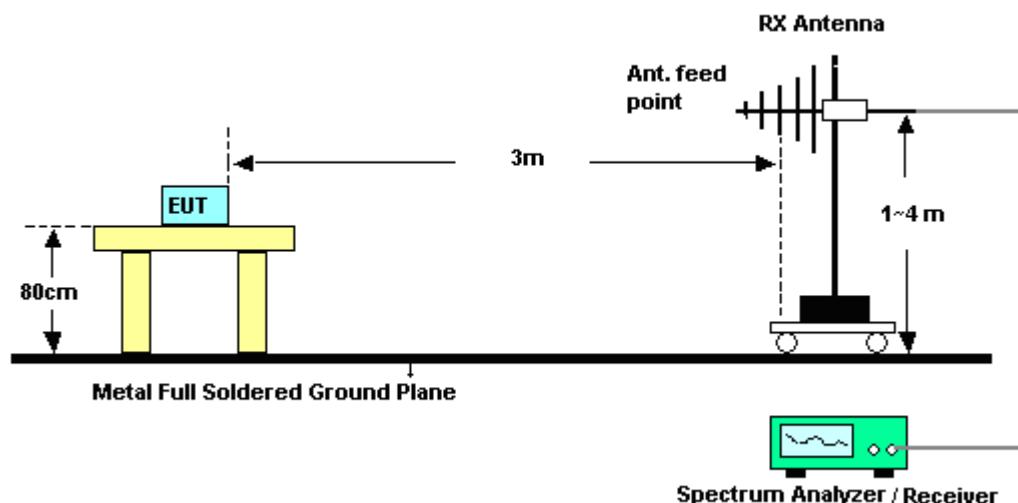

For radiated emissions above 1GHz

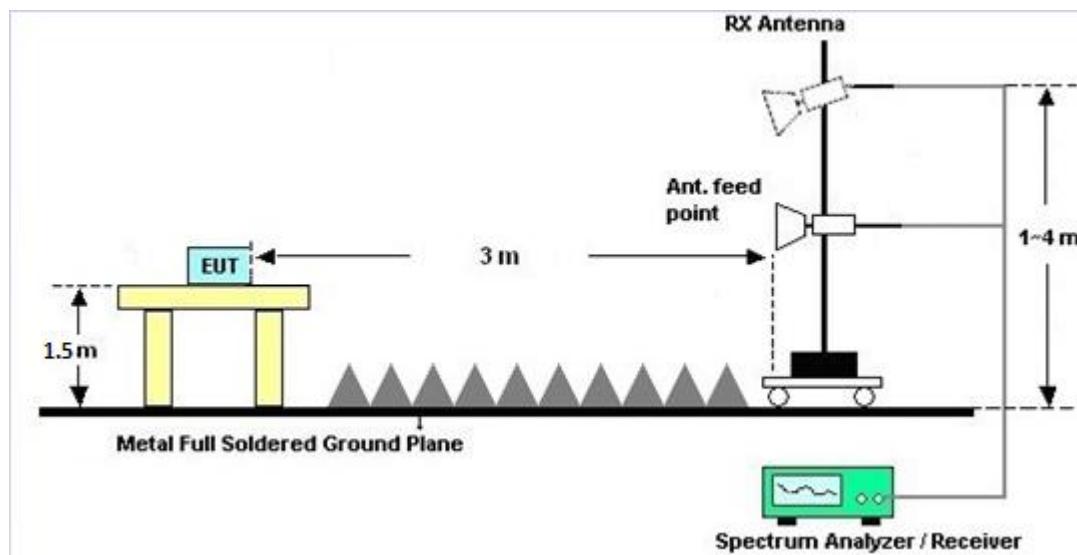

### 3.5.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported.



## 3.5.6 Test Result of Radiated Spurious at Band Edges

Test Engineer :	Donny Tang							Temperature :		23~24°C		
								Relative Humidity :		44~46%		

2.4GHz 2400~2483.5MHz

## BLE (Band Edge @ 3m)

BLE	Note	Frequency ( MHz )	Level ( dB $\mu$ V/m )	Over Limit ( dB )	Limit Line ( dB $\mu$ V/m )	Read Level ( dB $\mu$ V )	Antenna Factor ( dB/m )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. (P/A)	Pol. (H/V)
BLE CH 00 2402MHz		2370.38	47.37	-26.63	74	48.09	27.13	6.71	34.56	100	56	P	H
		2388.96	36.33	-17.67	54	36.97	27.17	6.75	34.56	100	56	A	H
	*	2402	95.93	-	-	96.57	27.17	6.75	34.56	100	56	P	H
	*	2402	94.22	-	-	94.86	27.17	6.75	34.56	100	56	A	H
													H
													H
		2337.72	47.73	-26.27	74	48.56	27.06	6.67	34.56	280	197	P	V
		2373	36.32	-17.68	54	37.04	27.13	6.71	34.56	280	197	A	V
	*	2402	83.17	-	-	83.81	27.17	6.75	34.56	280	197	P	V
	*	2402	82.43	-	-	83.07	27.17	6.75	34.56	280	197	A	V
BLE CH 19 2440MHz													V
		2366.94	47.24	-26.76	74	47.99	27.1	6.71	34.56	100	56	P	H
		2378.12	36.34	-17.66	54	37.06	27.13	6.71	34.56	100	56	A	H
	*	2440	96.36	-	-	96.78	27.29	6.84	34.55	100	56	P	H
	*	2440	95.32	-	-	95.74	27.29	6.84	34.55	100	56	A	H
		2483.97	47.31	-26.69	74	47.56	27.36	6.94	34.55	100	56	P	H
		2497.06	36.61	-17.39	54	36.82	27.4	6.94	34.55	100	56	A	H
		2312.73	47.12	-26.88	74	48.03	26.98	6.67	34.56	140	206	P	V
		2383.84	36.18	-17.82	54	36.9	27.13	6.71	34.56	140	206	A	V
	*	2440	83.29	-	-	83.71	27.29	6.84	34.55	140	206	P	V
	*	2440	81.61	-	-	82.03	27.29	6.84	34.55	140	206	A	V
		2486.84	47.98	-26.02	74	48.23	27.36	6.94	34.55	140	206	P	V
		2495.8	36.65	-17.35	54	36.86	27.4	6.94	34.55	140	206	A	V



<b>BLE CH 39 2480MHz</b>	*	2480	96.6	-	-	96.85	27.36	6.94	34.55	118	53	P	H
	*	2480	95.97	-	-	96.22	27.36	6.94	34.55	118	53	A	H
		2483.64	55.27	-18.73	74	55.52	27.36	6.94	34.55	118	53	P	H
		2483.52	40.73	-13.27	54	40.98	27.36	6.94	34.55	118	53	A	H
													H
													H
	*	2480	85.42	-	-	85.67	27.36	6.94	34.55	171	207	P	V
	*	2480	84.13	-	-	84.38	27.36	6.94	34.55	171	207	A	V
		2498.48	47.76	-26.24	74	47.97	27.4	6.94	34.55	171	207	P	V
		2483.88	36.74	-17.26	54	36.99	27.36	6.94	34.55	171	207	A	V
													V
													V
<b>Remark</b>	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												

**Note symbol**

*	<b>Fundamental Frequency</b> which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is <b>over limit</b> line.
P/A	<b>Peak or Average</b>
H/V	<b>Horizontal or Vertical</b>



A calculation example for radiated spurious emission is shown as below:

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1+2		( MHz )	( dB $\mu$ V/m )	( dB )	( dB $\mu$ V/m )	( dB $\mu$ V )	( dB/m )	( dB )	( dB )	( cm )	( deg )	(P/A)	(H/V)
802.11b CH 01		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

1. Level(dB $\mu$ V/m) =

Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dB $\mu$ V) - Preamp Factor(dB)

2. Over Limit(dB) = Level(dB $\mu$ V/m) – Limit Line(dB $\mu$ V/m)

#### For Peak Limit @ 2390MHz:

1. Level(dB $\mu$ V/m)

= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dB $\mu$ V) - Preamp Factor(dB)

= 32.22(dB/m) + 4.58(dB) + 54.51(dB $\mu$ V) – 35.86 (dB)

= 55.45 (dB $\mu$ V/m)

2. Over Limit(dB)

= Level(dB $\mu$ V/m) – Limit Line(dB $\mu$ V/m)

= 55.45(dB $\mu$ V/m) – 74(dB $\mu$ V/m)

= -18.55(dB)

#### For Average Limit @ 2390MHz:

1. Level(dB $\mu$ V/m)

= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dB $\mu$ V) - Preamp Factor(dB)

= 32.22(dB/m) + 4.58(dB) + 42.6(dB $\mu$ V) – 35.86 (dB)

= 43.54 (dB $\mu$ V/m)

2. Over Limit(dB)

= Level(dB $\mu$ V/m) – Limit Line(dB $\mu$ V/m)

= 43.54(dB $\mu$ V/m) – 54(dB $\mu$ V/m)

= -10.46(dB)

Both peak and average measured complies with the limit line, so test result is “PASS”.






## Note symbol

-L	Low channel location
-R	High channel location

## 2.4GHz 2400~2483.5MHz

## BLE (Band Edge @ 3m)

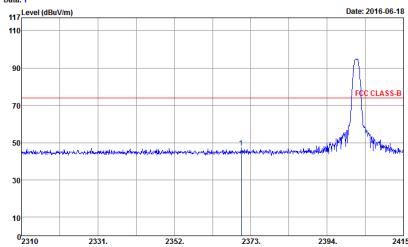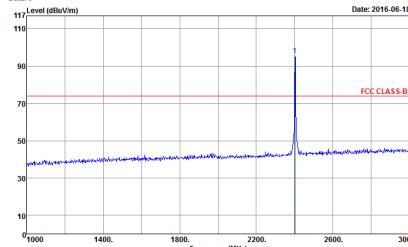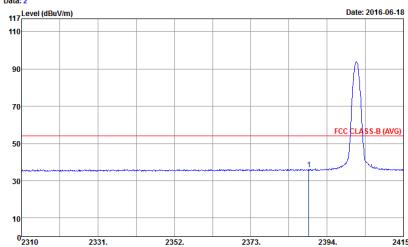BLE		2.4GHz 2400~2483.5MHz Band Edge @ 3m	
		BLE CH00 2402MHz	
		Horizontal	Fundamental
Peak		 <p>Data: 1 Level (dBuV/m): 111, 110, 90, 50, 30, 10 Frequency (MHz): 2310, 2351, 2352, 2373, 2394, 2415 Date: 2016-06-18</p> <p>FCC CLASS-B</p> <p>Site: 03CH06-HY Condition: FCC CLASS-B 3m 9120D_1156_150827 HORIZONTAL Detector: Peak Project: #W162316 Power: 120Vac/60Hz Memo: Mode 1</p>	 <p>Data: 3 Level (dBuV/m): 111, 110, 90, 50, 30, 10 Frequency (MHz): 1000, 1400, 1800, 2200, 2600, 3000 Date: 2016-06-18</p> <p>FCC CLASS-B</p> <p>Site: 03CH06-HY Condition: FCC CLASS-B 3m 9120D_1156_150827 HORIZONTAL Detector: Peak Project: #W162316 Power: 120Vac/60Hz Memo: Mode 1</p>
Avg.		 <p>Data: 2 Level (dBuV/m): 111, 110, 90, 50, 30, 10 Frequency (MHz): 2310, 2351, 2352, 2373, 2394, 2415 Date: 2016-06-18</p> <p>FCC CLASS-B (AVG)</p> <p>Site: 03CH06-HY Condition: FCC CLASS-B (AVG) 3m 9120D_1156_150827 HORIZONTAL Detector: Peak Project: #W162316 Power: 120Vac/60Hz Memo: Mode 1</p>	 <p>Data: 4 Level (dBuV/m): 111, 110, 90, 50, 30, 10 Frequency (MHz): 1000, 1400, 1800, 2200, 2600, 3000 Date: 2016-06-18</p> <p>FCC CLASS-B (AVG)</p> <p>Site: 03CH06-HY Condition: FCC CLASS-B (AVG) 3m 9120D_1156_150827 HORIZONTAL Detector: Peak Project: #W162316 Power: 120Vac/60Hz Memo: Mode 1</p>



BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	BLE CH00 2402MHz	
	Vertical	Fundamental
Peak	<p>Data: 5</p> <p>Site : 02C406-HY Condition : FCC CLASS-B 3m 91200_1156_150827 VERTICAL : RBW:1000.000KHz VBW:3.000KHz SWF:Auto Detector : Peak Project : #W162316 Power : 120Vac/60Hz Memo : Mode 1</p>	<p>Data: 7</p> <p>Site : 02C406-HY Condition : FCC CLASS-B 3m 91200_1156_150827 VERTICAL : RBW:1000.000KHz VBW:3.000KHz SWF:Auto Detector : Peak Project : #W162316 Power : 120Vac/60Hz Memo : Mode 1</p>
Avg	<p>Data: 6</p> <p>Site : 02C406-HY Condition : FCC CLASS-B (AVG) 3m 91200_1156_150827 VERTICAL : RBW:1000.000KHz VBW:3.000KHz SWF:Auto Detector : Peak Project : #W162316 Power : 120Vac/60Hz Memo : Mode 1</p>	<p>Data: 8</p> <p>Site : 02C406-HY Condition : FCC CLASS-B (AVG) 3m 91200_1156_150827 VERTICAL : RBW:1000.000KHz VBW:3.000KHz SWF:Auto Detector : Peak Project : #W162316 Power : 120Vac/60Hz Memo : Mode 1</p>



BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	BLE CH19 2440MHz - L	
	Horizontal	Fundamental
Peak	<p>Data: 1</p> <p>Site : 02CH06-HY Condition : FCC CLASS-B 3m 91200_1156_150827 HORIZONTAL RBW:1000.000KHz VBW:3.000KHz SWF:Auto Detector : Peak Project : #W162316 Power : 120Vac/60Hz Memo : Mode 2</p>	<p>Data: 3</p> <p>Site : 02CH06-HY Condition : FCC CLASS-B 3m 91200_1156_150827 HORIZONTAL RBW:1000.000KHz VBW:3.000KHz SWF:Auto Detector : Peak Project : #W162316 Power : 120Vac/60Hz Memo : Mode 2</p>
Avg.	<p>Data: 2</p> <p>Site : 02CH06-HY Condition : FCC CLASS-B (AVG) 3m 91200_1156_150827 HORIZONTAL RBW:1000.000KHz VBW:3.000KHz SWF:Auto Detector : Peak Project : #W162316 Power : 120Vac/60Hz Memo : Mode 2</p>	<p>Data: 4</p> <p>Site : 02CH06-HY Condition : FCC CLASS-B (AVG) 3m 91200_1156_150827 HORIZONTAL RBW:1000.000KHz VBW:3.000KHz SWF:Auto Detector : Peak Project : #W162316 Power : 120Vac/60Hz Memo : Mode 2</p>



BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
BLE CH19 2440MHz - R		
	Horizontal	Fundamental
Peak	<p>Data: 5</p> <p>Level (dBuV/m)</p> <p>Date: 2016-06-18</p> <p>FCC CLASS-B</p> <p>Site Condition : 02C406-HV : FCC CLASS-B 3m 91200_1156_150827 HORIZONTAL : RBW:1000.000KHz VBW:3.000KHz SWT:Auto Detector : Peak Project : #W162316 Power : 120Vac/60Hz Memo : Mode 2</p>	Left on blank
Avg.	<p>Data: 6</p> <p>Level (dBuV/m)</p> <p>Date: 2016-06-18</p> <p>FCC CLASS-B (AVG)</p> <p>Site Condition : 02C406-HV : FCC CLASS-B (AVG) 3m 91200_1156_150827 HORIZONTAL : RBW:1000.000KHz VBW:3.000KHz SWT:Auto Detector : Peak Project : #W162316 Power : 120Vac/60Hz Memo : Mode 2</p>	Left on blank



BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	BLE CH19 2440MHz - L	
	Vertical	Fundamental
Peak	<p>Data: 7</p> <p>Site : 02CH06-HY Condition : FCC CLASS-B 3m 91200_1156_150827 VERTICAL : RBW:1000.000KHz VBW:3.000KHz SWF:Auto Detector : Peak Project : #W162316 Power : 120Vac/60Hz Memo : Mode 2</p>	<p>Data: 8</p> <p>Site : 02CH06-HY Condition : FCC CLASS-B 3m 91200_1156_150827 VERTICAL : RBW:1000.000KHz VBW:3.000KHz SWF:Auto Detector : Peak Project : #W162316 Power : 120Vac/60Hz Memo : Mode 2</p>
Avg.	<p>Data: 9</p> <p>Site : 02CH06-HY Condition : FCC CLASS-B 3m 91200_1156_150827 VERTICAL : RBW:1000.000KHz VBW:3.000KHz SWF:Auto Detector : Peak Project : #W162316 Power : 120Vac/60Hz Memo : Mode 2</p>	<p>Data: 10</p> <p>Site : 02CH06-HY Condition : FCC CLASS-B (AVG) 3m 91200_1156_150827 VERTICAL : RBW:1000.000KHz VBW:3.000KHz SWF:Auto Detector : Peak Project : #W162316 Power : 120Vac/60Hz Memo : Mode 2</p>



BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	BLE CH19 2440MHz - R	
	Vertical	Fundamental
Peak	<p>Data: 11</p> <p>Site : 02C406-HV Condition : FCC CLASS-B 3m 91200_1156_150827 VERTICAL : RBW:1000.000KHz VBW:3.000KHz SWT:Auto Detector : Peak Project : #W162316 Power : 120Vac/60Hz Memo : Mode 2</p>	Left on blank
Avg.	<p>Data: 12</p> <p>Site : 02C406-HV Condition : FCC CLASS-B (AVG) 3m 91200_1156_150827 VERTICAL : RBW:1000.000KHz VBW:3.000KHz SWT:Auto Detector : Peak Project : #W162316 Power : 120Vac/60Hz Memo : Mode 2</p>	Left on blank



BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	BLE CH39 2480MHz	
	Horizontal	Fundamental
Peak	<p>Data: 3</p> <p>Site : 02C406-HY Condition : FCC CLASS-B 3m 91200_1156_150827 HORIZONTAL RBW:1000.000KHz VBW:3.000KHz SWF:Auto Detector : Peak Project : #W162316 Power : 120Vac/60Hz Memo : Mode 3</p>	<p>Data: 1</p> <p>Site : 02C406-HY Condition : FCC CLASS-B 3m 91200_1156_150827 HORIZONTAL RBW:1000.000KHz VBW:3.000KHz SWF:Auto Detector : Peak Project : #W162316 Power : 120Vac/60Hz Memo : Mode 3</p>
Avg.	<p>Data: 4</p> <p>Site : 02C406-HY Condition : FCC CLASS-B (AVG) 3m 91200_1156_150827 HORIZONTAL RBW:1000.000KHz VBW:3.000KHz SWF:Auto Detector : Peak Project : #W162316 Power : 120Vac/60Hz Memo : Mode 3</p>	<p>Data: 2</p> <p>Site : 02C406-HY Condition : FCC CLASS-B (AVG) 3m 91200_1156_150827 HORIZONTAL RBW:1000.000KHz VBW:3.000KHz SWF:Auto Detector : Peak Project : #W162316 Power : 120Vac/60Hz Memo : Mode 3</p>



BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	BLE CH39 2480MHz	
	Vertical	Fundamental
Peak	<p>Data: 7</p> <p>Site : 02CH06-HY Condition : FCC CLASS-B 3m 91200_1156_150827 VERTICAL : RBW:1000.000KHz VBW:3.000KHz SWT:Auto Detector : Peak Project : #W162316 Power : 120Vac/60Hz Memo : Mode 3</p>	<p>Data: 5</p> <p>Site : 02CH06-HY Condition : FCC CLASS-B 3m 91200_1156_150827 VERTICAL : RBW:1000.000KHz VBW:3.000KHz SWT:Auto Detector : Peak Project : #W162316 Power : 120Vac/60Hz Memo : Mode 3</p>
Avg.	<p>Data: 8</p> <p>Site : 02CH06-HY Condition : FCC CLASS-B (AVG) 3m 91200_1156_150827 VERTICAL : RBW:1000.000KHz VBW:3.000KHz SWT:Auto Detector : Peak Project : #W162316 Power : 120Vac/60Hz Memo : Mode 3</p>	<p>Data: 6</p> <p>Site : 02CH06-HY Condition : FCC CLASS-B (AVG) 3m 91200_1156_150827 VERTICAL : RBW:1000.000KHz VBW:3.000KHz SWT:Auto Detector : Peak Project : #W162316 Power : 120Vac/60Hz Memo : Mode 3</p>

3.5.7 Test Result of Radiated Spurious Emission (30MHz ~ 10<sup>th</sup> Harmonic)

Test Engineer :	Donny Tang							Temperature :		23~24°C	
								Relative Humidity :		44~46%	

2.4GHz 2400~2483.5MHz

## BLE (Harmonic @ 3m)

BLE	Note	Frequency ( MHz )	Level ( dB $\mu$ V/m )	Over Limit ( dB )	Limit Line ( dB $\mu$ V/m )	Read Level ( dB $\mu$ V )	Antenna Factor ( dB/m )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. (P/A)	Pol. (H/V)
BLE CH 00 2402MHz		4804	54.56	-19.44	74	72.12	31.2	11.01	59.77	100	63	P	H
		4804	44.37	-9.63	54	61.93	31.2	11.01	59.77	100	63	A	H
													H
													H
		4804	52.41	-21.59	74	69.97	31.2	11.01	59.77	100	113	P	V
		4804	38.2	-15.8	54	55.76	31.2	11.01	59.77	100	113	A	V
													V
													V
BLE CH 19 2440MHz		4880	54.81	-19.19	74	71.9	31.31	11.06	59.46	100	64	P	H
		4880	49.61	-4.39	54	66.7	31.31	11.06	59.46	100	64	A	H
		7323	40.74	-33.26	74	53.44	36.02	11.71	60.43	100	0	P	H
													H
		4880	49.17	-24.83	74	66.26	31.31	11.06	59.46	100	0	P	V
		7323	41.03	-32.97	74	53.73	36.02	11.71	60.43	100	0	P	V
													V
													V
BLE CH 39 2480MHz		4960	53.74	-20.26	74	70.19	31.44	11.17	59.06	100	63	P	H
		4960	49.38	-4.62	54	65.78	31.44	11.22	59.06	100	63	A	H
		7440	41.46	-32.54	74	54.04	36.29	11.61	60.48	100	0	P	H
													H
		4960	50.07	-23.93	74	66.47	31.44	11.22	59.06	100	0	P	V
		7440	41.5	-32.5	74	54.08	36.29	11.61	60.48	100	0	P	V
													V
	Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.											



## Emission Frequency 30 MHz ~ 1 GHz

## 2.4GHz BLE Low Frequency

BLE	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.	
2.4GHz BLE LF		74.28	31.66	-8.34	40	48.38	12.85	2.17	31.74	-	-	P	H	
		211.71	35.13	-8.37	43.5	48.76	16.09	2	31.72	-	-	P	H	
		299.73	38.27	-7.73	46	48.18	19.5	2.28	31.69	112	320	P	H	
		323.1	35.62	-10.38	46	44.82	20.24	2.26	31.7	-	-	P	H	
		332.2	35.2	-10.8	46	44.11	20.55	2.25	31.71	-	-	P	H	
		666.8	33.19	-12.81	46	35.61	26.3	3.34	32.06	-	-	P	H	
														H
														H
														H
														H
														H
														H
														V
		30.81	28.63	-11.37	40	33.39	25.14	1.9	31.8	-	-	P	V	
		74.28	31.75	-8.25	40	48.47	12.85	2.17	31.74	-	-	P	V	
		87.24	33.53	-6.47	40	49.02	14.34	1.9	31.73	100	214	P	V	
		332.2	33.34	-12.66	46	42.25	20.55	2.25	31.71	-	-	P	V	
		491.1	34.92	-11.08	46	40.01	23.91	2.88	31.88	-	-	P	V	
		666.8	37.55	-8.45	46	39.97	26.3	3.34	32.06	-	-	P	V	
														V
														V
														V
														V
														V
														V
	Remark	1. No other spurious found. 2. All results are PASS against limit line.												



## Note symbol

*	<b>Fundamental Frequency</b> which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is <b>over limit</b> line.
P/A	<b>Peak or Average</b>
H/V	<b>Horizontal or Vertical</b>



A calculation example for radiated spurious emission is shown as below:

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1+2		( MHz )	( dB $\mu$ V/m )	( dB )	( dB $\mu$ V/m )	( dB $\mu$ V )	( dB/m )	( dB )	( dB )	( cm )	( deg )	(P/A)	(H/V)
802.11b CH 01		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

1. Level(dB $\mu$ V/m) =

Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dB $\mu$ V) - Preamp Factor(dB)

2. Over Limit(dB) = Level(dB $\mu$ V/m) – Limit Line(dB $\mu$ V/m)

#### For Peak Limit @ 2390MHz:

1. Level(dB $\mu$ V/m)

= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dB $\mu$ V) - Preamp Factor(dB)

= 32.22(dB/m) + 4.58(dB) + 54.51(dB $\mu$ V) – 35.86 (dB)

= 55.45 (dB $\mu$ V/m)

2. Over Limit(dB)

= Level(dB $\mu$ V/m) – Limit Line(dB $\mu$ V/m)

= 55.45(dB $\mu$ V/m) – 74(dB $\mu$ V/m)

= -18.55(dB)

#### For Average Limit @ 2390MHz:

1. Level(dB $\mu$ V/m)

= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dB $\mu$ V) - Preamp Factor(dB)

= 32.22(dB/m) + 4.58(dB) + 42.6(dB $\mu$ V) – 35.86 (dB)

= 43.54 (dB $\mu$ V/m)

2. Over Limit(dB)

= Level(dB $\mu$ V/m) – Limit Line(dB $\mu$ V/m)

= 43.54(dB $\mu$ V/m) – 54(dB $\mu$ V/m)

= -10.46(dB)

**Both peak and average measured complies with the limit line, so test result is “PASS”.**




## 2.4GHz 2400~2483.5MHz

## BLE (Harmonic @ 3m)

BLE	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
	BLE CH00 2402MHz	
	Horizontal	Vertical
Peak Avg.	<p>Date: 5</p> <p>Level (dBuV/m)</p> <p>Frequency (MHz)</p> <p>Site : 03CH06-HY Condition : FCC CLASS-B 3m 9120D_1156_150827 HORIZONTAL Detector : Peak Project : #W162316 Power : 120Vac/60Hz Memo : Mode 1</p>	<p>Date: 6</p> <p>Level (dBuV/m)</p> <p>Frequency (MHz)</p> <p>Site : 03CH06-HY Condition : FCC CLASS-B 3m 9120D_1156_150827 VERTICAL Detector : Peak Project : #W162316 Power : 120Vac/60Hz Memo : Mode 1</p>



BLE	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
BLE CH19 2440MHz		
	Horizontal	Vertical
Peak Avg.	<p>Data: 5</p> <p>Condition : FCC CLASS-B 3m 91200_1I56_I50827 HORIZONTAL Detector : Peak Project : #W162316 Power : 120Vac/60Hz Memo : Mode 2</p>	<p>Data: 6</p> <p>Condition : FCC CLASS-B 3m 91200_1I56_I50827 VERTICAL Detector : Peak Project : #W162316 Power : 120Vac/60Hz Memo : Mode 2</p>

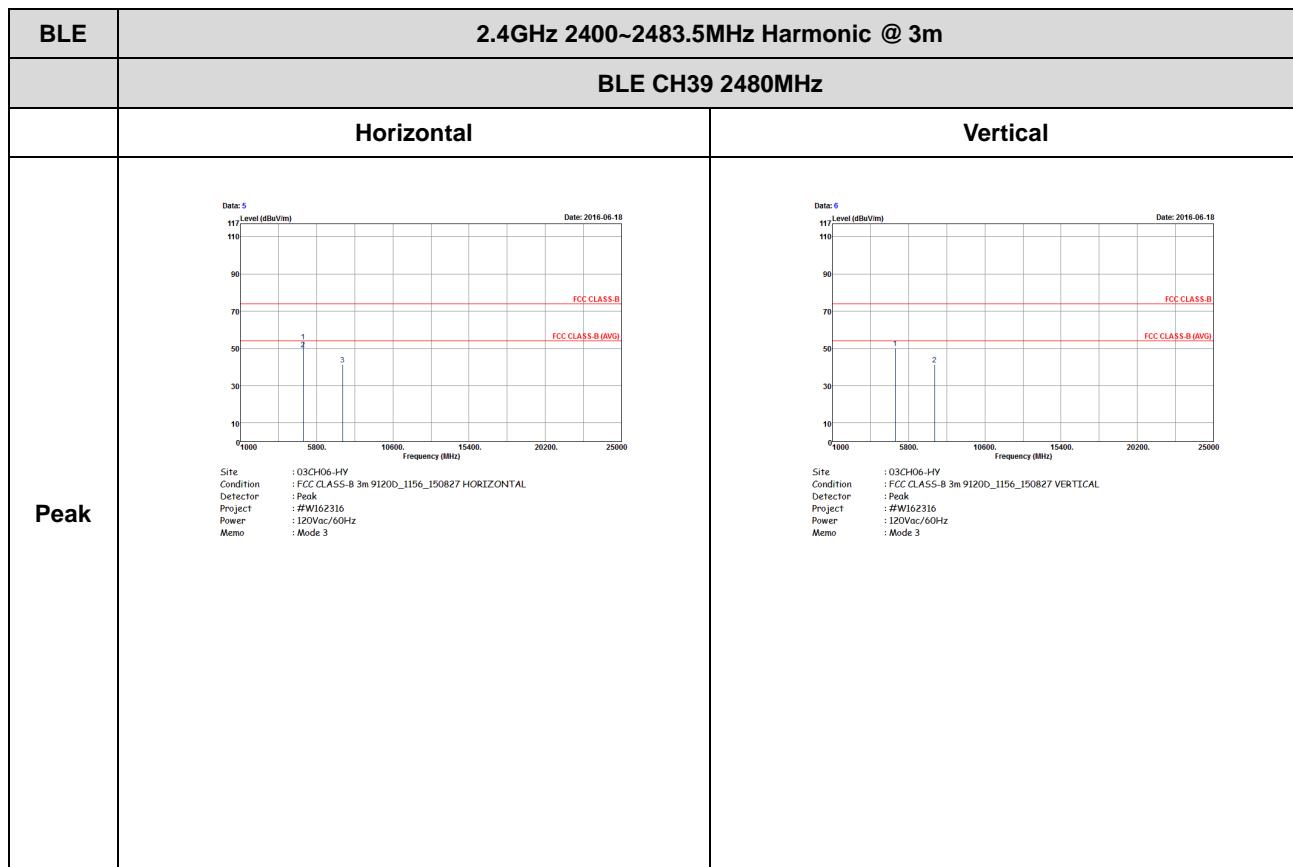



## Emission Frequency 30 MHz ~ 1 GHz

## 2.4GHz BLE Low Frequency

BLE	2.4GHz 2400~2483.5MHz	
	BLE Low Frequency	
	Horizontal	Vertical
QP / Peak	<p>Site : 03CH06-HY Condition : FCC CLASS-B 3m LF_ANT_2725 HORIZONTAL Detector : Peak Project : #W162316 Power : 120Vac/60Hz Memo : Mode 4</p>	<p>Site : 03CH06-HY Condition : FCC CLASS-B 3m LF_ANT_2725 VERTICAL Detector : Peak Project : #W162316 Power : 120Vac/60Hz Memo : Mode 4</p>



## 3.6 AC Conducted Emission Measurement

### 3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dB $\mu$ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\*Decreases with the logarithm of the frequency.


### 3.6.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.


### 3.6.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.

### 3.6.4 Test Setup

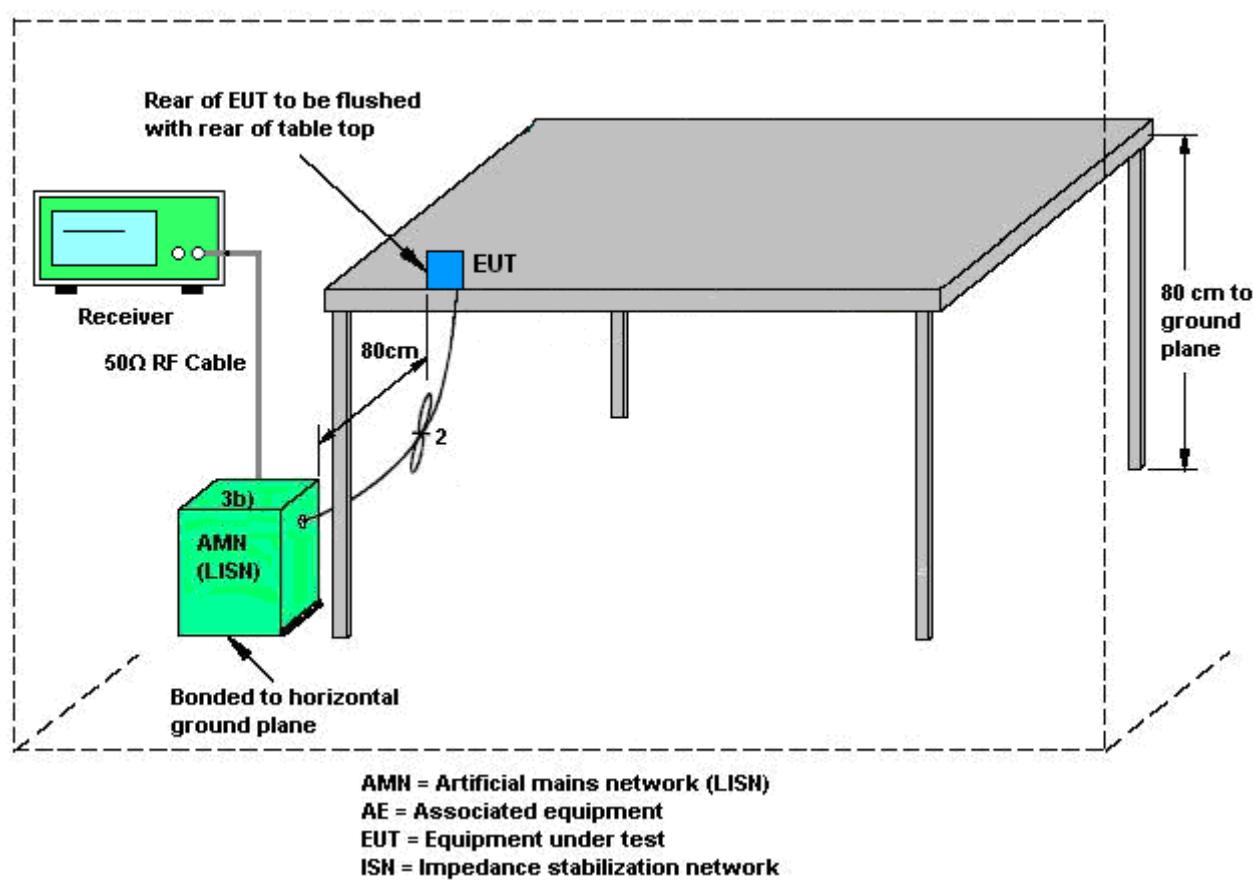


### 3.6.5 Test Result of AC Conducted Emission

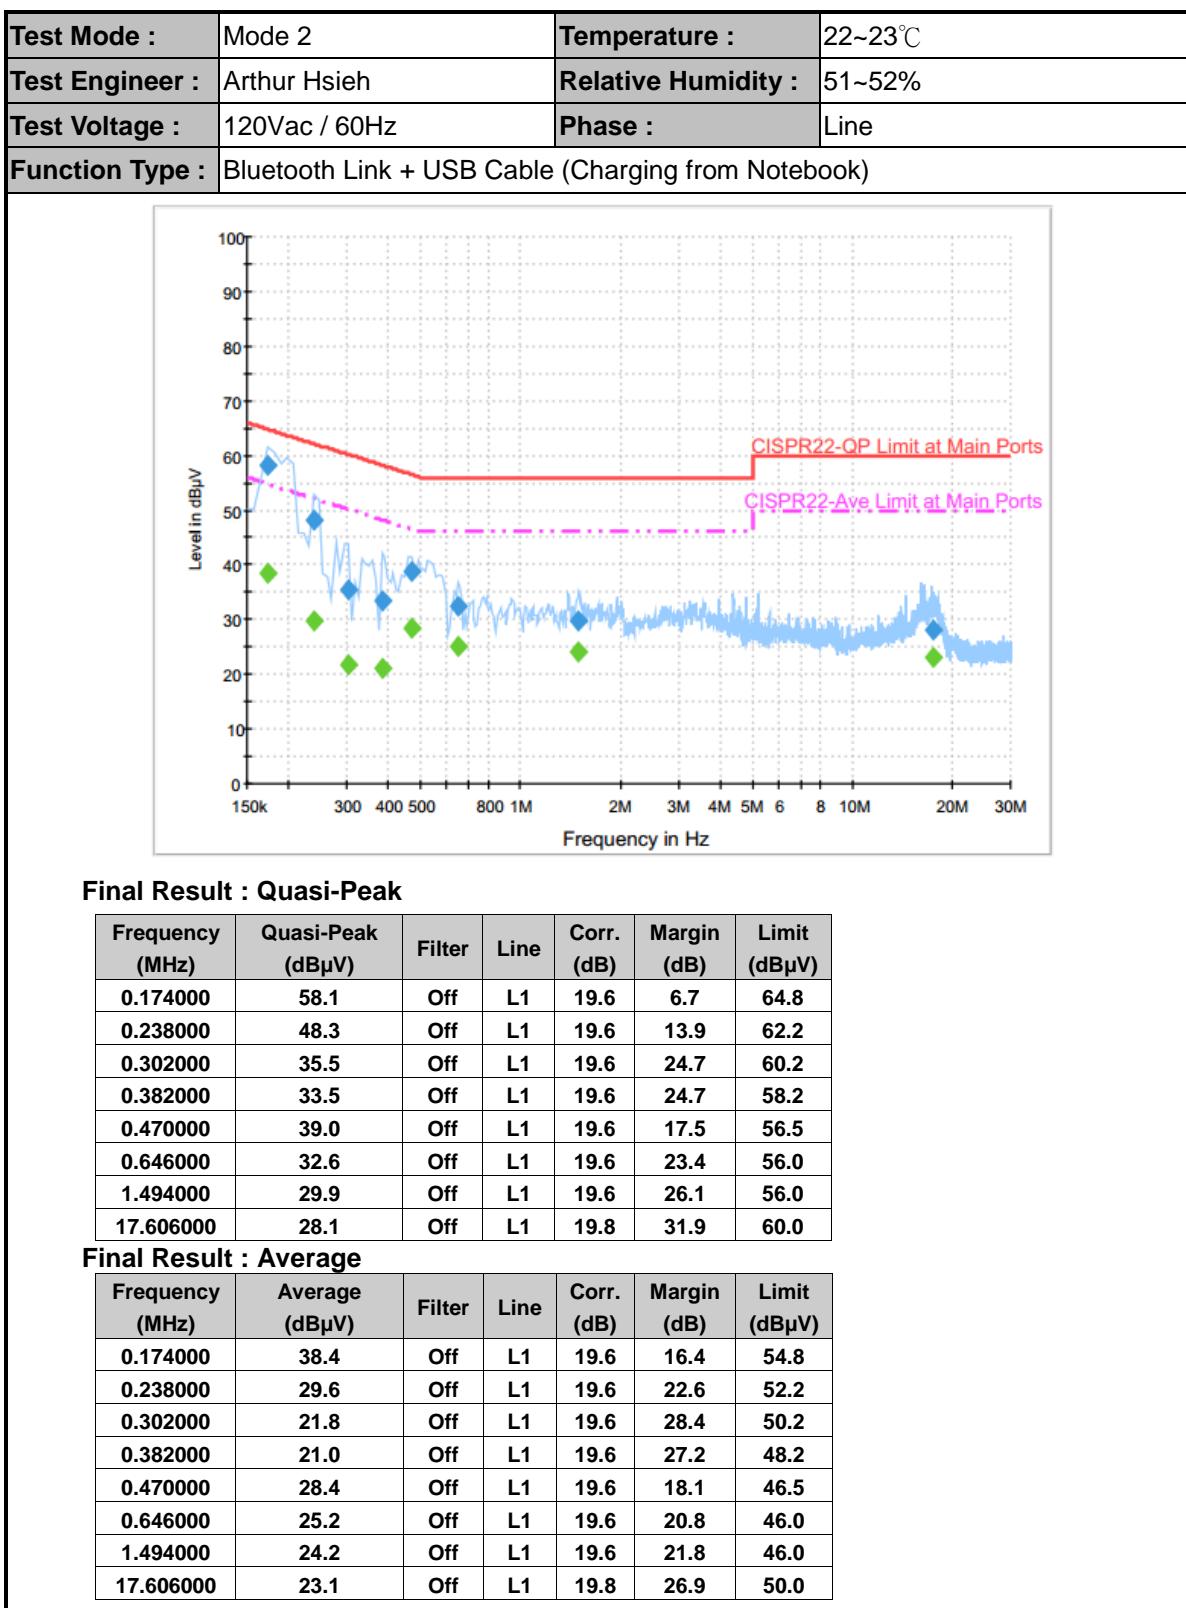



<b>Test Mode :</b>	Mode 2	<b>Temperature :</b>	22~23°C
<b>Test Engineer :</b>	Arthur Hsieh	<b>Relative Humidity :</b>	51~52%
<b>Test Voltage :</b>	120Vac / 60Hz	<b>Phase :</b>	Neutral
<b>Function Type :</b> Bluetooth Link + USB Cable (Charging from Notebook)			

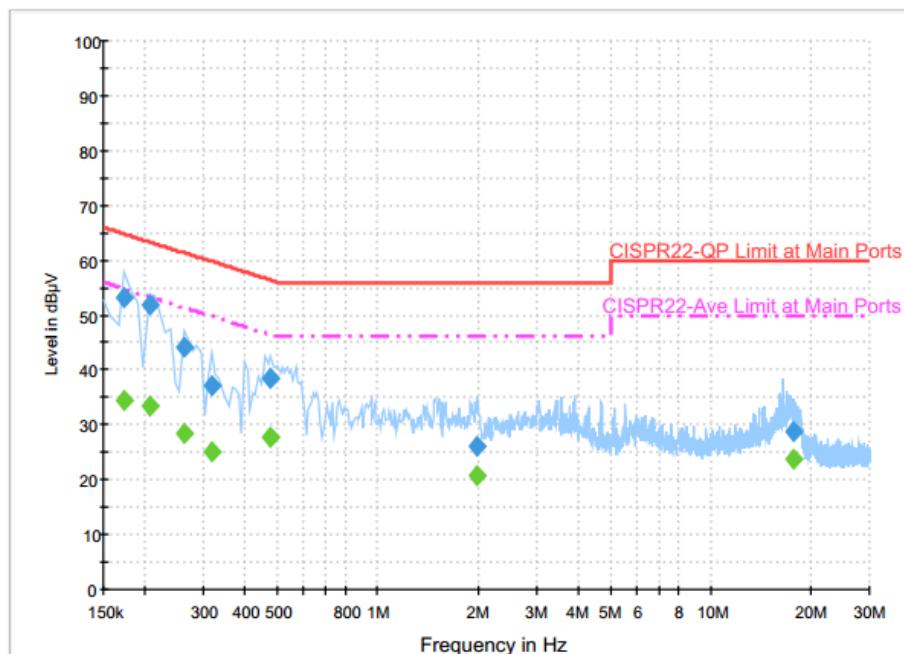**Final Result : Quasi-Peak**

Frequency (MHz)	Quasi-Peak (dBµV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.174000	53.3	Off	N	19.6	11.5	64.8
0.206000	51.8	Off	N	19.6	11.6	63.4
0.262000	44.0	Off	N	19.6	17.4	61.4
0.318000	37.1	Off	N	19.6	22.7	59.8
0.478000	38.6	Off	N	19.6	17.8	56.4
1.998000	26.1	Off	N	19.6	29.9	56.0
17.742000	28.6	Off	N	19.9	31.4	60.0

**Final Result : Average**

Frequency (MHz)	Average (dBµV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.174000	34.3	Off	N	19.6	20.5	54.8
0.206000	33.5	Off	N	19.6	19.9	53.4
0.262000	28.4	Off	N	19.6	23.0	51.4
0.318000	25.1	Off	N	19.6	24.7	49.8
0.478000	27.9	Off	N	19.6	18.5	46.4
1.998000	20.6	Off	N	19.6	25.4	46.0
17.742000	23.6	Off	N	19.9	26.4	50.0



## 3.7 Antenna Requirements

### 3.7.1 Standard Applicable

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the FCC rule.

### 3.7.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

### 3.7.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



## 4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	Rohde & Schwarz	FSP40	100057	9kHz-40GHz	Nov. 23, 2015	Jun. 16, 2016 ~ Aug. 10, 2016	Nov. 22, 2016	Conducted (TH05-HY)
Power Meter	Agilent	E4416A	GB412923 44	300MHz~40GHz	Jan. 08, 2016	Jun. 16, 2016 ~ Aug. 10, 2016	Jan. 07, 2017	Conducted (TH02-HY)
Power Sensor	Agilent	E9327A	US404415 48	300MHz~40GHz	Jan. 07, 2016	Jun. 16, 2016 ~ Aug. 10, 2016	Jan. 06, 2017	Conducted (TH02-HY)
AC Power Source	ChainTek	APC-1000W	N/A	N/A	N/A	Aug. 06, 2016	N/A	Conduction (CO05-HY)
EMI Test Receiver	Rohde & Schwarz	ESCI 7	100724	9kHz~7GHz	Aug. 26, 2015	Aug. 06, 2016	Aug. 25, 2016	Conduction (CO05-HY)
LISN	Rohde & Schwarz	ENV216	100080	9kHz~30MHz	Dec. 02, 2015	Aug. 06, 2016	Dec. 01, 2016	Conduction (CO05-HY)
Bilog Antenna	Schaffner	CBL6111C	2725	30MHz~1GHz	Nov. 17, 2015	Jun. 18, 2016~ Aug. 11, 2016	Nov. 16, 2016	Radiation (03CH06-HY)
EMI Test Receiver	Rohde & Schwarz	ESU26	100472	20Hz~26.5GHz	Jan. 07, 2016	Jun. 18, 2016~ Aug. 11, 2016	Jan. 06, 2017	Radiation (03CH06-HY)
Preamplifier	Agilent	8449B	3008A019 17	1GHz~26.5GHz	Apr. 18, 2016	Jun. 18, 2016~ Aug. 11, 2016	Apr. 17, 2017	Radiation (03CH06-HY)
Preamplifier	SONOMA	310N	186713	9kHz~1GHz	Apr. 19, 2016	Jun. 18, 2016~ Aug. 11, 2016	Apr. 18, 2017	Radiation (03CH06-HY)
Preamplifier	MITEQ	AMF-7D-0010 1800-30-10P	1850117	1GHz ~ 18GHz	Jul. 01, 2015	Jun. 18, 2016	Jun. 30, 2016	Radiation (03CH06-HY)
Preamplifier	MITEQ	AMF-7D-0010 1800-30-10P	1850117	1GHz ~ 18GHz	Jun. 22, 2016	Aug. 11, 2016	Jun. 21, 2017	Radiation (03CH06-HY)
Antenna Mast	MF	MF-7802	MF780208 212	1m~4m	N/A	Jun. 18, 2016~ Aug. 11, 2016	N/A	Radiation (03CH06-HY)
Turn Table	INN-CO	DS2000	420/650/00	0-360 degree	N/A	Jun. 18, 2016~ Aug. 11, 2016	N/A	Radiation (03CH06-HY)
Horn Antenna	SCHWARZBECK	BBHA 9120 D	9120D-152 2	1G~18GHz	Mar. 31, 2016	Jun. 18, 2016~ Aug. 11, 2016	Mar. 30, 2017	Radiation (03CH06-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA9170 584	18GHz- 40GHz	Nov. 02, 2015	Jun. 18, 2016~ Aug. 11, 2016	Nov. 01, 2016	Radiation (03CH06-HY)
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100315	9 kHz~30 MHz	Sep. 02, 2015	Jun. 18, 2016~ Aug. 11, 2016	Sep. 01, 2016	Radiation (03CH06-HY)



## 5 Uncertainty of Evaluation

### Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.26
--	------

### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	3.90
--	------

### Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	4.70
--	------

### Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	4.50
--	------