

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cbl/Ftr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNR Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.2	56.31	PK-U	28	-35.2	0	49.11	-	-	74	-24.89	-	-	142	124	H
	* 1.2	41.1	ADR	28	-35.2	.14	34.04	54	-19.96	-	-	-	-	142	124	H
2	* 1.44	47.72	PK-U	28.3	-34.3	0	41.72	-	-	74	-32.28	-	-	162	101	H
	* 1.44	36.77	ADR	28.3	-34.3	.14	32.91	54	-21.09	-	-	-	-	162	101	H
4	* 1.2	54.21	PK-U	28	-35.2	0	47.01	-	-	74	-26.99	-	-	104	101	V
	* 1.2	39.1	ADR	28	-35.2	.14	32.04	54	-21.96	-	-	-	-	104	101	V
6	* 5	48.87	PK-U	34.5	-28.4	0	54.97	-	-	74	-19.03	-	-	120	265	V
	* 5	39.74	ADR	34.5	-28.4	.14	45.98	54	-8.02	-	-	-	-	120	265	V
3	1.92	48.82	PK-U	31.1	-32.8	0	47.12	-	-	-	-	68.2	-21.08	5	211	H
5	1.92	49.27	PK-U	31.1	-32.8	0	47.57	-	-	-	-	68.2	-20.63	122	107	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak


ADR - U-NII AD primary method, RMS average

9.1.4. TX ABOVE 1 GHz 802.11ac VHT80 MODE IN THE 5.2 GHz BAND

1TX Chain 0

BANDEDGE (MID CHANNEL)

HORIZONTAL RESULT

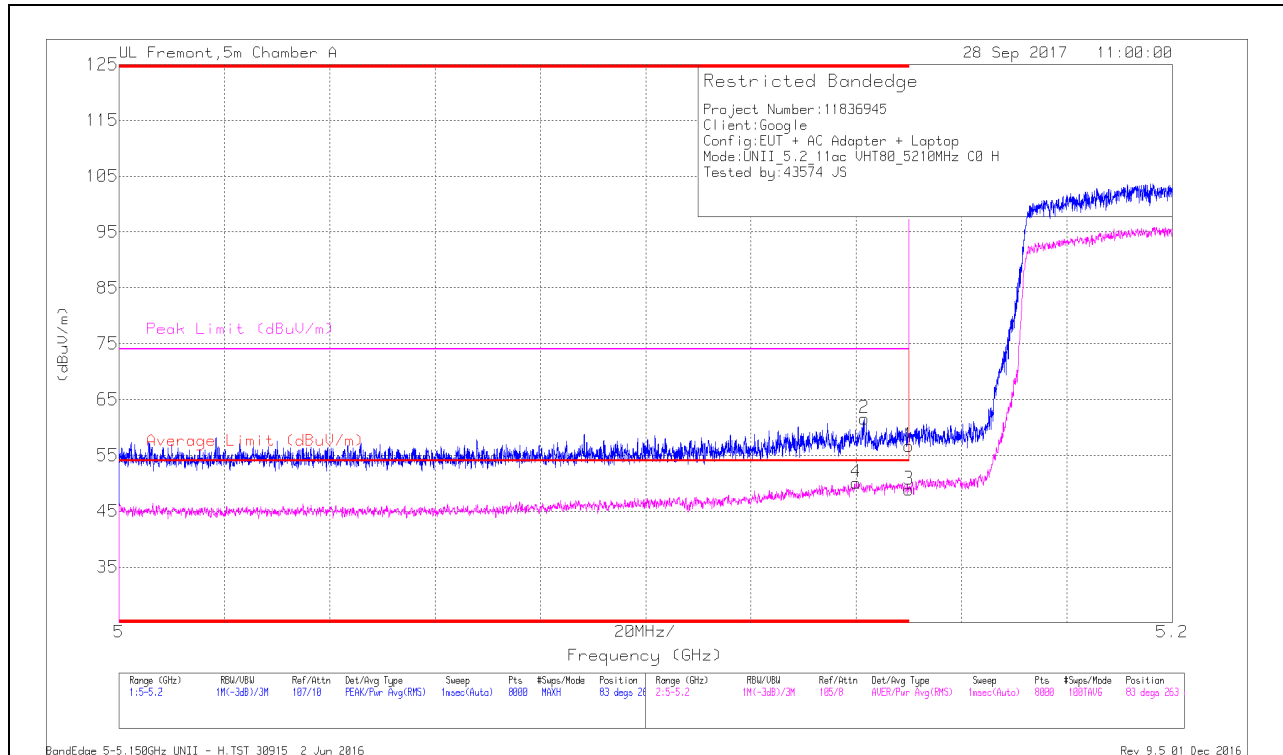


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T862 (dBm)	Amp/Ch/Filter/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Altitude (Degs)	Height (cm)	Polarity
1	* 5.15	40.34	Pk	34.4	-18	0	56.74	-	-	74	-17.26	83	263	H
2	* 5.141	45.22	Pk	34.4	-18	0	61.62	-	-	74	-12.38	83	263	H
3	* 5.15	32.25	RMS	34.4	-18	.24	48.89	54	-5.11	-	-	83	263	H
4	* 5.14	33.5	RMS	34.4	-18	.24	50.14	54	-3.86	-	-	83	263	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

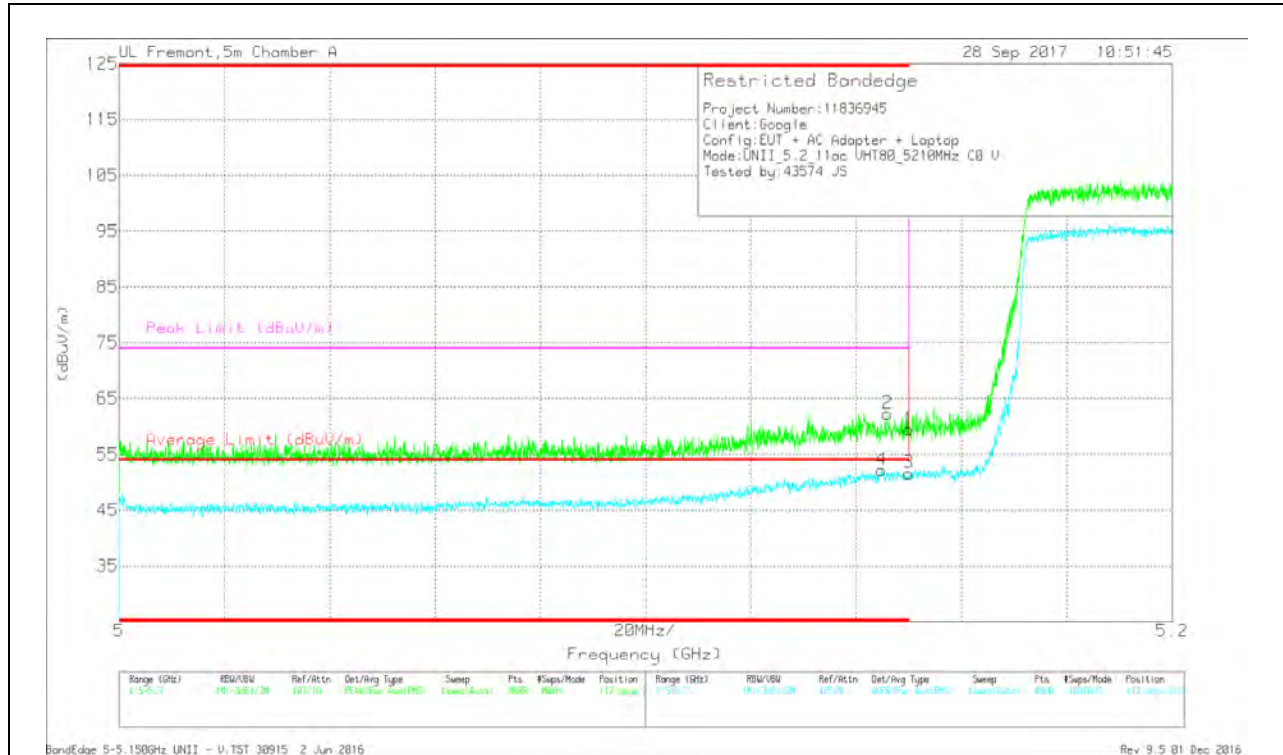

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T662 (dBm)	Amp/CbIFtr/Pd (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Altitude (Dege)	Height (cm)	Polarity
4	* 5.145	35.5	RMS	34.4	-18	.24	52.14	54	-1.86	-	-	112	265	V
2	* 5.146	45.91	Pk	34.4	-18	0	62.31	-	-	74	-11.69	112	265	V
1	* 5.15	43.09	Pk	34.4	-18	0	59.49	-	-	74	-14.51	112	265	V
3	* 5.15	34.97	RMS	34.4	-18	.24	51.61	54	-2.39	-	-	112	265	V



* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

HARMONICS AND SPURIOUS EMISSIONS

MID CHANNEL RESULTS

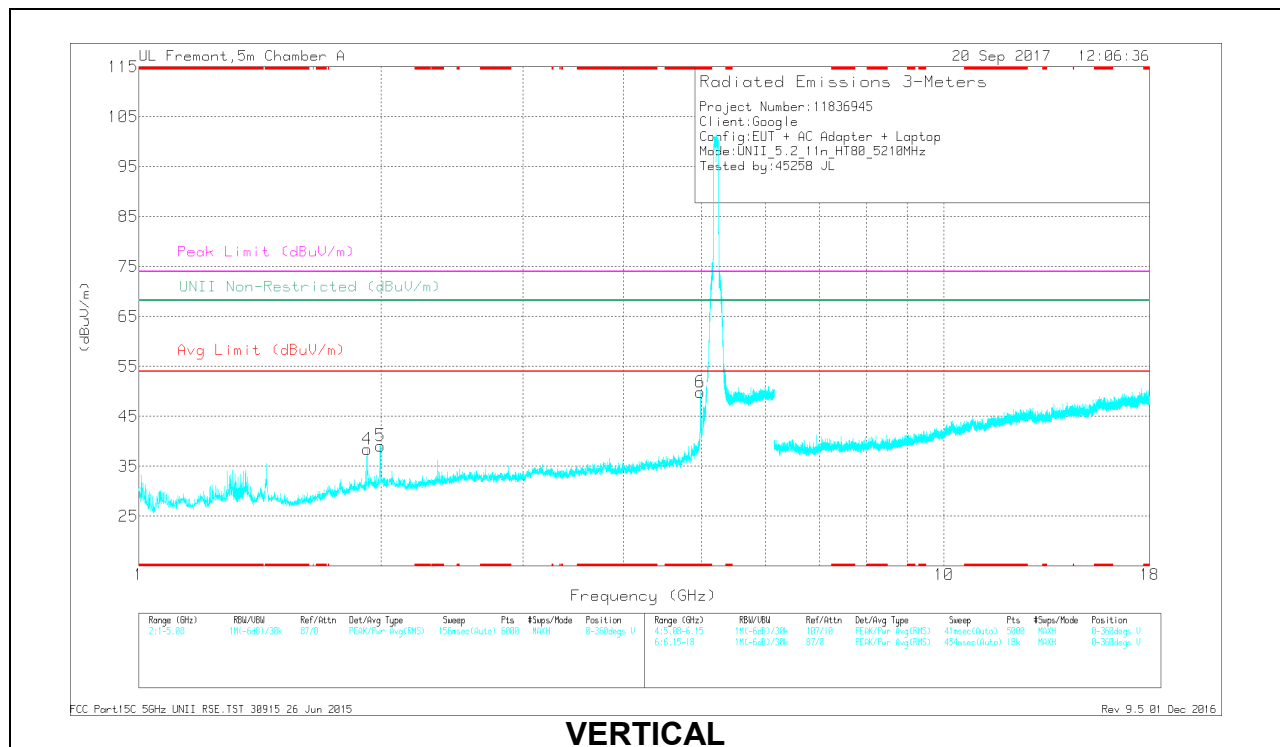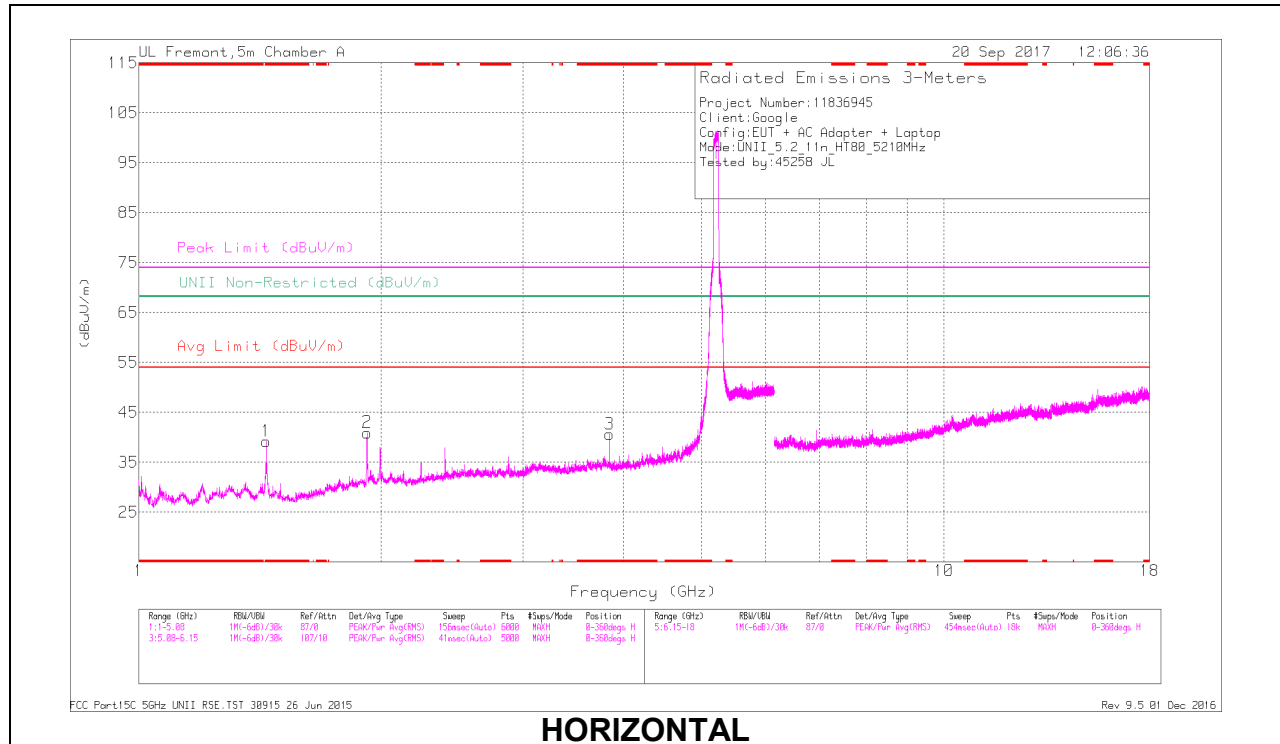

RADIATED EMISSIONS

Markers	Frequency (MHz)	Meter Reading (dBuV)	Det	AF T862 (dB/m)	Amp/Cbl/Ftr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.44	50.71	PK-U	28.7	-32.6	0	46.81	-	-	74	-27.19	-	-	188	254	H
	* 1.44	36.9	ADR	28.7	-32.6	24	33.24	54	-20.76	-	-	-	-	188	254	H
3	* 3.84	40.77	PK-U	33	-29.1	0	44.67	-	-	74	-29.33	-	-	136	174	H
	* 3.84	32.45	ADR	33	-29.1	24	36.59	54	-17.41	-	-	-	-	136	174	H
6	* 4.979	47.28	PK-U	34.3	-27	0	54.58	-	-	74	-19.42	-	-	214	189	V
	* 4.979	37.2	ADR	34.3	-27	24	44.74	54	-9.26	-	-	-	-	214	189	V
2	1.92	45.93	PK-U	31.2	-32.7	0	44.43	-	-	-	-	68.2	-23.77	150	193	H
4	1.92	46.67	PK-U	31.2	-32.7	0	45.17	-	-	-	-	68.2	-23.03	216	239	V
5	1.995	51.93	PK-U	31.4	-31.8	0	51.53	-	-	-	-	68.2	-16.67	240	172	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

1TX Chain 1

BANDEDGE (MID CHANNEL)

HORIZONTAL RESULT

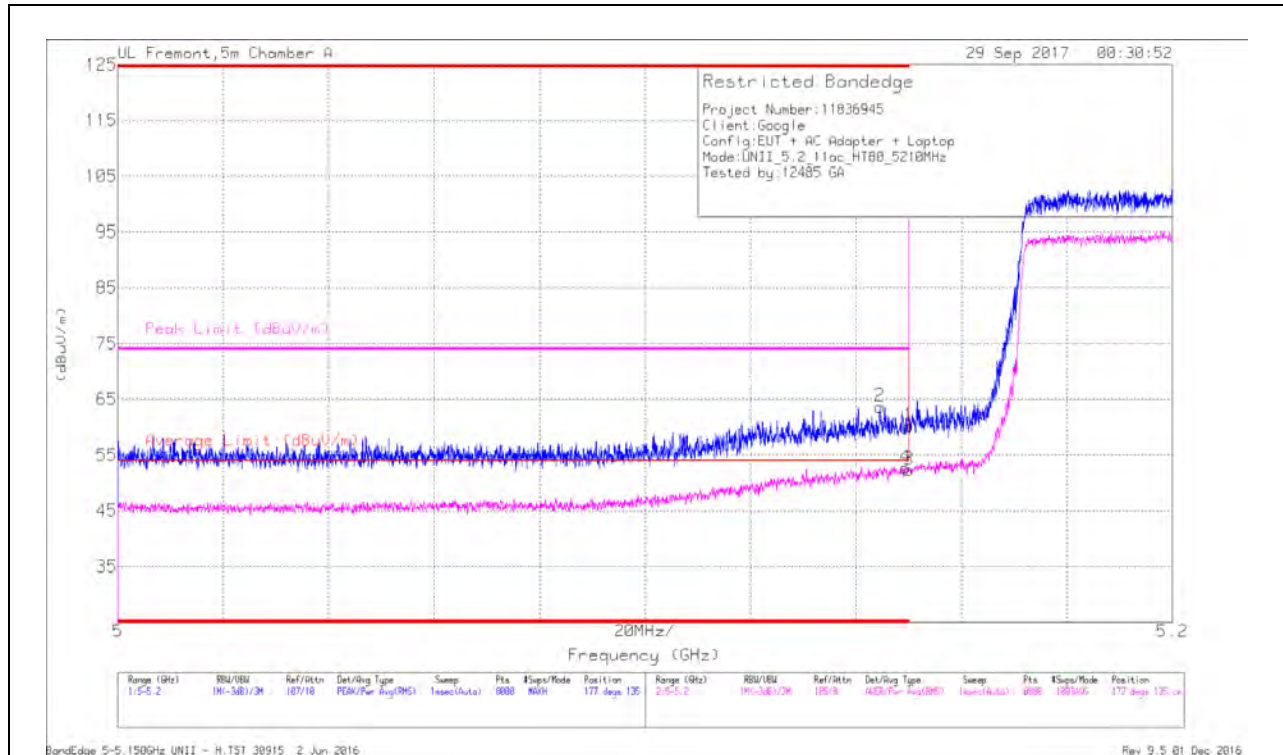


Marker	Frequency (GHz)	Meter Reading (dBuV)	Dot	AF T662 (dBm)	Amp/Cb/Filt/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.15	43.84	Pk	34.4	-18	0	60.24	-	-	74	-13.76	177	135	H
2	* 5.145	47.24	Pk	34.4	-18	0	63.64	-	-	74	-10.36	177	135	H
3	* 5.15	35.8	RMS	34.4	-18	.25	52.45	54	-1.55	-	-	177	135	H
4	* 5.149	36.15	RMS	34.4	-18	.25	52.8	54	-1.2	-	-	177	135	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

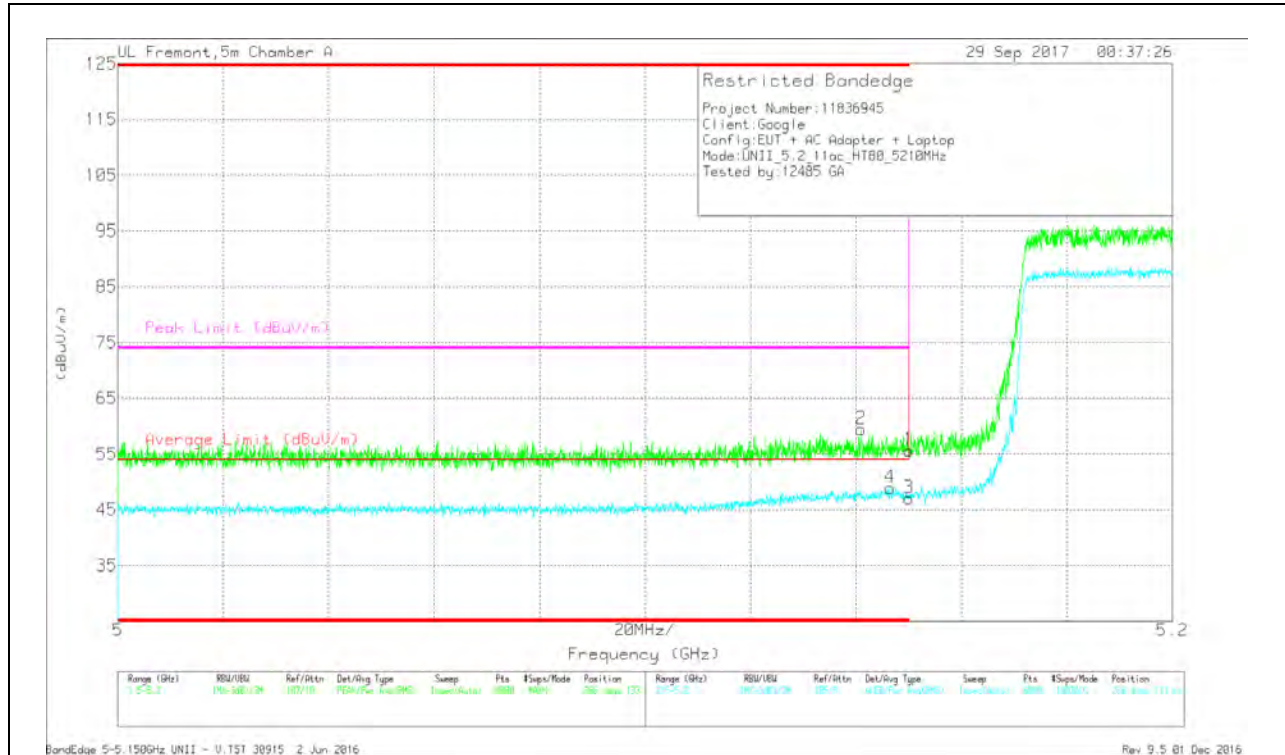

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T862 (dBm)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Altitude (Degs)	Height (cm)	Polarity
1	* 5.15	39.29	Pk	34.4	-18	0	55.69	-	-	74	-18.31	266	133	V
2	* 5.141	43.1	Pk	34.4	-18	0	59.5	-	-	74	-14.5	266	133	V
3	* 5.15	30.43	RMS	34.4	-18	.25	47.08	54	-6.92	-	-	266	133	V
4	* 5.146	32.23	RMS	34.4	-18	.25	48.88	54	-5.12	-	-	266	133	V



* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

HARMONICS AND SPURIOUS EMISSIONS

MID CHANNEL RESULTS

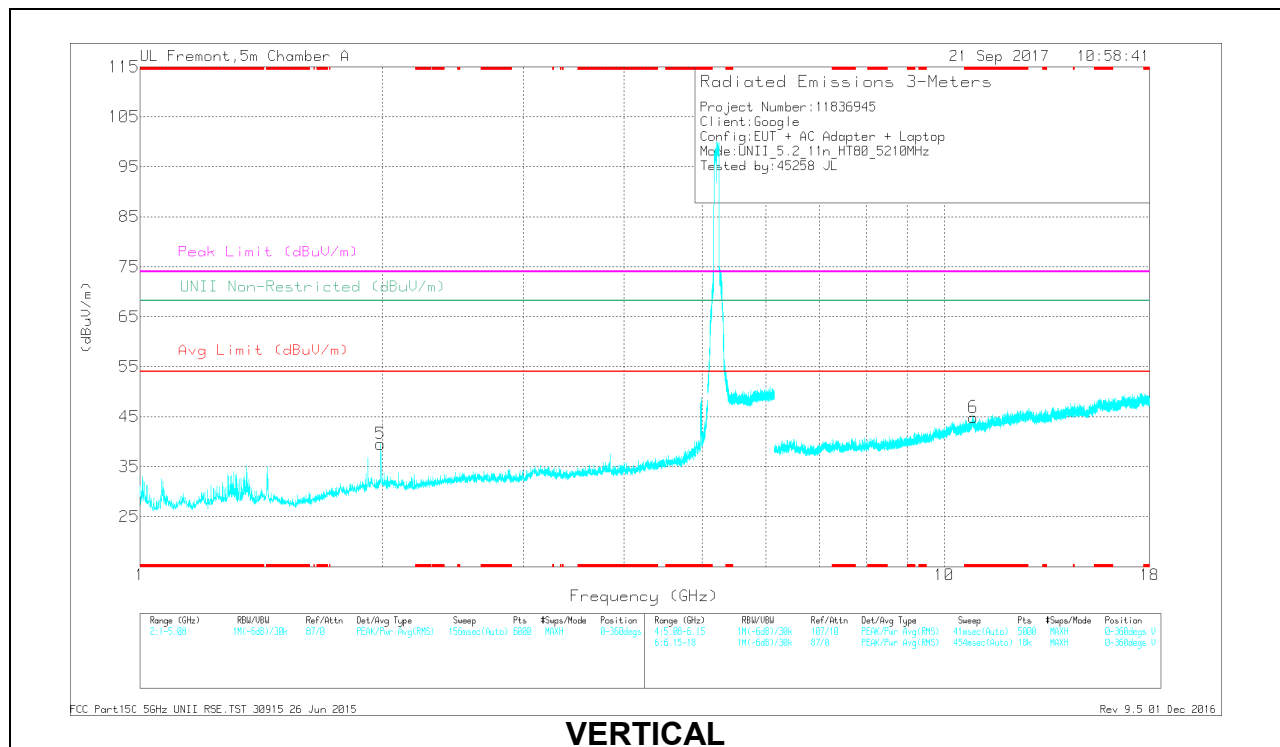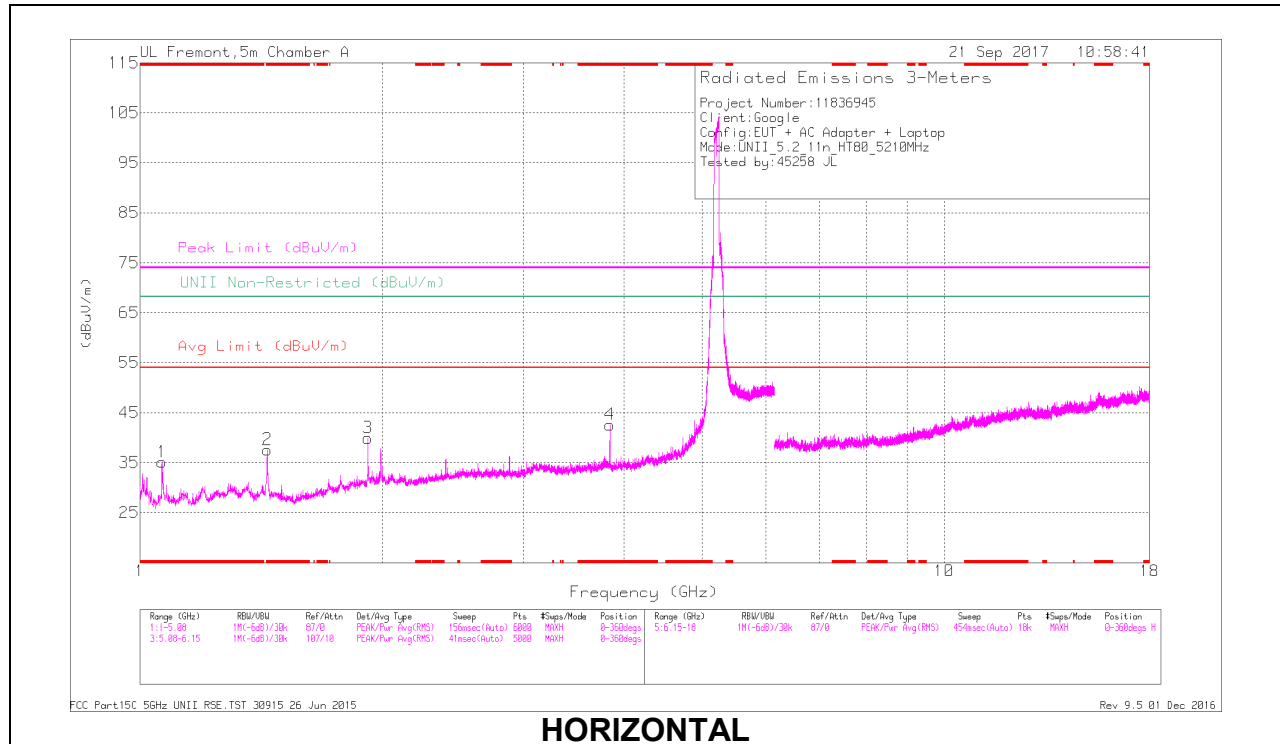

RADIATED EMISSIONS

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	AF T862 (dB/m)	Amp/Cat/Ftr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.064	43.19	PK-U	27.3	-33.4	0	37.09	-	-	74	-36.91	-	-	0	100	H
	* 1.067	30.04	ADR	27.3	-33.3	.25	24.29	54	-29.71	-	-	-	-	0	100	H
2	* 1.44	53.91	PK-U	28.7	-32.6	0	49.91	-	-	74	-24.09	-	-	199	106	H
	* 1.44	40.09	ADR	28.7	-32.6	.25	36.44	54	-17.56	-	-	-	-	199	106	H
4	* 3.84	42.55	PK-U	33	-29.1	0	46.45	-	-	74	-27.55	-	-	331	144	H
	* 3.84	37.14	ADR	33	-29.1	.25	41.29	54	-12.71	-	-	-	-	331	144	H
6	* 10.871	32.28	PK-U	37.9	-19.1	0	51.08	-	-	74	-22.92	-	-	296	212	V
	* 10.871	20.14	ADR	37.9	-19	.25	39.29	54	-14.71	-	-	-	-	296	212	V
3	1.92	46.28	PK-U	31.2	-32.7	0	44.78	-	-	-	-	68.2	-23.42	267	200	H
5	1.993	50.55	PK-U	31.4	-31.9	0	50.05	-	-	-	-	68.2	-18.15	223	110	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

2TX Chain 0 + Chain 1 CDD MODE

BANDEDGE (MID CHANNEL)

HORIZONTAL RESULT

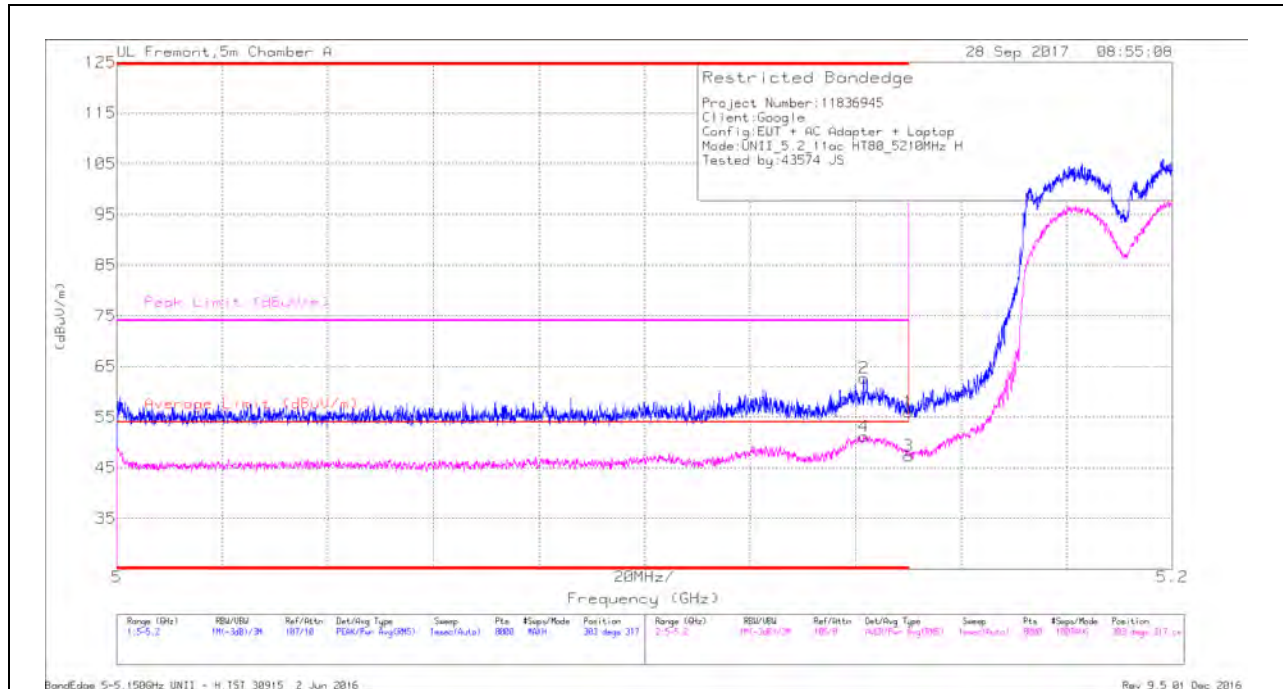


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T662 (dBm)	Amp/Cbl/Ftr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.15	39.6	Pk	34.4	-18	0	56	-	-	74	-18	303	317	H
2	* 5.142	46.28	Pk	34.4	-18	0	62.68	-	-	74	-11.32	303	317	H
3	* 5.15	30.7	RMS	34.4	-18	.24	47.34	54	-6.66	-	-	303	317	H
4	* 5.142	34.57	RMS	34.4	-18	.24	51.21	54	-2.79	-	-	303	317	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

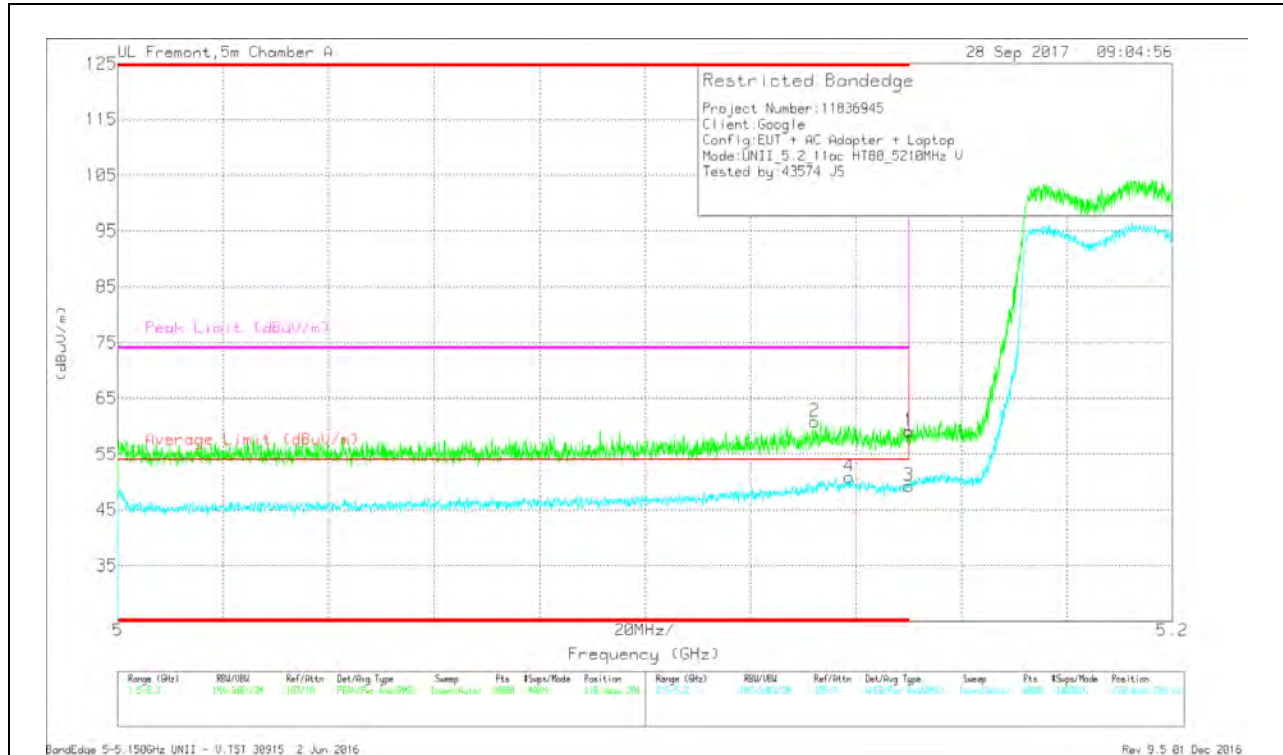

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T662 (dBm)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Altitude (Degs)	Height (cm)	Polarity
1	* 5.15	42.68	Pk	34.4	-18	0	59.08	-	-	74	-14.92	118	294	V
2	* 5.132	44.4	Pk	34.4	-17.9	0	60.9	-	-	74	-13.1	118	294	V
3	* 5.15	32.67	RMS	34.4	-18	.24	49.31	54	-4.69	-	-	118	294	V
4	* 5.139	34.26	RMS	34.4	-18	.24	50.9	54	-3.1	-	-	118	294	V



* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

HARMONICS AND SPURIOUS EMISSIONS

MID CHANNEL RESULTS

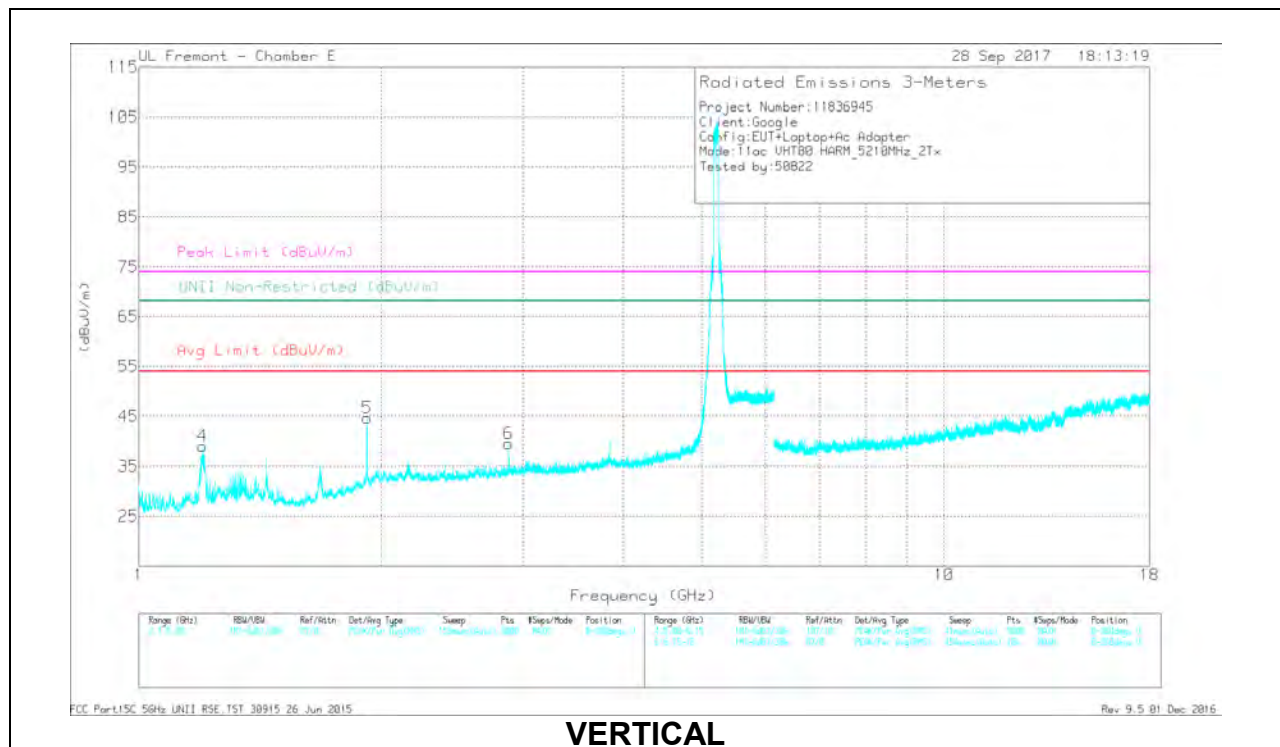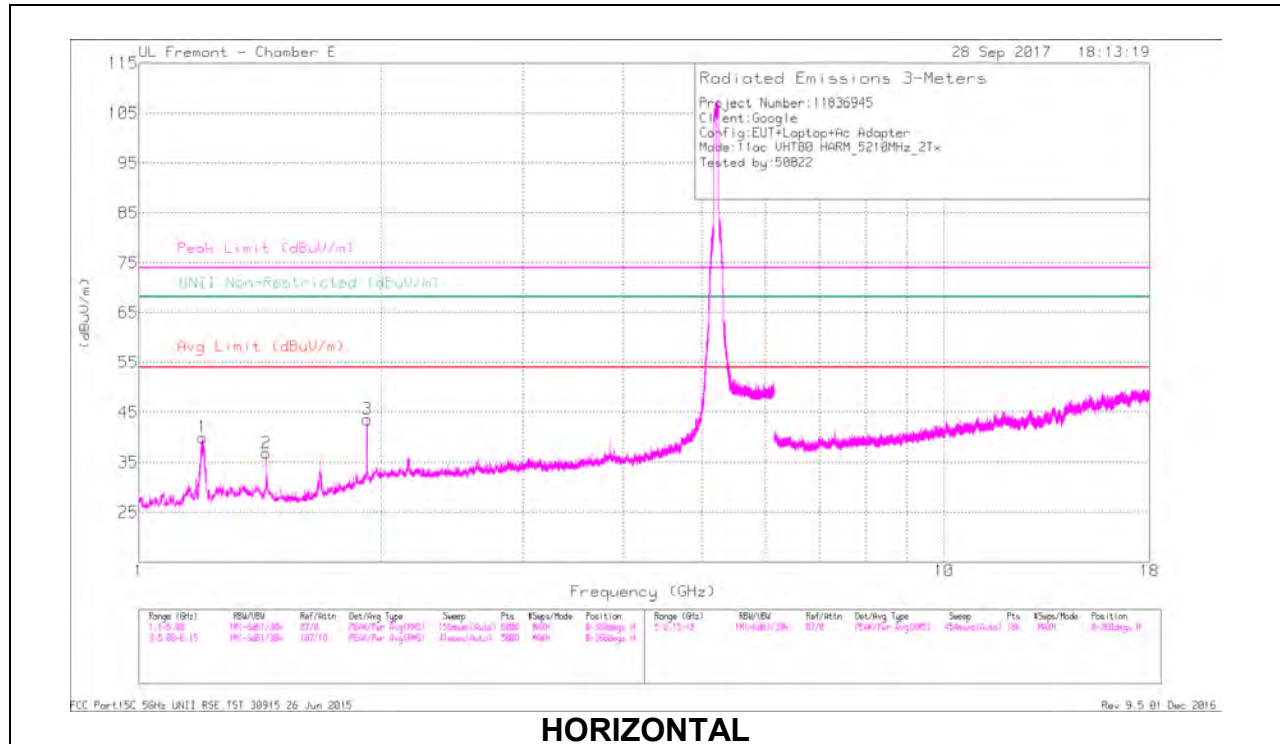

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cb/Att/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNR Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.2	57.97	PK-U	28	-35.2	0	50.77	-	-	74	-23.23	-	-	24	175	H
	* 1.2	42.48	ADR	28	-35.2	24	35.52	54	-18.48	-	-	-	-	24	175	H
2	* 1.44	49.35	PK-U	28.3	-34.3	0	43.35	-	-	74	-30.65	-	-	109	254	H
	* 1.44	38.91	ADR	28.3	-34.3	24	33.15	54	-20.85	-	-	-	-	109	254	H
4	* 1.2	55.21	PK-U	28	-35.2	0	48.01	-	-	74	-25.99	-	-	76	113	V
	* 1.2	39.32	ADR	28	-35.2	24	32.36	54	-21.64	-	-	-	-	76	113	V
6	* 2.88	42.77	PK-U	32.8	-30.9	0	44.67	-	-	74	-29.33	-	-	62	101	V
	* 2.88	36.18	ADR	32.8	-30.9	24	38.32	54	-15.68	-	-	-	-	62	101	V
3	1.92	49.59	PK-U	31.1	-32.8	0	47.89	-	-	-	-	68.2	-20.31	144	207	H
5	1.92	50.54	PK-U	31.1	-32.8	0	48.84	-	-	-	-	68.2	-19.36	24	193	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak


ADR - U-NII AD primary method, RMS average

9.1.5. TX ABOVE 1 GHz 802.11a MODE IN THE 5.3 GHz BAND

1TX Chain 0

BANDEDGE (HIGH CHANNEL)

HORIZONTAL RESULT

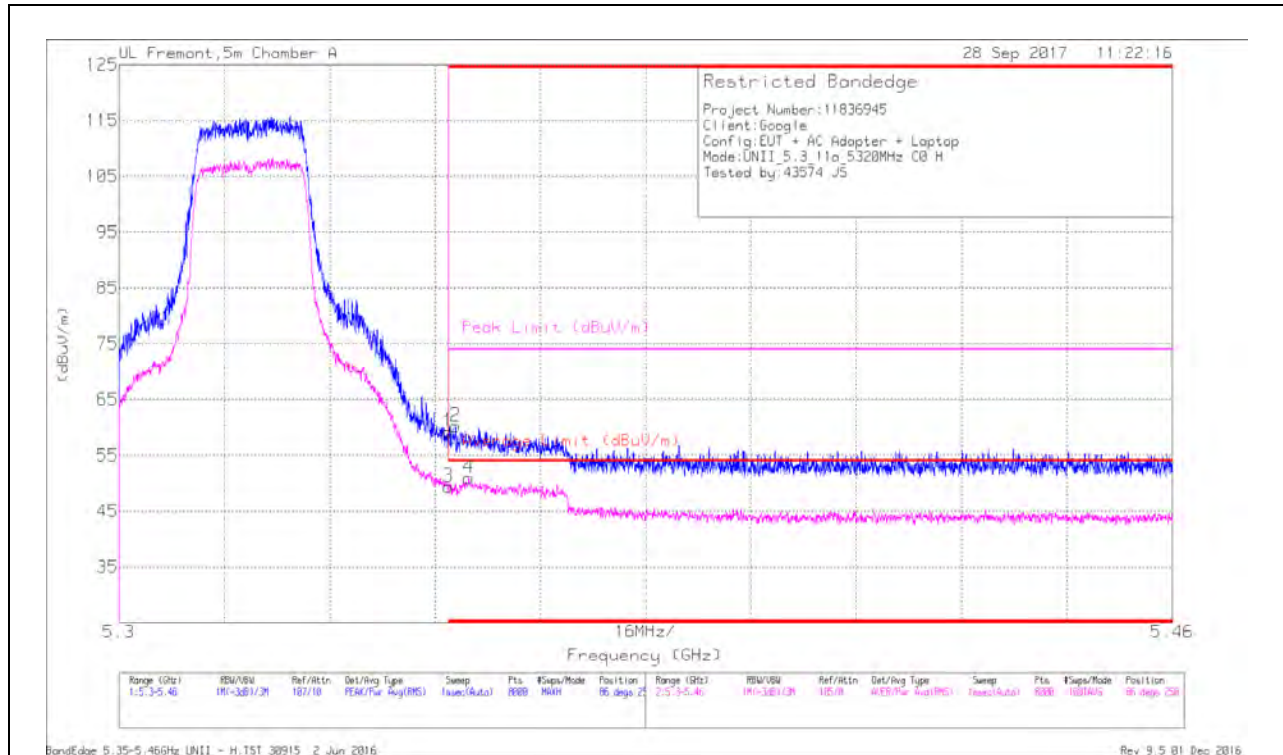


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T862 (dBm)	Amp/Cb/Fltr/Psd (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Altitude (Degs)	Height (cm)	Polarity
1	* 5.35	42.96	Pk	34.6	-18.3	0	59.26	-	-	74	-14.74	86	250	H
3	* 5.35	32.97	RMS	34.6	-18.3	.12	49.39	54	-4.61	-	-	86	250	H
2	* 5.351	44.05	Pk	34.6	-18.4	0	60.25	-	-	74	-13.75	86	250	H
4	* 5.353	34.56	RMS	34.6	-18.3	.12	50.98	54	-3.02	-	-	86	250	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

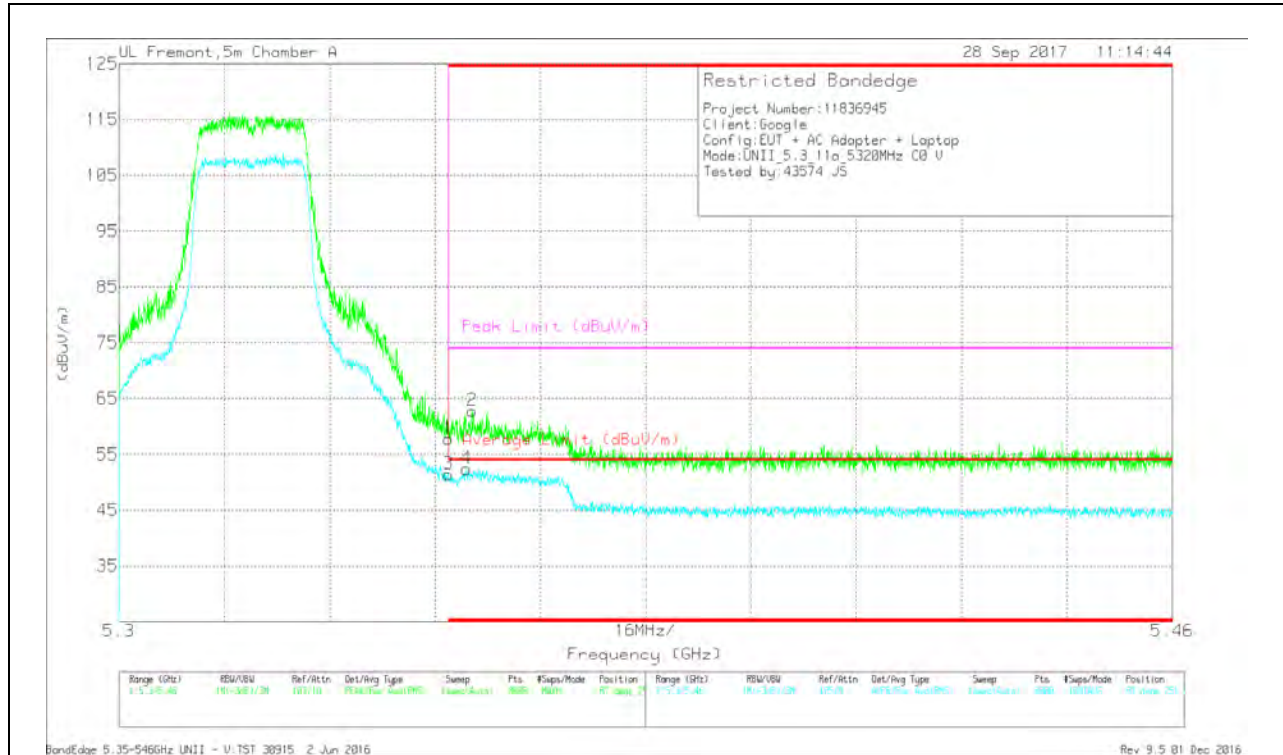

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T662 (dBm)	Amp/CbI/Filt/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Altitude (Dege)	Height (cm)	Polarity
1	* 5.35	41.5	Pk	34.6	-18.3	0	57.8	-	-	74	-16.2	87	251	V
3	* 5.35	35.01	RMS	34.6	-18.3	.12	51.43	54	-2.57	-	-	87	251	V
4	* 5.353	35.94	RMS	34.6	-18.3	.12	52.36	54	-1.64	-	-	87	251	V
2	* 5.354	46.46	Pk	34.6	-18.3	0	62.76	-	-	74	-11.24	87	251	V



* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL RESULTS

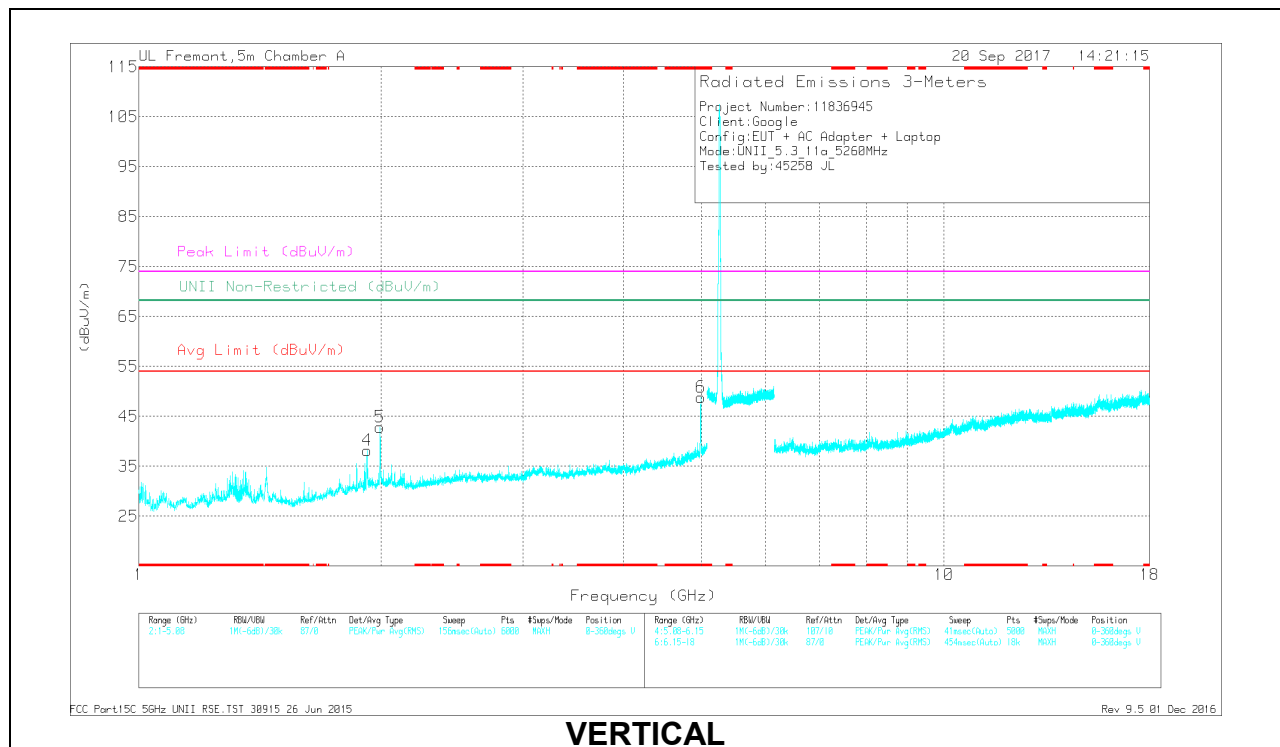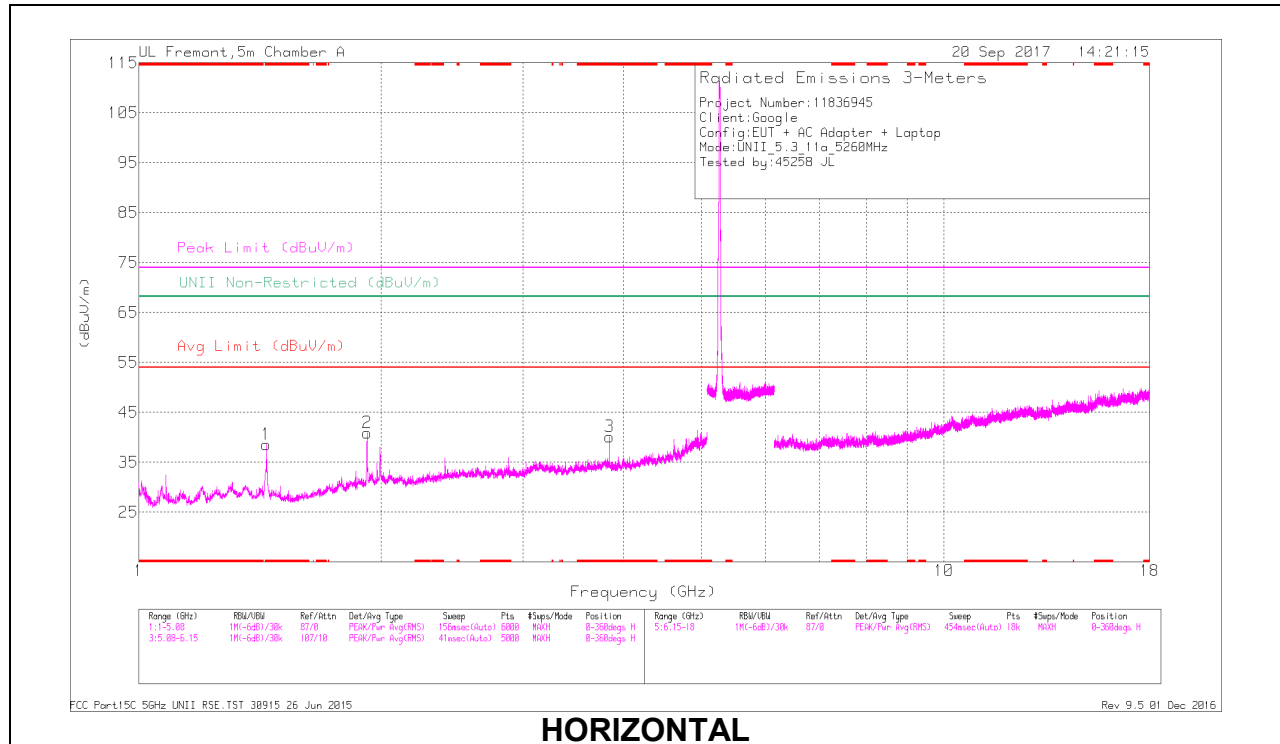

RADIATED EMISSIONS



Markers	Frequency (MHz)	Meter Reading (dBuV)	Det	AF T862 (dB/m)	Amp/Cbl/Ftr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.44	46.38	PK-U	28.7	-32.6	0	42.48	-	-	74	-31.52	-	-	177	145	H
1	* 1.44	37.29	ADR	28.7	-32.6	.12	33.51	54	-20.49	-	-	-	-	177	145	H
3	* 3.84	39.93	PK-U	33	-29.1	0	43.83	-	-	74	-30.17	-	-	135	290	H
3	* 3.84	31.67	ADR	33	-29.1	.12	35.69	54	-18.31	-	-	-	-	135	290	H
6	* 4.985	46.09	PK-U	34.3	-26.7	0	53.69	-	-	74	-20.31	-	-	250	184	V
6	* 4.985	36.18	ADR	34.3	-26.7	.12	43.9	54	-10.1	-	-	-	-	250	184	V
2	1.92	44.23	PK-U	31.2	-32.7	0	42.73	-	-	-	-	68.2	-25.47	118	256	H
4	1.92	43.58	PK-U	31.2	-32.7	0	42.08	-	-	-	-	68.2	-26.12	154	218	V
5	1.992	53.32	PK-U	31.4	-31.9	0	52.82	-	-	-	-	68.2	-15.38	93	241	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

MID CHANNEL RESULTS

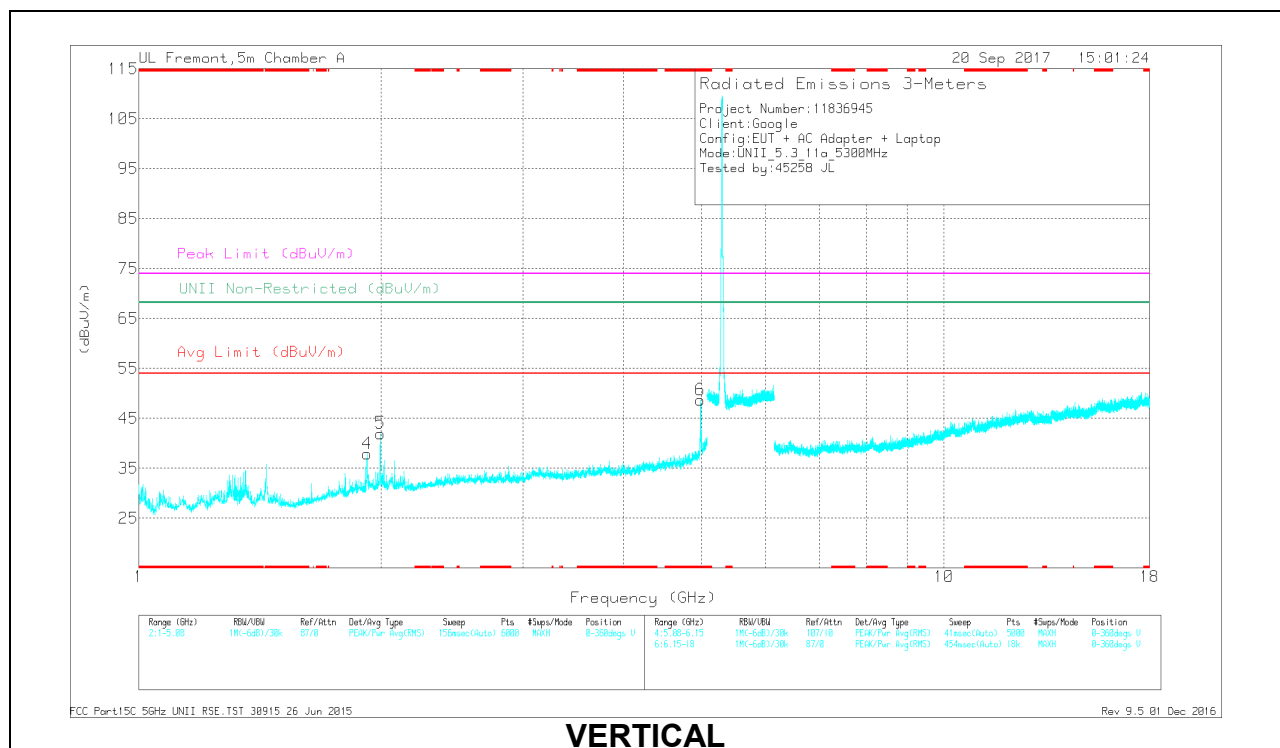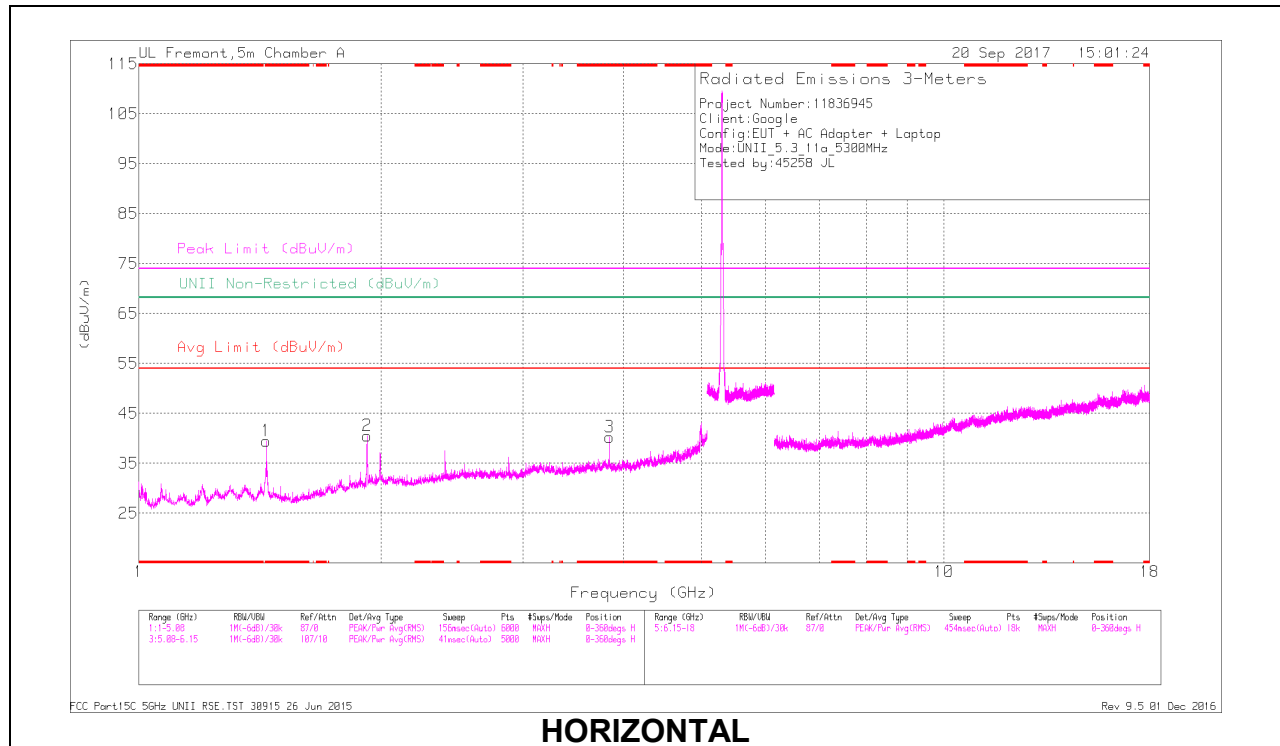

RADIATED EMISSIONS



	Frequency (MHz)	Meter Reading (dBuV)	Det	AF T862 (dB/m)	Amp/Ctrl/Filt/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.44	46.59	PK-U	28.7	-32.6	0	42.69	-	-	74	-31.31	-	-	180	150	H
1	* 1.44	38.74	ADR	28.7	-32.6	.12	32.96	54	-21.04	-	-	-	-	180	150	H
3	* 3.84	40.1	PK-U	33	-29.1	0	44	-	-	74	-30	-	-	132	156	H
3	* 3.84	32.13	ADR	33	-29.1	.12	36.15	54	-17.85	-	-	-	-	132	156	H
6	* 4.978	47.31	PK-U	34.3	-27	0	54.61	-	-	74	-19.39	-	-	254	191	V
6	* 4.978	36.34	ADR	34.3	-27	.12	43.76	54	-10.24	-	-	-	-	254	191	V
2	1.92	45.03	PK-U	31.2	-32.7	0	43.53	-	-	-	-	68.2	-24.67	129	148	H
4	1.92	44.28	PK-U	31.2	-32.7	0	42.78	-	-	-	-	68.2	-25.42	230	168	V
5	1.996	46.89	PK-U	31.4	-31.8	0	46.49	-	-	-	-	68.2	-21.71	72	202	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

HIGH CHANNEL RESULTS

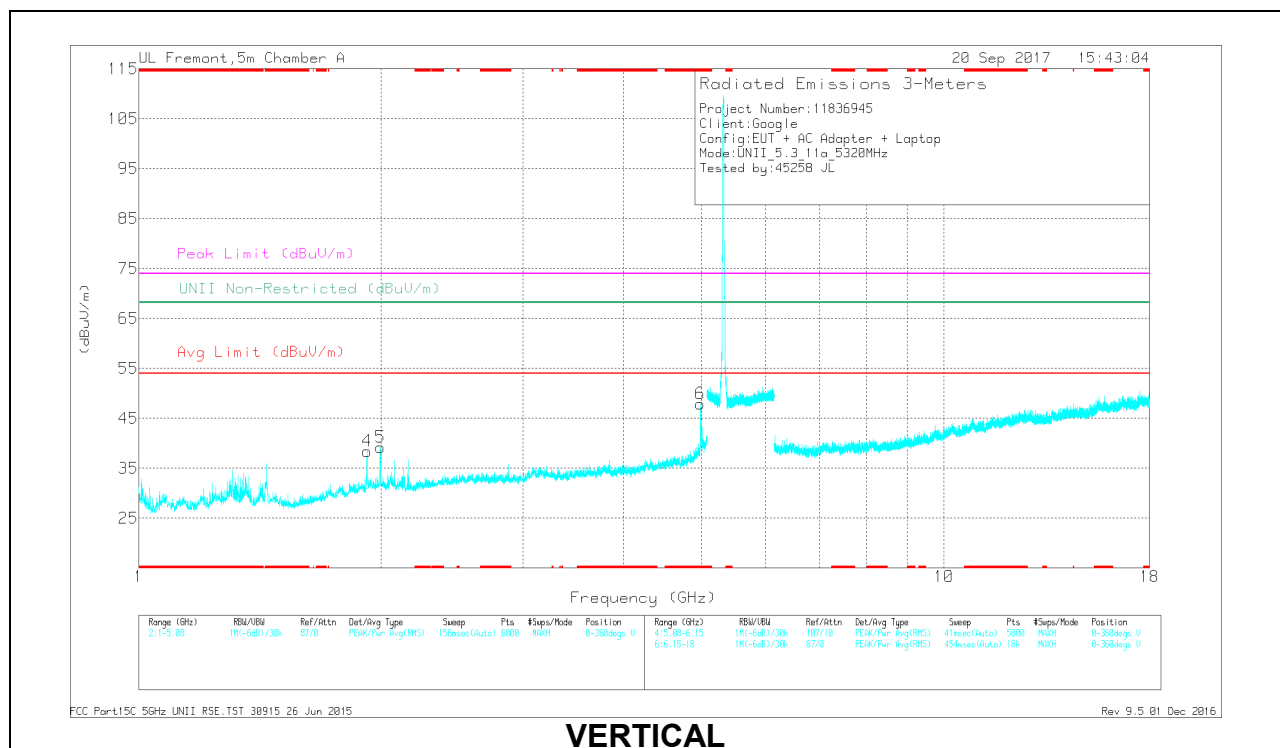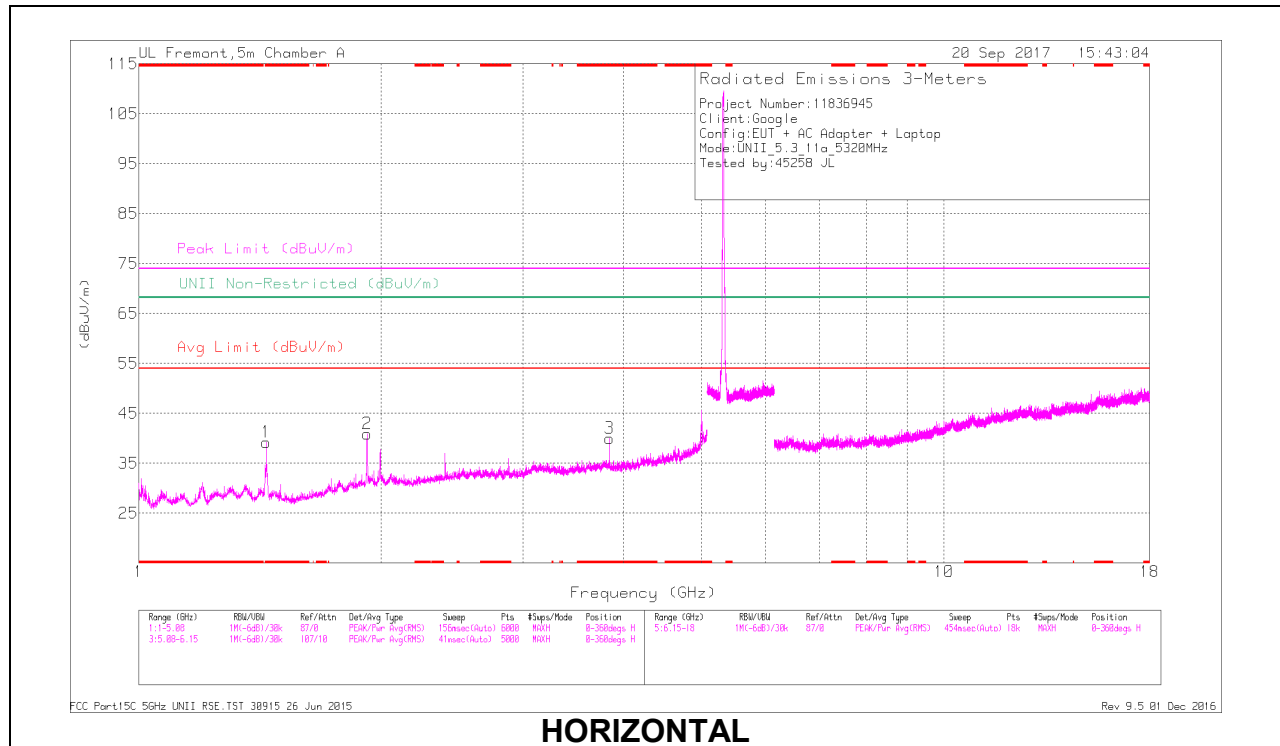

RADIATED EMISSIONS

Markers	Frequency (MHz)	Meter Reading (dBuV)	Det	AF T862 (dB/m)	Amp/Cbl/Ftr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.44	51.16	PK-U	28.7	-32.6	0	47.26	-	-	74	-26.74	-	-	161	104	H
1	* 1.44	41.11	ADR	28.7	-32.6	.12	37.33	54	-16.67	-	-	-	-	161	104	H
3	* 3.84	42.26	PK-U	33	-29.1	0	46.16	-	-	74	-27.84	-	-	205	236	H
3	* 3.84	35.6	ADR	33	-29.1	.12	39.62	54	-14.38	-	-	-	-	205	236	H
6	* 4.979	46.88	PK-U	34.3	-27	0	54.18	-	-	74	-19.82	-	-	253	196	V
6	* 4.979	36.45	ADR	34.3	-27	.12	43.87	54	-10.13	-	-	-	-	253	196	V
2	1.92	44.61	PK-U	31.2	-32.7	0	43.11	-	-	-	-	68.2	-25.09	203	235	H
4	1.92	43.46	PK-U	31.2	-32.7	0	41.96	-	-	-	-	68.2	-26.24	143	151	V
5	1.995	52.05	PK-U	31.4	-31.8	0	51.65	-	-	-	-	68.2	-16.55	237	156	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

1TX Chain 1

BANDEDGE (HIGH CHANNEL)

HORIZONTAL RESULT

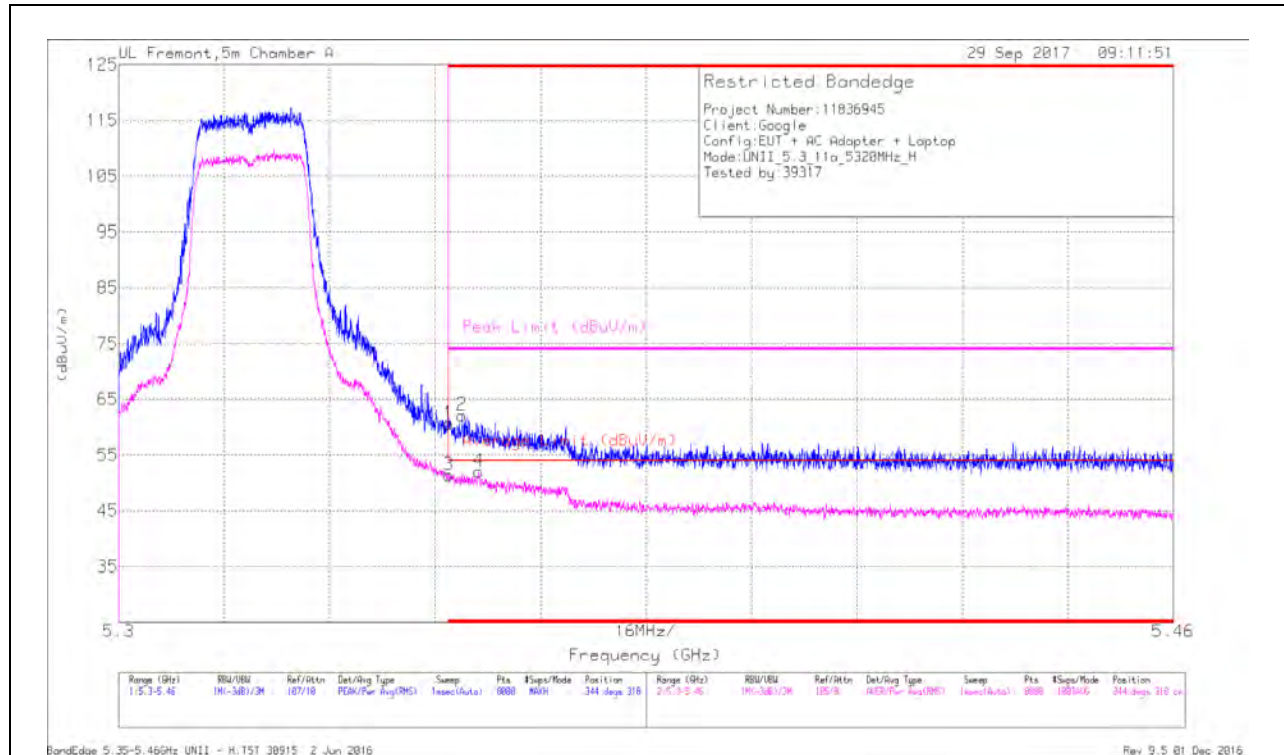


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T662 (dBm)	Amp/CbI/Ftr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35	44.33	Pk	34.6	-18.3	0	60.63	-	-	74	-13.37	344	318	H
3	* 5.35	34.92	RMS	34.6	-18.3	.14	51.36	54	-2.64	-	-	344	318	H
2	* 5.352	45.82	Pk	34.6	-18.3	0	62.12	-	-	74	-11.88	344	318	H
4	* 5.355	35.57	RMS	34.6	-18.3	.14	52.01	54	-1.99	-	-	344	318	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

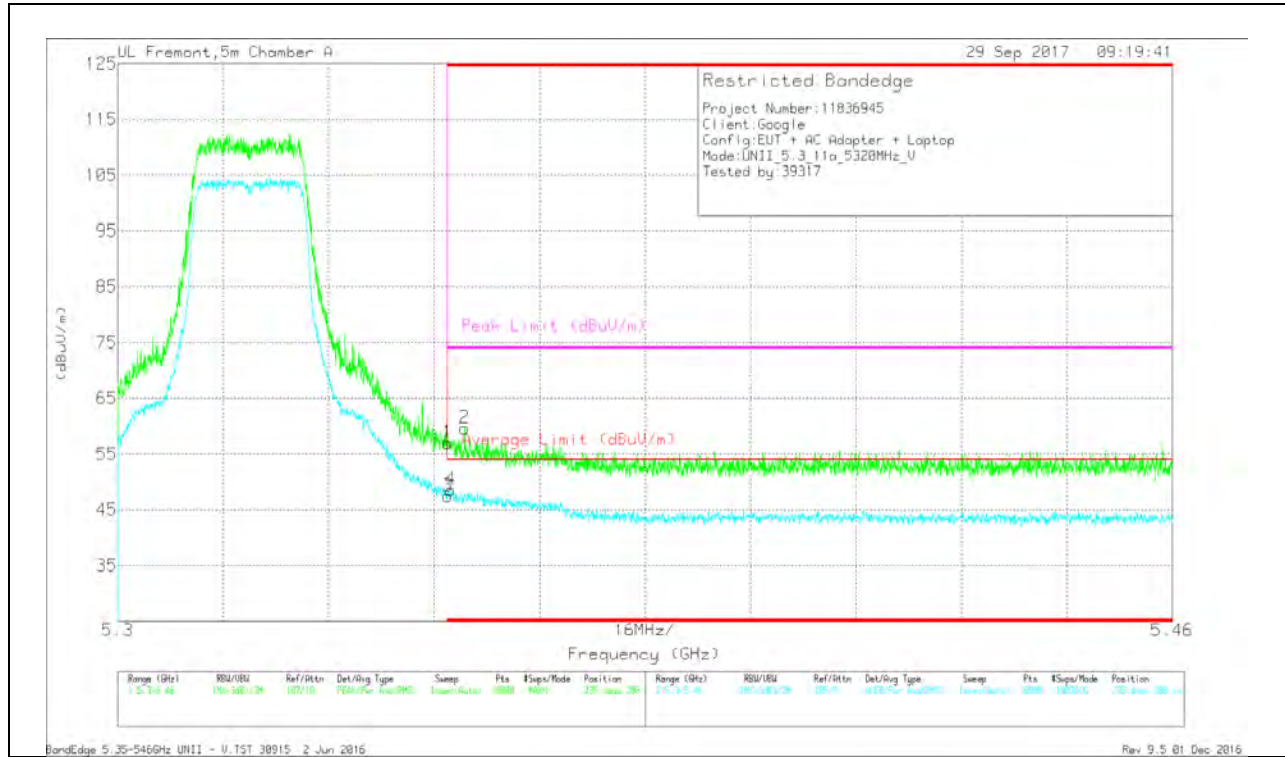

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T662 (dBm)	Amp/CbI/Ftr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35	40.65	Pk	34.6	-18.3	0	56.95	-	-	74	-17.05	235	288	V
3	* 5.35	31.03	RMS	34.6	-18.3	.14	47.47	54	-6.53	-	-	235	288	V
4	* 5.351	32.21	RMS	34.6	-18.4	.14	48.55	54	-5.45	-	-	235	288	V
2	* 5.353	43.33	Pk	34.6	-18.3	0	59.63	-	-	74	-14.37	235	288	V



* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL RESULTS

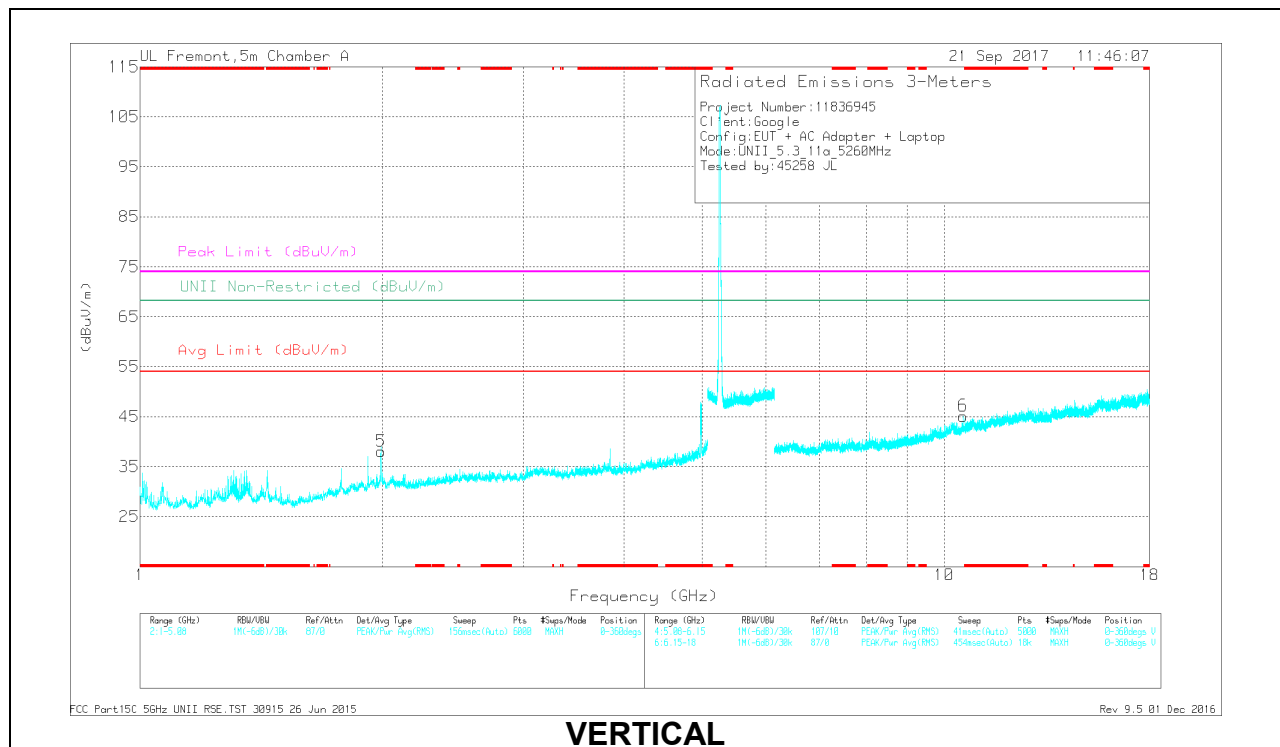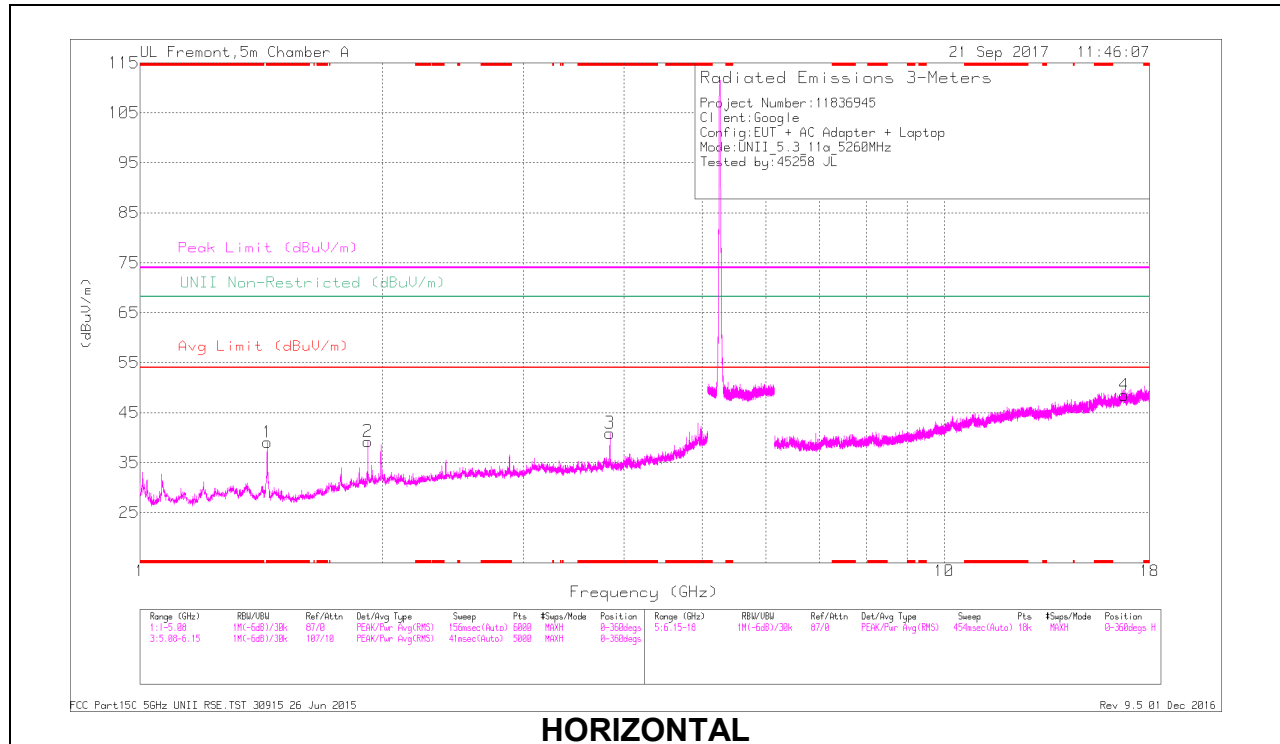

RADIATED EMISSIONS



Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	AF T862 (dB/m)	Amp/Ctrl/Filt/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.44	50.18	PK-U	28.7	-32.6	0	46.28	-	-	74	-27.72	-	-	199	106	H
	* 1.44	40.75	ADR	28.7	-32.6	-14	36.99	54	-17.01	-	-	-	-	199	106	H
3	* 3.84	42.98	PK-U	33	-29.1	0	46.88	-	-	74	-27.12	-	-	335	108	H
	* 3.84	37.5	ADR	33	-29.1	14	41.54	54	-12.46	-	-	-	-	335	108	H
2	1.92	46.16	PK-U	31.2	-32.7	0	44.66	-	-	-	-	68.2	-23.54	266	200	H
5	1.995	50.17	PK-U	31.4	-31.8	0	49.77	-	-	-	-	68.2	-18.43	261	326	V
6	10.561	32.04	PK-U	37.7	-20.3	0	49.44	-	-	-	-	68.2	-18.76	151	253	V
4	16.738	32.89	PK-U	41.7	-19.4	0	55.19	-	-	-	-	68.2	-13.01	6	251	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

MID CHANNEL RESULTS

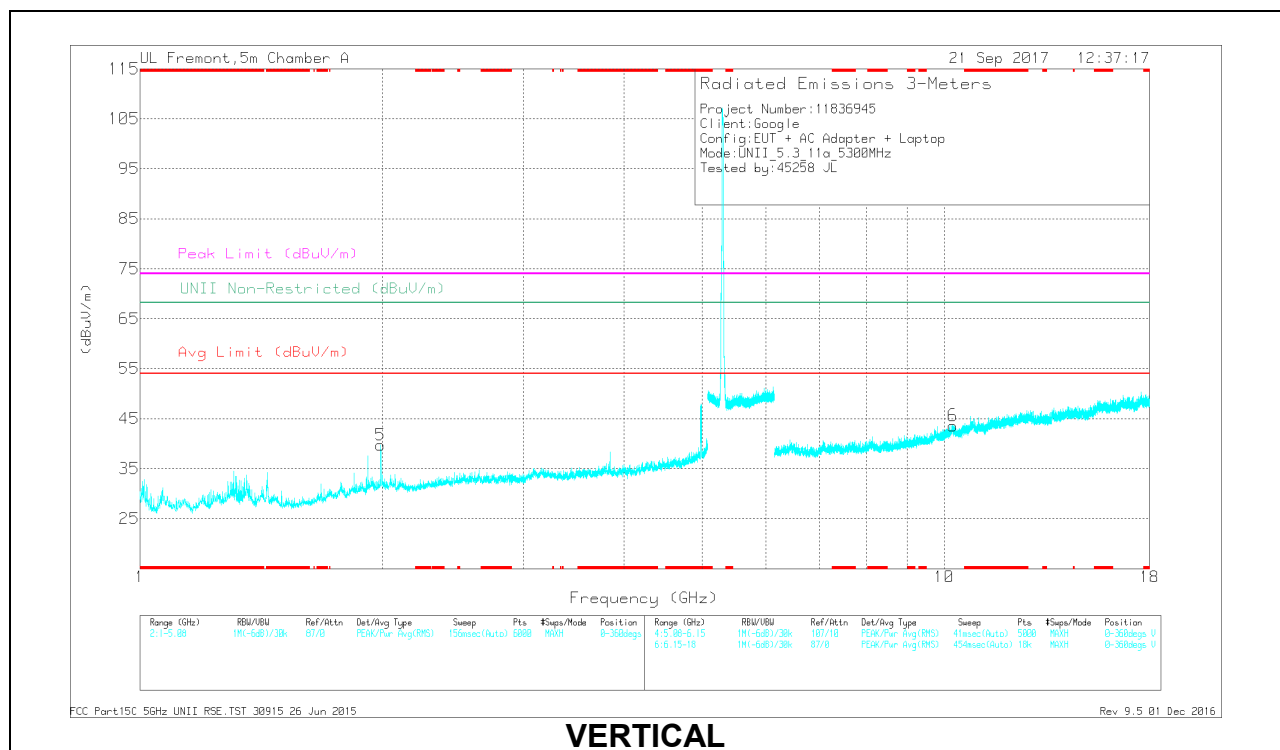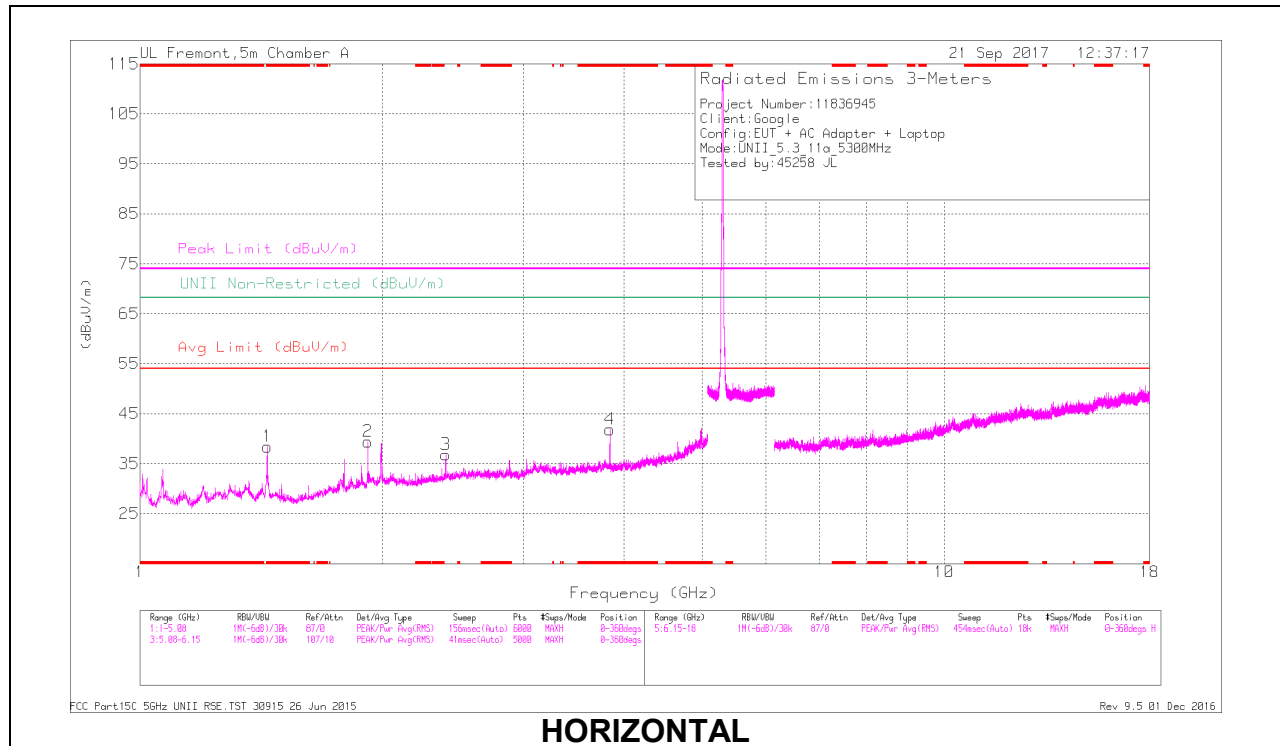

RADIATED EMISSIONS



Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	AF T862 (dB/m)	Amp/Cbl/Ftr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.44	50.35	PK-U	28.7	-32.6	0	46.45	-	-	74	-27.55	-	-	201	105	H
	* 1.44	39.76	ADR	28.7	-32.6	-14	36	54	-18	-	-	-	-	201	105	H
4	* 3.84	42.58	PK-U	33	-29.1	0	46.49	-	-	74	-27.52	-	-	338	109	H
	* 3.84	36.72	ADR	33	-29.1	14	40.76	54	-13.24	-	-	-	-	338	109	H
2	1.92	46.17	PK-U	31.2	-32.7	0	44.67	-	-	-	-	68.2	-23.53	266	200	H
5	1.992	48.6	PK-U	31.4	-31.9	0	48.1	-	-	-	-	68.2	-20.1	242	373	V
3	2.4	41.99	PK-U	31.8	-31.5	0	42.29	-	-	-	-	68.2	-25.91	2	381	H
6	10.249	32.19	PK-U	37.5	-19.7	0	49.99	-	-	-	-	68.2	-18.21	5	122	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

HIGH CHANNEL RESULTS

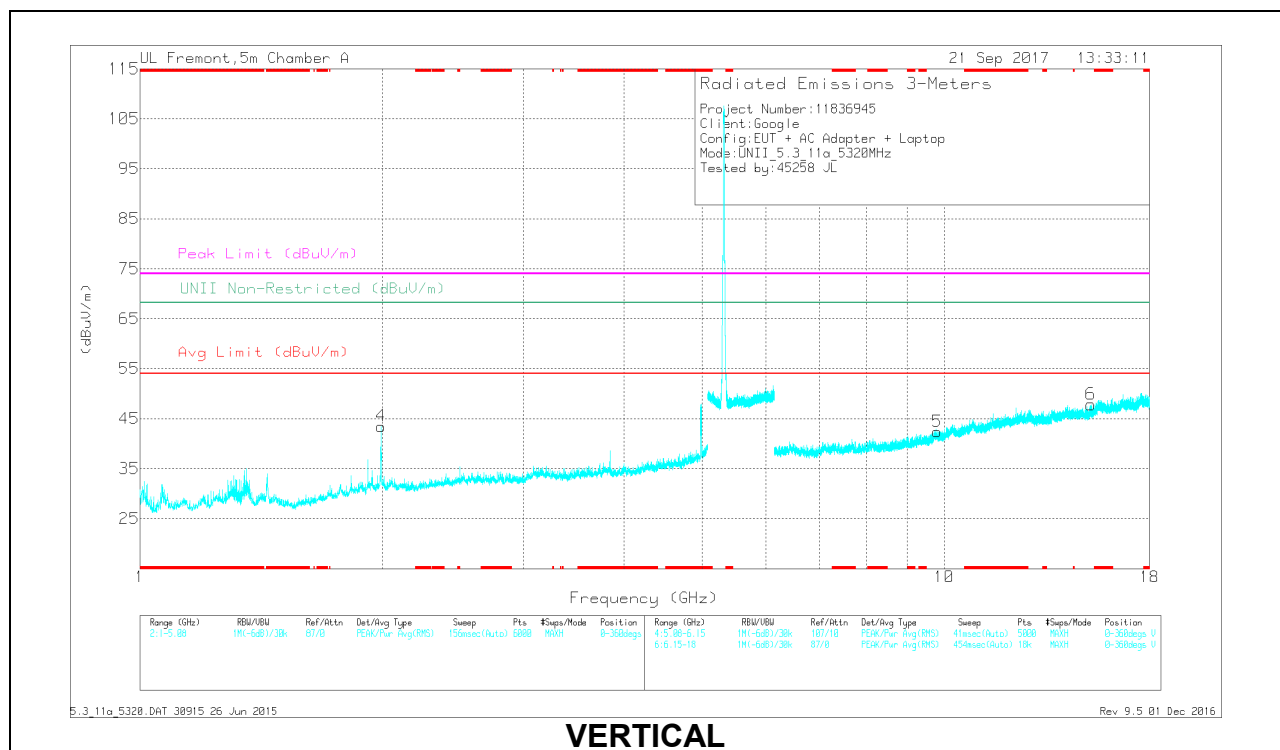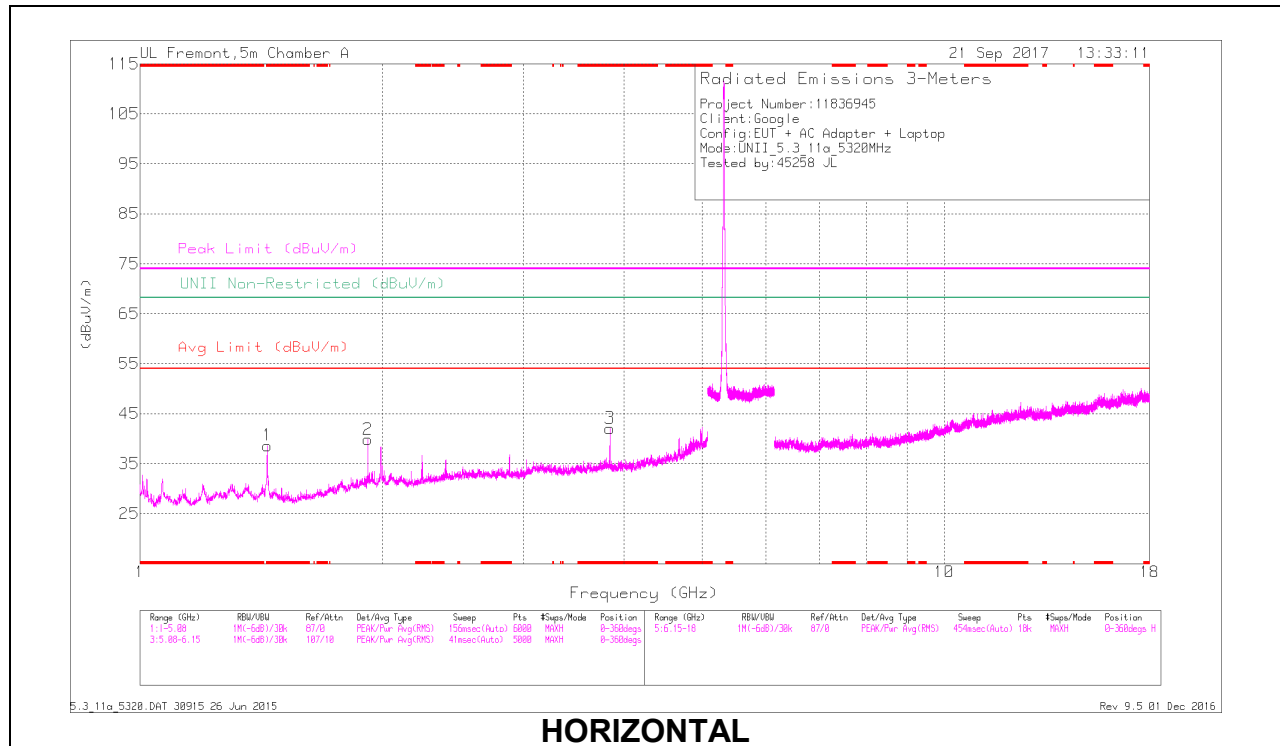

RADIATED EMISSIONS

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	AF T862 (dB/m)	Amp/Ctrl/Filt/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.44	51.27	PK-U	28.7	-32.6	0	47.37	-	-	74	-26.63	-	-	72	170	H
	* 1.44	39.3	ADR	28.7	-32.6	14	35.54	54	-18.46	-	-	-	-	72	170	H
3	* 3.84	43.15	PK-U	33	-29.1	0	47.05	-	-	74	-26.95	-	-	334	111	H
	* 3.84	37.78	ADR	33	-29.1	14	41.82	54	-12.18	-	-	-	-	334	111	H
2	1.92	46.74	PK-U	31.2	-32.7	0	45.24	-	-	-	-	68.2	-22.96	270	201	H
4	1.994	50.13	PK-U	31.4	-31.9	0	49.63	-	-	-	-	68.2	-18.57	251	320	V
5	9.8	32.43	PK-U	37	-21.3	0	48.13	-	-	-	-	68.2	-20.07	315	151	V
6	15.216	32.36	PK-U	39.8	-18.6	0	53.56	-	-	-	-	68.2	-14.64	198	393	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak


ADR - U-NII AD primary method, RMS average

9.1.6. TX ABOVE 1 GHz 802.11n HT20 MODE IN THE 5.3 GHz BAND

1TX Chain 0

BANDEDGE (HIGH CHANNEL)

HORIZONTAL RESULT

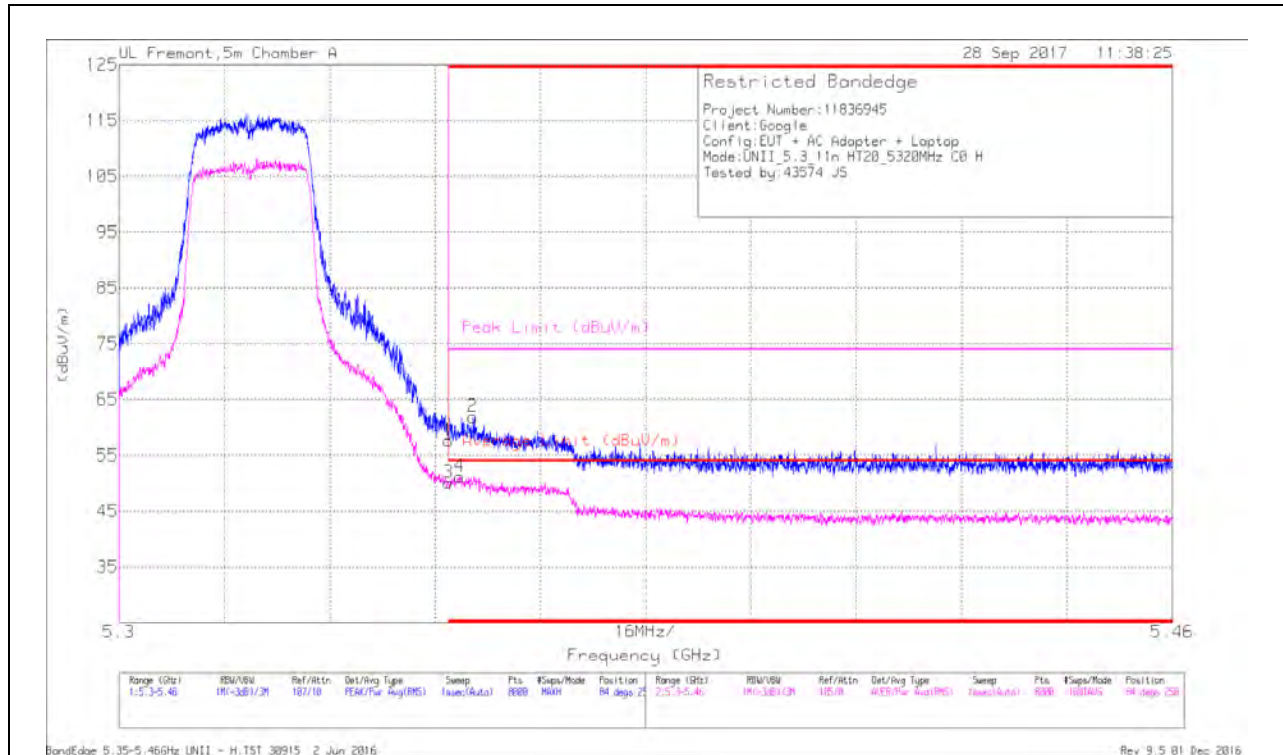


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T862 (dBm)	Amp/Cb/Fltr/Psd (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Altitude (Degs)	Height (cm)	Polarity
1	* 5.35	41.33	Pk	34.6	-18.3	0	57.83	-	-	74	-16.37	84	250	H
3	* 5.35	33.79	RMS	34.6	-18.3	0	50.09	54	-3.91	-	-	84	250	H
4	* 5.352	34.88	RMS	34.6	-18.3	0	51.18	54	-2.82	-	-	84	250	H
2	* 5.354	45.58	Pk	34.6	-18.3	0	61.88	-	-	74	-12.12	84	250	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

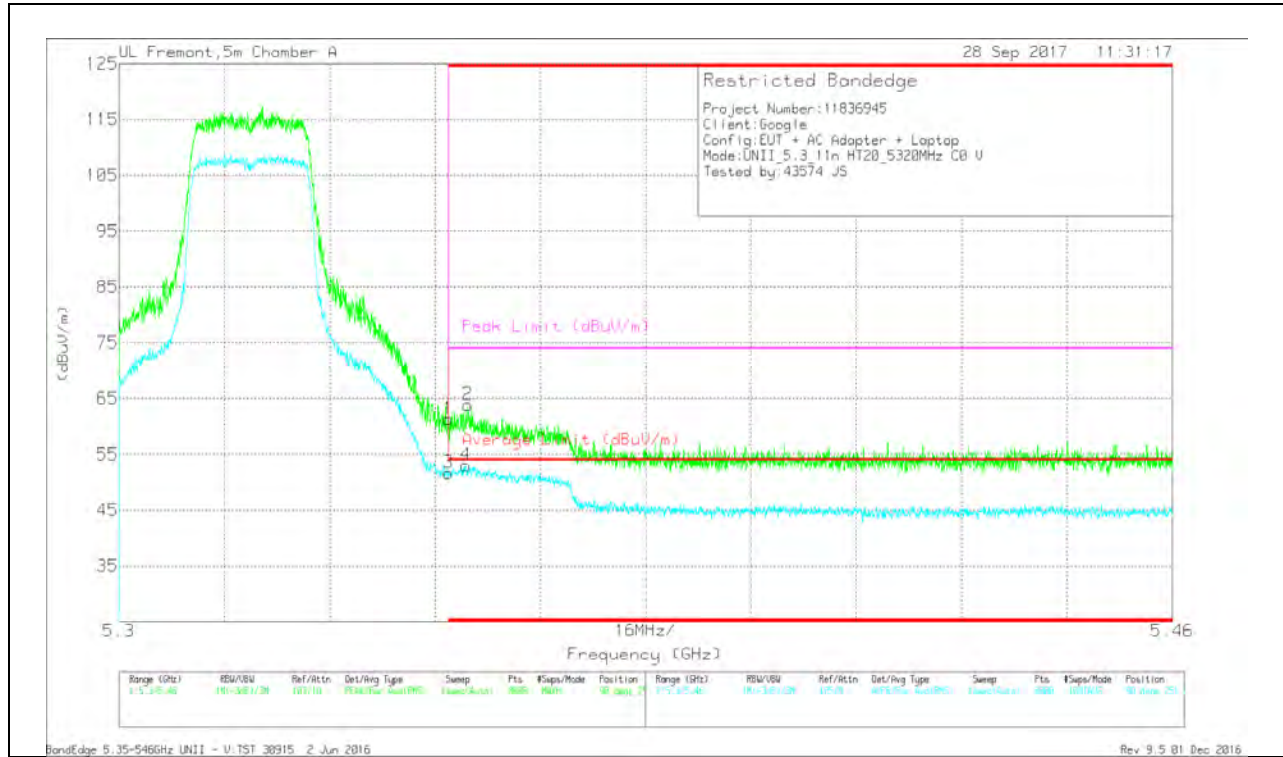



* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL RESULTS

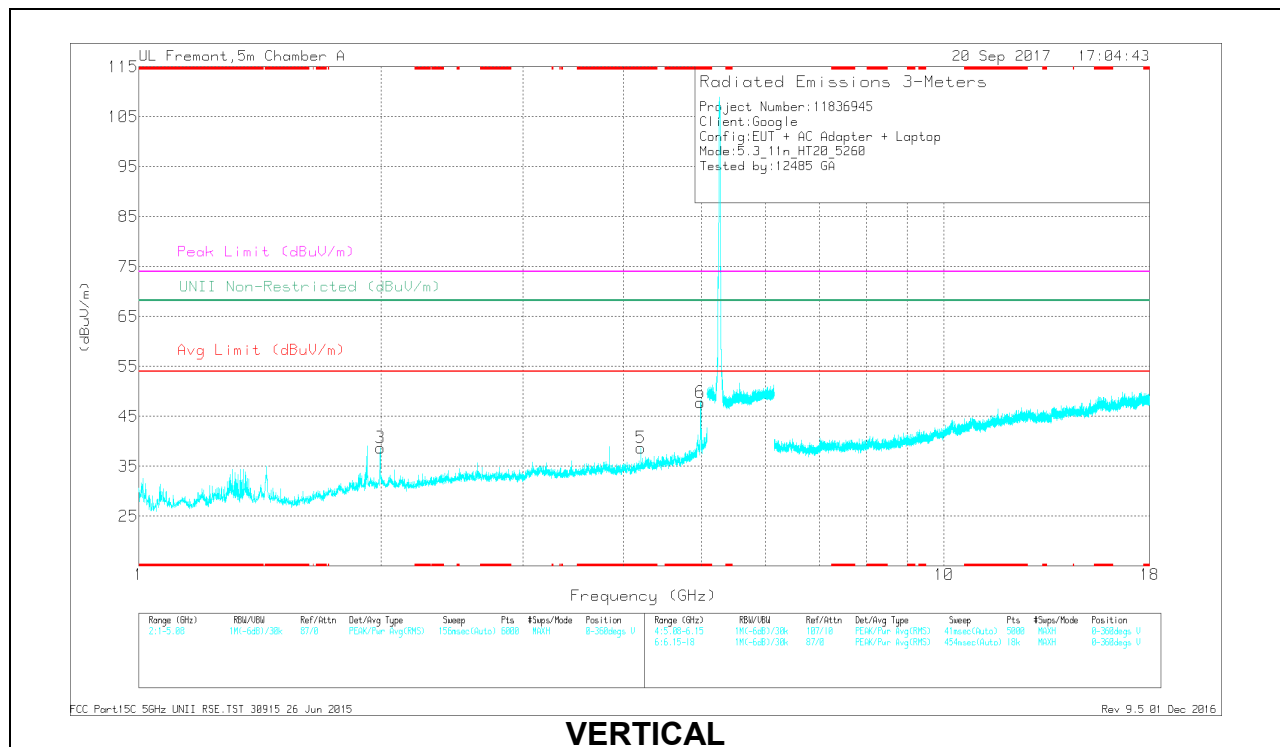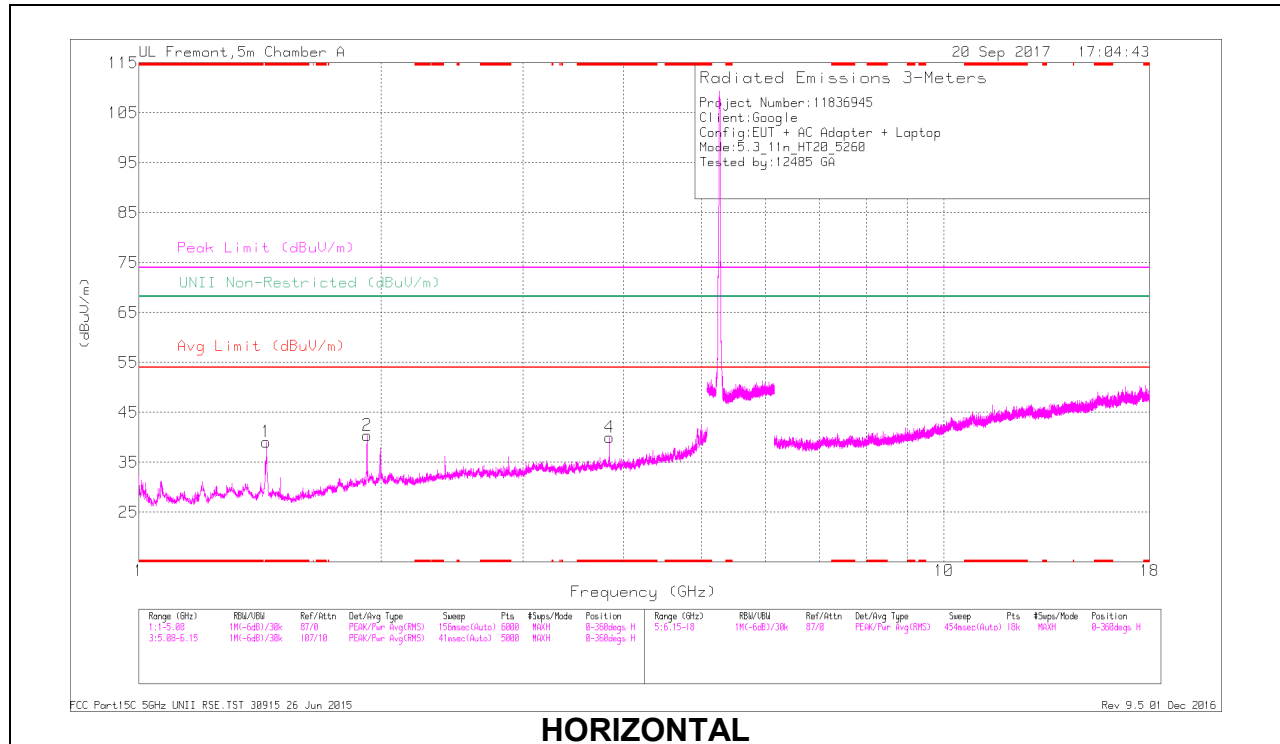

RADIATED EMISSIONS



Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	AF T862 (dB/m)	Amp/Ctrl/Filt/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.44	53.55	PK-U	28.7	-32.6	0	49.65	-	-	74	-24.35	-	-	202	113	H
	* 1.44	41.74	ADR	28.7	-32.6	0	37.84	54	-16.16	-	-	-	-	202	113	H
4	* 3.841	41.57	PK-U	33	-29.1	0	45.47	-	-	74	-28.53	-	-	198	122	H
	* 3.84	34.52	ADR	33	-29.1	0	38.42	54	-15.58	-	-	-	-	198	122	H
5	* 4.199	36.95	PK-U	33.4	-28.6	0	41.75	-	-	74	-32.25	-	-	335	210	V
	* 4.2	25.49	ADR	33.4	-28.6	0	30.29	54	-23.71	-	-	-	-	335	210	V
6	* 4.982	46.04	PK-U	34.3	-26.9	0	53.44	-	-	74	-20.56	-	-	254	200	V
	* 4.982	34.85	ADR	34.3	-26.9	0	42.25	54	-11.75	-	-	-	-	254	200	V
2	1.92	45.4	PK-U	31.2	-32.7	0	43.9	-	-	-	-	68.2	-24.3	316	203	H
3	1.996	52.99	PK-U	31.4	-31.8	0	52.59	-	-	-	-	68.2	-15.61	142	364	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

MID CHANNEL RESULTS

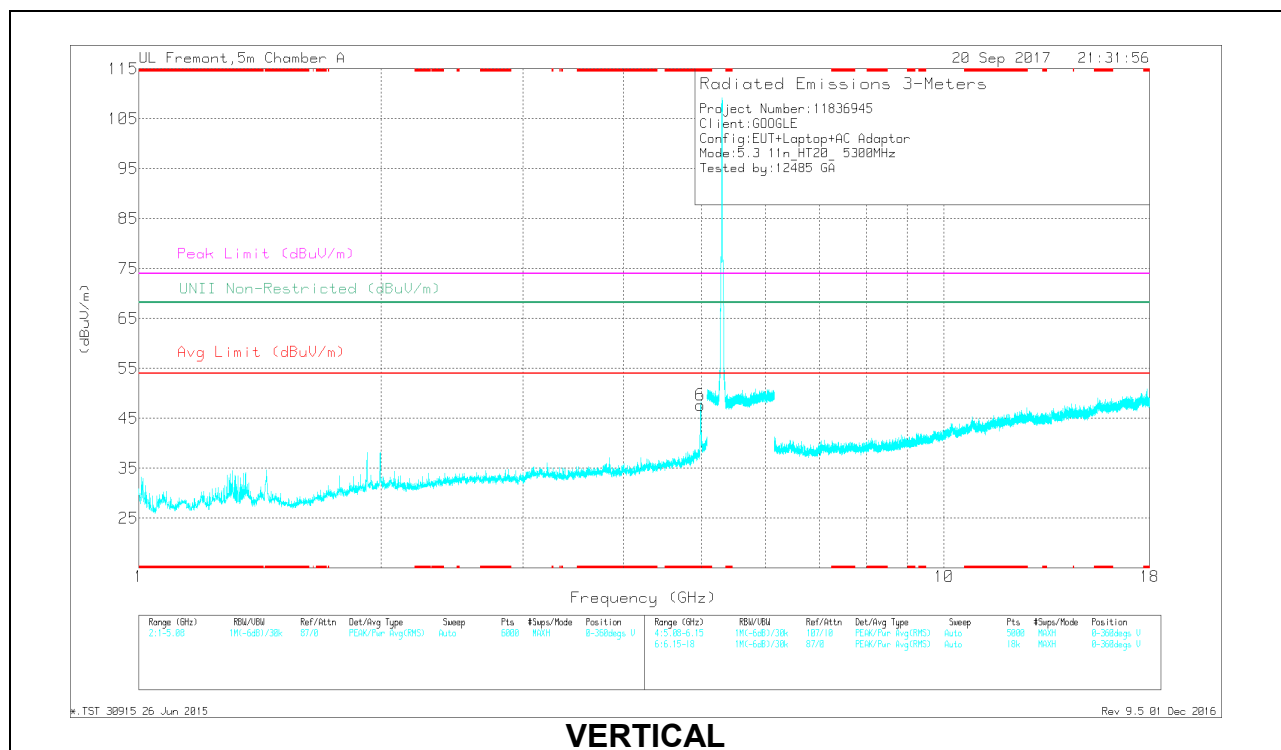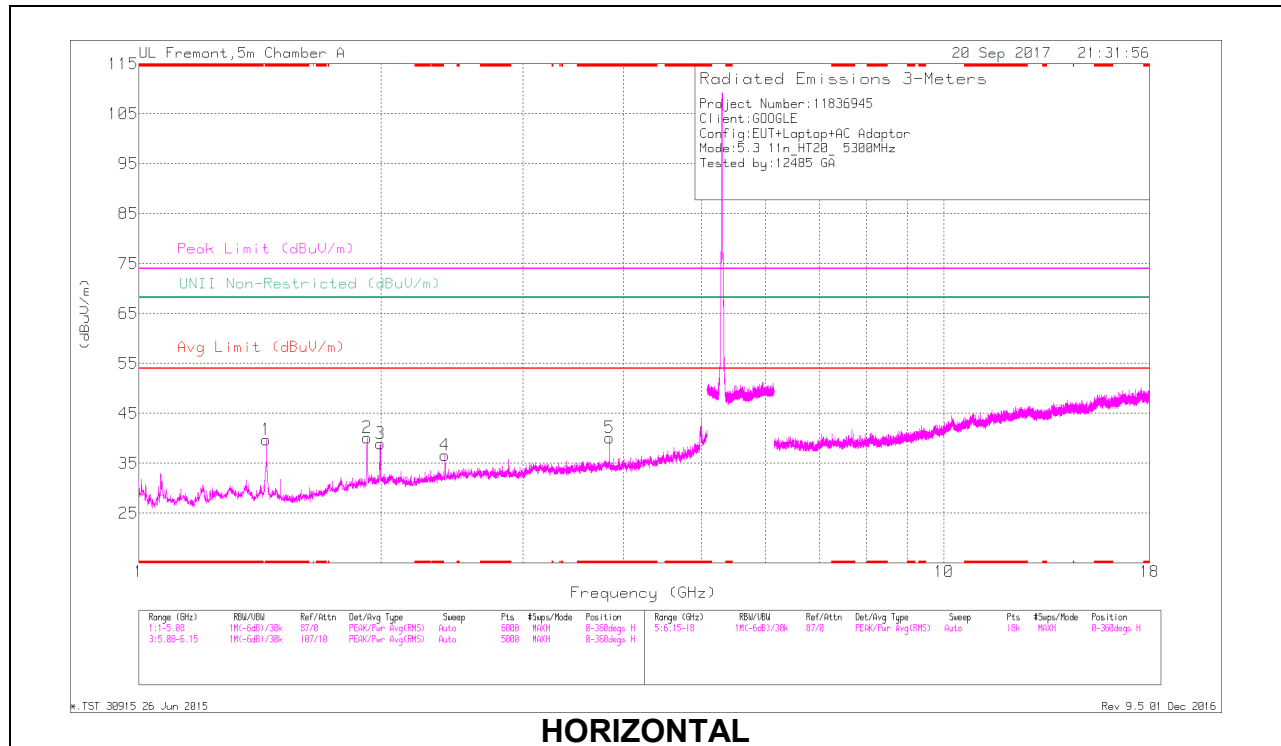

RADIATED EMISSIONS



Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	AF T862 (dB/m)	Amp/Ctrl/Filt/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.44	53.16	PK-U	28.7	-32.6	0	49.26	-	-	74	-24.74	-	-	202	118	H
	* 1.44	41.97	ADR	28.7	-32.6	0	38.07	54	-15.93	-	-	-	-	202	118	H
5	* 3.84	42.1	PK-U	33	-29.1	0	46	-	-	74	-28	-	-	198	102	H
	* 3.84	35.1	ADR	33	-29.1	0	39	54	-15	-	-	-	-	198	102	H
6	* 4.985	46.52	PK-U	34.3	-26.7	0	54.12	-	-	74	-19.88	-	-	208	217	V
	* 4.985	35.58	ADR	34.3	-26.7	0	43.18	54	-10.82	-	-	-	-	208	217	V
2	1.92	46.4	PK-U	31.2	-32.7	0	44.9	-	-	-	-	68.2	-23.3	148	196	H
3	1.995	48.92	PK-U	31.4	-31.8	0	48.52	-	-	-	-	68.2	-19.68	219	113	H
4	2.4	42.3	PK-U	31.8	-31.5	0	42.6	-	-	-	-	68.2	-25.6	192	198	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

HIGH CHANNEL RESULTS

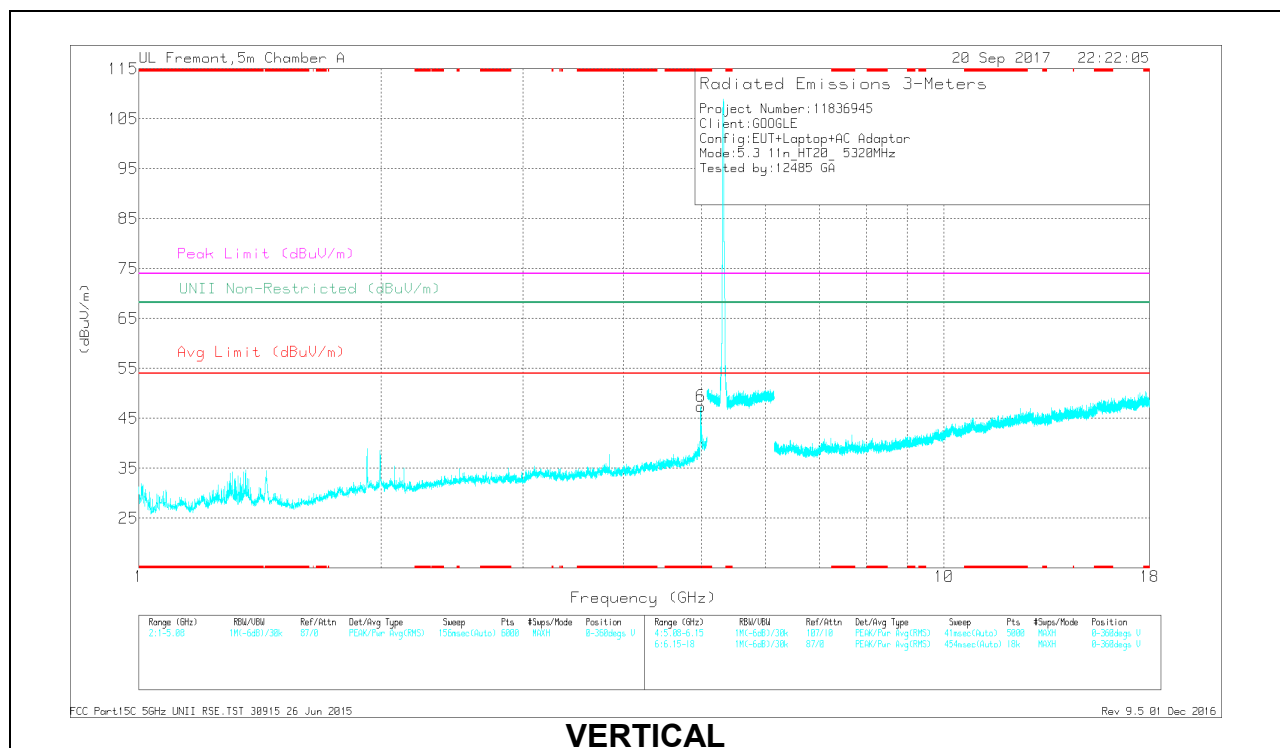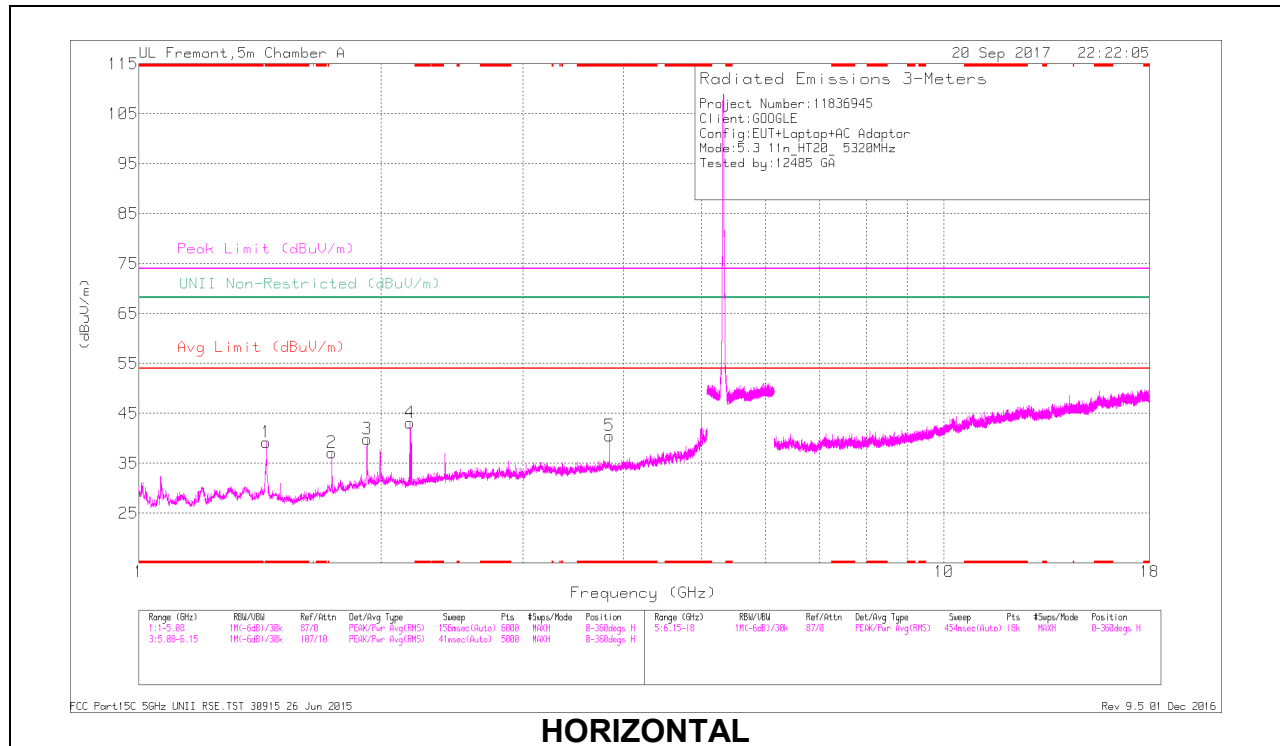

RADIATED EMISSIONS

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	AF T862 (dB/m)	Amp/Ctrl/Filt/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.44	53.5	PK-U	28.7	-32.6	0	49.6	-	-	74	-24.4	-	-	202	111	H
	* 1.44	42.73	ADR	28.7	-32.6	0	38.63	54	-15.17	-	-	-	-	202	111	H
5	* 3.84	41.55	PK-U	33	-29.1	0	45.45	-	-	74	-28.55	-	-	198	193	H
	* 3.84	34.94	ADR	33	-29.1	0	38.84	54	-15.16	-	-	-	-	198	193	H
6	* 4.989	46.65	PK-U	34.3	-26.7	0	54.25	-	-	74	-19.75	-	-	217	123	V
	* 4.989	36.5	ADR	34.3	-26.7	0	44.1	54	-9.9	-	-	-	-	217	123	V
2	1.737	39.36	PK-U	29.6	-32	0	36.96	-	-	-	-	68.2	-31.24	312	151	H
3	1.92	46.34	PK-U	31.2	-32.7	0	44.84	-	-	-	-	68.2	-23.36	147	166	H
4	2.168	40.07	PK-U	31.1	-32.3	0	38.87	-	-	-	-	68.2	-29.33	229	111	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

1TX Chain 1

BANDEDGE (HIGH CHANNEL)

HORIZONTAL RESULT

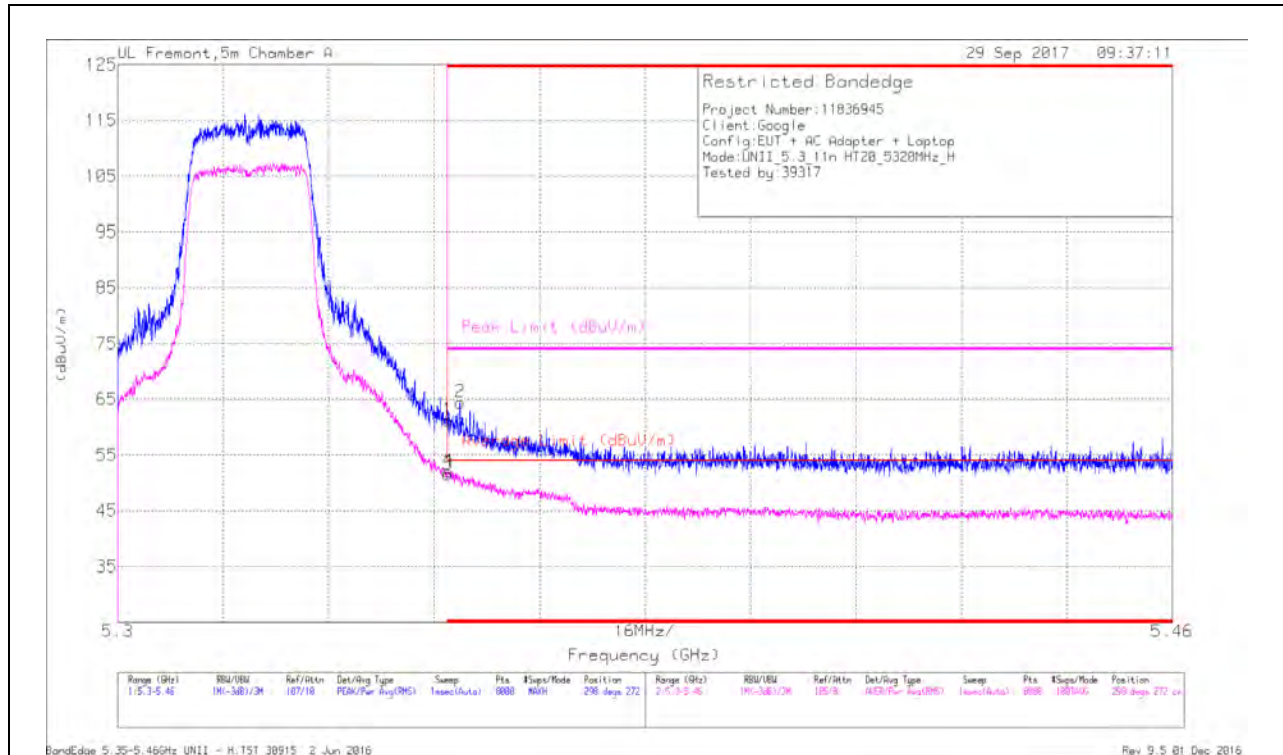


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T862 (dBm)	Amp/CbI/Ftr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35	44.95	Pk	34.6	-18.3	0	61.25	-	-	74	-12.75	298	272	H
3	* 5.35	35.18	RMS	34.6	-18.3	0	51.48	54	-2.52	-	-	298	272	H
4	* 5.35	35.68	RMS	34.6	-18.3	0	51.98	54	-2.02	-	-	298	272	H
2	* 5.352	48.09	Pk	34.6	-18.3	0	64.39	-	-	74	-9.61	298	272	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

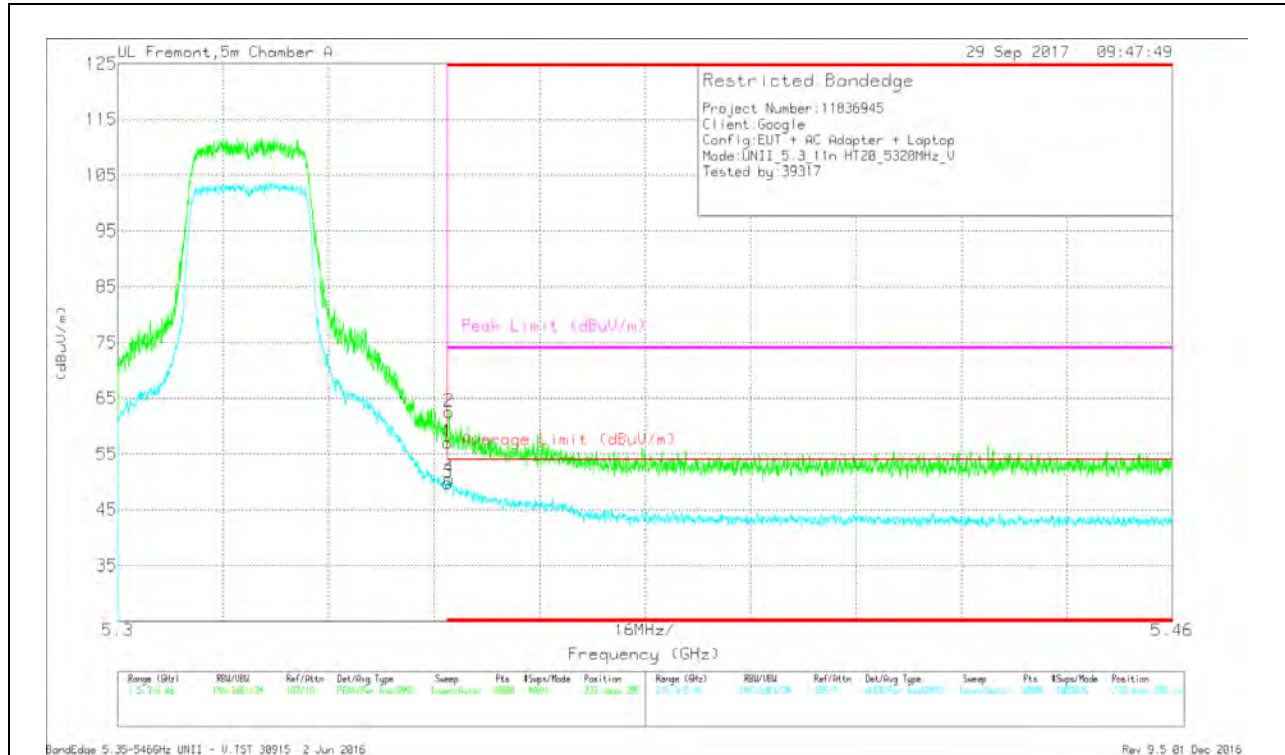

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF Y662 (dBm)	Amp/Cbl/Filt/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Altitude (Degs)	Height (cm)	Polarity
1	* 5.35	40.83	Pk	34.6	-18.3	0	57.13	-	-	74	-16.87	233	295	V
2	* 5.35	46.28	Pk	34.6	-18.3	0	62.58	-	-	74	-11.42	233	295	V
3	* 5.35	33.56	RMS	34.6	-18.3	0	49.86	54	-4.14	-	-	233	295	V
4	* 5.35	34.26	RMS	34.6	-18.3	0	50.56	54	-3.44	-	-	233	295	V



* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL RESULTS

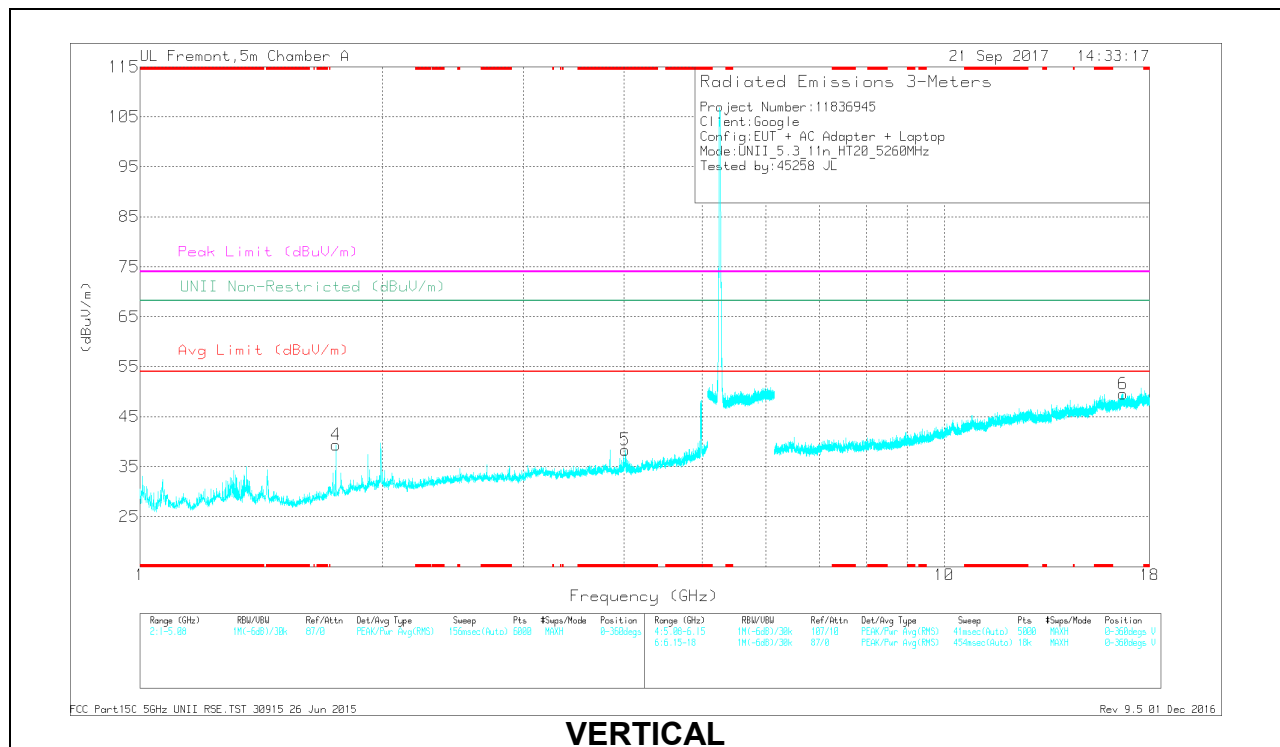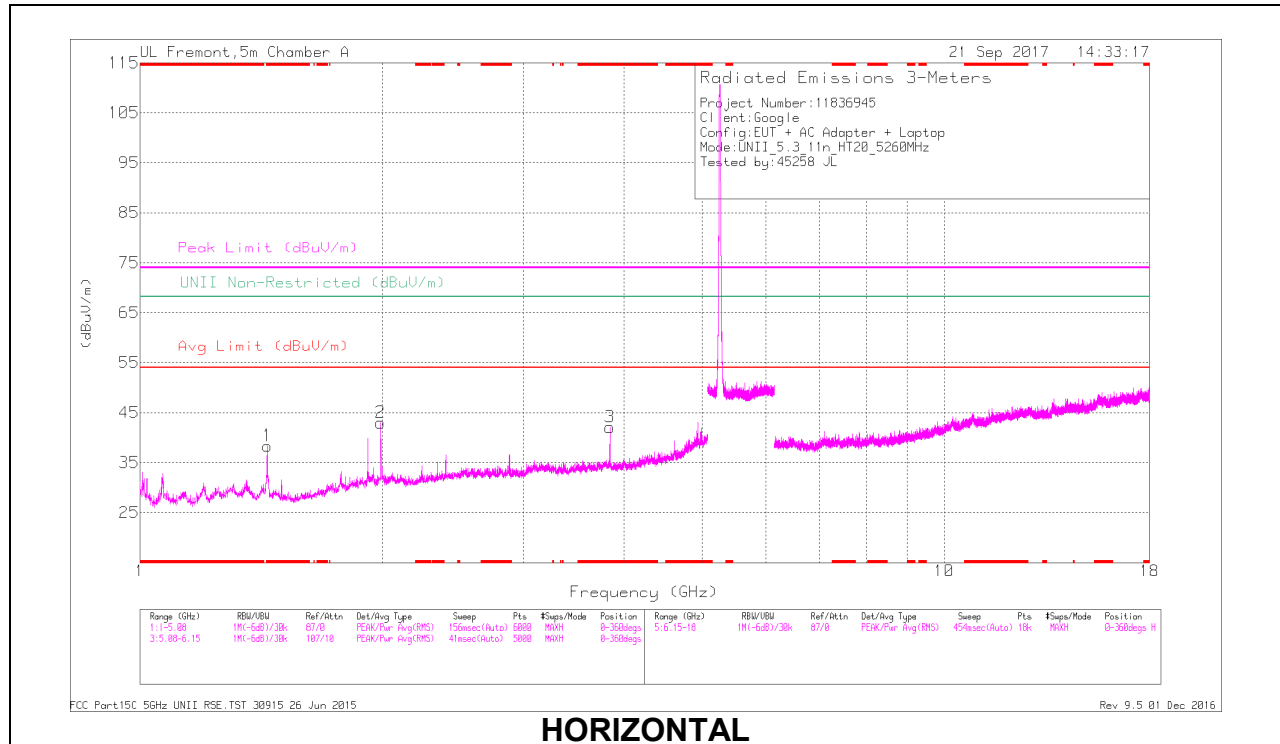

RADIATED EMISSIONS



Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T862 (dB/m)	Amp/Cbl/Filr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.44	52.13	PK-U	28.7	-32.6	0	48.23	-	-	74	-25.77	-	-	66	208	H
	* 1.44	40.84	ADR	28.7	-32.6	0	36.94	54	-17.06	-	-	-	-	66	208	H
3	* 3.84	42.61	PK-U	33	-29.1	0	48.51	-	-	74	-27.49	-	-	334	106	H
	* 3.84	37.32	ADR	33	-29.1	0	41.22	54	-12.78	-	-	-	-	334	106	H
5	* 4.014	37.33	PK-U	33.4	-28.8	0	41.93	-	-	74	-32.07	-	-	133	250	V
	* 4.014	25.44	ADR	33.4	-28.8	0	30.04	54	-23.96	-	-	-	-	133	250	V
4	1.754	38.93	PK-U	29.8	-32.2	0	36.53	-	-	-	-	68.2	-31.67	24	108	V
2	1.991	48.03	PK-U	31.4	-31.9	0	47.53	-	-	-	-	68.2	-20.67	224	172	H
6	16.683	32.02	PK-U	41.6	-18.9	0	54.72	-	-	-	-	68.2	-13.48	333	247	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

MID CHANNEL RESULTS

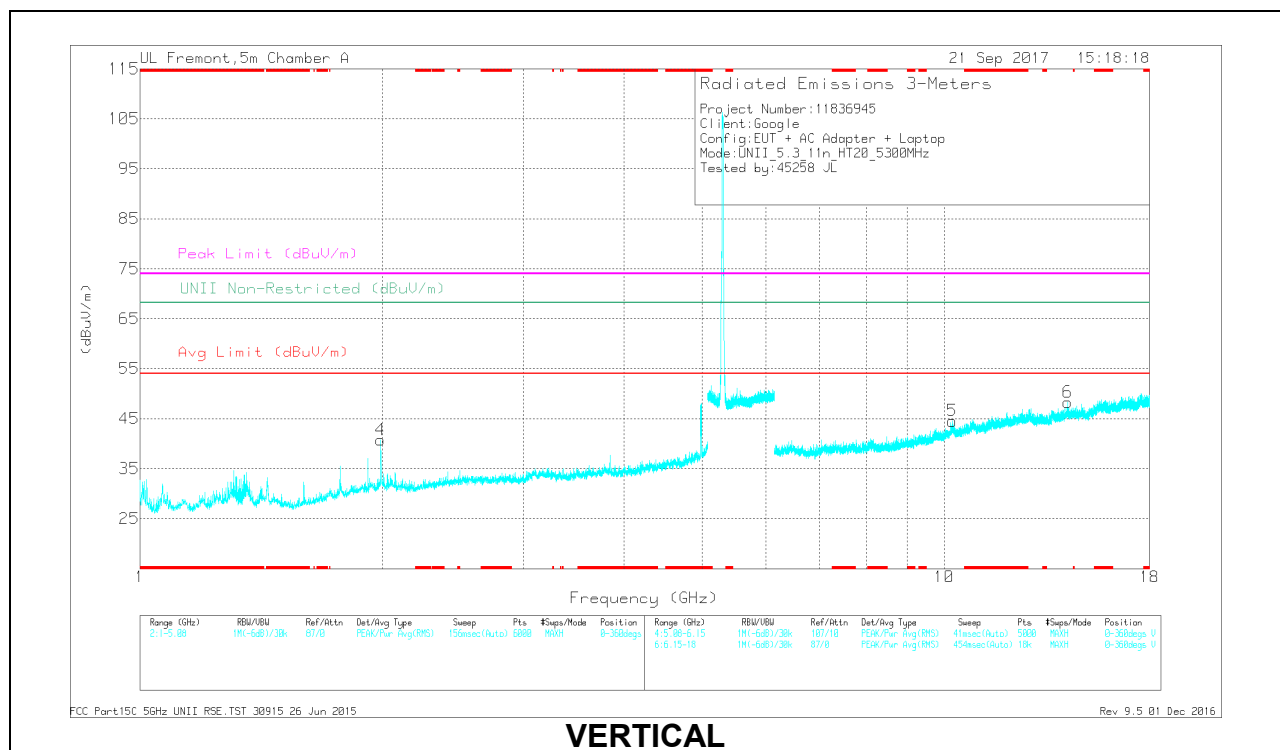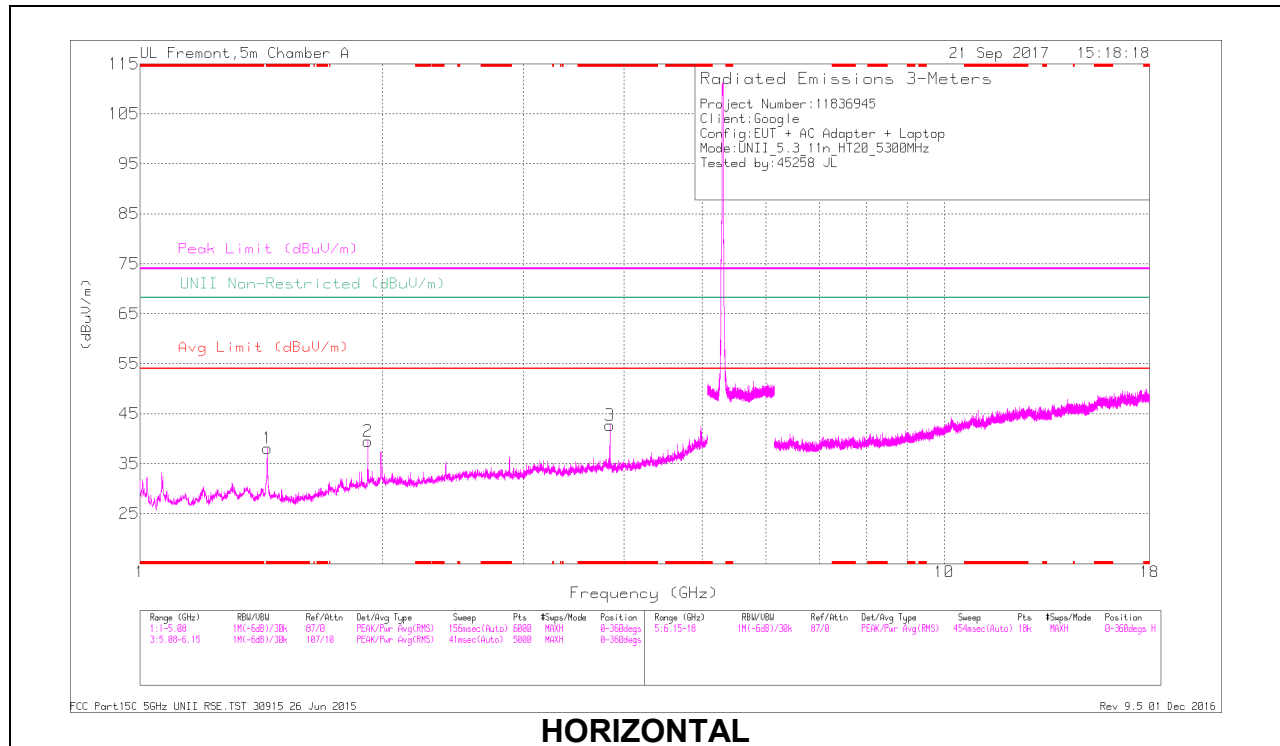

RADIATED EMISSIONS


Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	AF T862 (dB/m)	Amp/Cat/Ftr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNI Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.44	51.85	PK-U	28.7	-32.6	0	47.95	-	-	74	-26.05	-	-	65	207	H
	* 1.44	40.7	ADR	28.7	-32.6	0	36.8	54	-17.2	-	-	-	-	65	207	H
3	* 3.84	42.61	PK-U	33	-29.1	0	46.51	-	-	74	-27.49	-	-	330	109	H
	* 3.84	36.7	ADR	33	-29.1	0	40.6	54	-13.4	-	-	-	-	330	109	H
2	1.92	46.72	PK-U	31.2	-32.7	0	45.22	-	-	-	-	68.2	-22.98	267	199	H
4	1.993	50.72	PK-U	31.4	-31.9	0	50.22	-	-	-	-	68.2	-17.98	237	207	V
5	10.24	32.12	PK-U	37.5	-19.6	0	50.02	-	-	-	-	68.2	-18.18	360	238	V
6	14.246	32.35	PK-U	39.6	-19.4	0	52.55	-	-	-	-	68.2	-15.65	353	175	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

HIGH CHANNEL RESULTS

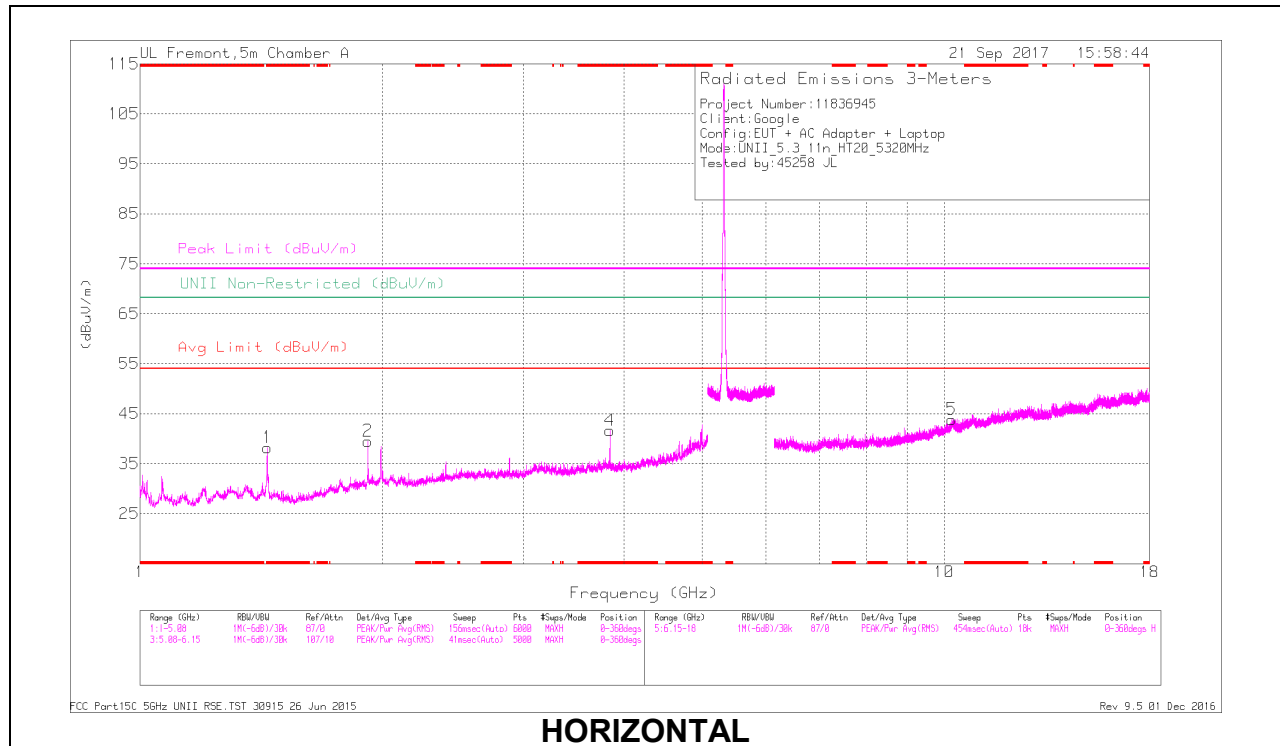

HORIZONTAL

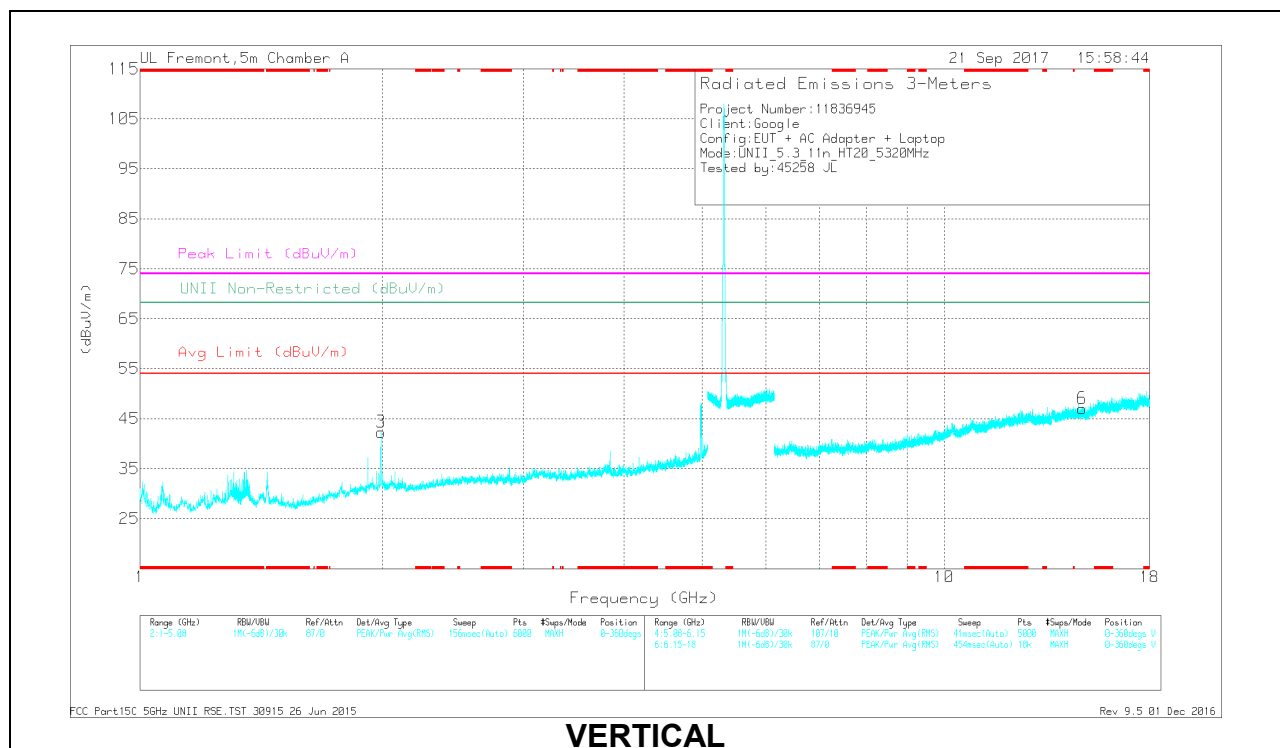

VERTICAL

RADIATED EMISSIONS

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	AF T862 (dB/m)	Amp/Ctrl/Filt/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.44	51.12	PK-U	28.7	-32.6	0	47.22	-	-	74	-26.78	-	-	71	175	H
	* 1.44	39.75	ADR	28.7	-32.6	0	35.85	54	-18.15	-	-	-	-	71	175	H
4	* 3.84	42.45	PK-U	33	-29.1	0	48.35	-	-	74	-27.65	-	-	325	343	H
	* 3.84	35.28	ADR	33	-29.1	0	39.16	54	-14.84	-	-	-	-	325	343	H
2	1.92	46.62	PK-U	31.2	-32.7	0	45.12	-	-	-	-	68.2	-23.08	270	198	H
3	1.994	53.09	PK-U	31.4	-31.9	0	52.59	-	-	-	-	68.2	-15.61	247	342	V
5	10.219	32.33	PK-U	37.5	-20	0	49.83	-	-	-	-	68.2	-18.37	217	194	H
6	14.842	32.08	PK-U	39.9	-19	0	52.98	-	-	-	-	68.2	-15.22	318	242	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

2TX Chain 0 + Chain 1 CDD MODE

BANDEDGE (HIGH CHANNEL)

HORIZONTAL RESULT

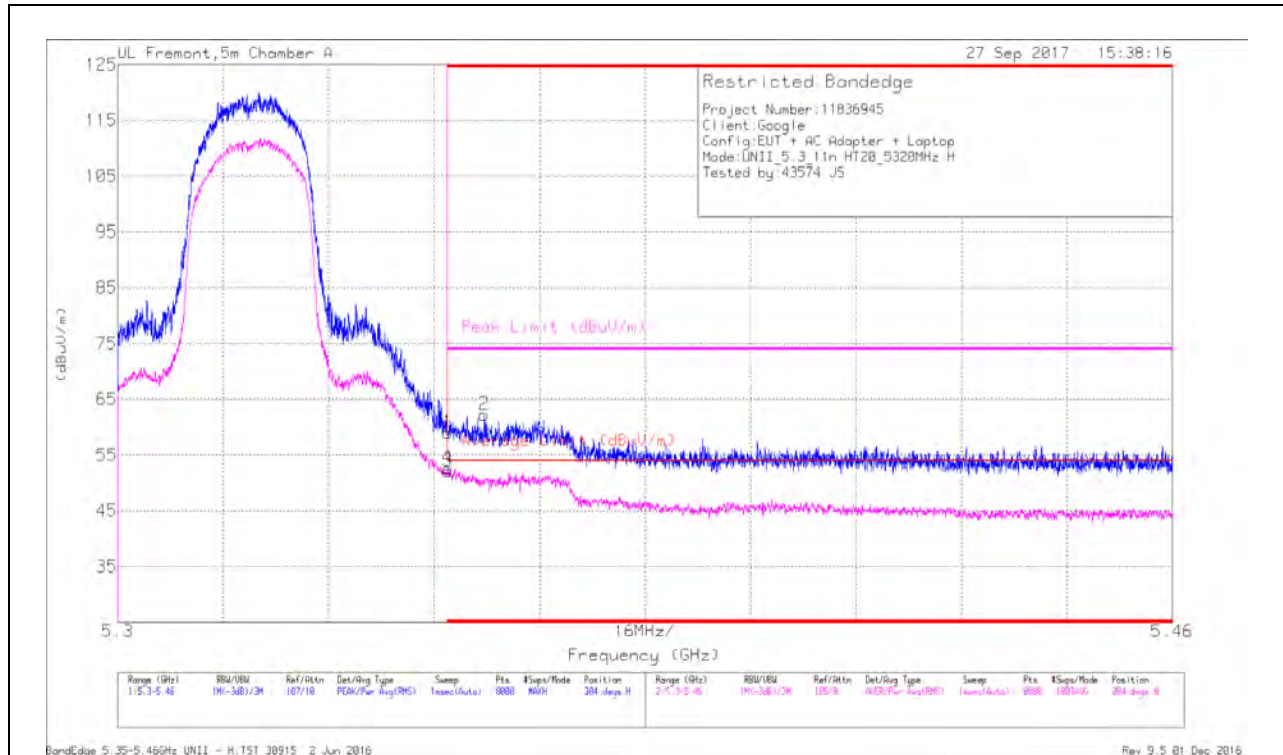


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T662 (dBm)	Amp/CbI/Ftr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35	42.63	Pk	34.6	-18.3	0	58.93	-	-	74	-15.07	304	287	H
3	* 5.35	35.86	RMS	34.6	-18.3	0	52.16	54	-1.84	-	-	304	287	H
4	* 5.35	36.32	RMS	34.6	-18.3	0	52.62	54	-1.38	-	-	304	287	H
2	* 5.356	45.94	Pk	34.6	-18.3	0	62.24	-	-	74	-11.76	304	287	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

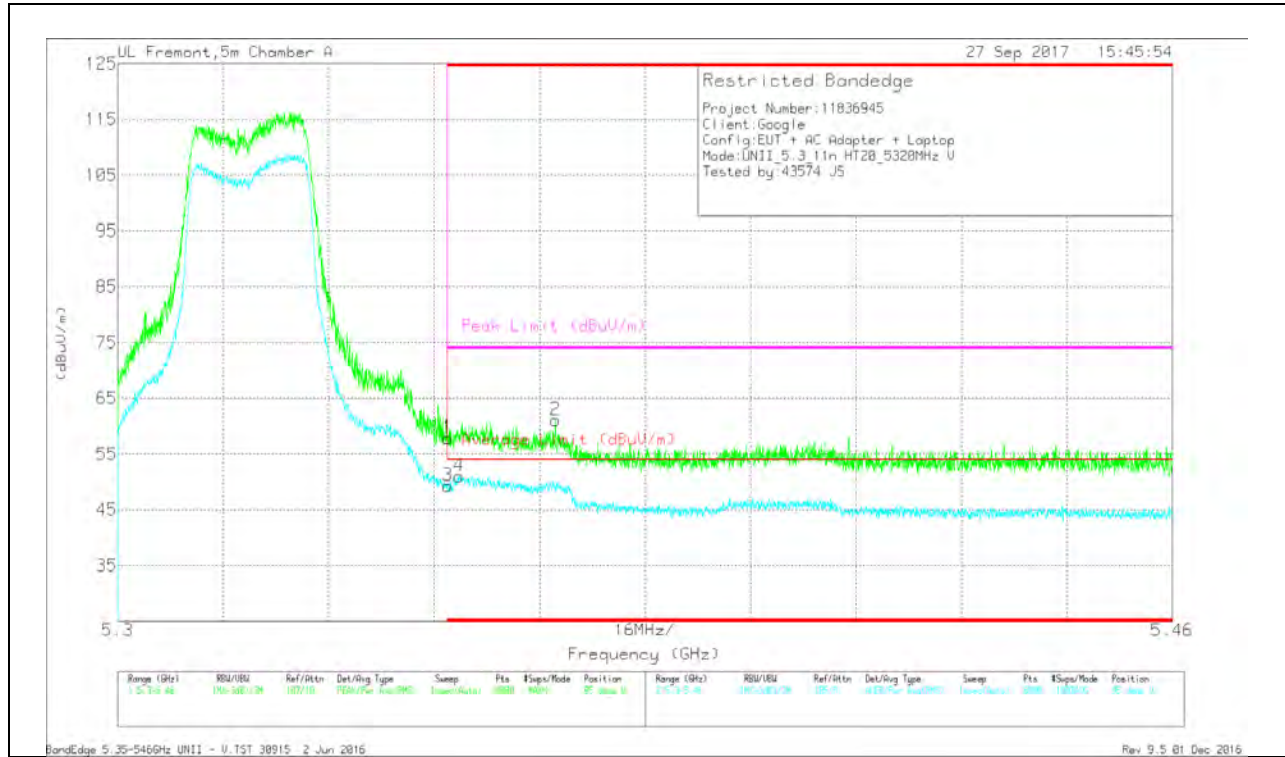

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF Y662 (dBm)	Amp/CbI/Ftr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Acimuth (Dege)	Height (cm)	Polarity
1	* 5.35	41.58	Pk	34.6	-18.3	0	57.88	-	-	74	-16.12	95	269	V
3	* 5.35	32.97	RMS	34.6	-18.3	0	49.27	54	-4.73	-	-	95	269	V
4	* 5.352	34.76	RMS	34.6	-18.3	0	51.06	54	-2.94	-	-	95	269	V
2	* 5.366	44.9	Pk	34.6	-18.4	0	61.1	-	-	74	-12.9	95	269	V



* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL RESULTS

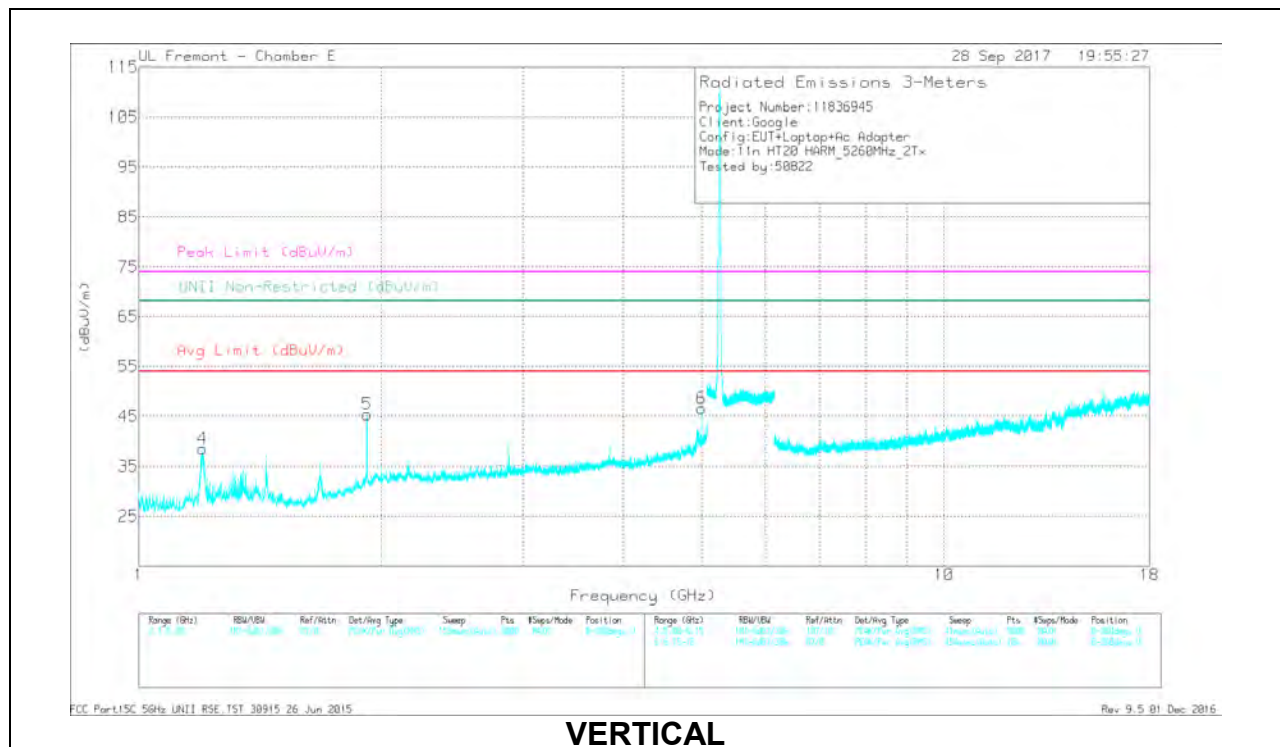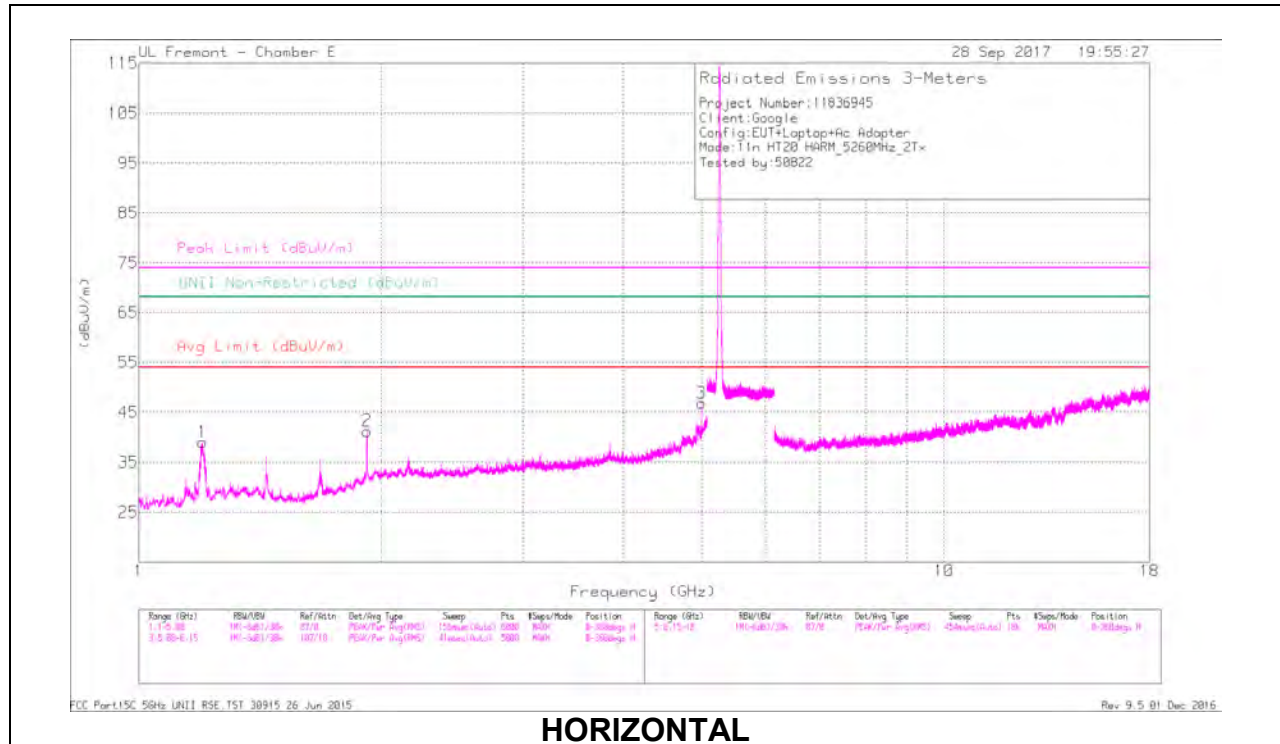

RADIATED EMISSIONS



Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cbl/Ftr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNR Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.198	58.37	PK-U	27.9	-35.2	0	51.07	-	-	74	-22.93	-	-	55	121	H
	* 1.2	40.93	ADR	28	-35.2	0	33.73	54	-20.27	-	-	-	-	55	121	H
3	* 5	49.37	PK-U	34.5	-28.4	0	54.47	-	-	74	-19.53	-	-	178	174	H
	* 5	39.65	ADR	34.5	-28.4	0	45.75	54	-8.25	-	-	-	-	178	174	H
4	* 1.2	55.79	PK-U	28	-35.2	0	48.59	-	-	74	-25.41	-	-	74	109	V
	* 1.2	40.53	ADR	28	-35.2	0	33.33	54	-20.67	-	-	-	-	74	109	V
6	* 5	48.47	PK-U	34.5	-28.4	0	54.57	-	-	74	-19.43	-	-	119	310	V
	* 5	40.2	ADR	34.5	-28.4	0	46.3	54	-7.7	-	-	-	-	119	310	V
2	1.92	49.6	PK-U	31.1	-32.8	0	47.9	-	-	-	-	68.2	-20.3	356	216	H
5	1.92	51.13	PK-U	31.1	-32.8	0	49.43	-	-	-	-	68.2	-18.77	24	194	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

MID CHANNEL RESULTS

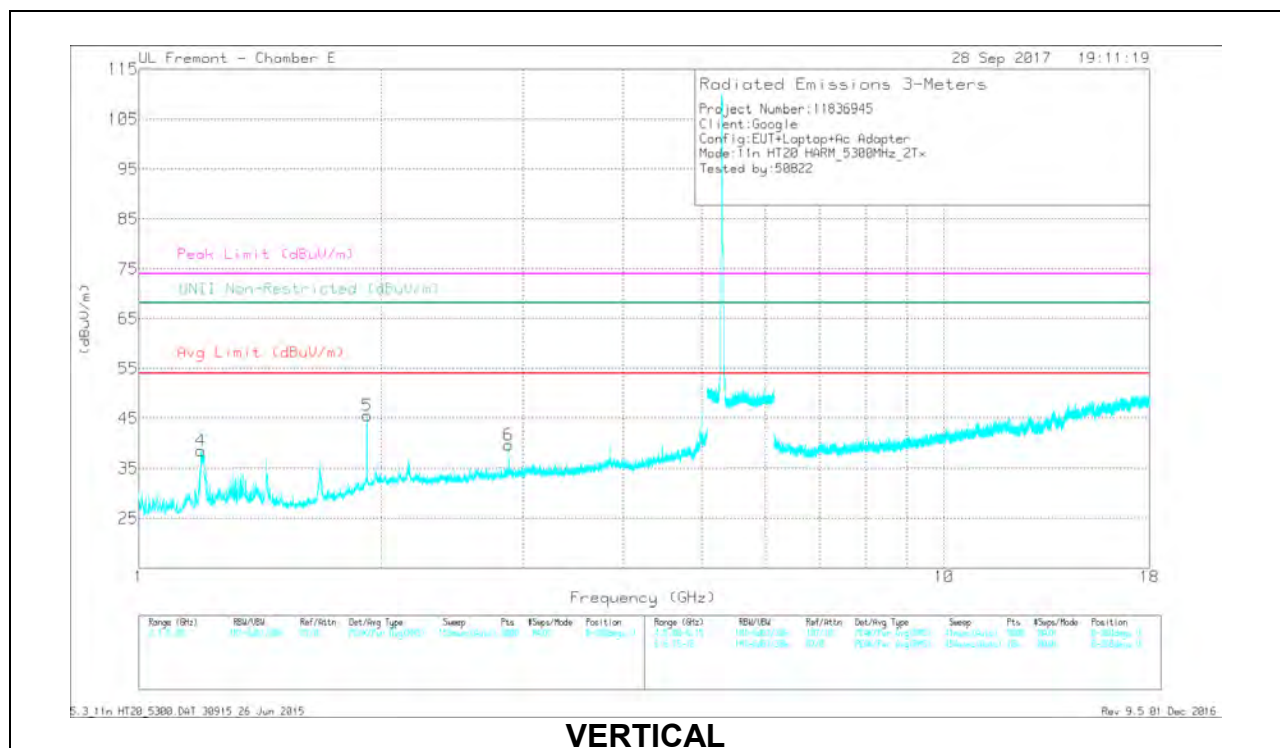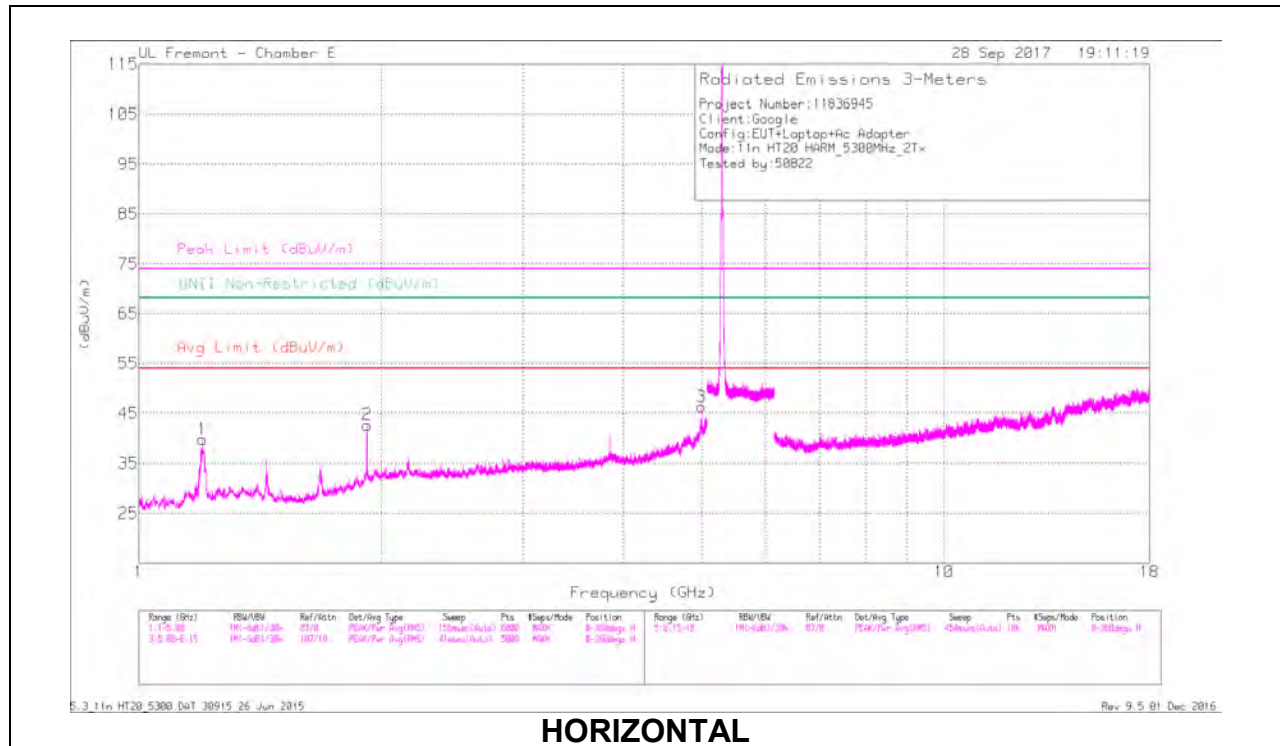

RADIATED EMISSIONS



Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cbl/Ftr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNR Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.2	56.22	PK-U	28	-35.2	0	49.02	-	-	74	-24.98	-	-	33	194	H
	* 1.2	40.32	ADR	28	-35.2	0	33.12	54	-20.88	-	-	-	-	33	194	H
3	* 4.999	46.61	PK-U	34.5	-28.4	0	52.71	-	-	74	-21.29	-	-	166	209	H
	* 5	38.43	ADR	34.5	-28.4	0	44.53	54	-9.47	-	-	-	-	166	209	H
4	* 1.194	55.02	PK-U	27.9	-35.2	0	47.72	-	-	74	-26.28	-	-	58	107	V
	* 1.194	37.73	ADR	27.9	-35.2	0	30.43	54	-23.57	-	-	-	-	58	107	V
6	* 2.88	43.94	PK-U	32.8	-30.9	0	45.84	-	-	74	-28.16	-	-	56	105	V
	* 2.88	37.05	ADR	32.8	-30.9	0	38.95	54	-15.05	-	-	-	-	56	105	V
2	1.92	49.1	PK-U	31.1	-32.8	0	47.4	-	-	-	-	68.2	-20.8	356	252	H
5	1.92	50.8	PK-U	31.1	-32.8	0	49.1	-	-	-	-	68.2	-19.1	24	191	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

HIGH CHANNEL RESULTS

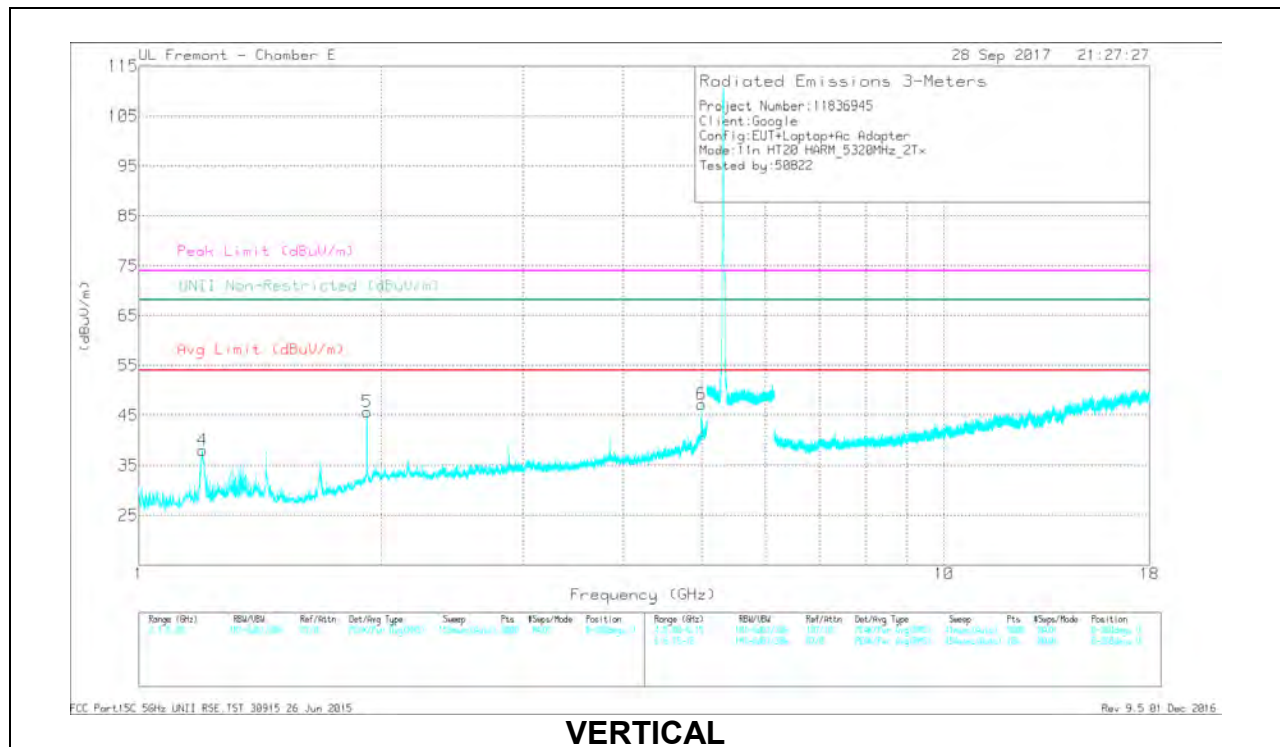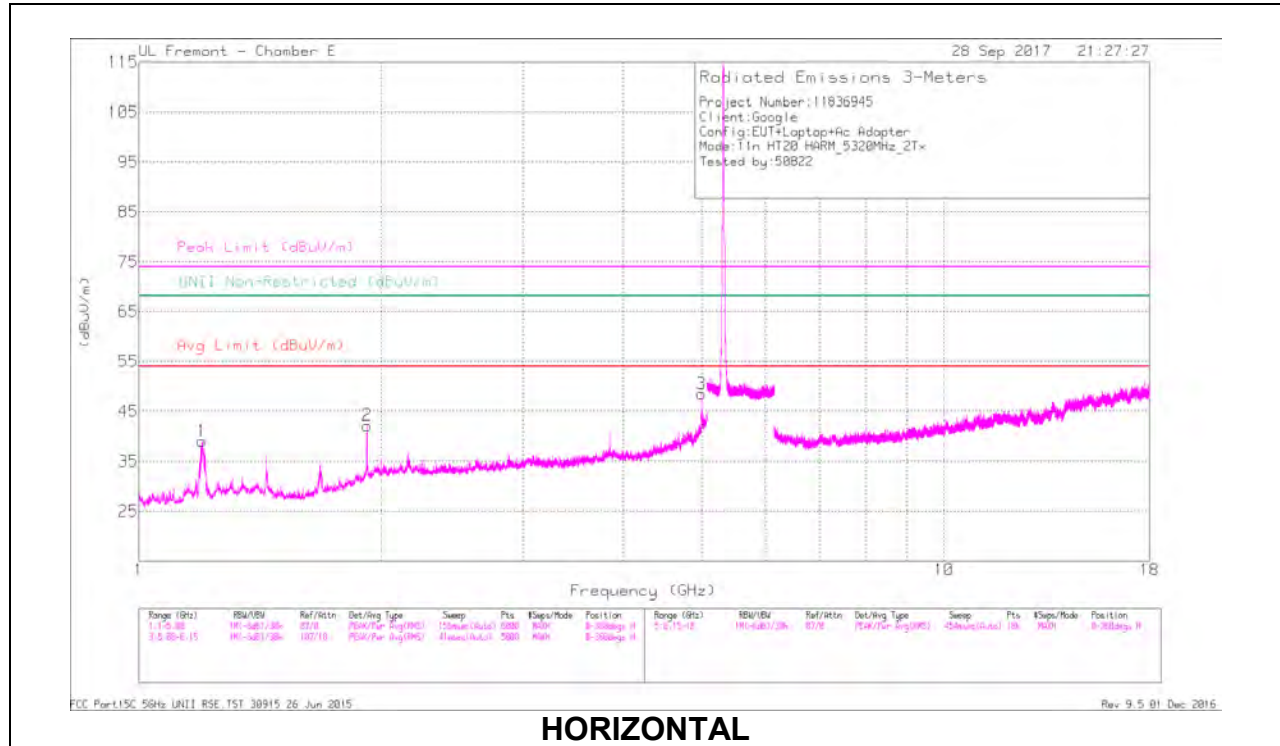

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cable/Ftr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNR Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.197	57.11	PK-U	27.9	-35.2	0	49.81	-	-	74	-24.19	-	-	61	184	H
	* 1.197	40.84	ADR	27.9	-35.2	0	33.54	54	-20.46	-	-	-	-	61	184	H
3	* 5	49.87	PK-U	34.5	-28.4	0	54.97	-	-	74	-19.03	-	-	172	136	H
	* 5	40.16	ADR	34.5	-28.4	0	46.26	54	-7.74	-	-	-	-	172	136	H
4	* 1.2	55.69	PK-U	28	-35.2	0	48.49	-	-	74	-25.51	-	-	61	132	V
	* 1.2	40.25	ADR	28	-35.2	0	33.05	54	-20.95	-	-	-	-	61	132	V
6	* 5	50.95	PK-U	34.5	-28.4	0	57.05	-	-	74	-16.95	-	-	124	314	V
	* 5	41.83	ADR	34.5	-28.4	0	47.93	54	-6.07	-	-	-	-	124	314	V
2	1.92	50.01	PK-U	31.1	-32.8	0	48.31	-	-	-	-	68.2	-19.89	353	250	H
5	1.92	51.15	PK-U	31.1	-32.8	0	49.45	-	-	-	-	68.2	-18.75	25	191	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak


ADR - U-NII AD primary method, RMS average

9.1.7. TX ABOVE 1 GHz 802.11n HT40 MODE IN THE 5.3 GHz BAND

1TX Chain 0

BANDEDGE (HIGH CHANNEL)

HORIZONTAL RESULT

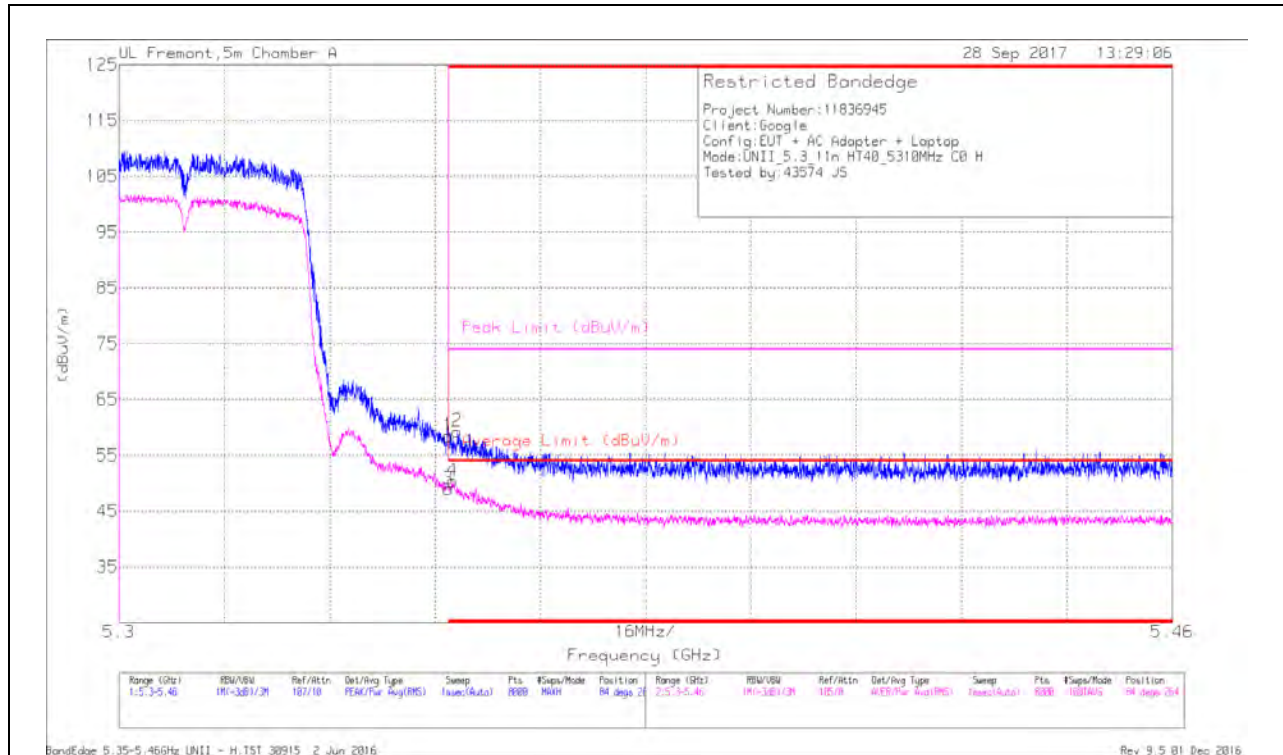


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T862 (dBm)	Amp/Cb/Fltr/Psd (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35	42.16	Pk	34.6	-18.3	0	59.46	-	-	74	-15.54	84	264	H
3	* 5.35	32.49	RMS	34.6	-18.3	.17	48.96	54	-5.04	-	-	84	264	H
2	* 5.351	42.97	Pk	34.6	-18.3	0	59.27	-	-	74	-14.73	84	264	H
4	* 5.351	34.03	RMS	34.6	-18.4	.17	50.4	54	-3.6	-	-	84	264	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

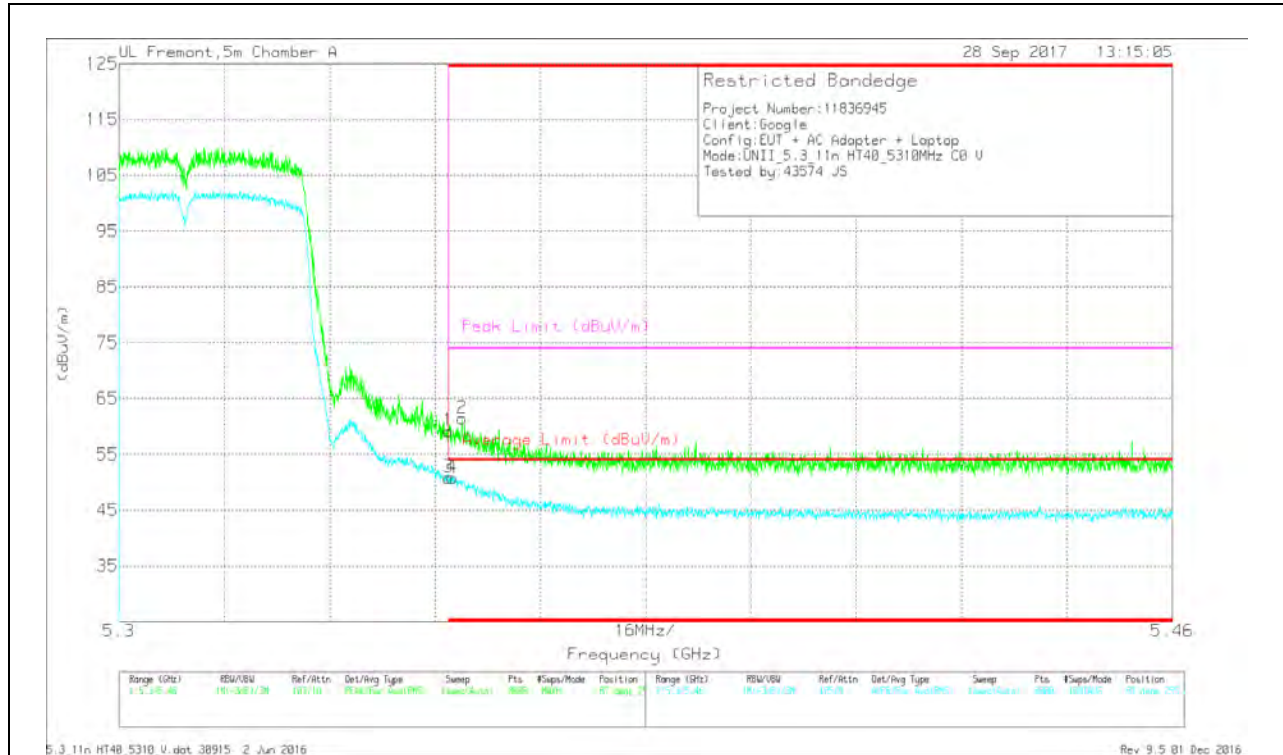

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T662 (dBm)	Amp/CbI/Ftr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Acimuth (Dege)	Height (cm)	Polarity
1	* 5.35	42.88	Pk	34.6	-18.3	0	59.18	-	-	74	-14.82	87	255	V
3	* 5.35	34.57	RMS	34.6	-18.3	.17	51.04	54	-2.96	-	-	87	255	V
4	* 5.351	34.6	RMS	34.6	-18.4	.17	50.97	54	-3.03	-	-	87	255	V
2	* 5.352	45.13	Pk	34.6	-18.3	0	61.43	-	-	74	-12.57	87	255	V



* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL RESULTS

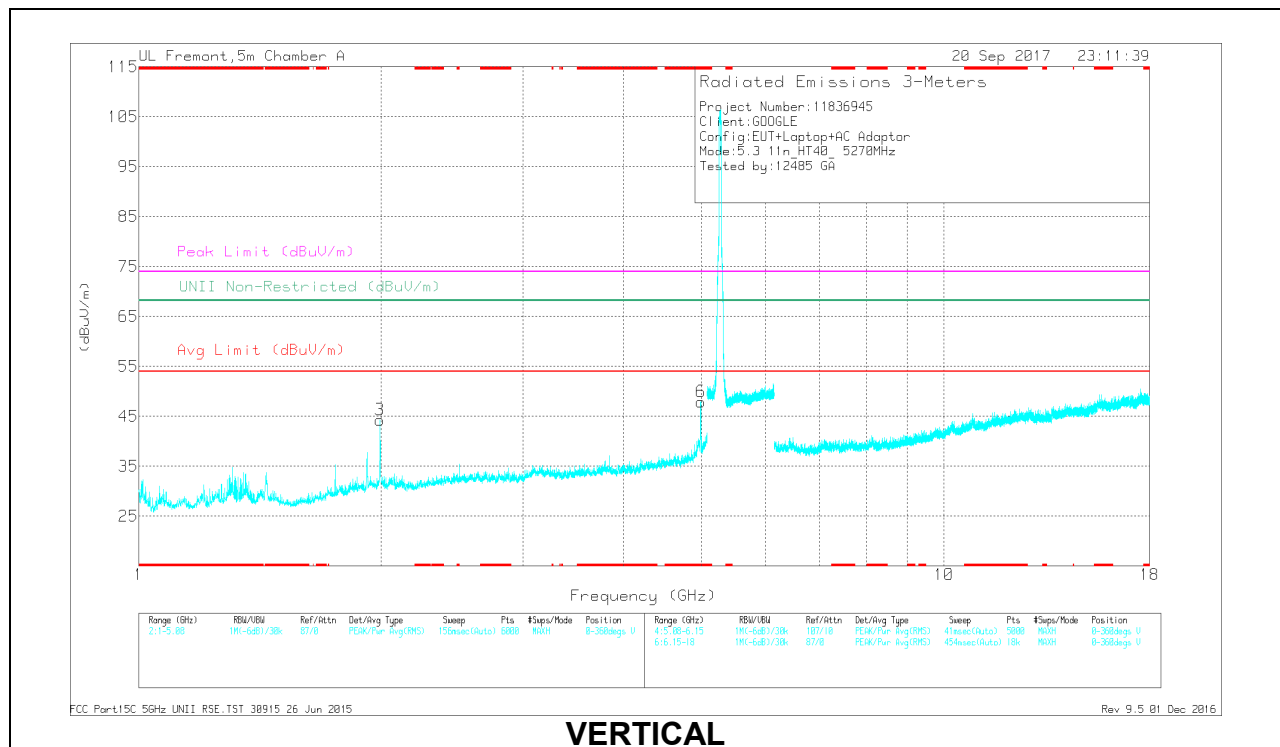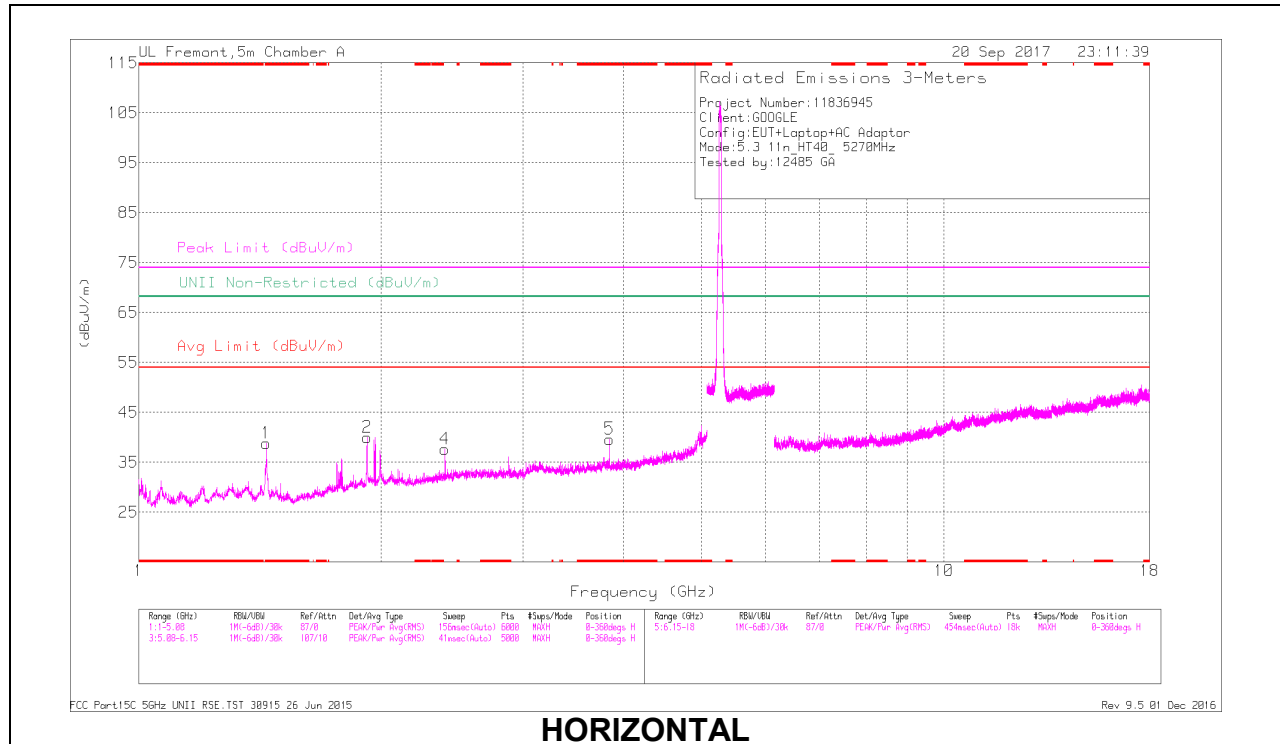

RADIATED EMISSIONS



Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	AF T862 (dB/m)	Amp/Ctrl/Filt/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.44	54.39	PK-U	28.7	-32.6	0	50.49	-	-	74	-23.51	-	-	200	112	H
	* 1.44	42.06	ADR	28.7	-32.6	.17	38.33	54	-15.67	-	-	-	-	200	112	H
5	* 3.84	41.83	PK-U	33	-29.1	0	45.73	-	-	74	-28.27	-	-	201	231	H
	* 3.84	35.33	ADR	33	-29.1	.17	39.4	54	-14.6	-	-	-	-	201	231	H
6	* 4.988	45.43	PK-U	34.3	-26.7	0	53.03	-	-	74	-20.97	-	-	183	214	V
	* 4.988	34.34	ADR	34.3	-26.7	.17	42.11	54	-11.89	-	-	-	-	183	214	V
2	1.92	45.66	PK-U	31.2	-32.7	0	44.16	-	-	-	-	68.2	-24.04	146	197	H
3	1.992	51.62	PK-U	31.4	-31.9	0	51.12	-	-	-	-	68.2	-17.08	338	196	V
4	2.4	42.38	PK-U	31.8	-31.5	0	42.68	-	-	-	-	68.2	-25.52	192	231	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

HIGH CHANNEL RESULTS

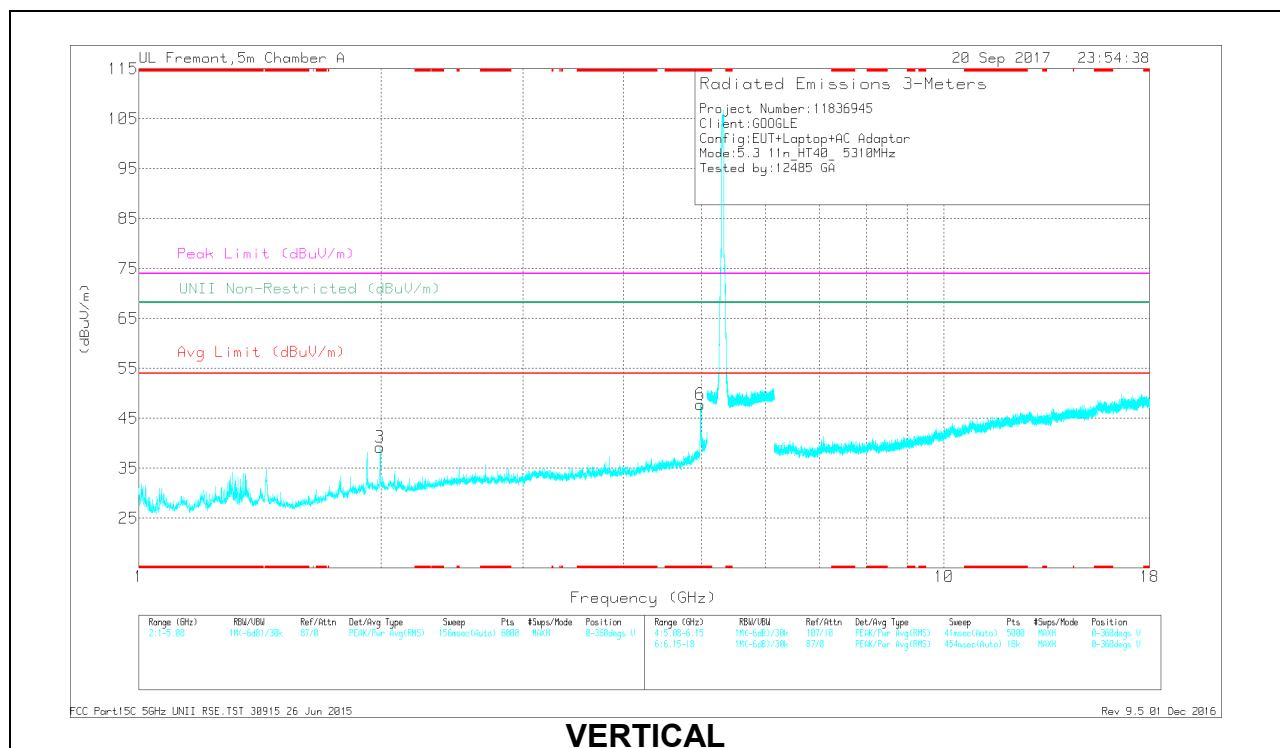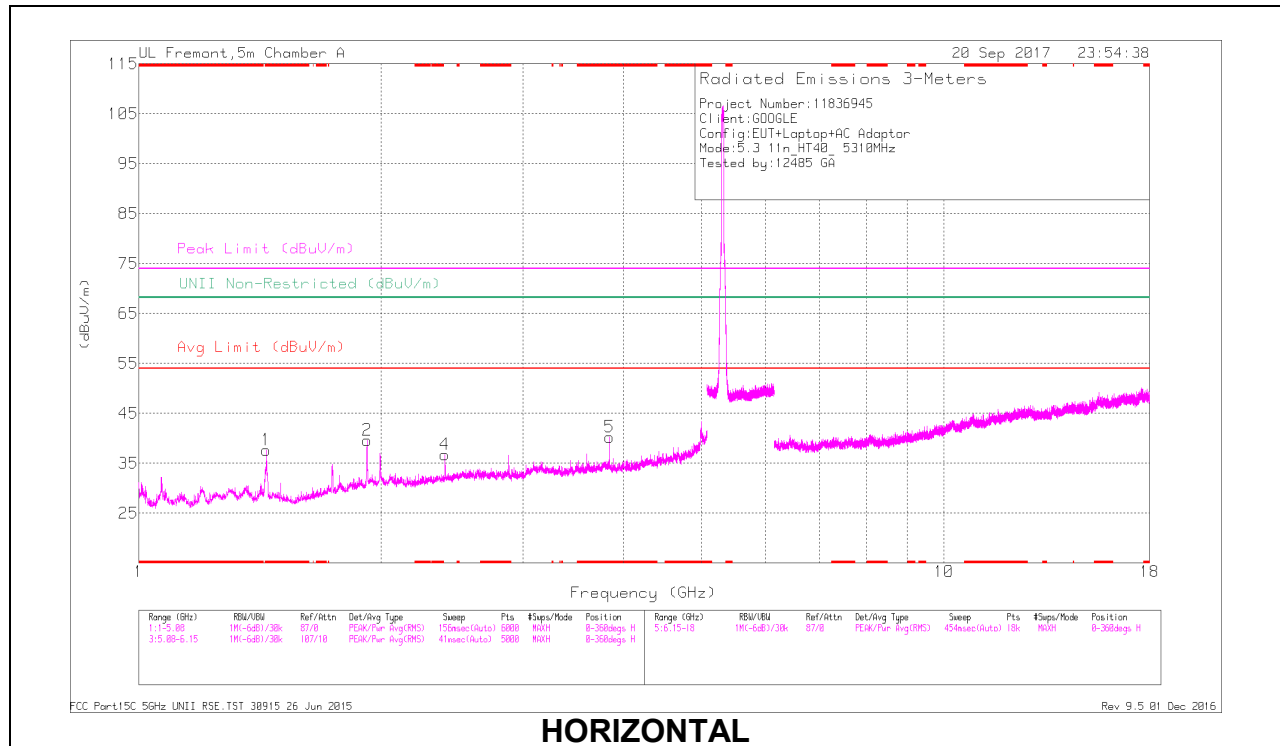

RADIATED EMISSIONS

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	AF T862 (dB/m)	Amp/Cbl/Ftr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.44	53.18	PK-U	28.7	-32.6	0	49.28	-	-	74	-24.72	-	-	202	112	H
	* 1.44	42.86	ADR	28.7	-32.6	.17	39.13	54	-14.87	-	-	-	-	202	112	H
5	* 3.841	41.35	PK-U	33	-29.1	0	45.25	-	-	74	-28.75	-	-	201	158	H
	* 3.84	35.33	ADR	33	-29.1	.17	39.4	54	-14.6	-	-	-	-	201	158	H
6	* 4.979	46.64	PK-U	34.3	-27	0	53.94	-	-	74	-20.06	-	-	257	216	V
	* 4.979	36.59	ADR	34.3	-27	.17	44.06	54	-9.94	-	-	-	-	257	216	V
2	1.92	46.11	PK-U	31.2	-32.7	0	44.61	-	-	-	-	68.2	-23.59	149	202	H
3	1.993	49.21	PK-U	31.4	-31.9	0	48.71	-	-	-	-	68.2	-19.49	78	204	V
4	2.4	42.46	PK-U	31.8	-31.5	0	42.76	-	-	-	-	68.2	-25.44	198	209	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

1TX Chain 1

BANDEDGE (HIGH CHANNEL)

HORIZONTAL RESULT

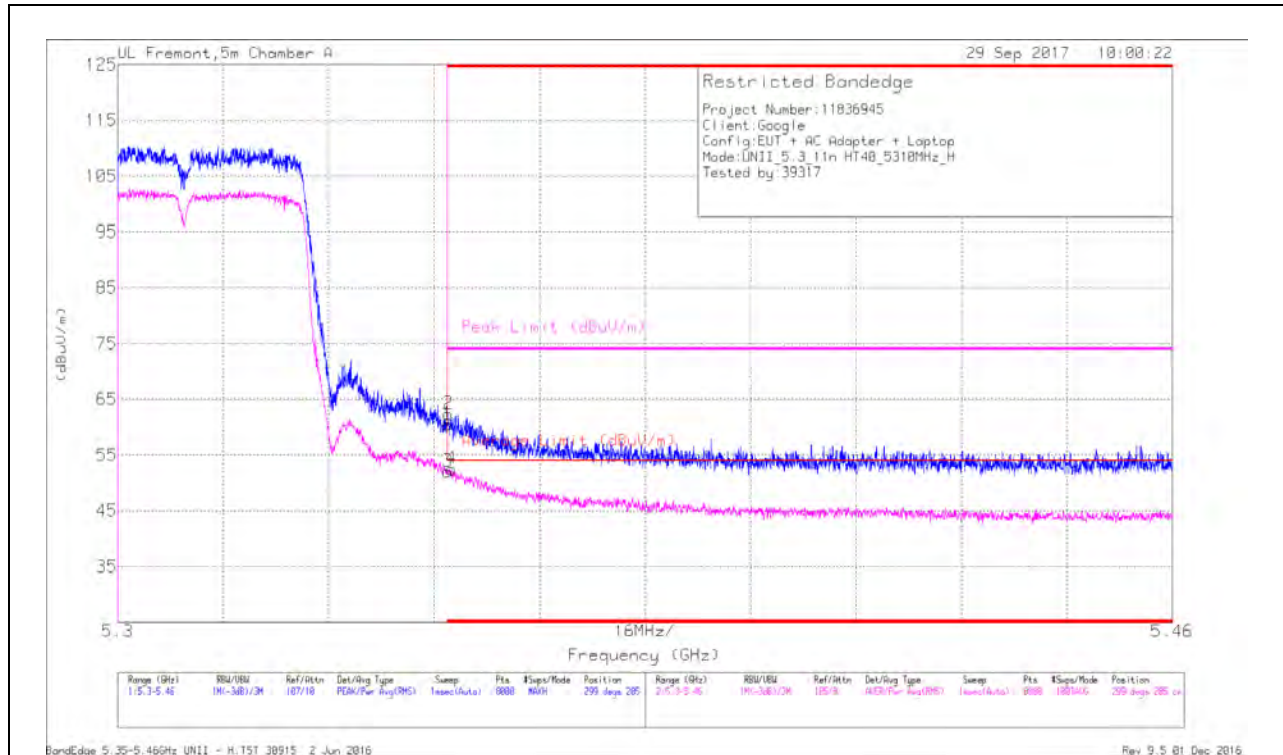


Marker	Frequenc y (GHz)	Meter Reading (dBuV)	Det	AF YB62 (dBm)	Amp/Cbl/Ftr/Pad (dB)	DC Corr (dB)	Correcte d Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35	44.15	Pk	34.6	-18.3	0	60.45	-	-	74	-13.55	299	285	H
2	* 5.35	46.06	Pk	34.6	-18.3	0	62.36	-	-	74	-11.64	299	285	H
3	* 5.35	35.63	RMS	34.6	-18.3	-12	52.05	54	-1.95	-	-	299	285	H
4	* 5.351	36.19	RMS	34.6	-18.4	-12	52.51	54	-1.49	-	-	299	285	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

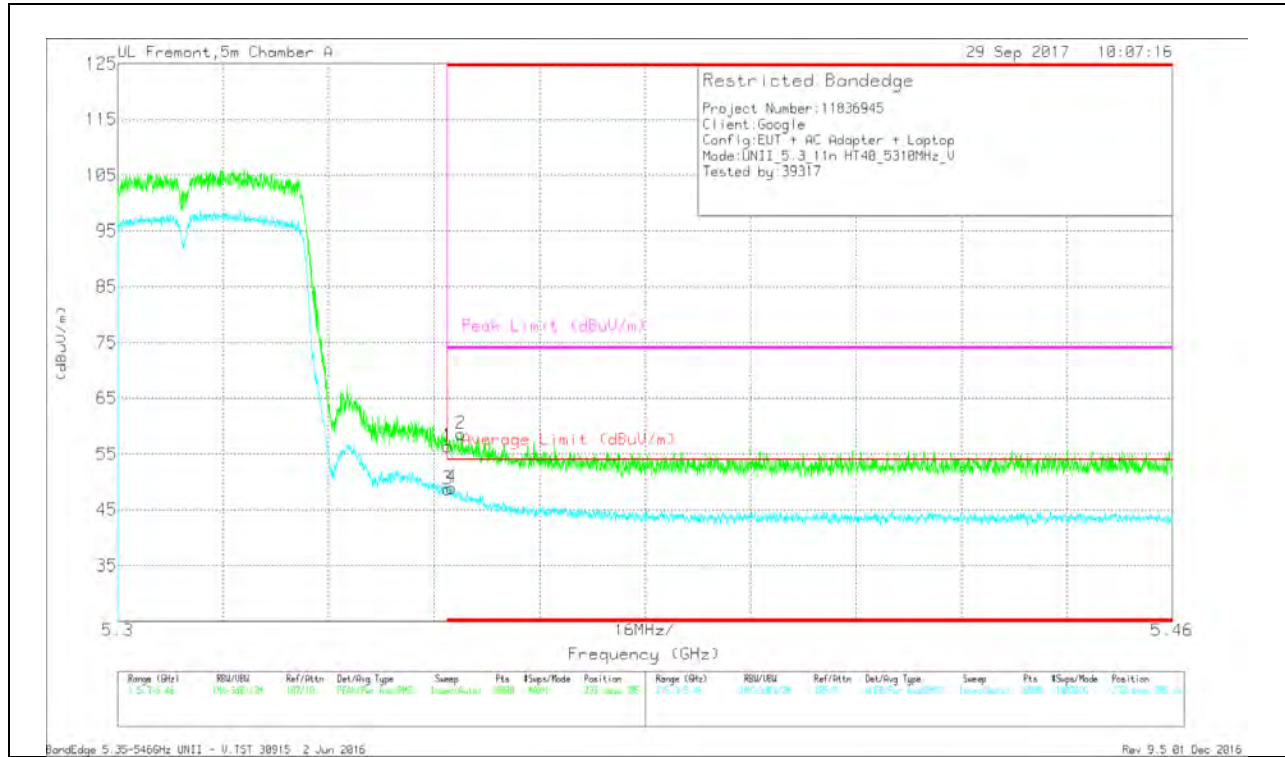

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF Y662 (dBm)	Amp/CbLFltr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Acimuth (Dege)	Height (cm)	Polarity
1	* 5.35	40.03	PK	34.6	-18.3	0	56.33	-	-	74	-17.67	233	385	V
3	* 5.35	32.31	RMS	34.6	-18.3	.12	48.73	54	-5.27	-	-	233	385	V
4	* 5.351	32.55	RMS	34.6	-18.4	.12	48.87	54	-5.13	-	-	233	385	V
2	* 5.352	42.31	PK	34.6	-18.3	0	58.61	-	-	74	-15.39	233	385	V



* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL RESULTS

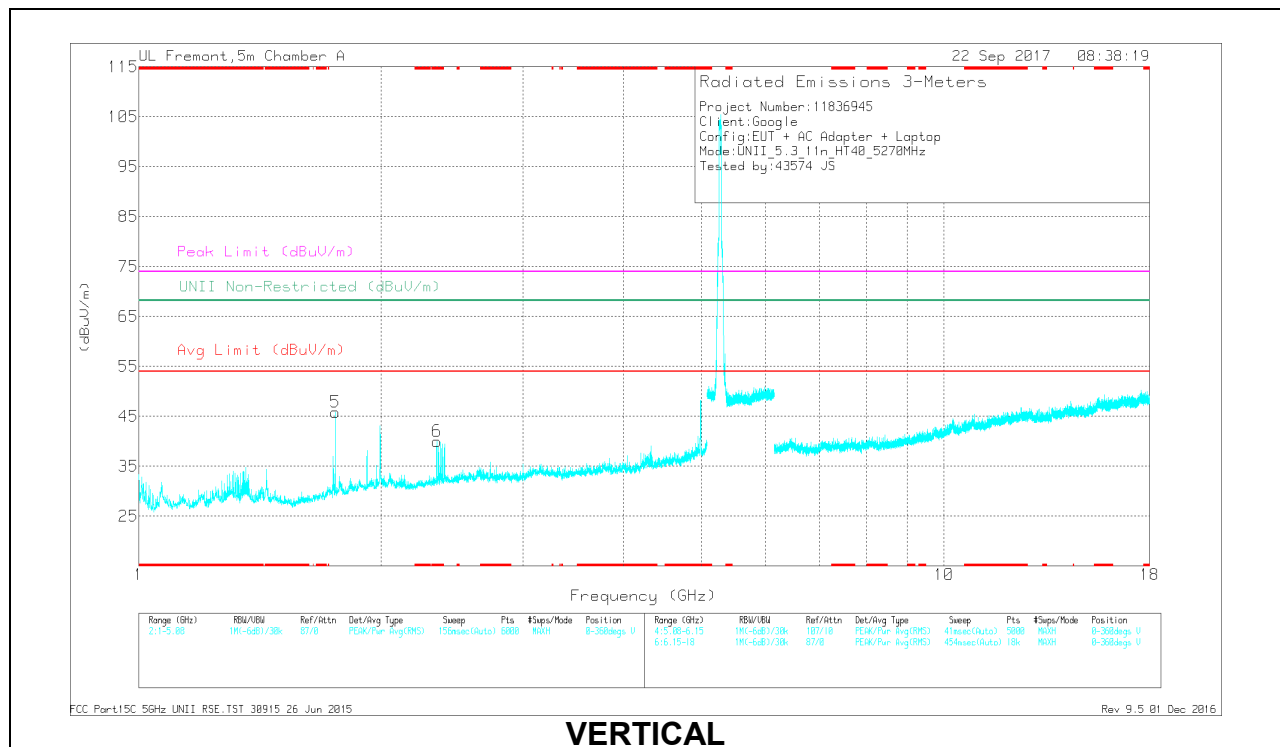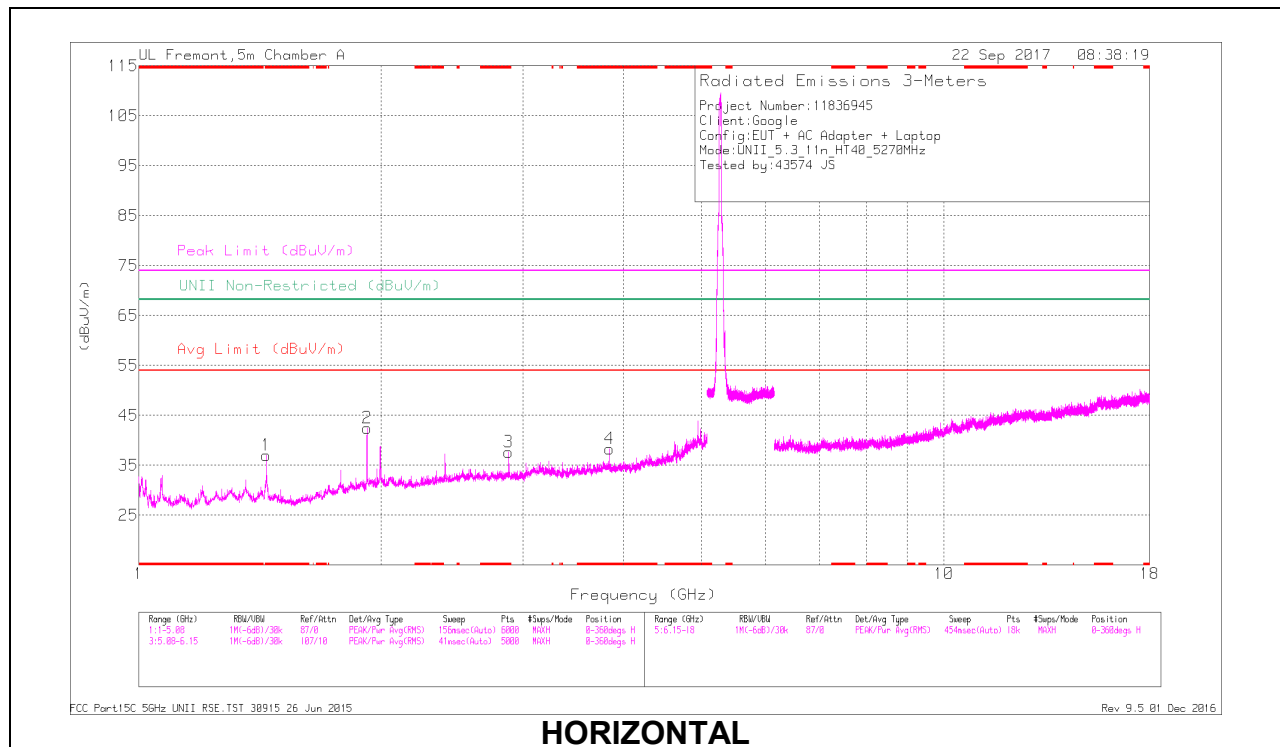

RADIATED EMISSIONS



Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	AF T862 (dB/m)	Amp/Ctrl/Filt/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.44	50.24	PK-U	28.7	-32.6	0	46.34	-	-	74	-27.66	-	-	169	212	H
	* 1.44	39.62	ADR	28.7	-32.6	.12	35.84	54	-18.16	-	-	-	-	169	212	H
3	* 2.88	41.05	PK-U	32.2	-30.6	0	42.65	-	-	74	-31.35	-	-	329	209	H
	* 2.88	33.88	ADR	32.2	-30.6	.12	35.6	54	-18.4	-	-	-	-	329	209	H
4	* 3.841	39.93	PK-U	33	-29.1	0	43.83	-	-	74	-30.17	-	-	15	117	H
	* 3.84	32.41	ADR	33	-29.1	.12	36.43	54	-17.57	-	-	-	-	15	117	H
6	* 2.343	39.1	PK-U	31.6	-31.4	0	39.3	-	-	74	-34.7	-	-	150	400	V
	* 2.344	27.29	ADR	31.6	-31.4	.12	27.61	54	-26.39	-	-	-	-	150	400	V
5	1.755	39.09	PK-U	29.8	-32.2	0	36.69	-	-	-	-	68.2	-31.51	334	368	V
2	1.92	47.11	PK-U	31.2	-32.7	0	45.61	-	-	-	-	68.2	-22.59	324	168	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

HIGH CHANNEL RESULTS

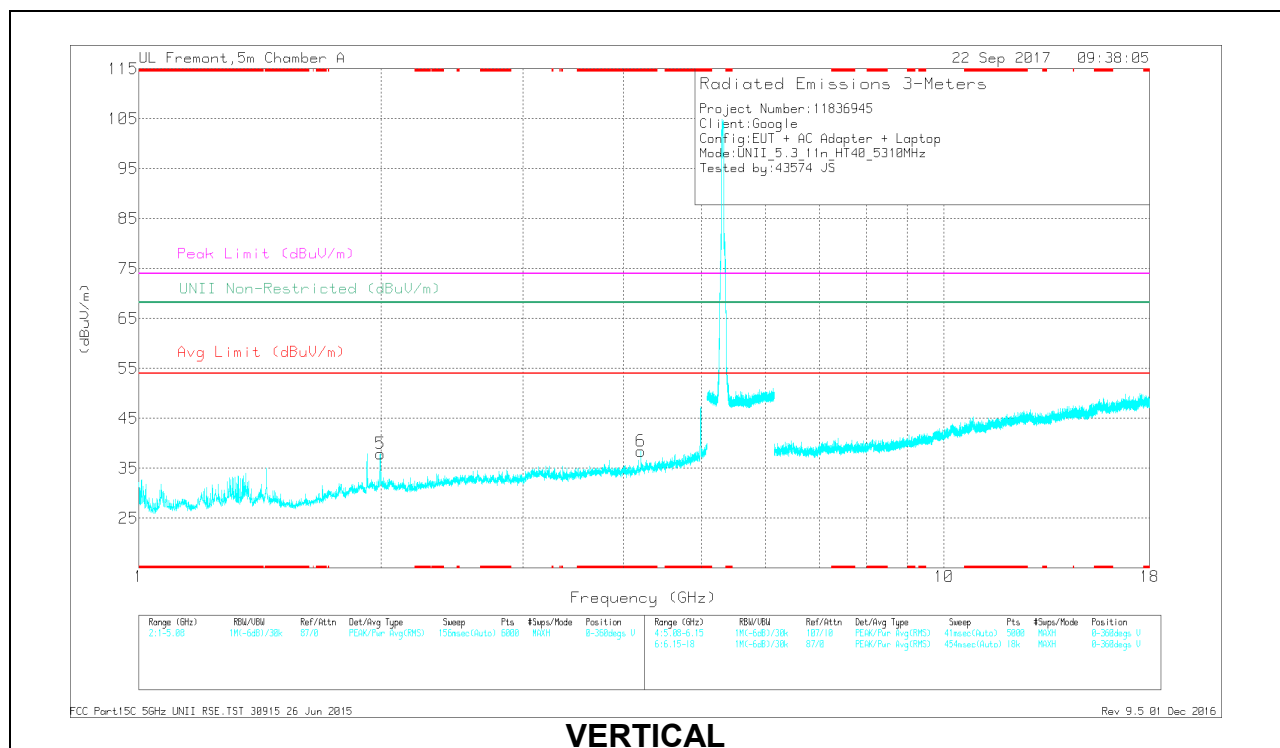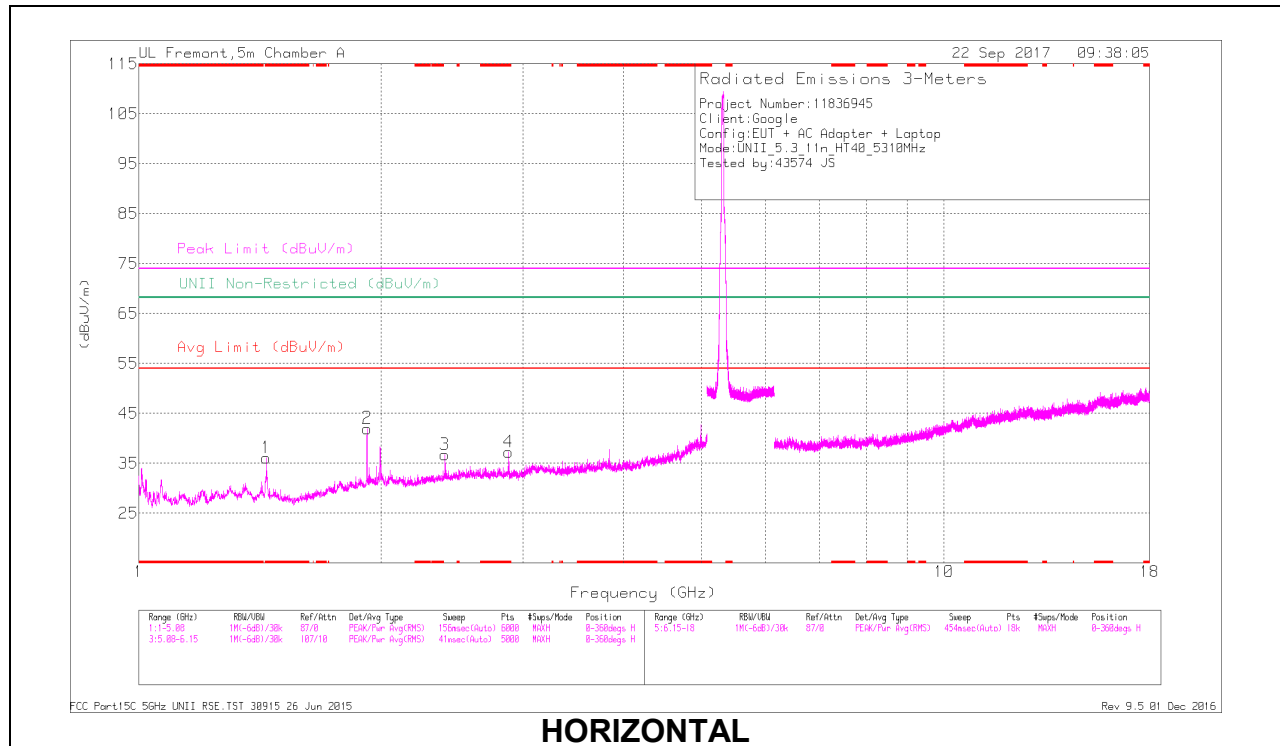

RADIATED EMISSIONS

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	AF T862 (dB/m)	Amp/Ctrl/Filt/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.44	50.67	PK-U	28.7	-32.6	0	46.77	-	-	74	-27.23	-	-	167	210	H
	* 1.44	38.36	ADR	28.7	-32.6	.12	34.58	54	-19.42	-	-	-	-	167	210	H
4	* 2.88	41.35	PK-U	32.2	-30.6	0	42.95	-	-	74	-31.06	-	-	334	143	H
	* 2.88	34.61	ADR	32.2	-30.6	.12	36.33	54	-17.67	-	-	-	-	334	143	H
6	* 4.203	37.5	PK-U	33.4	-28.6	0	42.3	-	-	74	-31.7	-	-	259	397	V
	* 4.203	25.56	ADR	33.4	-28.6	.12	30.48	54	-23.52	-	-	-	-	259	397	V
2	1.92	47.76	PK-U	31.2	-32.7	0	46.26	-	-	-	-	68.2	-21.94	325	159	H
5	1.994	47.16	PK-U	31.4	-31.9	0	46.66	-	-	-	-	68.2	-21.54	304	169	V
3	2.4	42.68	PK-U	31.8	-31.5	0	42.98	-	-	-	-	68.2	-25.22	349	205	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

2TX Chain 0 + Chain 1 CDD MODE

BANDEDGE (HIGH CHANNEL)

HORIZONTAL RESULT

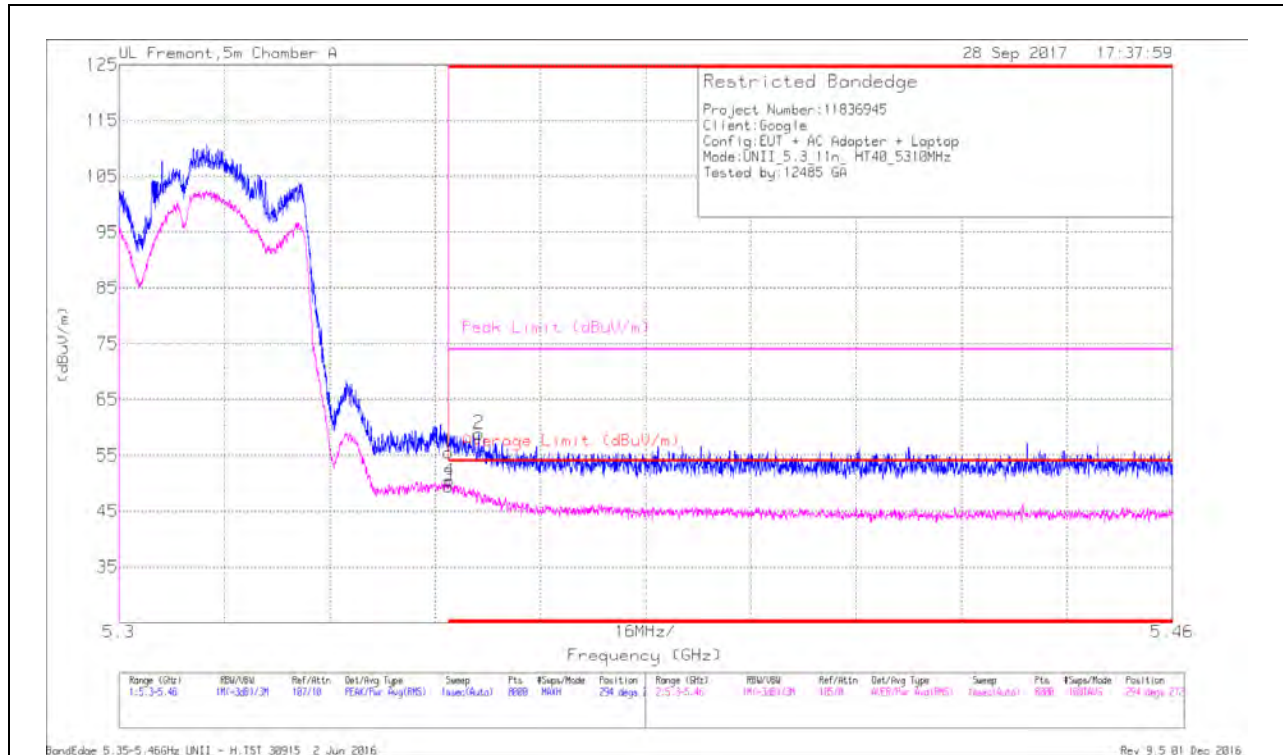


Marker	Frequency (GHz)	Meter Reading (dBuV)	Dot	AF T862 (dBm)	Amp/CbIFtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35	39.23	Pk	34.6	-18.3	0	55.53	-	-	74	-18.47	294	272	H
3	* 5.35	33.01	RMS	34.6	-18.3	.14	49.45	54	-4.55	-	-	294	272	H
4	* 5.35	34	RMS	34.6	-18.3	.14	50.44	54	-3.56	-	-	294	272	H
2	* 5.355	42.62	Pk	34.6	-18.3	0	58.92	-	-	74	-15.08	294	272	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

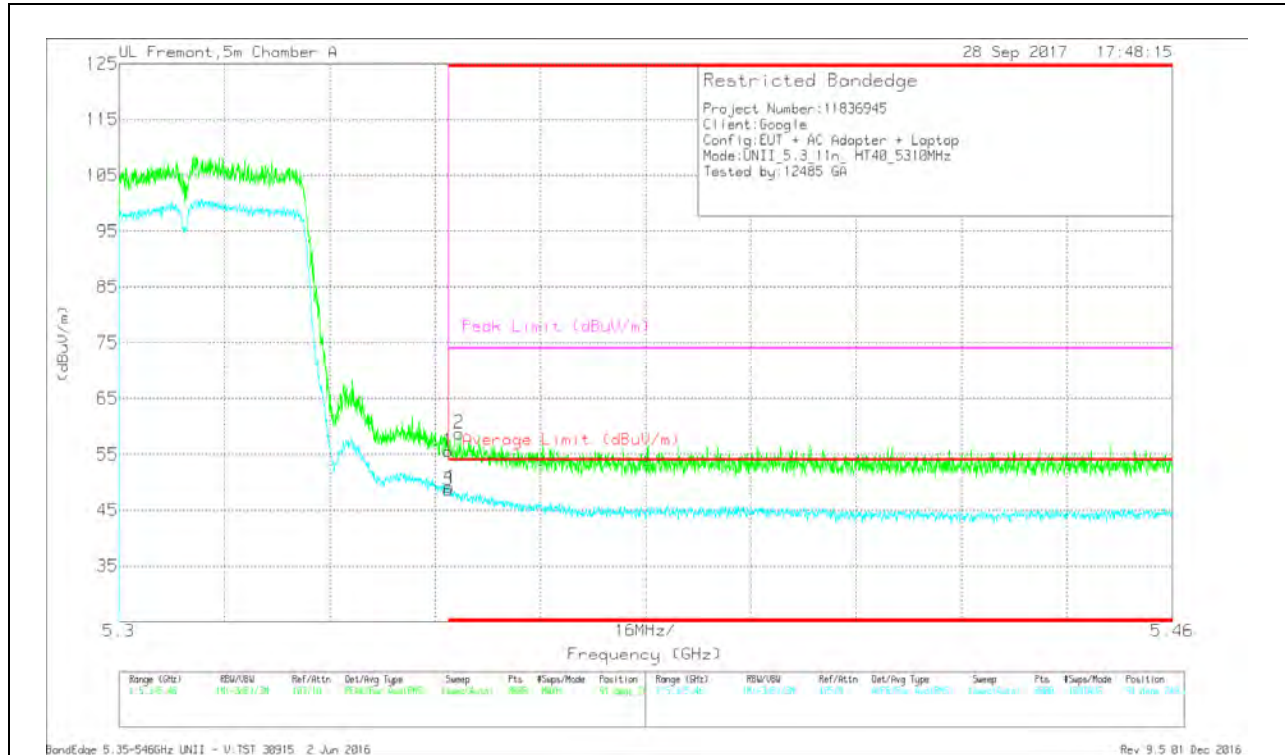

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T662 (dBm)	Amp/CbI/Ftr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Acimuth (Dege)	Height (cm)	Polarity
1	* 5.35	39.28	Pk	34.6	-18.3	0	55.58	-	-	74	-18.42	91	249	V
3	* 5.35	32.16	RMS	34.6	-18.3	.14	48.6	54	-5.4	-	-	91	249	V
4	* 5.35	32.66	RMS	34.6	-18.3	.14	49.1	54	-4.9	-	-	91	249	V
2	* 5.352	42.47	Pk	34.6	-18.3	0	58.77	-	-	74	-15.23	91	249	V



* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL RESULTS

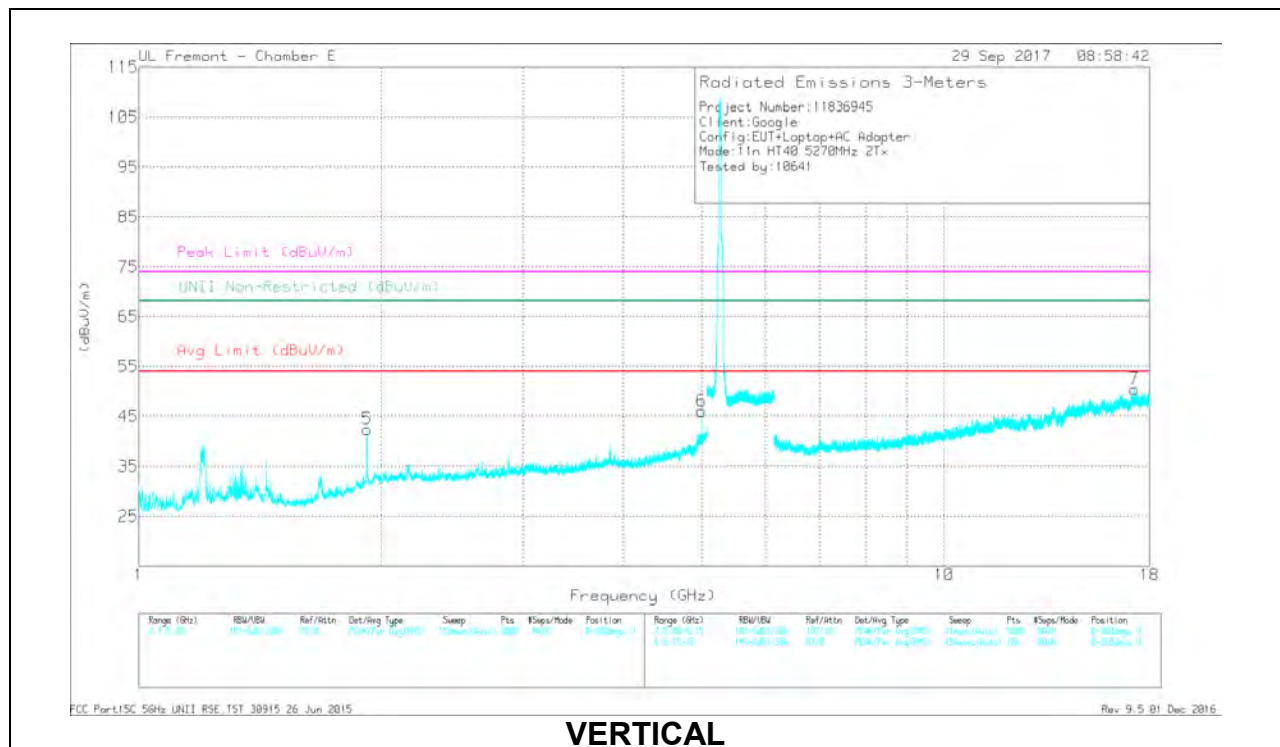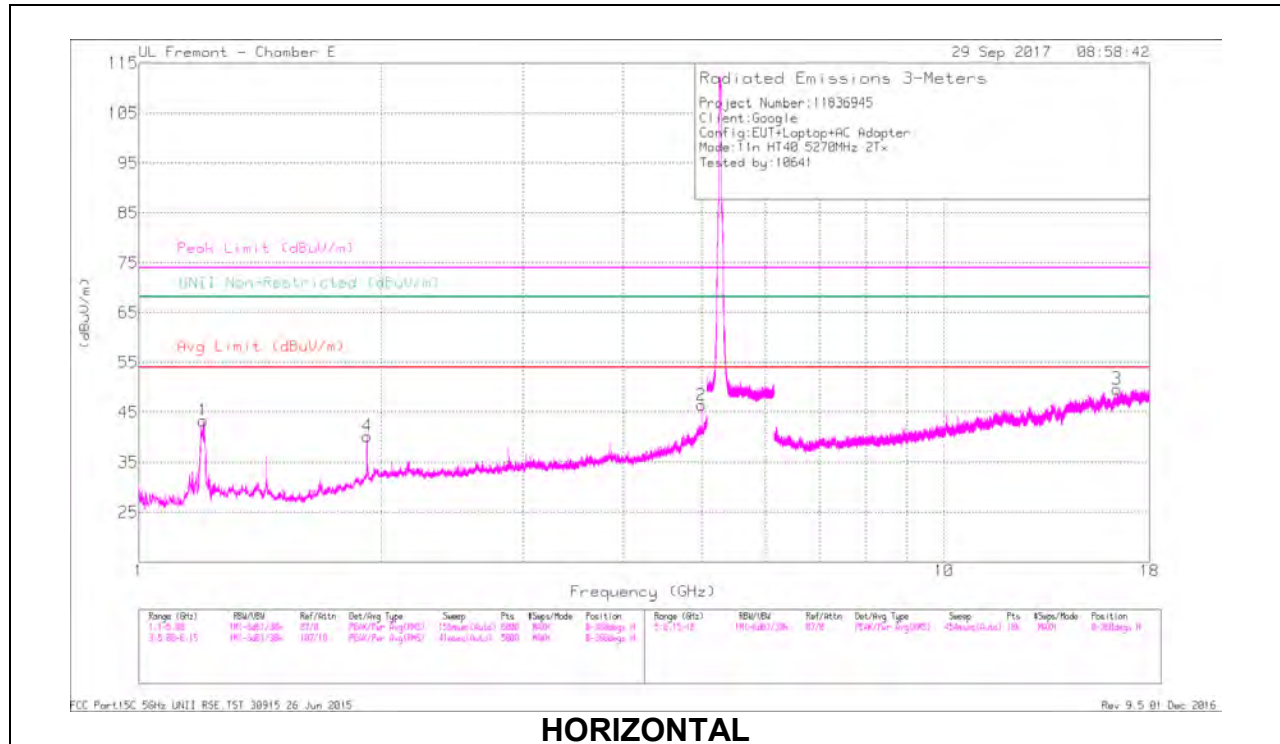

RADIATED EMISSIONS



Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/CbAtt/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNR Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.203	55.31	PK-U	28	-35.2	0	48.11	-	-	74	-25.89	-	-	275	196	H
	* 1.202	39.17	ADR	28	-35.2	14	32.11	54	-21.89	-	-	-	-	275	196	H
2	* 5	47.09	PK-U	34.5	-28.4	0	53.19	-	-	74	-20.81	-	-	203	146	H
	* 5	38.75	ADR	34.5	-28.4	14	44.99	54	-9.01	-	-	-	-	203	146	H
6	* 5	48.61	PK-U	34.5	-28.4	0	54.71	-	-	74	-19.29	-	-	121	285	V
	* 5	39.69	ADR	34.5	-28.4	14	45.93	54	-8.07	-	-	-	-	121	285	V
4	1.92	46.59	PK-U	31.1	-32.8	0	44.89	-	-	-	-	68.2	-23.31	169	101	H
5	1.92	48.81	PK-U	31.1	-32.8	0	47.11	-	-	-	-	68.2	-21.09	144	200	V
3	16.393	36.16	PK-U	41.1	-22	0	55.26	-	-	-	-	68.2	-12.94	67	254	H
7	17.236	34.75	PK-U	41.8	-21	0	55.55	-	-	-	-	68.2	-12.65	0	320	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

HIGH CHANNEL RESULTS

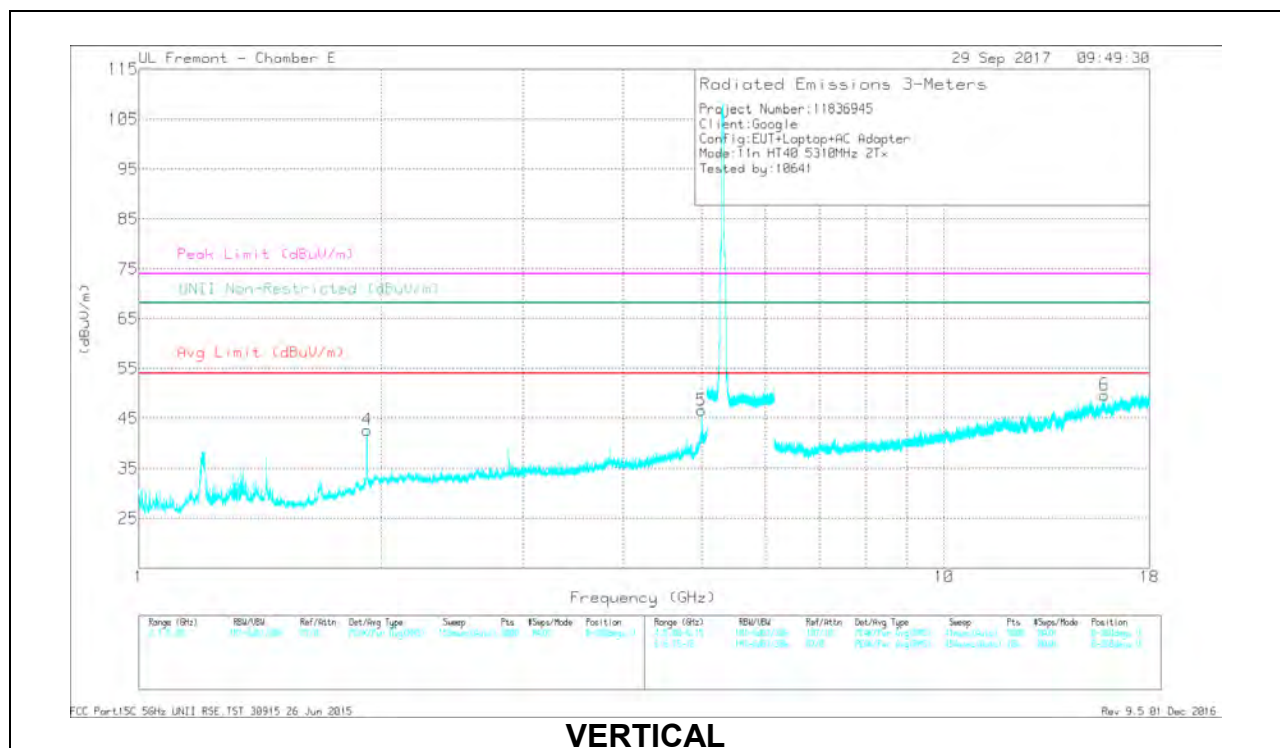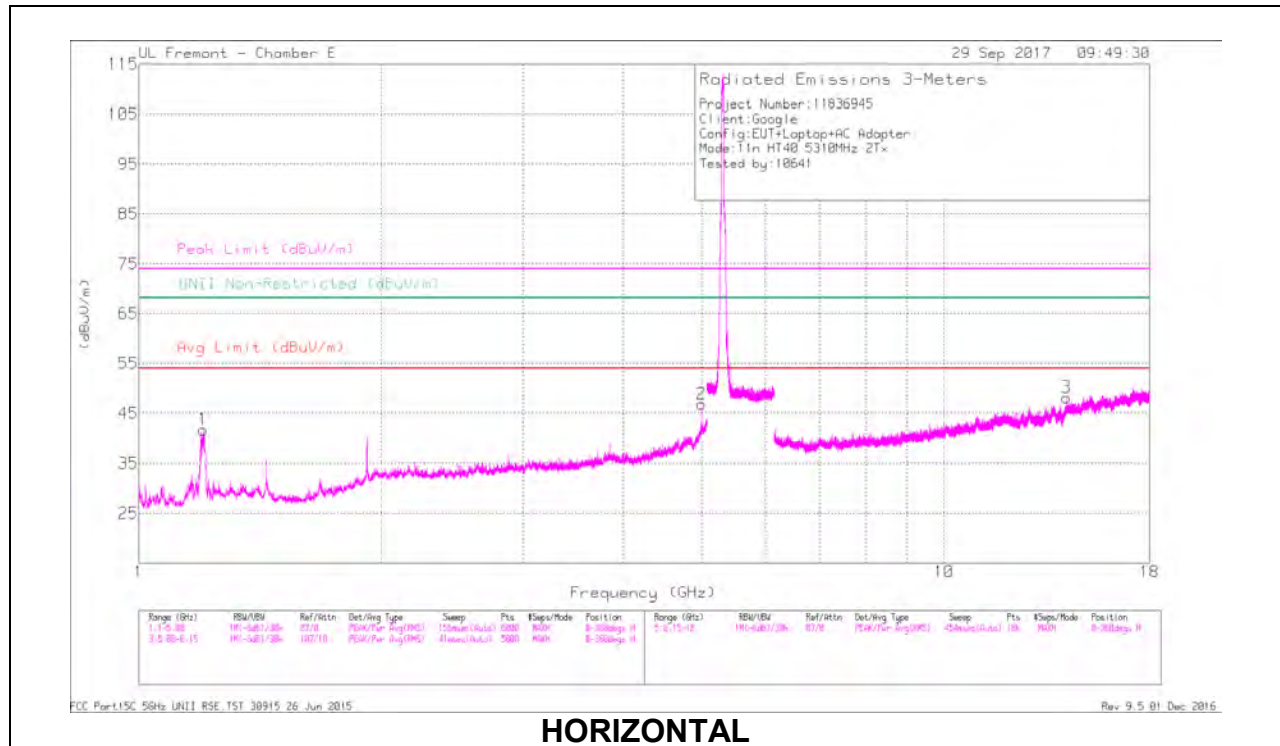

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cable/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNR Non-Restricted (dBuV/m)	PK Margin (dB)	Altitude (Degs)	Height (cm)	Polarity
1	* 1.203	57.84	PK-U	28	-35.2	0	50.64	-	-	74	-23.36	-	-	33	186	H
	* 1.202	42.09	ADR	28	-35.2	14	35.03	54	-18.97	-	-	-	-	33	186	H
2	* 5	47.13	PK-U	34.5	-28.4	0	53.23	-	-	74	-20.77	-	-	210	102	H
	* 5	38.35	ADR	34.5	-28.4	14	44.59	54	-9.41	-	-	-	-	210	102	H
5	* 5	46.57	PK-U	34.5	-28.4	0	52.67	-	-	74	-21.33	-	-	112	349	V
	* 5	37.19	ADR	34.5	-28.4	14	43.43	54	-10.57	-	-	-	-	112	349	V
6	* 15.81	35.16	PK-U	41.7	-23.1	0	53.76	-	-	74	-20.24	-	-	193	156	V
	* 15.813	23.86	ADR	41.7	-23.2	14	42.5	54	-11.5	-	-	-	-	193	156	V
4	1.92	50.38	PK-U	31.1	-32.8	0	48.68	-	-	-	-	68.2	-19.52	132	227	V
3	14.207	36.39	PK-U	40.7	-24.3	0	52.79	-	-	-	-	68.2	-15.41	261	346	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak


ADR - U-NII AD primary method, RMS average

9.1.8. TX ABOVE 1 GHz 802.11ac VHT80 MODE IN THE 5.3 GHz BAND

1TX Chain 0

BANDEDGE (MID CHANNEL)

HORIZONTAL RESULT

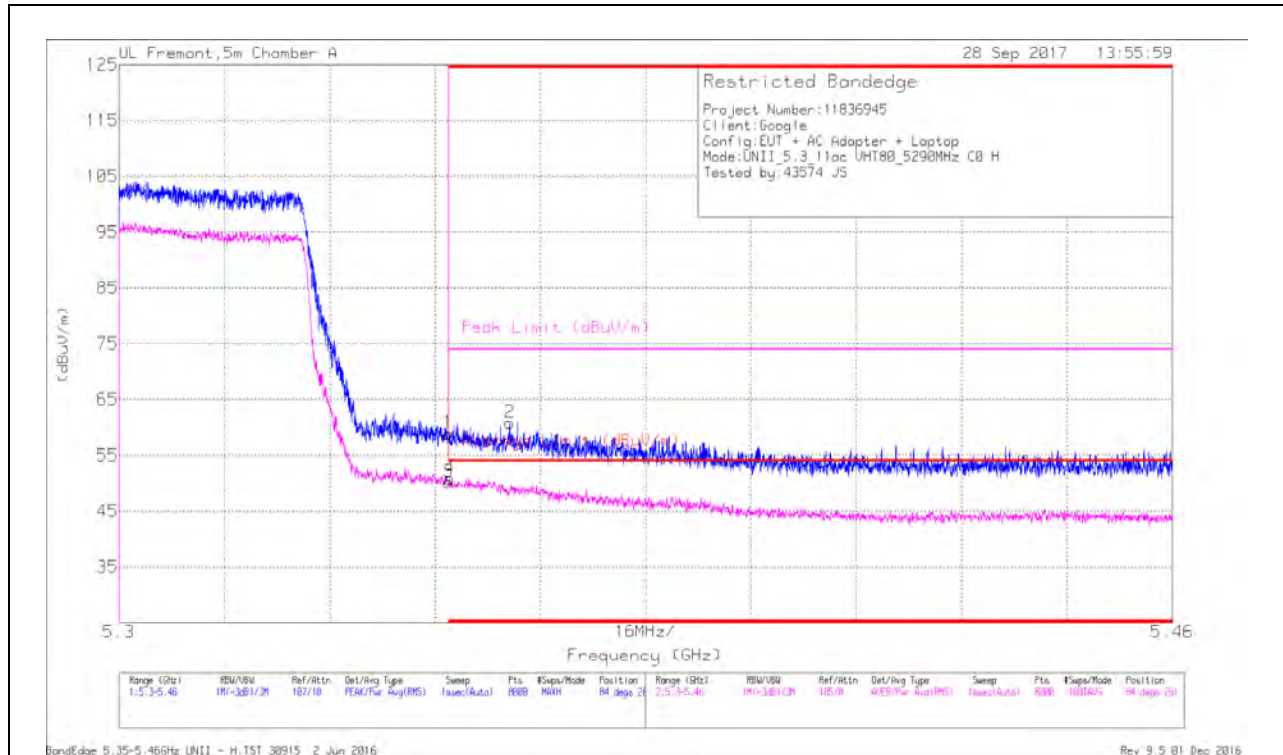


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T862 (dBm)	Amp/Cb/Ftr/Psd (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Altitude (m)	Height (cm)	Polarity
1	* 5.35	42.61	Pk	34.6	-18.3	0	59.91	-	-	74	-15.09	84	261	H
3	* 5.35	33.67	RMS	34.6	-18.3	24	50.21	54	-3.79	-	-	84	261	H
4	* 5.35	34.22	RMS	34.6	-18.3	24	50.76	54	-3.24	-	-	84	261	H
2	* 5.359	44.5	Pk	34.6	-18.3	0	60.8	-	-	74	-13.2	84	261	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

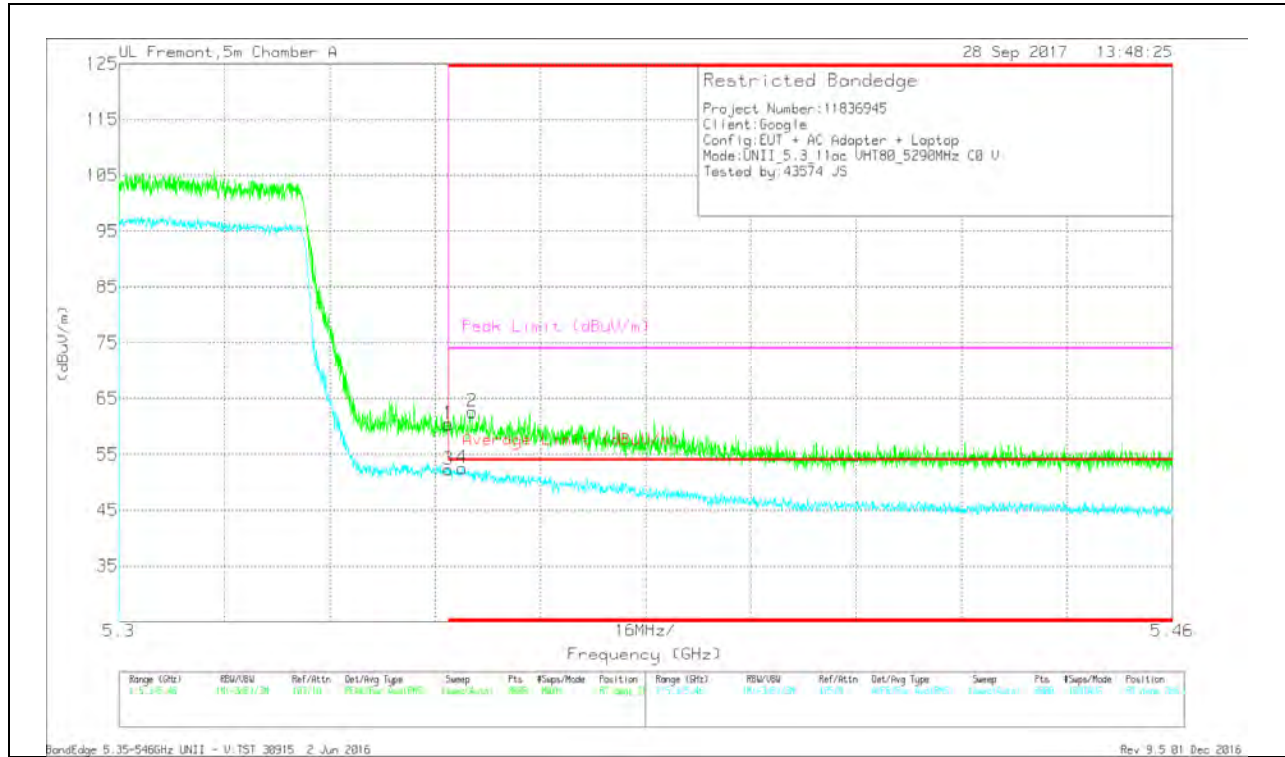

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T662 (dBm)	Amp/CbI/Ftr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Altitude (m)	Height (cm)	Polarity
1	* 5.35	44.12	Pk	34.6	-18.3	0	60.42	-	-	74	-13.58	87	266	V
3	* 5.35	35.73	RMS	34.6	-18.3	.24	52.27	54	-1.73	-	-	87	266	V
4	* 5.352	36.02	RMS	34.6	-18.3	.24	52.56	54	-1.44	-	-	87	266	V
2	* 5.354	46.33	Pk	34.6	-18.3	0	62.63	-	-	74	-11.37	87	266	V



* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

HARMONICS AND SPURIOUS EMISSIONS

MID CHANNEL RESULTS

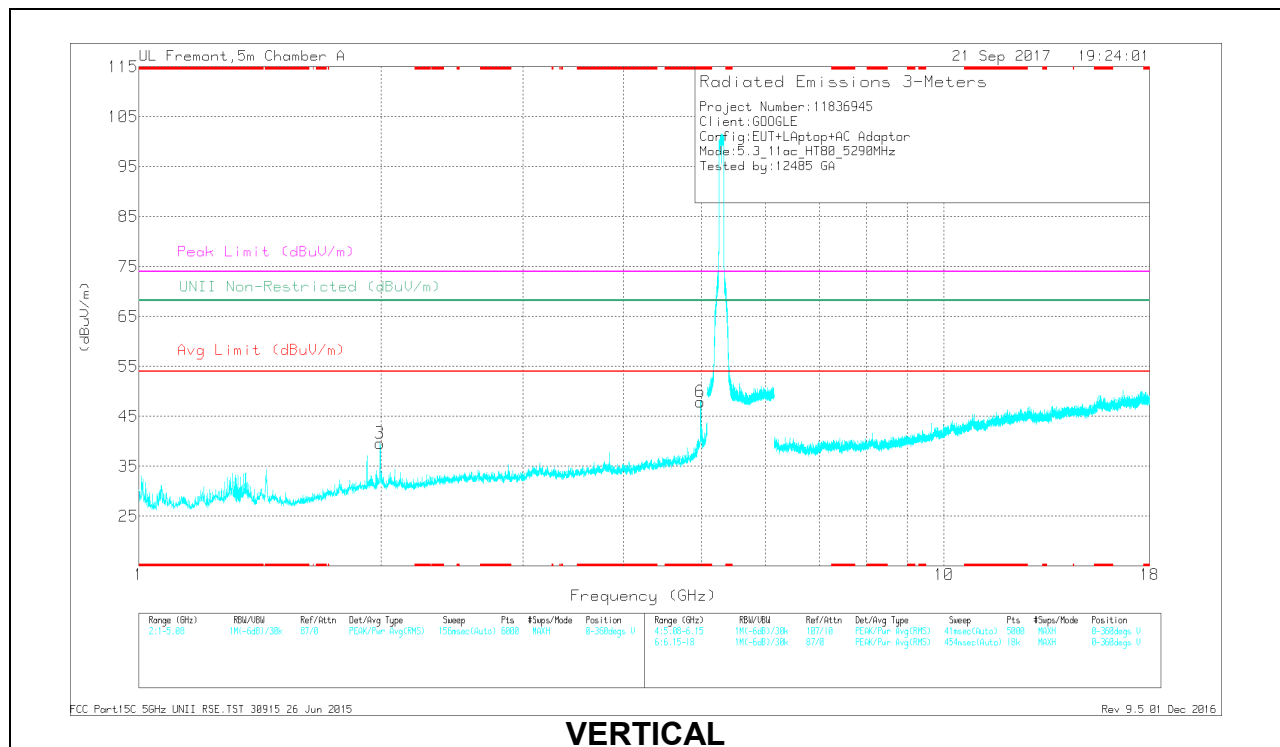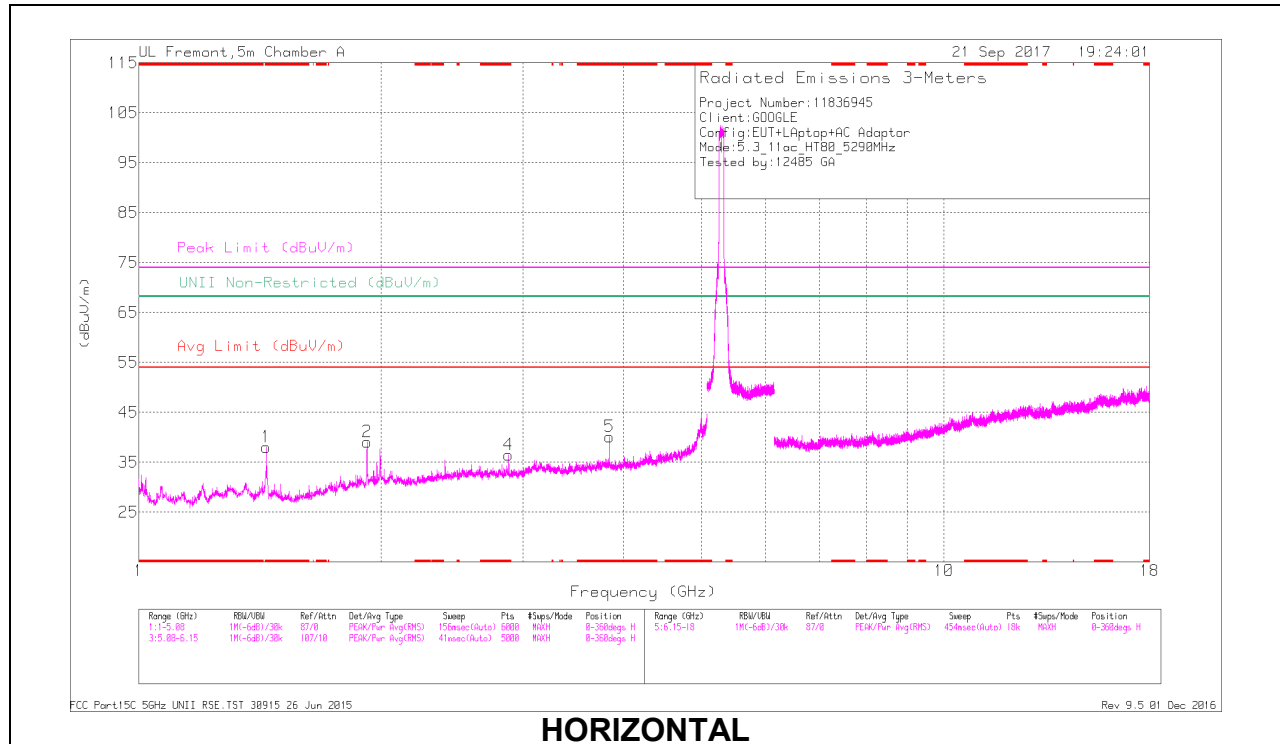

RADIATED EMISSIONS

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	AF T862 (dB/m)	Amp/Ctrl/Filt/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.44	51.67	PK-U	28.7	-32.6	0	47.77	-	-	74	-26.23	-	-	62	177	H
	* 1.44	40.68	ADR	28.7	-32.6	24	37.02	54	-18.98	-	-	-	-	62	177	H
4	* 2.88	39.73	PK-U	32.2	-30.6	0	41.33	-	-	74	-32.67	-	-	357	380	H
	* 2.88	31	ADR	32.2	-30.6	24	32.84	54	-21.16	-	-	-	-	357	380	H
5	* 3.84	41.78	PK-U	33	-29.1	0	45.68	-	-	74	-28.32	-	-	211	106	H
	* 3.84	35.32	ADR	33	-29.1	24	39.46	54	-14.54	-	-	-	-	211	106	H
6	* 4.979	47.92	PK-U	34.3	-27	0	55.22	-	-	74	-18.78	-	-	249	169	V
	* 4.979	37.11	ADR	34.3	-27	24	44.65	54	-9.35	-	-	-	-	249	169	V
2	1.92	46.69	PK-U	31.2	-32.7	0	45.19	-	-	-	-	68.2	-23.01	269	200	H
3	1.993	47.44	PK-U	31.4	-31.9	0	46.94	-	-	-	-	68.2	-21.26	235	125	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

1TX Chain 1

BANDEDGE (MID CHANNEL)

HORIZONTAL RESULT

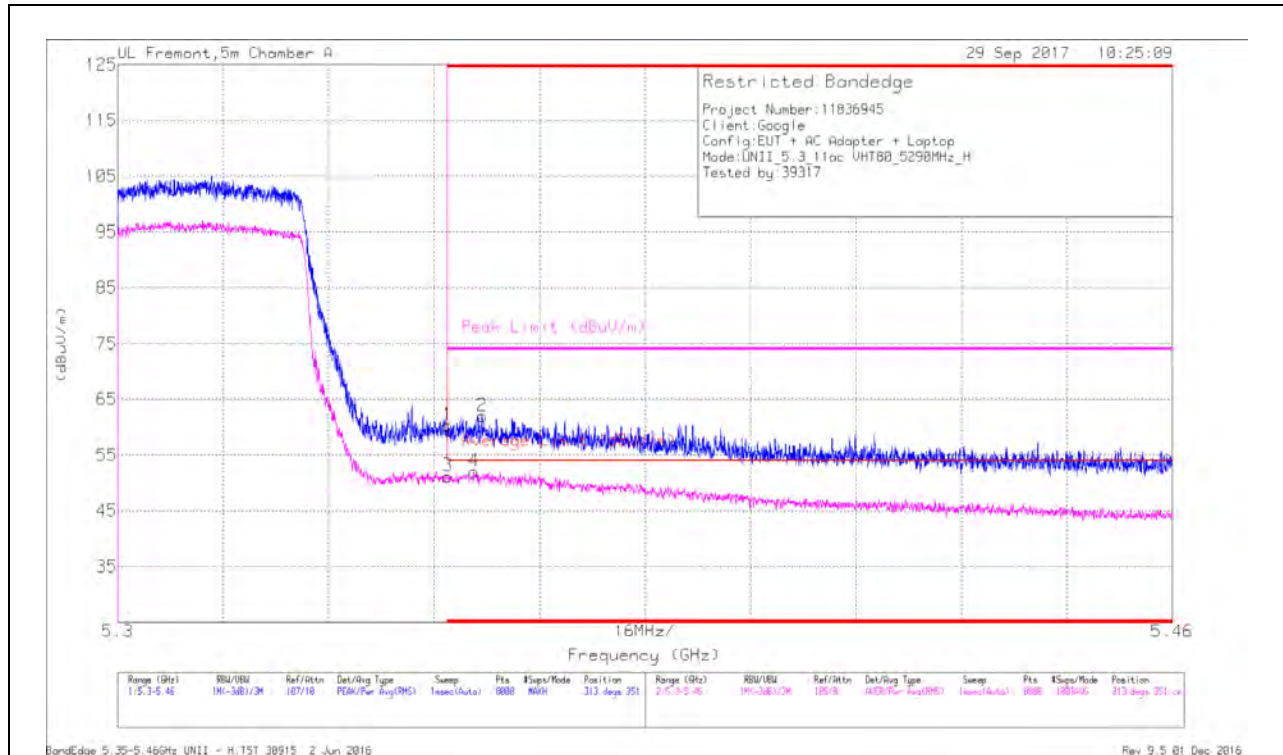


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T862 (dBm)	Amp/CbI/Ftr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35	44.04	Pk	34.6	-18.3	0	60.34	-	-	74	-13.66	313	351	H
3	* 5.35	34.67	RMS	34.6	-18.3	25	51.22	54	-2.78	-	-	313	351	H
4	* 5.354	35.53	RMS	34.6	-18.3	25	52.08	54	-1.92	-	-	313	351	H
2	* 5.355	45.65	Pk	34.6	-18.3	0	61.95	-	-	74	-12.05	313	351	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

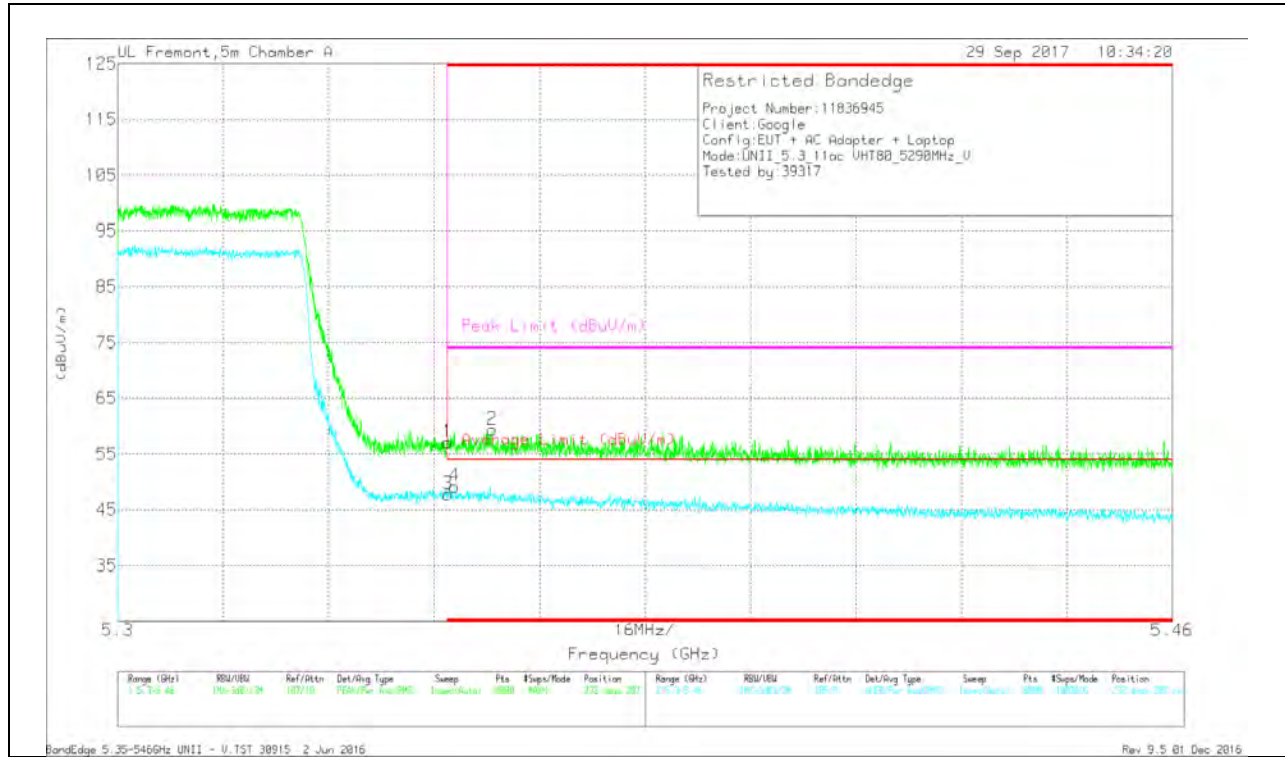

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T662 (dBm)	Amp/CbI/Ftr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Altitude (Dege)	Height (cm)	Polarity
1	* 5.35	40.79	PK	34.6	-18.3	0	57.09	-	-	74	-16.91	232	287	V
3	* 5.35	31.3	RMS	34.6	-18.3	.25	47.85	54	-6.15	-	-	232	287	V
4	* 5.351	32.69	RMS	34.6	-18.4	.25	49.14	54	-4.86	-	-	232	287	V
2	* 5.357	43.08	PK	34.6	-18.3	0	59.38	-	-	74	-14.62	232	287	V



* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK - Peak detector

RMS - RMS detection

HARMONICS AND SPURIOUS EMISSIONS

MID CHANNEL RESULTS

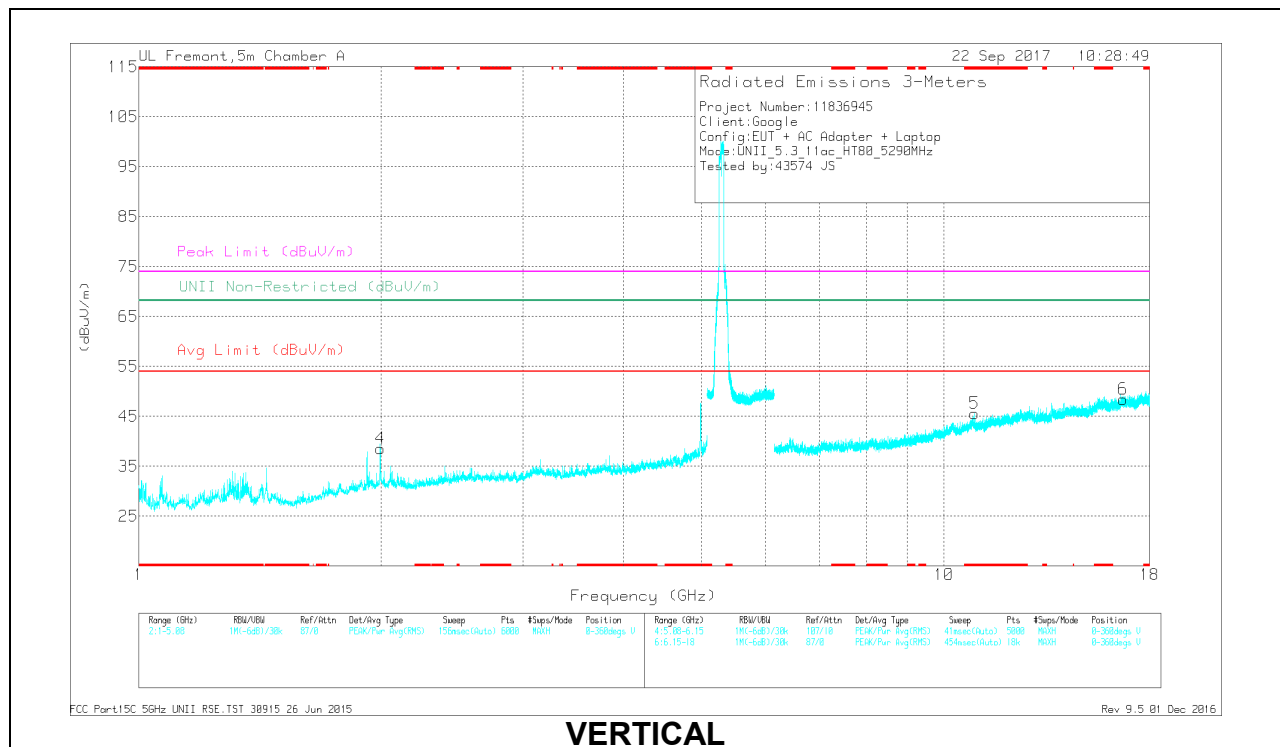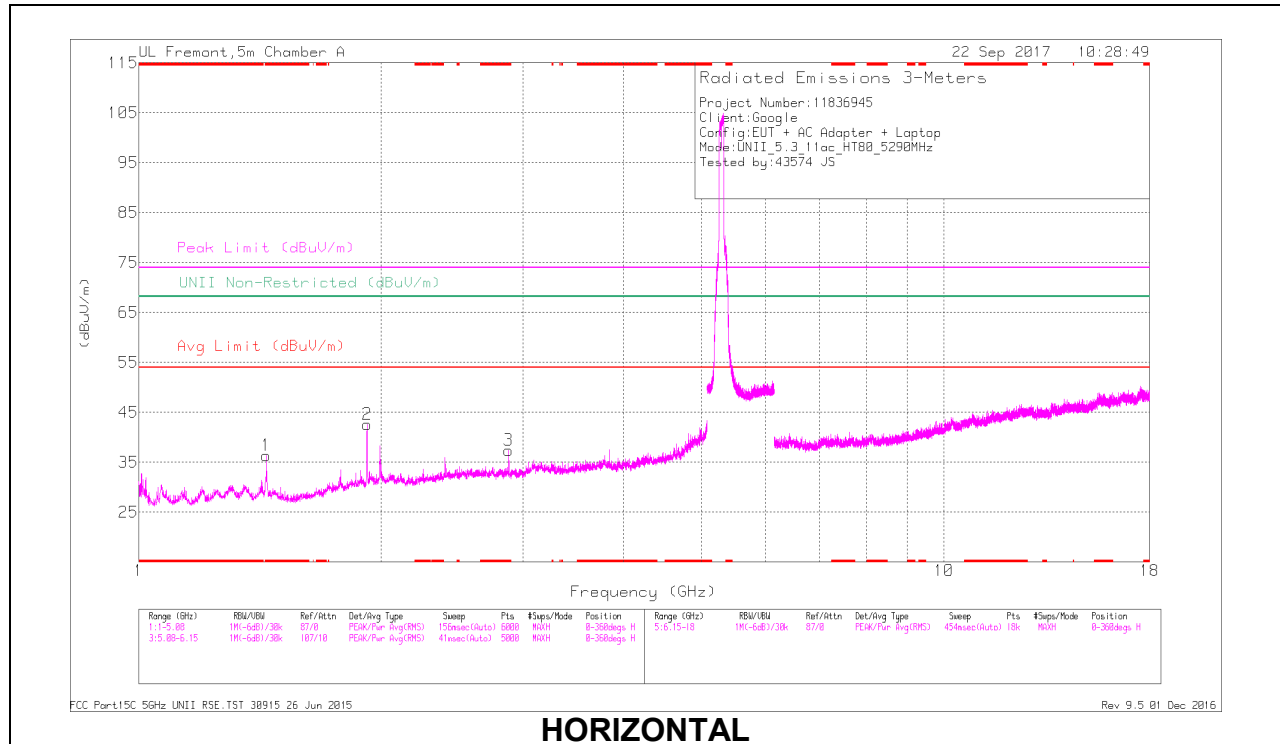

RADIATED EMISSIONS

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	AF T862 (dB/m)	Amp/Cat/Ftr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.44	49.78	PK-U	28.7	-32.6	0	45.88	-	-	74	-28.12	-	-	162	212	H
	* 1.44	38.57	ADR	28.7	-32.6	.25	34.92	54	-19.08	-	-	-	-	162	212	H
3	* 2.88	42.21	PK-U	32.2	-30.6	0	43.81	-	-	74	-30.19	-	-	330	101	H
	* 2.88	35.31	ADR	32.2	-30.6	.25	37.16	54	-16.84	-	-	-	-	330	101	H
5	* 10.907	31.48	PK-U	37.9	-19.4	0	49.98	-	-	74	-24.02	-	-	309	190	V
	* 10.908	19.96	ADR	37.9	-19.4	.25	38.71	54	-15.29	-	-	-	-	309	190	V
2	1.92	47.26	PK-U	31.2	-32.7	0	45.76	-	-	-	-	68.2	-22.44	326	222	H
4	1.994	52.45	PK-U	31.4	-31.9	0	51.95	-	-	-	-	68.2	-16.25	274	286	V
6	16.683	32.2	PK-U	41.6	-18.9	0	54.9	-	-	-	-	68.2	-13.3	278	230	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

2TX Chain 0 + Chain 1 CDD MODE

BANDEDGE (MID CHANNEL)

HORIZONTAL RESULT

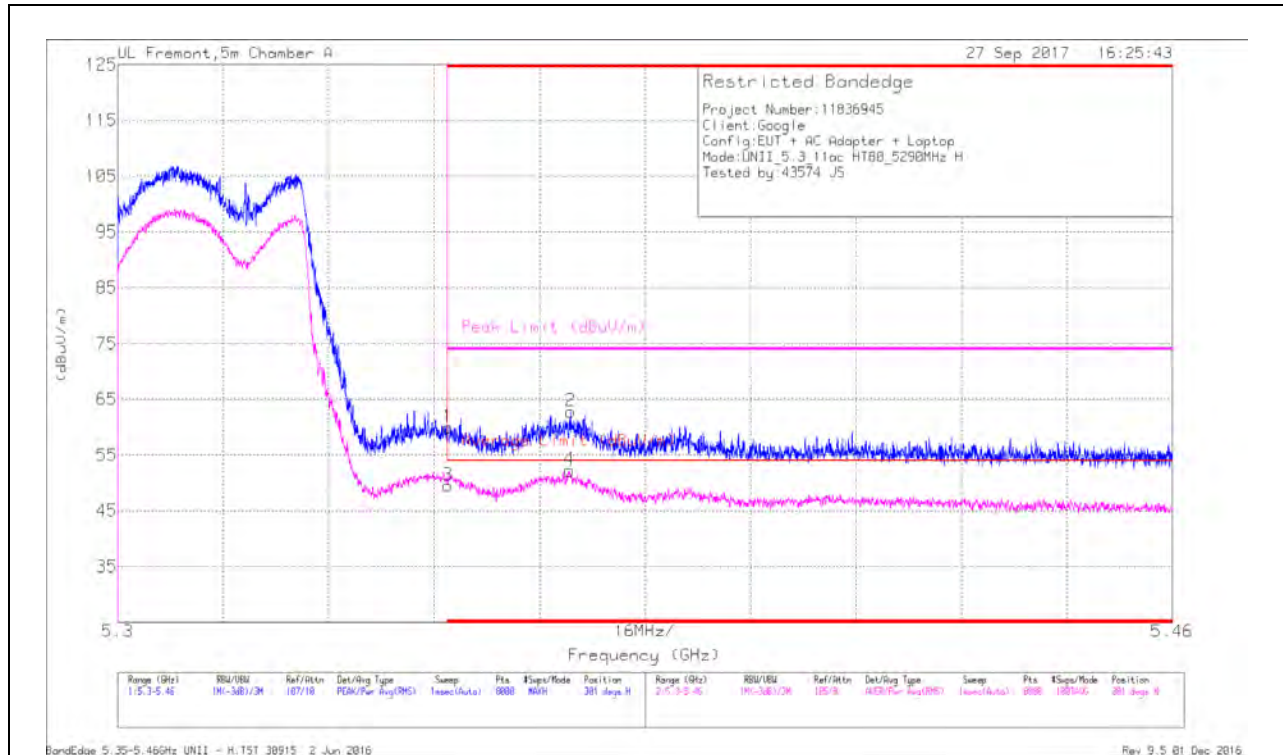


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T862 (dBm)	Amp/CbI/Ftr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35	43.64	Pk	34.6	-18.3	0	59.94	-	-	74	-14.06	301	292	H
3	* 5.35	33.05	RMS	34.6	-18.3	24	49.59	54	-4.41	-	-	301	292	H
4	* 5.368	35.78	RMS	34.6	-18.4	24	52.22	54	-1.78	-	-	301	292	H
2	* 5.369	46.61	Pk	34.6	-18.4	0	62.81	-	-	74	-11.19	301	292	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

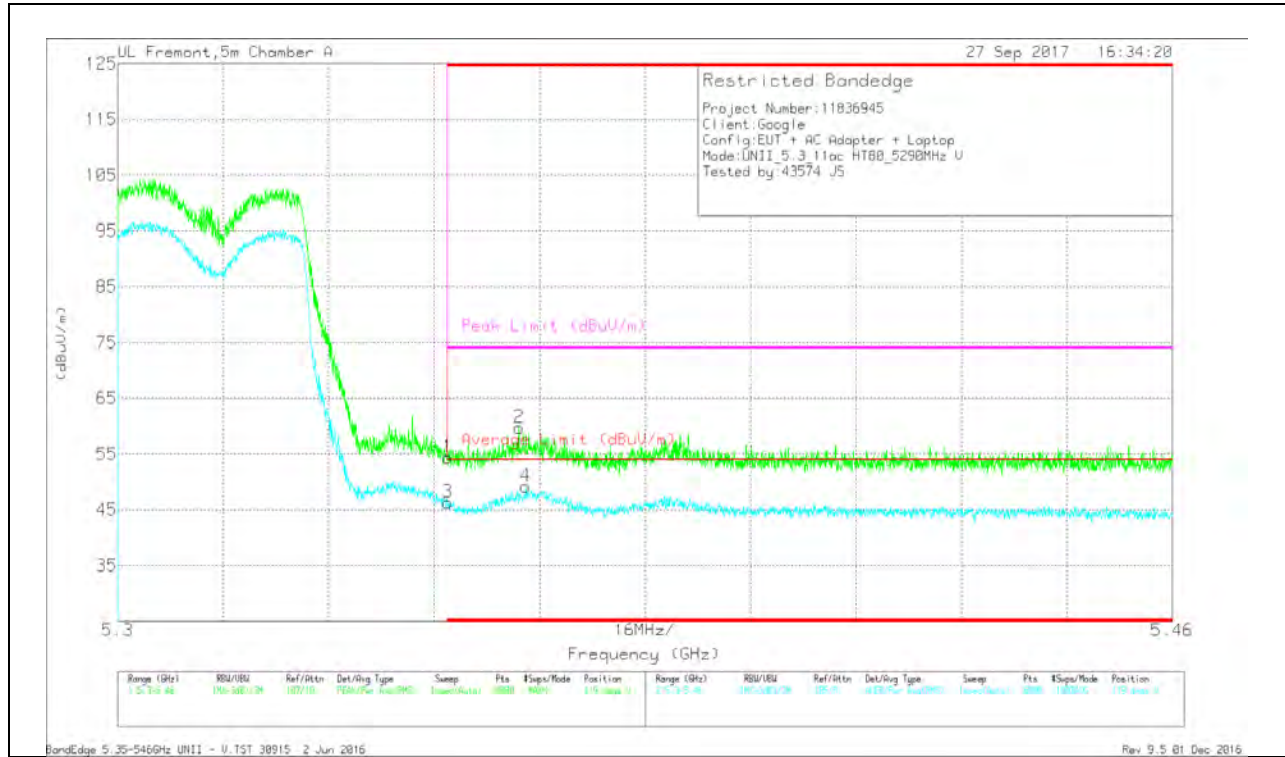

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T662 (dBm)	Amp/CbI/Ftr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35	38.04	Pk	34.6	-18.3	0	54.34	-	-	74	-19.66	119	265	V
3	* 5.35	29.75	RMS	34.6	-18.3	.24	46.29	54	-7.71	-	-	119	265	V
2	* 5.361	43.41	Pk	34.6	-18.3	0	59.71	-	-	74	-14.29	119	265	V
4	* 5.362	32.59	RMS	34.6	-18.3	.24	49.13	54	-4.87	-	-	119	265	V



* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

HARMONICS AND SPURIOUS EMISSIONS

MID CHANNEL RESULTS

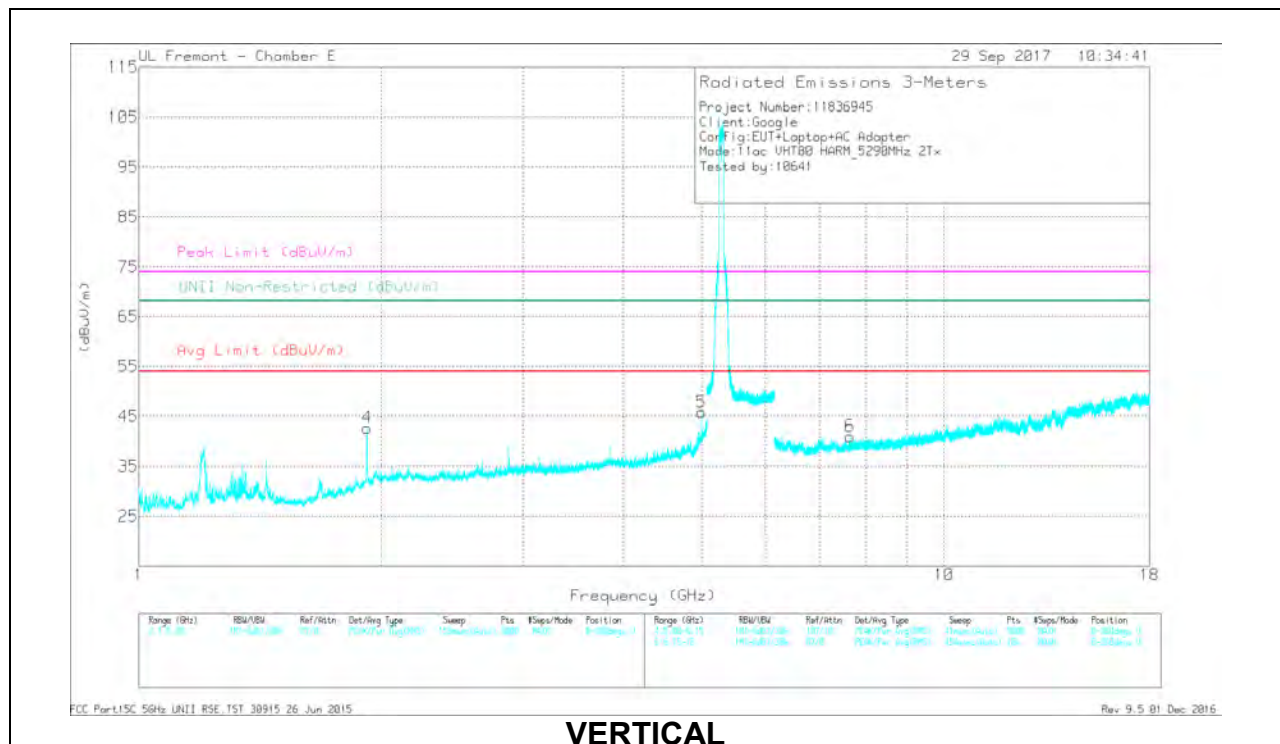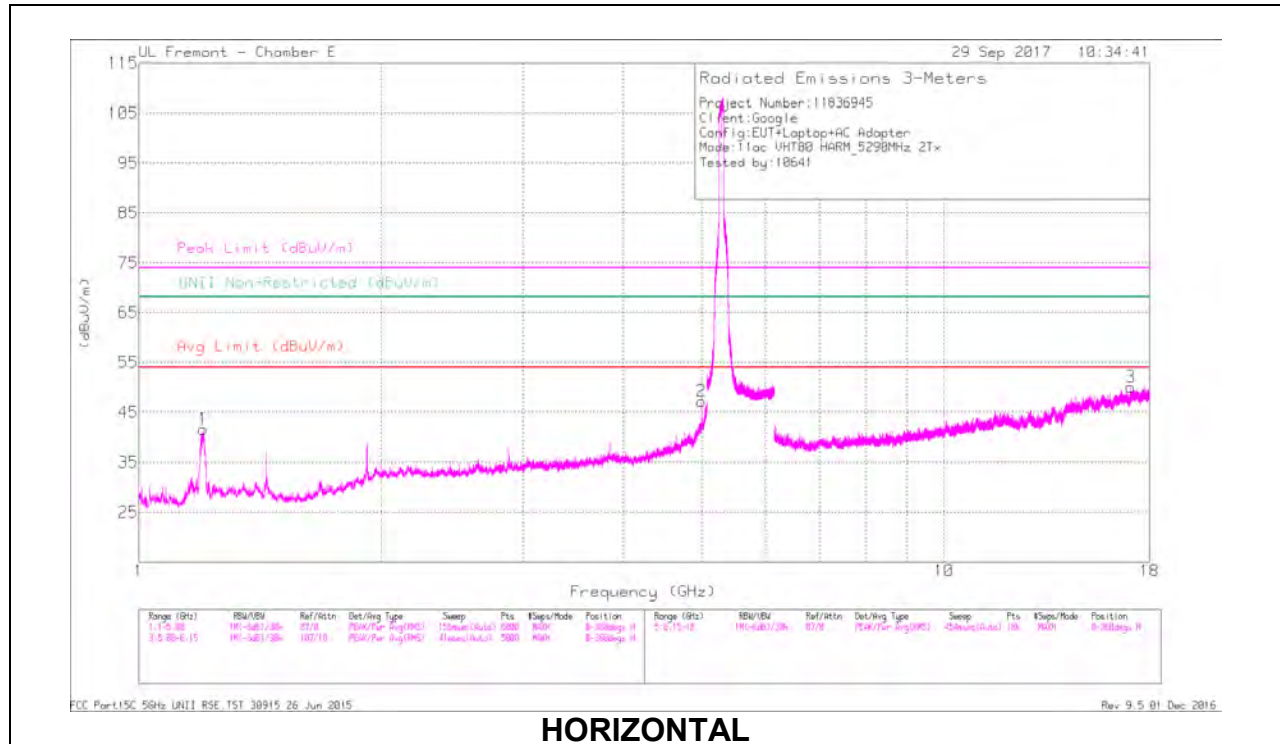

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cbl/Ftr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNR Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.204	60.33	PK-U	28	-35.3	0	53.03	-	-	74	-20.97	-	-	39	200	H
	* 1.202	42.31	ADR	28	-35.2	24	35.35	54	-18.65	-	-	-	-	39	200	H
2	* 5	46.35	PK-U	34.5	-28.4	0	53.05	-	-	74	-20.95	-	-	210	104	H
	* 5	38.25	ADR	34.5	-28.4	24	44.50	54	-9.41	-	-	-	-	210	104	H
5	* 4.999	48.25	PK-U	34.5	-28.4	0	54.35	-	-	74	-19.65	-	-	118	314	V
	* 5	39.62	ADR	34.5	-28.4	24	45.96	54	-8.04	-	-	-	-	118	314	V
6	* 7.648	36.39	PK-U	36.4	-27	0	45.79	-	-	74	-28.21	-	-	296	283	V
	* 7.65	24.99	ADR	36.4	-27	24	34.63	54	-19.37	-	-	-	-	296	283	V
4	1.92	51.85	PK-U	31.1	-32.8	0	50.15	-	-	-	-	68.2	-18.05	202	201	V
3	17.07	35.05	PK-U	41.4	-20.7	0	55.75	-	-	-	-	68.2	-12.45	147	229	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak


ADR - U-NII AD primary method, RMS average

9.1.9. TX ABOVE 1 GHz 802.11a MODE IN THE 5.6 GHz BAND

1TX Chain 0

BANDEDGE (LOW CHANNEL)

HORIZONTAL RESULT

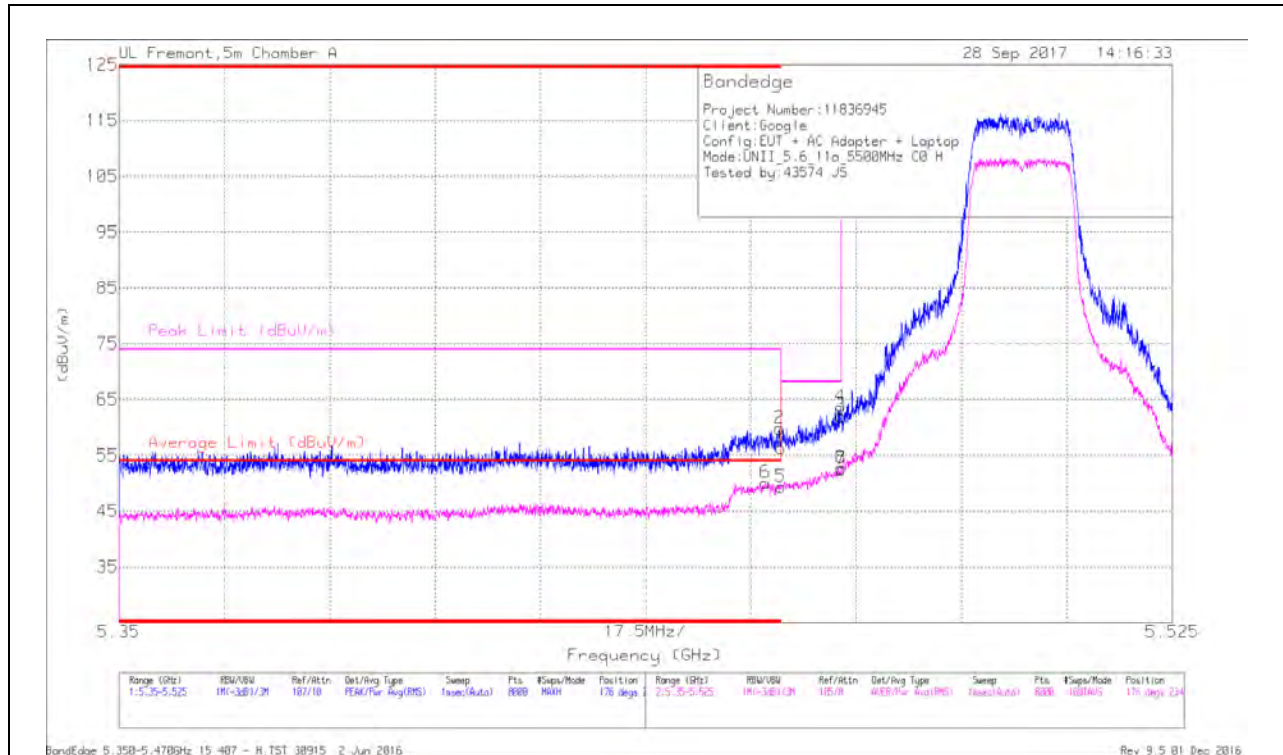


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T862 (dBm)	Amp/Cb/Ftr/Psd (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Altitude (m)	Height (cm)	Polarity
6	* 5.457	33.57	RMS	34.7	-18.3	.12	50.09	54	-3.91	-	-17.65	176	234	H
1	* 5.46	40.05	Pk	34.7	-18.4	0	56.35	-	-	74	-14.2	176	234	H
2	* 5.46	43.5	Pk	34.7	-18.4	0	59.8	-	-	74	-	176	234	H
5	* 5.46	32.94	RMS	34.7	-18.4	.12	49.36	54	-4.64	-	-	176	234	H
3	5.47	45.42	Pk	34.8	-18.2	0	62.02	-	-	68.2	-6.18	176	234	H
4	5.47	46.97	Pk	34.8	-18.2	0	63.57	-	-	68.2	-4.63	176	234	H
7	5.47	35.76	RMS	34.8	-18.2	.12	52.48	-	-	-	-	176	234	H
8	5.47	36.01	RMS	34.8	-18.2	.12	52.73	-	-	-	-	176	234	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

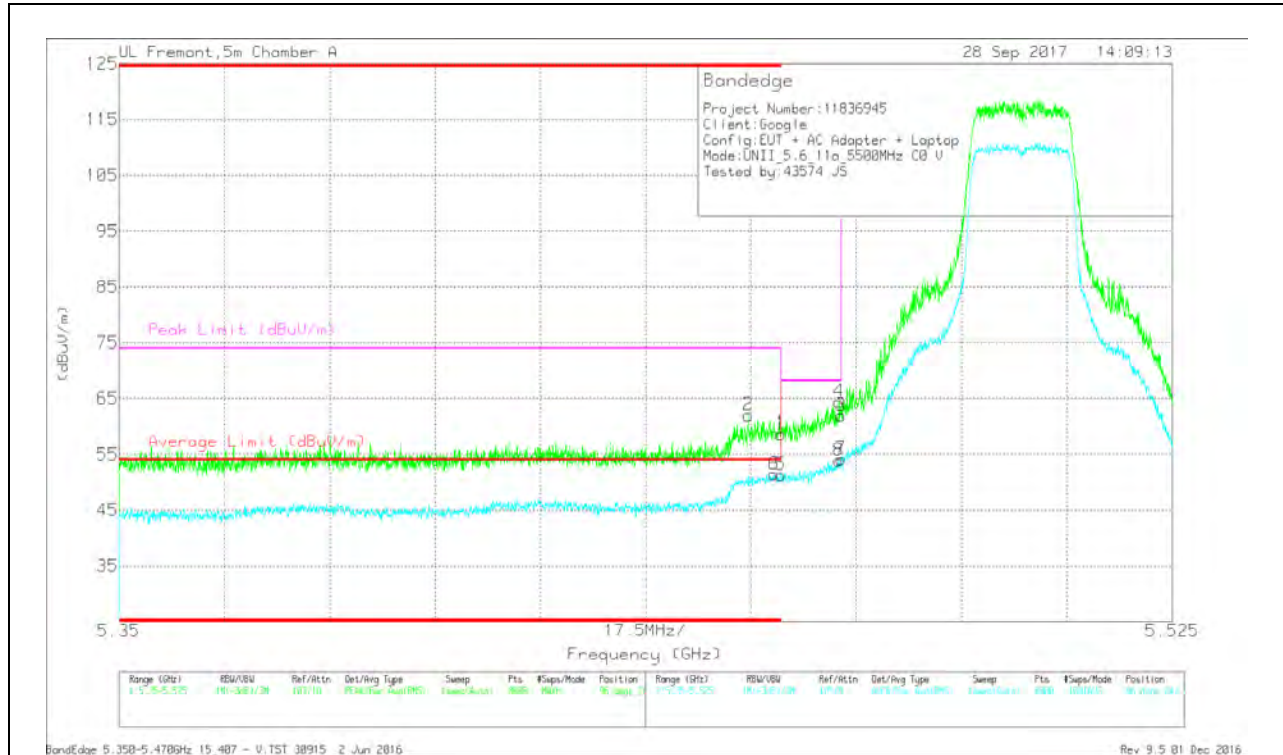

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T862 (dBm)	Amp/Cbl/Filt/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Altitude (Degs)	Height (cm)	Polarity
2	* 5.455	45.62	Pk	34.7	-18.3	0	62.02	-	-	74	-11.98	96	242	V
6	* 5.459	35	RMS	34.7	-18.4	.12	51.42	54	-2.58	-	-	96	242	V
1	* 5.46	42.37	Pk	34.7	-18.4	0	58.67	-	-	74	-15.33	96	242	V
5	* 5.46	34.86	RMS	34.7	-18.4	.12	51.28	54	-2.72	-	-	96	242	V
3	5.47	45.34	Pk	34.8	-18.2	0	61.94	-	-	68.2	-6.26	96	242	V
4	5.47	47.81	Pk	34.8	-18.2	0	64.41	-	-	68.2	-3.79	96	242	V
7	5.47	37.45	RMS	34.8	-18.2	.12	54.17	-	-	-	-	96	242	V
8	5.47	37.12	RMS	34.8	-18.2	.12	53.84	-	-	-	-	96	242	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

BANDEDGE (HIGH CHANNEL)

HORIZONTAL RESULT

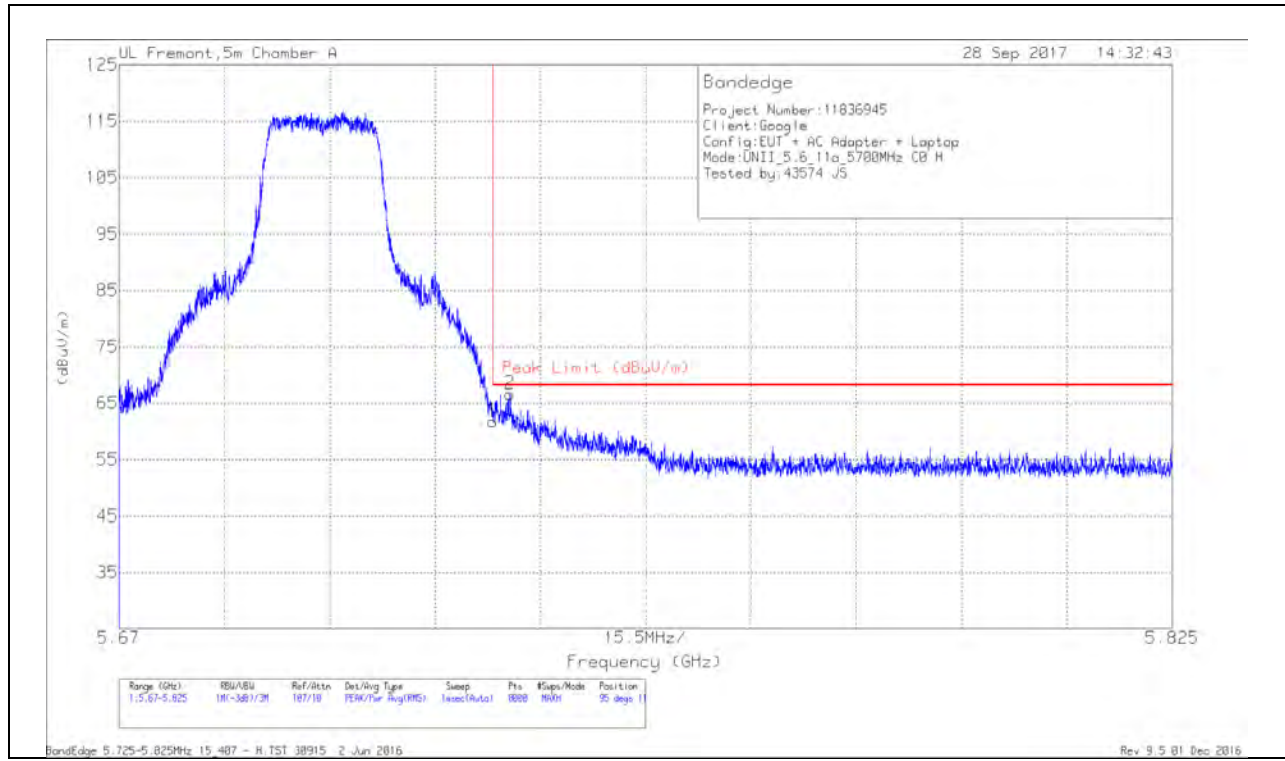


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T862 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	45.23	Pk	35	-18.4	0	61.83	68.2	-6.37	95	118	H
2	5.728	49.95	Pk	35	-18.3	0	66.65	68.2	-1.55	95	118	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

VERTICAL RESULT


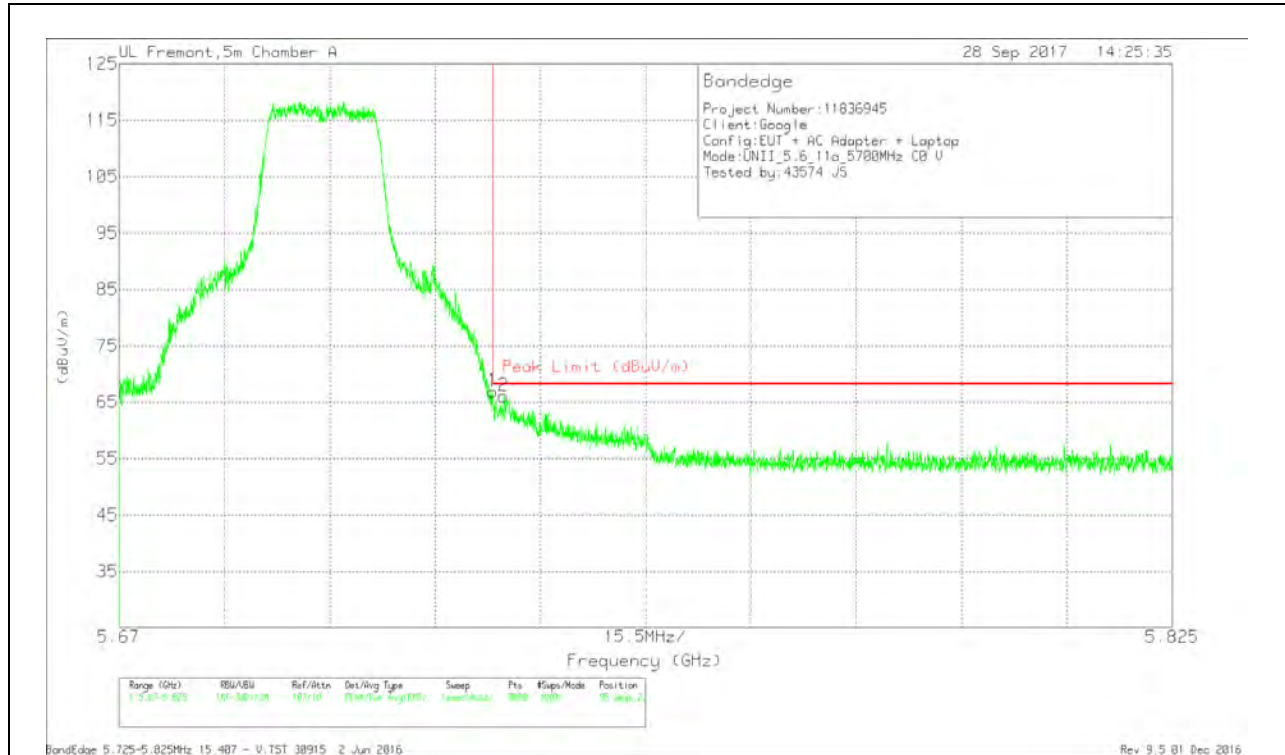


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T862 (dB/m)	Amp/CbI/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	50.27	Pk	35	-18.4	0	66.87	68.2	-1.33	95	233	V
2	5.727	49.37	Pk	35	-18.3	0	66.07	68.2	-2.13	95	233	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
Pk - Peak detector

HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL RESULTS

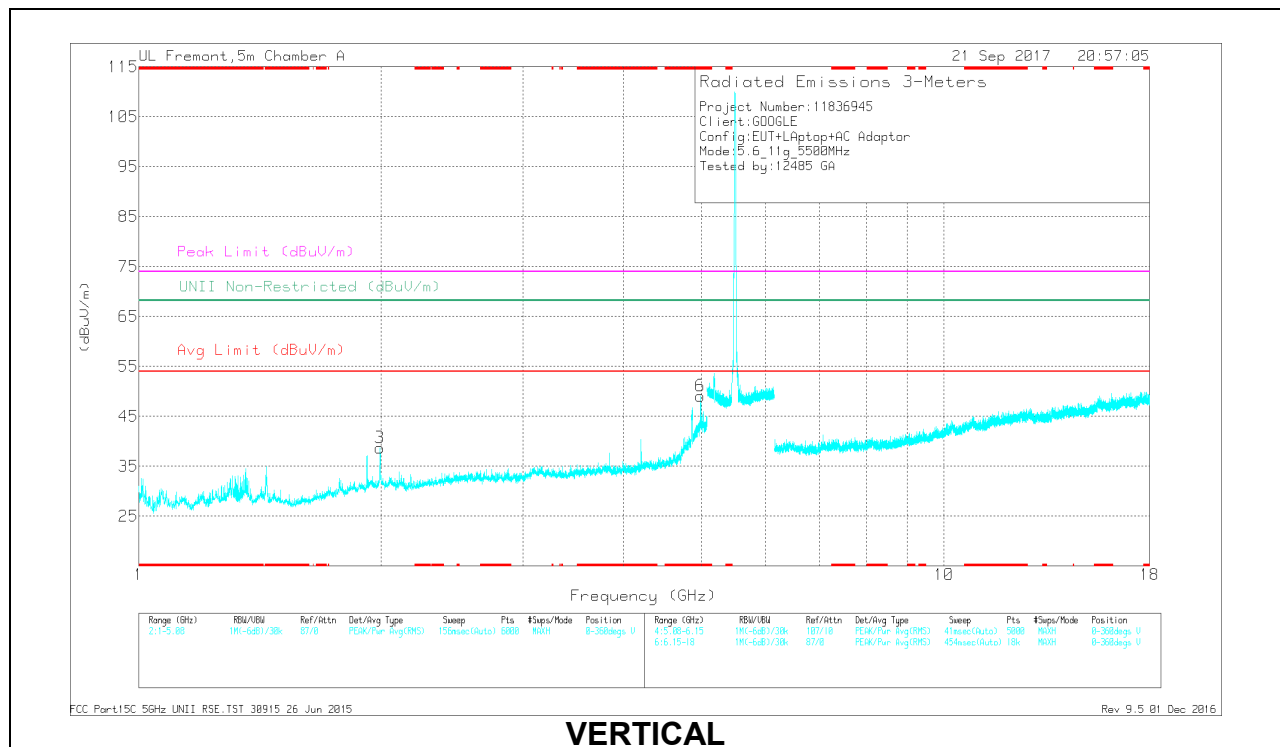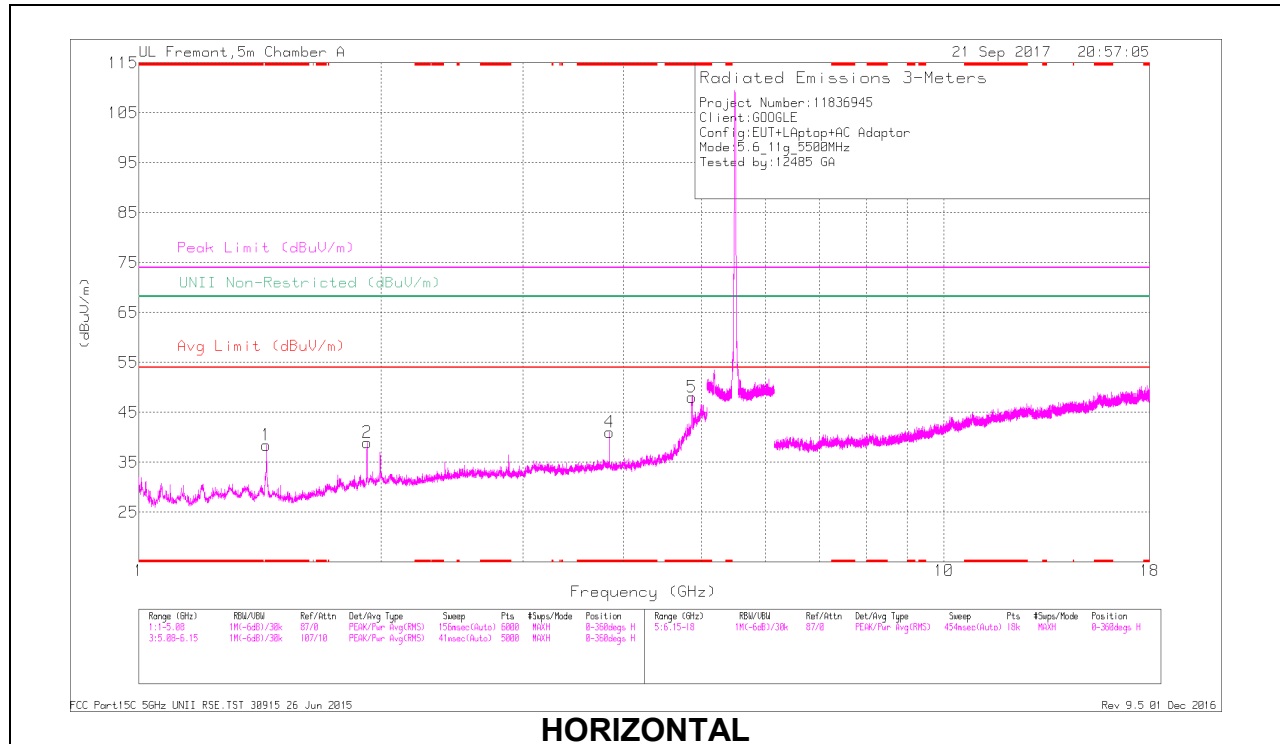

RADIATED EMISSIONS



Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	AF T862 (dB/m)	Amp/Ctrl/Filt/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.44	51.91	PK-U	28.7	-32.6	0	48.01	-	-	74	-25.99	-	-	67	176	H
	* 1.44	41.98	ADR	28.7	-32.6	.12	38.2	54	-15.8	-	-	-	-	67	176	H
4	* 3.84	41.87	PK-U	33	-29.1	0	45.77	-	-	74	-28.23	-	-	213	109	H
	* 3.84	35.67	ADR	33	-29.1	.12	39.69	54	-14.31	-	-	-	-	213	109	H
5	* 4.863	48.75	PK-U	34.1	-27.2	0	55.65	-	-	74	-18.35	-	-	359	103	H
	* 4.863	37.74	ADR	34.1	-27.2	.12	44.76	54	-9.24	-	-	-	-	359	103	H
6	* 4.985	47.5	PK-U	34.3	-26.8	0	55	-	-	74	-19	-	-	257	155	V
	* 4.985	38.46	ADR	34.3	-26.8	.12	44.08	54	-9.92	-	-	-	-	257	155	V
2	1.92	47.05	PK-U	31.2	-32.7	0	45.55	-	-	-	-	68.2	-22.65	267	196	H
3	1.991	49.94	PK-U	31.4	-31.9	0	49.44	-	-	-	-	68.2	-18.76	88	242	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

MID CHANNEL RESULTS

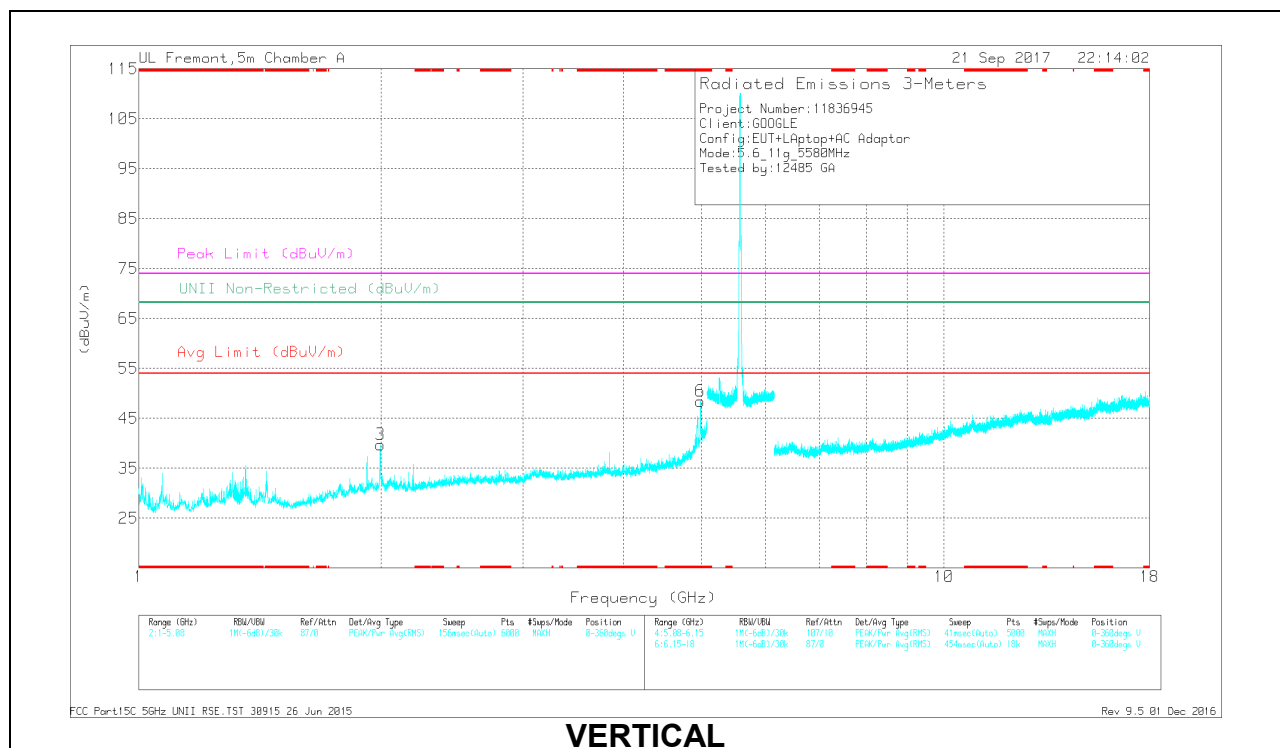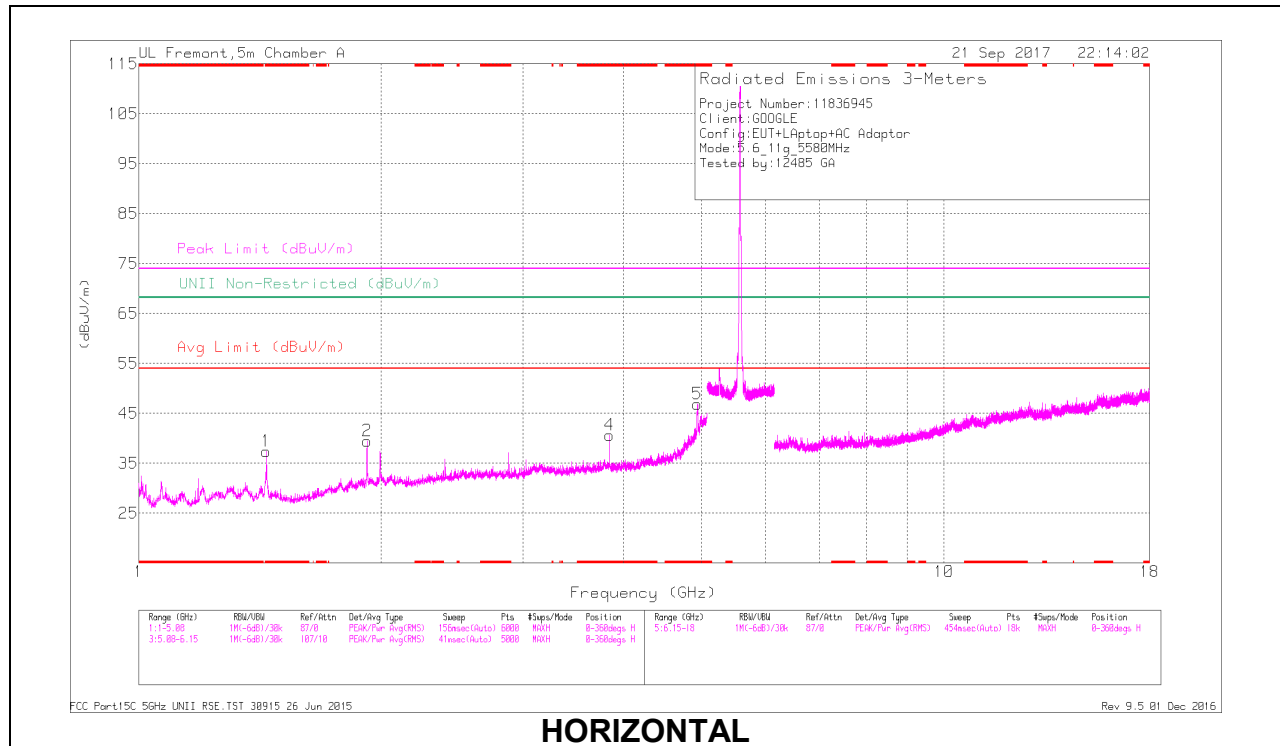

RADIATED EMISSIONS



Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	AF T862 (dB/m)	Amp/Ctrl/Filt/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.44	51.68	PK-U	28.7	-32.6	0	47.78	-	-	74	-26.22	-	-	71	175	H
	* 1.44	40.41	ADR	28.7	-32.6	.12	36.63	54	-17.37	-	-	-	-	71	175	H
4	* 3.84	41.94	PK-U	33	-29.1	0	45.84	-	-	74	-28.16	-	-	335	107	H
	* 3.84	34.86	ADR	33	-29.1	.12	38.88	54	-15.12	-	-	-	-	335	107	H
5	* 4.939	47.29	PK-U	34.2	-27.3	0	54.19	-	-	74	-19.81	-	-	360	208	H
	* 4.939	36.63	ADR	34.2	-27.3	.12	43.65	54	-10.35	-	-	-	-	360	208	H
6	* 4.979	48.23	PK-U	34.3	-27	0	55.53	-	-	74	-18.47	-	-	260	200	V
	* 4.979	37.02	ADR	34.3	-27	.12	44.44	54	-9.56	-	-	-	-	260	200	V
2	1.92	47.07	PK-U	31.2	-32.7	0	45.57	-	-	-	-	68.2	-22.63	272	196	H
3	1.994	48.44	PK-U	31.4	-31.9	0	47.94	-	-	-	-	68.2	-20.26	90	311	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

HIGH CHANNEL RESULTS

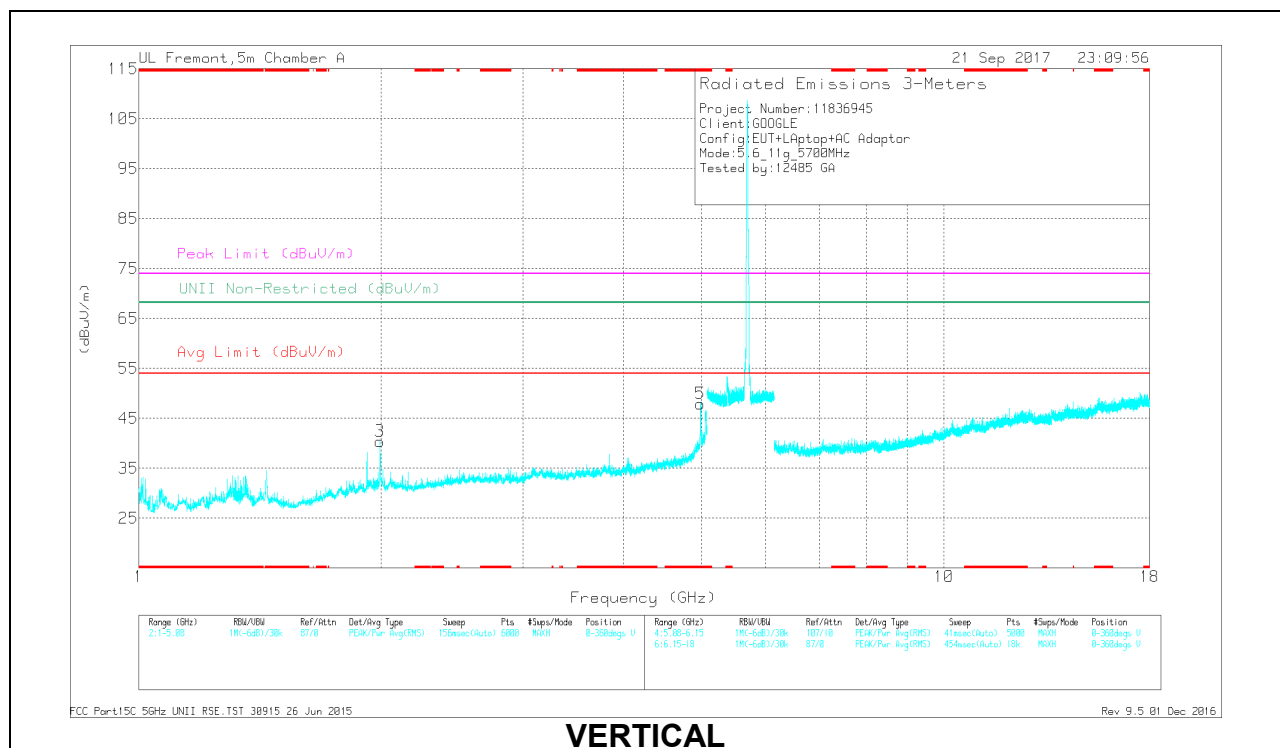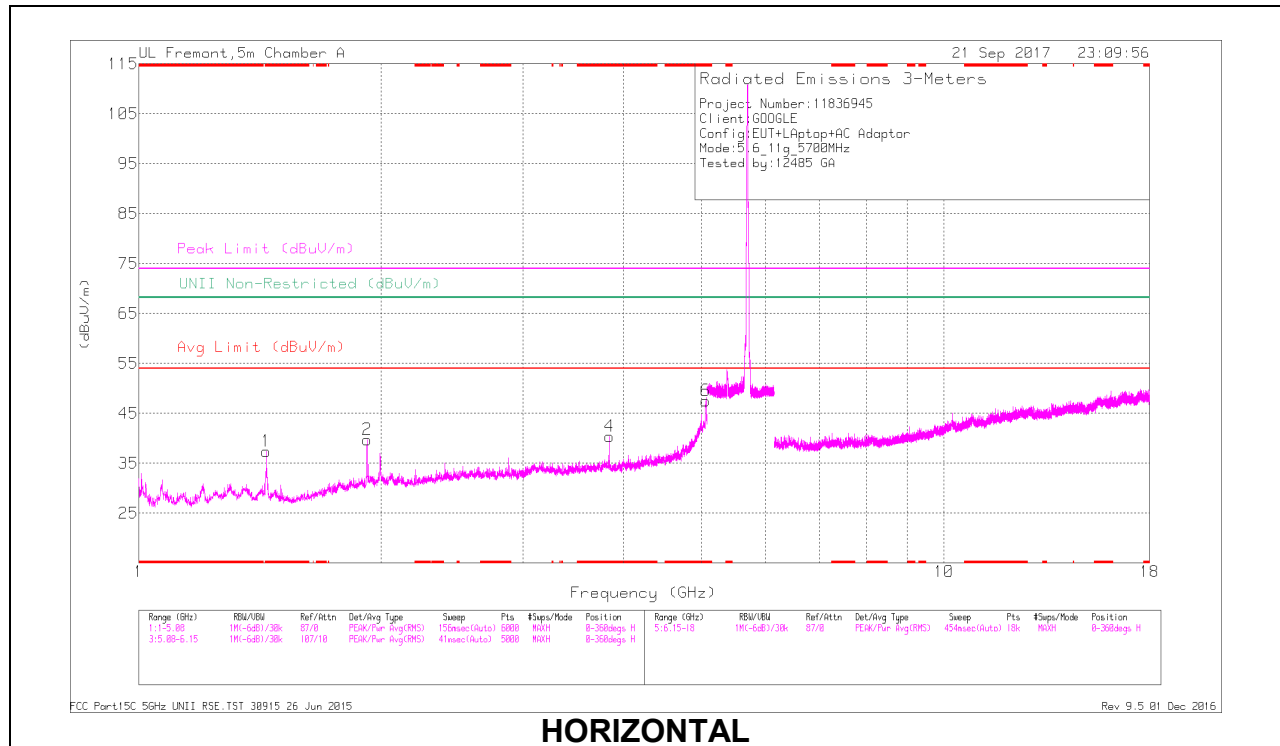

RADIATED EMISSIONS



Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	AF T862 (dB/m)	Amp/Ctrl/Filt/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.44	51.68	PK-U	28.7	-32.6	0	47.78	-	-	74	-26.22	-	-	82	143	H
	* 1.44	40.25	ADR	28.7	-32.6	.12	36.47	54	-17.53	-	-	-	-	82	143	H
4	* 3.841	40.61	PK-U	33	-29.1	0	44.51	-	-	74	-29.49	-	-	211	104	H
	* 3.84	32.44	ADR	33	-29.1	.12	36.46	54	-17.54	-	-	-	-	211	104	H
6	* 5.06	45.81	PK-U	34.4	-25.1	0	55.11	-	-	74	-18.89	-	-	359	145	H
	* 5.063	35.03	ADR	34.4	-25	.12	44.55	54	-9.45	-	-	-	-	359	145	H
5	* 4.982	47.15	PK-U	34.3	-26.9	0	54.55	-	-	74	-19.45	-	-	259	163	V
	* 4.982	36.82	ADR	34.3	-26.9	.12	44.34	54	-9.66	-	-	-	-	259	163	V
2	1.92	47.14	PK-U	31.2	-32.7	0	45.64	-	-	-	-	68.2	-22.56	274	200	H
3	1.992	50.43	PK-U	31.4	-31.9	0	49.93	-	-	-	-	68.2	-18.27	240	228	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

CHANNEL 144 RESULTS

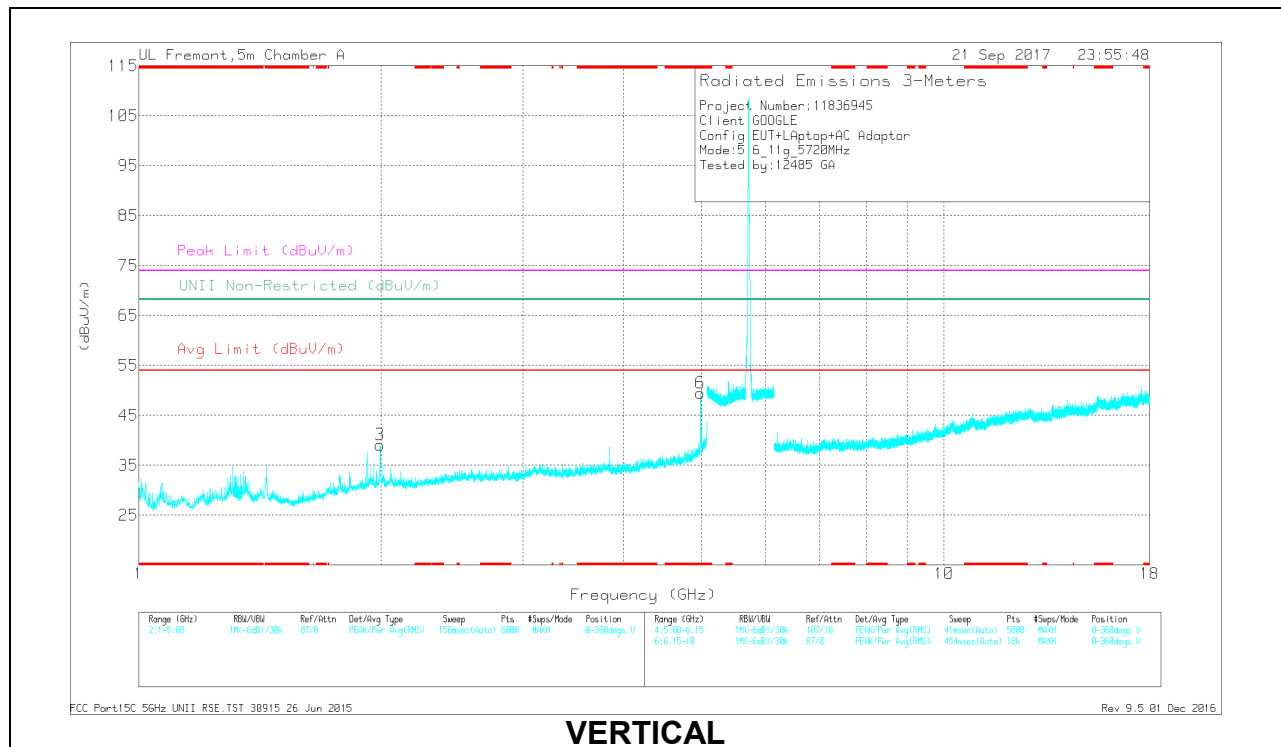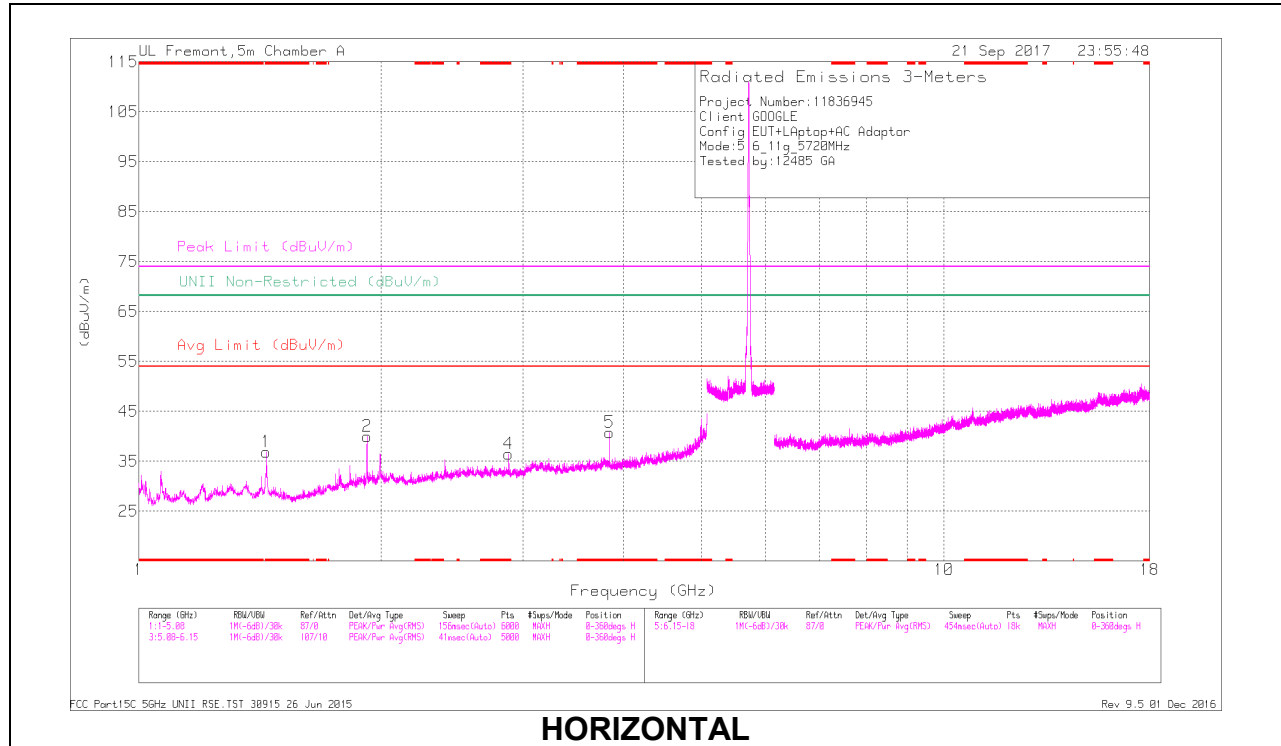

RADIATED EMISSIONS

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	AF T862 (dB/m)	Amp/Ctrl/Filt/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.44	51.11	PK-U	28.7	-32.6	0	47.21	-	-	74	-26.79	-	-	78	173	H
	* 1.44	40.49	ADR	28.7	-32.6	.12	36.71	54	-17.29	-	-	-	-	78	173	H
4	* 2.88	40.74	PK-U	32.2	-30.6	0	42.34	-	-	74	-31.66	-	-	52	253	H
	* 2.88	32.48	ADR	32.2	-30.6	.12	34.2	54	-19.8	-	-	-	-	52	253	H
5	* 3.84	42.74	PK-U	33	-29.1	0	46.64	-	-	74	-27.36	-	-	214	102	H
	* 3.84	35.4	ADR	33	-29.1	.12	39.42	54	-14.58	-	-	-	-	214	102	H
6	* 4.979	46	PK-U	34.3	-27	0	53.3	-	-	74	-20.7	-	-	256	193	V
	* 4.979	35.62	ADR	34.3	-27	.12	43.04	54	-10.96	-	-	-	-	256	193	V
2	1.92	47.5	PK-U	31.2	-32.7	0	46	-	-	-	-	66.2	-22.2	274	199	H
3	1.992	48.62	PK-U	31.4	-31.9	0	48.32	-	-	-	-	66.2	-19.88	229	146	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

1TX Chain 1

BANDEDGE (LOW CHANNEL)

HORIZONTAL RESULT

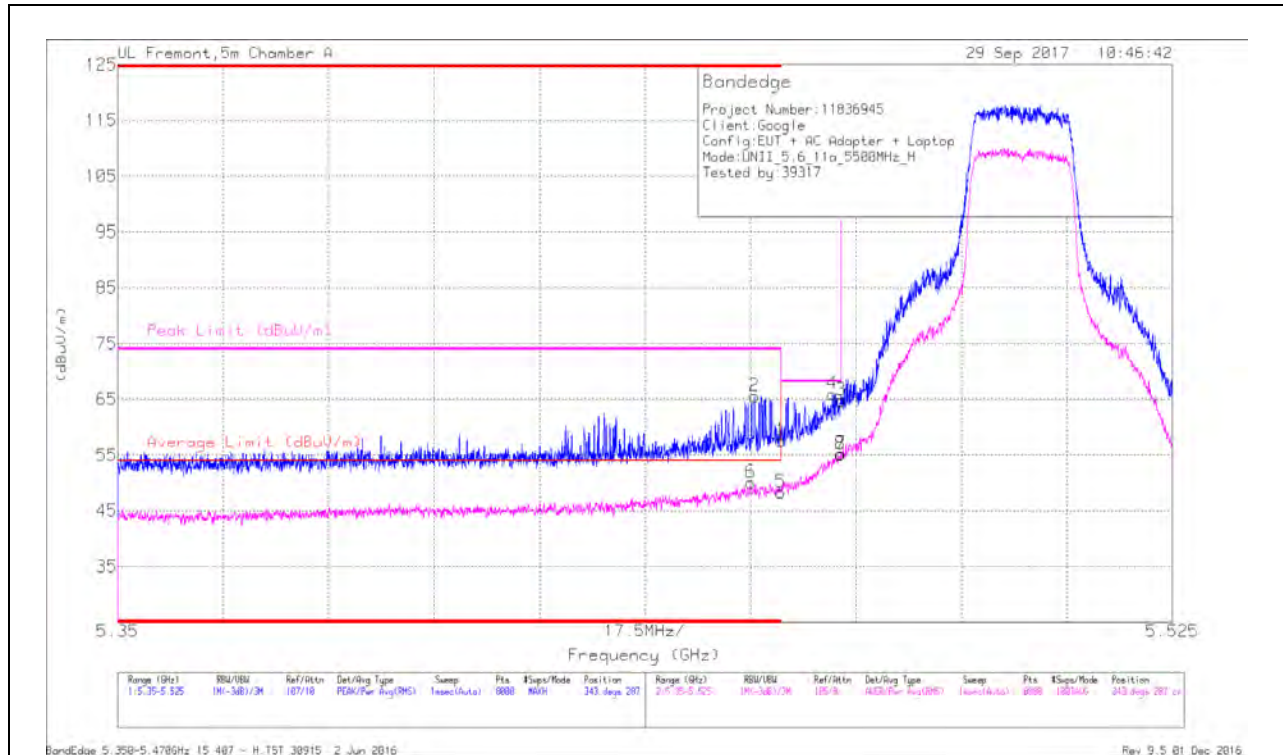


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T862 (dBm)	Amp/CbI/Ftr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Altitude (m)	Height (cm)	Polarity
6	* 5.455	33.51	RMS	34.7	-18.3	.14	50.05	54	-3.95	-	-	343	287	H
2	* 5.456	49.13	Pk	34.7	-18.3	0	65.53	-	-	74	-8.47	343	287	H
1	* 5.46	41.16	Pk	34.7	-18.4	0	57.46	-	-	74	-16.54	343	287	H
5	* 5.46	31.92	RMS	34.7	-18.4	.14	48.36	54	-5.64	-	-	343	287	H
4	5.469	49.32	Pk	34.8	-18.2	0	65.92	-	-	68.2	-2.28	343	287	H
3	5.47	48.16	Pk	34.8	-18.2	0	64.76	-	-	68.2	-3.44	343	287	H
7	5.47	38.48	RMS	34.8	-18.2	.14	55.22	-	-	-	-	343	287	H
8	5.47	38.34	RMS	34.8	-18.2	.14	55.08	-	-	-	-	343	287	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

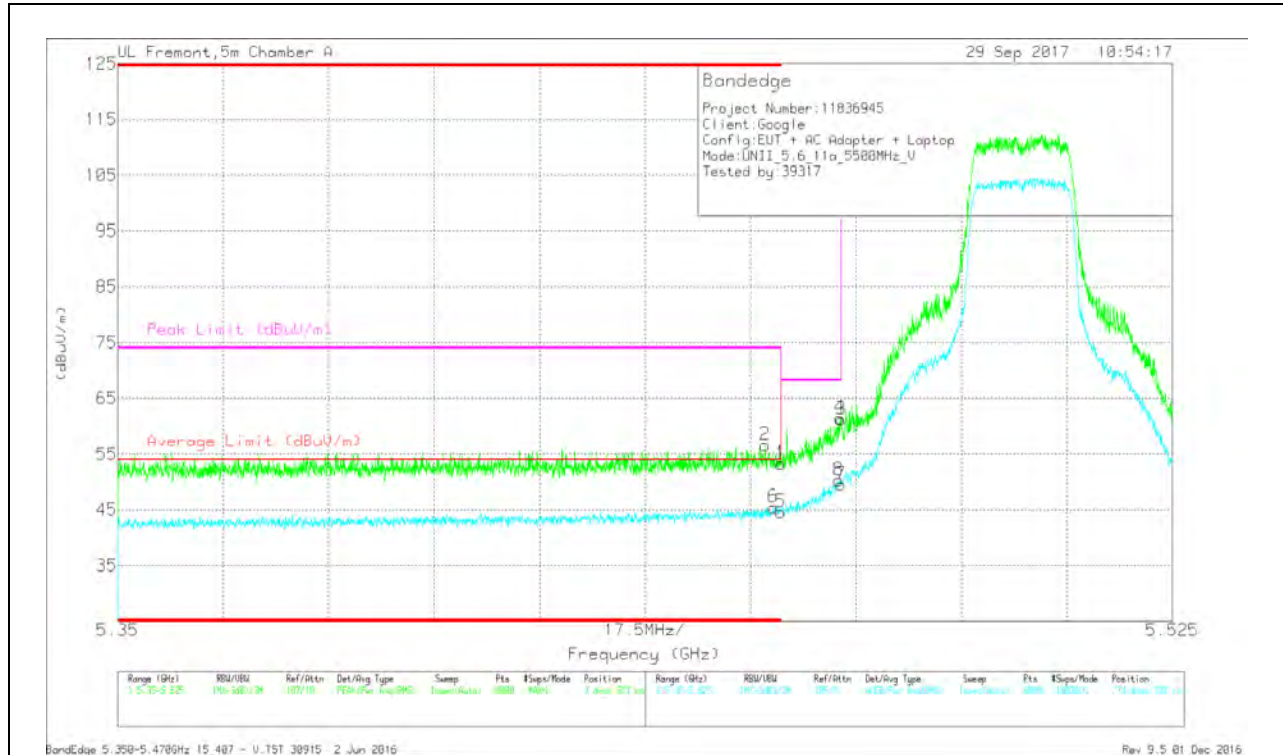


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T862 (dBm)	Amp/Cbl/Ftr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Acimuth (Dege)	Height (cm)	Polarity
2	* 5.457	40.2	Pk	34.7	-18.3	0	56.6	-	-	74	-17.4	2	397	V
6	* 5.459	29.06	RMS	34.7	-18.4	.14	45.5	54	-8.5	-	-	274	397	V
1	* 5.46	36.93	Pk	34.7	-18.4	0	53.23	-	-	74	-20.77	2	397	V
5	* 5.46	28.14	RMS	34.7	-18.4	.14	44.58	54	-9.42	-	-	274	397	V
3	5.47	44.58	Pk	34.8	-18.2	0	61.18	-	-	68.2	-7.02	2	397	V
4	5.47	44.9	Pk	34.8	-18.2	0	61.5	-	-	68.2	-6.7	2	397	V
7	5.47	32.81	RMS	34.8	-18.2	.14	49.55	-	-	-	-	274	397	V
8	5.47	33.56	RMS	34.8	-18.2	.14	50.3	-	-	-	-	274	397	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
Pk - Peak detector
RMS - RMS detection

BANDEDGE (HIGH CHANNEL)


HORIZONTAL RESULT

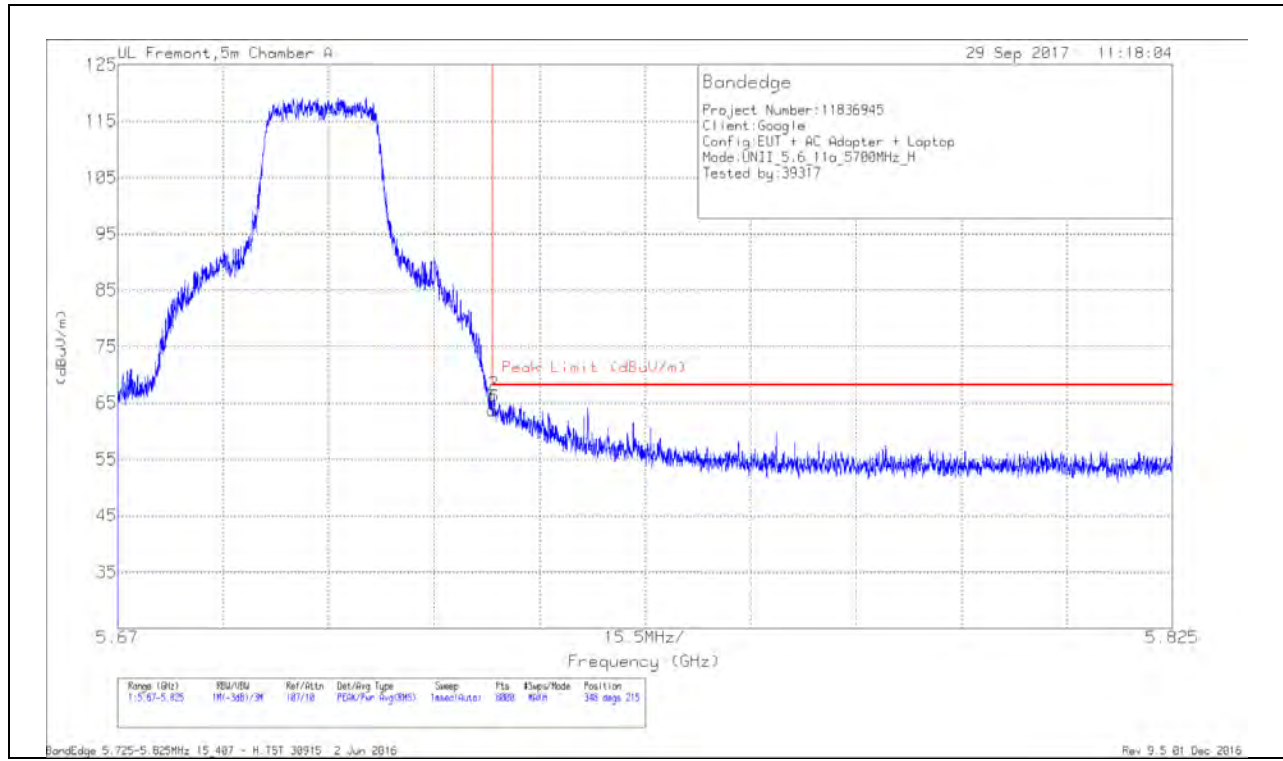

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T862 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	47.21	Pk	35	-18.4	0	63.81	68.2	-4.39	348	215	H
2	5.725	49.79	Pk	35	-18.4	0	66.39	68.2	-1.81	348	215	H

Pk - Peak detector

VERTICAL RESULT

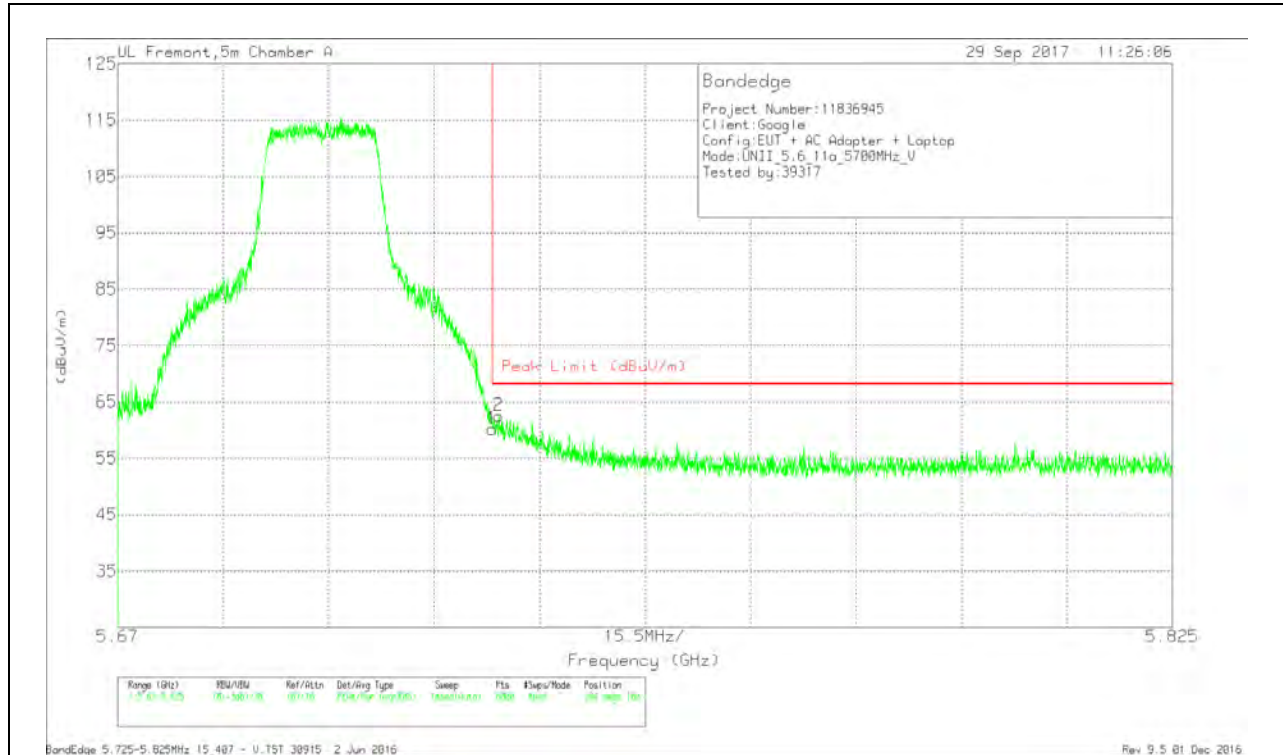

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T862 (dB/m)	Amp/Cbl/Filtr/P ad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	43.59	Pk	35	-18.4	0	60.19	68.2	-8.01	204	160	V
2	5.726	45.9	Pk	35	-18.4	0	62.5	68.2	-5.7	204	160	V

Pk - Peak detector

HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL RESULTS

