



**FCC CFR47 PART 15 SUBPART E
INDUSTRY CANADA RSS-210 ISSUE 8**

CERTIFICATION TEST REPORT

FOR

802.11a/b/g/n WiFi AND BLUETOOTH AUDIO/VIDEO DEVICE

MODEL NUMBER: W1

FCC ID: A4R-W1

REPORT NUMBER: 11U14119-2

ISSUE DATE: MAY 12, 2012

Prepared for
**GOOGLE INC.
1600 AMPHITHEATRE PARKWAY
MONTAINVIEW
CA, 94043, U.S.A**

Prepared by
**COMPLIANCE CERTIFICATION SERVICES (UL CCS)
47173 BENICIA STREET
FREMONT, CA 94538, U.S.A.
TEL: (510) 771-1000
FAX: (510) 661-0888**



NVLAP LAB CODE 200065-0

Revision History

Rev.	Issue Date	Revisions	Revised By
--	5/12/12	Initial Issue	T. LEE

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS.....	5
2. TEST METHODOLOGY	6
3. FACILITIES AND ACCREDITATION.....	6
4. CALIBRATION AND UNCERTAINTY	6
4.1. MEASURING INSTRUMENT CALIBRATION	6
4.2. SAMPLE CALCULATION.....	6
4.3. MEASUREMENT UNCERTAINTY	6
5. EQUIPMENT UNDER TEST	7
5.1. DESCRIPTION OF EUT.....	7
5.2. MAXIMUM OUTPUT POWER.....	7
5.3. DESCRIPTION OF AVAILABLE ANTENNAS	7
5.4. SOFTWARE AND FIRMWARE	7
5.5. WORST-CASE CONFIGURATION AND MODE.....	7
5.6. DESCRIPTION OF TEST SETUP.....	8
6. TEST AND MEASUREMENT EQUIPMENT	10
7. ANTENNA PORT TEST RESULTS	11
7.1. 802.11a MODE IN THE 5.2 GHz BAND.....	11
7.1.1. ON TIME, DUTY CYCLE AND MEASUREMENT METHODS	11
7.1.2. MEASUREMENT METHOD FOR POWER AND PPSD	11
7.1.3. MEASUREMENT METHOD FOR AVERAGE SPURIOUS EMISSIONS ABOVE 1 GHz	11
7.1.4. DUTY CYCLE AND ON TIME	12
7.1.5. 26 dB BANDWIDTH	13
7.1.6. 99% BANDWIDTH	16
7.1.1. OUTPUT POWER AND PPSD.....	19
7.1.2. AVERAGE POWER	23
7.1.1. PEAK EXCURSION	24
7.2. 802.11n HT20 MODE IN THE 5.2 GHz BAND.....	27
7.2.1. ON TIME, DUTY CYCLE AND MEASUREMENT METHODS	27
7.2.2. ON TIME AND DUTY CYCLE RESULTS	27
7.2.3. MEASUREMENT METHOD FOR POWER AND PPSD	27
7.2.4. MEASUREMENT METHOD FOR AVERAGE SPURIOUS EMISSIONS ABOVE 1 GHz	27
7.2.5. 26 dB BANDWIDTH	29
7.2.1. 99% BANDWIDTH	32
7.2.2. OUTPUT POWER AND PPSD.....	35
7.2.3. AVERAGE POWER	39
7.2.4. PEAK EXCURSION	40
8. RADIATED TEST RESULTS	43

8.1.	LIMITS AND PROCEDURE	43
8.2.	TRANSMITTER ABOVE 1 GHz	44
8.2.1.	TX ABOVE 1 GHz FOR 802.11a MODE IN THE LOWER 5.2 GHz BAND	44
8.2.2.	TX ABOVE 1 GHz FOR 802.11n MODE IN THE LOWER 5.2 GHz BAND	49
8.2.3.	RECEIVER ABOVE 1 GHz	54
8.3.	WORST-CASE BELOW 1 GHz	55
9.	AC POWER LINE CONDUCTED EMISSIONS	58
10.	MAXIMUM PERMISSIBLE EXPOSURE	62
11.	SETUP PHOTOS	65

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: GOOGLE INC.
1600 AMPHITHEATRE PARKWAY
MOUNTAIN VIEW, CA, 94043, U.S.A

EUT DESCRIPTION: 802.11a/b/g/n and Bluetooth Audio /Video Device

MODEL: W1

SERIAL NUMBER: AD3C12020001, AD3C12020005, AD8C12160093

DATE TESTED: JANUARY 18~30, and MAY 4-11, 2012

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 Part 15 Subpart E	Pass
INDUSTRY CANADA RSS-210 Issue 8 Annex 9	Pass
INDUSTRY CANADA RSS-GEN Issue 3	Pass

Compliance Certification Services (UL CCS) tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL CCS based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL CCS and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL CCS will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of any government.

Approved & Released For UL CCS By:

Tested By:



TIM LEE
STAFF ENGINEER
UL CCS

TOM CHEN
EMC ENGINEER
UL CCS

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.10-2009, FCC CFR 47 Part 2, FCC CFR 47 Part 15, FCC 06-96, RSS-GEN Issue 3, and RSS-210 Issue 8.

3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 47173 Benicia Street, Fremont, California, USA.

UL CCS is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://www.ccsemc.com>.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

$$\begin{aligned} \text{Field Strength (dBuV/m)} &= \text{Measured Voltage (dBuV)} + \text{Antenna Factor (dB/m)} + \\ &\text{Cable Loss (dB)} - \text{Preamplifier Gain (dB)} \\ 36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} &= 28.9 \text{ dBuV/m} \end{aligned}$$

4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Conducted Disturbance, 0.15 to 30 MHz	3.52 dB
Radiated Disturbance, 30 to 1000 MHz	4.94 dB

Uncertainty figures are valid to a confidence level of 95%.

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

The EUT is an audio/video device incorporating 802.11 a/b/g/n, Bluetooth, and near field communicator technology. The EUT has TOSLINK, audio, Ethernet, HDMI, and USB ports.

The EUT transmit only at the 5180 – 5240 MHz band. The EUT does not transmit at the 5.3 or 5.6 GHz UNII bands.

5.2. MAXIMUM OUTPUT POWER

The transmitter has a maximum peak conducted output power as follows:

Frequency Range (MHz)	Mode	Output Power (dBm)	Output Power (mW)
5180 - 5240	802.11a	14.27	26.73
5180 - 5240	802.11n	13.74	23.66

5.3. DESCRIPTION OF AVAILABLE ANTENNAS

The radio utilizes an PCB antenna, with a maximum gain of 6.0 dBi at 5 GHz band.

5.4. SOFTWARE AND FIRMWARE

The firmware installed in the EUT during testing was rev. 1.0.

The EUT driver software installed during testing was rev. 1.0.

The test utility software used during testing was rev. 1.0.

5.5. WORST-CASE CONFIGURATION AND MODE

For Radiated Emissions below 1 GHz and Power line Conducted Emissions, the channel with the highest conducted output power was selected as worst-case scenario.

Based on the manufacturer's attestation that the nominal output power is reduced as the data rate increases, the data rates tested represent the highest power and worst-case with respect to EMC performance. Worst-case data rates are:

For 11a mode (5.2 GHz band): 6Mbps

For 11n, HT20 mode (5.2 GHz band): MSCO

5.6. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT


PERIPHERAL SUPPORT EQUIPMENT LIST				
Description	Manufacturer	Model	Serial Number	FCC ID
Laptop	Lenovo	2768-HH4	R8-PCNFE 210124	DoC
Laptop AC Adapter	Lenovo	92P1109	Z1ZBTZ85VM0	DoC

I/O CABLES

I/O CABLE LIST						
Cable No.	Port	# of Identical Ports	Connector Type	Cable Type	Cable Length	Remarks
1	AC	1	US 115V	Un-shielded	1.8m	N/A
2	AC	1	US 115V	Un-shielded	1m	N/A
3	DC	1	DC	Un-shielded	1.8m	N/A
4	USB	1	Mini USB	Un-shielded	1.2m	Connect to Laptop

TEST SETUP

SETUP DIAGRAM FOR TESTS

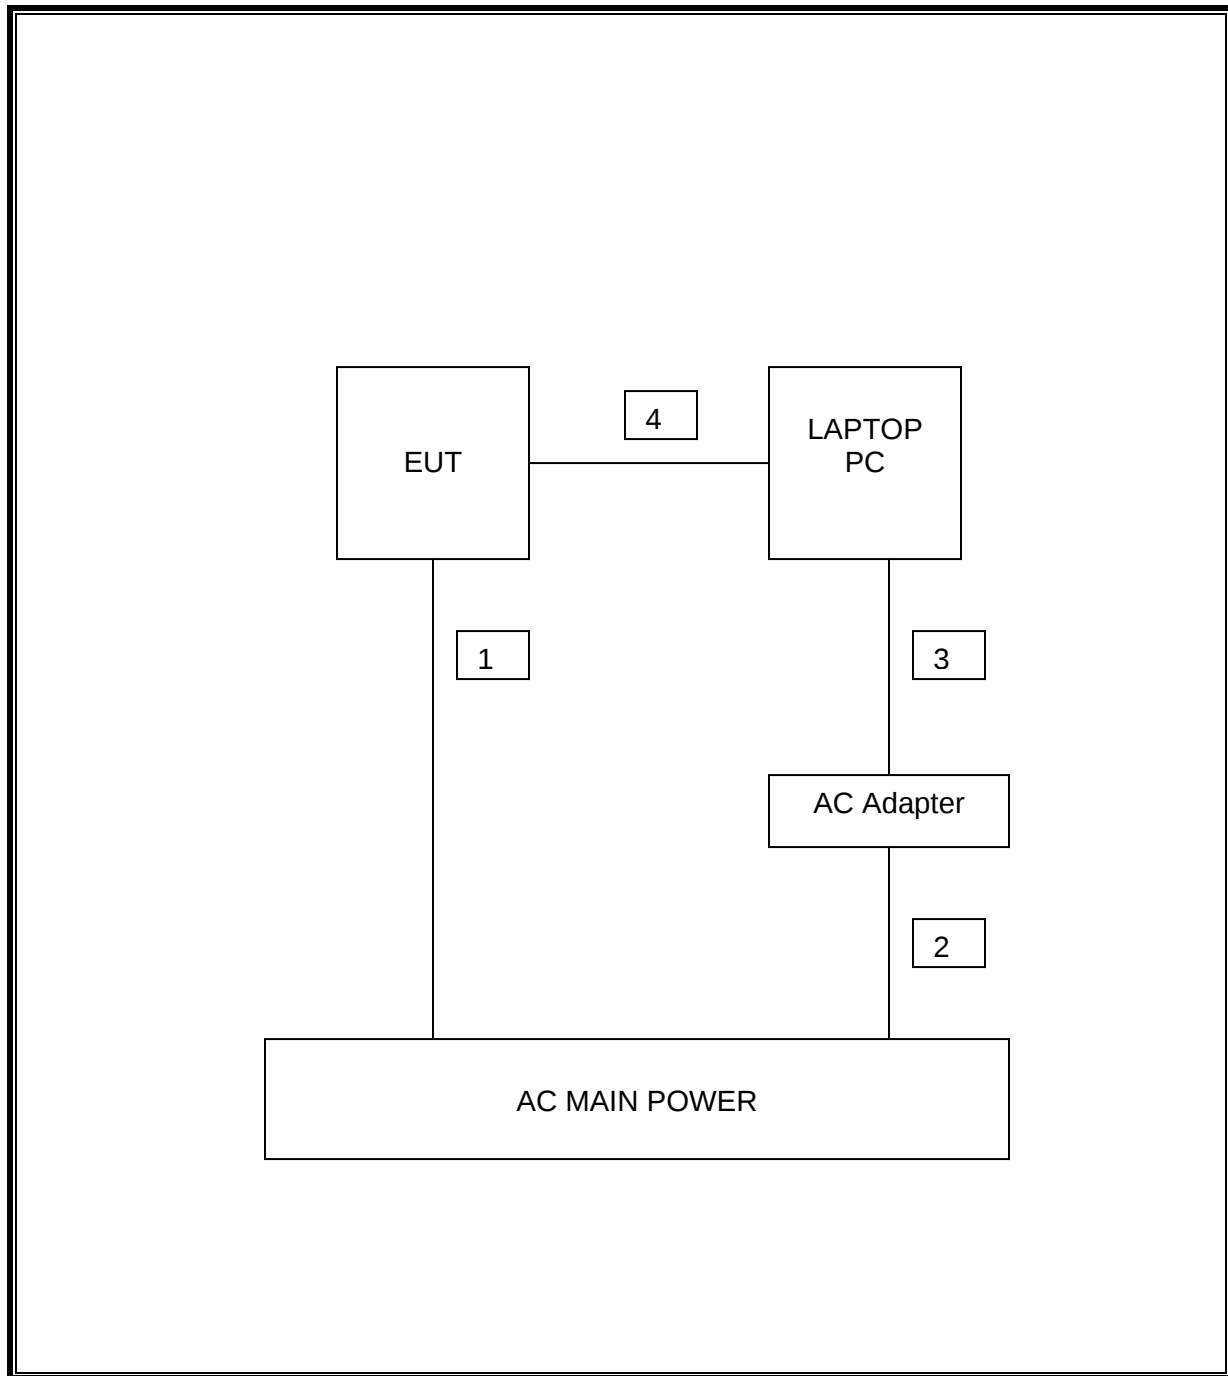

6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

TEST EQUIPMENT LIST					
Description	Manufacturer	Model	Asset	Cal Date	Cal Due
Spectrum Analyzer, 26.5 GHz	Agilent / HP	E4440A	C01176	08/04/11	08/04/12
Spectrum Analyzer, 44 GHz	Agilent / HP	E4446A	C01176	08/04/11	08/04/12
Antenna, Horn, 18 GHz	EMCO	3115	C00872	06/29/11	06/29/12
Preamplifier, 26.5 GHz	Agilent / HP	8449B	C00749	07/18/11	07/18/12
Antenna, Bilog, 2 GHz	Sunol Sciences	JB1	C01171	07/16/11	07/16/12
Preamplifier, 1300 MHz	Agilent / HP	8447D	C00558	11/11/11	11/11/12
Peak Power Meter	Agilent / HP	N1911A	1282124A	08/04/11	08/04/12
Peak and Avg Power Sensor	Agilent / HP	E9323A	1240537J	08/04/11	08/04/12
EMI Test Receiver, 9 kHz-7 GHz	R & S	ESCI 7	1000741	7/6/2011	7/6/2012
LISN, 30 MHz	FCC	LISN-50/250-25-2	N02625	11/10/11	11/10/12
Horn Antenna, 26 GHz	ARA	MWH-1826/B	C00589	07/28/11	07/28/12
Horn Antenna, 40 GHz	ARA	MWH-2640/B	C00981	06/14/11	06/14/12
Preamplifier, 40 GHz	Miteq	NSP4000-SP2	C00990	08/12/11	08/12/12

7. ANTENNA PORT TEST RESULTS

7.1. 802.11a MODE IN THE 5.2 GHz BAND

7.1.1. ON TIME, DUTY CYCLE AND MEASUREMENT METHODS

LIMITS

None; for reporting purposes only.

PROCEDURE

KDB 789033 Zero-Span Spectrum Analyzer Method.

Mode	ON Time B (msec)	Period (msec)	Duty Cycle x (linear)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)	1/B Minimum VBW (kHz)
802.11a 20 MHz	1.394	1.43	0.975	97.5%	0.11	0.717


7.1.2. MEASUREMENT METHOD FOR POWER AND PPSD

The Duty Cycle is less than 98% and consistent therefore KDB 789033 Method SA-2 is used.

7.1.3. MEASUREMENT METHOD FOR AVERAGE SPURIOUS EMISSIONS ABOVE 1 GHz

The Duty Cycle is less than 98% and consistent, KDB 789033 Method VB with Power RMS Averaging is used.

7.1.4. DUTY CYCLE AND ON TIME

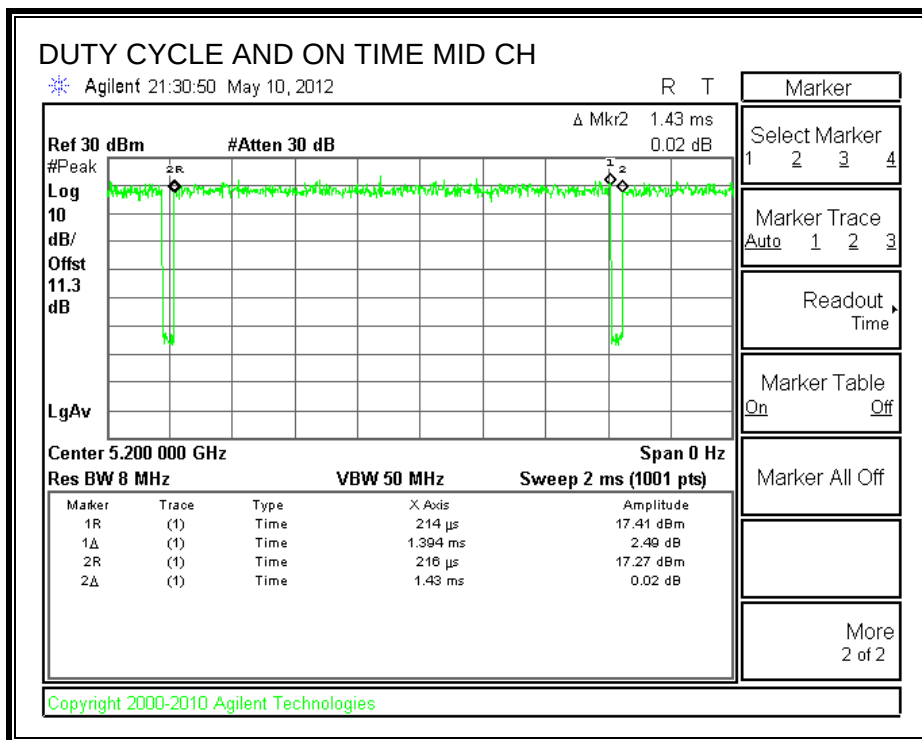

7.1.5. 26 dB BANDWIDTH



LIMITS


None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
Low	5180	18.54
Mid	5200	18.54
High	5240	18.57

26 dB BANDWIDTH

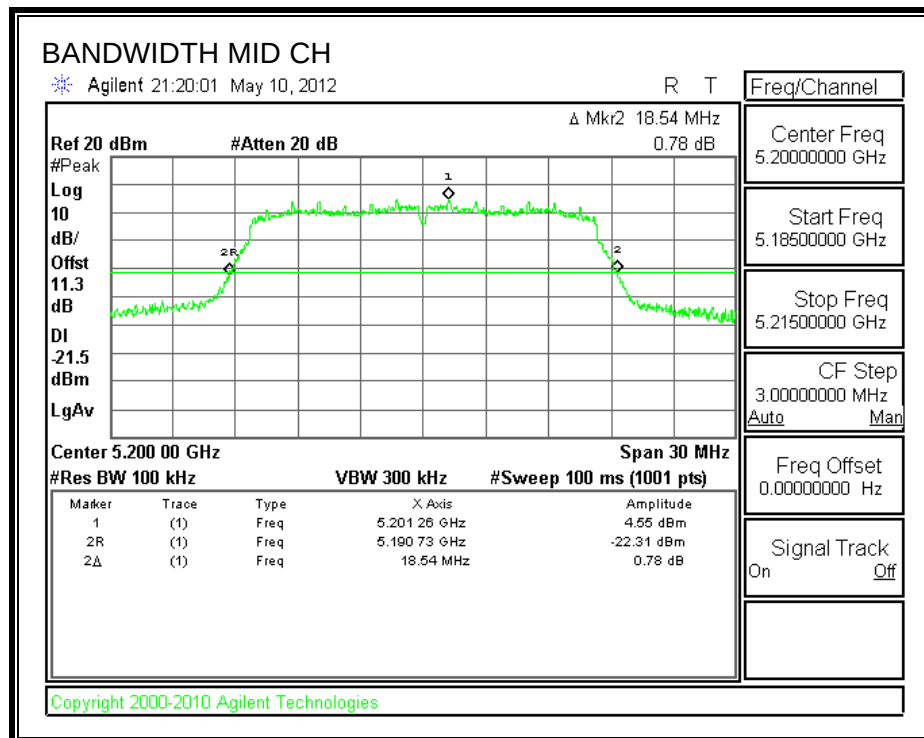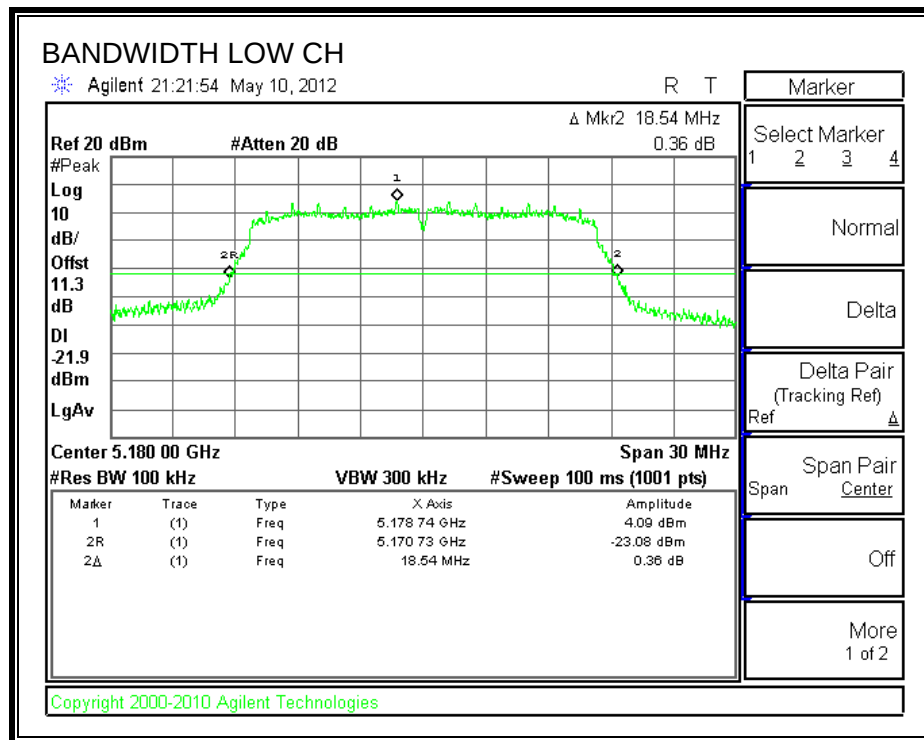

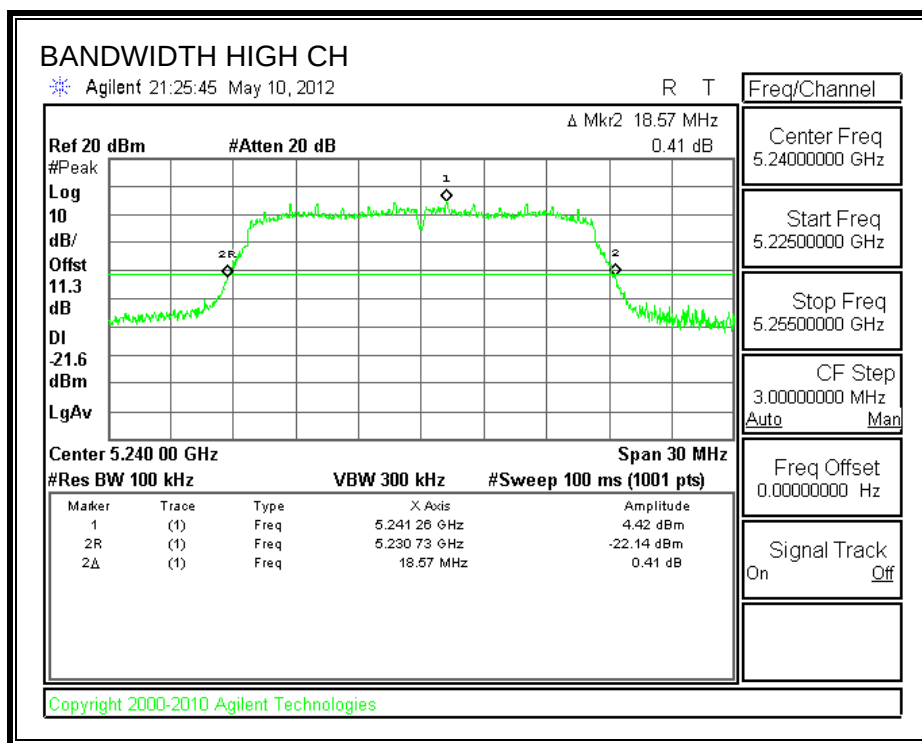

7.1.6. 99% BANDWIDTH



LIMITS


None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	5180	17.4803
Mid	5200	16.3429
High	5240	16.3459

99% BANDWIDTH

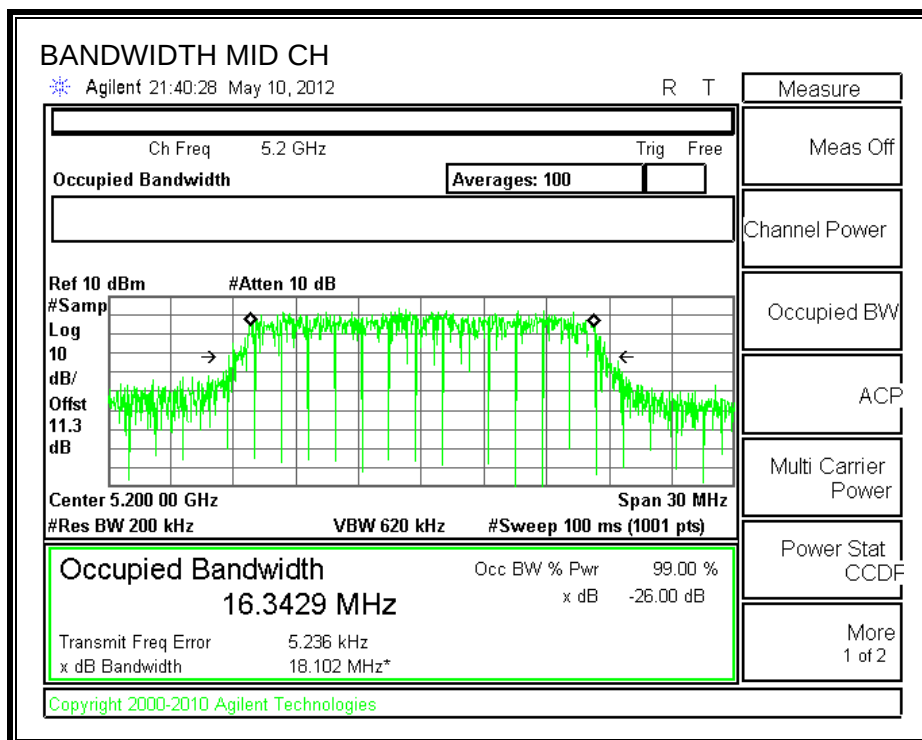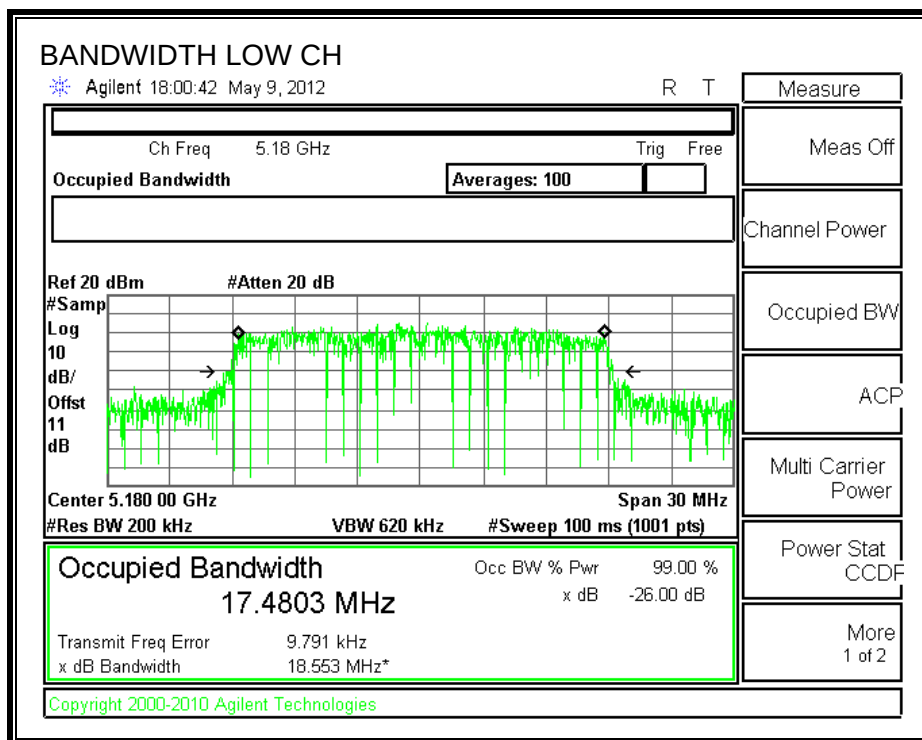

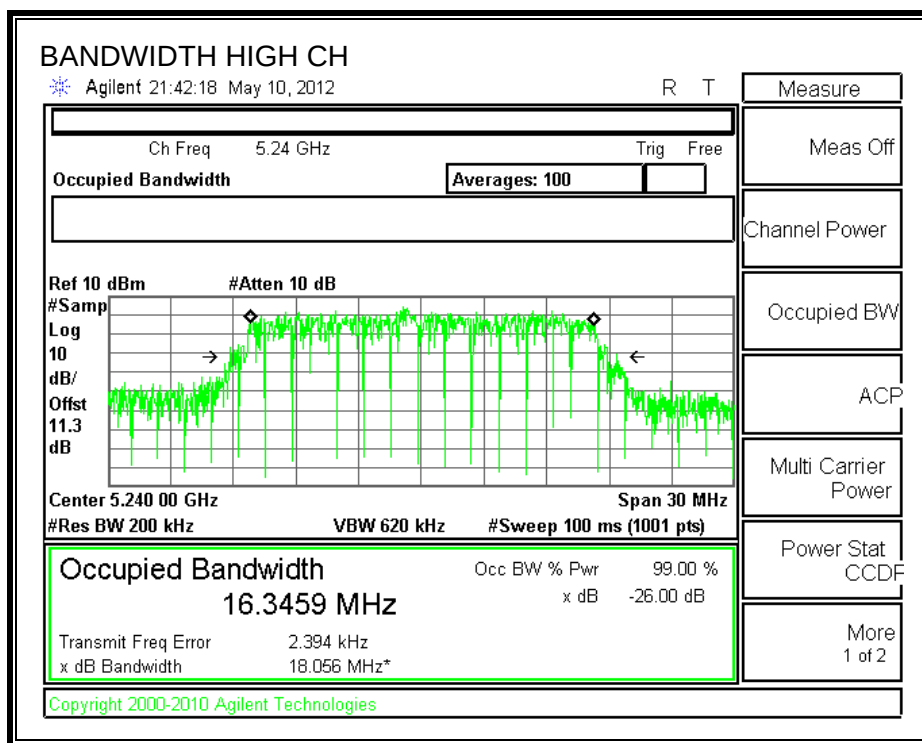

7.1.1. OUTPUT POWER AND PPSD

LIMITS

FCC §15.407 (a) (1)

IC RSS-210 A9.2 (1)

For the band 5.15–5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 50 mW or $4 \text{ dBm} + 10 \log B$, where B is the 26-dB emission bandwidth in MHz. In addition, the peak power spectral density shall not exceed 4 dBm in any 1-MHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

DIRECTIONAL ANTENNA GAIN

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

RESULTS

Limits

Channel	Frequency (MHz)	Fixed Limit (dBm)	B (MHz)	4 + 10 Log B Limit (dBm)	Directional Gain (dBi)	Power Limit (dBm)	PPSD Limit (dBm)
Low	5180	17	18.5	16.68	6.00	16.68	4.00
Mid	5200	17	18.5	16.68	6.00	16.68	4.00
High	5240	17	18.6	16.69	6.00	16.69	4.00

Duty Cycle CF (dB)	0.11	Included in Calculations of Corr'd Power & PSD
--------------------	------	--



Output Power Results


Channel	Frequency (MHz)	Meas Power (dBm)	Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5180	14.09	14.20	16.68	-2.48
Mid	5200	14.16	14.27	16.68	-2.41
High	5240	14.15	14.26	16.69	-2.43

PPSD Results

Channel	Frequency (MHz)	Meas PPSD (dBm)	Corr'd PPSD (dBm)	PPSD Limit (dBm)	PPSD Margin (dB)
Low	5180	3.85	3.96	4.00	-0.04
Mid	5200	3.78	3.89	4.00	-0.11
High	5240	3.83	3.94	4.00	-0.06

OUTPUT POWER AND PPSD

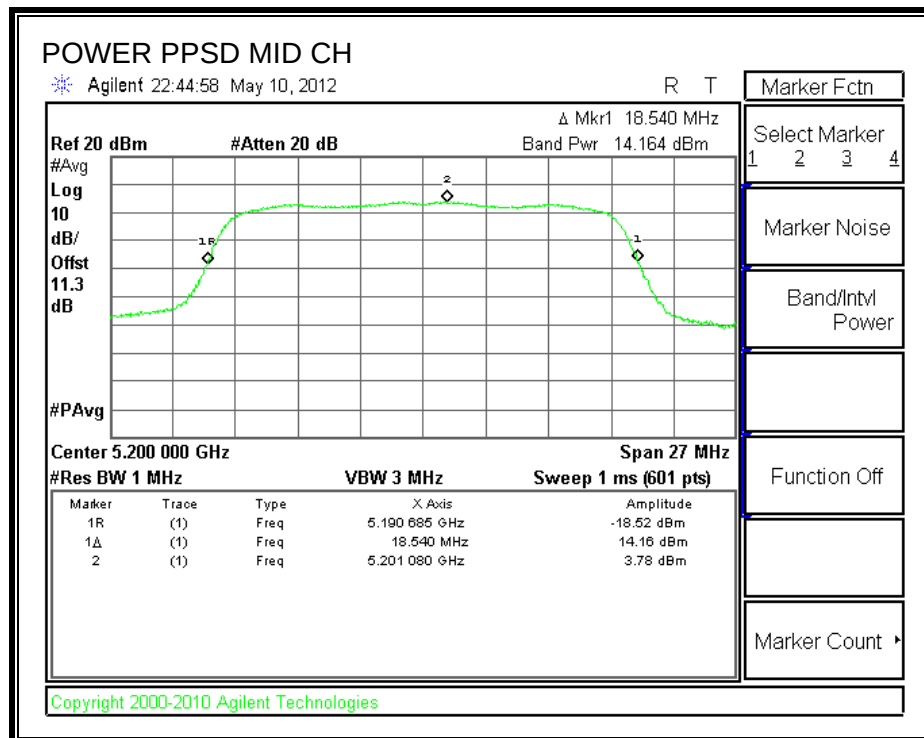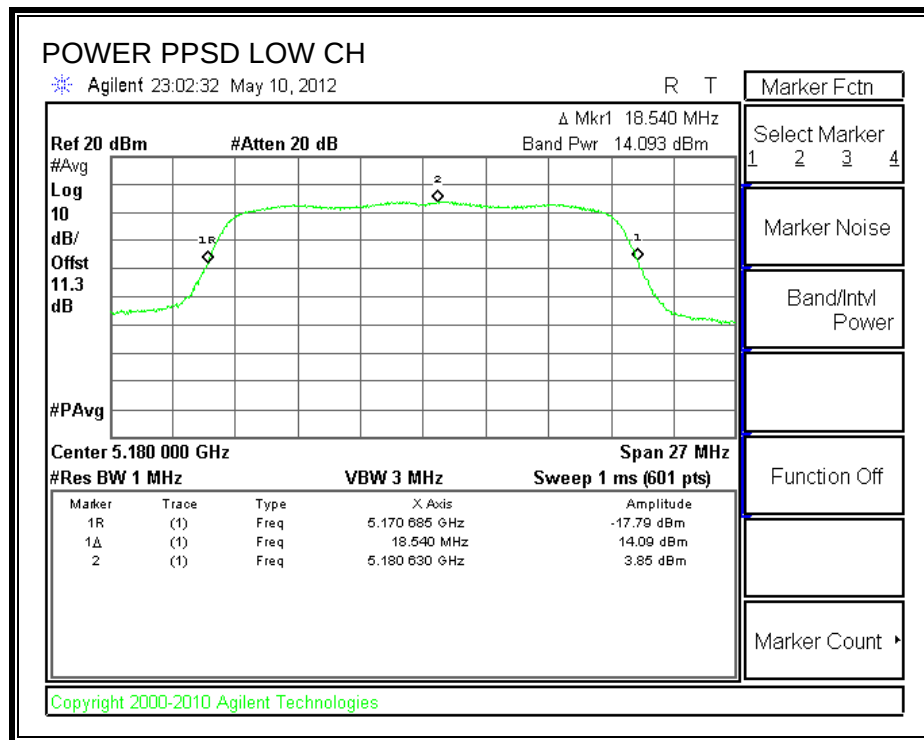

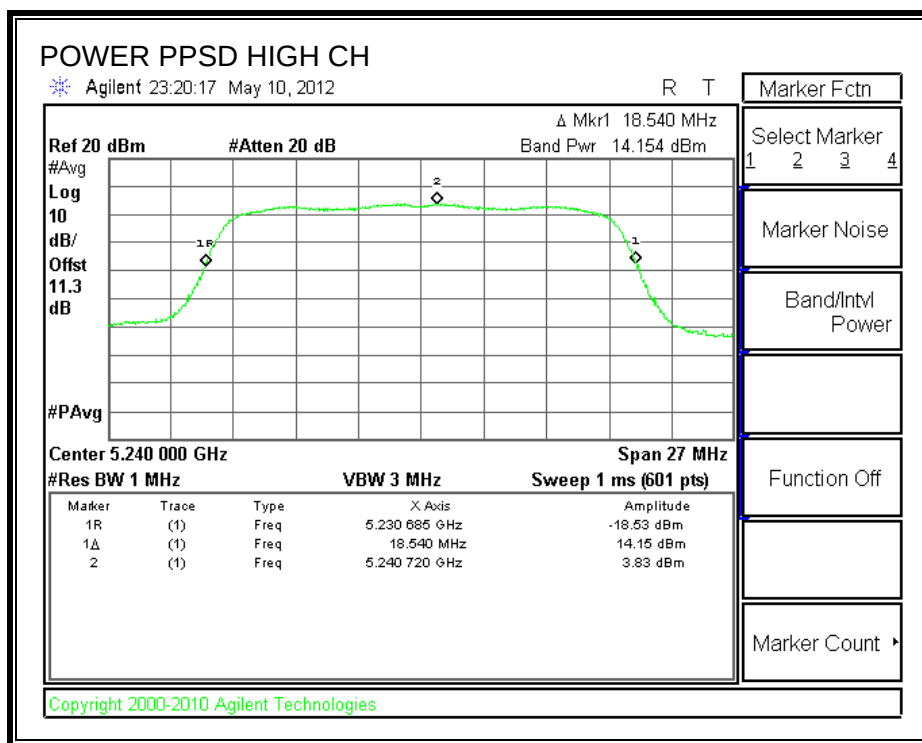

7.1.2. AVERAGE POWER

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

The transmitter output is connected to a power meter.

RESULTS

The cable assembly insertion loss of 11.3 dB (including 10 dB pad and 1.3 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

Channel	Frequency (MHz)	Power (dBm)
Low	5180	13.43
Middle	5200	13.85
High	5240	13.70

7.1.1. PEAK EXCURSION

LIMITS



FCC §15.407 (a) (6)


The ratio of the peak excursion of the modulation envelope (measured using a peak hold function) to the peak transmit power (measured as specified above) shall not exceed 13 dB across any 1 MHz bandwidth or the emission bandwidth whichever is less.

RESULTS

Channel	Frequency (MHz)	Peak Excursion (dB)	Limit (dB)	Margin (dB)
Low	5180	8.26	13	-4.7
Mid	5200	8.30	13	-4.7
High	5240	9.34	13	-3.7

PEAK EXCURSION

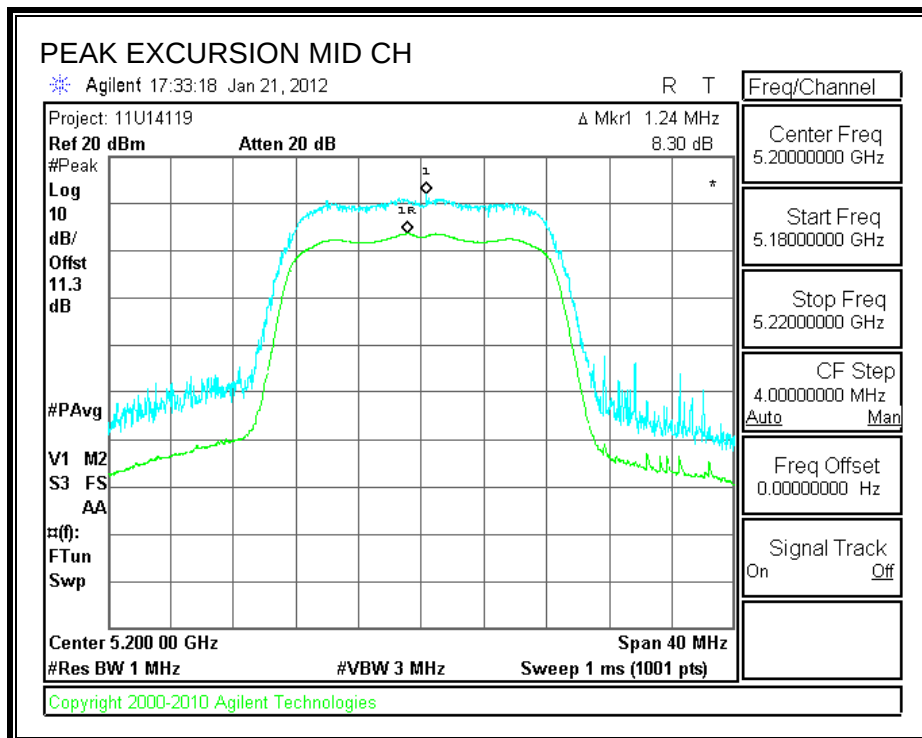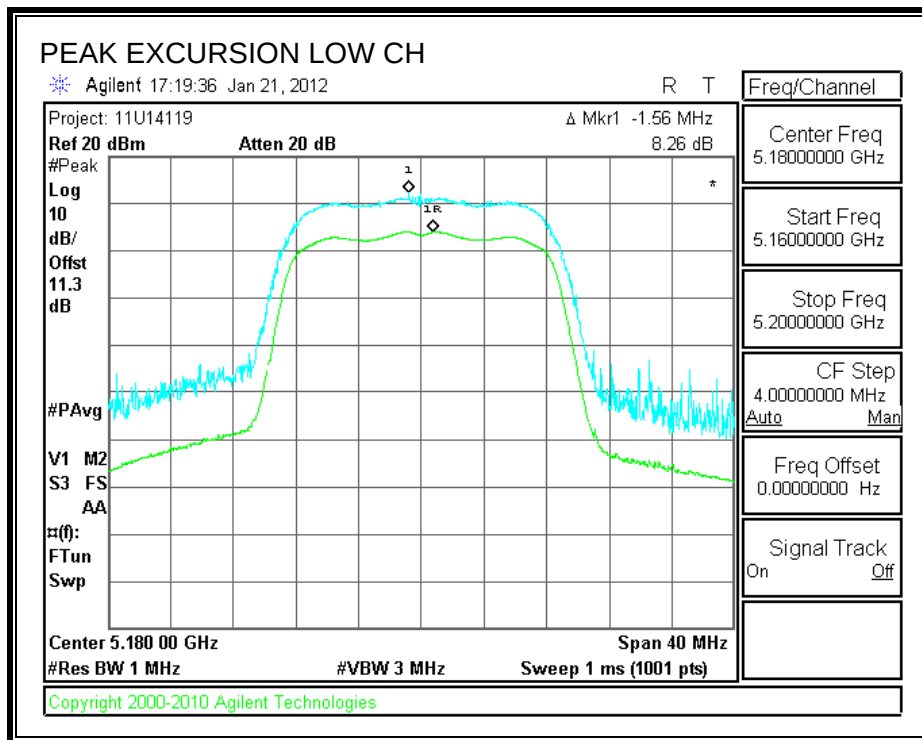

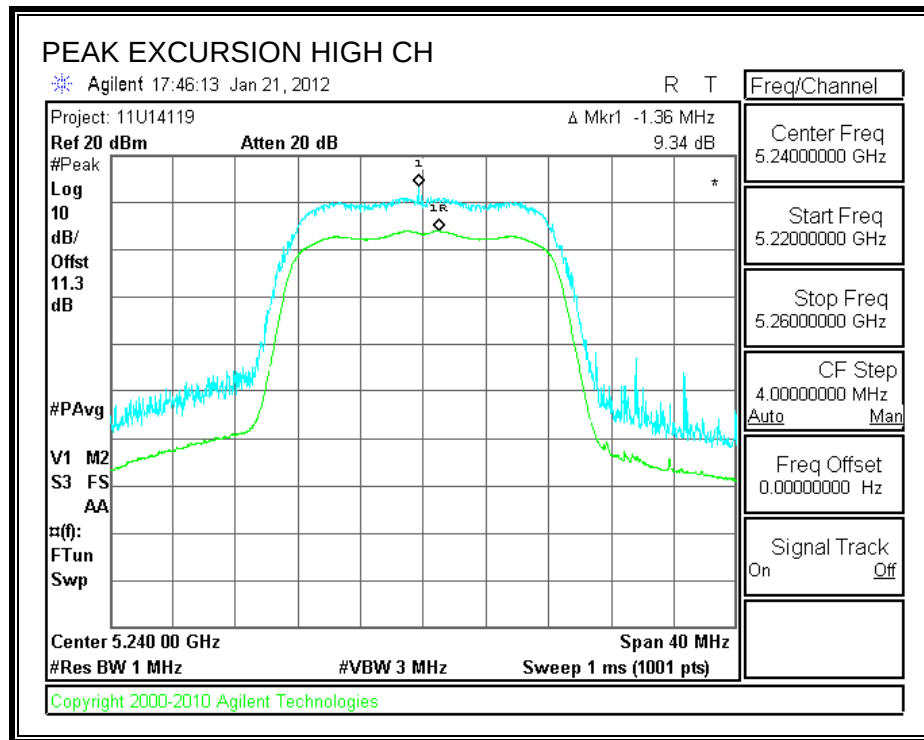

7.2. 802.11n HT20 MODE IN THE 5.2 GHz BAND

7.2.1. ON TIME, DUTY CYCLE AND MEASUREMENT METHODS

LIMITS

None; for reporting purposes only.

PROCEDURE

KDB 789033 Zero-Span Spectrum Analyzer Method.

7.2.2. ON TIME AND DUTY CYCLE RESULTS

Mode	ON Time B (msec)	Period (msec)	Duty Cycle x (linear)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)	1/B Minimum VBW (kHz)
802.11a 20 MHz	1.307	1.347	0.970	97.0%	0.13	0.765


7.2.3. MEASUREMENT METHOD FOR POWER AND PPSD

The Duty Cycle is less than 98% and consistent therefore KDB 789033 Method SA-2 is used.

7.2.4. MEASUREMENT METHOD FOR AVERAGE SPURIOUS EMISSIONS ABOVE 1 GHz

The Duty Cycle is less than 98% and consistent, KDB 789033 Method VB with Power RMS Averaging is used.

DUTY CYCLE AND ON TIME

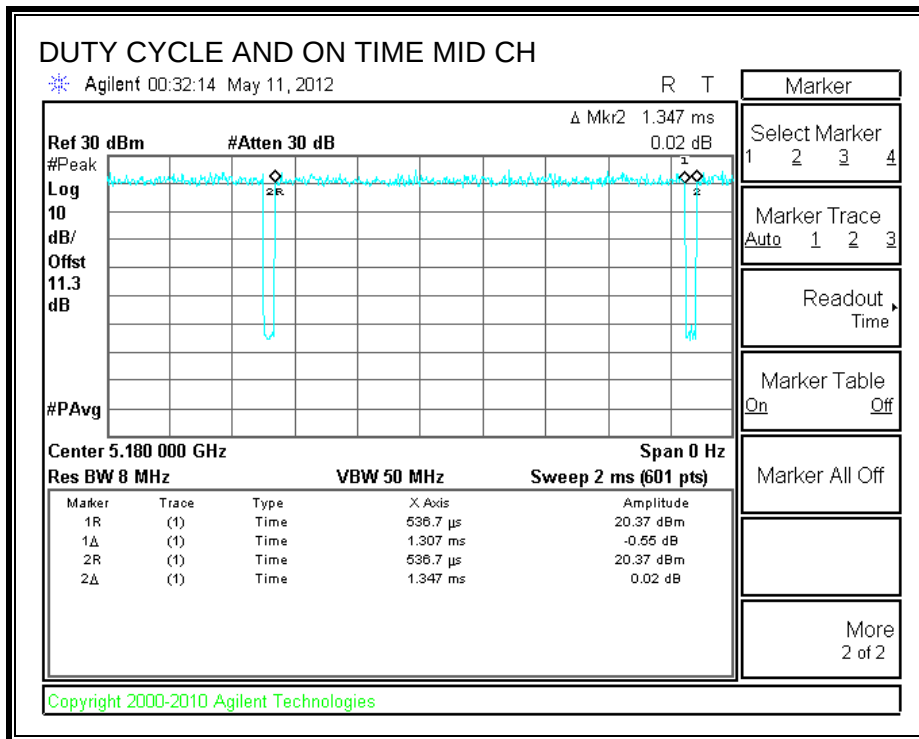

7.2.5. 26 dB BANDWIDTH



LIMITS


None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
Low	5180	18.88
Mid	5200	18.80
High	5240	18.82

26 dB BANDWIDTH

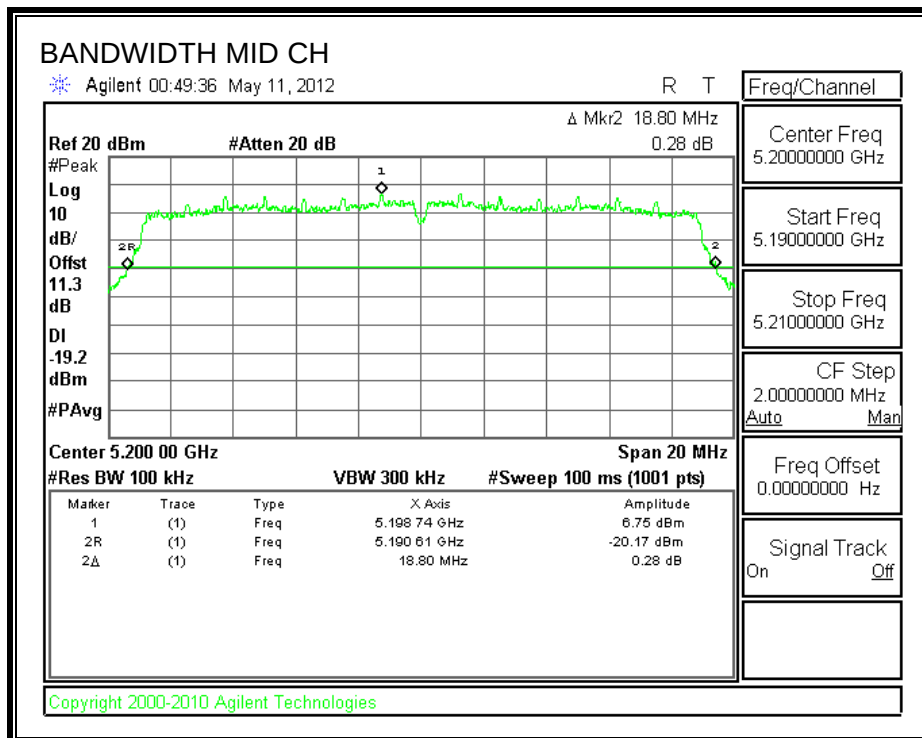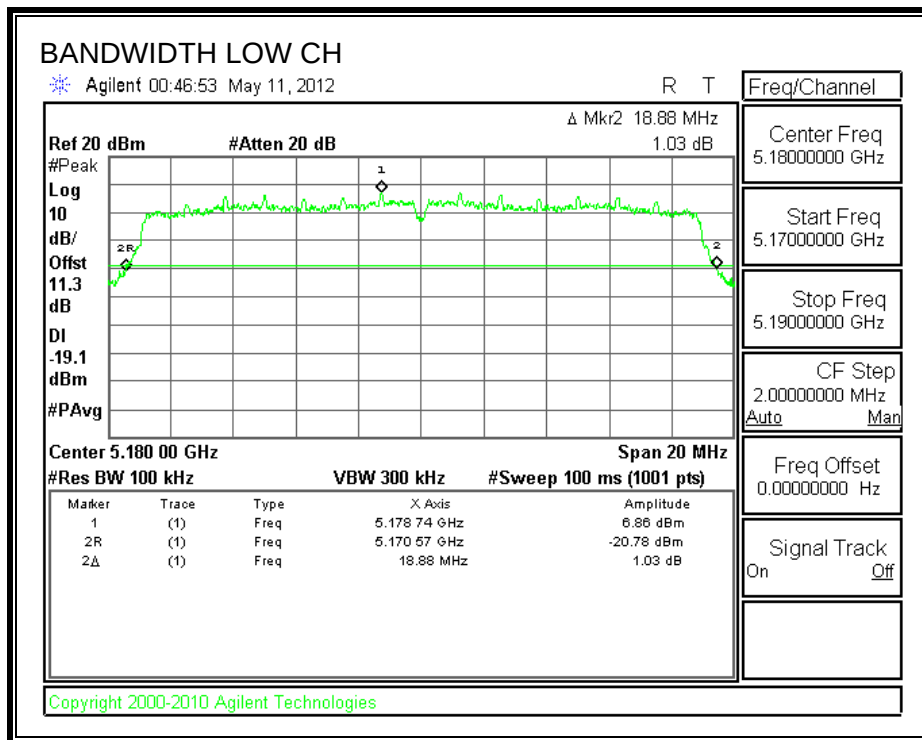

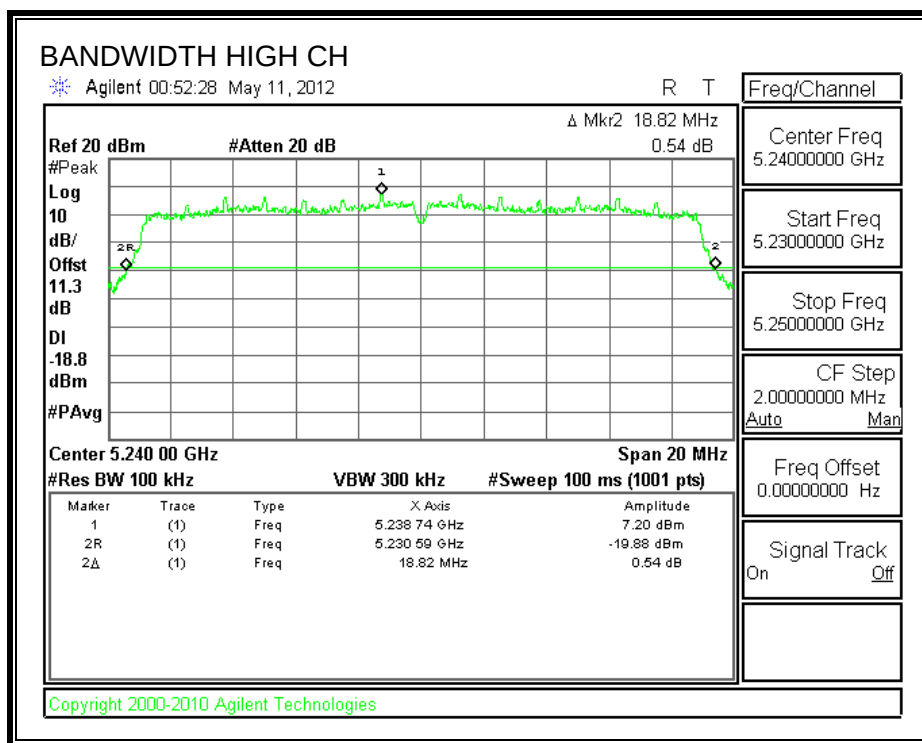

7.2.1. 99% BANDWIDTH



LIMITS


None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	5180	17.5178
Mid	5200	17.5058
High	5240	17.5121

99% BANDWIDTH

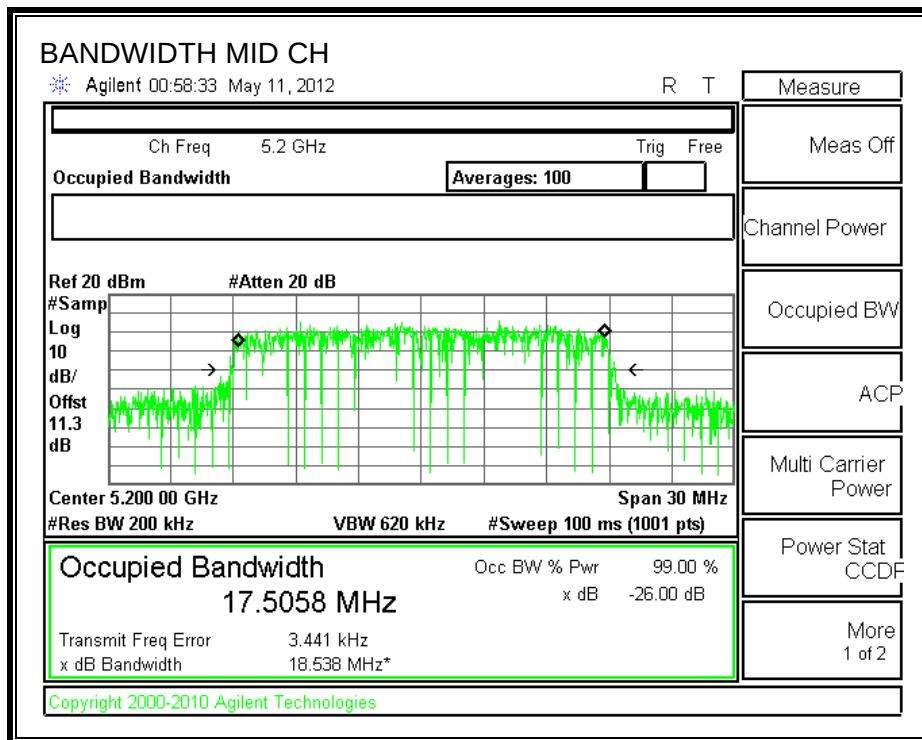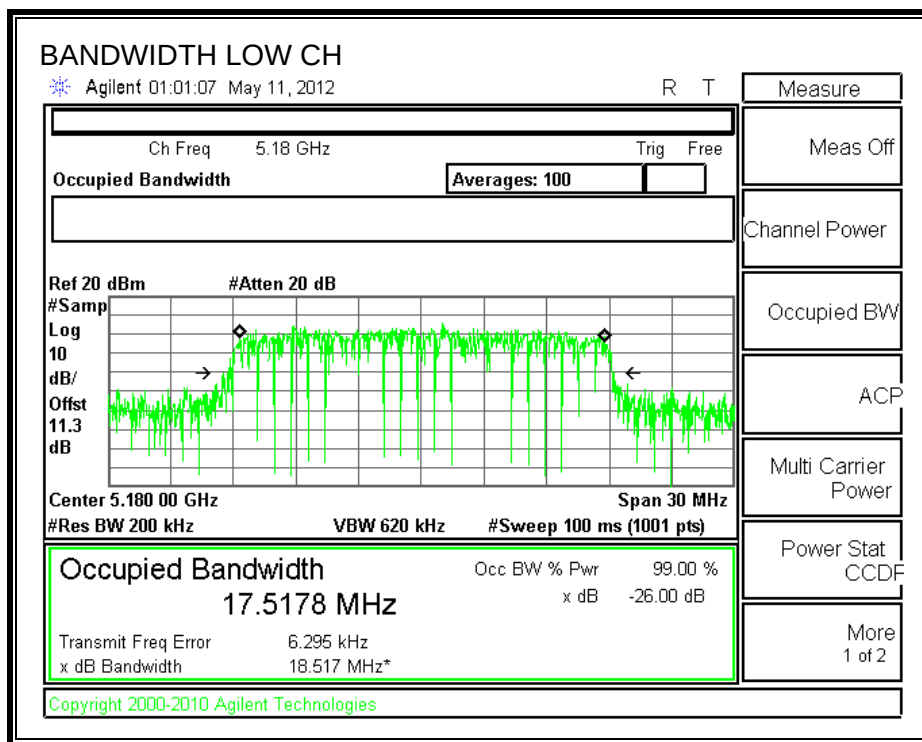

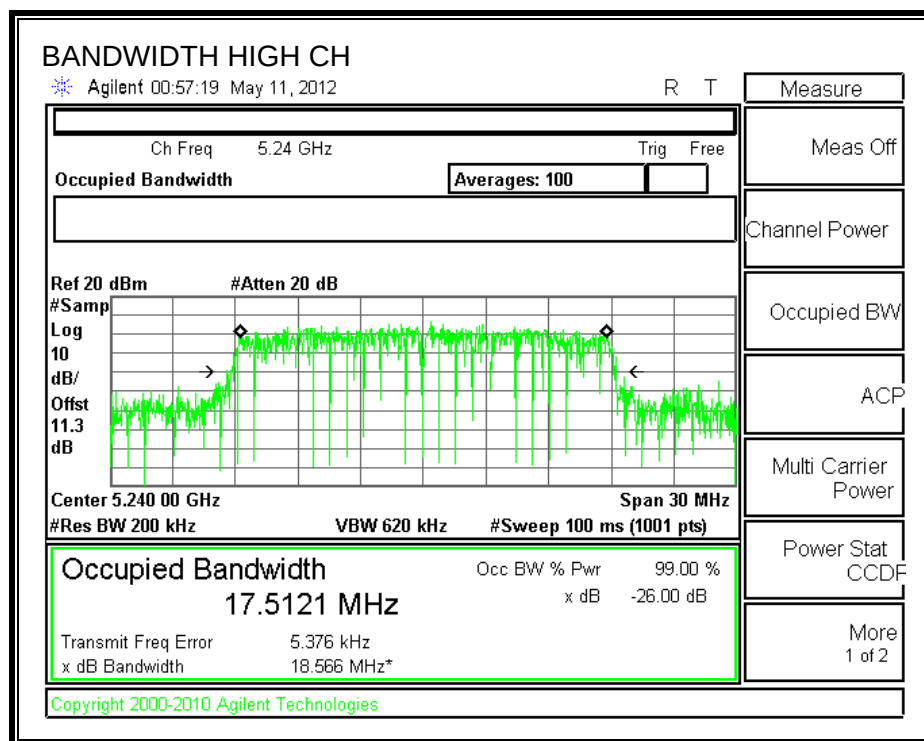

7.2.2. OUTPUT POWER AND PPSD

LIMITS

FCC §15.407 (a) (1)

IC RSS-210 A9.2 (1)

For the band 5.15–5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 50 mW or $4 \text{ dBm} + 10 \log B$, where B is the 26-dB emission bandwidth in MHz. In addition, the peak power spectral density shall not exceed 4 dBm in any 1-MHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

DIRECTIONAL ANTENNA GAIN

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

RESULTS

Limits

Channel	Frequency (MHz)	Fixed Limit (dBm)	B (MHz)	4 + 10 Log B Limit (dBm)	Directional Gain (dBi)	Power Limit (dBm)	PPSD Limit (dBm)
Low	5180	17	18.5	16.68	6.00	16.68	4.00
Mid	5200	17	18.5	16.68	6.00	16.68	4.00
High	5240	17	18.6	16.69	6.00	16.69	4.00

Duty Cycle CF (dB)	0.11	Included in Calculations of Corr'd Power & PSD
--------------------	------	--



Output Power Results


Channel	Frequency (MHz)	Meas Power (dBm)	Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5180	13.58	13.69	16.68	-2.99
Mid	5200	13.55	13.66	16.68	-3.02
High	5240	13.63	13.74	16.69	-2.95

PPSD Results

Channel	Frequency (MHz)	Meas PPSD (dBm)	Corr'd PPSD (dBm)	PPSD Limit (dBm)	PPSD Margin (dB)
Low	5180	3.33	3.44	4.00	-0.56
Mid	5200	3.37	3.48	4.00	-0.52
High	5240	3.72	3.83	4.00	-0.17

OUTPUT POWER AND PPSD

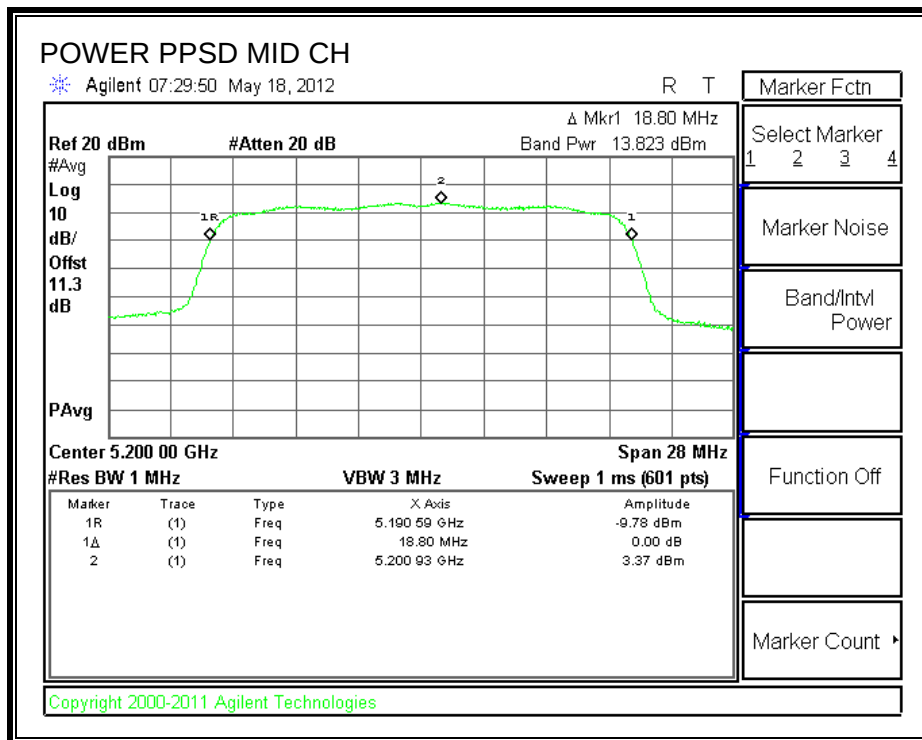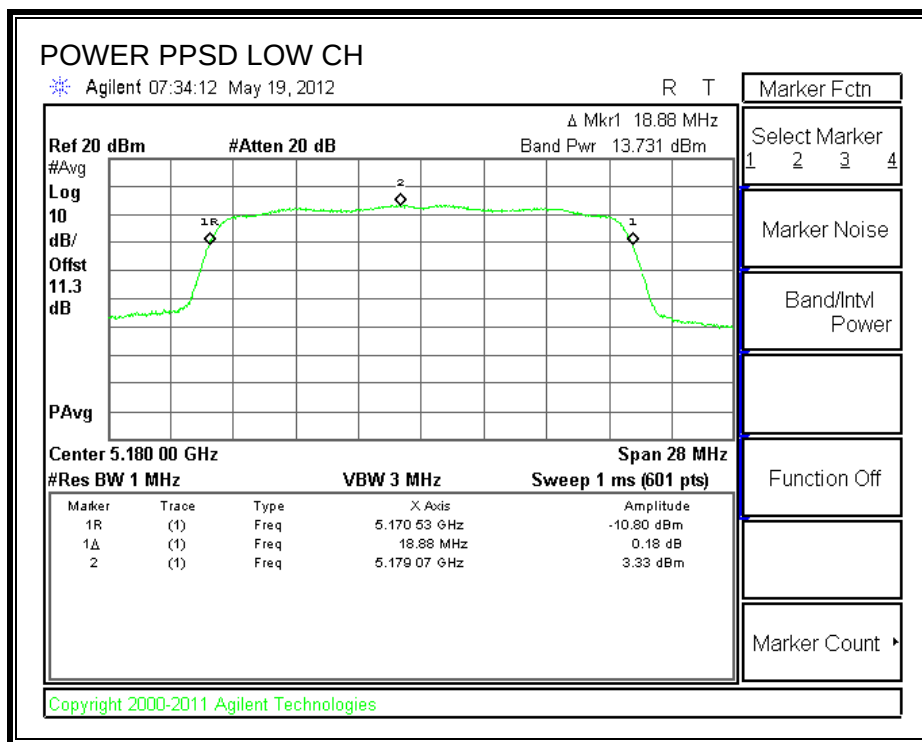

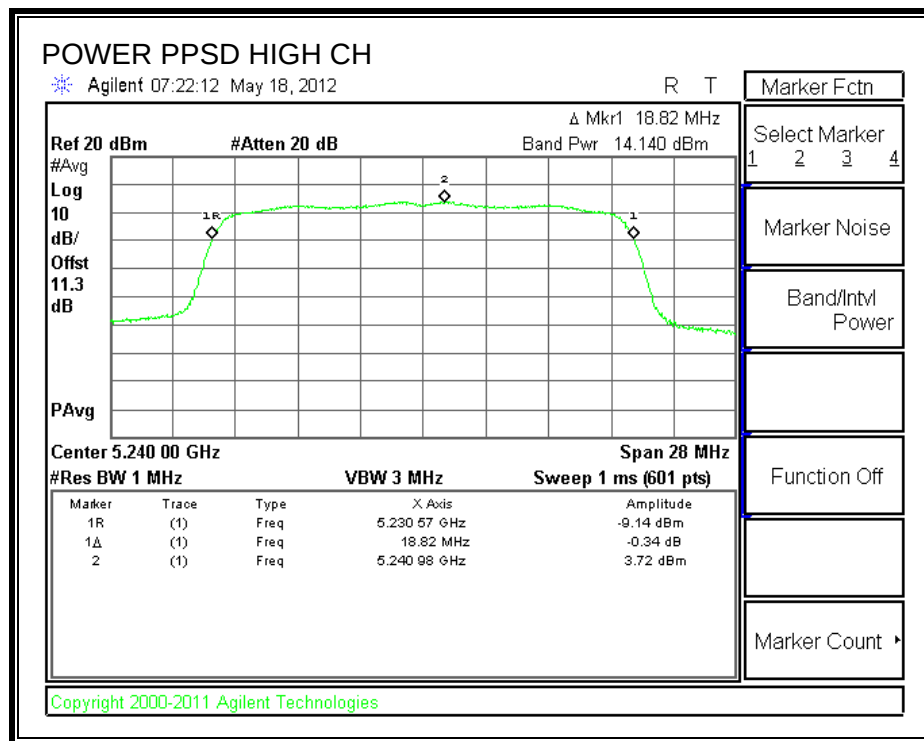

7.2.3. AVERAGE POWER

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

The transmitter output is connected to a power meter.

RESULTS

The cable assembly insertion loss of 11.3 dB (including 10 dB pad and 1.3 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

Channel	Frequency (MHz)	Power (dBm)
Low	5180	13.58
Middle	5200	13.55
High	5240	13.63

7.2.4. PEAK EXCURSION

LIMITS



FCC §15.407 (a) (6)


The ratio of the peak excursion of the modulation envelope (measured using a peak hold function) to the peak transmit power (measured as specified above) shall not exceed 13 dB across any 1 MHz bandwidth or the emission bandwidth whichever is less.

RESULTS

Channel	Frequency (MHz)	Peak Excursion (dB)	Limit (dB)	Margin (dB)
Low	5180	10.16	13	-2.8
Mid	5200	9.06	13	-3.9
High	5240	9.46	13	-3.5

PEAK EXCURSION

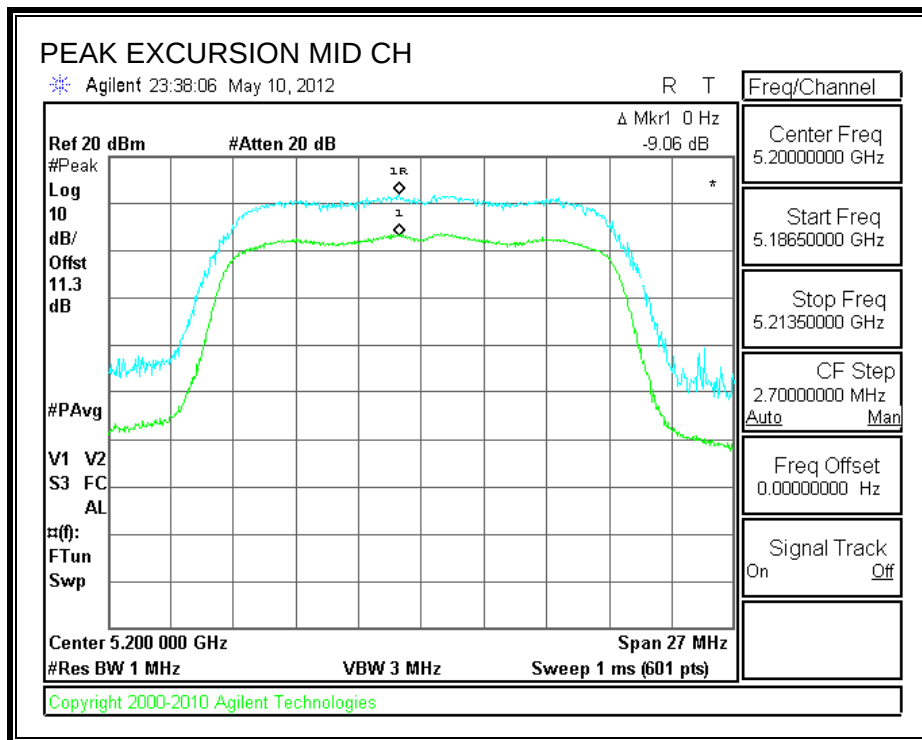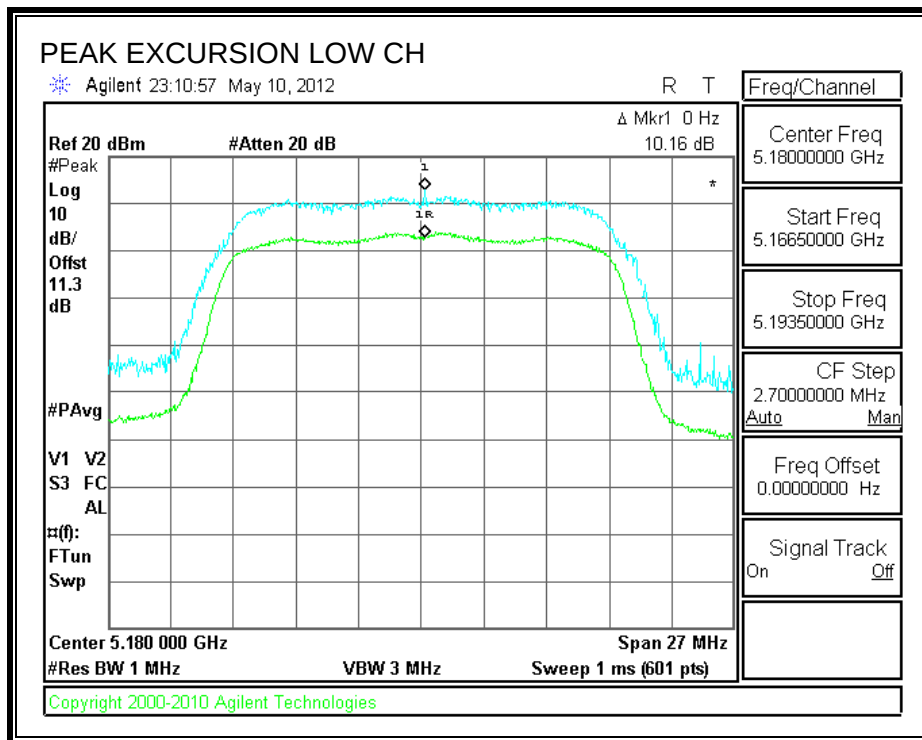

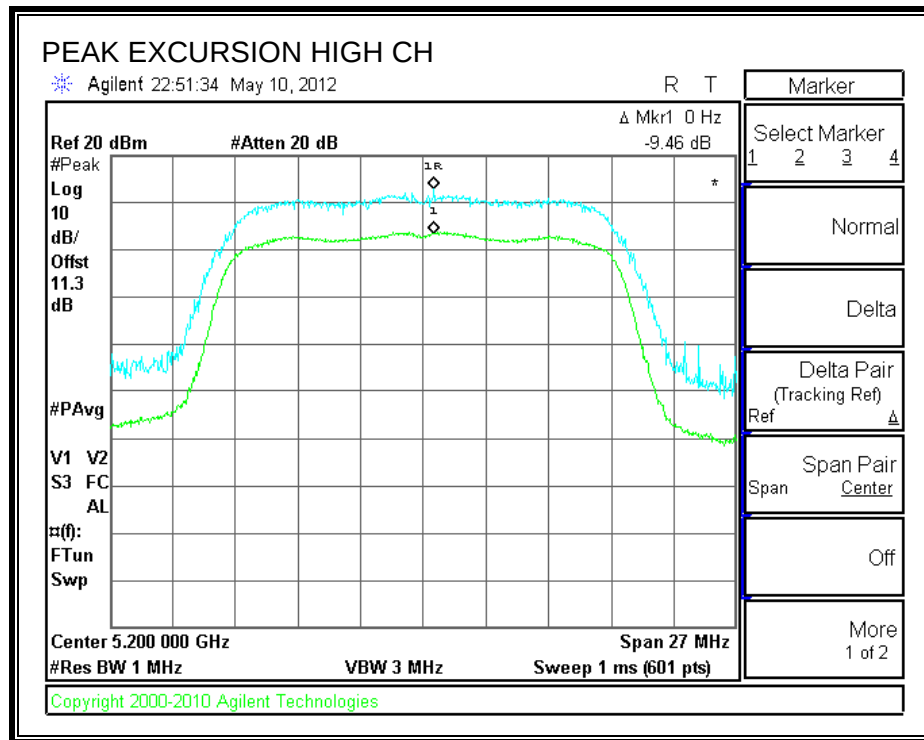

8. RADIATED TEST RESULTS

8.1. LIMITS AND PROCEDURE

LIMITS

FCC §15.205 and §15.209

IC RSS-210 Clause 2.6 (Transmitter)

IC RSS-GEN Clause 6 (Receiver)

Frequency Range (MHz)	Field Strength Limit (uV/m) at 3 m	Field Strength Limit (dBuV/m) at 3 m
30 - 88	100	40
88 - 216	150	43.5
216 - 960	200	46
Above 960	500	54

TEST PROCEDURE

The EUT is placed on a non-conducting table 80 cm above the ground plane. The antenna to EUT distance is 3 meters. The EUT is configured in accordance with ANSI C63.4. The EUT is set to transmit in a continuous mode.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 1 MHz for peak measurements and 10 Hz for average measurements.


The spectrum from 30 MHz to 40 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in each applicable band.


The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.

8.2. TRANSMITTER ABOVE 1 GHz


8.2.1. TX ABOVE 1 GHz FOR 802.11a MODE IN THE LOWER 5.2 GHz BAND


RESTRICTED BANDEDGE (LOW CHANNEL, HORIZONTAL)

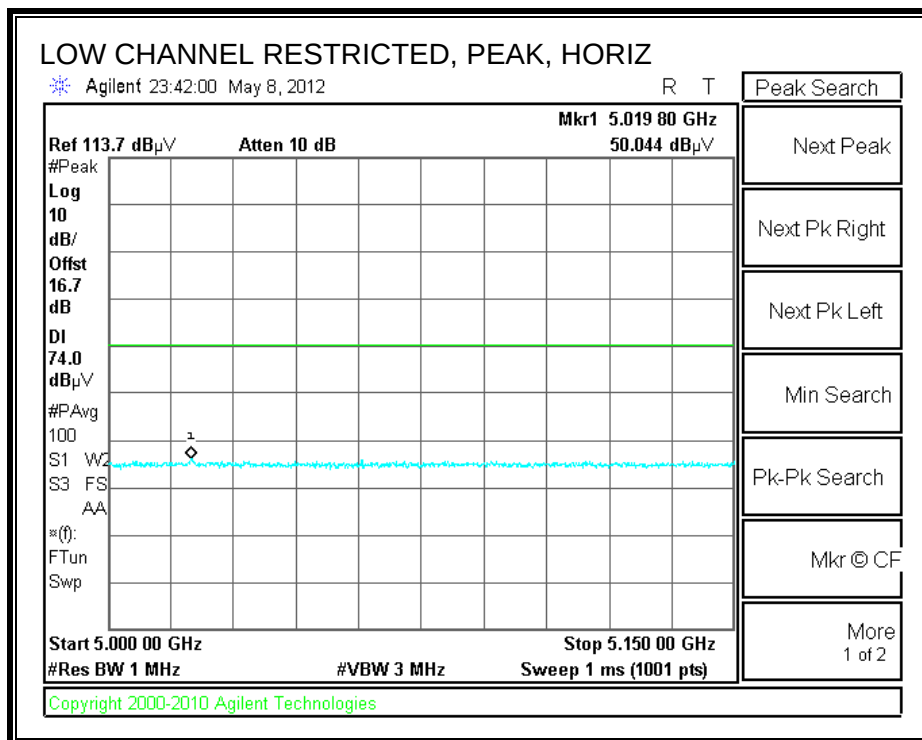

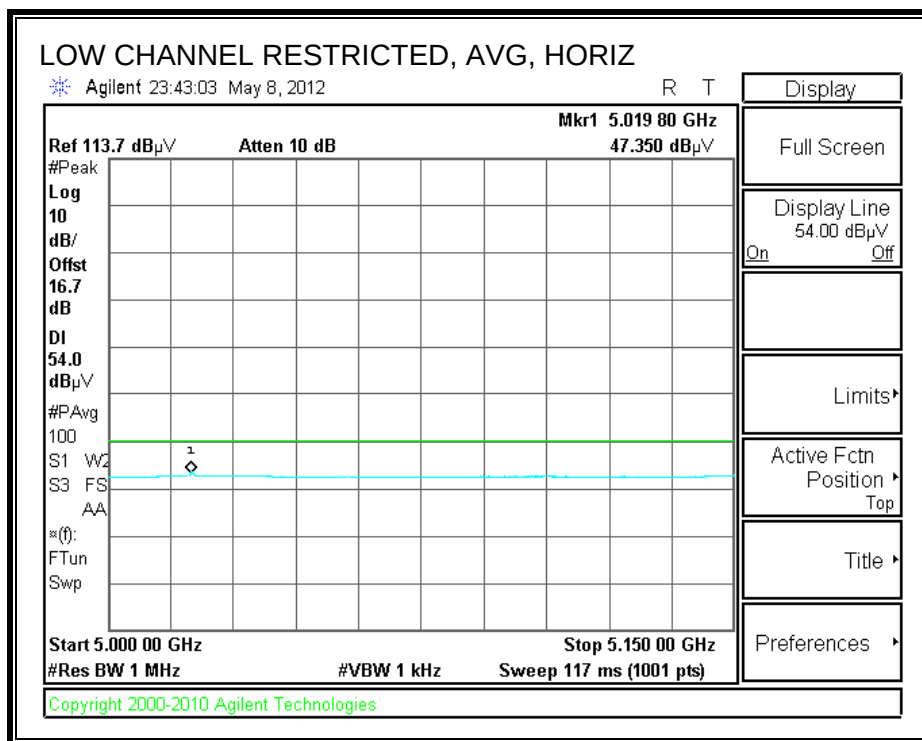

RESTRICTED BANDEDGE (LOW CHANNEL, VERTICAL)

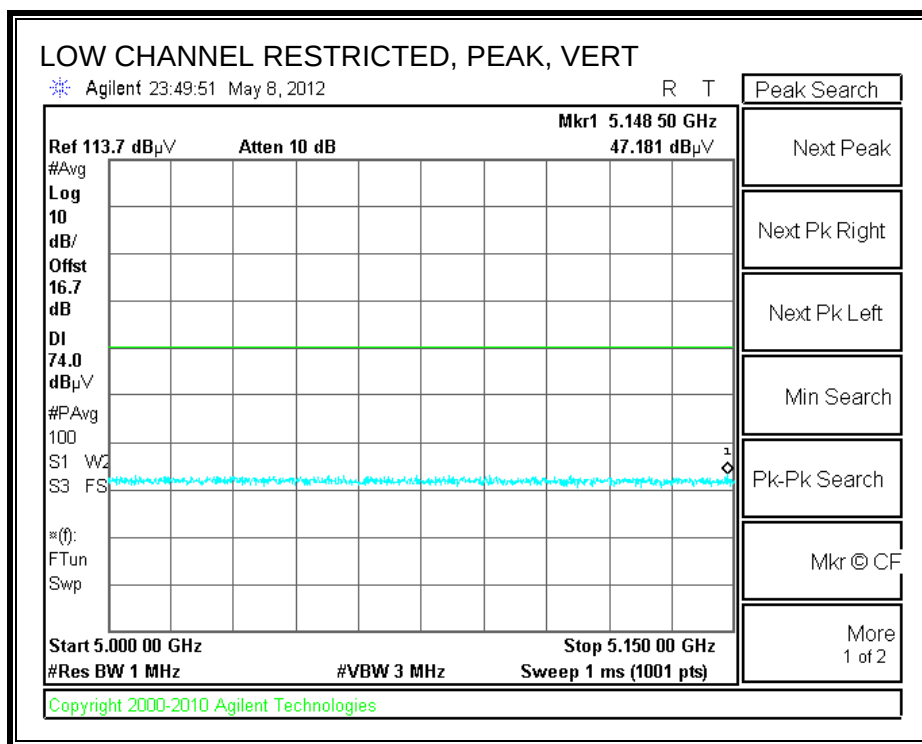

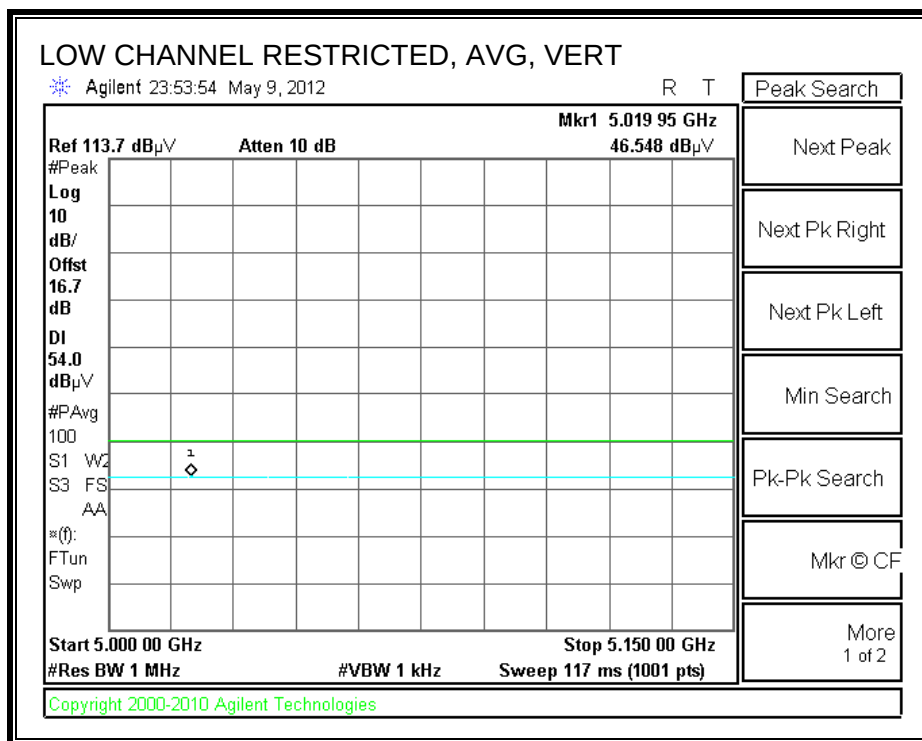



HARMONICS AND SPURIOUS EMISSIONS

High Frequency Measurement																	
Compliance Certification Services, Fremont 3m Chamber																	
Company:		GOOGLE															
Project #:		11U14119															
Date:		5/8/2012															
Test Engineer:		Thanh Nguyen															
Configuration:		EUT only															
Mode:		Tx a UNII 5.2GHz															
Test Equipment:																	
Horn 1-18GHz				Pre-amplifier 1-26GHz				Pre-amplifier 26-40GHz				Horn > 18GHz				Limit	
T60; S/N: 2238 @3m				T34 HP 8449B								T125; ARA 18-26GHz; S/N:1007				FCC 15.209	
Hi Frequency Cables																	
3' cable 22807700				12' cable 22807600				20' cable 22807500				HPF				Reject Filter	
3' cable 22807700				12' cable 22807600				20' cable 22807500									
Peak Measurements RBW=VBW=1MHz Average Measurements RBW=1MHz ; VBW=10Hz																	
f GHz	Dist (m)	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Fltr dB	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes (V/H)		
Low Ch 5180MHz																	
10.360	3.0	35.2	26.3	38.4	9.6	-32.5	0.0	0.0	50.6	41.7	74	54	-23.4	-12.3	V/Noise floor		
10.360	3.0	35.2	26.3	38.4	9.6	-32.5	0.0	0.0	50.6	41.7	74	54	-23.4	-12.3	H/Noise floor		
15.540	3.0	34.9	25.7	39.1	13.0	-31.9	0.0	0.0	55.0	45.8	74	54	-19.0	-8.2	V/Noise floor		
15.540	3.0	35.2	26.2	39.1	13.0	-31.9	0.0	0.0	55.3	46.3	74	54	-18.7	-7.7	H/Noise floor		
Mid Ch 5200																	
10.400	3.0	36.7	26.5	38.4	9.6	-32.5	0.0	0.0	52.2	42.0	74	54	-21.8	-12.0	V/Noise floor		
10.400	3.0	36.4	26.3	38.4	9.6	-32.5	0.0	0.0	51.9	41.8	74	54	-22.1	-12.2	H/Noise floor		
High ch 5240MHz																	
10.480	3.0	36.8	25.4	38.4	9.7	-32.5	0.0	0.0	52.4	41.0	74	54	-21.6	-13.0	H/Noise floor		
15.720	3.0	34.9	25.5	38.4	13.1	-31.9	0.0	0.0	54.5	45.1	74	54	-19.5	-8.9	H/Noise floor		
Rev. 11.10.11																	
f	Measurement Frequency					Amp	Preamp Gain					Avg Lim	Average Field Strength Limit				
Dist	Distance to Antenna					D Corr	Distance Correct to 3 meters					Pk Lim	Peak Field Strength Limit				
Read	Analyzer Reading					Avg	Average Field Strength @ 3 m					Avg Mar	Margin vs. Average Limit				
AF	Antenna Factor					Peak	Calculated Peak Field Strength					Pk Mar	Margin vs. Peak Limit				
CL	Cable Loss					HPF	High Pass Filter										


8.2.2. TX ABOVE 1 GHz FOR 802.11n MODE IN THE LOWER 5.2 GHz BAND


RESTRICTED BANDEDGE (LOW CHANNEL, HORIZONTAL)

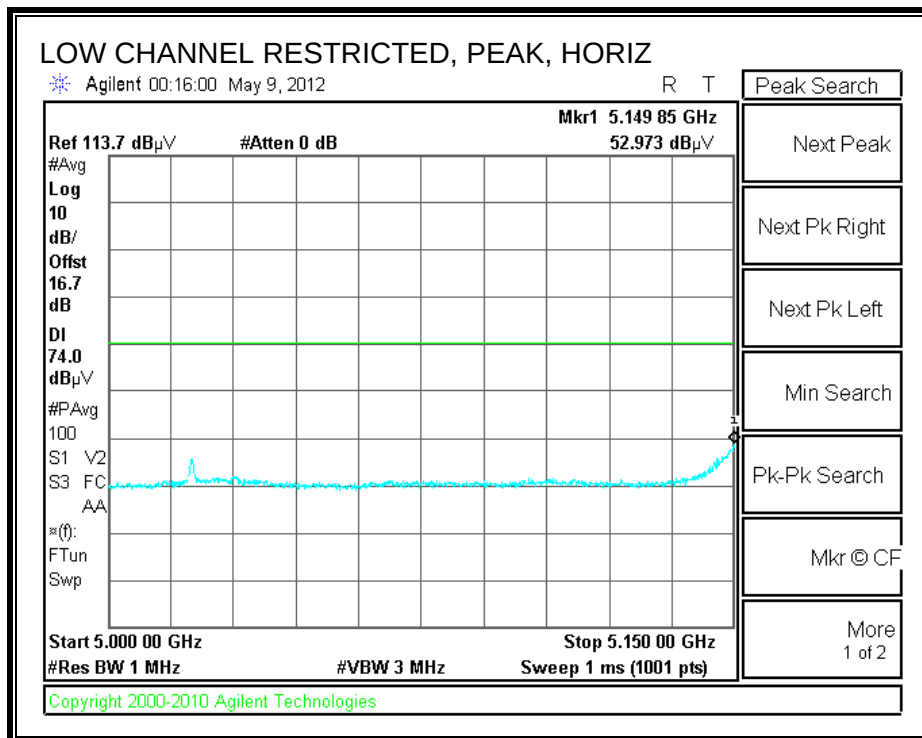

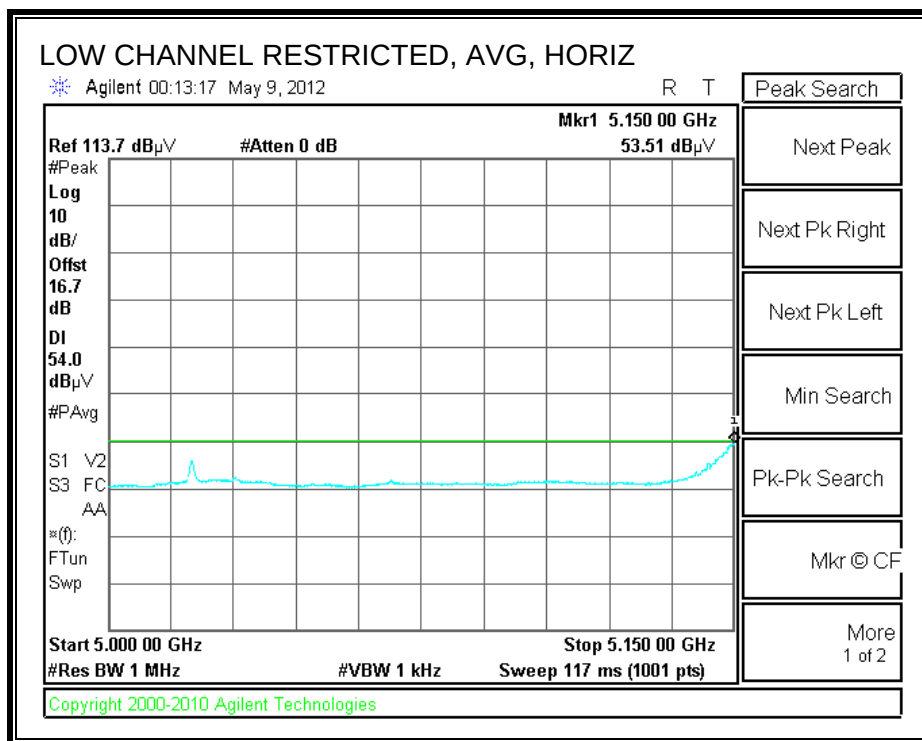

RESTRICTED BANDEDGE (LOW CHANNEL, VERTICAL)

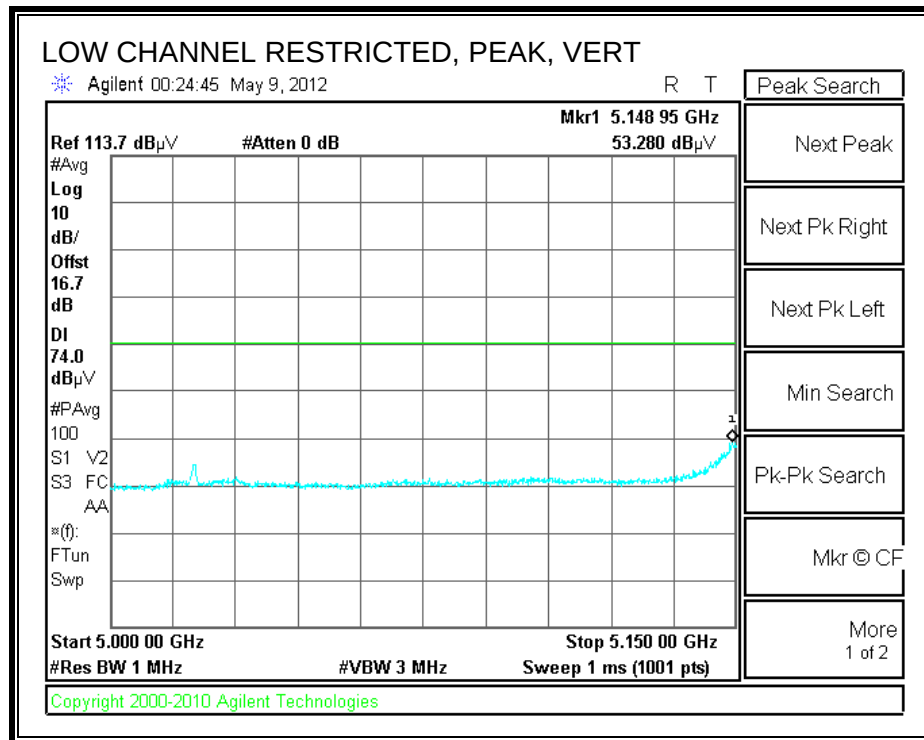

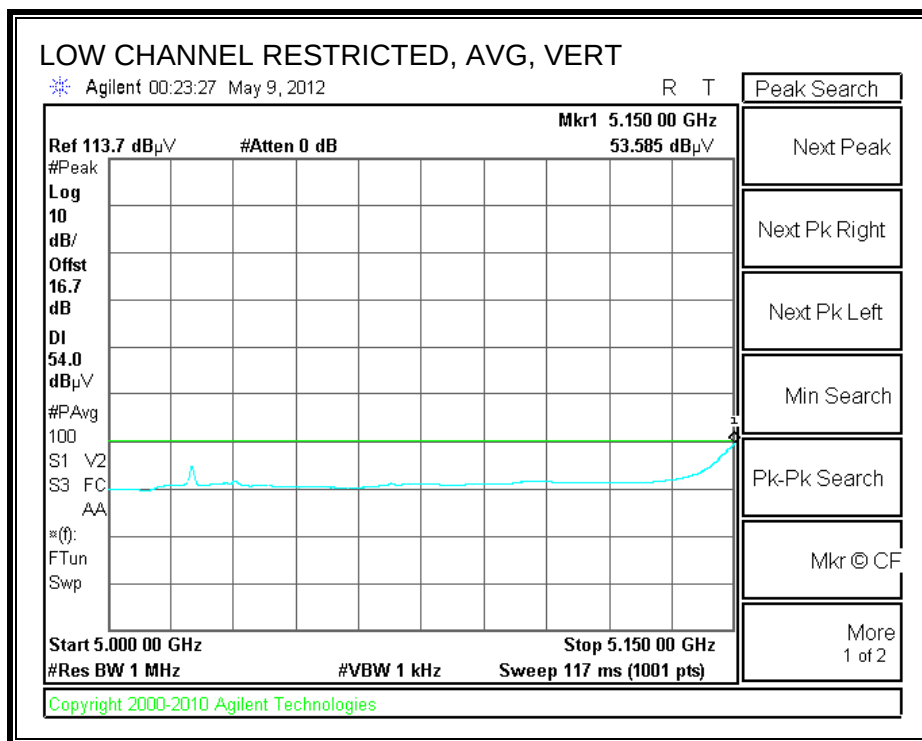

HARMONICS AND SPURIOUS EMISSIONS

High Frequency Measurement																	
Compliance Certification Services, Fremont 3m Chamber																	
Company:		GOOGLE															
Project #:		11U14119															
Date:		5/8/2012															
Test Engineer:		Thanh Nguyen															
Configuration:		EUT only															
Mode:		Tx HT20 UNII 5.2GHz															
Test Equipment:																	
Horn 1-18GHz				Pre-amplifier 1-26GHz				Pre-amplifier 26-40GHz				Horn > 18GHz				Limit	
T59; S/N: 3245 @3m				T145 Agilent 3008A00561								T39; ARA 18-26GHz; S/N:1013				FCC 15.209	
Hi Frequency Cables																	
3' cable 22807700				12' cable 22807600				20' cable 22807500				HPF		Reject Filter		Peak Measurements RBW=VBW=1MHz Average Measurements RBW=1MHz ; VBW=10Hz	
3' cable 22807700				12' cable 22807600				20' cable 22807500									
f	Dist	Read Pk	Read Avg.	AF	CL	Amp	D Corr	Filtr	Peak	Avg	Pk Lim	Avg Lim	Pk Mar	Avg Mar	Notes		
GHz	(m)	dBuV	dBuV	dB/m	dB	dB	dB	dB	dBuV/m	dBuV/m	dBuV/m	dBuV/m	dB	dB	(V/H)		
Low Ch 5180MHz																	
10.360	3.0	35.46	26.22	38.0	9.6	-34.2	0.0	0.0	48.9	39.6	74	54	-25.1	-14.4	V/Noise floor		
10.360	3.0	35.47	26.25	38.0	9.6	-34.2	0.0	0.0	48.9	39.6	74	54	-25.1	-14.4	H/Noise floor		
15.540	3.0	35.33	26.35	39.1	13.0	-32.3	0.0	0.0	55.1	46.1	74	54	-18.9	-7.9	V/Noise floor		
15.540	3.0	35.16	26.24	39.1	13.0	-32.3	0.0	0.0	54.9	46.0	74	54	-19.1	-8.0	H/Noise floor		
Mid Ch 5200																	
10.400	3.0	35.33	25.82	38.0	9.6	-34.2	0.0	0.0	48.8	39.3	74	54	-25.2	-14.7	V/Noise floor		
10.400	3.0	35.57	25.33	38.0	9.6	-34.2	0.0	0.0	49.1	38.8	74	54	-24.9	-15.2	H/Noise floor		
High ch 5240MHz																	
10.480	3.0	35.57	25.22	38.1	9.7	-34.1	0.0	0.0	49.3	39.0	74	54	-24.7	-15.0	H/Noise floor		
15.720	3.0	35.28	25.43	38.5	13.1	-32.2	0.0	0.0	54.6	44.7	74	54	-19.4	-9.3	H/Noise floor		
Rev. 11.10.11																	
f	Measurement Frequency					Amp	Preamp Gain					Avg Lim	Average Field Strength Limit				
Dist	Distance to Antenna					D Corr	Distance Correct to 3 meters					Pk Lim	Peak Field Strength Limit				
Read	Analyzer Reading					Avg	Average Field Strength @ 3 m					Avg Mar	Margin vs. Average Limit				
AF	Antenna Factor					Peak	Calculated Peak Field Strength					Pk Mar	Margin vs. Peak Limit				
CL	Cable Loss					HPF	High Pass Filter										


8.2.3. RECEIVER ABOVE 1 GHz

RECEIVER ABOVE 1 GHz FOR 20 MHz BANDWIDTH IN THE 5.2 GHz BAND


High Frequency Measurement																
Compliance Certification Services, Fremont 5m Chamber-B																
Company:		Google														
Project #:		11U14119														
Date:		01/23/12														
Test Engineer:		Tom Chen														
Configuration:		EUT alone														
Mode:		11a RX mode 20MHz Band Width														
Test Equipment:																
Horn 1-18GHz			Pre-amplifier 1-26GHz			Pre-amplifier 26-40GHz			Horn > 18GHz			Limit				
T59; S/N: 3245 @3m			T145 Agilent 3008A005t									RX RSS 210				
Hi Frequency Cables																
3' cable 22807700			12' cable 22807600			20' cable 22807500			HPF			Reject Filter			Peak Measurements RBW=VBW=1MHz Average Measurements RBW=1MHz, VBW=10Hz	
3' cable 22807700			12' cable 22807600			20' cable 22807500										
f GHz	Dist (m)	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Filtr dB	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes (V/H)	
1.126	3.0	46.9	28.2	24.4	2.8	-35.9	0.0	0.0	38.1	19.4	74	54	-35.9	-34.6	H	
1.672	3.0	43.8	25.1	26.9	3.4	-35.6	0.0	0.0	38.5	19.8	74	54	-35.5	-34.2	H	
2.463	3.0	42.1	23.4	28.7	4.3	-35.2	0.0	0.0	39.9	21.2	74	54	-34.1	-32.8	H	
1.126	3.0	47.5	28.8	24.4	2.8	-35.9	0.0	0.0	38.7	20.0	74	54	-35.3	-34.0	V	
2.043	3.0	44.6	25.9	28.4	3.8	-35.4	0.0	0.0	41.5	22.8	74	54	-32.5	-31.2	V	
2.372	3.0	42.1	23.4	28.4	4.2	-35.2	0.0	0.0	39.6	20.9	74	54	-34.4	-33.1	V	
Rev. 07.08.11																
f	Measurement Frequency					Amp	Preamp Gain					Avg Lim	Average Field Strength Limit			
Dist	Distance to Antenna					D Corr	Distance Correct to 3 meters					Pk Lim	Peak Field Strength Limit			
Read	Analyzer Reading					Avg	Average Field Strength @ 3 m					Avg Mar	Margin vs. Average Limit			
AF	Antenna Factor					Peak	Calculated Peak Field Strength					Pk Mar	Margin vs. Peak Limit			
CL	Cable Loss					HPF	High Pass Filter									

8.3. WORST-CASE BELOW 1 GHz

SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, HORIZONTAL)

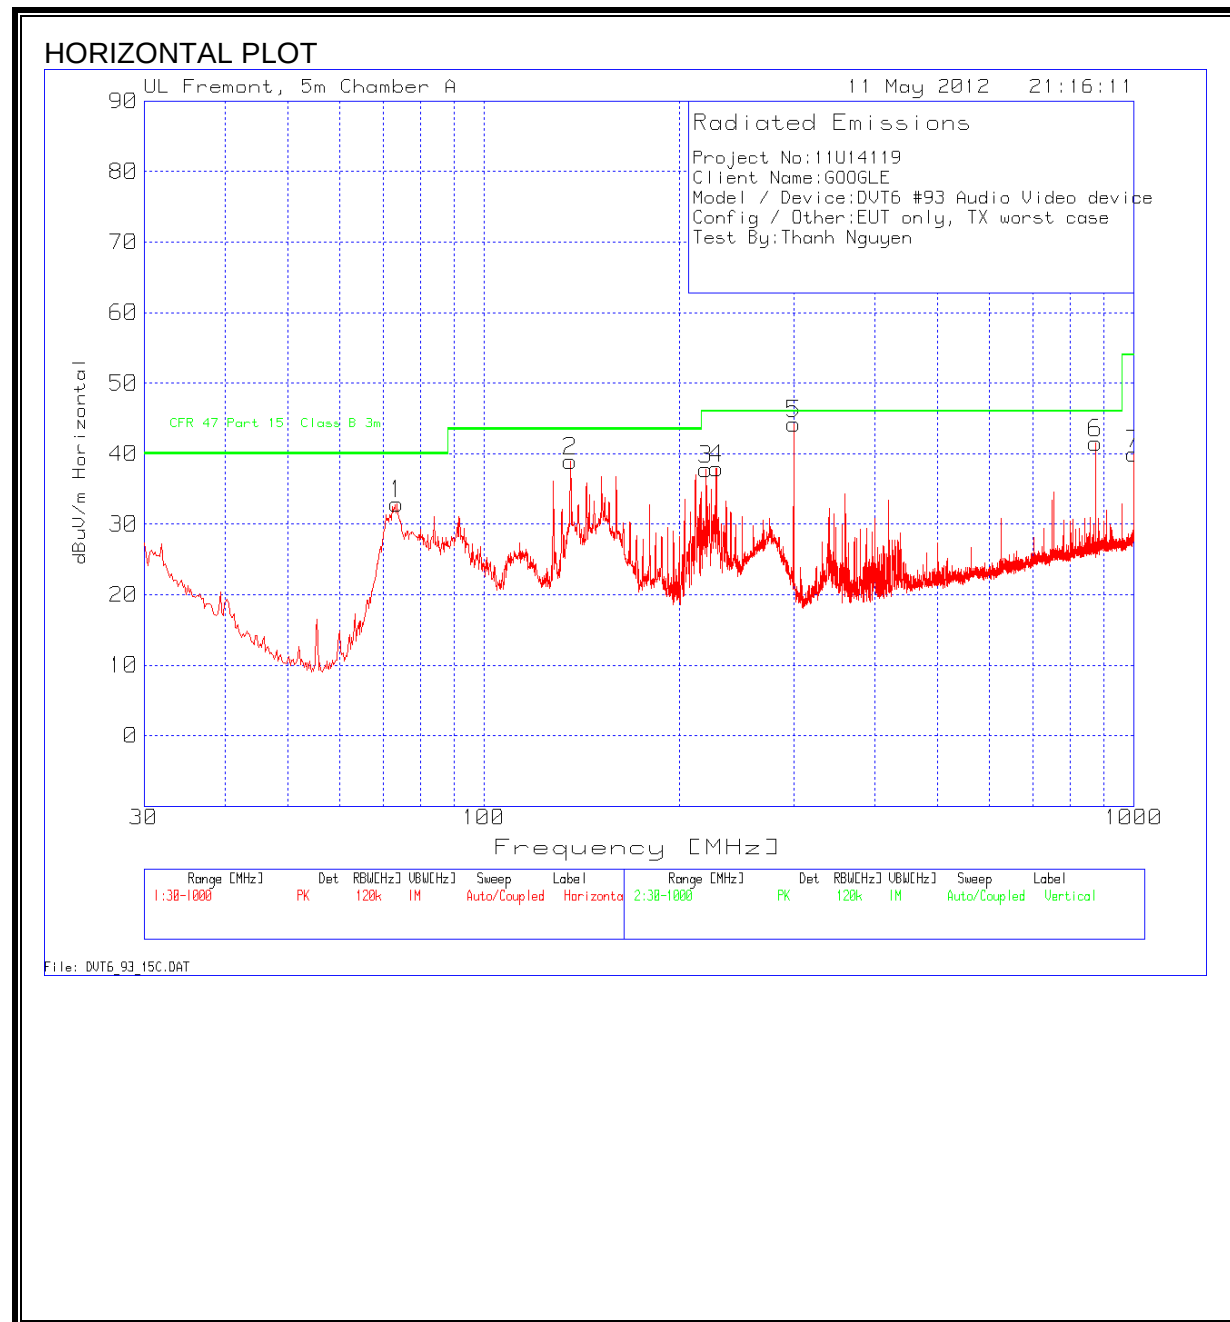

SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, VERTICAL)

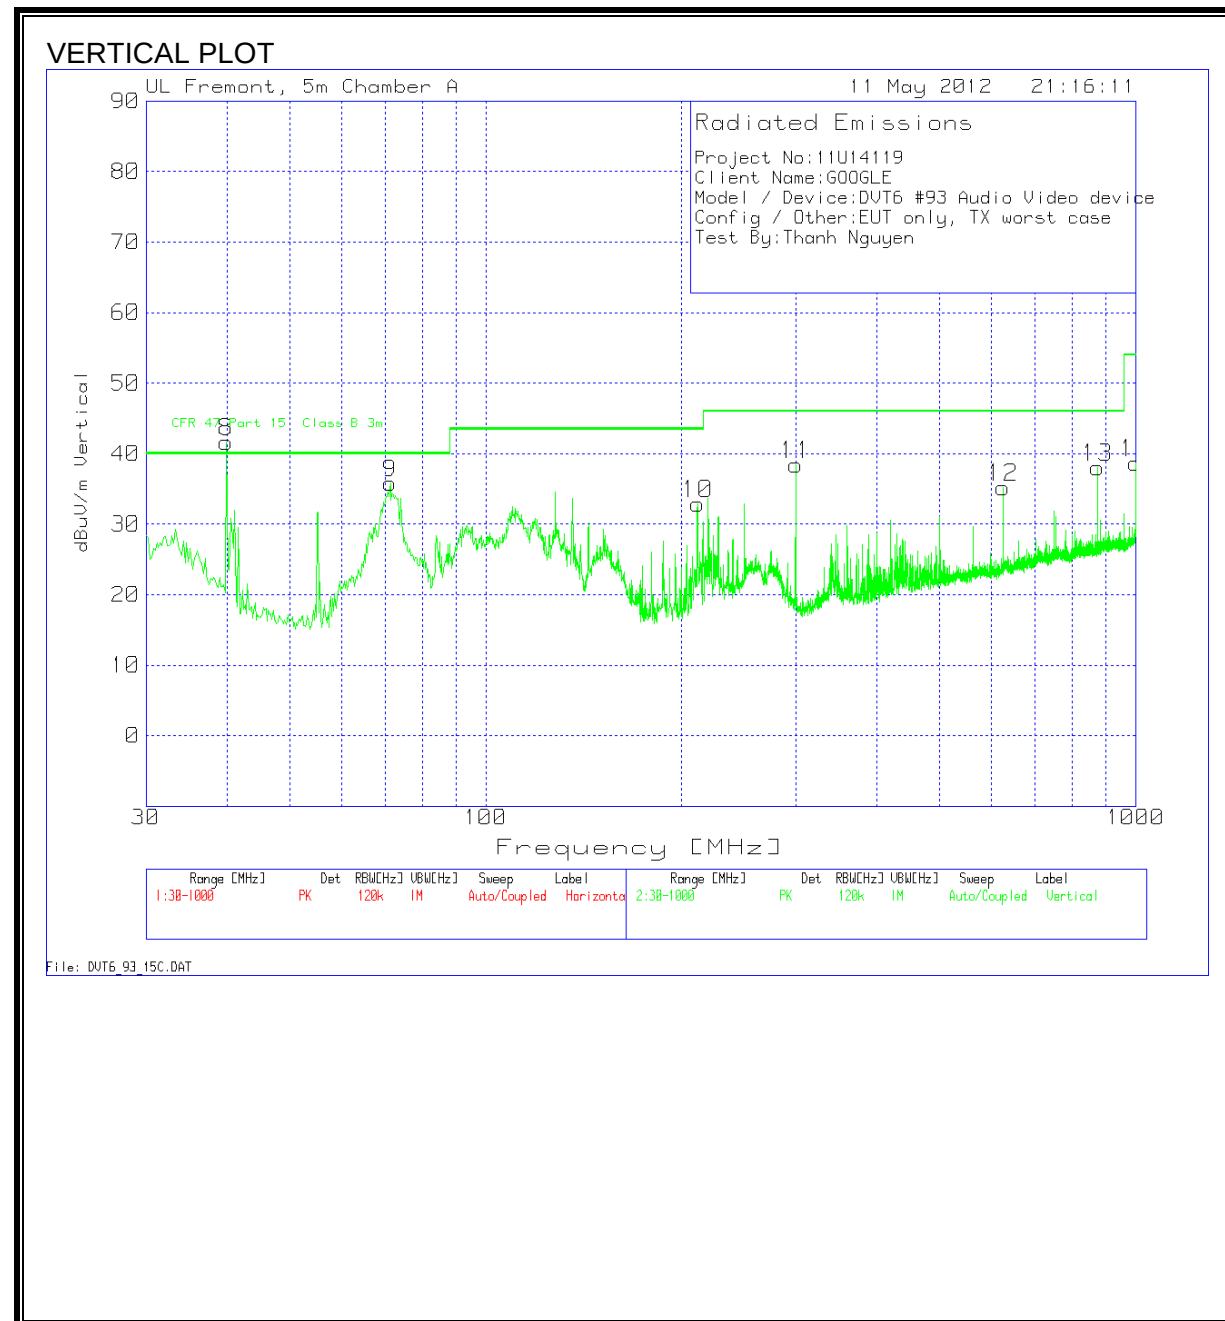

HORIZONTAL AND VERTICAL DATA

Project No:11U14119

Client Name:GOOGLE

Model / Device:DVT6 #93 Audio Video device

Config / Other:EUT only, TX worst case

Test By:Thanh Nguyen

Horizontal 30 - 1000MHz

Test Frequency	Meter Reading	Detector	PreAmp Gain (dB)	Antenna +Cable Factor	EMI Value dBuV/m	CFR 47 Part 15 Class B 3m limit	Margin	Height [cm]	Polarity
73.6151	52.04	PK	-27.1	8	32.94	40	-7.06	200	Horz
135.8393	52.7	PK	-26.7	13	39	43.5	-4.5	300	Horz
219.7742	53.34	PK	-26.2	10.6	37.74	46	-8.26	100	Horz
228.1095	53.18	PK	-26.1	10.8	37.88	46	-8.12	100	Horz
300.026	56.84	PK	-25.8	13.2	44.24	46	-1.76	100	Horz
300.0044	56.36	QP	-25.8	13.2	43.76	46	-2.24	101	Horz
875.1639	43.18	PK	-23.2	21.5	41.48	46	-4.52	100	Horz
1000	40.04	PK	-23.1	23	39.94	54	-14.06	100	Horz

Vertical 30 - 1000MHz

Test Frequency	Meter Reading	Detector	PreAmp Gain (dB)	Antenna +Cable Factor	EMI Value dBuV/m	CFR 47 Part 15 Class B 3m limit	Margin	Height [cm]	Polarity
39.8861	54.95	PK	-27.3	14	41.65	40	1.65	200	Vert
40.3997	30.58	QP	-27.3	13.7	16.98	40	-23.02	135	Vert
71.289	54.79	PK	-27.1	8.1	35.79	40	-4.21	100	Vert
211.8265	48.55	PK	-26.1	10.4	32.85	43.5	-10.65	200	Vert
300.026	50.98	PK	-25.8	13.2	38.38	46	-7.62	200	Vert
625.1039	39.93	PK	-23.7	19	35.23	46	-10.77	100	Vert
875.1639	39.7	PK	-23.2	21.5	38	46	-8	100	Vert
1000	38.82	PK	-23.1	23	38.72	54	-15.28	100	Vert

9. AC POWER LINE CONDUCTED EMISSIONS

LIMITS

FCC §15.207 (a)

RSS-Gen 7.2.2

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency.

TEST PROCEDURE


ANSI C63.4

RESULTS


6 WORST EMISSIONS

Project No:11U14119									
Client Name:GOOGLE									
Model/Device:W-1/802.11abg/Audio_Video device									
Test Volt/Freq:115VAC/60Hz									
Test By:Thanh Nguyen									
Line-L1 .15 - 30MHz									
Test Frequency	Meter Reading	Detector	T24 IL L1.TXT (dB)	LC Cables 1&3.TXT (dB)	dB(uVolts)	CFR 47 Part 15 Class B QP	Margin	CFR 47 Part 15 Class B Avg	Margin
0.15	54.57	PK	0.1	0	54.67	66	-11.33	-	-
0.15	37.69	Av	0.1	0	37.79	-	-	56	-18.21
3.12	40.53	PK	0.1	0.1	40.73	56	-15.27	-	-
3.12	28.44	Av	0.1	0.1	28.64	-	-	46	-17.36
17.2275	47.15	PK	0.2	0.2	47.55	60	-12.45	-	-
17.2275	33.91	Av	0.2	0.2	34.31	-	-	50	-15.69
Line-L2 .15 - 30MHz									
Test Frequency	Meter Reading	Detector	T24 IL L1.TXT (dB)	LC Cables 1&3.TXT (dB)	dB(uVolts)	CFR 47 Part 15 Class B QP	Margin	CFR 47 Part 15 Class B Avg	Margin
0.177	48.89	PK	0.1	0	48.99	64.6	-15.61	-	-
0.177	35.31	Av	0.1	0	35.41	-	-	54.6	-19.19
3.4485	39.11	PK	0.1	0.1	39.31	56	-16.69	-	-
3.4485	26.04	Av	0.1	0.1	26.24	-	-	46	-19.76
17.2365	45.47	PK	0.2	0.2	45.87	60	-14.13	-	-
17.2365	33.95	Av	0.2	0.2	34.35	-	-	50	-15.65

LINE 1 RESULTS

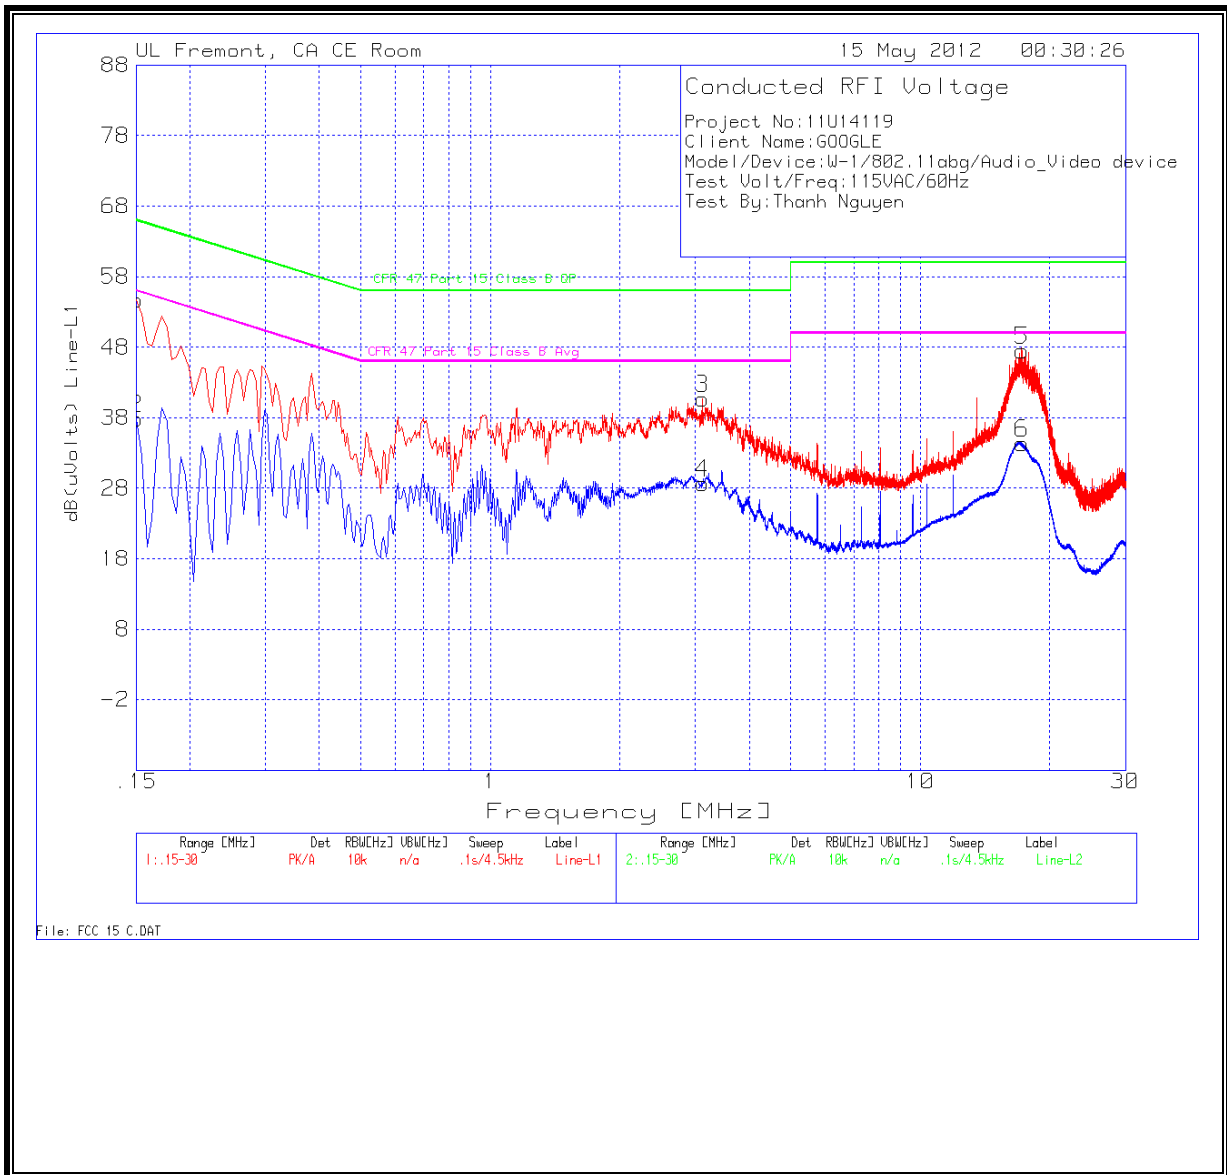

LINE 2 RESULTS

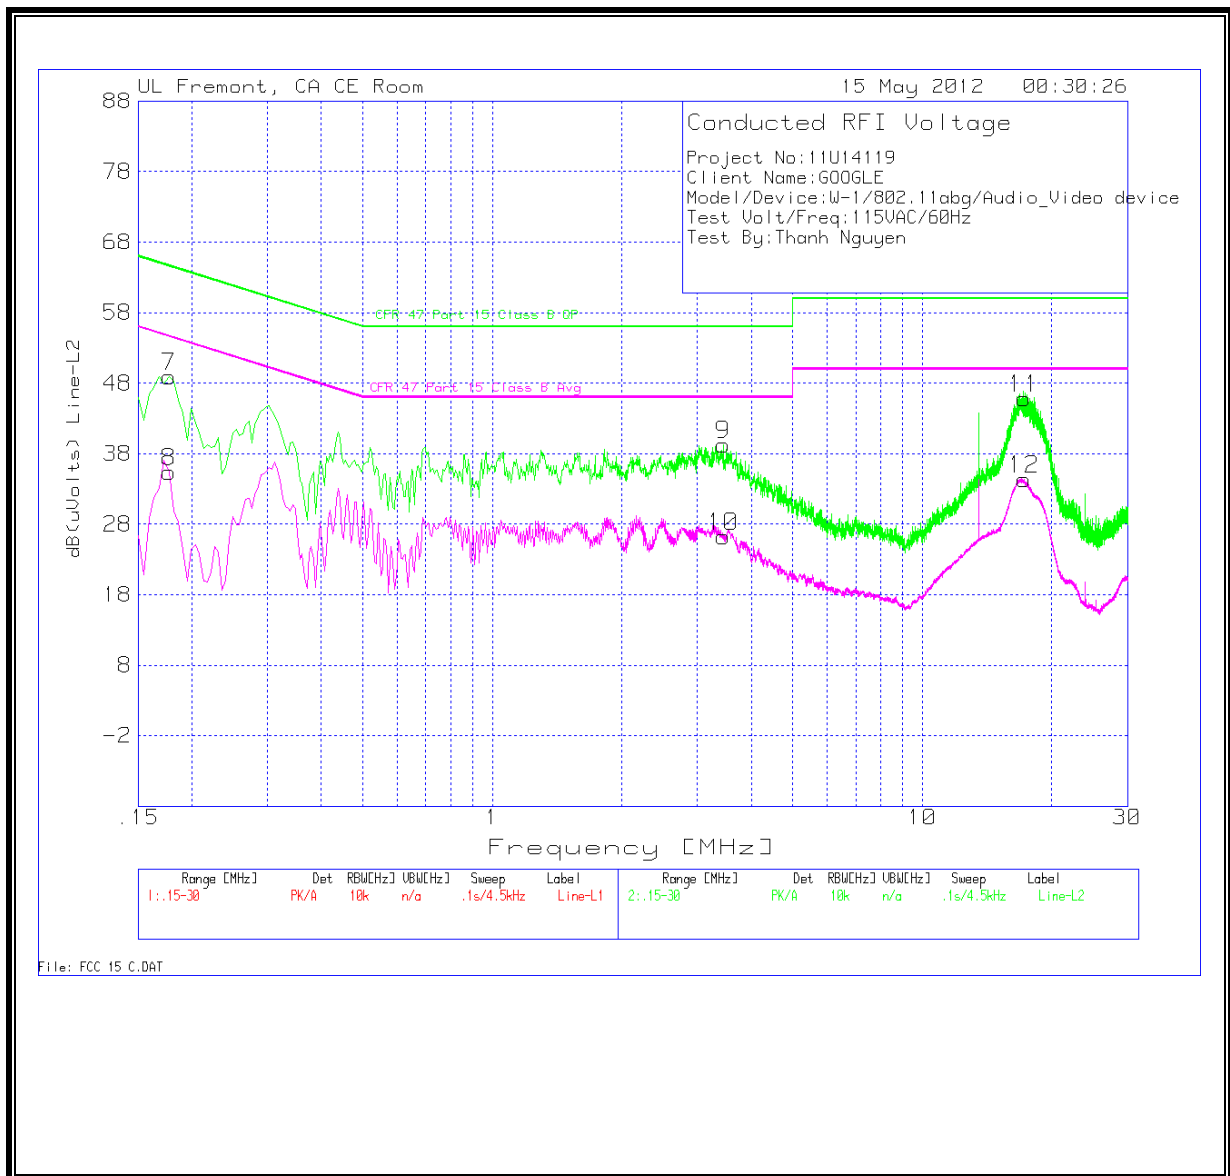

10. MAXIMUM PERMISSIBLE EXPOSURE

FCC RULES

§1.1310 The criteria listed in Table 1 shall be used to evaluate the environmental impact of human exposure to radio-frequency (RF) radiation as specified in §1.1307(b), except in the case of portable devices which shall be evaluated according to the provisions of §2.1093 of this chapter.

TABLE 1—LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm ²)	Averaging time (minutes)
(A) Limits for Occupational/Controlled Exposures				
0.3–3.0	614	1.63	*(100)	6
3.0–30	1842/f	4.89/f	*(900/f ²)	6
30–300	61.4	0.163	1.0	6
300–1500			f/300	6
1500–100,000			5	6
(B) Limits for General Population/Uncontrolled Exposure				
0.3–1.34	614	1.63	*(100)	30
1.34–30	824/f	2.19/f	*(180/f ²)	30

TABLE 1—LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)—Continued

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm ²)	Averaging time (minutes)
30–300	27.5	0.073	0.2	30
300–1500			f/1500	30
1500–100,000			1.0	30

f = frequency in MHz

* = Plane-wave equivalent power density

NOTE 1 TO TABLE 1: Occupational/controlled limits apply in situations in which persons are exposed as a consequence of their employment provided those persons are fully aware of the potential for exposure and can exercise control over their exposure. Limits for occupational/controlled exposure also apply in situations when an individual is transient through a location where occupational/controlled limits apply provided he or she is made aware of the potential for exposure.

NOTE 2 TO TABLE 1: General population/uncontrolled exposures apply in situations in which the general public may be exposed, or in which persons that are exposed as a consequence of their employment may not be fully aware of the potential for exposure or can not exercise control over their exposure.

IC RULES

IC Safety Code 6, Section 2.2.1 (a) A person other than an RF and microwave exposed worker shall not be exposed to electromagnetic radiation in a frequency band listed in Column 1 of Table 5, if the field strength exceeds the value given in Column 2 or 3 of Table 5, when averaged spatially and over time, or if the power density exceeds the value given in Column 4 of Table 5, when averaged spatially and over time.

Table 5
Exposure Limits for Persons Not Classed As RF and Microwave Exposed Workers (Including the General Public)

1 Frequency (MHz)	2 Electric Field Strength; rms (V/m)	3 Magnetic Field Strength; rms (A/m)	4 Power Density (W/m ²)	5 Averaging Time (min)
0.003–1	280	2.19		6
1–10	280/ f	2.19/ f		6
10–30	28	2.19/ f		6
30–300	28	0.073	2*	6
300–1 500	1.585 $f^{0.5}$	0.0042 $f^{0.5}$	$f/150$	6
1 500–15 000	61.4	0.163	10	6
15 000–150 000	61.4	0.163	10	616 000 / $f^{1.2}$
150 000–300 000	0.158 $f^{0.5}$	4.21 x 10 ⁻⁴ $f^{0.5}$	6.67 x 10 ⁻⁵ f	616 000 / $f^{1.2}$

* Power density limit is applicable at frequencies greater than 100 MHz.

- Notes:**
1. Frequency, f , is in MHz.
 2. A power density of 10 W/m² is equivalent to 1 mW/cm².
 3. A magnetic field strength of 1 A/m corresponds to 1.257 microtesla (μT) or 12.57 milligauss (mG).

EQUATIONS

Power density is given by:

$$S = \text{EIRP} / (4 * \pi * D^2)$$

where

S = Power density in W/m²

EIRP = Equivalent Isotropic Radiated Power in W

D = Separation distance in m

Power density in units of W/m² is converted to units of mW/cm² by dividing by 10.

Distance is given by:

$$D = \text{SQRT} (\text{EIRP} / (4 * \pi * S))$$

where

D = Separation distance in m

EIRP = Equivalent Isotropic Radiated Power in W

S = Power density in W/m²

For multiple colocated transmitters operating simultaneously in frequency bands where the limit is identical, the total power density is calculated using the total EIRP obtained by summing the Power * Gain product (in linear units) of each transmitter.

$$\text{Total EIRP} = (P1 * G1) + (P2 * G2) + \dots + (Pn * Gn)$$

where

Px = Power of transmitter x

Gx = Numeric gain of antenna x

In the table(s) below, Power and Gain are entered in units of dBm and dBi respectively and conversions to linear forms are used for the calculations.

LIMITS

From FCC §1.1310 Table 1 (B), the maximum value of S = 1.0 mW/cm²

From IC Safety Code 6, Section 2.2 Table 5 Column 4, S = 10 W/m²

RESULTS

Band	Mode	Separation Distance (m)	Output Power (dBm)	Antenna Gain (dBi)	IC Power Density (W/m ²)	FCC Power Density (mW/cm ²)
5 GHz	WLAN	0.20	13.85	6.00	0.19	0.019