



FCC RADIO TEST REPORT

FCC ID : A4RG013A
Equipment : Phone
Model name : G013A
Applicant : Google LLC
1600 Amphitheatre Parkway,
Mountain View, California, 94043 USA
Standard : FCC Part 15 Subpart E §15.407

The product was completed on Jun. 15, 2018. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any agency of government.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.

Approved by: Jones Tsai

SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory

No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.)



Table of Contents

History of this test report.....	3
Summary of Test Result	4
1 General Description	5
1.1 Product Feature of Equipment Under Test	5
1.2 Product Specification of Equipment Under Test	6
1.3 Modification of EUT	6
1.4 Testing Location	7
1.5 Applicable Standards	7
2 Test Configuration of Equipment Under Test	8
2.1 Carrier Frequency and Channel	8
2.2 Test Mode.....	9
2.3 Connection Diagram of Test System.....	10
2.4 Support Unit used in test configuration and system.....	11
2.5 EUT Operation Test Setup.....	12
2.6 Measurement Results Explanation Example	12
3 Test Result	13
3.1 6dB and 26dB and 99% Occupied Bandwidth Measurement	13
3.2 Maximum Conducted Output Power Measurement	16
3.3 Power Spectral Density Measurement	17
3.4 Unwanted Emissions Measurement	20
3.5 AC Conducted Emission Measurement.....	26
3.6 Automatically Discontinue Transmission	28
3.7 Antenna Requirements	29
4 List of Measuring Equipment	30
5 Uncertainty of Evaluation	32
Appendix A. Conducted Test Results	
Appendix B. AC Conducted Emission Test Result	
Appendix C. Radiated Spurious Emission	
Appendix D. Radiated Spurious Emission Plots	
Appendix E. Duty Cycle Plots	



History of this test report

Report No.	Version	Description	Issued Date
FR820225-02F	01	Initial issue of report	Jun. 22, 2018
FR820225-02F	02	Revising the description in section 3.6.3.	Jun. 28, 2018

Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.1	15.403 (i)	6dB & 26dB Bandwidth	Pass	-
3.1	2.1049	99% Occupied Bandwidth	Reporting only	-
3.2	15.407 (a)	Maximum Conducted Output Power	Pass	-
3.3	15.407 (a)	Power Spectral Density	Pass	-
3.4	15.407(b)	Unwanted Emissions	Pass	Under limit 3.37 dB at 5648.750 MHz
3.5	15.207	AC Conducted Emission	Pass	Under limit 10.38 dB at 0.150 MHz
3.6	15.407 (c)	Automatically Discontinue Transmission	Pass	-
3.7	15.203 & 15.407 (a)	Antenna Requirement	Pass	-

Reviewed by: Joseph Lin

Report Producer: Natasha Hsieh



1 General Description

1.1 Product Feature of Equipment Under Test

Product Feature	
Equipment	Phone
Model Name	G013A
FCC ID	A4RG013A
EUT supports Radios application	CDMA/EV-DO/GSM/EGPRS/WCDMA/HSPA/LTE/NFC/ GNSS/WPC WLAN 11b/g/n HT20/VHT20 WLAN 11a/n HT20/HT40 WLAN 11ac VHT20/VHT40/VHT80 Bluetooth BR/EDR/LE
EUT Stage	Identical Prototype

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

EUT Information List	
No.	S/N
#1	84PX006ND
#2	84VX0092H
#3	839X004QG

1.2 Product Specification of Equipment Under Test

Standards-related Product Specification												
Tx/Rx Channel Frequency Range		5745 MHz ~ 5825 MHz										
Maximum Output Power		<5745 MHz ~ 5825 MHz> <Ant. 1> 802.11a : 17.51 dBm / 0.0564 W 802.11n HT20 : 17.12 dBm / 0.0515 W 802.11n HT40 : 17.22 dBm / 0.0527 W 802.11ac VHT20: 17.09 dBm / 0.0512 W 802.11ac VHT40: 17.25 dBm / 0.0531 W 802.11ac VHT80: 16.71 dBm / 0.0469 W <Ant. 2> 802.11a : 17.27 dBm / 0.0533 W 802.11n HT20 : 18.34 dBm / 0.0682 W 802.11n HT40 : 17.71 dBm / 0.0590 W 802.11ac VHT20: 17.25 dBm / 0.0531 W 802.11ac VHT40: 17.45 dBm / 0.0556 W 802.11ac VHT80: 17.21 dBm / 0.0526 W MIMO <Ant. 1 + 2> 802.11a : 20.63 dBm / 0.1156 W 802.11n HT20 : 20.85 dBm / 0.1216 W 802.11n HT40 : 20.65 dBm / 0.1161 W 802.11ac VHT20: 20.43 dBm / 0.1104 W 802.11ac VHT40: 20.46 dBm / 0.1112 W 802.11ac VHT80: 20.19 dBm / 0.1045 W										
99% Occupied Bandwidth		<Ant. 1> 802.11a : 28.30 MHz 802.11n HT20 : 30.20 MHz 802.11n HT40 : 52.10 MHz 802.11ac VHT80 : 81.48 MHz <Ant. 2> 802.11a : 20.50 MHz 802.11n HT20 : 20.75 MHz 802.11n HT40 : 39.00 MHz 802.11ac VHT80 : 76.44 MHz										
Type of Modulation		802.11a/n : OFDM (BPSK / QPSK / 16QAM / 64QAM) 802.11ac : OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM)										
Antenna Type / Gain		<Ant. 1> : ILA Antenna with gain -0.38 dBi <Ant. 2> : Loop Antenna with gain -5.10 dBi										
Antenna Function Description		<table><tr><td></td><td>Ant. 1</td><td>Ant. 2</td></tr><tr><td>802.11 a/n/ac</td><td>V</td><td>V</td></tr><tr><td>802.11 n/ac MIMO</td><td>V</td><td>V</td></tr></table>			Ant. 1	Ant. 2	802.11 a/n/ac	V	V	802.11 n/ac MIMO	V	V
	Ant. 1	Ant. 2										
802.11 a/n/ac	V	V										
802.11 n/ac MIMO	V	V										

1.3 Modification of EUT

No modifications are made to the EUT during all test items.

1.4 Testing Location

Sporton Lab is accredited to ISO 17025 by Taiwan Accreditation Foundation (TAF code : 1190) and the FCC designation No. TW1190 and TW0007 under the FCC 2.948(e) by Mutual Recognition Agreement (MRA) in FCC Test.

Test Site	SPORTON INTERNATIONAL INC.	
Test Site Location	No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.) TEL: +886-3-327-3456 FAX: +886-3-328-4978	
Test Site No.	Sporton Site No.	
	TH05-HY	CO05-HY

Note: The test site complies with ANSI C63.4 2014 requirement.

Test Site	SPORTON INTERNATIONAL INC.	
Test Site Location	No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.) TEL: +886-3-327-0868 FAX: +886-3-327-0855	
Test Site No.	Sporton Site No.	
	03CH11-HY	

Note: The test site complies with ANSI C63.4 2014 requirement.

1.5 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart E
- ♦ FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
- ♦ FCC KDB 662911 D01 Multiple Transmitter Output v02r01.
- ♦ ANSI C63.10-2013

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

2 Test Configuration of Equipment Under Test

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (Y plane) were recorded in this report.
- b. AC power line Conducted Emission was tested under maximum output power.

2.1 Carrier Frequency and Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
5725-5850 MHz Band 4 (U-NII-3)	149	5745	157	5785
	151*	5755	159*	5795
	153	5765	161	5805
	155 [#]	5775	165	5825

Note:

1. The above Frequency and Channel in "*" were 802.11n HT40 and 802.11ac VHT40.
2. The above Frequency and Channel in "[#]" were 802.11ac VHT80.

2.2 Test Mode

Final test modes are considering the modulation and worse data rates as below table.

MIMO Mode


Modulation	Data Rate
802.11a	6 Mbps
802.11n HT20	MCS0
802.11n HT40	MCS0
802.11ac VHT20 (Covered by HT20)	MCS0
802.11ac VHT40 (Covered by HT40)	MCS0
802.11ac VHT80	MCS0

Test Cases	
AC Conducted Emission	Mode 1 : GSM1900 Idle + WLAN (2.4GHz) Link + Bluetooth Link + NFC Read On + USB cable (Type C) (Charging from Adapter 1)
Remark: For Radiated Test Cases, the tests were performed with Adapter 1.	


Ch. #		Band IV : 5725-5850 MHz			
		802.11a	802.11n HT20	802.11n HT40	802.11ac VHT80
L	Low	149	149	151	-
M	Middle	157	157	-	155
H	High	165	165	159	-


2.3 Connection Diagram of Test System

<WLAN Tx Mode>

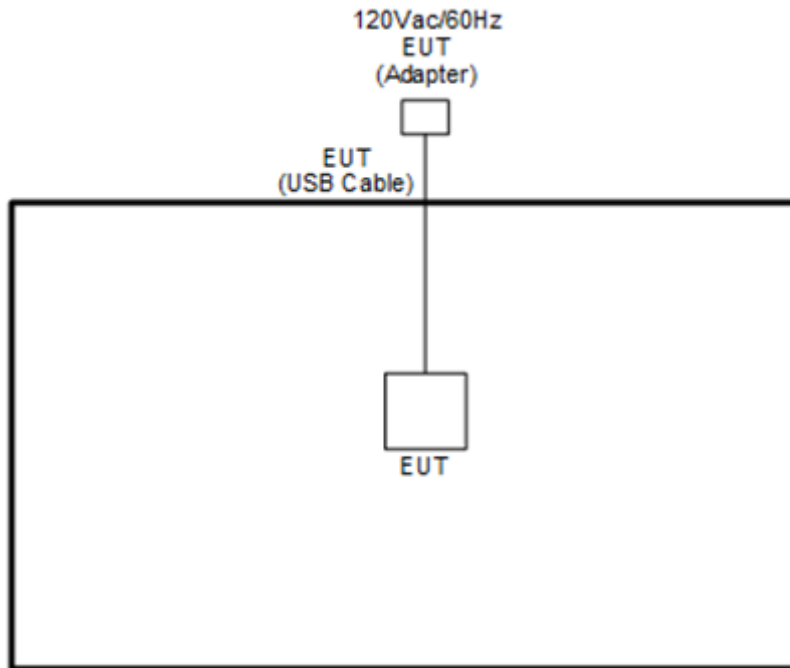

< WLAN Tx with WPC Charging Mode>

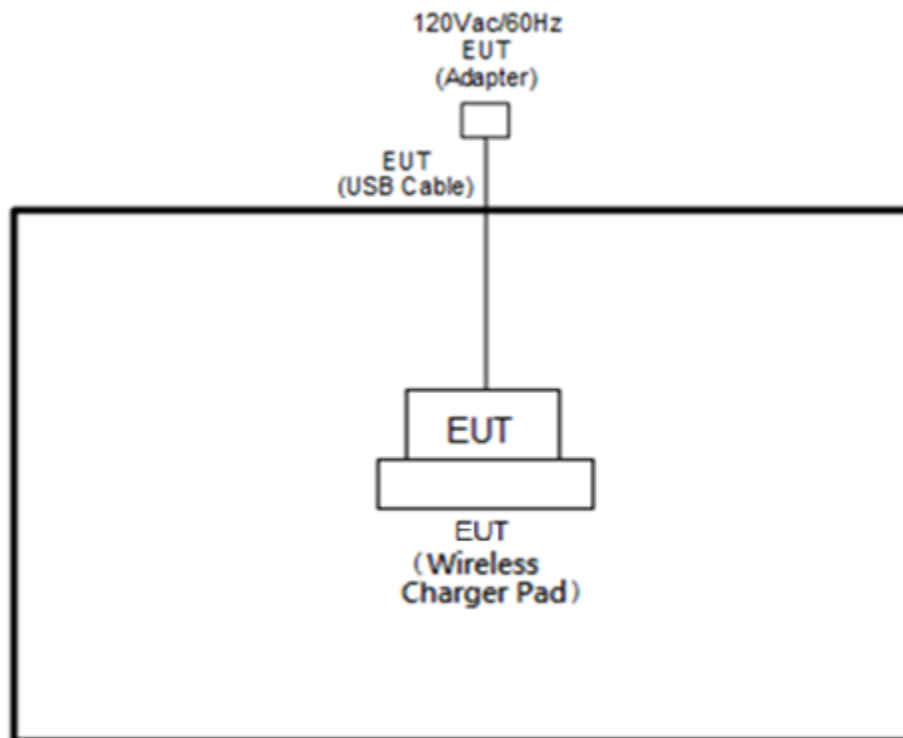
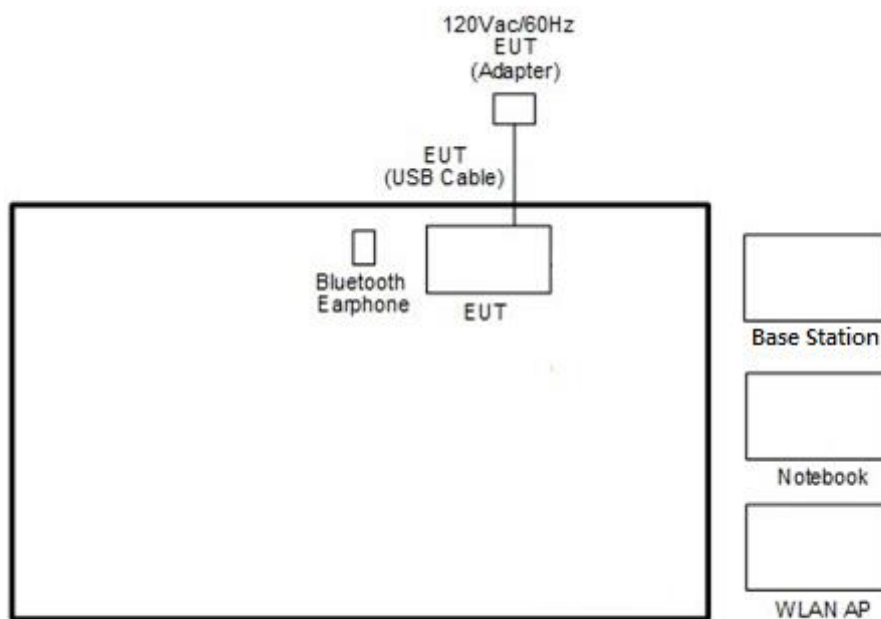
<AC Conducted Emissions Mode>

2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	System Simulator	Anritsu	MT8820C	N/A	N/A	Unshielded, 1.8 m
2.	Bluetooth Earphone	Sony Ericsson	MW600	PY7DDA-2029	N/A	N/A
3.	WLAN AP	ASUS	RT-AC66U	MSQ-RTAC66U	N/A	Unshielded, 1.8 m
4.	Notebook	DELL	Latitude E6320	FCC DoC/ Contains FCC ID: QDS-BRCM1054	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m



2.5 EUT Operation Test Setup

The RF test items, utility “QRCT” was installed in Notebook which was programmed in order to make the EUT get into the engineering modes to provide channel selection, power level, data rate and the application type and for continuous transmitting signals.

2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 4.2 dB and 10dB attenuator.

$$\begin{aligned}\text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)} \\ &= 4.2 + 10 = 14.2 \text{ (dB)}\end{aligned}$$

3 Test Result

3.1 6dB and 26dB and 99% Occupied Bandwidth Measurement

3.1.1 Description of 6dB and 26dB and 99% Occupied Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.

26dB and 99% Occupied bandwidth are reporting only.


3.1.2 Measuring Instruments

See list of measuring equipment of this test report.

3.1.3 Test Procedures

1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01. Section C) Emission bandwidth for the band 5.725-5.85GHz
2. Set RBW = 100kHz.
3. Set the VBW $\geq 3 \times$ RBW.
4. Detector = Peak.
5. Trace mode = max hold
6. Measure the maximum width of the emission that is 6 dB down from the peak of the emission.
7. Measure and record the results in the test report.

3.1.4 Test Setup

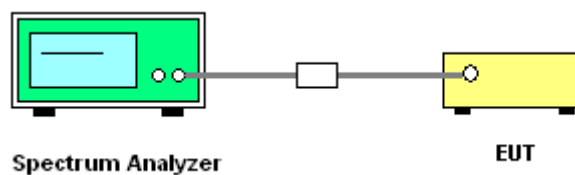


3.1.5 Test Result of 6dB Bandwidth

Please refer to Appendix A.




Minimum 6dB Bandwidth

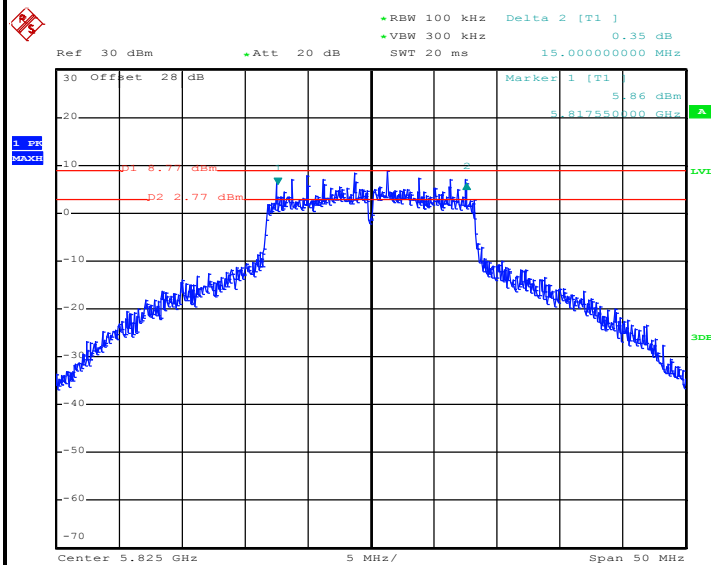


Date: 14.JUN.2018 16:58:49

Maximum 26dB Bandwidth

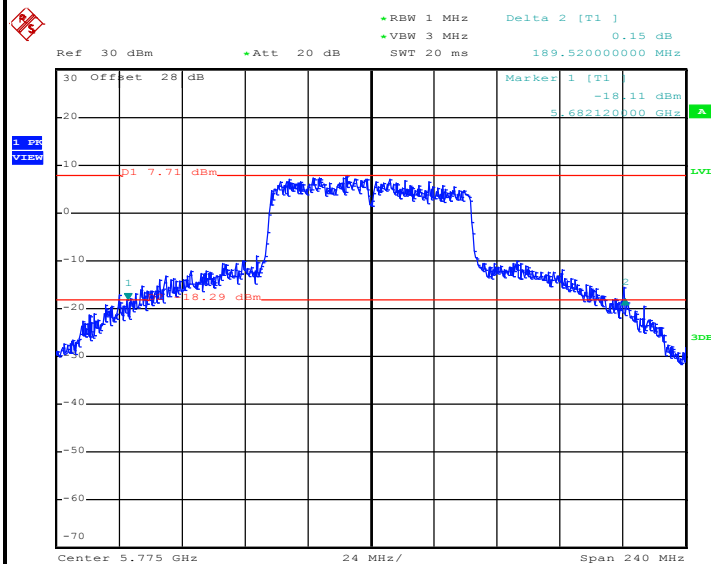

Date: 14.JUN.2018 17:53:14

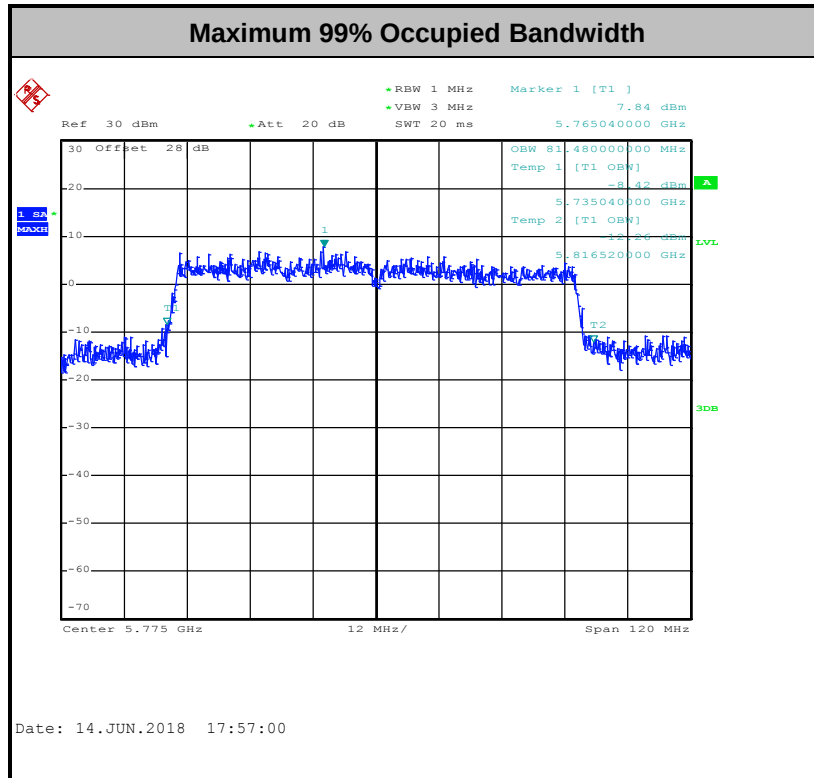

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

3.2 Maximum Conducted Output Power Measurement

3.2.1 Limit of Maximum Conducted Output Power

For the band 5.725–5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.2.2 Measuring Instruments

See list of measuring equipment of this test report.


3.2.3 Test Procedures

The testing follows Method PM of FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.

Method PM (Measurement using an RF average power meter):

1. Measurement is performed using a wideband RF power meter.
2. The EUT is configured to transmit continuously with a consistent duty cycle at its maximum power control level.
3. Measure the average power of the transmitter, and the average power is corrected with duty factor, $10 \log(1/x)$, where x is the duty cycle.

3.2.4 Test Setup

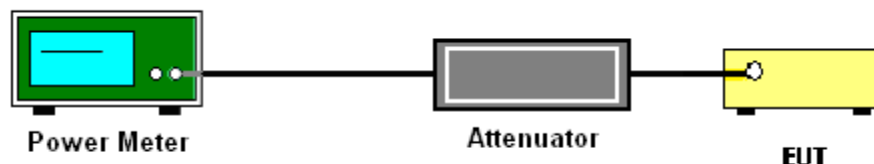

3.2.5 Test Result of Maximum Conducted Output Power

Please refer to Appendix A.



3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

For the band 5.725–5.85 GHz, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.3.2 Measuring Instruments

See list of measuring equipment of this test report.

3.3.3 Test Procedures

The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
Section F) Maximum power spectral density.

Method SA-2

(trace averaging across on and off times of the EUT transmissions, followed by duty cycle correction).


- Measure the duty cycle.
- Set span to encompass the entire emission bandwidth (EBW) of the signal.
- Set RBW = 300 kHz.
- Set VBW $\geq$ 1 MHz.
- Number of points in sweep $\geq$ 2 Span / RBW.
- Sweep time = auto.
- Detector = RMS
- Trace average at least 100 traces in power averaging mode.
- Add $10 \log(500\text{kHz}/\text{RBW})$ to the test result.
- Add $10 \log(1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times. For example, add $10 \log(1/0.25) = 6$ dB if the duty cycle is 25 percent.

1. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.
2. Each plot has already offset with cable loss, and attenuator loss. Measure the PPSD and record it.
3. For MIMO mode, calculation method follows FCC KDB 662911 D01 Multiple Transmitter Output v02r01.

Method (c): Measure and add $10 \log(N_{\text{ANT}})$ dB.

With this technique, spectrum measurements are performed at each output of the device, but rather than summing the spectra or the spectral peaks across the outputs, the quantity $10 \log(N_{\text{ANT}})$ dB is added to each spectrum value before comparing to the emission limit. The addition of $10 \log(N_{\text{ANT}})$ dB serves to apportion the emission limit among the N_{ANT} outputs so that each output is permitted to contribute no more than $1/N_{\text{ANT}}^{\text{th}}$ of the PSD limit.



3.3.4 Test Setup

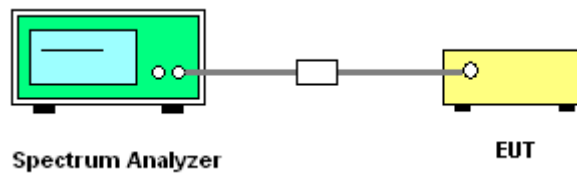



3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.

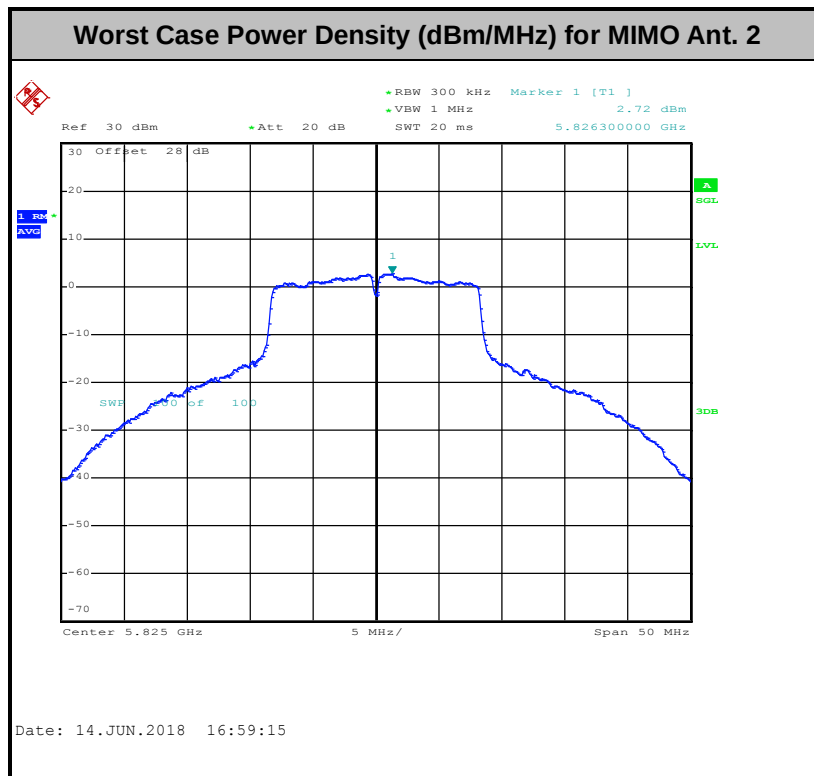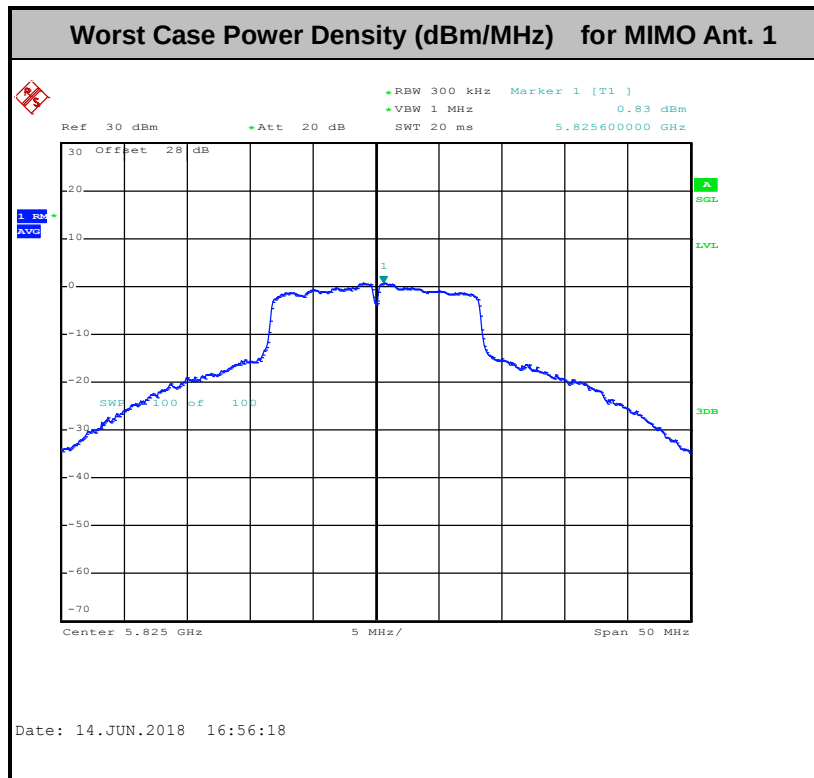

3.4 Unwanted Emissions Measurement

This section is to measure unwanted emissions through radiated measurement for band edge spurious emissions and out of band emissions measurement.

3.4.1 Limit of Unwanted Emissions

- (1) For transmitters operating in the 5.725-5.85 GHz band:

15.407(b)(4)(i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

- (2) Unwanted spurious emissions fallen in restricted bands shall comply with the general field strength limits as below table,

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

Note: The following formula is used to convert the EIRP to field strength.

$$E = \frac{1000000\sqrt{30P}}{3} \quad \mu\text{V/m, where P is the eirp (Watts)}$$



EIRP (dBm)	Field Strength at 3m (dBμV/m)
- 27	68.3

(3) KDB789033 D02 v02r01 G)2)c)

- (i) Section 15.407(b)(1) to (b)(3) specify the unwanted emission limits for the U-NII-1 and U-NII-2 bands. As specified, emissions above 1000 MHz that are outside of the restricted bands are subject to a peak emission limit of -27 dBm/MHz.³
- (ii) Section 15.407(b)(4) specifies the unwanted emission limit for the U-NII-3 band. A band emissions mask is specified in Section 15.407(b)(4)(i). The emission limits are in terms of a Peak detector. An alternative to the band emissions mask is specified in Section 15.407(b)(4)(ii). The alternative limits are based on the highest antenna gain specified in the filing. There are also marketing and importation restrictions for the devices using the alternative limit.⁴

Note 3: An out-of-band emission that complies with both the average and peak limits of Section 15.209 is not required to satisfy the -27 dBm/MHz peak emission limit.

Note 4: Only devices with antenna gains of 10 dBi or less may be approved using the emission limits specified in Section 15.247(d) till March 2, 2018; all other devices operating in this band must use the mask specified in Section 15.407(b)(4)(i).

3.4.2 Measuring Instruments

See list of measuring equipment of this test report.



3.4.3 Test Procedures

1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.

Section G) Unwanted emissions measurement.

(1) Procedure for Unwanted Emissions Measurements Below 1000MHz

- RBW = 120 kHz
- VBW = 300 kHz
- Detector = Peak
- Trace mode = max hold

(2) Procedure for Peak Unwanted Emissions Measurements Above 1000 MHz

- RBW = 1 MHz
- VBW $\geq$ 3 MHz
- Detector = Peak
- Sweep time = auto
- Trace mode = max hold

(3) Procedures for Average Unwanted Emissions Measurements Above 1000MHz


- RBW = 1 MHz
- VBW = 10 Hz, when duty cycle is no less than 98 percent.
- VBW $\geq$ 1/T, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.




2. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
3. The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
4. The antenna is a broadband antenna and its height is adjusted between one meter and four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
5. For each suspected emission, the EUT was arranged to its worst case and then adjust the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

3.4.4 Test Setup


For radiated emissions below 30MHz

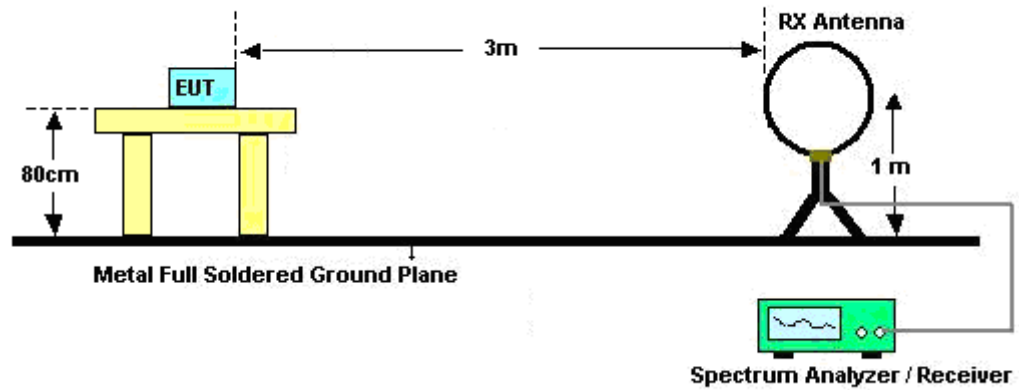

For radiated emissions from 30MHz to 1GHz

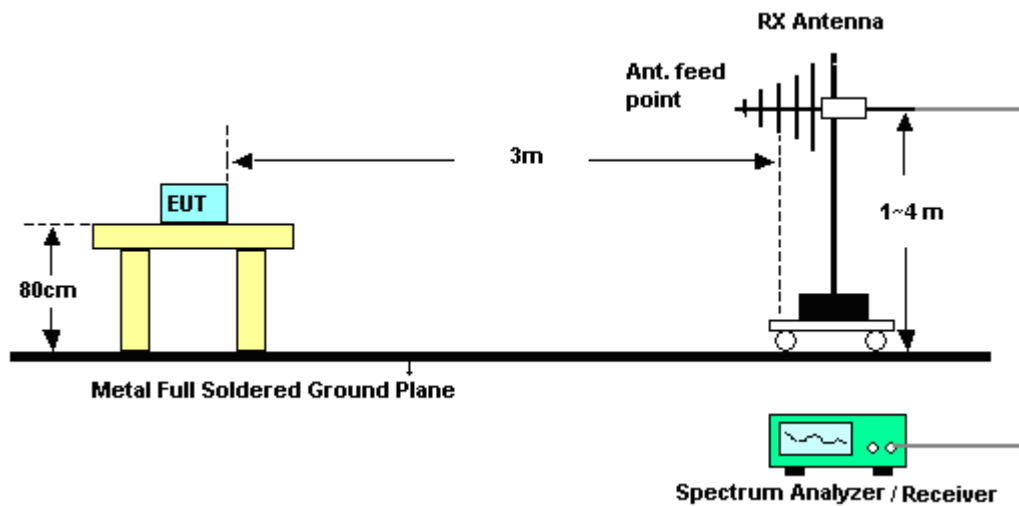

For radiated emissions above 1GHz

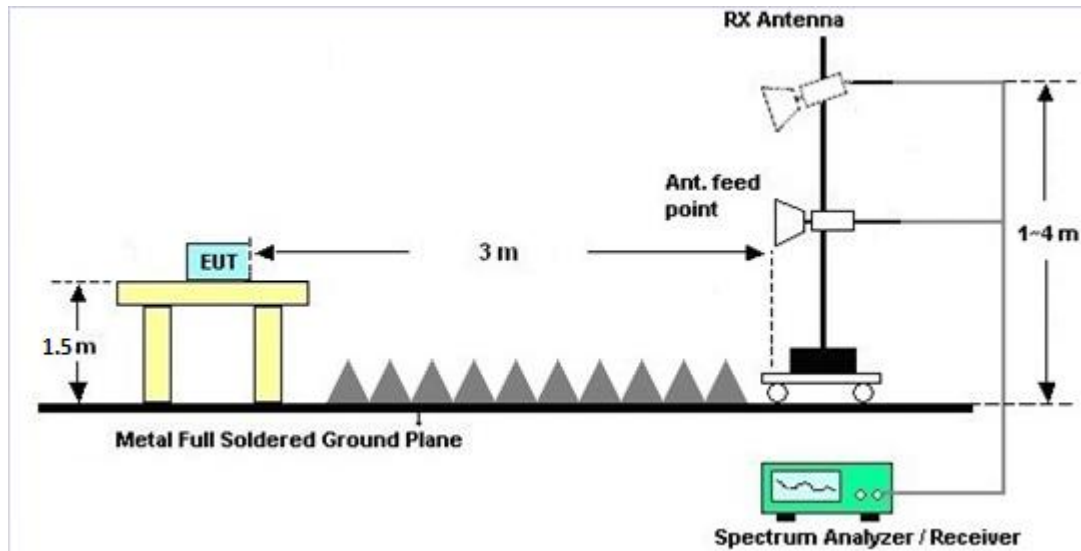

3.4.5 Test Results of Radiated Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

3.4.6 Test Result of Radiated Band Edges

Please refer to Appendix C and D.

3.4.7 Duty Cycle

Please refer to Appendix E.

3.4.8 Test Result of Unwanted Radiated Emission (30MHz ~ 10th Harmonic)

Please refer to Appendix C and D.

3.5 AC Conducted Emission Measurement

3.5.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.5.2 Measuring Instruments

See list of measuring equipment of this test report.

3.5.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.

3.5.4 Test Setup

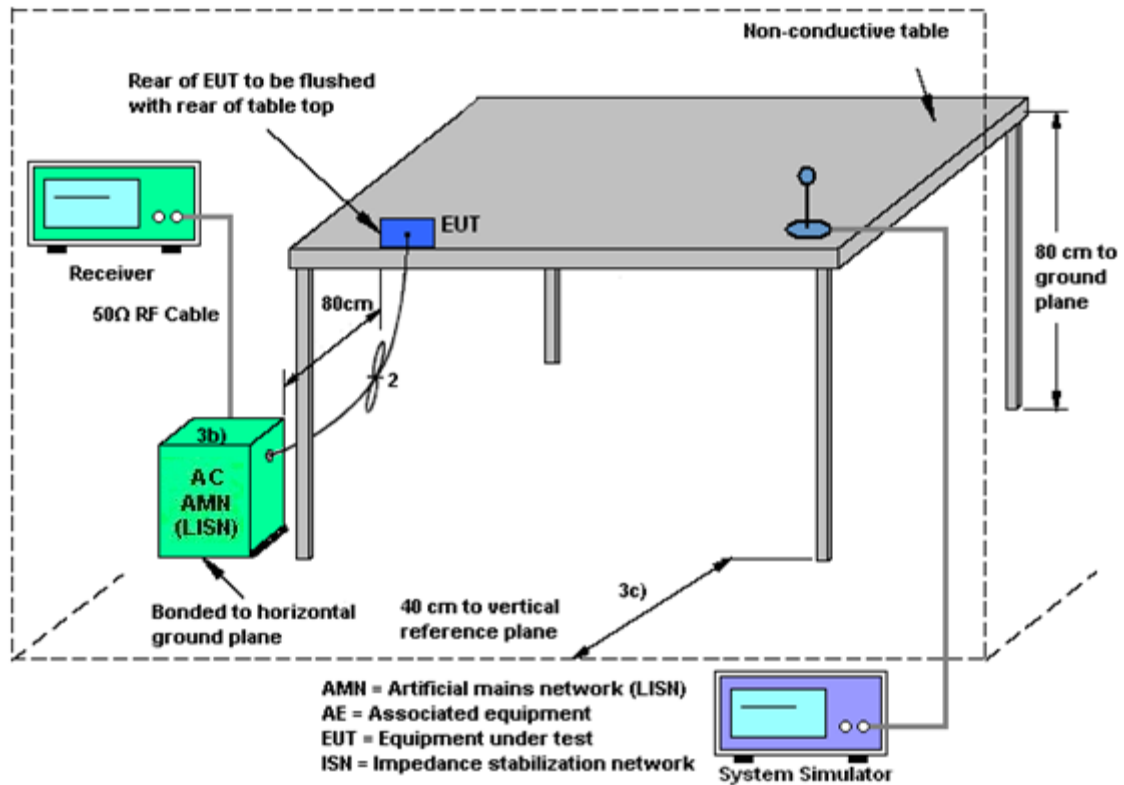

3.5.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



3.6 Automatically Discontinue Transmission

3.6.1 Limit of Automatically Discontinue Transmission

The device shall automatically discontinue transmission in case of either absence of information to transmit or operational failure. These provisions are not intended to preclude the transmission of control or signaling information or the use of repetitive codes used by certain digital technologies to complete frame or burst intervals. Applicants shall include in their application for equipment authorization to describe how this requirement is met.

3.6.2 Measuring Instruments

See list of measuring equipment of this test report.

3.6.3 Test Result of Automatically Discontinue Transmission

While the EUT is not transmitting any information, the EUT does automatically discontinue transmission and become standby mode for power saving. The EUT does detect the controlling signal of ACK message transmitting from remote device and verify whether it shall resend or discontinue transmission.

3.7 Antenna Requirements

3.7.1 Standard Applicable

If transmitting antenna directional gain is greater than 6 dBi, both the peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.7.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.7.3 Antenna Gain

<CDD Modes >

FCC KDB 662911 D01 Multiple Transmitter Output v02r01

For CDD transmissions, directional gain is calculated as

Directional gain = G_{ANT} + Array Gain, where Array Gain is as follows.

For power spectral density (PSD) measurements on all devices,

Array Gain = $10 \log(N_{ANT}/N_{SS}=1)$ dB.

For power measurements on IEEE 802.11 devices,

Array Gain = 0 dB (i.e., no array gain) for $N_{ANT} \leq 4$.

Directional gain may be calculated by using the formulas applicable to equal gain antennas with G_{ANT} set equal to the gain of the antenna having the highest gain;

The EUT supports CDD mode.

For power, the directional gain G_{ANT} is set equal to the antenna having the highest gain, i.e., F)2)f)i).

For PSD, the directional gain calculation is following F)2)f)ii) of KDB 662911 D01 v02r01.

The power and PSD limit should be modified if the directional gain of EUT is over 6 dBi,

The directional gain "DG" is calculated as following table.

<CDD Modes>						
			DG	DG	Power	PSD
			for	for	Limit	Limit
	Ant. 1	Ant. 2	Power	PSD	Reduction	Reduction
	(dBi)	(dBi)	(dBi)	(dBi)	(dB)	(dB)
Band IV	-0.38	-5.10	-0.38	0.59	0.00	0.00

Power Limit Reduction = $DG(\text{Power}) - 6\text{dBi}$, (min = 0)

PSD Limit Reduction = $DG(\text{PSD}) - 6\text{dBi}$, (min = 0)



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Power Meter	Anritsu	ML2495A	1240001	N/A	Sep. 07, 2017	Jun. 08, 2018 ~ Jun. 15, 2018	Sep. 06, 2018	Conducted (TH05-HY)
Power Sensor	Anritsu	MA2411B	1207349	300MHz~40GHz	Sep. 07, 2017	Jun. 08, 2018 ~ Jun. 15, 2018	Sep. 06, 2018	Conducted (TH05-HY)
Spectrum Analyzer	Rohde & Schwarz	FSP40	100055	9kHz~40GHz	Jun. 20, 2017	Jun. 08, 2018 ~ Jun. 15, 2018	Jun. 19, 2018	Conducted (TH05-HY)
Switch Box & RF Cable	Burgeon	ETF-058	EC1300484	N/A	Mar. 01, 2018	Jun. 08, 2018 ~ Jun. 15, 2018	Feb. 28, 2019	Conducted (TH05-HY)
Hygrometer	TECEPEL	HTC-1	2	N/A	Mar. 06, 2018	Jun. 08, 2018 ~ Jun. 15, 2018	Mar. 05, 2019	Conducted (TH05-HY)
AC Power Source	ChainTek	APC-1000W	N/A	N/A	N/A	Apr. 10, 2018	N/A	Conduction (CO05-HY)
EMI Test Receiver	Rohde & Schwarz	ESR3	102388	3.6GHz	Dec. 08, 2017	Apr. 10, 2018	Dec. 07, 2018	Conduction (CO05-HY)
LISN	Rohde & Schwarz	ENV216	100080	9kHz~30MHz	Nov. 30, 2017	Apr. 10, 2018	Nov. 29, 2018	Conduction (CO05-HY)
Software	Rohde & Schwarz	EMC32 V10.30	N/A	N/A	N/A	Apr. 10, 2018	N/A	Conduction (CO05-HY)
LF Cable	HUBER + SUHNER	RG-214/U	LF01	N/A	Jan. 03, 2018	Apr. 10, 2018	Jan. 02, 2019	Conduction (CO05-HY)
Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100851	N/A	Jan. 03, 2018	Apr. 10, 2018	Jan. 02, 2019	Conduction (CO05-HY)
Hygrometer	Testo	608-H1	34913912	N/A	Mar. 06, 2018	Apr. 10, 2018	Mar. 05, 2019	Conduction (CO05-HY)
Amplifier	MITEQ	TTA1840-35-HG	1871923	18GHz~40GHz, VSWR : 2.5:1 max	Jul. 18, 2017	Jun. 6, 2018 ~ Jun. 14, 2018	Jul. 17, 2018	Radiation (03CH11-HY)
Amplifier	SONOMA	310N	187312	9kHz~1GHz	Jan. 16, 2018	Jun. 06, 2018 ~ Jun. 14, 2018	Jan. 15, 2019	Radiation (03CH11-HY)
Bilog Antenna	TESEQ	CBL 6111D&N-6-06	35414&AT-N0602	30MHz~1GHz	Oct. 14, 2017	Jun. 06, 2018 ~ Jun. 14, 2018	Oct. 13, 2018	Radiation (03CH11-HY)
Horn Antenna	SCHWARZBECK	BBHA 9120 D	9120D-1326	1GHz ~ 18GHz	Oct. 16, 2017	Jun. 06, 2018 ~ Jun. 14, 2018	Oct. 15, 2018	Radiation (03CH11-HY)
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100488	9 kHz~30 MHz	Nov. 23, 2017	Jun. 06, 2018 ~ Jun. 14, 2018	Nov. 22, 2018	Radiation (03CH11-HY)
Preamplifier	Keysight	83017A	MY53270080	1GHz~26.5GHz	Nov. 10, 2016	Jun. 06, 2018 ~ Jun. 14, 2018	Nov. 09, 2018	Radiation (03CH11-HY)
Spectrum Analyzer	Keysight	N9010A	MY54200486	10Hz ~ 44GHz	Oct. 19, 2017	Jun. 06, 2018 ~ Jun. 14, 2018	Oct. 18, 2018	Radiation (03CH11-HY)
Controller	EMEC	EM 1000	N/A	Control Turn table & Ant Mast	N/A	Jun. 06, 2018 ~ Jun. 14, 2018	N/A	Radiation (03CH11-HY)
Antenna Mast	EMEC	AM-BS-4500-B	N/A	1~4m	N/A	Jun. 06, 2018 ~ Jun. 14, 2018	N/A	Radiation (03CH11-HY)
Turn Table	EMEC	TT 2000	N/A	0~360 Degree	N/A	Jun. 06, 2018 ~ Jun. 14, 2018	N/A	Radiation (03CH11-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA9170584	18GHz- 40GHz	Nov. 27, 2017	Jun. 06, 2018 ~ Jun. 14, 2018	Nov. 26, 2018	Radiation (03CH11-HY)
Preamplifier	Jet-Power	JPA0118-55-303K	1710001800054002	1GHz~18GHz	Apr. 17, 2018	Jun. 06, 2018 ~ Jun. 14, 2018	Apr. 16, 2019	Radiation (03CH11-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY9837/4	9K-30M	Mar. 20, 2018	Jun. 06, 2018 ~ Jun. 14, 2018	Mar. 19, 2019	Radiation (03CH11-HY)



Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY9837/4	30M-18G	Mar. 15, 2018	Jun. 06, 2018 ~ Jun. 14, 2018	Mar. 14, 2019	Radiation (03CH11-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	MY2589/2	30M-18G	Mar. 15, 2018	Jun. 06, 2018 ~ Jun. 14, 2018	Mar. 14, 2019	Radiation (03CH11-HY)
Filter	Wainwright	WHKX8-587 2.5-6750-18 000-40ST	SN3	6.75GHz High Pass	Sep. 18, 2017	Jun. 06, 2018 ~ Jun. 14, 2018	Sep. 17, 2018	Radiation (03CH11-HY)
Filter	Wainwright	WLK4-1000-1530-8000-4 0SS	SN11	1G Low Pass	Sep. 18, 2017	Jun. 06, 2018 ~ Jun. 14, 2018	Sep. 17, 2018	Radiation (03CH11-HY)
Software	Audix	E3 6.2009-8-24	RK-00104 2	N/A	N/A	Jun. 06, 2018 ~ Jun. 14, 2018	N/A	Radiation (03CH11-HY)
Hygrometer	TECPEL	DTN-303B	TP140325	N/A	Oct. 12, 2017	Jun. 06, 2018 ~ Jun. 14, 2018	Oct. 11, 2018	Radiation (03CH11-HY)

5 Uncertainty of Evaluation

Uncertainty of Conducted Emission Measurement (150kHz ~ 30MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	2.70
---	------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	5.20
---	------

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	5.50
---	------

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	5.20
---	------

Appendix A. Test Result of Conducted Test Items

Test Engineer:	Kai Liao	Temperature:	21~25	°C
Test Date:	2018/6/08 ~ 2018/6/15	Relative Humidity:	51~54	%

TEST RESULTS DATA
6dB and 26dB EBW and 99% OBW

Band IV													
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Bandwidth (MHz)		26dB Bandwidth (MHz)		6 dB Bandwidth (MHz)		6 dB Bandwidth Min. Limit (MHz)		Pass/Fail
					Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2	
11a	6Mbps	2	149	5745	17.70	19.25	42.95	36.40	15.10	15.10	0.5		Pass
11a	6Mbps	2	157	5785	18.15	20.50	32.45	39.50	15.10	15.70	0.5		Pass
11a	6Mbps	2	165	5825	28.30	20.50	44.35	39.40	15.10	15.00	0.5		Pass
HT20	MCS0	2	149	5745	25.00	20.15	46.68	37.68	15.90	16.50	0.5		Pass
HT20	MCS0	2	157	5785	30.20	20.75	50.52	39.10	17.55	16.00	0.5		Pass
HT20	MCS0	2	165	5825	28.20	19.80	48.82	37.44	17.50	16.00	0.5		Pass
HT40	MCS0	2	151	5755	52.10	37.60	88.11	73.62	35.01	35.10	0.5		Pass
HT40	MCS0	2	159	5795	37.00	39.00	100.11	79.47	35.01	35.46	0.5		Pass
VHT80	MCS0	2	155	5775	81.48	76.44	189.52	158.16	75.25	75.20	0.5		Pass

TEST RESULTS DATA
Average Power Table

Band IV														
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)		Average Conducted Power (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		Pass/Fail
					Ant 1	Ant 2	Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2	
11a	6Mbps	1	149	5745	0.08	0.08	17.51	17.27		30.00	30.00	-0.38	-5.10	Pass
11a	6Mbps	1	157	5785	0.08	0.08	16.72	16.53		30.00	30.00	-0.38	-5.10	Pass
11a	6Mbps	1	165	5825	0.08	0.08	16.67	16.53		30.00	30.00	-0.38	-5.10	Pass
HT20	MCS0	1	149	5745	0.09	0.00	17.12	18.34		30.00	30.00	-0.38	-5.10	Pass
HT20	MCS0	1	157	5785	0.09	0.00	16.56	18.18		30.00	30.00	-0.38	-5.10	Pass
HT20	MCS0	1	165	5825	0.09	0.00	16.51	17.68		30.00	30.00	-0.38	-5.10	Pass
HT40	MCS0	1	151	5755	0.18	0.18	17.22	17.71		30.00	30.00	-0.38	-5.10	Pass
HT40	MCS0	1	159	5795	0.18	0.18	16.49	17.24		30.00	30.00	-0.38	-5.10	Pass
VHT20	MCS0	1	149	5745	0.09	0.11	17.09	17.25		30.00	30.00	-0.38	-5.10	Pass
VHT20	MCS0	1	157	5785	0.09	0.11	16.67	16.35		30.00	30.00	-0.38	-5.10	Pass
VHT20	MCS0	1	165	5825	0.09	0.11	16.29	16.51		30.00	30.00	-0.38	-5.10	Pass
VHT40	MCS0	1	151	5755	0.18	0.18	17.25	17.45		30.00	30.00	-0.38	-5.10	Pass
VHT40	MCS0	1	159	5795	0.18	0.18	16.38	17.05		30.00	30.00	-0.38	-5.10	Pass
VHT80	MCS0	1	155	5775	0.20	0.20	16.71	17.21		30.00	30.00	-0.38	-5.10	Pass
11a	6Mbps	2	149	5745	0.08	0.08	17.84	17.39	20.63	30.00		-0.38		Pass
11a	6Mbps	2	157	5785	0.08	0.08	17.21	16.99	20.11	30.00		-0.38		Pass
11a	6Mbps	2	165	5825	0.08	0.08	16.73	16.66	19.71	30.00		-0.38		Pass
HT20	MCS0	2	149	5745	0.09	0.09	17.18	18.42	20.85	30.00		-0.38		Pass
HT20	MCS0	2	157	5785	0.09	0.09	16.59	18.21	20.48	30.00		-0.38		Pass
HT20	MCS0	2	165	5825	0.09	0.09	16.54	17.69	20.16	30.00		-0.38		Pass
HT40	MCS0	2	151	5755	0.18	0.18	17.50	17.78	20.65	30.00		-0.38		Pass
HT40	MCS0	2	159	5795	0.18	0.18	16.83	17.28	20.07	30.00		-0.38		Pass
VHT20	MCS0	2	149	5745	0.09	0.09	17.46	17.39	20.43	30.00		-0.38		Pass
VHT20	MCS0	2	157	5785	0.09	0.09	17.13	16.48	19.83	30.00		-0.38		Pass
VHT20	MCS0	2	165	5825	0.09	0.09	16.34	16.59	19.48	30.00		-0.38		Pass
VHT40	MCS0	2	151	5755	0.18	0.18	17.43	17.48	20.46	30.00		-0.38		Pass
VHT40	MCS0	2	159	5795	0.18	0.18	16.78	17.08	19.94	30.00		-0.38		Pass
VHT80	MCS0	2	155	5775	0.18	0.20	17.05	17.30	20.19	30.00		-0.38		Pass

TEST RESULTS DATA
Power Spectral Density

Band IV																
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)		10log (500kHz /RBW) Factor (dB)		Average Power Density (dBm/500kHz)			Average PSD Limit (dBm/500kHz)		DG (dBi)		Pass /Fail
					Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2	
11a	6Mbps	2	149	5745	0.08	0.08	2.22	0.28	2.78	8.01	30.00	0.59	Pass			
11a	6Mbps	2	157	5785	0.08	0.08	2.22	-1.51	2.63	7.86	30.00	0.59	Pass			
11a	6Mbps	2	165	5825	0.08	0.08	2.22	0.91	2.80	8.03	30.00	0.59	Pass			
HT20	MCS0	2	149	5745	0.09	0.09	2.22	1.13	2.39	7.62	30.00	0.59	Pass			
HT20	MCS0	2	157	5785	0.09	0.09	2.22	-0.89	2.20	7.43	30.00	0.59	Pass			
HT20	MCS0	2	165	5825	0.09	0.09	2.22	0.05	1.91	7.14	30.00	0.59	Pass			
HT40	MCS0	2	151	5755	0.18	0.18	2.22	-2.43	-1.05	4.18	30.00	0.59	Pass			
HT40	MCS0	2	159	5795	0.18	0.18	2.22	-4.37	-0.91	4.32	30.00	0.59	Pass			
VHT80	MCS0	2	155	5775	0.18	0.20	2.22	-5.80	-4.36	0.87	30.00	0.59	Pass			

Note: PSD Sum = Max PSD(Ant. 1, Ant. 2) + 10 log (n)




Appendix B. AC Conducted Emission Test Results

Test Engineer :	Blue Lan	Temperature :	25~26℃
		Relative Humidity :	51~53%

EUT Information

Report NO : 820225
Test Mode : Mode 1
Test Voltage : 120Vac/60Hz
Phase : Line

Full Spectrum

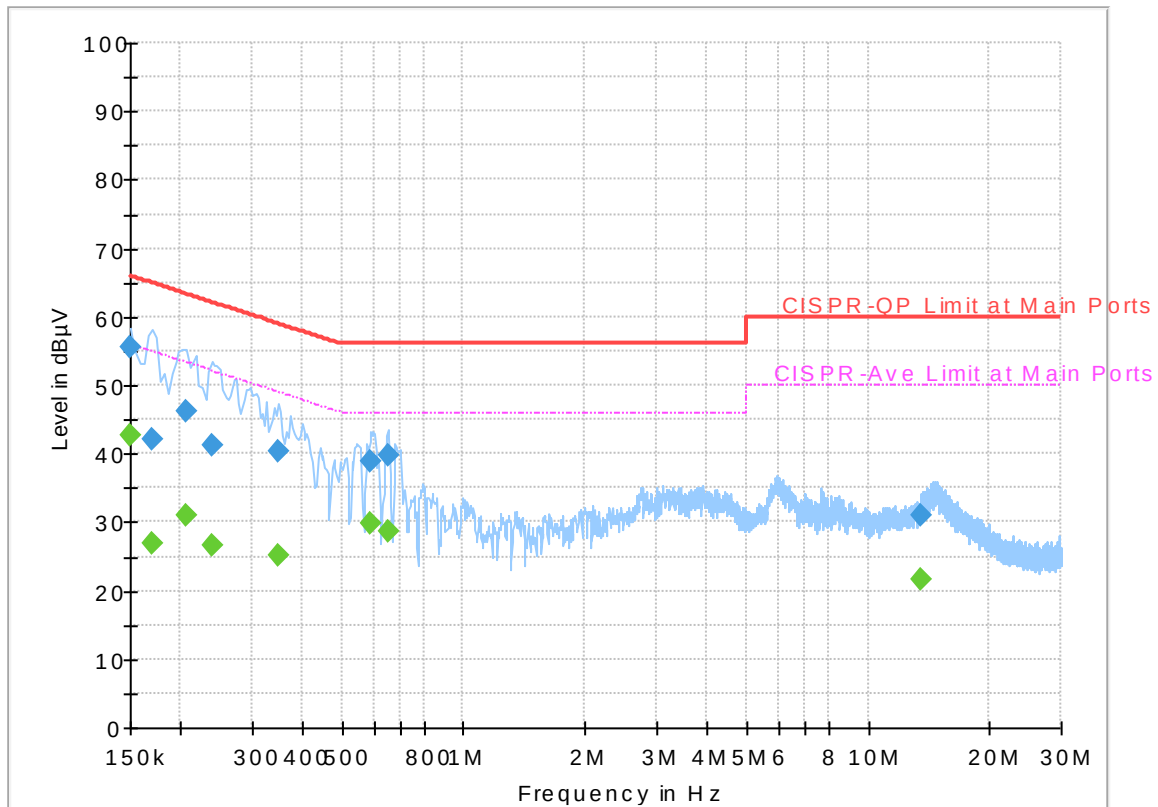


Final Result

Frequency (MHz)	QuasiPeak (dBμV)	Average (dBμV)	Limit (dBμV)	Margin (dB)	Line	Filter	Corr. (dB)
0.150000	---	42.81	56.00	13.19	L1	OFF	19.5
0.150000	55.62	---	66.00	10.38	L1	OFF	19.5
0.170000	---	27.01	54.96	27.95	L1	OFF	19.5
0.170000	42.11	---	64.96	22.85	L1	OFF	19.5
0.206000	---	30.95	53.37	22.42	L1	OFF	19.5
0.206000	46.21	---	63.37	17.16	L1	OFF	19.5
0.238000	---	26.47	52.17	25.70	L1	OFF	19.5
0.238000	41.32	---	62.17	20.85	L1	OFF	19.5
0.350000	---	25.21	48.96	23.75	L1	OFF	19.5
0.350000	40.47	---	58.96	18.49	L1	OFF	19.5
0.590000	---	29.90	46.00	16.10	L1	OFF	19.5
0.590000	38.80	---	56.00	17.20	L1	OFF	19.5
0.650000	---	28.59	46.00	17.41	L1	OFF	19.5
0.650000	39.87	---	56.00	16.13	L1	OFF	19.5
13.560000	---	21.70	50.00	28.30	L1	OFF	19.7
13.560000	31.00	---	60.00	29.00	L1	OFF	19.7

EUT Information

Report NO : 820225
Test Mode : Mode 1
Test Voltage : 120Vac/60Hz
Phase : Neutral

Full Spectrum

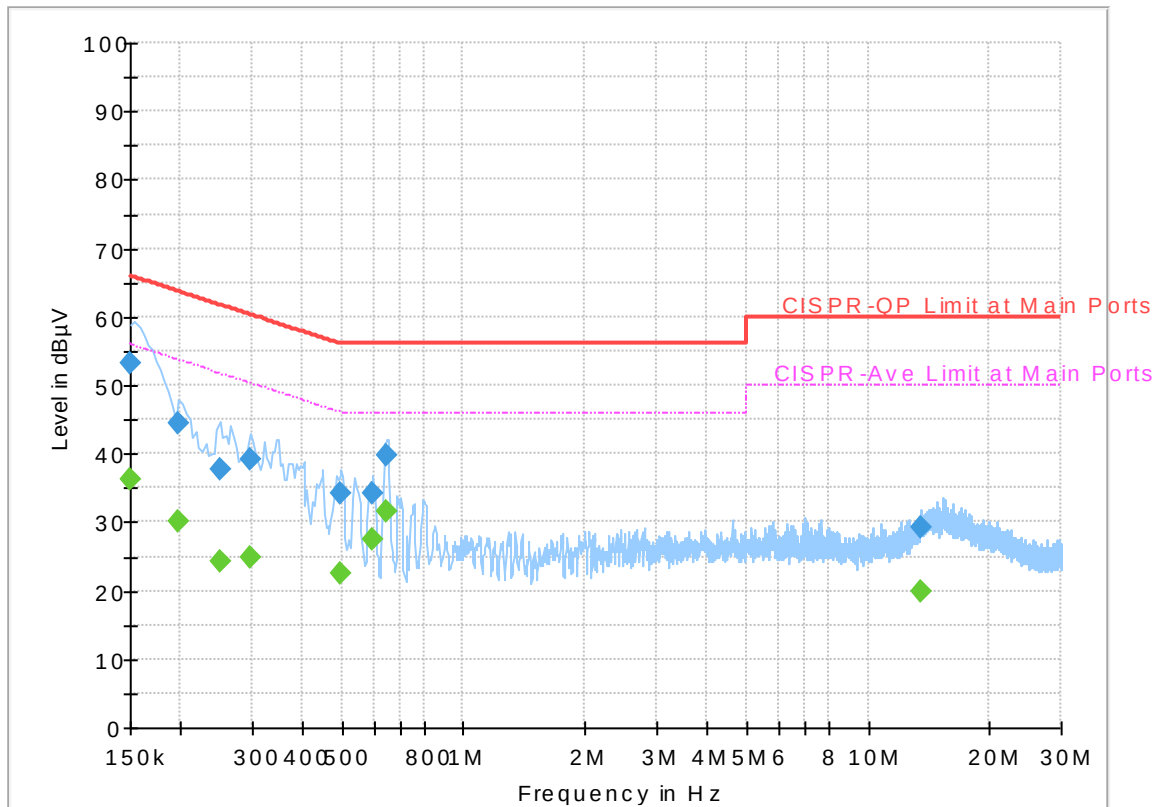

Final_Result

Frequency (MHz)	QuasiPeak (dBµV)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Line	Filter	Corr. (dB)
0.150000	---	36.18	56.00	19.82	N	OFF	19.5
0.150000	53.16	---	66.00	12.84	N	OFF	19.5
0.198000	---	30.13	53.69	23.56	N	OFF	19.5
0.198000	44.48	---	63.69	19.21	N	OFF	19.5
0.250000	---	24.37	51.76	27.39	N	OFF	19.5
0.250000	37.82	---	61.76	23.94	N	OFF	19.5
0.298000	---	24.90	50.30	25.40	N	OFF	19.5
0.298000	39.07	---	60.30	21.23	N	OFF	19.5
0.498000	---	22.54	46.03	23.49	N	OFF	19.5
0.498000	34.24	---	56.03	21.79	N	OFF	19.5
0.598000	---	27.57	46.00	18.43	N	OFF	19.5
0.598000	34.16	---	56.00	21.84	N	OFF	19.5
0.646000	---	31.47	46.00	14.53	N	OFF	19.5
0.646000	39.82	---	56.00	16.18	N	OFF	19.5
13.560000	---	20.00	50.00	30.00	N	OFF	19.8
13.560000	29.20	---	60.00	30.80	N	OFF	19.8



Appendix C. Radiated Spurious Emission

Test Engineer :	Hao Hsu, Ken Wu and Chuan Zhu	Temperature :	22~25°C
		Relative Humidity :	50~55%

Band 4 - 5725~5850MHz

WIFI 802.11a (Band Edge @ 3m)

WIFI Ant.	Note	Frequency	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Path Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	Pol.
1+2		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11a CH 149 5745MHz		5624	49.27	-18.93	68.2	40.48	32.32	9.55	33.08	192	61	P	H
		5697.6	58.38	-45.05	103.43	49.31	32.44	9.75	33.12	192	61	P	H
		5716.8	69.64	-40.27	109.91	60.49	32.47	9.81	33.13	192	61	P	H
		5723	75.5	-42.14	117.64	66.32	32.5	9.81	33.13	192	61	P	H
	*	5745	111.77	-	-	102.51	32.53	9.88	33.15	192	61	P	H
	*	5745	103.84	-	-	94.58	32.53	9.88	33.15	192	61	A	H
		5622.2	49.1	-19.1	68.2	40.31	32.32	9.55	33.08	365	281	P	V
		5683.4	52.08	-40.87	92.95	43.04	32.41	9.75	33.12	365	281	P	V
		5719.2	66.1	-44.48	110.58	56.92	32.5	9.81	33.13	365	281	P	V
		5723.8	73.92	-45.54	119.46	64.74	32.5	9.81	33.13	365	281	P	V
	*	5745	108.97	-	-	99.71	32.53	9.88	33.15	365	281	P	V
	*	5745	100.67	-	-	91.41	32.53	9.88	33.15	365	281	A	V



WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11a CH 157 5785MHz		5615.25	49.42	-18.78	68.2	40.66	32.29	9.55	33.08	189	62	P	H
		5696	49.74	-52.51	102.25	40.67	32.44	9.75	33.12	189	62	P	H
		5708.75	51.93	-55.72	107.65	42.78	32.47	9.81	33.13	189	62	P	H
		5722	51.47	-63.89	115.36	42.29	32.5	9.81	33.13	189	62	P	H
	*	5785	111.24	-	-	101.8	32.6	10.01	33.17	189	62	P	H
	*	5785	103.64	-	-	94.2	32.6	10.01	33.17	189	62	A	H
		5851	50.33	-69.59	119.92	40.78	32.72	10.02	33.19	189	62	P	H
		5865	50.28	-57.72	108	40.72	32.75	10.02	33.21	189	62	P	H
		5894.5	49.54	-41.19	90.73	39.93	32.81	10.02	33.22	189	62	P	H
		5930.25	49.31	-18.89	68.2	39.64	32.88	10.02	33.23	189	62	P	H
		5620.75	48.5	-19.7	68.2	39.71	32.32	9.55	33.08	376	283	P	V
		5680.75	49.47	-41.52	90.99	40.43	32.41	9.75	33.12	376	283	P	V
		5710.5	49.59	-58.55	108.14	40.44	32.47	9.81	33.13	376	283	P	V
		5720.5	50.68	-61.26	111.94	41.5	32.5	9.81	33.13	376	283	P	V
	*	5785	109.11	-	-	99.67	32.6	10.01	33.17	376	283	P	V
	*	5785	100.64	-	-	91.2	32.6	10.01	33.17	376	283	A	V
		5854	49.54	-63.54	113.08	39.96	32.75	10.02	33.19	376	283	P	V
		5869.5	50.59	-56.15	106.74	41.03	32.75	10.02	33.21	376	283	P	V
		5888.25	50.17	-45.19	95.36	40.56	32.81	10.02	33.22	376	283	P	V
		5948	48.95	-19.25	68.2	39.26	32.91	10.02	33.24	376	283	P	V



WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11a CH 165 5825MHz	*	5825	111.34	-	-	101.81	32.69	10.02	33.18	185	58	P	H
	*	5825	103.32	-	-	93.79	32.69	10.02	33.18	185	58	A	H
		5850.4	68.74	-52.55	121.29	59.19	32.72	10.02	33.19	185	58	P	H
		5855.2	63.09	-47.65	110.74	53.51	32.75	10.02	33.19	185	58	P	H
		5875.4	55.58	-49.32	104.9	45.99	32.78	10.02	33.21	185	58	P	H
		5948.4	49.45	-18.75	68.2	39.76	32.91	10.02	33.24	185	58	P	H
	*	5825	108.1	-	-	98.57	32.69	10.02	33.18	400	272	P	V
	*	5825	100.68	-	-	91.15	32.69	10.02	33.18	400	272	A	V
		5850.6	63.5	-57.33	120.83	53.95	32.72	10.02	33.19	400	272	P	V
		5855.4	58.51	-52.18	110.69	48.93	32.75	10.02	33.19	400	272	P	V
		5881.6	50.09	-50.21	100.3	40.5	32.78	10.02	33.21	400	272	P	V
		5926.8	49.9	-18.3	68.2	40.23	32.88	10.02	33.23	400	272	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 4 5725~5850MHz

WIFI 802.11a (Harmonic @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11a CH 149 5745MHz		11490	63.1	-10.9	74	68.98	40	15.72	61.6	100	360	P	H
		11490	50.5	-3.5	54	56.38	40	15.72	61.6	100	360	A	H
		17235	49.48	-18.72	68.2	45.13	40.54	19.6	55.79	100	0	P	H
		11490	61.13	-12.87	74	67.01	40	15.72	61.6	400	355	P	V
		11490	48.63	-5.37	54	54.51	40	15.72	61.6	400	355	A	V
		17235	46.66	-21.54	68.2	42.31	40.54	19.6	55.79	100	0	P	V
802.11a CH 157 5785MHz		11570	63.37	-10.63	74	69.49	39.86	15.77	61.75	100	360	P	H
		11570	50.52	-3.48	54	56.64	39.86	15.77	61.75	100	360	A	H
		17355	48.45	-19.75	68.2	43.34	40.96	19.68	55.53	100	0	P	H
		11570	57.78	-16.22	74	63.9	39.86	15.77	61.75	358	357	P	V
		11570	46.18	-7.82	54	52.3	39.86	15.77	61.75	358	357	A	V
		17355	45.95	-22.25	68.2	40.84	40.96	19.68	55.53	100	0	P	V
802.11a CH 165 5825MHz		11650	64.18	-9.82	74	70.52	39.72	15.84	61.9	100	0	P	H
		11650	46.68	-7.32	54	53.02	39.72	15.84	61.9	100	0	A	H
		17475	50.7	-17.5	68.2	44.84	41.38	19.75	55.27	100	0	P	H
													H
		11650	54.76	-19.24	74	61.1	39.72	15.84	61.9	330	18	P	V
		11650	44.31	-9.69	54	50.65	39.72	15.84	61.9	330	18	A	V
		17475	47.89	-20.31	68.2	42.03	41.38	19.75	55.27	100	0	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												

**Band 4 5725~5850MHz****WIFI 802.11n HT20 (Band Edge @ 3m)**

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20 CH 149 5745MHz		5637	48.65	-19.55	68.2	39.79	32.35	9.61	33.1	261	61	P	H
		5699.6	63.59	-41.32	104.91	54.52	32.44	9.75	33.12	261	61	P	H
		5719.8	75.35	-35.39	110.74	66.17	32.5	9.81	33.13	261	61	P	H
		5724.2	84.72	-35.66	120.38	75.54	32.5	9.81	33.13	261	61	P	H
	*	5745	111.85	-	-	102.59	32.53	9.88	33.15	261	61	P	H
	*	5745	102.77	-	-	93.51	32.53	9.88	33.15	261	61	A	H
		5634.8	49.63	-18.57	68.2	40.77	32.35	9.61	33.1	167	6	P	V
		5699.2	58.41	-46.2	104.61	49.34	32.44	9.75	33.12	167	6	P	V
		5718.8	75.29	-35.17	110.46	66.11	32.5	9.81	33.13	167	6	P	V
		5725	84.77	-37.43	122.2	75.59	32.5	9.81	33.13	167	6	P	V
	*	5745	112.19	-	-	102.93	32.53	9.88	33.15	167	6	P	V
	*	5745	103.5	-	-	94.24	32.53	9.88	33.15	167	6	A	V



WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20 CH 157 5785MHz		5605.5	49.22	-18.98	68.2	40.46	32.29	9.55	33.08	306	60	P	H
		5690.25	49.37	-48.64	98.01	40.3	32.44	9.75	33.12	306	60	P	H
		5718.5	49.83	-60.55	110.38	40.65	32.5	9.81	33.13	306	60	P	H
		5722.75	50.15	-66.92	117.07	40.97	32.5	9.81	33.13	306	60	P	H
	*	5785	110.24	-	-	100.8	32.6	10.01	33.17	306	60	P	H
	*	5785	101.29	-	-	91.85	32.6	10.01	33.17	306	60	A	H
		5850.25	50.27	-71.36	121.63	40.72	32.72	10.02	33.19	306	60	P	H
		5872.25	50.19	-55.78	105.97	40.6	32.78	10.02	33.21	306	60	P	H
		5875.5	49.54	-55.29	104.83	39.95	32.78	10.02	33.21	306	60	P	H
		5941.25	49.39	-18.81	68.2	39.7	32.91	10.02	33.24	306	60	P	H
		5628.5	49.44	-18.76	68.2	40.61	32.32	9.61	33.1	171	15	P	V
		5695.5	49.3	-52.58	101.88	40.23	32.44	9.75	33.12	171	15	P	V
		5710.5	49.16	-58.98	108.14	40.01	32.47	9.81	33.13	171	15	P	V
		5725	50.16	-72.04	122.2	40.98	32.5	9.81	33.13	171	15	P	V
	*	5785	110.77	-	-	101.33	32.6	10.01	33.17	171	15	P	V
	*	5785	102.15	-	-	92.71	32.6	10.01	33.17	171	15	A	V
		5850.5	50.56	-70.5	121.06	41.01	32.72	10.02	33.19	171	15	P	V
		5860.25	50.16	-59.17	109.33	40.6	32.75	10.02	33.21	171	15	P	V
		5880.5	49.96	-51.15	101.11	40.37	32.78	10.02	33.21	171	15	P	V
		5930.75	49.6	-18.6	68.2	39.93	32.88	10.02	33.23	171	15	P	V



WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20 CH 165 5825MHz	*	5825	109.29	-	-	99.76	32.69	10.02	33.18	197	57	P	H
	*	5825	100.67	-	-	91.14	32.69	10.02	33.18	197	57	A	H
		5850	74.2	-48	122.2	64.65	32.72	10.02	33.19	197	57	P	H
		5855.8	60.98	-49.6	110.58	51.4	32.75	10.02	33.19	197	57	P	H
		5876.8	54.79	-49.07	103.86	45.2	32.78	10.02	33.21	197	57	P	H
		5930	49.95	-18.25	68.2	40.28	32.88	10.02	33.23	197	57	P	H
	*	5825	111.19	-	-	101.66	32.69	10.02	33.18	167	15	P	V
	*	5825	102.14	-	-	92.61	32.69	10.02	33.18	167	15	A	V
		5850.6	69.7	-51.13	120.83	60.15	32.72	10.02	33.19	167	15	P	V
		5866.8	61.07	-46.42	107.49	51.51	32.75	10.02	33.21	167	15	P	V
		5883.6	53.56	-45.25	98.81	43.98	32.78	10.02	33.22	167	15	P	V
		5945.6	50	-18.2	68.2	40.31	32.91	10.02	33.24	167	15	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 4 5725~5850MHz
WIFI 802.11n HT20 (Harmonic @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20 CH 149 5745MHz		11490	62.51	-11.49	74	68.39	40	15.72	61.6	100	360	P	H
		11490	50.24	-3.76	54	56.12	40	15.72	61.6	100	360	A	H
		17235	48.48	-19.72	68.2	44.13	40.54	19.6	55.79	100	0	P	H
		11490	59.22	-14.78	74	65.1	40	15.72	61.6	400	352	P	V
		11490	48.51	-5.49	54	54.39	40	15.72	61.6	400	352	A	V
		17235	46.87	-21.33	68.2	42.52	40.54	19.6	55.79	100	0	P	V
802.11n HT20 CH 157 5785MHz		11570	61.85	-12.15	74	67.97	39.86	15.77	61.75	100	360	P	H
		11570	50.53	-3.47	54	56.65	39.86	15.77	61.75	100	360	A	H
		17355	49.43	-18.77	68.2	44.32	40.96	19.68	55.53	100	0	P	H
		11570	59	-15	74	65.12	39.86	15.77	61.75	300	333	P	V
		11570	47.59	-6.41	54	53.71	39.86	15.77	61.75	300	333	A	V
		17355	47.61	-20.59	68.2	42.5	40.96	19.68	55.53	100	0	P	V
802.11n HT20 CH 165 5825MHz		11650	59.38	-14.62	74	65.72	39.72	15.84	61.9	105	354	P	H
		11650	49.16	-4.84	54	55.5	39.72	15.84	61.9	105	354	A	H
		17475	49.97	-18.23	68.2	44.11	41.38	19.75	55.27	100	0	P	H
		11650	56.79	-17.21	74	63.13	39.72	15.84	61.9	202	360	P	V
		11650	45.51	-8.49	54	51.85	39.72	15.84	61.9	202	360	A	V
		17475	48.37	-19.83	68.2	42.51	41.38	19.75	55.27	100	0	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 4 5725~5850MHz

WIFI 802.11n HT40 (Band Edge @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT40 CH 151 5755MHz		5616.5	50.49	-17.71	68.2	41.7	32.32	9.55	33.08	264	59	P	H
		5699.5	65.65	-39.18	104.83	56.58	32.44	9.75	33.12	264	59	P	H
		5719.75	77.6	-33.13	110.73	68.42	32.5	9.81	33.13	264	59	P	H
		5724	82.01	-37.91	119.92	72.83	32.5	9.81	33.13	264	59	P	H
	*	5755	109.3	-	-	100	32.57	9.88	33.15	264	59	P	H
	*	5755	100.88	-	-	91.58	32.57	9.88	33.15	264	59	A	H
		5854.25	49.77	-62.74	112.51	40.19	32.75	10.02	33.19	264	59	P	H
		5871.5	49.85	-56.33	106.18	40.26	32.78	10.02	33.21	264	59	P	H
		5911.75	49.86	-28.11	77.97	40.23	32.84	10.02	33.23	264	59	P	H
		5932.75	48.81	-19.39	68.2	39.14	32.88	10.02	33.23	264	59	P	H
		5610.5	49.8	-18.4	68.2	41.04	32.29	9.55	33.08	117	10	P	V
		5697.25	62.29	-40.88	103.17	53.22	32.44	9.75	33.12	117	10	P	V
		5718.75	77.89	-32.56	110.45	68.71	32.5	9.81	33.13	117	10	P	V
		5724	78.66	-41.26	119.92	69.48	32.5	9.81	33.13	117	10	P	V
	*	5755	108.92	-	-	99.62	32.57	9.88	33.15	117	10	P	V
	*	5755	100.52	-	-	91.22	32.57	9.88	33.15	117	10	A	V
		5852.25	52.56	-64.51	117.07	43.01	32.72	10.02	33.19	117	10	P	V
		5864.5	50.25	-57.89	108.14	40.69	32.75	10.02	33.21	117	10	P	V
		5908	49.86	-30.88	80.74	40.22	32.84	10.02	33.22	117	10	P	V
		5948	49.42	-18.78	68.2	39.73	32.91	10.02	33.24	117	10	P	V



WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT40 CH 159 5795MHz		5645.25	48.78	-19.42	68.2	39.92	32.35	9.61	33.1	254	56	P	H
		5696	53.2	-49.05	102.25	44.13	32.44	9.75	33.12	254	56	P	H
		5710.5	57.88	-50.26	108.14	48.73	32.47	9.81	33.13	254	56	P	H
		5724.75	58.98	-62.65	121.63	49.8	32.5	9.81	33.13	254	56	P	H
	*	5795	108.7	-	-	99.23	32.63	10.01	33.17	254	56	P	H
	*	5795	100.5	-	-	91.03	32.63	10.01	33.17	254	56	A	H
		5850.75	60.73	-59.76	120.49	51.18	32.72	10.02	33.19	254	56	P	H
		5860.25	57.1	-52.23	109.33	47.54	32.75	10.02	33.21	254	56	P	H
		5883.5	52.72	-46.17	98.89	43.14	32.78	10.02	33.22	254	56	P	H
		5942	49.94	-18.26	68.2	40.25	32.91	10.02	33.24	254	56	P	H
		5649	48.86	-19.34	68.2	40	32.35	9.61	33.1	118	10	P	V
		5700	52.47	-52.73	105.2	43.4	32.44	9.75	33.12	118	10	P	V
		5715	59.81	-49.59	109.4	50.66	32.47	9.81	33.13	118	10	P	V
		5720	57.23	-53.57	110.8	48.05	32.5	9.81	33.13	118	10	P	V
	*	5795	109.28	-	-	99.81	32.63	10.01	33.17	118	10	P	V
	*	5795	100.79	-	-	91.32	32.63	10.01	33.17	118	10	A	V
		5853	61.03	-54.33	115.36	51.48	32.72	10.02	33.19	118	10	P	V
		5856	59.65	-50.87	110.52	50.07	32.75	10.02	33.19	118	10	P	V
		5876	56.22	-48.24	104.46	46.63	32.78	10.02	33.21	118	10	P	V
		5929.25	49.53	-18.67	68.2	39.86	32.88	10.02	33.23	118	10	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 4 5725~5850MHz

WIFI 802.11n HT40 (Harmonic @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT40 CH 151 5755MHz		11510	57.01	-16.99	74	62.88	40	15.73	61.6	100	360	P	H
		11510	49.17	-4.83	54	55.04	40	15.73	61.6	100	360	A	H
		17265	47.17	-21.03	68.2	42.6	40.66	19.62	55.71	100	0	P	H
		11510	54.48	-19.52	74	60.35	40	15.73	61.6	389	339	P	V
		11510	45.3	-8.7	54	51.17	40	15.73	61.6	389	339	A	V
		17265	47.31	-20.89	68.2	42.74	40.66	19.62	55.71	100	0	P	V
802.11n HT40 CH 159 5795MHz		11590	58.76	-15.24	74	64.93	39.83	15.79	61.79	100	0	P	H
		11590	48.56	-5.44	54	54.73	39.83	15.79	61.79	100	0	A	H
		17385	48.14	-20.06	68.2	42.83	41.08	19.69	55.46	100	0	P	H
		11590	54.35	-19.65	74	60.52	39.83	15.79	61.79	301	342	P	V
		11590	45.34	-8.66	54	51.51	39.83	15.79	61.79	301	342	A	V
		17385	47.65	-20.55	68.2	42.34	41.08	19.69	55.46	100	0	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 4 5725~5850MHz

WIFI 802.11ac VHT80 (Band Edge @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ac VHT80 CH 155 5775MHz		5648.75	64.83	-3.37	68.2	55.97	32.35	9.61	33.1	189	59	P	H
		5699.25	80.36	-24.29	104.65	71.29	32.44	9.75	33.12	189	59	P	H
		5718.25	83.12	-27.19	110.31	73.94	32.5	9.81	33.13	189	59	P	H
		5721	84.49	-28.59	113.08	75.31	32.5	9.81	33.13	189	59	P	H
	*	5775	106.99	-	-	97.6	32.6	9.95	33.16	189	59	P	H
	*	5775	98.65	-	-	89.26	32.6	9.95	33.16	189	59	A	H
		5850.25	78.82	-42.81	121.63	69.27	32.72	10.02	33.19	189	59	P	H
		5855.75	76.55	-34.04	110.59	66.97	32.75	10.02	33.19	189	59	P	H
		5877	70.99	-32.72	103.71	61.4	32.78	10.02	33.21	189	59	P	H
		5932.25	54.81	-13.39	68.2	45.14	32.88	10.02	33.23	189	59	P	H
		5649	61.31	-6.89	68.2	52.45	32.35	9.61	33.1	392	286	P	V
		5697.5	73.01	-30.35	103.36	63.94	32.44	9.75	33.12	392	286	P	V
		5711.5	79.7	-28.72	108.42	70.55	32.47	9.81	33.13	392	286	P	V
		5720.5	81.57	-30.37	111.94	72.39	32.5	9.81	33.13	392	286	P	V
	*	5775	103.29	-	-	93.9	32.6	9.95	33.16	392	286	P	V
	*	5775	95.45	-	-	86.06	32.6	9.95	33.16	392	286	A	V
		5853.25	74.97	-39.82	114.79	65.42	32.72	10.02	33.19	392	286	P	V
		5856	72.66	-37.86	110.52	63.08	32.75	10.02	33.19	392	286	P	V
		5875.5	69.48	-35.35	104.83	59.89	32.78	10.02	33.21	392	286	P	V
		5932.5	51.25	-16.95	68.2	41.58	32.88	10.02	33.23	392	286	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												

**Band 4 5725~5850MHz****WIFI 802.11ac VHT80 (Harmonic @ 3m)**

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ac VHT80 CH 155 5775MHz		11550	55.47	-18.53	74	61.52	39.9	15.76	61.71	100	28	P	H
		11550	43.34	-10.66	54	49.39	39.9	15.76	61.71	100	28	A	H
		17325	46.03	-22.17	68.2	41.13	40.84	19.66	55.6	100	0	P	H
		11550	49.61	-24.39	74	55.66	39.9	15.76	61.71	100	0	P	V
		17325	47	-21.2	68.2	42.1	40.84	19.66	55.6	100	0	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Emission below 1GHz

5GHz WIFI 802.11ac VHT80 (LF @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preampl	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1+2		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
5GHz 802.11ac VHT80 LF		61.32	31.53	-8.47	40	51.43	11.55	1.04	32.49	100	269	P	H
		63.75	25.61	-14.39	40	45.38	11.69	1.03	32.49	-	-	P	H
		78.06	24.34	-15.66	40	42.65	12.94	1.23	32.48	-	-	P	H
		345.5	26.24	-19.76	46	36.09	20.06	2.44	32.35	-	-	P	H
		624.8	30.84	-15.16	46	34.31	25.75	3.24	32.46	-	-	P	H
		957.3	33.13	-12.87	46	29.23	30.97	4.07	31.14	-	-	P	H
		30.27	33.25	-6.75	40	40.73	24.17	0.85	32.5	-	-	P	V
		48.09	34.83	-5.17	40	51.39	14.9	1.03	32.49	100	193	P	V
		63.21	31.9	-8.1	40	51.72	11.64	1.03	32.49	-	-	P	V
		499.5	26.67	-19.33	46	32.47	23.69	2.89	32.38	-	-	P	V
		725.6	28.96	-17.04	46	30.71	27.11	3.53	32.39	-	-	P	V
		956.6	33.94	-12.06	46	30.09	30.92	4.07	31.14	-	-	P	V
Remark	1. No other spurious found. 2. All results are PASS against limit line.												



<For WPC Charging Mode>

Band 4 - 5725~5850MHz

WIFI 802.11ac VHT80 (Band Edge @ 3m)

WIFI Ant.	Note	Frequency	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Path Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	Pol.
1+2		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11ac VHT80 CH 155 5775MHz		5646.75	58.64	-9.56	68.2	49.78	32.35	9.61	33.1	200	53	P	H
		5700	73.98	-31.22	105.2	64.91	32.44	9.75	33.12	200	53	P	H
		5720	77.58	-33.22	110.8	68.4	32.5	9.81	33.13	200	53	P	H
		5720.25	78.04	-33.33	111.37	68.86	32.5	9.81	33.13	200	53	P	H
	*	5775	105.08	-	-	95.69	32.6	9.95	33.16	200	53	P	H
	*	5775	97.28	-	-	87.89	32.6	9.95	33.16	200	53	A	H
		5850	70.08	-52.12	122.2	60.53	32.72	10.02	33.19	200	53	P	H
		5861	71.18	-37.94	109.12	61.62	32.75	10.02	33.21	200	53	P	H
		5875.5	64.22	-40.61	104.83	54.63	32.78	10.02	33.21	200	53	P	H
		5936	50.6	-17.6	68.2	40.94	32.88	10.02	33.24	200	53	P	H
		5649.5	56.38	-11.82	68.2	47.49	32.38	9.61	33.1	309	255	P	V
		5689	71.84	-25.25	97.09	62.77	32.44	9.75	33.12	309	255	P	V
		5706	74.59	-32.29	106.88	65.44	32.47	9.81	33.13	309	255	P	V
		5723.5	78.44	-40.34	118.78	69.26	32.5	9.81	33.13	309	255	P	V
	*	5775	103.44	-	-	94.05	32.6	9.95	33.16	309	255	P	V
	*	5775	94.87	-	-	85.48	32.6	9.95	33.16	309	255	A	V
		5850.5	72.79	-48.27	121.06	63.24	32.72	10.02	33.19	309	255	P	V
		5868.5	68.5	-38.52	107.02	58.94	32.75	10.02	33.21	309	255	P	V
		5882.5	61.8	-37.83	99.63	52.21	32.78	10.02	33.21	309	255	P	V
		5938.75	50.68	-17.52	68.2	40.99	32.91	10.02	33.24	309	255	P	V
Remark	3. No other spurious found. 4. All results are PASS against Peak and Average limit line.												

**Band 4 5725~5850MHz****WIFI 802.11ac VHT80 (Harmonic @ 3m)**

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ac VHT80 CH 155 5775MHz		11550	49.35	-24.65	74	55.4	39.9	15.76	61.71	100	0	P	H
		17325	47.49	-20.71	68.2	42.59	40.84	19.66	55.6	100	0	P	H
		11550	54.44	-19.56	74	60.49	39.9	15.76	61.71	200	0	P	V
		11550	43.64	-10.36	54	49.69	39.9	15.76	61.71	200	0	A	V
		17325	46.77	-21.43	68.2	41.87	40.84	19.66	55.6	100	0	P	V
Remark	3. No other spurious found. 4. All results are PASS against Peak and Average limit line.												



Emission below 1GHz

5GHz WIFI 802.11ac VHT80 (LF @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1+2		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
5GHz 802.11ac VHT80 LF		120.18	25.42	-18.08	43.5	39.12	17.33	1.43	32.46	-	-	P	H
		138.81	23.93	-19.57	43.5	37.59	17.21	1.57	32.44	-	-	P	H
		240.33	31.71	-14.29	46	44.96	17.11	2.02	32.38	-	-	P	H
		360.2	25.9	-20.1	46	35.21	20.52	2.52	32.35	-	-	P	H
		654.2	27.71	-18.29	46	30.61	26.26	3.31	32.47	-	-	P	H
		951	33.2	-12.8	46	29.79	30.61	3.99	31.19	100	0	P	H
		30	33.84	-6.16	40	41.32	24.17	0.85	32.5	-	-	P	V
		42.15	34.31	-5.69	40	48.37	17.61	0.82	32.49	-	-	P	V
		49.17	34.86	-5.14	40	51.84	14.48	1.03	32.49	100	102	P	V
		360.9	25.94	-20.06	46	35.23	20.54	2.52	32.35	-	-	P	V
		699.7	28.95	-17.05	46	31.54	26.4	3.48	32.47	-	-	P	V
		958	32.66	-13.34	46	28.69	31.02	4.08	31.13	-	-	P	V
Remark	3. No other spurious found. 4. All results are PASS against limit line.												



Note symbol

*	Fundamental Frequency which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is over limit line.
P/A	Peak or Average
H/V	Horizontal or Vertical



A calculation example for radiated spurious emission is shown as below:

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1+2		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11b		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
CH 01													
2412MHz		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

1. Path Loss(dB) = Cable loss(dB) + Filter loss(dB) + Attenuator loss(dB)
2. Level(dBμV/m) = Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
3. Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

For Peak Limit @ 2390MHz:

1. Level(dBμV/m)
 = Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
 = 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)
 = 55.45 (dBμV/m)
2. Over Limit(dB)
 = Level(dBμV/m) – Limit Line(dBμV/m)
 = 55.45(dBμV/m) – 74(dBμV/m)
 = -18.55(dB)

For Average Limit @ 2390MHz:

1. Level(dBμV/m)
 = Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
 = 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)
 = 43.54 (dBμV/m)
2. Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)
 = 43.54(dBμV/m) – 54(dBμV/m)
 = -10.46(dB)

Both peak and average measured complies with the limit line, so test result is “PASS”.



Appendix D. Radiated Spurious Emission Plots



Test Engineer :	Hao Hsu, Ken Wu and Chuan Zhu	Temperature :	22~25°C
		Relative Humidity :	50~55%

Note symbol



-L	Low channel location
-R	High channel location

Band 4 - 5725~5850MHz




WIFI 802.11a (Band Edge @ 3m)

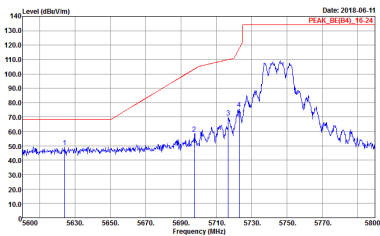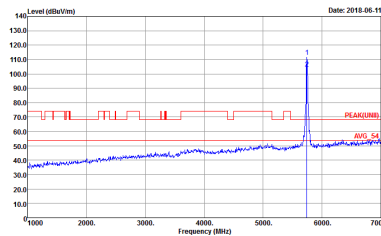WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11a CH149 5745MHz	
1+2	Horizontal	Fundamental
Peak	 Site : 03CH11-HY Condition : PEAK_BE(84)_16-24 3m HORN 91200-HF HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 820225-02	 Site : 03CH11-HY Condition : PEAK(UNII) 3m HORN 91200-HF HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 820225-02


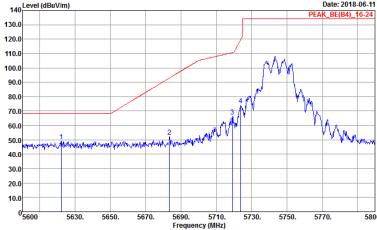
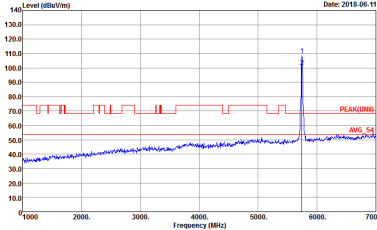


WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11a CH149 5745MHz	
1+2	Vertical	Fundamental
Peak	 Site : 03CH11-MY Condition : PEAK_BE(B4)_16-24 3m HORN 91200-HF VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 820225-02	 Site : 03CH11-MY Condition : PEAK(UNIT) 3m HORN 91200-HF VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 820225-02

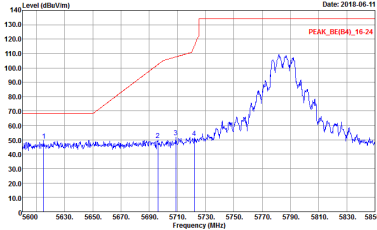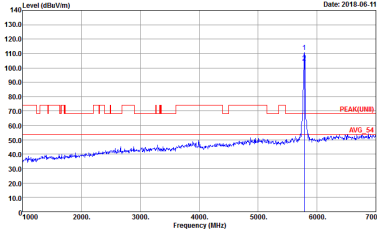
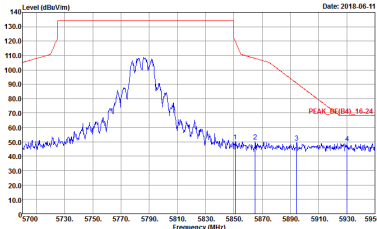


WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11a CH157 5785MHz	
1+2	Horizontal	Fundamental
Peak	 Site : 03CH11-HY Condition : PEAK_BE(B4)_16-24 3m HORN 9120D-HF HORIZONTAL Detector : Peak Project : 820225-02	 Site : 03CH11-HY Condition : PEAK(UNIT) 3m HORN 9120D-HF HORIZONTAL Detector : Peak Project : 820225-02
	 Site : 03CH11-HY Condition : PEAK_BE(B4)_16-24 3m HORN 9120D-HF HORIZONTAL Detector : Peak Project : 820225-02	Left blank

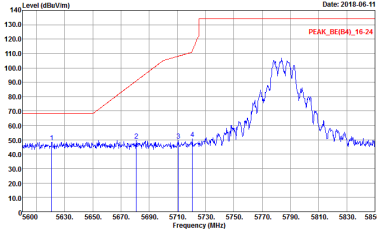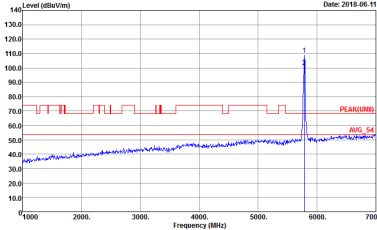
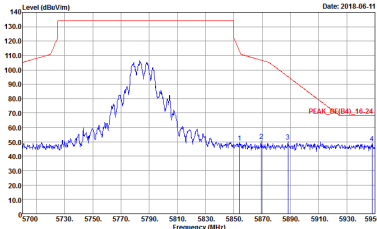


WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11a CH157 5785MHz	
1+2	Vertical	Fundamental
Peak	 Site : 03CH11-HY Condition : PEAK_BE(B4)_16-24 3m HORN 9120D-HF VERTICAL Detector : Peak Project : 820225-02	 Site : 03CH11-HY Condition : PEAK(UNIT) 3m HORN 9120D-HF VERTICAL Detector : Peak Project : 820225-02
	 Site : 03CH11-HY Condition : PEAK_BE(B4)_16-24 3m HORN 9120D-HF VERTICAL Detector : Peak Project : 820225-02	Left blank

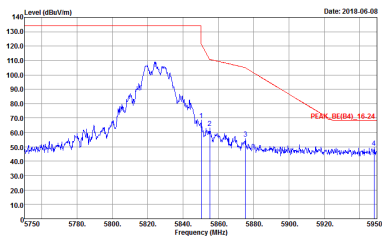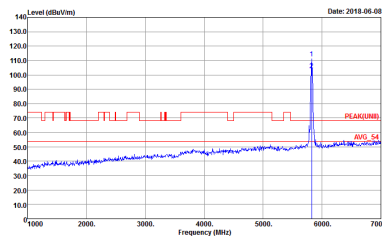



WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11a CH165 5825MHz	
1+2	Horizontal	Fundamental
Peak	 Site : 03CH11-14Y Condition : PEAK_8E(B4)_16-24 3m HORN 9120D-HF HORIZONTAL Detector : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Project : 820225-02	 Site : 03CH11-14Y Condition : PEAK_8E(B4)_16-24 3m HORN 9120D-HF HORIZONTAL Detector : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Project : 820225-02

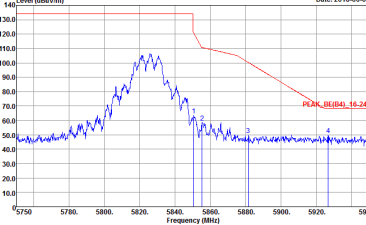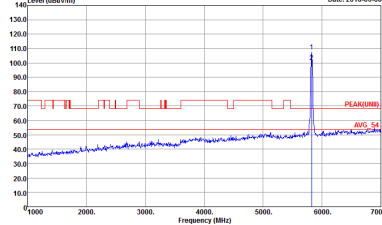



WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11a CH165 5825MHz	
1+2	Vertical	Fundamental
Peak	 Site : 03CH11-MY Condition : PEAK_BE(B4)_16-24 3m HORN 91200-HF VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 820225-02	 Site : 03CH11-MY Condition : PEAK(UNIT) 3m HORN 91200-HF VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 820225-02






Band 4 5725~5850MHz
WIFI 802.11n HT20 (Band Edge @ 3m)

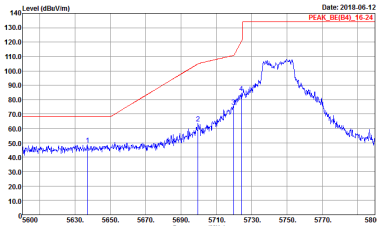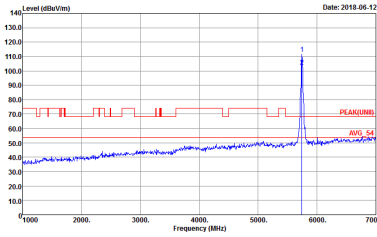WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11n HT20 CH149 5745MHz	
1+2	Horizontal	Fundamental
Peak	 Site : 03CH11-HY Condition : PEAK_BE(84)_16-24 3m HORN 9120D-HF HORIZONTAL Detector : Peak Project : 820225-02 Setting : 18.5	 Site : 03CH11-HY Condition : PEAK(UNIT) 3m HORN 9120D-HF HORIZONTAL Detector : Peak Project : 820225-02 Setting : 18.5


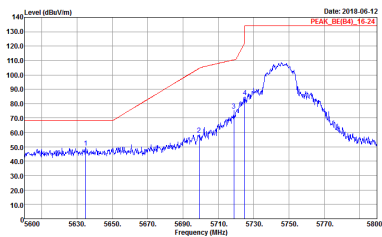
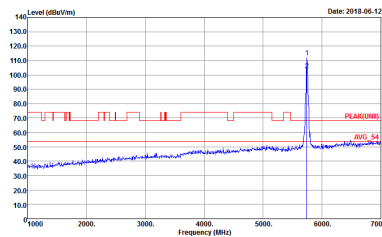


WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11n HT20 CH149 5745MHz	
1+2	Vertical	Fundamental
Peak	 Site : 03CH11-14Y Condition : PEAK_BE(B4)_16-24 3m HORN 91200-HF VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 820225-02 Setting : 18.5	 Site : 03CH11-14Y Condition : PEAK(UNIT) 3m HORN 91200-HF VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 820225-02 Setting : 18.5

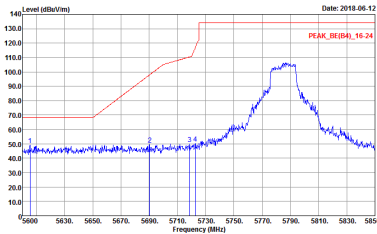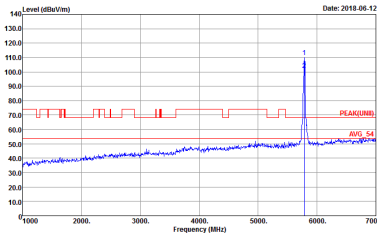
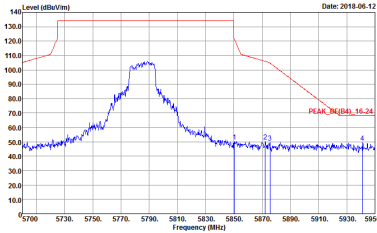


WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11n HT20 CH157 5785MHz	
1+2	Horizontal	Fundamental
Peak	 Site : 03CH11-HY Condition : PEAK_BE(B4)_16-24 3m HORN 9120D-HF HORIZONTAL Detector : Peak Project : 820225-02 Setting : 18.5	 Site : 03CH11-HY Condition : PEAK(UNIT) 3m HORN 9120D-HF HORIZONTAL Detector : Peak Project : 820225-02 Setting : 18.5
	 Site : 03CH11-HY Condition : PEAK_BE(B4)_16-24 3m HORN 9120D-HF HORIZONTAL Detector : Peak Project : 820225-02 Setting : 18.5	Left blank

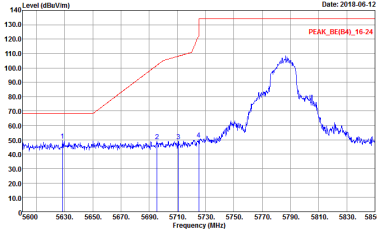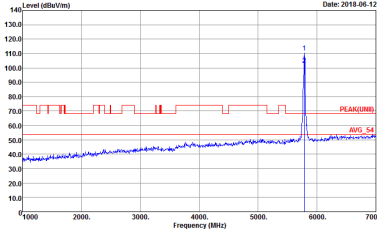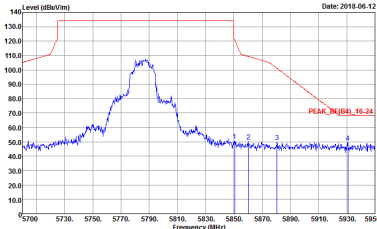

WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11n HT20 CH157 5785MHz	
1+2	Vertical	Fundamental
Peak	 Site : 03CH11-HY Condition : PEAK_BE(B4)_16-24 3m HORN 9120D-HF VERTICAL Detector : Peak Project : 820225-02 Setting : 18.5	 Site : 03CH11-HY Condition : PEAK(UNIT) 3m HORN 9120D-HF VERTICAL Detector : Peak Project : 820225-02 Setting : 18.5
	 Site : 03CH11-HY Condition : PEAK_BE(B4)_16-24 3m HORN 9120D-HF VERTICAL Detector : Peak Project : 820225-02 Setting : 18.5	Left blank

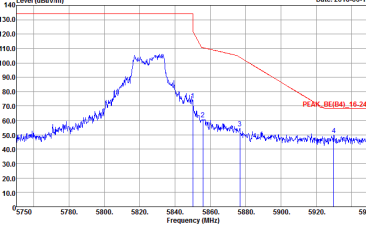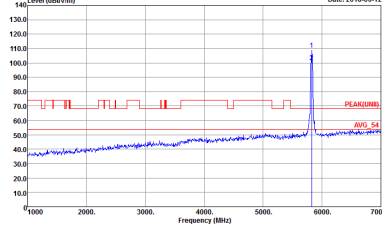

WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11n HT20 CH165 5825MHz	
1+2	Horizontal	Fundamental
Peak	 Site : 03CH11-14Y Condition : PEAK_BE(B4)_16-24 3m HORN 9120D-HF HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 820225-02 Setting : 18.5	 Site : 03CH11-14Y Condition : PEAK(UNIT) 3m HORN 9120D-HF HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 820225-02 Setting : 18.5






WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11n HT20 CH165 5825MHz	
1+2	Vertical	Fundamental
Peak	Site : 03CH11-14Y Condition : PEAK_8E(B4)_16-24 3m HORN 91200-HF VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 820225-02 Setting : 18.5	Site : 03CH11-14Y Condition : PEAK_8E(B4)_16-24 3m HORN 91200-HF VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 820225-02 Setting : 18.5






Band 4 5725~5850MHz
WIFI 802.11n HT40 (Band Edge @ 3m)

WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11n HT40 CH151 5755MHz	
1+2	Horizontal	Fundamental
Peak	Site : 03CH11-HY Condition : PEAK_BE(B4)_16-24 3m HORN 91200-HF HORIZONTAL Detector : Peak Project : 820225-02 Setting : 18.5	Site : 03CH11-HY Condition : PEAK(UNIT) 3m HORN 91200-HF HORIZONTAL Detector : Peak Project : 820225-02 Setting : 18.5
Peak	Site : 03CH11-HY Condition : PEAK_BE(B4)_16-24 3m HORN 91200-HF HORIZONTAL Detector : Peak Project : 820225-02 Setting : 18.5	Left blank

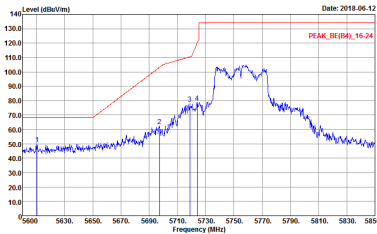
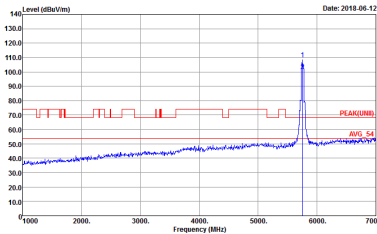
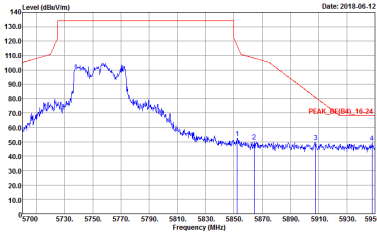


WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11n HT40 CH151 5755MHz	
1+2	Vertical	Fundamental
Peak	 Site : 03CH11-HY Condition : PEAK_BE(B4)_16-24 3m HORN 9120D-HF VERTICAL Detector : Peak Project : 820225-02 Setting : 18.5	 Site : 03CH11-HY Condition : PEAK(UNIT) 3m HORN 9120D-HF VERTICAL Detector : Peak Project : 820225-02 Setting : 18.5
	 Site : 03CH11-HY Condition : PEAK_BE(B4)_16-24 3m HORN 9120D-HF VERTICAL Detector : Peak Project : 820225-02 Setting : 18.5	Left blank

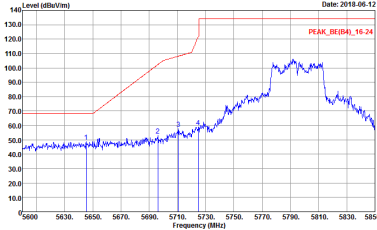
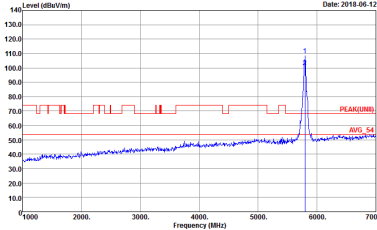
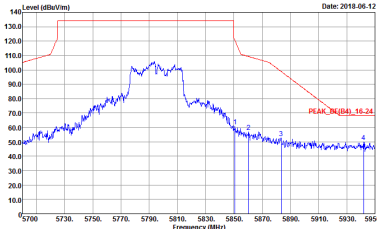





WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11n HT40 CH159 5795MHz	
1+2	Horizontal	Fundamental
Peak	 Site : 03CH11-HY Condition : PEAK_BE(B4)_16-24 3m HORN 91200-HF HORIZONTAL Detector : Peak Project : 820225-02 Setting : 18.5	 Site : 03CH11-HY Condition : PEAK(FUND) 3m HORN 91200-HF HORIZONTAL Detector : Peak Project : 820225-02 Setting : 18.5
	 Site : 03CH11-HY Condition : PEAK_BE(B4)_16-24 3m HORN 91200-HF HORIZONTAL Detector : Peak Project : 820225-02 Setting : 18.5	Left blank

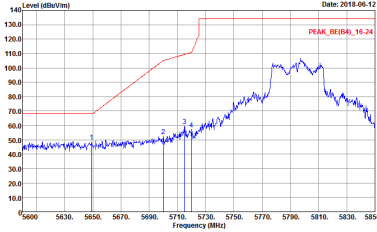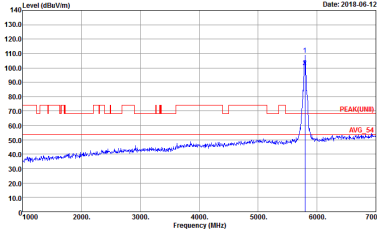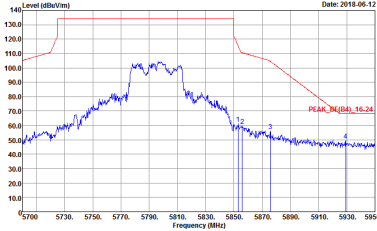

WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11n HT40 CH159 5795MHz	
1+2	Vertical	Fundamental
Peak	 Site : 03CH11-HY Condition : PEAK_BE(B4)_16-24 3m HORN 9120D-HF VERTICAL Detector : Peak Project : 820225-02 Setting : 18.5	 Site : 03CH11-HY Condition : PEAK(FUND) 3m HORN 9120D-HF VERTICAL Detector : Peak Project : 820225-02 Setting : 18.5
	 Site : 03CH11-HY Condition : PEAK_BE(B4)_16-24 3m HORN 9120D-HF VERTICAL Detector : Peak Project : 820225-02 Setting : 18.5	Left blank



Band 4 5725~5850MHz
WIFI 802.11ac VHT80 (Band Edge @ 3m)

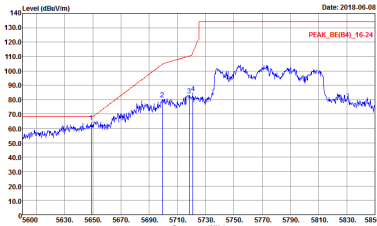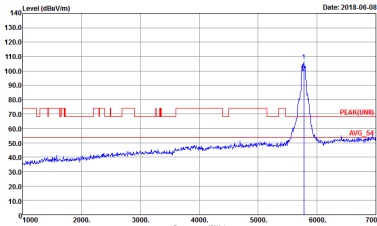
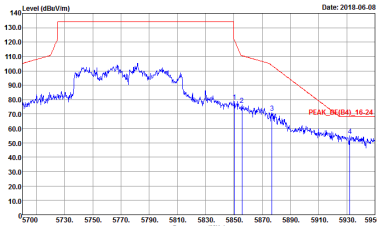
WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11ac VHT80 CH155 5775MHz	
1+2	Horizontal	Fundamental
Peak	 Site : 03CH11-HY Condition : PEAK_BE(B4)_16-24 3m HORN 91200-HF HORIZONTAL Detector : Peak Project : 820225-02 Setting : 17.5	 Site : 03CH11-HY Condition : PEAK(UNIT) 3m HORN 91200-HF HORIZONTAL Detector : Peak Project : 820225-02 Setting : 17.5
	 Site : 03CH11-HY Condition : PEAK_BE(B4)_16-24 3m HORN 91200-HF HORIZONTAL Detector : Peak Project : 820225-02 Setting : 17.5	Left blank

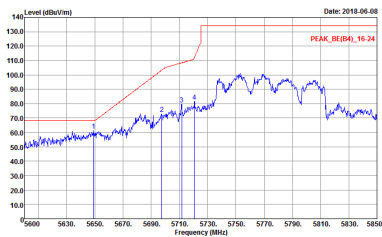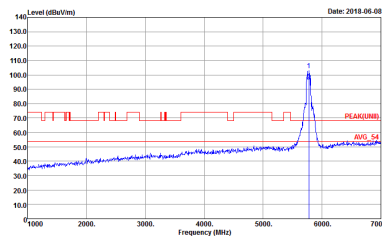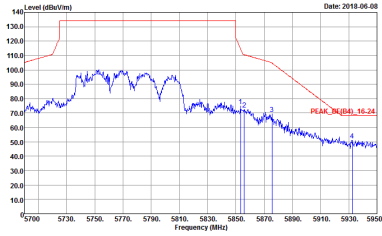WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11ac VHT80 CH155 5775MHz	
1+2	Vertical	Fundamental
Peak	 Site : 03CH11-HY Condition : PEAK_BE(B4)_16-24 3m HORN 9120D-HF VERTICAL Detector : Peak Project : 820225-02 Setting : 17.5	 Site : 03CH11-HY Condition : PEAK(UNIT) 3m HORN 9120D-HF VERTICAL Detector : Peak Project : 820225-02 Setting : 17.5
	 Site : 03CH11-HY Condition : PEAK_BE(B4)_16-24 3m HORN 9120D-HF VERTICAL Detector : Peak Project : 820225-02 Setting : 17.5	Left blank





Band 4 - 5725~5850MHz
WIFI 802.11a (Harmonic @ 3m)

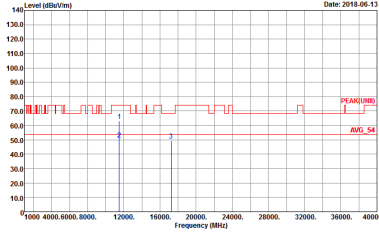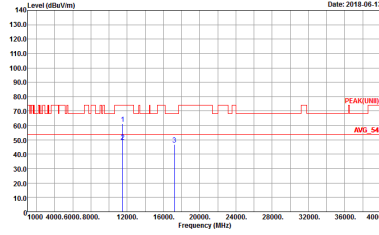WIFI	Band 4 5725~5850MHz Harmonic @ 3m	
ANT	802.11a CH149 5745MHz	
1+2	Horizontal	Vertical
Peak Avg.	 Site : 03CH11-HY Condition : PEAK(UNIT) 3m HORN 9120D-4F HORIZONTAL Detector : Peak Project : 820225-02	 Site : 03CH11-HY Condition : PEAK(UNIT) 3m HORN 9120D-4F VERTICAL Detector : Peak Project : 820225-02

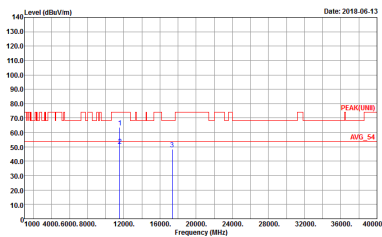
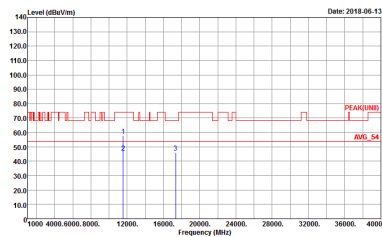
WIFI	Band 4 5725~5850MHz Harmonic @ 3m	
ANT	802.11a CH157 5785MHz	
1+2	Horizontal	Vertical
Peak Avg.	 Date: 2018.06.13 Site : 03CH11-14Y Condition : PEAK(UNII) 3m HORN 91200-HF HORIZONTAL Detector : Peak Project : 820225-02	 Date: 2018.06.13 Site : 03CH11-14Y Condition : PEAK(UNII) 3m HORN 91200-HF VERTICAL Detector : Peak Project : 820225-02

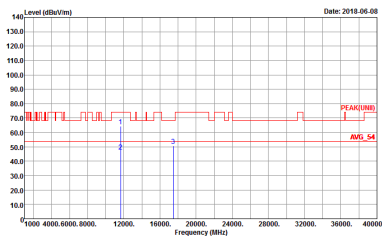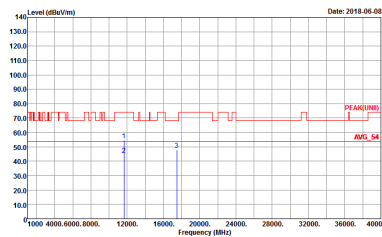



WIFI	Band 4 5725~5850MHz Harmonic @ 3m	
ANT	802.11a CH165 5825MHz	
1+2	Horizontal	Vertical
Peak Avg.	 Site : 03CH11-14Y Condition : PEAK(UHB) 3m HORN 91200-HF HORIZONTAL Detector : Peak Project : 820225-02 Setting : 18.5	 Site : 03CH11-14Y Condition : PEAK(UHB) 3m HORN 91200-HF VERTICAL Detector : Peak Project : 820225-02 Setting : 18.5





Band 4 5725~5850MHz
WIFI 802.11n HT20 (Harmonic @ 3m)

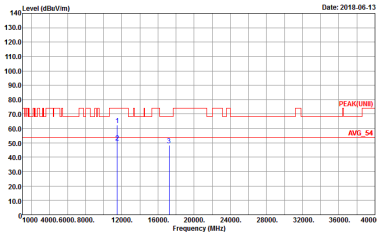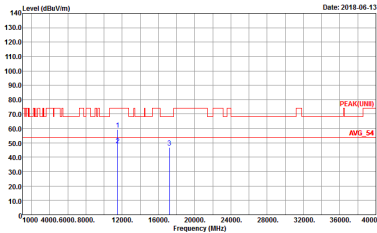WIFI	Band 4 5725~5850MHz Harmonic @ 3m	
ANT	802.11n HT20 CH149 5745MHz	
1+2	Horizontal	Vertical
Peak Avg.	 Site : 03CHI1-HY Condition : PEAK(UNIT) 3m HORN 9120D-HF HORIZONTAL Detector : Peak Project : 820225-02	 Site : 03CHI1-HY Condition : PEAK(UNIT) 3m HORN 9120D-HF VERTICAL Detector : Peak Project : 820225-02

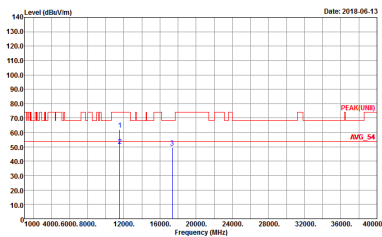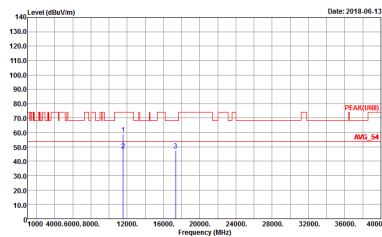



WIFI	Band 4 5725~5850MHz Harmonic @ 3m	
ANT	802.11n HT20 CH157 5785MHz	
1+2	Horizontal	Vertical
Peak Avg.	 Site : 03CH11-14Y Condition : PEAK(UNII) 3m HORN 91200-HF HORIZONTAL Detector : Peak Project : 820225-02 Setting : 18.5	 Site : 03CH11-14Y Condition : PEAK(UNII) 3m HORN 91200-HF VERTICAL Detector : Peak Project : 820225-02 Setting : 18.5

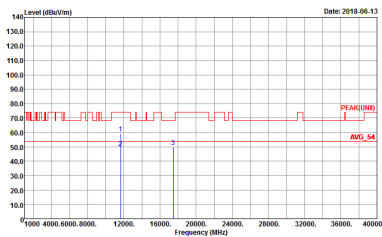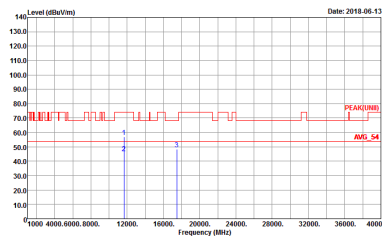



WIFI	Band 4 5725~5850MHz Harmonic @ 3m	
ANT	802.11n HT20 CH165 5825MHz	
1+2	Horizontal	Vertical
Peak Avg.	 Site : 03CH11-14Y Condition : PEAK(UNII) 3m HORN 91200-HF HORIZONTAL Detector : Peak Project : 820225-02 Setting : 18.5	 Site : 03CH11-14Y Condition : PEAK(UNII) 3m HORN 91200-HF VERTICAL Detector : Peak Project : 820225-02 Setting : 18.5



Band 4 5725~5850MHz
WIFI 802.11n HT40 (Harmonic @ 3m)

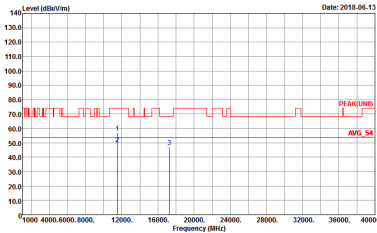
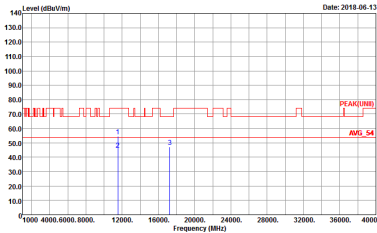
WIFI	Band 4 5725~5850MHz Harmonic @ 3m	
ANT	802.11n HT40 CH151 5755MHz	
1+2	Horizontal	Vertical
Peak Avg.	 Site : 03CH11-HY Condition : PEAK(UNIT) 3m HORN 9120D-HF HORIZONTAL Detector : Peak Project : 820225-02 Setting : 18.5	 Site : 03CH11-HY Condition : PEAK(UNIT) 3m HORN 9120D-HF VERTICAL Detector : Peak Project : 820225-02 Setting : 18.5

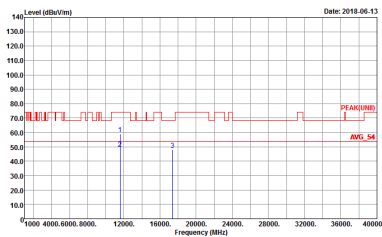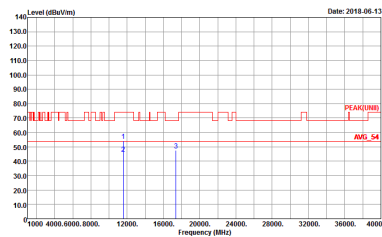

WIFI	Band 4 5725~5850MHz Harmonic @ 3m	
ANT	802.11n HT40 CH159 5795MHz	
1+2	Horizontal	Vertical
Peak Avg.	 Site : 03CH11-14Y Condition : PEAK(UWB) 3m HORN 91200-HF HORIZONTAL Detector : Peak Project : 820225-02 Setting : 18.5	 Site : 03CH11-14Y Condition : PEAK(UWB) 3m HORN 91200-HF VERTICAL Detector : Peak Project : 820225-02 Setting : 18.5





Band 4 5725~5850MHz
WIFI 802.11ac VHT80 (Harmonic @ 3m)

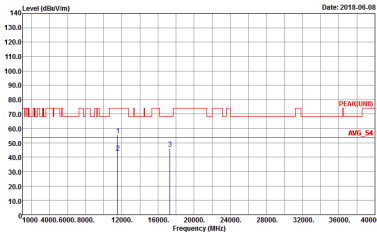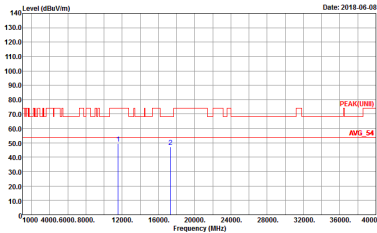WIFI	Band 4 5725~5850MHz Harmonic @ 3m	
ANT	802.11ac VHT80 CH155 5775MHz	
1+2	Horizontal	Vertical
Peak Avg.	 Site : 03CH11-HY Condition : PEAK(UNIT) 3m HORN 9120D-HF HORIZONTAL Detector : Peak Project : 820225-02	 Site : 03CH11-HY Condition : PEAK(UNIT) 3m HORN 9120D-HF VERTICAL Detector : Peak Project : 820225-02






Emission below 1GHz
5GHz WIFI 802.11ac VHT80 (LF)

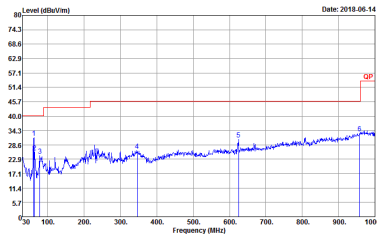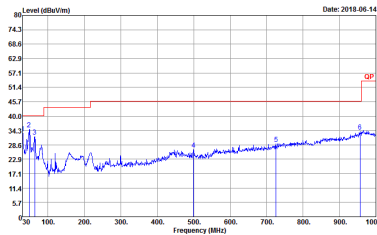WIFI	5GHz 5725~5850MHz	
ANT	802.11ac VHT80 LF	
1+2	Horizontal	Vertical
QP / Peak	 Site : 03CH11-HY Condition : QP 3m BE-LOG 6111D-LF_ETC HORIZONTAL Detector : Peak Project : 820225-02	 Site : 03CH11-HY Condition : QP 3m BE-LOG 6111D-LF_ETC VERTICAL Detector : Peak Project : 820225-02






<For WPC Charging Mode>

Band 4 - 5725~5850MHz
WIFI 802.11ac VHT80 (Band Edge @ 3m)

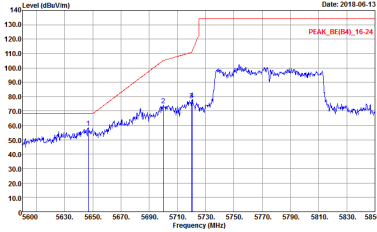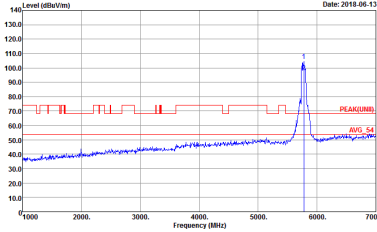
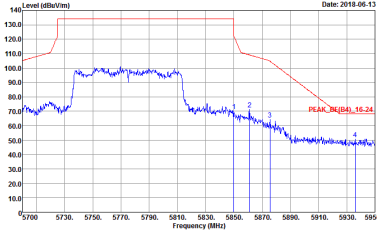
WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11ac VHT80 CH155 5775MHz	
1+2	Horizontal	Fundamental
Peak	 Site : 03CH11-HY Condition : PEAK_BE(B4)_16-24 3m HORN 9120D-HF HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 820225-02 Setting : 18.5	 Site : 03CH11-HY Condition : PEAK(LINE) 3m HORN 9120D-HF HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 820225-02 Setting : 18.5
Peak	 Site : 03CH11-HY Condition : PEAK_BE(B4)_16-24 3m HORN 9120D-HF HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 820225-02 Setting : 18.5	Left blank

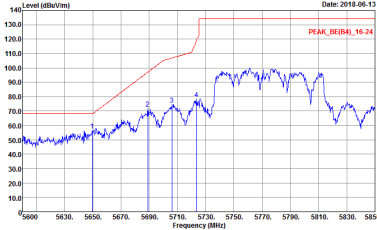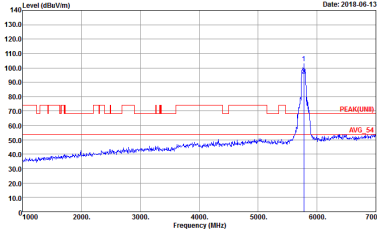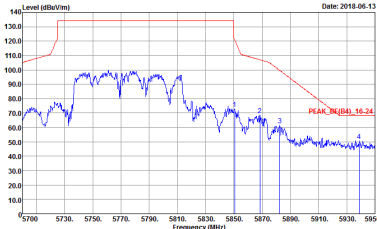

WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11ac VHT80 CH155 5775MHz	
1+2	Vertical	Fundamental
Peak	 Site : 03CH11-HY Condition : PEAK_BE(B4)_16-24 3m HORN 9120D-HF VERTICAL Detector : Peak Project : 820225-02 Setting : 18.5	 Site : 03CH11-HY Condition : PEAK(FUND) 3m HORN 9120D-HF VERTICAL Detector : Peak Project : 820225-02 Setting : 18.5
	 Site : 03CH11-HY Condition : PEAK_BE(B4)_16-24 3m HORN 9120D-HF VERTICAL Detector : Peak Project : 820225-02 Setting : 18.5	Left blank





Band 4 - 5725~5850MHz
WIFI 802.11ac VHT80 (Harmonic @ 3m)

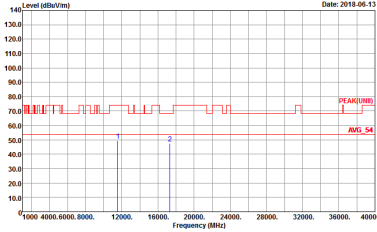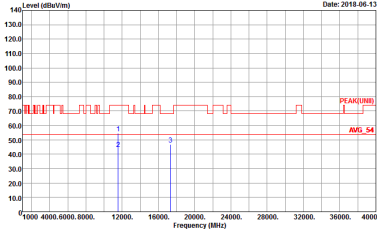WIFI	Band 4 5725~5850MHz Harmonic @ 3m	
ANT	802.11ac VHT80 CH155 5775MHz	
1+2	Horizontal	Vertical
Peak Avg.	 Site : 03CH11-HY Condition : PEAK(UNIT) 3m HORN 9120D-4F HORIZONTAL Detector : Peak Project : 820225-02	 Site : 03CH11-HY Condition : PEAK(UNIT) 3m HORN 9120D-4F VERTICAL Detector : Peak Project : 820225-02



Emission below 1GHz
5GHz WIFI 802.11ac VHT80 (LF)

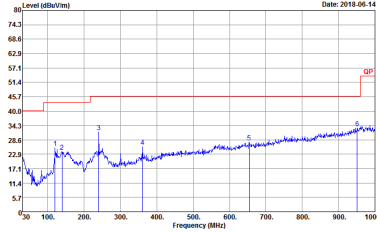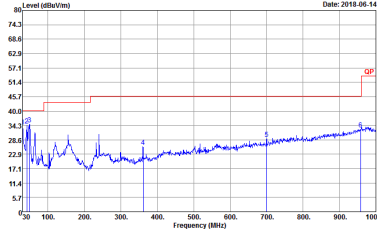
WIFI	5GHz 5725~5850MHz	
ANT	802.11ac VHT80 LF	
1+2	Horizontal	Vertical
QP / Peak	 Site : 03CH11-HY Condition : QP 3m BE-LOG 6111D-LF_ETC HORIZONTAL Detector : Peak Project : 820225-02	 Site : 03CH11-HY Condition : QP 3m BE-LOG 6111D-LF_ETC VERTICAL Detector : Peak Project : 820225-02

Appendix E. Duty Cycle Plots

Antenna	Band	Duty Cycle(%)	T(us)	1/T(kHz)	VBW Setting	Duty Factor(dB)
1	802.11a	98.07	-	-	10Hz	0.08
2	802.11a	98.08	-	-	10Hz	0.08
1+2	802.11a for antenna 1	98.10	-	-	10Hz	0.08
1+2	802.11a for antenna 2	98.11	-	-	10Hz	0.08
1	5GHz 802.11n HT20	97.94	1900	0.53	1kHz	0.09
2	5GHz 802.11n HT20	97.42	1890	0.53	1kHz	0.11
1+2	5GHz 802.11n HT20 for antenna 1	97.97	1930	0.52	1kHz	0.09
1+2	5GHz 802.11n HT20 for antenna 2	97.97	1930	0.52	1kHz	0.09
1	5GHz 802.11n HT40	95.88	930	1.08	3kHz	0.18
2	5GHz 802.11n HT40	95.88	930	1.08	3kHz	0.18
1+2	5GHz 802.11n HT40 for antenna 1	95.96	950	1.05	3kHz	0.18
1+2	5GHz 802.11n HT40 for antenna 2	95.96	950	1.05	3kHz	0.18
1	5GHz 802.11ac VHT20	97.95	1910	0.52	1kHz	0.09
2	5GHz 802.11ac VHT20	97.44	1900	0.53	1kHz	0.11
1+2	5GHz 802.11ac VHT20 for antenna 1	97.98	1940	0.52	1kHz	0.09
1+2	5GHz 802.11ac VHT20 for antenna 2	97.98	1940	0.52	1kHz	0.09
1	5GHz 802.11ac VHT40	95.92	940	1.06	3kHz	0.18
2	5GHz 802.11ac VHT40	95.88	930	1.08	3kHz	0.18
1+2	5GHz 802.11ac VHT40 for antenna 1	96.00	960	1.04	3kHz	0.18
1+2	5GHz 802.11ac VHT40 for antenna 2	95.98	955	1.05	3kHz	0.18
1	5GHz 802.11ac VHT80	95.56	860	1.16	3kHz	0.20
2	5GHz 802.11ac VHT80	95.51	850	1.18	3kHz	0.20
1+2	5GHz 802.11ac VHT80 for antenna 1	95.88	860	1.16	3kHz	0.18
1+2	5GHz 802.11ac VHT80 for antenna 2	95.56	860	1.16	3kHz	0.20


<Ant. 1>

802.11a

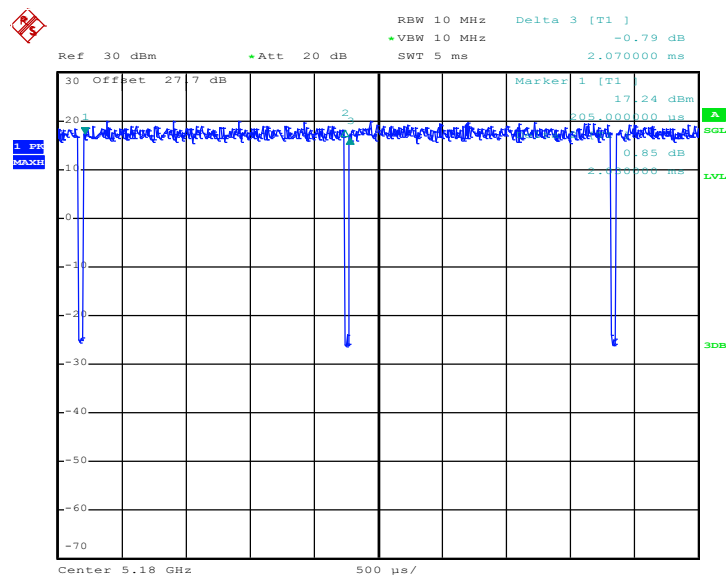


Date: 5.JUN.2018 22:04:35


802.11n HT20

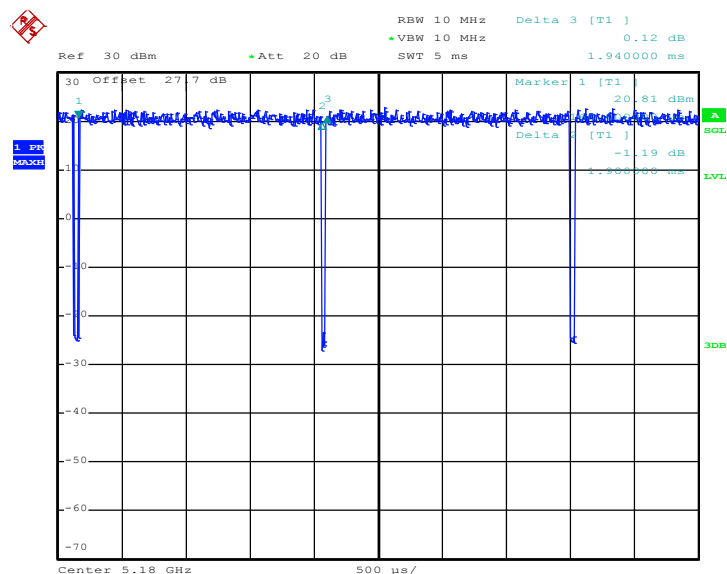


Date: 5.JUN.2018 22:14:48

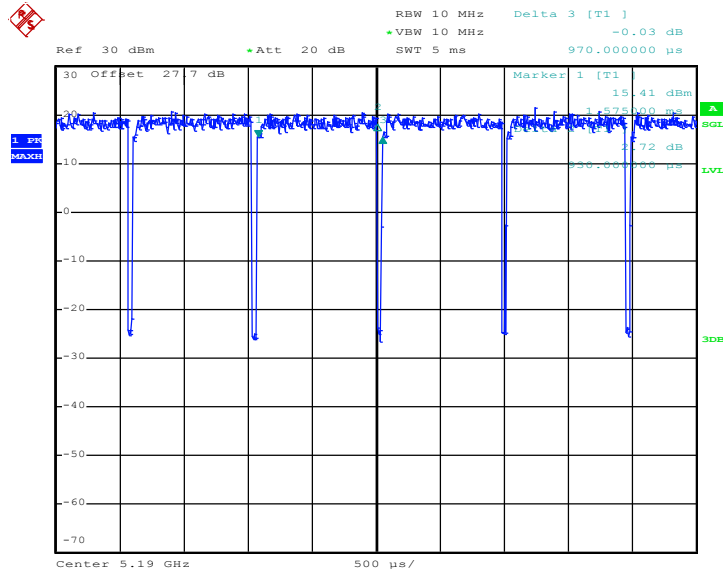802.11n HT40


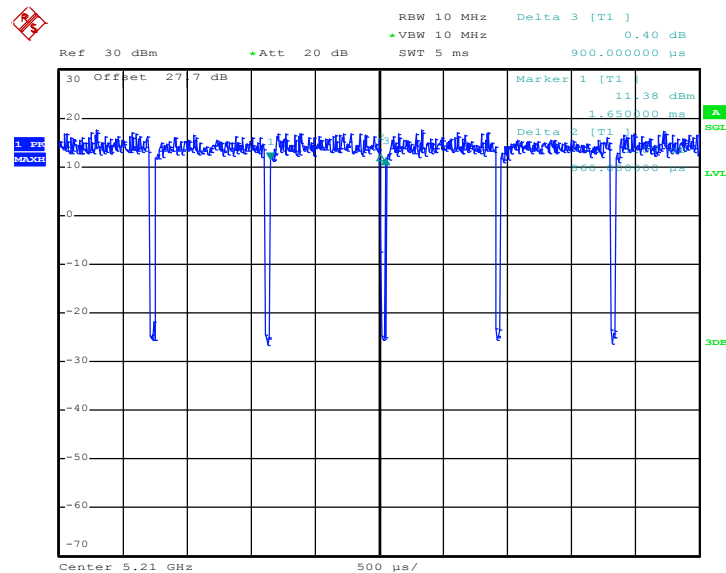
Date: 5.JUN.2018 22:26:57

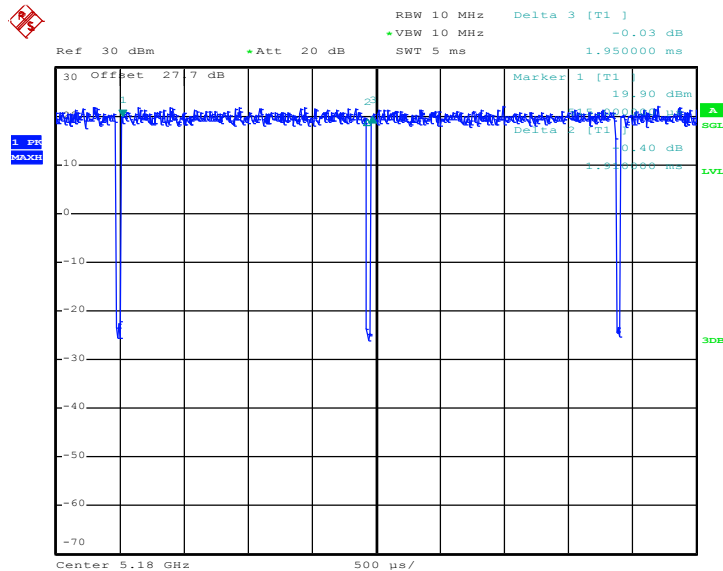802.11ac VHT20


Date: 5.JUN.2018 23:25:18

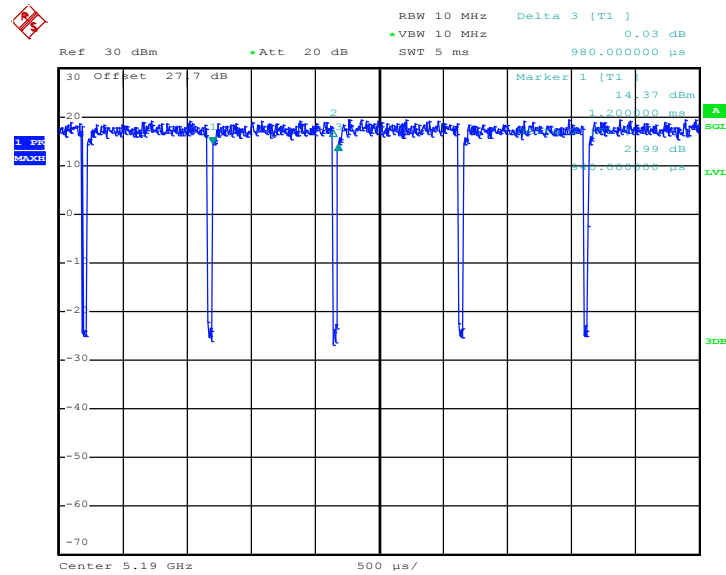802.11ac VHT40


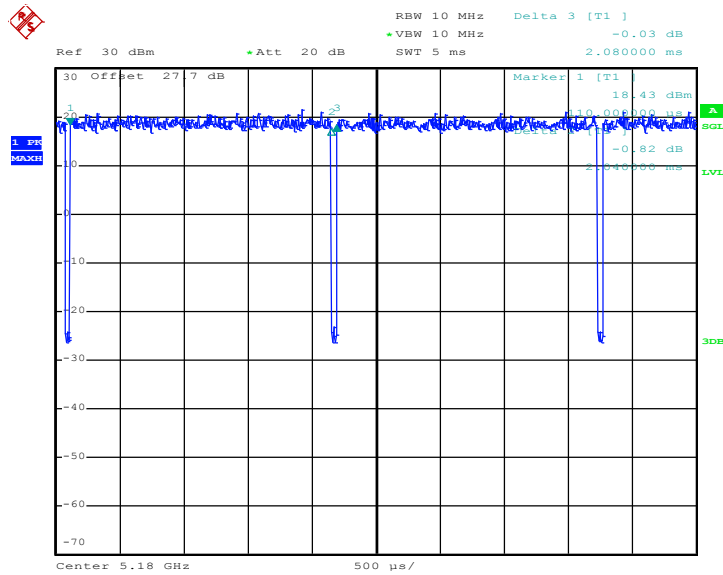
Date: 5.JUN.2018 23:08:20

802.11ac VHT80


Date: 8.JUN.2018 20:23:59


<Ant. 2>

802.11a




Date: 5.JUN.2018 22:05:10

802.11n HT20

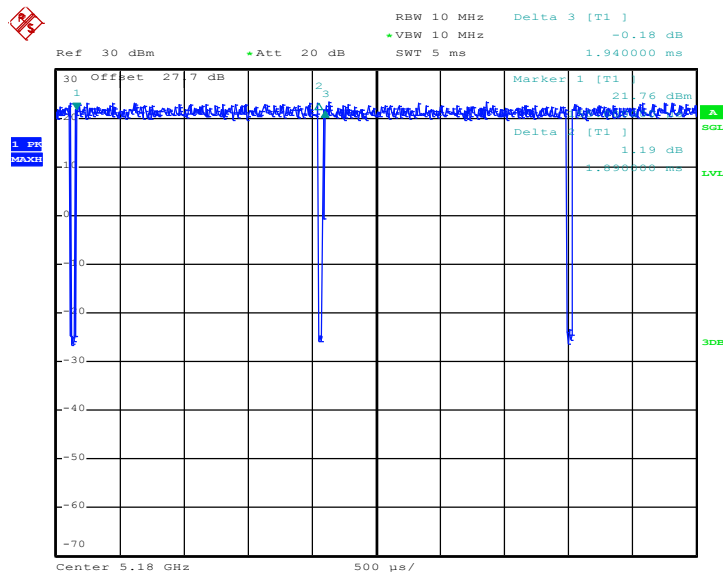


Date: 5.JUN.2018 22:14:15

802.11n HT40

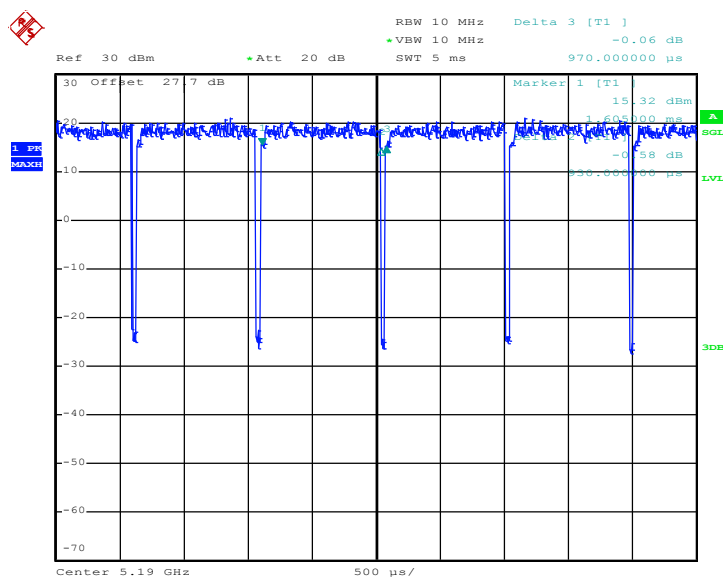


Date: 8.JUN.2018 20:13:01


802.11ac VHT20

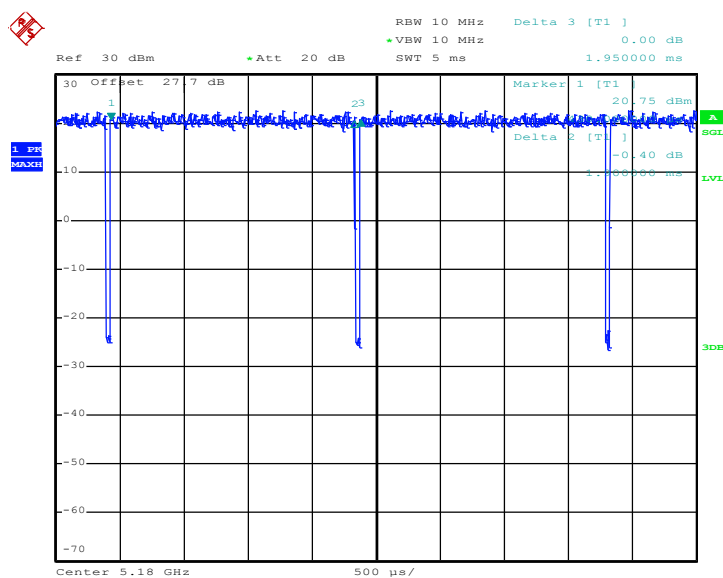


Date: 5.JUN.2018 23:26:04

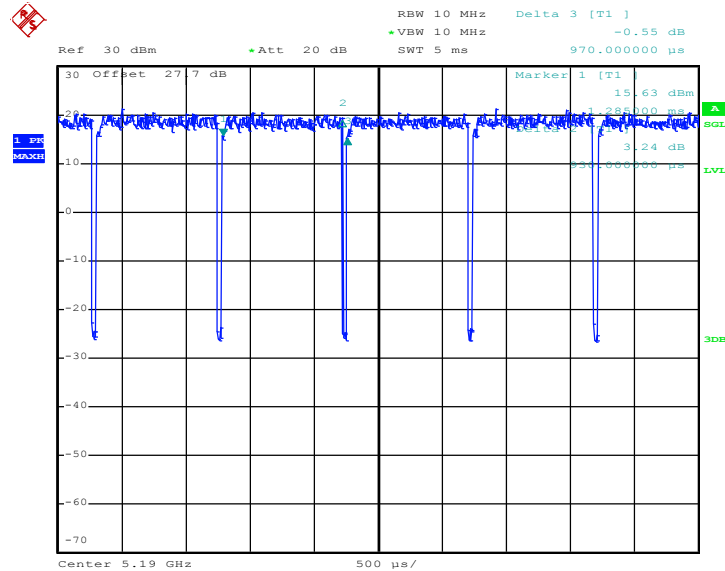802.11ac VHT40


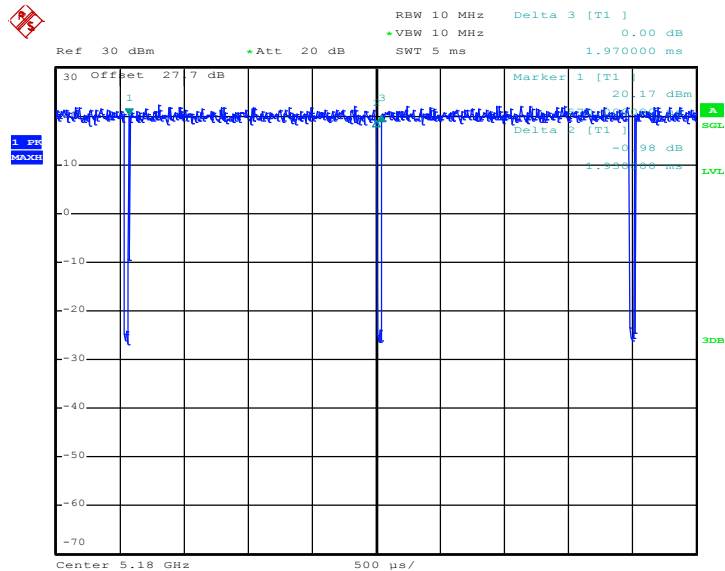
Date: 5.JUN.2018 23:09:01

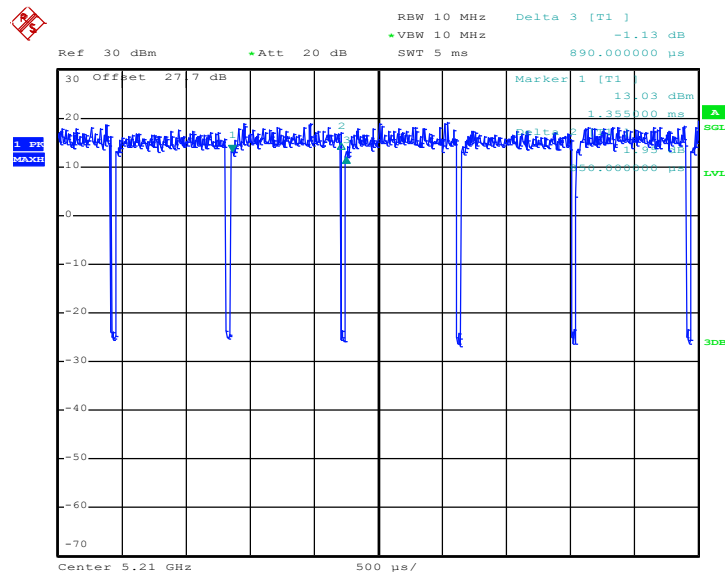802.11ac VHT80


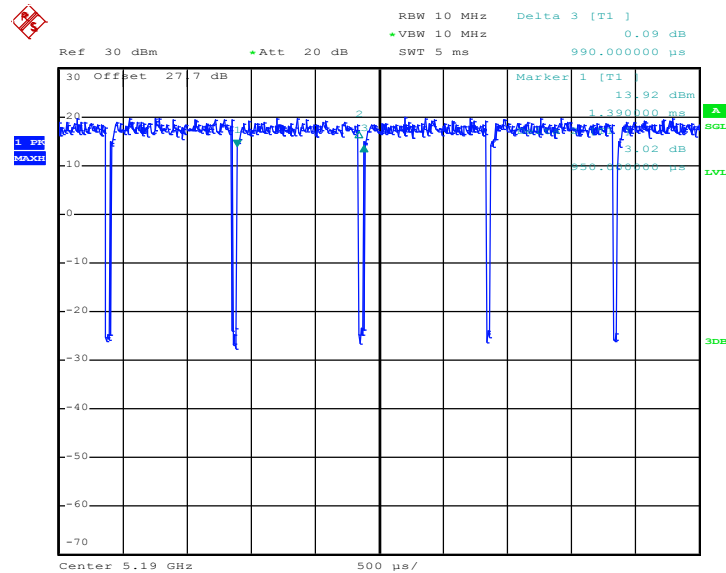
Date: 8.JUN.2018 20:25:32

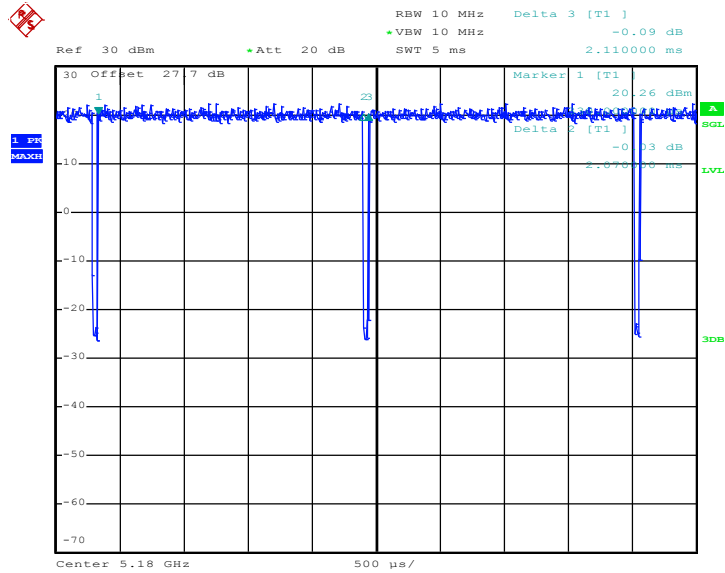MIMO <Ant. 1>
802.11a


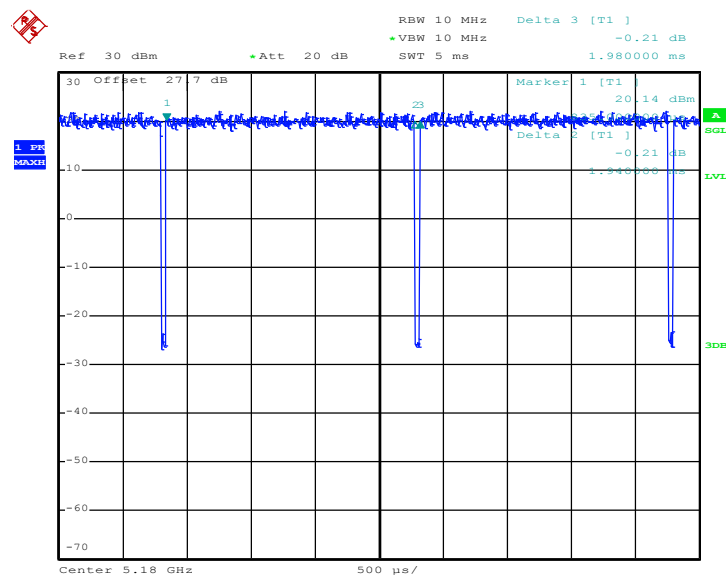
Date: 2.JUN.2018 05:04:35

802.11n HT20


Date: 2.JUN.2018 05:06:36

802.11n HT40


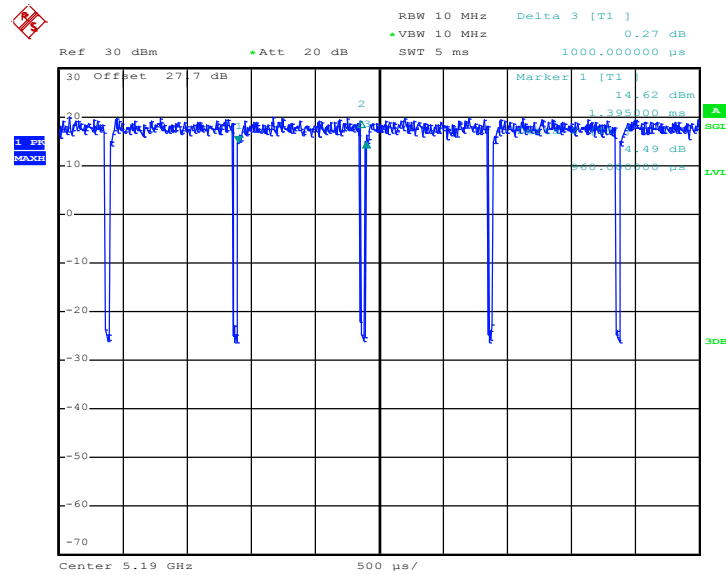
Date: 2.JUN.2018 05:10:41

802.11ac VHT20


Date: 2.JUN.2018 05:07:37




802.11ac VHT40



Date: 2.JUN.2018 05:09:45

802.11ac VHT80

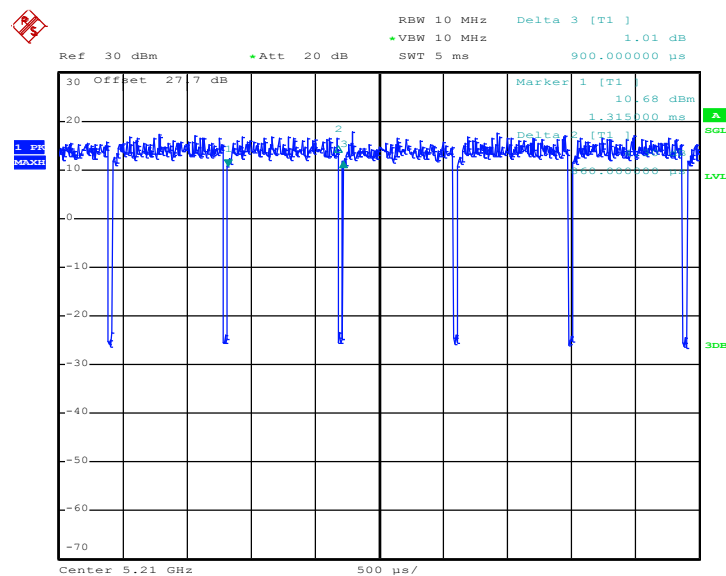


Date: 8.JUN.2018 20:22:34




MIMO <Ant. 2>

802.11a

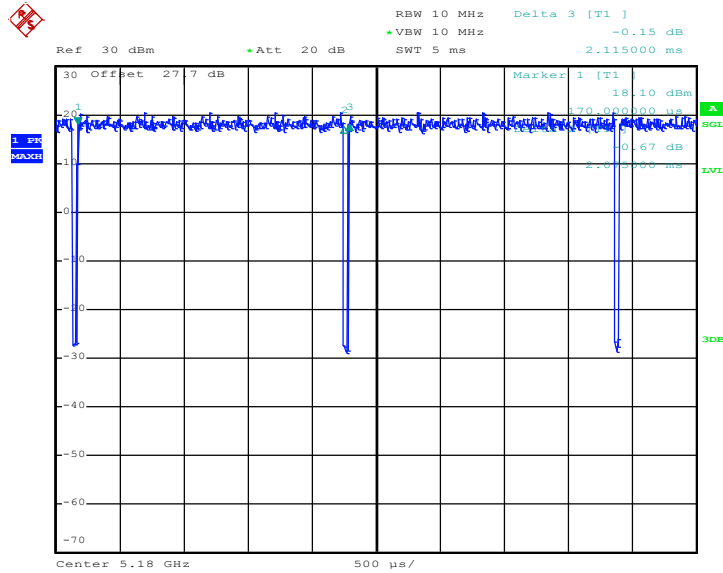

Date: 15.JUN.2018 11:55:04


802.11n HT20

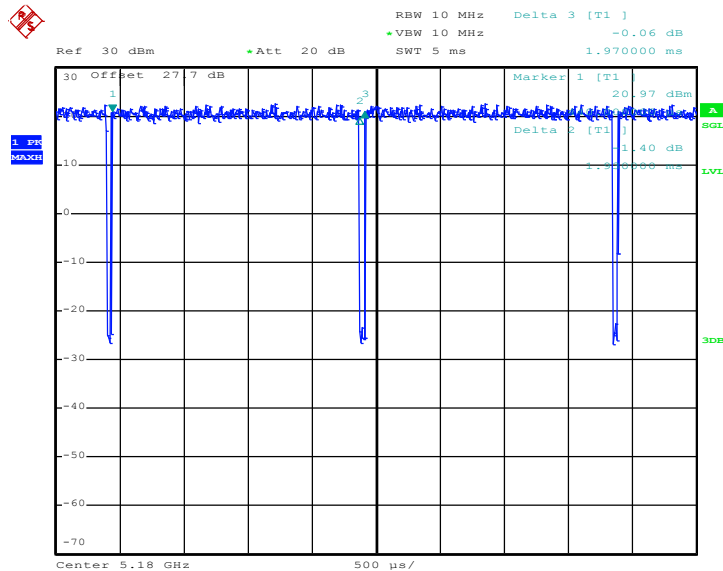

Date: 2.JUN.2018 05:06:02




802.11n HT40

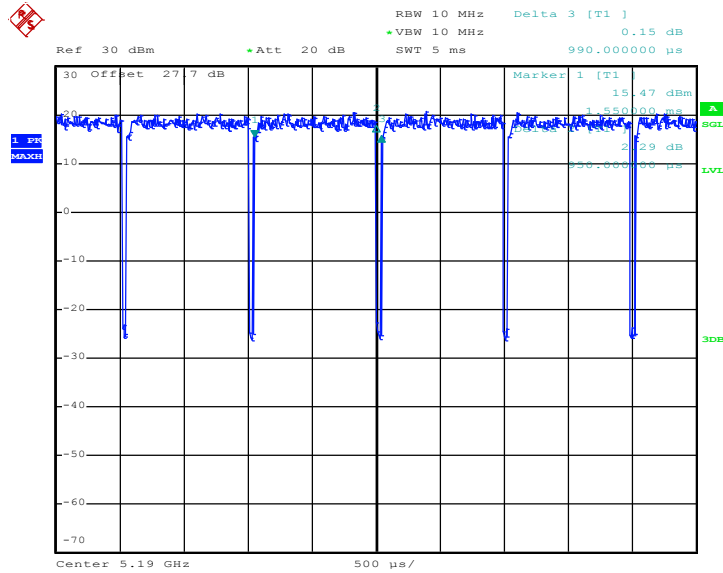


Date: 2.JUN.2018 05:11:10


802.11ac VHT20

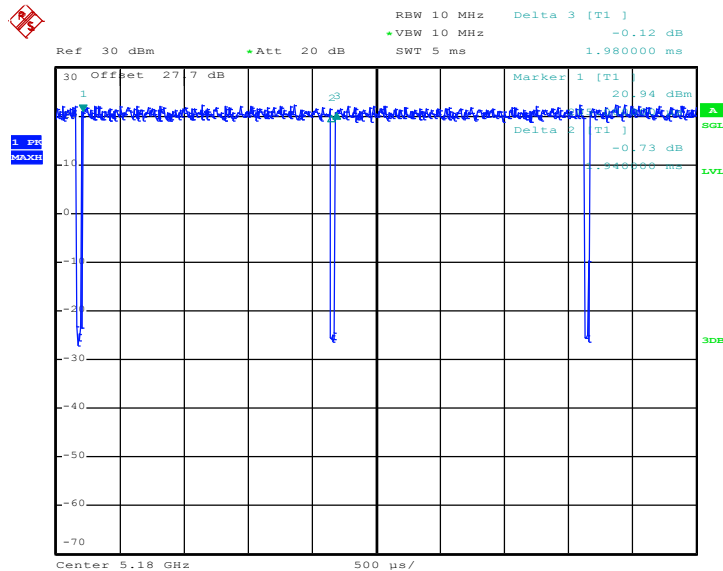

Date: 2.JUN.2018 05:08:11

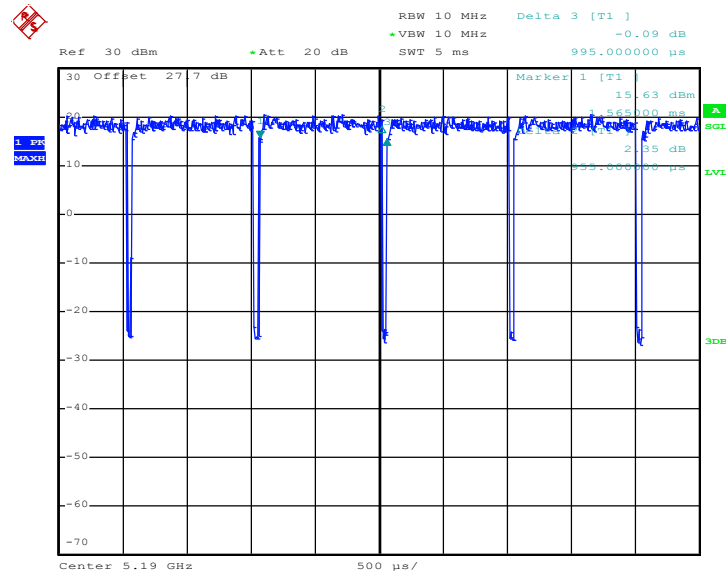802.11ac VHT40


Date: 2.JUN.2018 05:09:20

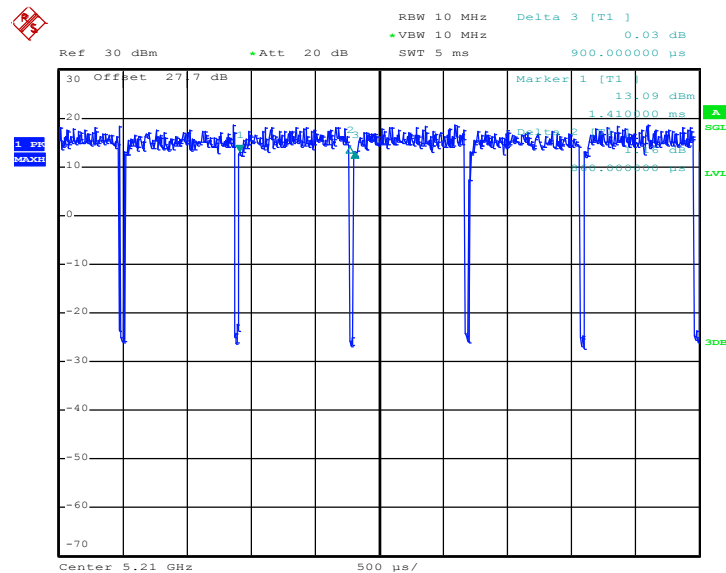802.11ac VHT80


Date: 8.JUN.2018 20:23:08

———THE END———