



FCC RADIO TEST REPORT

FCC ID : A4RG020D
Equipment : Smartphone
Model Name : G020D
Applicant : Google LLC
1600 Amphitheatre Parkway,
Mountain View, CA 94043, USA
Standard : 47 CFR Part 2, 22(H), 24(E), 27(L)

The product was completed on Dec. 21, 2018. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the test procedures given in ANSI / TIA-603-E and has been in compliance with the applicable technical standards.

The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any agency of government.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.

Approved by: Jones Tsai

SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory

No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.)



Table of Contents

History of this test report	3
Summary of Test Result	4
1 General Description.....	5
1.1 Product Feature of Equipment Under Test	5
1.2 Product Specification of Equipment Under Test.....	5
1.3 Modification of EUT	6
1.4 Maximum ERP/EIRP Power, Frequency Tolerance, and Emission Designator	6
1.5 Testing Location	7
1.6 Applicable Standards	7
2 Test Configuration of Equipment Under Test.....	8
2.1 Test Mode	8
2.2 Connection Diagram of Test System	9
2.3 Support Unit used in test configuration	9
2.4 Measurement Results Explanation Example	9
2.5 Frequency List of Low/Middle/High Channels	10
3 Conducted Test Result.....	11
3.1 Measuring Instruments	11
3.2 Conducted Output Power and ERP/EIRP	12
3.3 Peak-to-Average Ratio.....	13
3.4 99% Occupied Bandwidth and 26dB Bandwidth Measurement	14
3.5 Conducted Band Edge	15
3.6 Conducted Spurious Emission	16
3.7 Frequency Stability.....	17
4 Radiated Test Items	18
4.1 Measuring Instruments	18
4.2 Test Setup	18
4.3 Test Result of Radiated Test	18
4.4 Field Strength of Spurious Radiation Measurement	19
5 List of Measuring Equipment	20
6 Uncertainty of Evaluation.....	22
Appendix A. Test Results of Conducted Test	
Appendix B. Test Results of ERP/EIRP and Radiated Test	



History of this test report

Report No.	Version	Description	Issued Date
FG891147-01A	01	Initial issue of report	Dec. 26, 2018

Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.2	§2.1046	Conducted Output Power	Pass	-
	§22.913 (a)(2)	Effective Radiated Power		
	§24.232 (c)	Equivalent Isotropic Radiated Power		
	§27.50 (d)(4)	Equivalent Isotropic Radiated Power		
3.3	§24.232 (d)	Peak-to-Average Ratio	Pass	-
3.4	§2.1049 §22.917 (b) §24.238 (b) §27.53 (g)	Occupied Bandwidth	Pass	-
3.5	§2.1051 §22.917 (a) §24.238 (a) §27.53 (g)	Band Edge Measurement	Pass	-
3.6	§2.1051 §22.917 (a) §24.238 (a) §27.53 (g)	Conducted Emission	Pass	-
3.7	§2.1055 §22.355	Frequency Stability Temperature & Voltage	Pass	-
	§2.1055 §24.235 §27.54			-
4.4	§2.1053 §22.917 (a) §24.238 (a) §27.53 (h)	Field Strength of Spurious Radiation	Pass	Under limit 18.31 dB at 2512.000 MHz

Reviewed by: Wii Chang

Report Producer: Natasha Hsieh

1 General Description

1.1 Product Feature of Equipment Under Test

Product Feature	
Equipment	Smartphone
Model Name	G020D
Sample 1	The device with 1st battery
Sample 2	The device with 2nd battery
FCC ID	A4RG020D
EUT supports Radios application	GSM/EGPRS/WCDMA/HSPA/LTE/NFC/GNSS WLAN 11b/g/n HT20 WLAN 11a/n HT20/HT40 WLAN 11ac VHT20/VHT40/VHT80 Bluetooth BR/EDR/LE
EUT Stage	Identical Prototype

Remark: The above EUT's information was declared by manufacturer.

1.2 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx Frequency	GSM/GPRS/EDGE: 850: 824.2 MHz ~ 848.8 MHz 1900: 1850.2 MHz ~ 1909.8 MHz WCDMA: Band V: 826.4 MHz ~ 846.6 MHz Band II: 1852.4 MHz ~ 1907.6 MHz Band IV: 1712.4 MHz ~ 1752.6 MHz
Rx Frequency	GSM/GPRS/EDGE: 850: 869.2 MHz ~ 893.8 MHz 1900: 1930.2 MHz ~ 1989.8 MHz WCDMA: Band V: 871.4 MHz ~ 891.6 MHz Band II: 1932.4 MHz ~ 1987.6 MHz Band IV: 2112.4 MHz ~ 2152.6 MHz
Maximum Output Power to Antenna	GSM/GPRS/EDGE: 850: 33.29 dBm 1900: 30.34 dBm WCDMA: Band V: 23.85 dBm Band II: 24.95 dBm Band IV: 23.22 dBm

Standards-related Product Specification	
Antenna Type / Gain	Cellular Band : PIFA Antenna type with gain -4.7 dBi PCS Band : PIFA Antenna type with gain -1.0 dBi AWS Band : PIFA Antenna type with gain -0.6 dBi
Type of Modulation	GSM: GMSK GPRS: GMSK EDGE: GMSK / 8PSK WCDMA: BPSK (Uplink) HSDPA: 64QAM (Downlink) HSUPA: QPSK (Uplink)

1.3 Modification of EUT

No modifications are made to the EUT during all test items.

1.4 Maximum ERP/EIRP Power, Frequency Tolerance, and Emission Designator

FCC Rule	Frequency Range (MHz)	System	Type of Modulation	Maximum ERP/EIRP (W)	Frequency Tolerance (ppm)	Emission Designator
Part 22	824.2 ~848.8	GSM850 GPRS class 8	GMSK	0.4406	0.0371 ppm	249KGXW
Part 22	824.2 ~848.8	GSM850 EDGE class 8	8PSK	0.1040	0.0048 ppm	248KG7W
Part 22	826.4 ~846.6	WCDMA Band V RMC 12.2Kbps	BPSK	0.0501	0.0191 ppm	4M15F9W
Part 24	1850.2 ~1909.8	GSM1900 GPRS class 8	GMSK	0.8590	0.0255 ppm	246KGXW
Part 24	1850.2 ~1909.8	GSM1900 EDGE class 8	8PSK	0.3006	0.0080 ppm	247KG7W
Part 24	1852.4 ~ 1907.6	WCDMA Band II RMC 12.2Kbps	BPSK	0.2483	0.0085 ppm	4M15F9W
Part 27	1712.4 ~ 1752.6	WCDMA Band IV RMC 12.2Kbps	BPSK	0.1828	0.0323 ppm	4M15F9W

1.5 Testing Location

Sporton Lab is accredited to ISO 17025 by Taiwan Accreditation Foundation (TAF code : 1190) and the FCC designation No. TW1190 and TW0007 under the FCC 2.948(e) by Mutual Recognition Agreement (MRA) in FCC Test.

Test Site	SPORTON INTERNATIONAL INC.
Test Site Location	No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.) TEL: +886-3-327-3456 FAX: +886-3-328-4978
Test Site No.	Sporton Site No. TH03-HY

Note: The test site complies with ANSI C63.4 2014 requirement.

Test Site	SPORTON INTERNATIONAL INC.
Test Site Location	No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.) TEL: +886-3-327-0868 FAX: +886-3-327-0855
Test Site No.	Sporton Site No. 03CH11-HY

Note: The test site complies with ANSI C63.4 2014 requirement.

1.6 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ ANSI C63.26-2015
- ♦ ANSI / TIA-603-E
- ♦ 47 CFR Part 2, 22(H), 24(E), 27(L)
- ♦ FCC KDB 971168 D01 Power Meas. License Digital Systems v03r01
- ♦ FCC KDB 412172 D01 Determining ERP and EIRP v01r01

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



2 Test Configuration of Equipment Under Test

2.1 Test Mode

Antenna port conducted and radiated test items were performed according to KDB 971168 D01 Power Meas. License Digital Systems v03r01 with maximum output power.

For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (X plane for Cellular Band, PCS Band, and AWS Band for Sample 1 with Adapter 1, X plane for Cellular Band for Sample 1 with Adapter 2, Y plane for Cellular Band for Sample 2 with Adapter 1) were recorded in this report.

Radiated emissions were investigated as following frequency range:


1. 30 MHz to 9000 MHz for GSM850 and WCDMA Band V.
2. 30 MHz to 18000 MHz for WCDMA Band IV.
3. 30 MHz to 19100 MHz for GSM1900 and WCDMA Band II

All modes and data rates and positions were investigated.

Test modes are chosen to be reported as the worst case configuration below:

Test Modes		
Band	Radiated TCs	Conducted TCs
GSM 850	■ GPRS Class 8 Link	■ GPRS Class 8 Link
	■ EDGE Class 8 Link	■ EDGE Class 8 Link
GSM 1900	■ GPRS Class 8 Link	■ GPRS Class 8 Link
	■ EDGE Class 8 Link	■ EDGE Class 8 Link
WCDMA Band V	■ RMC 12.2Kbps Link	■ RMC 12.2Kbps Link
WCDMA Band II	■ RMC 12.2Kbps Link	■ RMC 12.2Kbps Link
WCDMA Band IV	■ RMC 12.2Kbps Link	■ RMC 12.2Kbps Link

2.2 Connection Diagram of Test System

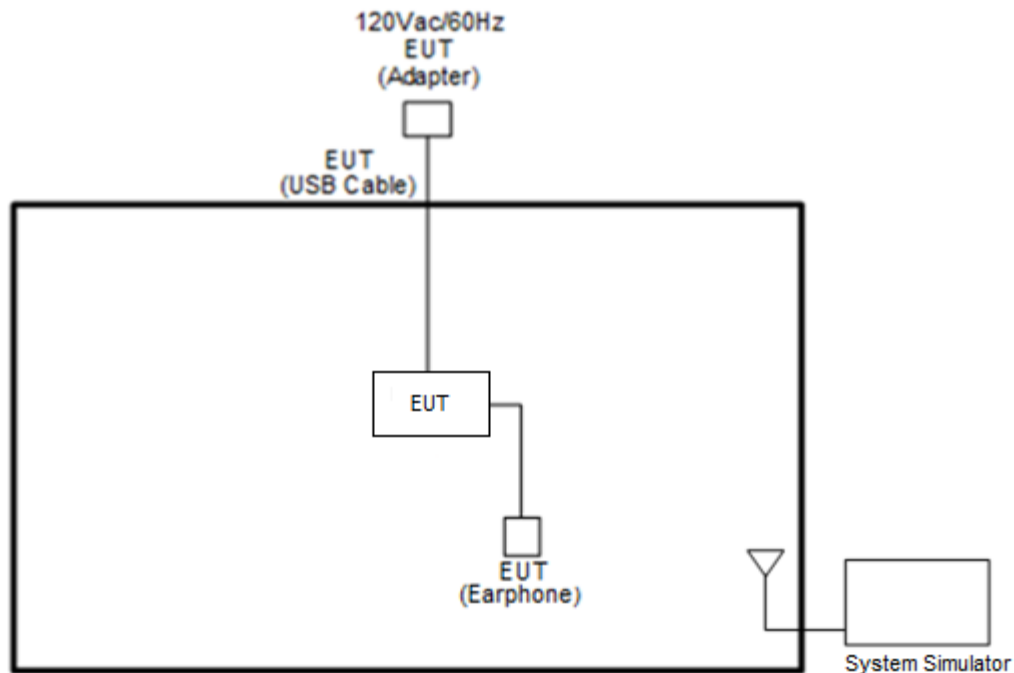

2.3 Support Unit used in test configuration

Item	Equipment	Trade Name	Model No.	FCC ID	Data Cable	Power Cord
1.	System Simulator	R&S	CMU 200	N/A	N/A	Unshielded, 1.8 m

2.4 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between RF conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level will be exactly the RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

The following shows an offset computation example with RF cable loss 4.2 dB and a 10dB attenuator.

Example:

$$\begin{aligned}
 \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)}. \\
 &= 4.2 + 10 = 14.2 \text{ (dB)}
 \end{aligned}$$



2.5 Frequency List of Low/Middle/High Channels

Frequency List				
Band	Channel/Frequency(MHz)	Lowest	Middle	Highest
GSM850	Channel	128	189	251
	Frequency	824.2	836.4	848.8
WCDMA Band V	Channel	4132	4182	4233
	Frequency	826.4	836.4	846.6
GSM1900	Channel	512	661	810
	Frequency	1850.2	1880.0	1909.8
WCDMA Band II	Channel	9262	9400	9538
	Frequency	1852.4	1880.0	1907.6
WCDMA Band IV	Channel	1312	1413	1513
	Frequency	1712.4	1732.6	1752.6

3 Conducted Test Result

3.1 Measuring Instruments


See list of measuring instruments of this test report.

3.1.1 Test Setup

3.1.2 Conducted Output Power



3.1.3 Peak-to-Average Ratio, Occupied Bandwidth, Conducted Band-Edge and Conducted Spurious Emission

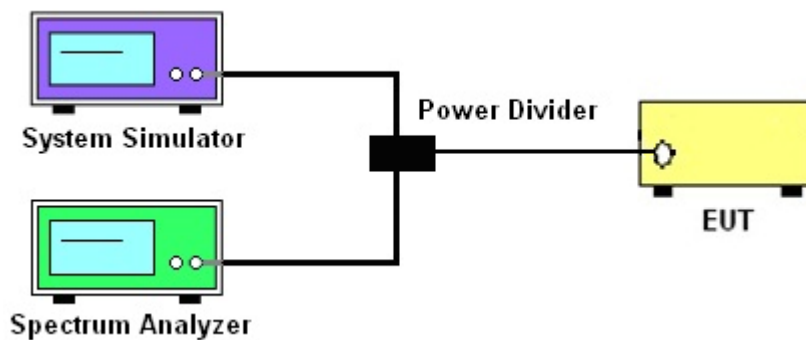

3.1.4 Frequency Stability



3.1.5 Test Result of Conducted Test

Please refer to Appendix A.

3.2 Conducted Output Power and ERP/EIRP

3.2.1 Description of the Conducted Output Power and ERP/EIRP

A system simulator was used to establish communication with the EUT. Its parameters were set to enforce EUT transmitting at the maximum power. The measured power in the radio frequency on the transmitter output terminals shall be reported.

The ERP of mobile transmitters must not exceed 7 Watts for GSM850 and WCDMA Band V.

The EIRP of mobile transmitters must not exceed 2 Watts for GSM1900 and WCDMA Band II.

The EIRP of mobile transmitters must not exceed 1 Watts for WCDMA Band IV.

According to KDB 412172 D01 Power Approach,

$EIRP = P_T + G_T - L_C$, $ERP = EIRP - 2.15$, where

P_T = transmitter output power in dBm

G_T = gain of the transmitting antenna in dBi

L_C = signal attenuation in the connecting cable between the transmitter and antenna in dB

3.2.2 Test Procedures

1. The transmitter output port was connected to the system simulator.
2. Set EUT at maximum power through system simulator.
3. Select lowest, middle, and highest channels for each band and different modulation.
4. Measure the maximum burst average power for GSM and maximum average power for other modulation signal.



3.3 Peak-to-Average Ratio

3.3.1 Description of the PAR Measurement

The peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

3.3.2 Test Procedures

The testing follows FCC KDB 971168 D01 v03r01 Section 5.7.1

1. The EUT was connected to spectrum analyzer and system simulator via a power divider.
2. Set EUT to transmit at maximum output power.
3. When the duty cycle is less than 98%, then signal gating will be implemented on the spectrum analyzer by triggering from the system simulator.
4. Set the CCDF (Complementary Cumulative Distribution Function) option of the spectrum analyzer.
5. Record the maximum PAPR level associated with a probability of 0.1%.

3.4 99% Occupied Bandwidth and 26dB Bandwidth Measurement

3.4.1 Description of 99% Occupied Bandwidth and 26dB Bandwidth Measurement

The occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

The 26 dB emission bandwidth is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated 26 dB below the maximum in-band spectral density of the modulated signal. Spectral density (power per unit bandwidth) is to be measured with a detector of resolution bandwidth equal to approximately 1.0% of the emission bandwidth.

3.4.2 Test Procedures

The testing follows FCC KDB 971168 D01 v03r01 Section 4.2

1. The EUT was connected to spectrum analyzer and system simulator via a power divider.
2. The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the spectrum analyzer shall be between two and five times the anticipated OBW.
3. The nominal resolution bandwidth (RBW) shall be in the range of 1 to 5 % of the anticipated OBW, and the VBW shall be at least 3 times the RBW.
4. Set the detection mode to peak, and the trace mode to max hold.
5. Determine the reference value: Set the EUT to transmit a modulated signal. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace. (this is the reference value)
6. Determine the “-26 dB down amplitude” as equal to (Reference Value – X).
7. Place two markers, one at the lowest and the other at the highest frequency of the envelope of the spectral display such that each marker is at or slightly below the “-X dB down amplitude” determined in step 6. If a marker is below this “-X dB down amplitude” value it shall be placed as close as possible to this value. The OBW is the positive frequency difference between the two markers.
8. Use the 99 % power bandwidth function of the spectrum analyzer and report the measured bandwidth.



3.5 Conducted Band Edge

3.5.1 Description of Conducted Band Edge Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.

3.5.2 Test Procedures

The testing follows FCC KDB 971168 D01 v03r01 Section 6.0.

1. The EUT was connected to the spectrum analyzer and system simulator via a power divider.
2. The RF output of EUT was connected to the spectrum analyzer by an RF cable and attenuator.
The path loss was compensated to the results for each measurement.
3. The band edges of low and high channels for the highest RF powers were measured.
4. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
5. The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)

3.6 Conducted Spurious Emission

3.6.1 Description of Conducted Spurious Emission Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.

It is measured by means of a calibrated spectrum analyzer and scanned from 30 MHz up to a frequency including its 10th harmonic.

3.6.2 Test Procedures

The testing follows FCC KDB 971168 D01 v03r01 Section 6.0.

1. The EUT was connected to the spectrum analyzer and system simulator via a power divider.
2. The RF output of EUT was connected to the spectrum analyzer by an RF cable and attenuator.
The path loss was compensated to the results for each measurement.
3. The middle channel for the highest RF power within the transmitting frequency was measured.
4. The conducted spurious emission for the whole frequency range was taken.
5. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
6. The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)

3.7 Frequency Stability

3.7.1 Description of Frequency Stability Measurement

22.355

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within $\pm 0.00025\%$ ($\pm 2.5\text{ppm}$) of the center frequency.

24.235 & 27.54

The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

3.7.2 Test Procedures for Temperature Variation

The testing follows FCC KDB 971168 D01 v03r01 Section 9.0.

1. The EUT was set up in the thermal chamber and connected with the system simulator.
2. With power OFF, the temperature was decreased to -30°C and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute.
3. With power OFF, the temperature was raised in 10°C steps up to 50°C . The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

3.7.3 Test Procedures for Voltage Variation

The testing follows FCC KDB 971168 D01 v03r01 Section 9.0.

1. The EUT was placed in a temperature chamber at $20\pm 5^{\circ}\text{C}$ and connected with the system simulator.
2. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value measured at the input to the EUT.
3. The variation in frequency was measured for the worst case.


4 Radiated Test Items

4.1 Measuring Instruments


See list of measuring instruments of this test report.

4.2 Test Setup

For radiated test from 30MHz to 1GHz

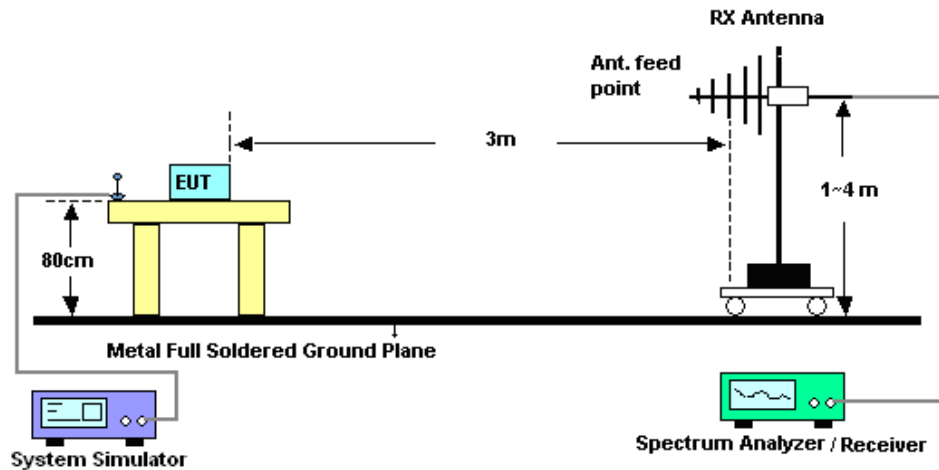

For radiated test above 1GHz

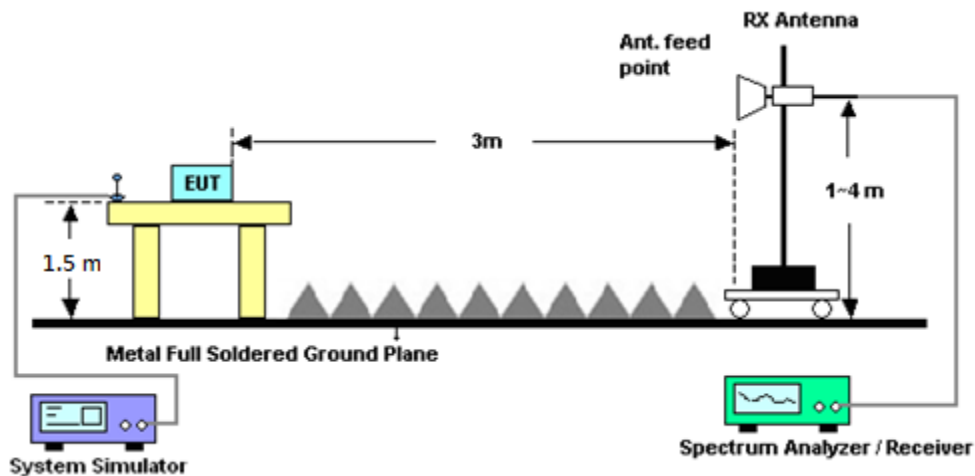

4.3 Test Result of Radiated Test

Please refer to Appendix B.



4.4 Field Strength of Spurious Radiation Measurement

4.4.1 Description of Field Strength of Spurious Radiated Measurement

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB. The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

4.4.2 Test Procedures

The testing follows FCC KDB 971168 D01 v03r01 Section 5.8 and ANSI / TIA-603-E Section 2.2.12.

1. The EUT was placed on a rotatable wooden table 0.8 meters for frequency below 1GHz and 1.5 meter for frequency above 1GHz above the ground.
2. The EUT was set 3 meters from the receiving antenna, which was mounted on the antenna tower.
3. The table was rotated 360 degrees to determine the position of the highest spurious emission.
4. The height of the receiving antenna is varied between one meter and four meters to search for the maximum spurious emission for both horizontal and vertical polarizations.
5. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking record of maximum spurious emission.
6. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
7. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
8. Taking the record of output power at antenna port.
9. Repeat step 7 to step 8 for another polarization.
10. $EIRP \text{ (dBm)} = S.G. \text{ Power} - Tx \text{ Cable Loss} + Tx \text{ Antenna Gain}$
11. $ERP \text{ (dBm)} = EIRP - 2.15$
12. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
13. The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)



5 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Base Station (Measure)	Rohde & Schwarz	CMU200	117995	GSM / GPRS / WCDMA / CDMA	Aug. 10, 2018	Oct. 21, 2018	Aug. 09, 2019	Conducted (TH03-HY)
Spectrum Analyzer	Rohde & Schwarz	FSP30	101329	9kHz~30GHz	Jun. 29, 2018	Oct. 21, 2018	Jun. 28, 2019	Conducted (TH03-HY)
Temperature Chamber	ESPEC	SU-641	92013721	-30°C ~70°C	Dec. 06, 2017	Oct. 21, 2018	Dec. 05, 2019	Conducted (TH03-HY)
Programmable Power Supply	GW Instek	PSS-2005	EL883644	Voltage:0~20V; Current:0~5A	Dec. 06, 2017	Oct. 21, 2018	Dec. 05, 2019	Conducted (TH03-HY)
Amplifier	MITEQ	TTA1840-35-HG	1871923	18GHz~40GHz, VSWR : 2.5:1 max	Jul. 16, 2018	Nov. 30, 2018~Dec. 21, 2018	Jul. 15, 2019	Radiation (03CH11-HY)
Amplifier	SONOMA	310N	187231	9kHz~1GHz	Jan. 08, 2018	Nov. 30, 2018~Dec. 21, 2018	Jan. 07, 2019	Radiation (03CH11-HY)
Bilog Antenna	TESEQ	CBL 6111D&N-6-06	35414&AT-N 0602	30MHz~1GHz	Oct. 13, 2018	Nov. 30, 2018~Dec. 21, 2018	Oct. 12, 2019	Radiation (03CH11-HY)
Horn Antenna	SCHWARZBECK	BBHA 9120 D	9120D-1326	1GHz ~ 18GHz	Oct. 15, 2018	Nov. 30, 2018~Dec. 21, 2018	Oct. 14, 2019	Radiation (03CH11-HY)
Horn Antenna	SCHWARZBECK	BBHA 9120D	9120D-1328	1GHz ~ 18GHz	Nov. 09, 2018	Nov. 30, 2018~Dec. 21, 2018	Nov. 08, 2019	Radiation (03CH11-HY)
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100488	9 kHz~30 MHz	Nov. 23, 2017	Nov. 30, 2018~Dec. 21, 2018	Nov. 22, 2019	Radiation (03CH11-HY)
Preamplifier	Keysight	83017A	MY53270148	1GHz~26.5GHz	Nov. 14, 2018	Nov. 30, 2018~Dec. 21, 2018	Nov. 13, 2019	Radiation (03CH11-HY)
Spectrum Analyzer	Keysight	N9010A	MY54200486	10Hz ~ 44GHz	Oct. 18, 2018	Nov. 30, 2018~Dec. 21, 2018	Oct. 17, 2019	Radiation (03CH11-HY)
Filter	Wainwright	WHKX12-10 80-1200-150 0-60SS	SN2	1.2G High Pass	Sep. 17, 2018	Nov. 30, 2018~Dec. 21, 2018	Sep. 16, 2019	Radiation (03CH11-HY)
Filter	Wainwright	WHKX12-27 00-3000-180 00-60SS	SN3	2.7G High Pass	Sep. 17, 2018	Nov. 30, 2018~Dec. 21, 2018	Sep. 16, 2019	Radiation (03CH11-HY)
Controller	EMEC	EM 1000	N/A	Control Turn table & Ant Mast	N/A	Nov. 30, 2018~Dec. 21, 2018	N/A	Radiation (03CH11-HY)
Antenna Mast	EMEC	AM-BS-4500 -B	N/A	1~4m	N/A	Nov. 30, 2018~Dec. 21, 2018	N/A	Radiation (03CH11-HY)
Turn Table	EMEC	TT 2000	N/A	0~360 Degree	N/A	Nov. 30, 2018~Dec. 21, 2018	N/A	Radiation (03CH11-HY)



Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
EMI Test Receiver	Keysight	N9038A (MXE)	MY55420170	N/A	Mar. 06, 2018	Nov. 30, 2018~ Dec. 21, 2018	Mar. 05, 2019	Radiation (03CH11-HY)
Signal Generator	Rohde & Schwarz	SMF100A	101107	100kHz-40GHz	May 22, 2018	Nov. 30, 2018~ Dec. 21, 2018	May 21, 2019	Radiation (03CH11-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA9170576	18GHz- 40GHz	May 08, 2018	Nov. 30, 2018~ Dec. 21, 2018	May 07, 2019	Radiation (03CH11-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY9837/4PE	9kHz-30MHz	Mar. 14, 2018	Nov. 30, 2018~ Dec. 21, 2018	Mar. 13, 2019	Radiation (03CH11-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	MY2859/2	30MHz-40GHz	Mar. 14, 2018	Nov. 30, 2018~ Dec. 21, 2018	Mar. 13, 2019	Radiation (03CH11-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY9837/4PE	30M-18G	Mar. 14, 2018	Nov. 30, 2018~ Dec. 21, 2018	Mar. 13, 2019	Radiation (03CH11-HY)
Software	Audix	E3 6.2009-8-24	RK-001042	N/A	N/A	Nov. 30, 2018~ Dec. 21, 2018	N/A	Radiation (03CH11-HY)



6 Uncertainty of Evaluation

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	5.20
---	------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	5.50
---	------

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	5.20
---	------



Appendix A. Test Results of Conducted Test

Conducted Output Power(Average power)

Conducted Power (*Unit: dBm)						
Band	GSM850			GSM1900		
Channel	128	189	251	512	661	810
Frequency	824.2	836.4	848.8	1850.2	1880	1909.8
GSM	33.28	33.20	33.05	30.00	30.29	30.18
GPRS class 8	33.29	33.21	33.09	30.01	30.34	30.19
GPRS class 10	30.86	30.93	30.94	28.33	28.36	28.29
GPRS class 11	28.73	28.88	28.96	25.93	26.03	26.16
GPRS class 12	27.46	27.67	27.73	24.75	24.84	24.95
EGPRS class 8	27.02	26.99	27.01	25.78	25.67	25.73
EGPRS class 10	26.06	25.91	25.87	24.54	24.56	24.65
EGPRS class 11	23.85	23.84	23.81	23.53	23.47	23.64
EGPRS class 12	21.79	21.75	21.82	22.83	22.81	22.89

Conducted Power (*Unit: dBm)						
Band	WCDMA Band V			WCDMA Band II		
Channel	4132	4182	4233	9262	9400	9538
Frequency	826.4	836.4	846.6	1852.4	1880	1907.6
RMC 12.2K	23.80	23.74	23.85	24.87	24.95	24.93
HSDPA Subtest-1	22.72	22.66	22.73	23.86	23.91	23.85
HSDPA Subtest-2	22.79	22.72	22.77	23.88	23.90	23.87
HSDPA Subtest-3	22.28	22.15	22.23	23.38	23.43	23.40
HSDPA Subtest-4	22.27	22.14	22.18	23.41	23.42	23.40
HSUPA Subtest-1	22.85	22.72	22.85	23.84	23.92	23.89
HSUPA Subtest-2	20.77	20.78	20.80	21.91	21.91	21.89
HSUPA Subtest-3	21.85	21.77	21.85	22.91	22.94	22.74
HSUPA Subtest-4	20.81	20.81	20.83	21.80	21.85	21.93
HSUPA Subtest-5	22.75	22.75	22.85	23.85	23.95	23.95



Conducted Power (*Unit: dBm)			
Band	WCDMA Band IV		
Channel	1312	1413	1513
Frequency	1712.4	1732.6	1752.6
RMC 12.2K	23.22	23.14	23.15
HSDPA Subtest-1	22.38	22.34	22.28
HSDPA Subtest-2	22.35	22.33	22.26
HSDPA Subtest-3	21.91	21.80	21.81
HSDPA Subtest-4	21.90	21.79	21.75
HSUPA Subtest-1	22.23	22.22	22.28
HSUPA Subtest-2	20.22	20.32	20.20
HSUPA Subtest-3	21.27	21.27	21.31
HSUPA Subtest-4	20.25	20.29	20.27
HSUPA Subtest-5	22.30	22.20	22.20



A2. GSM

Peak-to-Average Ratio

Mode	GSM850		Limit: 13dB
Mod.	GPRS class 8	EDGE class 8	Result
Lowest CH	1.08	3.36	PASS
Middle CH	1.16	3.40	
Highest CH	1.16	3.44	

Mode	GSM1900		Limit: 13dB
Mod.	GPRS class 8	EDGE class 8	Result
Lowest CH	0.68	3.36	PASS
Middle CH	0.80	3.36	
Highest CH	0.80	3.52	



GSM850 (GPRS class 8)		GSM850 (EDGE class 8)	
Lowest Channel		Lowest Channel	
<			



GSM1900 (GPRS class 8)		GSM1900 (EDGE class 8)	
Lowest Channel		Lowest Channel	
</			


**26dB Bandwidth**

Mode	GSM850 : 26dB BW(MHz)	
Mod.	GPRS class 8	EDGE class 8
Lowest CH	0.309	0.307
Middle CH	0.307	0.306
Highest CH	0.305	0.308
Mode	GSM1900 : 26dB BW(MHz)	
Mod.	GPRS class 8	EDGE class 8
Lowest CH	0.312	0.300
Middle CH	0.306	0.304
Highest CH	0.289	0.305



GSM850 (GPRS class 8)


Lowest Channel

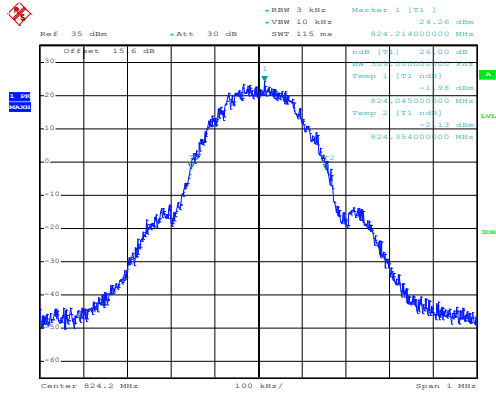

Date: 21.OCT.2018 06:33:06


GSM850 (EDGE class 8)

Lowest Channel

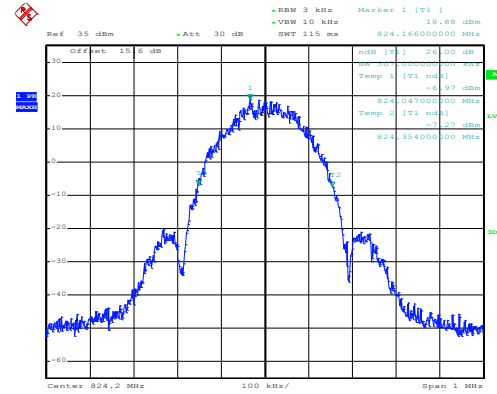


Date: 21.OCT.2018 06:49:33

Middle Channel

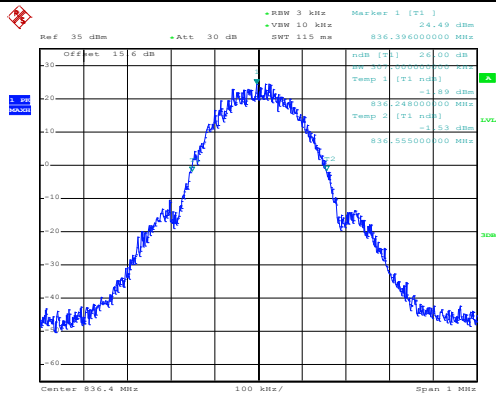


Date: 21.OCT.2018 06:33:39

Middle Channel

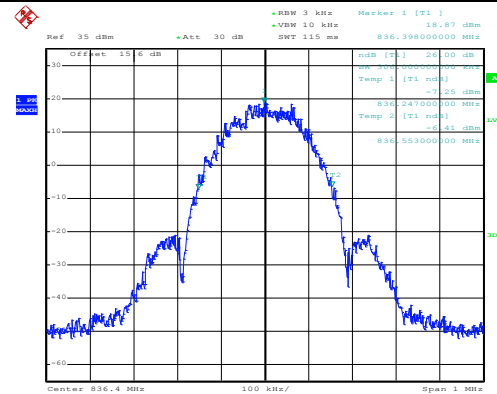


Date: 21.OCT.2018 06:50:08

Highest Channel

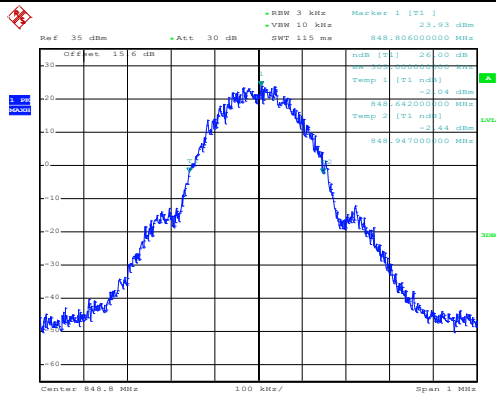

Date: 21.OCT.2018 06:34:11

Highest Channel

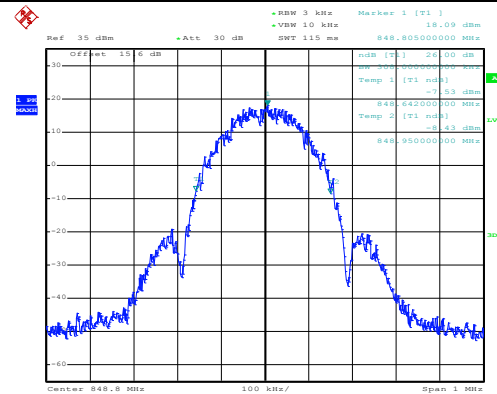


Date: 21.OCT.2018 06:50:40



GSM1900 (GPRS class 8)


Lowest Channel

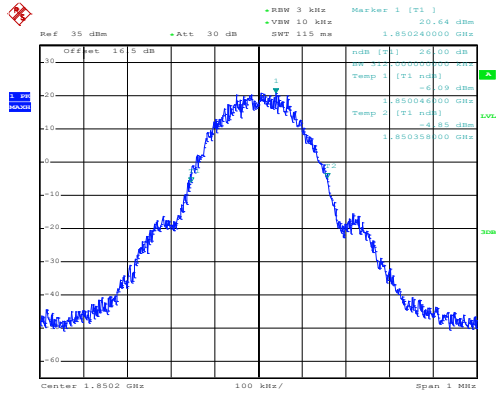

Date: 21.OCT.2018 06:17:14


GSM1900 (EDGE class 8)

Lowest Channel

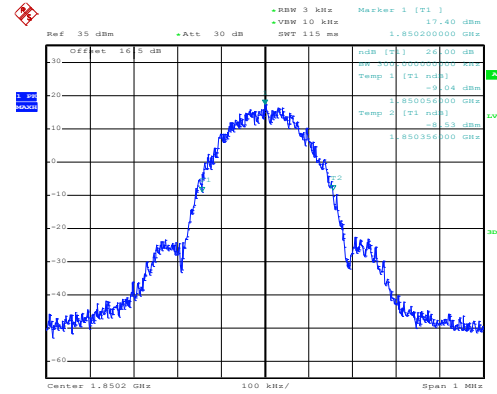


Date: 21.OCT.2018 06:42:02

Middle Channel

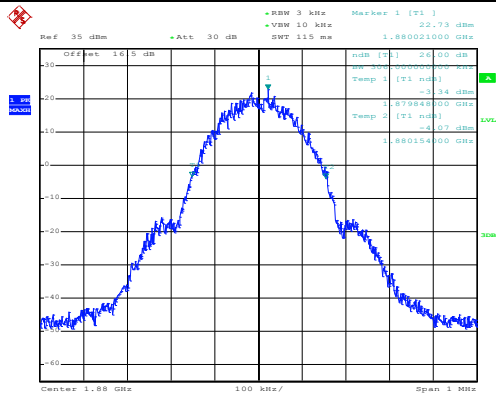


Date: 21.OCT.2018 06:17:49

Middle Channel

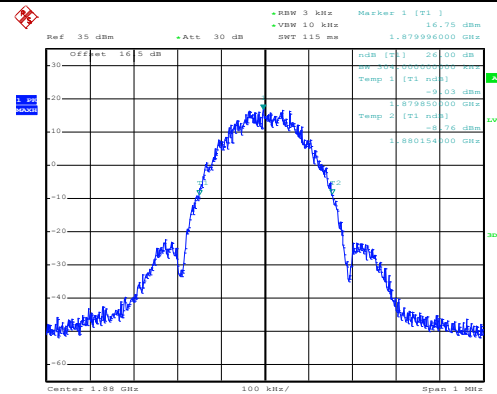


Date: 21.OCT.2018 06:42:46

Highest Channel

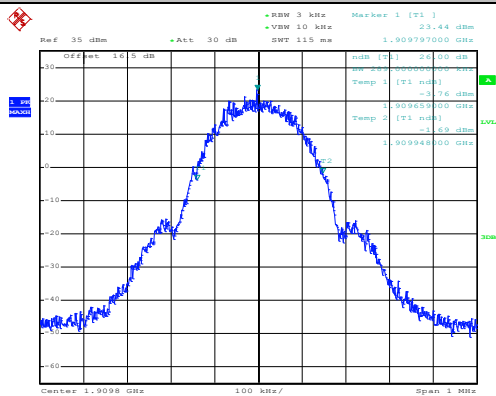

Date: 21.OCT.2018 06:18:22

Highest Channel

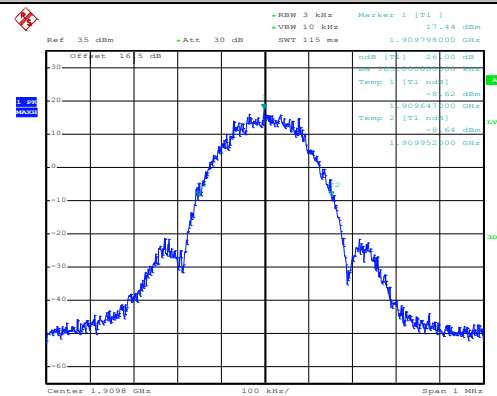


Date: 21.OCT.2018 06:43:19

**Occupied Bandwidth**

Mode	GSM850 : 99% OBW(MHz)	
Mod.	GPRS class 8	EDGE class 8
Lowest CH	0.243	0.241
Middle CH	0.249	0.248
Highest CH	0.243	0.241
Mode	GSM1900 : 99% OBW(MHz)	
Mod.	GPRS class 8	EDGE class 8
Lowest CH	0.242	0.246
Middle CH	0.243	0.247
Highest CH	0.246	0.245

GSM850 (GPRS class 8)


Lowest Channel

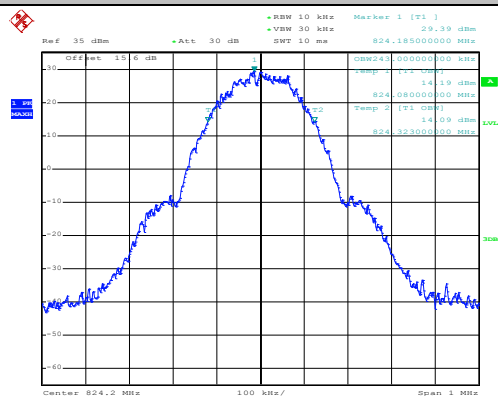

Date: 21.OCT.2018 06:34:45


GSM850 (EDGE class 8)

Lowest Channel

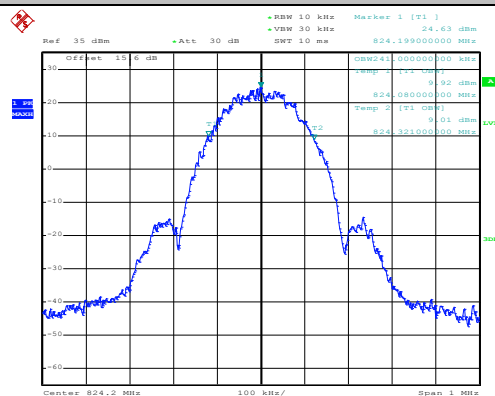


Date: 21.OCT.2018 06:51:14

Middle Channel

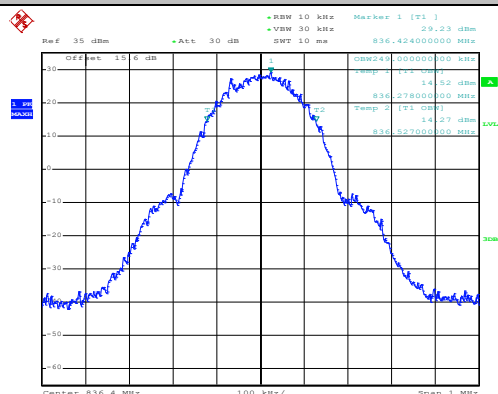


Date: 21.OCT.2018 06:35:18

Middle Channel

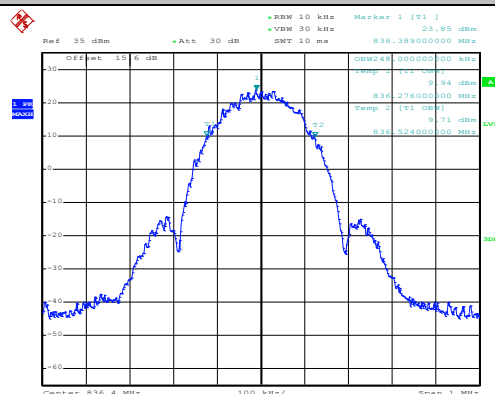


Date: 21.OCT.2018 06:51:48

Highest Channel

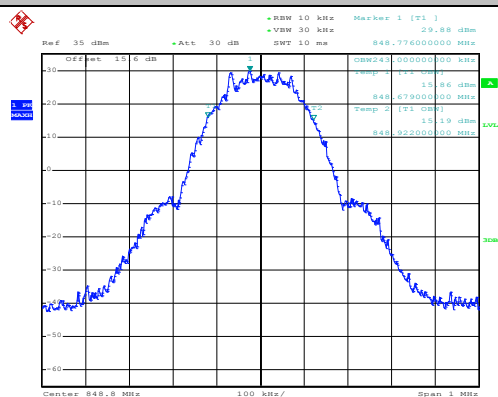

Date: 21.OCT.2018 06:35:50

Highest Channel

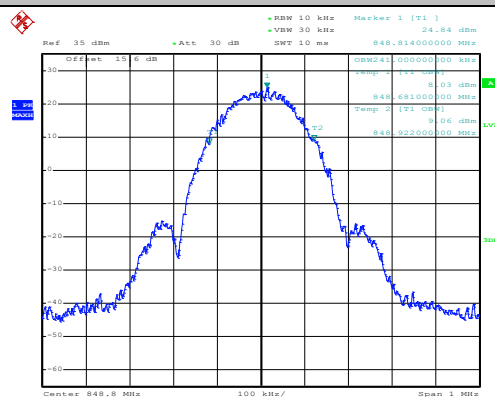


Date: 21.OCT.2018 06:52:20



GSM1900 (GPRS class 8)


Lowest Channel

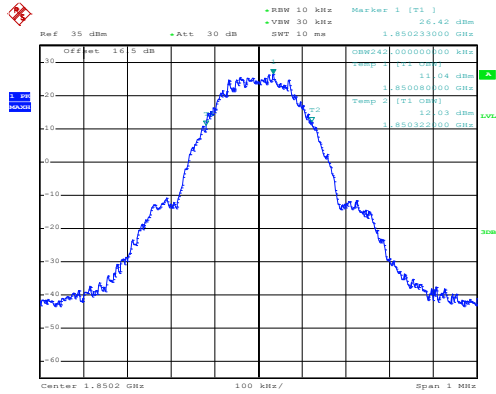

Date: 21.OCT.2018 06:18:59


GSM1900 (EDGE class 8)

Lowest Channel

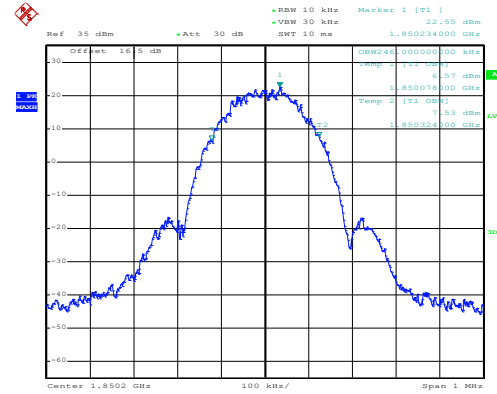


Date: 21.OCT.2018 06:43:59

Middle Channel

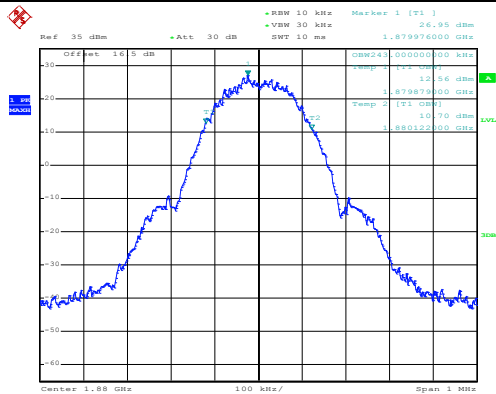


Date: 21.OCT.2018 06:19:32

Middle Channel

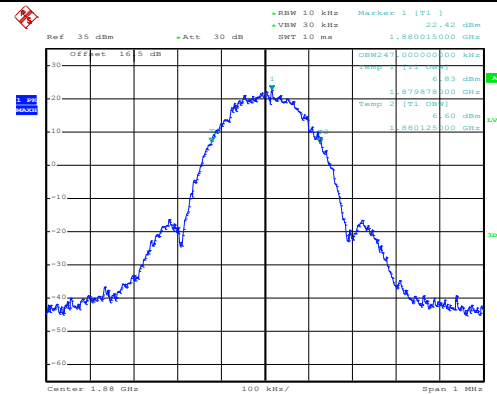


Date: 21.OCT.2018 06:46:45

Highest Channel

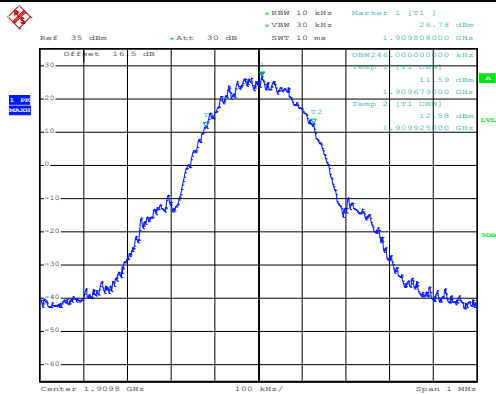

Date: 21.OCT.2018 06:20:06

Highest Channel

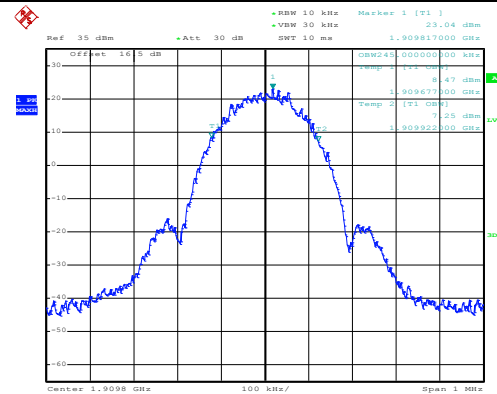


Date: 21.OCT.2018 06:47:18



Conducted Band Edge


GSM850 (GPRS class 8)

Lowest Band Edge

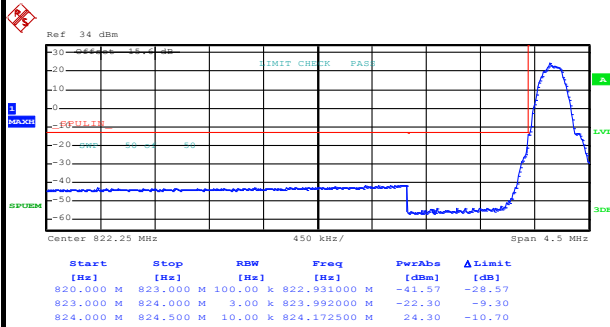

Date: 21.OCT.2018 10:07:01


Highest Band Edge

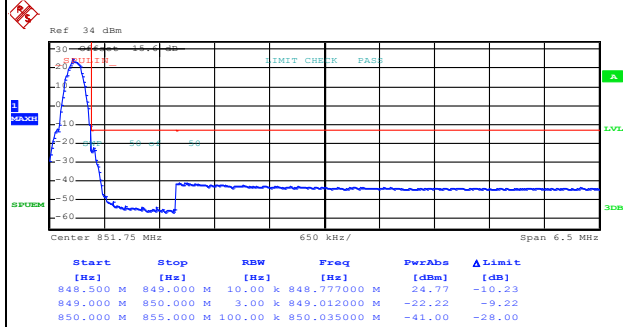

Date: 21.OCT.2018 10:08:31


GSM850 (EDGE class 8)

Lowest Band Edge

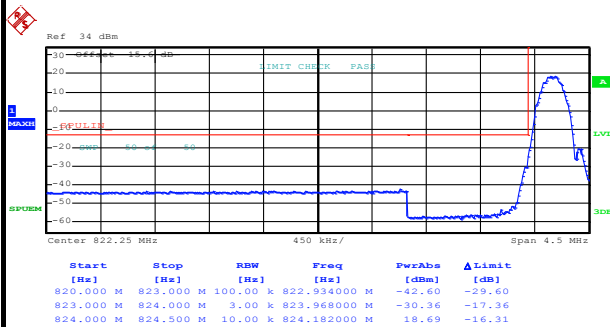

Date: 21.OCT.2018 09:54:04

Highest Band Edge

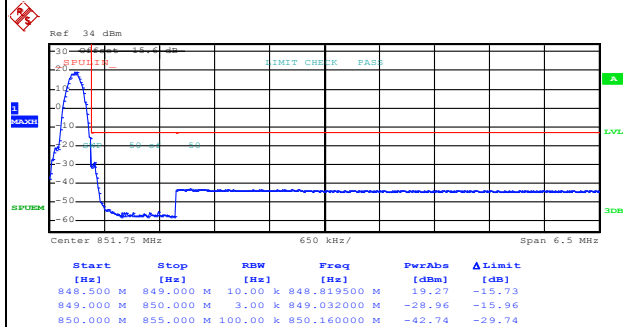


Date: 21.OCT.2018 09:55:35




GSM1900 (GPRS class 8)

Lowest Band Edge

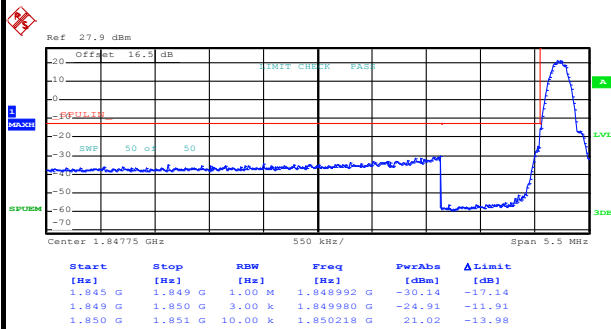

Date: 21.OCT.2018 10:01:02


Highest Band Edge

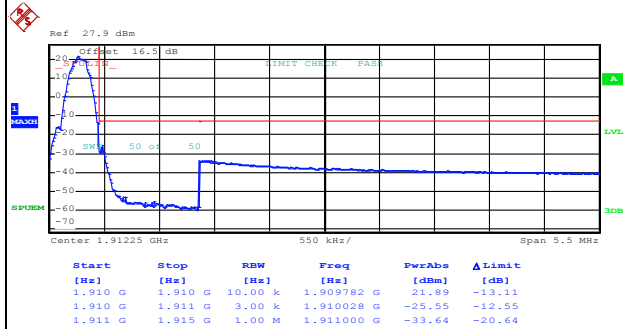

Date: 21.OCT.2018 10:02:31


GSM1900 (EDGE class 8)

Lowest Band Edge

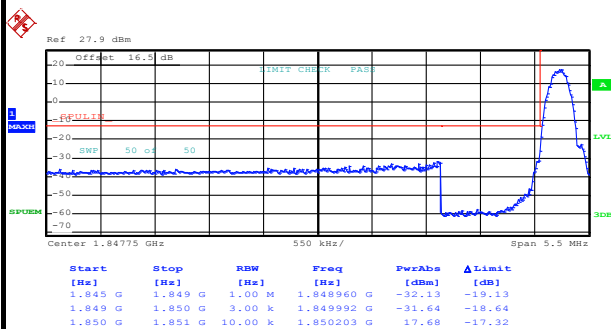







Date: 21.OCT.2018 09:47:53







Highest Band Edge

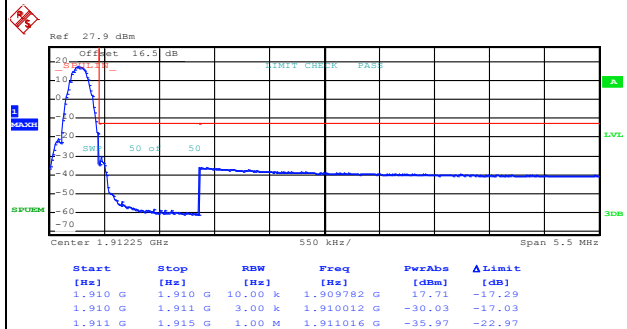

Date: 21.OCT.2018 09:49:24

Conducted Spurious Emission

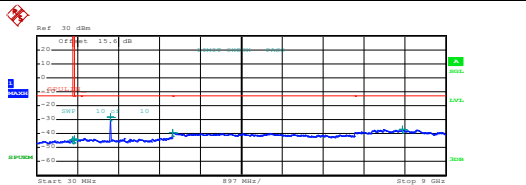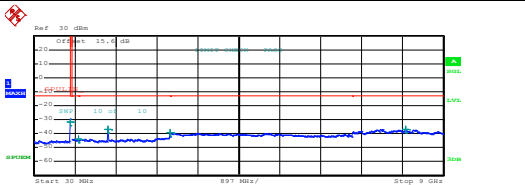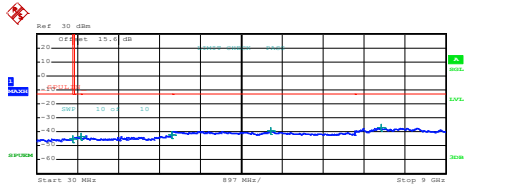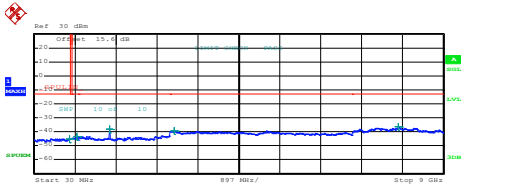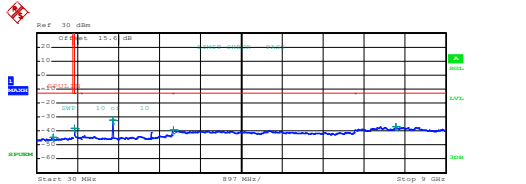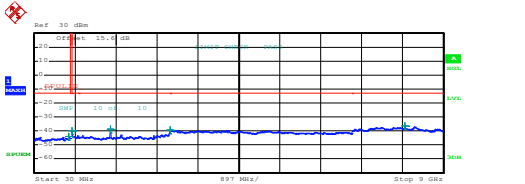GSM850 (GPRS class 8)	GSM850 (EDGE class 8)																																																																																				
Lowest Channel	Lowest Channel																																																																																				
<table><thead><tr><th>Start</th><th>Stop</th><th>RBW</th><th>Freq</th><th>PerAbn</th><th>ΔLimit</th></tr><tr><th>[Hz]</th><th>[Hz]</th><th>[Hz]</th><th>[Hz]</th><th>[dBm]</th><th>[dB]</th></tr></thead><tbody><tr><td>30.000 M</td><td>820.000 M</td><td>1.00 M</td><td>815.062500 M</td><td>-44.54</td><td>-31.54</td></tr><tr><td>855.000 M</td><td>1.000 G</td><td>1.00 M</td><td>857.827500 M</td><td>-43.74</td><td>-30.74</td></tr><tr><td>1.000 G</td><td>3.000 G</td><td>1.00 M</td><td>1.6485000 G</td><td>-29.32</td><td>-15.32</td></tr><tr><td>3.000 G</td><td>7.000 G</td><td>1.00 M</td><td>3.0030000 G</td><td>-39.28</td><td>-26.28</td></tr><tr><td>7.000 G</td><td>9.000 G</td><td>1.00 M</td><td>8.0460000 G</td><td>-37.04</td><td>-24.04</td></tr></tbody></table> Date: 21.OCT.2018 10:03:50	Start	Stop	RBW	Freq	PerAbn	ΔLimit	[Hz]	[Hz]	[Hz]	[Hz]	[dBm]	[dB]	30.000 M	820.000 M	1.00 M	815.062500 M	-44.54	-31.54	855.000 M	1.000 G	1.00 M	857.827500 M	-43.74	-30.74	1.000 G	3.000 G	1.00 M	1.6485000 G	-29.32	-15.32	3.000 G	7.000 G	1.00 M	3.0030000 G	-39.28	-26.28	7.000 G	9.000 G	1.00 M	8.0460000 G	-37.04	-24.04	<table><thead><tr><th>Start</th><th>Stop</th><th>RBW</th><th>Freq</th><th>PerAbn</th><th>ΔLimit</th></tr><tr><th>[Hz]</th><th>[Hz]</th><th>[Hz]</th><th>[Hz]</th><th>[dBm]</th><th>[dB]</th></tr></thead><tbody><tr><td>30.000 M</td><td>820.000 M</td><td>1.00 M</td><td>819.802500 M</td><td>-51.91</td><td>-18.91</td></tr><tr><td>855.000 M</td><td>1.000 G</td><td>1.00 M</td><td>999.420010 M</td><td>-43.84</td><td>-30.84</td></tr><tr><td>1.000 G</td><td>3.000 G</td><td>1.00 M</td><td>1.6485000 G</td><td>-37.24</td><td>-24.24</td></tr><tr><td>3.000 G</td><td>7.000 G</td><td>1.00 M</td><td>3.0090000 G</td><td>-39.37</td><td>-26.37</td></tr><tr><td>7.000 G</td><td>9.000 G</td><td>1.00 M</td><td>8.1700000 G</td><td>-36.92</td><td>-23.92</td></tr></tbody></table> Date: 21.OCT.2018 09:50:43	Start	Stop	RBW	Freq	PerAbn	ΔLimit	[Hz]	[Hz]	[Hz]	[Hz]	[dBm]	[dB]	30.000 M	820.000 M	1.00 M	819.802500 M	-51.91	-18.91	855.000 M	1.000 G	1.00 M	999.420010 M	-43.84	-30.84	1.000 G	3.000 G	1.00 M	1.6485000 G	-37.24	-24.24	3.000 G	7.000 G	1.00 M	3.0090000 G	-39.37	-26.37	7.000 G	9.000 G	1.00 M	8.1700000 G	-36.92	-23.92
Start	Stop	RBW	Freq	PerAbn	ΔLimit																																																																																
[Hz]	[Hz]	[Hz]	[Hz]	[dBm]	[dB]																																																																																
30.000 M	820.000 M	1.00 M	815.062500 M	-44.54	-31.54																																																																																
855.000 M	1.000 G	1.00 M	857.827500 M	-43.74	-30.74																																																																																
1.000 G	3.000 G	1.00 M	1.6485000 G	-29.32	-15.32																																																																																
3.000 G	7.000 G	1.00 M	3.0030000 G	-39.28	-26.28																																																																																
7.000 G	9.000 G	1.00 M	8.0460000 G	-37.04	-24.04																																																																																
Start	Stop	RBW	Freq	PerAbn	ΔLimit																																																																																
[Hz]	[Hz]	[Hz]	[Hz]	[dBm]	[dB]																																																																																
30.000 M	820.000 M	1.00 M	819.802500 M	-51.91	-18.91																																																																																
855.000 M	1.000 G	1.00 M	999.420010 M	-43.84	-30.84																																																																																
1.000 G	3.000 G	1.00 M	1.6485000 G	-37.24	-24.24																																																																																
3.000 G	7.000 G	1.00 M	3.0090000 G	-39.37	-26.37																																																																																
7.000 G	9.000 G	1.00 M	8.1700000 G	-36.92	-23.92																																																																																
Middle Channel	Middle Channel																																																																																				
<table><thead><tr><th>Start</th><th>Stop</th><th>RBW</th><th>Freq</th><th>PerAbn</th><th>ΔLimit</th></tr><tr><th>[Hz]</th><th>[Hz]</th><th>[Hz]</th><th>[Hz]</th><th>[dBm]</th><th>[dB]</th></tr></thead><tbody><tr><td>30.000 M</td><td>820.000 M</td><td>1.00 M</td><td>812.495000 M</td><td>-45.00</td><td>-32.00</td></tr><tr><td>855.000 M</td><td>1.000 G</td><td>1.00 M</td><td>990.937500 M</td><td>-43.61</td><td>-30.61</td></tr><tr><td>1.000 G</td><td>3.000 G</td><td>1.00 M</td><td>2.9920000 G</td><td>-42.23</td><td>-29.23</td></tr><tr><td>3.000 G</td><td>7.000 G</td><td>1.00 M</td><td>5.1530000 G</td><td>-39.59</td><td>-26.59</td></tr><tr><td>7.000 G</td><td>9.000 G</td><td>1.00 M</td><td>7.5885000 G</td><td>-36.76</td><td>-23.76</td></tr></tbody></table> Date: 21.OCT.2018 10:04:38	Start	Stop	RBW	Freq	PerAbn	ΔLimit	[Hz]	[Hz]	[Hz]	[Hz]	[dBm]	[dB]	30.000 M	820.000 M	1.00 M	812.495000 M	-45.00	-32.00	855.000 M	1.000 G	1.00 M	990.937500 M	-43.61	-30.61	1.000 G	3.000 G	1.00 M	2.9920000 G	-42.23	-29.23	3.000 G	7.000 G	1.00 M	5.1530000 G	-39.59	-26.59	7.000 G	9.000 G	1.00 M	7.5885000 G	-36.76	-23.76	<table><thead><tr><th>Start</th><th>Stop</th><th>RBW</th><th>Freq</th><th>PerAbn</th><th>ΔLimit</th></tr><tr><th>[Hz]</th><th>[Hz]</th><th>[Hz]</th><th>[Hz]</th><th>[dBm]</th><th>[dB]</th></tr></thead><tbody><tr><td>30.000 M</td><td>820.000 M</td><td>1.00 M</td><td>794.325000 M</td><td>-44.87</td><td>-31.87</td></tr><tr><td>855.000 M</td><td>1.000 G</td><td>1.00 M</td><td>987.737500 M</td><td>-43.64</td><td>-30.64</td></tr><tr><td>1.000 G</td><td>3.000 G</td><td>1.00 M</td><td>1.6730000 G</td><td>-38.16</td><td>-25.16</td></tr><tr><td>3.000 G</td><td>7.000 G</td><td>1.00 M</td><td>3.0990000 G</td><td>-39.36</td><td>-26.36</td></tr><tr><td>7.000 G</td><td>9.000 G</td><td>1.00 M</td><td>8.0055000 G</td><td>-36.64</td><td>-23.64</td></tr></tbody></table> Date: 21.OCT.2018 09:51:31	Start	Stop	RBW	Freq	PerAbn	ΔLimit	[Hz]	[Hz]	[Hz]	[Hz]	[dBm]	[dB]	30.000 M	820.000 M	1.00 M	794.325000 M	-44.87	-31.87	855.000 M	1.000 G	1.00 M	987.737500 M	-43.64	-30.64	1.000 G	3.000 G	1.00 M	1.6730000 G	-38.16	-25.16	3.000 G	7.000 G	1.00 M	3.0990000 G	-39.36	-26.36	7.000 G	9.000 G	1.00 M	8.0055000 G	-36.64	-23.64
Start	Stop	RBW	Freq	PerAbn	ΔLimit																																																																																
[Hz]	[Hz]	[Hz]	[Hz]	[dBm]	[dB]																																																																																
30.000 M	820.000 M	1.00 M	812.495000 M	-45.00	-32.00																																																																																
855.000 M	1.000 G	1.00 M	990.937500 M	-43.61	-30.61																																																																																
1.000 G	3.000 G	1.00 M	2.9920000 G	-42.23	-29.23																																																																																
3.000 G	7.000 G	1.00 M	5.1530000 G	-39.59	-26.59																																																																																
7.000 G	9.000 G	1.00 M	7.5885000 G	-36.76	-23.76																																																																																
Start	Stop	RBW	Freq	PerAbn	ΔLimit																																																																																
[Hz]	[Hz]	[Hz]	[Hz]	[dBm]	[dB]																																																																																
30.000 M	820.000 M	1.00 M	794.325000 M	-44.87	-31.87																																																																																
855.000 M	1.000 G	1.00 M	987.737500 M	-43.64	-30.64																																																																																
1.000 G	3.000 G	1.00 M	1.6730000 G	-38.16	-25.16																																																																																
3.000 G	7.000 G	1.00 M	3.0990000 G	-39.36	-26.36																																																																																
7.000 G	9.000 G	1.00 M	8.0055000 G	-36.64	-23.64																																																																																
Highest Channel	Highest Channel																																																																																				
<table><thead><tr><th>Start</th><th>Stop</th><th>RBW</th><th>Freq</th><th>PerAbn</th><th>ΔLimit</th></tr><tr><th>[Hz]</th><th>[Hz]</th><th>[Hz]</th><th>[Hz]</th><th>[dBm]</th><th>[dB]</th></tr></thead><tbody><tr><td>30.000 M</td><td>820.000 M</td><td>1.00 M</td><td>381.747500 M</td><td>-44.54</td><td>-31.54</td></tr><tr><td>855.000 M</td><td>1.000 G</td><td>1.00 M</td><td>855.036250 M</td><td>-38.26</td><td>-25.26</td></tr><tr><td>1.000 G</td><td>3.000 G</td><td>1.00 M</td><td>1.6975000 G</td><td>-32.43</td><td>-19.43</td></tr><tr><td>3.000 G</td><td>7.000 G</td><td>1.00 M</td><td>3.0200000 G</td><td>-39.34</td><td>-26.34</td></tr><tr><td>7.000 G</td><td>9.000 G</td><td>1.00 M</td><td>7.9105000 G</td><td>-37.25</td><td>-24.25</td></tr></tbody></table> Date: 21.OCT.2018 10:05:27	Start	Stop	RBW	Freq	PerAbn	ΔLimit	[Hz]	[Hz]	[Hz]	[Hz]	[dBm]	[dB]	30.000 M	820.000 M	1.00 M	381.747500 M	-44.54	-31.54	855.000 M	1.000 G	1.00 M	855.036250 M	-38.26	-25.26	1.000 G	3.000 G	1.00 M	1.6975000 G	-32.43	-19.43	3.000 G	7.000 G	1.00 M	3.0200000 G	-39.34	-26.34	7.000 G	9.000 G	1.00 M	7.9105000 G	-37.25	-24.25	<table><thead><tr><th>Start</th><th>Stop</th><th>RBW</th><th>Freq</th><th>PerAbn</th><th>ΔLimit</th></tr><tr><th>[Hz]</th><th>[Hz]</th><th>[Hz]</th><th>[Hz]</th><th>[dBm]</th><th>[dB]</th></tr></thead><tbody><tr><td>30.000 M</td><td>820.000 M</td><td>1.00 M</td><td>789.190000 M</td><td>-44.12</td><td>-31.12</td></tr><tr><td>855.000 M</td><td>1.000 G</td><td>1.00 M</td><td>855.036250 M</td><td>-40.17</td><td>-27.17</td></tr><tr><td>1.000 G</td><td>3.000 G</td><td>1.00 M</td><td>1.6975000 G</td><td>-38.52</td><td>-25.52</td></tr><tr><td>3.000 G</td><td>7.000 G</td><td>1.00 M</td><td>3.0000000 G</td><td>-39.55</td><td>-26.55</td></tr><tr><td>7.000 G</td><td>9.000 G</td><td>1.00 M</td><td>8.1625000 G</td><td>-36.44</td><td>-23.44</td></tr></tbody></table> Date: 21.OCT.2018 09:52:22	Start	Stop	RBW	Freq	PerAbn	ΔLimit	[Hz]	[Hz]	[Hz]	[Hz]	[dBm]	[dB]	30.000 M	820.000 M	1.00 M	789.190000 M	-44.12	-31.12	855.000 M	1.000 G	1.00 M	855.036250 M	-40.17	-27.17	1.000 G	3.000 G	1.00 M	1.6975000 G	-38.52	-25.52	3.000 G	7.000 G	1.00 M	3.0000000 G	-39.55	-26.55	7.000 G	9.000 G	1.00 M	8.1625000 G	-36.44	-23.44
Start	Stop	RBW	Freq	PerAbn	ΔLimit																																																																																
[Hz]	[Hz]	[Hz]	[Hz]	[dBm]	[dB]																																																																																
30.000 M	820.000 M	1.00 M	381.747500 M	-44.54	-31.54																																																																																
855.000 M	1.000 G	1.00 M	855.036250 M	-38.26	-25.26																																																																																
1.000 G	3.000 G	1.00 M	1.6975000 G	-32.43	-19.43																																																																																
3.000 G	7.000 G	1.00 M	3.0200000 G	-39.34	-26.34																																																																																
7.000 G	9.000 G	1.00 M	7.9105000 G	-37.25	-24.25																																																																																
Start	Stop	RBW	Freq	PerAbn	ΔLimit																																																																																
[Hz]	[Hz]	[Hz]	[Hz]	[dBm]	[dB]																																																																																
30.000 M	820.000 M	1.00 M	789.190000 M	-44.12	-31.12																																																																																
855.000 M	1.000 G	1.00 M	855.036250 M	-40.17	-27.17																																																																																
1.000 G	3.000 G	1.00 M	1.6975000 G	-38.52	-25.52																																																																																
3.000 G	7.000 G	1.00 M	3.0000000 G	-39.55	-26.55																																																																																
7.000 G	9.000 G	1.00 M	8.1625000 G	-36.44	-23.44																																																																																

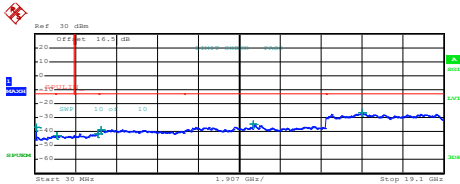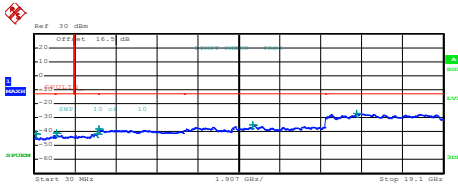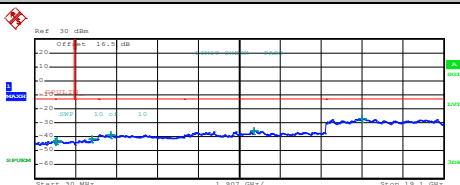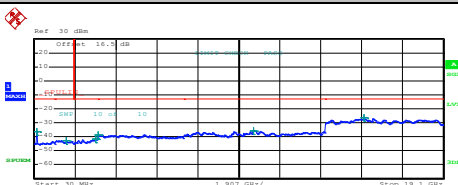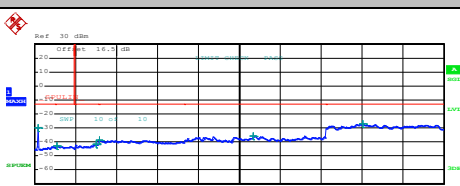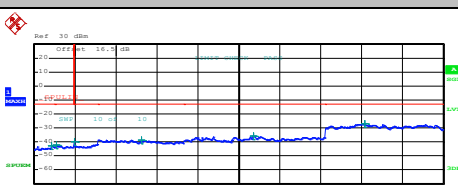GSM1900 (GPRS class 8)	GSM1900 (EDGE class 8)																																																																																				
Lowest Channel	Lowest Channel																																																																																				
 Start 30 MHz Stop 19.1 GHz <table><thead><tr><th>Start [MHz]</th><th>Stop [MHz]</th><th>RW [MHz]</th><th>Freq [MHz]</th><th>PerAbn [dBm]</th><th>Δ Limit [dB]</th></tr></thead><tbody><tr><td>30.000 M</td><td>1.000 G</td><td>1.00 M</td><td>111.985000 M</td><td>-37.19</td><td>-24.19</td></tr><tr><td>1.000 G</td><td>1.845 G</td><td>1.00 M</td><td>1.054714 G</td><td>-42.74</td><td>-29.74</td></tr><tr><td>1.845 G</td><td>3.000 G</td><td>1.00 M</td><td>2.983352 G</td><td>-41.64</td><td>-28.64</td></tr><tr><td>3.000 G</td><td>7.000 G</td><td>1.00 M</td><td>3.106000 G</td><td>-38.46</td><td>-25.46</td></tr><tr><td>7.000 G</td><td>13.600 G</td><td>1.00 M</td><td>10.219150 G</td><td>-34.88</td><td>-21.88</td></tr><tr><td>13.600 G</td><td>19.100 G</td><td>1.00 M</td><td>15.283750 G</td><td>-26.61</td><td>-13.61</td></tr></tbody></table>	Start [MHz]	Stop [MHz]	RW [MHz]	Freq [MHz]	PerAbn [dBm]	Δ Limit [dB]	30.000 M	1.000 G	1.00 M	111.985000 M	-37.19	-24.19	1.000 G	1.845 G	1.00 M	1.054714 G	-42.74	-29.74	1.845 G	3.000 G	1.00 M	2.983352 G	-41.64	-28.64	3.000 G	7.000 G	1.00 M	3.106000 G	-38.46	-25.46	7.000 G	13.600 G	1.00 M	10.219150 G	-34.88	-21.88	13.600 G	19.100 G	1.00 M	15.283750 G	-26.61	-13.61	 Start 30 MHz Stop 19.1 GHz <table><thead><tr><th>Start [MHz]</th><th>Stop [MHz]</th><th>RW [MHz]</th><th>Freq [MHz]</th><th>PerAbn [dBm]</th><th>Δ Limit [dB]</th></tr></thead><tbody><tr><td>30.000 M</td><td>1.000 G</td><td>1.00 M</td><td>111.985000 M</td><td>-41.54</td><td>-28.54</td></tr><tr><td>1.000 G</td><td>1.845 G</td><td>1.00 M</td><td>1.064009 G</td><td>-41.08</td><td>-28.08</td></tr><tr><td>1.845 G</td><td>3.000 G</td><td>1.00 M</td><td>2.982911 G</td><td>-41.66</td><td>-28.66</td></tr><tr><td>3.000 G</td><td>7.000 G</td><td>1.00 M</td><td>3.051000 G</td><td>-38.17</td><td>-25.17</td></tr><tr><td>7.000 G</td><td>13.600 G</td><td>1.00 M</td><td>10.225750 G</td><td>-35.44</td><td>-22.44</td></tr><tr><td>13.600 G</td><td>19.100 G</td><td>1.00 M</td><td>15.054750 G</td><td>-26.61</td><td>-13.61</td></tr></tbody></table>	Start [MHz]	Stop [MHz]	RW [MHz]	Freq [MHz]	PerAbn [dBm]	Δ Limit [dB]	30.000 M	1.000 G	1.00 M	111.985000 M	-41.54	-28.54	1.000 G	1.845 G	1.00 M	1.064009 G	-41.08	-28.08	1.845 G	3.000 G	1.00 M	2.982911 G	-41.66	-28.66	3.000 G	7.000 G	1.00 M	3.051000 G	-38.17	-25.17	7.000 G	13.600 G	1.00 M	10.225750 G	-35.44	-22.44	13.600 G	19.100 G	1.00 M	15.054750 G	-26.61	-13.61
Start [MHz]	Stop [MHz]	RW [MHz]	Freq [MHz]	PerAbn [dBm]	Δ Limit [dB]																																																																																
30.000 M	1.000 G	1.00 M	111.985000 M	-37.19	-24.19																																																																																
1.000 G	1.845 G	1.00 M	1.054714 G	-42.74	-29.74																																																																																
1.845 G	3.000 G	1.00 M	2.983352 G	-41.64	-28.64																																																																																
3.000 G	7.000 G	1.00 M	3.106000 G	-38.46	-25.46																																																																																
7.000 G	13.600 G	1.00 M	10.219150 G	-34.88	-21.88																																																																																
13.600 G	19.100 G	1.00 M	15.283750 G	-26.61	-13.61																																																																																
Start [MHz]	Stop [MHz]	RW [MHz]	Freq [MHz]	PerAbn [dBm]	Δ Limit [dB]																																																																																
30.000 M	1.000 G	1.00 M	111.985000 M	-41.54	-28.54																																																																																
1.000 G	1.845 G	1.00 M	1.064009 G	-41.08	-28.08																																																																																
1.845 G	3.000 G	1.00 M	2.982911 G	-41.66	-28.66																																																																																
3.000 G	7.000 G	1.00 M	3.051000 G	-38.17	-25.17																																																																																
7.000 G	13.600 G	1.00 M	10.225750 G	-35.44	-22.44																																																																																
13.600 G	19.100 G	1.00 M	15.054750 G	-26.61	-13.61																																																																																
Date: 21.OCT.2018 09:57:52	Date: 21.OCT.2018 09:44:21																																																																																				
Middle Channel	Middle Channel																																																																																				
 Start 30 MHz Stop 19.1 GHz <table><thead><tr><th>Start [MHz]</th><th>Stop [MHz]</th><th>RW [MHz]</th><th>Freq [MHz]</th><th>PerAbn [dBm]</th><th>Δ Limit [dB]</th></tr></thead><tbody><tr><td>30.000 M</td><td>1.000 G</td><td>1.00 M</td><td>994.907500 M</td><td>-43.22</td><td>-30.22</td></tr><tr><td>1.000 G</td><td>1.845 G</td><td>1.00 M</td><td>1.005300 G</td><td>-42.75</td><td>-29.75</td></tr><tr><td>1.845 G</td><td>3.000 G</td><td>1.00 M</td><td>2.697285 G</td><td>-41.46</td><td>-28.46</td></tr><tr><td>3.000 G</td><td>7.000 G</td><td>1.00 M</td><td>3.586000 G</td><td>-38.83</td><td>-25.83</td></tr><tr><td>7.000 G</td><td>13.600 G</td><td>1.00 M</td><td>10.247200 G</td><td>-35.86</td><td>-22.86</td></tr><tr><td>13.600 G</td><td>19.100 G</td><td>1.00 M</td><td>15.278188 G</td><td>-27.05</td><td>-14.05</td></tr></tbody></table>	Start [MHz]	Stop [MHz]	RW [MHz]	Freq [MHz]	PerAbn [dBm]	Δ Limit [dB]	30.000 M	1.000 G	1.00 M	994.907500 M	-43.22	-30.22	1.000 G	1.845 G	1.00 M	1.005300 G	-42.75	-29.75	1.845 G	3.000 G	1.00 M	2.697285 G	-41.46	-28.46	3.000 G	7.000 G	1.00 M	3.586000 G	-38.83	-25.83	7.000 G	13.600 G	1.00 M	10.247200 G	-35.86	-22.86	13.600 G	19.100 G	1.00 M	15.278188 G	-27.05	-14.05	 Start 30 MHz Stop 19.1 GHz <table><thead><tr><th>Start [MHz]</th><th>Stop [MHz]</th><th>RW [MHz]</th><th>Freq [MHz]</th><th>PerAbn [dBm]</th><th>Δ Limit [dB]</th></tr></thead><tbody><tr><td>30.000 M</td><td>1.000 G</td><td>1.00 M</td><td>141.792500 M</td><td>-36.59</td><td>-23.59</td></tr><tr><td>1.000 G</td><td>1.845 G</td><td>1.00 M</td><td>1.535450 G</td><td>-42.75</td><td>-29.75</td></tr><tr><td>1.845 G</td><td>3.000 G</td><td>1.00 M</td><td>2.875225 G</td><td>-41.36</td><td>-28.36</td></tr><tr><td>3.000 G</td><td>7.000 G</td><td>1.00 M</td><td>3.037000 G</td><td>-38.65</td><td>-25.65</td></tr><tr><td>7.000 G</td><td>13.600 G</td><td>1.00 M</td><td>10.238950 G</td><td>-35.99</td><td>-22.99</td></tr><tr><td>13.600 G</td><td>19.100 G</td><td>1.00 M</td><td>15.398500 G</td><td>-26.71</td><td>-13.71</td></tr></tbody></table>	Start [MHz]	Stop [MHz]	RW [MHz]	Freq [MHz]	PerAbn [dBm]	Δ Limit [dB]	30.000 M	1.000 G	1.00 M	141.792500 M	-36.59	-23.59	1.000 G	1.845 G	1.00 M	1.535450 G	-42.75	-29.75	1.845 G	3.000 G	1.00 M	2.875225 G	-41.36	-28.36	3.000 G	7.000 G	1.00 M	3.037000 G	-38.65	-25.65	7.000 G	13.600 G	1.00 M	10.238950 G	-35.99	-22.99	13.600 G	19.100 G	1.00 M	15.398500 G	-26.71	-13.71
Start [MHz]	Stop [MHz]	RW [MHz]	Freq [MHz]	PerAbn [dBm]	Δ Limit [dB]																																																																																
30.000 M	1.000 G	1.00 M	994.907500 M	-43.22	-30.22																																																																																
1.000 G	1.845 G	1.00 M	1.005300 G	-42.75	-29.75																																																																																
1.845 G	3.000 G	1.00 M	2.697285 G	-41.46	-28.46																																																																																
3.000 G	7.000 G	1.00 M	3.586000 G	-38.83	-25.83																																																																																
7.000 G	13.600 G	1.00 M	10.247200 G	-35.86	-22.86																																																																																
13.600 G	19.100 G	1.00 M	15.278188 G	-27.05	-14.05																																																																																
Start [MHz]	Stop [MHz]	RW [MHz]	Freq [MHz]	PerAbn [dBm]	Δ Limit [dB]																																																																																
30.000 M	1.000 G	1.00 M	141.792500 M	-36.59	-23.59																																																																																
1.000 G	1.845 G	1.00 M	1.535450 G	-42.75	-29.75																																																																																
1.845 G	3.000 G	1.00 M	2.875225 G	-41.36	-28.36																																																																																
3.000 G	7.000 G	1.00 M	3.037000 G	-38.65	-25.65																																																																																
7.000 G	13.600 G	1.00 M	10.238950 G	-35.99	-22.99																																																																																
13.600 G	19.100 G	1.00 M	15.398500 G	-26.71	-13.71																																																																																
Date: 21.OCT.2018 09:58:39	Date: 21.OCT.2018 09:45:12																																																																																				
Highest Channel	Highest Channel																																																																																				
 Start 30 MHz Stop 19.1 GHz <table><thead><tr><th>Start [MHz]</th><th>Stop [MHz]</th><th>RW [MHz]</th><th>Freq [MHz]</th><th>PerAbn [dBm]</th><th>Δ Limit [dB]</th></tr></thead><tbody><tr><td>30.000 M</td><td>1.000 G</td><td>1.00 M</td><td>171.620000 M</td><td>-29.90</td><td>-16.90</td></tr><tr><td>1.000 G</td><td>1.845 G</td><td>1.00 M</td><td>1.064220 G</td><td>-42.67</td><td>-29.67</td></tr><tr><td>1.845 G</td><td>3.000 G</td><td>1.00 M</td><td>2.873397 G</td><td>-41.40</td><td>-28.40</td></tr><tr><td>3.000 G</td><td>7.000 G</td><td>1.00 M</td><td>3.031000 G</td><td>-38.83</td><td>-25.83</td></tr><tr><td>7.000 G</td><td>13.600 G</td><td>1.00 M</td><td>10.212550 G</td><td>-35.63</td><td>-22.63</td></tr><tr><td>13.600 G</td><td>19.100 G</td><td>1.00 M</td><td>15.310000 G</td><td>-26.66</td><td>-13.66</td></tr></tbody></table>	Start [MHz]	Stop [MHz]	RW [MHz]	Freq [MHz]	PerAbn [dBm]	Δ Limit [dB]	30.000 M	1.000 G	1.00 M	171.620000 M	-29.90	-16.90	1.000 G	1.845 G	1.00 M	1.064220 G	-42.67	-29.67	1.845 G	3.000 G	1.00 M	2.873397 G	-41.40	-28.40	3.000 G	7.000 G	1.00 M	3.031000 G	-38.83	-25.83	7.000 G	13.600 G	1.00 M	10.212550 G	-35.63	-22.63	13.600 G	19.100 G	1.00 M	15.310000 G	-26.66	-13.66	 Start 30 MHz Stop 19.1 GHz <table><thead><tr><th>Start [MHz]</th><th>Stop [MHz]</th><th>RW [MHz]</th><th>Freq [MHz]</th><th>PerAbn [dBm]</th><th>Δ Limit [dB]</th></tr></thead><tbody><tr><td>30.000 M</td><td>1.000 G</td><td>1.00 M</td><td>832.432500 M</td><td>-43.06</td><td>-30.06</td></tr><tr><td>1.000 G</td><td>1.845 G</td><td>1.00 M</td><td>1.049433 G</td><td>-42.45</td><td>-29.45</td></tr><tr><td>1.845 G</td><td>3.000 G</td><td>1.00 M</td><td>1.935211 G</td><td>-40.17</td><td>-27.17</td></tr><tr><td>3.000 G</td><td>7.000 G</td><td>1.00 M</td><td>3.042000 G</td><td>-38.80</td><td>-25.80</td></tr><tr><td>7.000 G</td><td>13.600 G</td><td>1.00 M</td><td>10.236475 G</td><td>-35.82</td><td>-22.82</td></tr><tr><td>13.600 G</td><td>19.100 G</td><td>1.00 M</td><td>15.433553 G</td><td>-26.89</td><td>-13.89</td></tr></tbody></table>	Start [MHz]	Stop [MHz]	RW [MHz]	Freq [MHz]	PerAbn [dBm]	Δ Limit [dB]	30.000 M	1.000 G	1.00 M	832.432500 M	-43.06	-30.06	1.000 G	1.845 G	1.00 M	1.049433 G	-42.45	-29.45	1.845 G	3.000 G	1.00 M	1.935211 G	-40.17	-27.17	3.000 G	7.000 G	1.00 M	3.042000 G	-38.80	-25.80	7.000 G	13.600 G	1.00 M	10.236475 G	-35.82	-22.82	13.600 G	19.100 G	1.00 M	15.433553 G	-26.89	-13.89
Start [MHz]	Stop [MHz]	RW [MHz]	Freq [MHz]	PerAbn [dBm]	Δ Limit [dB]																																																																																
30.000 M	1.000 G	1.00 M	171.620000 M	-29.90	-16.90																																																																																
1.000 G	1.845 G	1.00 M	1.064220 G	-42.67	-29.67																																																																																
1.845 G	3.000 G	1.00 M	2.873397 G	-41.40	-28.40																																																																																
3.000 G	7.000 G	1.00 M	3.031000 G	-38.83	-25.83																																																																																
7.000 G	13.600 G	1.00 M	10.212550 G	-35.63	-22.63																																																																																
13.600 G	19.100 G	1.00 M	15.310000 G	-26.66	-13.66																																																																																
Start [MHz]	Stop [MHz]	RW [MHz]	Freq [MHz]	PerAbn [dBm]	Δ Limit [dB]																																																																																
30.000 M	1.000 G	1.00 M	832.432500 M	-43.06	-30.06																																																																																
1.000 G	1.845 G	1.00 M	1.049433 G	-42.45	-29.45																																																																																
1.845 G	3.000 G	1.00 M	1.935211 G	-40.17	-27.17																																																																																
3.000 G	7.000 G	1.00 M	3.042000 G	-38.80	-25.80																																																																																
7.000 G	13.600 G	1.00 M	10.236475 G	-35.82	-22.82																																																																																
13.600 G	19.100 G	1.00 M	15.433553 G	-26.89	-13.89																																																																																
Date: 21.OCT.2018 09:59:29	Date: 21.OCT.2018 09:46:03																																																																																				

**Frequency Stability**

Test Conditions	Middle Channel	GSM850 (GPRS class 8)	GSM850 (EDGE class 8)	Limit 2.5ppm
Temperature (°C)	Voltage (Volt)	Deviation (ppm)		Result
50	Normal Voltage	0.0371	0.0000	PASS
40	Normal Voltage	0.0012	0.0012	
30	Normal Voltage	0.0012	0.0012	
20(Ref.)	Normal Voltage	0.0000	0.0000	
10	Normal Voltage	0.0060	0.0048	
0	Normal Voltage	0.0132	0.0036	
-10	Normal Voltage	0.0251	0.0036	
-20	Normal Voltage	0.0191	0.0012	
-30	Normal Voltage	0.0263	0.0048	
20	Maximum Voltage	0.0012	0.0000	
20	Normal Voltage	0.0000	0.0000	
20	Battery End Point	0.0012	0.0000	



Test Conditions	Middle Channel	GSM1900 (GPRS class 8)	GSM1900 (EDGE class 8)	Limit Note 2.
Temperature (°C)	Voltage (Volt)	Deviation (ppm)		Result
50	Normal Voltage	0.0011	0.0027	PASS
40	Normal Voltage	0.0255	0.0048	
30	Normal Voltage	0.0048	0.0016	
20(Ref.)	Normal Voltage	0.0000	0.0000	
10	Normal Voltage	0.0027	0.0074	
0	Normal Voltage	0.0005	0.0016	
-10	Normal Voltage	0.0000	0.0080	
-20	Normal Voltage	0.0005	0.0027	
-30	Normal Voltage	0.0043	0.0074	
20	Maximum Voltage	0.0048	0.0016	
20	Normal Voltage	0.0000	0.0000	
20	Battery End Point	0.0043	0.0016	

Note:

1. Normal Voltage = 3.8V. ; Battery End Point (BEP) = 3.6 V. ; Maximum Voltage =4.4 V
2. The frequency fundamental emissions stay within the authorized frequency block.










A3. WCDMA

Peak-to-Average Ratio


Mode	WCDMA Band V	WCDMA Band II	WCDMA Band IV	Limit: 13dB
Mod.	RMC 12.2Kbps	RMC 12.2Kbps	RMC 12.2Kbps	Result
Lowest CH	3.40	3.20	3.40	PASS
Middle CH	3.24	4.28	4.40	
Highest CH	3.96	4.04	4.32	

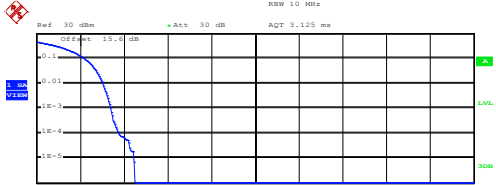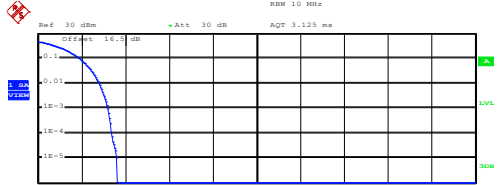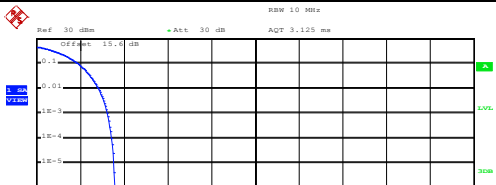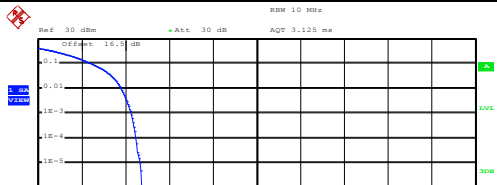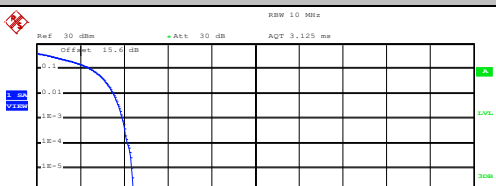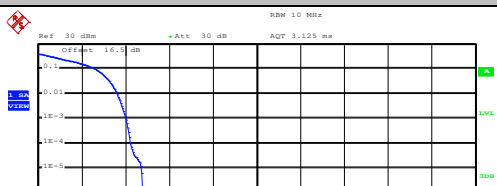


WCDMA Band V (RMC 12.2Kbps)	WCDMA Band II (RMC 12.2Kbps)																												
Lowest Channel	Lowest Channel																												
 Center 826.4 MHz Complementary Cumulative Distribution Function (100000 samples) Trace 1 <table><tr><td>Mean</td><td>22.60 dBm</td></tr><tr><td>Peak</td><td>27.09 dBm</td></tr><tr><td>Crest</td><td>4.50 dB</td></tr></table> <table><tr><td>10 %</td><td>2.20 dB</td></tr><tr><td>1 %</td><td>3.04 dB</td></tr><tr><td>.1 %</td><td>3.40 dB</td></tr><tr><td>.01 %</td><td>3.76 dB</td></tr></table> Date: 21.OCT.2018 07:11:33	Mean	22.60 dBm	Peak	27.09 dBm	Crest	4.50 dB	10 %	2.20 dB	1 %	3.04 dB	.1 %	3.40 dB	.01 %	3.76 dB	 Center 1.8324 GHz Complementary Cumulative Distribution Function (100000 samples) Trace 1 <table><tr><td>Mean</td><td>22.90 dBm</td></tr><tr><td>Peak</td><td>26.53 dBm</td></tr><tr><td>Crest</td><td>3.63 dB</td></tr></table> <table><tr><td>10 %</td><td>1.92 dB</td></tr><tr><td>1 %</td><td>2.80 dB</td></tr><tr><td>.1 %</td><td>3.20 dB</td></tr><tr><td>.01 %</td><td>3.36 dB</td></tr></table> Date: 21.OCT.2018 06:59:49	Mean	22.90 dBm	Peak	26.53 dBm	Crest	3.63 dB	10 %	1.92 dB	1 %	2.80 dB	.1 %	3.20 dB	.01 %	3.36 dB
Mean	22.60 dBm																												
Peak	27.09 dBm																												
Crest	4.50 dB																												
10 %	2.20 dB																												
1 %	3.04 dB																												
.1 %	3.40 dB																												
.01 %	3.76 dB																												
Mean	22.90 dBm																												
Peak	26.53 dBm																												
Crest	3.63 dB																												
10 %	1.92 dB																												
1 %	2.80 dB																												
.1 %	3.20 dB																												
.01 %	3.36 dB																												
Middle Channel	Middle Channel																												
 Center 836.0 MHz Complementary Cumulative Distribution Function (100000 samples) Trace 1 <table><tr><td>Mean</td><td>22.55 dBm</td></tr><tr><td>Peak</td><td>26.11 dBm</td></tr><tr><td>Crest</td><td>3.56 dB</td></tr></table> <table><tr><td>10 %</td><td>1.92 dB</td></tr><tr><td>1 %</td><td>2.84 dB</td></tr><tr><td>.1 %</td><td>3.24 dB</td></tr><tr><td>.01 %</td><td>3.44 dB</td></tr></table> Date: 21.OCT.2018 07:11:53	Mean	22.55 dBm	Peak	26.11 dBm	Crest	3.56 dB	10 %	1.92 dB	1 %	2.84 dB	.1 %	3.24 dB	.01 %	3.44 dB	 Center 1.88 GHz Complementary Cumulative Distribution Function (100000 samples) Trace 1 <table><tr><td>Mean</td><td>21.99 dBm</td></tr><tr><td>Peak</td><td>26.74 dBm</td></tr><tr><td>Crest</td><td>4.75 dB</td></tr></table> <table><tr><td>10 %</td><td>2.52 dB</td></tr><tr><td>1 %</td><td>3.80 dB</td></tr><tr><td>.1 %</td><td>4.28 dB</td></tr><tr><td>.01 %</td><td>4.48 dB</td></tr></table> Date: 21.OCT.2018 07:00:01	Mean	21.99 dBm	Peak	26.74 dBm	Crest	4.75 dB	10 %	2.52 dB	1 %	3.80 dB	.1 %	4.28 dB	.01 %	4.48 dB
Mean	22.55 dBm																												
Peak	26.11 dBm																												
Crest	3.56 dB																												
10 %	1.92 dB																												
1 %	2.84 dB																												
.1 %	3.24 dB																												
.01 %	3.44 dB																												
Mean	21.99 dBm																												
Peak	26.74 dBm																												
Crest	4.75 dB																												
10 %	2.52 dB																												
1 %	3.80 dB																												
.1 %	4.28 dB																												
.01 %	4.48 dB																												
Highest Channel	Highest Channel																												
 Center 846.0 MHz Complementary Cumulative Distribution Function (100000 samples) Trace 1 <table><tr><td>Mean</td><td>22.11 dBm</td></tr><tr><td>Peak</td><td>26.53 dBm</td></tr><tr><td>Crest</td><td>4.42 dB</td></tr></table> <table><tr><td>10 %</td><td>2.48 dB</td></tr><tr><td>1 %</td><td>3.52 dB</td></tr><tr><td>.1 %</td><td>3.96 dB</td></tr><tr><td>.01 %</td><td>4.20 dB</td></tr></table> Date: 21.OCT.2018 07:12:03	Mean	22.11 dBm	Peak	26.53 dBm	Crest	4.42 dB	10 %	2.48 dB	1 %	3.52 dB	.1 %	3.96 dB	.01 %	4.20 dB	 Center 1.9370 GHz Complementary Cumulative Distribution Function (100000 samples) Trace 1 <table><tr><td>Mean</td><td>22.23 dBm</td></tr><tr><td>Peak</td><td>27.02 dBm</td></tr><tr><td>Crest</td><td>4.80 dB</td></tr></table> <table><tr><td>10 %</td><td>2.64 dB</td></tr><tr><td>1 %</td><td>3.64 dB</td></tr><tr><td>.1 %</td><td>4.04 dB</td></tr><tr><td>.01 %</td><td>4.24 dB</td></tr></table> Date: 21.OCT.2018 07:00:13	Mean	22.23 dBm	Peak	27.02 dBm	Crest	4.80 dB	10 %	2.64 dB	1 %	3.64 dB	.1 %	4.04 dB	.01 %	4.24 dB
Mean	22.11 dBm																												
Peak	26.53 dBm																												
Crest	4.42 dB																												
10 %	2.48 dB																												
1 %	3.52 dB																												
.1 %	3.96 dB																												
.01 %	4.20 dB																												
Mean	22.23 dBm																												
Peak	27.02 dBm																												
Crest	4.80 dB																												
10 %	2.64 dB																												
1 %	3.64 dB																												
.1 %	4.04 dB																												
.01 %	4.24 dB																												

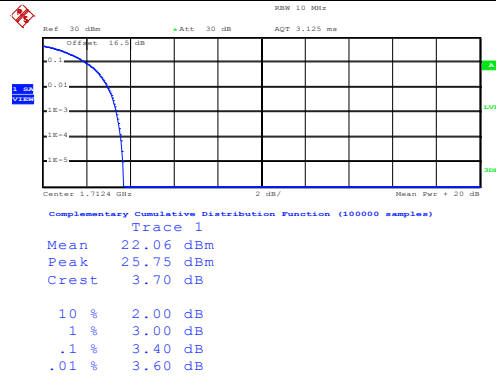WCDMA Band IV (RMC 12.2Kbps)
Lowest Channel


Date: 21.OCT.2018 07:02:46

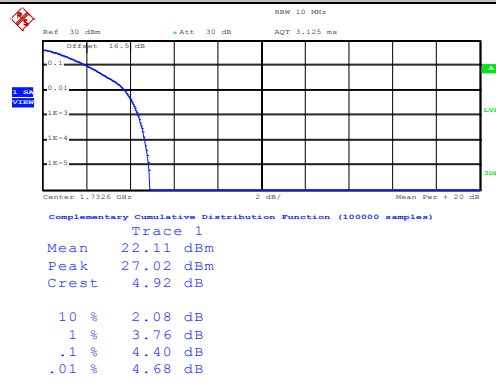Middle Channel


Date: 21.OCT.2018 07:03:01

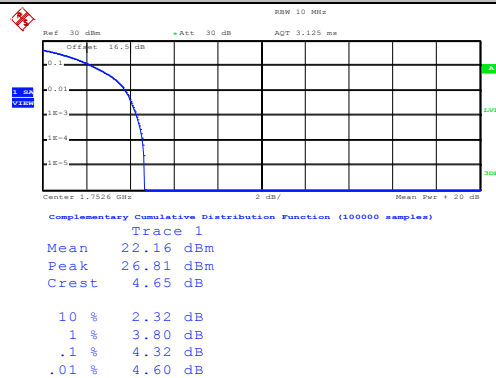Highest Channel


Date: 21.OCT.2018 07:03:18


**26dB Bandwidth**

Mode	WCDMA Band V 26dB BW(MHz)	WCDMA Band II 26dB BW(MHz)	WCDMA Band IV 26dB BW(MHz)
Mod.	RMC 12.2Kbps	RMC 12.2Kbps	RMC 12.2Kbps
Lowest CH	4.73	4.72	4.72
Middle CH	4.75	4.74	4.70
Highest CH	4.70	4.72	4.71



WCDMA Band V (RMC 12.2Kbps)


Lowest Channel

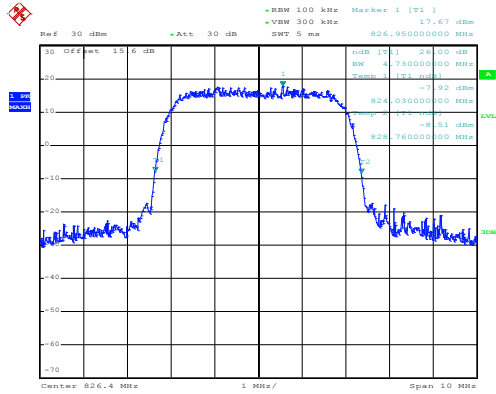

Date: 21.OCT.2018 07:08:24


WCDMA Band II (RMC 12.2Kbps)

Lowest Channel

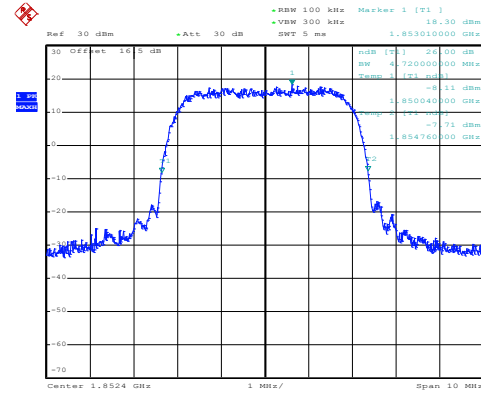


Date: 21.OCT.2018 06:56:32

Middle Channel

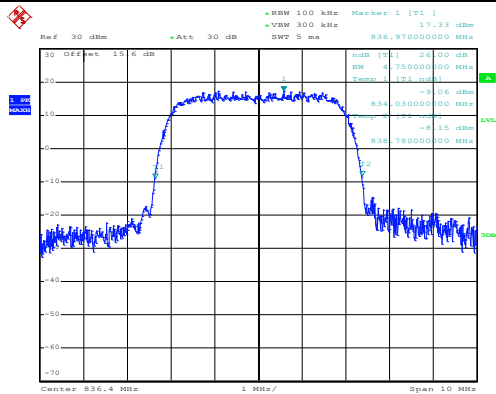


Date: 21.OCT.2018 07:08:57

Middle Channel

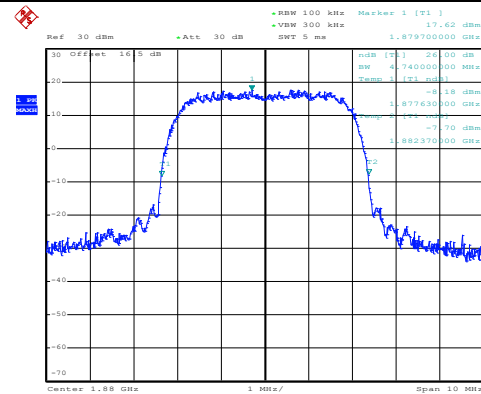


Date: 21.OCT.2018 06:57:05

Highest Channel

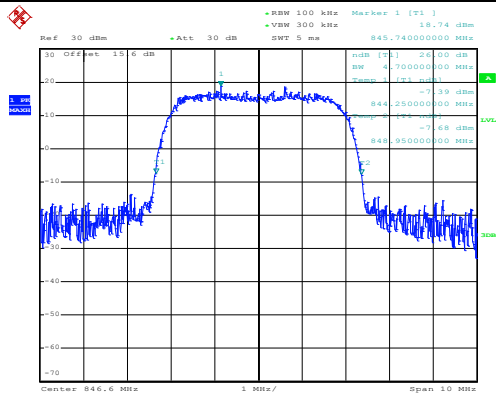

Date: 21.OCT.2018 07:09:27

Highest Channel

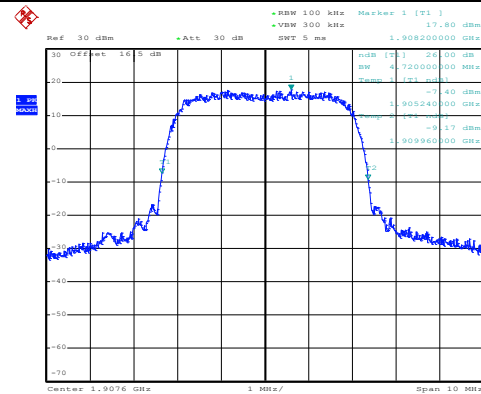


Date: 21.OCT.2018 06:57:37




WCDMA Band IV (RMC 12.2Kbps)

Lowest Channel

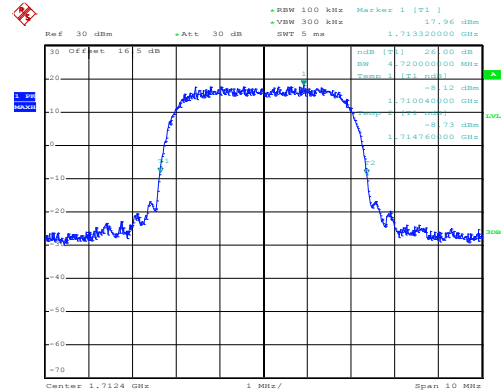


Date: 21.OCT.2018 07:01:21

Middle Channel

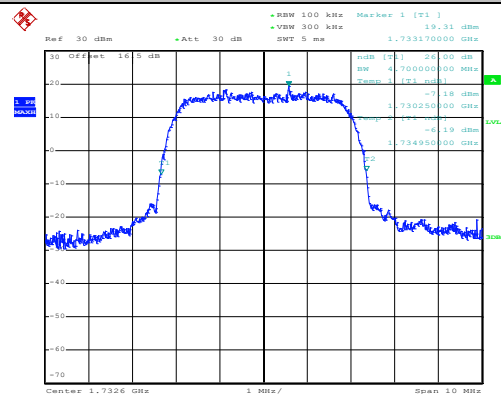

Date: 21.OCT.2018 07:01:53


Highest Channel

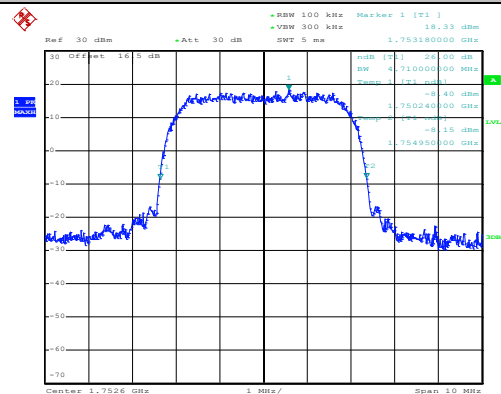


Date: 21.OCT.2018 07:02:26

**Occupied Bandwidth**


Mode	WCDMA Band V 99% OBW(MHz)	WCDMA Band II 99% OBW(MHz)	WCDMA Band IV 99% OBW(MHz)
Mod.	RMC 12.2Kbps	RMC 12.2Kbps	RMC 12.2Kbps
Lowest CH	4.15	4.14	4.14
Middle CH	4.14	4.15	4.15
Highest CH	4.15	4.14	4.14

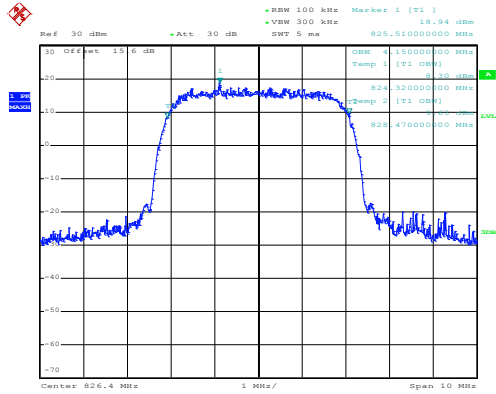WCDMA Band V (RMC 12.2Kbps)
Lowest Channel


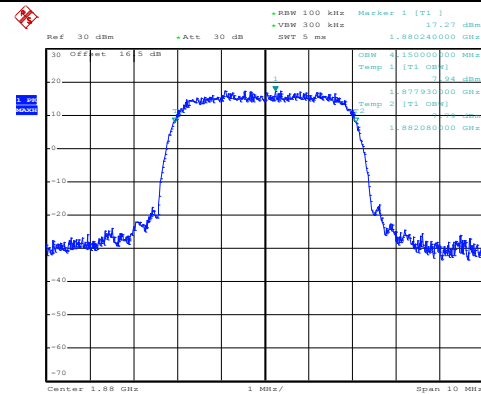
Date: 21.OCT.2018 07:10:10

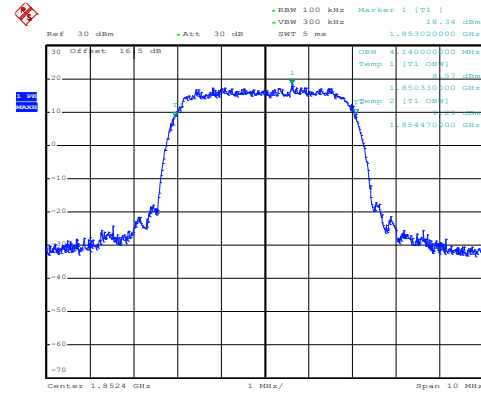WCDMA Band II (RMC 12.2Kbps)
Lowest Channel


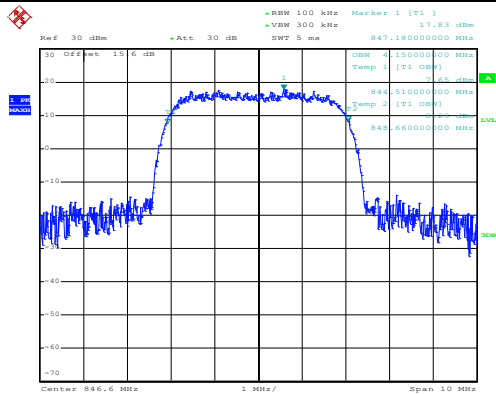
Date: 21.OCT.2018 06:58:24

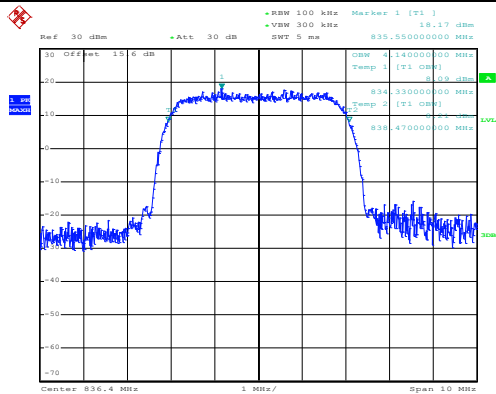Middle Channel


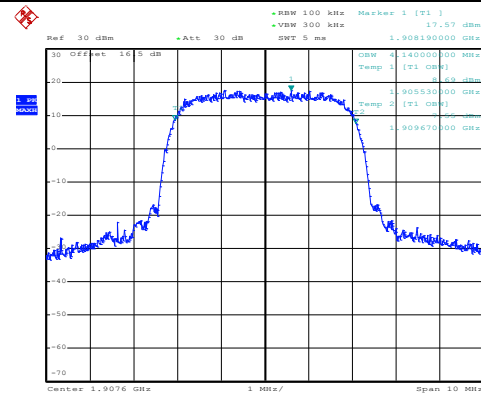
Date: 21.OCT.2018 07:10:44

Middle Channel


Date: 21.OCT.2018 06:58:57

Highest Channel


Date: 21.OCT.2018 07:11:17


Highest Channel


Date: 21.OCT.2018 06:59:26




WCDMA Band IV (RMC 12.2Kbps)

Lowest Channel

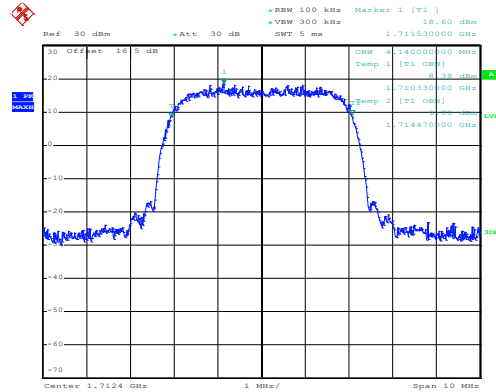


Date: 21.OCT.2018 07:03:57

Middle Channel

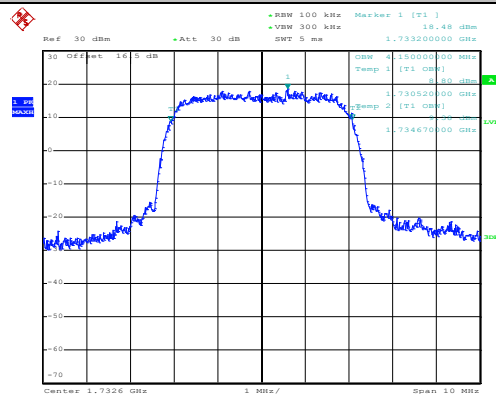

Date: 21.OCT.2018 07:04:31

Highest Channel

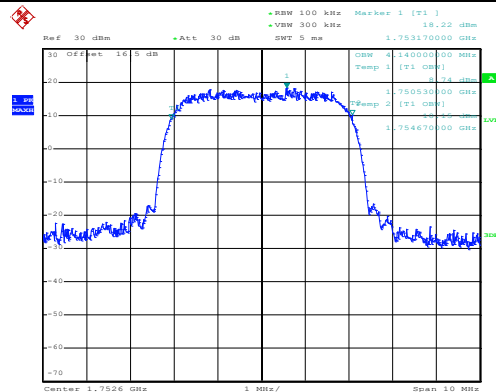


Date: 21.OCT.2018 07:05:05



Conducted Band Edge


WCDMA Band V (RMC 12.2Kbps)

Lowest Band Edge

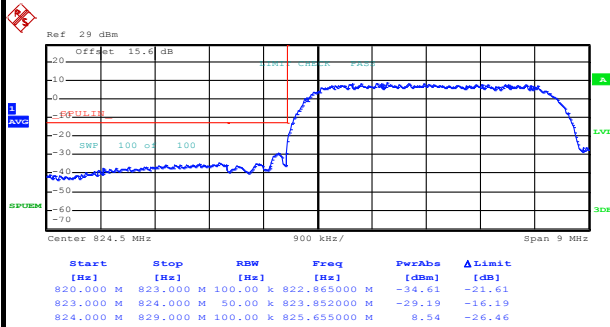

Date: 21.OCT.2018 09:16:39


Highest Band Edge

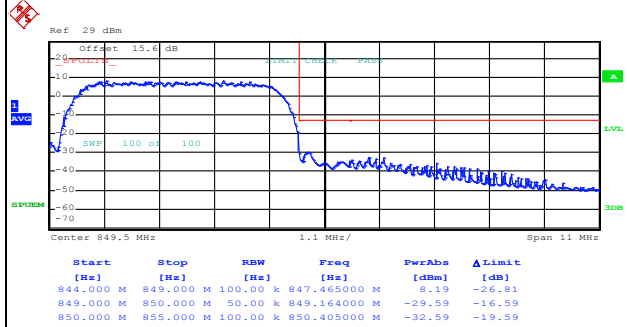

Date: 21.OCT.2018 09:20:06


WCDMA Band II (RMC 12.2Kbps)

Lowest Band Edge

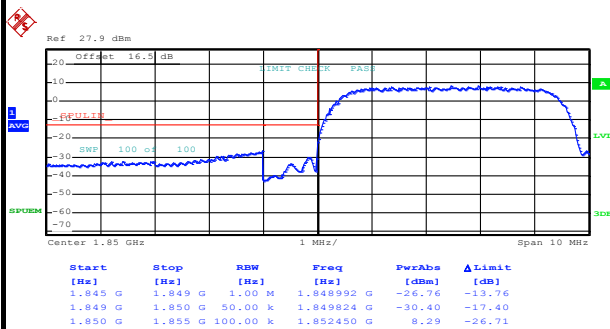

Date: 21.OCT.2018 09:38:56

Highest Band Edge

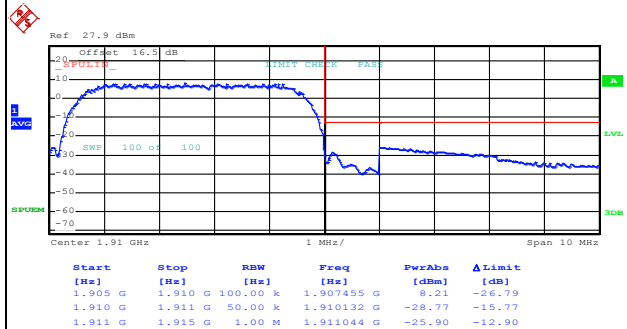


Date: 21.OCT.2018 09:41:45




WCDMA Band IV (RMC 12.2Kbps)

Lowest Band Edge

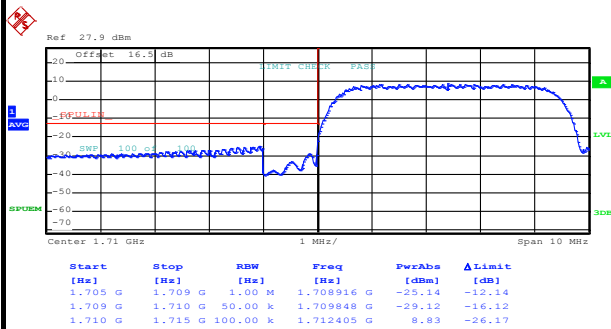

Date: 21.OCT.2018 09:28:08

Highest Band Edge

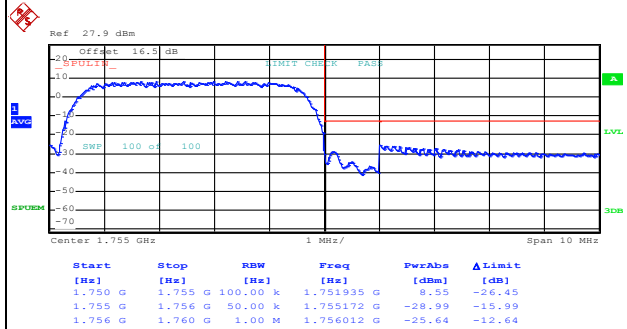


Date: 21.OCT.2018 09:30:56

Conducted Spurious Emission

WCDMA Band V (RMC 12.2Kbps)


Lowest Channel

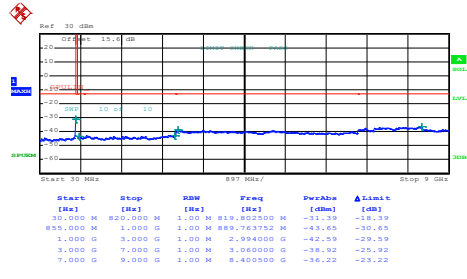

Date: 21.OCT.2018 09:12:01


WCDMA Band II (RMC 12.2Kbps)

Lowest Channel

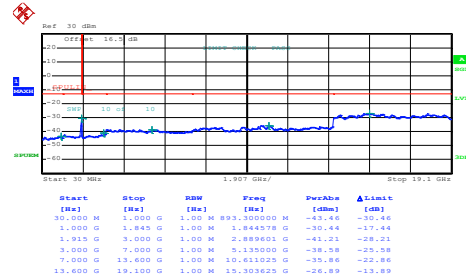


Date: 21.OCT.2018 09:32:21

Middle Channel

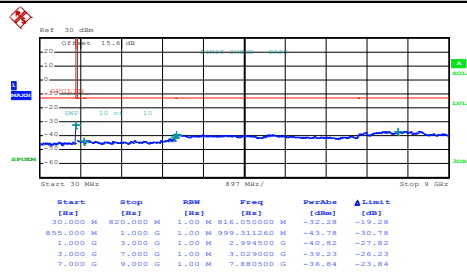


Date: 21.OCT.2018 09:13:00

Middle Channel

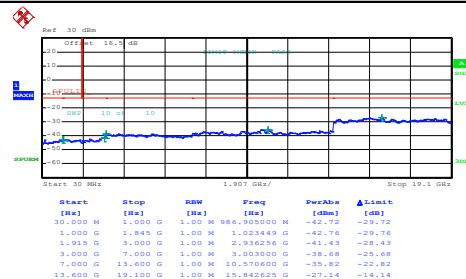


Date: 21.OCT.2018 09:33:12

Highest Channel

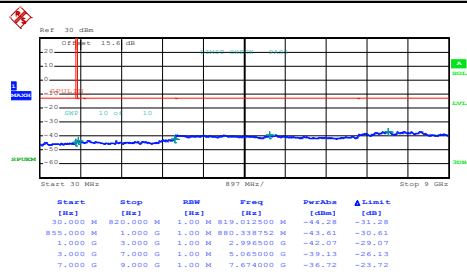

Date: 21.OCT.2018 09:13:51

Highest Channel

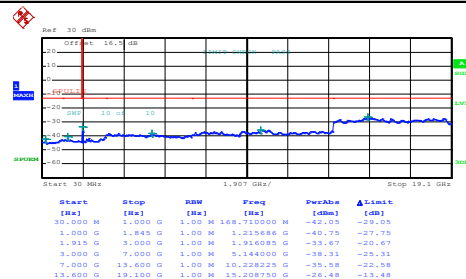


Date: 21.OCT.2018 09:34:05




WCDMA Band IV (RMC 12.2Kbps)

Lowest Channel

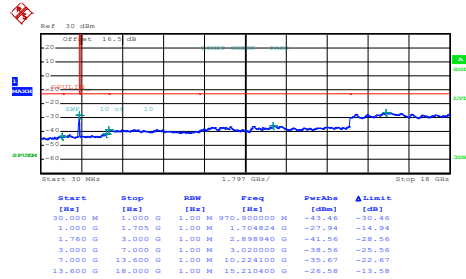


Date: 21.OCT.2018 09:23:31

Middle Channel

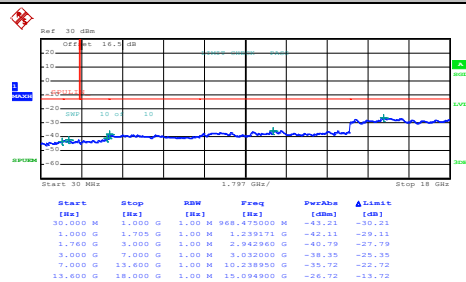

Date: 21.OCT.2018 09:24:22

Highest Channel

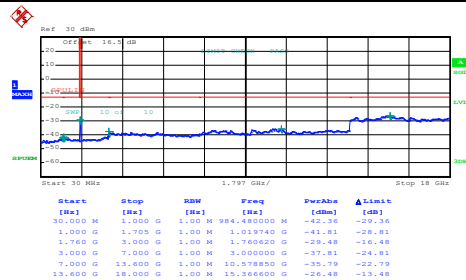

Date: 21.OCT.2018 09:25:10

**Frequency Stability**

Test Conditions	Middle Channel	WCDMA Band V (RMC 12.2Kbps)	Limit 2.5ppm
Temperature (°C)	Voltage (Volt)	Deviation (ppm)	Result
50	Normal Voltage	0.0000	PASS
40	Normal Voltage	0.0024	
30	Normal Voltage	0.0084	
20(Ref.)	Normal Voltage	0.0000	
10	Normal Voltage	0.0084	
0	Normal Voltage	0.0108	
-10	Normal Voltage	0.0167	
-20	Normal Voltage	0.0096	
-30	Normal Voltage	0.0191	
20	Maximum Voltage	0.0191	
20	Normal Voltage	0.0167	
20	Battery End Point	0.0191	



Test Conditions	Middle Channel	WCDMA Band II (RMC 12.2Kbps)	Limit Note 2.
Temperature (°C)	Voltage (Volt)	Deviation (ppm)	Result
50	Normal Voltage	0.0037	PASS
40	Normal Voltage	0.0011	
30	Normal Voltage	0.0048	
20(Ref.)	Normal Voltage	0.0000	
10	Normal Voltage	0.0027	
0	Normal Voltage	0.0032	
-10	Normal Voltage	0.0021	
-20	Normal Voltage	0.0027	
-30	Normal Voltage	0.0085	
20	Maximum Voltage	0.0021	
20	Normal Voltage	0.0000	
20	Battery End Point	0.0000	



Test Conditions	Middle Channel	WCDMA Band IV (RMC 12.2Kbps)	Limit Note 2.
Temperature (°C)	Voltage (Volt)	Deviation (ppm)	Result
50	Normal Voltage	0.0006	PASS
40	Normal Voltage	0.0023	
30	Normal Voltage	0.0075	
20(Ref.)	Normal Voltage	0.0000	
10	Normal Voltage	0.0289	
0	Normal Voltage	0.0323	
-10	Normal Voltage	0.0317	
-20	Normal Voltage	0.0317	
-30	Normal Voltage	0.0312	
20	Maximum Voltage	0.0006	
20	Normal Voltage	0.0000	
20	Battery End Point	0.0000	

Note:

1. Normal Voltage = 3.8V. ; Battery End Point (BEP) = 3.6 V. ; Maximum Voltage =4.4 V
2. The frequency fundamental emissions stay within the authorized frequency block.



Appendix B. Test Results of ERP/EIRP and Radiated Test

ERP/EIRP

Channel	Mode	Conducted		ERP	
		Power (dBm)	Power (Watts)	ERP(dBm)	ERP(W)
Lowest	GSM850	33.29	2.1330	26.44	0.4406
Middle	GPRS class 8	33.21	2.0941	26.36	0.4325
Highest	(GT - LC = -4.7 dB)	33.09	2.0370	26.24	0.4207
Lowest	GSM850	27.02	0.5035	20.17	0.1040
Middle	EDGE class 8	26.99	0.5000	20.14	0.1033
Highest	(GT - LC = -4.7 dB)	27.01	0.5023	20.16	0.1038
Lowest	WCDMA Band V	23.80	0.2399	16.95	0.0495
Middle	RMC 12.2Kbps	23.74	0.2366	16.89	0.0489
Highest	(GT - LC = -4.7 dB)	23.85	0.2427	17.00	0.0501

Channel	Mode	Conducted		EIRP	
		Power (dBm)	Power (Watts)	EIRP(dBm)	EIRP(W)
Lowest	GSM1900	30.01	1.0023	29.01	0.7962
Middle	GPRS class 8	30.34	1.0814	29.34	0.8590
Highest	(GT - LC = -1 dB)	30.19	1.0447	29.19	0.8299
Lowest	GSM1900	25.78	0.3784	24.78	0.3006
Middle	EDGE class 8	25.67	0.3690	24.67	0.2931
Highest	(GT - LC = -1 dB)	25.73	0.3741	24.73	0.2972
Lowest	WCDMA Band II	24.87	0.3069	23.87	0.2438
Middle	RMC 12.2Kbps	24.95	0.3126	23.95	0.2483
Highest	(GT - LC = -1 dB)	24.93	0.3112	23.93	0.2472
Limit	EIRP < 2W	Result		PASS	

Channel	Mode	Conducted		EIRP	
		Power (dBm)	Power (Watts)	EIRP(dBm)	EIRP(W)
Lowest	WCDMA Band IV	23.22	0.2099	22.62	0.1828
Middle	RMC 12.2Kbps	23.14	0.2061	22.54	0.1795
Highest	(GT - LC = -0.6 dB)	23.15	0.2065	22.55	0.1799
Limit	EIRP < 1W	Result		PASS	

**Radiated Spurious Emission**

<For Sample 1>

<Adapter 1>

GSM850

GSM 850									
Channel	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	1648	-54.98	-13	-41.98	-64.86	-61.93	0.53	9.63	H
	2472	-37.48	-13	-24.48	-50.94	-45.46	0.65	10.78	H
	3296	-58.27	-13	-45.27	-74.38	-67.35	0.76	11.99	H
									H
									H
									H
									H
	1648	-57.41	-13	-44.41	-67	-64.36	0.53	9.63	V
	2472	-38.81	-13	-25.81	-52.76	-46.79	0.65	10.78	V
	3296	-58.36	-13	-45.36	-74.44	-67.44	0.76	11.99	V
									V
									V
									V
									V



Middle	1672	-53.38	-13	-40.38	-63.42	-60.38	0.53	9.68	H
	2512	-31.31	-13	-18.31	-44.76	-39.31	0.66	10.81	H
	3344	-58.37	-13	-45.37	-74.57	-67.59	0.76	12.13	H
									H
									H
									H
									H
	1672	-56.94	-13	-43.94	-66.58	-63.94	0.53	9.68	V
	2512	-32.62	-13	-19.62	-46.48	-40.62	0.66	10.81	V
	3344	-58.59	-13	-45.59	-74.6	-67.81	0.76	12.13	V
									V
									V
									V
									V
Highest	1696	-54.42	-13	-41.42	-64.75	-61.47	0.53	9.73	H
	2544	-35.65	-13	-22.65	-49.15	-43.66	0.67	10.83	H
	3392	-57.96	-13	-44.96	-74.27	-67.32	0.77	12.28	H
									H
									H
									H
									H
	1696	-54.04	-13	-41.04	-63.75	-61.09	0.53	9.73	V
	2544	-37.72	-13	-24.72	-51.59	-45.73	0.67	10.83	V
	3392	-58.44	-13	-45.44	-74.34	-67.8	0.77	12.28	V
									V
									V
									V
									V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

**EDGE 850**

EDGE 850									
Channel	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	1648	-46.90	-13	-33.90	-56.78	-53.85	0.53	9.63	H
	2472	-38.39	-13	-25.39	-51.85	-46.37	0.65	10.78	H
	3296	-58.42	-13	-45.42	-74.53	-67.5	0.76	11.99	H
									H
									H
									H
									H
	1648	-51.81	-13	-38.81	-61.4	-58.76	0.53	9.63	V
	2472	-43.56	-13	-30.56	-57.51	-51.54	0.65	10.78	V
	3296	-58.26	-13	-45.26	-74.34	-67.34	0.76	11.99	V
									V
									V
									V
									V
Middle	1672	-52.97	-13	-39.97	-64.03	-59.97	0.53	9.68	H
	2512	-35.31	-13	-22.31	-49.85	-43.31	0.66	10.81	H
	3352	-56.11	-13	-43.11	-72.79	-65.35	0.76	12.16	H
	4184	-53.73	-13	-40.73	-71.55	-63.07	0.84	12.33	H
									H
									H
									H
	1672	-55.96	-13	-42.96	-67.28	-62.96	0.53	9.68	V
	2512	-38.32	-13	-25.32	-53.47	-46.32	0.66	10.81	V
	3352	-56.27	-13	-43.27	-72.59	-65.51	0.76	12.16	V
	4184	-54.12	-13	-41.12	-73.17	-63.46	0.84	12.33	V
									V
									V
									V



Highest	1696	-43.48	-13	-30.48	-53.81	-50.53	0.53	9.73	H
	2544	-32.91	-13	-19.91	-46.41	-40.92	0.67	10.83	H
	3392	-58.29	-13	-45.29	-74.6	-67.65	0.77	12.28	H
	4248	-55.08	-13	-42.08	-72.72	-64.39	0.84	12.30	H
									H
									H
									H
	1696	-48.10	-13	-35.10	-57.81	-55.15	0.53	9.73	V
	2544	-41.77	-13	-28.77	-55.64	-49.78	0.67	10.83	V
	3392	-58.74	-13	-45.74	-74.64	-68.1	0.77	12.28	V
	4248	-55.30	-13	-42.30	-74.21	-64.61	0.84	12.30	V
									V
									V
									V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

**WCDMA 850**

WCDMA 850									
Channel	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	1653	-62.86	-13	-49.86	-72.75	-69.82	0.53	9.64	H
	2479	-59.12	-13	-46.12	-72.58	-67.1	0.65	10.78	H
	3306	-58.26	-13	-45.26	-74.38	-67.37	0.76	12.02	H
									H
									H
									H
									H
	1653	-50.41	-13	-37.41	-73.01	-57.37	0.53	9.64	V
	2479	-59.82	-13	-46.82	-73.77	-67.8	0.65	10.78	V
	3306	-58.50	-13	-45.50	-74.59	-67.61	0.76	12.02	V
									V
									V
									V
									V
Middle	1672	-61.54	-13	-48.54	-71.58	-68.54	0.53	9.68	H
	2512	-58.24	-13	-45.24	-71.69	-66.24	0.66	10.81	H
	3346	-58.20	-13	-45.20	-74.43	-67.42	0.76	12.14	H
									H
									H
									H
									H
	1672	-61.97	-13	-48.97	-71.61	-68.97	0.53	9.68	V
	2512	-59.51	-13	-46.51	-73.37	-67.51	0.66	10.81	V
	3346	-58.54	-13	-45.54	-74.51	-67.76	0.76	12.14	V
									V
									V
									V
									V



Highest	1693	-62.35	-13	-49.35	-72.68	-69.39	0.53	9.72	H
	2540	-60.01	-13	-47.01	-73.51	-68.02	0.67	10.82	H
	3386	-58.06	-13	-45.06	-74.37	-67.4	0.77	12.26	H
									H
									H
									H
									H
	1693	-63.14	-13	-50.14	-72.85	-70.18	0.53	9.72	V
	2540	-59.61	-13	-46.61	-73.48	-67.62	0.67	10.82	V
	3386	-58.60	-13	-45.60	-74.5	-67.94	0.77	12.26	V
									V
									V
									V
									V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

**WCDMA 1700**

WCDMA 1700									
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	3426	-57.60	-13	-44.60	-74.43	-69.2	0.77	12.38	H
	5136	-55.60	-13	-42.60	-76.04	-67.1	0.97	12.47	H
	6852	-53.71	-13	-40.71	-77.14	-64.5	0.83	11.63	H
									H
									H
									H
									H
	3426	-58.10	-13	-45.10	-74.73	-69.7	0.77	12.38	V
	5136	-56.10	-13	-43.10	-76.46	-67.6	0.97	12.47	V
	6852	-53.41	-13	-40.41	-77.17	-64.2	0.83	11.63	V
									V
									V
									V
									V
Middle	3468	-57.47	-13	-44.47	-74.57	-69.2	0.78	12.50	H
	5196	-56.00	-13	-43.00	-76.35	-67.6	0.99	12.59	H
	6930	-53.15	-13	-40.15	-76.55	-63.6	1.01	11.45	H
									H
									H
									H
									H
	3468	-57.17	-13	-44.17	-74.75	-68.9	0.78	12.50	V
	5196	-55.90	-13	-42.90	-76.6	-67.5	0.99	12.59	V
	6930	-52.85	-13	-39.85	-76.59	-63.3	1.01	11.45	V
									V
									V
									V
									V



Highest	3504	-58.08	-13	-45.08	-75.17	-69.9	0.78	12.60	H
	5256	-56.80	-13	-43.80	-77.2	-68.5	1.01	12.71	H
	7008	-52.28	-13	-39.28	-75.91	-62.4	1.17	11.29	H
									H
									H
									H
									H
	3504	-57.48	-13	-44.48	-75.27	-69.3	0.78	12.60	V
	5256	-56.70	-13	-43.70	-77.21	-68.4	1.01	12.71	V
	7008	-53.38	-13	-40.38	-76.05	-63.5	1.17	11.29	V
									V
									V
									V
									V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

**GPRS 1900**

GPRS 1900									
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	3702	-53.20	-13	-40.20	-70.18	-64.99	0.72	12.52	H
	5550	-37.43	-13	-24.43	-59.24	-49.6	1.00	13.17	H
	7400	-51.33	-13	-38.33	-76.4	-60.73	1.18	10.58	H
									H
									H
									H
									H
	3702	-53.74	-13	-40.74	-71.89	-65.53	0.72	12.52	V
	5550	-37.74	-13	-24.74	-59.64	-49.91	1.00	13.17	V
	7400	-51.72	-13	-38.72	-76.58	-61.12	1.18	10.58	V
									V
									V
									V
									V
Middle	3762	-52.48	-13	-39.48	-69.61	-64.29	0.69	12.50	H
	5640	-35.01	-13	-22.01	-56.72	-47.14	0.98	13.12	H
	7520	-50.87	-13	-37.87	-75.79	-60.15	1.18	10.46	H
									H
									H
									H
									H
	3762	-53.60	-13	-40.60	-71.94	-65.41	0.69	12.50	V
	5640	-34.66	-13	-21.66	-56.54	-46.79	0.98	13.12	V
	7520	-51.16	-13	-38.16	-76.13	-60.44	1.18	10.46	V
									V
									V
									V
									V



Highest	3822	-52.21	-13	-39.21	-69.46	-63.99	0.69	12.47	H
	5730	-37.84	-13	-24.84	-59.55	-49.91	0.99	13.06	H
	7644	-50.82	-13	-37.82	-76.01	-60.44	1.18	10.80	H
									H
									H
									H
									H
	3822	-54.29	-13	-41.29	-72.76	-66.07	0.69	12.47	V
	5730	-38.33	-13	-25.33	-60.25	-50.4	0.99	13.06	V
	7644	-50.88	-13	-37.88	-75.85	-60.5	1.18	10.80	V
									V
									V
									V
									V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

**EDGE1900**

EDGE 1900									
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	3702	-56.41	-13	-43.41	-73.34	-68.2	0.72	12.52	H
	5550	-44.43	-13	-31.43	-66.09	-56.6	1.00	13.17	H
	7400	-51.70	-13	-38.70	-76.59	-61.1	1.18	10.58	H
									H
									H
									H
									H
	3702	-52.31	-13	-39.31	-70.26	-64.1	0.72	12.52	V
	5550	-49.63	-13	-36.63	-71.46	-61.8	1.00	13.17	V
	7400	-51.90	-13	-38.90	-76.67	-61.3	1.18	10.58	V
									V
									V
									V
									V
Middle	3762	-52.79	-13	-39.79	-69.62	-64.6	0.69	12.50	H
	5640	-45.07	-13	-32.07	-66.49	-57.2	0.98	13.12	H
	7520	-51.02	-13	-38.02	-75.88	-60.3	1.18	10.46	H
									H
									H
									H
									H
	3762	-52.39	-13	-39.39	3762	-64.2	0.69	12.50	V
	5640	-50.37	-13	-37.37	5640	-62.5	0.98	13.12	V
	7520	-52.02	-13	-39.02	7520	-61.3	1.18	10.46	V
									V
									V
									V
									V



Highest	3822	-53.82	-13	-40.82	-71.04	-65.6	0.69	12.47	H
	5730	-47.63	-13	-34.63	-68.91	-59.7	0.99	13.06	H
	7644	-50.88	-13	-37.88	-76.08	-60.5	1.18	10.80	H
									H
									H
									H
									H
	3822	-53.02	-13	-40.02	-71.44	-64.8	0.69	12.47	V
	5730	-48.73	-13	-35.73	-70.65	-60.8	0.99	13.06	V
	7644	-51.78	-13	-38.78	-76.27	-61.4	1.18	10.80	V
									V
									V
									V
									V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

**WCDMA 1900**

WCDMA 1900									
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	3708	-56.00	-13	-43.00	-73.03	-67.8	0.72	12.52	H
	5556	-52.68	-13	-39.68	-74.45	-64.85	1.00	13.17	H
	7410	-51.32	-13	-38.32	-76.36	-60.7	1.18	10.56	H
									H
									H
									H
									H
	3708	-54.46	-13	-41.46	-72.66	-66.26	0.72	12.52	V
	5556	-54.16	-13	-41.16	-76.05	-66.33	1.00	13.17	V
	7410	-51.63	-13	-38.63	-76.52	-61.01	1.18	10.56	V
									V
									V
									V
									V
Middle	3762	-55.36	-13	-42.36	-72.49	-67.17	0.69	12.50	H
	5640	-52.36	-13	-39.36	-74.07	-64.49	0.98	13.12	H
	7518	-51.79	-13	-38.79	-76.71	-61.06	1.18	10.45	H
									H
									H
									H
									H
	3762	-54.54	-13	-41.54	-72.88	-66.35	0.69	12.50	V
	5640	-53.81	-13	-40.81	-75.69	-65.94	0.98	13.12	V
	7518	-51.48	-13	-38.48	-76.45	-60.75	1.18	10.45	V
									V
									V
									V
									V



Highest	3816	-55.07	-13	-42.07	-72.32	-66.86	0.69	12.47	H
	5724	-53.12	-13	-40.12	-74.83	-65.19	0.99	13.07	H
	7632	-50.55	-13	-37.55	-75.72	-60.14	1.18	10.77	H
									H
									H
									H
									H
	3816	-53.77	-13	-40.77	-72.24	-65.56	0.69	12.47	V
	5724	-53.80	-13	-40.80	-75.72	-65.87	0.99	13.07	V
	7632	-51.21	-13	-38.21	-76.13	-60.8	1.18	10.77	V
									V
									V
									V
									V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



<For Sample 1>

<Adapter 2>

GSM850

GSM 850									
Channel	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Middle	1672	-50.29	-13	-37.29	-60.33	-57.29	0.53	9.68	H
	2512	-40.70	-13	-27.70	-54.15	-48.7	0.66	10.81	H
	3344	-57.89	-13	-44.89	-74.09	-67.11	0.76	12.13	H
									H
									H
									H
									H
	1672	-49.23	-13	-36.23	-58.87	-56.23	0.53	9.68	V
	2512	-32.73	-13	-19.73	-46.59	-40.73	0.66	10.81	V
	3344	-58.59	-13	-45.59	-74.6	-67.81	0.76	12.13	V
									V
									V
									V
									V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



<For Sample 2>

<Adapter 1>

GSM850

GSM 850									
Channel	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Middle	1672	-51.70	-13	-38.70	-61.74	-58.7	0.53	9.68	H
	2512	-49.10	-13	-36.10	-62.55	-57.1	0.66	10.81	H
	3344	-58.12	-13	-45.12	-74.32	-67.34	0.76	12.13	H
									H
									H
									H
									H
	1672	-38.52	-13	-25.52	-48.16	-45.52	0.53	9.68	V
	2512	-42.66	-13	-29.66	-56.52	-50.66	0.66	10.81	V
	3344	-58.76	-13	-45.76	-74.77	-67.98	0.76	12.13	V
									V
									V
									V
									V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

—————THE END—————