


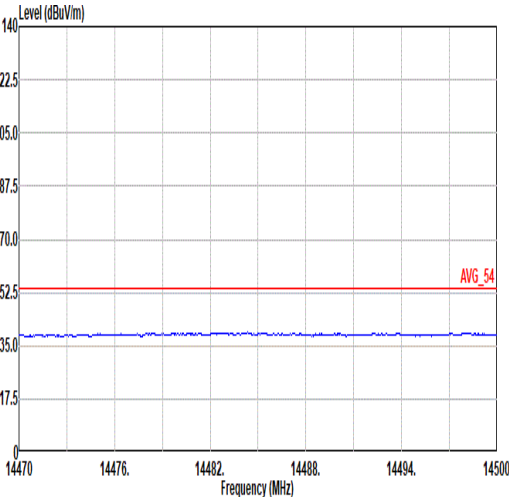





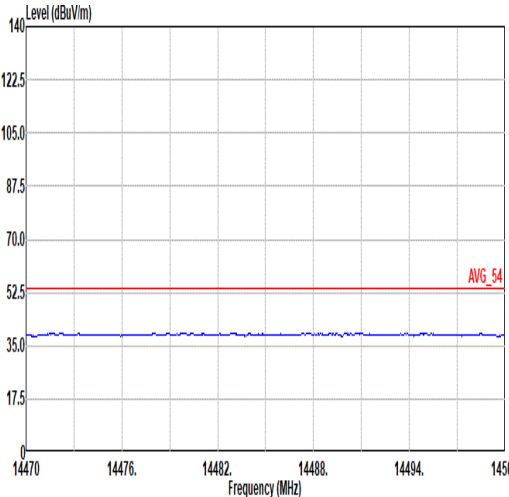


Mode	3																																																																																																																																
	Harmonic																																																																																																																																
	2400-2483.5_802.11b_CH11_2462MHz																																																																																																																																
ANT	1																																																																																																																																
Pol.	Horizontal					Vertical																																																																																																																											
Peak Avg																																																																																																																																	
	Site : 03CH11-HY Condition: PEAK_74 3m 91280_01620_240828 HORIZONTAL Mode : 3 Setting : 80 Plane : X with adapter <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr></thead><tbody><tr><td>1 4924.00</td><td>40.02</td><td>74.00</td><td>-33.98</td><td>62.98</td><td>32.90</td><td>10.24</td><td>66.66</td><td>0.56</td><td>-- -- Peak</td></tr><tr><td>2 7386.00</td><td>49.94</td><td>74.00</td><td>-24.06</td><td>66.27</td><td>36.48</td><td>12.76</td><td>65.86</td><td>0.29</td><td>239 222 Peak</td></tr><tr><td>3 7386.00</td><td>44.80</td><td>54.00</td><td>-9.20</td><td>61.13</td><td>36.48</td><td>12.76</td><td>65.86</td><td>0.29</td><td>239 222 Average</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1 4924.00	40.02	74.00	-33.98	62.98	32.90	10.24	66.66	0.56	-- -- Peak	2 7386.00	49.94	74.00	-24.06	66.27	36.48	12.76	65.86	0.29	239 222 Peak	3 7386.00	44.80	54.00	-9.20	61.13	36.48	12.76	65.86	0.29	239 222 Average	Site : 03CH11-HY Condition: PEAK_74 3m 91280_01620_240828 VERTICAL Mode : 3 Setting : 80 Plane : X with adapter <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr></thead><tbody><tr><td>1 4924.00</td><td>41.32</td><td>74.00</td><td>-32.68</td><td>64.28</td><td>32.90</td><td>10.24</td><td>66.66</td><td>0.56</td><td>-- -- Peak</td></tr><tr><td>2 7386.00</td><td>49.77</td><td>74.00</td><td>-24.23</td><td>66.10</td><td>36.48</td><td>12.76</td><td>65.86</td><td>0.29</td><td>100 238 Peak</td></tr><tr><td>3 7386.00</td><td>45.16</td><td>54.00</td><td>-8.84</td><td>61.49</td><td>36.48</td><td>12.76</td><td>65.86</td><td>0.29</td><td>100 238 Average</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1 4924.00	41.32	74.00	-32.68	64.28	32.90	10.24	66.66	0.56	-- -- Peak	2 7386.00	49.77	74.00	-24.23	66.10	36.48	12.76	65.86	0.29	100 238 Peak	3 7386.00	45.16	54.00	-8.84	61.49	36.48	12.76	65.86	0.29
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																																																																								
1 4924.00	40.02	74.00	-33.98	62.98	32.90	10.24	66.66	0.56	-- -- Peak																																																																																																																								
2 7386.00	49.94	74.00	-24.06	66.27	36.48	12.76	65.86	0.29	239 222 Peak																																																																																																																								
3 7386.00	44.80	54.00	-9.20	61.13	36.48	12.76	65.86	0.29	239 222 Average																																																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																																																																								
1 4924.00	41.32	74.00	-32.68	64.28	32.90	10.24	66.66	0.56	-- -- Peak																																																																																																																								
2 7386.00	49.77	74.00	-24.23	66.10	36.48	12.76	65.86	0.29	100 238 Peak																																																																																																																								
3 7386.00	45.16	54.00	-8.84	61.49	36.48	12.76	65.86	0.29	100 238 Average																																																																																																																								




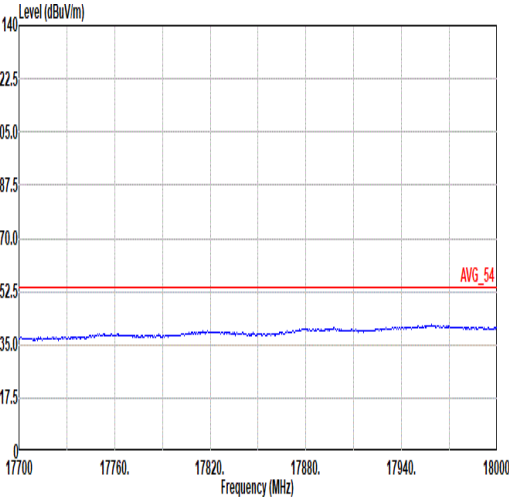


Mode	3	
	Harmonic	
	2400-2483.5_802.11b_CH11_2462MHz	
ANT	1	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	 Site : 03CH11-HY Condition: AVG_54 3m 91280_01620_240828 HORIZONTAL Mode : 3 Setting : 80 Plane : X with adapter	 Site : 03CH11-HY Condition: AVG_54 3m 91280_01620_240828 VERTICAL Mode : 3 Setting : 80 Plane : X with adapter
	 Site : 03CH11-HY Condition: AVG_54 3m 91280_01620_240828 HORIZONTAL Mode : 3 Setting : 80 Plane : X with adapter	 Site : 03CH11-HY Condition: AVG_54 3m 91280_01620_240828 VERTICAL Mode : 3 Setting : 80 Plane : X with adapter


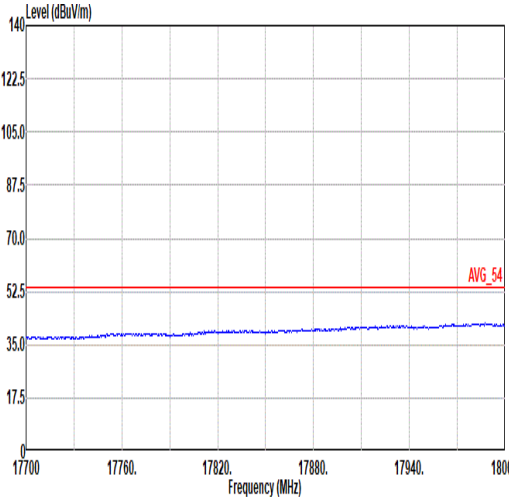


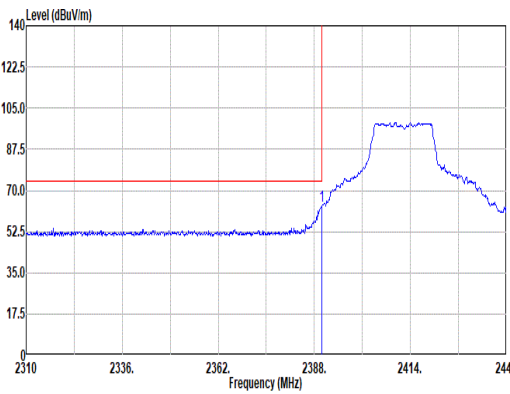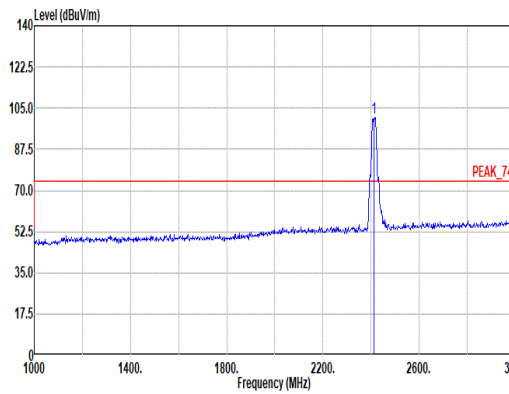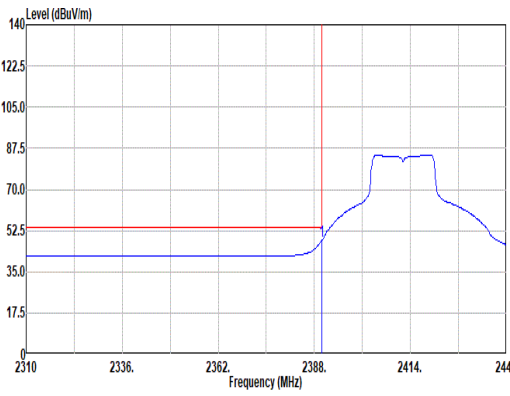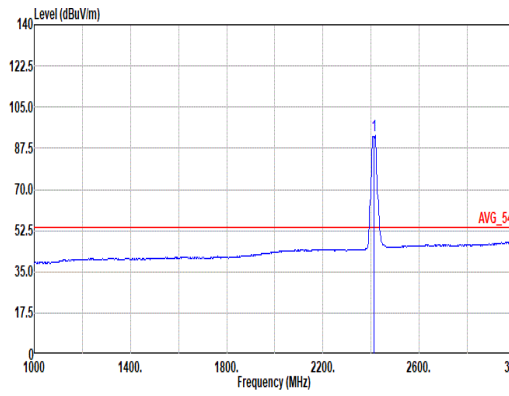Mode	4																																																																																																										
	Band Edge																																																																																																										
	2400-2483.5_802.11g_CH01_2412MHz																																																																																																										
ANT	1																																																																																																										
Pol.	Horizontal						Fundamental																																																																																																				
Peak																																																																																																											
	Site : 03CH11-HY Condition: PEAK_BE_74 3m 91200_01620_240828 HORIZONTAL : RBW:1000.000kHz VBN:3000.000kHz SMT:Auto Detector : PEAK Mode : 4 Setting : 72 Plane : X with adapter <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="3">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>2389.95</td><td>63.14</td><td>74.00</td><td>-10.86</td><td>51.96</td><td>27.30</td><td>7.19</td><td>33.34</td><td>10.03</td><td>300</td><td>222 PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	2389.95	63.14	74.00	-10.86	51.96	27.30	7.19	33.34	10.03	300	222 PEAK	Site : 03CH11-HY Condition: PEAK_74 3m 91200_01620_240828 HORIZONTAL : RBW:1000.000kHz VBN:3000.000kHz SMT:Auto Detector : PEAK Mode : 4 Setting : 72 Plane : X with adapter <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="3">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>2412.00</td><td>100.69</td><td>-----</td><td>-----</td><td>89.30</td><td>27.46</td><td>7.22</td><td>33.32</td><td>10.03</td><td>300</td><td>222 PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	2412.00	100.69	-----	-----	89.30	27.46	7.22	33.32	10.03	300
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																	
1	2389.95	63.14	74.00	-10.86	51.96	27.30	7.19	33.34	10.03	300	222 PEAK																																																																																																
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																	
1	2412.00	100.69	-----	-----	89.30	27.46	7.22	33.32	10.03	300	222 PEAK																																																																																																
Avg																																																																																																											
	Site : 03CH11-HY Condition: AVG_BE_54 3m 91200_01620_240828 HORIZONTAL : RBW:1000.000kHz VBN:0.750kHz SMT:Auto Detector : PEAK Mode : 4 Setting : 72 Plane : X with adapter <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="3">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>2389.95</td><td>48.23</td><td>54.00</td><td>-5.77</td><td>37.05</td><td>27.30</td><td>7.19</td><td>33.34</td><td>10.03</td><td>300</td><td>222 AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	2389.95	48.23	54.00	-5.77	37.05	27.30	7.19	33.34	10.03	300	222 AVERAGE	Site : 03CH11-HY Condition: AVG_54 3m 91200_01620_240828 HORIZONTAL : RBW:1000.000kHz VBN:0.750kHz SMT:Auto Detector : PEAK Mode : 4 Setting : 72 Plane : X with adapter <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="3">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>2412.00</td><td>92.77</td><td>-----</td><td>-----</td><td>81.35</td><td>27.48</td><td>7.23</td><td>33.32</td><td>10.03</td><td>300</td><td>222 AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	2412.00	92.77	-----	-----	81.35	27.48	7.23	33.32	10.03	300
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																	
1	2389.95	48.23	54.00	-5.77	37.05	27.30	7.19	33.34	10.03	300	222 AVERAGE																																																																																																
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																	
1	2412.00	92.77	-----	-----	81.35	27.48	7.23	33.32	10.03	300	222 AVERAGE																																																																																																

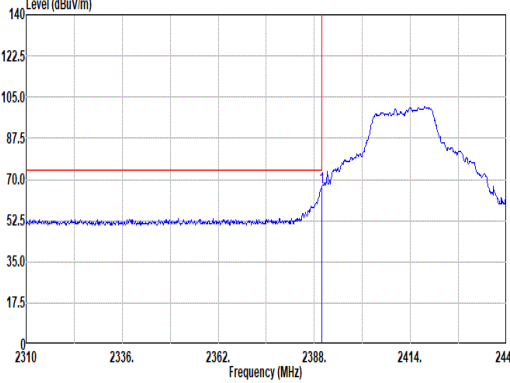
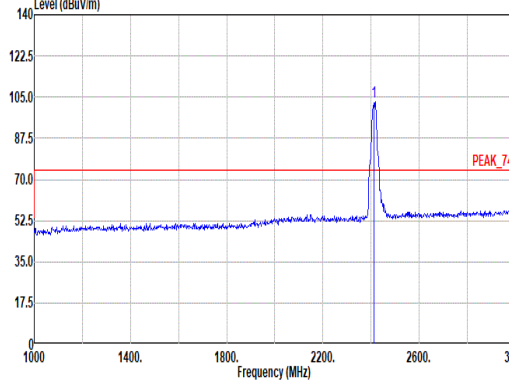
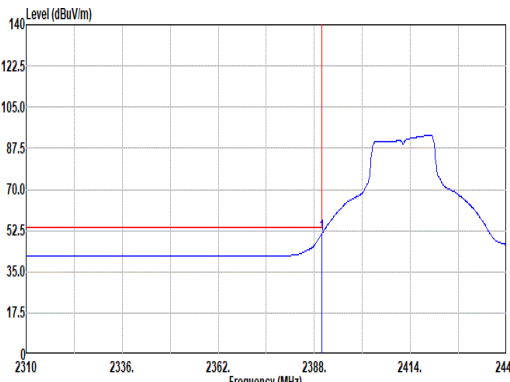
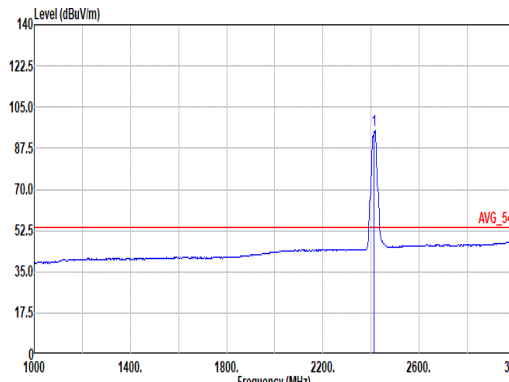


Mode	4																																																																																																		
	Band Edge																																																																																																		
	2400-2483.5_802.11g_CH01_2412MHz																																																																																																		
ANT	1																																																																																																		
Pol.	Vertical						Fundamental																																																																																												
Peak																																																																																																			
	Site : 03CH11-HY Condition: PEAK_BE_74 3m 91200_01620_240828 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto Detector : PEAK Mode : 4 Setting : 72 Plane : X with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th>PEAK</th></tr><tr><td>1</td><td>2389.95</td><td>66.67</td><td>74.00</td><td>-7.33</td><td>55.49</td><td>27.30</td><td>7.19</td><td>33.34</td><td>10.03</td><td>400</td><td>316 PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	PEAK	1	2389.95	66.67	74.00	-7.33	55.49	27.30	7.19	33.34	10.03	400	316 PEAK	Site : 03CH11-HY Condition: PEAK_74 3m 91200_01620_240828 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto Detector : PEAK Mode : 4 Setting : 72 Plane : X with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th>PEAK</th></tr><tr><td>1</td><td>2412.00</td><td>102.90</td><td>-----</td><td>-----</td><td>91.46</td><td>27.50</td><td>7.23</td><td>33.32</td><td>10.03</td><td>400</td><td>316 PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	PEAK	1	2412.00	102.90	-----	-----	91.46	27.50	7.23	33.32	10.03	400
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	PEAK																																																																																								
1	2389.95	66.67	74.00	-7.33	55.49	27.30	7.19	33.34	10.03	400	316 PEAK																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	PEAK																																																																																								
1	2412.00	102.90	-----	-----	91.46	27.50	7.23	33.32	10.03	400	316 PEAK																																																																																								
Avg																																																																																																			
	Site : 03CH11-HY Condition: AVG_BE_54 3m 91200_01620_240828 VERTICAL : RBW:1000.000kHz VBW:0.750kHz SMT:Auto Detector : PEAK Mode : 4 Setting : 72 Plane : X with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th>AVERAGE</th></tr><tr><td>1</td><td>2389.95</td><td>50.96</td><td>54.00</td><td>-3.04</td><td>39.78</td><td>27.30</td><td>7.19</td><td>33.34</td><td>10.03</td><td>400</td><td>316 AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	AVERAGE	1	2389.95	50.96	54.00	-3.04	39.78	27.30	7.19	33.34	10.03	400	316 AVERAGE	Site : 03CH11-HY Condition: AVG_54 3m 91200_01620_240828 VERTICAL : RBW:1000.000kHz VBW:0.750kHz SMT:Auto Detector : PEAK Mode : 4 Setting : 72 Plane : X with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th>AVERAGE</th></tr><tr><td>1</td><td>2412.00</td><td>95.06</td><td>-----</td><td>-----</td><td>83.64</td><td>27.48</td><td>7.23</td><td>33.32</td><td>10.03</td><td>400</td><td>316 AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	AVERAGE	1	2412.00	95.06	-----	-----	83.64	27.48	7.23	33.32	10.03	400
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	AVERAGE																																																																																								
1	2389.95	50.96	54.00	-3.04	39.78	27.30	7.19	33.34	10.03	400	316 AVERAGE																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	AVERAGE																																																																																								
1	2412.00	95.06	-----	-----	83.64	27.48	7.23	33.32	10.03	400	316 AVERAGE																																																																																								

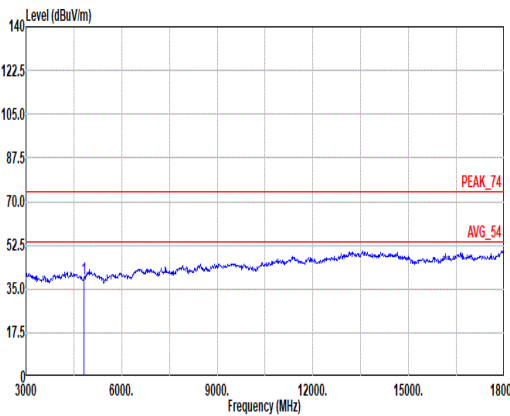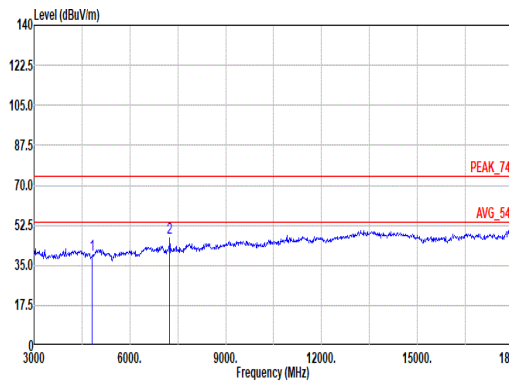

Mode	4																																																																	
	Harmonic																																																																	
	2400-2483.5_802.11g_CH01_2412MHz																																																																	
ANT	1																																																																	
Pol.	Horizontal						Vertical																																																											
Peak Avg																																																																		
	Site : 03CH11-HY Condition: PEAK_74 3m 91200_01620_240828 HORIZONTAL Mode : 4 Setting : 72 Plane : X with adapter						Site : 03CH11-HY Condition: PEAK_74 3m 91200_01620_240828 VERTICAL Mode : 4 Setting : 72 Plane : X with adapter : The unwanted signal "7236 MHz" can be ignored since it falls within : the non-restricted band and meet the requirements of 15.247 (d).																																																											
<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4824.00</td><td>39.05</td><td>74.00</td><td>-34.95</td><td>62.91</td><td>32.44</td><td>9.93</td><td>66.74</td><td>0.51</td><td>--</td><td>Peak</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4824.00	39.05	74.00	-34.95	62.91	32.44	9.93	66.74	0.51	--	Peak												
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																								
1	4824.00	39.05	74.00	-34.95	62.91	32.44	9.93	66.74	0.51	--	Peak																																																							
<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4824.00</td><td>39.82</td><td>74.00</td><td>-34.18</td><td>63.68</td><td>32.44</td><td>9.93</td><td>66.74</td><td>0.51</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>7236.00</td><td>46.95</td><td>-----</td><td>-----</td><td>62.74</td><td>36.80</td><td>12.75</td><td>65.68</td><td>0.34</td><td>--</td><td>Peak</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4824.00	39.82	74.00	-34.18	63.68	32.44	9.93	66.74	0.51	--	Peak	2	7236.00	46.95	-----	-----	62.74	36.80	12.75	65.68	0.34	--	Peak
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																								
1	4824.00	39.82	74.00	-34.18	63.68	32.44	9.93	66.74	0.51	--	Peak																																																							
2	7236.00	46.95	-----	-----	62.74	36.80	12.75	65.68	0.34	--	Peak																																																							

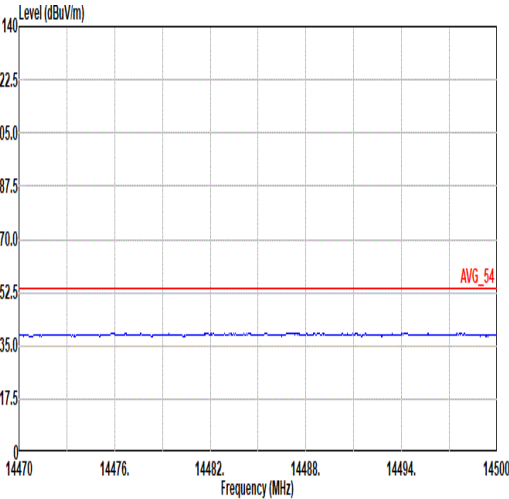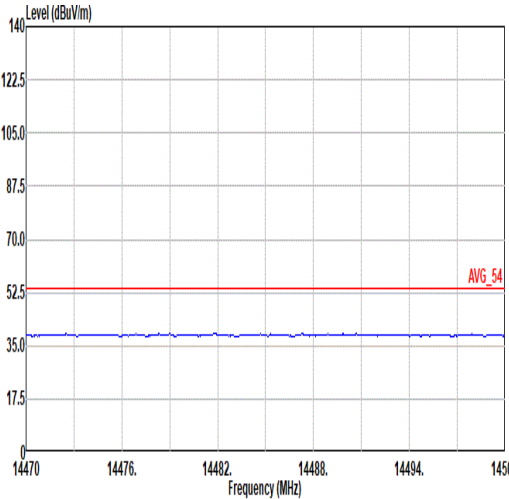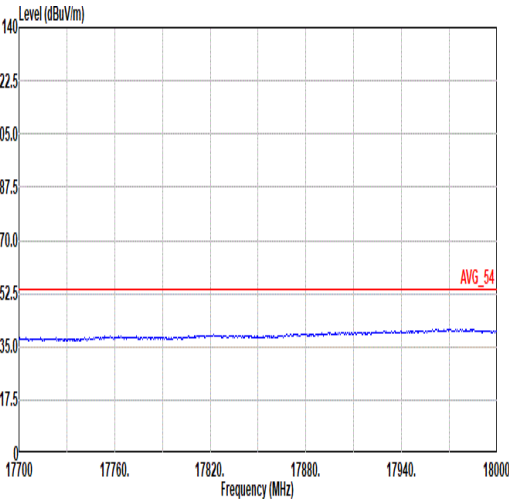
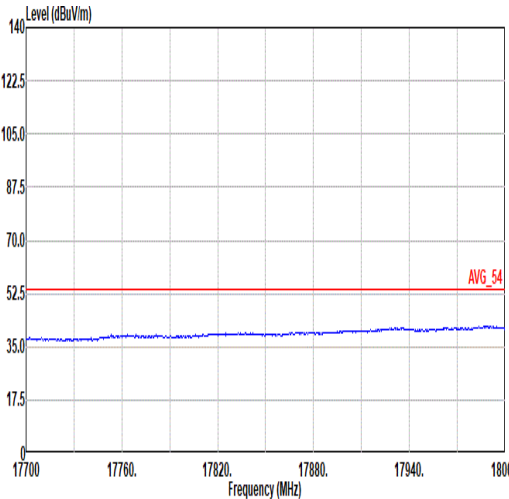


Mode	4	
	Harmonic	
	2400-2483.5_802.11g_CH01_2412MHz	
ANT	1	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	 Site : 03CH11-HY Condition: AVG_54 3m 91280_01620_240828 HORIZONTAL Mode : 4 Setting : 72 Plane : X with adapter	 Site : 03CH11-HY Condition: AVG_54 3m 91280_01620_240828 VERTICAL Mode : 4 Setting : 72 Plane : X with adapter
17.7G ~18G Avg	 Site : 03CH11-HY Condition: AVG_54 3m 91280_01620_240828 HORIZONTAL Mode : 4 Setting : 72 Plane : X with adapter	 Site : 03CH11-HY Condition: AVG_54 3m 91280_01620_240828 VERTICAL Mode : 4 Setting : 72 Plane : X with adapter







Mode	5																																																																																																	
	Band Edge - L																																																																																																	
	2400-2483.5_802.11g_CH06_2437MHz																																																																																																	
ANT	1																																																																																																	
Pol.	Horizontal						Fundamental																																																																																											
Peak																																																																																																		
	Site : 03CH11-HY Condition: PEAK_BE_74 3m 91200_01620_240828 HORIZONTAL : RBW:1000.000kHz VBN:3000.000kHz SMT:Auto Detector : PEAK Mode : 5 Setting : 84 Plane : X with adapter <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2389.38</td><td>54.51</td><td>74.00</td><td>-19.49</td><td>43.34</td><td>27.29</td><td>7.19</td><td>33.34</td><td>10.03</td><td>118 13 PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor						MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.38	54.51	74.00	-19.49	43.34	27.29	7.19	33.34	10.03	118 13 PEAK	Site : 03CH11-HY Condition: PEAK_74 3m 91200_01620_240828 HORIZONTAL : RBW:1000.000kHz VBN:3000.000kHz SMT:Auto Detector : PEAK Mode : 5 Setting : 84 Plane : X with adapter <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2437.00</td><td>103.57</td><td>-----</td><td>-----</td><td>92.01</td><td>27.60</td><td>7.24</td><td>33.31</td><td>10.03</td><td>118 13 PEAK</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor						MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2437.00	103.57	-----	-----	92.01	27.60	7.24	33.31	10.03
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																									
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	2389.38	54.51	74.00	-19.49	43.34	27.29	7.19	33.34	10.03	118 13 PEAK																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																									
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	2437.00	103.57	-----	-----	92.01	27.60	7.24	33.31	10.03	118 13 PEAK																																																																																								
Avg																																																																																																		
	Site : 03CH11-HY Condition: AVG_BE_54 3m 91200_01620_240828 HORIZONTAL : RBW:1000.000kHz VBN:0.750kHz SMT:Auto Detector : PEAK Mode : 5 Setting : 84 Plane : X with adapter <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2389.08</td><td>43.06</td><td>54.00</td><td>-10.94</td><td>31.88</td><td>27.30</td><td>7.19</td><td>33.34</td><td>10.03</td><td>118 13 AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor						MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.08	43.06	54.00	-10.94	31.88	27.30	7.19	33.34	10.03	118 13 AVERAGE	Site : 03CH11-HY Condition: AVG_54 3m 91200_01620_240828 HORIZONTAL : RBW:1000.000kHz VBN:0.750kHz SMT:Auto Detector : PEAK Mode : 5 Setting : 84 Plane : X with adapter <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2437.00</td><td>96.04</td><td>-----</td><td>-----</td><td>84.48</td><td>27.60</td><td>7.24</td><td>33.31</td><td>10.03</td><td>118 13 AVERAGE</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor						MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2437.00	96.04	-----	-----	84.48	27.60	7.24	33.31	10.03
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																									
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	2389.08	43.06	54.00	-10.94	31.88	27.30	7.19	33.34	10.03	118 13 AVERAGE																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																									
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	2437.00	96.04	-----	-----	84.48	27.60	7.24	33.31	10.03	118 13 AVERAGE																																																																																								

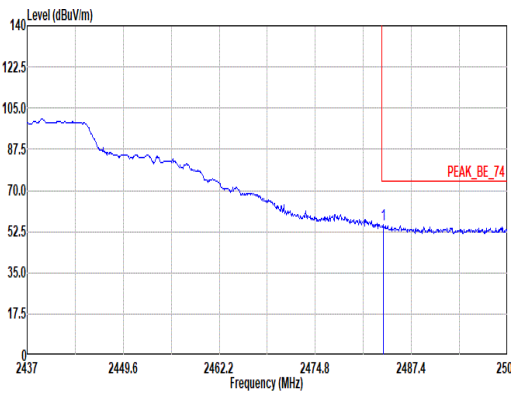
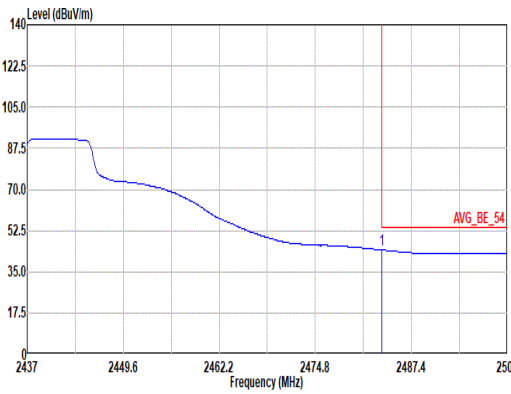


Mode	5																																																	
	Band Edge - R																																																	
	2400-2483.5_802.11g_CH06_2437MHz																																																	
ANT	1																																																	
Pol.	Horizontal						Fundamental																																											
Peak	 Site : 03CH11-HY Condition: PEAK_BE_74 3m 91200_01620_240828 HORIZONTAL : RBW:1000.000kHz VBN:3000.000kHz SMT:Auto Detector : PEAK Mode : 5 Setting : 84 Plane : X with adapter <table><thead><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 2483.68</td><td>55.21</td><td>74.00</td><td>-18.79</td><td>43.30</td><td>27.84</td><td>7.32</td><td>33.28</td><td>10.03</td><td>118</td><td>13</td><td>PEAK</td></tr></tbody></table>						Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg	1 2483.68	55.21	74.00	-18.79	43.30	27.84	7.32	33.28	10.03	118	13	PEAK	Blank					
Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																						
MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg																																						
1 2483.68	55.21	74.00	-18.79	43.30	27.84	7.32	33.28	10.03	118	13	PEAK																																							
Avg	 Site : 03CH11-HY Condition: AVG_BE_54 3m 91200_01620_240828 HORIZONTAL : RBW:1000.000kHz VBN:0.750kHz SMT:Auto Detector : PEAK Mode : 5 Setting : 84 Plane : X with adapter <table><thead><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 2483.56</td><td>44.31</td><td>54.00</td><td>-9.69</td><td>32.40</td><td>27.84</td><td>7.32</td><td>33.28</td><td>10.03</td><td>118</td><td>13</td><td>AVERAGE</td></tr></tbody></table>						Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg	1 2483.56	44.31	54.00	-9.69	32.40	27.84	7.32	33.28	10.03	118	13	AVERAGE	Blank					
Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																						
MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg																																						
1 2483.56	44.31	54.00	-9.69	32.40	27.84	7.32	33.28	10.03	118	13	AVERAGE																																							

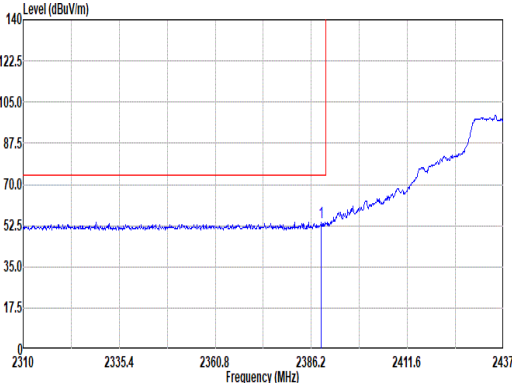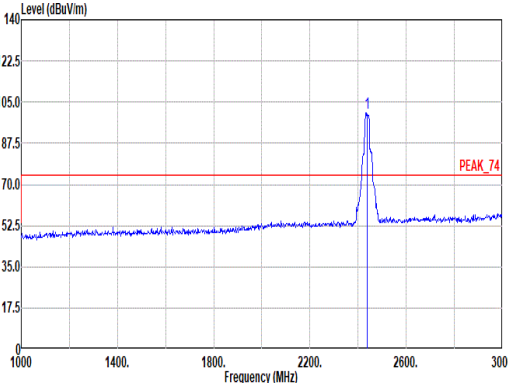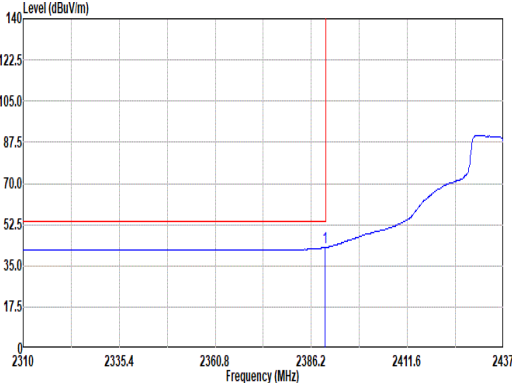
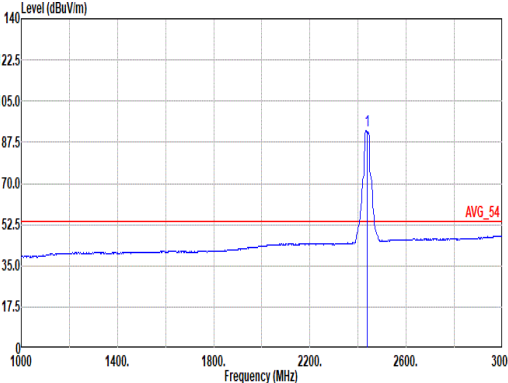


Mode	5																																																																																																			
	Band Edge - L																																																																																																			
	2400-2483.5_802.11g_CH06_2437MHz																																																																																																			
ANT	1																																																																																																			
Pol.	Vertical						Fundamental																																																																																													
Peak	 Site : 03CH11-HY Condition: PEAK_BE_74 3m 91200_01620_240828 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto Detector : PEAK Mode : 5 Setting : 84 Plane : X with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2386.87</td><td>54.08</td><td>74.00</td><td>-19.92</td><td>42.92</td><td>27.29</td><td>7.18</td><td>33.34</td><td>10.03</td><td>379</td><td>345</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2386.87	54.08	74.00	-19.92	42.92	27.29	7.18	33.34	10.03	379	345	PEAK	 Site : 03CH11-HY Condition: PEAK_74 3m 91200_01620_240828 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto Detector : PEAK Mode : 5 Setting : 84 Plane : X with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2437.00</td><td>100.34</td><td>-----</td><td>-----</td><td>88.78</td><td>27.60</td><td>7.24</td><td>33.31</td><td>10.03</td><td>379</td><td>345</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2437.00	100.34	-----	-----	88.78	27.60	7.24	33.31	10.03	379	345	PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2386.87	54.08	74.00	-19.92	42.92	27.29	7.18	33.34	10.03	379	345	PEAK																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																											
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2437.00	100.34	-----	-----	88.78	27.60	7.24	33.31	10.03	379	345	PEAK																																																																																								
Avg	 Site : 03CH11-HY Condition: AVG_BE_54 3m 91200_01620_240828 VERTICAL : RBW:1000.000kHz VBW:0.750kHz SMT:Auto Detector : PEAK Mode : 5 Setting : 84 Plane : X with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2389.08</td><td>42.75</td><td>54.00</td><td>-11.25</td><td>31.57</td><td>27.30</td><td>7.19</td><td>33.34</td><td>10.03</td><td>379</td><td>345</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.08	42.75	54.00	-11.25	31.57	27.30	7.19	33.34	10.03	379	345	AVERAGE	 Site : 03CH11-HY Condition: AVG_54 3m 91200_01620_240828 VERTICAL : RBW:1000.000kHz VBW:0.750kHz SMT:Auto Detector : PEAK Mode : 5 Setting : 84 Plane : X with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2437.00</td><td>92.39</td><td>-----</td><td>-----</td><td>80.83</td><td>27.60</td><td>7.24</td><td>33.31</td><td>10.03</td><td>379</td><td>345</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2437.00	92.39	-----	-----	80.83	27.60	7.24	33.31	10.03	379	345	AVERAGE
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																											
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2389.08	42.75	54.00	-11.25	31.57	27.30	7.19	33.34	10.03	379	345	AVERAGE																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																											
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2437.00	92.39	-----	-----	80.83	27.60	7.24	33.31	10.03	379	345	AVERAGE																																																																																								



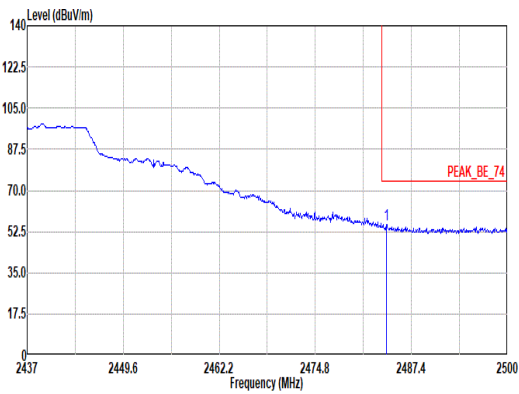
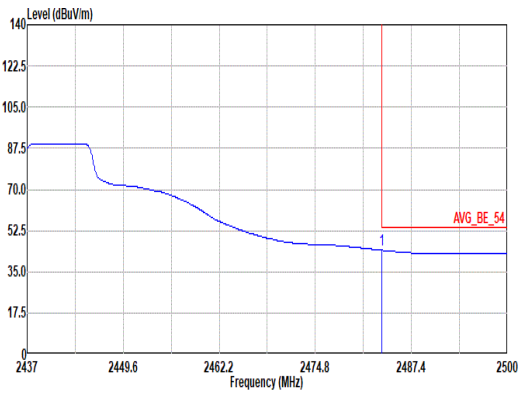


Mode	5																																																	
	Band Edge - R																																																	
	2400-2483.5_802.11g_CH06_2437MHz																																																	
ANT	1																																																	
Pol.	Vertical						Fundamental																																											
Peak	 Site : 03CH11-HY Condition: PEAK_BE_74 3m 91200_01620_240828 VERTICAL : RBW:1000.000kHz VBN:3000.000kHz SMT:Auto Detector : PEAK Mode : 5 Setting : 84 Plane : X with adapter <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 2484.12</td><td>55.57</td><td>74.00</td><td>-18.43</td><td>43.66</td><td>27.84</td><td>7.32</td><td>33.28</td><td>10.03</td><td>379</td><td>345</td><td>PEAK</td></tr></table>						Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1 2484.12	55.57	74.00	-18.43	43.66	27.84	7.32	33.28	10.03	379	345	PEAK	Blank					
Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																						
MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																							
1 2484.12	55.57	74.00	-18.43	43.66	27.84	7.32	33.28	10.03	379	345	PEAK																																							
Avg	 Site : 03CH11-HY Condition: AVG_BE_54 3m 91200_01620_240828 VERTICAL : RBW:1000.000kHz VBN:0.750kHz SMT:Auto Detector : PEAK Mode : 5 Setting : 84 Plane : X with adapter <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 2483.56</td><td>44.15</td><td>54.00</td><td>-9.85</td><td>32.24</td><td>27.84</td><td>7.32</td><td>33.28</td><td>10.03</td><td>379</td><td>345</td><td>AVERAGE</td></tr></table>						Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1 2483.56	44.15	54.00	-9.85	32.24	27.84	7.32	33.28	10.03	379	345	AVERAGE	Blank					
Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																						
MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																							
1 2483.56	44.15	54.00	-9.85	32.24	27.84	7.32	33.28	10.03	379	345	AVERAGE																																							



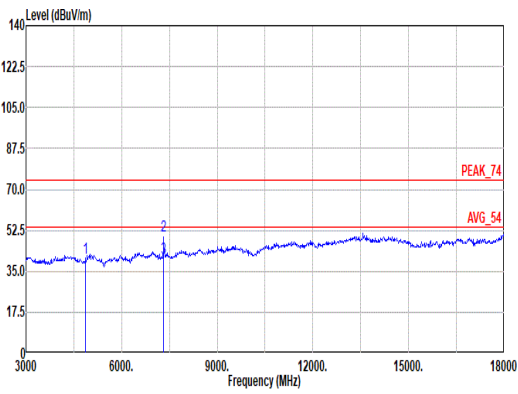
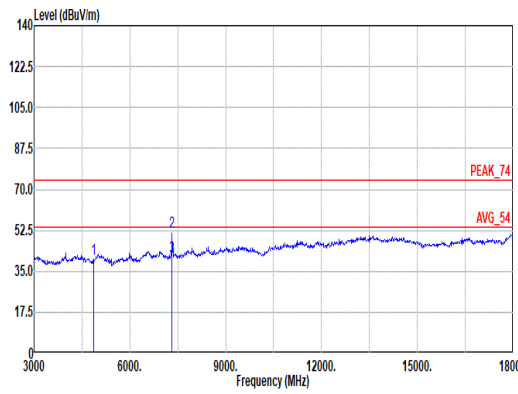


Mode	5																																																																																																																																																	
	Harmonic																																																																																																																																																	
	2400-2483.5_802.11g_CH06_2437MHz																																																																																																																																																	
ANT	1																																																																																																																																																	
Pol.	Horizontal						Vertical																																																																																																																																											
Peak Avg																																																																																																																																																		
	Site : 03CH11-HY Condition: PEAK_74 3m 91280_01620_240828 HORIZONTAL Mode : 5 Setting : 84 Plane : X with adapter						Site : 03CH11-HY Condition: PEAK_74 3m 91280_01620_240828 VERTICAL Mode : 5 Setting : 84 Plane : X with adapter																																																																																																																																											
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4874.00</td><td>40.61</td><td>74.00</td><td>-33.39</td><td>63.99</td><td>32.70</td><td>10.09</td><td>66.70</td><td>0.53</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>7311.00</td><td>50.04</td><td>74.00</td><td>-23.96</td><td>65.95</td><td>36.78</td><td>12.76</td><td>65.77</td><td>0.32</td><td>264</td><td>217 Peak</td></tr><tr><td>3</td><td>7311.00</td><td>40.60</td><td>54.00</td><td>-13.40</td><td>56.51</td><td>36.78</td><td>12.76</td><td>65.77</td><td>0.32</td><td>264</td><td>217 Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	4874.00	40.61	74.00	-33.39	63.99	32.70	10.09	66.70	0.53	--	Peak	2	7311.00	50.04	74.00	-23.96	65.95	36.78	12.76	65.77	0.32	264	217 Peak	3	7311.00	40.60	54.00	-13.40	56.51	36.78	12.76	65.77	0.32	264	217 Average	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4874.00</td><td>39.97</td><td>74.00</td><td>-34.03</td><td>63.35</td><td>32.70</td><td>10.09</td><td>66.70</td><td>0.53</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>7311.00</td><td>51.79</td><td>74.00</td><td>-22.21</td><td>67.70</td><td>36.78</td><td>12.76</td><td>65.77</td><td>0.32</td><td>100</td><td>236 Peak</td></tr><tr><td>3</td><td>7311.00</td><td>41.08</td><td>54.00</td><td>-12.92</td><td>56.99</td><td>36.78</td><td>12.76</td><td>65.77</td><td>0.32</td><td>100</td><td>236 Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	4874.00	39.97	74.00	-34.03	63.35	32.70	10.09	66.70	0.53	--	Peak	2	7311.00	51.79	74.00	-22.21	67.70	36.78	12.76	65.77	0.32	100	236 Peak	3	7311.00	41.08	54.00	-12.92	56.99	36.78	12.76	65.77	0.32	100	236 Average
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																								
1	4874.00	40.61	74.00	-33.39	63.99	32.70	10.09	66.70	0.53	--	Peak																																																																																																																																							
2	7311.00	50.04	74.00	-23.96	65.95	36.78	12.76	65.77	0.32	264	217 Peak																																																																																																																																							
3	7311.00	40.60	54.00	-13.40	56.51	36.78	12.76	65.77	0.32	264	217 Average																																																																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																								
1	4874.00	39.97	74.00	-34.03	63.35	32.70	10.09	66.70	0.53	--	Peak																																																																																																																																							
2	7311.00	51.79	74.00	-22.21	67.70	36.78	12.76	65.77	0.32	100	236 Peak																																																																																																																																							
3	7311.00	41.08	54.00	-12.92	56.99	36.78	12.76	65.77	0.32	100	236 Average																																																																																																																																							

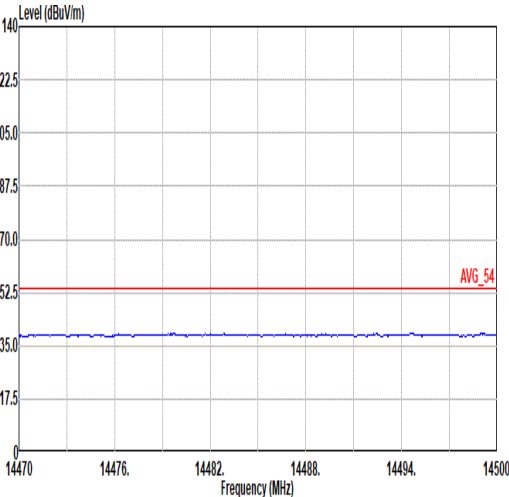
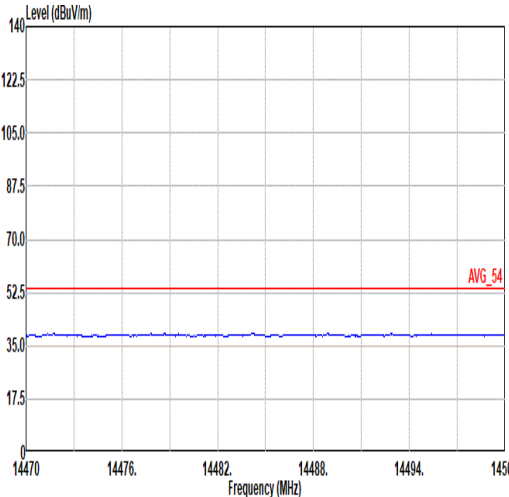
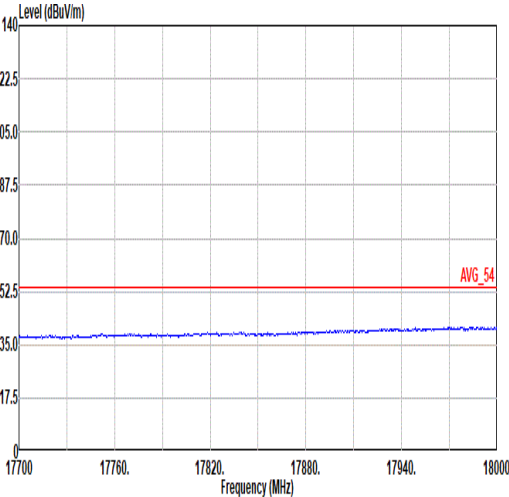
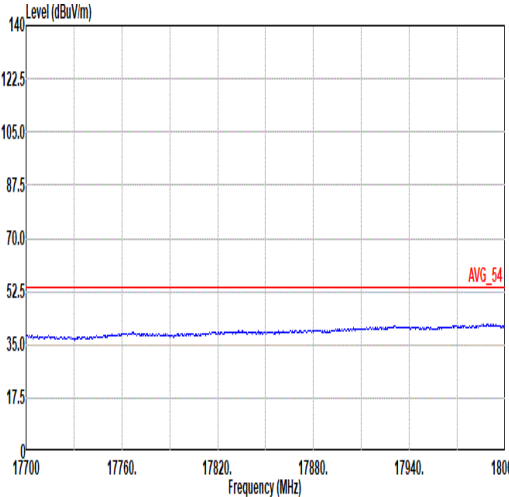


Mode	5	
	Harmonic	
	2400-2483.5_802.11g_CH06_2437MHz	
ANT	1	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	 Site : 03CH11-HY Condition: AVG_54 3m 91280_01620_240828 HORIZONTAL Mode : 5 Setting : 84 Plane : X with adapter	 Site : 03CH11-HY Condition: AVG_54 3m 91280_01620_240828 VERTICAL Mode : 5 Setting : 84 Plane : X with adapter
17.7G ~18G Avg	 Site : 03CH11-HY Condition: AVG_54 3m 91280_01620_240828 HORIZONTAL Mode : 5 Setting : 84 Plane : X with adapter	 Site : 03CH11-HY Condition: AVG_54 3m 91280_01620_240828 VERTICAL Mode : 5 Setting : 84 Plane : X with adapter

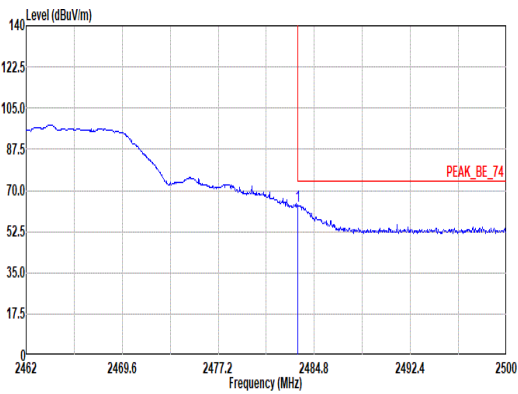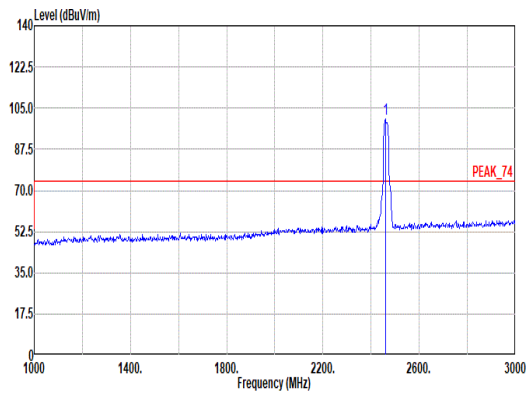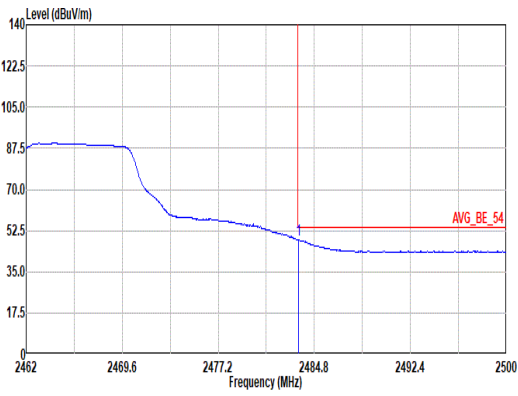
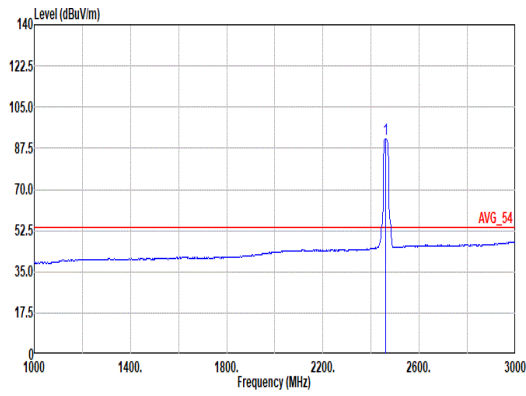


Mode	6																																																																																																		
	Band Edge																																																																																																		
	2400-2483.5_802.11g_CH11_2462MHz																																																																																																		
ANT	1																																																																																																		
Pol.	Horizontal						Fundamental																																																																																												
Peak																																																																																																			
	Site : 03CH11-HY Condition: PEAK_BE_74 3m 91200_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto Detector : PEAK Mode : 6 Setting : 70 Plane : X with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.51</td><td>63.57</td><td>74.00</td><td>-10.43</td><td>51.66</td><td>27.84</td><td>7.32</td><td>33.28</td><td>10.03</td><td>392</td><td>41</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.51	63.57	74.00	-10.43	51.66	27.84	7.32	33.28	10.03	392	41	PEAK	Site : 03CH11-HY Condition: PEAK_74 3m 91200_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto Detector : PEAK Mode : 6 Setting : 70 Plane : X with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2462.00</td><td>100.15</td><td>-----</td><td>-----</td><td>88.53</td><td>27.60</td><td>7.28</td><td>33.29</td><td>10.03</td><td>392</td><td>41</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	100.15	-----	-----	88.53	27.60	7.28	33.29	10.03	392	41
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2483.51	63.57	74.00	-10.43	51.66	27.84	7.32	33.28	10.03	392	41	PEAK																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2462.00	100.15	-----	-----	88.53	27.60	7.28	33.29	10.03	392	41	PEAK																																																																																							
Avg																																																																																																			
	Site : 03CH11-HY Condition: AVG_BE_54 3m 91200_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:0.750kHz SMT:Auto Detector : PEAK Mode : 6 Setting : 70 Plane : X with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.55</td><td>48.71</td><td>54.00</td><td>-5.29</td><td>36.00</td><td>27.84</td><td>7.32</td><td>33.28</td><td>10.03</td><td>392</td><td>41</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.55	48.71	54.00	-5.29	36.00	27.84	7.32	33.28	10.03	392	41	AVERAGE	Site : 03CH11-HY Condition: AVG_54 3m 91200_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:0.750kHz SMT:Auto Detector : PEAK Mode : 6 Setting : 70 Plane : X with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2462.00</td><td>91.33</td><td>-----</td><td>-----</td><td>79.72</td><td>27.60</td><td>7.28</td><td>33.30</td><td>10.03</td><td>392</td><td>41</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	91.33	-----	-----	79.72	27.60	7.28	33.30	10.03	392	41
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2483.55	48.71	54.00	-5.29	36.00	27.84	7.32	33.28	10.03	392	41	AVERAGE																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2462.00	91.33	-----	-----	79.72	27.60	7.28	33.30	10.03	392	41	AVERAGE																																																																																							

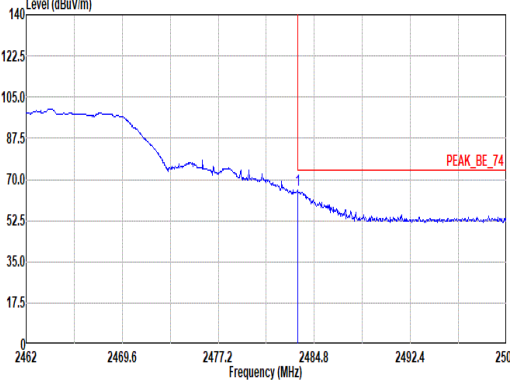
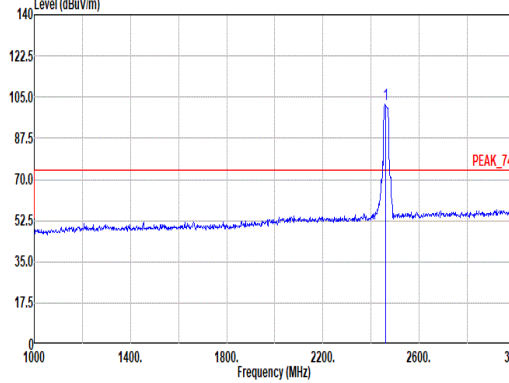
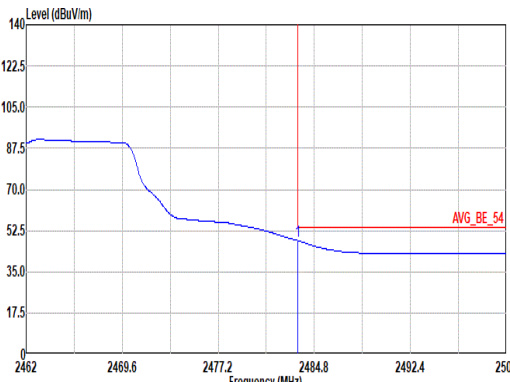
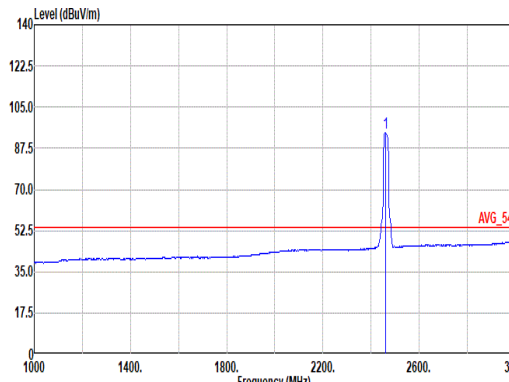


Mode	6																																																																																																
	Band Edge																																																																																																
	2400-2483.5_802.11g_CH11_2462MHz																																																																																																
ANT	1																																																																																																
Pol.	Vertical						Fundamental																																																																																										
Peak																																																																																																	
	Site : 03CH11-HY Condition: PEAK_BE_74 3m 91200_01620_240828 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto Detector : PEAK Mode : 6 Setting : 70 Plane : X with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.51</td><td>65.49</td><td>74.00</td><td>-8.51</td><td>53.58</td><td>27.84</td><td>7.32</td><td>33.28</td><td>10.03</td><td>146</td><td>143 PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.51	65.49	74.00	-8.51	53.58	27.84	7.32	33.28	10.03	146	143 PEAK	Site : 03CH11-HY Condition: PEAK_74 3m 91200_01620_240828 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto Detector : PEAK Mode : 6 Setting : 70 Plane : X with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2462.00</td><td>101.85</td><td>-----</td><td>-----</td><td>90.24</td><td>27.60</td><td>7.28</td><td>33.30</td><td>10.03</td><td>146</td><td>143 PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	101.85	-----	-----	90.24	27.60	7.28	33.30	10.03	146
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																								
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																							
1	2483.51	65.49	74.00	-8.51	53.58	27.84	7.32	33.28	10.03	146	143 PEAK																																																																																						
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																								
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																							
1	2462.00	101.85	-----	-----	90.24	27.60	7.28	33.30	10.03	146	143 PEAK																																																																																						
Avg																																																																																																	
	Site : 03CH11-HY Condition: AVG_BE_54 3m 91200_01620_240828 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto Detector : PEAK Mode : 6 Setting : 70 Plane : X with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.51</td><td>48.24</td><td>54.00</td><td>-5.76</td><td>36.33</td><td>27.84</td><td>7.32</td><td>33.28</td><td>10.03</td><td>146</td><td>143 AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.51	48.24	54.00	-5.76	36.33	27.84	7.32	33.28	10.03	146	143 AVERAGE	Site : 03CH11-HY Condition: AVG_54 3m 91200_01620_240828 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto Detector : PEAK Mode : 6 Setting : 70 Plane : X with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2462.00</td><td>93.98</td><td>-----</td><td>-----</td><td>82.37</td><td>27.60</td><td>7.28</td><td>33.30</td><td>10.03</td><td>146</td><td>143 AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	93.98	-----	-----	82.37	27.60	7.28	33.30	10.03	146
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																								
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																							
1	2483.51	48.24	54.00	-5.76	36.33	27.84	7.32	33.28	10.03	146	143 AVERAGE																																																																																						
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																								
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																							
1	2462.00	93.98	-----	-----	82.37	27.60	7.28	33.30	10.03	146	143 AVERAGE																																																																																						



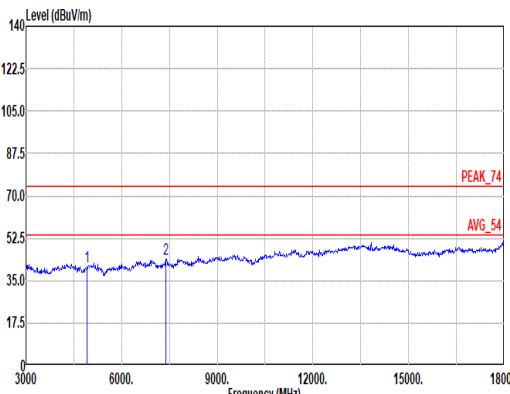
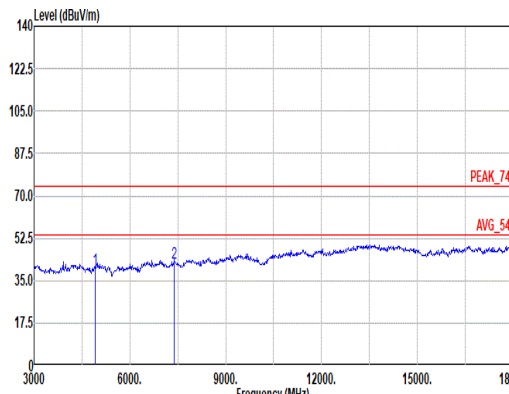


Mode	6																																																																																																																												
	Harmonic																																																																																																																												
	2400-2483.5_802.11g_CH11_2462MHz																																																																																																																												
ANT	1																																																																																																																												
Pol.	Horizontal						Vertical																																																																																																																						
Peak Avg																																																																																																																													
	Site : 03CH11-HY Condition: PEAK_74 3m 91280_01620_240828 HORIZONTAL Mode : 6 Setting : 70 Plane : X with adapter <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>4924.00</td><td>40.59</td><td>74.00</td><td>-33.41</td><td>63.55</td><td>32.90</td><td>10.24</td><td>66.66</td><td>0.56</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>7386.00</td><td>43.78</td><td>74.00</td><td>-30.22</td><td>60.11</td><td>36.48</td><td>12.76</td><td>65.86</td><td>0.29</td><td>--</td><td>--</td><td>Peak</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4924.00	40.59	74.00	-33.41	63.55	32.90	10.24	66.66	0.56	--	--	Peak	2	7386.00	43.78	74.00	-30.22	60.11	36.48	12.76	65.86	0.29	--	--	Peak	Site : 03CH11-HY Condition: PEAK_74 3m 91280_01620_240828 VERTICAL Mode : 6 Setting : 70 Plane : X with adapter <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>4924.00</td><td>39.65</td><td>74.00</td><td>-34.35</td><td>62.61</td><td>32.90</td><td>10.24</td><td>66.66</td><td>0.56</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>7386.00</td><td>42.17</td><td>74.00</td><td>-31.83</td><td>58.50</td><td>36.48</td><td>12.76</td><td>65.86</td><td>0.29</td><td>--</td><td>--</td><td>Peak</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4924.00	39.65	74.00	-34.35	62.61	32.90	10.24	66.66	0.56	--	--	Peak	2	7386.00	42.17	74.00	-31.83	58.50	36.48	12.76	65.86	0.29	--	--
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																					
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark																																																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																			
1	4924.00	40.59	74.00	-33.41	63.55	32.90	10.24	66.66	0.56	--	--	Peak																																																																																																																	
2	7386.00	43.78	74.00	-30.22	60.11	36.48	12.76	65.86	0.29	--	--	Peak																																																																																																																	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																					
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark																																																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																			
1	4924.00	39.65	74.00	-34.35	62.61	32.90	10.24	66.66	0.56	--	--	Peak																																																																																																																	
2	7386.00	42.17	74.00	-31.83	58.50	36.48	12.76	65.86	0.29	--	--	Peak																																																																																																																	

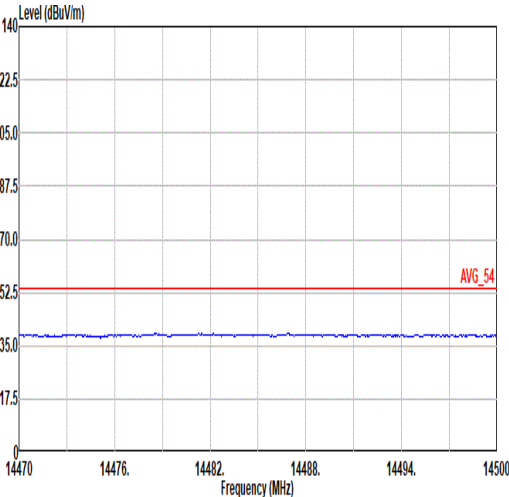
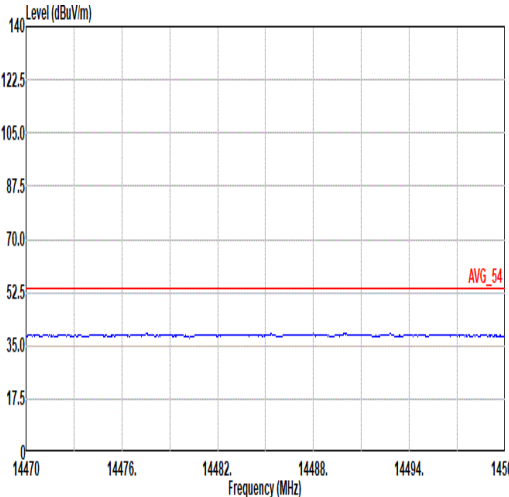
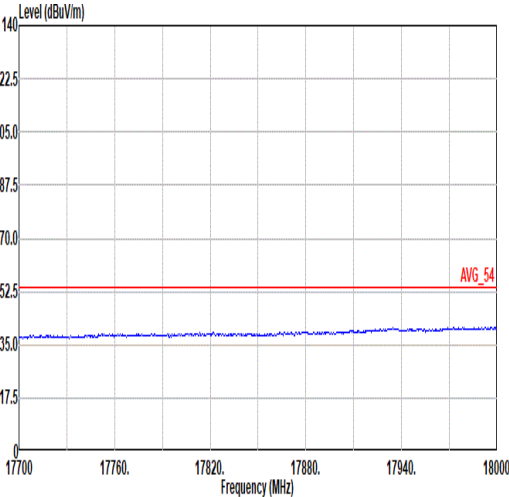
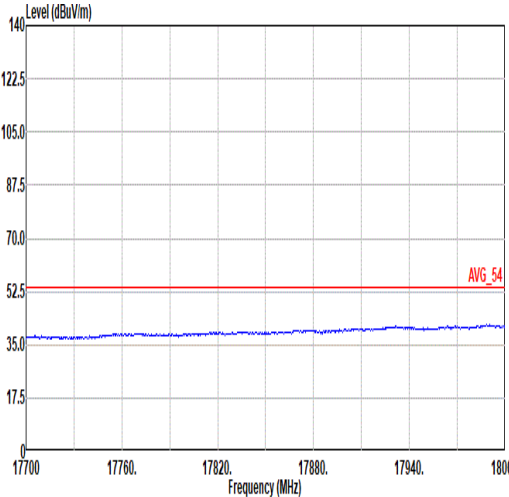


Mode	6	
	Harmonic	
	2400-2483.5_802.11g_CH11_2462MHz	
ANT	1	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	 Site : 03CH11-HY Condition: AVG_54 3m 91280_01620_240828 HORIZONTAL Mode : 6 Setting : 70 Plane : X with adapter	 Site : 03CH11-HY Condition: AVG_54 3m 91280_01620_240828 VERTICAL Mode : 6 Setting : 70 Plane : X with adapter
	 Site : 03CH11-HY Condition: AVG_54 3m 91280_01620_240828 HORIZONTAL Mode : 6 Setting : 70 Plane : X with adapter	 Site : 03CH11-HY Condition: AVG_54 3m 91280_01620_240828 VERTICAL Mode : 6 Setting : 70 Plane : X with adapter

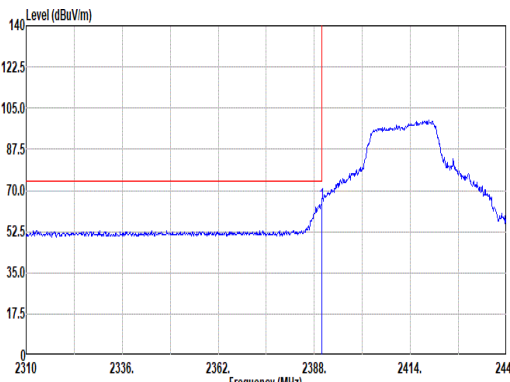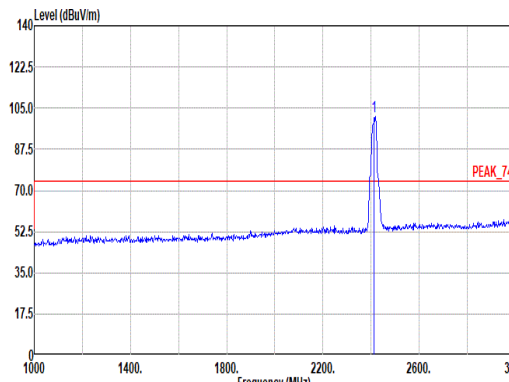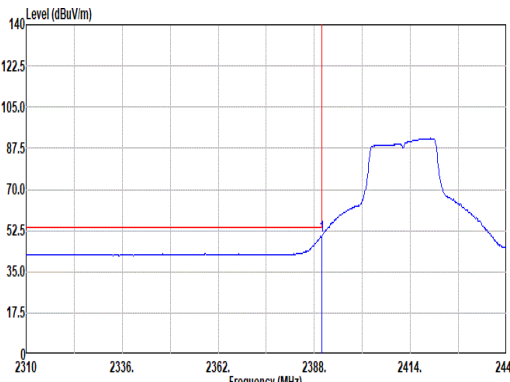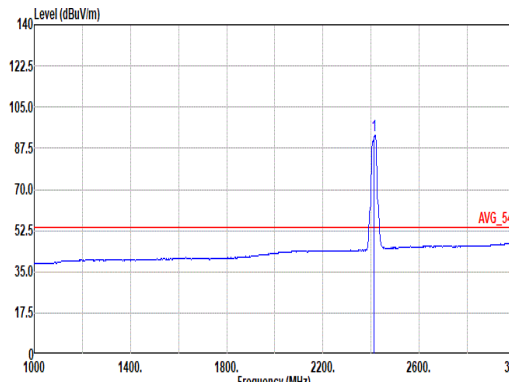

Mode	7																																																																																																										
	Band Edge																																																																																																										
	2400-2483.5_802.11n_HT20_CH01_2412MHz																																																																																																										
ANT	1																																																																																																										
Pol.	Horizontal						Fundamental																																																																																																				
Peak																																																																																																											
	Site : 03CH11-HY Condition: PEAK_BE_74 3m 91200_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto Detector : PEAK Mode : 7 Setting : 72 Plane : X with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="3">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2389.95</td><td>64.60</td><td>74.00</td><td>-9.40</td><td>53.42</td><td>27.30</td><td>7.19</td><td>33.34</td><td>10.03</td><td>367</td><td>224 PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	2389.95	64.60	74.00	-9.40	53.42	27.30	7.19	33.34	10.03	367	224 PEAK	Site : 03CH11-HY Condition: PEAK_74 3m 91200_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto Detector : PEAK Mode : 7 Setting : 72 Plane : X with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="3">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2412.00</td><td>101.66</td><td>-----</td><td>-----</td><td>90.22</td><td>27.50</td><td>7.23</td><td>33.32</td><td>10.03</td><td>367</td><td>224 PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	2412.00	101.66	-----	-----	90.22	27.50	7.23	33.32	10.03	367
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																	
1	2389.95	64.60	74.00	-9.40	53.42	27.30	7.19	33.34	10.03	367	224 PEAK																																																																																																
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																	
1	2412.00	101.66	-----	-----	90.22	27.50	7.23	33.32	10.03	367	224 PEAK																																																																																																
Avg																																																																																																											
	Site : 03CH11-HY Condition: AVG_BE_54 3m 91200_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:0.750kHz SMT:Auto Detector : PEAK Mode : 7 Setting : 72 Plane : X with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="3">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2389.95</td><td>50.19</td><td>54.00</td><td>-3.81</td><td>39.01</td><td>27.30</td><td>7.19</td><td>33.34</td><td>10.03</td><td>367</td><td>224 AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	2389.95	50.19	54.00	-3.81	39.01	27.30	7.19	33.34	10.03	367	224 AVERAGE	Site : 03CH11-HY Condition: AVG_54 3m 91200_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:0.750kHz SMT:Auto Detector : PEAK Mode : 7 Setting : 72 Plane : X with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="3">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2412.00</td><td>93.21</td><td>-----</td><td>-----</td><td>81.77</td><td>27.50</td><td>7.23</td><td>33.32</td><td>10.03</td><td>367</td><td>224 AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	2412.00	93.21	-----	-----	81.77	27.50	7.23	33.32	10.03	367
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																	
1	2389.95	50.19	54.00	-3.81	39.01	27.30	7.19	33.34	10.03	367	224 AVERAGE																																																																																																
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																	
1	2412.00	93.21	-----	-----	81.77	27.50	7.23	33.32	10.03	367	224 AVERAGE																																																																																																

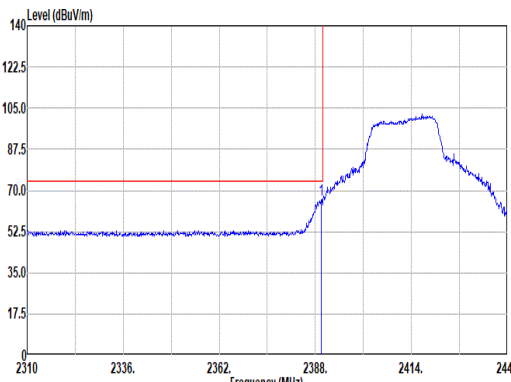
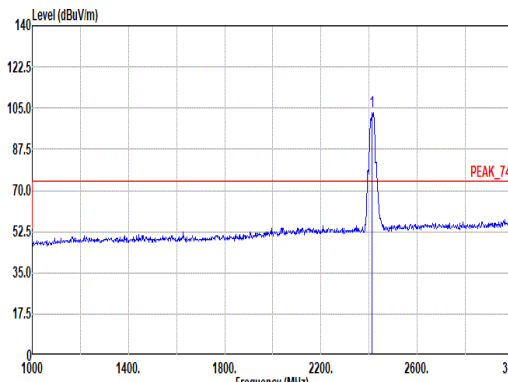
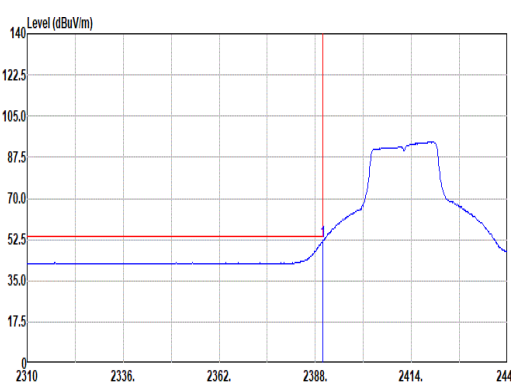
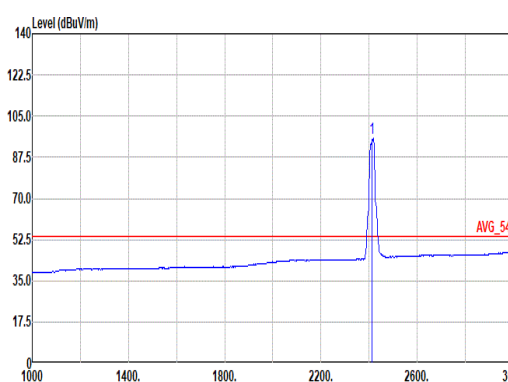


	7																																																																																																		
Mode	Band Edge																																																																																																		
	2400-2483.5_802.11n HT20_CH01_2412MHz																																																																																																		
ANT	1																																																																																																		
Pol.	Vertical						Fundamental																																																																																												
Peak																																																																																																			
	Site : 03CH11-HY Condition: PEAK_BE_74 3m 91200_01620_240828 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto Detector : PEAK Mode : 7 Setting : 72 Plane : X with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2389.56</td><td>65.92</td><td>74.00</td><td>-8.08</td><td>54.74</td><td>27.30</td><td>7.19</td><td>33.34</td><td>10.03</td><td>205</td><td>314</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.56	65.92	74.00	-8.08	54.74	27.30	7.19	33.34	10.03	205	314	PEAK	Site : 03CH11-HY Condition: PEAK_74 3m 91200_01620_240828 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto Detector : PEAK Mode : 7 Setting : 72 Plane : X with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2412.00</td><td>103.80</td><td>-----</td><td>-----</td><td>92.36</td><td>27.50</td><td>7.23</td><td>33.32</td><td>10.03</td><td>205</td><td>314</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	103.80	-----	-----	92.36	27.50	7.23	33.32	10.03	205	314
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2389.56	65.92	74.00	-8.08	54.74	27.30	7.19	33.34	10.03	205	314	PEAK																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2412.00	103.80	-----	-----	92.36	27.50	7.23	33.32	10.03	205	314	PEAK																																																																																							
Avg																																																																																																			
	Site : 03CH11-HY Condition: AVG_BE_54 3m 91200_01620_240828 VERTICAL : RBW:1000.000kHz VBW:0.750kHz SMT:Auto Detector : PEAK Mode : 7 Setting : 72 Plane : X with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2389.95</td><td>51.56</td><td>54.00</td><td>-2.44</td><td>40.30</td><td>27.30</td><td>7.19</td><td>33.34</td><td>10.03</td><td>205</td><td>314</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.95	51.56	54.00	-2.44	40.30	27.30	7.19	33.34	10.03	205	314	AVERAGE	Site : 03CH11-HY Condition: AVG_54 3m 91200_01620_240828 VERTICAL : RBW:1000.000kHz VBW:0.750kHz SMT:Auto Detector : PEAK Mode : 7 Setting : 72 Plane : X with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2412.00</td><td>95.46</td><td>-----</td><td>-----</td><td>84.02</td><td>27.50</td><td>7.23</td><td>33.32</td><td>10.03</td><td>205</td><td>314</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	95.46	-----	-----	84.02	27.50	7.23	33.32	10.03	205	314
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2389.95	51.56	54.00	-2.44	40.30	27.30	7.19	33.34	10.03	205	314	AVERAGE																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2412.00	95.46	-----	-----	84.02	27.50	7.23	33.32	10.03	205	314	AVERAGE																																																																																							







Mode	7																																																																
	Harmonic																																																																
	2400-2483.5_802.11n_HT20_CH01_2412MHz																																																																
ANT	1																																																																
Pol.	Horizontal						Vertical																																																										
Peak Avg																																																																	
	Site : 03CH11-HY Condition: PEAK_74 3m 91280_01620_240828 HORIZONTAL Mode : 7 Setting : 72 Plane : X with adapter : The unwanted signal "7236 MHz" can be ignored since it falls within : the non-restricted band and meet the requirements of 15.247 (d).																																																																
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4824.00</td><td>39.70</td><td>74.00</td><td>-34.30</td><td>63.56</td><td>32.44</td><td>9.93</td><td>66.74</td><td>0.51</td><td>-- -- Peak</td></tr><tr><td>2</td><td>7236.00</td><td>44.17</td><td>-----</td><td>-----</td><td>59.96</td><td>36.80</td><td>12.75</td><td>65.68</td><td>0.34</td><td>-- -- Peak</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4824.00	39.70	74.00	-34.30	63.56	32.44	9.93	66.74	0.51	-- -- Peak	2	7236.00	44.17	-----	-----	59.96	36.80	12.75	65.68	0.34	-- -- Peak
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																							
1	4824.00	39.70	74.00	-34.30	63.56	32.44	9.93	66.74	0.51	-- -- Peak																																																							
2	7236.00	44.17	-----	-----	59.96	36.80	12.75	65.68	0.34	-- -- Peak																																																							
	Site : 03CH11-HY Condition: PEAK_74 3m 91280_01620_240828 VERTICAL Mode : 7 Setting : 72 Plane : X with adapter : The unwanted signal "7236 MHz" can be ignored since it falls within : the non-restricted band and meet the requirements of 15.247 (d).																																																																
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4824.00</td><td>38.19</td><td>74.00</td><td>-35.81</td><td>62.05</td><td>32.44</td><td>9.93</td><td>66.74</td><td>0.51</td><td>-- -- Peak</td></tr><tr><td>2</td><td>7236.00</td><td>45.25</td><td>-----</td><td>-----</td><td>61.04</td><td>36.80</td><td>12.75</td><td>65.68</td><td>0.34</td><td>-- -- Peak</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4824.00	38.19	74.00	-35.81	62.05	32.44	9.93	66.74	0.51	-- -- Peak	2	7236.00	45.25	-----	-----	61.04	36.80	12.75	65.68	0.34	-- -- Peak
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																							
1	4824.00	38.19	74.00	-35.81	62.05	32.44	9.93	66.74	0.51	-- -- Peak																																																							
2	7236.00	45.25	-----	-----	61.04	36.80	12.75	65.68	0.34	-- -- Peak																																																							

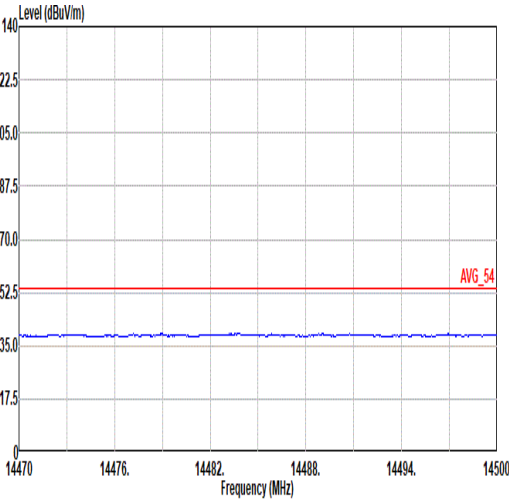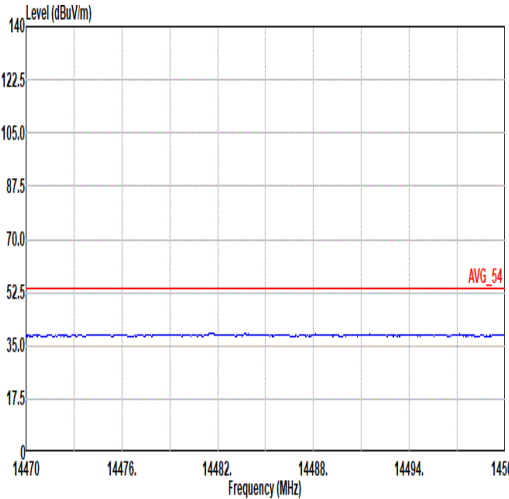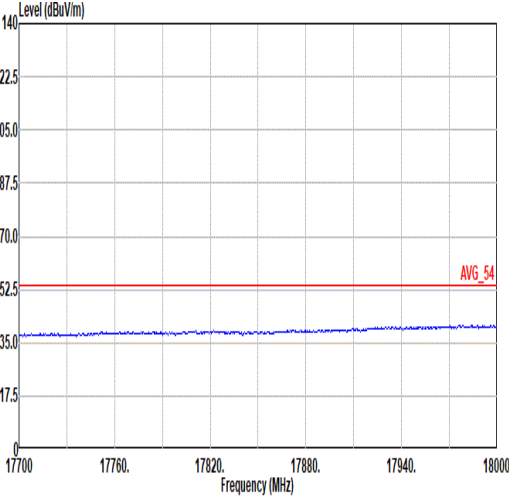
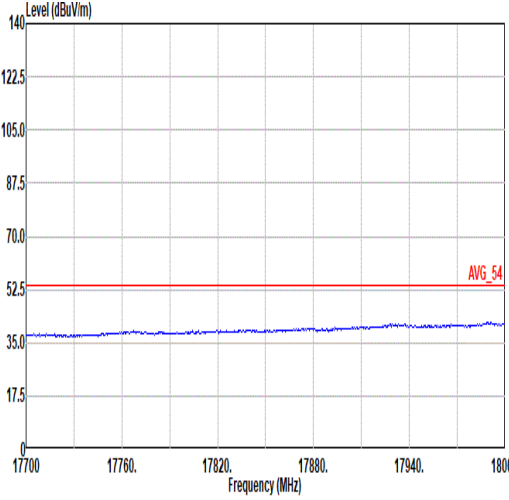


Mode	7	
	Harmonic	
	2400-2483.5_802.11n HT20_CH01_2412MHz	
ANT	1	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	 Site : 03CH11-HY Condition: AVG_54 3m 91280_01620_240828 HORIZONTAL Mode : 7 Setting : 72 Plane : X with adapter	 Site : 03CH11-HY Condition: AVG_54 3m 91280_01620_240828 VERTICAL Mode : 7 Setting : 72 Plane : X with adapter
	 Site : 03CH11-HY Condition: AVG_54 3m 91280_01620_240828 HORIZONTAL Mode : 7 Setting : 72 Plane : X with adapter	 Site : 03CH11-HY Condition: AVG_54 3m 91280_01620_240828 VERTICAL Mode : 7 Setting : 72 Plane : X with adapter

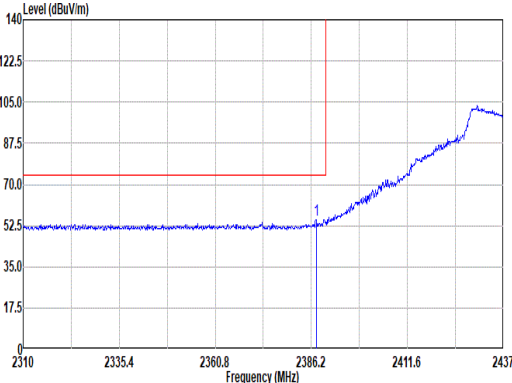
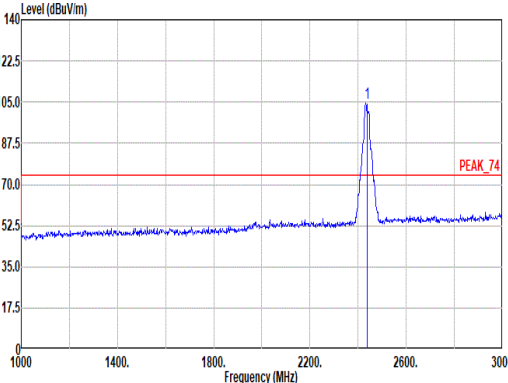
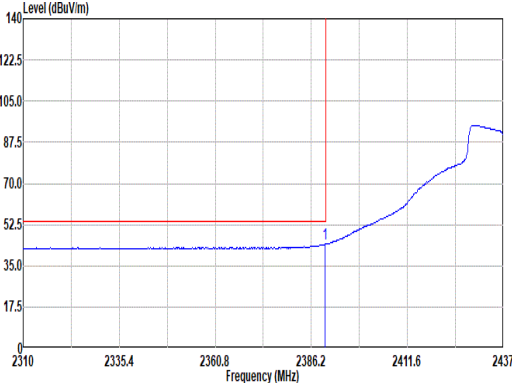
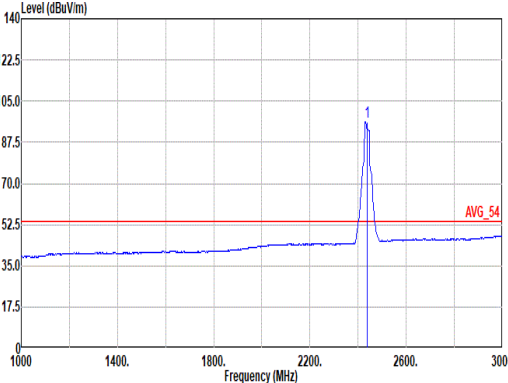


Mode	8																																																																																																	
	Band Edge - L																																																																																																	
	2400-2483.5_802.11n_HT20_CH06_2437MHz																																																																																																	
ANT	1																																																																																																	
Pol.	Horizontal						Fundamental																																																																																											
Peak																																																																																																		
	Site : 03CH11-HY Condition: PEAK_BE_74 3m 91200_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto Detector : PEAK Mode : 8 Setting : 82 Plane : X with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2387.60</td><td>54.82</td><td>74.00</td><td>-19.18</td><td>43.67</td><td>27.28</td><td>7.18</td><td>33.34</td><td>10.03</td><td>400 2 PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2387.60	54.82	74.00	-19.18	43.67	27.28	7.18	33.34	10.03	400 2 PEAK	Site : 03CH11-HY Condition: PEAK_74 3m 91200_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto Detector : PEAK Mode : 8 Setting : 82 Plane : X with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2437.00</td><td>104.45</td><td>-----</td><td>-----</td><td>92.89</td><td>27.60</td><td>7.24</td><td>33.31</td><td>10.03</td><td>400 2 PEAK</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2437.00	104.45	-----	-----	92.89	27.60	7.24	33.31	10.03
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	2387.60	54.82	74.00	-19.18	43.67	27.28	7.18	33.34	10.03	400 2 PEAK																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	2437.00	104.45	-----	-----	92.89	27.60	7.24	33.31	10.03	400 2 PEAK																																																																																								
Avg																																																																																																		
	Site : 03CH11-HY Condition: AVG_BE_54 3m 91200_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:0.750kHz SMT:Auto Detector : PEAK Mode : 8 Setting : 82 Plane : X with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2389.00</td><td>44.20</td><td>54.00</td><td>-9.80</td><td>33.02</td><td>27.30</td><td>7.19</td><td>33.34</td><td>10.03</td><td>400 2 AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.00	44.20	54.00	-9.80	33.02	27.30	7.19	33.34	10.03	400 2 AVERAGE	Site : 03CH11-HY Condition: AVG_54 3m 91200_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:0.750kHz SMT:Auto Detector : PEAK Mode : 8 Setting : 82 Plane : X with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2437.00</td><td>96.05</td><td>-----</td><td>-----</td><td>84.49</td><td>27.60</td><td>7.24</td><td>33.31</td><td>10.03</td><td>400 2 AVERAGE</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2437.00	96.05	-----	-----	84.49	27.60	7.24	33.31	10.03
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	2389.00	44.20	54.00	-9.80	33.02	27.30	7.19	33.34	10.03	400 2 AVERAGE																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	2437.00	96.05	-----	-----	84.49	27.60	7.24	33.31	10.03	400 2 AVERAGE																																																																																								

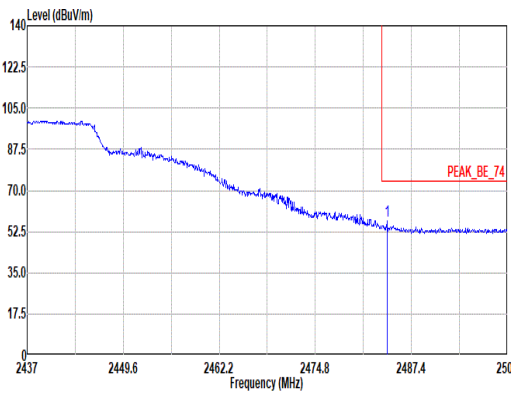
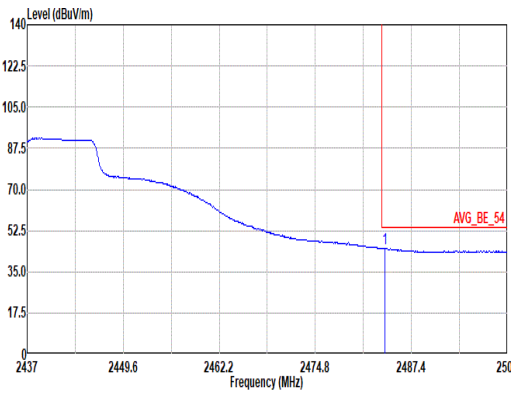


Mode	8																																																					
	Band Edge - R																																																					
	2400-2483.5_802.11n HT20_CH06_2437MHz																																																					
ANT	1																																																					
Pol.	Horizontal						Fundamental																																															
Peak	 Site : 03CH11-HY Condition: PEAK_BE_74 3m 91200_01620_240828 HORIZONTAL : RBW:1000.000kHz VBN:3000.000kHz SMT:Auto Detector : PEAK Mode : 8 Setting : 82 Plane : X with adapter <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2484.19</td><td>57.09</td><td>74.00</td><td>-16.91</td><td>45.18</td><td>27.84</td><td>7.32</td><td>33.28</td><td>10.03</td><td>400</td><td></td><td>2</td><td>PEAK</td></tr></table>							Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2484.19	57.09	74.00	-16.91	45.18	27.84	7.32	33.28	10.03	400		2	PEAK	Blank					
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																									
	MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																										
1	2484.19	57.09	74.00	-16.91	45.18	27.84	7.32	33.28	10.03	400		2	PEAK																																									
Avg	 Site : 03CH11-HY Condition: AVG_BE_54 3m 91200_01620_240828 HORIZONTAL : RBW:1000.000kHz VBN:0.750kHz SMT:Auto Detector : PEAK Mode : 8 Setting : 82 Plane : X with adapter <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2483.94</td><td>44.99</td><td>54.00</td><td>-9.01</td><td>33.00</td><td>27.84</td><td>7.32</td><td>33.28</td><td>10.03</td><td>400</td><td></td><td>2</td><td>AVERAGE</td></tr></table>							Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2483.94	44.99	54.00	-9.01	33.00	27.84	7.32	33.28	10.03	400		2	AVERAGE	Blank					
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																									
	MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																										
1	2483.94	44.99	54.00	-9.01	33.00	27.84	7.32	33.28	10.03	400		2	AVERAGE																																									

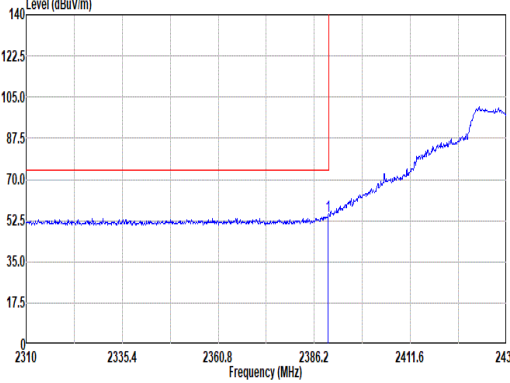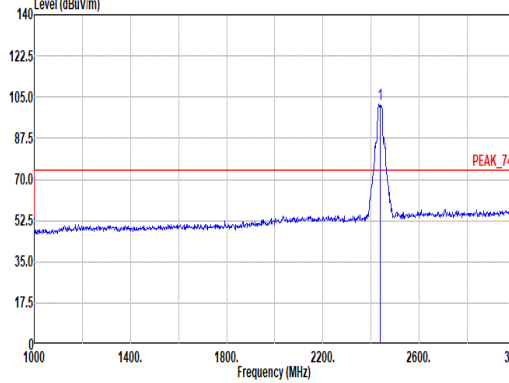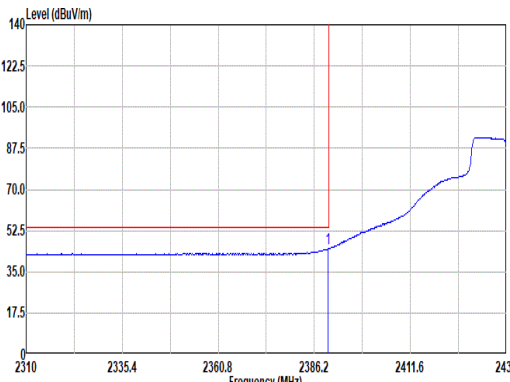
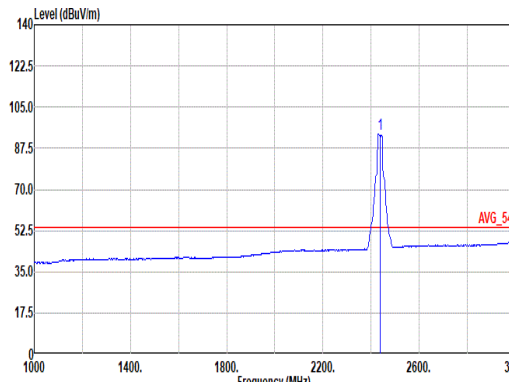


Mode	8																																																																																																	
	Band Edge - L																																																																																																	
	2400-2483.5_802.11n_HT20_CH06_2437MHz																																																																																																	
ANT	1																																																																																																	
Pol.	Vertical						Fundamental																																																																																											
Peak																																																																																																		
	Site : 03CH11-HY Condition: PEAK_BE_74 3m 91200_01620_240828 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto Detector : PEAK Mode : 8 Setting : 82 Plane : X with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th>PEAK</th></tr><tr><td>1</td><td>2389.88</td><td>54.47</td><td>74.00</td><td>-19.53</td><td>43.29</td><td>27.30</td><td>7.19</td><td>33.34</td><td>10.03</td><td>200</td><td>66 PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	PEAK	1	2389.88	54.47	74.00	-19.53	43.29	27.30	7.19	33.34	10.03	200	66 PEAK	Site : 03CH11-HY Condition: PEAK_74 3m 91200_01620_240828 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto Detector : PEAK Mode : 8 Setting : 82 Plane : X with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th>PEAK</th></tr><tr><td>1</td><td>2437.00</td><td>101.87</td><td>-----</td><td>-----</td><td>90.31</td><td>27.60</td><td>7.24</td><td>33.31</td><td>10.03</td><td>200</td><td>66 PEAK</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	PEAK	1	2437.00	101.87	-----	-----	90.31	27.60	7.24	33.31	10.03	200
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																									
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	PEAK																																																																																							
1	2389.88	54.47	74.00	-19.53	43.29	27.30	7.19	33.34	10.03	200	66 PEAK																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																									
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	PEAK																																																																																							
1	2437.00	101.87	-----	-----	90.31	27.60	7.24	33.31	10.03	200	66 PEAK																																																																																							
Avg																																																																																																		
	Site : 03CH11-HY Condition: AVG_BE_54 3m 91200_01620_240828 VERTICAL : RBW:1000.000kHz VBW:0.750kHz SMT:Auto Detector : PEAK Mode : 8 Setting : 82 Plane : X with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th>AVERAGE</th></tr><tr><td>1</td><td>2389.88</td><td>44.81</td><td>54.00</td><td>-9.19</td><td>33.63</td><td>27.30</td><td>7.19</td><td>33.34</td><td>10.03</td><td>200</td><td>66 AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	AVERAGE	1	2389.88	44.81	54.00	-9.19	33.63	27.30	7.19	33.34	10.03	200	66 AVERAGE	Site : 03CH11-HY Condition: AVG_54 3m 91200_01620_240828 VERTICAL : RBW:1000.000kHz VBW:0.750kHz SMT:Auto Detector : PEAK Mode : 8 Setting : 82 Plane : X with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th>AVERAGE</th></tr><tr><td>1</td><td>2437.00</td><td>93.71</td><td>-----</td><td>-----</td><td>82.15</td><td>27.60</td><td>7.24</td><td>33.31</td><td>10.03</td><td>200</td><td>66 AVERAGE</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	AVERAGE	1	2437.00	93.71	-----	-----	82.15	27.60	7.24	33.31	10.03	200
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																									
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	AVERAGE																																																																																							
1	2389.88	44.81	54.00	-9.19	33.63	27.30	7.19	33.34	10.03	200	66 AVERAGE																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																									
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	AVERAGE																																																																																							
1	2437.00	93.71	-----	-----	82.15	27.60	7.24	33.31	10.03	200	66 AVERAGE																																																																																							



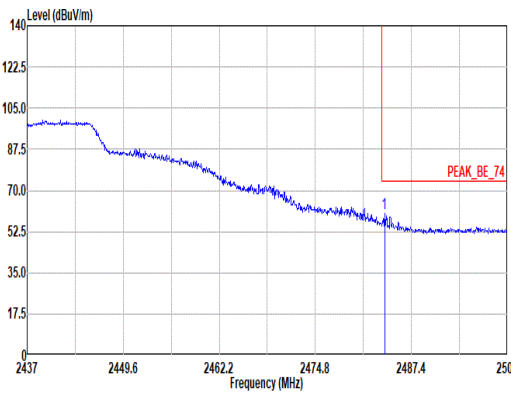
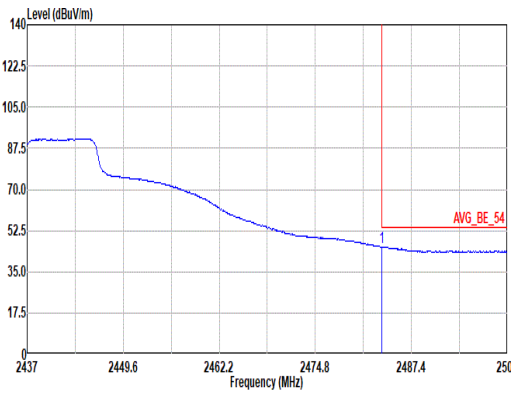


Mode	8																																																							
	Band Edge - R																																																							
	2400-2483.5_802.11n HT20_CH06_2437MHz																																																							
ANT	1																																																							
Pol.	Vertical						Fundamental																																																	
Peak	 Site : 03CH11-HY Condition: PEAK_BE_74 3m 91200_01620_240828 VERTICAL : RBW:1000.000kHz VBN:3000.000kHz SMT:Auto Detector : PEAK Mode : 8 Setting : 82 Plane : X with adapter <table><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>cm</th><th>deg</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th>Remark</th></tr><tr><td>1 2483.87</td><td>60.19</td><td>74.00</td><td>-13.81</td><td>48.28</td><td>27.84</td><td>7.32</td><td>33.28</td><td>10.03</td><td>200</td><td>66</td><td>PEAK</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	Remark	1 2483.87	60.19	74.00	-13.81	48.28	27.84	7.32	33.28	10.03	200	66	PEAK	Blank				
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	Remark																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	Remark																																													
1 2483.87	60.19	74.00	-13.81	48.28	27.84	7.32	33.28	10.03	200	66	PEAK																																													
Avg	 Site : 03CH11-HY Condition: AVG_BE_54 3m 91200_01620_240828 VERTICAL : RBW:1000.000kHz VBN:0.750kHz SMT:Auto Detector : PEAK Mode : 8 Setting : 82 Plane : X with adapter <table><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>cm</th><th>deg</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th>Remark</th></tr><tr><td>1 2483.56</td><td>45.58</td><td>54.00</td><td>-8.42</td><td>33.67</td><td>27.84</td><td>7.32</td><td>33.28</td><td>10.03</td><td>200</td><td>66</td><td>AVERAGE</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	Remark	1 2483.56	45.58	54.00	-8.42	33.67	27.84	7.32	33.28	10.03	200	66	AVERAGE	Blank				
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	Remark																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	Remark																																													
1 2483.56	45.58	54.00	-8.42	33.67	27.84	7.32	33.28	10.03	200	66	AVERAGE																																													



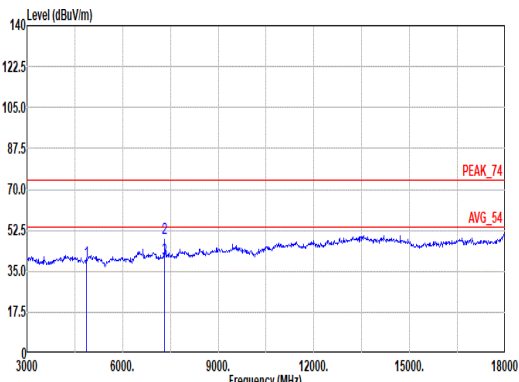
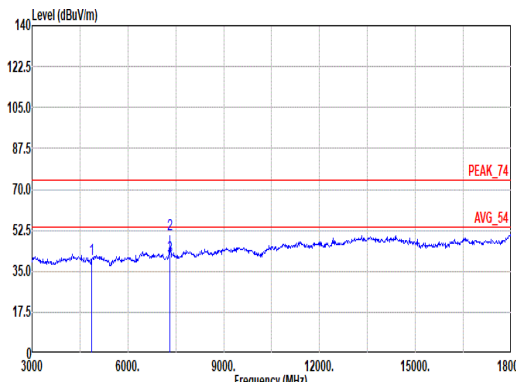


Mode	8																																																																																																																															
	Harmonic																																																																																																																															
	2400-2483.5_802.11n HT20_CH06_2437MHz																																																																																																																															
ANT	1																																																																																																																															
Pol.	Horizontal	Vertical																																																																																																																														
Peak Avg	 Site : 03CH11-HY Condition: PEAK_74 3m 91280_01620_240828 HORIZONTAL Mode : 8 Setting : 82 Plane : X with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr><tr><td>1</td><td>4874.00</td><td>39.23</td><td>74.00</td><td>-34.77</td><td>62.61</td><td>32.70</td><td>10.09</td><td>66.70</td><td>0.53</td><td>-- -- Peak</td></tr><tr><td>2</td><td>7311.00</td><td>48.87</td><td>74.00</td><td>-25.13</td><td>64.78</td><td>36.78</td><td>12.76</td><td>65.77</td><td>0.32</td><td>255 208 Peak</td></tr><tr><td>3</td><td>7311.00</td><td>40.31</td><td>54.00</td><td>-13.69</td><td>56.22</td><td>36.78</td><td>12.76</td><td>65.77</td><td>0.32</td><td>255 208 Average</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1	4874.00	39.23	74.00	-34.77	62.61	32.70	10.09	66.70	0.53	-- -- Peak	2	7311.00	48.87	74.00	-25.13	64.78	36.78	12.76	65.77	0.32	255 208 Peak	3	7311.00	40.31	54.00	-13.69	56.22	36.78	12.76	65.77	0.32	255 208 Average	 Site : 03CH11-HY Condition: PEAK_74 3m 91280_01620_240828 VERTICAL Mode : 8 Setting : 82 Plane : X with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr><tr><td>1</td><td>4874.00</td><td>40.37</td><td>74.00</td><td>-33.63</td><td>63.75</td><td>32.70</td><td>10.09</td><td>66.70</td><td>0.53</td><td>-- -- Peak</td></tr><tr><td>2</td><td>7311.00</td><td>50.90</td><td>74.00</td><td>-23.10</td><td>66.81</td><td>36.78</td><td>12.76</td><td>65.77</td><td>0.32</td><td>100 223 Peak</td></tr><tr><td>3</td><td>7311.00</td><td>41.19</td><td>54.00</td><td>-12.81</td><td>57.10</td><td>36.78</td><td>12.76</td><td>65.77</td><td>0.32</td><td>100 223 Average</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1	4874.00	40.37	74.00	-33.63	63.75	32.70	10.09	66.70	0.53	-- -- Peak	2	7311.00	50.90	74.00	-23.10	66.81	36.78	12.76	65.77	0.32	100 223 Peak	3	7311.00	41.19	54.00	-12.81	57.10	36.78	12.76	65.77	0.32	100 223 Average
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																																																																							
1	4874.00	39.23	74.00	-34.77	62.61	32.70	10.09	66.70	0.53	-- -- Peak																																																																																																																						
2	7311.00	48.87	74.00	-25.13	64.78	36.78	12.76	65.77	0.32	255 208 Peak																																																																																																																						
3	7311.00	40.31	54.00	-13.69	56.22	36.78	12.76	65.77	0.32	255 208 Average																																																																																																																						
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																																																																							
1	4874.00	40.37	74.00	-33.63	63.75	32.70	10.09	66.70	0.53	-- -- Peak																																																																																																																						
2	7311.00	50.90	74.00	-23.10	66.81	36.78	12.76	65.77	0.32	100 223 Peak																																																																																																																						
3	7311.00	41.19	54.00	-12.81	57.10	36.78	12.76	65.77	0.32	100 223 Average																																																																																																																						

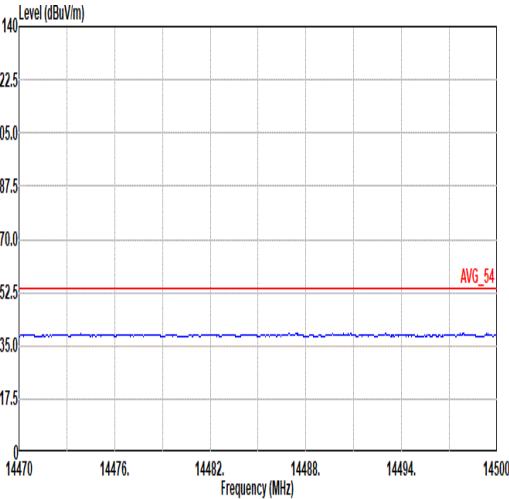
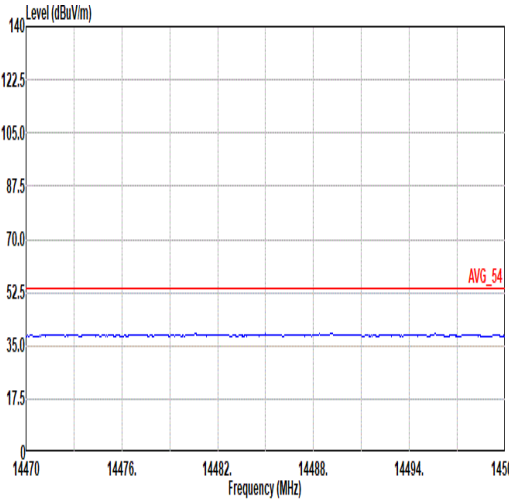
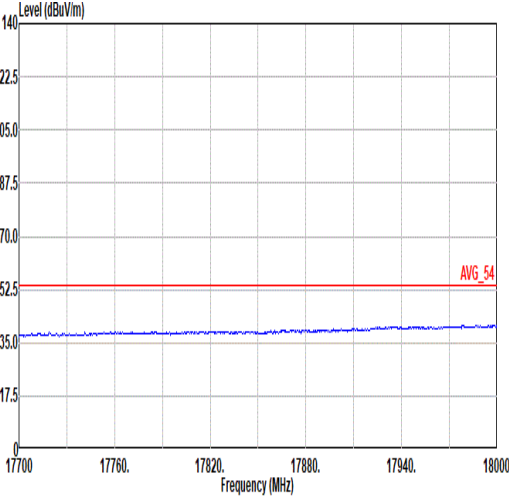
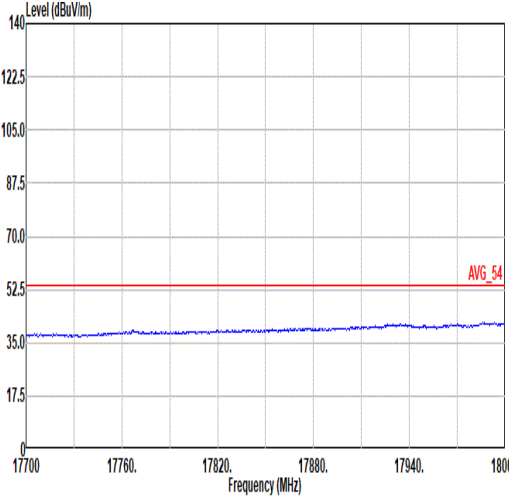


Mode	8	
	Harmonic	
	2400-2483.5_802.11n_HT20_CH06_2437MHz	
ANT	1	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	 Site : 03CH11-HY Condition: AVG_54 3m 91280_01620_240828 HORIZONTAL Mode : 8 Setting : 82 Plane : X with adapter	 Site : 03CH11-HY Condition: AVG_54 3m 91280_01620_240828 VERTICAL Mode : 8 Setting : 82 Plane : X with adapter
	 Site : 03CH11-HY Condition: AVG_54 3m 91280_01620_240828 HORIZONTAL Mode : 8 Setting : 82 Plane : X with adapter	 Site : 03CH11-HY Condition: AVG_54 3m 91280_01620_240828 VERTICAL Mode : 8 Setting : 82 Plane : X with adapter

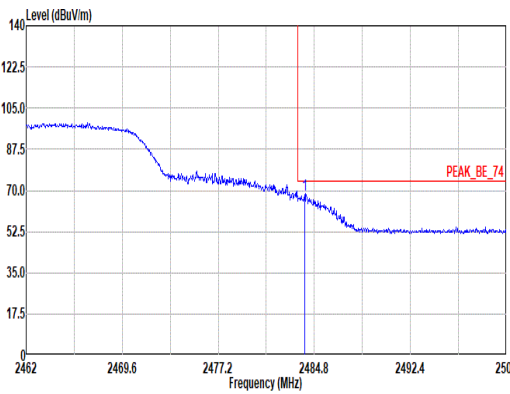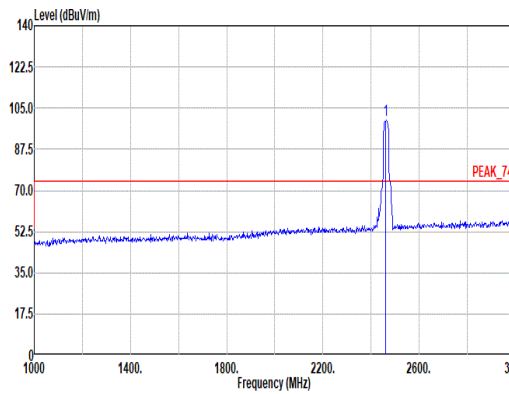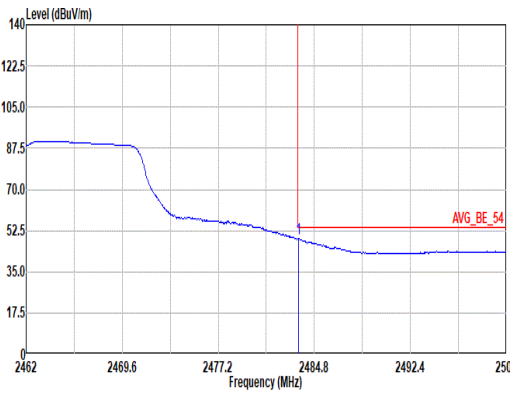
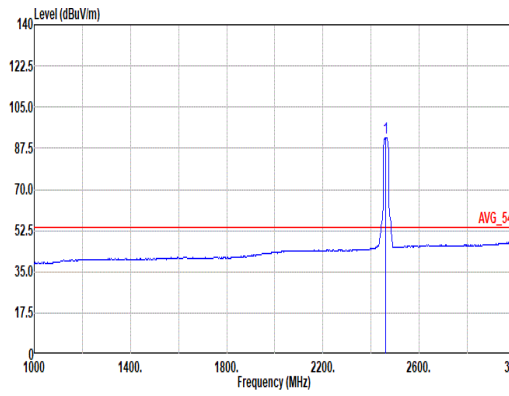


Mode	9																																																																																																		
	Band Edge																																																																																																		
	2400-2483.5_802.11n HT20_CH11_2462MHz																																																																																																		
ANT	1																																																																																																		
Pol.	Horizontal						Fundamental																																																																																												
Peak																																																																																																			
	Site : 03CH11-HY Condition: PEAK_BE_74 3m 91200_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto Detector : PEAK Mode : 9 Setting : 68 Plane : X with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2484.04</td><td>68.38</td><td>74.00</td><td>-5.62</td><td>56.47</td><td>27.84</td><td>7.32</td><td>33.28</td><td>10.03</td><td>195</td><td>29</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2484.04	68.38	74.00	-5.62	56.47	27.84	7.32	33.28	10.03	195	29	PEAK	Site : 03CH11-HY Condition: PEAK_74 3m 91200_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto Detector : PEAK Mode : 9 Setting : 68 Plane : X with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2462.00</td><td>99.85</td><td>-----</td><td>-----</td><td>88.18</td><td>27.64</td><td>7.29</td><td>33.29</td><td>10.03</td><td>195</td><td>29</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	99.85	-----	-----	88.18	27.64	7.29	33.29	10.03	195	29
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2484.04	68.38	74.00	-5.62	56.47	27.84	7.32	33.28	10.03	195	29	PEAK																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2462.00	99.85	-----	-----	88.18	27.64	7.29	33.29	10.03	195	29	PEAK																																																																																							
Avg																																																																																																			
	Site : 03CH11-HY Condition: AVG_BE_54 3m 91200_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:0.750kHz SMT:Auto Detector : PEAK Mode : 9 Setting : 68 Plane : X with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.55</td><td>49.04</td><td>54.00</td><td>-4.96</td><td>37.13</td><td>27.84</td><td>7.32</td><td>33.28</td><td>10.03</td><td>195</td><td>29</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.55	49.04	54.00	-4.96	37.13	27.84	7.32	33.28	10.03	195	29	AVERAGE	Site : 03CH11-HY Condition: AVG_54 3m 91200_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:0.750kHz SMT:Auto Detector : PEAK Mode : 9 Setting : 68 Plane : X with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2462.00</td><td>91.99</td><td>-----</td><td>-----</td><td>80.32</td><td>27.64</td><td>7.29</td><td>33.29</td><td>10.03</td><td>195</td><td>29</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	91.99	-----	-----	80.32	27.64	7.29	33.29	10.03	195	29
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2483.55	49.04	54.00	-4.96	37.13	27.84	7.32	33.28	10.03	195	29	AVERAGE																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2462.00	91.99	-----	-----	80.32	27.64	7.29	33.29	10.03	195	29	AVERAGE																																																																																							

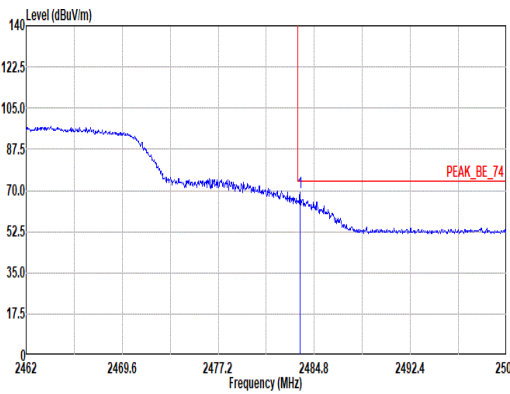
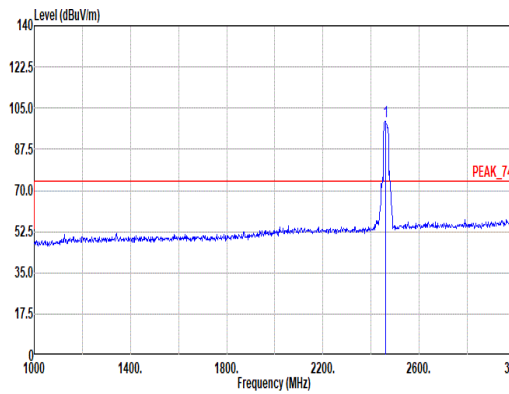
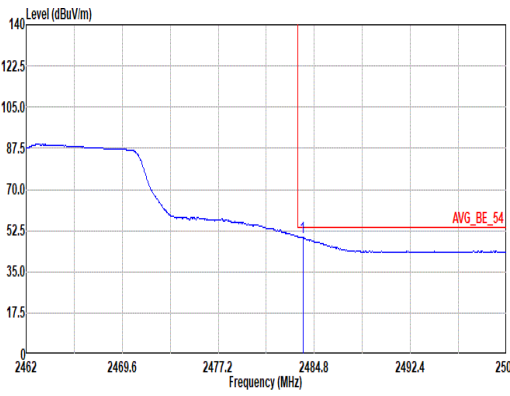
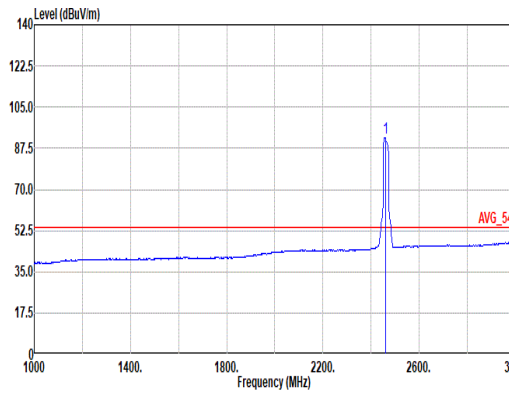


Mode	9																																																																																																	
	Band Edge																																																																																																	
	2400-2483.5_802.11n_HT20_CH11_2462MHz																																																																																																	
ANT	1																																																																																																	
Pol.	Vertical						Fundamental																																																																																											
Peak																																																																																																		
	Site : 03CH11-HY Condition: PEAK_BE_74 3m 91200_01620_240828 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto Detector : PEAK Mode : 9 Setting : 68 Plane : X with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th>PEAK</th></tr><tr><td>1</td><td>2483.66</td><td>69.28</td><td>74.00</td><td>-4.72</td><td>57.37</td><td>27.84</td><td>7.32</td><td>33.28</td><td>10.03</td><td>300</td><td>333 PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	PEAK	1	2483.66	69.28	74.00	-4.72	57.37	27.84	7.32	33.28	10.03	300	333 PEAK	Site : 03CH11-HY Condition: PEAK_74 3m 91200_01620_240828 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto Detector : PEAK Mode : 9 Setting : 68 Plane : X with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th>PEAK</th></tr><tr><td>1</td><td>2462.00</td><td>99.56</td><td>-----</td><td>-----</td><td>87.95</td><td>27.60</td><td>7.28</td><td>33.30</td><td>10.03</td><td>300</td><td>333 PEAK</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	PEAK	1	2462.00	99.56	-----	-----	87.95	27.60	7.28	33.30	10.03	300
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																									
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	PEAK																																																																																							
1	2483.66	69.28	74.00	-4.72	57.37	27.84	7.32	33.28	10.03	300	333 PEAK																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																									
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	PEAK																																																																																							
1	2462.00	99.56	-----	-----	87.95	27.60	7.28	33.30	10.03	300	333 PEAK																																																																																							
Avg																																																																																																		
	Site : 03CH11-HY Condition: AVG_BE_54 3m 91200_01620_240828 VERTICAL : RBW:1000.000kHz VBW:0.750kHz SMT:Auto Detector : PEAK Mode : 9 Setting : 68 Plane : X with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th>AVERAGE</th></tr><tr><td>1</td><td>2483.09</td><td>49.92</td><td>54.00</td><td>-4.08</td><td>38.01</td><td>27.84</td><td>7.32</td><td>33.28</td><td>10.03</td><td>300</td><td>333 AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	AVERAGE	1	2483.09	49.92	54.00	-4.08	38.01	27.84	7.32	33.28	10.03	300	333 AVERAGE	Site : 03CH11-HY Condition: AVG_54 3m 91200_01620_240828 VERTICAL : RBW:1000.000kHz VBW:0.750kHz SMT:Auto Detector : PEAK Mode : 9 Setting : 68 Plane : X with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th>AVERAGE</th></tr><tr><td>1</td><td>2462.00</td><td>91.94</td><td>-----</td><td>-----</td><td>80.33</td><td>27.60</td><td>7.28</td><td>33.30</td><td>10.03</td><td>300</td><td>333 AVERAGE</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	AVERAGE	1	2462.00	91.94	-----	-----	80.33	27.60	7.28	33.30	10.03	300
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																									
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	AVERAGE																																																																																							
1	2483.09	49.92	54.00	-4.08	38.01	27.84	7.32	33.28	10.03	300	333 AVERAGE																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																									
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	AVERAGE																																																																																							
1	2462.00	91.94	-----	-----	80.33	27.60	7.28	33.30	10.03	300	333 AVERAGE																																																																																							



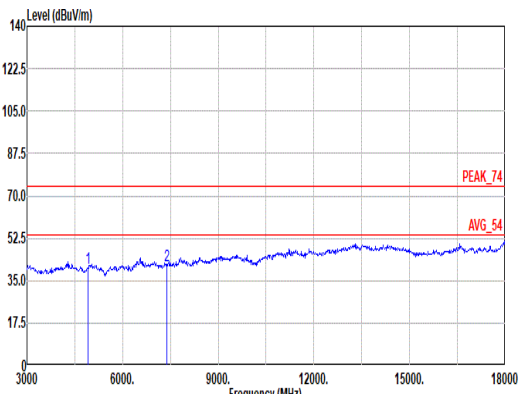
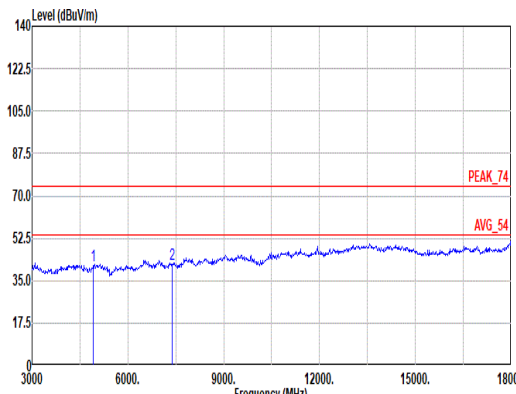


Mode	9																																																																																																																			
	Harmonic																																																																																																																			
	2400-2483.5_802.11n HT20_CH11_2462MHz																																																																																																																			
ANT	1																																																																																																																			
Pol.	Horizontal	Vertical																																																																																																																		
Peak Avg	 Site : 03CH11-HY Condition: PEAK_74 3m 91280_01620_240828 HORIZONTAL Mode : 9 Setting : 68 Plane : X with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4924.00</td><td>40.32</td><td>74.00</td><td>-33.68</td><td>63.28</td><td>32.90</td><td>10.24</td><td>66.66</td><td>0.56</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>7386.00</td><td>41.41</td><td>74.00</td><td>-32.59</td><td>57.74</td><td>36.48</td><td>12.76</td><td>65.86</td><td>0.29</td><td>--</td><td>--</td><td>Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4924.00	40.32	74.00	-33.68	63.28	32.90	10.24	66.66	0.56	--	--	Peak	2	7386.00	41.41	74.00	-32.59	57.74	36.48	12.76	65.86	0.29	--	--	Peak	 Site : 03CH11-HY Condition: PEAK_74 3m 91280_01620_240828 VERTICAL Mode : 9 Setting : 68 Plane : X with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4924.00</td><td>41.42</td><td>74.00</td><td>-32.58</td><td>64.38</td><td>32.90</td><td>10.24</td><td>66.66</td><td>0.56</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>7386.00</td><td>41.56</td><td>74.00</td><td>-32.44</td><td>57.89</td><td>36.48</td><td>12.76</td><td>65.86</td><td>0.29</td><td>--</td><td>--</td><td>Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4924.00	41.42	74.00	-32.58	64.38	32.90	10.24	66.66	0.56	--	--	Peak	2	7386.00	41.56	74.00	-32.44	57.89	36.48	12.76	65.86	0.29	--	--	Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																											
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark																																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																										
1	4924.00	40.32	74.00	-33.68	63.28	32.90	10.24	66.66	0.56	--	--	Peak																																																																																																								
2	7386.00	41.41	74.00	-32.59	57.74	36.48	12.76	65.86	0.29	--	--	Peak																																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																												
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark																																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																										
1	4924.00	41.42	74.00	-32.58	64.38	32.90	10.24	66.66	0.56	--	--	Peak																																																																																																								
2	7386.00	41.56	74.00	-32.44	57.89	36.48	12.76	65.86	0.29	--	--	Peak																																																																																																								

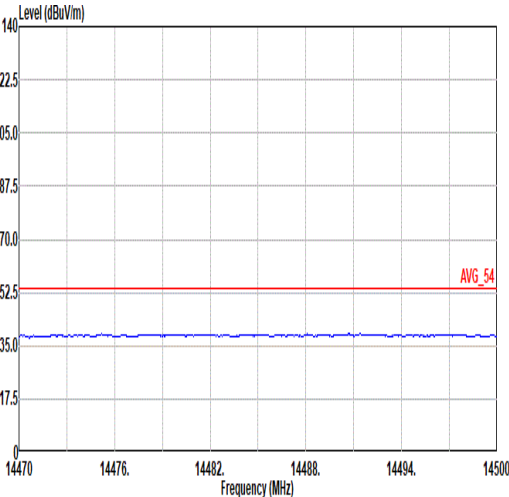
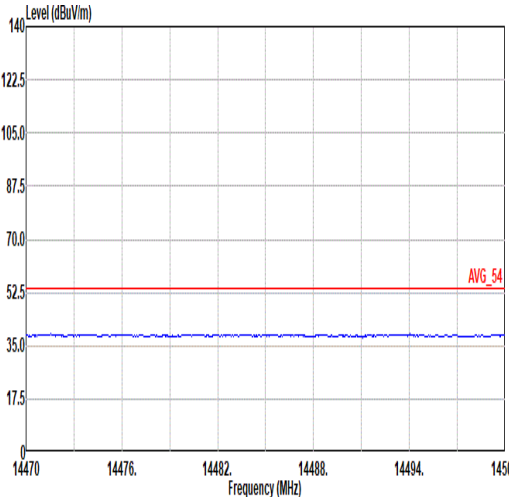
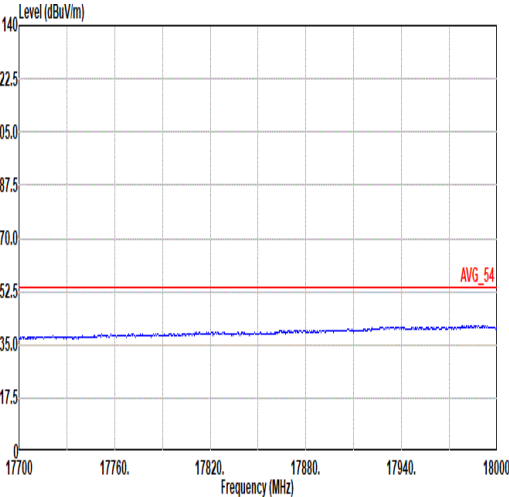
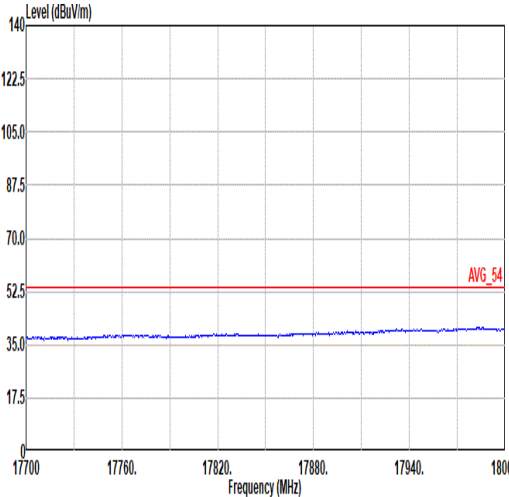


Mode	9	
	Harmonic	
	2400-2483.5_802.11n_HT20_CH11_2462MHz	
ANT	1	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	 Site : 03CH11-HY Condition: AVG_54 3m 91280_01620_240828 HORIZONTAL Mode : 9 Setting : 68 Plane : X with adapter	 Site : 03CH11-HY Condition: AVG_54 3m 91280_01620_240828 VERTICAL Mode : 9 Setting : 68 Plane : X with adapter
	 Site : 03CH11-HY Condition: AVG_54 3m 91280_01620_240828 HORIZONTAL Mode : 9 Setting : 68 Plane : X with adapter	 Site : 03CH11-HY Condition: AVG_54 3m 91280_01620_240828 VERTICAL Mode : 9 Setting : 68 Plane : X with adapter

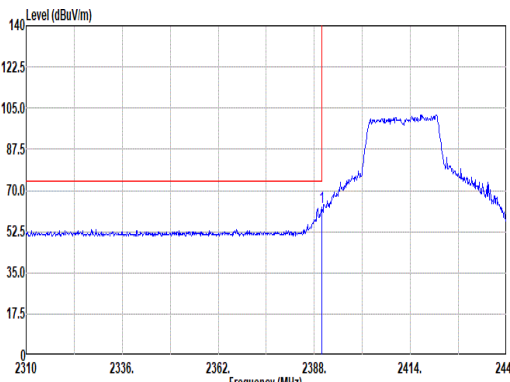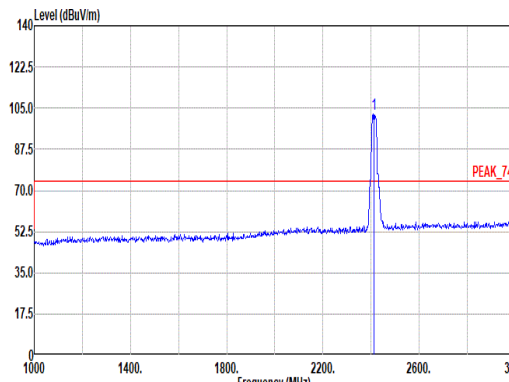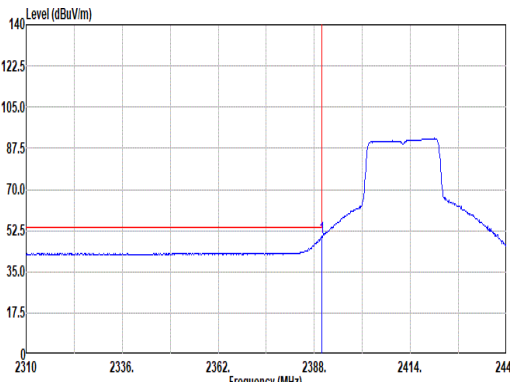
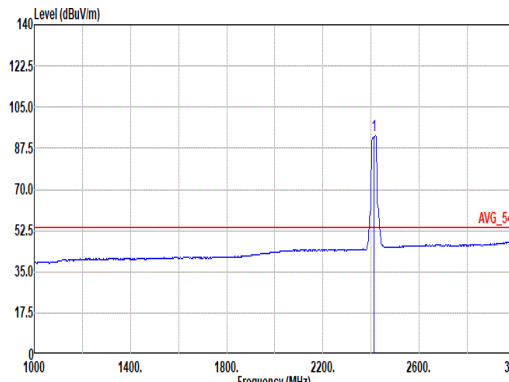


Mode	10																																																																																																										
	Band Edge																																																																																																										
	2400-2483.5_802.11ax HE20_CH01_Full RU_2412MHz																																																																																																										
ANT	1																																																																																																										
Pol.	Horizontal						Fundamental																																																																																																				
Peak																																																																																																											
	Site : 03CH11-HY Condition: PEAK_BE_74 3m 91200_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto Detector : PEAK Mode : 10 Setting : 70 Plane : X with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="3">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2389.95</td><td>62.88</td><td>74.00</td><td>-11.12</td><td>51.70</td><td>27.30</td><td>7.19</td><td>33.34</td><td>10.03</td><td>400</td><td>28 PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	2389.95	62.88	74.00	-11.12	51.70	27.30	7.19	33.34	10.03	400	28 PEAK	Site : 03CH11-HY Condition: PEAK_74 3m 91200_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto Detector : PEAK Mode : 10 Setting : 70 Plane : X with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="3">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2412.00</td><td>102.32</td><td>-----</td><td>-----</td><td>91.01</td><td>27.40</td><td>7.21</td><td>33.33</td><td>10.03</td><td>400</td><td>28 PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	2412.00	102.32	-----	-----	91.01	27.40	7.21	33.33	10.03	400
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																	
1	2389.95	62.88	74.00	-11.12	51.70	27.30	7.19	33.34	10.03	400	28 PEAK																																																																																																
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																	
1	2412.00	102.32	-----	-----	91.01	27.40	7.21	33.33	10.03	400	28 PEAK																																																																																																
Avg																																																																																																											
	Site : 03CH11-HY Condition: AVG_BE_54 3m 91200_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:1.000kHz SMT:Auto Detector : PEAK Mode : 10 Setting : 70 Plane : X with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="3">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2389.95</td><td>49.87</td><td>54.00</td><td>-4.13</td><td>38.69</td><td>27.30</td><td>7.19</td><td>33.34</td><td>10.03</td><td>400</td><td>28 AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	2389.95	49.87	54.00	-4.13	38.69	27.30	7.19	33.34	10.03	400	28 AVERAGE	Site : 03CH11-HY Condition: AVG_54 3m 91200_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:1.000kHz SMT:Auto Detector : PEAK Mode : 10 Setting : 70 Plane : X with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="3">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2412.00</td><td>92.99</td><td>-----</td><td>-----</td><td>81.55</td><td>27.50</td><td>7.23</td><td>33.32</td><td>10.03</td><td>400</td><td>28 AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	2412.00	92.99	-----	-----	81.55	27.50	7.23	33.32	10.03	400
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																	
1	2389.95	49.87	54.00	-4.13	38.69	27.30	7.19	33.34	10.03	400	28 AVERAGE																																																																																																
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																	
1	2412.00	92.99	-----	-----	81.55	27.50	7.23	33.32	10.03	400	28 AVERAGE																																																																																																

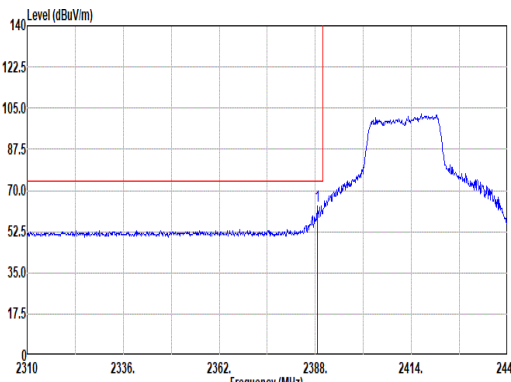
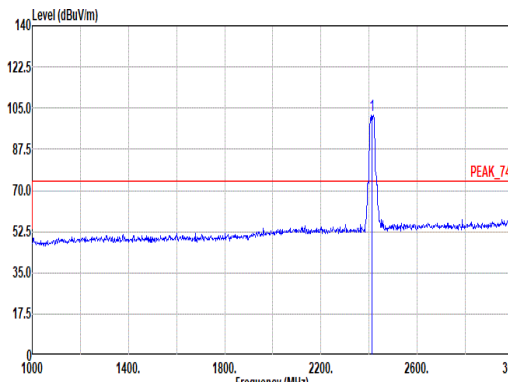
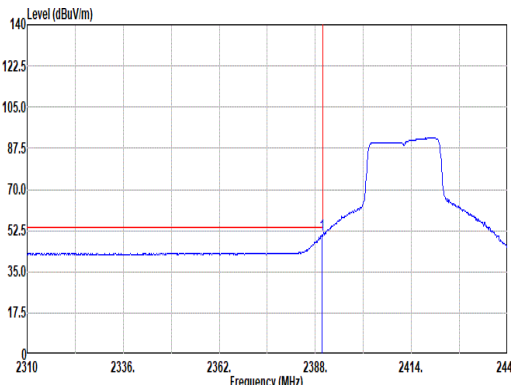
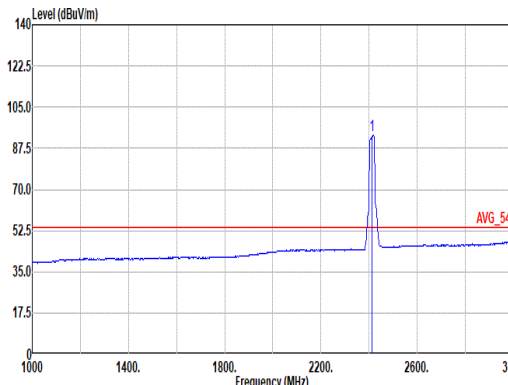


Mode	10																																																																																																		
	Band Edge																																																																																																		
	2400-2483.5_802.11ax HE20_CH01_Full RU_2412MHz																																																																																																		
ANT	1																																																																																																		
Pol.	Vertical						Fundamental																																																																																												
Peak																																																																																																			
	Site : 03CH11-HY Condition: PEAK_BE_74 3m 91200_01620_240828 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto Detector : PEAK Mode : 10 Setting : 70 Plane : X with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2388.52</td><td>63.42</td><td>74.00</td><td>-10.58</td><td>52.26</td><td>27.29</td><td>7.18</td><td>33.34</td><td>10.03</td><td>400</td><td>127</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2388.52	63.42	74.00	-10.58	52.26	27.29	7.18	33.34	10.03	400	127	PEAK	Site : 03CH11-HY Condition: PEAK_74 3m 91200_01620_240828 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto Detector : PEAK Mode : 10 Setting : 70 Plane : X with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2412.00</td><td>102.03</td><td>-----</td><td>-----</td><td>90.59</td><td>27.50</td><td>7.23</td><td>33.32</td><td>10.03</td><td>400</td><td>127</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	102.03	-----	-----	90.59	27.50	7.23	33.32	10.03	400	127
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2388.52	63.42	74.00	-10.58	52.26	27.29	7.18	33.34	10.03	400	127	PEAK																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2412.00	102.03	-----	-----	90.59	27.50	7.23	33.32	10.03	400	127	PEAK																																																																																							
Avg																																																																																																			
	Site : 03CH11-HY Condition: AVG_BE_54 3m 91200_01620_240828 VERTICAL : RBW:1000.000kHz VBW:1.000kHz SMT:Auto Detector : PEAK Mode : 10 Setting : 70 Plane : X with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2389.82</td><td>50.45</td><td>54.00</td><td>-3.55</td><td>39.27</td><td>27.30</td><td>7.19</td><td>33.34</td><td>10.03</td><td>400</td><td>127</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.82	50.45	54.00	-3.55	39.27	27.30	7.19	33.34	10.03	400	127	AVERAGE	Site : 03CH11-HY Condition: AVG_54 3m 91200_01620_240828 VERTICAL : RBW:1000.000kHz VBW:1.000kHz SMT:Auto Detector : PEAK Mode : 10 Setting : 70 Plane : X with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2412.00</td><td>93.22</td><td>-----</td><td>-----</td><td>81.78</td><td>27.50</td><td>7.23</td><td>33.32</td><td>10.03</td><td>400</td><td>127</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	93.22	-----	-----	81.78	27.50	7.23	33.32	10.03	400	127
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2389.82	50.45	54.00	-3.55	39.27	27.30	7.19	33.34	10.03	400	127	AVERAGE																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2412.00	93.22	-----	-----	81.78	27.50	7.23	33.32	10.03	400	127	AVERAGE																																																																																							



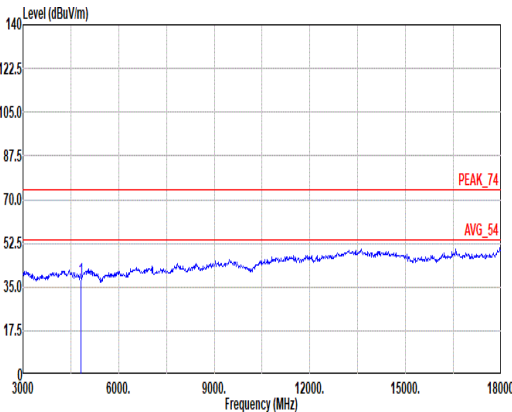
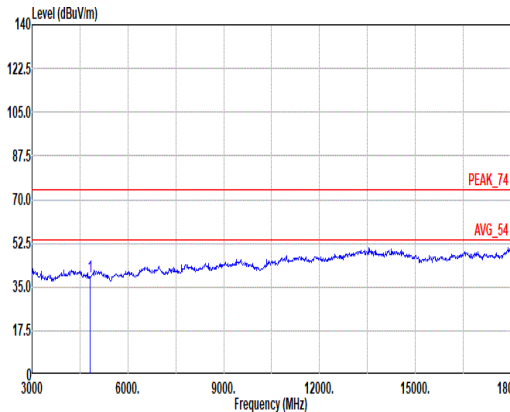


Mode	10																																																																																																	
	Harmonic																																																																																																	
	2400-2483.5_802.11ax HE20_CH01_Full RU_2412MHz																																																																																																	
ANT	1																																																																																																	
Pol.	Horizontal						Vertical																																																																																											
Peak Avg	 Site : 03CH11-HY Condition: PEAK_74 3m 91200_01620_240828 HORIZONTAL Mode : 10 Setting : 70 Plane : X with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4824.00</td><td>38.07</td><td>74.00</td><td>-35.93</td><td>61.93</td><td>32.44</td><td>9.93</td><td>66.74</td><td>0.51</td><td>--</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4824.00	38.07	74.00	-35.93	61.93	32.44	9.93	66.74	0.51	--	Peak	 Site : 03CH11-HY Condition: PEAK_74 3m 91200_01620_240828 VERTICAL Mode : 10 Setting : 70 Plane : X with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4824.00</td><td>39.11</td><td>74.00</td><td>-34.89</td><td>62.97</td><td>32.44</td><td>9.93</td><td>66.74</td><td>0.51</td><td>--</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4824.00	39.11	74.00	-34.89	62.97	32.44	9.93	66.74	0.51	--	Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	4824.00	38.07	74.00	-35.93	61.93	32.44	9.93	66.74	0.51	--	Peak																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	4824.00	39.11	74.00	-34.89	62.97	32.44	9.93	66.74	0.51	--	Peak																																																																																							

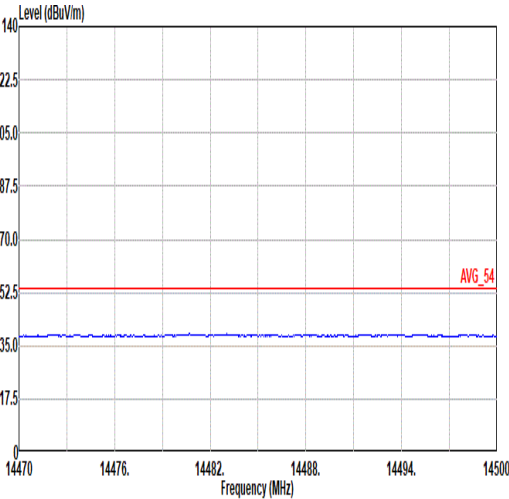
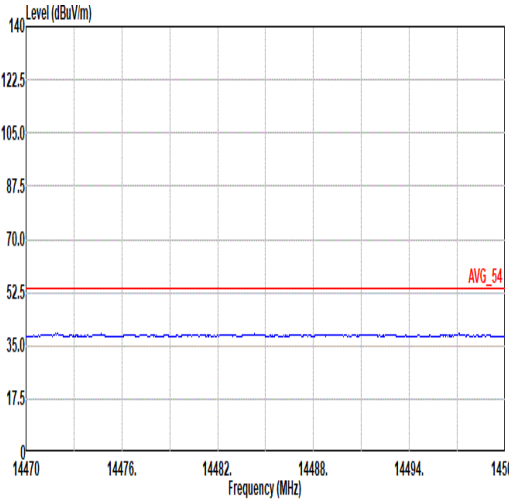
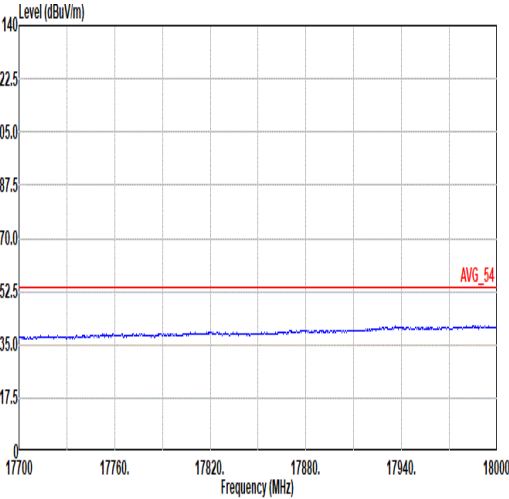
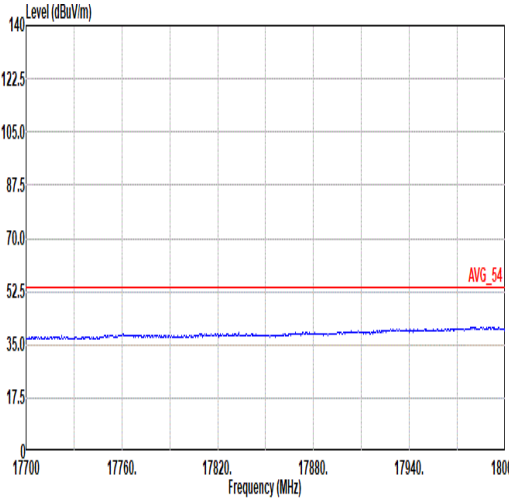


Mode	10	
	Harmonic	
	2400-2483.5_802.11ax HE20_CH01_Full RU_2412MHz	
ANT	1	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	 Site : 03CH11-HY Condition: AVG_54 3m 91280_01620_240828 HORIZONTAL Mode : 10 Setting : 70 Plane : X with adapter	 Site : 03CH11-HY Condition: AVG_54 3m 91280_01620_240828 VERTICAL Mode : 10 Setting : 70 Plane : X with adapter
	 Site : 03CH11-HY Condition: AVG_54 3m 91280_01620_240828 HORIZONTAL Mode : 10 Setting : 70 Plane : X with adapter	 Site : 03CH11-HY Condition: AVG_54 3m 91280_01620_240828 VERTICAL Mode : 10 Setting : 70 Plane : X with adapter

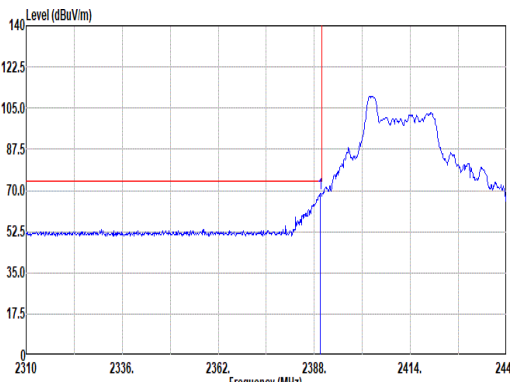
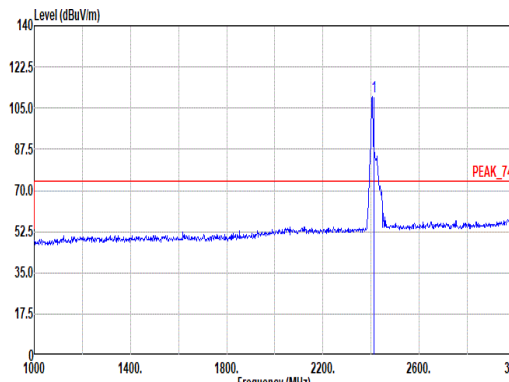
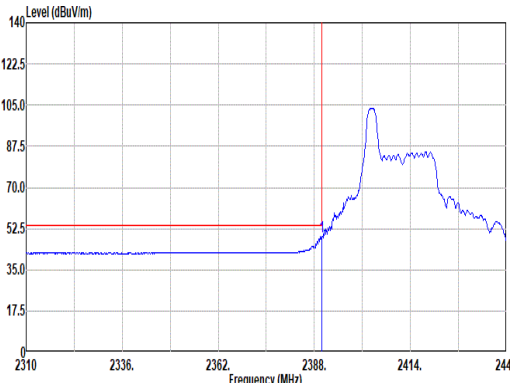
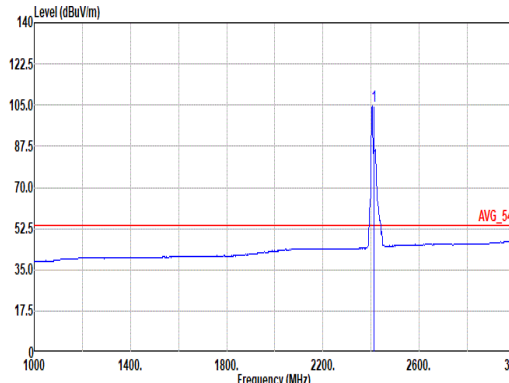


		11																																																																																																									
Mode	Band Edge																																																																																																										
	2400-2483.5_802.11ax HE20_CH01_Partial RU 26/0_2412MHz																																																																																																										
ANT	1																																																																																																										
Pol.	Horizontal						Fundamental																																																																																																				
Peak																																																																																																											
	Site : 03CH11-HY Condition: PEAK_BE_74 3m 91200_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto Detector : PEAK Mode : 11 Setting : 80 Plane : X with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="3">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2389.69</td><td>68.88</td><td>74.00</td><td>-5.12</td><td>57.70</td><td>27.30</td><td>7.19</td><td>33.34</td><td>10.03</td><td>305</td><td>352 PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	2389.69	68.88	74.00	-5.12	57.70	27.30	7.19	33.34	10.03	305	352 PEAK	Site : 03CH11-HY Condition: PEAK_74 3m 91200_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto Detector : PEAK Mode : 11 Setting : 80 Plane : X with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="3">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2412.00</td><td>109.96</td><td>-----</td><td>-----</td><td>98.65</td><td>27.40</td><td>7.21</td><td>33.33</td><td>10.03</td><td>305</td><td>352 PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	2412.00	109.96	-----	-----	98.65	27.40	7.21	33.33	10.03	305
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																	
1	2389.69	68.88	74.00	-5.12	57.70	27.30	7.19	33.34	10.03	305	352 PEAK																																																																																																
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																	
1	2412.00	109.96	-----	-----	98.65	27.40	7.21	33.33	10.03	305	352 PEAK																																																																																																
Avg																																																																																																											
	Site : 03CH11-HY Condition: AVG_BE_54 3m 91200_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:0.300kHz SMT:Auto Detector : PEAK Mode : 11 Setting : 80 Plane : X with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="3">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2389.95</td><td>49.13</td><td>54.00</td><td>-4.87</td><td>37.95</td><td>27.30</td><td>7.19</td><td>33.34</td><td>10.03</td><td>305</td><td>352 AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	2389.95	49.13	54.00	-4.87	37.95	27.30	7.19	33.34	10.03	305	352 AVERAGE	Site : 03CH11-HY Condition: AVG_54 3m 91200_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:0.300kHz SMT:Auto Detector : PEAK Mode : 11 Setting : 80 Plane : X with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="3">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2412.00</td><td>104.80</td><td>-----</td><td>-----</td><td>93.49</td><td>27.40</td><td>7.21</td><td>33.33</td><td>10.03</td><td>305</td><td>352 AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	2412.00	104.80	-----	-----	93.49	27.40	7.21	33.33	10.03	305
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																	
1	2389.95	49.13	54.00	-4.87	37.95	27.30	7.19	33.34	10.03	305	352 AVERAGE																																																																																																
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																	
1	2412.00	104.80	-----	-----	93.49	27.40	7.21	33.33	10.03	305	352 AVERAGE																																																																																																

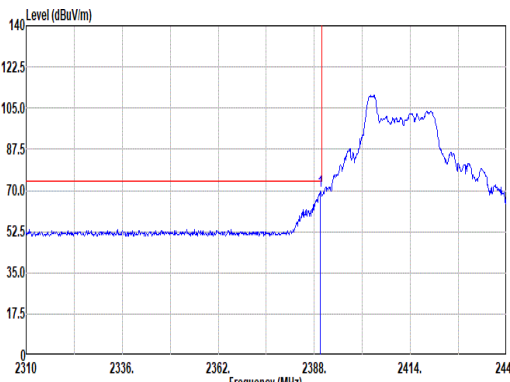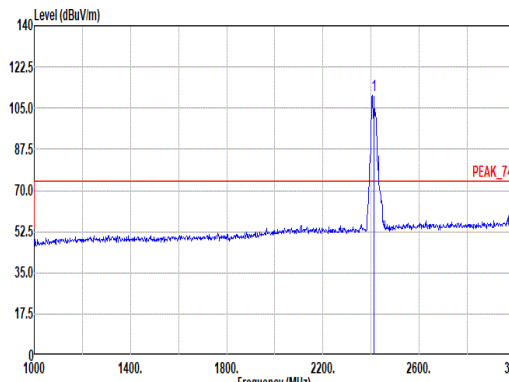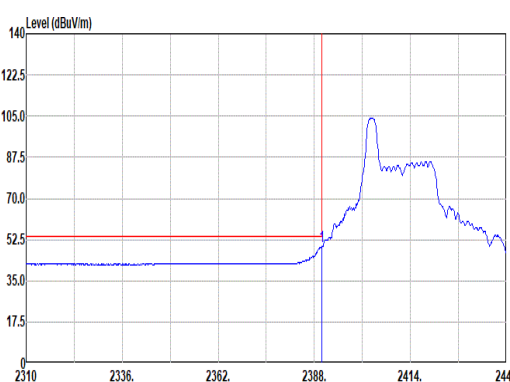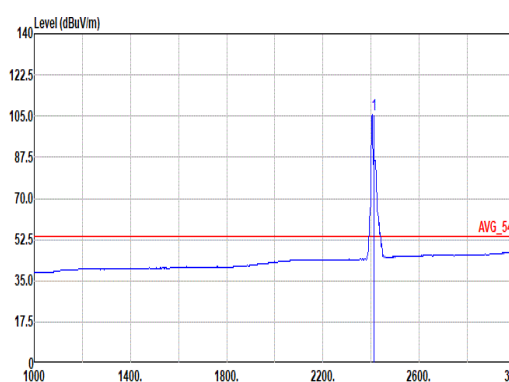

		11																																																				
Mode		Band Edge																																																				
		2400-2483.5_802.11ax HE20_CH01_Partial RU 26/0_2412MHz																																																				
ANT		1																																																				
Pol.		Vertical																																																				
Peak																																																						
	Site : 03CH11-HY Condition: PEAK_BE_74 3m 91200_01620_240828 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto Detector : PEAK Mode : 11 Setting : 80 Plane : X with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2389.69</td><td>69.69</td><td>74.00</td><td>-4.31</td><td>58.51</td><td>27.30</td><td>7.19</td><td>33.34</td><td>10.03</td><td>400 312 PEAK</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.69	69.69	74.00	-4.31	58.51	27.30	7.19	33.34	10.03
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																												
1	2389.69	69.69	74.00	-4.31	58.51	27.30	7.19	33.34	10.03	400 312 PEAK																																												
Fundamental																																																						
	Site : 03CH11-HY Condition: PEAK_74 3m 91200_01620_240828 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto Detector : PEAK Mode : 11 Setting : 80 Plane : X with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2412.00</td><td>110.49</td><td>-----</td><td>-----</td><td>99.18</td><td>27.40</td><td>7.21</td><td>33.33</td><td>10.03</td><td>400 312 PEAK</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	110.49	-----	-----	99.18	27.40	7.21	33.33	10.03
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																												
1	2412.00	110.49	-----	-----	99.18	27.40	7.21	33.33	10.03	400 312 PEAK																																												
Avg																																																						
	Site : 03CH11-HY Condition: AVG_BE_54 3m 91200_01620_240828 VERTICAL : RBW:1000.000kHz VBW:0.300kHz SMT:Auto Detector : PEAK Mode : 11 Setting : 80 Plane : X with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2389.95</td><td>49.41</td><td>54.00</td><td>-4.59</td><td>38.23</td><td>27.30</td><td>7.19</td><td>33.34</td><td>10.03</td><td>400 312 AVERAGE</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.95	49.41	54.00	-4.59	38.23	27.30	7.19	33.34	10.03
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																												
1	2389.95	49.41	54.00	-4.59	38.23	27.30	7.19	33.34	10.03	400 312 AVERAGE																																												
AVERAGE																																																						
	Site : 03CH11-HY Condition: AVG_54 3m 91200_01620_240828 VERTICAL : RBW:1000.000kHz VBW:0.300kHz SMT:Auto Detector : PEAK Mode : 11 Setting : 80 Plane : X with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2412.00</td><td>105.51</td><td>-----</td><td>-----</td><td>94.20</td><td>27.40</td><td>7.21</td><td>33.33</td><td>10.03</td><td>400 312 AVERAGE</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	105.51	-----	-----	94.20	27.40	7.21	33.33	10.03
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																												
1	2412.00	105.51	-----	-----	94.20	27.40	7.21	33.33	10.03	400 312 AVERAGE																																												

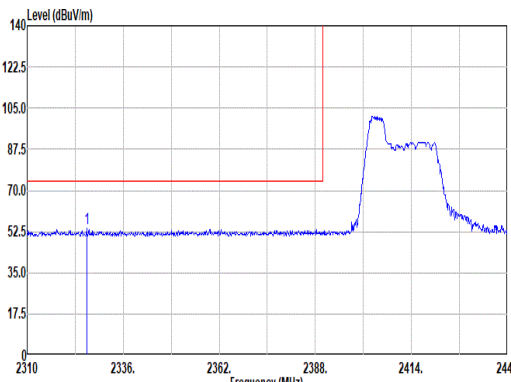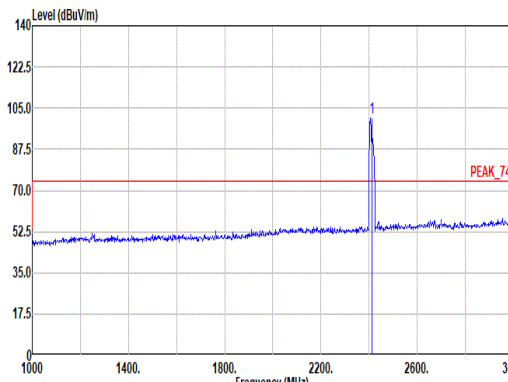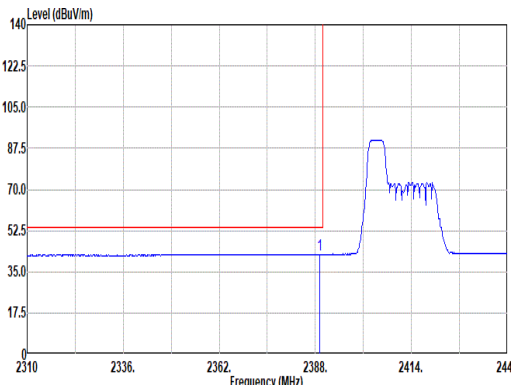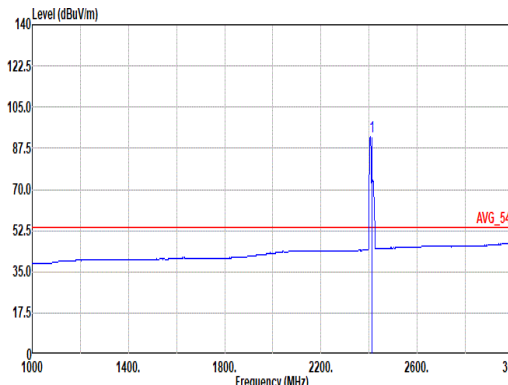

	12																																																																																																		
Mode	Band Edge																																																																																																		
	2400-2483.5_802.11ax HE20_CH01_Partial RU 52/37_2412MHz																																																																																																		
ANT	1																																																																																																		
Pol.	Horizontal						Fundamental																																																																																												
Peak																																																																																																			
	Site : 03CH11-HY Condition: PEAK_BE_74 3m 91200_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto Detector : PEAK Mode : 12 Setting : 39 Plane : X with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2326.12</td><td>53.75</td><td>74.00</td><td>-20.25</td><td>42.88</td><td>27.14</td><td>7.10</td><td>33.38</td><td>10.01</td><td>226</td><td>201</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2326.12	53.75	74.00	-20.25	42.88	27.14	7.10	33.38	10.01	226	201	PEAK	Site : 03CH11-HY Condition: PEAK_74 3m 91200_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto Detector : PEAK Mode : 12 Setting : 39 Plane : X with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2412.00</td><td>101.04</td><td>-----</td><td>-----</td><td>89.73</td><td>27.40</td><td>7.21</td><td>33.33</td><td>10.03</td><td>226</td><td>201</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	101.04	-----	-----	89.73	27.40	7.21	33.33	10.03	226	201
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2326.12	53.75	74.00	-20.25	42.88	27.14	7.10	33.38	10.01	226	201	PEAK																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2412.00	101.04	-----	-----	89.73	27.40	7.21	33.33	10.03	226	201	PEAK																																																																																							
Avg																																																																																																			
	Site : 03CH11-HY Condition: AVG_BE_54 3m 91200_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:0.300kHz SMT:Auto Detector : PEAK Mode : 12 Setting : 39 Plane : X with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2309.17</td><td>42.49</td><td>54.00</td><td>-11.51</td><td>31.32</td><td>27.29</td><td>7.19</td><td>33.34</td><td>10.03</td><td>226</td><td>201</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2309.17	42.49	54.00	-11.51	31.32	27.29	7.19	33.34	10.03	226	201	AVERAGE	Site : 03CH11-HY Condition: AVG_54 3m 91200_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:0.300kHz SMT:Auto Detector : PEAK Mode : 12 Setting : 39 Plane : X with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2412.00</td><td>92.50</td><td>-----</td><td>-----</td><td>81.19</td><td>27.40</td><td>7.21</td><td>33.33</td><td>10.03</td><td>226</td><td>201</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	92.50	-----	-----	81.19	27.40	7.21	33.33	10.03	226	201
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2309.17	42.49	54.00	-11.51	31.32	27.29	7.19	33.34	10.03	226	201	AVERAGE																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2412.00	92.50	-----	-----	81.19	27.40	7.21	33.33	10.03	226	201	AVERAGE																																																																																							



		12											
Mode	Band Edge												
	2400-2483.5_802.11ax HE20_CH01_Partial RU 52/37_2412MHz												
ANT	1												
Pol.	Vertical												
Peak	Fundamental												
	Fundamental												
Peak	Vertical												
	Vertical												
Avg	Fundamental												
	Fundamental												

Level (dBuV/m)

140

122.5

105.0

87.5

70.0

52.5

35.0

17.5

0

2310

2336

2362

2388

2414

2440

Frequency (MHz)

Site : 03CH11-HY

Condition: PEAK_BE_74 3m 91200_01620_240828 VERTICAL

: RBW:1000.000kHz VBW:3000.000kHz SMT:Auto

Detector : PEAK

Mode : 12

Setting : 39

Plane : X with adapter

	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	
1	2361.74	53.34	74.00	-20.66	42.33	27.20	7.15	33.36	10.02	116	360 PEAK

Level (dBuV/m)

140

122.5

105.0

87.5

70.0

52.5

35.0

17.5

0

1000

1400

1800

2200

2600

3000

Frequency (MHz)

Site : 03CH11-HY

Condition: PEAK_74 3m 91200_01620_240828 VERTICAL

: RBW:1000.000kHz VBW:3000.000kHz SMT:Auto

Detector : PEAK

Mode : 12

Setting : 39

Plane : X with adapter

	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	
1	2412.00	103.19	-----	-----	91.88	27.40	7.21	33.33	10.03	116	360 PEAK

Level (dBuV/m)

140

122.5

105.0

87.5

70.0

52.5

35.0

17.5

0

2310

2336

2362

2388

2414

2440

Frequency (MHz)

Site : 03CH11-HY

Condition: AVG_BE_54 3m 91200_01620_240828 VERTICAL

: RBW:1000.000kHz VBW:0.300kHz SMT:Auto

Detector : PEAK

Mode : 12

Setting : 39

Plane : X with adapter

	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	
1	2382.93	42.44	54.00	-11.56	31.34	27.23	7.18	33.34	10.03	116	360 AVERAGE

Level (dBuV/m)

140

122.5

105.0

87.5

70.0

52.5

35.0

17.5

0

1000

1400

1800

2200

2600

3000

Frequency (MHz)

Site : 03CH11-HY

Condition: AVG_54 3m 91200_01620_240828 VERTICAL

: RBW:1000.000kHz VBW:0.300kHz SMT:Auto

Detector : PEAK





Mode : 12

Setting : 39





Plane : X with adapter

	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	
1	2412.00	91.89	-----	-----	80.58	27.40	7.21	33.33	10.03	116	360 AVERAGE

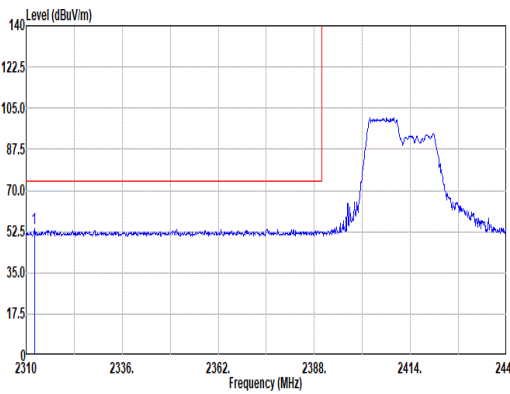
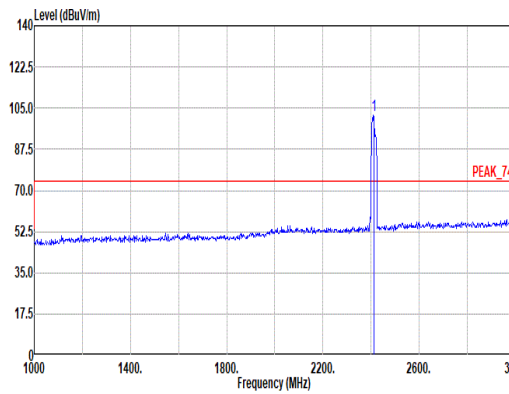
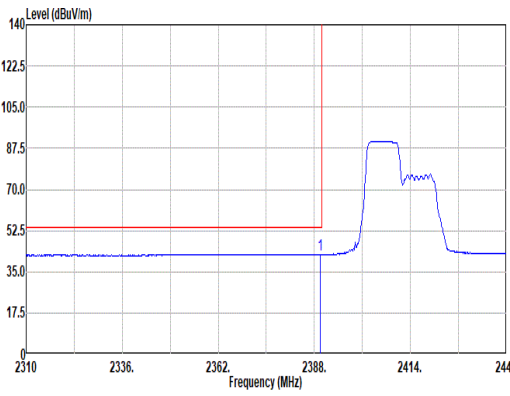
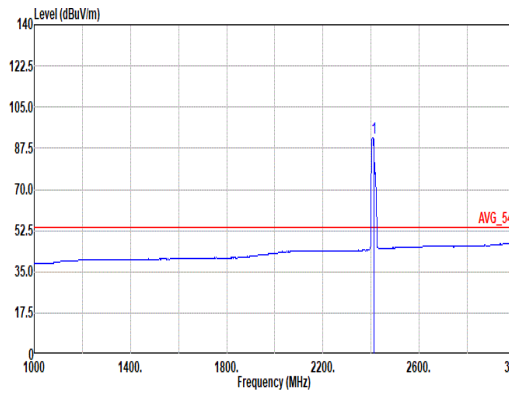


		13																																																	
Mode		Band Edge																																																	
		2400-2483.5_802.11ax HE20_CH01_Partial RU 106/53_2412MHz																																																	
ANT		1																																																	
Pol.		Horizontal																																																	
Peak																																																			
	Site : 03CH11-HY Condition: PEAK_BE_74 3m 91200_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto Detector : PEAK Mode : 13 Setting : 48 Plane : X with adapter <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2312.21</td><td>53.76</td><td>74.00</td><td>-20.24</td><td>42.86</td><td>27.20</td><td>7.08</td><td>33.39</td><td>10.01</td><td>397</td><td>226</td><td>PEAK</td></tr></table>												Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2312.21	53.76	74.00	-20.24	42.86	27.20	7.08	33.39	10.01	397	226
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																						
	MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																							
1	2312.21	53.76	74.00	-20.24	42.86	27.20	7.08	33.39	10.01	397	226	PEAK																																							
Fundamental																																																			
	Site : 03CH11-HY Condition: PEAK_74 3m 91200_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto Detector : PEAK Mode : 13 Setting : 48 Plane : X with adapter <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2412.00</td><td>101.74</td><td>-----</td><td>-----</td><td>90.43</td><td>27.40</td><td>7.21</td><td>33.33</td><td>10.03</td><td>397</td><td>226</td><td>PEAK</td></tr></table>												Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2412.00	101.74	-----	-----	90.43	27.40	7.21	33.33	10.03	397	226
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																						
	MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																							
1	2412.00	101.74	-----	-----	90.43	27.40	7.21	33.33	10.03	397	226	PEAK																																							
Avg																																																			
	Site : 03CH11-HY Condition: AVG_BE_54 3m 91200_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:0.300kHz SMT:Auto Detector : PEAK Mode : 13 Setting : 48 Plane : X with adapter <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2309.69</td><td>42.43</td><td>54.00</td><td>-11.57</td><td>31.25</td><td>27.30</td><td>7.19</td><td>33.34</td><td>10.03</td><td>397</td><td>226</td><td>AVERAGE</td></tr></table>												Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2309.69	42.43	54.00	-11.57	31.25	27.30	7.19	33.34	10.03	397	226
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																						
	MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																							
1	2309.69	42.43	54.00	-11.57	31.25	27.30	7.19	33.34	10.03	397	226	AVERAGE																																							
AVERAGE																																																			
	Site : 03CH11-HY Condition: AVG_54 3m 91200_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:0.300kHz SMT:Auto Detector : PEAK Mode : 13 Setting : 48 Plane : X with adapter <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2412.00</td><td>91.90</td><td>-----</td><td>-----</td><td>80.59</td><td>27.40</td><td>7.21</td><td>33.33</td><td>10.03</td><td>397</td><td>226</td><td>AVERAGE</td></tr></table>												Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2412.00	91.90	-----	-----	80.59	27.40	7.21	33.33	10.03	397	226
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																						
	MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																							
1	2412.00	91.90	-----	-----	80.59	27.40	7.21	33.33	10.03	397	226	AVERAGE																																							

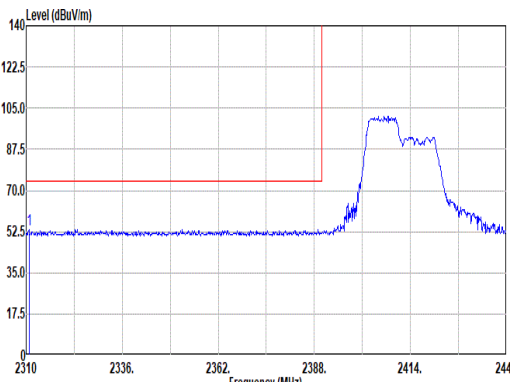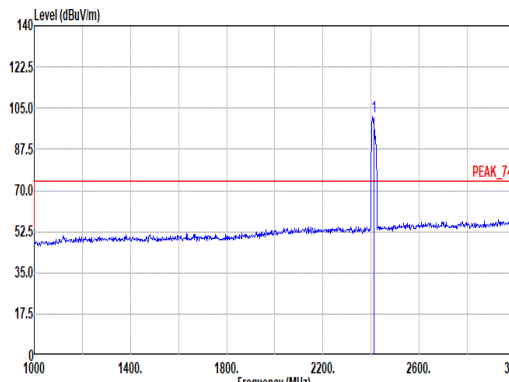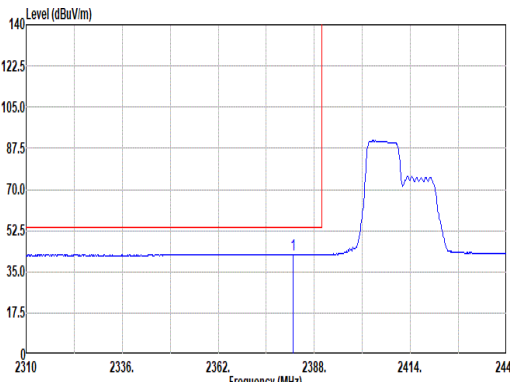
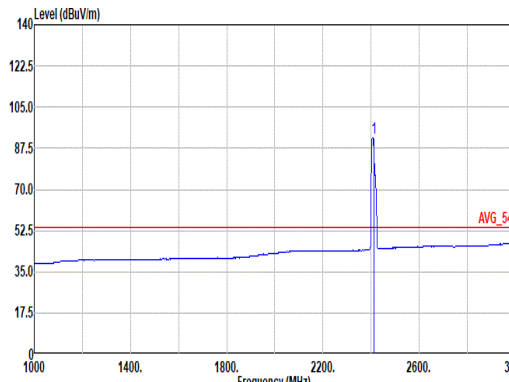


		13																																																																																									
Mode		Band Edge																																																																																									
		2400-2483.5_802.11ax HE20_CH01_Partial RU 106/53_2412MHz																																																																																									
ANT		1																																																																																									
Pol.		Vertical																																																																																									
Fundamental																																																																																											
Peak		 Site : 03CH11-HY Condition: PEAK_BE_74 3m 91200_01620_240828 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto Detector : PEAK Mode : 13 Setting : 48 Plane : X with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2310.78</td><td>53.61</td><td>74.00</td><td>-20.39</td><td>42.71</td><td>27.20</td><td>7.08</td><td>33.39</td><td>10.01</td><td>247</td><td>322</td><td>PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2310.78	53.61	74.00	-20.39	42.71	27.20	7.08	33.39	10.01	247	322	PEAK	 Site : 03CH11-HY Condition: PEAK_74 3m 91200_01620_240828 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto Detector : PEAK Mode : 13 Setting : 48 Plane : X with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2412.00</td><td>101.21</td><td>-----</td><td>-----</td><td>89.90</td><td>27.40</td><td>7.21</td><td>33.33</td><td>10.03</td><td>247</td><td>322</td><td>PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	101.21	-----	-----	89.90	27.40	7.21	33.33	10.03	247	322	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																	
1	2310.78	53.61	74.00	-20.39	42.71	27.20	7.08	33.39	10.01	247	322	PEAK																																																																															
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																	
1	2412.00	101.21	-----	-----	89.90	27.40	7.21	33.33	10.03	247	322	PEAK																																																																															
Avg		 Site : 03CH11-HY Condition: AVG_BE_54 3m 91200_01620_240828 VERTICAL : RBW:1000.000kHz VBW:0.300kHz SMT:Auto Detector : PEAK Mode : 13 Setting : 48 Plane : X with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2302.28</td><td>42.45</td><td>54.00</td><td>-11.55</td><td>31.36</td><td>27.22</td><td>7.18</td><td>33.34</td><td>10.03</td><td>247</td><td>322</td><td>AVERAGE</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2302.28	42.45	54.00	-11.55	31.36	27.22	7.18	33.34	10.03	247	322	AVERAGE	 Site : 03CH11-HY Condition: AVG_54 3m 91200_01620_240828 VERTICAL : RBW:1000.000kHz VBW:0.300kHz SMT:Auto Detector : PEAK Mode : 13 Setting : 48 Plane : X with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2412.00</td><td>92.16</td><td>-----</td><td>-----</td><td>80.05</td><td>27.40</td><td>7.21</td><td>33.33</td><td>10.03</td><td>247</td><td>322</td><td>AVERAGE</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	92.16	-----	-----	80.05	27.40	7.21	33.33	10.03	247	322	AVERAGE
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																	
1	2302.28	42.45	54.00	-11.55	31.36	27.22	7.18	33.34	10.03	247	322	AVERAGE																																																																															
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																	
1	2412.00	92.16	-----	-----	80.05	27.40	7.21	33.33	10.03	247	322	AVERAGE																																																																															

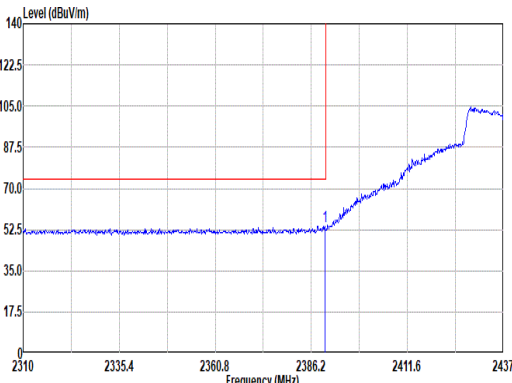
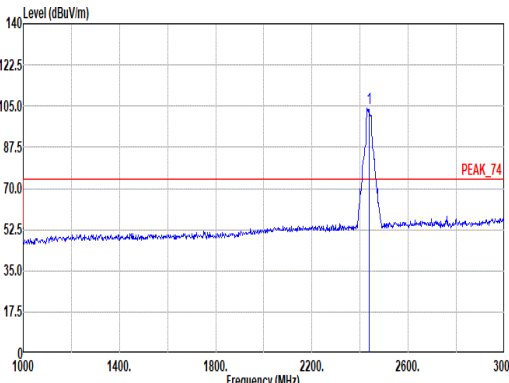
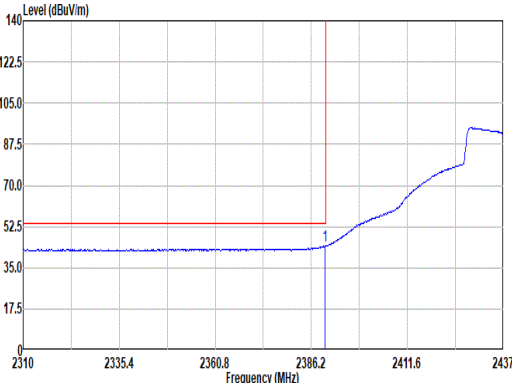
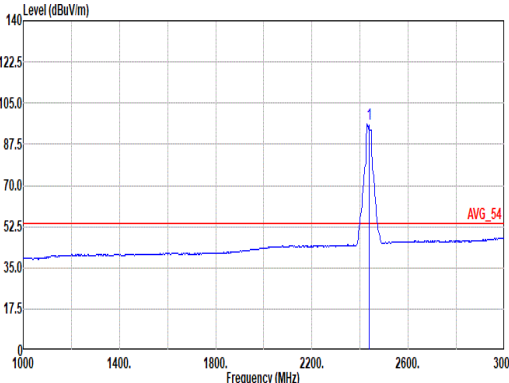


		14																																																				
Mode		Band Edge - L																																																				
		2400-2483.5_802.11ax HE20_CH06_Full RU_2437MHz																																																				
ANT		1																																																				
Pol.		Horizontal					Fundamental																																															
Peak																																																						
		Site : 03CH11-HY Condition: PEAK_BE_74 3m 91200_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto Detector : PEAK Mode : 14 Setting : 82 Plane : X with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2389.76</td><td>54.13</td><td>74.00</td><td>-19.87</td><td>42.95</td><td>27.30</td><td>7.19</td><td>33.34</td><td>10.03</td><td>389 23 PEAK</td></tr></table>											Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2389.76	54.13	74.00	-19.87	42.95	27.30	7.19	33.34	10.03
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																												
1	2389.76	54.13	74.00	-19.87	42.95	27.30	7.19	33.34	10.03	389 23 PEAK																																												
Fundamental																																																						
		Site : 03CH11-HY Condition: PEAK_74 3m 91200_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto Detector : PEAK Mode : 14 Setting : 82 Plane : X with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2437.00</td><td>103.97</td><td>-----</td><td>-----</td><td>92.43</td><td>27.58</td><td>7.24</td><td>33.31</td><td>10.03</td><td>389 23 PEAK</td></tr></table>											Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2437.00	103.97	-----	-----	92.43	27.58	7.24	33.31	10.03
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																												
1	2437.00	103.97	-----	-----	92.43	27.58	7.24	33.31	10.03	389 23 PEAK																																												
Avg																																																						
		Site : 03CH11-HY Condition: AVG_BE_54 3m 91200_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:1.000kHz SMT:Auto Detector : PEAK Mode : 14 Setting : 82 Plane : X with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2389.76</td><td>44.27</td><td>54.00</td><td>-9.73</td><td>33.09</td><td>27.30</td><td>7.19</td><td>33.34</td><td>10.03</td><td>389 23 AVERAGE</td></tr></table>											Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2389.76	44.27	54.00	-9.73	33.09	27.30	7.19	33.34	10.03
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																												
1	2389.76	44.27	54.00	-9.73	33.09	27.30	7.19	33.34	10.03	389 23 AVERAGE																																												
Fundamental																																																						
		Site : 03CH11-HY Condition: AVG_54 3m 91200_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:1.000kHz SMT:Auto Detector : PEAK Mode : 14 Setting : 82 Plane : X with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2437.00</td><td>95.90</td><td>-----</td><td>-----</td><td>84.36</td><td>27.58</td><td>7.24</td><td>33.31</td><td>10.03</td><td>389 23 AVERAGE</td></tr></table>											Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2437.00	95.90	-----	-----	84.36	27.58	7.24	33.31	10.03
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																												
1	2437.00	95.90	-----	-----	84.36	27.58	7.24	33.31	10.03	389 23 AVERAGE																																												

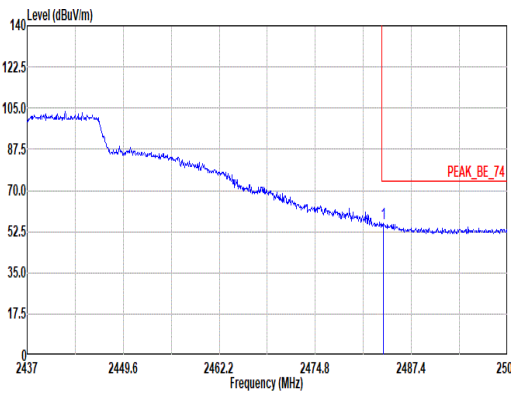
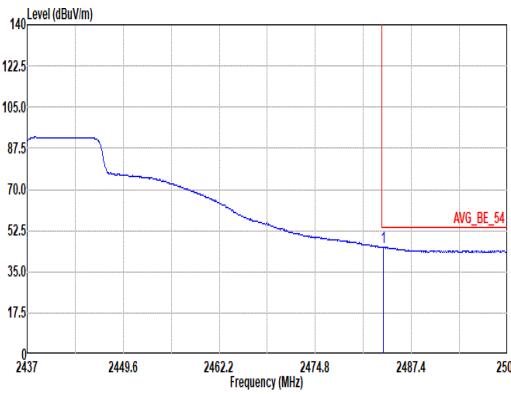


Mode	14																																																		
	Band Edge - R																																																		
	2400-2483.5_802.11ax HE20_CH06_Full RU_2437MHz																																																		
ANT	1																																																		
Pol.	Horizontal						Fundamental																																												
Peak	 Site : 03CH11-HY Condition: PEAK_BE_74 3m 91200_01620_240828 HORIZONTAL : RBW:1000.000kHz VBN:3000.000kHz SMT:Auto Detector : PEAK Mode : 14 Setting : 82 Plane : X with adapter <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2483.75</td><td>55.75</td><td>74.00</td><td>-18.25</td><td>43.04</td><td>27.04</td><td>7.32</td><td>33.28</td><td>10.03</td><td>309</td><td>23</td><td>PEAK</td></tr></table>						Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2483.75	55.75	74.00	-18.25	43.04	27.04	7.32	33.28	10.03	309	23	PEAK	Blank					
Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																							
MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																								
1	2483.75	55.75	74.00	-18.25	43.04	27.04	7.32	33.28	10.03	309	23	PEAK																																							
Avg	 Site : 03CH11-HY Condition: AVG_BE_54 3m 91200_01620_240828 HORIZONTAL : RBW:1000.000kHz VBN:1.000kHz SMT:Auto Detector : PEAK Mode : 14 Setting : 82 Plane : X with adapter <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2483.75</td><td>45.59</td><td>54.00</td><td>-8.41</td><td>33.68</td><td>27.04</td><td>7.32</td><td>33.28</td><td>10.03</td><td>309</td><td>23</td><td>AVERAGE</td></tr></table>						Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2483.75	45.59	54.00	-8.41	33.68	27.04	7.32	33.28	10.03	309	23	AVERAGE	Blank					
Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																							
MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																								
1	2483.75	45.59	54.00	-8.41	33.68	27.04	7.32	33.28	10.03	309	23	AVERAGE																																							

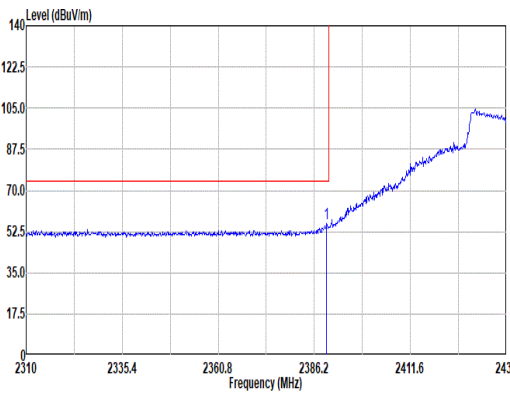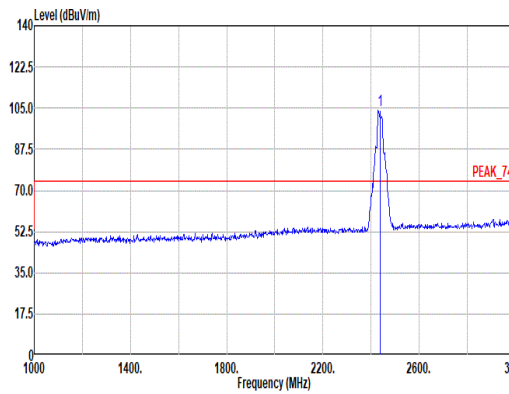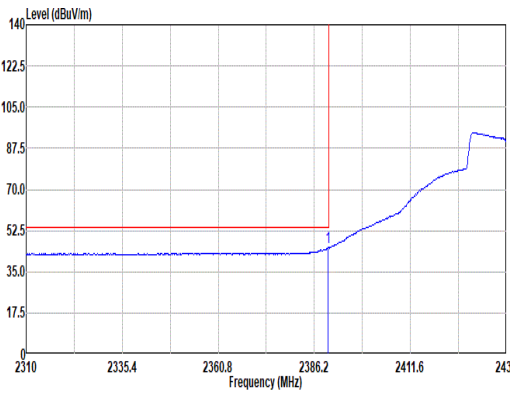
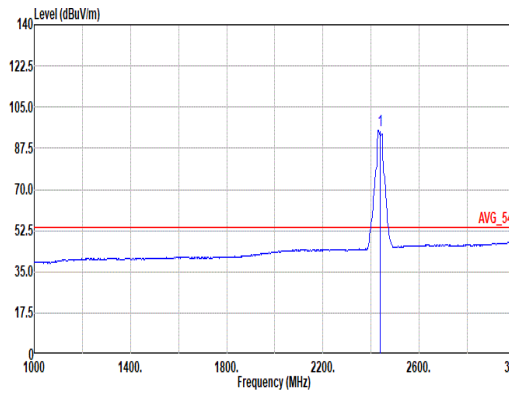


Mode	14																																																																																																										
	Band Edge - L																																																																																																										
	2400-2483.5_802.11ax HE20_CH06_Full RU_2437MHz																																																																																																										
ANT	1																																																																																																										
Pol.	Vertical						Fundamental																																																																																																				
Peak																																																																																																											
	Site : 03CH11-HY Condition: PEAK_BE_74 3m 91200_01620_240828 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto Detector : PEAK Mode : 14 Setting : 82 Plane : X with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="3">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2389.50</td><td>56.01</td><td>74.00</td><td>-17.99</td><td>44.83</td><td>27.30</td><td>7.19</td><td>33.34</td><td>10.03</td><td>400</td><td>344 PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	2389.50	56.01	74.00	-17.99	44.83	27.30	7.19	33.34	10.03	400	344 PEAK	Site : 03CH11-HY Condition: PEAK_74 3m 91200_01620_240828 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto Detector : PEAK Mode : 14 Setting : 82 Plane : X with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="3">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2437.00</td><td>104.10</td><td>-----</td><td>-----</td><td>92.56</td><td>27.58</td><td>7.24</td><td>33.31</td><td>10.03</td><td>400</td><td>344 PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	2437.00	104.10	-----	-----	92.56	27.58	7.24	33.31	10.03	400
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																	
1	2389.50	56.01	74.00	-17.99	44.83	27.30	7.19	33.34	10.03	400	344 PEAK																																																																																																
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																	
1	2437.00	104.10	-----	-----	92.56	27.58	7.24	33.31	10.03	400	344 PEAK																																																																																																
Avg																																																																																																											
	Site : 03CH11-HY Condition: AVG_BE_54 3m 91200_01620_240828 VERTICAL : RBW:1000.000kHz VBW:1.000kHz SMT:Auto Detector : PEAK Mode : 14 Setting : 82 Plane : X with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="3">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2389.00</td><td>45.38</td><td>54.00</td><td>-8.62</td><td>34.20</td><td>27.30</td><td>7.19</td><td>33.34</td><td>10.03</td><td>400</td><td>344 AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	2389.00	45.38	54.00	-8.62	34.20	27.30	7.19	33.34	10.03	400	344 AVERAGE	Site : 03CH11-HY Condition: AVG_54 3m 91200_01620_240828 VERTICAL : RBW:1000.000kHz VBW:1.000kHz SMT:Auto Detector : PEAK Mode : 14 Setting : 82 Plane : X with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="3">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2437.00</td><td>95.36</td><td>-----</td><td>-----</td><td>83.82</td><td>27.58</td><td>7.24</td><td>33.31</td><td>10.03</td><td>400</td><td>344 AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	2437.00	95.36	-----	-----	83.82	27.58	7.24	33.31	10.03	400
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																	
1	2389.00	45.38	54.00	-8.62	34.20	27.30	7.19	33.34	10.03	400	344 AVERAGE																																																																																																
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																	
1	2437.00	95.36	-----	-----	83.82	27.58	7.24	33.31	10.03	400	344 AVERAGE																																																																																																



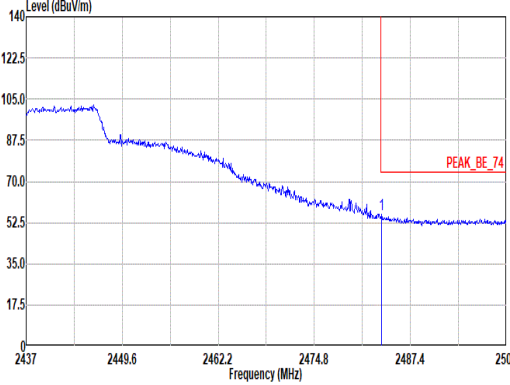
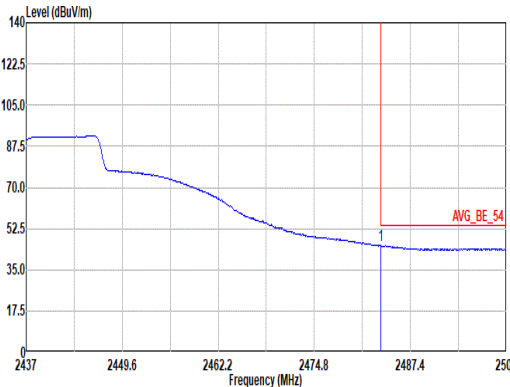


Mode	14																																														
	Band Edge - R																																														
	2400-2483.5_802.11ax HE20_CH06_Full RU_2437MHz																																														
ANT	1																																														
Pol.	Vertical						Fundamental																																								
Peak							Blank																																								
	Site : 03CH11-HY Condition: PEAK_BE_74 3m 91200_01620_240828 VERTICAL : RBW:1000.000kHz VBN:3000.000kHz SMT:Auto Detector : PEAK Mode : 14 Setting : 82 Plane : X with adapter <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>2483.62</td><td>55.95</td><td>74.00</td><td>-18.05</td><td></td><td>44.04</td><td>27.84</td><td>7.32</td><td>33.28</td><td>10.03</td><td>400</td><td>344</td><td>PEAK</td></tr></tbody></table>													Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2483.62	55.95	74.00	-18.05		44.04
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																		
	MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																			
1	2483.62	55.95	74.00	-18.05		44.04	27.84	7.32	33.28	10.03	400	344	PEAK																																		
Avg							Blank																																								
	Site : 03CH11-HY Condition: AVG_BE_54 3m 91200_01620_240828 VERTICAL : RBW:1000.000kHz VBN:1.000kHz SMT:Auto Detector : PEAK Mode : 14 Setting : 82 Plane : X with adapter <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>2483.56</td><td>45.24</td><td>54.00</td><td>-8.76</td><td></td><td>33.33</td><td>27.84</td><td>7.32</td><td>33.28</td><td>10.03</td><td>400</td><td>344</td><td>AVERAGE</td></tr></tbody></table>													Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2483.56	45.24	54.00	-8.76		33.33
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																		
	MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																			
1	2483.56	45.24	54.00	-8.76		33.33	27.84	7.32	33.28	10.03	400	344	AVERAGE																																		



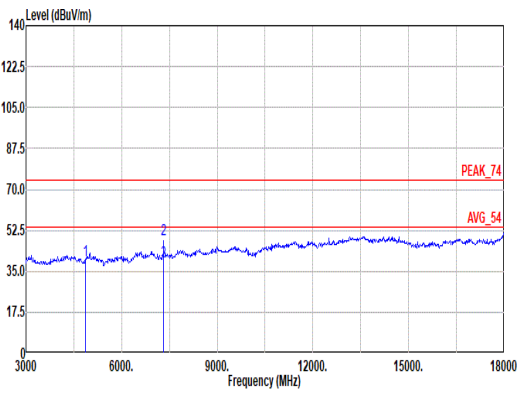
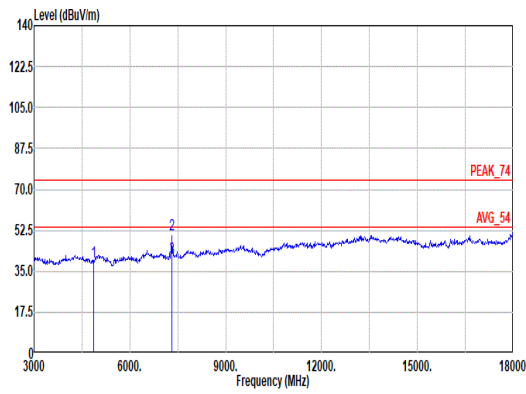


Mode	14																																																																																																																																																
	Harmonic																																																																																																																																																
	2400-2483.5_802.11ax HE20_CH06_Full RU_2437MHz																																																																																																																																																
ANT	1																																																																																																																																																
Pol.	Horizontal						Vertical																																																																																																																																										
Peak Avg																																																																																																																																																	
	Site : 03CH11-HY Condition: PEAK_74 3m 91280_01620_240828 HORIZONTAL Mode : 14 Setting : 82 Plane : X with adapter <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>4874.00</td><td>39.64</td><td>74.00</td><td>-34.36</td><td>63.02</td><td>32.70</td><td>10.09</td><td>66.70</td><td>0.53</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>7311.00</td><td>48.67</td><td>74.00</td><td>-25.33</td><td>64.58</td><td>36.78</td><td>12.76</td><td>65.77</td><td>0.32</td><td>125</td><td>235 Peak</td></tr><tr><td>3</td><td>7311.00</td><td>38.90</td><td>54.00</td><td>-15.10</td><td>54.81</td><td>36.78</td><td>12.76</td><td>65.77</td><td>0.32</td><td>125</td><td>235 Average</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	4874.00	39.64	74.00	-34.36	63.02	32.70	10.09	66.70	0.53	--	Peak	2	7311.00	48.67	74.00	-25.33	64.58	36.78	12.76	65.77	0.32	125	235 Peak	3	7311.00	38.90	54.00	-15.10	54.81	36.78	12.76	65.77	0.32	125	235 Average	Site : 03CH11-HY Condition: PEAK_74 3m 91280_01620_240828 VERTICAL Mode : 14 Setting : 82 Plane : X with adapter <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>4874.00</td><td>39.24</td><td>74.00</td><td>-34.76</td><td>62.62</td><td>32.70</td><td>10.09</td><td>66.70</td><td>0.53</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>7311.00</td><td>50.76</td><td>74.00</td><td>-23.24</td><td>66.67</td><td>36.78</td><td>12.76</td><td>65.77</td><td>0.32</td><td>100</td><td>228 Peak</td></tr><tr><td>3</td><td>7311.00</td><td>40.87</td><td>54.00</td><td>-13.13</td><td>56.78</td><td>36.78</td><td>12.76</td><td>65.77</td><td>0.32</td><td>100</td><td>228 Average</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	4874.00	39.24	74.00	-34.76	62.62	32.70	10.09	66.70	0.53	--	Peak	2	7311.00	50.76	74.00	-23.24	66.67	36.78	12.76	65.77	0.32	100	228 Peak	3	7311.00	40.87	54.00	-13.13	56.78	36.78	12.76	65.77	0.32	100
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																							
1	4874.00	39.64	74.00	-34.36	63.02	32.70	10.09	66.70	0.53	--	Peak																																																																																																																																						
2	7311.00	48.67	74.00	-25.33	64.58	36.78	12.76	65.77	0.32	125	235 Peak																																																																																																																																						
3	7311.00	38.90	54.00	-15.10	54.81	36.78	12.76	65.77	0.32	125	235 Average																																																																																																																																						
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																							
1	4874.00	39.24	74.00	-34.76	62.62	32.70	10.09	66.70	0.53	--	Peak																																																																																																																																						
2	7311.00	50.76	74.00	-23.24	66.67	36.78	12.76	65.77	0.32	100	228 Peak																																																																																																																																						
3	7311.00	40.87	54.00	-13.13	56.78	36.78	12.76	65.77	0.32	100	228 Average																																																																																																																																						

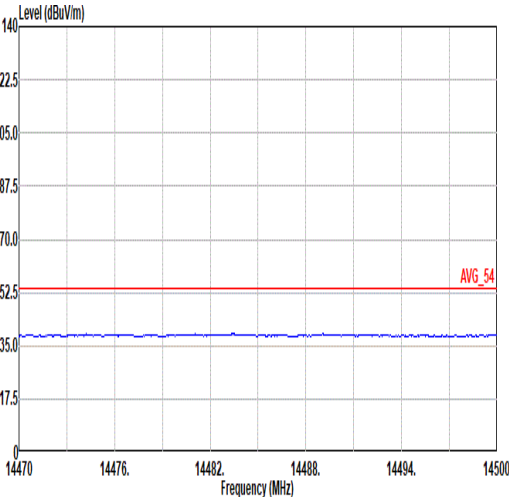
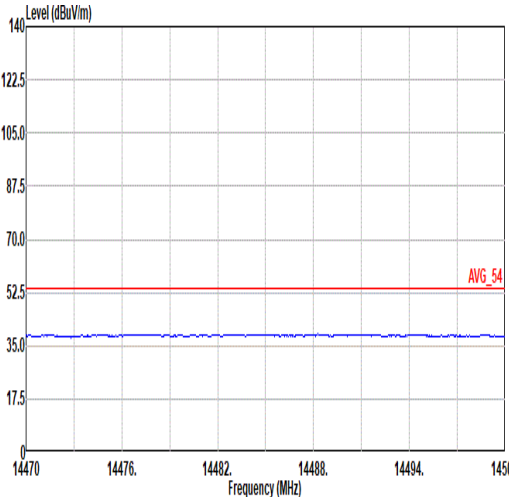
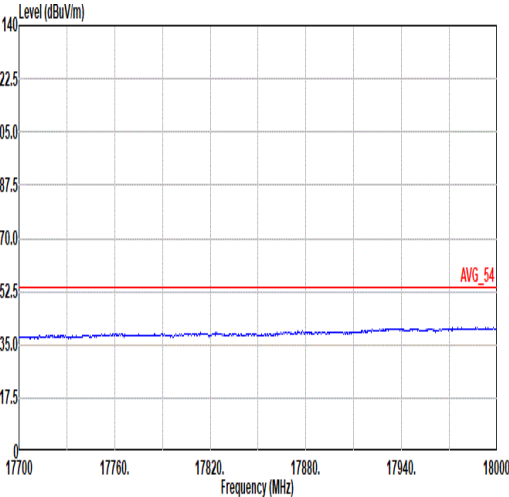
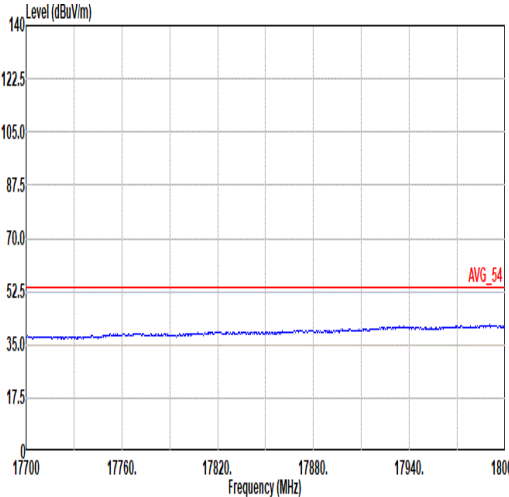


Mode	14	
	Harmonic	
	2400-2483.5_802.11ax HE20_CH06_Full RU_2437MHz	
ANT	1	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	 Site : 03CH11-HY Condition: AVG_54 3m 91280_01620_240828 HORIZONTAL Mode : 14 Setting : 82 Plane : X with adapter	 Site : 03CH11-HY Condition: AVG_54 3m 91280_01620_240828 VERTICAL Mode : 14 Setting : 82 Plane : X with adapter
	 Site : 03CH11-HY Condition: AVG_54 3m 91280_01620_240828 HORIZONTAL Mode : 14 Setting : 82 Plane : X with adapter	 Site : 03CH11-HY Condition: AVG_54 3m 91280_01620_240828 VERTICAL Mode : 14 Setting : 82 Plane : X with adapter

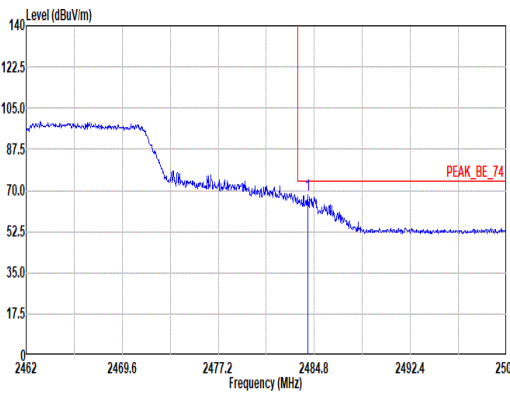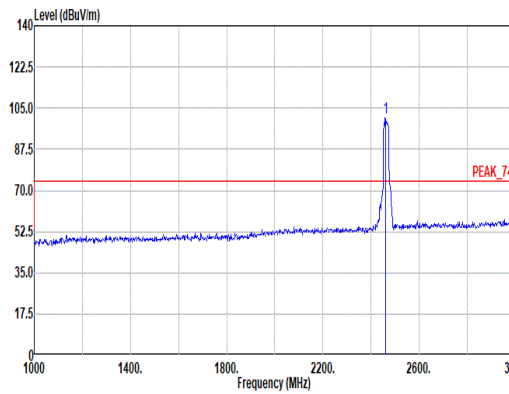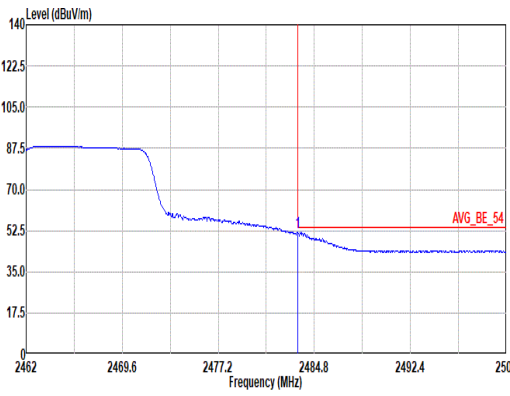
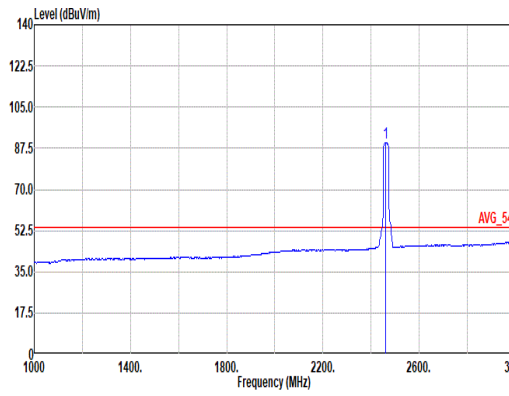


Mode	15																																																																																																										
	Band Edge																																																																																																										
	2400-2483.5_802.11ax HE20_CH11_Full RU_2462MHz																																																																																																										
ANT	1																																																																																																										
Pol.	Horizontal						Fundamental																																																																																																				
Peak																																																																																																											
	Site : 03CH11-HY Condition: PEAK_BE_74 3m 91200_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto Detector : PEAK Mode : 15 Setting : 64 Plane : X with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="3">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2484.27</td><td>68.38</td><td>74.00</td><td>-5.62</td><td>56.47</td><td>27.84</td><td>7.32</td><td>33.28</td><td>10.03</td><td>326</td><td>21 PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	2484.27	68.38	74.00	-5.62	56.47	27.84	7.32	33.28	10.03	326	21 PEAK	Site : 03CH11-HY Condition: PEAK_74 3m 91200_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto Detector : PEAK Mode : 15 Setting : 64 Plane : X with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="3">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2462.00</td><td>100.72</td><td>-----</td><td>-----</td><td>89.11</td><td>27.60</td><td>7.28</td><td>33.30</td><td>10.03</td><td>326</td><td>21 PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	2462.00	100.72	-----	-----	89.11	27.60	7.28	33.30	10.03	326
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																	
1	2484.27	68.38	74.00	-5.62	56.47	27.84	7.32	33.28	10.03	326	21 PEAK																																																																																																
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																	
1	2462.00	100.72	-----	-----	89.11	27.60	7.28	33.30	10.03	326	21 PEAK																																																																																																
Avg																																																																																																											
	Site : 03CH11-HY Condition: AVG_BE_54 3m 91200_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:1.000kHz SMT:Auto Detector : PEAK Mode : 15 Setting : 64 Plane : X with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="3">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2483.51</td><td>51.71</td><td>54.00</td><td>-2.29</td><td>39.00</td><td>27.84</td><td>7.32</td><td>33.28</td><td>10.03</td><td>326</td><td>21 AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	2483.51	51.71	54.00	-2.29	39.00	27.84	7.32	33.28	10.03	326	21 AVERAGE	Site : 03CH11-HY Condition: AVG_54 3m 91200_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:1.000kHz SMT:Auto Detector : PEAK Mode : 15 Setting : 64 Plane : X with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="3">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2462.00</td><td>90.05</td><td>-----</td><td>-----</td><td>78.43</td><td>27.60</td><td>7.28</td><td>33.29</td><td>10.03</td><td>326</td><td>21 AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	2462.00	90.05	-----	-----	78.43	27.60	7.28	33.29	10.03	326
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																	
1	2483.51	51.71	54.00	-2.29	39.00	27.84	7.32	33.28	10.03	326	21 AVERAGE																																																																																																
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																	
1	2462.00	90.05	-----	-----	78.43	27.60	7.28	33.29	10.03	326	21 AVERAGE																																																																																																

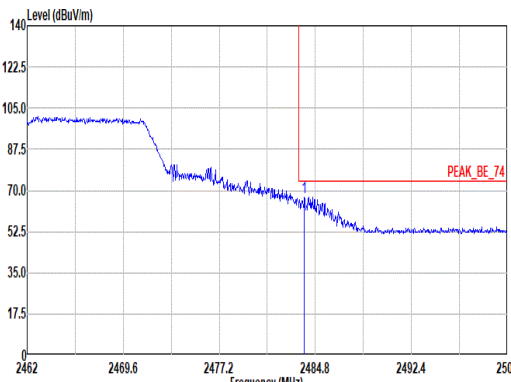
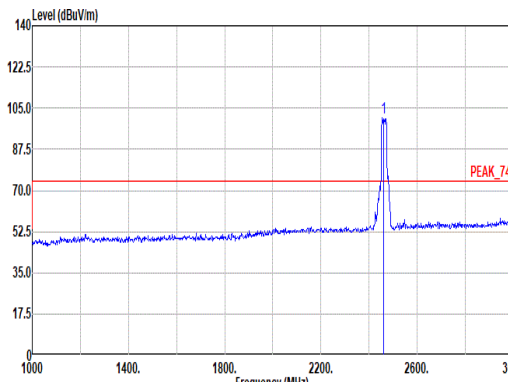
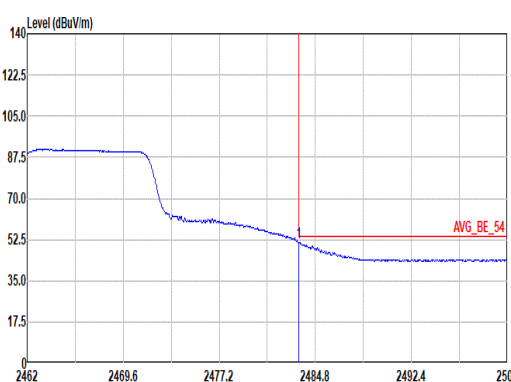
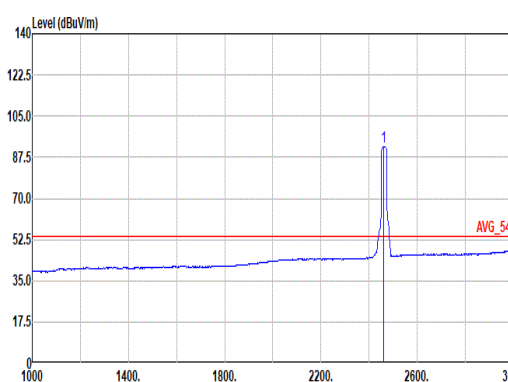


Mode	15																																																																																																	
	Band Edge																																																																																																	
	2400-2483.5_802.11ax HE20_CH11_Full RU_2462MHz																																																																																																	
ANT	1																																																																																																	
Pol.	Vertical						Fundamental																																																																																											
Peak																																																																																																		
	Site : 03CH11-HY Condition: PEAK_BE_74 3m 91200_01620_240828 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto Detector : PEAK Mode : 15 Setting : 64 Plane : X with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th>PEAK</th></tr><tr><td>1</td><td>2483.93</td><td>67.03</td><td>74.00</td><td>-6.97</td><td>55.12</td><td>27.84</td><td>7.32</td><td>33.28</td><td>10.03</td><td>176</td><td>360</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	PEAK	1	2483.93	67.03	74.00	-6.97	55.12	27.84	7.32	33.28	10.03	176	360	Site : 03CH11-HY Condition: PEAK_74 3m 91200_01620_240828 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto Detector : PEAK Mode : 15 Setting : 64 Plane : X with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th>PEAK</th></tr><tr><td>1</td><td>2462.00</td><td>100.64</td><td>-----</td><td>-----</td><td>89.03</td><td>27.60</td><td>7.28</td><td>33.30</td><td>10.03</td><td>176</td><td>360</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	PEAK	1	2462.00	100.64	-----	-----	89.03	27.60	7.28	33.30	10.03	176
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	PEAK																																																																																							
1	2483.93	67.03	74.00	-6.97	55.12	27.84	7.32	33.28	10.03	176	360																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	PEAK																																																																																							
1	2462.00	100.64	-----	-----	89.03	27.60	7.28	33.30	10.03	176	360																																																																																							
Avg																																																																																																		
	Site : 03CH11-HY Condition: AVG_BE_54 3m 91200_01620_240828 VERTICAL : RBW:1000.000kHz VBW:1.000kHz SMT:Auto Detector : PEAK Mode : 15 Setting : 64 Plane : X with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th>AVERAGE</th></tr><tr><td>1</td><td>2483.51</td><td>51.27</td><td>54.00</td><td>-2.73</td><td>39.36</td><td>27.84</td><td>7.32</td><td>33.28</td><td>10.03</td><td>176</td><td>360</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	AVERAGE	1	2483.51	51.27	54.00	-2.73	39.36	27.84	7.32	33.28	10.03	176	360	Site : 03CH11-HY Condition: AVG_54 3m 91200_01620_240828 VERTICAL : RBW:1000.000kHz VBW:1.000kHz SMT:Auto Detector : PEAK Mode : 15 Setting : 64 Plane : X with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th>AVERAGE</th></tr><tr><td>1</td><td>2462.00</td><td>92.17</td><td>-----</td><td>-----</td><td>80.52</td><td>27.62</td><td>7.29</td><td>33.29</td><td>10.03</td><td>176</td><td>360</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	AVERAGE	1	2462.00	92.17	-----	-----	80.52	27.62	7.29	33.29	10.03	176
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	AVERAGE																																																																																							
1	2483.51	51.27	54.00	-2.73	39.36	27.84	7.32	33.28	10.03	176	360																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	AVERAGE																																																																																							
1	2462.00	92.17	-----	-----	80.52	27.62	7.29	33.29	10.03	176	360																																																																																							



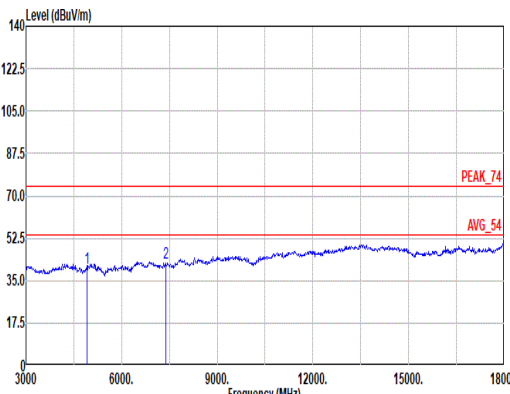
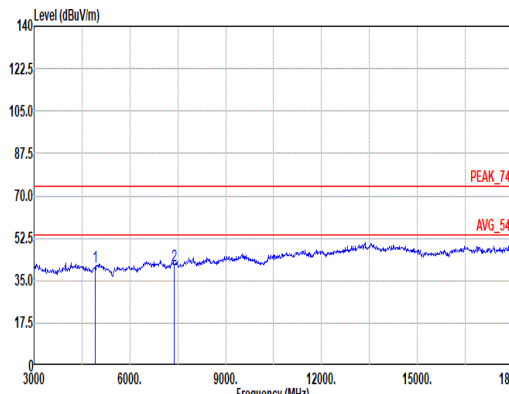


Mode	15																																																																																																																												
	Harmonic																																																																																																																												
	2400-2483.5_802.11ax HE20_CH11_Full RU_2462MHz																																																																																																																												
ANT	1																																																																																																																												
Pol.	Horizontal						Vertical																																																																																																																						
Peak Avg																																																																																																																													
	Site : 03CH11-HY Condition: PEAK_74 3m 91280_01620_240828 HORIZONTAL Mode : 15 Setting : 64 Plane : X with adapter <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>4924.00</td><td>40.05</td><td>74.00</td><td>-33.95</td><td>63.01</td><td>32.90</td><td>10.24</td><td>66.66</td><td>0.56</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>7386.00</td><td>42.20</td><td>74.00</td><td>-31.80</td><td>58.53</td><td>36.48</td><td>12.76</td><td>65.86</td><td>0.29</td><td>--</td><td>--</td><td>Peak</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4924.00	40.05	74.00	-33.95	63.01	32.90	10.24	66.66	0.56	--	--	Peak	2	7386.00	42.20	74.00	-31.80	58.53	36.48	12.76	65.86	0.29	--	--	Peak	Site : 03CH11-HY Condition: PEAK_74 3m 91280_01620_240828 VERTICAL Mode : 15 Setting : 64 Plane : X with adapter <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>4924.00</td><td>40.72</td><td>74.00</td><td>-33.28</td><td>63.68</td><td>32.90</td><td>10.24</td><td>66.66</td><td>0.56</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>7386.00</td><td>41.42</td><td>74.00</td><td>-32.58</td><td>57.75</td><td>36.48</td><td>12.76</td><td>65.86</td><td>0.29</td><td>--</td><td>--</td><td>Peak</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4924.00	40.72	74.00	-33.28	63.68	32.90	10.24	66.66	0.56	--	--	Peak	2	7386.00	41.42	74.00	-32.58	57.75	36.48	12.76	65.86	0.29	--	--
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																					
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark																																																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																			
1	4924.00	40.05	74.00	-33.95	63.01	32.90	10.24	66.66	0.56	--	--	Peak																																																																																																																	
2	7386.00	42.20	74.00	-31.80	58.53	36.48	12.76	65.86	0.29	--	--	Peak																																																																																																																	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																					
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark																																																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																			
1	4924.00	40.72	74.00	-33.28	63.68	32.90	10.24	66.66	0.56	--	--	Peak																																																																																																																	
2	7386.00	41.42	74.00	-32.58	57.75	36.48	12.76	65.86	0.29	--	--	Peak																																																																																																																	

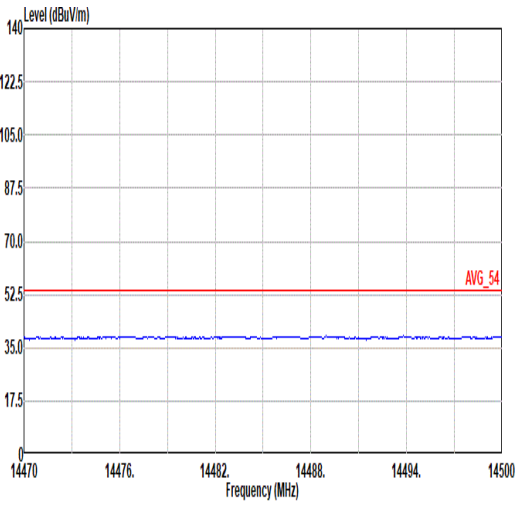
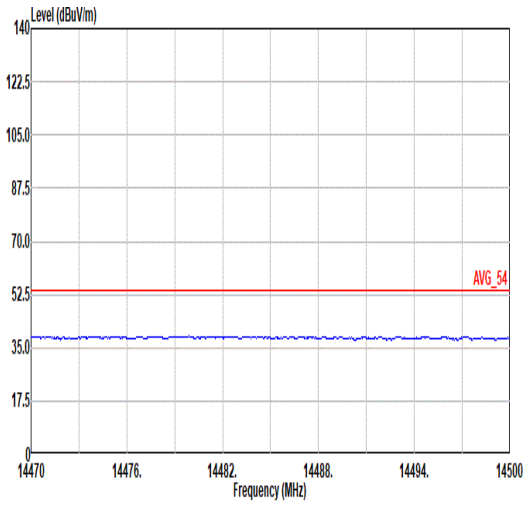
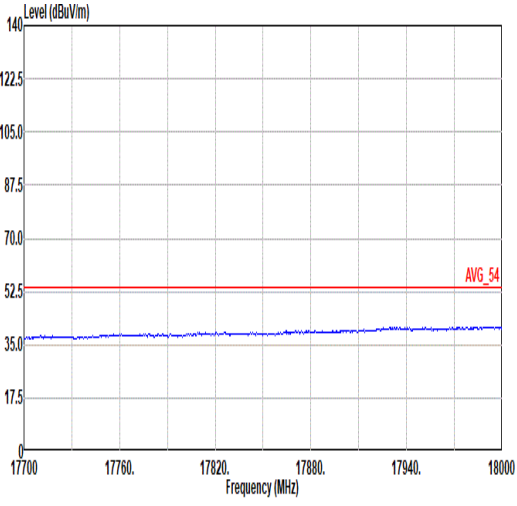
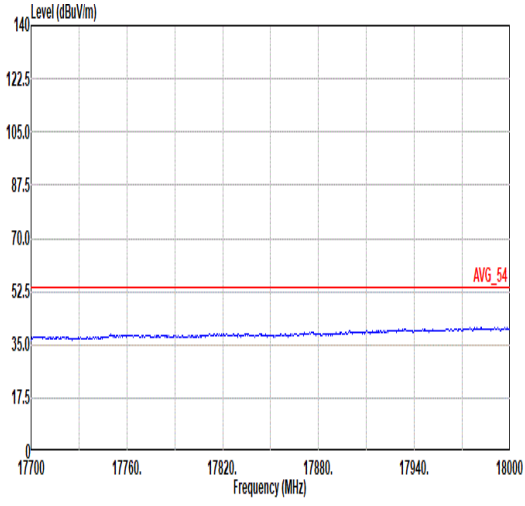


Mode	15	
	Harmonic	
	2400-2483.5_802.11ax HE20_CH11_Full RU_2462MHz	
ANT	1	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	 Site : 03CH11-HY Condition: AVG_54 3m 91280_01620_240828 HORIZONTAL Mode : 15 Setting : 64 Plane : X with adapter	 Site : 03CH11-HY Condition: AVG_54 3m 91280_01620_240828 VERTICAL Mode : 15 Setting : 64 Plane : X with adapter
	 Site : 03CH11-HY Condition: AVG_54 3m 91280_01620_240828 HORIZONTAL Mode : 15 Setting : 64 Plane : X with adapter	 Site : 03CH11-HY Condition: AVG_54 3m 91280_01620_240828 VERTICAL Mode : 15 Setting : 64 Plane : X with adapter

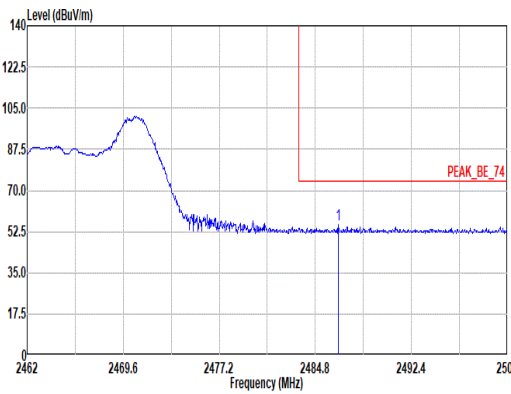
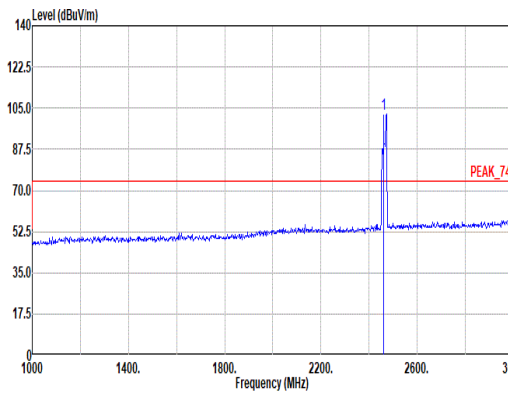
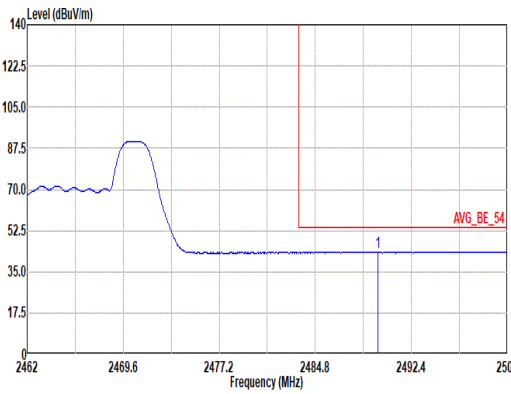
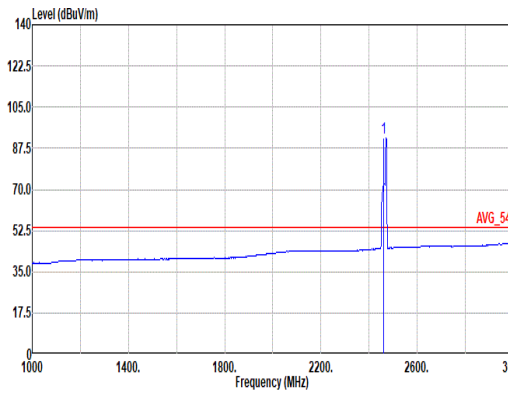


Mode	16																																																																																																		
	Band Edge																																																																																																		
	2400-2483.5_802.11ax HE20_CH11_Partial RU 26/8_2462MHz																																																																																																		
ANT	1																																																																																																		
Pol.	Horizontal						Fundamental																																																																																												
Peak																																																																																																			
	Site : 03CH11-HY Condition: PEAK_BE_74 3m 91280_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto Detector : PEAK Mode : 16 Setting : 25 Plane : X with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2486.62</td><td>55.24</td><td>74.00</td><td>-18.76</td><td>43.30</td><td>27.87</td><td>7.32</td><td>33.28</td><td>10.03</td><td>219</td><td>41</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2486.62	55.24	74.00	-18.76	43.30	27.87	7.32	33.28	10.03	219	41	PEAK	Site : 03CH11-HY Condition: PEAK_74 3m 91280_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto Detector : PEAK Mode : 16 Setting : 25 Plane : X with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2462.00</td><td>102.37</td><td>-----</td><td>-----</td><td>90.61</td><td>27.72</td><td>7.30</td><td>33.29</td><td>10.03</td><td>219</td><td>41</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	102.37	-----	-----	90.61	27.72	7.30	33.29	10.03	219	41
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2486.62	55.24	74.00	-18.76	43.30	27.87	7.32	33.28	10.03	219	41	PEAK																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2462.00	102.37	-----	-----	90.61	27.72	7.30	33.29	10.03	219	41	PEAK																																																																																							
Avg																																																																																																			
	Site : 03CH11-HY Condition: AVG_BE_54 3m 91280_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:0.300kHz SMT:Auto Detector : PEAK Mode : 16 Setting : 25 Plane : X with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2489.78</td><td>43.33</td><td>54.00</td><td>-10.67</td><td>31.35</td><td>27.90</td><td>7.33</td><td>33.28</td><td>10.03</td><td>219</td><td>41</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2489.78	43.33	54.00	-10.67	31.35	27.90	7.33	33.28	10.03	219	41	AVERAGE	Site : 03CH11-HY Condition: AVG_54 3m 91280_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:0.300kHz SMT:Auto Detector : PEAK Mode : 16 Setting : 25 Plane : X with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2462.00</td><td>91.97</td><td>-----</td><td>-----</td><td>80.23</td><td>27.70</td><td>7.30</td><td>33.29</td><td>10.03</td><td>219</td><td>41</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	91.97	-----	-----	80.23	27.70	7.30	33.29	10.03	219	41
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2489.78	43.33	54.00	-10.67	31.35	27.90	7.33	33.28	10.03	219	41	AVERAGE																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2462.00	91.97	-----	-----	80.23	27.70	7.30	33.29	10.03	219	41	AVERAGE																																																																																							

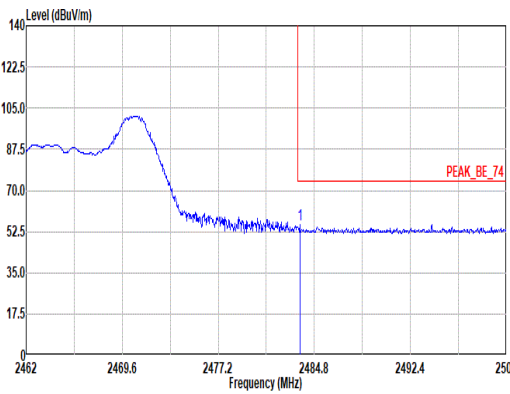
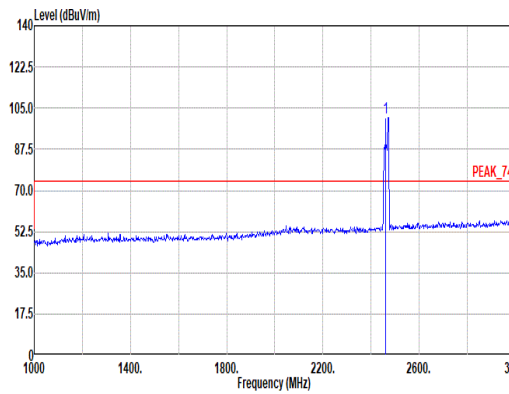
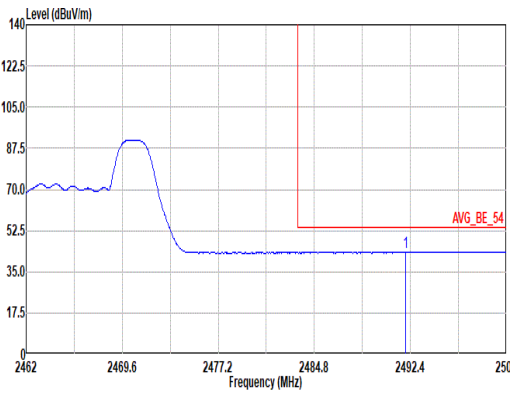
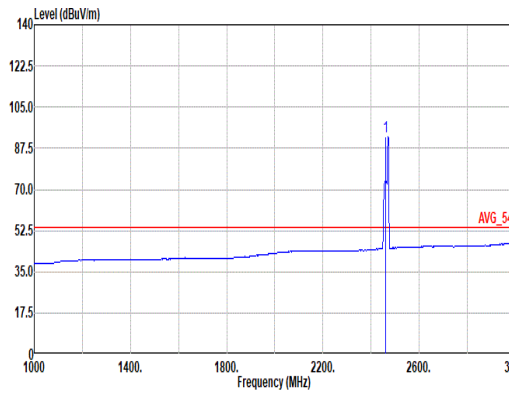


Mode	16																																																																																																										
	Band Edge																																																																																																										
	2400-2483.5_802.11ax HE20_CH11_Partial RU 26/8_2462MHz																																																																																																										
ANT	1																																																																																																										
Pol.	Vertical						Fundamental																																																																																																				
Peak																																																																																																											
	Site : 03CH11-HY Condition: PEAK_BE_74 3m 91200_01620_240828 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto Detector : PEAK Mode : 16 Setting : 25 Plane : X with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="3">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th>PEAK</th></tr><tr><td>1</td><td>2483.66</td><td>55.54</td><td>74.00</td><td>-18.46</td><td>43.63</td><td>27.84</td><td>7.32</td><td>33.28</td><td>10.03</td><td>100</td><td>290 PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	PEAK	1	2483.66	55.54	74.00	-18.46	43.63	27.84	7.32	33.28	10.03	100	290 PEAK	Site : 03CH11-HY Condition: PEAK_74 3m 91200_01620_240828 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto Detector : PEAK Mode : 16 Setting : 25 Plane : X with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="3">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th>PEAK</th></tr><tr><td>1</td><td>2462.00</td><td>101.17</td><td>-----</td><td>-----</td><td>89.43</td><td>27.70</td><td>7.30</td><td>33.29</td><td>10.03</td><td>100</td><td>290 PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	PEAK	1	2462.00	101.17	-----	-----	89.43	27.70	7.30	33.29	10.03	100
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	PEAK																																																																																																
1	2483.66	55.54	74.00	-18.46	43.63	27.84	7.32	33.28	10.03	100	290 PEAK																																																																																																
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	PEAK																																																																																																
1	2462.00	101.17	-----	-----	89.43	27.70	7.30	33.29	10.03	100	290 PEAK																																																																																																
Avg																																																																																																											
	Site : 03CH11-HY Condition: AVG_BE_54 3m 91200_01620_240828 VERTICAL : RBW:1000.000kHz VBW:0.300kHz SMT:Auto Detector : PEAK Mode : 16 Setting : 25 Plane : X with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="3">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th>AVERAGE</th></tr><tr><td>1</td><td>2492.02</td><td>43.36</td><td>54.00</td><td>-10.64</td><td>31.37</td><td>27.90</td><td>7.33</td><td>33.27</td><td>10.03</td><td>100</td><td>290 AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	AVERAGE	1	2492.02	43.36	54.00	-10.64	31.37	27.90	7.33	33.27	10.03	100	290 AVERAGE	Site : 03CH11-HY Condition: AVG_54 3m 91200_01620_240828 VERTICAL : RBW:1000.000kHz VBW:0.300kHz SMT:Auto Detector : PEAK Mode : 16 Setting : 25 Plane : X with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="3">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th>AVERAGE</th></tr><tr><td>1</td><td>2462.00</td><td>92.46</td><td>-----</td><td>-----</td><td>80.72</td><td>27.70</td><td>7.30</td><td>33.29</td><td>10.03</td><td>100</td><td>290 AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	AVERAGE	1	2462.00	92.46	-----	-----	80.72	27.70	7.30	33.29	10.03	100
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	AVERAGE																																																																																																
1	2492.02	43.36	54.00	-10.64	31.37	27.90	7.33	33.27	10.03	100	290 AVERAGE																																																																																																
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	AVERAGE																																																																																																
1	2462.00	92.46	-----	-----	80.72	27.70	7.30	33.29	10.03	100	290 AVERAGE																																																																																																

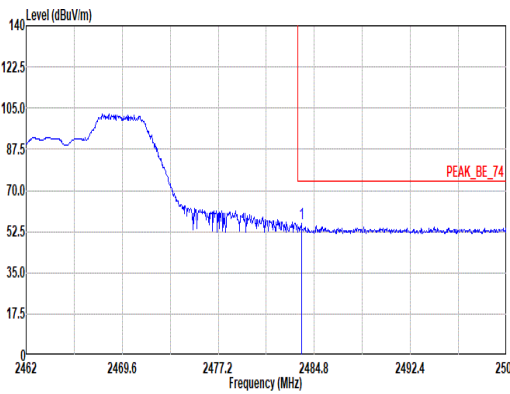
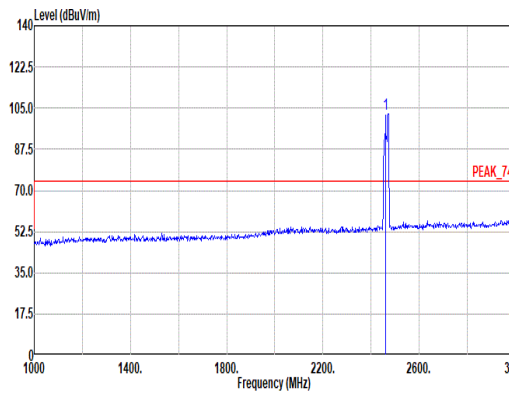
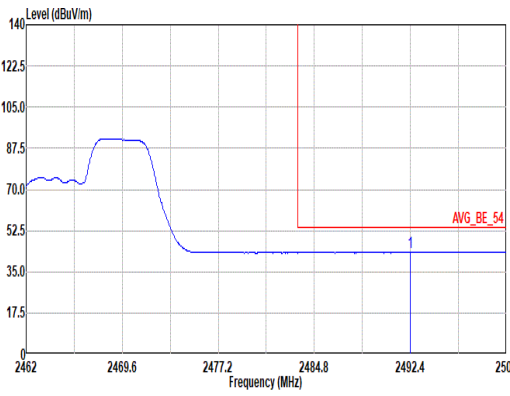
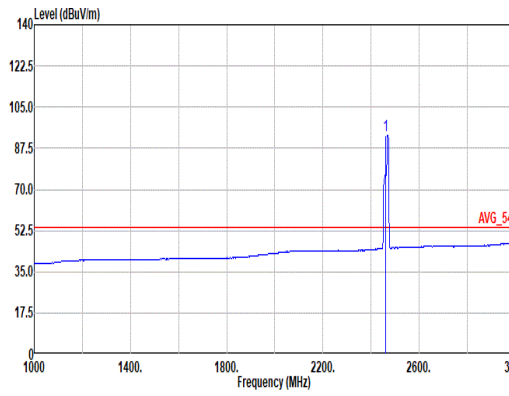


		17																																																																																																	
Mode	Band Edge																																																																																																		
	2400-2483.5_802.11ax HE20_CH11_Partial RU 52/40_2462MHz																																																																																																		
ANT	1																																																																																																		
Pol.	Horizontal						Fundamental																																																																																												
Peak																																																																																																			
	Site : 03CH11-HY Condition: PEAK_BE_74 3m 91200_01620_240828 HORIZONTAL : RBW:1000.000kHz VBN:3000.000kHz SMT:Auto Detector : PEAK Mode : 17 Setting : 37 Plane : X with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.77</td><td>56.13</td><td>74.00</td><td>-17.87</td><td>44.22</td><td>27.84</td><td>7.32</td><td>33.28</td><td>10.03</td><td>337 217 PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.77	56.13	74.00	-17.87	44.22	27.84	7.32	33.28	10.03	337 217 PEAK	Site : 03CH11-HY Condition: PEAK_74 3m 91200_01620_240828 HORIZONTAL : RBW:1000.000kHz VBN:3000.000kHz SMT:Auto Detector : PEAK Mode : 17 Setting : 37 Plane : X with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2462.00</td><td>102.61</td><td>-----</td><td>-----</td><td>90.87</td><td>27.70</td><td>7.30</td><td>33.29</td><td>10.03</td><td>337 217 PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	102.61	-----	-----	90.87	27.70	7.30	33.29	10.03
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2483.77	56.13	74.00	-17.87	44.22	27.84	7.32	33.28	10.03	337 217 PEAK																																																																																									
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2462.00	102.61	-----	-----	90.87	27.70	7.30	33.29	10.03	337 217 PEAK																																																																																									
Avg																																																																																																			
	Site : 03CH11-HY Condition: AVG_BE_54 3m 91200_01620_240828 HORIZONTAL : RBW:1000.000kHz VBN:0.300kHz SMT:Auto Detector : PEAK Mode : 17 Setting : 37 Plane : X with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2492.40</td><td>43.41</td><td>54.00</td><td>-10.59</td><td>31.42</td><td>27.90</td><td>7.33</td><td>33.27</td><td>10.03</td><td>337 217 AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2492.40	43.41	54.00	-10.59	31.42	27.90	7.33	33.27	10.03	337 217 AVERAGE	Site : 03CH11-HY Condition: AVG_54 3m 91200_01620_240828 HORIZONTAL : RBW:1000.000kHz VBN:0.300kHz SMT:Auto Detector : PEAK Mode : 17 Setting : 37 Plane : X with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2462.00</td><td>92.95</td><td>-----</td><td>-----</td><td>81.23</td><td>27.68</td><td>7.30</td><td>33.29</td><td>10.03</td><td>337 217 AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	92.95	-----	-----	81.23	27.68	7.30	33.29	10.03
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2492.40	43.41	54.00	-10.59	31.42	27.90	7.33	33.27	10.03	337 217 AVERAGE																																																																																									
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2462.00	92.95	-----	-----	81.23	27.68	7.30	33.29	10.03	337 217 AVERAGE																																																																																									

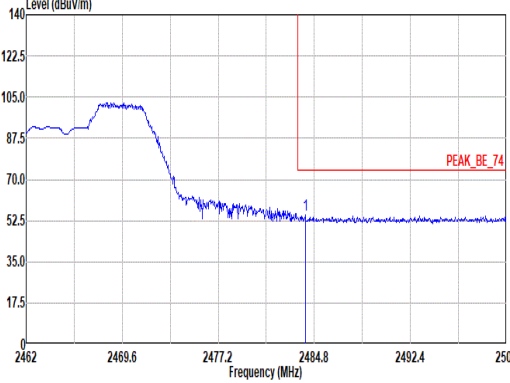
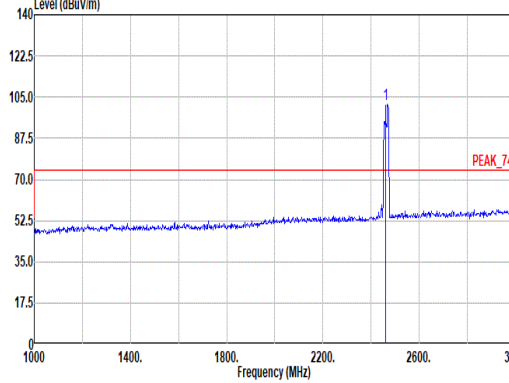
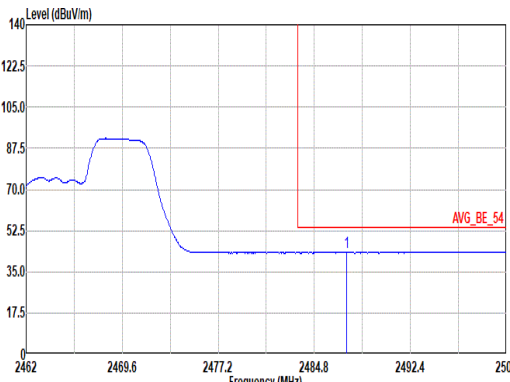
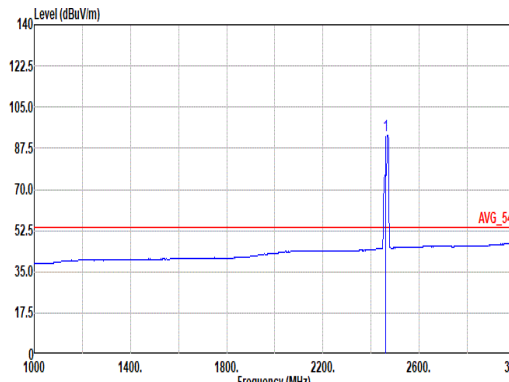


	17																																																																																																										
Mode	Band Edge																																																																																																										
	2400-2483.5_802.11ax HE20_CH11_Partial RU 52/40_2462MHz																																																																																																										
ANT	1																																																																																																										
Pol.	Vertical						Fundamental																																																																																																				
Peak																																																																																																											
	Site : 03CH11-HY Condition: PEAK_BE_74 3m 91200_01620_240828 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto Detector : PEAK Mode : 17 Setting : 37 Plane : X with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="3">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2484.08</td><td>55.10</td><td>74.00</td><td>-18.90</td><td>43.19</td><td>27.84</td><td>7.32</td><td>33.28</td><td>10.03</td><td>211</td><td>326 PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	2484.08	55.10	74.00	-18.90	43.19	27.84	7.32	33.28	10.03	211	326 PEAK	Site : 03CH11-HY Condition: PEAK_74 3m 91200_01620_240828 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto Detector : PEAK Mode : 17 Setting : 37 Plane : X with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="3">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2462.00</td><td>101.84</td><td>-----</td><td>-----</td><td>90.12</td><td>27.68</td><td>7.30</td><td>33.29</td><td>10.03</td><td>211</td><td>326 PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	2462.00	101.84	-----	-----	90.12	27.68	7.30	33.29	10.03	211
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																	
1	2484.08	55.10	74.00	-18.90	43.19	27.84	7.32	33.28	10.03	211	326 PEAK																																																																																																
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																	
1	2462.00	101.84	-----	-----	90.12	27.68	7.30	33.29	10.03	211	326 PEAK																																																																																																
Avg																																																																																																											
	Site : 03CH11-HY Condition: AVG_BE_54 3m 91200_01620_240828 VERTICAL : RBW:1000.000kHz VBW:0.300kHz SMT:Auto Detector : PEAK Mode : 17 Setting : 37 Plane : X with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="3">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2487.35</td><td>43.45</td><td>54.00</td><td>-10.55</td><td>31.51</td><td>27.87</td><td>7.32</td><td>33.28</td><td>10.03</td><td>211</td><td>326 AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	2487.35	43.45	54.00	-10.55	31.51	27.87	7.32	33.28	10.03	211	326 AVERAGE	Site : 03CH11-HY Condition: AVG_54 3m 91200_01620_240828 VERTICAL : RBW:1000.000kHz VBW:0.300kHz SMT:Auto Detector : PEAK Mode : 17 Setting : 37 Plane : X with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="3">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2462.00</td><td>93.11</td><td>-----</td><td>-----</td><td>81.39</td><td>27.68</td><td>7.30</td><td>33.29</td><td>10.03</td><td>211</td><td>326 AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	2462.00	93.11	-----	-----	81.39	27.68	7.30	33.29	10.03	211
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																	
1	2487.35	43.45	54.00	-10.55	31.51	27.87	7.32	33.28	10.03	211	326 AVERAGE																																																																																																
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																	
1	2462.00	93.11	-----	-----	81.39	27.68	7.30	33.29	10.03	211	326 AVERAGE																																																																																																

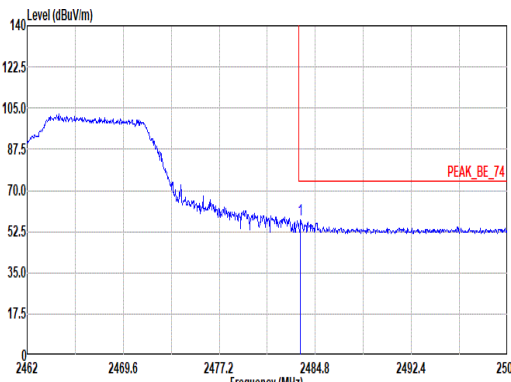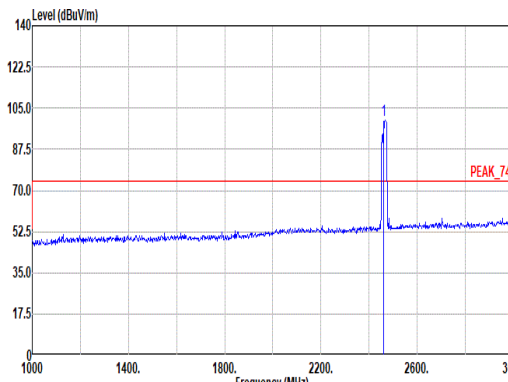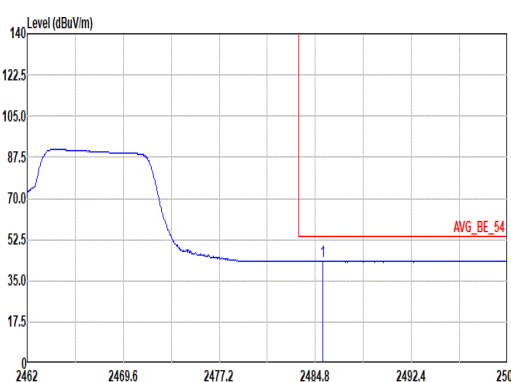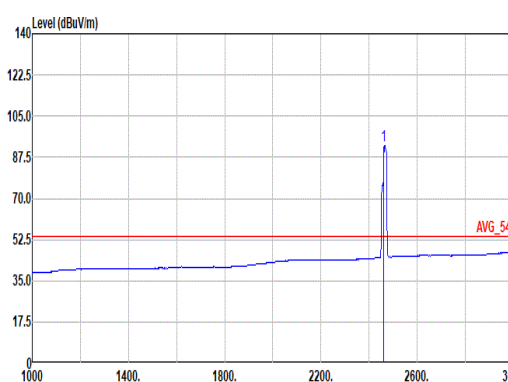

		18																																																																																																
Mode	Band Edge																																																																																																	
	2400-2483.5_802.11ax HE20_CH11_Partial RU 106/54_2462MHz																																																																																																	
ANT	1																																																																																																	
Pol.	Horizontal						Fundamental																																																																																											
Peak																																																																																																		
	Site : 03CH11-HY Condition: PEAK_BE_74 3m 91200_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto Detector : PEAK Mode : 18 Setting : 46 Plane : X with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.62</td><td>57.57</td><td>74.00</td><td>-16.43</td><td>45.66</td><td>27.84</td><td>7.32</td><td>33.28</td><td>10.03</td><td>337</td><td>234</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.62	57.57	74.00	-16.43	45.66	27.84	7.32	33.28	10.03	337	234	PEAK	Site : 03CH11-HY Condition: PEAK_74 3m 91200_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto Detector : PEAK Mode : 18 Setting : 46 Plane : X with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2462.00</td><td>99.99</td><td>-----</td><td>-----</td><td>88.30</td><td>27.66</td><td>7.29</td><td>33.29</td><td>10.03</td><td>337</td><td>234</td><td>PEAK</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	99.99	-----	-----	88.30	27.66	7.29	33.29	10.03	337	234
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	2483.62	57.57	74.00	-16.43	45.66	27.84	7.32	33.28	10.03	337	234	PEAK																																																																																						
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	2462.00	99.99	-----	-----	88.30	27.66	7.29	33.29	10.03	337	234	PEAK																																																																																						
Avg																																																																																																		
	Site : 03CH11-HY Condition: AVG_BE_54 3m 91200_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:0.300kHz SMT:Auto Detector : PEAK Mode : 18 Setting : 46 Plane : X with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2485.41</td><td>43.39</td><td>54.00</td><td>-10.61</td><td>31.47</td><td>27.05</td><td>7.32</td><td>33.28</td><td>10.03</td><td>337</td><td>234</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2485.41	43.39	54.00	-10.61	31.47	27.05	7.32	33.28	10.03	337	234	AVERAGE	Site : 03CH11-HY Condition: AVG_54 3m 91200_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:0.300kHz SMT:Auto Detector : PEAK Mode : 18 Setting : 46 Plane : X with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2462.00</td><td>92.25</td><td>-----</td><td>-----</td><td>80.58</td><td>27.64</td><td>7.29</td><td>33.29</td><td>10.03</td><td>337</td><td>234</td><td>AVERAGE</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	92.25	-----	-----	80.58	27.64	7.29	33.29	10.03	337	234
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	2485.41	43.39	54.00	-10.61	31.47	27.05	7.32	33.28	10.03	337	234	AVERAGE																																																																																						
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	2462.00	92.25	-----	-----	80.58	27.64	7.29	33.29	10.03	337	234	AVERAGE																																																																																						

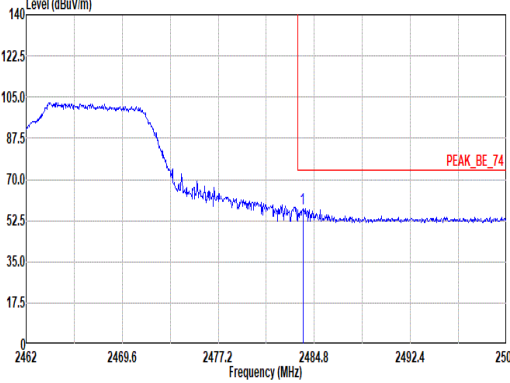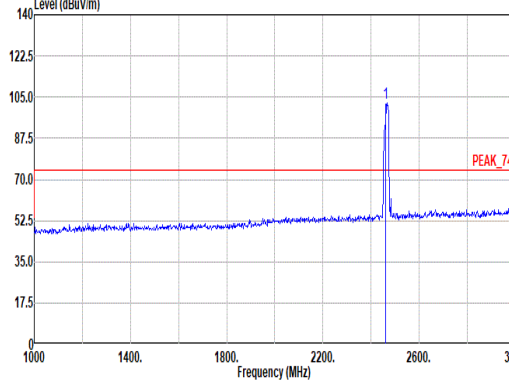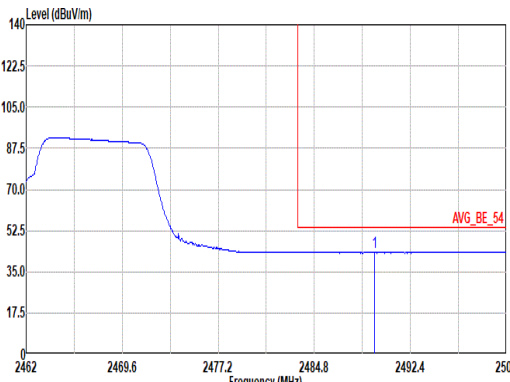
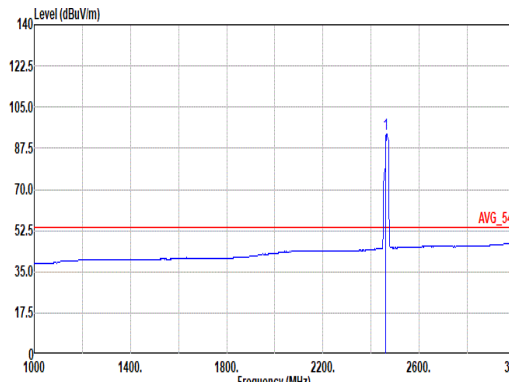


		18																																																																																																									
Mode	Band Edge																																																																																																										
	2400-2483.5_802.11ax HE20_CH11_Partial RU 106/54_2462MHz																																																																																																										
ANT	1																																																																																																										
Pol.	Vertical						Fundamental																																																																																																				
Peak																																																																																																											
	Site : 03CH11-HY Condition: PEAK_BE_74 3m 91200_01620_240828 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto Detector : PEAK Mode : 18 Setting : 46 Plane : X with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="3">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2483.89</td><td>57.85</td><td>74.00</td><td>-16.15</td><td>45.94</td><td>27.84</td><td>7.32</td><td>33.28</td><td>10.03</td><td>206</td><td>324 PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	2483.89	57.85	74.00	-16.15	45.94	27.84	7.32	33.28	10.03	206	324 PEAK	Site : 03CH11-HY Condition: PEAK_74 3m 91200_01620_240828 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto Detector : PEAK Mode : 18 Setting : 46 Plane : X with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="3">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2462.00</td><td>102.28</td><td>-----</td><td>-----</td><td>90.56</td><td>27.68</td><td>7.30</td><td>33.29</td><td>10.03</td><td>206</td><td>324 PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	2462.00	102.28	-----	-----	90.56	27.68	7.30	33.29	10.03	206
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																	
1	2483.89	57.85	74.00	-16.15	45.94	27.84	7.32	33.28	10.03	206	324 PEAK																																																																																																
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																	
1	2462.00	102.28	-----	-----	90.56	27.68	7.30	33.29	10.03	206	324 PEAK																																																																																																
Avg																																																																																																											
	Site : 03CH11-HY Condition: AVG_BE_54 3m 91200_01620_240828 VERTICAL : RBW:1000.000kHz VBW:0.300kHz SMT:Auto Detector : PEAK Mode : 18 Setting : 46 Plane : X with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="3">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2409.59</td><td>43.36</td><td>54.00</td><td>-10.64</td><td>31.38</td><td>27.90</td><td>7.33</td><td>33.28</td><td>10.03</td><td>206</td><td>324 AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	2409.59	43.36	54.00	-10.64	31.38	27.90	7.33	33.28	10.03	206	324 AVERAGE	Site : 03CH11-HY Condition: AVG_54 3m 91200_01620_240828 VERTICAL : RBW:1000.000kHz VBW:0.300kHz SMT:Auto Detector : PEAK Mode : 18 Setting : 46 Plane : X with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="3">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2462.00</td><td>93.42</td><td>-----</td><td>-----</td><td>81.75</td><td>27.64</td><td>7.29</td><td>33.29</td><td>10.03</td><td>206</td><td>324 AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	2462.00	93.42	-----	-----	81.75	27.64	7.29	33.29	10.03	206
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																	
1	2409.59	43.36	54.00	-10.64	31.38	27.90	7.33	33.28	10.03	206	324 AVERAGE																																																																																																
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																	
1	2462.00	93.42	-----	-----	81.75	27.64	7.29	33.29	10.03	206	324 AVERAGE																																																																																																







Mode	19																																																																																							
	SHF																																																																																							
	2400-2483.5_802.11g_CH10_Full RU_2457MHz																																																																																							
ANT	1																																																																																							
Pol.	Horizontal	Vertical																																																																																						
Peak	Site : 03CH11-HY Condition: PEAK_74 1m SHF_1224_240624 HORIZONTAL Mode : 19 Setting : 64 Plane : X with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>19602.03</td><td>40.98</td><td>74.00</td><td>-33.02</td><td>51.32</td><td>37.80</td><td>25.70</td><td>64.30</td><td>-9.54</td><td>--</td><td>PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	19602.03	40.98	74.00	-33.02	51.32	37.80	25.70	64.30	-9.54	--	PEAK	Site : 03CH11-HY Condition: PEAK_74 1m SHF_1224_240624 VERTICAL Mode : 19 Setting : 64 Plane : X with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>19158.51</td><td>40.98</td><td>74.00</td><td>-33.02</td><td>51.50</td><td>38.07</td><td>25.28</td><td>64.33</td><td>-9.54</td><td>--</td><td>PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	19158.51	40.98	74.00	-33.02	51.50	38.07	25.28	64.33	-9.54	--	PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																														
1	19602.03	40.98	74.00	-33.02	51.32	37.80	25.70	64.30	-9.54	--	PEAK																																																																													
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																														
1	19158.51	40.98	74.00	-33.02	51.50	38.07	25.28	64.33	-9.54	--	PEAK																																																																													



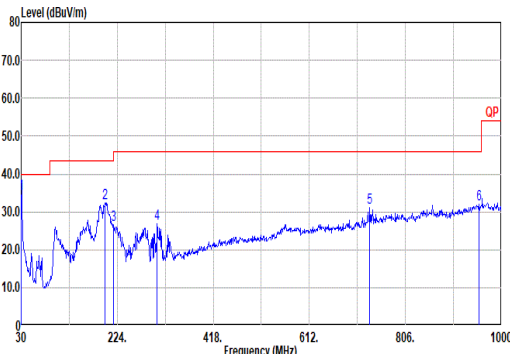
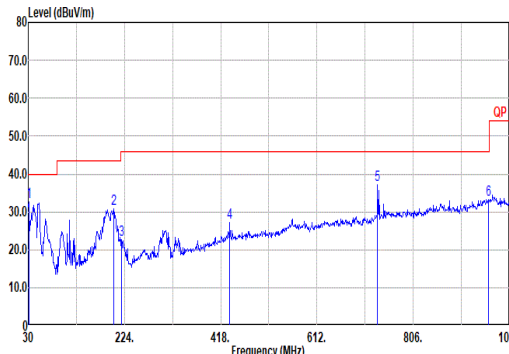


Mode	20																																																																																																																																																																																																																							
	LF																																																																																																																																																																																																																							
	2400-2483.5_802.11g_CH10_Full RU_2457MHz																																																																																																																																																																																																																							
ANT	1																																																																																																																																																																																																																							
Pol.	Horizontal						Vertical																																																																																																																																																																																																																	
QP/ Peak																																																																																																																																																																																																																								
	Site : 03CH11-HY Condition: QP 3m B1LOG_37059801_241127 HORIZONTAL Mode : 20 Setting : Plane : X with adapter						Site : 03CH11-HY Condition: QP 3m B1LOG_37059801_241127 VERTICAL Mode : 20 Setting : Plane : X with adapter																																																																																																																																																																																																																	
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>30.00</td><td>34.73</td><td>40.00</td><td>-5.27</td><td>41.79</td><td>24.51</td><td>0.86</td><td>32.43</td><td>0.00</td><td>100</td><td>3 QP</td></tr><tr><td>2</td><td>199.75</td><td>32.25</td><td>43.50</td><td>-11.25</td><td>47.20</td><td>15.18</td><td>2.06</td><td>32.19</td><td>0.00</td><td>--</td><td>-- Peak</td></tr><tr><td>3</td><td>216.24</td><td>26.52</td><td>46.00</td><td>-19.48</td><td>41.52</td><td>15.04</td><td>2.15</td><td>32.19</td><td>0.00</td><td>--</td><td>-- Peak</td></tr><tr><td>4</td><td>304.51</td><td>26.87</td><td>46.00</td><td>-19.13</td><td>37.01</td><td>19.50</td><td>2.57</td><td>32.21</td><td>0.00</td><td>--</td><td>-- Peak</td></tr><tr><td>5</td><td>734.22</td><td>31.00</td><td>46.00</td><td>-15.00</td><td>31.10</td><td>28.07</td><td>3.95</td><td>32.12</td><td>0.00</td><td>--</td><td>-- Peak</td></tr><tr><td>6</td><td>954.41</td><td>31.96</td><td>46.00</td><td>-14.04</td><td>27.17</td><td>31.10</td><td>4.54</td><td>30.85</td><td>0.00</td><td>--</td><td>-- Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	30.00	34.73	40.00	-5.27	41.79	24.51	0.86	32.43	0.00	100	3 QP	2	199.75	32.25	43.50	-11.25	47.20	15.18	2.06	32.19	0.00	--	-- Peak	3	216.24	26.52	46.00	-19.48	41.52	15.04	2.15	32.19	0.00	--	-- Peak	4	304.51	26.87	46.00	-19.13	37.01	19.50	2.57	32.21	0.00	--	-- Peak	5	734.22	31.00	46.00	-15.00	31.10	28.07	3.95	32.12	0.00	--	-- Peak	6	954.41	31.96	46.00	-14.04	27.17	31.10	4.54	30.85	0.00	--	-- Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>30.97</td><td>32.52</td><td>40.00</td><td>-7.48</td><td>39.85</td><td>24.21</td><td>0.87</td><td>32.41</td><td>0.00</td><td>--</td><td>-- Peak</td></tr><tr><td>2</td><td>201.69</td><td>30.73</td><td>43.50</td><td>-12.77</td><td>45.65</td><td>15.20</td><td>2.07</td><td>32.19</td><td>0.00</td><td>--</td><td>-- Peak</td></tr><tr><td>3</td><td>218.18</td><td>22.62</td><td>46.00</td><td>-23.38</td><td>37.43</td><td>15.22</td><td>2.16</td><td>32.19</td><td>0.00</td><td>--</td><td>-- Peak</td></tr><tr><td>4</td><td>436.43</td><td>27.22</td><td>46.00</td><td>-18.78</td><td>33.22</td><td>23.08</td><td>3.08</td><td>32.16</td><td>0.00</td><td>--</td><td>-- Peak</td></tr><tr><td>5</td><td>734.22</td><td>37.04</td><td>46.00</td><td>-8.96</td><td>37.14</td><td>28.07</td><td>3.95</td><td>32.12</td><td>0.00</td><td>--</td><td>-- Peak</td></tr><tr><td>6</td><td>958.29</td><td>33.30</td><td>46.00</td><td>-12.70</td><td>28.36</td><td>31.21</td><td>4.54</td><td>30.81</td><td>0.00</td><td>--</td><td>-- Peak</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	30.97	32.52	40.00	-7.48	39.85	24.21	0.87	32.41	0.00	--	-- Peak	2	201.69	30.73	43.50	-12.77	45.65	15.20	2.07	32.19	0.00	--	-- Peak	3	218.18	22.62	46.00	-23.38	37.43	15.22	2.16	32.19	0.00	--	-- Peak	4	436.43	27.22	46.00	-18.78	33.22	23.08	3.08	32.16	0.00	--	-- Peak	5	734.22	37.04	46.00	-8.96	37.14	28.07	3.95	32.12	0.00	--	-- Peak	6	958.29	33.30	46.00	-12.70	28.36	31.21	4.54	30.81	0.00	--
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																																																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																																																																																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																																																																														
1	30.00	34.73	40.00	-5.27	41.79	24.51	0.86	32.43	0.00	100	3 QP																																																																																																																																																																																																													
2	199.75	32.25	43.50	-11.25	47.20	15.18	2.06	32.19	0.00	--	-- Peak																																																																																																																																																																																																													
3	216.24	26.52	46.00	-19.48	41.52	15.04	2.15	32.19	0.00	--	-- Peak																																																																																																																																																																																																													
4	304.51	26.87	46.00	-19.13	37.01	19.50	2.57	32.21	0.00	--	-- Peak																																																																																																																																																																																																													
5	734.22	31.00	46.00	-15.00	31.10	28.07	3.95	32.12	0.00	--	-- Peak																																																																																																																																																																																																													
6	954.41	31.96	46.00	-14.04	27.17	31.10	4.54	30.85	0.00	--	-- Peak																																																																																																																																																																																																													
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																																																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																																																																																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																																																																														
1	30.97	32.52	40.00	-7.48	39.85	24.21	0.87	32.41	0.00	--	-- Peak																																																																																																																																																																																																													
2	201.69	30.73	43.50	-12.77	45.65	15.20	2.07	32.19	0.00	--	-- Peak																																																																																																																																																																																																													
3	218.18	22.62	46.00	-23.38	37.43	15.22	2.16	32.19	0.00	--	-- Peak																																																																																																																																																																																																													
4	436.43	27.22	46.00	-18.78	33.22	23.08	3.08	32.16	0.00	--	-- Peak																																																																																																																																																																																																													
5	734.22	37.04	46.00	-8.96	37.14	28.07	3.95	32.12	0.00	--	-- Peak																																																																																																																																																																																																													
6	958.29	33.30	46.00	-12.70	28.36	31.21	4.54	30.81	0.00	--	-- Peak																																																																																																																																																																																																													

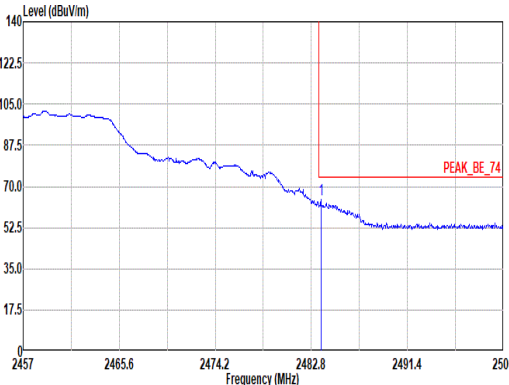
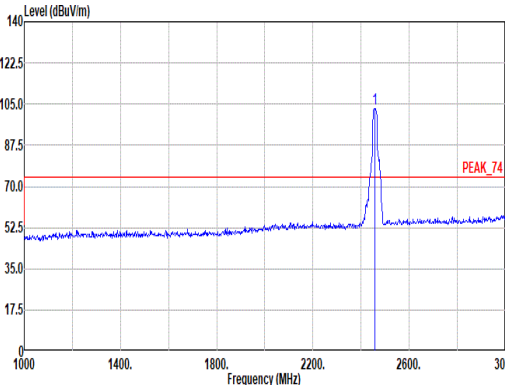
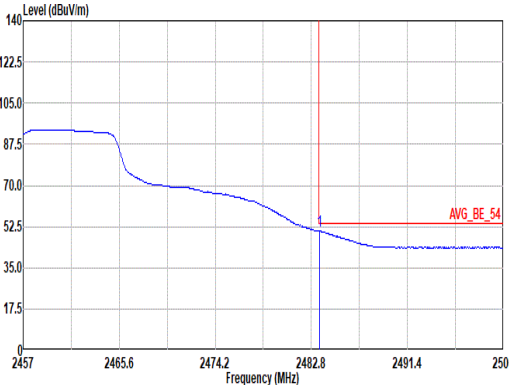
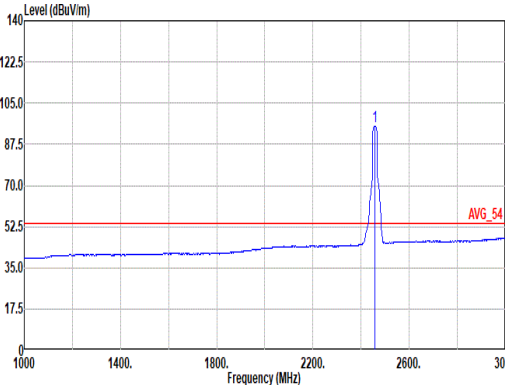


Mode	21																																																																																																			
	Band Edge																																																																																																			
	2400-2483.5_802.11g_CH10_2457MHz																																																																																																			
ANT	1																																																																																																			
Pol.	Horizontal						Fundamental																																																																																													
Peak	 Level (dBuV/m) Frequency (MHz) PEAK_BE_74 Site : 03CH11-HY Condition: PEAK_BE_74 3m 91200_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto Detector : PEAK Mode : 22 Setting : 74 Plane : X with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.66</td><td>64.21</td><td>74.00</td><td>-9.79</td><td>52.14</td><td>27.84</td><td>7.32</td><td>33.12</td><td>10.03</td><td>299</td><td>225</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.66	64.21	74.00	-9.79	52.14	27.84	7.32	33.12	10.03	299	225	PEAK	 Level (dBuV/m) Frequency (MHz) PEAK_74 Site : 03CH11-HY Condition: PEAK_74 3m 91200_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto Detector : PEAK Mode : 22 Setting : 74 Plane : X with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2457.00</td><td>103.25</td><td>-----</td><td>-----</td><td>91.48</td><td>27.60</td><td>7.28</td><td>33.14</td><td>10.03</td><td>299</td><td>225</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2457.00	103.25	-----	-----	91.48	27.60	7.28	33.14	10.03	299	225	PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2483.66	64.21	74.00	-9.79	52.14	27.84	7.32	33.12	10.03	299	225	PEAK																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																											
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2457.00	103.25	-----	-----	91.48	27.60	7.28	33.14	10.03	299	225	PEAK																																																																																								
Avg	 Level (dBuV/m) Frequency (MHz) AVG_BE_54 Site : 03CH11-HY Condition: AVG_BE_54 3m 91200_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:0.750kHz SMT:Auto Detector : PEAK Mode : 22 Setting : 74 Plane : X with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.53</td><td>50.61</td><td>54.00</td><td>-3.39</td><td>38.54</td><td>27.84</td><td>7.32</td><td>33.12</td><td>10.03</td><td>300</td><td>227</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.53	50.61	54.00	-3.39	38.54	27.84	7.32	33.12	10.03	300	227	AVERAGE	 Level (dBuV/m) Frequency (MHz) AVG_54 Site : 03CH11-HY Condition: AVG_54 3m 91200_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:0.750kHz SMT:Auto Detector : PEAK Mode : 22 Setting : 74 Plane : X with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2457.00</td><td>95.30</td><td>-----</td><td>-----</td><td>83.53</td><td>27.60</td><td>7.28</td><td>33.14</td><td>10.03</td><td>299</td><td>225</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2457.00	95.30	-----	-----	83.53	27.60	7.28	33.14	10.03	299	225	AVERAGE
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																											
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2483.53	50.61	54.00	-3.39	38.54	27.84	7.32	33.12	10.03	300	227	AVERAGE																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																											
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2457.00	95.30	-----	-----	83.53	27.60	7.28	33.14	10.03	299	225	AVERAGE																																																																																								

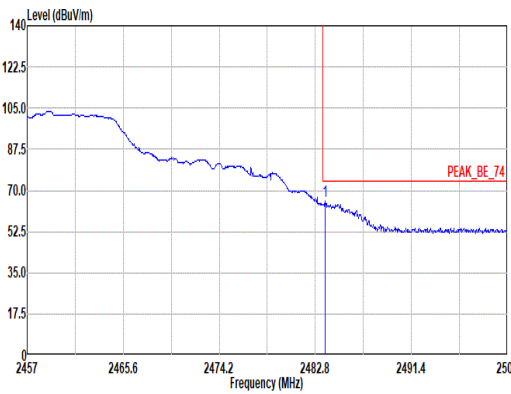
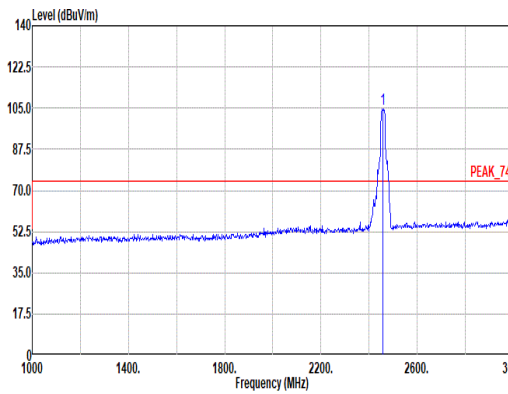
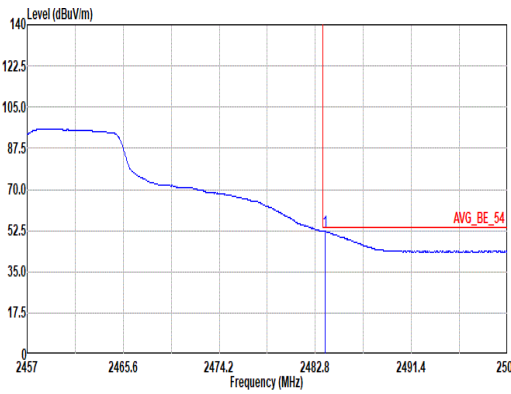
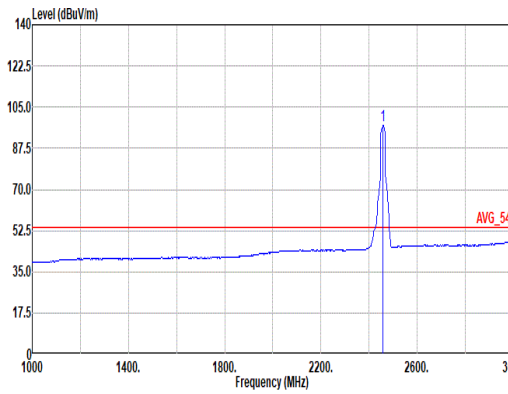


		21																																																																																											
Mode		Band Edge																																																																																											
		2400-2483.5_802.11g_CH10_2457MHz																																																																																											
ANT		1																																																																																											
Pol.		Vertical																																																																																											
Peak		 Site : 03CH11-HY Condition: PEAK_BE_74 3m 91200_01620_240828 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto Detector : PEAK Mode : 22 Setting : 74 Plane : X with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th>PEAK</th></tr><tr><td>1</td><td>2483.66</td><td>65.50</td><td>74.00</td><td>-8.50</td><td>53.43</td><td>27.84</td><td>7.32</td><td>33.12</td><td>10.03</td><td>122</td><td>298</td><td>PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	PEAK	1	2483.66	65.50	74.00	-8.50	53.43	27.84	7.32	33.12	10.03	122	298	PEAK	 Site : 03CH11-HY Condition: PEAK_74 3m 91200_01620_240828 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto Detector : PEAK Mode : 22 Setting : 74 Plane : X with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th>PEAK</th></tr><tr><td>1</td><td>2457.00</td><td>104.48</td><td>-----</td><td>-----</td><td>92.71</td><td>27.60</td><td>7.28</td><td>33.14</td><td>10.03</td><td>122</td><td>298</td><td>PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	PEAK	1	2457.00	104.48	-----	-----	92.71	27.60	7.28	33.14	10.03	122	298	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	PEAK																																																																																		
1	2483.66	65.50	74.00	-8.50	53.43	27.84	7.32	33.12	10.03	122	298	PEAK																																																																																	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	PEAK																																																																																		
1	2457.00	104.48	-----	-----	92.71	27.60	7.28	33.14	10.03	122	298	PEAK																																																																																	
Avg		 Site : 03CH11-HY Condition: AVG_BE_54 3m 91200_01620_240828 VERTICAL : RBW:1000.000kHz VBW:0.750kHz SMT:Auto Detector : PEAK Mode : 22 Setting : 74 Plane : X with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th>AVERAGE</th></tr><tr><td>1</td><td>2483.66</td><td>52.24</td><td>54.00</td><td>-1.76</td><td>40.17</td><td>27.84</td><td>7.32</td><td>33.12</td><td>10.03</td><td>122</td><td>298</td><td>AVERAGE</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	AVERAGE	1	2483.66	52.24	54.00	-1.76	40.17	27.84	7.32	33.12	10.03	122	298	AVERAGE	 Site : 03CH11-HY Condition: AVG_54 3m 91200_01620_240828 VERTICAL : RBW:1000.000kHz VBW:0.750kHz SMT:Auto Detector : PEAK Mode : 22 Setting : 74 Plane : X with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th>AVERAGE</th></tr><tr><td>1</td><td>2457.00</td><td>96.98</td><td>-----</td><td>-----</td><td>85.21</td><td>27.60</td><td>7.28</td><td>33.14</td><td>10.03</td><td>122</td><td>298</td><td>AVERAGE</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	AVERAGE	1	2457.00	96.98	-----	-----	85.21	27.60	7.28	33.14	10.03	122	298	AVERAGE
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	AVERAGE																																																																																		
1	2483.66	52.24	54.00	-1.76	40.17	27.84	7.32	33.12	10.03	122	298	AVERAGE																																																																																	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	AVERAGE																																																																																		
1	2457.00	96.98	-----	-----	85.21	27.60	7.28	33.14	10.03	122	298	AVERAGE																																																																																	

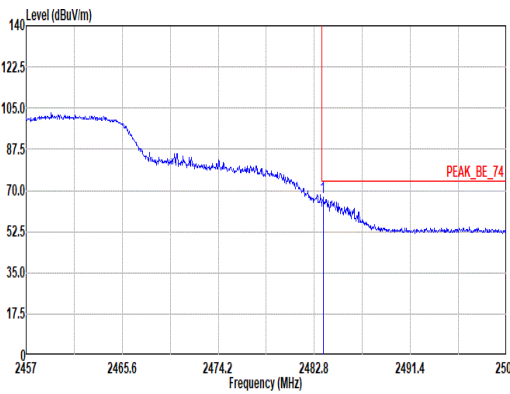
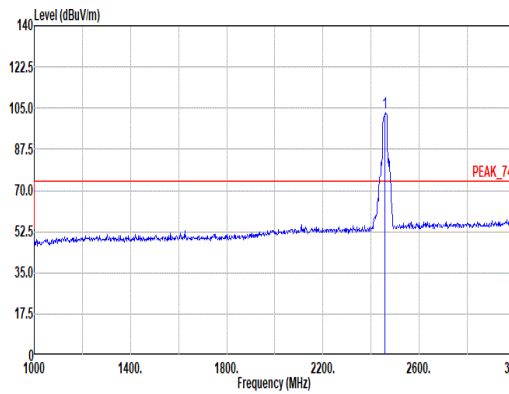
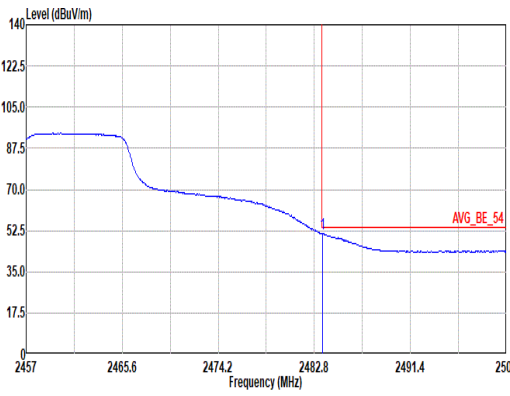
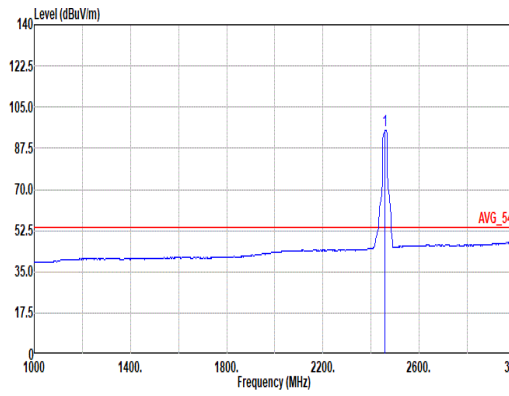


Mode	22																																																																																																		
	Band Edge																																																																																																		
	2400-2483.5_802.11n_HT20_CH10_2457MHz																																																																																																		
ANT	1																																																																																																		
Pol.	Horizontal						Fundamental																																																																																												
Peak																																																																																																			
	Site : 03CH11-HY Condition: PEAK_BE_74 3m 91200_01620_240828 HORIZONTAL : RBW:1000.000kHz VBN:3000.000kHz SMT:Auto Detector : PEAK Mode : 23 Setting : 72 Plane : X with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.57</td><td>66.89</td><td>74.00</td><td>-7.11</td><td>54.82</td><td>27.84</td><td>7.32</td><td>33.12</td><td>10.03</td><td>374</td><td>224</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.57	66.89	74.00	-7.11	54.82	27.84	7.32	33.12	10.03	374	224	PEAK	Site : 03CH11-HY Condition: PEAK_74 3m 91200_01620_240828 HORIZONTAL : RBW:1000.000kHz VBN:3000.000kHz SMT:Auto Detector : PEAK Mode : 23 Setting : 72 Plane : X with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2457.00</td><td>103.26</td><td>-----</td><td>-----</td><td>91.49</td><td>27.60</td><td>7.28</td><td>33.14</td><td>10.03</td><td>374</td><td>224</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2457.00	103.26	-----	-----	91.49	27.60	7.28	33.14	10.03	374	224
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2483.57	66.89	74.00	-7.11	54.82	27.84	7.32	33.12	10.03	374	224	PEAK																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2457.00	103.26	-----	-----	91.49	27.60	7.28	33.14	10.03	374	224	PEAK																																																																																							
Avg																																																																																																			
	Site : 03CH11-HY Condition: AVG_BE_54 3m 91200_01620_240828 HORIZONTAL : RBW:1000.000kHz VBN:0.750kHz SMT:Auto Detector : PEAK Mode : 23 Setting : 72 Plane : X with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.53</td><td>51.27</td><td>54.00</td><td>-2.73</td><td>39.20</td><td>27.84</td><td>7.32</td><td>33.12</td><td>10.03</td><td>374</td><td>224</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.53	51.27	54.00	-2.73	39.20	27.84	7.32	33.12	10.03	374	224	AVERAGE	Site : 03CH11-HY Condition: AVG_54 3m 91200_01620_240828 HORIZONTAL : RBW:1000.000kHz VBN:0.750kHz SMT:Auto Detector : PEAK Mode : 23 Setting : 72 Plane : X with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2457.00</td><td>95.21</td><td>-----</td><td>-----</td><td>83.44</td><td>27.60</td><td>7.28</td><td>33.14</td><td>10.03</td><td>374</td><td>224</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2457.00	95.21	-----	-----	83.44	27.60	7.28	33.14	10.03	374	224
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2483.53	51.27	54.00	-2.73	39.20	27.84	7.32	33.12	10.03	374	224	AVERAGE																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2457.00	95.21	-----	-----	83.44	27.60	7.28	33.14	10.03	374	224	AVERAGE																																																																																							

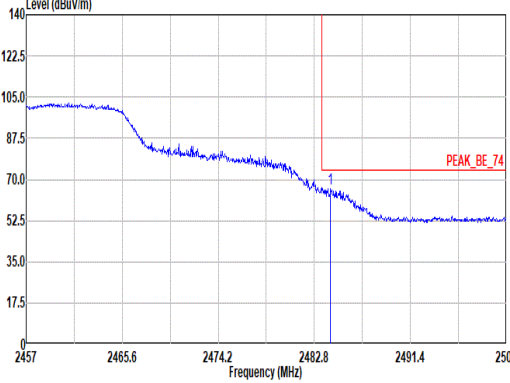
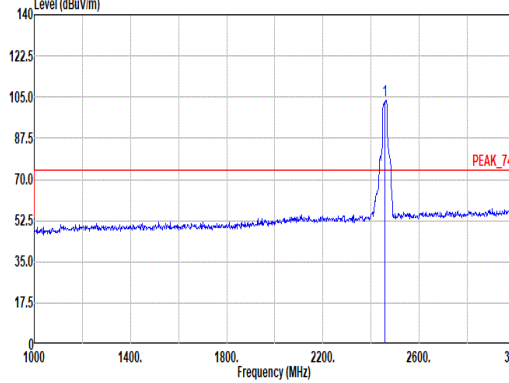
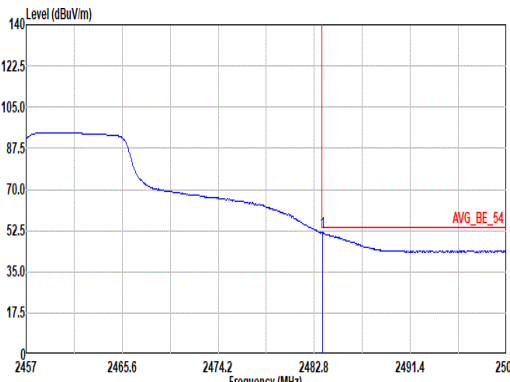
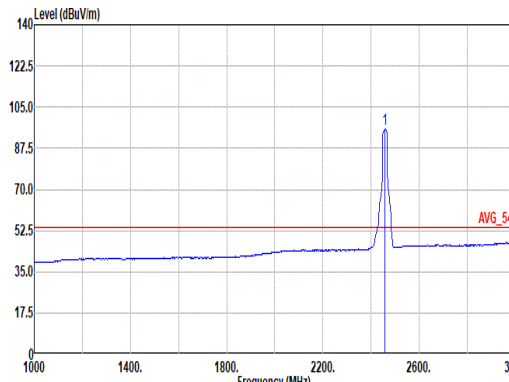


Mode	22																																																																																																										
	Band Edge																																																																																																										
	2400-2483.5_802.11n_HT20_CH10_2457MHz																																																																																																										
ANT	1																																																																																																										
Pol.	Vertical						Fundamental																																																																																																				
Peak																																																																																																											
	Site : 03CH11-HY Condition: PEAK_BE_74 3m 91200_01620_240828 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto Detector : PEAK Mode : 23 Setting : 72 Plane : X with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="3">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th>PEAK</th></tr><tr><td>1</td><td>2484.26</td><td>66.15</td><td>74.00</td><td>-7.85</td><td>54.07</td><td>27.84</td><td>7.32</td><td>33.11</td><td>10.03</td><td>200</td><td>296 PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	PEAK	1	2484.26	66.15	74.00	-7.85	54.07	27.84	7.32	33.11	10.03	200	296 PEAK	Site : 03CH11-HY Condition: PEAK_74 3m 91200_01620_240828 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto Detector : PEAK Mode : 23 Setting : 72 Plane : X with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="3">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th>PEAK</th></tr><tr><td>1</td><td>2457.00</td><td>103.65</td><td>-----</td><td>-----</td><td>91.88</td><td>27.60</td><td>7.28</td><td>33.14</td><td>10.03</td><td>200</td><td>296 PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	PEAK	1	2457.00	103.65	-----	-----	91.88	27.60	7.28	33.14	10.03	200
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	PEAK																																																																																																
1	2484.26	66.15	74.00	-7.85	54.07	27.84	7.32	33.11	10.03	200	296 PEAK																																																																																																
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	PEAK																																																																																																
1	2457.00	103.65	-----	-----	91.88	27.60	7.28	33.14	10.03	200	296 PEAK																																																																																																
Avg																																																																																																											
	Site : 03CH11-HY Condition: AVG_BE_54 3m 91200_01620_240828 VERTICAL : RBW:1000.000kHz VBW:0.750kHz SMT:Auto Detector : PEAK Mode : 23 Setting : 72 Plane : X with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="3">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th>AVERAGE</th></tr><tr><td>1</td><td>2483.53</td><td>51.54</td><td>54.00</td><td>-2.46</td><td>39.47</td><td>27.84</td><td>7.32</td><td>33.12</td><td>10.03</td><td>200</td><td>296 AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	AVERAGE	1	2483.53	51.54	54.00	-2.46	39.47	27.84	7.32	33.12	10.03	200	296 AVERAGE	Site : 03CH11-HY Condition: AVG_54 3m 91200_01620_240828 VERTICAL : RBW:1000.000kHz VBW:0.750kHz SMT:Auto Detector : PEAK Mode : 23 Setting : 72 Plane : X with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="3">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th>AVERAGE</th></tr><tr><td>1</td><td>2457.00</td><td>95.60</td><td>-----</td><td>-----</td><td>83.83</td><td>27.60</td><td>7.28</td><td>33.14</td><td>10.03</td><td>200</td><td>296 AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	AVERAGE	1	2457.00	95.60	-----	-----	83.83	27.60	7.28	33.14	10.03	200
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	AVERAGE																																																																																																
1	2483.53	51.54	54.00	-2.46	39.47	27.84	7.32	33.12	10.03	200	296 AVERAGE																																																																																																
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	AVERAGE																																																																																																
1	2457.00	95.60	-----	-----	83.83	27.60	7.28	33.14	10.03	200	296 AVERAGE																																																																																																

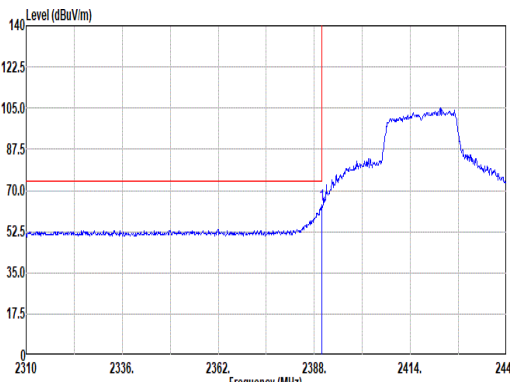
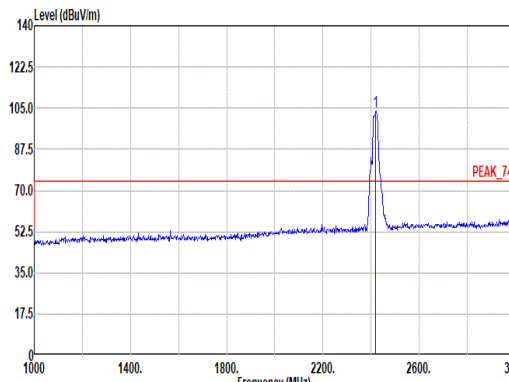
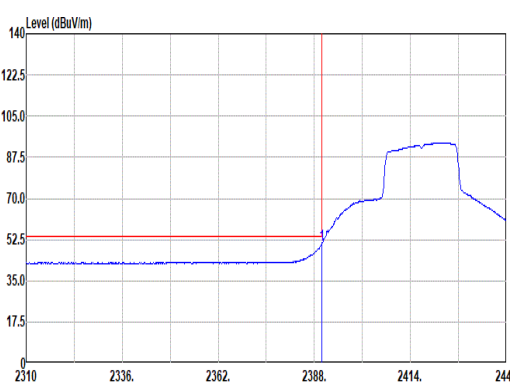
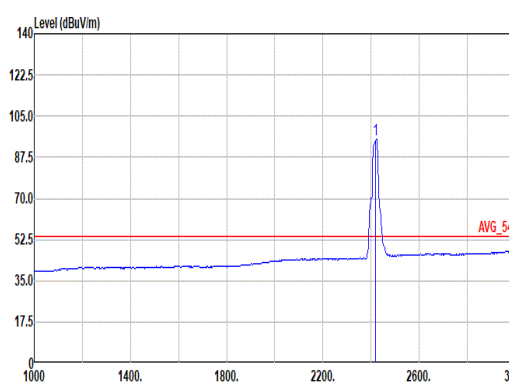


Mode	23																																																																																																																
	Band Edge																																																																																																																
	2400-2483.5_802.11ax HE20_CH2_Full RU_2417MHz																																																																																																																
ANT	1																																																																																																																
Pol.	Horizontal						Fundamental																																																																																																										
Peak																																																																																																																	
	Site : 03CH11-HY Condition: PEAK_BE_74 3m 91200_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto Detector : PEAK Mode : 24 Setting : 74 Plane : X with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="3">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1</td><td>2389.95</td><td>63.94</td><td>74.00</td><td>-10.06</td><td>52.62</td><td>27.30</td><td>7.19</td><td>33.20</td><td>10.03</td><td>351</td><td>219</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark			Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor								MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm	deg			1	2389.95	63.94	74.00	-10.06	52.62	27.30	7.19	33.20	10.03	351	219	PEAK	Site : 03CH11-HY Condition: PEAK_74 3m 91200_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto Detector : PEAK Mode : 24 Setting : 74 Plane : X with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="3">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1</td><td>2417.00</td><td>103.75</td><td>-----</td><td>-----</td><td>92.16</td><td>27.50</td><td>7.23</td><td>33.17</td><td>10.03</td><td>351</td><td>219</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark			Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor								MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm	deg			1	2417.00	103.75	-----	-----	92.16	27.50	7.23	33.17	10.03	351	219
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																								
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm	deg																																																																																																							
1	2389.95	63.94	74.00	-10.06	52.62	27.30	7.19	33.20	10.03	351	219	PEAK																																																																																																					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																								
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm	deg																																																																																																							
1	2417.00	103.75	-----	-----	92.16	27.50	7.23	33.17	10.03	351	219	PEAK																																																																																																					
Avg																																																																																																																	
	Site : 03CH11-HY Condition: AVG_BE_54 3m 91200_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:1.000kHz SMT:Auto Detector : PEAK Mode : 24 Setting : 74 Plane : X with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="3">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1</td><td>2389.95</td><td>50.28</td><td>54.00</td><td>-3.72</td><td>38.96</td><td>27.30</td><td>7.19</td><td>33.20</td><td>10.03</td><td>351</td><td>219</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark			Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor								MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm	deg			1	2389.95	50.28	54.00	-3.72	38.96	27.30	7.19	33.20	10.03	351	219	AVERAGE	Site : 03CH11-HY Condition: AVG_54 3m 91200_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:1.000kHz SMT:Auto Detector : PEAK Mode : 24 Setting : 74 Plane : X with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="3">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1</td><td>2417.00</td><td>95.03</td><td>-----</td><td>-----</td><td>83.40</td><td>27.54</td><td>7.23</td><td>33.17</td><td>10.03</td><td>351</td><td>219</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark			Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor								MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm	deg			1	2417.00	95.03	-----	-----	83.40	27.54	7.23	33.17	10.03	351	219
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																								
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm	deg																																																																																																							
1	2389.95	50.28	54.00	-3.72	38.96	27.30	7.19	33.20	10.03	351	219	AVERAGE																																																																																																					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																								
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm	deg																																																																																																							
1	2417.00	95.03	-----	-----	83.40	27.54	7.23	33.17	10.03	351	219	AVERAGE																																																																																																					

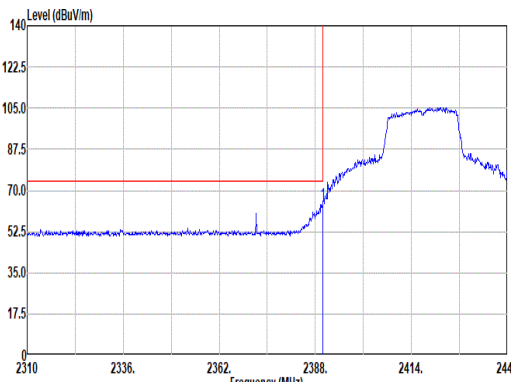
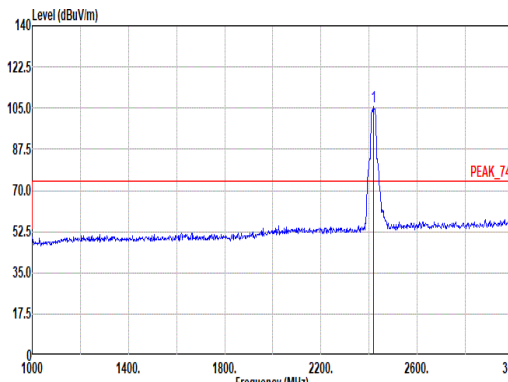
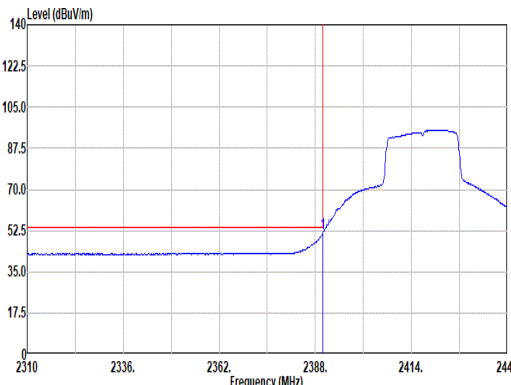
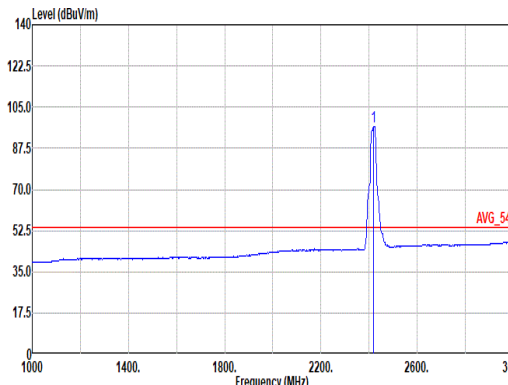


Mode	23																																																																																													
	Band Edge																																																																																													
	2400-2483.5_802.11ax HE20_CH2_Full RU_2417MHz																																																																																													
ANT	1																																																																																													
Pol.	Vertical						Fundamental																																																																																							
Peak																																																																																														
	Site : 03CH11-HY Condition: PEAK_BE_74 3m 91200_01620_240828 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto Detector : PEAK Mode : 24 Setting : 74 Plane : X with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2389.95</td><td>64.66</td><td>74.00</td><td>-9.34</td><td>53.34</td><td>27.30</td><td>7.19</td><td>33.20</td><td>10.03</td><td>341 PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.95	64.66	74.00	-9.34	53.34	27.30	7.19	33.20	10.03	341 PEAK	Site : 03CH11-HY Condition: PEAK_74 3m 91200_01620_240828 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto Detector : PEAK Mode : 24 Setting : 74 Plane : X with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2417.00</td><td>105.85</td><td>-----</td><td>-----</td><td>94.26</td><td>27.50</td><td>7.23</td><td>33.17</td><td>10.03</td><td>341 PEAK</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2417.00	105.85	-----	-----	94.26	27.50	7.23	33.17	10.03
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																					
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																				
1	2389.95	64.66	74.00	-9.34	53.34	27.30	7.19	33.20	10.03	341 PEAK																																																																																				
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																					
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																				
1	2417.00	105.85	-----	-----	94.26	27.50	7.23	33.17	10.03	341 PEAK																																																																																				
Avg																																																																																														
	Site : 03CH11-HY Condition: AVG_BE_54 3m 91200_01620_240828 VERTICAL : RBW:1000.000kHz VBW:1.000kHz SMT:Auto Detector : PEAK Mode : 24 Setting : 74 Plane : X with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2389.95</td><td>51.07</td><td>54.00</td><td>-2.93</td><td>39.75</td><td>27.30</td><td>7.19</td><td>33.20</td><td>10.03</td><td>341 AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.95	51.07	54.00	-2.93	39.75	27.30	7.19	33.20	10.03	341 AVERAGE	Site : 03CH11-HY Condition: AVG_54 3m 91200_01620_240828 VERTICAL : RBW:1000.000kHz VBW:1.000kHz SMT:Auto Detector : PEAK Mode : 24 Setting : 74 Plane : X with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2417.00</td><td>96.84</td><td>-----</td><td>-----</td><td>85.23</td><td>27.52</td><td>7.23</td><td>33.17</td><td>10.03</td><td>341 AVERAGE</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2417.00	96.84	-----	-----	85.23	27.52	7.23	33.17	10.03
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																					
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																				
1	2389.95	51.07	54.00	-2.93	39.75	27.30	7.19	33.20	10.03	341 AVERAGE																																																																																				
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																					
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																				
1	2417.00	96.84	-----	-----	85.23	27.52	7.23	33.17	10.03	341 AVERAGE																																																																																				

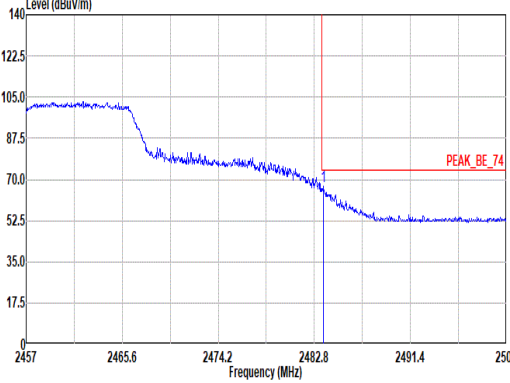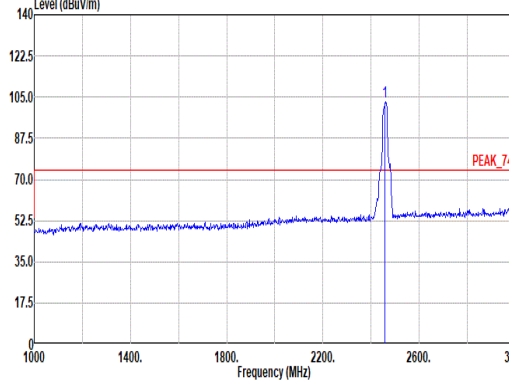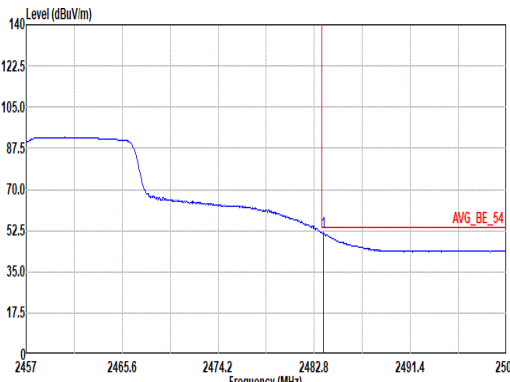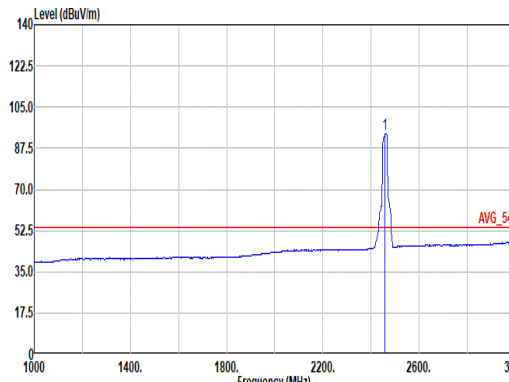

		24																																																																																																									
Mode	Band Edge																																																																																																										
	2400-2483.5_802.11ax HE20_CH10_Full RU_2457MHz																																																																																																										
ANT	1																																																																																																										
Pol.	Horizontal						Fundamental																																																																																																				
Peak																																																																																																											
	Site : 03CH11-HY Condition: PEAK_BE_74 3m 91200_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto Detector : PEAK Mode : 25 Setting : 70 Plane : X with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="3">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2483.62</td><td>67.11</td><td>74.00</td><td>-6.89</td><td>55.04</td><td>27.84</td><td>7.32</td><td>33.12</td><td>10.03</td><td>374</td><td>223 PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	2483.62	67.11	74.00	-6.89	55.04	27.84	7.32	33.12	10.03	374	223 PEAK	Site : 03CH11-HY Condition: PEAK_74 3m 91200_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto Detector : PEAK Mode : 25 Setting : 70 Plane : X with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="3">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2457.00</td><td>102.83</td><td>-----</td><td>-----</td><td>91.02</td><td>27.62</td><td>7.29</td><td>33.13</td><td>10.03</td><td>374</td><td>223 PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	2457.00	102.83	-----	-----	91.02	27.62	7.29	33.13	10.03	374
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																	
1	2483.62	67.11	74.00	-6.89	55.04	27.84	7.32	33.12	10.03	374	223 PEAK																																																																																																
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																	
1	2457.00	102.83	-----	-----	91.02	27.62	7.29	33.13	10.03	374	223 PEAK																																																																																																
Avg																																																																																																											
	Site : 03CH11-HY Condition: AVG_BE_54 3m 91200_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:1.000kHz SMT:Auto Detector : PEAK Mode : 25 Setting : 70 Plane : X with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="3">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2483.62</td><td>51.61</td><td>54.00</td><td>-2.39</td><td>39.54</td><td>27.84</td><td>7.32</td><td>33.12</td><td>10.03</td><td>374</td><td>223 AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	2483.62	51.61	54.00	-2.39	39.54	27.84	7.32	33.12	10.03	374	223 AVERAGE	Site : 03CH11-HY Condition: AVG_54 3m 91200_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:1.000kHz SMT:Auto Detector : PEAK Mode : 25 Setting : 70 Plane : X with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="3">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2457.00</td><td>93.66</td><td>-----</td><td>-----</td><td>81.89</td><td>27.60</td><td>7.28</td><td>33.14</td><td>10.03</td><td>374</td><td>223 AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	2457.00	93.66	-----	-----	81.89	27.60	7.28	33.14	10.03	374
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																	
1	2483.62	51.61	54.00	-2.39	39.54	27.84	7.32	33.12	10.03	374	223 AVERAGE																																																																																																
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																	
1	2457.00	93.66	-----	-----	81.89	27.60	7.28	33.14	10.03	374	223 AVERAGE																																																																																																

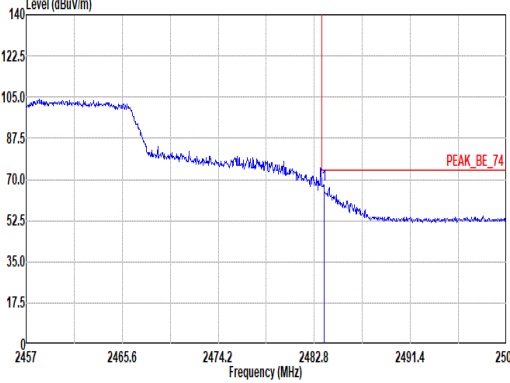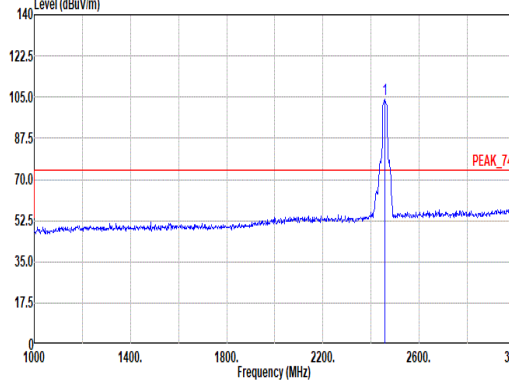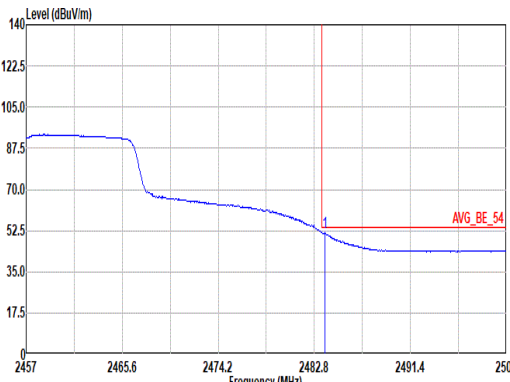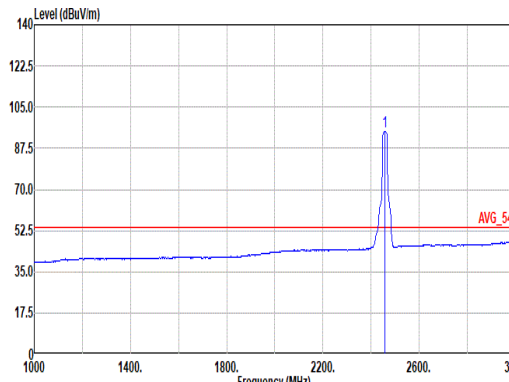

Mode	24																																																																																																		
	Band Edge																																																																																																		
	2400-2483.5_802.11ax HE20_CH10_Full RU_2457MHz																																																																																																		
ANT	1																																																																																																		
Pol.	Vertical						Fundamental																																																																																												
Peak																																																																																																			
	Site : 03CH11-HY Condition: PEAK_BE_74 3m 91200_01620_240828 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto Detector : PEAK Mode : 25 Setting : 70 Plane : X with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.66</td><td>67.64</td><td>74.00</td><td>-6.36</td><td>55.57</td><td>27.84</td><td>7.32</td><td>33.12</td><td>10.03</td><td>297</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.66	67.64	74.00	-6.36	55.57	27.84	7.32	33.12	10.03	297	PEAK	Site : 03CH11-HY Condition: PEAK_74 3m 91200_01620_240828 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto Detector : PEAK Mode : 25 Setting : 70 Plane : X with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2457.00</td><td>104.01</td><td>-----</td><td>-----</td><td>92.24</td><td>27.60</td><td>7.28</td><td>33.14</td><td>10.03</td><td>100</td><td>297</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2457.00	104.01	-----	-----	92.24	27.60	7.28	33.14	10.03	100	297	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2483.66	67.64	74.00	-6.36	55.57	27.84	7.32	33.12	10.03	297	PEAK																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2457.00	104.01	-----	-----	92.24	27.60	7.28	33.14	10.03	100	297	PEAK																																																																																							
Avg																																																																																																			
	Site : 03CH11-HY Condition: AVG_BE_54 3m 91200_01620_240828 VERTICAL : RBW:1000.000kHz VBW:1.000kHz SMT:Auto Detector : PEAK Mode : 25 Setting : 70 Plane : X with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.75</td><td>51.64</td><td>54.00</td><td>-2.36</td><td>39.56</td><td>27.84</td><td>7.32</td><td>33.11</td><td>10.03</td><td>100</td><td>297</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.75	51.64	54.00	-2.36	39.56	27.84	7.32	33.11	10.03	100	297	AVERAGE	Site : 03CH11-HY Condition: AVG_54 3m 91200_01620_240828 VERTICAL : RBW:1000.000kHz VBW:1.000kHz SMT:Auto Detector : PEAK Mode : 25 Setting : 70 Plane : X with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2457.00</td><td>94.68</td><td>-----</td><td>-----</td><td>82.91</td><td>27.60</td><td>7.28</td><td>33.14</td><td>10.03</td><td>100</td><td>297</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2457.00	94.68	-----	-----	82.91	27.60	7.28	33.14	10.03	100	297
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2483.75	51.64	54.00	-2.36	39.56	27.84	7.32	33.11	10.03	100	297	AVERAGE																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2457.00	94.68	-----	-----	82.91	27.60	7.28	33.14	10.03	100	297	AVERAGE																																																																																							




Appendix D. Duty Cycle Plots

Band	Duty Cycle (%)	T(us)	1/T(kHz)	VBW Setting
802.11b	98.40	8610	-	10Hz
802.11g	90.56	1429	0.700	750Hz
2.4GHz 802.11n HT20	89.90	1335	0.749	750Hz
2.4GHz 802.11ax HE20 Full RU	87.51	1044	0.958	1kHz
2.4GHz 802.11ax HE20 26 RU	83.81	5280	0.189	300Hz
2.4GHz 802.11ax HE20 52 RU	83.83	5153	0.194	300Hz
2.4GHz 802.11ax HE20 106 RU	82.60	4770	0.210	300Hz







2.4GHz 802.11ax HE20 26 RU

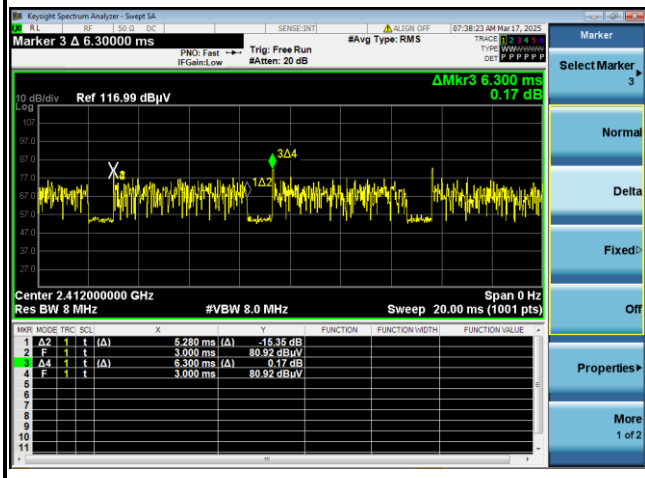

2.4GHz 802.11ax HE20 52 RU

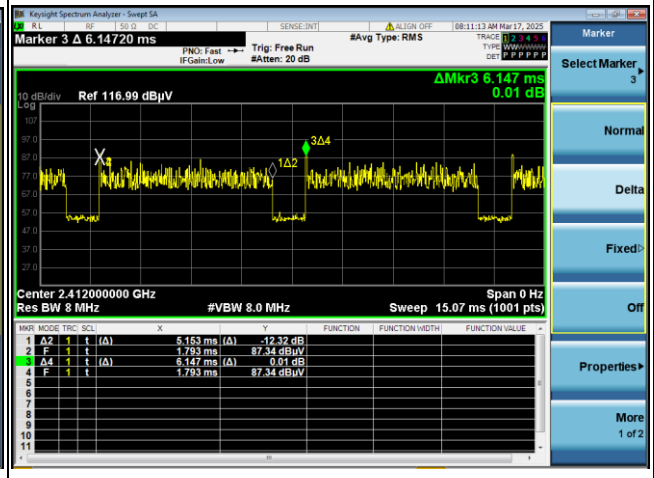

2.4GHz 802.11ax HE20 106 RU

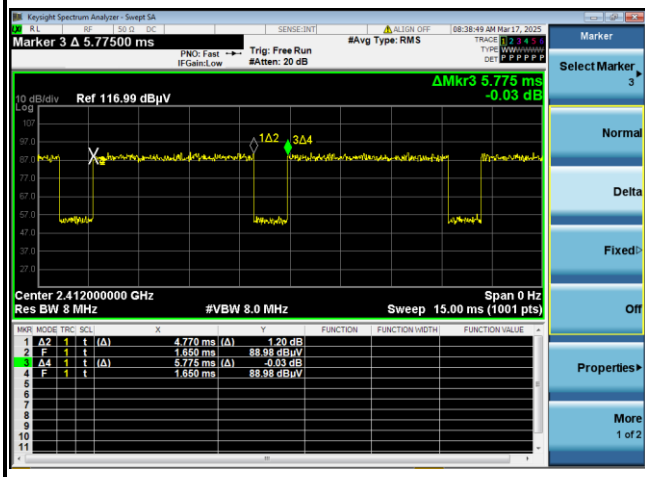

—THE END—