



# FCC Radio Test Report

**APPLICANT** : Google LLC  
**EQUIPMENT** : Wireless Device  
**MODEL NAME** : G1KAW  
**FCC ID** : A4RG1KAW  
**STANDARD** : FCC 47 CFR Part 25  
**CLASSIFICATION** : Licensed Non-Broadcast Station Transmitter (TNB)  
**TEST DATE(S)** : Mar. 25, 2025 ~ Apr. 14, 2025

We, Sporton International Inc. (Kunshan), would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.26-2015 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Kunshan), the test report shall not be reproduced except in full.

Jason Jia



Approved by: Jason Jia

**Sportun International Inc. (Kunshan)**  
No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300  
People's Republic of China



## TABLE OF CONTENTS

REVISION HISTORY.....	3
SUMMARY OF TEST RESULT .....	4
<b>1 GENERAL DESCRIPTION.....</b>	<b>5</b>
1.1    Applicant.....	5
1.2    Product Feature of Equipment Under Test .....	5
1.3    Product Specification of Equipment Under Test .....	5
1.4    Modification of EUT .....	5
1.5    Maximum EIRP and Emission Designator .....	6
1.6    Testing Location .....	6
1.7    Test Software .....	6
1.8    Applied Standards .....	7
<b>2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST.....</b>	<b>8</b>
2.1    Test Mode.....	8
2.2    Connection Diagram of Test System .....	8
2.3    Support Unit used in test configuration and system.....	8
2.4    Measurement Results Explanation Example .....	9
2.5    Frequency List of Low/Middle/High Channels.....	9
<b>3 TEST RESULT.....</b>	<b>10</b>
3.1    RF Output Power and EIRP .....	10
3.2    Frequency Stability.....	11
3.3    Occupied Bandwidth .....	12
3.4    Conducted Emissions Mask .....	13
3.5    Conducted Spurious Emission .....	15
3.6    Field Strength of Spurious Radiation .....	17
3.7    Additional Limits on Emissions from Mobile Earth Station.....	20
<b>4 LIST OF MEASURING EQUIPMENT.....</b>	<b>22</b>
<b>5 MEASUREMENT UNCERTAINTY .....</b>	<b>23</b>
<b>APPENDIX A. TEST RESULTS OF CONDUCTED TEST</b>	
<b>APPENDIX B. TEST RESULTS OF RADIATED TEST</b>	



## REVISION HISTORY



## SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	§2.1046)	RF Output Power	-	Report Only	-
	§25.204(a)	Equivalent Isotropic Radiated Power	40dBW(max)	PASS	-
3.2	§2.1055, §25.202(d)	Frequency Stability	within 0.001 percent of the reference frequency.	PASS	-
3.3	§2.1049	Occupied Bandwidth	-	PASS	-
3.4	§2.1051, §25.202(f)(1)(2)	Conducted Emissions Mask	§25.202(f)(1)(2)	PASS	
3.5	§2.1051, §25.202(f)(3)	Conducted Spurious Emission	§25.202(f)(3)	PASS	-
3.6	§2.1053, §25.202(f)(3)	Field Strength of Spurious Radiation	§25.202(f)(3)	PASS	Under limit 36.87 dB at 3255.00 MHz
3.7	§25.216(c)(e)(h)(i)	Additional Limits on Emissions from Mobile Earth Station	§25.216(c)(e)(h)(i)	PASS	-

**Conformity Assessment Condition:**

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacturer who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2. The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty"

**Disclaimer:**

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.



## 1 General Description

### 1.1 Applicant

Google LLC

1600 Amphitheatre Parkway, Mountain View, CA, 94043 USA

### 1.2 Product Feature of Equipment Under Test

Product Feature	
Equipment	Wireless Device
Model Name	G1KAW
FCC ID	A4RG1KAW
IMEI Code	Conducted: 350340650027283/350340650027069 Radiation: 350340650071554

### 1.3 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx Frequency	Band 23 : 2000 MHz ~ 2020 MHz Band 255 : 1626.6 MHz ~ 1660 MHz
Rx Frequency	Band 23 : 2180 MHz ~ 2200 MHz Band 255 : 1525.1 MHz ~ 1558.5 MHz
Sub-carrier Spacing	3.75kHz, 15kHz
Bandwidth	230kHz
Maximum Output Power to Antenna	Band 23 : 23.44 dBm Band 255 : 23.27 dBm
Antenna Type	PIFA Antenna
Antenna Gain	Band 23 : -7.2 dBi Band 255 : -8.1 dBi
Type of Modulation	BPSK / QPSK

### 1.4 Modification of EUT

No modifications are made to the EUT during all test items.



## 1.5 Maximum EIRP and Emission Designator

Band 23		BPSK/QPSK	
SCS (kHz)	Frequency Range (MHz)	Maximum EIRP(W)	Emission Designator (99%OBW)
3.75	2000.1 ~ 2019.9	0.0419	-
15	2000.1 ~ 2019.9	0.0421	185KG7D
Band 255		BPSK/QPSK	
SCS (kHz)	Frequency Range (MHz)	Maximum EIRP(W)	Emission Designator (99%OBW)
3.75	1626.7 ~ 1659.9	0.0328	-
15	1626.7 ~ 1659.9	0.0329	185KG7D

**Note:** All modulations have been tested, and only the worst test results are shown in the report.

## 1.6 Testing Location

Sportun International Inc. (Kunshan) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

Test Firm	Sportun International Inc. (Kunshan)		
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158		
Test Site No.	Sportun Site No.	FCC Designation No.	FCC Test Firm Registration No.
	03CH04-KS TH01-KS	CN1257	314309

## 1.7 Test Software

Item	Site	Manufacture	Name	Version
1.	TH01-KS	SPORTON	FCC LTE_Ver2.0 Auto_china_210503	2.0
2.	03CH04-KS	AUDIX	E3	210616



## 1.8 Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- FCC 47 CFR Part 25
- ANSI C63.26-2015
- FCC KDB 971168 D01 Power Meas. License Digital Systems v03r01
- FCC KDB 412172 D01 Determining ERP and EIRP v01r01
- FCC KDB 414788 D01 Radiated Test Site v01r01

**Remark:** All test items were verified and recorded according to the standards and without any deviation during the test.



## 2 Test Configuration of Equipment Under Test

### 2.1 Test Mode

Antenna port conducted and radiated test items listed below are performed according to KDB 971168 D01 Power Meas License Digital Systems v03r01 with maximum output power.

Radiated measurements are performed by rotating the EUT in three different orthogonal test planes to find the maximum emission. (X/Z-Plane)

### 2.2 Connection Diagram of Test System



This example is connection diagram of EUT test configurations.

For detail, please refer to test mode configuration and setup photographs for each test item.

### 2.3 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	DC Power Supply	GW	GPS-3030D	N/A	N/A	Unshielded, 1.8 m

### 2.4 EUT Operation Test Setup

For all test items, an engineering test program was provided and enabled to make EUT continuous transmit.



## 2.5 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss.

*Offset = RF cable loss.*

Following shows an offset computation example with cable loss 5.8dB.

*Offset(dB) = RF cable loss(dB).*

= 5.8 (dB)

## 2.6 Frequency List of Low/Middle/High Channels

Band 23 Channel and Frequency List				
SCS [kHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
3.75 / 15	Frequency	2000.1	2010	2019.9

Band 255 Channel and Frequency List				
SCS [kHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
3.75 / 15	Frequency	1626.7	1643.5	1659.9



### 3 Test Result

#### 3.1 RF Output Power and EIRP

##### 3.1.1 Description of the Conducted Output Power and EIRP Measurement

###### FCC Part 25.204 (a)

In bands shared coequally with terrestrial radio communication services, the equivalent isotropically radiated power transmitted in any direction towards the horizon by an earth station, other than an ESV, operating in frequency bands between 1 and 15 GHz, shall not exceed the following limits except as provided for in paragraph (c) of this section:

- + 40 dBW in any 4 kHz band for  $\theta \leq 0^\circ$
- + 40 + 3 $\theta$  dBW in any 4 kHz band for  $0^\circ < \theta \leq 5^\circ$

Where  $\theta$  is the angle of elevation of the horizon viewed from the center of radiation of the antenna of the earth station and measured in degrees as positive above the horizontal plane and negative below it.

According to KDB 412172 D01 Power Approach,

EIRP = PT + GT – LC, ERP = EIRP -2.15, where

PT = transmitter output power in dBm

GT = gain of the transmitting antenna in dBi

LC = signal attenuation in the connecting cable between the transmitter and antenna in dB

##### 3.1.2 Test Procedures

The output power is measured by using power meter and FTM (Factory Test Mode) when the transmitter is operating at the manufacturer's rated power and modulated with signals. The maximum antenna gain of EUT for the test range will then be added to the measured conducted power to calculate the EIRP. Since the power meter can only measure the overall power, the measured result will be worse than the one measured in 4 kHz RBW. The test result will be compared to the most restricted limit: +40 dBW.

##### 3.1.3 Test Results

Please refer to Appendix A.

## 3.2 Frequency Stability

### 3.2.1 Description of the Frequency Stability Measurement

#### FCC Part 25.202 (d) Frequency tolerance, Earth stations.

The carrier frequency of each earth station transmitter authorized in these services shall be maintained within 0.001 percent of the reference frequency.


### 3.2.2 Test Procedures for Temperature Variation

1. The testing follows ANSI C63.26 section 5.6.4
2. The EUT was set up in the thermal chamber and connected with the spectrum analyzer.
3. With power OFF, the temperature was decreased to -30°C and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute.
4. With power OFF, the temperature was raised in 10°C steps up to 50°C. The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

### 3.2.3 Test Procedures for Voltage Variation

1. The testing follows ANSI C63.26 section 5.6.5
2. The EUT was placed in a temperature chamber at  $20\pm 5^\circ C$  and connected with the spectrum analyzer.
3. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value for other than hand carried battery equipment.
4. The power supply voltage to the EUT was varied from the lowermost voltage to the uppermost voltage. The range is specified by manufacturer.
5. The variation in frequency was measured for the worst case.

### 3.2.4 Test Setup

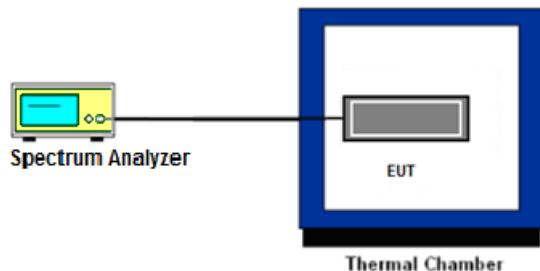

### 3.2.5 Test Results

Please refer to Appendix A.

### 3.3 Occupied Bandwidth

#### 3.3.1 Description of Occupied Bandwidth Measurement

The occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.


#### 3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

#### 3.3.3 Test Procedures

1. The testing follows ANSI C63.26 Section 5.4
2. The EUT was connected to spectrum analyzer.
3. The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the spectrum analyzer shall be between two and five times the anticipated OBW.
4. The nominal resolution bandwidth (RBW) shall be in the range of 1 to 5 % of the anticipated OBW, and the VBW shall be at least 3 times the RBW.
5. Set the detection mode to peak, and the trace mode to max hold.
6. Determine the reference value: Set the EUT to transmit a modulated signal. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace. (this is the reference value)
7. Use the 99 % power bandwidth function of the spectrum analyzer and report the measured bandwidth.

#### 3.3.4 Test Setup

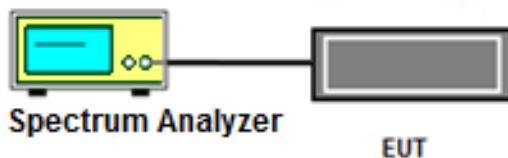

#### 3.3.5 Test Result

Please refer to Appendix A.



## 3.4 Conducted Emissions Mask

### 3.4.1 Description of Conducted Emissions Mask Measurement

#### FCC Part 25.202(f) Emissions Limitations

The mean power of the emissions shall be attenuated below the mean output power of the transmitter in accordance with the following schedule:

- (1) In any 4 kHz band, the center frequency of which is removed from the assigned frequency by more than 50% up to and including 100% of the authorized bandwidth: 25 decibels;
- (2) In any 4 kHz band, the center frequency of which is removed from the assigned frequency by more than 100% up to and including 250% of the authorized bandwidth: 35 decibels;


### 3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

### 3.4.3 Test Procedures

1. The testing follows ANSI C63.26 section 5.7
2. The EUT was connected to the spectrum analyzer.
3. The RF output of EUT was connected to the spectrum analyzer by an RF cable and attenuator. The path loss was compensated to the results for each measurement.
4. The highest RF power within the transmitting frequency was measured.
5. Make the measurement with the spectrum analyzer's RBW = 3kHz, VBW = 10kHz, and add a correction factor of  $10\log^*(4\text{kHz}/3\text{kHz}) = 1.25\text{dB}$  to meet the 4kHz integration requirement, taking the record of the worst unwanted emission.
6. If the test result in Step 5 exceed the limit, the following procedure will be used:
  - 6.1. Make the measurement with the spectrum analyzer's RBW = 1kHz, VBW = 3kHz.
  - 6.2. Record all measured worst frequencies.
  - 6.3. Use the Channel Power Function of the Spectrum Analyzer.
  - 6.4. Measure the power in 1kHz bandwidth center the worst frequencies, add a correction factor of  $10\log^*(4\text{kHz}/1\text{kHz})$  to meet the 4kHz integration requirement.
7. The limit line is derived from FCC 25.202 (f) below the transmitter power P(Watts)

### 3.4.4 Test Setup

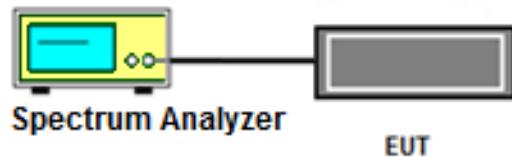

### 3.4.5 Test Result

Please refer to Appendix A.



## 3.5 Conducted Spurious Emission

### 3.5.1 Description of Conducted Spurious Emission Measurement

#### FCC Part 25.202(f) Emissions Limitations

The mean power of the emissions shall be attenuated below the mean output power of the transmitter in accordance with the following schedule:

(3) In any 4 kHz band, the center frequency of which is removed from the assigned frequency by more than 250% of the authorized bandwidth: an amount equal to 43 decibels plus 10 times Logarithm (to the base 10) of the transmitter power in watts.

### 3.5.2 Measuring Instruments


The measuring equipment is listed in the section 4 of this test report.

### 3.5.3 Test Procedures

1. The testing follows ANSI C63.26 section 5.7
2. The EUT was connected to the spectrum analyzer.
3. The RF output of EUT was connected to the spectrum analyzer by an RF cable and attenuator. The path loss was compensated to the results for each measurement.
4. The highest RF power within the transmitting frequency was measured.
5. Peak detector is used instead of RMS detector since the measured result of Peak detector is worse than the RMS one. If the test result of Peak detector exceed the limit, RMS detector will then be used.
6. Make the measurement with the spectrum analyzer's RBW = 100kHz, VBW = 300kHz, taking the record of the worst unwanted emission.
7. The conducted spurious emission for the whole frequency range was taken.
8. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
9. The limit line is derived from FCC 25.202 (f) below the transmitter power P(Watts)



### 3.5.4 Test Setup

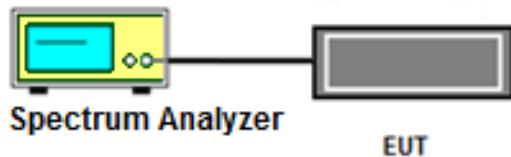

### 3.5.5 Test Result

Please refer to Appendix A.



## 3.6 Field Strength of Spurious Radiation

### 3.6.1 Description of Radiated Spurious Emission

#### FCC Part 25.202(f) Emissions Limitations

The mean power of the emissions shall be attenuated below the mean output power of the transmitter in accordance with the following schedule:

(3) In any 4 kHz band, the center frequency of which is removed from the assigned frequency by more than 250% of the authorized bandwidth: an amount equal to 43 decibels plus 10 times Logarithm (to the base 10) of the transmitter power in watts

### 3.6.2 Measuring Instruments


The measuring equipment is listed in the section 4 of this test report.

### 3.6.3 Test Procedures


1. The testing follows ANSI C63.26 Section 5.5
2. The EUT was placed on a rotatable table with:
  - 0.8 meter above ground for emissions under 1 GHz
  - 1.5 meter above ground for emissions above 1 GHz
3. The EUT was set 3 meters from the receiving antenna, which was mounted on the antenna tower.
4. The table was rotated 360 degrees to determine the position of the highest spurious emission.
5. The height of the receiving antenna is varied between one meter and four meters to search the maximum spurious emission for both horizontal and vertical polarizations.
6. Peak detector is used instead of RMS detector since the measured result of Peak detector is worse than the RMS one. If the test result of Peak detector exceed the limit, RMS detector will then be used.
7. Make the measurement with the spectrum analyzer's RBW = 100kHz, VBW = 300kHz, taking the record of maximum spurious emission.
8. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

### 3.6.4 Test Setup


For radiated emissions below 30MHz

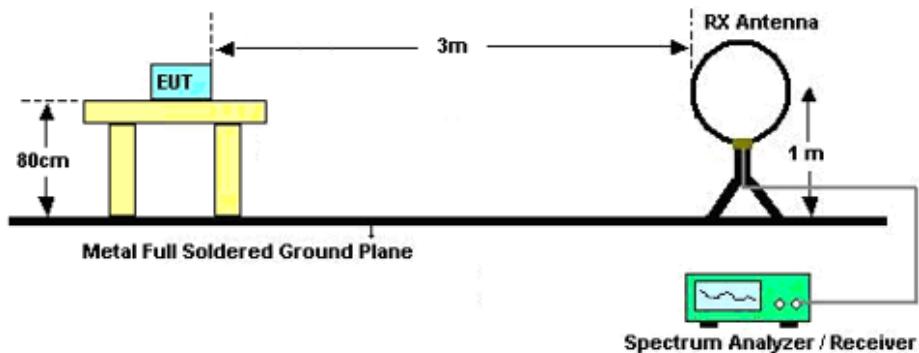

For radiated emissions from 30MHz to 1GHz

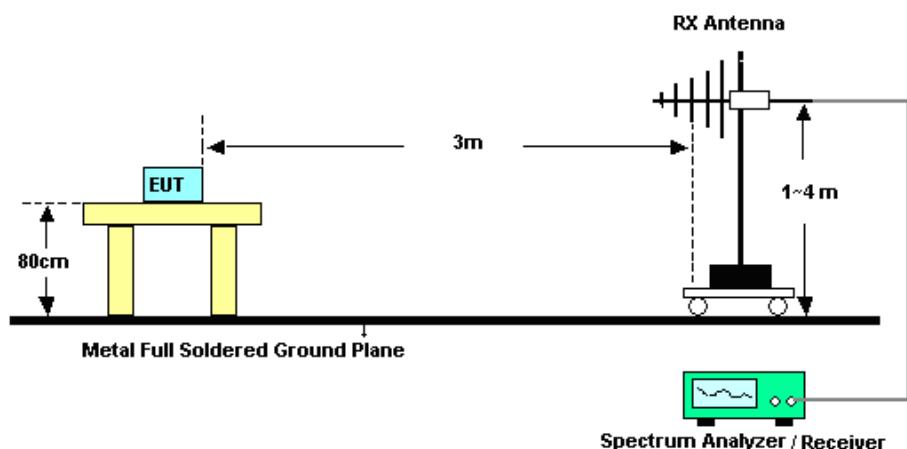

For radiated emissions above 1GHz

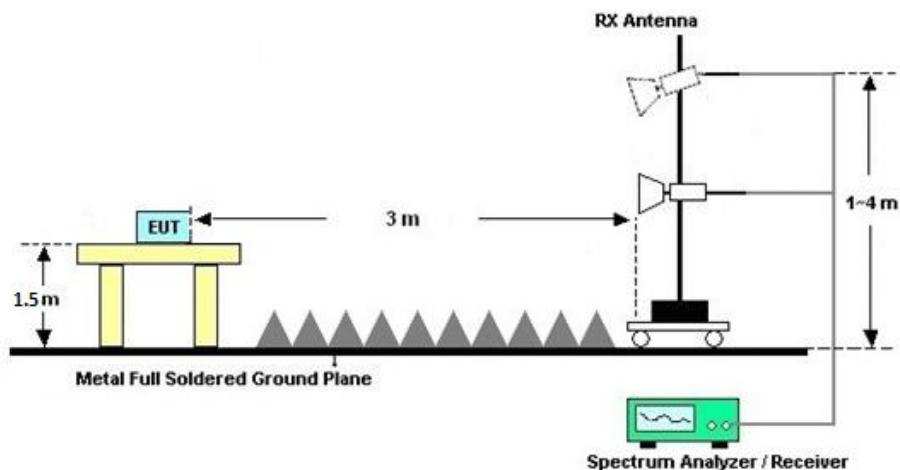

### 3.6.5 Test Results

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

Please refer to Appendix B.



### 3.7 Additional Limits on Emissions from Mobile Earth Station

Additional Limits on emissions from mobile earth stations for protection of aeronautical radionavigation-satellite service and Special requirements for ancillary terrestrial components operating in the 1626.5-1660.5 MHz and 2000-2020 MHz bands.

#### 3.7.1 Description of Additional Limits on Emissions from Mobile Earth Station

##### FCC Part 25.216 Emissions Limitations:

(c) The e.i.r.p. density of emissions from mobile earth stations placed in service after July 21, 2002 with assigned uplink frequencies between 1610 MHz and 1660.5 MHz shall not exceed -70 dBW/MHz, averaged over any 2 millisecond active transmission interval, in the band 1559-1605 MHz. The e.i.r.p. of discrete emissions of less than 700 Hz bandwidth from such stations shall not exceed -80 dBW, averaged over any 2 millisecond active transmission interval, in the 1559-1605 MHz band.

(e) The e.i.r.p density of emissions from mobile earth stations with assigned uplink frequencies between 1990 MHz and 2025 MHz shall not exceed -70 dBW/MHz, averaged over any 2 millisecond active transmission interval, in frequencies between 1559 MHz and 1610 MHz. The e.i.r.p. of discrete emissions of less than 700 Hz bandwidth from such stations between 1559 MHz and 1605 MHz shall not exceed -80 dBW, averaged over any 2 millisecond active transmission interval. The e.i.r.p. of discrete emissions of less than 700 Hz bandwidth from such stations between 1605 MHz and 1610 MHz manufactured more than six months after Federal Register publication of the rule changes adopted in FCC 03-283 shall not exceed -80 dBW, averaged over any 2 millisecond active transmission interval.

(h) Mobile earth stations manufactured more than six months after Federal Register publication of the rule changes adopted in FCC 03-283 with assigned uplink frequencies in the 1626.5-1660.5 MHz band shall suppress the power density of emissions in the 1605-1610 MHz band-segment to an extent determined by linear interpolation from -70 dBW/MHz at 1605 MHz to -46 dBW/MHz at 1610 MHz, averaged over any 2 millisecond active transmission interval. The e.i.r.p of discrete emissions of less than 700 Hz bandwidth from such stations shall not exceed a level determined by linear interpolation from -80 dBW at 1605 MHz to -56 dBW at 1610 MHz, averaged over any 2 millisecond active transmission interval.

(i) The e.i.r.p density of carrier-off state emissions from mobile earth stations manufactured more than six months after Federal Register publication of the rule changes adopted in FCC 03-283 with assigned uplink frequencies between 1 and 3 GHz shall not exceed  $-80 \text{ dBW/MHz}$  in the 1559-1610 MHz band averaged over any two millisecond interval.

(j) A Root-Mean-Square detector shall be used for all power density measurements.


### 3.7.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

### 3.7.3 Test Procedures

1. The testing follows ANSI C63.26 section 5.7
2. The EUT was connected to the spectrum analyzer.
3. The RF output of EUT was connected to the spectrum analyzer by an RF cable and attenuator. The path loss was compensated to the results for each measurement.
4. The highest RF power within the transmitting frequency was measured.
5. Use the spectrum analyzer with  $\text{RBW} = 1\text{kHz}$  for discrete emissions and  $\text{RBW} = 1\text{MHz}$  for broadband emissions, and set  $\text{VBW}$  to 3 times the  $\text{RBW}$ . Record the maximum spurious emission detected.

### 3.7.4 Test Setup

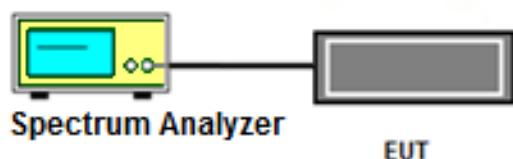

### 3.7.5 Test Results

Please refer to Appendix A.



## 4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Oct. 10, 2024	Mar. 25, 2025~Apr. 14, 2025	Oct. 09, 2025	Conducted (TH01-KS)
Power divider	STI	STI08-0055	-	0.5~40GHz	NCR	Mar. 25, 2025~Apr. 14, 2025	NCR	Conducted (TH01-KS)
Temperature & humidity chamber	Hongzhan	LP-150U	H2014011 440	-40~+150°C 20%~95%RH	Jul. 04, 2024	Mar. 25, 2025~Apr. 14, 2025	Jul. 03, 2025	Conducted (TH01-KS)
EXA Spectrum Analyzer	Keysight	N9010A	MY553705 28	10Hz~44G,MAX 30dB	Oct. 11, 2024	Mar. 30, 2025~Apr. 02, 2025	Oct. 10, 2025	Radiation (03CH04-KS)
Loop Antenna	R&S	HFH2-Z2E	101125	9kHz~30MHz	Sep. 08, 2024	Mar. 30, 2025~Apr. 02, 2025	Sep. 07, 2025	Radiation (03CH04-KS)
Bilog Antenna	TeseQ	CBL6111D	44483	30MHz~1GHz	Nov. 23, 2024	Mar. 30, 2025~Apr. 02, 2025	Nov. 22, 2025	Radiation (03CH04-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	00227860	1GHz~18GHz	Aug. 16, 2024	Mar. 30, 2025~Apr. 02, 2025	Aug. 15, 2025	Radiation (03CH04-KS)
SHF-EHF Horn	Com-power	AH-840	101116	18GHz~40GHz	Oct. 22, 2024	Mar. 30, 2025~Apr. 02, 2025	Oct. 21, 2025	Radiation (03CH04-KS)
Amplifier	SONOMA	310N	380826	9KHz-1GHz	Jul. 03, 2024	Mar. 30, 2025~Apr. 02, 2025	Jul. 02, 2025	Radiation (03CH04-KS)
Amplifier	EM	EM18G40GA	060852	18~40GHz	Jan. 03, 2025	Mar. 30, 2025~Apr. 02, 2025	Jan. 02, 2026	Radiation (03CH04-KS)
high gain Amplifier	EM	EM01G18GA	060840	1Ghz-18Ghz	Oct. 09, 2024	Mar. 30, 2025~Apr. 02, 2025	Oct. 08, 2025	Radiation (03CH04-KS)
Amplifier	EM	EM01G18GA	060892	1Ghz-18Ghz	Oct. 09, 2024	Mar. 30, 2025~Apr. 02, 2025	Oct. 08, 2025	Radiation (03CH04-KS)
AC Power Source	Chroma	61601	F1040900 04	N/A	NCR	Mar. 30, 2025~Apr. 02, 2025	NCR	Radiation (03CH04-KS)
Turn Table	ChamPro	EM 1000-T	060762-T	0~360 degree	NCR	Mar. 30, 2025~Apr. 02, 2025	NCR	Radiation (03CH04-KS)
Antenna Mast	ChamPro	EM 1000-A	060762-A	1 m~4 m	NCR	Mar. 30, 2025~Apr. 02, 2025	NCR	Radiation (03CH04-KS)

NCR: No Calibration Required



## 5 Measurement Uncertainty

### Uncertainty of Conducted Measurement

Test Item	Uncertainty
Conducted Power	$\pm 0.50$ dB
Conducted Emissions	$\pm 2.22$ dB
Occupied Channel Bandwidth	$\pm 0.1$ %

### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2U_{C(y)}$ )	2.83dB
--	--------

### Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2U_{C(y)}$ )	2.83dB
--	--------

### Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2U_{C(y)}$ )	2.82dB
--	--------



## Appendix A. Test Results of Conducted Test

Test Engineer :	Smile Wang	Temperature :	24~26°C
		Relative Humidity :	50~53%

### Conducted Output Power(Average power) and EIRP

#### Band 23

Sub-carrier Spacing (KHz)	Modulation	SC Size	SC Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	EIRP(W)	EIRP(W)	EIRP(W)
Channel				25501	25600	25699	25501	25600	25699
Frequency (MHz)				2000.1	2010	2019.9	2000.1	2010	2019.9
3.75	BPSK	1	0	23.30	22.87	22.72	0.0407	0.0369	0.0356
3.75	BPSK	1	47	23.32	22.83	22.59	0.0409	0.0366	0.0346
3.75	QPSK	1	0	23.29	22.83	22.70	0.0406	0.0366	0.0355
3.75	QPSK	1	47	23.42	22.99	22.88	0.0419	0.0379	0.0370
15	BPSK	1	0	23.16	22.85	22.49	0.0394	0.0367	0.0338
15	BPSK	1	11	23.44	23.02	22.81	0.0421	0.0382	0.0364
15	QPSK	1	0	23.13	22.63	22.55	0.0392	0.0349	0.0343
15	QPSK	1	11	23.28	22.74	22.75	0.0406	0.0358	0.0359
15	QPSK	3	0	22.93	22.79	22.76	0.0374	0.0362	0.0360
15	QPSK	3	9	22.90	22.82	22.63	0.0371	0.0365	0.0349
15	QPSK	6	0	23.02	22.86	22.44	0.0382	0.0368	0.0334
15	QPSK	6	6	23.06	22.85	22.58	0.0385	0.0367	0.0345
15	QPSK	12	0	22.94	22.56	22.29	0.0375	0.0344	0.0323

#### Band 255

Sub-carrier Spacing (KHz)	Modulation	SC Size	SC Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	EIRP(W)	EIRP(W)	EIRP(W)
Channel				261506	261674	261838	261506	261674	261838
Frequency (MHz)				1626.7	1643.5	1659.9	1626.7	1643.5	1659.9
3.75	BPSK	1	0	22.76	22.97	22.92	0.0292	0.0307	0.0303
3.75	BPSK	1	47	22.88	23.16	23.12	0.0301	0.0321	0.0318
3.75	QPSK	1	0	22.84	22.94	23.02	0.0298	0.0305	0.0310
3.75	QPSK	1	47	23.04	23.26	23.10	0.0312	0.0328	0.0316
15	BPSK	1	0	22.70	22.99	22.88	0.0288	0.0308	0.0301
15	BPSK	1	11	22.98	23.27	23.17	0.0308	0.0329	0.0321
15	QPSK	1	0	22.80	22.97	23.04	0.0295	0.0307	0.0312
15	QPSK	1	11	22.90	23.18	23.05	0.0302	0.0322	0.0313
15	QPSK	3	0	22.56	22.52	22.75	0.0279	0.0277	0.0292
15	QPSK	3	9	22.63	22.49	22.72	0.0284	0.0275	0.0290
15	QPSK	6	0	22.69	22.66	22.76	0.0288	0.0286	0.0293
15	QPSK	6	6	22.59	22.72	22.83	0.0281	0.0290	0.0297
15	QPSK	12	0	22.78	23.06	23.18	0.0294	0.0313	0.0322



## Band 23


### Occupied Bandwidth

Mode	LTE Band 23 : 99%OBW(kHz)
SCS	15kHz
Mod.	QPSK
SC Size	12SC0
Lowest CH	182.35
Middle CH	184.52
Highest CH	182.35




## Band 23 SCS 15KHz


## Lowest Channel / 12SC0 / QPSK

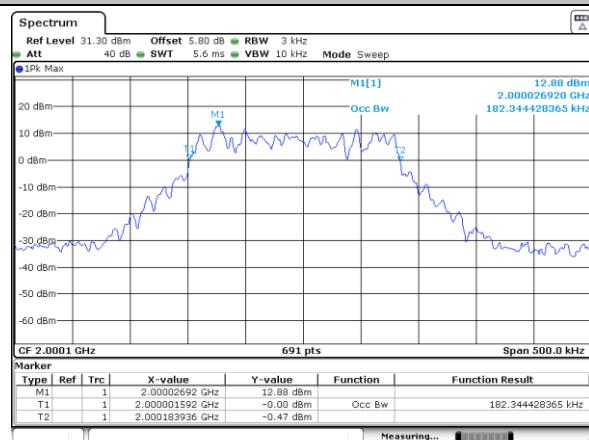

## Middle Channel / 12SC0 / QPSK

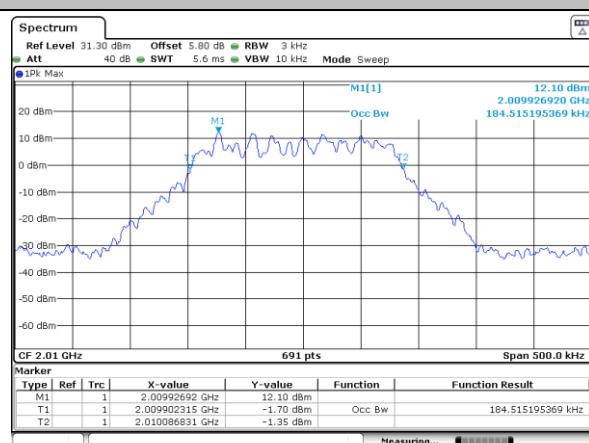



## Highest Channel / 12SC0 / QPSK

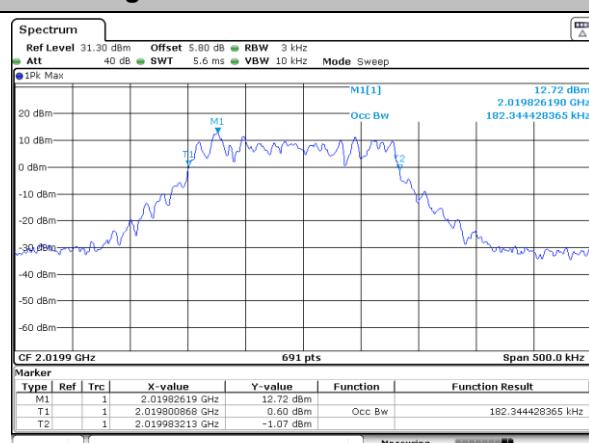



MASK

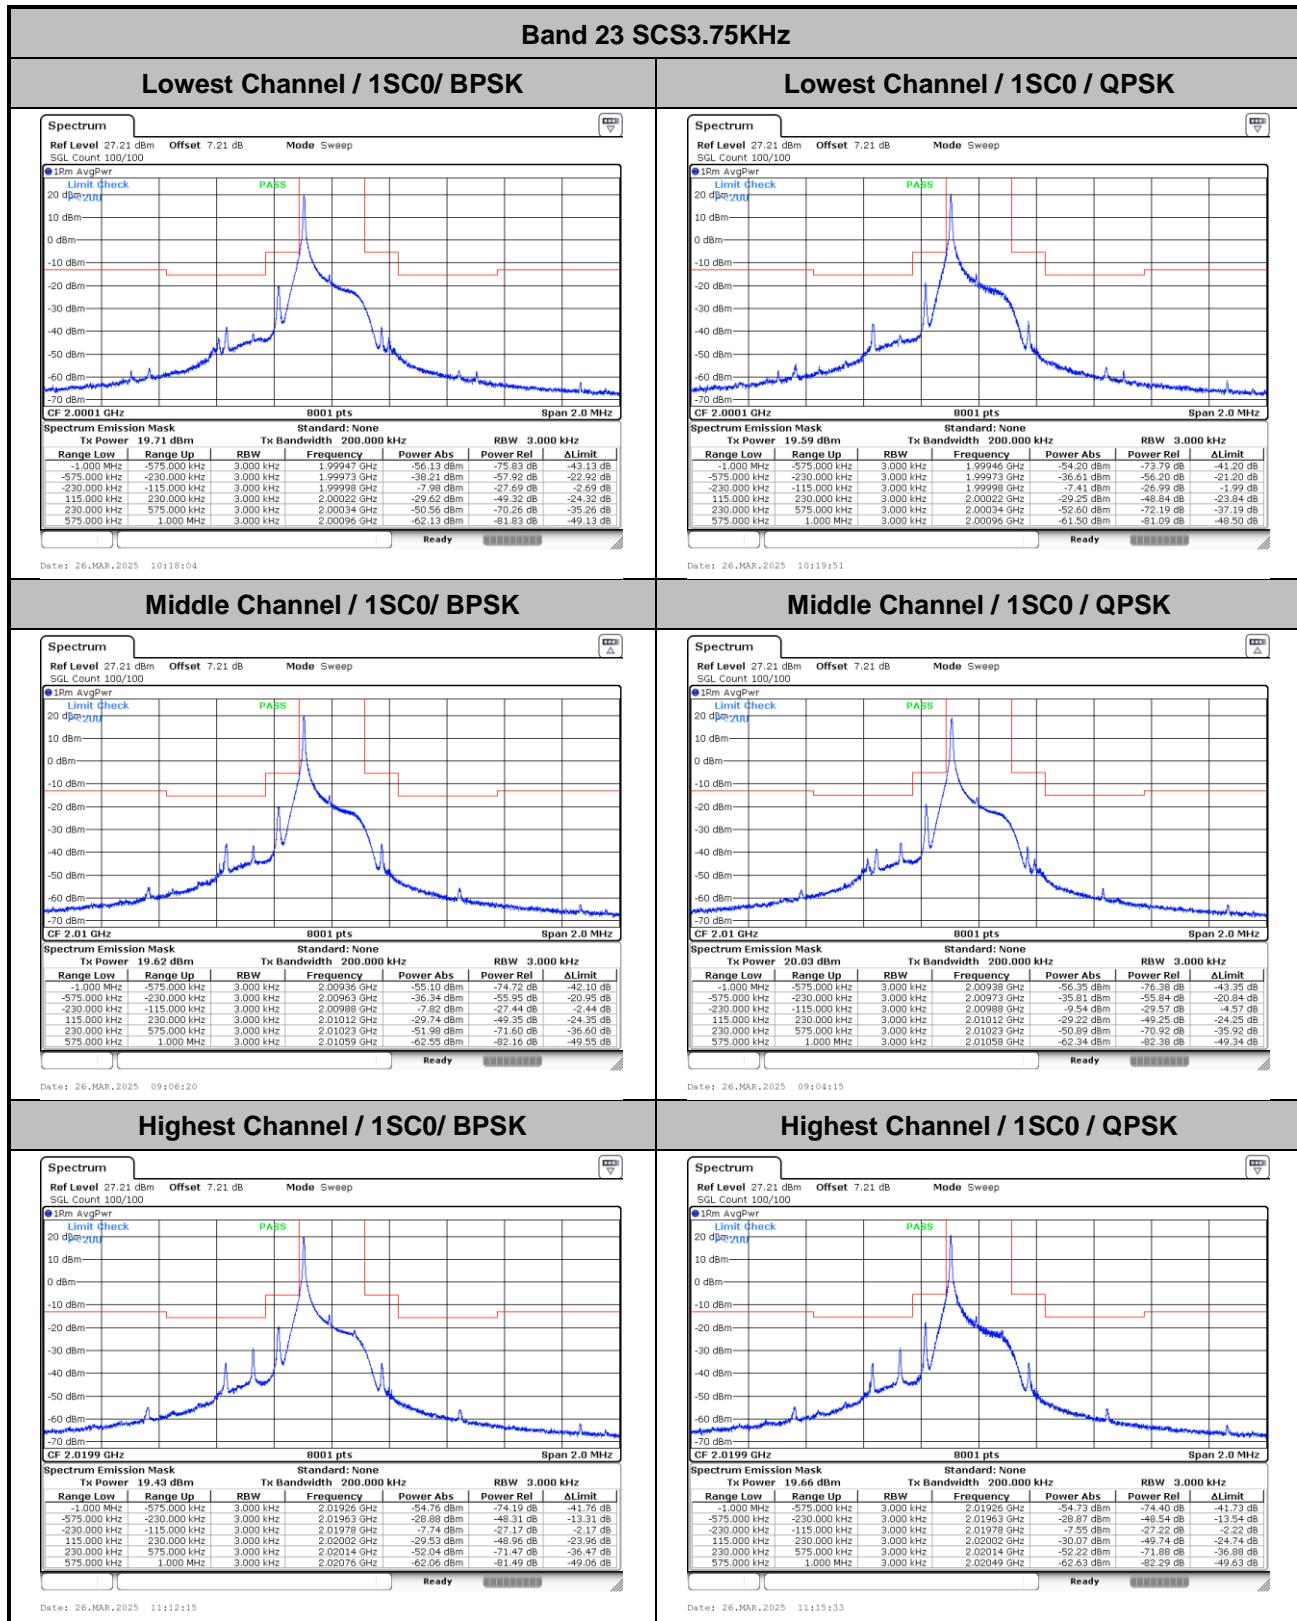


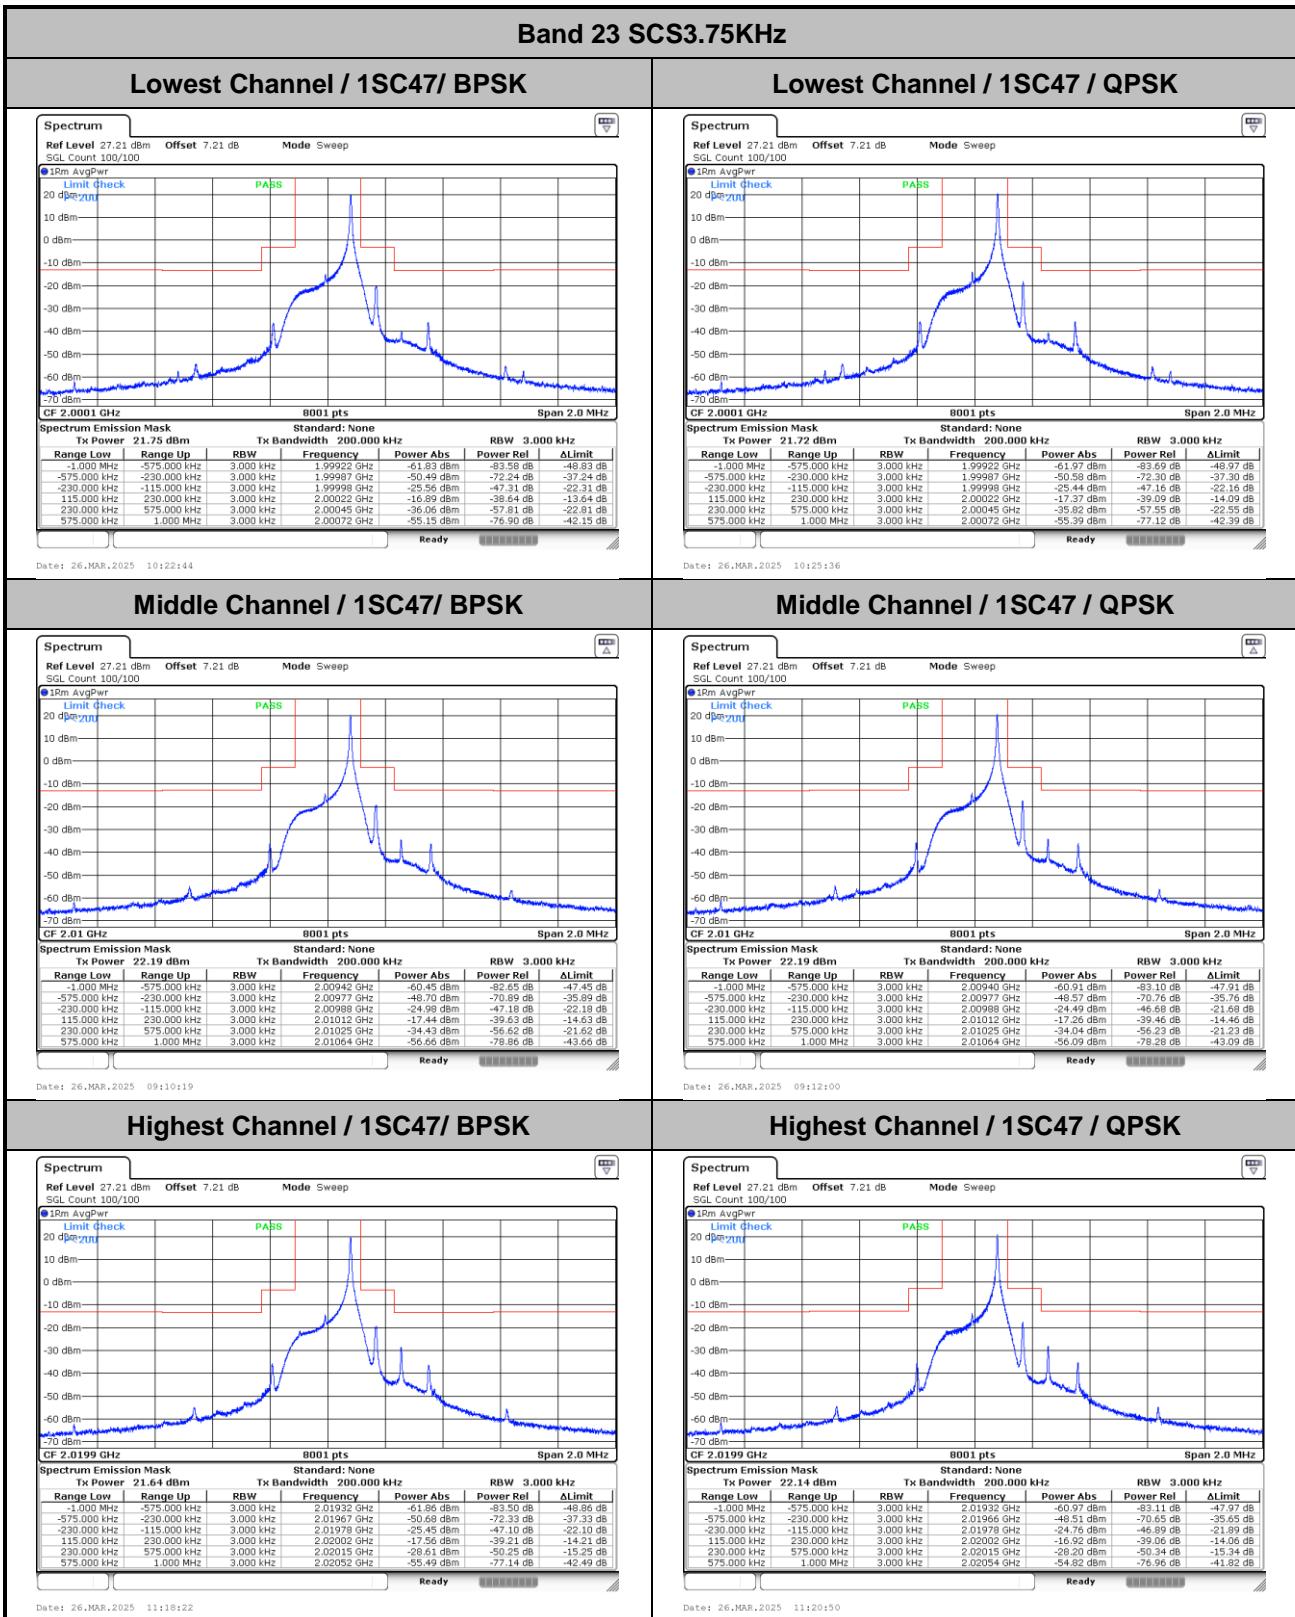




## Band 23 SCS15KHz

## Lowest Channel / 1SC0/ BPSK

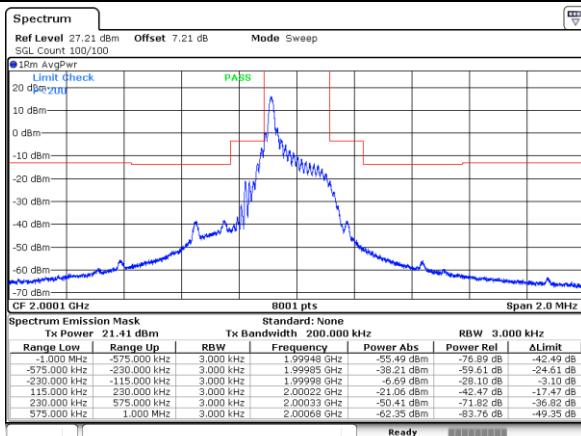


Date: 26.MAR.2025 10:31:04

## Lowest Channel / 1SC0 / QPSK

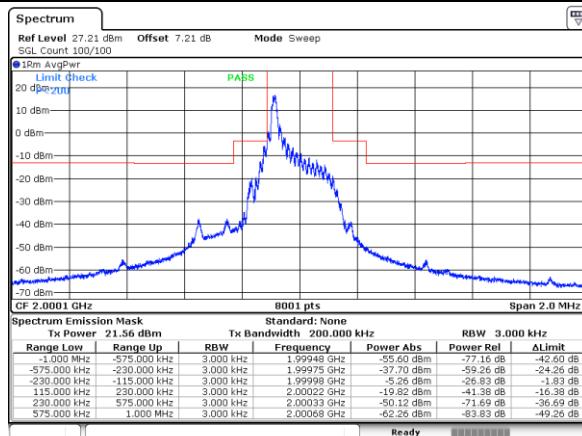


Date: 26.MAR.2025 13:26:58

## Middle Channel / 1SC0/ BPSK

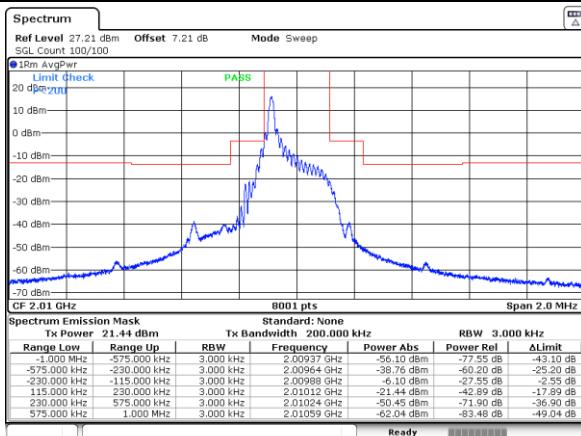


Date: 26.MAR.2025 09:36:52

## Middle Channel / 1SC0 / QPSK

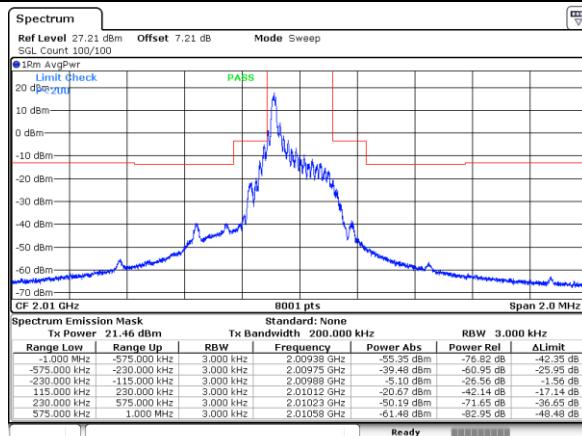


Date: 26.MAR.2025 13:12:01

## Highest Channel / 1SC0/ BPSK

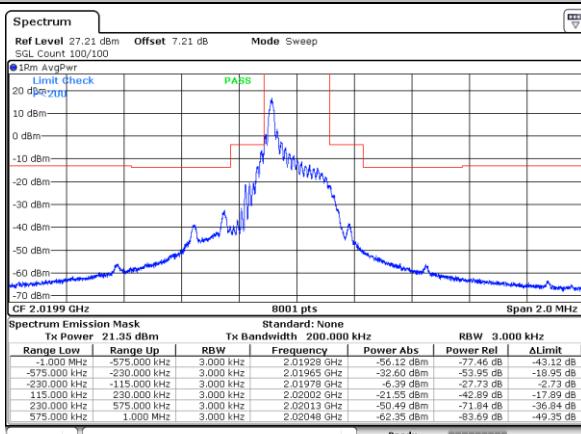

Date: 26.MAR.2025 12:44:58

## Highest Channel / 1SC0 / QPSK

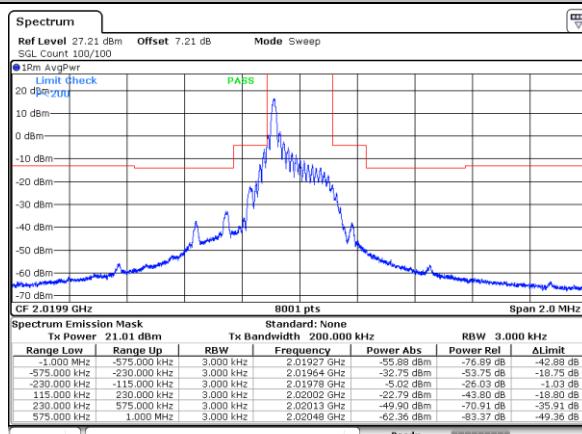


Date: 26.MAR.2025 12:46:30




## Band 23 SCS15KHz

## Lowest Channel / 1SC11 / BPSK

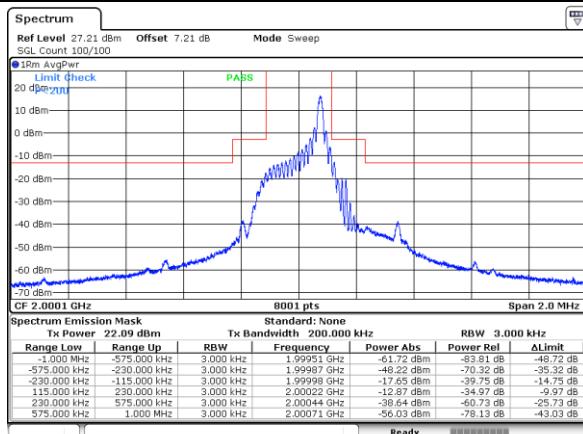


Date: 26.MAR.2025 10:34:52

## Lowest Channel / 1SC11 / QPSK

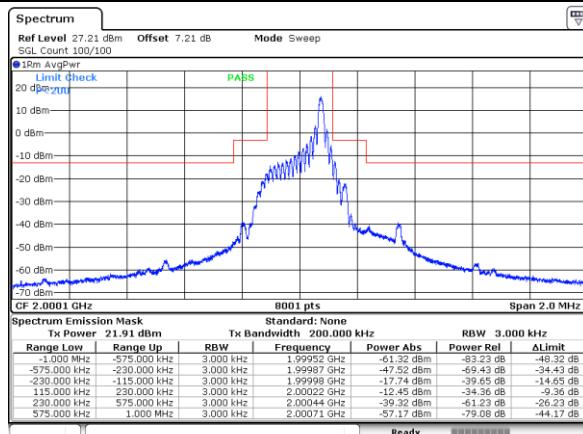


Date: 26.MAR.2025 10:40:34

## Middle Channel / 1SC11/ BPSK

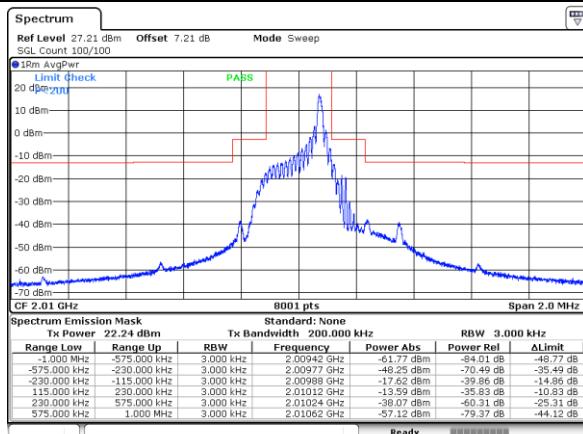


Date: 26.MAR.2025 09:49:35

## Middle Channel / 1SC11 / QPSK

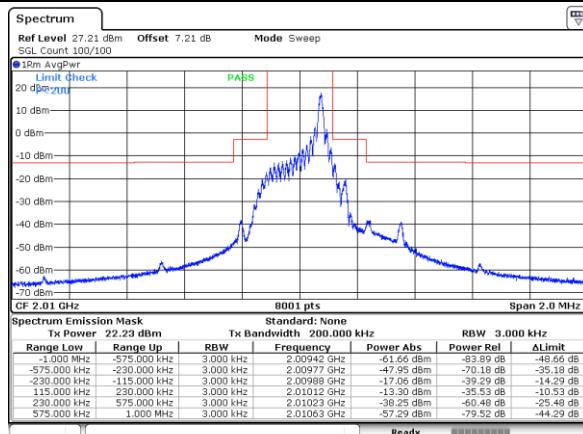


Date: 26.MAR.2025 09:51:20

## Highest Channel / 1SC11/ BPSK

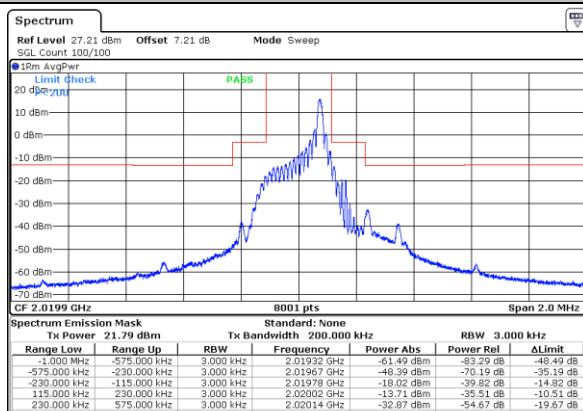



Date: 26.MAR.2025 12:54:06


## Highest Channel / 1SC11/ QPSK

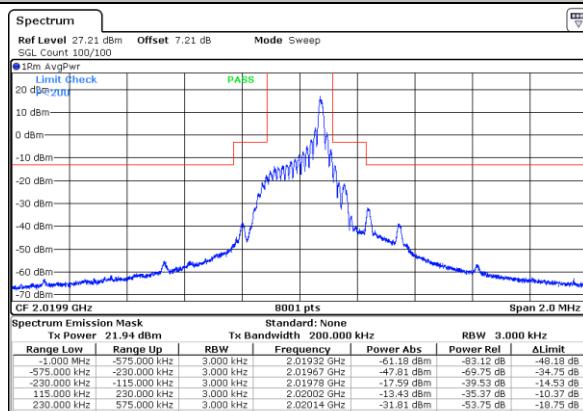

Date: 26.MAR.2025 12:55:41

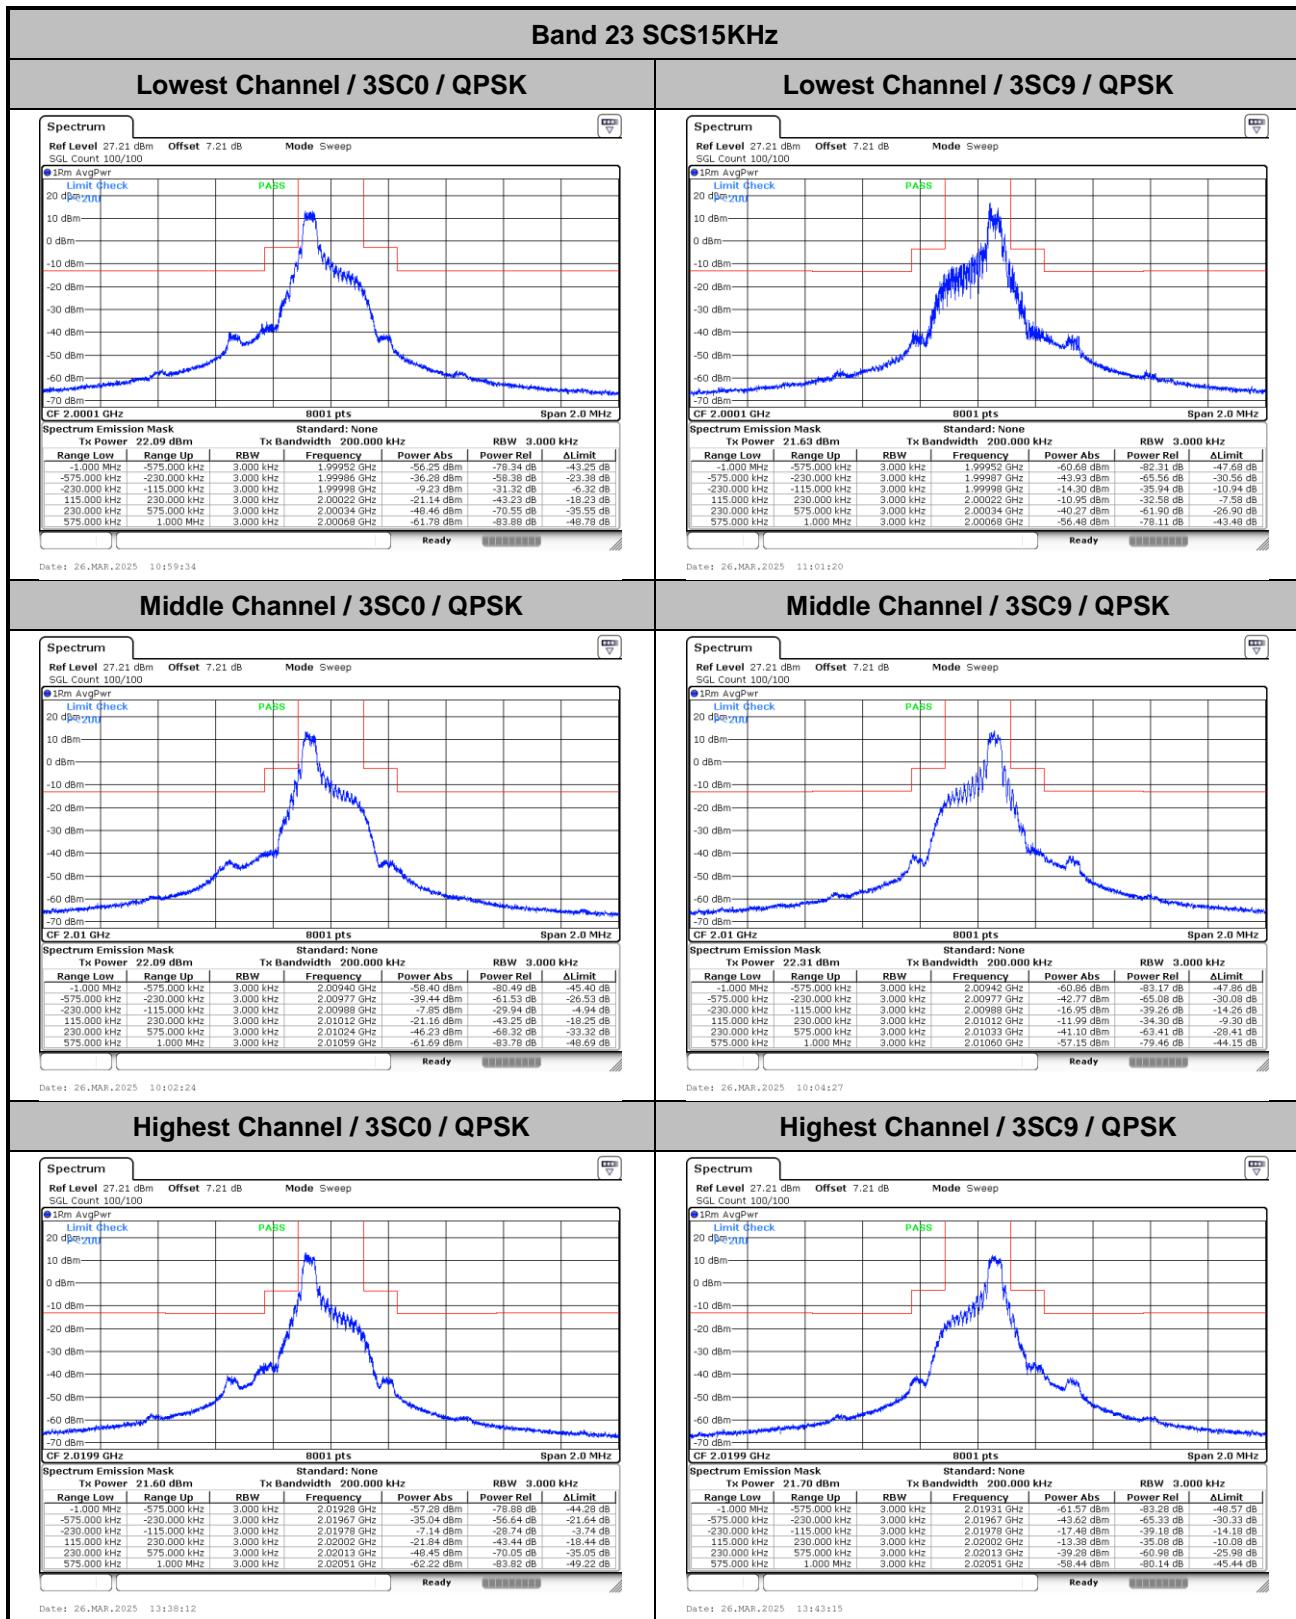


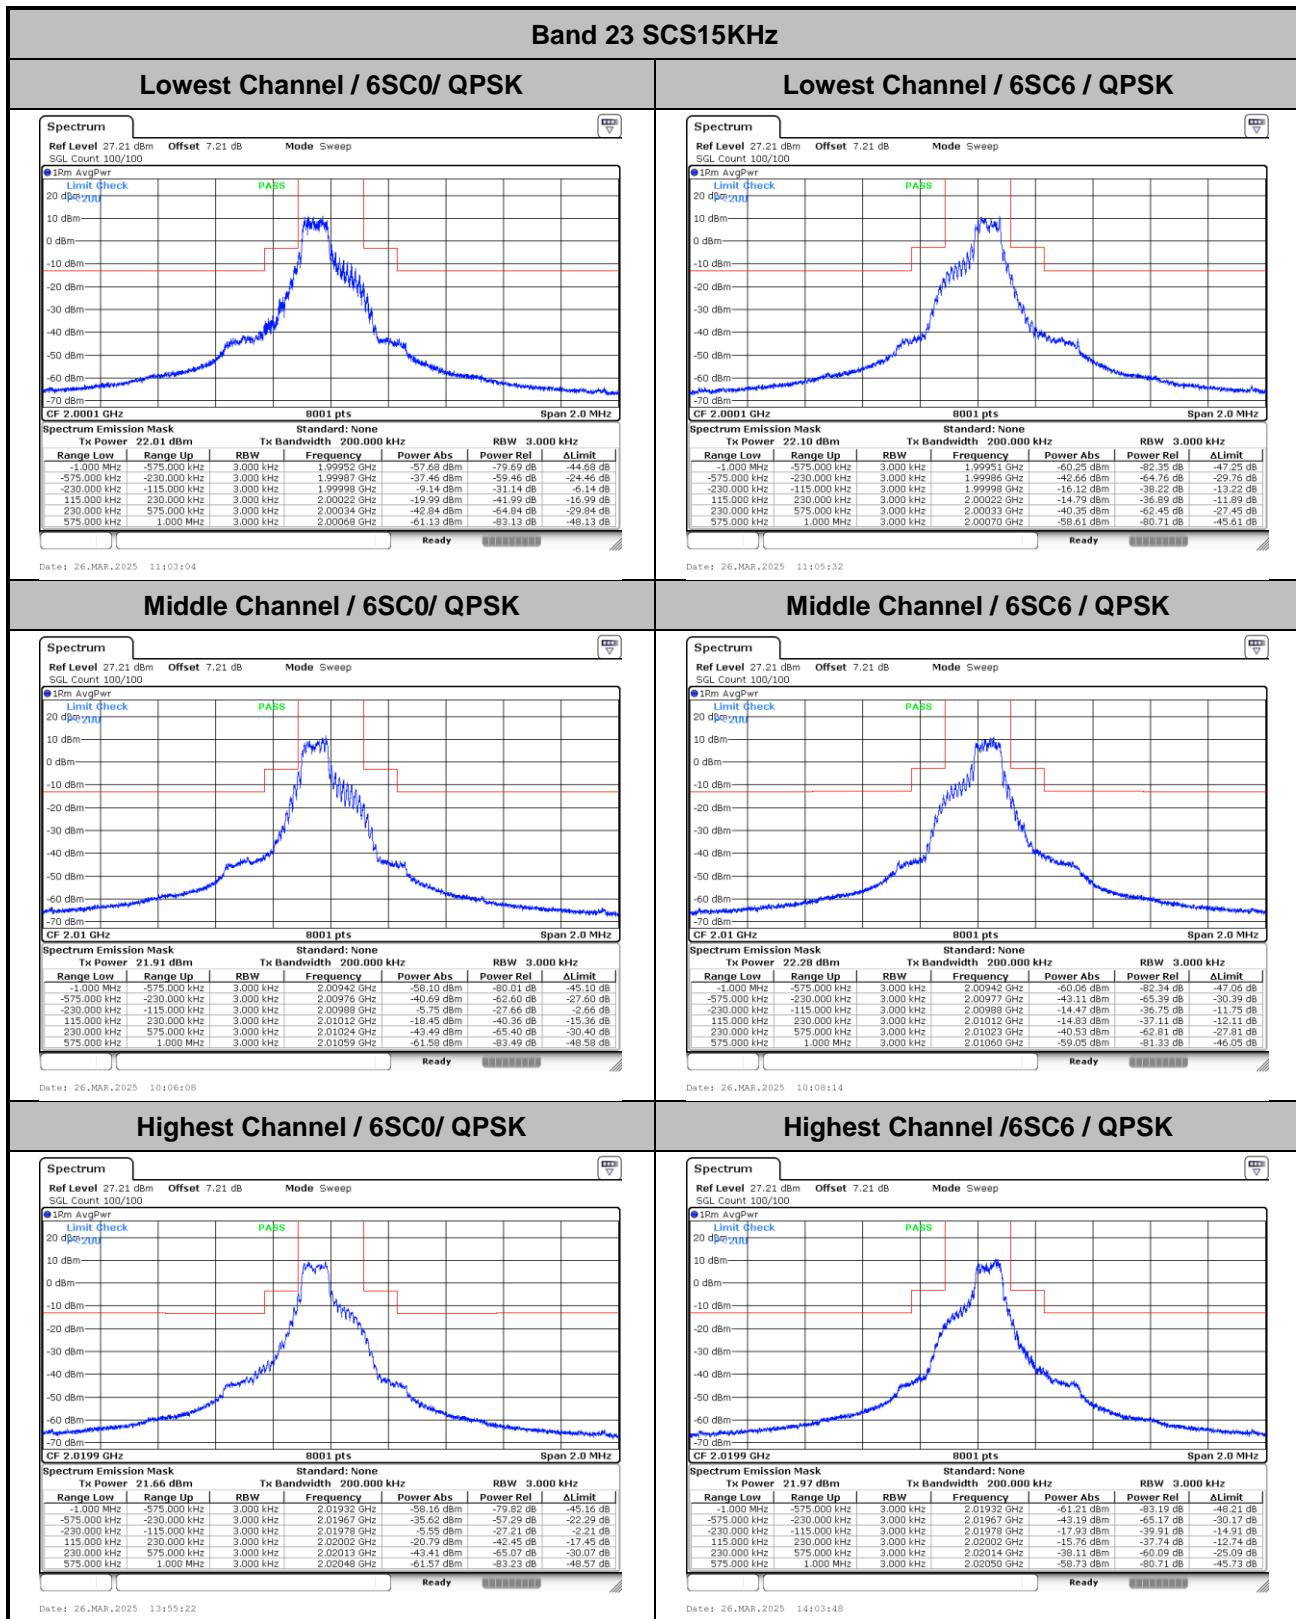

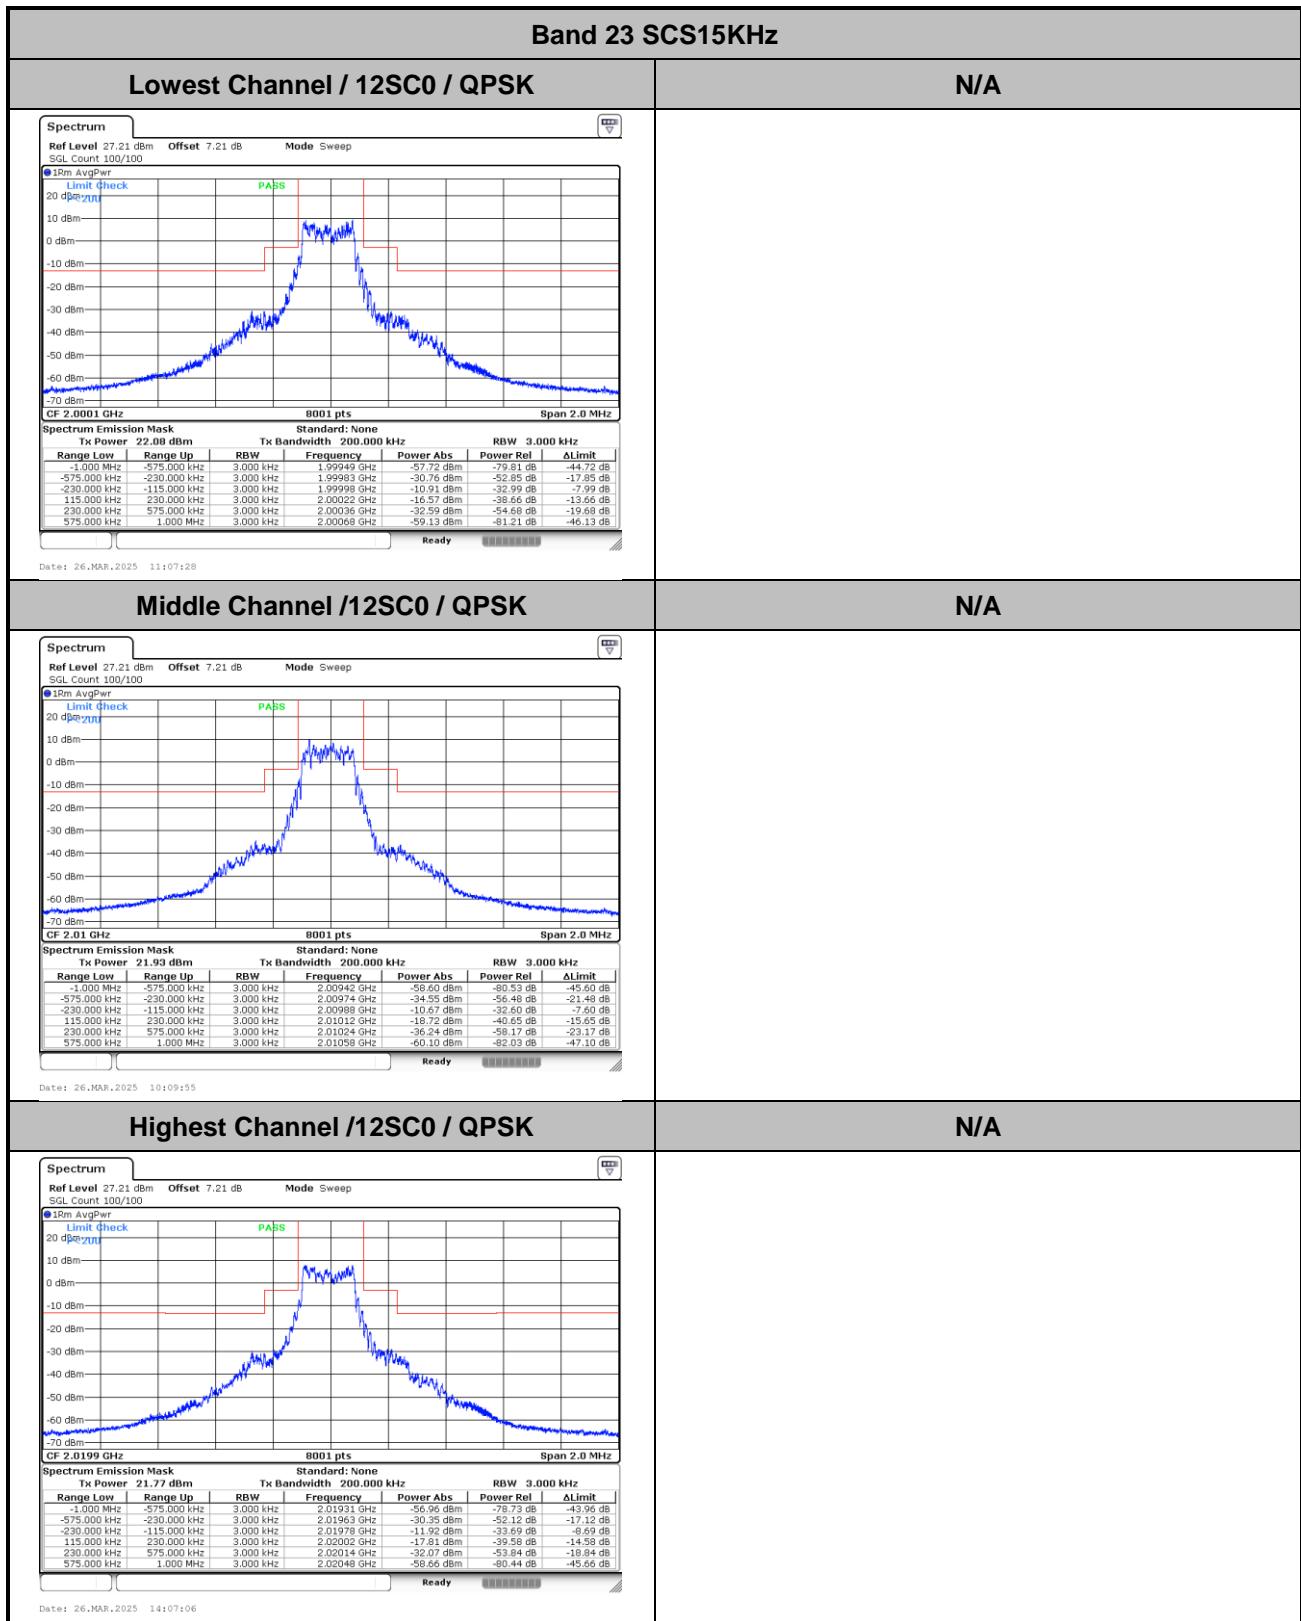




## Conducted Spurious Emission

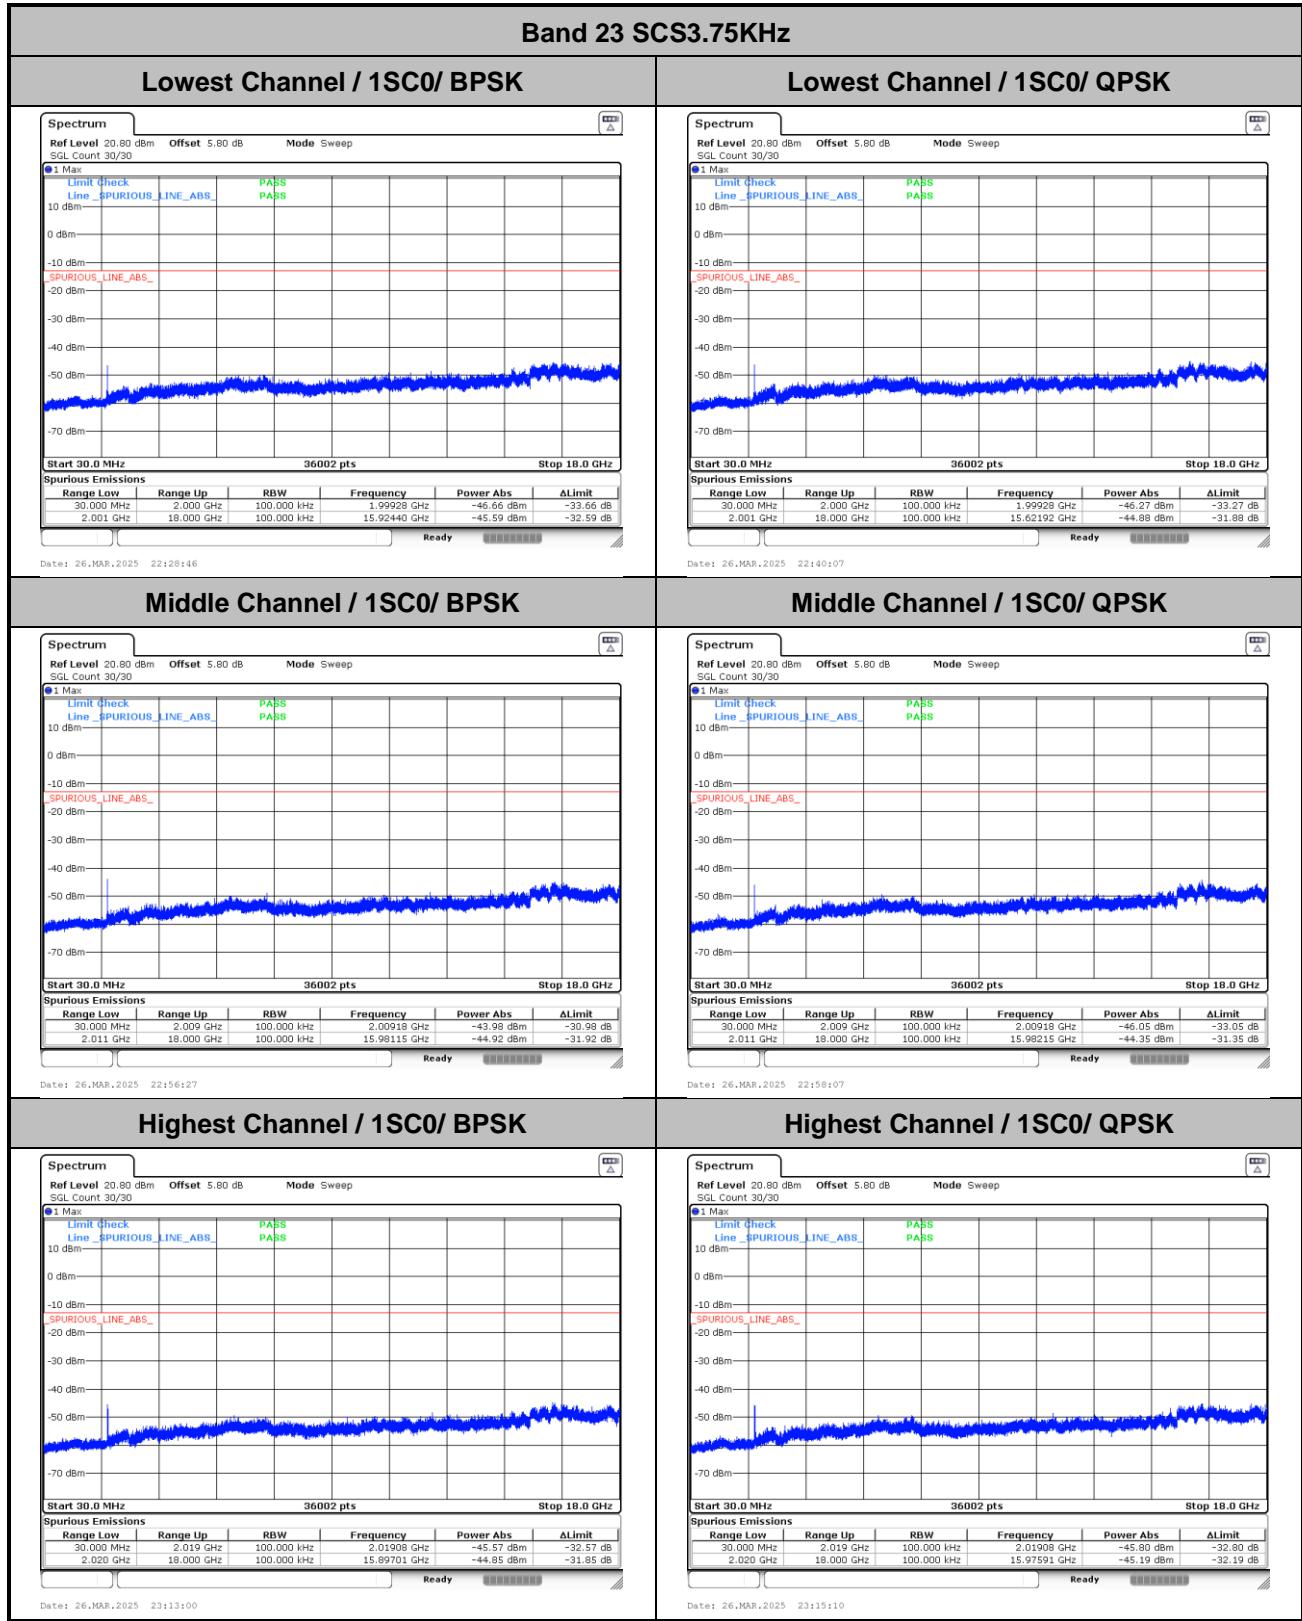




## Band 23 SCS15KHz

## Lowest Channel / 1SC0/ BPSK

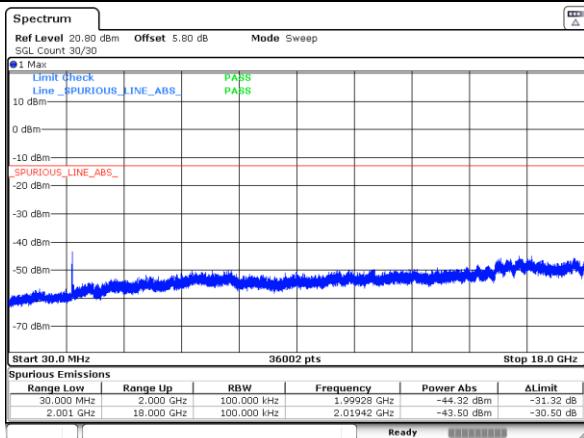


Date: 26.MAR.2025 22:43:00

## Lowest Channel / 1SC0/ QPSK

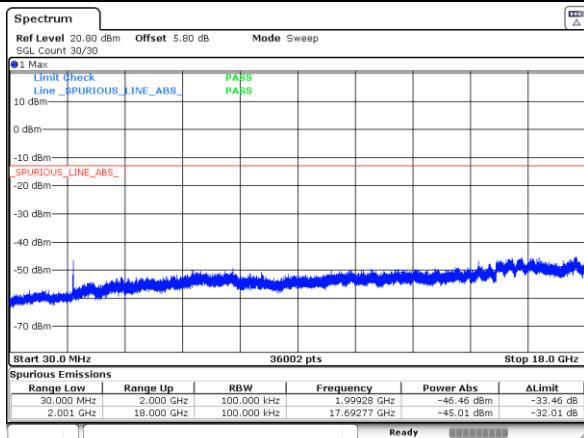


Date: 26.MAR.2025 22:46:26

## Middle Channel / 1SC0/ BPSK

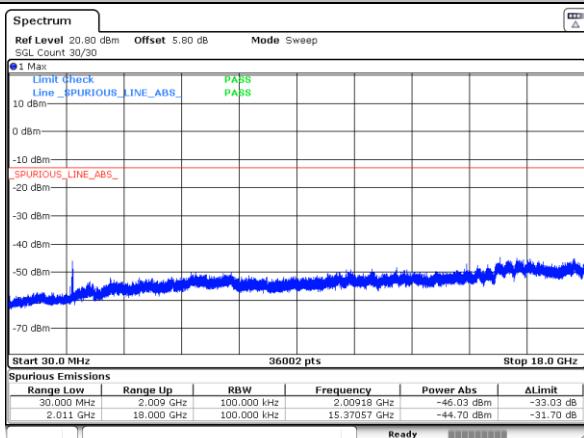


Date: 26.MAR.2025 23:08:52

## Middle Channel / 1SC0/ QPSK

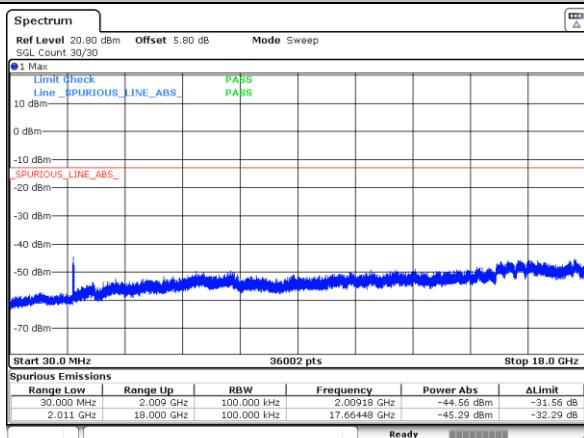


Date: 26.MAR.2025 23:09:58

## Highest Channel / 1SC0/ BPSK

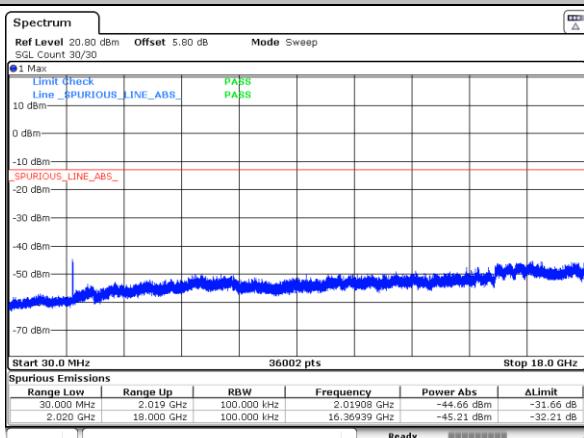

Date: 26.MAR.2025 23:17:38


## Highest Channel / 1SC0/ QPSK

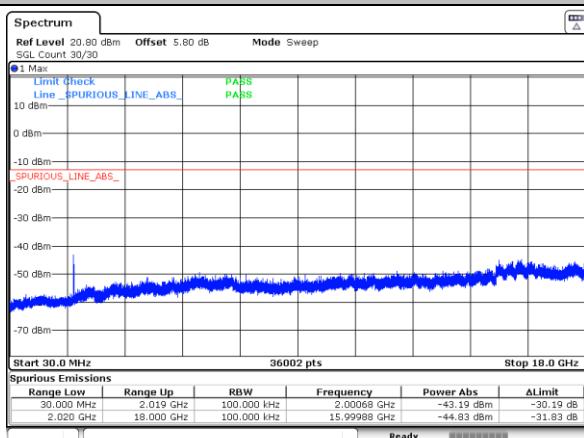



Date: 26.MAR.2025 23:19:18





## Emission limits for protection of aeronautical service

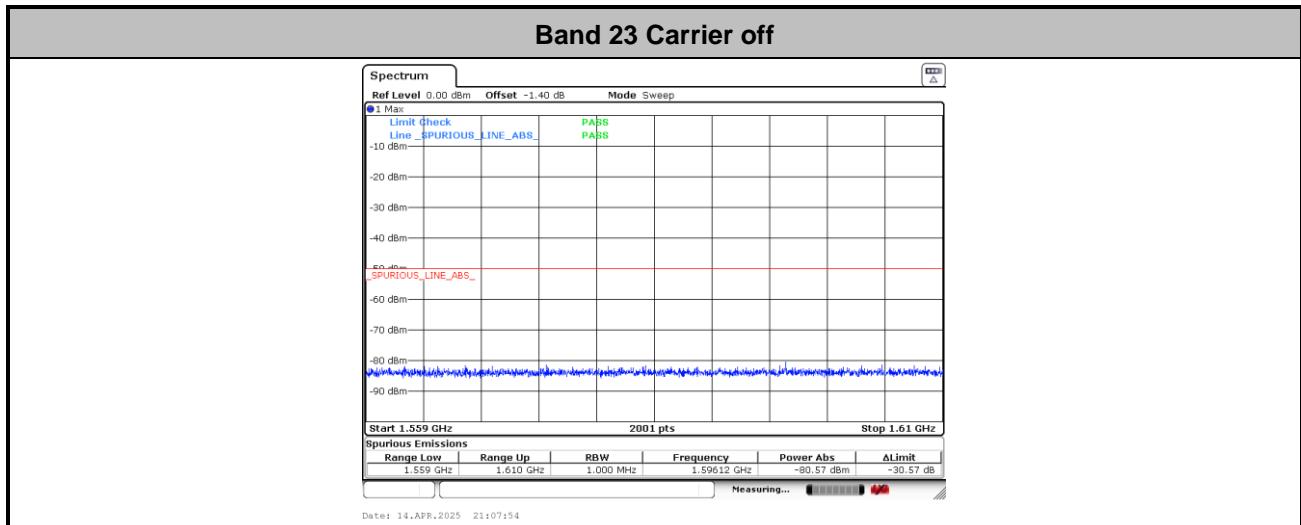

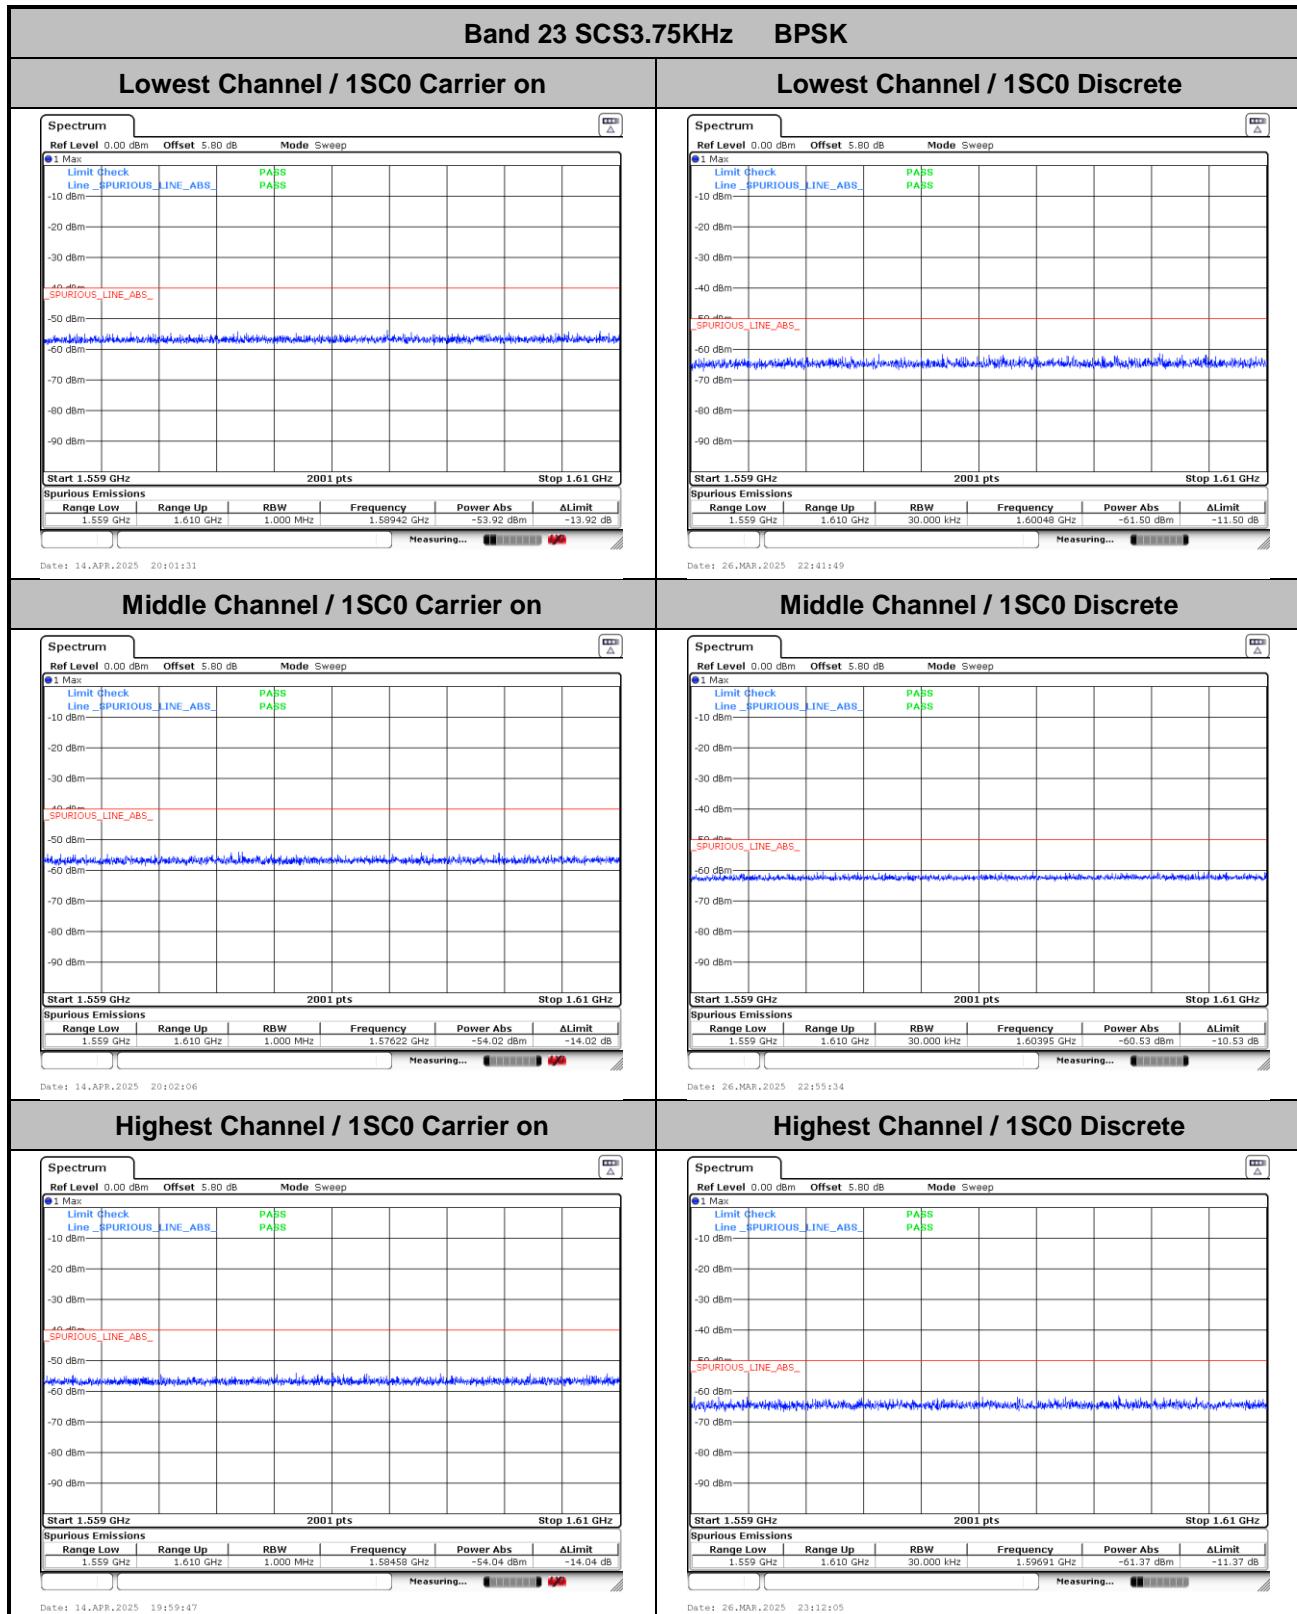

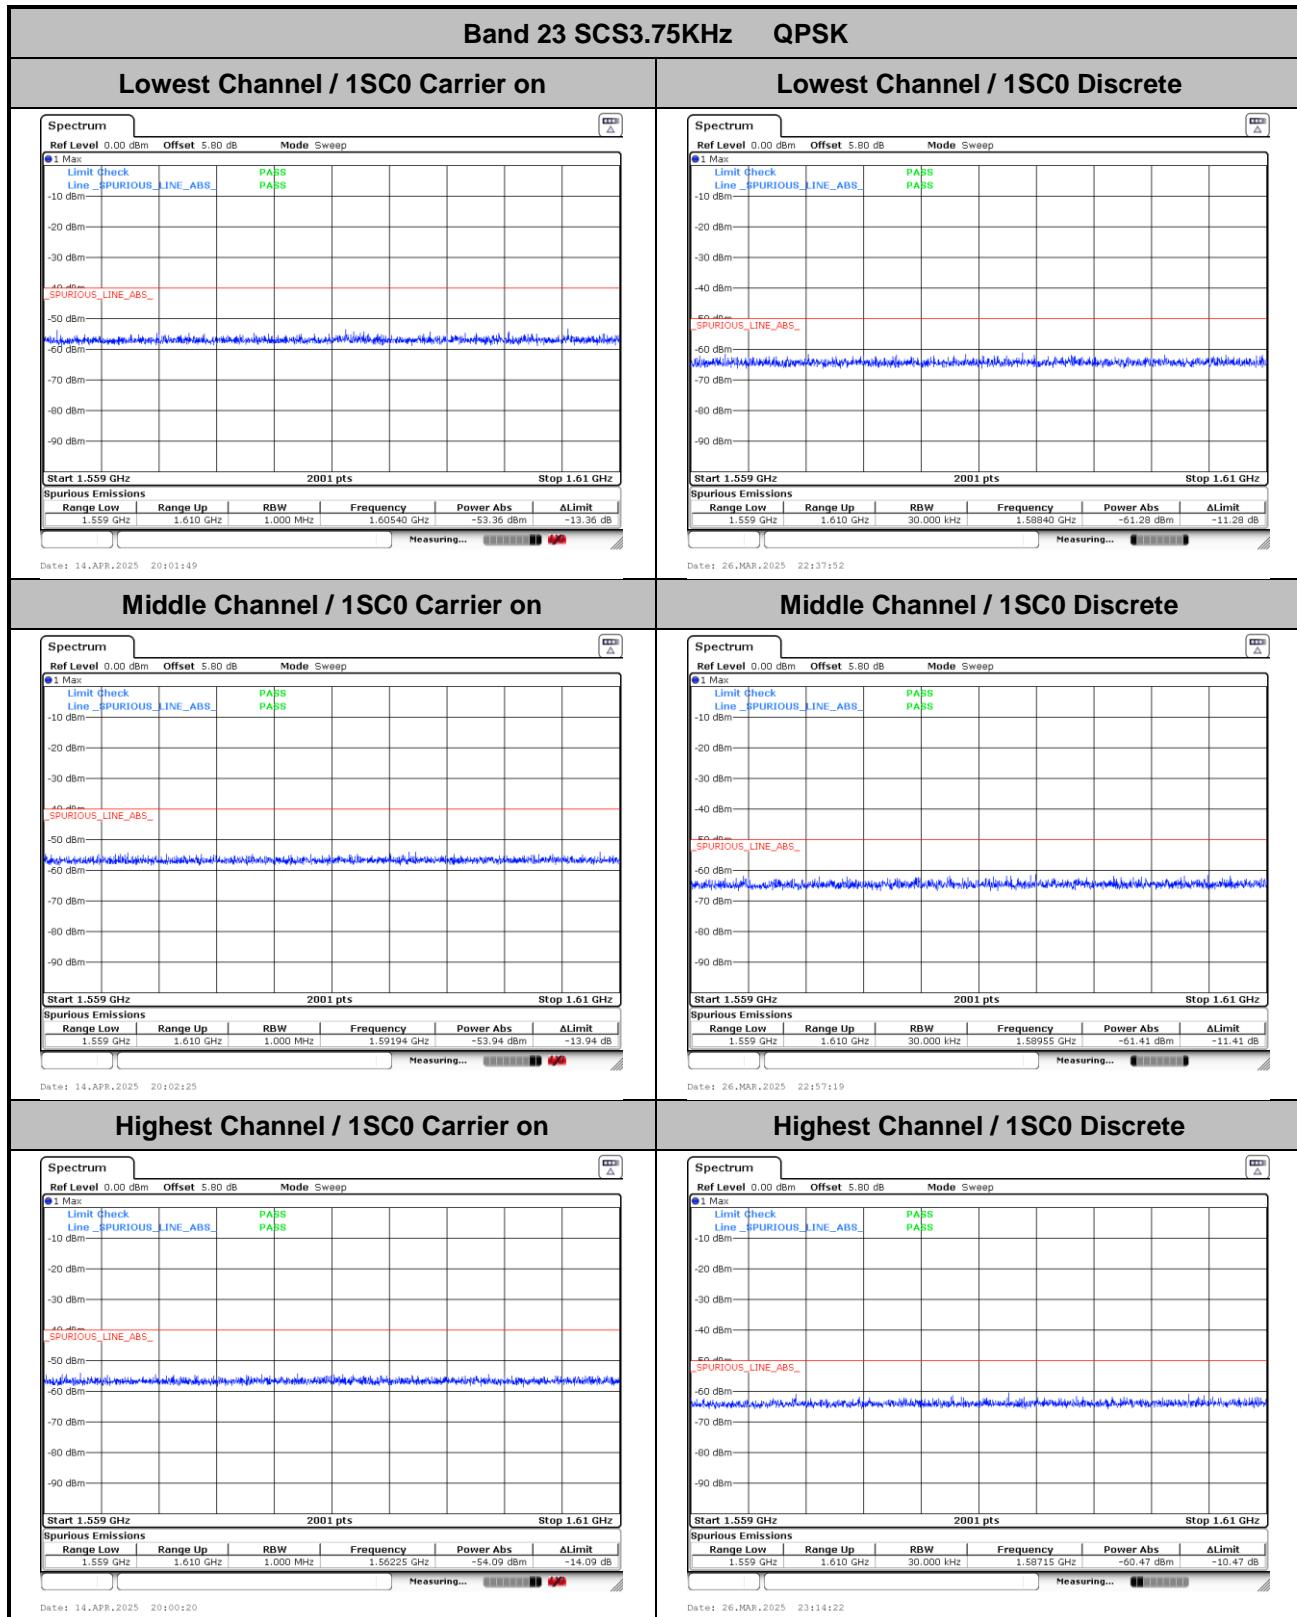

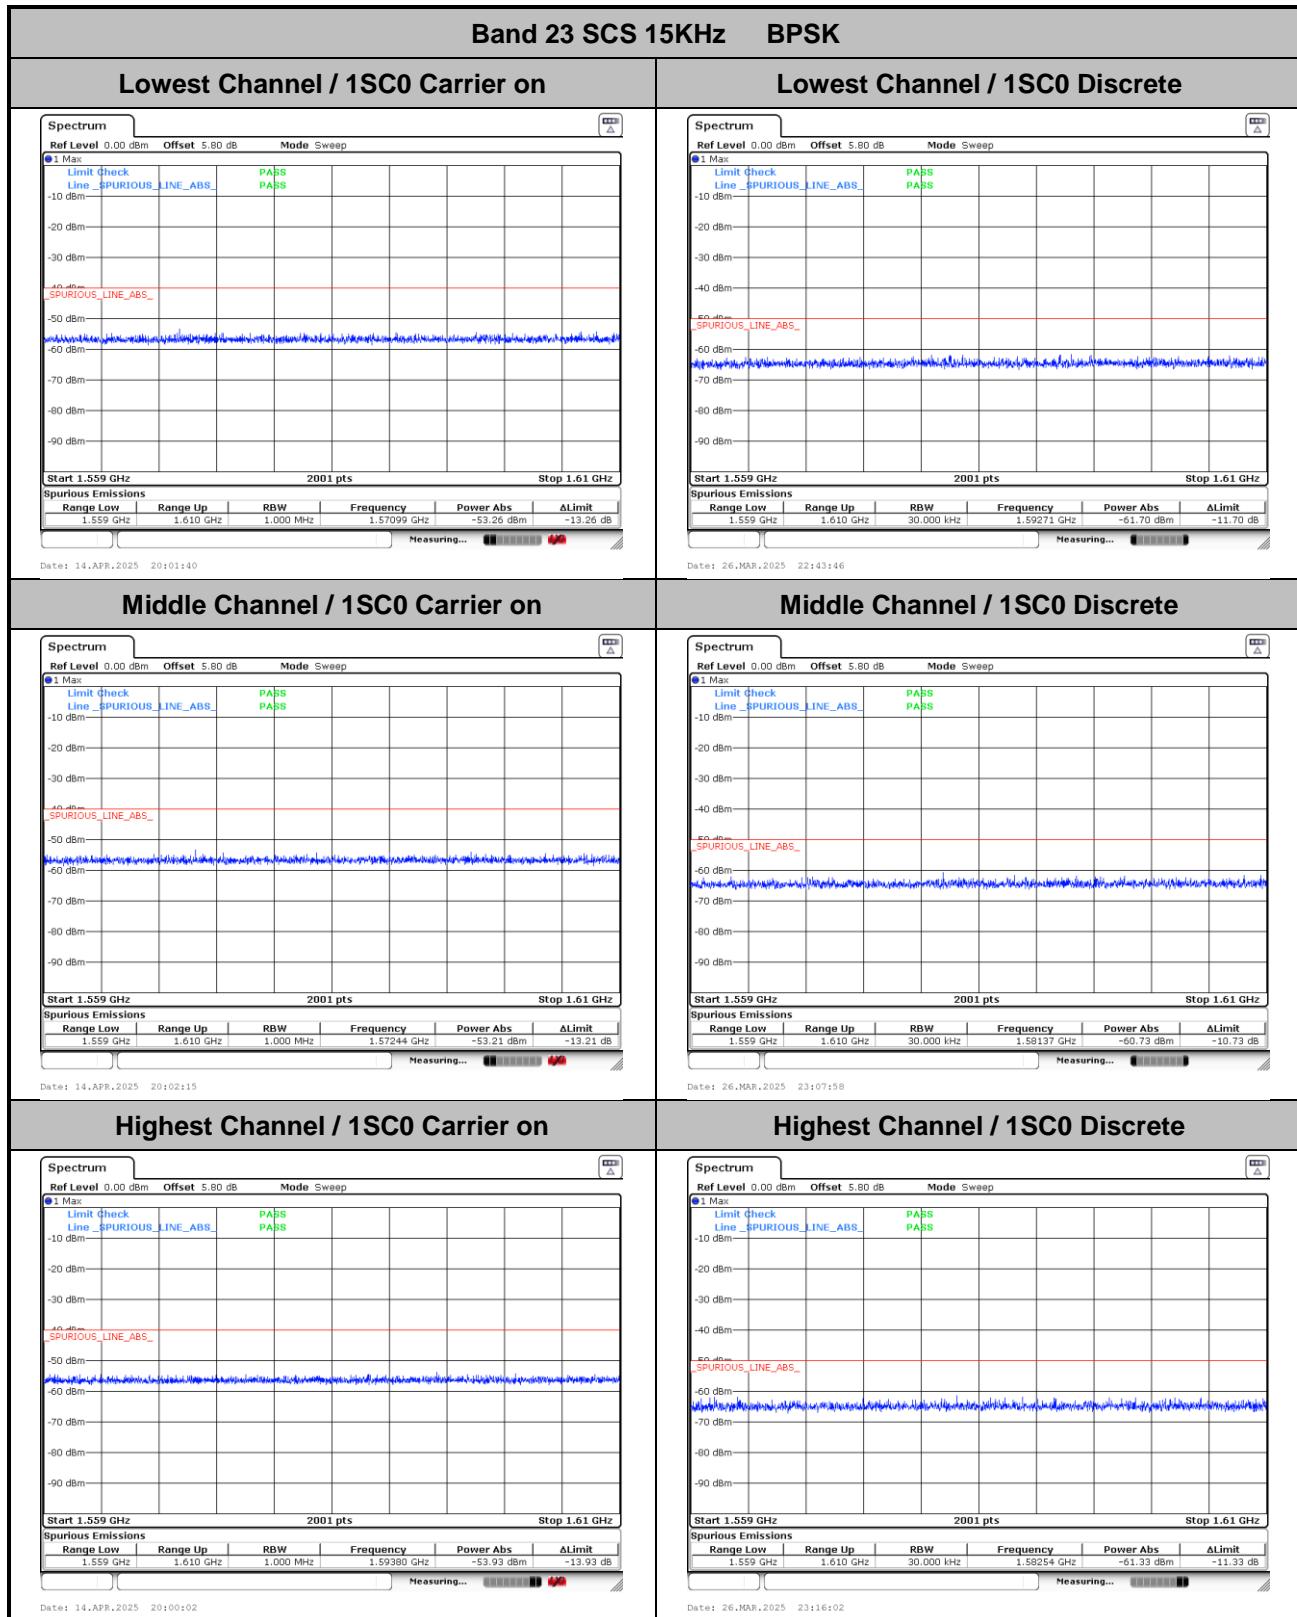

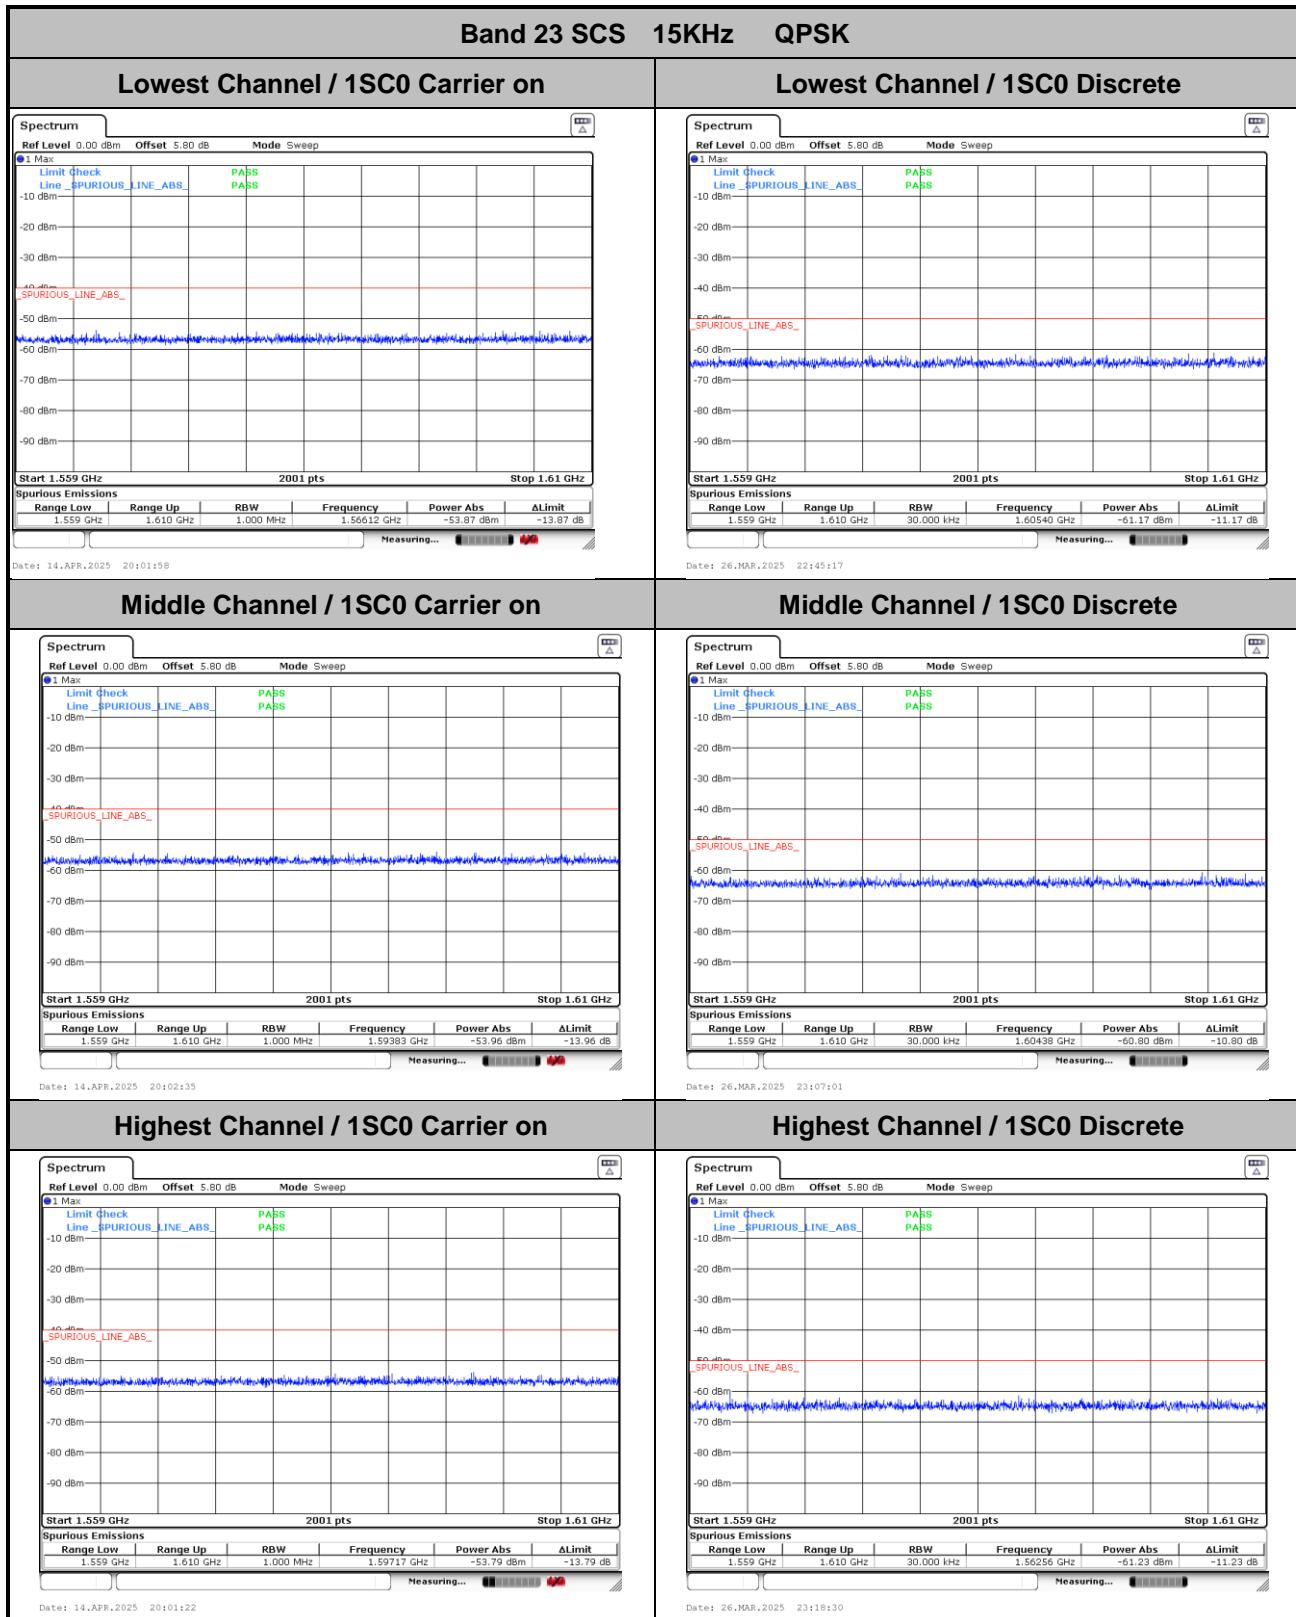



## Frequency Stability

Test Conditions		LTE Band 23 (QPSK) / Middle Channel	Limit
Temperature (°C)	Voltage (Volt)	3.75 KHz	10ppm
		Deviation (ppm)	Result
50	Normal Voltage	6.0080	PASS
40	Normal Voltage	1.1503	
30	Normal Voltage	1.5054	
20(Ref.)	Normal Voltage	0.0000	
10	Normal Voltage	1.4548	
0	Normal Voltage	1.4462	
-10	Normal Voltage	3.6887	
-20	Normal Voltage	0.0564	
-30	Normal Voltage	0.5325	
20	Maximum Voltage	5.0044	
20	Normal Voltage	4.9158	
20	Minimum Voltage	1.4683	

**Note:** Normal Voltage =3.88 V. ; Minimum Voltage =3.6 V. ; Maximum Voltage =4.48 V.



## Band 255


### Occupied Bandwidth

Mode	LTE Band 255 : 99%OBW(kHz)
SCS	15kHz
Mod.	QPSK
SC Size	12SC0
Lowest CH	181.32
Middle CH	184.52
Highest CH	183.82




## Band 255 SCS 3.75KHz


## Lowest Channel / 12SC0 / QPSK

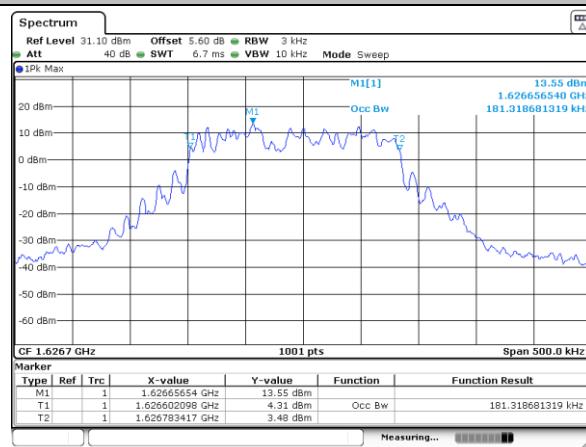

## Middle Channel / 12SC0 / QPSK

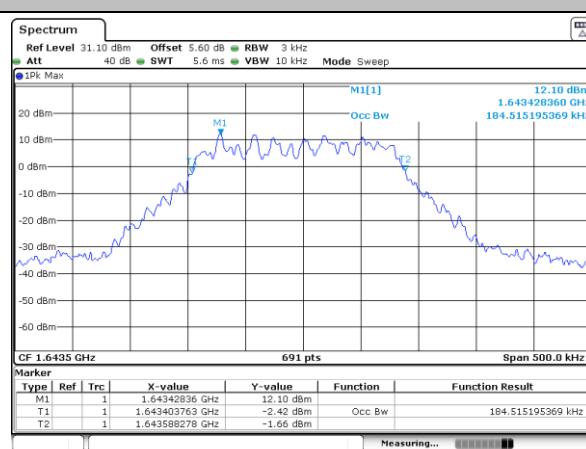

## Highest Channel / 12SC0 / QPSK

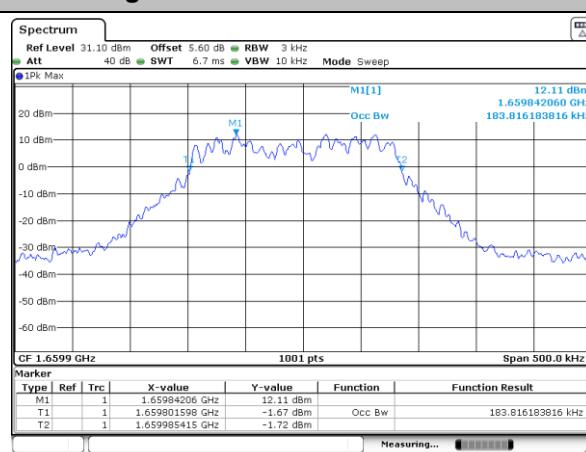



MASK

