


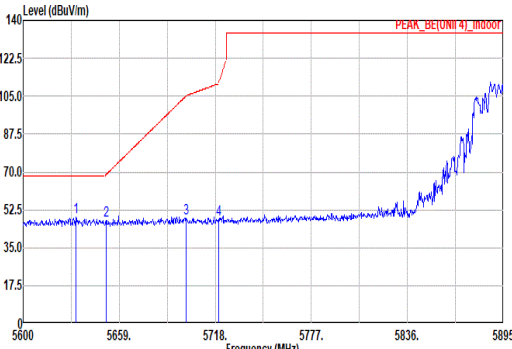
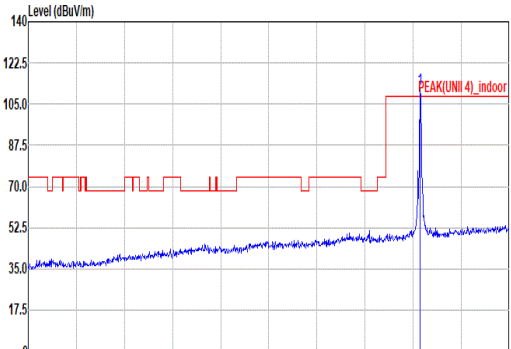




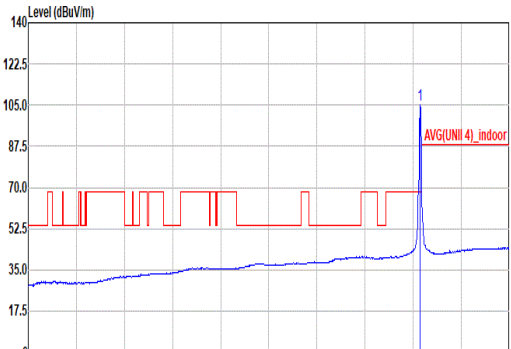


	74																																																																																																																																				
Mode	Band Edge - L																																																																																																																																				
	U-NII-4_5.725-5.85_802.11be EHT20_CH177_Partial 106/54 RU_5885MHz																																																																																																																																				
ANT	3+4																																																																																																																																				
Pol.	Vertical						Fundamental																																																																																																																														
Peak	 Level (dBuV/m) Frequency (MHz) PEAK_BE(UNII 4)_indoor Site : 03CH13-HY Condition: PEAK_BE(UNII 4)_indoor 3m HORN_91200_1326 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5632.45</td><td>49.83</td><td>68.20</td><td>-19.17</td><td>42.40</td><td>33.13</td><td>10.36</td><td>36.86</td><td>0.00</td><td>300</td><td>150</td><td>PEAK</td></tr><tr><td>2</td><td>5651.04</td><td>47.57</td><td>68.97</td><td>-21.40</td><td>40.85</td><td>33.21</td><td>10.38</td><td>36.87</td><td>0.00</td><td>300</td><td>150</td><td>PEAK</td></tr><tr><td>3</td><td>5700.30</td><td>48.71</td><td>105.28</td><td>-56.57</td><td>41.58</td><td>33.60</td><td>10.43</td><td>36.90</td><td>0.00</td><td>300</td><td>150</td><td>PEAK</td></tr><tr><td>4</td><td>5720.07</td><td>47.98</td><td>110.95</td><td>-62.97</td><td>40.72</td><td>33.72</td><td>10.45</td><td>36.91</td><td>0.00</td><td>300</td><td>150</td><td>PEAK</td></tr></tbody></table>							Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg	1	5632.45	49.83	68.20	-19.17	42.40	33.13	10.36	36.86	0.00	300	150	PEAK	2	5651.04	47.57	68.97	-21.40	40.85	33.21	10.38	36.87	0.00	300	150	PEAK	3	5700.30	48.71	105.28	-56.57	41.58	33.60	10.43	36.90	0.00	300	150	PEAK	4	5720.07	47.98	110.95	-62.97	40.72	33.72	10.45	36.91	0.00	300	150	PEAK	 Level (dBuV/m) Frequency (MHz) PEAK(UNII 4)_indoor Site : 03CH13-HY Condition: PEAK(UNII 4)_indoor 3m HORN_91200_1326 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5885.00</td><td>111.48</td><td>-----</td><td>-----</td><td>103.44</td><td>34.46</td><td>10.58</td><td>37.00</td><td>0.00</td><td>300</td><td>150</td><td>PEAK</td></tr></tbody></table>							Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg	1	5885.00	111.48	-----	-----	103.44	34.46	10.58	37.00	0.00	300	150	PEAK
		Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg																																																																																																																								
1	5632.45	49.83	68.20	-19.17	42.40	33.13	10.36	36.86	0.00	300	150	PEAK																																																																																																																									
2	5651.04	47.57	68.97	-21.40	40.85	33.21	10.38	36.87	0.00	300	150	PEAK																																																																																																																									
3	5700.30	48.71	105.28	-56.57	41.58	33.60	10.43	36.90	0.00	300	150	PEAK																																																																																																																									
4	5720.07	47.98	110.95	-62.97	40.72	33.72	10.45	36.91	0.00	300	150	PEAK																																																																																																																									
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg																																																																																																																								
1	5885.00	111.48	-----	-----	103.44	34.46	10.58	37.00	0.00	300	150	PEAK																																																																																																																									
Avg	Blank						 Level (dBuV/m) Frequency (MHz) AVG(UNII 4)_indoor Site : 03CH13-HY Condition: AVG(UNII 4)_indoor 3m HORN_91200_1326 VERTICAL : RBW:1000.000kHz VBW:0.820kHz SMT:Auto <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5885.00</td><td>104.91</td><td>-----</td><td>-----</td><td>96.87</td><td>34.46</td><td>10.58</td><td>37.00</td><td>0.00</td><td>300</td><td>150</td><td>AVERAGE</td></tr></tbody></table>							Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg	1	5885.00	104.91	-----	-----	96.87	34.46	10.58	37.00	0.00	300	150	AVERAGE																																																																																
		Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg																																																																																																																								
1	5885.00	104.91	-----	-----	96.87	34.46	10.58	37.00	0.00	300	150	AVERAGE																																																																																																																									


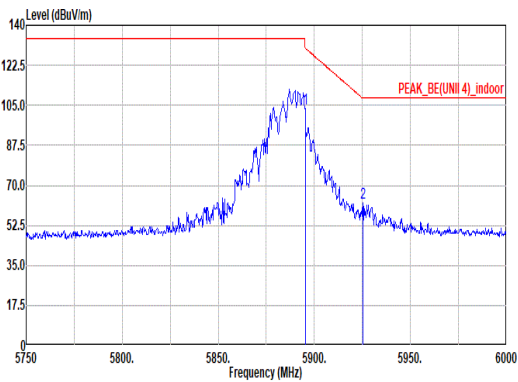


Mode	74																																																																			
	Band Edge - R																																																																			
	U-NII-4_5.725-5.85_802.11be EHT20_CH177_Partial 106/54 RU_5885MHz																																																																			
ANT	3+4																																																																			
Pol.	Vertical						Fundamental																																																													
Peak	 Site : 03CH13-HY Condition: PEAK_BE(UNII 4)_indoor 3m HORN_91280_1326 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5895.25</td><td>103.47</td><td>130.02</td><td>-26.55</td><td>95.41</td><td>34.48</td><td>10.58</td><td>37.00</td><td>0.00</td><td>300</td><td>150</td><td>PEAK</td></tr><tr><td>2</td><td>5925.25</td><td>62.21</td><td>108.20</td><td>-45.99</td><td>54.14</td><td>34.50</td><td>10.59</td><td>37.02</td><td>0.00</td><td>300</td><td>150</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm	deg	1	5895.25	103.47	130.02	-26.55	95.41	34.48	10.58	37.00	0.00	300	150	PEAK	2	5925.25	62.21	108.20	-45.99	54.14	34.50	10.59	37.02	0.00	300	150	PEAK	Blank				
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																												
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm	deg																																																										
1	5895.25	103.47	130.02	-26.55	95.41	34.48	10.58	37.00	0.00	300	150	PEAK																																																								
2	5925.25	62.21	108.20	-45.99	54.14	34.50	10.59	37.02	0.00	300	150	PEAK																																																								
Avg	 Site : 03CH13-HY Condition: AVG_BE(UNII 4)_indoor 3m HORN_91280_1326 VERTICAL : RBW:1000.000kHz VBW:0.020kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5895.25</td><td>92.24</td><td>110.02</td><td>-17.78</td><td>84.18</td><td>34.48</td><td>10.58</td><td>37.00</td><td>0.00</td><td>300</td><td>150</td><td>AVERAGE</td></tr><tr><td>2</td><td>5925.00</td><td>49.08</td><td>88.20</td><td>-39.12</td><td>41.01</td><td>34.50</td><td>10.59</td><td>37.02</td><td>0.00</td><td>300</td><td>150</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm	deg	1	5895.25	92.24	110.02	-17.78	84.18	34.48	10.58	37.00	0.00	300	150	AVERAGE	2	5925.00	49.08	88.20	-39.12	41.01	34.50	10.59	37.02	0.00	300	150	AVERAGE	Blank				
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																												
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm	deg																																																										
1	5895.25	92.24	110.02	-17.78	84.18	34.48	10.58	37.00	0.00	300	150	AVERAGE																																																								
2	5925.00	49.08	88.20	-39.12	41.01	34.50	10.59	37.02	0.00	300	150	AVERAGE																																																								



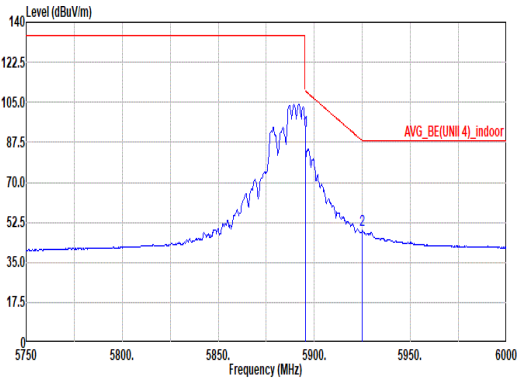


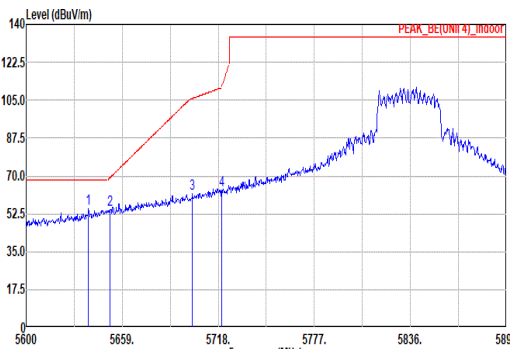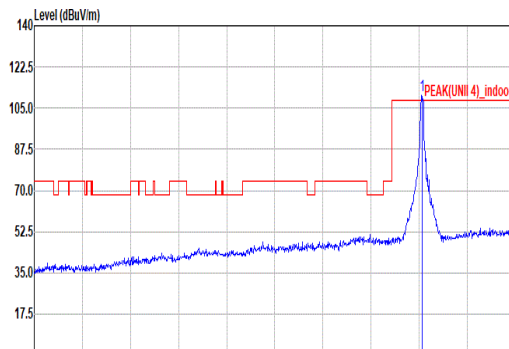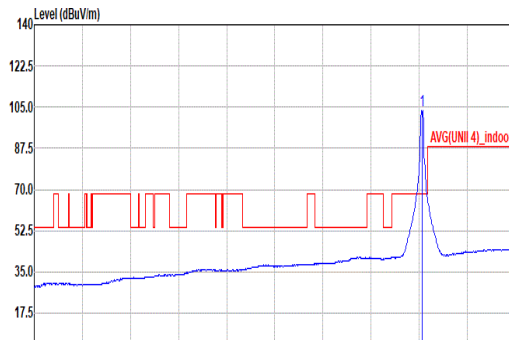Mode	75																																																																																																																																									
	Band Edge - L																																																																																																																																									
	U-NII-4_5.725-5.85_802.11be EHT40_CH167_Full RU_5835MHz																																																																																																																																									
ANT	3+4																																																																																																																																									
Pol.	Horizontal						Fundamental																																																																																																																																			
Peak	 Site : 03CH13-HY Condition: PEAK_BE(UNII 4)_indoor 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5638.35</td><td>54.68</td><td>68.20</td><td>-13.52</td><td>48.03</td><td>33.15</td><td>10.36</td><td>36.86</td><td>0.00</td><td>100</td><td>322</td><td>PEAK</td></tr><tr><td>2</td><td>5651.33</td><td>54.46</td><td>69.19</td><td>-14.73</td><td>47.74</td><td>33.21</td><td>10.38</td><td>36.87</td><td>0.00</td><td>100</td><td>322</td><td>PEAK</td></tr><tr><td>3</td><td>5702.07</td><td>61.95</td><td>105.78</td><td>-43.83</td><td>54.81</td><td>33.61</td><td>10.43</td><td>36.90</td><td>0.00</td><td>100</td><td>322</td><td>PEAK</td></tr><tr><td>4</td><td>5720.07</td><td>63.34</td><td>110.95</td><td>-47.61</td><td>56.08</td><td>33.72</td><td>10.45</td><td>36.91</td><td>0.00</td><td>100</td><td>322</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5638.35	54.68	68.20	-13.52	48.03	33.15	10.36	36.86	0.00	100	322	PEAK	2	5651.33	54.46	69.19	-14.73	47.74	33.21	10.38	36.87	0.00	100	322	PEAK	3	5702.07	61.95	105.78	-43.83	54.81	33.61	10.43	36.90	0.00	100	322	PEAK	4	5720.07	63.34	110.95	-47.61	56.08	33.72	10.45	36.91	0.00	100	322	PEAK	 Site : 03CH13-HY Condition: PEAK(UNII 4)_indoor 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5835.00</td><td>110.34</td><td>-----</td><td>-----</td><td>102.50</td><td>34.26</td><td>10.55</td><td>36.97</td><td>0.00</td><td>100</td><td>322</td><td>PEAK</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5835.00	110.34	-----	-----	102.50	34.26	10.55	36.97	0.00	100	322	PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																
1	5638.35	54.68	68.20	-13.52	48.03	33.15	10.36	36.86	0.00	100	322	PEAK																																																																																																																														
2	5651.33	54.46	69.19	-14.73	47.74	33.21	10.38	36.87	0.00	100	322	PEAK																																																																																																																														
3	5702.07	61.95	105.78	-43.83	54.81	33.61	10.43	36.90	0.00	100	322	PEAK																																																																																																																														
4	5720.07	63.34	110.95	-47.61	56.08	33.72	10.45	36.91	0.00	100	322	PEAK																																																																																																																														
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																
1	5835.00	110.34	-----	-----	102.50	34.26	10.55	36.97	0.00	100	322	PEAK																																																																																																																														
Avg	Blank						 Site : 03CH13-HY Condition: AVG(UNII 4)_indoor 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5835.00</td><td>103.63</td><td>-----</td><td>-----</td><td>95.79</td><td>34.26</td><td>10.55</td><td>36.97</td><td>0.00</td><td>100</td><td>322</td><td>AVERAGE</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5835.00	103.63	-----	-----	95.79	34.26	10.55	36.97	0.00	100	322	AVERAGE																																																																																			
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																
1	5835.00	103.63	-----	-----	95.79	34.26	10.55	36.97	0.00	100	322	AVERAGE																																																																																																																														

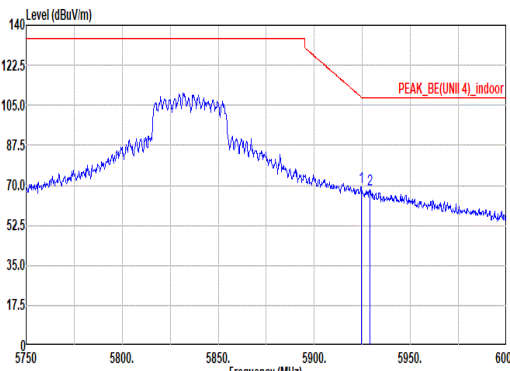
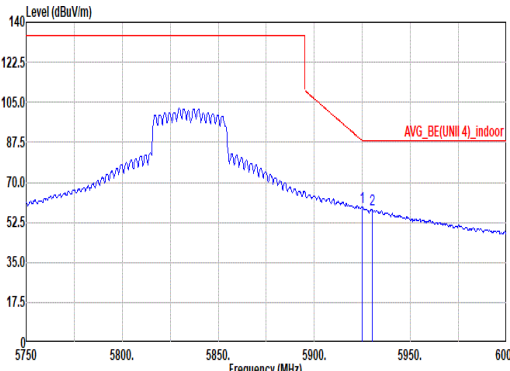


Mode	75																																																															
	Band Edge - R																																																															
	U-NII-4_5.725-5.85_802.11be EHT40_CH167_Full RU_5835MHz																																																															
ANT	3+4																																																															
Pol.	Horizontal						Fundamental																																																									
Peak	 Site : 03CH13-HY Condition: PEAK_BE(UNII 4)_indoor 3m HORN_91280_1326 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>5924.50</td><td>69.20</td><td>108.57</td><td>-39.37</td><td>61.13</td><td>34.50</td><td>10.59</td><td>37.02</td><td>0.00</td><td>100</td><td>322</td><td>PEAK</td></tr><tr><td>2</td><td>5928.75</td><td>68.02</td><td>108.20</td><td>-40.18</td><td>59.95</td><td>34.50</td><td>10.59</td><td>37.02</td><td>0.00</td><td>100</td><td>322</td><td>PEAK</td></tr></table>							Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5924.50	69.20	108.57	-39.37	61.13	34.50	10.59	37.02	0.00	100	322	PEAK	2	5928.75	68.02	108.20	-40.18	59.95	34.50	10.59	37.02	0.00	100	322	PEAK	Blank					
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																					
1	5924.50	69.20	108.57	-39.37	61.13	34.50	10.59	37.02	0.00	100	322	PEAK																																																				
2	5928.75	68.02	108.20	-40.18	59.95	34.50	10.59	37.02	0.00	100	322	PEAK																																																				
Avg	 Site : 03CH13-HY Condition: AVG_BE(UNII 4)_indoor 3m HORN_91280_1326 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>5925.00</td><td>59.30</td><td>88.20</td><td>-28.90</td><td>51.23</td><td>34.50</td><td>10.59</td><td>37.02</td><td>0.00</td><td>100</td><td>322</td><td>AVERAGE</td></tr><tr><td>2</td><td>5930.00</td><td>58.28</td><td>88.20</td><td>-29.92</td><td>50.21</td><td>34.50</td><td>10.59</td><td>37.02</td><td>0.00</td><td>100</td><td>322</td><td>AVERAGE</td></tr></table>							Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5925.00	59.30	88.20	-28.90	51.23	34.50	10.59	37.02	0.00	100	322	AVERAGE	2	5930.00	58.28	88.20	-29.92	50.21	34.50	10.59	37.02	0.00	100	322	AVERAGE	Blank					
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																					
1	5925.00	59.30	88.20	-28.90	51.23	34.50	10.59	37.02	0.00	100	322	AVERAGE																																																				
2	5930.00	58.28	88.20	-29.92	50.21	34.50	10.59	37.02	0.00	100	322	AVERAGE																																																				

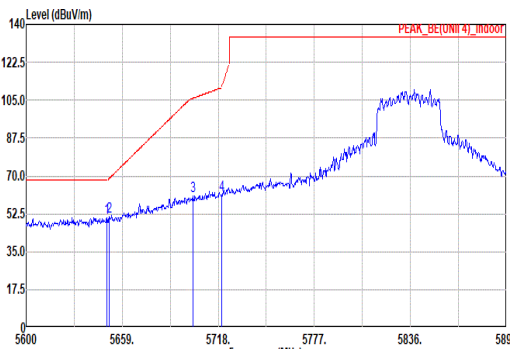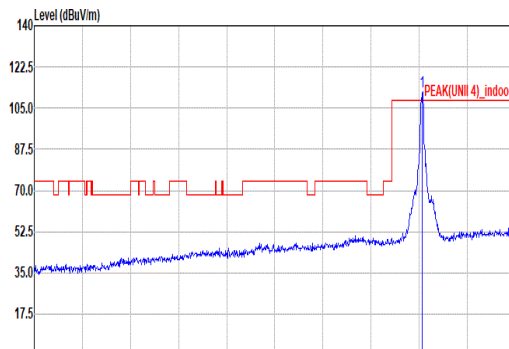
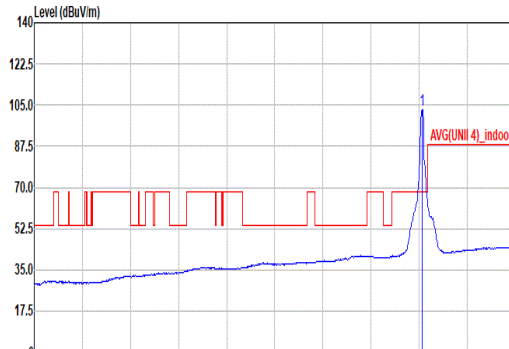


	75																																																																																																																														
Mode	Band Edge - L																																																																																																																														
	U-NII-4_5.725-5.85_802.11be EHT40_CH167_Full RU_5835MHz																																																																																																																														
ANT	3+4																																																																																																																														
Pol.	Vertical					Fundamental																																																																																																																									
Peak	 Level (dBuV/m) Frequency (MHz) PEAK_BE(UNII 4)_indoor Site : 03CH13-HY Condition: PEAK_BE(UNII 4)_indoor 3m HORN_91200_1326 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>5649.56</td><td>50.51</td><td>68.20</td><td>-17.69</td><td>43.81</td><td>33.20</td><td>10.37</td><td>36.87</td><td>0.00</td><td>400</td><td>148</td><td>PEAK</td></tr><tr><td>2</td><td>5651.04</td><td>51.02</td><td>68.97</td><td>-17.95</td><td>44.30</td><td>33.21</td><td>10.38</td><td>36.87</td><td>0.00</td><td>400</td><td>148</td><td>PEAK</td></tr><tr><td>3</td><td>5702.37</td><td>60.66</td><td>105.86</td><td>-45.20</td><td>53.52</td><td>33.61</td><td>10.43</td><td>36.90</td><td>0.00</td><td>400</td><td>148</td><td>PEAK</td></tr><tr><td>4</td><td>5720.07</td><td>61.52</td><td>110.95</td><td>-49.43</td><td>54.26</td><td>33.72</td><td>10.45</td><td>36.91</td><td>0.00</td><td>400</td><td>148</td><td>PEAK</td></tr></table>						Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5649.56	50.51	68.20	-17.69	43.81	33.20	10.37	36.87	0.00	400	148	PEAK	2	5651.04	51.02	68.97	-17.95	44.30	33.21	10.38	36.87	0.00	400	148	PEAK	3	5702.37	60.66	105.86	-45.20	53.52	33.61	10.43	36.90	0.00	400	148	PEAK	4	5720.07	61.52	110.95	-49.43	54.26	33.72	10.45	36.91	0.00	400	148	PEAK	 Level (dBuV/m) Frequency (MHz) PEAK(UNII 4)_indoor Site : 03CH13-HY Condition: PEAK(UNII 4)_indoor 3m HORN_91200_1326 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>5835.00</td><td>112.17</td><td>-----</td><td>-----</td><td>104.30</td><td>34.28</td><td>10.56</td><td>36.97</td><td>0.00</td><td>400</td><td>148</td><td>PEAK</td></tr></table>						Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5835.00	112.17	-----	-----	104.30	34.28	10.56	36.97	0.00	400	148	PEAK
	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																				
1	5649.56	50.51	68.20	-17.69	43.81	33.20	10.37	36.87	0.00	400	148	PEAK																																																																																																																			
2	5651.04	51.02	68.97	-17.95	44.30	33.21	10.38	36.87	0.00	400	148	PEAK																																																																																																																			
3	5702.37	60.66	105.86	-45.20	53.52	33.61	10.43	36.90	0.00	400	148	PEAK																																																																																																																			
4	5720.07	61.52	110.95	-49.43	54.26	33.72	10.45	36.91	0.00	400	148	PEAK																																																																																																																			
	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																				
1	5835.00	112.17	-----	-----	104.30	34.28	10.56	36.97	0.00	400	148	PEAK																																																																																																																			
Avg	Blank					 Level (dBuV/m) Frequency (MHz) AVG(UNII 4)_indoor Site : 03CH13-HY Condition: AVG(UNII 4)_indoor 3m HORN_91200_1326 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>5835.00</td><td>103.07</td><td>-----</td><td>-----</td><td>95.20</td><td>34.28</td><td>10.56</td><td>36.97</td><td>0.00</td><td>400</td><td>148</td><td>AVERAGE</td></tr></table>						Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5835.00	103.07	-----	-----	95.20	34.28	10.56	36.97	0.00	400	148	AVERAGE																																																																														
	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																				
1	5835.00	103.07	-----	-----	95.20	34.28	10.56	36.97	0.00	400	148	AVERAGE																																																																																																																			



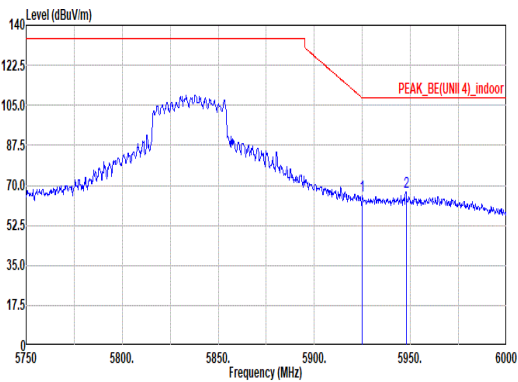
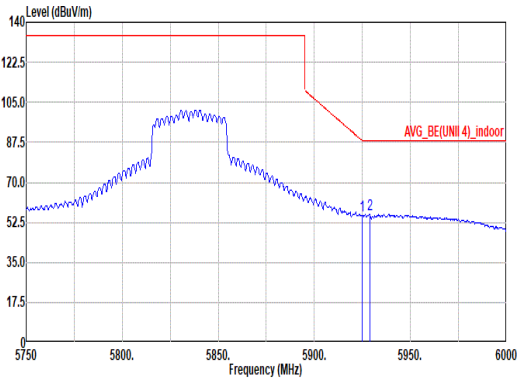


Mode	75																																																																			
	Band Edge - R																																																																			
	U-NII-4_5.725-5.85_802.11be EHT40_CH167_Full RU_5835MHz																																																																			
ANT	3+4																																																																			
Pol.	Vertical						Fundamental																																																													
Peak	 Site : 03CH13-HY Condition: PEAK_BE(UNII 4)_indoor 3m HORN_91280_1326 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5925.00</td><td>65.37</td><td>108.20</td><td>-42.83</td><td>57.30</td><td>34.50</td><td>10.59</td><td>37.02</td><td>0.00</td><td>400</td><td>148</td><td>PEAK</td></tr><tr><td>2</td><td>5947.75</td><td>67.18</td><td>108.20</td><td>-41.02</td><td>59.11</td><td>34.50</td><td>10.60</td><td>37.03</td><td>0.00</td><td>400</td><td>148</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5925.00	65.37	108.20	-42.83	57.30	34.50	10.59	37.02	0.00	400	148	PEAK	2	5947.75	67.18	108.20	-41.02	59.11	34.50	10.60	37.03	0.00	400	148	PEAK	Blank				
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																										
1	5925.00	65.37	108.20	-42.83	57.30	34.50	10.59	37.02	0.00	400	148	PEAK																																																								
2	5947.75	67.18	108.20	-41.02	59.11	34.50	10.60	37.03	0.00	400	148	PEAK																																																								
Avg	 Site : 03CH13-HY Condition: AVG_BE(UNII 4)_indoor 3m HORN_91280_1326 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5925.00</td><td>55.40</td><td>88.20</td><td>-32.80</td><td>47.33</td><td>34.50</td><td>10.59</td><td>37.02</td><td>0.00</td><td>400</td><td>148</td><td>AVERAGE</td></tr><tr><td>2</td><td>5928.75</td><td>55.98</td><td>88.20</td><td>-32.22</td><td>47.91</td><td>34.50</td><td>10.59</td><td>37.02</td><td>0.00</td><td>400</td><td>148</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5925.00	55.40	88.20	-32.80	47.33	34.50	10.59	37.02	0.00	400	148	AVERAGE	2	5928.75	55.98	88.20	-32.22	47.91	34.50	10.59	37.02	0.00	400	148	AVERAGE	Blank				
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																										
1	5925.00	55.40	88.20	-32.80	47.33	34.50	10.59	37.02	0.00	400	148	AVERAGE																																																								
2	5928.75	55.98	88.20	-32.22	47.91	34.50	10.59	37.02	0.00	400	148	AVERAGE																																																								


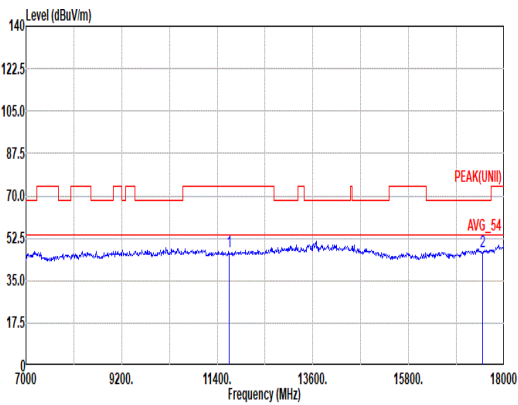
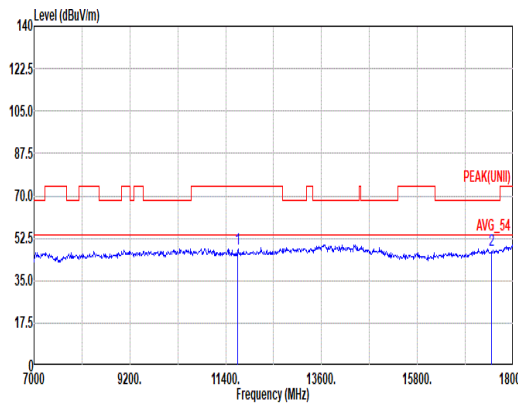


Mode	75																																																																
	Harmonic																																																																
	U-NII-4_5.725-5.85_802.11be EHT40_CH167_Full RU_5835MHz																																																																
ANT	3+4																																																																
Pol.	Horizontal																																																																
Peak Avg																																																																	
	Site : 03CH13-HY Condition: PEAK(UNII) 3m HORN_91200_1326 HORIZONTAL Mode : 75																																																																
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>11670.00</td><td>47.06</td><td>74.00</td><td>-26.94</td><td>47.86</td><td>38.54</td><td>16.15</td><td>56.05</td><td>0.56</td><td>--</td><td>PEAK</td></tr><tr><td>2</td><td>17505.00</td><td>47.03</td><td>68.20</td><td>-21.17</td><td>44.50</td><td>38.84</td><td>19.87</td><td>56.97</td><td>0.79</td><td>--</td><td>PEAK</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11670.00	47.06	74.00	-26.94	47.86	38.54	16.15	56.05	0.56	--	PEAK	2	17505.00	47.03	68.20	-21.17	44.50	38.84	19.87	56.97	0.79	--
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																							
1	11670.00	47.06	74.00	-26.94	47.86	38.54	16.15	56.05	0.56	--	PEAK																																																						
2	17505.00	47.03	68.20	-21.17	44.50	38.84	19.87	56.97	0.79	--	PEAK																																																						
Peak Avg																																																																	
	Site : 03CH13-HY Condition: PEAK(UNII) 3m HORN_91200_1326 VERTICAL Mode : 75																																																																
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>11670.00</td><td>47.82</td><td>74.00</td><td>-26.18</td><td>48.62</td><td>38.54</td><td>16.15</td><td>56.05</td><td>0.56</td><td>--</td><td>PEAK</td></tr><tr><td>2</td><td>17505.00</td><td>47.47</td><td>68.20</td><td>-20.73</td><td>44.94</td><td>38.84</td><td>19.87</td><td>56.97</td><td>0.79</td><td>--</td><td>PEAK</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11670.00	47.82	74.00	-26.18	48.62	38.54	16.15	56.05	0.56	--	PEAK	2	17505.00	47.47	68.20	-20.73	44.94	38.84	19.87	56.97	0.79	--
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																							
1	11670.00	47.82	74.00	-26.18	48.62	38.54	16.15	56.05	0.56	--	PEAK																																																						
2	17505.00	47.47	68.20	-20.73	44.94	38.84	19.87	56.97	0.79	--	PEAK																																																						

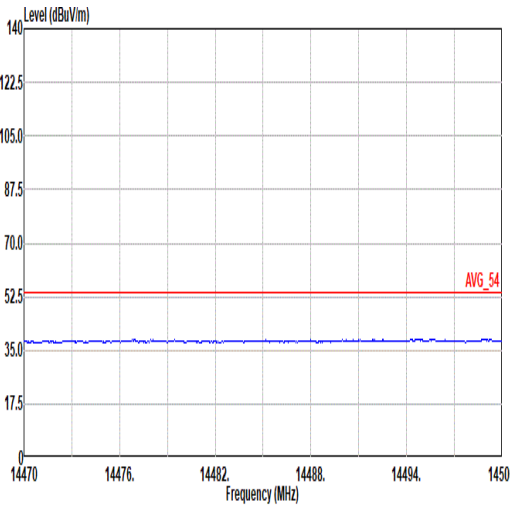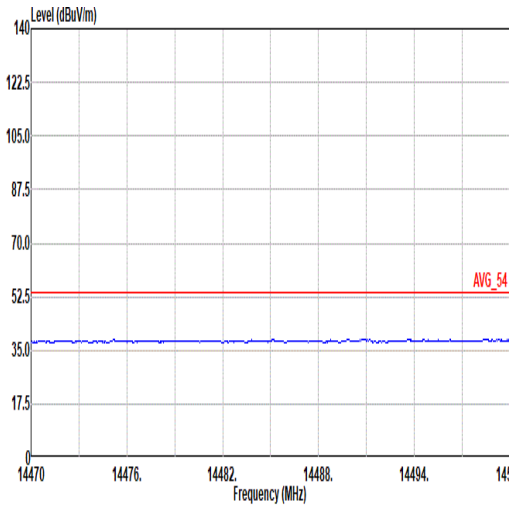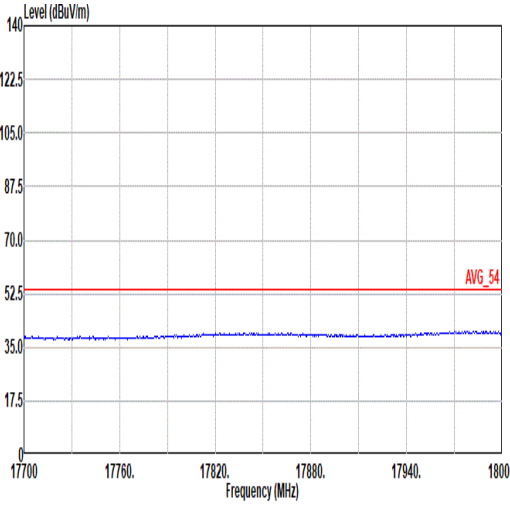
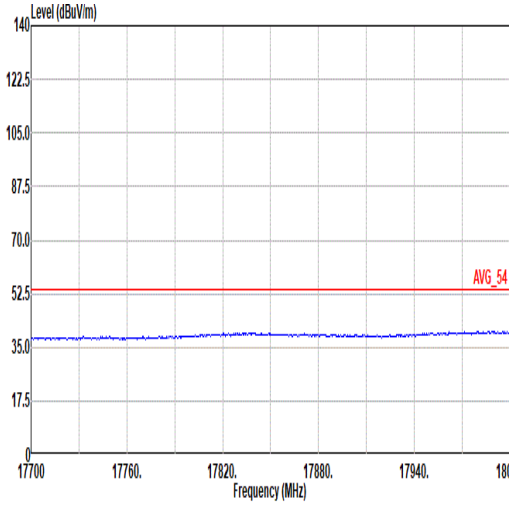


Mode	75	
	Harmonic	
	U-NII-4_5.725-5.85_802.11be EHT40_CH167_Full RU_5835MHz	
ANT	3+4	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	 Site : 03CH13-HY Condition: AVG_54 3m HORN_91200_1326 HORIZONTAL Mode : 75	 Site : 03CH13-HY Condition: AVG_54 3m HORN_91200_1326 VERTICAL Mode : 75
	 Site : 03CH13-HY Condition: AVG_54 3m HORN_91200_1326 HORIZONTAL Mode : 75	 Site : 03CH13-HY Condition: AVG_54 3m HORN_91200_1326 VERTICAL Mode : 75

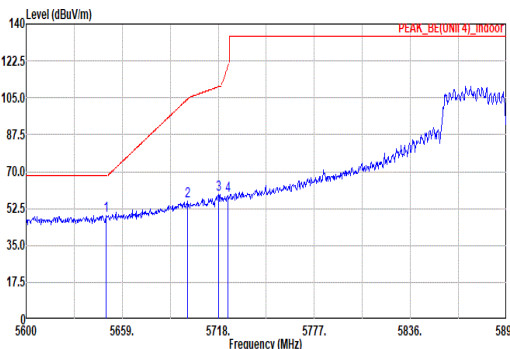
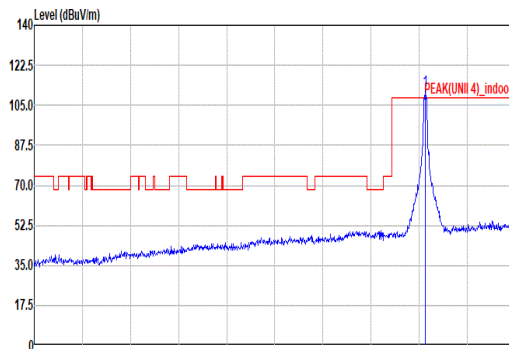
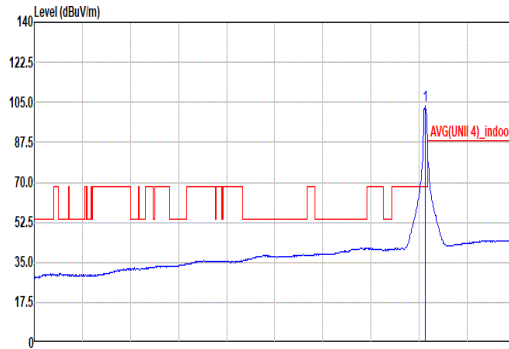


	76																																																																																																																				
Mode	Band Edge - L																																																																																																																				
	U-NII-4_5.725-5.85_802.11be EHT40_CH175_Full RU_5875MHz																																																																																																																				
ANT	3+4																																																																																																																				
Pol.	Horizontal						Fundamental																																																																																																														
Peak	 Site : 03CH13-HY Condition: PEAK_BE(UNII 4)_indoor 3m HORN_91280_1326 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5648.97</td><td>49.38</td><td>68.20</td><td>-18.82</td><td>42.68</td><td>33.20</td><td>10.37</td><td>36.87</td><td>0.00</td><td>100</td><td>301</td><td>PEAK</td></tr><tr><td>2</td><td>5699.12</td><td>56.21</td><td>104.55</td><td>-48.34</td><td>49.09</td><td>33.59</td><td>10.43</td><td>36.90</td><td>0.00</td><td>100</td><td>301</td><td>PEAK</td></tr><tr><td>3</td><td>5718.00</td><td>59.30</td><td>110.24</td><td>-50.94</td><td>52.05</td><td>33.71</td><td>10.45</td><td>36.91</td><td>0.00</td><td>100</td><td>301</td><td>PEAK</td></tr><tr><td>4</td><td>5723.90</td><td>58.46</td><td>119.69</td><td>-61.23</td><td>51.17</td><td>33.74</td><td>10.46</td><td>36.91</td><td>0.00</td><td>100</td><td>301</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss	Factor	Factor	cm	deg	1	5648.97	49.38	68.20	-18.82	42.68	33.20	10.37	36.87	0.00	100	301	PEAK	2	5699.12	56.21	104.55	-48.34	49.09	33.59	10.43	36.90	0.00	100	301	PEAK	3	5718.00	59.30	110.24	-50.94	52.05	33.71	10.45	36.91	0.00	100	301	PEAK	4	5723.90	58.46	119.69	-61.23	51.17	33.74	10.46	36.91	0.00	100	301	PEAK	 Site : 03CH13-HY Condition: PEAK(UNII 4)_indoor 3m HORN_91280_1326 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5875.00</td><td>111.34</td><td>-----</td><td>-----</td><td>103.36</td><td>34.40</td><td>10.57</td><td>36.99</td><td>0.00</td><td>100</td><td>301</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss	Factor	Factor	cm	deg	1	5875.00	111.34	-----	-----	103.36	34.40	10.57	36.99	0.00	100	301	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																												
Freq	Level	Line	Level	Factor	Loss	Factor	Factor	cm	deg																																																																																																												
1	5648.97	49.38	68.20	-18.82	42.68	33.20	10.37	36.87	0.00	100	301	PEAK																																																																																																									
2	5699.12	56.21	104.55	-48.34	49.09	33.59	10.43	36.90	0.00	100	301	PEAK																																																																																																									
3	5718.00	59.30	110.24	-50.94	52.05	33.71	10.45	36.91	0.00	100	301	PEAK																																																																																																									
4	5723.90	58.46	119.69	-61.23	51.17	33.74	10.46	36.91	0.00	100	301	PEAK																																																																																																									
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																												
Freq	Level	Line	Level	Factor	Loss	Factor	Factor	cm	deg																																																																																																												
1	5875.00	111.34	-----	-----	103.36	34.40	10.57	36.99	0.00	100	301	PEAK																																																																																																									
Avg	Blank						 Site : 03CH13-HY Condition: AVG(UNII 4)_indoor 3m HORN_91280_1326 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5875.00</td><td>103.59</td><td>-----</td><td>-----</td><td>95.61</td><td>34.40</td><td>10.57</td><td>36.99</td><td>0.00</td><td>100</td><td>301</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss	Factor	Factor	cm	deg	1	5875.00	103.59	-----	-----	95.61	34.40	10.57	36.99	0.00	100	301	AVERAGE																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																												
Freq	Level	Line	Level	Factor	Loss	Factor	Factor	cm	deg																																																																																																												
1	5875.00	103.59	-----	-----	95.61	34.40	10.57	36.99	0.00	100	301	AVERAGE																																																																																																									

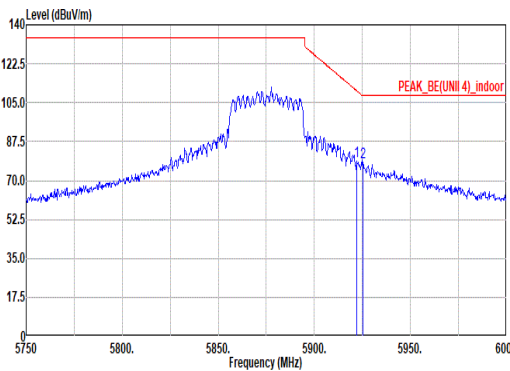
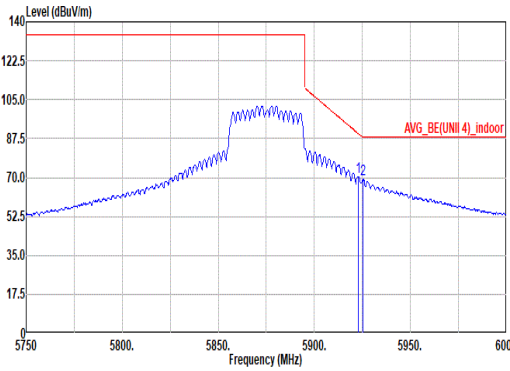


Mode	76																																																										
	Band Edge - R																																																										
	U-NII-4_5.725-5.85_802.11be EHT40_CH175_Full RU_5875MHz																																																										
ANT	3+4																																																										
Pol.	Horizontal	Fundamental																																																									
Peak	 Site : 03CH13-HY Condition: PEAK_BE(UNII 4)_indoor 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5922.25</td><td>78.60</td><td>110.21</td><td>-31.61</td><td>70.53</td><td>34.50</td><td>10.59</td><td>37.02</td><td>0.00</td><td>100</td><td>301</td><td>PEAK</td></tr><tr><td>2</td><td>5925.25</td><td>78.12</td><td>108.20</td><td>-30.08</td><td>70.05</td><td>34.50</td><td>10.59</td><td>37.02</td><td>0.00</td><td>100</td><td>301</td><td>PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5922.25	78.60	110.21	-31.61	70.53	34.50	10.59	37.02	0.00	100	301	PEAK	2	5925.25	78.12	108.20	-30.08	70.05	34.50	10.59	37.02	0.00	100	301	PEAK	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																	
1	5922.25	78.60	110.21	-31.61	70.53	34.50	10.59	37.02	0.00	100	301	PEAK																																															
2	5925.25	78.12	108.20	-30.08	70.05	34.50	10.59	37.02	0.00	100	301	PEAK																																															
Avg	 Site : 03CH13-HY Condition: AVG_BE(UNII 4)_indoor 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5922.75</td><td>70.38</td><td>89.85</td><td>-19.47</td><td>62.31</td><td>34.50</td><td>10.59</td><td>37.02</td><td>0.00</td><td>100</td><td>301</td><td>AVERAGE</td></tr><tr><td>2</td><td>5925.25</td><td>69.11</td><td>88.20</td><td>-19.09</td><td>61.04</td><td>34.50</td><td>10.59</td><td>37.02</td><td>0.00</td><td>100</td><td>301</td><td>AVERAGE</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5922.75	70.38	89.85	-19.47	62.31	34.50	10.59	37.02	0.00	100	301	AVERAGE	2	5925.25	69.11	88.20	-19.09	61.04	34.50	10.59	37.02	0.00	100	301	AVERAGE	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																	
1	5922.75	70.38	89.85	-19.47	62.31	34.50	10.59	37.02	0.00	100	301	AVERAGE																																															
2	5925.25	69.11	88.20	-19.09	61.04	34.50	10.59	37.02	0.00	100	301	AVERAGE																																															

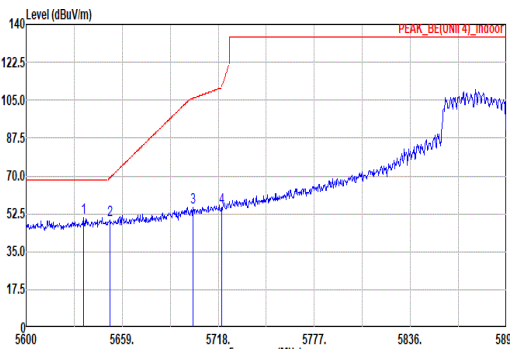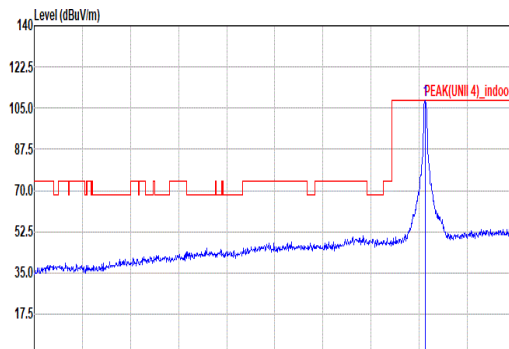
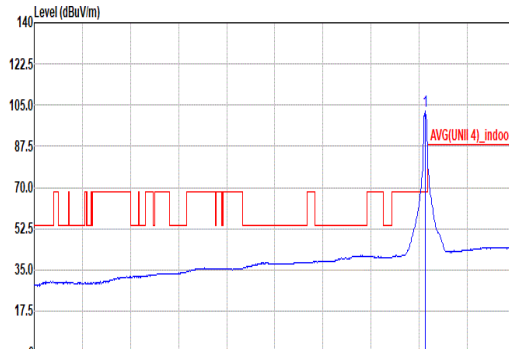


Mode	76																																																																																																																																											
	Band Edge - L																																																																																																																																											
	U-NII-4_5.725-5.85_802.11be EHT40_CH175_Full RU_5875MHz																																																																																																																																											
ANT	3+4																																																																																																																																											
Pol.	Vertical							Fundamental																																																																																																																																				
Peak	 Site : 03CH13-HY Condition: PEAK_BE(UNII 4)_indoor 3m HORN_91200_1326 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5635.11</td><td>50.89</td><td>68.20</td><td>-17.31</td><td></td><td>44.25</td><td>33.14</td><td>10.36</td><td>36.86</td><td>0.00</td><td>351</td><td>151</td><td>PEAK</td></tr><tr><td>2</td><td>5651.33</td><td>49.69</td><td>69.19</td><td>-19.50</td><td></td><td>42.97</td><td>33.21</td><td>10.38</td><td>36.87</td><td>0.00</td><td>351</td><td>151</td><td>PEAK</td></tr><tr><td>3</td><td>5702.66</td><td>55.46</td><td>105.95</td><td>-50.49</td><td></td><td>48.31</td><td>33.62</td><td>10.43</td><td>36.90</td><td>0.00</td><td>351</td><td>151</td><td>PEAK</td></tr><tr><td>4</td><td>5720.07</td><td>55.23</td><td>110.95</td><td>-55.72</td><td></td><td>47.97</td><td>33.72</td><td>10.45</td><td>36.91</td><td>0.00</td><td>351</td><td>151</td><td>PEAK</td></tr></table>								Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB		dBuV	dB/m	dB	dB	dB	dB	cm	deg	1	5635.11	50.89	68.20	-17.31		44.25	33.14	10.36	36.86	0.00	351	151	PEAK	2	5651.33	49.69	69.19	-19.50		42.97	33.21	10.38	36.87	0.00	351	151	PEAK	3	5702.66	55.46	105.95	-50.49		48.31	33.62	10.43	36.90	0.00	351	151	PEAK	4	5720.07	55.23	110.95	-55.72		47.97	33.72	10.45	36.91	0.00	351	151	PEAK	 Site : 03CH13-HY Condition: PEAK(UNII 4)_indoor 3m HORN_91200_1326 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5875.00</td><td>100.32</td><td>-----</td><td>-----</td><td></td><td>100.33</td><td>34.41</td><td>10.57</td><td>36.99</td><td>0.00</td><td>351</td><td>151</td><td>PEAK</td></tr></table>								Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB		dBuV	dB/m	dB	dB	dB	dB	cm	deg	1	5875.00	100.32	-----	-----		100.33	34.41	10.57	36.99	0.00	351	151	PEAK
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																															
	MHz	dBuV/m	dBuV/m	dB		dBuV	dB/m	dB	dB	dB	dB	cm	deg																																																																																																																															
1	5635.11	50.89	68.20	-17.31		44.25	33.14	10.36	36.86	0.00	351	151	PEAK																																																																																																																															
2	5651.33	49.69	69.19	-19.50		42.97	33.21	10.38	36.87	0.00	351	151	PEAK																																																																																																																															
3	5702.66	55.46	105.95	-50.49		48.31	33.62	10.43	36.90	0.00	351	151	PEAK																																																																																																																															
4	5720.07	55.23	110.95	-55.72		47.97	33.72	10.45	36.91	0.00	351	151	PEAK																																																																																																																															
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																															
	MHz	dBuV/m	dBuV/m	dB		dBuV	dB/m	dB	dB	dB	dB	cm	deg																																																																																																																															
1	5875.00	100.32	-----	-----		100.33	34.41	10.57	36.99	0.00	351	151	PEAK																																																																																																																															
Avg	Blank							 Site : 03CH13-HY Condition: AVG(UNII 4)_indoor 3m HORN_91200_1326 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5875.00</td><td>102.28</td><td>-----</td><td>-----</td><td></td><td>94.31</td><td>34.39</td><td>10.57</td><td>36.99</td><td>0.00</td><td>351</td><td>151</td><td>AVERAGE</td></tr></table>								Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB		dBuV	dB/m	dB	dB	dB	dB	cm	deg	1	5875.00	102.28	-----	-----		94.31	34.39	10.57	36.99	0.00	351	151	AVERAGE																																																																																				
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																															
	MHz	dBuV/m	dBuV/m	dB		dBuV	dB/m	dB	dB	dB	dB	cm	deg																																																																																																																															
1	5875.00	102.28	-----	-----		94.31	34.39	10.57	36.99	0.00	351	151	AVERAGE																																																																																																																															



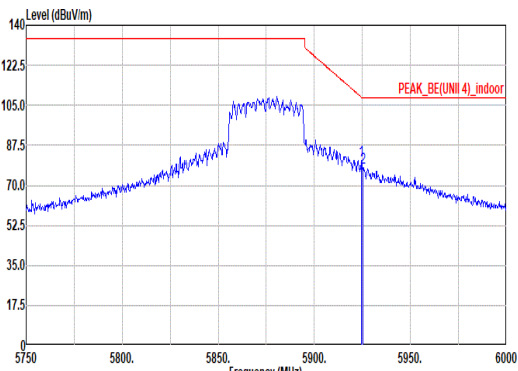
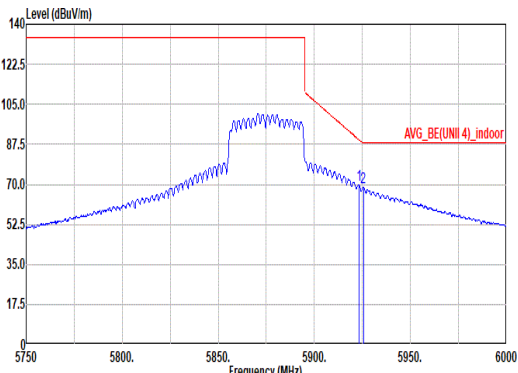


Mode	76																																																																				
	Band Edge - R																																																																				
	U-NII-4_5.725-5.85_802.11be EHT40_CH175_Full RU_5875MHz																																																																				
ANT	3+4																																																																				
Pol.	Vertical						Fundamental																																																														
Peak	 Site : 03CH13-HY Condition: PEAK_BE(UNII 4)_indoor 3m HORN_91280_1326 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5924.50</td><td>80.64</td><td>108.57</td><td>-27.93</td><td>72.57</td><td>34.50</td><td>10.59</td><td>37.02</td><td>0.00</td><td>351</td><td>151</td><td>PEAK</td></tr><tr><td>2</td><td>5925.25</td><td>77.87</td><td>108.20</td><td>-30.33</td><td>69.80</td><td>34.50</td><td>10.59</td><td>37.02</td><td>0.00</td><td>351</td><td>151</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5924.50	80.64	108.57	-27.93	72.57	34.50	10.59	37.02	0.00	351	151	PEAK	2	5925.25	77.87	108.20	-30.33	69.80	34.50	10.59	37.02	0.00	351	151	PEAK	Blank					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																											
1	5924.50	80.64	108.57	-27.93	72.57	34.50	10.59	37.02	0.00	351	151	PEAK																																																									
2	5925.25	77.87	108.20	-30.33	69.80	34.50	10.59	37.02	0.00	351	151	PEAK																																																									
Avg	 Site : 03CH13-HY Condition: AVG_BE(UNII 4)_indoor 3m HORN_91280_1326 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5923.25</td><td>69.48</td><td>89.48</td><td>-20.00</td><td>61.41</td><td>34.50</td><td>10.59</td><td>37.02</td><td>0.00</td><td>351</td><td>151</td><td>AVERAGE</td></tr><tr><td>2</td><td>5925.50</td><td>68.63</td><td>88.20</td><td>-19.57</td><td>60.56</td><td>34.50</td><td>10.59</td><td>37.02</td><td>0.00</td><td>351</td><td>151</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5923.25	69.48	89.48	-20.00	61.41	34.50	10.59	37.02	0.00	351	151	AVERAGE	2	5925.50	68.63	88.20	-19.57	60.56	34.50	10.59	37.02	0.00	351	151	AVERAGE	Blank					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																											
1	5923.25	69.48	89.48	-20.00	61.41	34.50	10.59	37.02	0.00	351	151	AVERAGE																																																									
2	5925.50	68.63	88.20	-19.57	60.56	34.50	10.59	37.02	0.00	351	151	AVERAGE																																																									


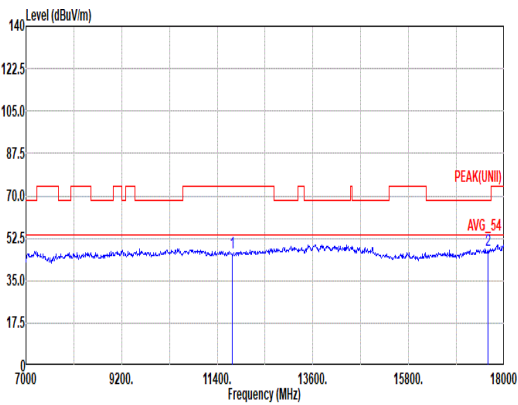
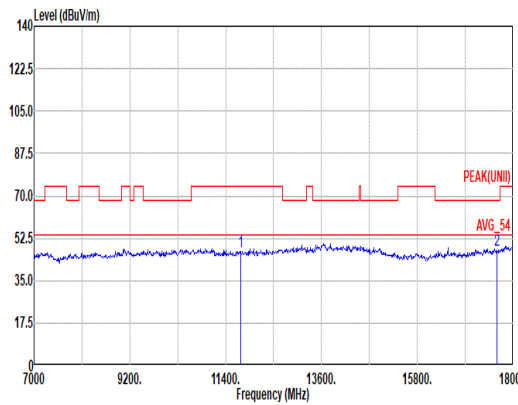


Mode	76																																																																
	Harmonic																																																																
	U-NII-4_5.725-5.85_802.11be EHT40_CH175_Full RU_5875MHz																																																																
ANT	3+4																																																																
Pol.	Horizontal																																																																
Peak Avg																																																																	
	Site : 03CH13-HY Condition: PEAK(UNII) 3m HORN_91200_1326 HORIZONTAL Mode : 76																																																																
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>11750.00</td><td>46.25</td><td>74.00</td><td>-27.75</td><td>46.95</td><td>38.60</td><td>16.20</td><td>56.06</td><td>0.56</td><td>--</td><td>PEAK</td></tr><tr><td>2</td><td>17625.00</td><td>47.61</td><td>68.20</td><td>-20.59</td><td>44.40</td><td>39.35</td><td>19.97</td><td>56.90</td><td>0.79</td><td>--</td><td>PEAK</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11750.00	46.25	74.00	-27.75	46.95	38.60	16.20	56.06	0.56	--	PEAK	2	17625.00	47.61	68.20	-20.59	44.40	39.35	19.97	56.90	0.79	--
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																							
1	11750.00	46.25	74.00	-27.75	46.95	38.60	16.20	56.06	0.56	--	PEAK																																																						
2	17625.00	47.61	68.20	-20.59	44.40	39.35	19.97	56.90	0.79	--	PEAK																																																						
Peak Avg																																																																	
	Site : 03CH13-HY Condition: PEAK(UNII) 3m HORN_91200_1326 VERTICAL Mode : 76																																																																
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>11750.00</td><td>47.19</td><td>74.00</td><td>-26.81</td><td>47.89</td><td>38.60</td><td>16.20</td><td>56.06</td><td>0.56</td><td>--</td><td>PEAK</td></tr><tr><td>2</td><td>17625.00</td><td>47.54</td><td>68.20</td><td>-20.66</td><td>44.33</td><td>39.35</td><td>19.97</td><td>56.90</td><td>0.79</td><td>--</td><td>PEAK</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11750.00	47.19	74.00	-26.81	47.89	38.60	16.20	56.06	0.56	--	PEAK	2	17625.00	47.54	68.20	-20.66	44.33	39.35	19.97	56.90	0.79	--
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																							
1	11750.00	47.19	74.00	-26.81	47.89	38.60	16.20	56.06	0.56	--	PEAK																																																						
2	17625.00	47.54	68.20	-20.66	44.33	39.35	19.97	56.90	0.79	--	PEAK																																																						

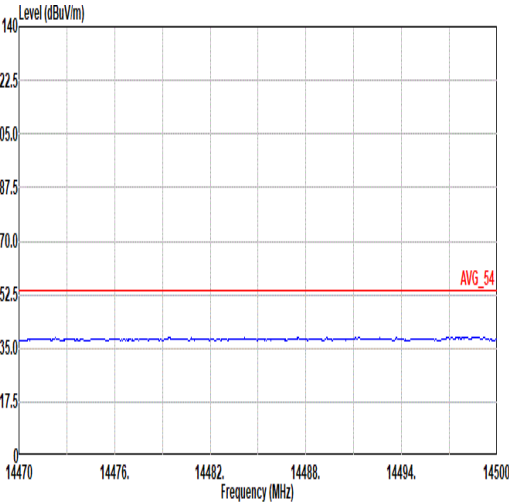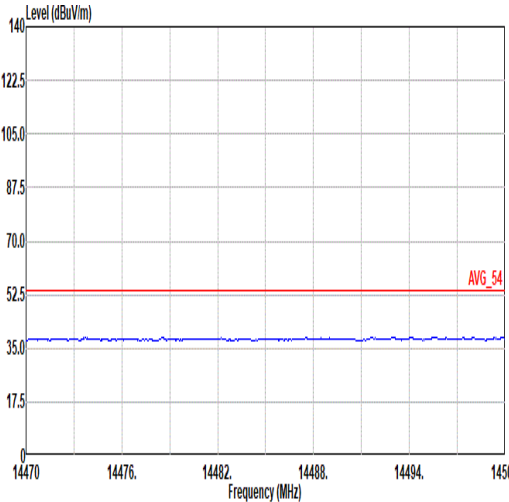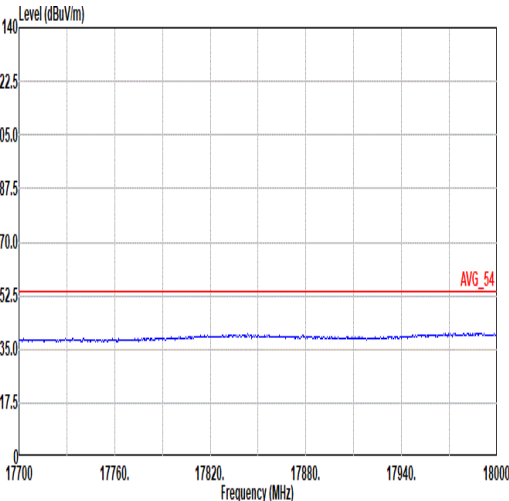
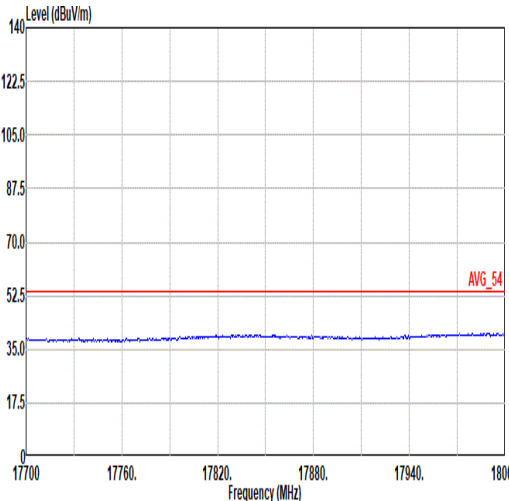


Mode	76	
	Harmonic	
	U-NII-4_5.725-5.85_802.11be EHT40_CH175_Full RU_5875MHz	
ANT	3+4	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	 Site : 03CH13-HY Condition: AVG_54 3m HORN_91200_1326 HORIZONTAL Mode : 76	 Site : 03CH13-HY Condition: AVG_54 3m HORN_91200_1326 VERTICAL Mode : 76
	 Site : 03CH13-HY Condition: AVG_54 3m HORN_91200_1326 HORIZONTAL Mode : 76	 Site : 03CH13-HY Condition: AVG_54 3m HORN_91200_1326 VERTICAL Mode : 76

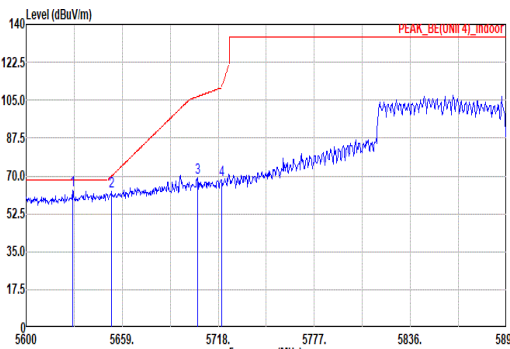
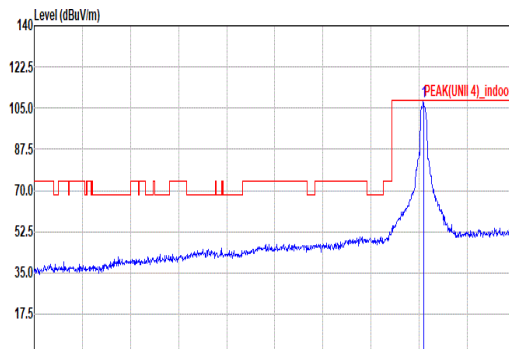
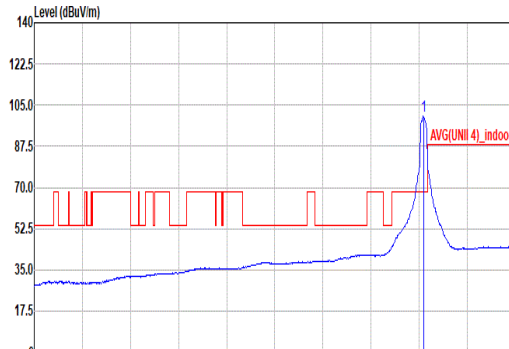


Mode	77																																																																																																																																										
	Band Edge - L																																																																																																																																										
	U-NII-4_5.725-5.85_802.11be EHT80_CH171_Full RU_5855MHz																																																																																																																																										
ANT	3+4																																																																																																																																										
Pol.	Horizontal						Fundamental																																																																																																																																				
Peak	 Site : 03CH13-HY Condition: PEAK_BE(UNII 4)_indoor 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5628.62</td><td>63.24</td><td>68.20</td><td>-4.96</td><td>56.64</td><td>33.11</td><td>10.35</td><td>36.86</td><td>0.00</td><td>100</td><td>322</td><td>PEAK</td></tr><tr><td>2</td><td>5652.22</td><td>62.63</td><td>69.85</td><td>-7.22</td><td>55.90</td><td>33.22</td><td>10.38</td><td>36.87</td><td>0.00</td><td>100</td><td>322</td><td>PEAK</td></tr><tr><td>3</td><td>5705.32</td><td>68.95</td><td>106.69</td><td>-37.74</td><td>61.78</td><td>33.63</td><td>10.44</td><td>36.90</td><td>0.00</td><td>100</td><td>322</td><td>PEAK</td></tr><tr><td>4</td><td>5720.07</td><td>68.24</td><td>110.95</td><td>-42.71</td><td>60.98</td><td>33.72</td><td>10.45</td><td>36.91</td><td>0.00</td><td>100</td><td>322</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5628.62	63.24	68.20	-4.96	56.64	33.11	10.35	36.86	0.00	100	322	PEAK	2	5652.22	62.63	69.85	-7.22	55.90	33.22	10.38	36.87	0.00	100	322	PEAK	3	5705.32	68.95	106.69	-37.74	61.78	33.63	10.44	36.90	0.00	100	322	PEAK	4	5720.07	68.24	110.95	-42.71	60.98	33.72	10.45	36.91	0.00	100	322	PEAK	 Site : 03CH13-HY Condition: PEAK(UNII 4)_indoor 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5855.00</td><td>107.60</td><td>-----</td><td>-----</td><td>99.72</td><td>34.30</td><td>10.56</td><td>36.98</td><td>0.00</td><td>100</td><td>322</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5855.00	107.60	-----	-----	99.72	34.30	10.56	36.98	0.00	100	322	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																	
1	5628.62	63.24	68.20	-4.96	56.64	33.11	10.35	36.86	0.00	100	322	PEAK																																																																																																																															
2	5652.22	62.63	69.85	-7.22	55.90	33.22	10.38	36.87	0.00	100	322	PEAK																																																																																																																															
3	5705.32	68.95	106.69	-37.74	61.78	33.63	10.44	36.90	0.00	100	322	PEAK																																																																																																																															
4	5720.07	68.24	110.95	-42.71	60.98	33.72	10.45	36.91	0.00	100	322	PEAK																																																																																																																															
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																	
1	5855.00	107.60	-----	-----	99.72	34.30	10.56	36.98	0.00	100	322	PEAK																																																																																																																															
Avg	Blank						 Site : 03CH13-HY Condition: AVG(UNII 4)_indoor 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000kHz VBW:1.500kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5855.00</td><td>100.37</td><td>-----</td><td>-----</td><td>92.50</td><td>34.28</td><td>10.56</td><td>36.97</td><td>0.00</td><td>100</td><td>322</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5855.00	100.37	-----	-----	92.50	34.28	10.56	36.97	0.00	100	322	AVERAGE																																																																																			
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																	
1	5855.00	100.37	-----	-----	92.50	34.28	10.56	36.97	0.00	100	322	AVERAGE																																																																																																																															

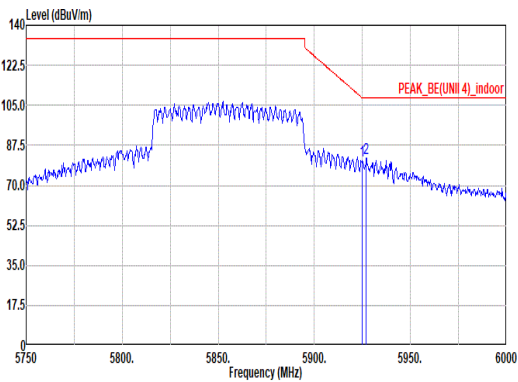
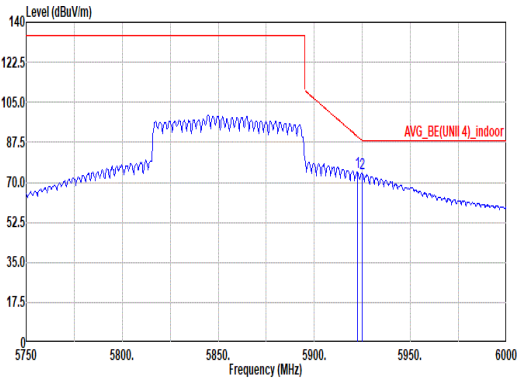


Mode	77																																																			
	Band Edge - R																																																			
	U-NII-4_5.725-5.85_802.11be EHT80_CH171_Full RU_5855MHz																																																			
ANT	3+4																																																			
Pol.	Horizontal	Fundamental																																																		
Peak	 Site : 03CH13-HY Condition: PEAK_BE(UNII 4)_indoor 3m HORN_91280_1326 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 5925.00</td><td>80.67</td><td>108.20 -27.53</td><td>72.60</td><td>34.50</td><td>10.59</td><td>37.02</td><td>0.00</td><td>100</td><td>322 PEAK</td></tr><tr><td>2 5927.00</td><td>81.84</td><td>108.20 -26.36</td><td>73.77</td><td>34.50</td><td>10.59</td><td>37.02</td><td>0.00</td><td>100</td><td>322 PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm	deg	1 5925.00	80.67	108.20 -27.53	72.60	34.50	10.59	37.02	0.00	100	322 PEAK	2 5927.00	81.84	108.20 -26.36	73.77	34.50	10.59	37.02	0.00	100	322 PEAK	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																											
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																														
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm	deg																																											
1 5925.00	80.67	108.20 -27.53	72.60	34.50	10.59	37.02	0.00	100	322 PEAK																																											
2 5927.00	81.84	108.20 -26.36	73.77	34.50	10.59	37.02	0.00	100	322 PEAK																																											
Avg	 Site : 03CH13-HY Condition: AVG_BE(UNII 4)_indoor 3m HORN_91280_1326 HORIZONTAL : RBW:1000.000kHz VBW:1.500kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 5922.50</td><td>74.35</td><td>90.03 -15.68</td><td>66.28</td><td>34.50</td><td>10.59</td><td>37.02</td><td>0.00</td><td>100</td><td>322 AVERAGE</td></tr><tr><td>2 5925.00</td><td>73.79</td><td>88.20 -14.41</td><td>65.72</td><td>34.50</td><td>10.59</td><td>37.02</td><td>0.00</td><td>100</td><td>322 AVERAGE</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm	deg	1 5922.50	74.35	90.03 -15.68	66.28	34.50	10.59	37.02	0.00	100	322 AVERAGE	2 5925.00	73.79	88.20 -14.41	65.72	34.50	10.59	37.02	0.00	100	322 AVERAGE	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																											
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																														
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm	deg																																											
1 5922.50	74.35	90.03 -15.68	66.28	34.50	10.59	37.02	0.00	100	322 AVERAGE																																											
2 5925.00	73.79	88.20 -14.41	65.72	34.50	10.59	37.02	0.00	100	322 AVERAGE																																											

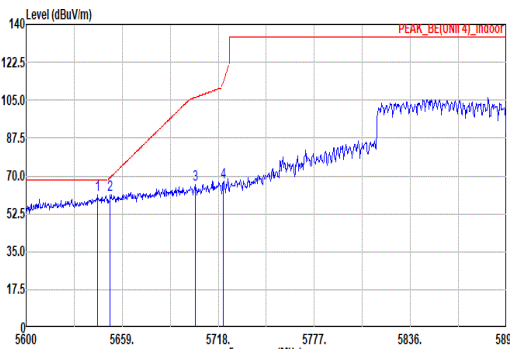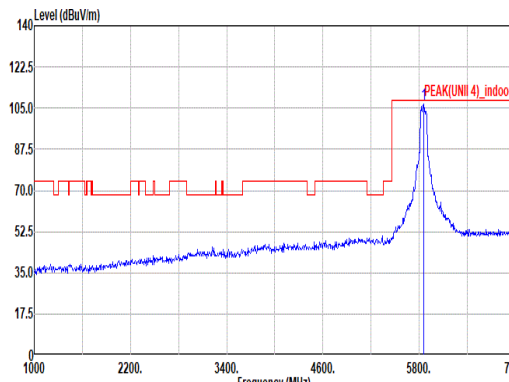
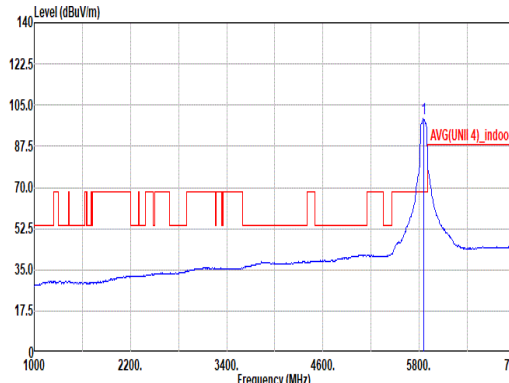


Mode	77																																																																																																																																										
	Band Edge - L																																																																																																																																										
	U-NII-4_5.725-5.85_802.11be EHT80_CH171_Full RU_5855MHz																																																																																																																																										
ANT	3+4																																																																																																																																										
Pol.	Vertical						Fundamental																																																																																																																																				
Peak	 Level (dBuV/m) Frequency (MHz) PEAK_BE(UNII 4)_indoor Site : 03CH13-HY Condition: PEAK_BE(UNII 4)_indoor 3m HORN_91200_1326 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5643.96</td><td>61.32</td><td>68.20</td><td>-6.88</td><td>54.64</td><td>33.18</td><td>10.37</td><td>36.87</td><td>0.00</td><td>300</td><td>120</td><td>PEAK</td></tr><tr><td>2</td><td>5651.63</td><td>61.25</td><td>69.41</td><td>-8.16</td><td>54.53</td><td>33.21</td><td>10.38</td><td>36.87</td><td>0.00</td><td>300</td><td>120</td><td>PEAK</td></tr><tr><td>3</td><td>5703.84</td><td>66.14</td><td>106.28</td><td>-40.14</td><td>58.99</td><td>33.62</td><td>10.43</td><td>36.90</td><td>0.00</td><td>300</td><td>120</td><td>PEAK</td></tr><tr><td>4</td><td>5720.95</td><td>66.85</td><td>112.97</td><td>-46.12</td><td>59.58</td><td>33.73</td><td>10.45</td><td>36.91</td><td>0.00</td><td>300</td><td>120</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5643.96	61.32	68.20	-6.88	54.64	33.18	10.37	36.87	0.00	300	120	PEAK	2	5651.63	61.25	69.41	-8.16	54.53	33.21	10.38	36.87	0.00	300	120	PEAK	3	5703.84	66.14	106.28	-40.14	58.99	33.62	10.43	36.90	0.00	300	120	PEAK	4	5720.95	66.85	112.97	-46.12	59.58	33.73	10.45	36.91	0.00	300	120	PEAK	 Level (dBuV/m) Frequency (MHz) PEAK(UNII 4)_indoor Site : 03CH13-HY Condition: PEAK(UNII 4)_indoor 3m HORN_91200_1326 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5855.00</td><td>106.46</td><td>-----</td><td>-----</td><td>98.54</td><td>34.34</td><td>10.56</td><td>36.98</td><td>0.00</td><td>300</td><td>120</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5855.00	106.46	-----	-----	98.54	34.34	10.56	36.98	0.00	300	120	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																	
1	5643.96	61.32	68.20	-6.88	54.64	33.18	10.37	36.87	0.00	300	120	PEAK																																																																																																																															
2	5651.63	61.25	69.41	-8.16	54.53	33.21	10.38	36.87	0.00	300	120	PEAK																																																																																																																															
3	5703.84	66.14	106.28	-40.14	58.99	33.62	10.43	36.90	0.00	300	120	PEAK																																																																																																																															
4	5720.95	66.85	112.97	-46.12	59.58	33.73	10.45	36.91	0.00	300	120	PEAK																																																																																																																															
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																	
1	5855.00	106.46	-----	-----	98.54	34.34	10.56	36.98	0.00	300	120	PEAK																																																																																																																															
Avg	Blank						 Level (dBuV/m) Frequency (MHz) AVG(UNII 4)_indoor Site : 03CH13-HY Condition: AVG(UNII 4)_indoor 3m HORN_91200_1326 VERTICAL : RBW:1000.000kHz VBW:1.500kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5855.00</td><td>99.57</td><td>-----</td><td>-----</td><td>91.69</td><td>34.30</td><td>10.56</td><td>36.98</td><td>0.00</td><td>300</td><td>120</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5855.00	99.57	-----	-----	91.69	34.30	10.56	36.98	0.00	300	120	AVERAGE																																																																																			
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																	
1	5855.00	99.57	-----	-----	91.69	34.30	10.56	36.98	0.00	300	120	AVERAGE																																																																																																																															



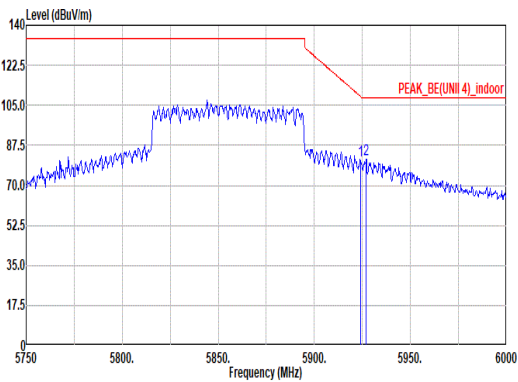
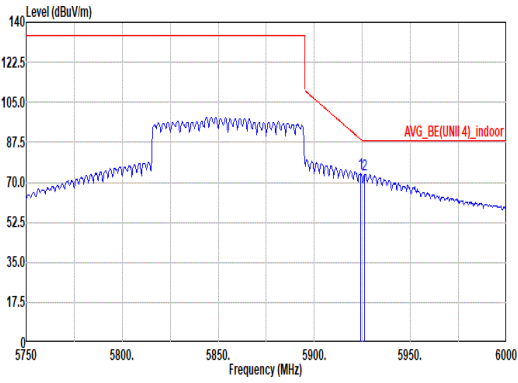


	77																																																			
Mode	Band Edge - R																																																			
	U-NII-4_5.725-5.85_802.11be EHT80_CH171_Full RU_5855MHz																																																			
ANT	3+4																																																			
Pol.	Vertical	Fundamental																																																		
Peak	 Site : 03CH13-HY Condition: PEAK_BE(UNII 4)_indoor 3m HORN_91280_1326 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr><tr><td>1</td><td>5924.25</td><td>81.02</td><td>108.75</td><td>-27.73</td><td>72.95</td><td>34.50</td><td>10.59</td><td>37.02</td><td>0.00 300 120 PEAK</td></tr><tr><td>2</td><td>5927.00</td><td>81.46</td><td>108.20</td><td>-26.74</td><td>73.39</td><td>34.50</td><td>10.59</td><td>37.02</td><td>0.00 300 120 PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1	5924.25	81.02	108.75	-27.73	72.95	34.50	10.59	37.02	0.00 300 120 PEAK	2	5927.00	81.46	108.20	-26.74	73.39	34.50	10.59	37.02	0.00 300 120 PEAK	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																											
1	5924.25	81.02	108.75	-27.73	72.95	34.50	10.59	37.02	0.00 300 120 PEAK																																											
2	5927.00	81.46	108.20	-26.74	73.39	34.50	10.59	37.02	0.00 300 120 PEAK																																											
Avg	 Site : 03CH13-HY Condition: AVG_BE(UNII 4)_indoor 3m HORN_91280_1326 VERTICAL : RBW:1000.000kHz VBW:1.500kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr><tr><td>1</td><td>5924.00</td><td>73.88</td><td>88.93</td><td>-15.05</td><td>65.81</td><td>34.50</td><td>10.59</td><td>37.02</td><td>0.00 300 120 AVERAGE</td></tr><tr><td>2</td><td>5926.00</td><td>73.53</td><td>88.20</td><td>-14.67</td><td>65.46</td><td>34.50</td><td>10.59</td><td>37.02</td><td>0.00 300 120 AVERAGE</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1	5924.00	73.88	88.93	-15.05	65.81	34.50	10.59	37.02	0.00 300 120 AVERAGE	2	5926.00	73.53	88.20	-14.67	65.46	34.50	10.59	37.02	0.00 300 120 AVERAGE	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																											
1	5924.00	73.88	88.93	-15.05	65.81	34.50	10.59	37.02	0.00 300 120 AVERAGE																																											
2	5926.00	73.53	88.20	-14.67	65.46	34.50	10.59	37.02	0.00 300 120 AVERAGE																																											


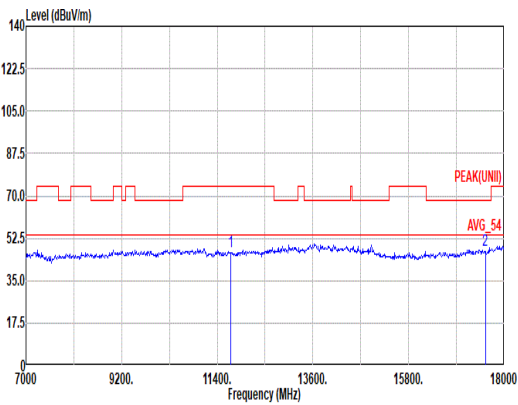
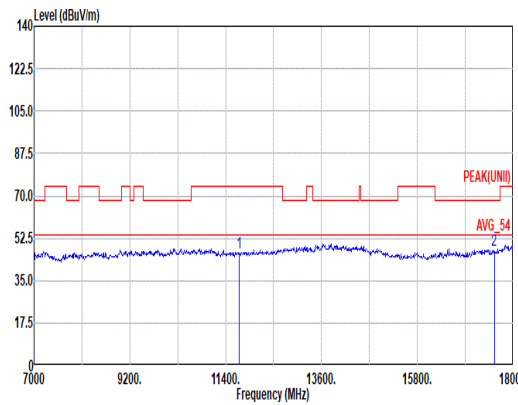


Mode	77																																																																																																																								
	Harmonic																																																																																																																								
	U-NII-4_5.725-5.85_802.11be EHT80_CH171_Full RU_5855MHz																																																																																																																								
ANT	3+4																																																																																																																								
Pol.	Horizontal						Vertical																																																																																																																		
Peak Avg																																																																																																																									
	Site : 03CH13-HY Condition: PEAK(UNII) 3m HORN_91200_1326 HORIZONTAL Mode : 77 <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>11710.00</td><td>46.84</td><td>74.00</td><td>-27.16</td><td>47.55</td><td>38.60</td><td>16.18</td><td>56.05</td><td>0.56</td><td>--</td><td>PEAK</td></tr><tr><td>2</td><td>17565.00</td><td>47.41</td><td>68.20</td><td>-20.79</td><td>44.40</td><td>39.23</td><td>19.92</td><td>56.93</td><td>0.79</td><td>--</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11710.00	46.84	74.00	-27.16	47.55	38.60	16.18	56.05	0.56	--	PEAK	2	17565.00	47.41	68.20	-20.79	44.40	39.23	19.92	56.93	0.79	--	PEAK	Site : 03CH13-HY Condition: PEAK(UNII) 3m HORN_91200_1326 VERTICAL Mode : 77 <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>11710.00</td><td>46.60</td><td>74.00</td><td>-27.40</td><td>47.31</td><td>38.60</td><td>16.18</td><td>56.05</td><td>0.56</td><td>--</td><td>PEAK</td></tr><tr><td>2</td><td>17565.00</td><td>47.74</td><td>68.20</td><td>-20.46</td><td>44.73</td><td>39.23</td><td>19.92</td><td>56.93</td><td>0.79</td><td>--</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11710.00	46.60	74.00	-27.40	47.31	38.60	16.18	56.05	0.56	--	PEAK	2	17565.00	47.74	68.20	-20.46	44.73	39.23	19.92	56.93	0.79	--
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																															
1	11710.00	46.84	74.00	-27.16	47.55	38.60	16.18	56.05	0.56	--	PEAK																																																																																																														
2	17565.00	47.41	68.20	-20.79	44.40	39.23	19.92	56.93	0.79	--	PEAK																																																																																																														
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																															
1	11710.00	46.60	74.00	-27.40	47.31	38.60	16.18	56.05	0.56	--	PEAK																																																																																																														
2	17565.00	47.74	68.20	-20.46	44.73	39.23	19.92	56.93	0.79	--	PEAK																																																																																																														

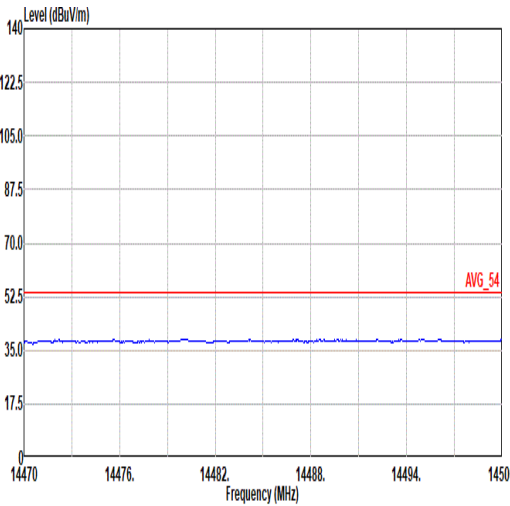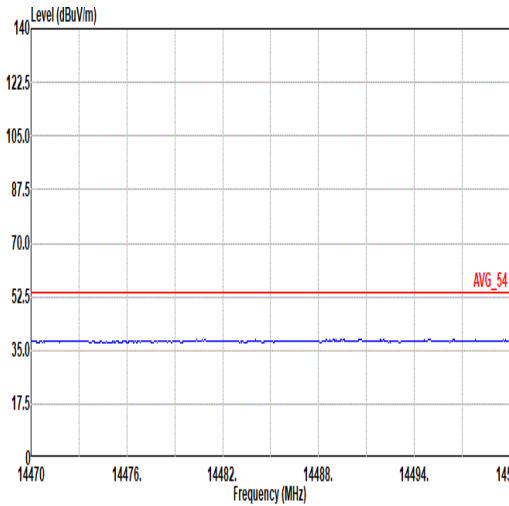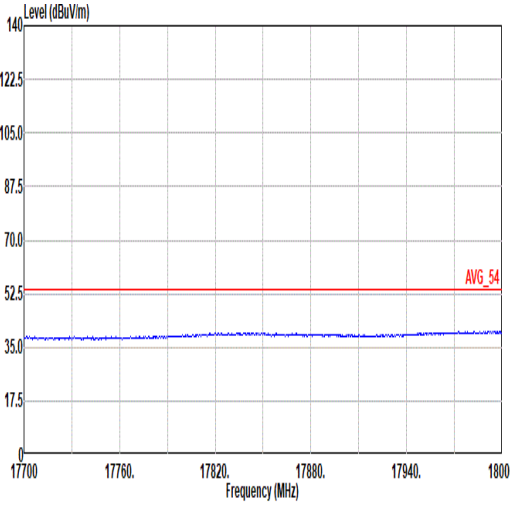
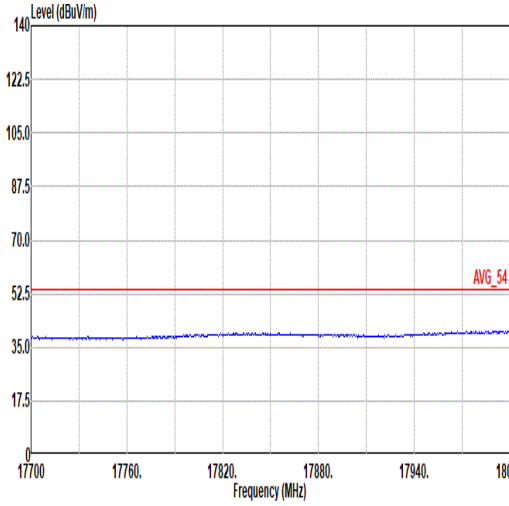


Mode	77	
	Harmonic	
	U-NII-4_5.725-5.85_802.11be EHT80_CH171_Full RU_5855MHz	
ANT	3+4	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	 Site : 03CH13-HY Condition: AVG_54 3m HORN_91200_1326 HORIZONTAL Mode : 77	 Site : 03CH13-HY Condition: AVG_54 3m HORN_91200_1326 VERTICAL Mode : 77
	 Site : 03CH13-HY Condition: AVG_54 3m HORN_91200_1326 HORIZONTAL Mode : 77	 Site : 03CH13-HY Condition: AVG_54 3m HORN_91200_1326 VERTICAL Mode : 77

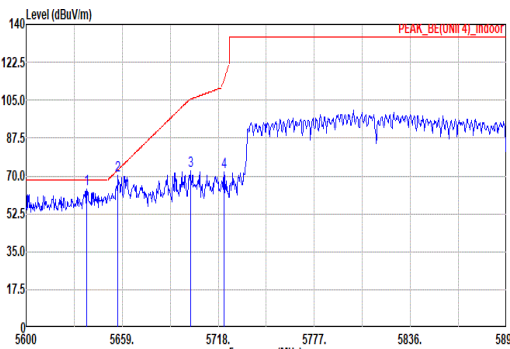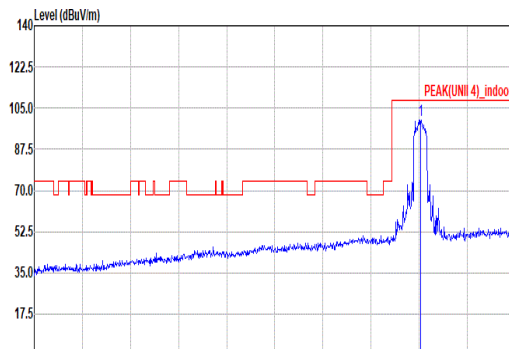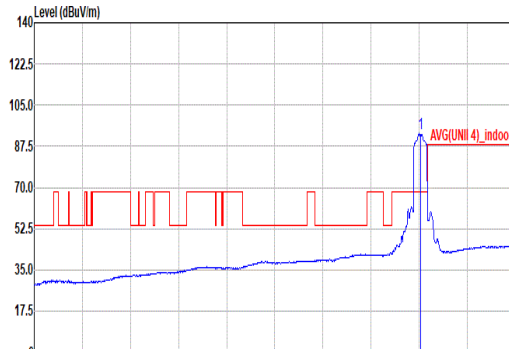

Mode	78																																																																																																																																										
	Band Edge - L																																																																																																																																										
	U-NII-4_5.725-5.85_802.11be EHT160_CH163_Full RU_5815MHz																																																																																																																																										
ANT	3+4																																																																																																																																										
Pol.	Horizontal						Fundamental																																																																																																																																				
Peak	 Site : 03CH13-HY Condition: PEAK_BE(UNII 4)_indoor 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5637.17</td><td>63.99</td><td>68.20</td><td>-4.21</td><td>57.34</td><td>33.15</td><td>10.36</td><td>36.86</td><td>0.00</td><td>100</td><td>322</td><td>PEAK</td></tr><tr><td>2</td><td>5656.35</td><td>70.21</td><td>72.91</td><td>-2.70</td><td>63.45</td><td>33.25</td><td>10.38</td><td>36.87</td><td>0.00</td><td>100</td><td>322</td><td>PEAK</td></tr><tr><td>3</td><td>5700.89</td><td>72.63</td><td>105.45</td><td>-32.82</td><td>65.49</td><td>33.61</td><td>10.43</td><td>36.90</td><td>0.00</td><td>100</td><td>322</td><td>PEAK</td></tr><tr><td>4</td><td>5721.54</td><td>71.61</td><td>114.31</td><td>-42.70</td><td>64.34</td><td>33.73</td><td>10.45</td><td>36.91</td><td>0.00</td><td>100</td><td>322</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5637.17	63.99	68.20	-4.21	57.34	33.15	10.36	36.86	0.00	100	322	PEAK	2	5656.35	70.21	72.91	-2.70	63.45	33.25	10.38	36.87	0.00	100	322	PEAK	3	5700.89	72.63	105.45	-32.82	65.49	33.61	10.43	36.90	0.00	100	322	PEAK	4	5721.54	71.61	114.31	-42.70	64.34	33.73	10.45	36.91	0.00	100	322	PEAK	 Site : 03CH13-HY Condition: PEAK(UNII 4)_indoor 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5815.00</td><td>100.09</td><td>-----</td><td>-----</td><td>92.25</td><td>34.25</td><td>10.55</td><td>36.96</td><td>0.00</td><td>100</td><td>322</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5815.00	100.09	-----	-----	92.25	34.25	10.55	36.96	0.00	100	322	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																	
1	5637.17	63.99	68.20	-4.21	57.34	33.15	10.36	36.86	0.00	100	322	PEAK																																																																																																																															
2	5656.35	70.21	72.91	-2.70	63.45	33.25	10.38	36.87	0.00	100	322	PEAK																																																																																																																															
3	5700.89	72.63	105.45	-32.82	65.49	33.61	10.43	36.90	0.00	100	322	PEAK																																																																																																																															
4	5721.54	71.61	114.31	-42.70	64.34	33.73	10.45	36.91	0.00	100	322	PEAK																																																																																																																															
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																	
1	5815.00	100.09	-----	-----	92.25	34.25	10.55	36.96	0.00	100	322	PEAK																																																																																																																															
Avg	Blank						 Site : 03CH13-HY Condition: AVG(UNII 4)_indoor 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000kHz VBW:2.700kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5815.00</td><td>92.80</td><td>-----</td><td>-----</td><td>85.06</td><td>34.16</td><td>10.53</td><td>36.95</td><td>0.00</td><td>100</td><td>322</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5815.00	92.80	-----	-----	85.06	34.16	10.53	36.95	0.00	100	322	AVERAGE																																																																																			
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																	
1	5815.00	92.80	-----	-----	85.06	34.16	10.53	36.95	0.00	100	322	AVERAGE																																																																																																																															

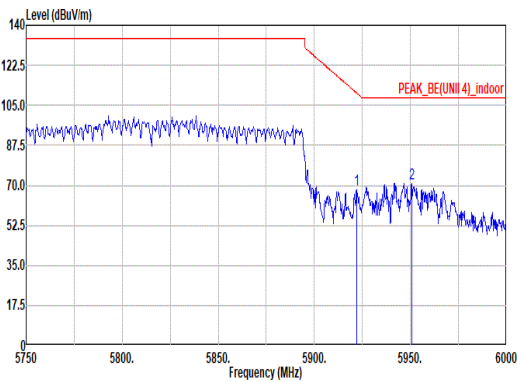
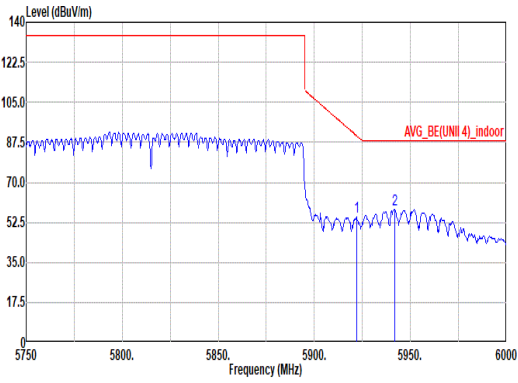


Mode	78																																																			
	Band Edge - R																																																			
	U-NII-4_5.725-5.85_802.11be EHT160_CH163_Full RU_5815MHz																																																			
ANT	3+4																																																			
Pol.	Horizontal	Fundamental																																																		
Peak	 Site : 03CH13-HY Condition: PEAK_BE(UNII 4)_indoor 3m HORN_91280_1326 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr><tr><td>1</td><td>5922.00</td><td>68.05</td><td>110.39</td><td>-42.34</td><td>59.98</td><td>34.50</td><td>10.59</td><td>37.02</td><td>0.00 100 322 PEAK</td></tr><tr><td>2</td><td>5950.75</td><td>71.04</td><td>108.20</td><td>-37.16</td><td>62.97</td><td>34.50</td><td>10.60</td><td>37.03</td><td>0.00 100 322 PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1	5922.00	68.05	110.39	-42.34	59.98	34.50	10.59	37.02	0.00 100 322 PEAK	2	5950.75	71.04	108.20	-37.16	62.97	34.50	10.60	37.03	0.00 100 322 PEAK	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																											
1	5922.00	68.05	110.39	-42.34	59.98	34.50	10.59	37.02	0.00 100 322 PEAK																																											
2	5950.75	71.04	108.20	-37.16	62.97	34.50	10.60	37.03	0.00 100 322 PEAK																																											
Avg	 Site : 03CH13-HY Condition: AVG_BE(UNII 4)_indoor 3m HORN_91280_1326 HORIZONTAL : RBW:1000.000kHz VBW:2.700kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr><tr><td>1</td><td>5922.00</td><td>54.71</td><td>90.39</td><td>-35.68</td><td>46.64</td><td>34.50</td><td>10.59</td><td>37.02</td><td>0.00 100 322 AVERAGE</td></tr><tr><td>2</td><td>5941.75</td><td>58.31</td><td>88.20</td><td>-29.89</td><td>50.24</td><td>34.50</td><td>10.60</td><td>37.03</td><td>0.00 100 322 AVERAGE</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1	5922.00	54.71	90.39	-35.68	46.64	34.50	10.59	37.02	0.00 100 322 AVERAGE	2	5941.75	58.31	88.20	-29.89	50.24	34.50	10.60	37.03	0.00 100 322 AVERAGE	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																											
1	5922.00	54.71	90.39	-35.68	46.64	34.50	10.59	37.02	0.00 100 322 AVERAGE																																											
2	5941.75	58.31	88.20	-29.89	50.24	34.50	10.60	37.03	0.00 100 322 AVERAGE																																											





Mode	78																																																																																																																																								
	Band Edge - L																																																																																																																																								
	U-NII-4_5.725-5.85_802.11be EHT160_CH163_Full RU_5815MHz																																																																																																																																								
ANT	3+4																																																																																																																																								
Pol.	Vertical						Fundamental																																																																																																																																		
Peak	Site : 03CH13-HY Condition: PEAK_BE(UNII 4)_indoor 3m HORN_91200_1326 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5638.94</td><td>64.41</td><td>68.20</td><td>-3.79</td><td>57.76</td><td>33.16</td><td>10.36</td><td>36.87</td><td>0.00</td><td>300</td><td>123</td><td>PEAK</td></tr><tr><td>2</td><td>5658.12</td><td>69.74</td><td>74.23</td><td>-4.49</td><td>62.98</td><td>33.26</td><td>10.38</td><td>36.88</td><td>0.00</td><td>300</td><td>123</td><td>PEAK</td></tr><tr><td>3</td><td>5704.14</td><td>71.21</td><td>106.36</td><td>-35.15</td><td>64.06</td><td>33.62</td><td>10.43</td><td>36.90</td><td>0.00</td><td>300</td><td>123</td><td>PEAK</td></tr><tr><td>4</td><td>5728.07</td><td>68.15</td><td>110.95</td><td>-42.80</td><td>60.89</td><td>33.72</td><td>10.45</td><td>36.91</td><td>0.00</td><td>300</td><td>123</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5638.94	64.41	68.20	-3.79	57.76	33.16	10.36	36.87	0.00	300	123	PEAK	2	5658.12	69.74	74.23	-4.49	62.98	33.26	10.38	36.88	0.00	300	123	PEAK	3	5704.14	71.21	106.36	-35.15	64.06	33.62	10.43	36.90	0.00	300	123	PEAK	4	5728.07	68.15	110.95	-42.80	60.89	33.72	10.45	36.91	0.00	300	123	PEAK	Site : 03CH13-HY Condition: PEAK(UNII 4)_indoor 3m HORN_91200_1326 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5815.00</td><td>98.83</td><td>-----</td><td>-----</td><td>90.99</td><td>34.26</td><td>10.55</td><td>36.97</td><td>0.00</td><td>300</td><td>123</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5815.00	98.83	-----	-----	90.99	34.26	10.55	36.97	0.00	300	123	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																
1	5638.94	64.41	68.20	-3.79	57.76	33.16	10.36	36.87	0.00	300	123	PEAK																																																																																																																													
2	5658.12	69.74	74.23	-4.49	62.98	33.26	10.38	36.88	0.00	300	123	PEAK																																																																																																																													
3	5704.14	71.21	106.36	-35.15	64.06	33.62	10.43	36.90	0.00	300	123	PEAK																																																																																																																													
4	5728.07	68.15	110.95	-42.80	60.89	33.72	10.45	36.91	0.00	300	123	PEAK																																																																																																																													
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																
1	5815.00	98.83	-----	-----	90.99	34.26	10.55	36.97	0.00	300	123	PEAK																																																																																																																													
Avg	Blank						Site : 03CH13-HY Condition: AVG(UNII 4)_indoor 3m HORN_91200_1326 VERTICAL : RBW:1000.000kHz VBW:2.700kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5815.00</td><td>92.10</td><td>-----</td><td>-----</td><td>84.36</td><td>34.16</td><td>10.53</td><td>36.95</td><td>0.00</td><td>300</td><td>123</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5815.00	92.10	-----	-----	84.36	34.16	10.53	36.95	0.00	300	123	AVERAGE																																																																																		
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																
1	5815.00	92.10	-----	-----	84.36	34.16	10.53	36.95	0.00	300	123	AVERAGE																																																																																																																													



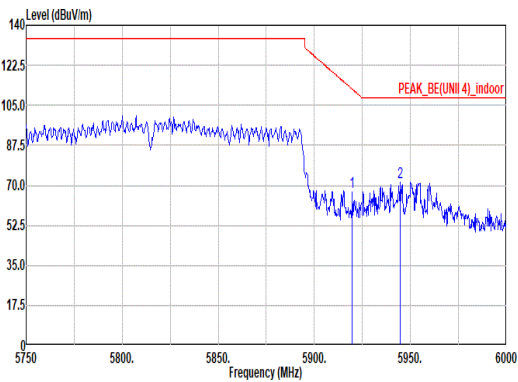
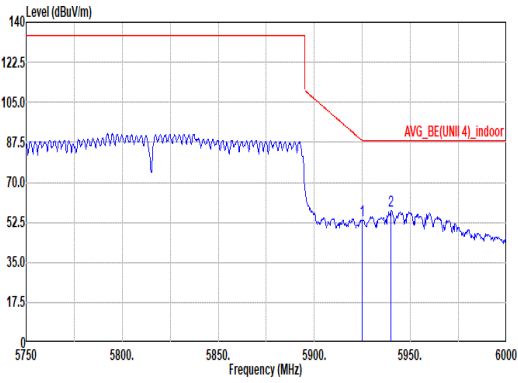


Mode	78																																																			
	Band Edge - R																																																			
	U-NII-4_5.725-5.85_802.11be EHT160_CH163_Full RU_5815MHz																																																			
ANT	3+4																																																			
Pol.	Vertical	Fundamental																																																		
Peak	 Site : 03CH13-HY Condition: PEAK_BE(UNII 4)_indoor 3m HORN_91280_1326 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5919.75</td><td>67.18</td><td>112.04</td><td>-44.86</td><td>59.11</td><td>34.50</td><td>10.59</td><td>37.02</td><td>0.00 300 123 PEAK</td></tr><tr><td>2</td><td>5944.50</td><td>71.13</td><td>108.20</td><td>-37.07</td><td>63.06</td><td>34.50</td><td>10.60</td><td>37.03</td><td>0.00 300 123 PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5919.75	67.18	112.04	-44.86	59.11	34.50	10.59	37.02	0.00 300 123 PEAK	2	5944.50	71.13	108.20	-37.07	63.06	34.50	10.60	37.03	0.00 300 123 PEAK	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																											
1	5919.75	67.18	112.04	-44.86	59.11	34.50	10.59	37.02	0.00 300 123 PEAK																																											
2	5944.50	71.13	108.20	-37.07	63.06	34.50	10.60	37.03	0.00 300 123 PEAK																																											
Avg	 Site : 03CH13-HY Condition: AVG_BE(UNII 4)_indoor 3m HORN_91280_1326 VERTICAL : RBW:1000.000kHz VBW:2.700kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5925.00</td><td>53.44</td><td>88.20</td><td>-34.76</td><td>45.37</td><td>34.50</td><td>10.59</td><td>37.02</td><td>0.00 300 123 AVERAGE</td></tr><tr><td>2</td><td>5940.00</td><td>57.77</td><td>88.20</td><td>-30.43</td><td>49.70</td><td>34.50</td><td>10.60</td><td>37.03</td><td>0.00 300 123 AVERAGE</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5925.00	53.44	88.20	-34.76	45.37	34.50	10.59	37.02	0.00 300 123 AVERAGE	2	5940.00	57.77	88.20	-30.43	49.70	34.50	10.60	37.03	0.00 300 123 AVERAGE	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																											
1	5925.00	53.44	88.20	-34.76	45.37	34.50	10.59	37.02	0.00 300 123 AVERAGE																																											
2	5940.00	57.77	88.20	-30.43	49.70	34.50	10.60	37.03	0.00 300 123 AVERAGE																																											

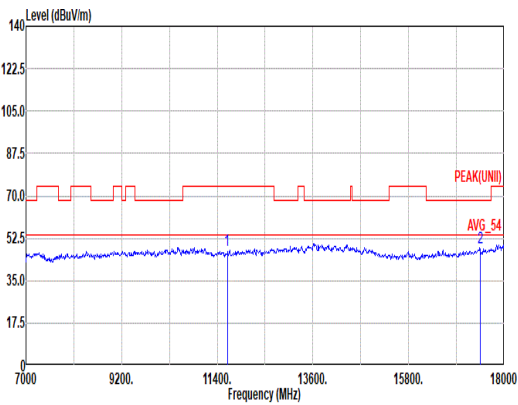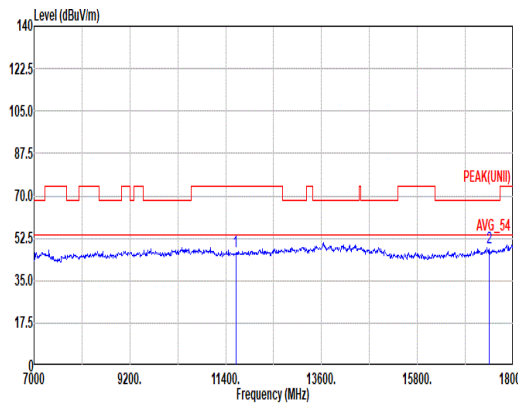

Mode	78																																																																																																																									
	Harmonic																																																																																																																									
	U-NII-4_5.725-5.85_802.11be EHT160_CH163_Full RU_5815MHz																																																																																																																									
ANT	3+4																																																																																																																									
Pol.	Horizontal						Vertical																																																																																																																			
Peak Avg																																																																																																																										
	Site : 03CH13-HY Condition: PEAK(UNII) 3m HORN_91200_1326 HORIZONTAL Mode : 78 <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>11630.00</td><td>47.31</td><td>74.00</td><td>-26.69</td><td>48.13</td><td>38.54</td><td>16.12</td><td>56.04</td><td>0.56</td><td>--</td><td>PEAK</td></tr><tr><td>2</td><td>17445.00</td><td>48.69</td><td>68.20</td><td>-19.51</td><td>46.13</td><td>38.82</td><td>19.83</td><td>56.88</td><td>0.79</td><td>--</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11630.00	47.31	74.00	-26.69	48.13	38.54	16.12	56.04	0.56	--	PEAK	2	17445.00	48.69	68.20	-19.51	46.13	38.82	19.83	56.88	0.79	--	PEAK	Site : 03CH13-HY Condition: PEAK(UNII) 3m HORN_91200_1326 VERTICAL Mode : 78 <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>11630.00</td><td>47.24</td><td>74.00</td><td>-26.76</td><td>48.06</td><td>38.54</td><td>16.12</td><td>56.04</td><td>0.56</td><td>--</td><td>PEAK</td></tr><tr><td>2</td><td>17445.00</td><td>48.61</td><td>68.20</td><td>-19.59</td><td>46.05</td><td>38.82</td><td>19.83</td><td>56.88</td><td>0.79</td><td>--</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	11630.00	47.24	74.00	-26.76	48.06	38.54	16.12	56.04	0.56	--	PEAK	2	17445.00	48.61	68.20	-19.59	46.05	38.82	19.83	56.88	0.79	--
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																
1	11630.00	47.31	74.00	-26.69	48.13	38.54	16.12	56.04	0.56	--	PEAK																																																																																																															
2	17445.00	48.69	68.20	-19.51	46.13	38.82	19.83	56.88	0.79	--	PEAK																																																																																																															
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																															
1	11630.00	47.24	74.00	-26.76	48.06	38.54	16.12	56.04	0.56	--	PEAK																																																																																																															
2	17445.00	48.61	68.20	-19.59	46.05	38.82	19.83	56.88	0.79	--	PEAK																																																																																																															

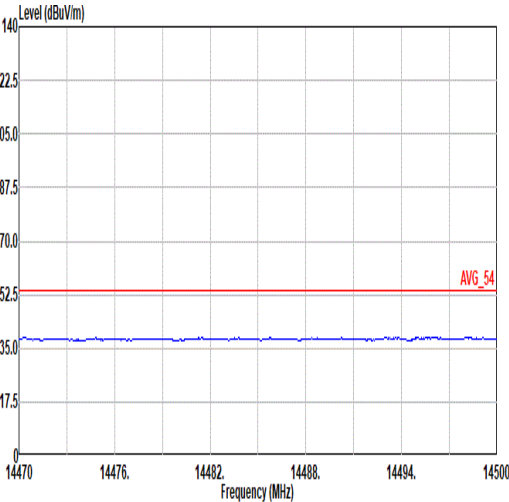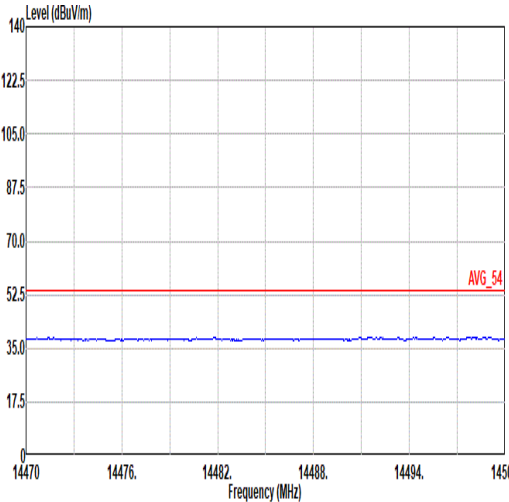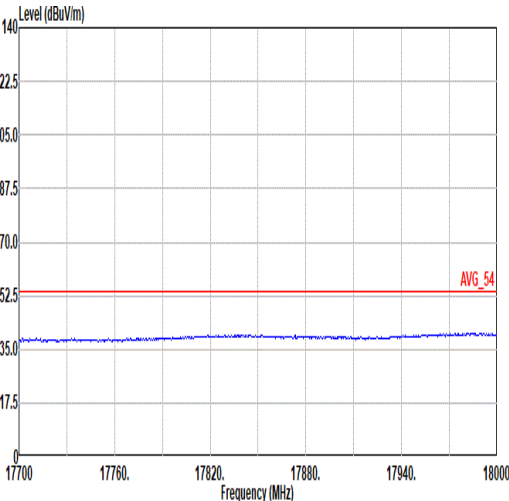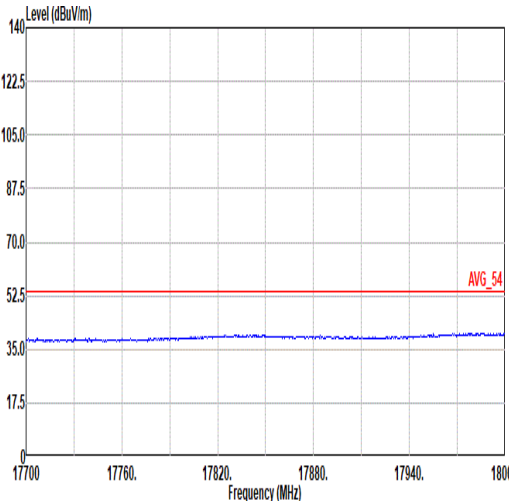

Mode	78	
	Harmonic	
	U-NII-4_5.725-5.85_802.11be EHT160_CH163_Full RU_5815MHz	
ANT	3+4	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	 Site : 03CH13-HY Condition: AVG_54 3m HORN_91200_1326 HORIZONTAL Mode : 78	 Site : 03CH13-HY Condition: AVG_54 3m HORN_91200_1326 VERTICAL Mode : 78
	 Site : 03CH13-HY Condition: AVG_54 3m HORN_91200_1326 HORIZONTAL Mode : 78	 Site : 03CH13-HY Condition: AVG_54 3m HORN_91200_1326 VERTICAL Mode : 78




Appendix D. Duty Cycle Plots

<For Radiated Spurious Emission test>


Antenna	Band	Duty Cycle(%)	T(us)	1/T(kHz)	VBW Setting
3+4	802.11a	100.00	-	-	10Hz
3+4	5GHz 802.11be EHT20 Full RU	98.97	-	-	10Hz
3+4	5GHz 802.11be EHT20 26 RU	97.89	1620	0.62	680Hz
3+4	5GHz 802.11be EHT20 52 RU	97.67	1465	0.68	750Hz
3+4	5GHz 802.11be EHT20 106 RU	97.39	1305	0.77	820Hz
3+4	5GHz 802.11be EHT40 Full RU	98.67	-	-	10Hz
3+4	5GHz 802.11be EHT80 Full RU	97.38	744	1.34	1.5kHz
3+4	5GHz 802.11be EHT160 Full RU	95.33	408	2.45	2.7kHz

MIMO <Ant. 3+4>

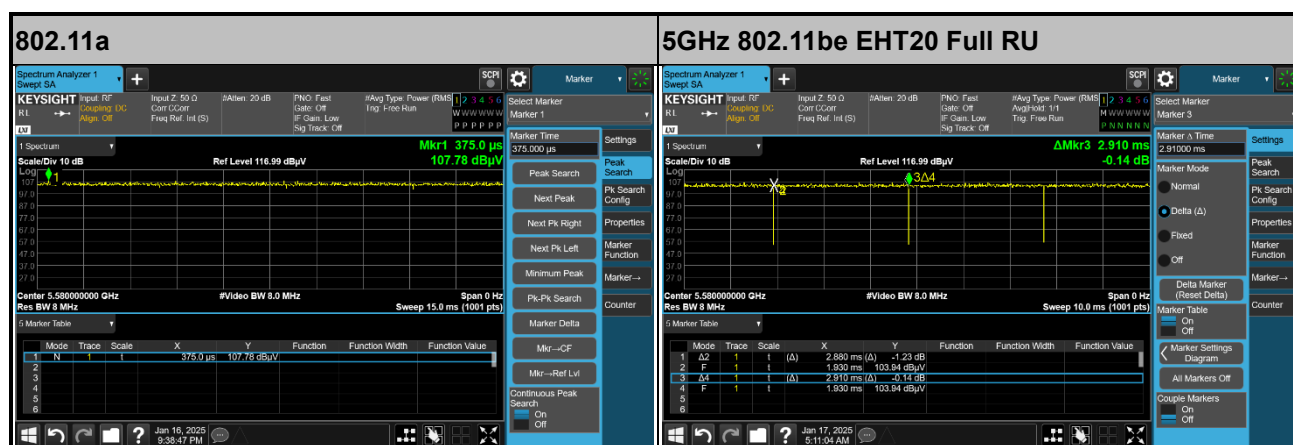





5GHz 802.11be EHT20 26 RU

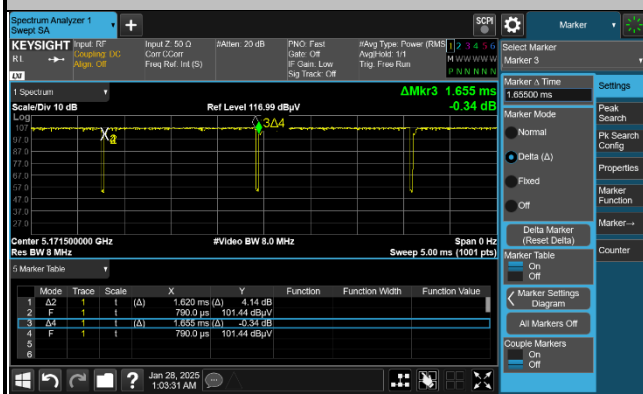


5GHz 802.11be EHT20 52 RU

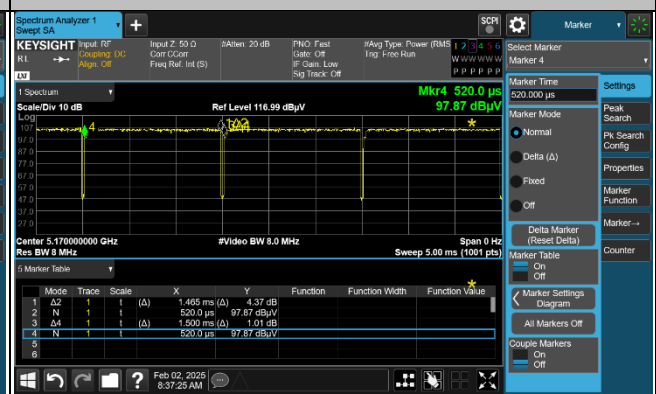


5GHz 802.11be EHT20 106 RU

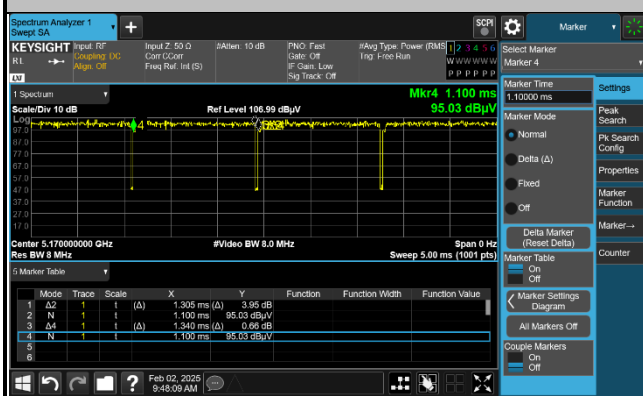


5GHz 802.11be EHT40 Full RU

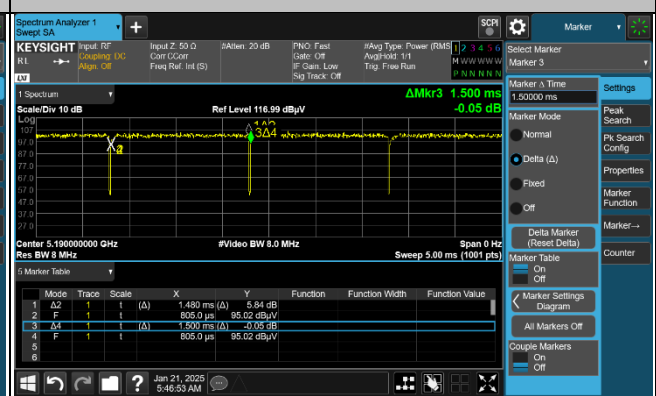

5GHz 802.11be EHT80 Full RU

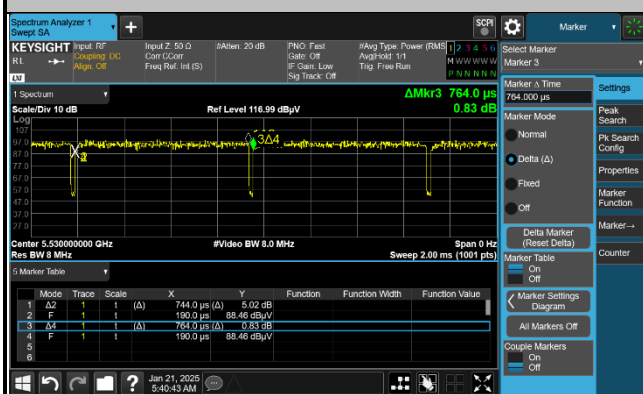

5GHz 802.11be EHT160 Full RU

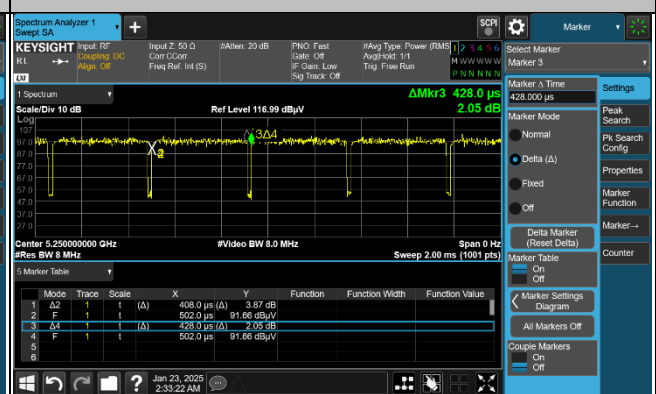

<For Conducted test>


Antenna	Band	Duty Cycle(%)	T(us)	Duty Factor(dB)
3+4	802.11a for Ant3	99.66	-	0.01
3+4	802.11a for Ant4	99.51	-	0.02
3+4	802.11be EHT20 Full RU for Ant3	99.31	-	0.03
3+4	802.11be EHT20 Full RU for Ant4	99.31	-	0.03
3+4	802.11be EHT20 26RU0 for Ant3	99.50	-	0.02
3+4	802.11be EHT20 26RU0 for Ant4	99.36	-	0.03
3+4	802.11be EHT20 52RU37 for Ant3	99.34	-	0.03
3+4	802.11be EHT20 52RU37 for Ant4	99.36	-	0.03
3+4	802.11be EHT20 106RU53 for Ant3	99.17	-	0.04
3+4	802.11be EHT20 106RU53 for Ant4	99.17	-	0.04
3+4	802.11be EHT20 52T+26T70 for Ant3	98.85	-	0.05
3+4	802.11be EHT20 52T+26T70 for Ant4	98.85	-	0.05
3+4	802.11be EHT20 106T+26T82 for Ant3	98.19	-	0.08
3+4	802.11be EHT20 106T+26T82 for Ant4	98.33	-	0.07
3+4	802.11be EHT40 Full RU for Ant3	98.80	-	0.05
3+4	802.11be EHT40 Full RU for Ant4	98.66	-	0.06
3+4	802.11be EHT80 Full RU for Ant3	97.25	744	0.12
3+4	802.11be EHT80 Full RU for Ant4	97.38	743	0.12
3+4	802.11be EHT80 Puncture20 for Ant3	97.96	1007	0.09
3+4	802.11be EHT80 Puncture20 for Ant4	98.06	-	0.09



Antenna	Band	Duty Cycle(%)	T(us)	Duty Factor(dB)
3+4	802.11be EHT160 Full RU for Ant3	95.09	407	0.22
3+4	802.11be EHT160 Full RU for Ant4	95.33	408	0.21
3+4	802.11be EHT160 Puncture20 for Ant3	95.85	462	0.18
3+4	802.11be EHT160 Puncture20 for Ant4	95.65	462	0.19
3+4	802.11be EHT160 Puncture40 for Ant3	96.17	527	0.17
3+4	802.11be EHT160 Puncture40 for Ant4	96.34	527	0.16

Note: The duty factor applied for each channel is verified before PSD measurement, there might be negligible factor delta between low, middle and high channels so table above is just for reference only.

MIMO <Ant. 3+4>

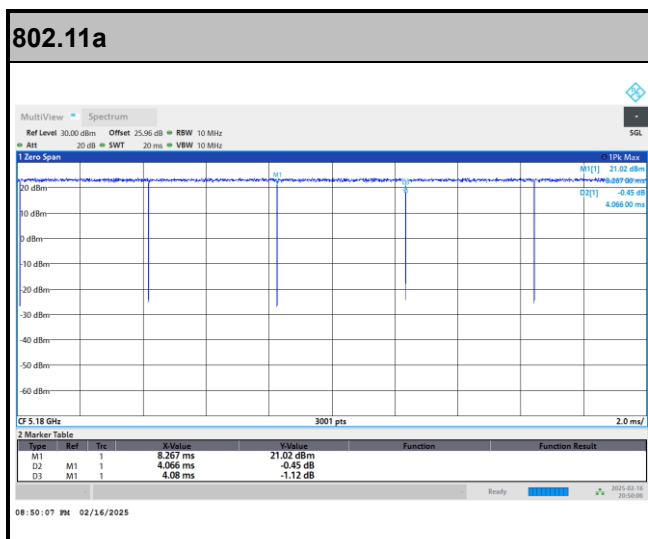

————THE END————