FCC CO-LOCATION RADIO TEST REPORT

FCC ID	:	**A4RGKV4X**
Equipment	:	**Phone**
Model Name	:	**GKV4X**
Applicant	:	**Google LLC** **1600 Amphitheatre Parkway,** **Mountain View, California, 94043 USA**
Standard	:	**FCC Part 15 Subpart E §15.407**

The product was received on Aug. 24, 2023 and testing was performed from Sep. 08, 2023 to Sep. 12, 2023. We, Sporton International Inc. Wensan Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval from Sporton International Inc. Wensan Laboratory, the test report shall not be reproduced except in full.

Louis Wu

Approved by: Louis Wu

Sporton International Inc. Wensan Laboratory
No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan (R.O.C.)

TEL: 886-3-327-0868
FAX: 886-3-327-0855

Table of Contents

History of this test report **3**
Summary of Test Result **4**
1 General Description **5**
1.1 Product Feature of Equipment Under Test 5
1.2 Modification of EUT 5
1.3 Testing Location 6
1.4 Applicable Standards 6
2 Test Configuration of Equipment Under Test **7**
2.1 Carrier Frequency and Channel 7
2.2 Connection Diagram of Test System 8
2.3 EUT Operation Test Setup 8
3 Test Result **9**
3.1 Unwanted Emissions Measurement 9
3.2 Antenna Requirements 15
4 List of Measuring Equipment **16**
5 Measurement Uncertainty **17**
Appendix A. Radiated Spurious Emission
Appendix B. Radiated Spurious Emission Plots
Appendix C. Duty Cycle Plots
Appendix D. Setup Photographs

History of this test report

Report No.	Version	Description	Issue Date
FR380307I	01	Initial issue of report	Dec. 11, 2023

Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.1	15.247(d) 15.407(b)	Unwanted Emissions	Pass	3.07 dB under the limit at 5925.00 MHz
3.2	15.203	Antenna Requirement	Pass	-

Conformity Assessment Condition:

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacturer who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2. The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty".

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.

Reviewed by: William Chen

Report Producer: Lucy Wu

1 General Description

1.1 Product Feature of Equipment Under Test

Product Feature
General Specs GSM/WCDMA/LTE/5G NR, Bluetooth, BLE, BLE channel sounding, Wi-Fi 2.4GHz 802.11b/g/n/ac/ax, Wi-Fi 5GHz 802.11a/n/ac/ax, Wi-Fi 6GHz 802.11a/ax, NFC, WPC Rx and GNSS Rx. **Antenna Type** WLAN: **<Ant. 4>:** ILA Antenna **<Ant. 3>:** IFA Antenna Bluetooth: **<Ant. 4>:** ILA Antenna **<Ant. 3>:** IFA Antenna

EUT Information List	
S/N	**Performed Test Item**
38011JEKB00050	Radiated Spurious Emission

Antenna information		
2400 MHz ~ 2483.5 MHz	Peak Gain (dBi)	<Ant. 4>: -0.7 <Ant. 3>: -1.2
5150 MHz ~ 5250 MHz	Peak Gain (dBi)	<Ant. 4>: -3.6 <Ant. 3>: -3.4
5925 MHz ~ 6425 MHz	Peak Gain (dBi)	<Ant. 4>: -2.7 <Ant. 3>: -3.8

Remark: The EUT's information above is declared by manufacturer. Please refer to Disclaimer in report summary.

1.2 Modification of EUT

No modifications made to the EUT during the testing.

1.3 Testing Location

Test Site	Sporton International Inc. Wensan Laboratory
Test Site Location	No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan (R.O.C.) TEL: +886-3-327-0868 FAX: +886-3-327-0855
Test Site No.	**Sporton Site No.**
	03CH15-HY

Note: The test site complies with ANSI C63.4 2014 requirement.

FCC designation No.: TW3786

1.4 Applicable Standards

According to the specifications declared by the manufacturer, the EUT must comply with the requirements of the following standards:

- FCC Part 15 Subpart E
- FCC Part 15 Subpart C §15.247
- FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
- FCC KDB Publication No. 558074 D01 15.247 Meas Guidance v05r02
- FCC KDB 414788 D01 Radiated Test Site v01r01.
- FCC KDB 662911 D01 Multiple Transmitter Output v02r01.
- ANSI C63.10-2013

Remark:

1. All the test items were validated and recorded in accordance with the standards without any modification during the testing.
2. The TAF code is not including all the FCC KDB listed without accreditation.

2 Test Configuration of Equipment Under Test

a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, the measured emission level of the EUT was maximized by rotating the EUT on a turntable, adjusting the orientation of the EUT antenna in three orthogonal axis (X: flat, Y: portrait, Z: landscape) and accessory (Adapter or Earphone), and adjusting the measurement antenna orientation, following C63.10 exploratory test procedures.

2.1 Carrier Frequency and Channel

2400-2483.5 MHz			
Bluetooth – LE 2Mbps		802.11g	
Channel	Channel	Channel	Freq. (MHz)
39	2480	06	2437

5150-5250 MHz		5925-6425 MHz	
802.11a		802.11a	
Channel	Freq. (MHz)	Channel	Freq. (MHz)
36	5180	01	5955

<Co-Location>

Modulation	Data Rate	Worst Plane
2.4GHz 802.11g for MIMO <Ant. 4+3> + 5GHz 802.11a for MIMO <Ant. 4+3>	6 Mbps + 6 Mbps	Z Plane with Adapter
2.4GHz 802.11g for MIMO <Ant. 4+3> + 6GHz 802.11a for MIMO <Ant. 4+3>	6 Mbps + 6 Mbps	Z Plane with Adapter
Bluetooth – LE for <Ant. 3> + 5GHz 802.11a for MIMO <Ant. 4+3>	GFSK + 6 Mbps	X Plane with Adapter

Remark:

1. For Radiated Test Cases, the tests were performed with Adapter 1 and USB Cable 3.
2. During the preliminary test, both charging modes (Adapter mode and WPC Rx mode) were verified. It is determined that the adaptor mode is the worst case for official test.

2.2 Connection Diagram of Test System

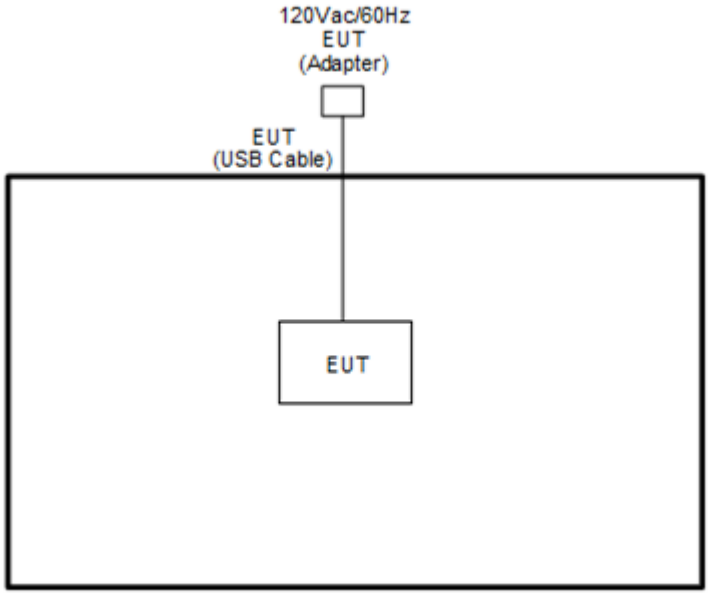

2.3 EUT Operation Test Setup

The RF test items, utility “CMD v.10.0.19045.3570” was installed in Notebook which was programmed in order to make the EUT get into the engineering modes to provide channel selection, power level, data rate and the application type and for continuous transmitting signals.

3 Test Result

3.1 Unwanted Emissions Measurement

This section is to measure unwanted emissions through radiated measurement for band edge spurious emissions and out of band emissions measurement.

3.1.1 Limit of Unwanted Emissions

<For 2402 MHz ~ 2480 MHz>

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device is measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB.

<For 5150 MHz ~ 5250 MHz>

For transmitters operating in the 5150-5250 MHz band: all emissions outside of the 5150-5350 MHz band shall not exceed an EIRP of –27dBm/MHz.

<For 5925 MHz ~ 6425 MHz>

For transmitters operating within the 5.925-7.125 GHz band: Any emissions outside of the 5.925-7.125 GHz band must not exceed an e.i.r.p. of −27 dBm/MHz.

EIRP (dBm)	Field Strength at 3m (dBμV/m)
- 27 (RMS)	68.3
- 7 (Peak)	88.3

According 987594 D02 U-NII 6GHz EMC Measurement v01 section G:

Unwanted emissions outside of restricted bands are measured with a RMS detector.

In addition, 15.35(b) applies where the peak emissions must be limited to no more than 20 dB above the average limit

Unwanted spurious emissions fallen in restricted bands shall comply with the general field strength limits as below table:

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

Note: The following formula is used to convert the EIRP to field strength.

$$E=\frac{1000000\sqrt{30P}}{3}$$ μV/m, where P is the eirp (Watts)

EIRP (dBm)	Field Strength at 3m (dBμV/m)
- 27	68.3

(2) KDB789033 D02 v02r01 G)2)c)

(i) Sections 15.407(b)(1-3) specifies the unwanted emissions limit for the U-NII-1 and U-NII-2 bands. As specified, emissions above 1000 MHz that are outside of the restricted bands are subject to a peak emission limit of −27 dBm/MHz.

(ii) Section 15.407(b)(4) specifies the unwanted emissions limit for the U-NII-3 band. A band emissions mask is specified in Section 15.407(b)(4)(i). The emission limits are based on the use of a peak detector.

3.1.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.1.3 Test Procedures

1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01. Section G) Unwanted emissions measurement.

   (1) Procedure for Unwanted Emissions Measurements Below 1000 MHz

   - RBW = 120 kHz
   - VBW = 300 kHz
   - Detector = Peak
   - Trace mode = max hold

   (2) Procedure for Peak Unwanted Emissions Measurements Above 1000 MHz

   - RBW = 1 MHz
   - VBW ≥ 3 MHz
   - Detector = Peak
   - Sweep time = auto
   - Trace mode = max hold

   (3) Procedures for Average Unwanted Emissions Measurements Above 1000 MHz

   - RBW = 1 MHz
   - VBW = 10 Hz, when duty cycle is no less than 98 percent.
   - VBW ≥ 1/T, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

2. The EUT is placed on a turntable with 0.8 meter for frequency below 1 GHz and 1.5 meter for frequency above 1 GHz respectively above ground.
3. The EUT is set 3 meters away from the receiving antenna which is mounted on the top of a variable height antenna tower.
4. The antenna is a broadband antenna and its height is adjusted between one meter and four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
5. For each suspected emission, the EUT is arranged to its worst case and then adjust the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
6. Radiated testing below 1 GHz is performed by adjusting the antenna tower from 1 m to 4 m and by rotating the turn table from 0 degree to 360 degrees to find the peak maximum hold reading. When there is no suspected emission found and the emission level is with at least 6 dB margin against QP limit line, the position is marked as "-".

7. Radiated testing above 1 GHz is performed by adjusting the antenna tower from 1 m to 4 m and by rotating the turn table from 0 degree to 360 degrees to find the peak maximum hold reading for scanning all frequencies. When there is no suspected emission found and the harmonic emission level is with at least 6 dB margin against average limit line, the position is marked as "-".

3.1.4 Test Setup

For radiated emissions below 30MHz

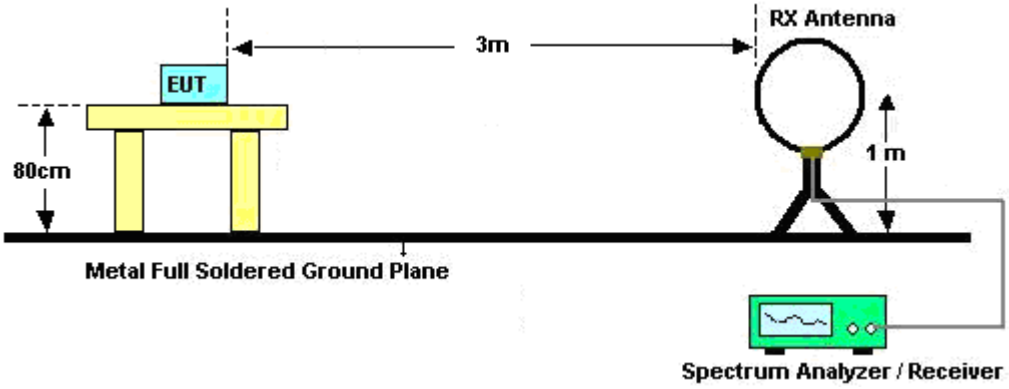

For radiated emissions from 30MHz to 1GHz

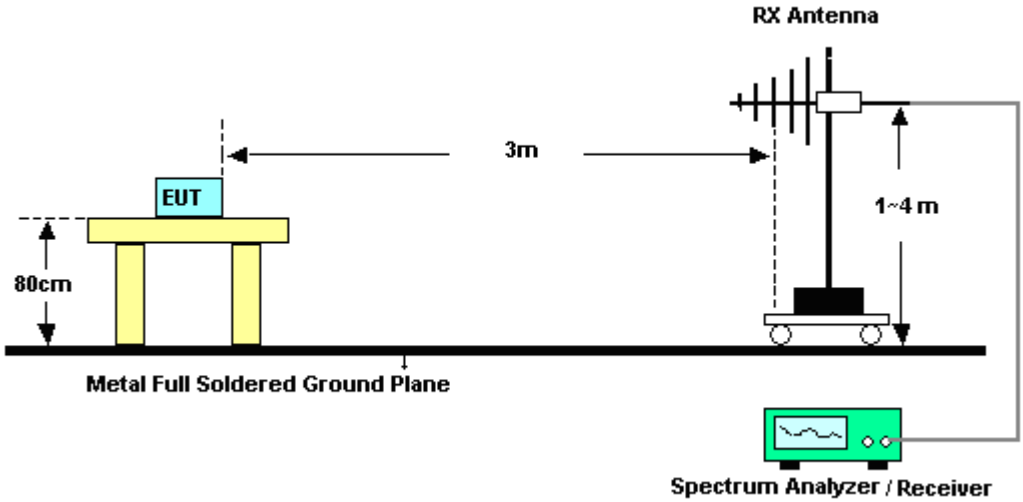

For radiated test from 1GHz to 18GHz

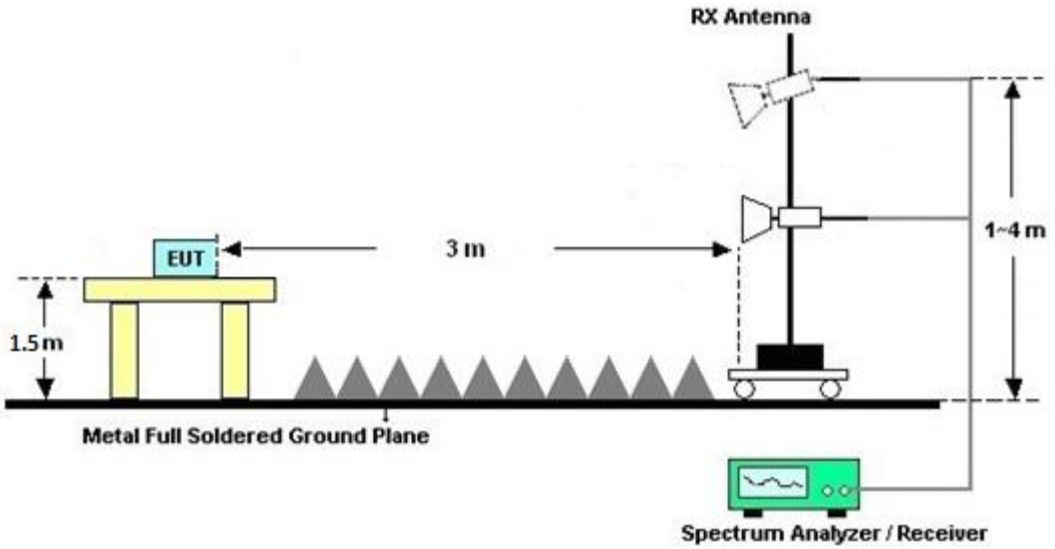

For radiated test above 18GHz

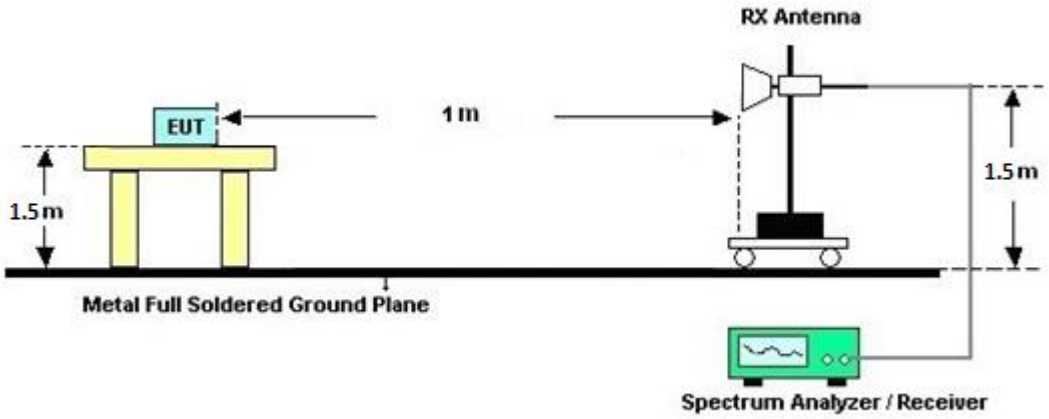

3.1.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which starts from 9 kHz to 30 MHz, is pre-scanned and the result which is 20 dB lower than the limit line is not reported.

There is adequate comparison measurement of both open-field test site and alternative test site - semi-Anechoic chamber according to 414788 D01 Radiated Test Site v01r01, and the result came out very similar.

3.1.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix A and B.

3.1.7 Duty Cycle

Please refer to Appendix C.

3.1.8 Test Result of Radiated Spurious Emissions (30MHz ~ 10th Harmonic)

Please refer to Appendix A and B.

3.2 Antenna Requirements

3.2.1 Standard Applicable

The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

3.2.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

4 List of Measuring Equipment

Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100488	9 kHz~30 MHz	Sep. 20, 2022	Sep. 08, 2023~ Sep. 12, 2023	Sep. 19, 2023	Radiation (03CH15-HY)
Bilog Antenna	TESEQ	CBL 6111D & 00800N1D01N-06	41912 & 05	30MHz~1GHz	Feb. 05, 2023	Sep. 08, 2023~ Sep. 12, 2023	Feb. 04, 2024	Radiation (03CH15-HY)
Horn Antenna	SCHWARZBECK	BBHA 9120 D	9120D-1212	1GHz~18GHz	Mar. 23, 2023	Sep. 08, 2023~ Sep. 12, 2023	Mar. 22, 2024	Radiation (03CH15-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA 9170	00993	18GHz~40GHz	Nov. 24, 2022	Sep. 08, 2023~ Sep. 12, 2023	Nov. 23, 2023	Radiation (03CH15-HY)
Amplifier	SONOMA	310N	363440	9kHz~1GHz	Dec. 26, 2022	Sep. 08, 2023~ Sep. 12, 2023	Dec. 25, 2023	Radiation (03CH15-HY)
Preamplifier	EMEC	EM01G18G	060837	1GHz~18GHz	Feb. 16, 2023	Sep. 08, 2023~ Sep. 12, 2023	Feb. 15, 2024	Radiation (03CH15-HY)
Preamplifier	EM Electronics	EM01G18G	060802	1GHz~18GHz	Mar. 03, 2023	Sep. 08, 2023~ Sep. 12, 2023	Mar. 02, 2024	Radiation (03CH15-HY)
Preamplifier	EMEC	EM18G40G	060801	18GHz~40GHz	Jun. 27, 2023	Sep. 08, 2023~ Sep. 12, 2023	Jun. 26, 2024	Radiation (03CH15-HY)
EMI Test Receiver	Keysight	N9038A(MXE)	MY54130085	20MHz~8.4GHz	Oct. 18, 2022	Sep. 08, 2023~ Sep. 12, 2023	Oct. 17, 2023	Radiation (03CH15-HY
Spectrum Analyzer	Keysight	N9010A	MY54200485	10Hz~44GHz	Mar. 20, 2023	Sep. 08, 2023~ Sep. 12, 2023	Mar. 19, 2024	Radiation (03CH15-HY)
Antenna Mast	ChainTek	MBS-520-1	N/A	1m~4m	N/A	Sep. 08, 2023~ Sep. 12, 2023	N/A	Radiation (03CH15-HY)
Turn Table	ChainTek	T-200-S-1	N/A	0~360 Degree	N/A	Sep. 08, 2023~ Sep. 12, 2023	N/A	Radiation (03CH15-HY)
Software	Audix	E3 6.2009-8-24(k5)	RK-000451	N/A	N/A	Sep. 08, 2023~ Sep. 12, 2023	N/A	Radiation (03CH15-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104, 102E	MY582185/4, 519228/2,803 950/2	N/A	Jun. 13, 2023	Sep. 08, 2023~ Sep. 12, 2023	Jun. 12, 2024	Radiation (03CH15-HY)
Filter	Wainwright	WLJ4-1000-153 0-6000-40ST	SN4	1.53GHz Low Pass Filter	Jun. 14, 2023	Sep. 08, 2023~ Sep. 12, 2023	Jun. 13, 2024	Radiation (03CH15-HY)
Filter	Wainwright	WHKX8-5872.5 -6750-18000-40 ST	SN6	6.75GHz High Pass Filter	Jun. 07, 2023	Sep. 08, 2023~ Sep. 12, 2023	Jun. 06, 2024	Radiation (03CH15-HY)
Filter	Wainwright	WHW2-7100-1 0000-18000-40 CC	SN2	10GHz High Pass Filter	Nov. 14, 2022	Sep. 08, 2023~ Sep. 12, 2023	Nov. 13, 2023	Radiation (03CH15-HY)
Hygrometer	TECPEL	DTM-302	SN2	N/A	Sep. 08, 2023	Sep. 08, 2023~ Sep. 12, 2023	Sep. 07, 2024	Radiation (03CH15-HY)

5 Measurement Uncertainty

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	6.3 dB

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 6000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	4.2 dB

Uncertainty of Radiated Emission Measurement (6000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.4 dB

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.2 dB

Appendix A. Radiated Spurious Emission

Test Engineer :	Bigshow Wang and Quentin Liu	Temperature :	21~26°C
		Relative Humidity :	45~60%

WLAN (2.4GHz) 802.11g_Tx_CH06 + WLAN (5GHz) 802.11a_Tx_CH36

2.4GHz 2400~2483.5MHz

WIFI 802.11g (Band Edge @ 3m)

WIFI	Note	Frequency	Level	Margin	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
Ant					Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
4+3		(MHz)	(dBµV/m)	(dB)	(dBµV/m)	(dBµV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11g CH 06 2437MHz		2389.674	56.21	-17.79	74	49.76	27.38	15.84	36.77	325	228	P	H
		2389.968	41.48	-12.52	54	35.03	27.38	15.84	36.77	325	228	A	H
	*	2437	110.09	-	-	103.42	27.55	15.89	36.77	325	228	P	H
	*	2437	102.33	-	-	95.66	27.55	15.89	36.77	325	228	A	H
		2483.815	59.52	-14.48	74	52.6	27.74	15.95	36.77	325	228	P	H
		2483.649	42.9	-11.1	54	35.99	27.73	15.95	36.77	325	228	A	H
													H
													H
													H
		2389.968	58.82	-15.18	74	52.37	27.38	15.84	36.77	100	261	P	V
		2389.674	42.66	-11.34	54	36.21	27.38	15.84	36.77	100	261	A	V
	*	2437	111.35	-	-	104.68	27.55	15.89	36.77	100	261	P	V
	*	2437	104.39	-	-	97.72	27.55	15.89	36.77	100	261	A	V
		2484.23	62.36	-11.64	74	55.44	27.74	15.95	36.77	100	261	P	V
		2483.5	44.87	-9.13	54	37.96	27.73	15.95	36.77	100	261	A	V
													V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												

Band 1 - 5150~5250MHz

WIFI 802.11a (Band Edge @ 3m)

WIFI	Note	Frequency	Level	Margin	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
Ant.					Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
4+3		(MHz)	(dBµV/m)	(dB)	(dBµV/m)	(dBµV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11a CH 36 5180MHz		5149	55.98	-18.02	74	50.81	32.95	8.84	36.62	100	299	P	H
		5150	49.35	-4.65	54	44.18	32.95	8.84	36.62	100	299	A	H
	*	5180	102.85	-	-	97.67	32.92	8.88	36.62	100	299	P	H
	*	5180	96.44	-	-	91.26	32.92	8.88	36.62	100	299	A	H
													H
													H
													H
													H
													H
													H
													H
													H
		5148.8	53.54	-20.46	74	48.37	32.95	8.84	36.62	312	240	P	V
		5150	46.94	-7.06	54	41.77	32.95	8.84	36.62	312	240	A	V
	*	5180	100.75	-	-	95.57	32.92	8.88	36.62	312	240	P	V
	*	5180	93.68	-	-	88.5	32.92	8.88	36.62	312	240	A	V
													V
													V
													V
													V
													V
													V
													V
													V

Remark

1. No other spurious found.
2. All results are PASS against Peak and Average limit line.

WLAN (2.4GHz) 802.11g_Tx_CH06 + WLAN (5GHz) 802.11a_Tx_CH36

(Harmonic @ 3m)

WIFI	Note	Frequency	Level	Margin	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
Ant.					Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
4+3		(MHz)	(dBµV/m)	(dB)	(dBµV/m)	(dBµV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11g CH 06 2437MHz + 802.11a CH 36 5180MHz		4874	48.6	-25.4	74	44.16	32.54	8.56	36.66	-	-	P	H
		4874	38.91	-15.09	54	34.47	32.54	8.56	36.66	-	-	A	H
		7311	50.23	-23.77	74	61.27	36.73	10.88	58.65	100	250	P	H
		7311	41.44	-12.56	54	52.48	36.73	10.88	58.65	100	250	A	H
		10360	45.24	-22.96	68.2	52.08	38.54	12.48	57.86	-	-	P	H
		15540	47.56	-26.44	74	50.78	38.28	15.82	57.32	-	-	P	H
													H
													H
													H
													H
													H
													H
		4874	48.56	-25.44	74	44.12	32.54	8.56	36.66	-	-	P	V
		4874	38.64	-15.36	54	34.2	32.54	8.56	36.66	-	-	A	V
		7311	46.09	-27.91	74	57.13	36.73	10.88	58.65	100	192	P	V
		7311	38.93	-15.07	54	49.97	36.73	10.88	58.65	100	192	A	V
		10360	44.81	-23.39	68.2	51.65	38.54	12.48	57.86	-	-	P	V
		15540	47.5	-26.5	74	50.72	38.28	15.82	57.32	-	-	P	V
													V
													V
													V
													V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against limit line. 3. The emission position marked as "-" means no suspected emission found with sufficient margin against limit line or noise floor only.												

Emission above 18GHz

WLAN (2.4GHz) 802.11g_Tx_CH06 + WLAN (5GHz) 802.11a_Tx_CH36

(SHF @ 1m)

WIFI	Note	Frequency	Level	Margin	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
Ant.					Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
4+3		(MHz)	(dBµV/m)	(dB)	(dBµV/m)	(dBµV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
		39054	47.49	-26.51	74	61.2	43.93	-0.88	56.76	-	-	P	H
													H
													H
													H
													H
													H
													H
802.11g													H
CH 06													H
2437MHz													H
+													H
802.11a		39890	47.57	-26.43	74	59.25	44.62	-0.37	55.93	-	-	P	V
CH 36													V
5180MHz													V
SHF													V
													V
													V
													V
													V
													V
													V
													V
													V

Remark

1. No other spurious found.
2. All results are PASS against limit line.
3. The emission position marked as "-" means no suspected emission found with sufficient margin against limit line or noise floor only.

Emission below 1GHz

WLAN (2.4GHz) 802.11g_Tx_CH06 + WLAN (5GHz) 802.11a_Tx_CH36

(LF @ 3m)

WIFI	Note	Frequency	Level	Margin	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
Ant.					Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
4+3		(MHz)	(dBµV/m)	(dB)	(dBµV/m)	(dBµV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
		30.36	22.55	-17.45	40	29.89	24.33	0.72	32.39	-	-	P	H
		98.04	36.42	-7.08	43.5	51.79	15.74	1.3	32.41	199	60	Q	H
		132.96	28.93	-14.57	43.5	42.23	17.66	1.45	32.41	-	-	P	H
		187.5	34.41	-9.09	43.5	50.06	14.91	1.83	32.39	-	-	P	H
		431.2	23.99	-22.01	46	30.95	22.95	2.49	32.4	-	-	P	H
		789.6	30.77	-15.23	46	31.38	28.09	3.39	32.09	-	-	P	H
													H
802.11g													H
CH 06													H
2437MHz													H
+													H
802.11a		33.78	27.89	-12.11	40	36.83	22.73	0.74	32.41	-	-	P	V
CH 36		95.34	35.74	-7.76	43.5	51.51	15.36	1.29	32.42	-	-	P	V
5180MHz		135.3	30.84	-12.66	43.5	44.2	17.58	1.47	32.41	-	-	P	V
LF		188.04	28.97	-14.53	43.5	44.61	14.92	1.83	32.39	-	-	P	V
		489.6	26.39	-19.61	46	32.39	23.72	2.67	32.39	-	-	P	V
		834.4	30.98	-15.02	46	30.93	28.49	3.45	31.89	-	-	P	V
													V
													V
													V
													V
													V

Remark

1. No other spurious found.
2. All results are PASS against limit line.
3. The emission position marked as "-" means no suspected emission found and emission level has at least 6dB margin against limit or emission is noise floor only.

WLAN (2.4GHz) 802.11g_Tx_CH06 + WLAN (6GHz) 802.11a_Tx_CH01

2.4GHz 2400~2483.5MHz

WIFI 802.11g (Band Edge @ 3m)

WIFI	Note	Frequency	Level	Margin	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
Ant					Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
4+3		(MHz)	(dBµV/m)	(dB)	(dBµV/m)	(dBµV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
		2388.792	57.02	-16.98	74	50.52	27.38	15.89	36.77	100	268	P	H
		2388.939	41	-13	54	34.49	27.38	15.9	36.77	100	268	A	H
	*	2437	111.12	-	-	104.38	27.55	15.96	36.77	100	268	P	H
	*	2437	102.48	-	-	95.74	27.55	15.96	36.77	100	268	A	H
		2483.649	59.66	-14.34	74	52.66	27.73	16.04	36.77	100	268	P	H
		2484.147	42.71	-11.29	54	35.7	27.74	16.04	36.77	100	268	A	H
													H
													H
802.11g													H
CH 06		2388.645	53.11	-20.89	74	46.61	27.38	15.89	36.77	291	318	P	V
2437MHz		2389.674	40.75	-13.25	54	34.24	27.38	15.9	36.77	291	318	A	V
	*	2437	106.46	-	-	99.72	27.55	15.96	36.77	291	318	P	V
	*	2437	99.6	-	-	92.86	27.55	15.96	36.77	291	318	A	V
		2483.732	57.75	-16.25	74	50.75	27.73	16.04	36.77	291	318	P	V
		2483.5	41.56	-12.44	54	34.56	27.73	16.04	36.77	291	318	A	V
													V
													V
													V
													V

Remark

1. No other spurious found.
2. All results are PASS against Peak and Average limit line.

Band 5 - 5925~6425MHz

WIFI 802.11a (Band Edge @ 3m)

WIFI	Note	Frequency	Level	Margin	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
Ant.					Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
4+3		(MHz)	(dBµV/m)	(dB)	(dBµV/m)	(dBµV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11a CH 01 5955MHz		5923.7	62.82	-25.38	88.2	46.28	34.15	18.92	36.53	100	232	P	H
		5925	55.41	-12.79	68.2	38.87	34.15	18.92	36.53	100	232	A	H
	*	5955	106.11	-	-	89.6	34.09	18.95	36.53	100	232	P	H
	*	5955	100.37	-	-	83.86	34.09	18.95	36.53	100	232	A	H
													H
													H
													H
													H
													H
													H
													H
													H
		5924.15	74.02	-14.18	88.2	57.48	34.15	18.92	36.53	324	256	P	V
		5925	65.13	-3.07	68.2	48.59	34.15	18.92	36.53	324	256	A	V
	*	5955	116.59	-	-	100.08	34.09	18.95	36.53	324	256	P	V
	*	5955	110.53	-	-	94.02	34.09	18.95	36.53	324	256	A	V
													V
													V
													V
													V
													V
													V
													V
													V

Remark

1. No other spurious found.
2. All results are PASS against Peak and Average limit line.

WLAN (2.4GHz) 802.11g_Tx_CH06 + WLAN (6GHz) 802.11a_Tx_CH01

(Harmonic @ 3m)

WIFI Ant.	Note	Frequency	Level	Margin	Limit Line	Read Level	Antenna Factor	Path Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	Pol.
4+3		(MHz)	(dBµV/m)	(dB)	(dBµV/m)	(dBµV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11g CH 06 2437MHz + 802.11a CH 01 5955MHz		4874	47.45	-26.55	74	43.01	32.54	8.56	36.66	-	-	P	H
		7311	53.5	-20.5	74	64.54	36.73	10.88	58.65	100	250	P	H
		7311	44.2	-9.8	54	55.24	36.73	10.88	58.65	100	250	A	H
		11910	45.26	-28.74	74	50.12	39.07	12.92	56.85	-	-	P	H
		17865	50.85	-23.15	74	50.88	41.07	15.82	56.92	-	-	P	H
		17865	41.33	-12.67	54	41.36	41.07	15.82	56.92	-	-	A	H
													H
													H
													H
													H
													H
													H
		4874	47.17	-26.83	74	42.73	32.54	8.56	36.66	-	-	P	V
		7311	48.68	-25.32	74	59.72	36.73	10.88	58.65	106	179	P	V
		7311	41.35	-12.65	54	52.39	36.73	10.88	58.65	106	179	A	V
		11910	45.54	-28.46	74	50.4	39.07	12.92	56.85	-	-	P	V
		17865	50.3	-23.7	74	50.33	41.07	15.82	56.92	-	-	P	V
		17865	40.95	-13.05	54	40.98	41.07	15.82	56.92	-	-	A	V
													V
													V
													V
													V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against limit line. 3. The emission position marked as "-" means no suspected emission found with sufficient margin against limit line or noise floor only.												

Emission below 1GHz

WLAN (2.4GHz) 802.11g_Tx_CH06 + WLAN (6GHz) 802.11a_Tx_CH01

(LF @ 3m)

WIFI	Note	Frequency	Level	Margin	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
Ant.					Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
4+3		(MHz)	(dBµV/m)	(dB)	(dBµV/m)	(dBµV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
		30.54	22.1	-17.9	40	29.48	24.29	0.72	32.39	-	-	P	H
		96.96	36.3	-7.2	43.5	51.89	15.53	1.3	32.42	200	59	Q	H
		132.96	28.83	-14.67	43.5	42.13	17.66	1.45	32.41	-	-	P	H
		186.96	34.41	-9.09	43.5	50.07	14.9	1.83	32.39	-	-	P	H
		499.2	24.35	-21.65	46	30.14	23.9	2.69	32.38	-	-	P	H
		844	31.95	-14.05	46	31.4	28.93	3.46	31.84	-	-	P	H
													H
802.11g													H
CH 06													H
2437MHz													H
+													H
802.11a		33.96	33.73	-6.27	40	42.74	22.66	0.74	32.41	100	228	Q	V
CH 01		95.7	34.91	-8.59	43.5	50.65	15.39	1.29	32.42	-	-	P	V
5955MHz		135.66	29.91	-13.59	43.5	43.26	17.59	1.47	32.41	-	-	P	V
LF		188.22	28.16	-15.34	43.5	43.8	14.92	1.83	32.39	-	-	P	V
		560	26.92	-19.08	46	30.32	26.15	2.89	32.44	-	-	P	V
		852.8	30.92	-15.08	46	30.22	29.01	3.48	31.79	-	-	P	V
													V
													V
													V
													V
													V

Remark

1. No other spurious found.
2. All results are PASS against limit line.
3. The emission position marked as "-" means no suspected emission found and emission level has at least 6dB margin against limit or emission is noise floor only.

BLE(2M)_Tx_CH39 + WLAN (5GHz) 802.11a_Tx_CH36

2.4GHz 2400~2483.5MHz

BLE (Band Edge @ 3m)

BLE	Note	Frequency	Level	Margin	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
Ant.					Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
3		(MHz)	(dBµV/m)	(dB)	(dBµV/m)	(dBµV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
BLE CH 39 2480MHz	*	2480	114.29	-	-	107.4	27.72	15.94	36.77	100	54	P	H
	*	2480	112.35	-	-	105.46	27.72	15.94	36.77	100	54	A	H
		2483.86	59.79	-14.21	74	52.87	27.74	15.95	36.77	100	54	P	H
		2483.5	48.86	-5.14	54	41.95	27.73	15.95	36.77	100	54	A	H
													H
													H
													H
													H
													H
													H
													H
													H
	*	2480	107.69	-	-	100.8	27.72	15.94	36.77	350	358	P	V
	*	2480	103.47	-	-	96.58	27.72	15.94	36.77	350	358	A	V
		2483.68	51.82	-22.18	74	44.91	27.73	15.95	36.77	350	358	P	V
		2483.5	43.11	-10.89	54	36.2	27.73	15.95	36.77	350	358	A	V
													V
													V
													V
													V
													V
													V
													V
													V

Remark

1. No other spurious found.
2. All results are PASS against Peak and Average limit line.

Band 1 - 5150~5250MHz

WIFI 802.11a (Band Edge @ 3m)

WIFI	Note	Frequency	Level	Margin	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
Ant.					Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
4+3		(MHz)	(dBµV/m)	(dB)	(dBµV/m)	(dBµV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11a CH 36 5180MHz		5148.6	52.8	-21.2	74	47.63	32.95	8.84	36.62	100	360	P	H
		5150	44.37	-9.63	54	39.2	32.95	8.84	36.62	100	360	A	H
	*	5180	101.62	-	-	96.44	32.92	8.88	36.62	100	360	P	H
	*	5180	95.05	-	-	89.87	32.92	8.88	36.62	100	360	A	H
													H
													H
													H
													H
													H
													H
													H
													H
		5149.6	52.42	-21.58	74	47.25	32.95	8.84	36.62	324	248	P	V
		5149.8	43.86	-10.14	54	38.69	32.95	8.84	36.62	324	248	A	V
	*	5180	101.88	-	-	96.7	32.92	8.88	36.62	324	248	P	V
	*	5180	94.28	-	-	89.1	32.92	8.88	36.62	324	248	A	V
													V
													V
													V
													V
													V
													V
													V
													V

Remark

1. No other spurious found.
2. All results are PASS against Peak and Average limit line.

BLE(2M)_Tx_CH39 + WLAN (5GHz) 802.11a_Tx_CH36

(Harmonic @ 3m)

	Note	Frequency	Level	Margin	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
Ant.					Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
Simultaneously		(MHz)	(dBµV/m)	(dB)	(dBµV/m)	(dBµV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
BLE CH 39 2480MHz + 802.11a CH 36 5180MHz		4874	48.6	-25.4	74	44.16	32.54	8.56	36.66	-	-	P	H
		4874	38.91	-15.09	54	34.47	32.54	8.56	36.66	-	-	A	H
		7311	50.23	-23.77	74	61.27	36.73	10.88	58.65	100	250	P	H
		7311	41.44	-12.56	54	52.48	36.73	10.88	58.65	100	250	A	H
		10360	45.24	-22.96	68.2	52.08	38.54	12.48	57.86	-	-	P	H
		15540	47.56	-26.44	74	50.78	38.28	15.82	57.32	-	-	P	H
													H
													H
													H
													H
													H
													H
		4874	48.56	-25.44	74	44.12	32.54	8.56	36.66	-	-	P	V
		4874	38.64	-15.36	54	34.2	32.54	8.56	36.66	-	-	A	V
		7311	46.09	-27.91	74	57.13	36.73	10.88	58.65	100	192	P	V
		7311	38.93	-15.07	54	49.97	36.73	10.88	58.65	100	192	A	V
		10360	44.81	-23.39	68.2	51.65	38.54	12.48	57.86	-	-	P	V
		15540	47.5	-26.5	74	50.72	38.28	15.82	57.32	-	-	P	V
													V
													V
													V
													V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against limit line. 3. The emission position marked as "-" means no suspected emission found with sufficient margin against limit line or noise floor only.												

Emission above 18GHz

BLE(2M)_Tx_CH39 + WLAN (5GHz) 802.11a_Tx_CH36

(SHF @ 1m)

	Note	Frequency	Level	Margin	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
Ant.					Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
Simultaneously		(MHz)	(dBµV/m)	(dB)	(dBµV/m)	(dBµV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
		36480	47.96	-26.04	74	63.93	43.58	-1.04	58.51	-	-	P	H
													H
													H
													H
													H
													H
													H
BLE													H
CH 39													H
2480MHz													H
+													H
802.11a		39758	47.04	-26.96	74	59.19	44.41	-0.47	56.09	-	-	P	V
CH 36													V
5180MHz													V
SHF													V
													V
													V
													V
													V
													V
													V
													V

Remark

1. No other spurious found.
2. All results are PASS against limit line.
3. The emission position marked as "-" means no suspected emission found with sufficient margin against limit line or noise floor only.

Emission below 1GHz

BLE(2M)_Tx_CH39 + WLAN (5GHz) 802.11a_Tx_CH36

(LF @ 3m)

	Note	Frequency	Level	Margin	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
Ant.					Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
Simultaneously		(MHz)	(dBµV/m)	(dB)	(dBµV/m)	(dBµV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
		30.54	23.12	-16.88	40	30.5	24.29	0.72	32.39	-	-	P	H
		96.96	39.77	-3.73	43.5	55.36	15.53	1.3	32.42	200	59	Q	H
		131.7	28.83	-14.67	43.5	42.15	17.66	1.44	32.42	-	-	P	H
		186.78	34.37	-9.13	43.5	50.03	14.9	1.83	32.39	-	-	P	H
		565.6	27.47	-18.53	46	30.95	26.05	2.91	32.44	-	-	P	H
		857.6	31.33	-14.67	46	30.49	29.11	3.49	31.76	-	-	P	H
													H
													H
BLE													H
CH 39													H
2480MHz													H
+													H
802.11a		34.14	28.96	-11.04	40	38.04	22.59	0.74	32.41	-	-	P	V
CH 36		94.98	35.22	-8.28	43.5	51.01	15.34	1.29	32.42	-	-	P	V
5180MHz		137.1	29.74	-13.76	43.5	43.02	17.64	1.48	32.4	-	-	P	V
LF		184.62	27.52	-15.98	43.5	43.17	14.92	1.83	32.4	-	-	P	V
		582.4	26.88	-19.12	46	30.5	25.88	2.93	32.43	-	-	P	V
		875.2	31.23	-14.77	46	30.36	28.95	3.55	31.63	-	-	P	V
													V
													V
													V
													V
													V

Remark

1. No other spurious found.
2. All results are PASS against limit line.
3. The emission position marked as "-" means no suspected emission found and emission level has at least 6dB margin against limit or emission is noise floor only.

Note symbol

*	**Fundamental Frequency** which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is **Margin** line.
P/A	**P**eak or **A**verage
H/V	**H**orizontal or **V**ertical

A calculation example for radiated spurious emission is shown as below:

WIFI	Note	Frequency	Level	Margin	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
Ant.					Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
4+3		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11b CH 01 2412MHz		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

1. Path Loss(dB) = Cable loss(dB) + Filter loss(dB) + Attenuator loss(dB)
2. Level(dBμV/m) = Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
3. Margin(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

For Peak Limit @ 2390MHz:

1. Level(dBμV/m)

= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)

= 55.45 (dBμV/m)

2. Margin(dB)

= Level(dBμV/m) – Limit Line(dBμV/m)

= 55.45(dBμV/m) – 74(dBμV/m)

= -18.55(dB)

For Average Limit @ 2390MHz:

1. Level(dBμV/m)

= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)

= 43.54 (dBμV/m)

2. Margin(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

= 43.54(dBμV/m) – 54(dBμV/m)

= -10.46(dB)

Both peak and average measured complies with the limit line, so test result is "PASS".

Appendix B. Radiated Spurious Emission Plots

Test Engineer :	Bigshow Wang and Quentin Liu	**Temperature :**	21~26°C
		Relative Humidity :	45~60%

Note symbol

-L	**Low channel location**
-R	**High channel location**

WLAN (2.4GHz) 802.11g_Tx_CH06 + WLAN (5GHz) 802.11a_Tx_CH36

2.4GHz 2400~2483.5MHz

WIFI 802.11g (Band Edge @ 3m)

WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	11g_Tx_Ch06 2437MHz - L	
4+3	Horizontal	Fundamental
Peak	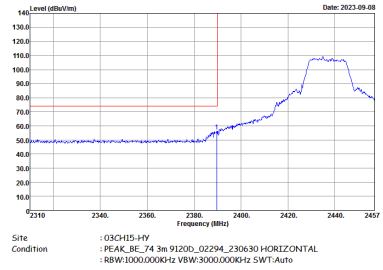	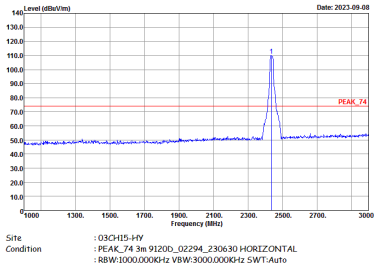
Avg.	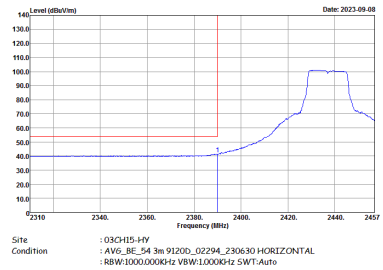	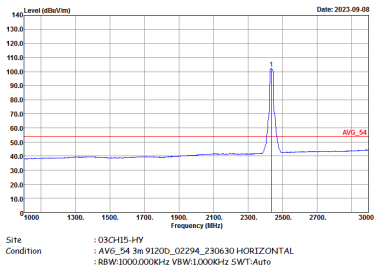

WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11g CH06 2437MHz - R	
4+3	Horizontal	Fundamental
Peak	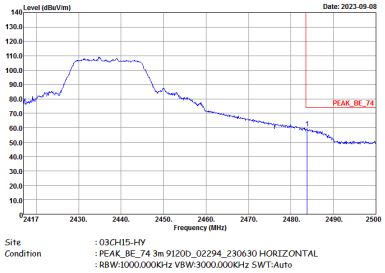	Left blank
Avg.	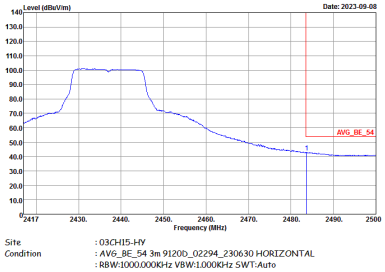	Left blank

WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11g CH06 2437MHz - R	
4+3	Vertical	Fundamental
Peak	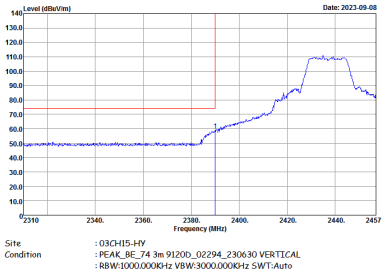	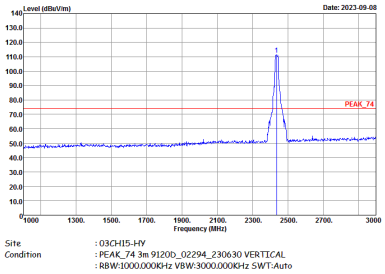
Avg.	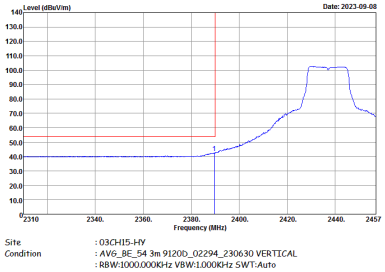	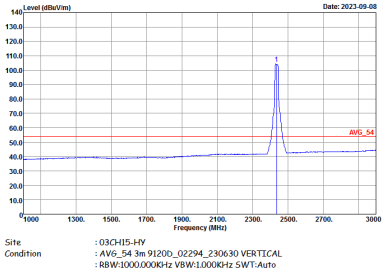

WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11g CH06 2437MHz - R	
4+3	Horizontal	Fundamental
Peak	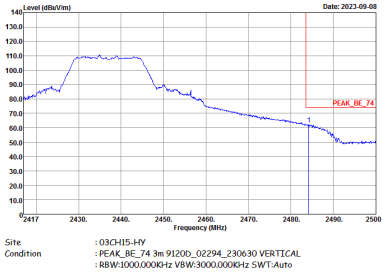	Left blank
Avg.	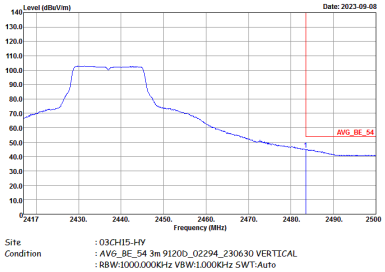	Left blank

Band 1 - 5150~5250MHz

WIFI 802.11a (Band Edge @ 3m)

WIFI	Band 1 5150~5250MHz Band Edge @ 3m	
ANT	11a_Tx_Ch36 5180MHz	
4+3	Horizontal	Fundamental
Peak	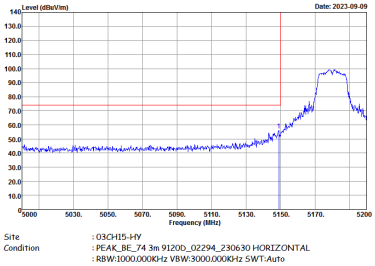	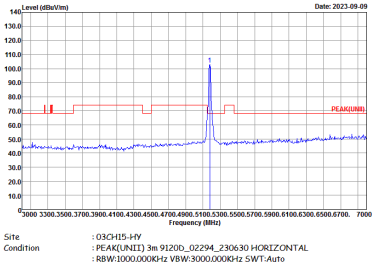
Avg.	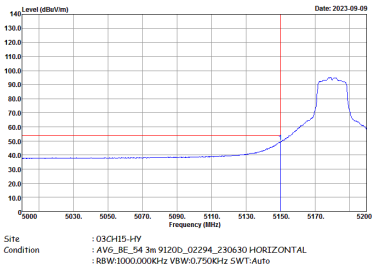	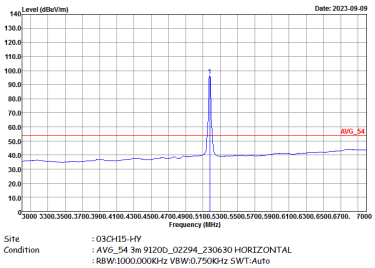

WIFI	Band 1 5150~5250MHz Band Edge @ 3m	
ANT	11a_Tx_Ch36 5180MHz	
4+3	Vertical	Fundamental
Peak	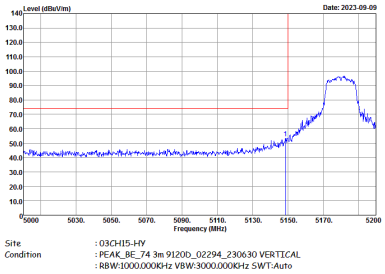	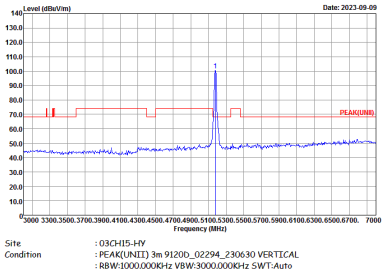
Avg.	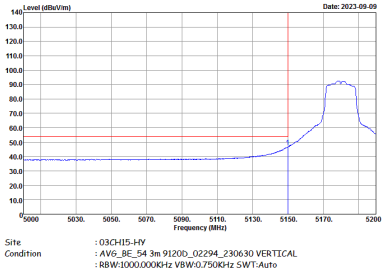	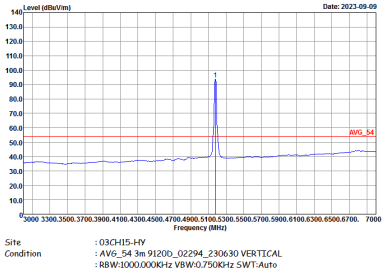

WLAN (2.4GHz) 802.11g_Tx_CH06 + WLAN (5GHz) 802.11a_Tx_CH36

(Harmonic @ 3m)

WIFI	2.4GHz 2400~2483.5MHz +Band 1 5150~5250MHz Harmonic @ 3m	
ANT	11g_Tx_Ch06+11a_Tx_Ch36	
4+3	Horizontal	Vertical
Peak Avg.	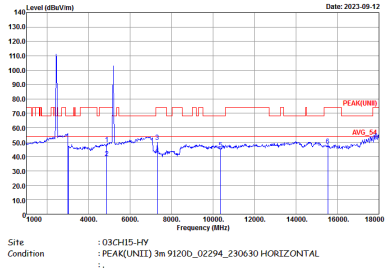	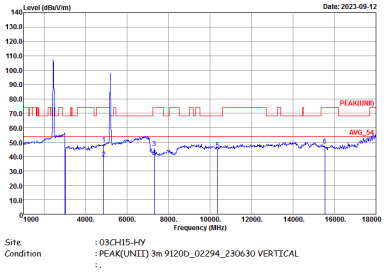

Emission above 18GHz

WLAN (2.4GHz) 802.11g_Tx_CH06 + WLAN (5GHz) 802.11a_Tx_CH36

(SHF)

WIFI	2.4GHz 2400~2483.5MHz +Band 1 5150~5250MHz SHF @ 1m	
ANT	11g_Tx_Ch06+11a_Tx_Ch36	
4+3	Horizontal	Vertical
Peak Avg.	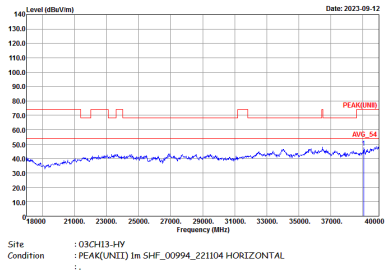	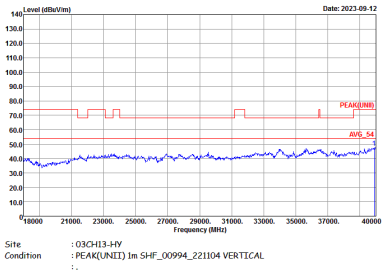

Emission below 1GHz

WLAN (2.4GHz) 802.11g_Tx_CH06 + WLAN (5GHz) 802.11a_Tx_CH36

(LF)

WIFI	2.4GHz 2400~2483.5MHz +Band 1 5150~5250MHz LF @ 3m	
ANT	11g_Tx_Ch06+11a_Tx_Ch36	
4+3	Horizontal	Vertical
QP / Peak	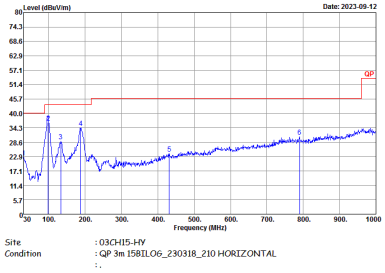	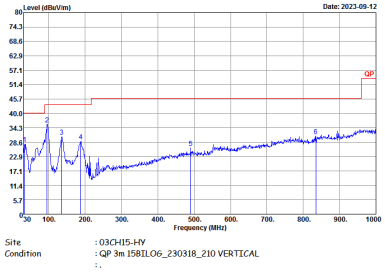

WLAN (2.4GHz) 802.11g_Tx_CH06 + WLAN (6GHz) 802.11a_Tx_CH01

2.4GHz 2400~2483.5MHz

WIFI 802.11g (Band Edge @ 3m)

WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	11g_Tx_Ch06 2437MHz - L	
4+3	Horizontal	Fundamental
Peak	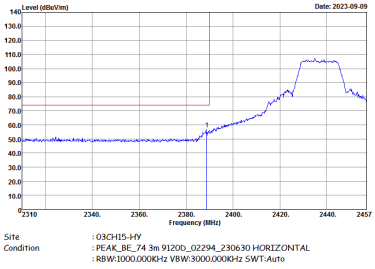	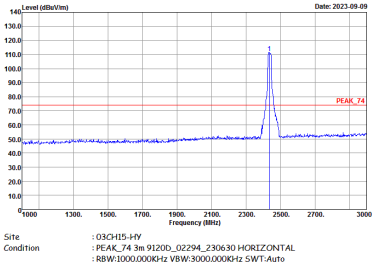
Avg.	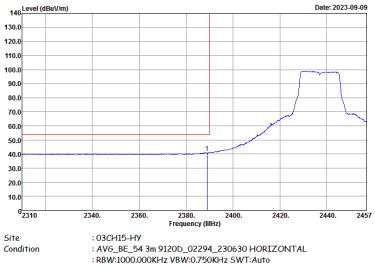	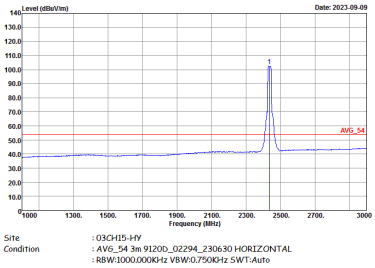

WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11g CH06 2437MHz - R	
4+3	Horizontal	Fundamental
Peak	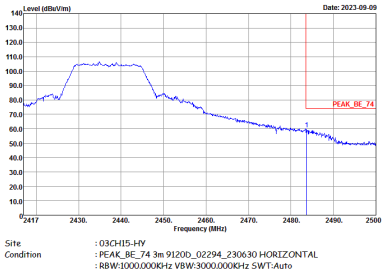	Left blank
Avg.	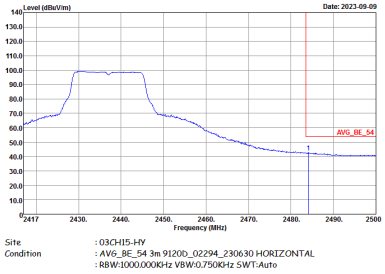	Left blank

WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11g CH06 2437MHz - R	
4+3	Vertical	Fundamental
Peak	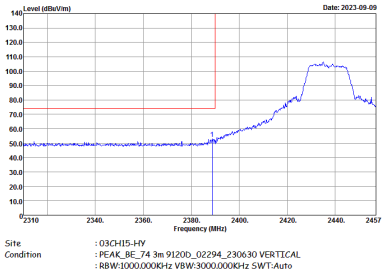	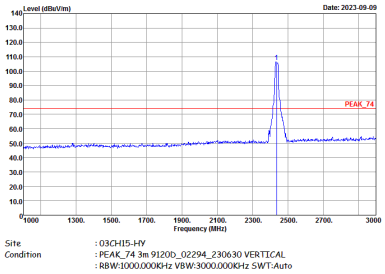
Avg.	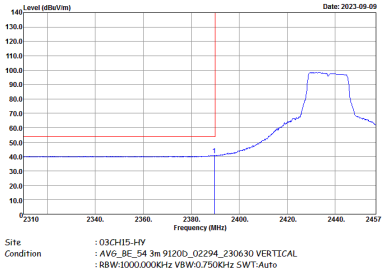	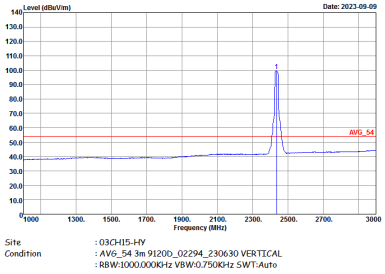

WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11g CH06 2437MHz - R	
4+3	Horizontal	Fundamental
Peak	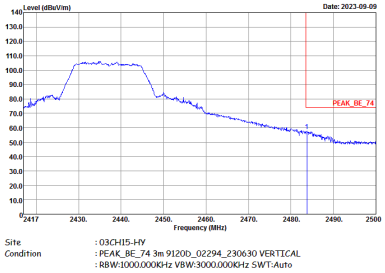	Left blank
Avg.	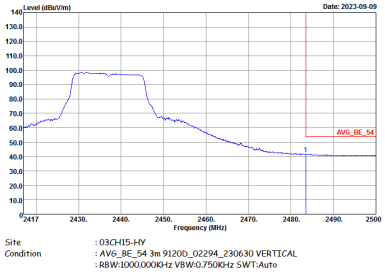	Left blank

Band 5 - 5925~6425MHz

WIFI 802.11a (Band Edge @ 3m)

WIFI	Band 5 5925~6425MHz Band Edge @ 3m	
ANT	802.11a CH01 5955MHz	
4+3	Horizontal	Fundamental
Peak	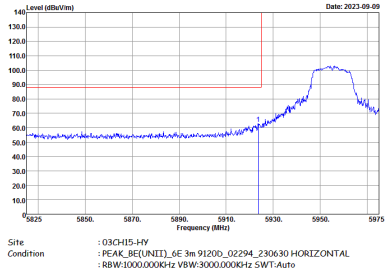	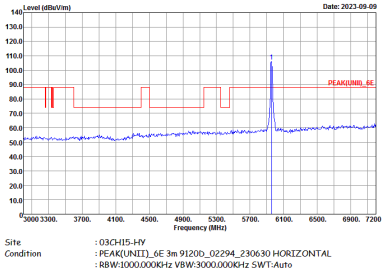
Avg.	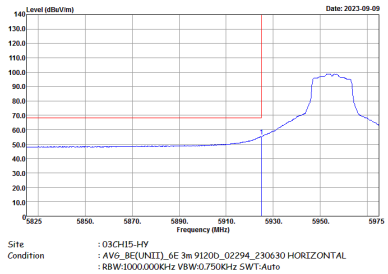	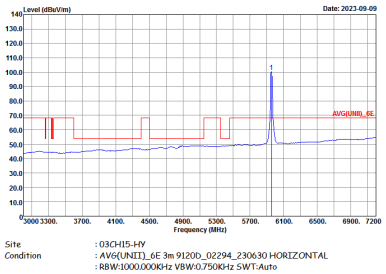

WIFI	Band 5 5925~6425MHz Band Edge @ 3m	
ANT	802.11a CH01 5955MHz	
4+3	Vertical	Fundamental
Peak	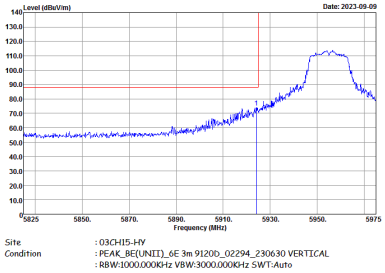	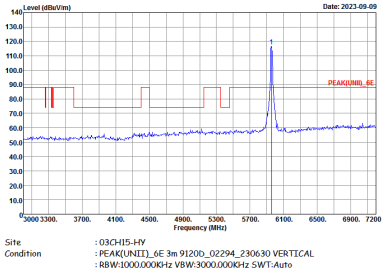
Avg.	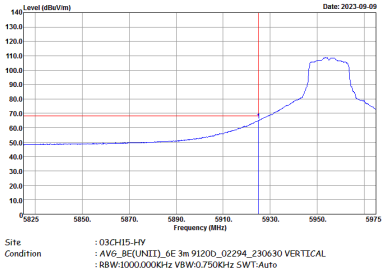	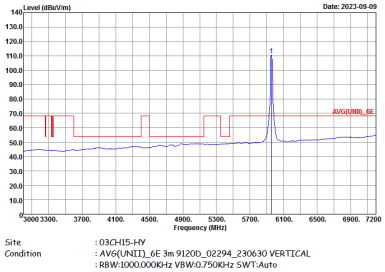

WLAN (2.4GHz) 802.11g_Tx_CH06 + WLAN (6GHz) 802.11a_Tx_CH01

(Harmonic @ 3m)

WIFI	2.4GHz 2400~2483.5MHz +Band 5 5925~6425MHz Harmonic @ 3m	
ANT	11g_Tx_Ch06+11a_Tx_Ch01	
4+3	Horizontal	Vertical
Peak Avg.	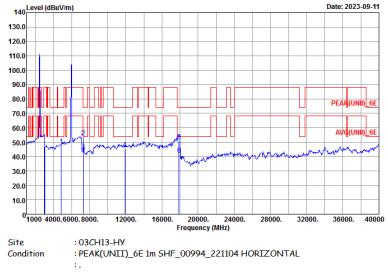	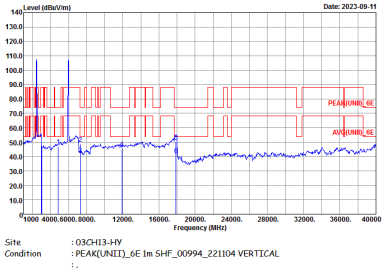

WIFI	2.4GHz 2400~2483.5MHz +Band 5 5925~6425MHz Harmonic @ 3m	
ANT	11g_Tx_Ch06+11a_Tx_Ch01	
4+3	Horizontal	Vertical
14.47G ~14.5G Avg.	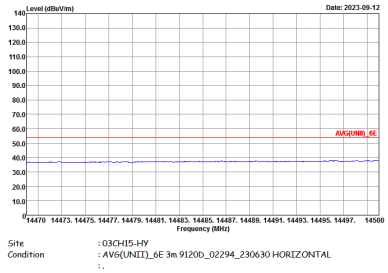	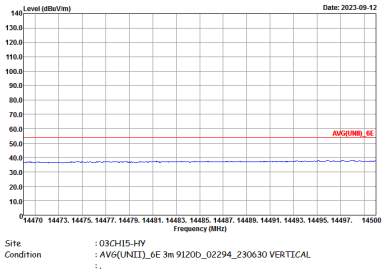
17.7G ~18G Avg.	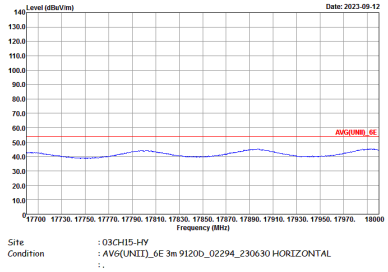	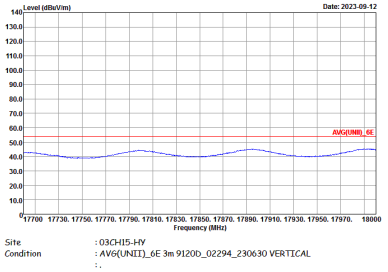

Emission below 1GHz

WLAN (2.4GHz) 802.11g_Tx_CH06 + WLAN (6GHz) 802.11a_Tx_CH01

(LF)

WIFI	2.4GHz 2400~2483.5MHz +Band 5 5925~6425MHz Harmonic @ 3m	
ANT	11g_Tx_Ch06+11a_Tx_Ch01	
4+3	Horizontal	Vertical
QP / Peak	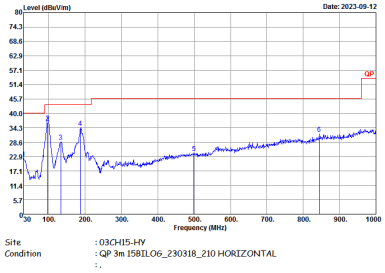	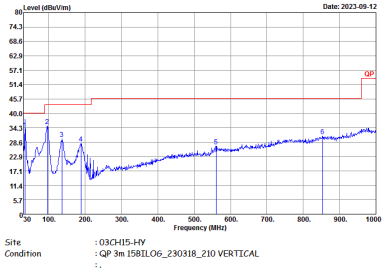

BLE(2M)_Tx_CH39 + WLAN (5GHz) 802.11a_Tx_CH36

2.4GHz 2400~2483.5MHz

BLE (Band Edge @ 3m)

BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BLE CH39 2480MHz	
3	Horizontal	Fundamental
Peak	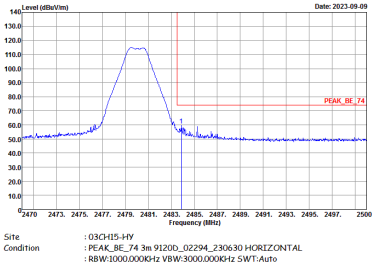	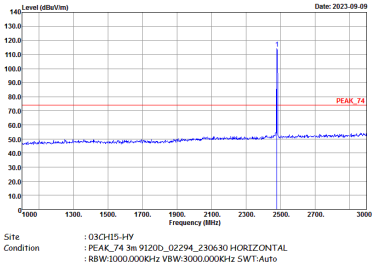
Avg.	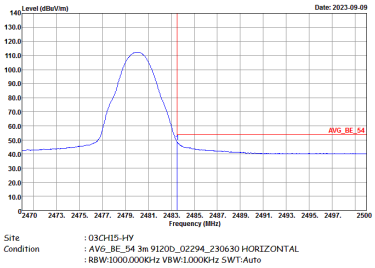	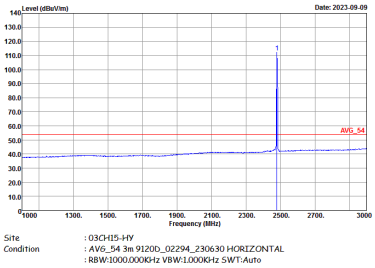

BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BLE CH39 2480MHz	
3	Vertical	Fundamental
Peak	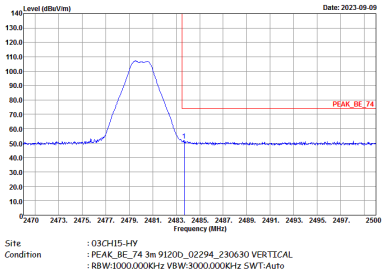 Site : 03CH15-HY Condition : PEAK_BE_74 3m 9120D_02294_230630 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto	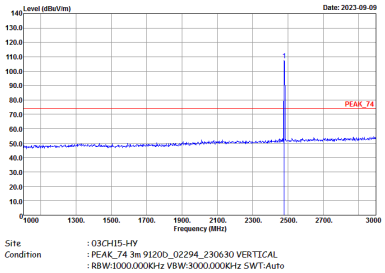 Site : 03CH15-HY Condition : PEAK_74 3m 9120D_02294_230630 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto
Avg.	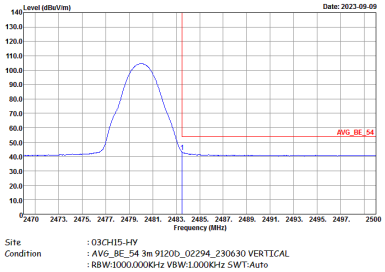 Site : 03CH15-HY Condition : AVG_BE_54 3m 9120D_02294_230630 VERTICAL : RBW:1000.000KHz VBW:1000KHz SWT:Auto	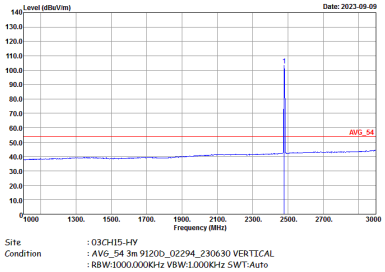 Site : 03CH15-HY Condition : AVG_54 3m 9120D_02294_230630 VERTICAL : RBW:1000.000KHz VBW:1000KHz SWT:Auto

Band 1 - 5150~5250MHz

WIFI 802.11a (Band Edge @ 3m)

WIFI	Band 1 5150~5250MHz Band Edge @ 3m	
ANT	11a_Tx_Ch36 5180MHz	
4+3	Horizontal	Fundamental
Peak	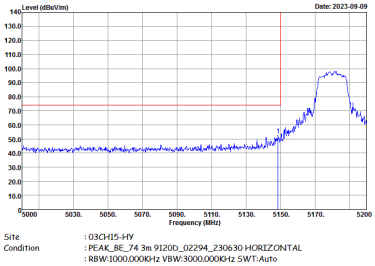	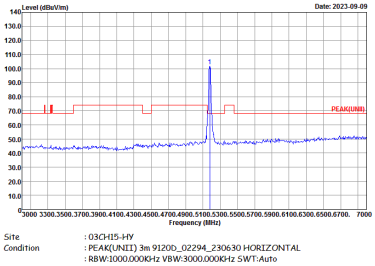
Avg.	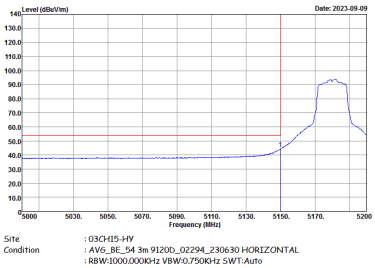	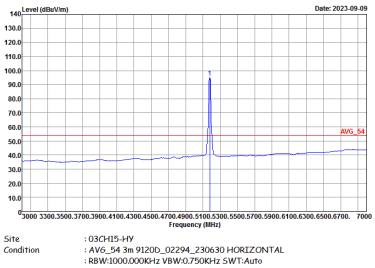

WIFI	Band 1 5150~5250MHz Band Edge @ 3m	
ANT	11a_Tx_Ch36 5180MHz	
4+3	Vertical	Fundamental
Peak	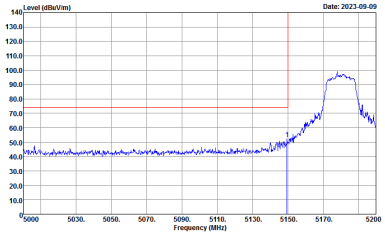	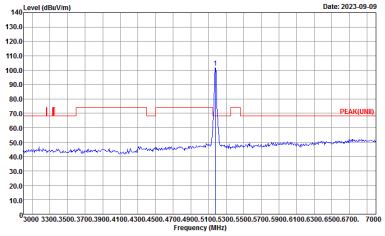
Avg.	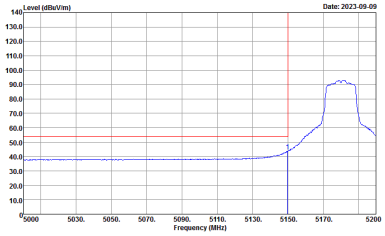	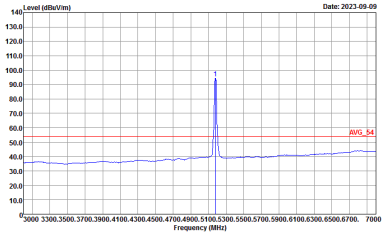

BLE(2M)_Tx_CH39 + WLAN (5GHz) 802.11a_Tx_CH36

(Harmonic @ 3m)

	2.4GHz 2400~2483.5MHz +Band 1 5150~5250MHz Harmonic @ 3m	
ANT	BLE_Tx_Ch39+11a_Tx_Ch36	
Simultaneously	Horizontal	Vertical
Peak Avg.	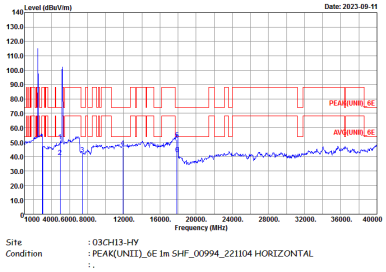	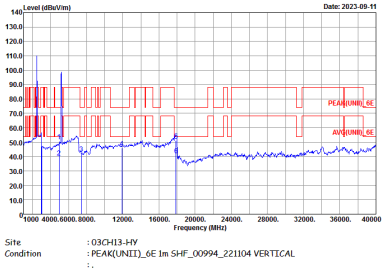

	2.4GHz 2400~2483.5MHz +Band 1 5150~5250MHz Harmonic @ 3m	
ANT	BLE_Tx_Ch39+11a_Tx_Ch36	
Simultaneously	Horizontal	Vertical
14.47G ~14.5G Avg.	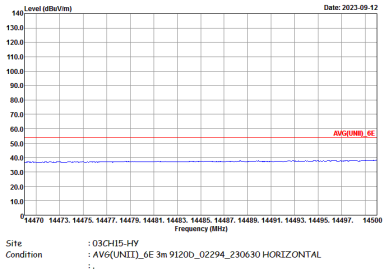	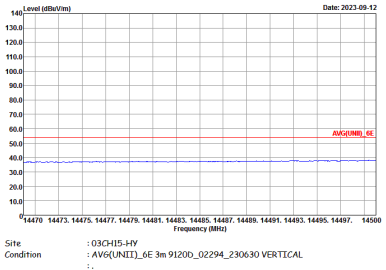
17.7G ~18G Avg.	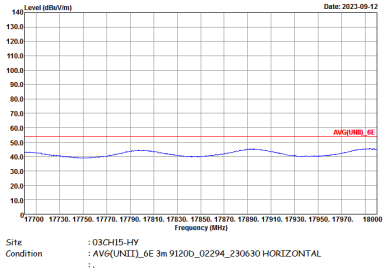	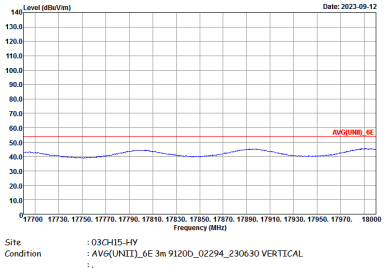

Emission above 18GHz

BLE(2M)_Tx_CH39 + WLAN (5GHz) 802.11a_Tx_CH36

(SHF)

	2.4GHz 2400~2483.5MHz +Band 1 5150~5250MHz Harmonic @ 1m	
ANT	BLE_Tx_Ch39+11a_Tx_Ch36	
Simultaneously	Horizontal	Vertical
Peak Avg.	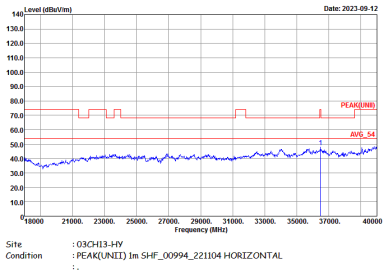	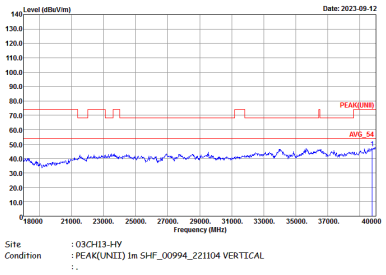

Emission below 1GHz

BLE(2M)_Tx_CH39 + WLAN (5GHz) 802.11a_Tx_CH36

(LF)

	2.4GHz 2400~2483.5MHz +Band 1 5150~5250MHz Harmonic @ 3m	
ANT	BLE_Tx_Ch39+11a_Tx_Ch36	
Simultaneously	Horizontal	Vertical
QP / Peak	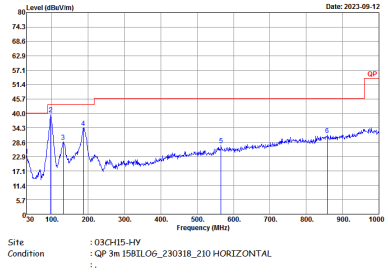	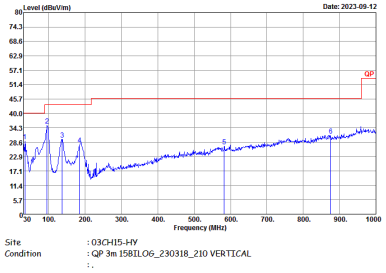

Appendix C. Duty Cycle Plots

<Mode 1>

Antenna	Band	Duty Cycle(%)	T(us)	1/T(kHz)	VBW Setting
4+3	2.4GHz 802.11g	93.46	1430	0.70	750Hz
4+3	5GHz 802.11a	93.46	1430	0.70	750Hz

MIMO <Ant. 4+3>

2.4GHz 802.11g	5GHz 802.11a
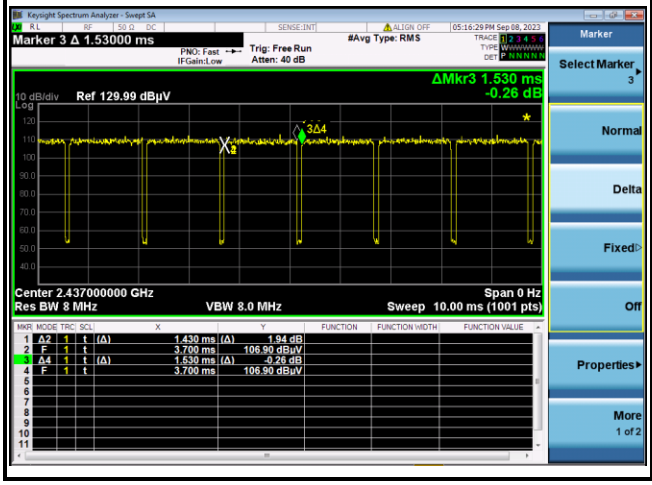	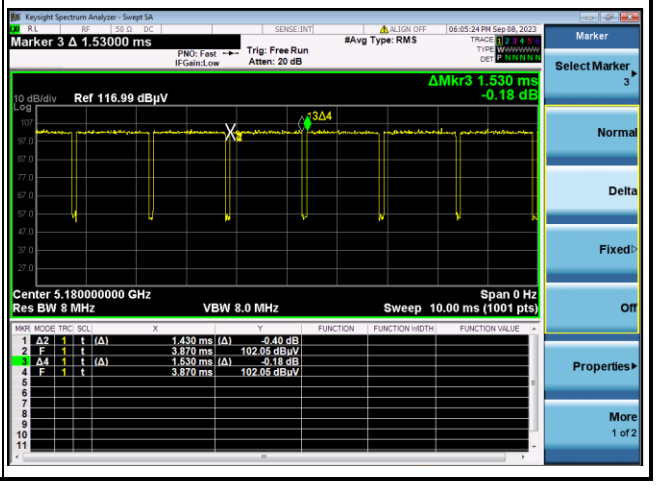

<Mode 2>

Antenna	Band	Duty Cycle(%)	T(us)	1/T(kHz)	VBW Setting
4+3	2.4GHz 802.11g	93.46	1430	0.70	750Hz
4+3	6GHz 802.11a	93.46	1430	0.70	750Hz

MIMO <Ant. 4+3>

2.4GHz 802.11g	6GHz 802.11a
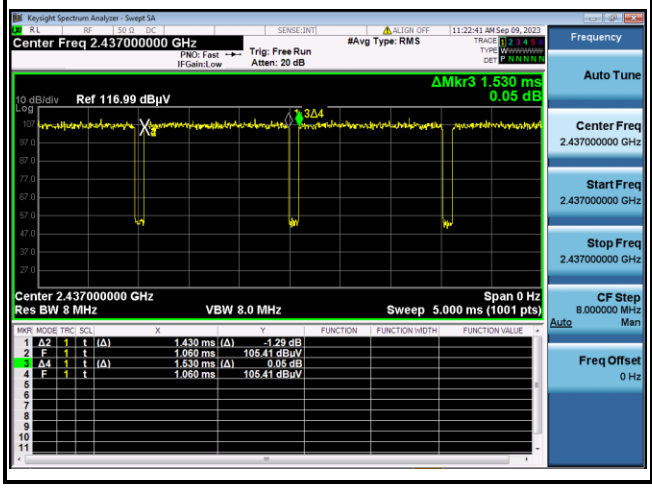	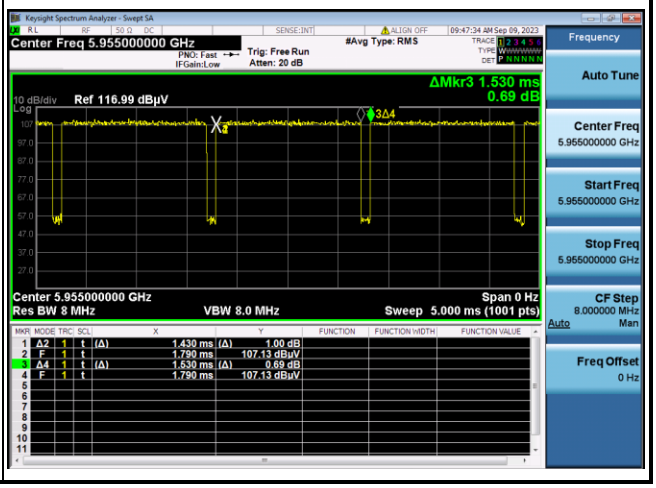

<Mode 3>

Antenna	Band	Duty Cycle(%)	T(us)	1/T(kHz)	VBW Setting
3	Bluetooth - LE for 2Mbps	56.91	1070	0.93	1kHz
4+3	5GHz 802.11a	93.46	1430	0.70	750Hz

<Ant. 3> **MIMO <Ant. 4+3>**

Bluetooth - LE for 2Mbps	5GHz 802.11a
	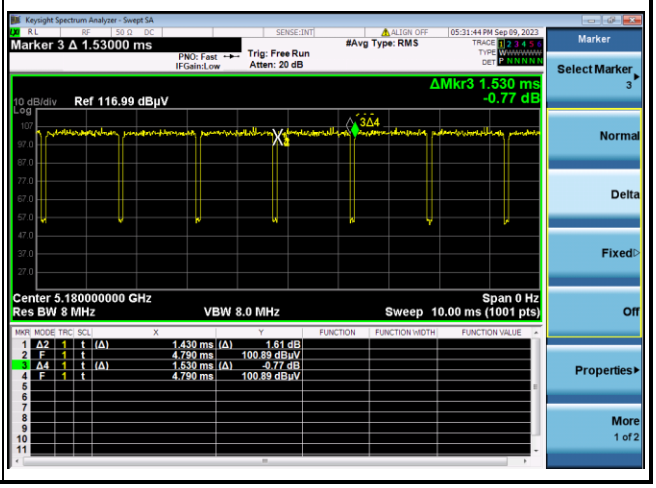

———THE END———