



4

Mode

Band Edge


2400-2483.5_802.11g_CH01_2412MHz

Pol.

Horizontal


Fundamental

Peak

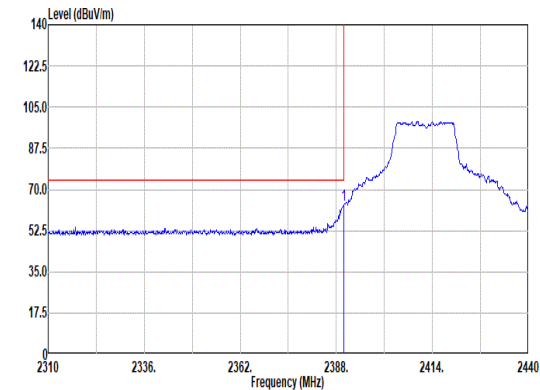

Site : 03CH11-HY
Condition: PEAK_BE_74 3m 91200_01620_240828 HORIZONTAL
: RBW:1000.000kHz VBW:3000.000kHz SMT:Auto
Detector : PEAK
Mode : 4
Setting : 72
Plane : X with adapter


1	Limit		Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg
1	2389.95	63.14	74.00	-10.86	51.96	27.30	7.19	33.34	10.03	300 222 PEAK

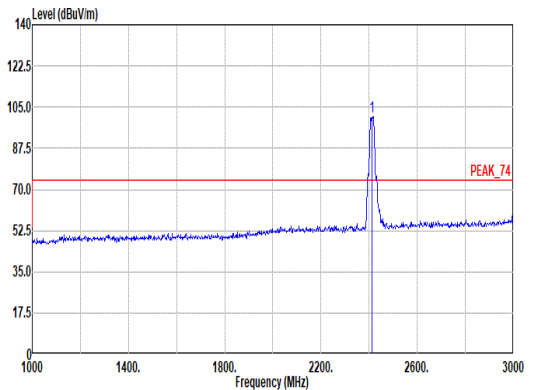

Site : 03CH11-HY
Condition: PEAK_74 3m 91200_01620_240828 HORIZONTAL
: RBW:1000.000kHz VBW:3000.000kHz SMT:Auto
Detector : PEAK
Mode : 4
Setting : 72
Plane : X with adapter


1	Limit		Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg
1	2412.00	100.69	-----	-----	89.30	27.46	7.22	33.32	10.03	300 222 PEAK

Avg

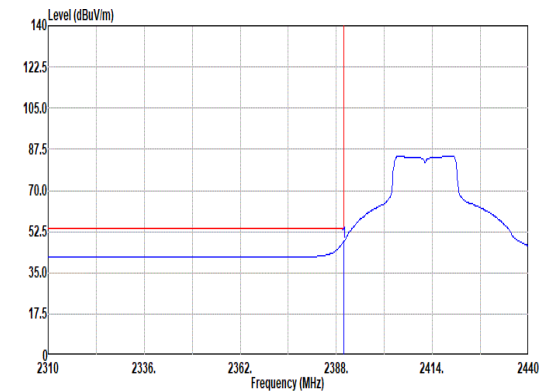

Site : 03CH11-HY
Condition: AVG_BE_54 3m 91200_01620_240828 HORIZONTAL
: RBW:1000.000kHz VBW:0.750kHz SMT:Auto
Detector : PEAK
Mode : 4
Setting : 72
Plane : X with adapter

1	Limit		Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg
1	2389.95	48.23	54.00	-5.77	37.05	27.30	7.19	33.34	10.03	300 222 AVERAGE

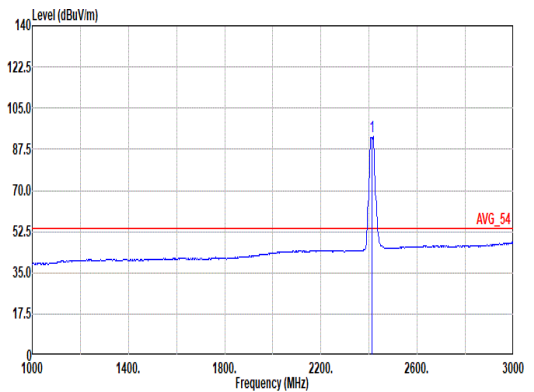

Site : 03CH11-HY
Condition: AVG_54 3m 91200_01620_240828 HORIZONTAL
: RBW:1000.000kHz VBW:0.750kHz SMT:Auto
Detector : PEAK
Mode : 4
Setting : 72
Plane : X with adapter

1	Limit		Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg
1	2412.00	92.77	-----	-----	81.35	27.48	7.23	33.32	10.03	300 222 AVERAGE



4

Mode

Band Edge


2400-2483.5_802.11g_CH01_2412MHz

Pol.

Vertical


Fundamental

Peak

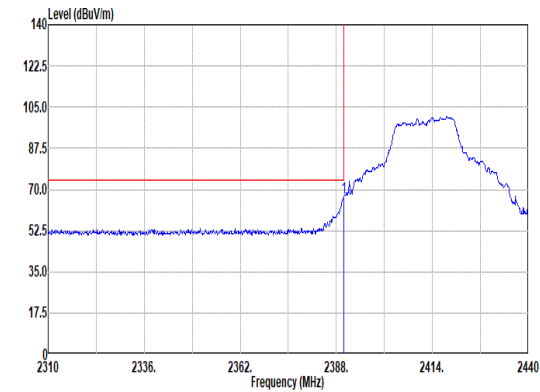

Site : 03CH11-HY
Condition: PEAK_BE_74 3m 91200_01620_240828 VERTICAL
: RBW:1000.000kHz VBW:3000.000kHz SMT:Auto
Detector : PEAK
Mode : 4
Setting : 72
Plane : X with adapter


	Freq	Limit		Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark
		Level	Line Margin	Level	Factor	Loss	Factor	Factor			
	MHz	dBuV/m	dBuV/m	dB	dB	dB/m	dB	dB	dB	cm	deg
1	2389.95	66.67	74.00	-7.33	55.49	27.30	7.19	33.34	10.03	400	316 PEAK

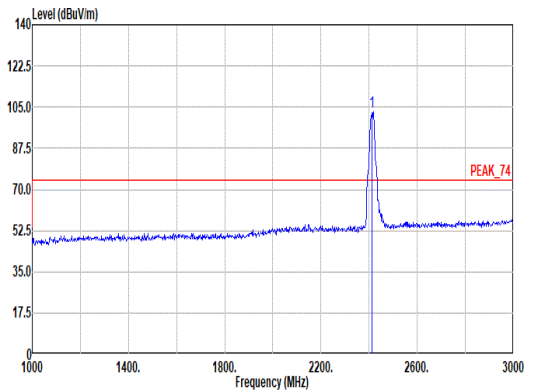

Site : 03CH11-HY
Condition: PEAK_74 3m 91200_01620_240828 VERTICAL
: RBW:1000.000kHz VBW:3000.000kHz SMT:Auto
Detector : PEAK
Mode : 4
Setting : 72
Plane : X with adapter


	Freq	Limit		Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark
		Level	Line Margin	Level	Factor	Loss	Factor	Factor			
	MHz	dBuV/m	dBuV/m	dB	dB	dB/m	dB	dB	dB	cm	deg
1	2412.00	102.90	-----	91.46	27.50	7.23	33.32	10.03	400	316 PEAK	

Avg

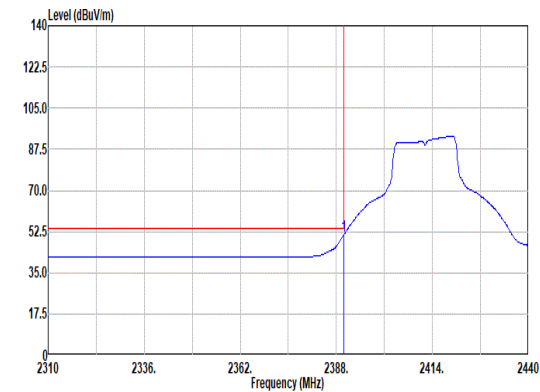

Site : 03CH11-HY
Condition: AVG_BE_54 3m 91200_01620_240828 VERTICAL
: RBW:1000.000kHz VBW:0.750kHz SMT:Auto
Detector : PEAK
Mode : 4
Setting : 72
Plane : X with adapter



	Freq	Limit		Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark
		Level	Line Margin	Level	Factor	Loss	Factor	Factor			
	MHz	dBuV/m	dBuV/m	dB	dB	dB/m	dB	dB	dB	cm	deg
1	2389.95	50.96	54.00	-3.04	39.78	27.30	7.19	33.34	10.03	400	316 AVERAGE

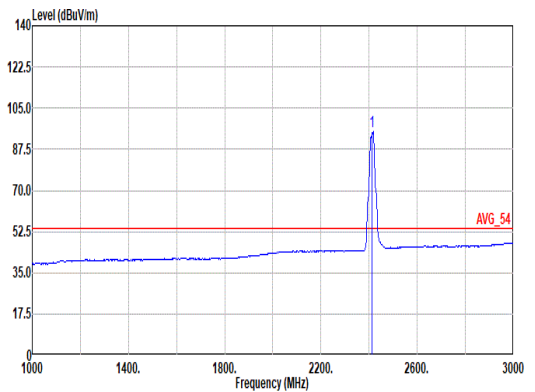





Site : 03CH11-HY
Condition: AVG_54 3m 91200_01620_240828 VERTICAL
: RBW:1000.000kHz VBW:0.750kHz SMT:Auto
Detector : PEAK
Mode : 4
Setting : 72
Plane : X with adapter

	Freq	Limit		Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark
		Level	Line Margin	Level	Factor	Loss	Factor	Factor			
	MHz	dBuV/m	dBuV/m	dB	dB	dB/m	dB	dB	dB	cm	deg
1	2412.00	95.06	-----	83.64	27.48	7.23	33.32	10.03	400	316 AVERAGE	

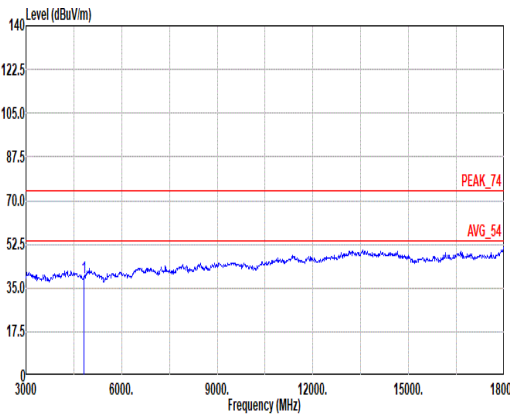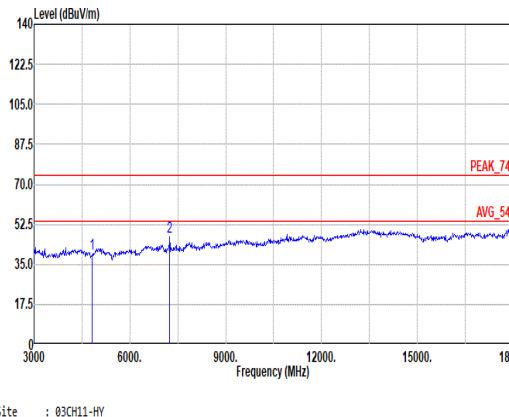

Mode	4																																																																	
	Harmonic																																																																	
	2400-2483.5_802.11g_CH01_2412MHz																																																																	
Pol.	Horizontal						Vertical																																																											
Peak Avg																																																																		
	Site : 03CH11-HY Condition: PEAK_74 3m 91200_01620_240828 HORIZONTAL Mode : 4 Setting : 72 Plane : X with adapter						Site : 03CH11-HY Condition: PEAK_74 3m 91200_01620_240828 VERTICAL Mode : 4 Setting : 72 Plane : X with adapter : The unwanted signal "7236 MHz" can be ignored since it falls within : the non-restricted band and meet the requirements of 15.247 (d).																																																											
<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4824.00</td><td>39.05</td><td>74.00</td><td>-34.95</td><td>62.91</td><td>32.44</td><td>9.93</td><td>66.74</td><td>0.51</td><td>--</td><td>Peak</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4824.00	39.05	74.00	-34.95	62.91	32.44	9.93	66.74	0.51	--	Peak												
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																								
1	4824.00	39.05	74.00	-34.95	62.91	32.44	9.93	66.74	0.51	--	Peak																																																							
<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4824.00</td><td>39.82</td><td>74.00</td><td>-34.18</td><td>63.68</td><td>32.44</td><td>9.93</td><td>66.74</td><td>0.51</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>7236.00</td><td>46.95</td><td>-----</td><td>-----</td><td>62.74</td><td>36.80</td><td>12.75</td><td>65.68</td><td>0.34</td><td>--</td><td>Peak</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4824.00	39.82	74.00	-34.18	63.68	32.44	9.93	66.74	0.51	--	Peak	2	7236.00	46.95	-----	-----	62.74	36.80	12.75	65.68	0.34	--	Peak
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																								
1	4824.00	39.82	74.00	-34.18	63.68	32.44	9.93	66.74	0.51	--	Peak																																																							
2	7236.00	46.95	-----	-----	62.74	36.80	12.75	65.68	0.34	--	Peak																																																							

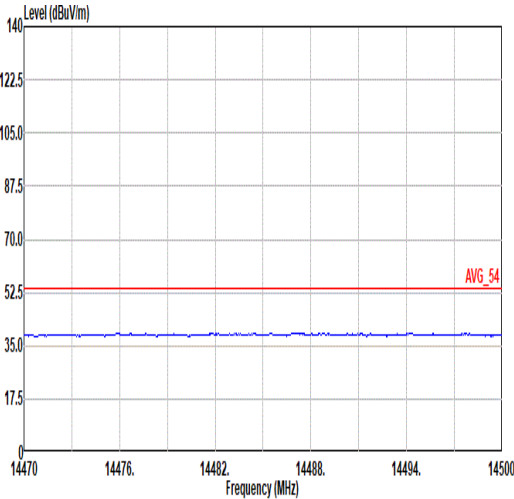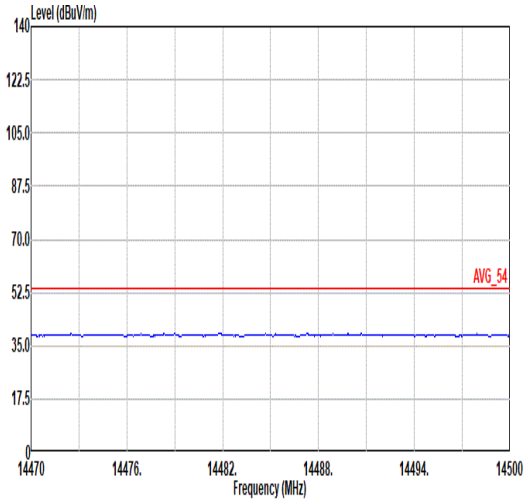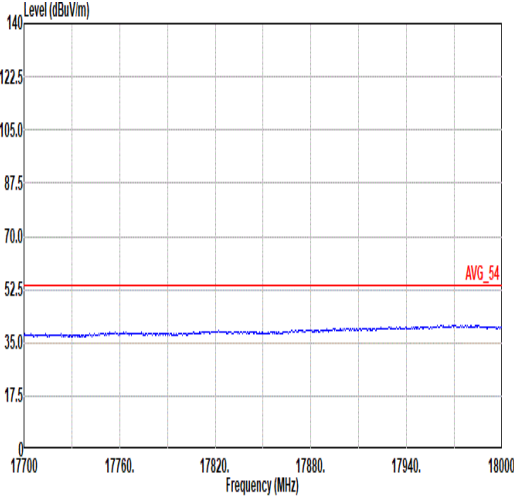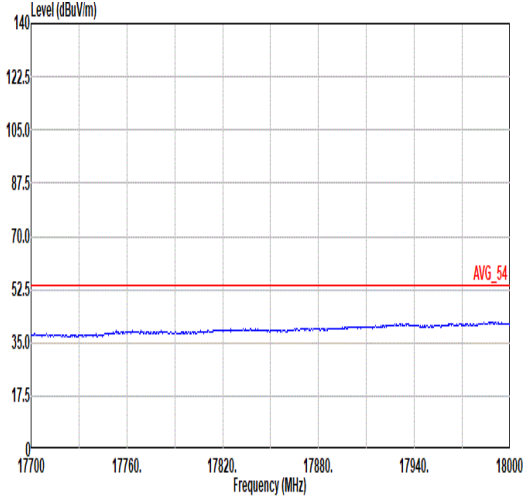

Mode	4	
	Harmonic	
	2400-2483.5_802.11g_CH01_2412MHz	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	 Site : 03CH11-HY Condition: AVG_54 3m 91280_01620_240828 HORIZONTAL Mode : 4 Setting : 72 Plane : X with adapter	 Site : 03CH11-HY Condition: AVG_54 3m 91280_01620_240828 VERTICAL Mode : 4 Setting : 72 Plane : X with adapter
17.7G ~18G Avg	 Site : 03CH11-HY Condition: AVG_54 3m 91280_01620_240828 HORIZONTAL Mode : 4 Setting : 72 Plane : X with adapter	 Site : 03CH11-HY Condition: AVG_54 3m 91280_01620_240828 VERTICAL Mode : 4 Setting : 72 Plane : X with adapter



5

Mode

Band Edge - L


2400-2483.5_802.11g_CH06_2437MHz

Pol.

Horizontal


Fundamental

Peak

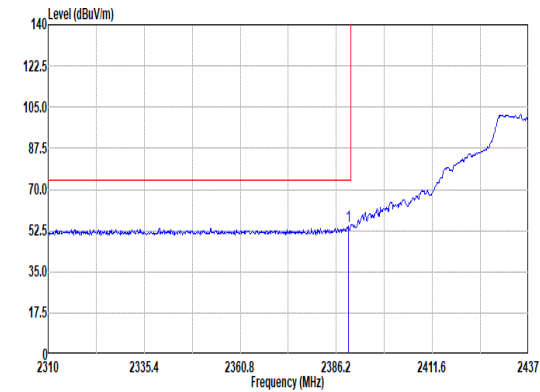

Site : 03CH11-HY
Condition: PEAK_BE_74 3m 91200_01620_240828 HORIZONTAL
: RBW:1000.000kHz VBW:3000.000kHz SMT:Auto
Detector : PEAK
Mode : 5
Setting : 84
Plane : X with adapter


1	Limit		Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark
	Freq	Level	Line	Level	Factor	Loss	Factor	Factor		
	MHz	dBuV/m	dBuV/m	dB	dB	dB/m	dB	dB	cm	deg
1	2389.38	54.51	74.00	-19.49	43.34	27.29	7.19	33.34	10.03	118 13 PEAK

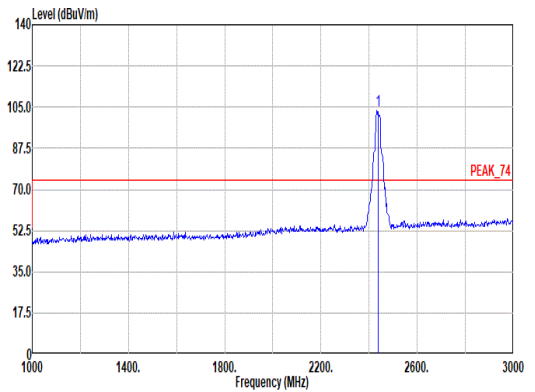

Site : 03CH11-HY
Condition: PEAK_74 3m 91200_01620_240828 HORIZONTAL
: RBW:1000.000kHz VBW:3000.000kHz SMT:Auto
Detector : PEAK
Mode : 5
Setting : 84
Plane : X with adapter


1	Limit		Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark
	Freq	Level	Line	Level	Factor	Loss	Factor	Factor		
	MHz	dBuV/m	dBuV/m	dB	dB	dB/m	dB	dB	cm	deg
1	2437.00	103.57	-----	92.01	27.60	7.24	33.31	10.03	118	13 PEAK

Avg

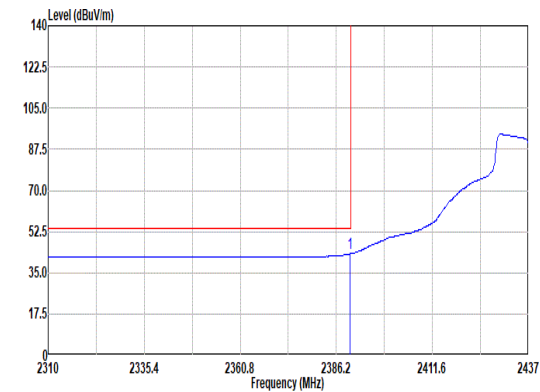

Site : 03CH11-HY
Condition: AVG_BE_54 3m 91200_01620_240828 HORIZONTAL
: RBW:1000.000kHz VBW:0.750kHz SMT:Auto
Detector : PEAK
Mode : 5
Setting : 84
Plane : X with adapter



1	Limit		Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark
	Freq	Level	Line	Level	Factor	Loss	Factor	Factor		
	MHz	dBuV/m	dBuV/m	dB	dB	dB/m	dB	dB	cm	deg
1	2389.88	43.06	54.00	-10.94	31.88	27.30	7.19	33.34	10.03	118 13 AVERAGE

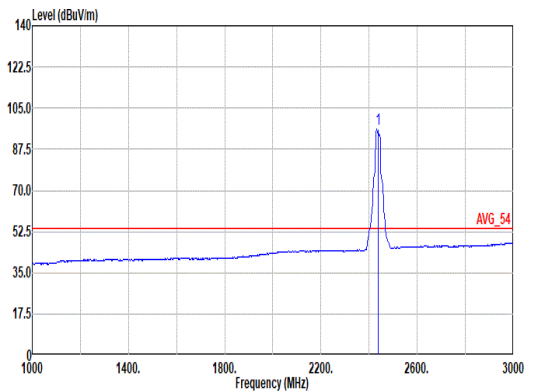





Site : 03CH11-HY
Condition: AVG_54 3m 91200_01620_240828 HORIZONTAL
: RBW:1000.000kHz VBW:0.750kHz SMT:Auto
Detector : PEAK
Mode : 5
Setting : 84
Plane : X with adapter

1	Limit		Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark
	Freq	Level	Line	Level	Factor	Loss	Factor	Factor		
	MHz	dBuV/m	dBuV/m	dB	dB	dB/m	dB	dB	cm	deg
1	2437.00	96.04	-----	84.48	27.60	7.24	33.31	10.03	118	13 AVERAGE

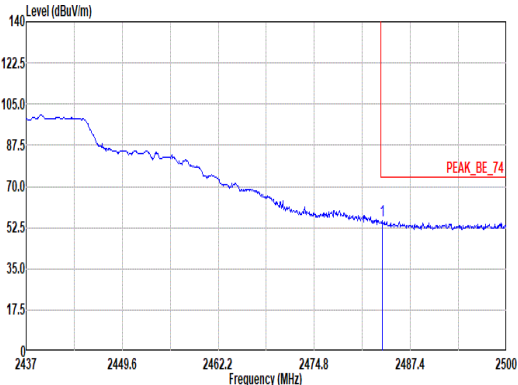
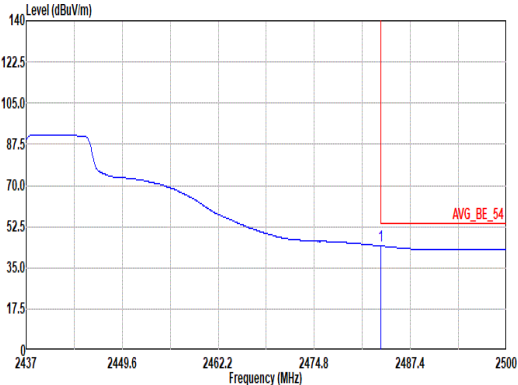


Mode	5																																																							
	Band Edge - R																																																							
	2400-2483.5_802.11g_CH06_2437MHz																																																							
Pol.	Horizontal						Fundamental																																																	
Peak	 Site : 03CH11-HY Condition: PEAK_BE_74 3m 91200_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto Detector : PEAK Mode : 5 Setting : 84 Plane : X with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.68</td><td>55.21</td><td>74.00</td><td>-18.79</td><td>43.30</td><td>27.84</td><td>7.32</td><td>33.28</td><td>10.03</td><td>118</td><td>13</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.68	55.21	74.00	-18.79	43.30	27.84	7.32	33.28	10.03	118	13	PEAK	Blank					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																														
1	2483.68	55.21	74.00	-18.79	43.30	27.84	7.32	33.28	10.03	118	13	PEAK																																												
Avg	 Site : 03CH11-HY Condition: AVG_BE_54 3m 91200_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:0.750kHz SMT:Auto Detector : PEAK Mode : 5 Setting : 84 Plane : X with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.56</td><td>44.31</td><td>54.00</td><td>-9.69</td><td>32.40</td><td>27.84</td><td>7.32</td><td>33.28</td><td>10.03</td><td>118</td><td>13</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.56	44.31	54.00	-9.69	32.40	27.84	7.32	33.28	10.03	118	13	AVERAGE	Blank					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																														
1	2483.56	44.31	54.00	-9.69	32.40	27.84	7.32	33.28	10.03	118	13	AVERAGE																																												

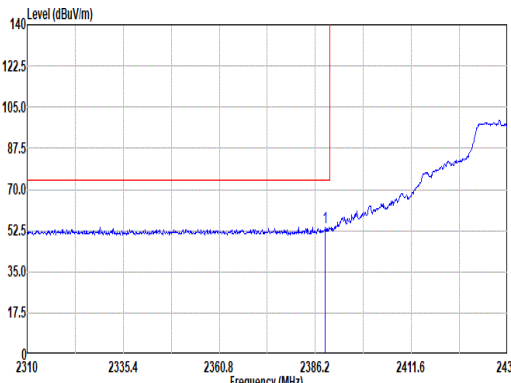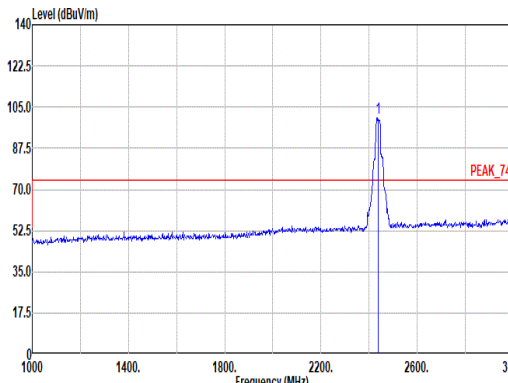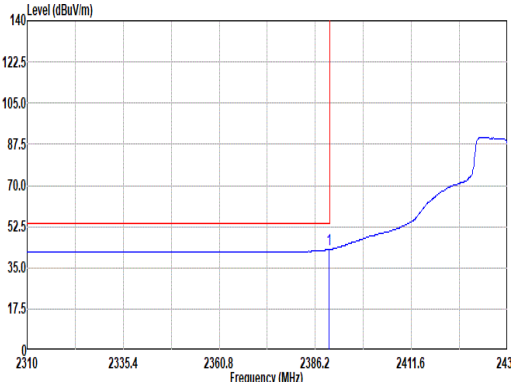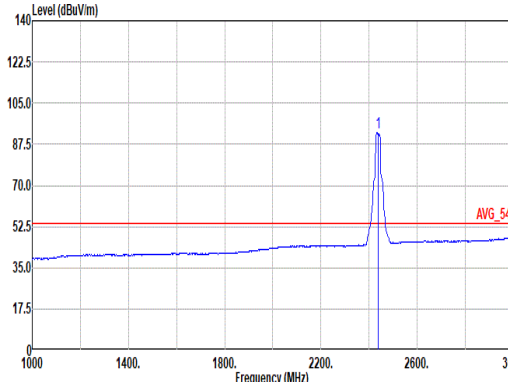

Mode	5																																																																																																		
	Band Edge - L																																																																																																		
	2400-2483.5_802.11g_CH06_2437MHz																																																																																																		
Pol.	Vertical						Fundamental																																																																																												
Peak																																																																																																			
	Site : 03CH11-HY Condition: PEAK_BE_74 3m 91200_01620_240828 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto Detector : PEAK Mode : 5 Setting : 84 Plane : X with adapter <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2388.87</td><td>54.08</td><td>74.00</td><td>-19.92</td><td>42.92</td><td>27.29</td><td>7.18</td><td>33.34</td><td>10.03</td><td>379</td><td>345</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2388.87	54.08	74.00	-19.92	42.92	27.29	7.18	33.34	10.03	379	345	PEAK	Site : 03CH11-HY Condition: PEAK_74 3m 91200_01620_240828 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto Detector : PEAK Mode : 5 Setting : 84 Plane : X with adapter <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2437.00</td><td>100.34</td><td>-----</td><td>-----</td><td>88.78</td><td>27.60</td><td>7.24</td><td>33.31</td><td>10.03</td><td>379</td><td>345</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2437.00	100.34	-----	-----	88.78	27.60	7.24	33.31	10.03	379	345
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2388.87	54.08	74.00	-19.92	42.92	27.29	7.18	33.34	10.03	379	345	PEAK																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2437.00	100.34	-----	-----	88.78	27.60	7.24	33.31	10.03	379	345	PEAK																																																																																							
Avg																																																																																																			
	Site : 03CH11-HY Condition: AVG_BE_54 3m 91200_01620_240828 VERTICAL : RBW:1000.000kHz VBW:0.750kHz SMT:Auto Detector : PEAK Mode : 5 Setting : 84 Plane : X with adapter <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2389.88</td><td>42.75</td><td>54.00</td><td>-11.25</td><td>31.57</td><td>27.30</td><td>7.19</td><td>33.34</td><td>10.03</td><td>379</td><td>345</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.88	42.75	54.00	-11.25	31.57	27.30	7.19	33.34	10.03	379	345	AVERAGE	Site : 03CH11-HY Condition: AVG_54 3m 91200_01620_240828 VERTICAL : RBW:1000.000kHz VBW:0.750kHz SMT:Auto Detector : PEAK Mode : 5 Setting : 84 Plane : X with adapter <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2437.00</td><td>92.39</td><td>-----</td><td>-----</td><td>80.83</td><td>27.60</td><td>7.24</td><td>33.31</td><td>10.03</td><td>379</td><td>345</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2437.00	92.39	-----	-----	80.83	27.60	7.24	33.31	10.03	379	345
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2389.88	42.75	54.00	-11.25	31.57	27.30	7.19	33.34	10.03	379	345	AVERAGE																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2437.00	92.39	-----	-----	80.83	27.60	7.24	33.31	10.03	379	345	AVERAGE																																																																																							



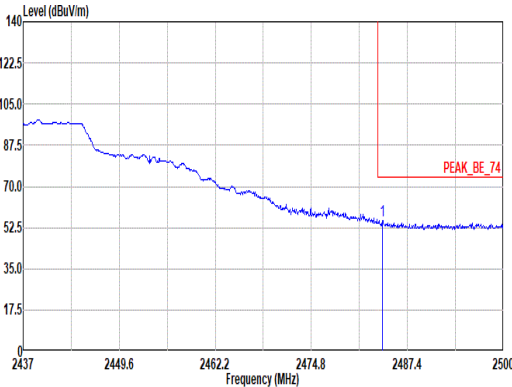
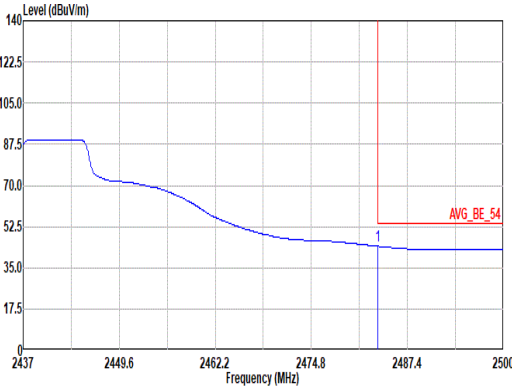


Mode	5																																											
	Band Edge - R																																											
	2400-2483.5_802.11g_CH06_2437MHz																																											
Pol.	Vertical	Fundamental																																										
Peak	 Site : 03CH11-HY Condition: PEAK_BE_74 3m 91200_01620_240828 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto Detector : PEAK Mode : 5 Setting : 84 Plane : X with adapter <table><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>cm</th><th>deg</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 2484.12</td><td>55.57</td><td>74.00</td><td>-18.43</td><td>43.66</td><td>27.84</td><td>7.32</td><td>33.28</td><td>10.03</td><td>379</td><td>345</td></tr></table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 2484.12	55.57	74.00	-18.43	43.66	27.84	7.32	33.28	10.03	379	345	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																		
1 2484.12	55.57	74.00	-18.43	43.66	27.84	7.32	33.28	10.03	379	345																																		
Avg	 Site : 03CH11-HY Condition: AVG_BE_54 3m 91200_01620_240828 VERTICAL : RBW:1000.000kHz VBW:0.750kHz SMT:Auto Detector : PEAK Mode : 5 Setting : 84 Plane : X with adapter <table><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>cm</th><th>deg</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 2483.56</td><td>44.15</td><td>54.00</td><td>-9.85</td><td>32.24</td><td>27.84</td><td>7.32</td><td>33.28</td><td>10.03</td><td>379</td><td>345</td></tr></table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 2483.56	44.15	54.00	-9.85	32.24	27.84	7.32	33.28	10.03	379	345	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																		
1 2483.56	44.15	54.00	-9.85	32.24	27.84	7.32	33.28	10.03	379	345																																		



Mode	5																																																																																																																																													
	Harmonic																																																																																																																																													
	2400-2483.5_802.11g_CH06_2437MHz																																																																																																																																													
Pol.	Horizontal	Vertical																																																																																																																																												
Peak Avg	Site : 03CH11-HY Condition: PEAK_74 3m 91200_01620_240828 HORIZONTAL Mode : 5 Setting : 84 Plane : X with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4874.00</td><td>40.61</td><td>74.00</td><td>-33.39</td><td>63.99</td><td>32.70</td><td>10.09</td><td>66.70</td><td>0.53</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>7311.00</td><td>50.04</td><td>74.00</td><td>-23.96</td><td>65.95</td><td>36.78</td><td>12.76</td><td>65.77</td><td>0.32</td><td>264</td><td>217</td><td>Peak</td></tr><tr><td>3</td><td>7311.00</td><td>40.60</td><td>54.00</td><td>-13.40</td><td>56.51</td><td>36.78</td><td>12.76</td><td>65.77</td><td>0.32</td><td>264</td><td>217</td><td>Average</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4874.00	40.61	74.00	-33.39	63.99	32.70	10.09	66.70	0.53	--	--	Peak	2	7311.00	50.04	74.00	-23.96	65.95	36.78	12.76	65.77	0.32	264	217	Peak	3	7311.00	40.60	54.00	-13.40	56.51	36.78	12.76	65.77	0.32	264	217	Average	Site : 03CH11-HY Condition: PEAK_74 3m 91200_01620_240828 VERTICAL Mode : 5 Setting : 84 Plane : X with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4874.00</td><td>39.97</td><td>74.00</td><td>-34.03</td><td>63.35</td><td>32.70</td><td>10.09</td><td>66.70</td><td>0.53</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>7311.00</td><td>51.79</td><td>74.00</td><td>-22.21</td><td>67.70</td><td>36.78</td><td>12.76</td><td>65.77</td><td>0.32</td><td>100</td><td>236</td><td>Peak</td></tr><tr><td>3</td><td>7311.00</td><td>41.08</td><td>54.00</td><td>-12.92</td><td>56.99</td><td>36.78</td><td>12.76</td><td>65.77</td><td>0.32</td><td>100</td><td>236</td><td>Average</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4874.00	39.97	74.00	-34.03	63.35	32.70	10.09	66.70	0.53	--	--	Peak	2	7311.00	51.79	74.00	-22.21	67.70	36.78	12.76	65.77	0.32	100	236	Peak	3	7311.00	41.08	54.00	-12.92	56.99	36.78	12.76	65.77	0.32	100	236	Average
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																				
1	4874.00	40.61	74.00	-33.39	63.99	32.70	10.09	66.70	0.53	--	--	Peak																																																																																																																																		
2	7311.00	50.04	74.00	-23.96	65.95	36.78	12.76	65.77	0.32	264	217	Peak																																																																																																																																		
3	7311.00	40.60	54.00	-13.40	56.51	36.78	12.76	65.77	0.32	264	217	Average																																																																																																																																		
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																				
1	4874.00	39.97	74.00	-34.03	63.35	32.70	10.09	66.70	0.53	--	--	Peak																																																																																																																																		
2	7311.00	51.79	74.00	-22.21	67.70	36.78	12.76	65.77	0.32	100	236	Peak																																																																																																																																		
3	7311.00	41.08	54.00	-12.92	56.99	36.78	12.76	65.77	0.32	100	236	Average																																																																																																																																		

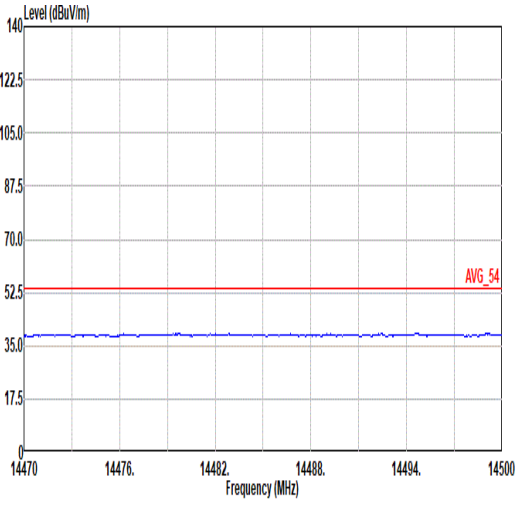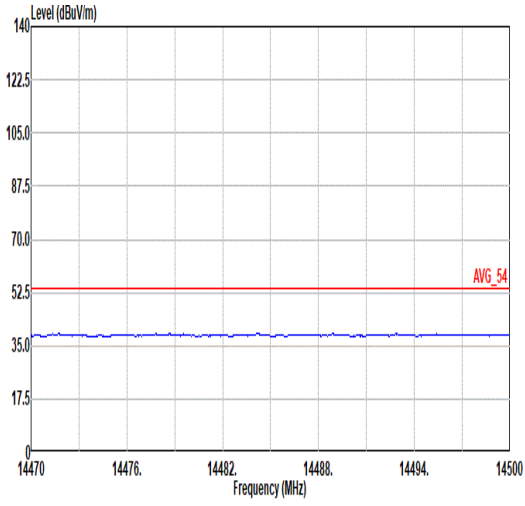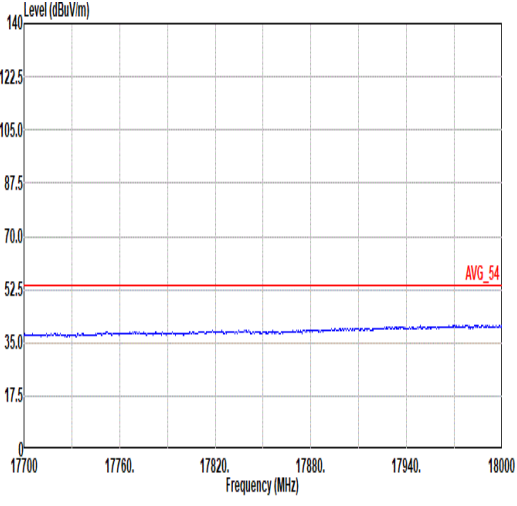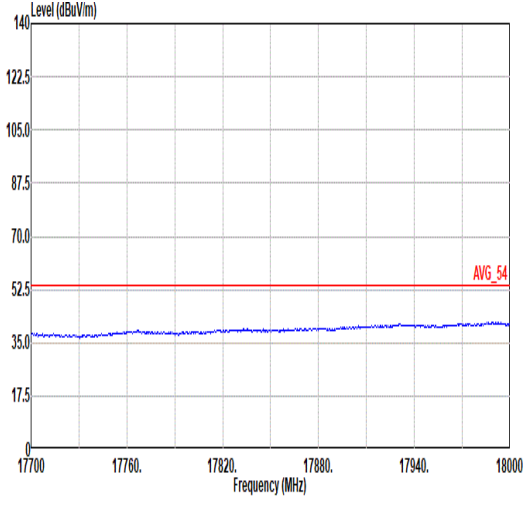

Mode	5	
	Harmonic	
	2400-2483.5_802.11g_CH06_2437MHz	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	 Site : 03CH11-HY Condition: AVG_54_3m_91280_01620_240828 HORIZONTAL Mode : 5 Setting : 84 Plane : X with adapter	 Site : 03CH11-HY Condition: AVG_54_3m_91280_01620_240828 VERTICAL Mode : 5 Setting : 84 Plane : X with adapter
17.7G ~18G Avg	 Site : 03CH11-HY Condition: AVG_54_3m_91280_01620_240828 HORIZONTAL Mode : 5 Setting : 84 Plane : X with adapter	 Site : 03CH11-HY Condition: AVG_54_3m_91280_01620_240828 VERTICAL Mode : 5 Setting : 84 Plane : X with adapter



6

Mode

Band Edge


2400-2483.5_802.11g_CH11_2462MHz

Pol.

Horizontal


Fundamental

Peak

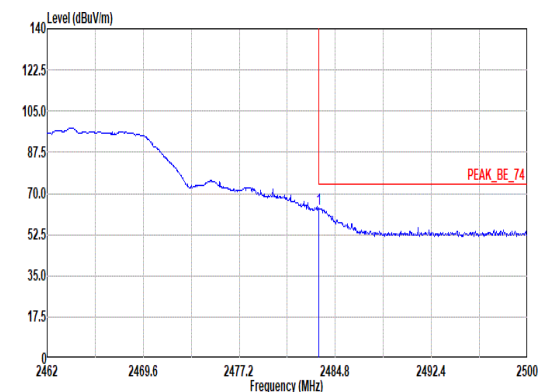

Site : 03CH11-HY
Condition: PEAK_BE_74 3m 91200_01620_240828 HORIZONTAL
: RBW:1000.000kHz VBW:3000.000kHz SMT:Auto
Detector : PEAK
Mode : 6
Setting : 70
Plane : X with adapter


Freq	Limit		Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark
	Level	Line Margin	Level	Factor	Loss	Factor	Factor	Factor	Factor	
MHz	dBuV/m	dBuV/m	dB	dB	dB/m	dB	dB	dB	cm	deg
1 2483.51	63.57	74.00	-10.43	51.66	27.84	7.32	33.28	10.03	392	41 PEAK

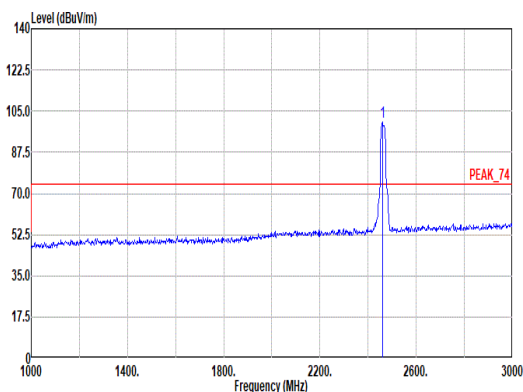

Site : 03CH11-HY
Condition: PEAK_74 3m 91200_01620_240828 HORIZONTAL
: RBW:1000.000kHz VBW:3000.000kHz SMT:Auto
Detector : PEAK
Mode : 6
Setting : 70
Plane : X with adapter


Freq	Limit		Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark
	Level	Line Margin	Level	Factor	Loss	Factor	Factor			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg
1 2462.00	100.15	-----	88.53	27.60	7.28	33.29	10.03	392	41	PEAK

Avg

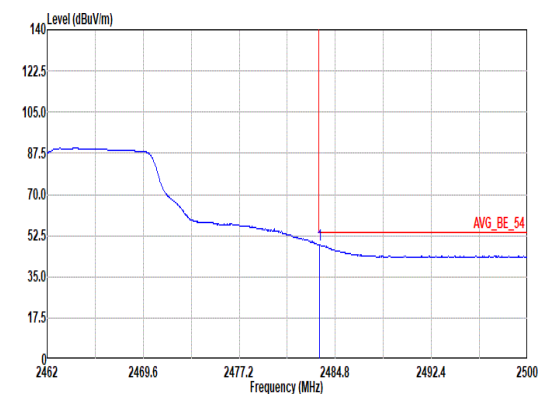

Site : 03CH11-HY
Condition: AVG_BE_54 3m 91200_01620_240828 HORIZONTAL
: RBW:1000.000kHz VBW:0.750kHz SMT:Auto
Detector : PEAK
Mode : 6
Setting : 70
Plane : X with adapter





Freq	Limit		Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark
	Level	Line Margin	Level	Factor	Loss	Factor	Factor	Factor	Factor	
MHz	dBuV/m	dBuV/m	dB	dB	dB/m	dB	dB	dB	cm	deg
1 2483.55	48.71	54.00	-5.29	36.80	27.84	7.32	33.28	10.03	392	41 AVERAGE

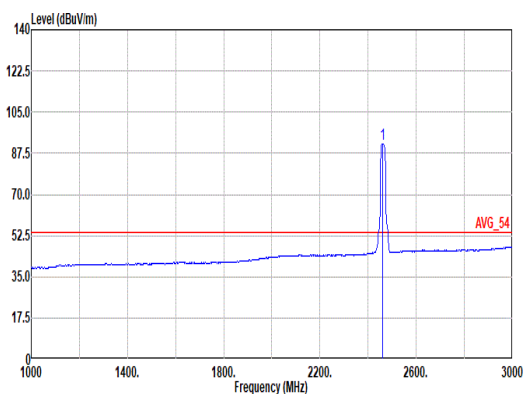



Site : 03CH11-HY
Condition: AVG_54 3m 91200_01620_240828 HORIZONTAL
: RBW:1000.000kHz VBW:0.750kHz SMT:Auto
Detector : PEAK
Mode : 6
Setting : 70
Plane : X with adapter

Freq	Limit		Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark
	Level	Line Margin	Level	Factor	Loss	Factor	Factor			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg
1 2462.00	91.33	-----	79.72	27.60	7.28	33.30	10.03	392	41	AVERAGE

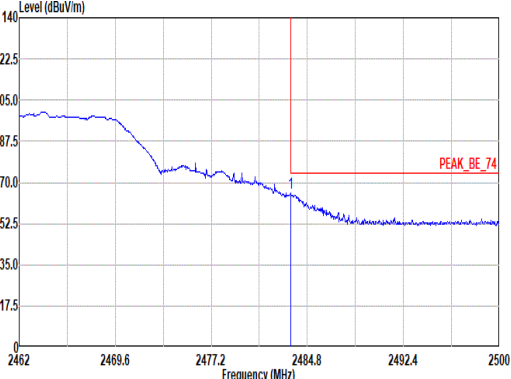
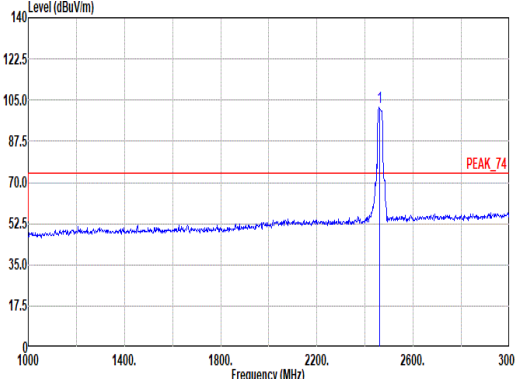
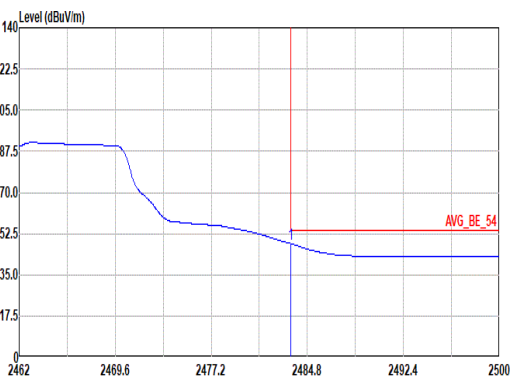
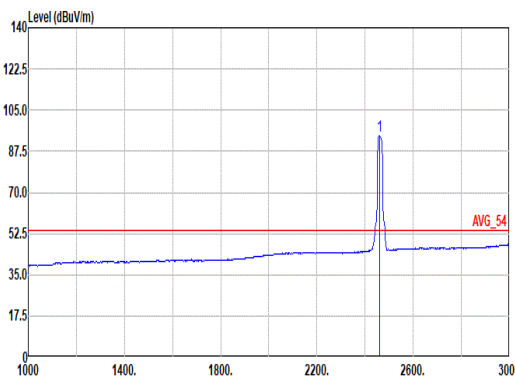


Mode	6																																																																																																			
	Band Edge																																																																																																			
	2400-2483.5_802.11g_CH11_2462MHz																																																																																																			
Pol.	Vertical						Fundamental																																																																																													
Peak																																																																																																				
	Site : 03CH11-HY Condition: PEAK_BE_74 3m 91200_01620_240828 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto Detector : PEAK Mode : 6 Setting : 70 Plane : X with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th>PEAK</th></tr><tr><td>1</td><td>2483.51</td><td>65.49</td><td>74.00</td><td>-8.51</td><td>53.58</td><td>27.84</td><td>7.32</td><td>33.28</td><td>10.03</td><td>146</td><td>143 PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	PEAK	1	2483.51	65.49	74.00	-8.51	53.58	27.84	7.32	33.28	10.03	146	143 PEAK	Site : 03CH11-HY Condition: PEAK_74 3m 91200_01620_240828 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto Detector : PEAK Mode : 6 Setting : 70 Plane : X with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th>PEAK</th></tr><tr><td>1</td><td>2462.00</td><td>101.85</td><td>-----</td><td>-----</td><td>90.24</td><td>27.60</td><td>7.28</td><td>33.30</td><td>10.03</td><td>146</td><td>143 PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	PEAK	1	2462.00	101.85	-----	-----	90.24	27.60	7.28	33.30	10.03	146
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																											
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	PEAK																																																																																									
1	2483.51	65.49	74.00	-8.51	53.58	27.84	7.32	33.28	10.03	146	143 PEAK																																																																																									
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																											
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	PEAK																																																																																								
1	2462.00	101.85	-----	-----	90.24	27.60	7.28	33.30	10.03	146	143 PEAK																																																																																									
Avg																																																																																																				
	Site : 03CH11-HY Condition: AVG_BE_54 3m 91200_01620_240828 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto Detector : PEAK Mode : 6 Setting : 70 Plane : X with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th>AVERAGE</th></tr><tr><td>1</td><td>2483.51</td><td>48.24</td><td>54.00</td><td>-5.76</td><td>36.33</td><td>27.84</td><td>7.32</td><td>33.28</td><td>10.03</td><td>146</td><td>143 AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	AVERAGE	1	2483.51	48.24	54.00	-5.76	36.33	27.84	7.32	33.28	10.03	146	143 AVERAGE	Site : 03CH11-HY Condition: AVG_54 3m 91200_01620_240828 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto Detector : PEAK Mode : 6 Setting : 70 Plane : X with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th>AVERAGE</th></tr><tr><td>1</td><td>2462.00</td><td>93.90</td><td>-----</td><td>-----</td><td>82.37</td><td>27.60</td><td>7.28</td><td>33.30</td><td>10.03</td><td>146</td><td>143 AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	AVERAGE	1	2462.00	93.90	-----	-----	82.37	27.60	7.28	33.30	10.03	146
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																											
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	AVERAGE																																																																																									
1	2483.51	48.24	54.00	-5.76	36.33	27.84	7.32	33.28	10.03	146	143 AVERAGE																																																																																									
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																											
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	AVERAGE																																																																																								
1	2462.00	93.90	-----	-----	82.37	27.60	7.28	33.30	10.03	146	143 AVERAGE																																																																																									

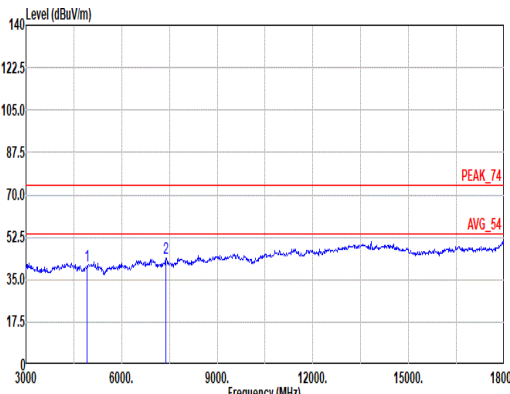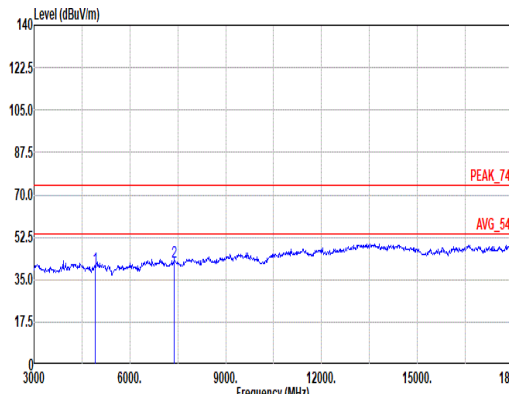

Mode	6																																																																																																																							
	Harmonic																																																																																																																							
	2400-2483.5_802.11g_CH11_2462MHz																																																																																																																							
Pol.	Horizontal						Vertical																																																																																																																	
Peak Avg																																																																																																																								
	Site : 03CH11-HY Condition: PEAK_74 3m 91280_01620_240828 HORIZONTAL Mode : 6 Setting : 70 Plane : X with adapter <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>4924.00</td><td>40.59</td><td>74.00</td><td>-33.41</td><td>63.55</td><td>32.90</td><td>10.24</td><td>66.66</td><td>0.56</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>7386.00</td><td>43.78</td><td>74.00</td><td>-30.22</td><td>60.11</td><td>36.48</td><td>12.76</td><td>65.86</td><td>0.29</td><td>--</td><td>Peak</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4924.00	40.59	74.00	-33.41	63.55	32.90	10.24	66.66	0.56	--	Peak	2	7386.00	43.78	74.00	-30.22	60.11	36.48	12.76	65.86	0.29	--	Peak	Site : 03CH11-HY Condition: PEAK_74 3m 91280_01620_240828 VERTICAL Mode : 6 Setting : 70 Plane : X with adapter <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>4924.00</td><td>39.65</td><td>74.00</td><td>-34.35</td><td>62.61</td><td>32.90</td><td>10.24</td><td>66.66</td><td>0.56</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>7386.00</td><td>42.17</td><td>74.00</td><td>-31.83</td><td>58.50</td><td>36.48</td><td>12.76</td><td>65.86</td><td>0.29</td><td>--</td><td>Peak</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4924.00	39.65	74.00	-34.35	62.61	32.90	10.24	66.66	0.56	--	Peak	2	7386.00	42.17	74.00	-31.83	58.50	36.48	12.76	65.86	0.29	--
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																														
1	4924.00	40.59	74.00	-33.41	63.55	32.90	10.24	66.66	0.56	--	Peak																																																																																																													
2	7386.00	43.78	74.00	-30.22	60.11	36.48	12.76	65.86	0.29	--	Peak																																																																																																													
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																														
1	4924.00	39.65	74.00	-34.35	62.61	32.90	10.24	66.66	0.56	--	Peak																																																																																																													
2	7386.00	42.17	74.00	-31.83	58.50	36.48	12.76	65.86	0.29	--	Peak																																																																																																													

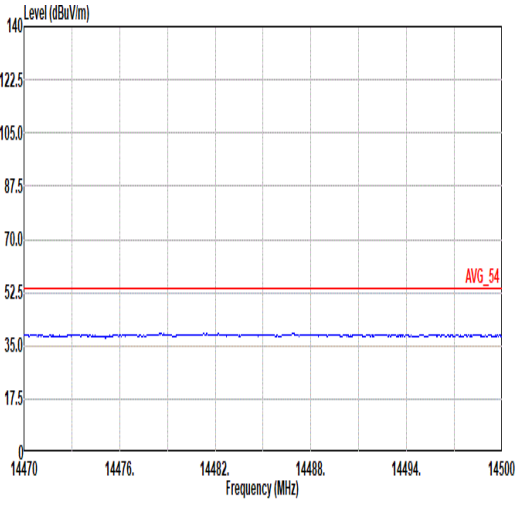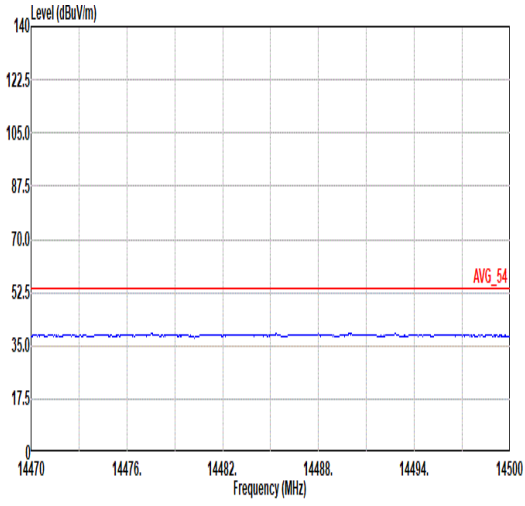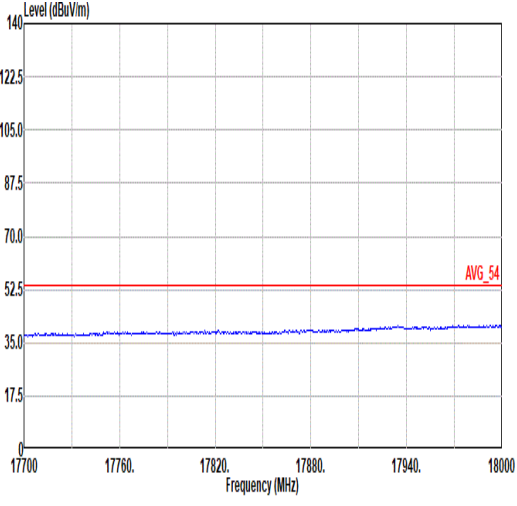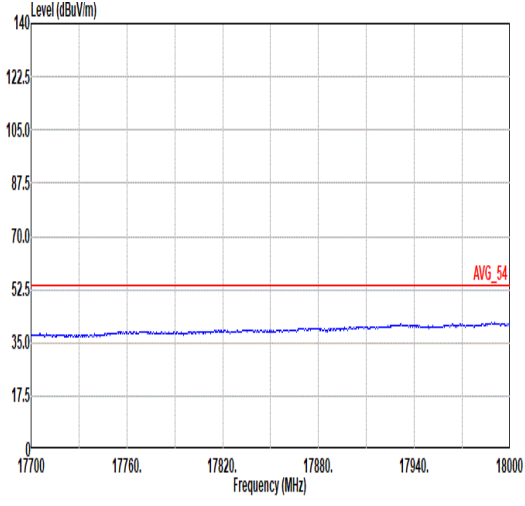

Mode	6	
	Harmonic	
	2400-2483.5_802.11g_CH11_2462MHz	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	 Site : 03CH11-HY Condition: AVG_54 3m 91280_01620_240828 HORIZONTAL Mode : 6 Setting : 70 Plane : X with adapter	 Site : 03CH11-HY Condition: AVG_54 3m 91280_01620_240828 VERTICAL Mode : 6 Setting : 70 Plane : X with adapter
17.7G ~18G Avg	 Site : 03CH11-HY Condition: AVG_54 3m 91280_01620_240828 HORIZONTAL Mode : 6 Setting : 70 Plane : X with adapter	 Site : 03CH11-HY Condition: AVG_54 3m 91280_01620_240828 VERTICAL Mode : 6 Setting : 70 Plane : X with adapter



7

Mode

Band Edge


2400-2483.5_802.11n_HT20_CH01_2412MHz

Pol.

Horizontal


Fundamental

Peak

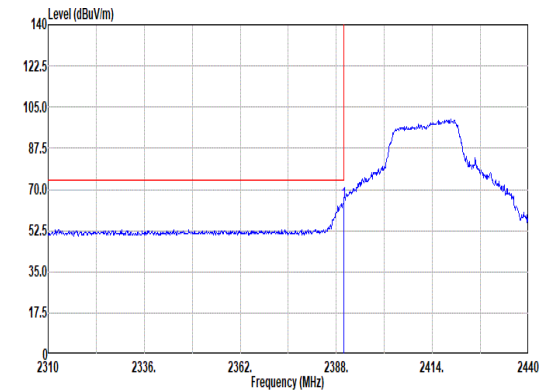

Site : 03CH11-HY
Condition: PEAK_BE_74 3m 91200_01620_240828 HORIZONTAL
: RBW:1000.000kHz VBW:3000.000kHz SMT:Auto
Detector : PEAK
Mode : 7
Setting : 72
Plane : X with adapter


1	Limit		Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg
1	2389.95	64.60	74.00	-9.40	53.42	27.30	7.19	33.34	10.03	367 224 PEAK

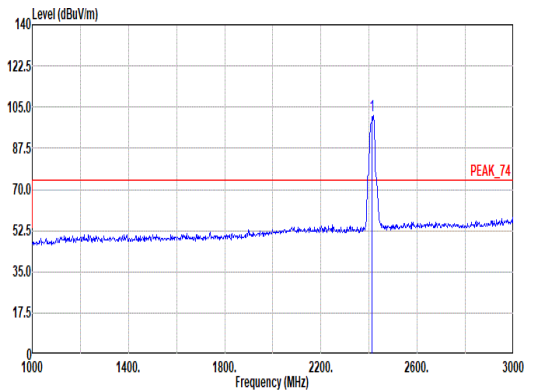

Site : 03CH11-HY
Condition: PEAK_74 3m 91200_01620_240828 HORIZONTAL
: RBW:1000.000kHz VBW:3000.000kHz SMT:Auto
Detector : PEAK
Mode : 7
Setting : 72
Plane : X with adapter


1	Limit		Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg
1	2412.00	101.66	-----	-----	90.22	27.50	7.23	33.32	10.03	367 224 PEAK

Avg

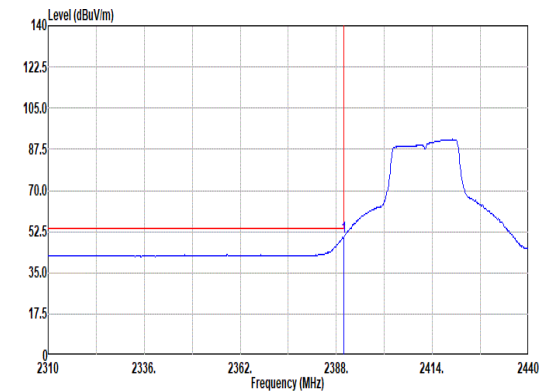

Site : 03CH11-HY
Condition: AVG_BE_54 3m 91200_01620_240828 HORIZONTAL
: RBW:1000.000kHz VBW:0.750kHz SMT:Auto
Detector : PEAK
Mode : 7
Setting : 72
Plane : X with adapter

1	Limit		Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg
1	2389.95	50.19	54.00	-3.81	39.01	27.30	7.19	33.34	10.03	367 224 AVERAGE

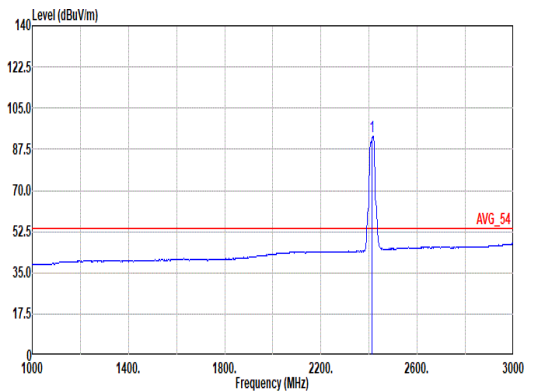

Site : 03CH11-HY
Condition: AVG_54 3m 91200_01620_240828 HORIZONTAL
: RBW:1000.000kHz VBW:0.750kHz SMT:Auto
Detector : PEAK
Mode : 7
Setting : 72
Plane : X with adapter

1	Limit		Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg
1	2412.00	93.21	-----	-----	81.77	27.50	7.23	33.32	10.03	367 224 AVERAGE



7

Mode

Band Edge


2400-2483.5_802.11n_HT20_CH01_2412MHz

Pol.

Vertical


Fundamental

Peak

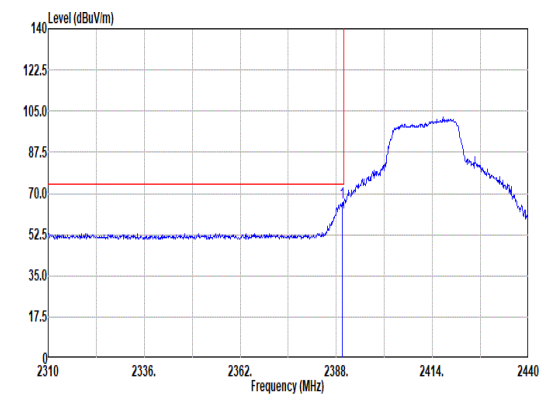

Site : 03CH11-HY
Condition: PEAK_BE_74 3m 91200_01620_240828 VERTICAL
: RBW:1000.000kHz VBW:3000.000kHz SMT:Auto
Detector : PEAK
Mode : 7
Setting : 72
Plane : X with adapter


1	Limit		Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark
	Freq	Level	Line	Level	Factor	Loss	Factor	Factor		
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm	deg
1	2389.56	65.92	74.00	-8.08	54.74	27.30	7.19	33.34	10.03	205 314 PEAK

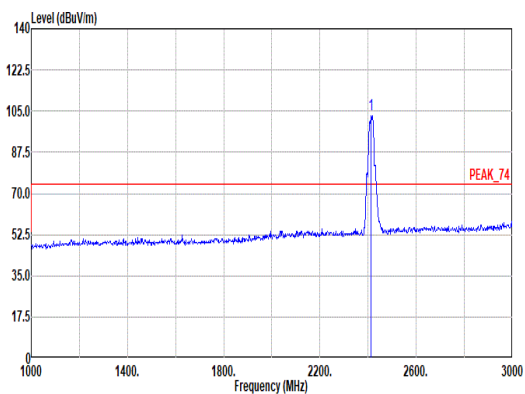

Site : 03CH11-HY
Condition: PEAK_74 3m 91200_01620_240828 VERTICAL
: RBW:1000.000kHz VBW:3000.000kHz SMT:Auto
Detector : PEAK
Mode : 7
Setting : 72
Plane : X with adapter


1	Limit		Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark
	Freq	Level	Line	Level	Factor	Loss	Factor	Factor		
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm	deg
1	2412.00	103.80	-----	92.36	27.50	7.23	33.32	10.03	205	314 PEAK

Avg

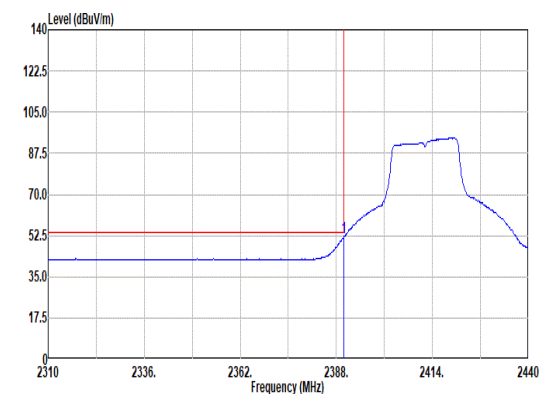

Site : 03CH11-HY
Condition: AVG_BE_54 3m 91200_01620_240828 VERTICAL
: RBW:1000.000kHz VBW:0.750kHz SMT:Auto
Detector : PEAK
Mode : 7
Setting : 72
Plane : X with adapter



1	Limit		Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark
	Freq	Level	Line	Level	Factor	Loss	Factor	Factor		
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm	deg
1	2389.95	51.56	54.00	-2.44	40.38	27.30	7.19	33.34	10.03	205 314 AVERAGE

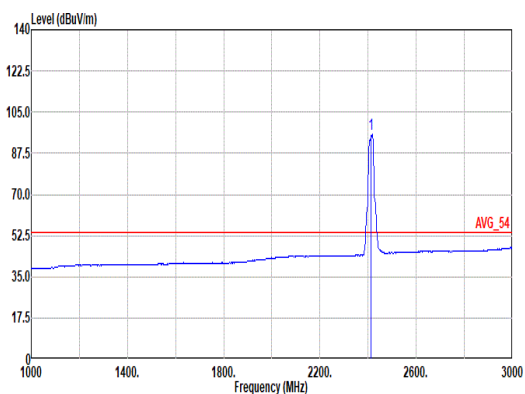





Site : 03CH11-HY
Condition: AVG_54 3m 91200_01620_240828 VERTICAL
: RBW:1000.000kHz VBW:0.750kHz SMT:Auto
Detector : PEAK
Mode : 7
Setting : 72
Plane : X with adapter

1	Limit		Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark
	Freq	Level	Line	Level	Factor	Loss	Factor	Factor		
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm	deg
1	2412.00	95.46	-----	84.02	27.50	7.23	33.32	10.03	205	314 AVERAGE

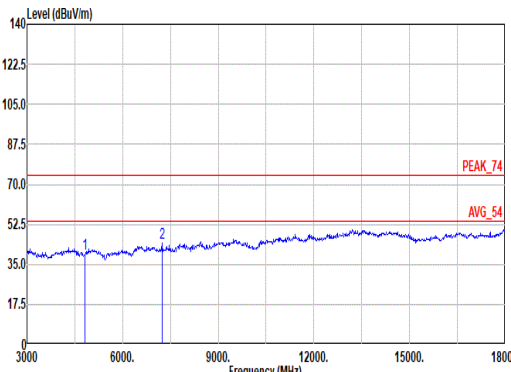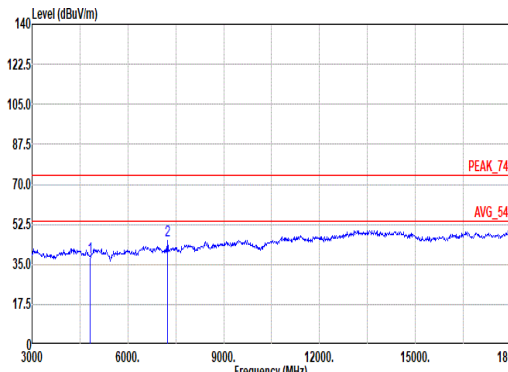

Mode	7																																																																																																															
	Harmonic																																																																																																															
	2400-2483.5_802.11n HT20_CH01_2412MHz																																																																																																															
Pol.	Horizontal	Vertical																																																																																																														
Peak Avg	 Site : 03CH11-HY Condition: PEAK_74 3m 91280_01620_240828 HORIZONTAL Mode : 7 Setting : 72 Plane : X with adapter : The unwanted signal "7236 MHz" can be ignored since it falls within : the non-restricted band and meet the requirements of 15.247 (d). <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4824.00</td><td>39.70</td><td>74.00</td><td>-34.30</td><td>63.56</td><td>32.44</td><td>9.93</td><td>66.74</td><td>0.51</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>7236.00</td><td>44.17</td><td>-----</td><td>-----</td><td>59.96</td><td>36.80</td><td>12.75</td><td>65.68</td><td>0.34</td><td>--</td><td>Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4824.00	39.70	74.00	-34.30	63.56	32.44	9.93	66.74	0.51	--	Peak	2	7236.00	44.17	-----	-----	59.96	36.80	12.75	65.68	0.34	--	Peak	 Site : 03CH11-HY Condition: PEAK_74 3m 91280_01620_240828 VERTICAL Mode : 7 Setting : 72 Plane : X with adapter : The unwanted signal "7236 MHz" can be ignored since it falls within : the non-restricted band and meet the requirements of 15.247 (d). <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4824.00</td><td>38.19</td><td>74.00</td><td>-35.81</td><td>62.05</td><td>32.44</td><td>9.93</td><td>66.74</td><td>0.51</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>7236.00</td><td>45.25</td><td>-----</td><td>-----</td><td>61.04</td><td>36.80</td><td>12.75</td><td>65.68</td><td>0.34</td><td>--</td><td>Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4824.00	38.19	74.00	-35.81	62.05	32.44	9.93	66.74	0.51	--	Peak	2	7236.00	45.25	-----	-----	61.04	36.80	12.75	65.68	0.34	--	Peak
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																								
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark																																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																						
1	4824.00	39.70	74.00	-34.30	63.56	32.44	9.93	66.74	0.51	--	Peak																																																																																																					
2	7236.00	44.17	-----	-----	59.96	36.80	12.75	65.68	0.34	--	Peak																																																																																																					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																								
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark																																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																						
1	4824.00	38.19	74.00	-35.81	62.05	32.44	9.93	66.74	0.51	--	Peak																																																																																																					
2	7236.00	45.25	-----	-----	61.04	36.80	12.75	65.68	0.34	--	Peak																																																																																																					

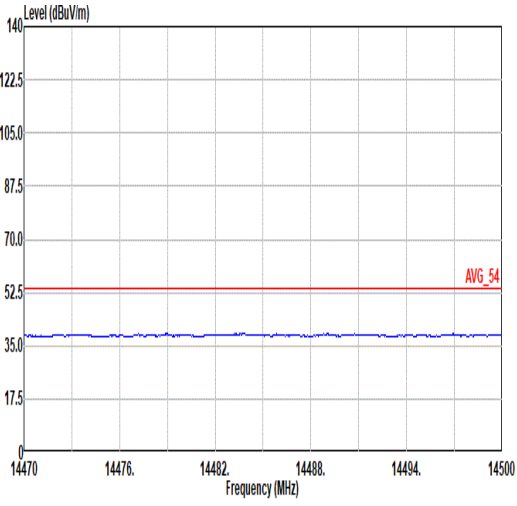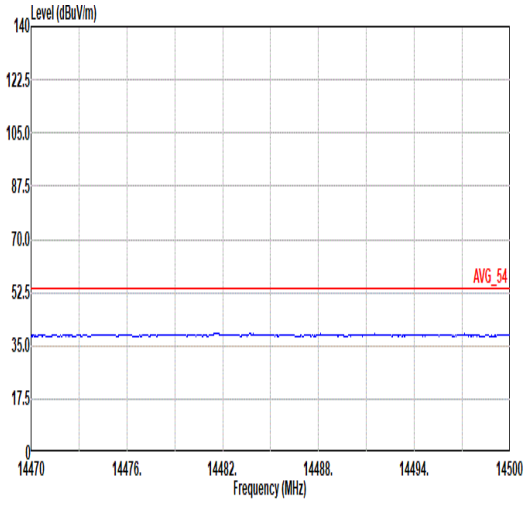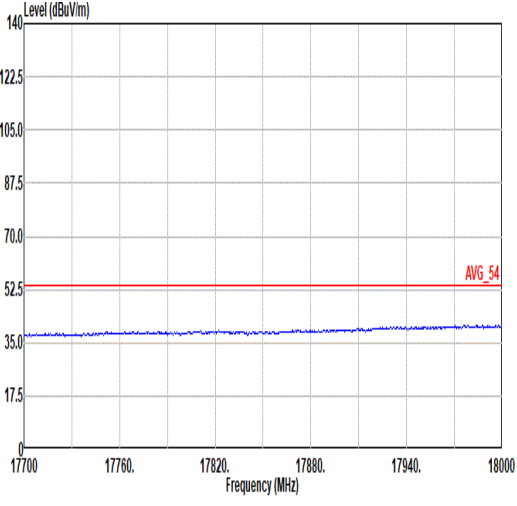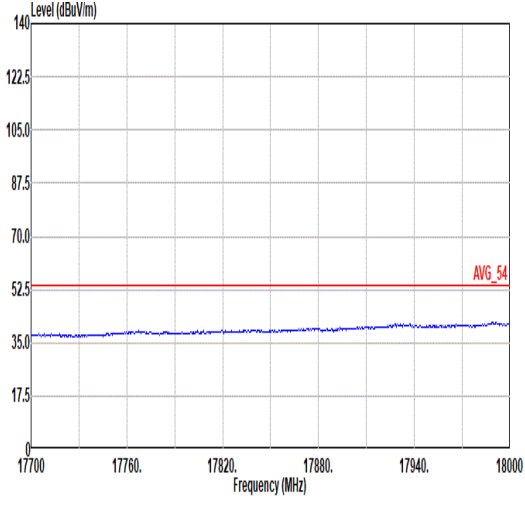

Mode	7	
	Harmonic	
	2400-2483.5_802.11n_HT20_CH01_2412MHz	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	 Site : 03CH11-HY Condition: AVG_54 3m 91280_01620_240828 HORIZONTAL Mode : 7 Setting : 72 Plane : X with adapter	 Site : 03CH11-HY Condition: AVG_54 3m 91280_01620_240828 VERTICAL Mode : 7 Setting : 72 Plane : X with adapter
17.7G ~18G Avg	 Site : 03CH11-HY Condition: AVG_54 3m 91280_01620_240828 HORIZONTAL Mode : 7 Setting : 72 Plane : X with adapter	 Site : 03CH11-HY Condition: AVG_54 3m 91280_01620_240828 VERTICAL Mode : 7 Setting : 72 Plane : X with adapter



8

Mode

Band Edge - L


2400-2483.5_802.11n_HT20_CH06_2437MHz

Pol.

Horizontal


Fundamental

Peak

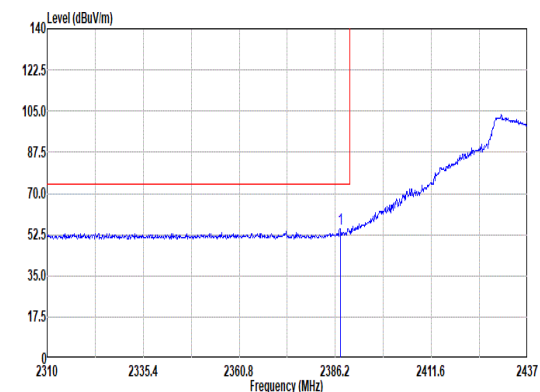

Site : 03CH11-HY
Condition: PEAK_BE_74 3m 91200_01620_240828 HORIZONTAL
: RBW:1000.000kHz VBW:3000.000kHz SMT:Auto
Detector : PEAK
Mode : 8
Setting : 82
Plane : X with adapter


1	Limit		Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark
	Freq	Level	Line	Level	Factor	Loss	Factor	Factor	cm	deg
	MHz	dBuV/m	dBuV/m	dB	dB	dB/m	dB	dB	cm	deg
1	2387.60	54.82	74.00	-19.18	43.67	27.28	7.18	33.34	10.03	400
										2 PEAK

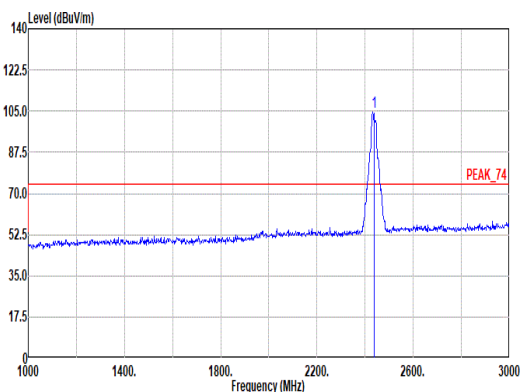

Site : 03CH11-HY
Condition: PEAK_74 3m 91200_01620_240828 HORIZONTAL
: RBW:1000.000kHz VBW:3000.000kHz SMT:Auto
Detector : PEAK
Mode : 8
Setting : 82
Plane : X with adapter


1	Limit		Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark
	Freq	Level	Line	Level	Factor	Loss	Factor	Factor	cm	deg
	MHz	dBuV/m	dBuV/m	dB	dB	dB/m	dB	dB	cm	deg
1	2437.00	104.45	-----	92.89	27.60	7.24	33.31	10.03	400	2 PEAK

Avg

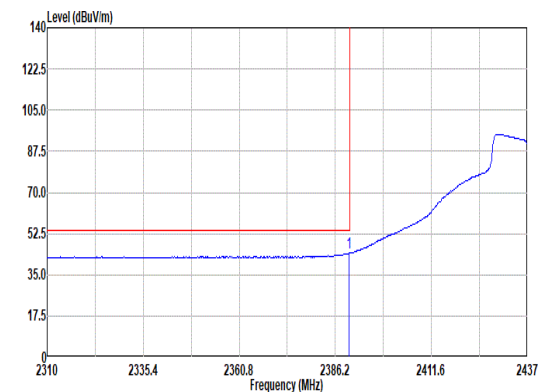

Site : 03CH11-HY
Condition: AVG_BE_54 3m 91200_01620_240828 HORIZONTAL
: RBW:1000.000kHz VBW:0.750kHz SMT:Auto
Detector : PEAK
Mode : 8
Setting : 82
Plane : X with adapter



1	Limit		Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark
	Freq	Level	Line	Level	Factor	Loss	Factor	Factor	cm	deg
	MHz	dBuV/m	dBuV/m	dB	dB	dB/m	dB	dB	cm	deg
1	2389.88	44.20	54.00	-9.80	33.02	27.30	7.19	33.34	10.03	400
										2 AVERAGE

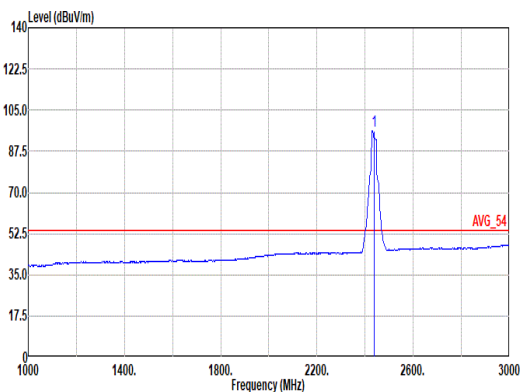

Site : 03CH11-HY
Condition: AVG_54 3m 91200_01620_240828 HORIZONTAL
: RBW:1000.000kHz VBW:0.750kHz SMT:Auto
Detector : PEAK
Mode : 8
Setting : 82
Plane : X with adapter

1	Limit		Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark
	Freq	Level	Line	Level	Factor	Loss	Factor	Factor	cm	deg
	MHz	dBuV/m	dBuV/m	dB	dB	dB/m	dB	dB	cm	deg
1	2437.00	96.05	-----	84.49	27.60	7.24	33.31	10.03	400	2 AVERAGE

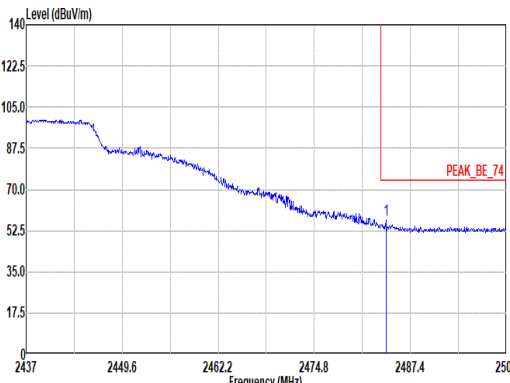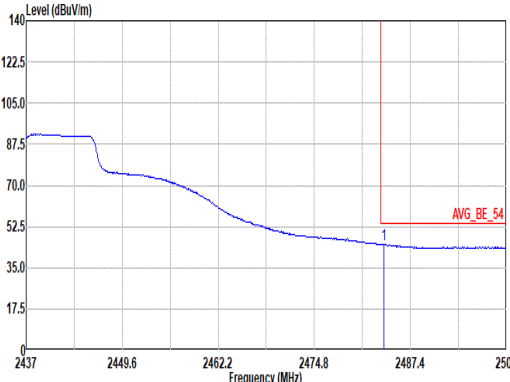

Mode	8																																											
	Band Edge - R																																											
	2400-2483.5_802.11n HT20_CH06_2437MHz																																											
Pol.	Horizontal	Fundamental																																										
Peak	 Site : 03CH11-HY Condition: PEAK_BE_74 3m 91200_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto Detector : PEAK Mode : 8 Setting : 82 Plane : X with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 2484.19</td><td>57.09</td><td>74.00</td><td>-16.91</td><td>45.18</td><td>27.84</td><td>7.32</td><td>33.28</td><td>10.03</td><td>400</td><td>2 PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 2484.19	57.09	74.00	-16.91	45.18	27.84	7.32	33.28	10.03	400	2 PEAK	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																		
1 2484.19	57.09	74.00	-16.91	45.18	27.84	7.32	33.28	10.03	400	2 PEAK																																		
Avg	 Site : 03CH11-HY Condition: AVG_BE_54 3m 91200_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:0.750kHz SMT:Auto Detector : PEAK Mode : 8 Setting : 82 Plane : X with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 2483.94</td><td>44.99</td><td>54.00</td><td>-9.01</td><td>33.08</td><td>27.84</td><td>7.32</td><td>33.28</td><td>10.03</td><td>400</td><td>2 AVERAGE</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 2483.94	44.99	54.00	-9.01	33.08	27.84	7.32	33.28	10.03	400	2 AVERAGE	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																		
1 2483.94	44.99	54.00	-9.01	33.08	27.84	7.32	33.28	10.03	400	2 AVERAGE																																		



8

Mode

Band Edge - L


2400-2483.5_802.11n_HT20_CH06_2437MHz

Pol.

Vertical


Fundamental

Peak

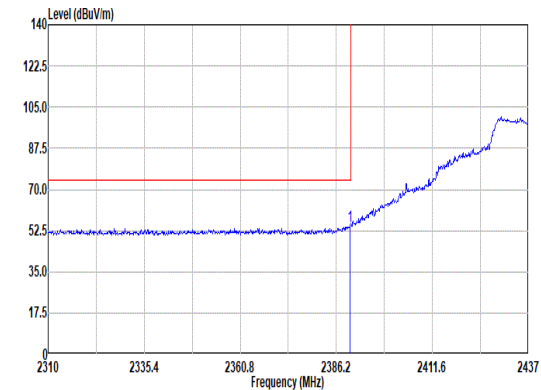

Site : 03CH11-HY
Condition: PEAK_BE_74 3m 91200_01620_240828 VERTICAL
: RBW:1000.000kHz VBW:3000.000kHz SMT:Auto
Detector : PEAK
Mode : 8
Setting : 82
Plane : X with adapter


1	Limit		Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark
	Freq	Level	Line	Level	Factor	Loss	Factor	Factor		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg
1	2389.88	54.47	74.00	-19.53	43.29	27.30	7.19	33.34	10.03	200 66 PEAK

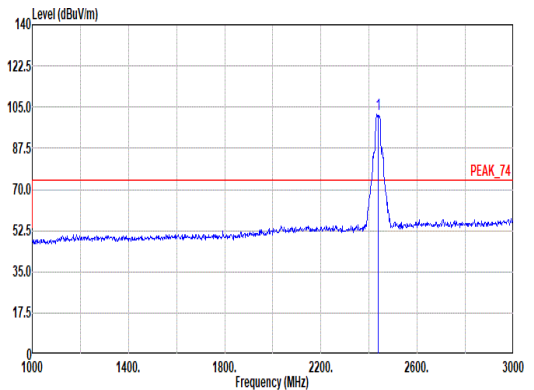

Site : 03CH11-HY
Condition: PEAK_74 3m 91200_01620_240828 VERTICAL
: RBW:1000.000kHz VBW:3000.000kHz SMT:Auto
Detector : PEAK
Mode : 8
Setting : 82
Plane : X with adapter


1	Limit		Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark
	Freq	Level	Line	Level	Factor	Loss	Factor	Factor		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg
1	2437.00	101.87	-----	-----	90.31	27.60	7.24	33.31	10.03	200 66 PEAK

Avg

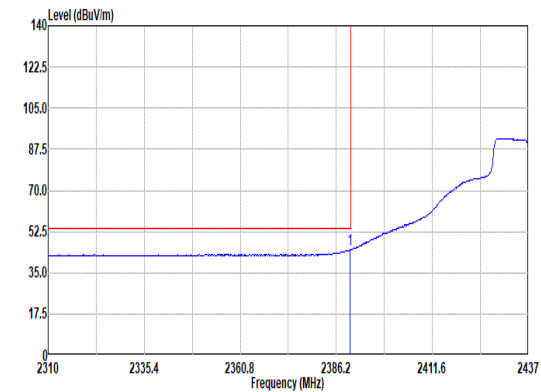

Site : 03CH11-HY
Condition: AVG_BE_54 3m 91200_01620_240828 VERTICAL
: RBW:1000.000kHz VBW:0.750kHz SMT:Auto
Detector : PEAK
Mode : 8
Setting : 82
Plane : X with adapter



1	Limit		Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark
	Freq	Level	Line	Level	Factor	Loss	Factor	Factor		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg
1	2389.88	44.81	54.00	-9.19	33.63	27.30	7.19	33.34	10.03	200 66 AVERAGE

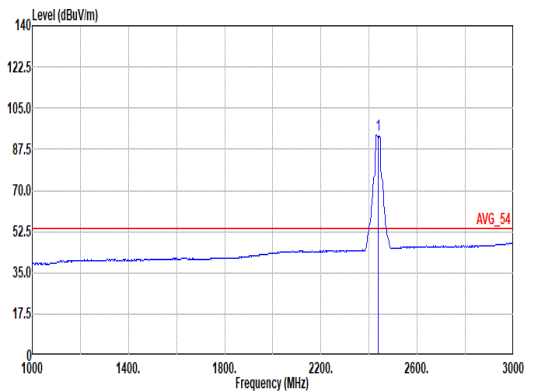



Site : 03CH11-HY
Condition: AVG_54 3m 91200_01620_240828 VERTICAL
: RBW:1000.000kHz VBW:0.750kHz SMT:Auto
Detector : PEAK
Mode : 8
Setting : 82
Plane : X with adapter

1	Limit		Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark
	Freq	Level	Line	Level	Factor	Loss	Factor	Factor		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg
1	2437.00	93.71	-----	-----	82.15	27.60	7.24	33.31	10.03	200 66 AVERAGE



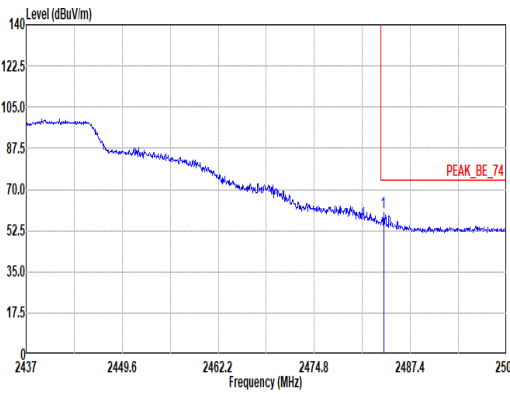
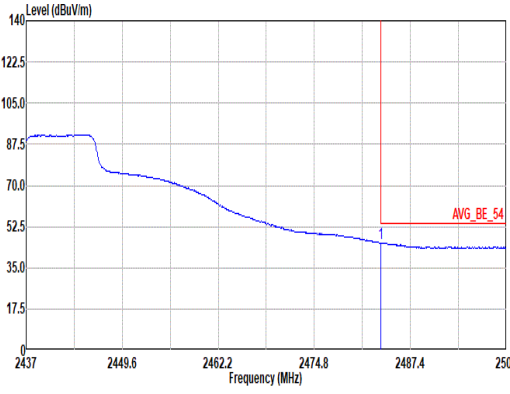


Mode	8																																														
	Band Edge - R																																														
	2400-2483.5_802.11n HT20_CH06_2437MHz																																														
Pol.	Vertical	Fundamental																																													
Peak	 Site : 03CH11-HY Condition: PEAK_BE_74 3m 91200_01620_240828 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto Detector : PEAK Mode : 8 Setting : 82 Plane : X with adapter <table><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>cm</th><th>deg</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th>Remark</th></tr><tr><td>1 2483.87</td><td>60.19</td><td>74.00</td><td>-13.81</td><td>48.28</td><td>27.84</td><td>7.32</td><td>33.28</td><td>10.03</td><td>200</td><td>66</td><td>PEAK</td></tr></table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	Remark	1 2483.87	60.19	74.00	-13.81	48.28	27.84	7.32	33.28	10.03	200	66	PEAK	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	Remark																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	Remark																																				
1 2483.87	60.19	74.00	-13.81	48.28	27.84	7.32	33.28	10.03	200	66	PEAK																																				
Avg	 Site : 03CH11-HY Condition: AVG_BE_54 3m 91200_01620_240828 VERTICAL : RBW:1000.000kHz VBW:0.750kHz SMT:Auto Detector : PEAK Mode : 8 Setting : 82 Plane : X with adapter <table><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>cm</th><th>deg</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th>Remark</th></tr><tr><td>1 2483.56</td><td>45.58</td><td>54.00</td><td>-8.42</td><td>33.67</td><td>27.84</td><td>7.32</td><td>33.28</td><td>10.03</td><td>200</td><td>66</td><td>AVERAGE</td></tr></table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	Remark	1 2483.56	45.58	54.00	-8.42	33.67	27.84	7.32	33.28	10.03	200	66	AVERAGE	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	Remark																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	Remark																																				
1 2483.56	45.58	54.00	-8.42	33.67	27.84	7.32	33.28	10.03	200	66	AVERAGE																																				



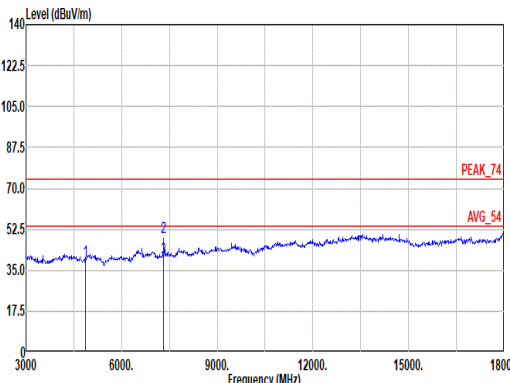
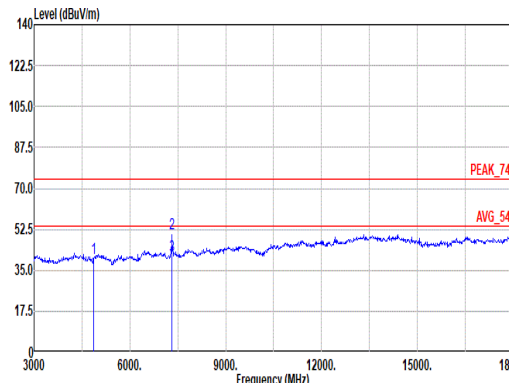


Mode	8																																																																																																																																																					
	Harmonic																																																																																																																																																					
	2400-2483.5_802.11n HT20_CH06_2437MHz																																																																																																																																																					
Pol.	Horizontal						Vertical																																																																																																																																															
Peak Avg																																																																																																																																																						
	Site : 03CH11-HY Condition: PEAK_74 3m 91200_01620_240828 HORIZONTAL Mode : 8 Setting : 82 Plane : X with adapter <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>4874.00</td><td>39.23</td><td>74.00</td><td>-34.77</td><td>62.61</td><td>32.70</td><td>10.09</td><td>66.70</td><td>0.53</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>7311.00</td><td>48.87</td><td>74.00</td><td>-25.13</td><td>64.78</td><td>36.78</td><td>12.76</td><td>65.77</td><td>0.32</td><td>255</td><td>208</td><td>Peak</td></tr><tr><td>3</td><td>7311.00</td><td>40.31</td><td>54.00</td><td>-13.69</td><td>56.22</td><td>36.78</td><td>12.76</td><td>65.77</td><td>0.32</td><td>255</td><td>208</td><td>Average</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4874.00	39.23	74.00	-34.77	62.61	32.70	10.09	66.70	0.53	--	--	Peak	2	7311.00	48.87	74.00	-25.13	64.78	36.78	12.76	65.77	0.32	255	208	Peak	3	7311.00	40.31	54.00	-13.69	56.22	36.78	12.76	65.77	0.32	255	208	Average	Site : 03CH11-HY Condition: PEAK_74 3m 91200_01620_240828 VERTICAL Mode : 8 Setting : 82 Plane : X with adapter <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>4874.00</td><td>40.37</td><td>74.00</td><td>-33.63</td><td>63.75</td><td>32.70</td><td>10.09</td><td>66.70</td><td>0.53</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>7311.00</td><td>50.90</td><td>74.00</td><td>-23.10</td><td>66.81</td><td>36.78</td><td>12.76</td><td>65.77</td><td>0.32</td><td>100</td><td>223</td><td>Peak</td></tr><tr><td>3</td><td>7311.00</td><td>41.19</td><td>54.00</td><td>-12.81</td><td>57.10</td><td>36.78</td><td>12.76</td><td>65.77</td><td>0.32</td><td>100</td><td>223</td><td>Average</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4874.00	40.37	74.00	-33.63	63.75	32.70	10.09	66.70	0.53	--	--	Peak	2	7311.00	50.90	74.00	-23.10	66.81	36.78	12.76	65.77	0.32	100	223	Peak	3	7311.00	41.19	54.00	-12.81	57.10	36.78	12.76	65.77	0.32	100	223
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																												
1	4874.00	39.23	74.00	-34.77	62.61	32.70	10.09	66.70	0.53	--	--	Peak																																																																																																																																										
2	7311.00	48.87	74.00	-25.13	64.78	36.78	12.76	65.77	0.32	255	208	Peak																																																																																																																																										
3	7311.00	40.31	54.00	-13.69	56.22	36.78	12.76	65.77	0.32	255	208	Average																																																																																																																																										
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																												
1	4874.00	40.37	74.00	-33.63	63.75	32.70	10.09	66.70	0.53	--	--	Peak																																																																																																																																										
2	7311.00	50.90	74.00	-23.10	66.81	36.78	12.76	65.77	0.32	100	223	Peak																																																																																																																																										
3	7311.00	41.19	54.00	-12.81	57.10	36.78	12.76	65.77	0.32	100	223	Average																																																																																																																																										

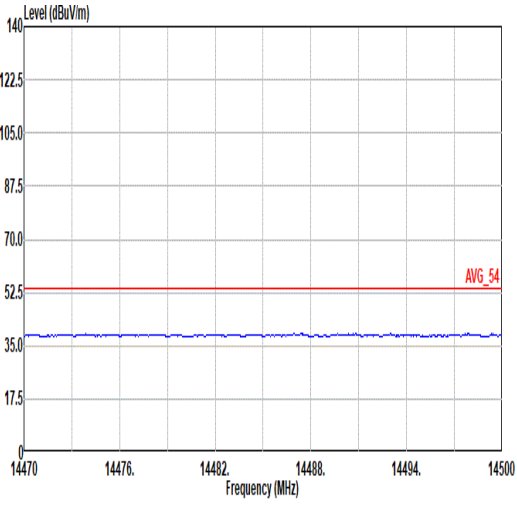
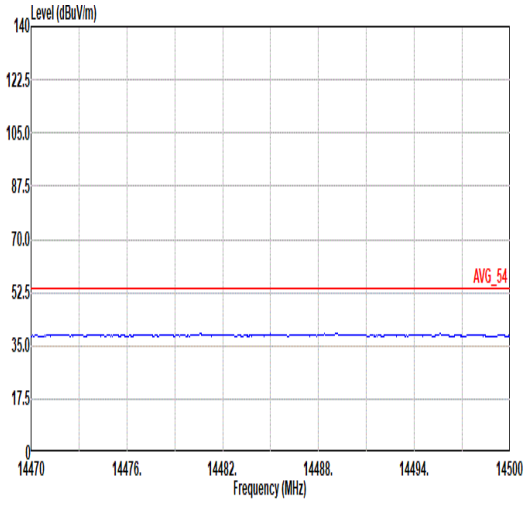
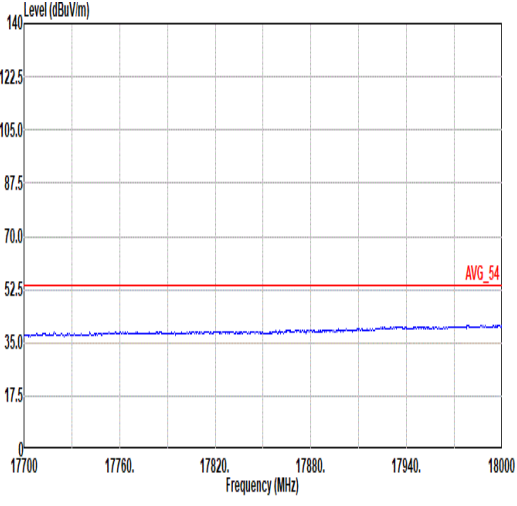
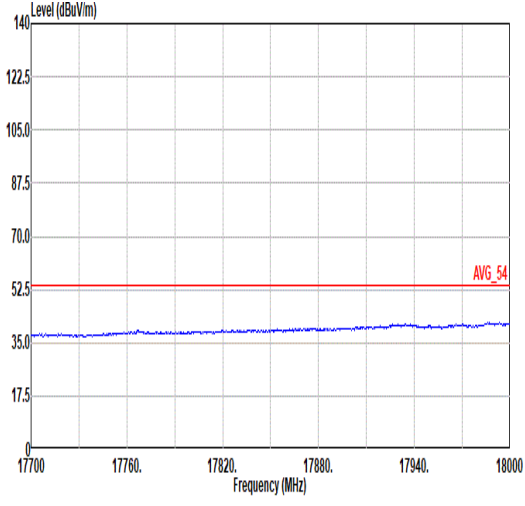


Mode	8	
	Harmonic	
	2400-2483.5_802.11n_HT20_CH06_2437MHz	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	 Site : 03CH11-HY Condition: AVG_54 3m 91280_01620_240828 HORIZONTAL Mode : 8 Setting : 82 Plane : X with adapter	 Site : 03CH11-HY Condition: AVG_54 3m 91280_01620_240828 VERTICAL Mode : 8 Setting : 82 Plane : X with adapter
17.7G ~18G Avg	 Site : 03CH11-HY Condition: AVG_54 3m 91280_01620_240828 HORIZONTAL Mode : 8 Setting : 82 Plane : X with adapter	 Site : 03CH11-HY Condition: AVG_54 3m 91280_01620_240828 VERTICAL Mode : 8 Setting : 82 Plane : X with adapter

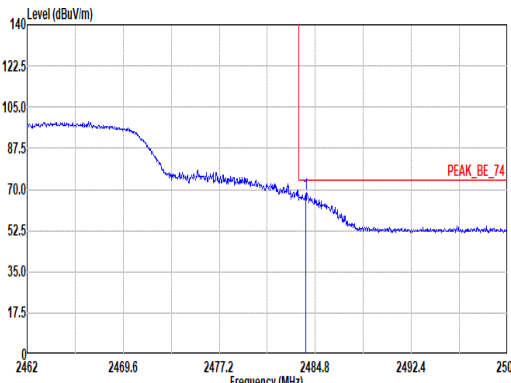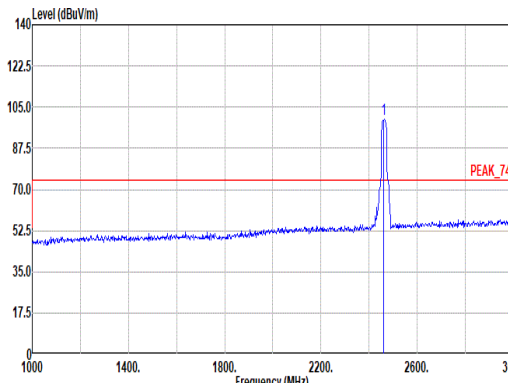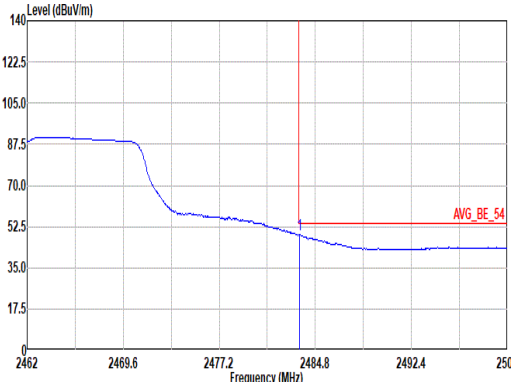
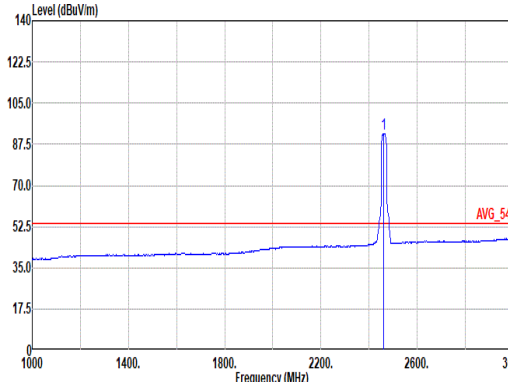


Mode	9																																																																																																
	Band Edge																																																																																																
	2400-2483.5_802.11n HT20_CH11_2462MHz																																																																																																
Pol.	Horizontal						Fundamental																																																																																										
Peak																																																																																																	
	Site : 03CH11-HY Condition: PEAK_BE_74 3m 91200_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto Detector : PEAK Mode : 9 Setting : 68 Plane : X with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2484.04</td><td>68.38</td><td>74.00</td><td>-5.62</td><td>56.47</td><td>27.84</td><td>7.32</td><td>33.28</td><td>10.03</td><td>195</td><td>29</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	1	2484.04	68.38	74.00	-5.62	56.47	27.84	7.32	33.28	10.03	195	29	PEAK	Site : 03CH11-HY Condition: PEAK_74 3m 91200_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto Detector : PEAK Mode : 9 Setting : 68 Plane : X with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2462.00</td><td>99.85</td><td>-----</td><td>-----</td><td>88.18</td><td>27.64</td><td>7.29</td><td>33.29</td><td>10.03</td><td>195</td><td>29</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	1	2462.00	99.85	-----	-----	88.18	27.64	7.29	33.29	10.03	195	29
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																								
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg																																																																																								
1	2484.04	68.38	74.00	-5.62	56.47	27.84	7.32	33.28	10.03	195	29	PEAK																																																																																					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																								
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg																																																																																								
1	2462.00	99.85	-----	-----	88.18	27.64	7.29	33.29	10.03	195	29	PEAK																																																																																					
Avg																																																																																																	
	Site : 03CH11-HY Condition: AVG_BE_54 3m 91200_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:0.750kHz SMT:Auto Detector : PEAK Mode : 9 Setting : 68 Plane : X with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.55</td><td>49.04</td><td>54.00</td><td>-4.96</td><td>37.13</td><td>27.84</td><td>7.32</td><td>33.28</td><td>10.03</td><td>195</td><td>29</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	1	2483.55	49.04	54.00	-4.96	37.13	27.84	7.32	33.28	10.03	195	29	AVERAGE	Site : 03CH11-HY Condition: AVG_54 3m 91200_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:0.750kHz SMT:Auto Detector : PEAK Mode : 9 Setting : 68 Plane : X with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2462.00</td><td>91.99</td><td>-----</td><td>-----</td><td>80.32</td><td>27.64</td><td>7.29</td><td>33.29</td><td>10.03</td><td>195</td><td>29</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	1	2462.00	91.99	-----	-----	80.32	27.64	7.29	33.29	10.03	195	29
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																								
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg																																																																																								
1	2483.55	49.04	54.00	-4.96	37.13	27.84	7.32	33.28	10.03	195	29	AVERAGE																																																																																					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																								
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg																																																																																								
1	2462.00	91.99	-----	-----	80.32	27.64	7.29	33.29	10.03	195	29	AVERAGE																																																																																					

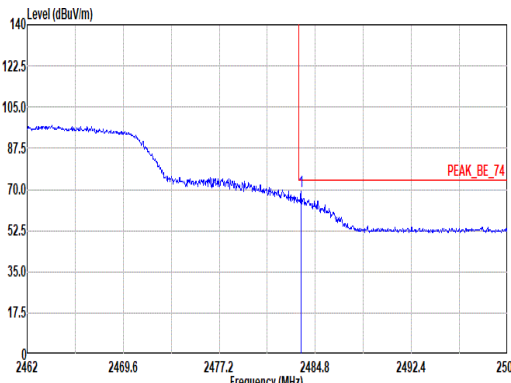
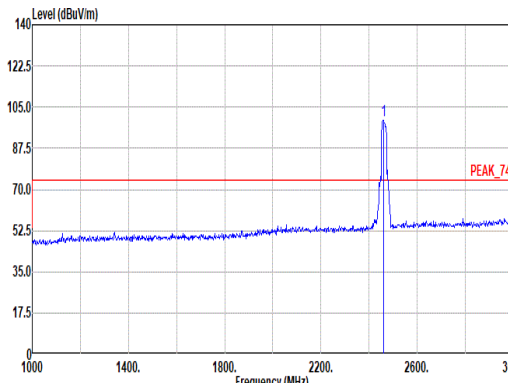
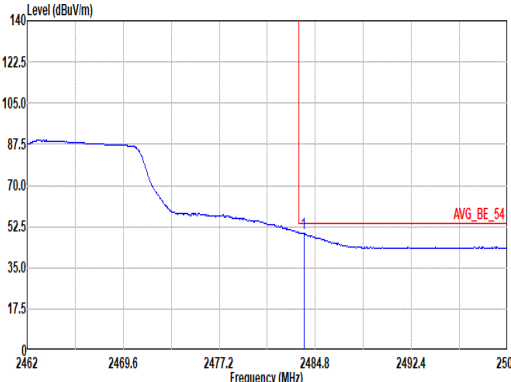
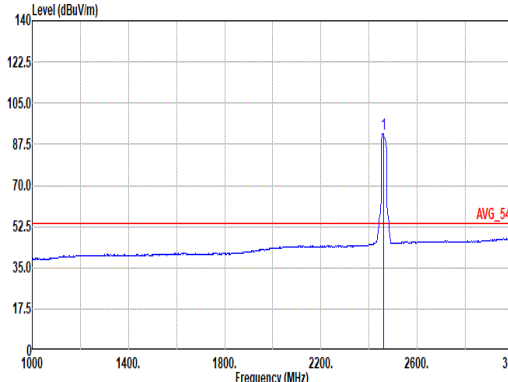


Mode	9																																																	
	Band Edge																																																	
	2400-2483.5_802.11n HT20_CH11_2462MHz																																																	
Pol.	Vertical																																																	
Peak	 Site : 03CH11-HY Condition: PEAK_BE_74 3m 91200_01620_240828 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto Detector : PEAK Mode : 9 Setting : 68 Plane : X with adapter <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2483.66</td><td>69.28</td><td>74.00</td><td>-4.72</td><td>57.37</td><td>27.84</td><td>7.32</td><td>33.28</td><td>10.03</td><td>300</td><td>333</td><td>PEAK</td></tr></table>												Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2483.66	69.28	74.00	-4.72	57.37	27.84	7.32	33.28	10.03	300	333	PEAK
		Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																							
1	2483.66	69.28	74.00	-4.72	57.37	27.84	7.32	33.28	10.03	300	333	PEAK																																						
 Site : 03CH11-HY Condition: PEAK_74 3m 91200_01620_240828 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto Detector : PEAK Mode : 9 Setting : 68 Plane : X with adapter <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2462.00</td><td>99.56</td><td>-----</td><td>-----</td><td>87.95</td><td>27.60</td><td>7.28</td><td>33.30</td><td>10.03</td><td>300</td><td>333</td><td>PEAK</td></tr></table>												Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2462.00	99.56	-----	-----	87.95	27.60	7.28	33.30	10.03	300	333	PEAK	
	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																							
1	2462.00	99.56	-----	-----	87.95	27.60	7.28	33.30	10.03	300	333	PEAK																																						
Avg	 Site : 03CH11-HY Condition: AVG_BE_54 3m 91200_01620_240828 VERTICAL : RBW:1000.000kHz VBW:0.750kHz SMT:Auto Detector : PEAK Mode : 9 Setting : 68 Plane : X with adapter <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2483.89</td><td>49.92</td><td>54.00</td><td>-4.08</td><td>38.01</td><td>27.84</td><td>7.32</td><td>33.28</td><td>10.03</td><td>300</td><td>333</td><td>AVERAGE</td></tr></table>												Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2483.89	49.92	54.00	-4.08	38.01	27.84	7.32	33.28	10.03	300	333	AVERAGE
		Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																							
1	2483.89	49.92	54.00	-4.08	38.01	27.84	7.32	33.28	10.03	300	333	AVERAGE																																						
 Site : 03CH11-HY Condition: AVG_54 3m 91200_01620_240828 VERTICAL : RBW:1000.000kHz VBW:0.750kHz SMT:Auto Detector : PEAK Mode : 9 Setting : 68 Plane : X with adapter <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2462.00</td><td>91.94</td><td>-----</td><td>-----</td><td>80.33</td><td>27.60</td><td>7.28</td><td>33.30</td><td>10.03</td><td>300</td><td>333</td><td>AVERAGE</td></tr></table>												Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2462.00	91.94	-----	-----	80.33	27.60	7.28	33.30	10.03	300	333	AVERAGE	
	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																							
1	2462.00	91.94	-----	-----	80.33	27.60	7.28	33.30	10.03	300	333	AVERAGE																																						



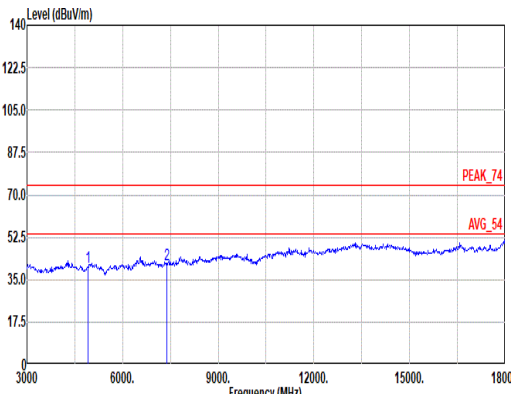
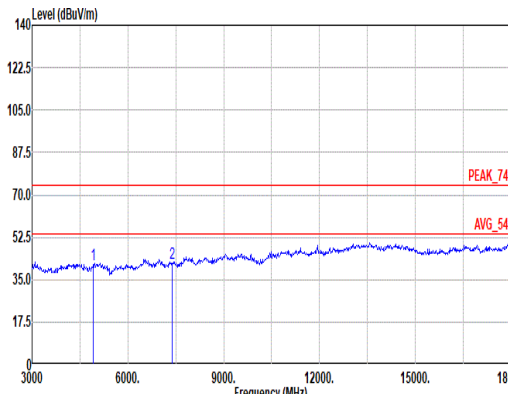


Mode	9																																																																																																															
	Harmonic																																																																																																															
	2400-2483.5_802.11n HT20_CH11_2462MHz																																																																																																															
Pol.	Horizontal	Vertical																																																																																																														
Peak Avg	 Site : 03CH11-HY Condition: PEAK_74 3m 91280_01620_240828 HORIZONTAL Mode : 9 Setting : 68 Plane : X with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4924.00</td><td>40.32</td><td>74.00</td><td>-33.68</td><td>63.28</td><td>32.90</td><td>10.24</td><td>66.66</td><td>0.56</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>7386.00</td><td>41.41</td><td>74.00</td><td>-32.59</td><td>57.74</td><td>36.48</td><td>12.76</td><td>65.86</td><td>0.29</td><td>--</td><td>Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4924.00	40.32	74.00	-33.68	63.28	32.90	10.24	66.66	0.56	--	Peak	2	7386.00	41.41	74.00	-32.59	57.74	36.48	12.76	65.86	0.29	--	Peak	 Site : 03CH11-HY Condition: PEAK_74 3m 91280_01620_240828 VERTICAL Mode : 9 Setting : 68 Plane : X with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4924.00</td><td>41.42</td><td>74.00</td><td>-32.58</td><td>64.38</td><td>32.90</td><td>10.24</td><td>66.66</td><td>0.56</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>7386.00</td><td>41.56</td><td>74.00</td><td>-32.44</td><td>57.89</td><td>36.48</td><td>12.76</td><td>65.86</td><td>0.29</td><td>--</td><td>Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4924.00	41.42	74.00	-32.58	64.38	32.90	10.24	66.66	0.56	--	Peak	2	7386.00	41.56	74.00	-32.44	57.89	36.48	12.76	65.86	0.29	--	Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																						
1	4924.00	40.32	74.00	-33.68	63.28	32.90	10.24	66.66	0.56	--	Peak																																																																																																					
2	7386.00	41.41	74.00	-32.59	57.74	36.48	12.76	65.86	0.29	--	Peak																																																																																																					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																						
1	4924.00	41.42	74.00	-32.58	64.38	32.90	10.24	66.66	0.56	--	Peak																																																																																																					
2	7386.00	41.56	74.00	-32.44	57.89	36.48	12.76	65.86	0.29	--	Peak																																																																																																					

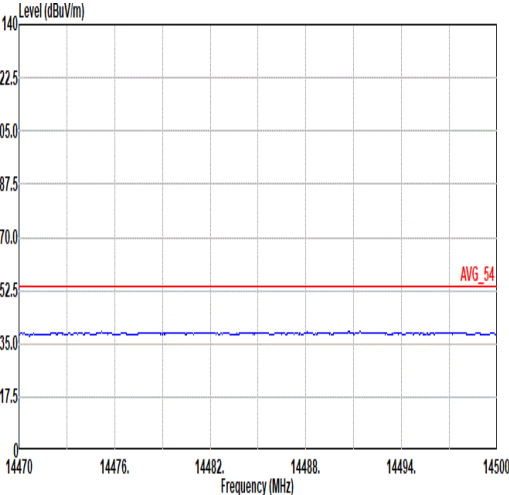
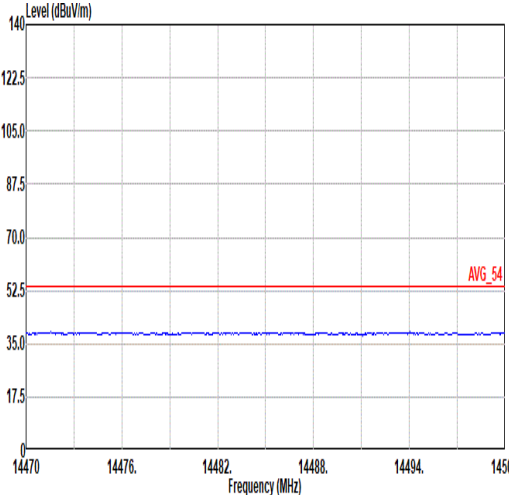
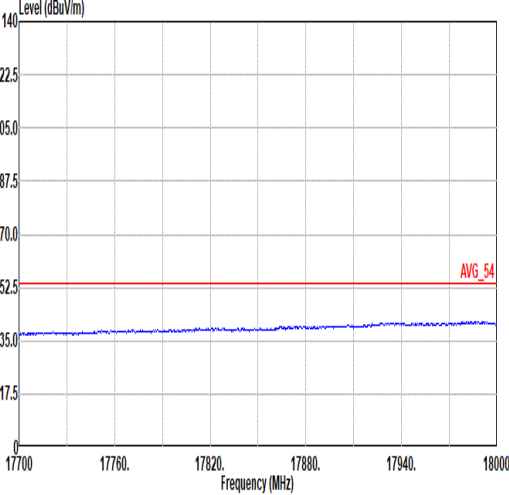
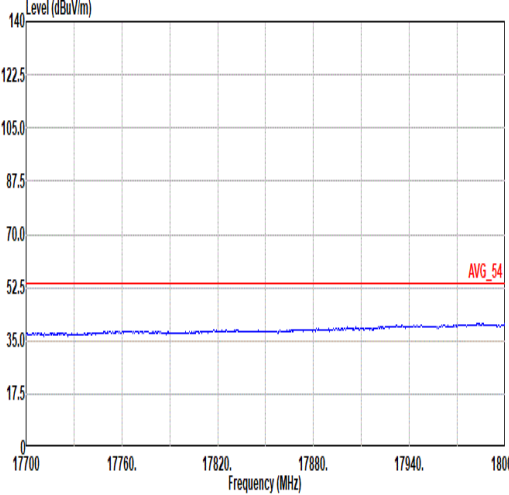


Mode	9	
	Harmonic	
	2400-2483.5_802.11n_HT20_CH11_2462MHz	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	 Site : 03CH11-HY Condition: AVG_54 3m 91280_01620_240828 HORIZONTAL Mode : 9 Setting : 68 Plane : X with adapter	 Site : 03CH11-HY Condition: AVG_54 3m 91280_01620_240828 VERTICAL Mode : 9 Setting : 68 Plane : X with adapter
17.7G ~18G Avg	 Site : 03CH11-HY Condition: AVG_54 3m 91280_01620_240828 HORIZONTAL Mode : 9 Setting : 68 Plane : X with adapter	 Site : 03CH11-HY Condition: AVG_54 3m 91280_01620_240828 VERTICAL Mode : 9 Setting : 68 Plane : X with adapter

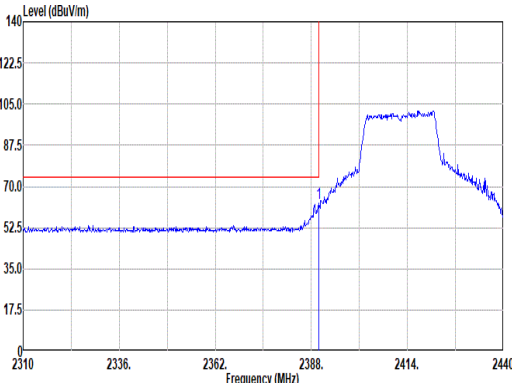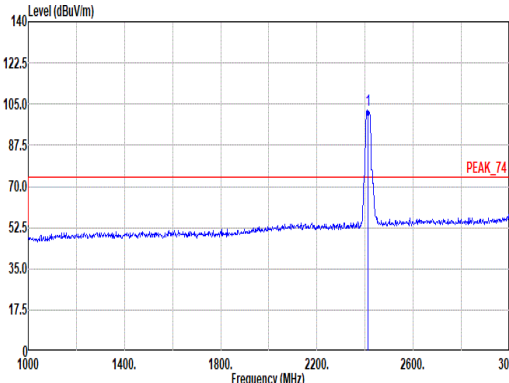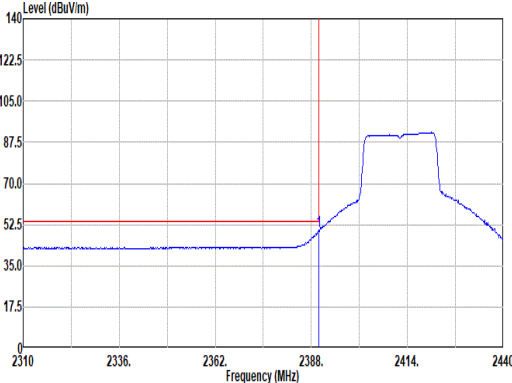
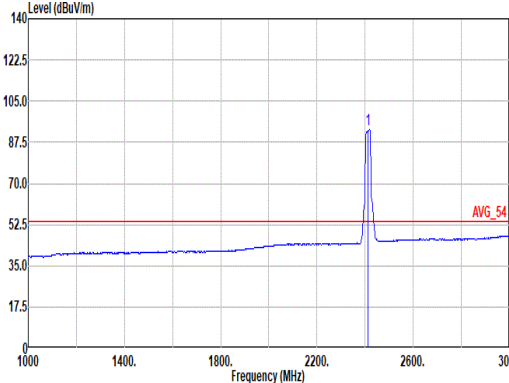


		10																																																				
Mode		Band Edge																																																				
		2400-2483.5_802.11ax HE20_CH01_Full RU_2412MHz																																																				
Pol.		Horizontal					Fundamental																																															
Peak																																																						
		Site : 03CH11-HY Condition: PEAK_BE_74 3m 91200_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto Detector : PEAK Mode : 10 Setting : 70 Plane : X with adapter <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2389.95</td><td>62.88</td><td>74.00</td><td>-11.12</td><td>51.70</td><td>27.30</td><td>7.19</td><td>33.34</td><td>10.03</td><td>400</td><td>28</td><td>PEAK</td></tr></tbody></table>											Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.95	62.88	74.00	-11.12	51.70	27.30	7.19	33.34	10.03	400	28
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																												
1	2389.95	62.88	74.00	-11.12	51.70	27.30	7.19	33.34	10.03	400	28	PEAK																																										
																																																						
		Site : 03CH11-HY Condition: PEAK_74 3m 91200_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto Detector : PEAK Mode : 10 Setting : 70 Plane : X with adapter <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2412.00</td><td>102.32</td><td>-----</td><td>-----</td><td>91.01</td><td>27.40</td><td>7.21</td><td>33.33</td><td>10.03</td><td>400</td><td>28</td><td>PEAK</td></tr></tbody></table>											Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	102.32	-----	-----	91.01	27.40	7.21	33.33	10.03	400	28
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																												
1	2412.00	102.32	-----	-----	91.01	27.40	7.21	33.33	10.03	400	28	PEAK																																										
Avg																																																						
		Site : 03CH11-HY Condition: AVG_BE_54 3m 91200_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:1.000kHz SMT:Auto Detector : PEAK Mode : 10 Setting : 70 Plane : X with adapter <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2389.95</td><td>49.87</td><td>54.00</td><td>-4.13</td><td>38.69</td><td>27.30</td><td>7.19</td><td>33.34</td><td>10.03</td><td>400</td><td>28</td><td>AVERAGE</td></tr></tbody></table>											Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.95	49.87	54.00	-4.13	38.69	27.30	7.19	33.34	10.03	400	28
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																												
1	2389.95	49.87	54.00	-4.13	38.69	27.30	7.19	33.34	10.03	400	28	AVERAGE																																										
																																																						
		Site : 03CH11-HY Condition: AVG_54 3m 91200_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:1.000kHz SMT:Auto Detector : PEAK Mode : 10 Setting : 70 Plane : X with adapter <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2412.00</td><td>92.99</td><td>-----</td><td>-----</td><td>81.55</td><td>27.50</td><td>7.23</td><td>33.32</td><td>10.03</td><td>400</td><td>28</td><td>AVERAGE</td></tr></tbody></table>											Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	92.99	-----	-----	81.55	27.50	7.23	33.32	10.03	400	28
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																												
1	2412.00	92.99	-----	-----	81.55	27.50	7.23	33.32	10.03	400	28	AVERAGE																																										

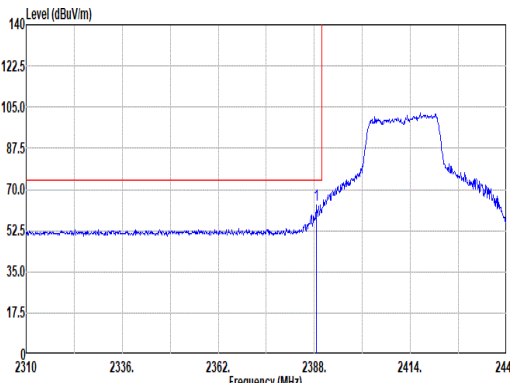
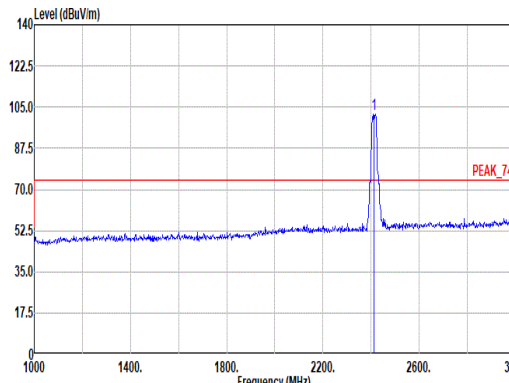
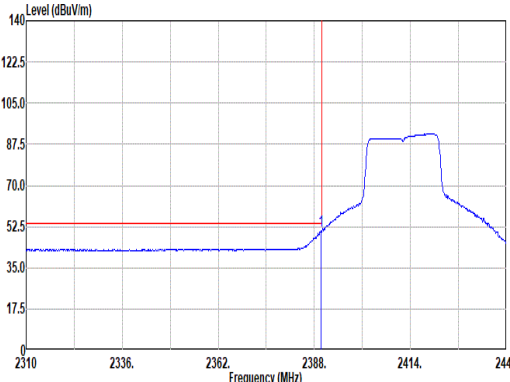
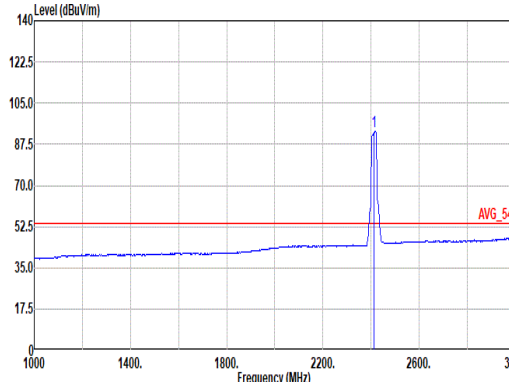


Mode	10																																																																																																			
	Band Edge																																																																																																			
	2400-2483.5_802.11ax HE20_CH01_Full RU_2412MHz																																																																																																			
Pol.	Vertical						Fundamental																																																																																													
Peak																																																																																																				
	Site : 03CH11-HY Condition: PEAK_BE_74 3m 91200_01620_240828 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto Detector : PEAK Mode : 10 Setting : 70 Plane : X with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2388.52</td><td>63.42</td><td>74.00</td><td>-10.58</td><td>52.26</td><td>27.29</td><td>7.18</td><td>33.34</td><td>10.03</td><td>400</td><td>127 PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor						MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2388.52	63.42	74.00	-10.58	52.26	27.29	7.18	33.34	10.03	400	127 PEAK	Site : 03CH11-HY Condition: PEAK_74 3m 91200_01620_240828 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto Detector : PEAK Mode : 10 Setting : 70 Plane : X with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2412.00</td><td>102.03</td><td>-----</td><td>-----</td><td>90.59</td><td>27.50</td><td>7.23</td><td>33.32</td><td>10.03</td><td>400</td><td>127 PEAK</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor						MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	102.03	-----	-----	90.59	27.50	7.23	33.32	10.03	400
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																											
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2388.52	63.42	74.00	-10.58	52.26	27.29	7.18	33.34	10.03	400	127 PEAK																																																																																									
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																											
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2412.00	102.03	-----	-----	90.59	27.50	7.23	33.32	10.03	400	127 PEAK																																																																																									
Avg																																																																																																				
	Site : 03CH11-HY Condition: AVG_BE_54 3m 91200_01620_240828 VERTICAL : RBW:1000.000kHz VBW:1.000kHz SMT:Auto Detector : PEAK Mode : 10 Setting : 70 Plane : X with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2389.82</td><td>50.45</td><td>54.00</td><td>-3.55</td><td>39.27</td><td>27.30</td><td>7.19</td><td>33.34</td><td>10.03</td><td>400</td><td>127 AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor						MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.82	50.45	54.00	-3.55	39.27	27.30	7.19	33.34	10.03	400	127 AVERAGE	Site : 03CH11-HY Condition: AVG_54 3m 91200_01620_240828 VERTICAL : RBW:1000.000kHz VBW:1.000kHz SMT:Auto Detector : PEAK Mode : 10 Setting : 70 Plane : X with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2412.00</td><td>93.22</td><td>-----</td><td>-----</td><td>81.78</td><td>27.50</td><td>7.23</td><td>33.32</td><td>10.03</td><td>400</td><td>127 AVERAGE</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor						MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	93.22	-----	-----	81.78	27.50	7.23	33.32	10.03	400
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																											
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2389.82	50.45	54.00	-3.55	39.27	27.30	7.19	33.34	10.03	400	127 AVERAGE																																																																																									
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																											
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2412.00	93.22	-----	-----	81.78	27.50	7.23	33.32	10.03	400	127 AVERAGE																																																																																									



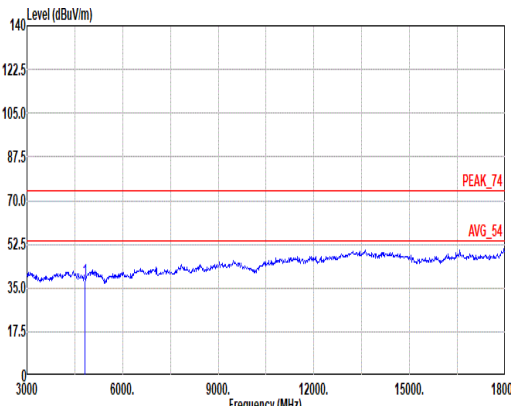
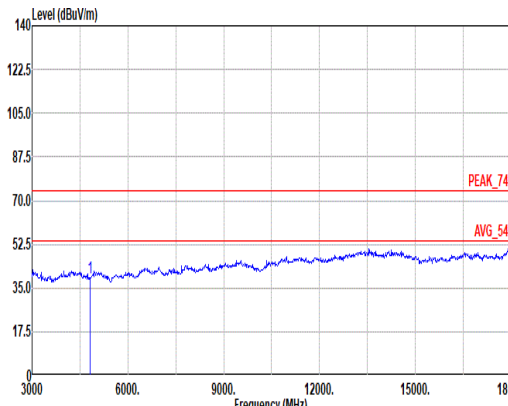


Mode	10																																																																																																		
	Harmonic																																																																																																		
	2400-2483.5_802.11ax HE20_CH01_Full RU_2412MHz																																																																																																		
Pol.	Horizontal						Vertical																																																																																												
Peak Avg																																																																																																			
	Site : 03CH11-HY Condition: PEAK_74 3m 91280_01620_240828 HORIZONTAL Mode : 10 Setting : 70 Plane : X with adapter <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>4824.00</td><td>38.07</td><td>74.00</td><td>-35.93</td><td>61.93</td><td>32.44</td><td>9.93</td><td>66.74</td><td>0.51</td><td>--</td><td>--</td><td>Peak</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4824.00	38.07	74.00	-35.93	61.93	32.44	9.93	66.74	0.51	--	--	Peak	Site : 03CH11-HY Condition: PEAK_74 3m 91280_01620_240828 VERTICAL Mode : 10 Setting : 70 Plane : X with adapter <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>4824.00</td><td>39.11</td><td>74.00</td><td>-34.89</td><td>62.97</td><td>32.44</td><td>9.93</td><td>66.74</td><td>0.51</td><td>--</td><td>--</td><td>Peak</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4824.00	39.11	74.00	-34.89	62.97	32.44	9.93	66.74	0.51	--	--
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	4824.00	38.07	74.00	-35.93	61.93	32.44	9.93	66.74	0.51	--	--	Peak																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	4824.00	39.11	74.00	-34.89	62.97	32.44	9.93	66.74	0.51	--	--	Peak																																																																																							

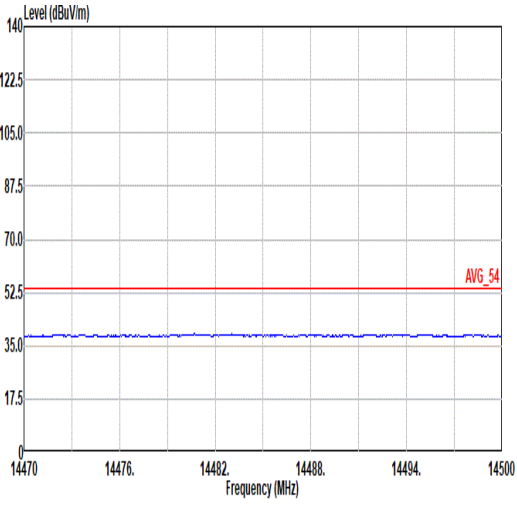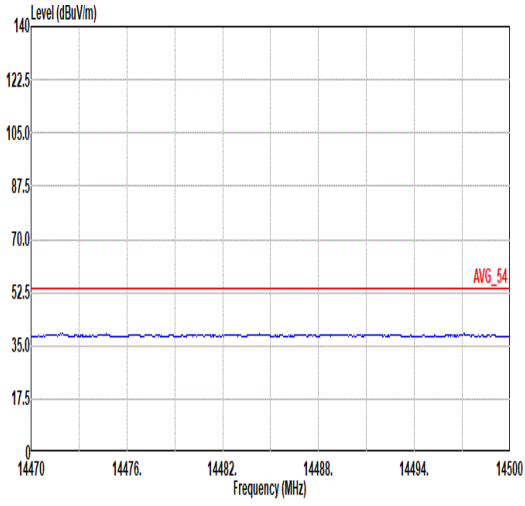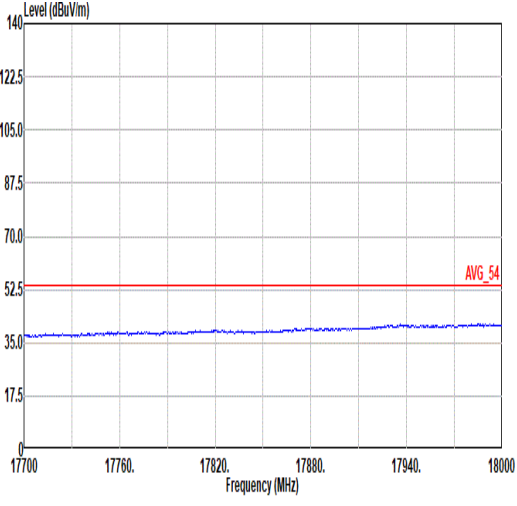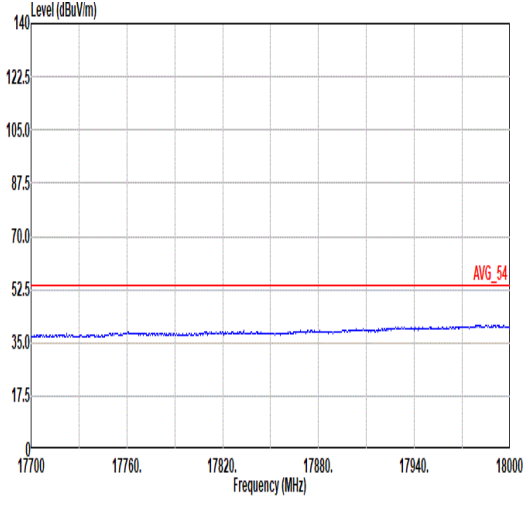

Mode	10	
	Harmonic	
	2400-2483.5_802.11ax HE20_CH01_Full RU_2412MHz	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	 Site : 03CH11-HY Condition: AVG_54 3m 91280_01620_240828 HORIZONTAL Mode : 10 Setting : 70 Plane : X with adapter	 Site : 03CH11-HY Condition: AVG_54 3m 91280_01620_240828 VERTICAL Mode : 10 Setting : 70 Plane : X with adapter
17.7G ~18G Avg	 Site : 03CH11-HY Condition: AVG_54 3m 91280_01620_240828 HORIZONTAL Mode : 10 Setting : 70 Plane : X with adapter	 Site : 03CH11-HY Condition: AVG_54 3m 91280_01620_240828 VERTICAL Mode : 10 Setting : 70 Plane : X with adapter

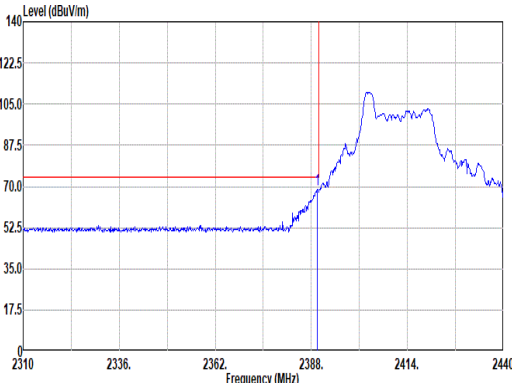
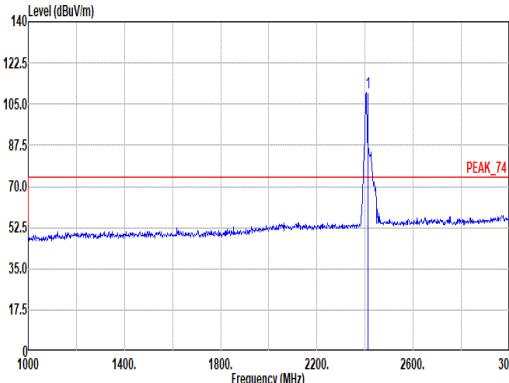
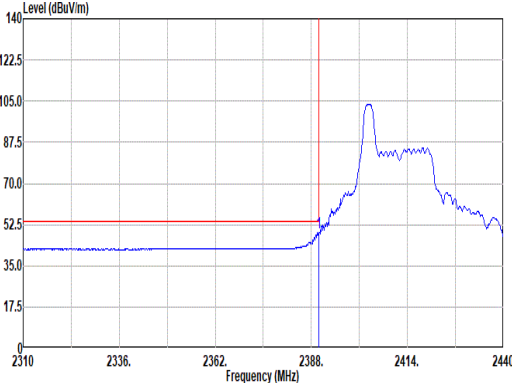
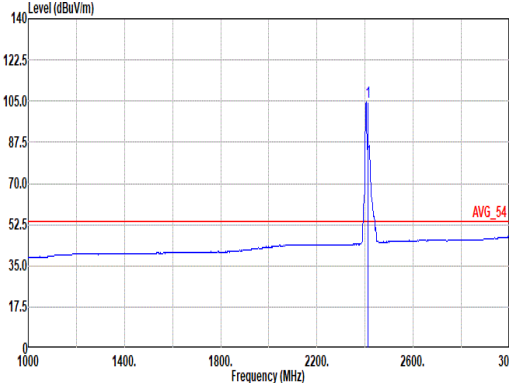


		11																																																																																																																																																																																																																							
Mode	Band Edge																																																																																																																																																																																																																								
	2400-2483.5_802.11ax HE20_CH01_Partial RU 26/0_2412MHz																																																																																																																																																																																																																								
Pol.	Horizontal						Fundamental																																																																																																																																																																																																																		
Peak	 Site : 03CH11-HY Condition: PEAK_BE_74 3m 91200_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto Detector : PEAK Mode : 11 Setting : 80 Plane : X with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="3">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2389.69</td><td>68.88</td><td>74.00</td><td>-5.12</td><td>57.70</td><td>27.30</td><td>7.19</td><td>33.34</td><td>10.03</td><td>305</td><td>352 PEAK</td></tr></table>  Site : 03CH11-HY Condition: PEAK_74 3m 91200_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto Detector : PEAK Mode : 11 Setting : 80 Plane : X with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="3">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2412.00</td><td>109.96</td><td>-----</td><td>-----</td><td>98.65</td><td>27.40</td><td>7.21</td><td>33.33</td><td>10.03</td><td>305</td><td>352 PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	2389.69	68.88	74.00	-5.12	57.70	27.30	7.19	33.34	10.03	305	352 PEAK		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	2412.00	109.96	-----	-----	98.65	27.40	7.21	33.33	10.03	305	352 PEAK	Avg	 Site : 03CH11-HY Condition: AVG_BE_54 3m 91200_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:0.300kHz SMT:Auto Detector : PEAK Mode : 11 Setting : 80 Plane : X with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="3">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2389.95</td><td>49.13</td><td>54.00</td><td>-4.87</td><td>37.95</td><td>27.30</td><td>7.19</td><td>33.34</td><td>10.03</td><td>305</td><td>352 AVERAGE</td></tr></table>  Site : 03CH11-HY Condition: AVG_54 3m 91200_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:0.300kHz SMT:Auto Detector : PEAK Mode : 11 Setting : 80 Plane : X with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="3">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2412.00</td><td>104.80</td><td>-----</td><td>-----</td><td>93.49</td><td>27.40</td><td>7.21</td><td>33.33</td><td>10.03</td><td>305</td><td>352 AVERAGE</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	2389.95	49.13	54.00	-4.87	37.95	27.30	7.19	33.34	10.03	305	352 AVERAGE		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	2412.00	104.80	-----	-----	93.49	27.40	7.21	33.33	10.03	305	352 AVERAGE
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																																																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																																																																															
1	2389.69	68.88	74.00	-5.12	57.70	27.30	7.19	33.34	10.03	305	352 PEAK																																																																																																																																																																																																														
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																																																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																																																																															
1	2412.00	109.96	-----	-----	98.65	27.40	7.21	33.33	10.03	305	352 PEAK																																																																																																																																																																																																														
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																																																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																																																																															
1	2389.95	49.13	54.00	-4.87	37.95	27.30	7.19	33.34	10.03	305	352 AVERAGE																																																																																																																																																																																																														
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																																																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																																																																															
1	2412.00	104.80	-----	-----	93.49	27.40	7.21	33.33	10.03	305	352 AVERAGE																																																																																																																																																																																																														



		11										
Mode		Band Edge										
		2400-2483.5_802.11ax HE20_CH01_Partial RU 26/0_2412MHz										
Pol.		Vertical						Fundamental				
Peak												

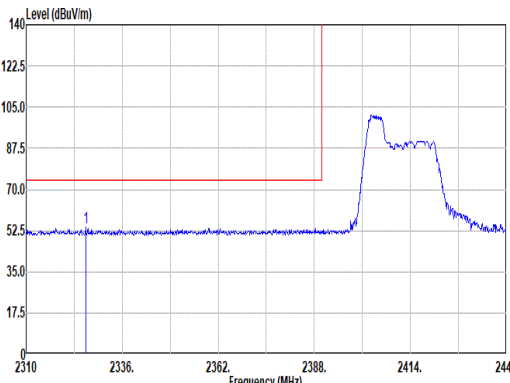
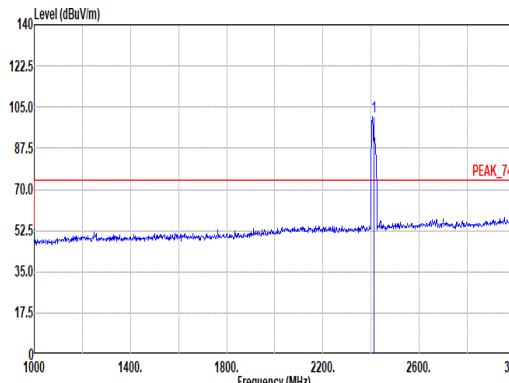
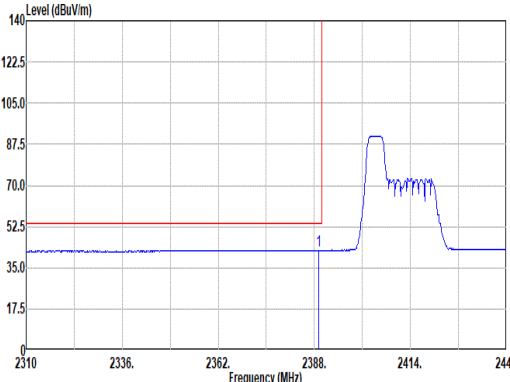
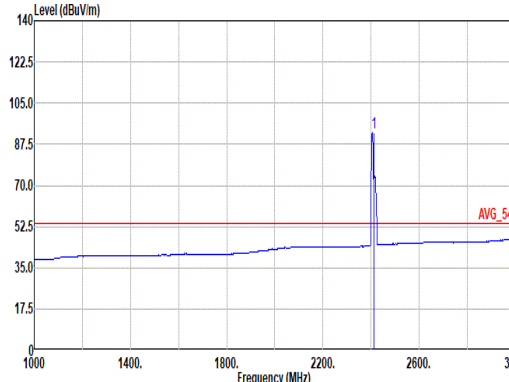


		12																																																				
Mode		Band Edge																																																				
		2400-2483.5_802.11ax HE20_CH01_Partial RU 52/37_2412MHz																																																				
Pol.		Horizontal					Fundamental																																															
Peak																																																						
		Site : 03CH11-HY Condition: PEAK_BE_74 3m 91200_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto Detector : PEAK Mode : 12 Setting : 39 Plane : X with adapter <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th>PEAK</th></tr></thead><tbody><tr><td>1</td><td>2326.12</td><td>53.75</td><td>74.00</td><td>-20.25</td><td>42.88</td><td>27.14</td><td>7.10</td><td>33.38</td><td>10.01</td><td>226</td><td>201 PEAK</td></tr></tbody></table>											Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	PEAK	1	2326.12	53.75	74.00	-20.25	42.88	27.14	7.10	33.38	10.01	226
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																													
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	PEAK																																											
1	2326.12	53.75	74.00	-20.25	42.88	27.14	7.10	33.38	10.01	226	201 PEAK																																											
Fundamental																																																						
		Site : 03CH11-HY Condition: PEAK_74 3m 91200_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto Detector : PEAK Mode : 12 Setting : 39 Plane : X with adapter <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th>PEAK</th></tr></thead><tbody><tr><td>1</td><td>2412.00</td><td>101.04</td><td>-----</td><td>-----</td><td>89.73</td><td>27.40</td><td>7.21</td><td>33.33</td><td>10.03</td><td>226</td><td>201 PEAK</td></tr></tbody></table>											Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	PEAK	1	2412.00	101.04	-----	-----	89.73	27.40	7.21	33.33	10.03	226
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																													
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	PEAK																																											
1	2412.00	101.04	-----	-----	89.73	27.40	7.21	33.33	10.03	226	201 PEAK																																											
Avg																																																						
		Site : 03CH11-HY Condition: AVG_BE_54 3m 91200_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:0.300kHz SMT:Auto Detector : PEAK Mode : 12 Setting : 39 Plane : X with adapter <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th>AVERAGE</th></tr></thead><tbody><tr><td>1</td><td>2309.17</td><td>42.49</td><td>54.00</td><td>-11.51</td><td>31.32</td><td>27.29</td><td>7.19</td><td>33.34</td><td>10.03</td><td>226</td><td>201 AVERAGE</td></tr></tbody></table>											Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	AVERAGE	1	2309.17	42.49	54.00	-11.51	31.32	27.29	7.19	33.34	10.03	226
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																													
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	AVERAGE																																											
1	2309.17	42.49	54.00	-11.51	31.32	27.29	7.19	33.34	10.03	226	201 AVERAGE																																											
Avg																																																						
		Site : 03CH11-HY Condition: AVG_54 3m 91200_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:0.300kHz SMT:Auto Detector : PEAK Mode : 12 Setting : 39 Plane : X with adapter <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th>AVERAGE</th></tr></thead><tbody><tr><td>1</td><td>2412.00</td><td>92.50</td><td>-----</td><td>-----</td><td>81.19</td><td>27.40</td><td>7.21</td><td>33.33</td><td>10.03</td><td>226</td><td>201 AVERAGE</td></tr></tbody></table>											Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	AVERAGE	1	2412.00	92.50	-----	-----	81.19	27.40	7.21	33.33	10.03	226
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																													
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	AVERAGE																																											
1	2412.00	92.50	-----	-----	81.19	27.40	7.21	33.33	10.03	226	201 AVERAGE																																											



		12																																																				
Mode	Band Edge																																																					
	2400-2483.5_802.11ax HE20_CH01_Partial RU 52/37_2412MHz																																																					
Pol.	Fundamental																																																					
Peak	Vertical																																																					
	Site : 03CH11-HY Condition: PEAK_BE_74 3m 91200_01620_240828 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto Detector : PEAK Mode : 12 Setting : 39 Plane : X with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th>PEAK</th></tr><tr><td>1</td><td>2361.74</td><td>53.34</td><td>74.00</td><td>-20.66</td><td>42.33</td><td>27.20</td><td>7.15</td><td>33.36</td><td>10.02</td><td>116</td><td>360</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	PEAK	1	2361.74	53.34	74.00	-20.66	42.33	27.20	7.15	33.36	10.02	116
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	PEAK																																											
1	2361.74	53.34	74.00	-20.66	42.33	27.20	7.15	33.36	10.02	116	360																																											
Avg	Fundamental																																																					
	Site : 03CH11-HY Condition: PEAK_74 3m 91200_01620_240828 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto Detector : PEAK Mode : 12 Setting : 39 Plane : X with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th>PEAK</th></tr><tr><td>1</td><td>2412.00</td><td>103.19</td><td>-----</td><td>-----</td><td>91.88</td><td>27.40</td><td>7.21</td><td>33.33</td><td>10.03</td><td>116</td><td>360</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	PEAK	1	2412.00	103.19	-----	-----	91.88	27.40	7.21	33.33	10.03	116
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	PEAK																																											
1	2412.00	103.19	-----	-----	91.88	27.40	7.21	33.33	10.03	116	360																																											
Peak	Vertical																																																					
	Site : 03CH11-HY Condition: AVG_BE_54 3m 91200_01620_240828 VERTICAL : RBW:1000.000kHz VBW:0.300kHz SMT:Auto Detector : PEAK Mode : 12 Setting : 39 Plane : X with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th>AVERAGE</th></tr><tr><td>1</td><td>2382.93</td><td>42.44</td><td>54.00</td><td>-11.56</td><td>31.34</td><td>27.23</td><td>7.18</td><td>33.34</td><td>10.03</td><td>116</td><td>360</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	AVERAGE	1	2382.93	42.44	54.00	-11.56	31.34	27.23	7.18	33.34	10.03	116
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	AVERAGE																																											
1	2382.93	42.44	54.00	-11.56	31.34	27.23	7.18	33.34	10.03	116	360																																											
Avg	Fundamental																																																					
	Site : 03CH11-HY Condition: AVG_54 3m 91200_01620_240828 VERTICAL : RBW:1000.000kHz VBW:0.300kHz SMT:Auto Detector : PEAK Mode : 12 Setting : 39 Plane : X with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th>AVERAGE</th></tr><tr><td>1</td><td>2412.00</td><td>91.89</td><td>-----</td><td>-----</td><td>80.58</td><td>27.40</td><td>7.21</td><td>33.33</td><td>10.03</td><td>116</td><td>360</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	AVERAGE	1	2412.00	91.89	-----	-----	80.58	27.40	7.21	33.33	10.03	116
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	AVERAGE																																											
1	2412.00	91.89	-----	-----	80.58	27.40	7.21	33.33	10.03	116	360																																											

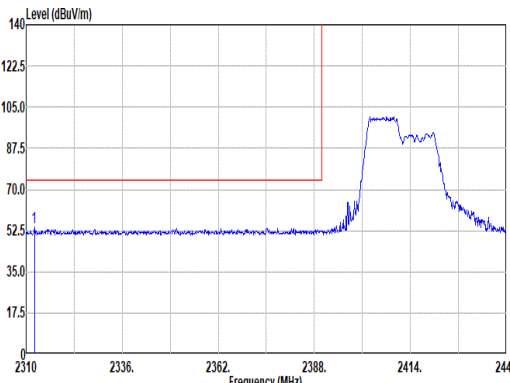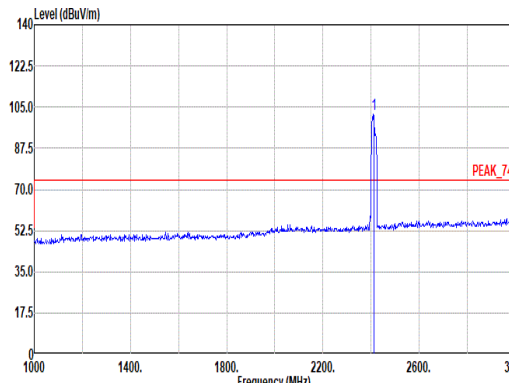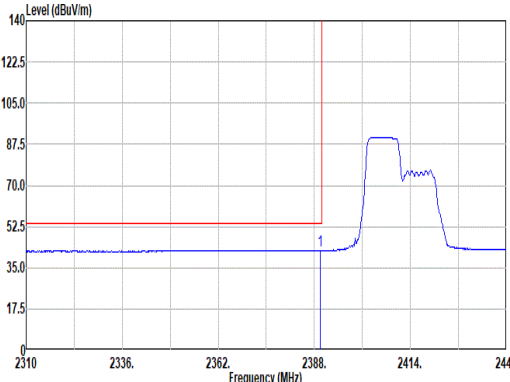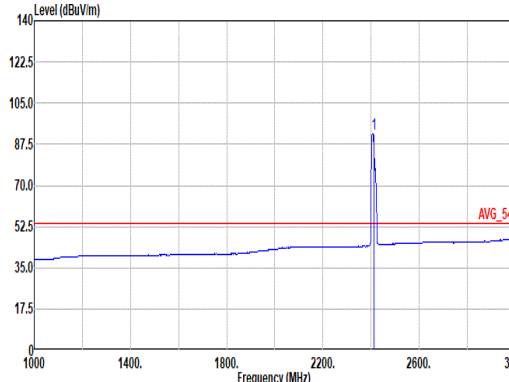

		13																																																																																																																																																																																																																							
Mode	Band Edge																																																																																																																																																																																																																								
	2400-2483.5_802.11ax HE20_CH01_Partial RU 106/53_2412MHz																																																																																																																																																																																																																								
Pol.	Horizontal						Fundamental																																																																																																																																																																																																																		
Peak	 Site : 03CH11-HY Condition: PEAK_BE_74 3m 91200_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto Detector : PEAK Mode : 13 Setting : 48 Plane : X with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="3">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2312.21</td><td>53.76</td><td>74.00</td><td>-20.24</td><td>42.06</td><td>27.20</td><td>7.08</td><td>33.39</td><td>10.01</td><td>397</td><td>226 PEAK</td></tr></table>  Site : 03CH11-HY Condition: PEAK_74 3m 91200_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto Detector : PEAK Mode : 13 Setting : 48 Plane : X with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="3">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2412.00</td><td>101.74</td><td>-----</td><td>-----</td><td>90.43</td><td>27.40</td><td>7.21</td><td>33.33</td><td>10.03</td><td>397</td><td>226 PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	2312.21	53.76	74.00	-20.24	42.06	27.20	7.08	33.39	10.01	397	226 PEAK		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	2412.00	101.74	-----	-----	90.43	27.40	7.21	33.33	10.03	397	226 PEAK	Avg	 Site : 03CH11-HY Condition: AVG_BE_54 3m 91200_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:0.300kHz SMT:Auto Detector : PEAK Mode : 13 Setting : 48 Plane : X with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="3">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2309.69</td><td>42.43</td><td>54.00</td><td>-11.57</td><td>31.25</td><td>27.30</td><td>7.19</td><td>33.34</td><td>10.03</td><td>397</td><td>226 AVERAGE</td></tr></table>  Site : 03CH11-HY Condition: AVG_54 3m 91200_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:0.300kHz SMT:Auto Detector : PEAK Mode : 13 Setting : 48 Plane : X with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="3">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2412.00</td><td>91.90</td><td>-----</td><td>-----</td><td>80.59</td><td>27.40</td><td>7.21</td><td>33.33</td><td>10.03</td><td>397</td><td>226 AVERAGE</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	2309.69	42.43	54.00	-11.57	31.25	27.30	7.19	33.34	10.03	397	226 AVERAGE		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	2412.00	91.90	-----	-----	80.59	27.40	7.21	33.33	10.03	397	226 AVERAGE
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																																																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																																																																															
1	2312.21	53.76	74.00	-20.24	42.06	27.20	7.08	33.39	10.01	397	226 PEAK																																																																																																																																																																																																														
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																																																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																																																																															
1	2412.00	101.74	-----	-----	90.43	27.40	7.21	33.33	10.03	397	226 PEAK																																																																																																																																																																																																														
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																																																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																																																																															
1	2309.69	42.43	54.00	-11.57	31.25	27.30	7.19	33.34	10.03	397	226 AVERAGE																																																																																																																																																																																																														
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																																																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																																																																															
1	2412.00	91.90	-----	-----	80.59	27.40	7.21	33.33	10.03	397	226 AVERAGE																																																																																																																																																																																																														





		13																																																										
Mode		Band Edge																																																										
		2400-2483.5_802.11ax HE20_CH01_Partial RU 106/53_2412MHz																																																										
Pol.		Vertical																																																										
Peak		Site : 03CH11-HY Condition: PEAK_BE_74 3m 91200_01620_240828 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto Detector : PEAK Mode : 13 Setting : 48 Plane : X with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="3">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2382.28</td><td>53.61</td><td>74.00</td><td>-20.39</td><td>42.71</td><td>27.20</td><td>7.08</td><td>33.39</td><td>10.01</td><td>247</td><td>322 PEAK</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	2382.28	53.61	74.00	-20.39	42.71	27.20	7.08	33.39	10.01	247	322 PEAK
			Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																		
1	2382.28	53.61	74.00	-20.39	42.71	27.20	7.08	33.39	10.01	247	322 PEAK																																																	
Site : 03CH11-HY Condition: PEAK_74 3m 91200_01620_240828 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto Detector : PEAK Mode : 13 Setting : 48 Plane : X with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="3">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2412.00</td><td>101.21</td><td>-----</td><td>-----</td><td>89.90</td><td>27.40</td><td>7.21</td><td>33.33</td><td>10.03</td><td>247</td><td>322 PEAK</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	2412.00	101.21	-----	-----	89.90	27.40	7.21	33.33	10.03	247	322 PEAK		
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																		
1	2412.00	101.21	-----	-----	89.90	27.40	7.21	33.33	10.03	247	322 PEAK																																																	
Avg		Site : 03CH11-HY Condition: AVG_BE_54 3m 91200_01620_240828 VERTICAL : RBW:1000.000kHz VBW:0.300kHz SMT:Auto Detector : PEAK Mode : 13 Setting : 48 Plane : X with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="3">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2382.28</td><td>42.45</td><td>54.00</td><td>-11.55</td><td>31.36</td><td>27.22</td><td>7.18</td><td>33.34</td><td>10.03</td><td>247</td><td>322 AVERAGE</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	2382.28	42.45	54.00	-11.55	31.36	27.22	7.18	33.34	10.03	247	322 AVERAGE
			Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																		
1	2382.28	42.45	54.00	-11.55	31.36	27.22	7.18	33.34	10.03	247	322 AVERAGE																																																	
Site : 03CH11-HY Condition: AVG_54 3m 91200_01620_240828 VERTICAL : RBW:1000.000kHz VBW:0.300kHz SMT:Auto Detector : PEAK Mode : 13 Setting : 48 Plane : X with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="3">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2412.00</td><td>92.16</td><td>-----</td><td>-----</td><td>80.85</td><td>27.40</td><td>7.21</td><td>33.33</td><td>10.03</td><td>247</td><td>322 AVERAGE</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	2412.00	92.16	-----	-----	80.85	27.40	7.21	33.33	10.03	247	322 AVERAGE		
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																		
1	2412.00	92.16	-----	-----	80.85	27.40	7.21	33.33	10.03	247	322 AVERAGE																																																	







Mode	14																																																																																																																							
	Band Edge - L																																																																																																																							
	2400-2483.5_802.11ax HE20_CH06_Full RU_2437MHz																																																																																																																							
Pol.	Horizontal						Fundamental																																																																																																																	
Peak	Site : 03CH11-HY Condition: PEAK_BE_74 3m 91200_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto Detector : PEAK Mode : 14 Setting : 82 Plane : X with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="3">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2389.76</td><td>54.13</td><td>74.00</td><td>-19.87</td><td>42.95</td><td>27.30</td><td>7.19</td><td>33.34</td><td>10.03</td><td>389</td><td>23 PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	2389.76	54.13	74.00	-19.87	42.95	27.30	7.19	33.34	10.03	389	23 PEAK	Site : 03CH11-HY Condition: PEAK_74 3m 91200_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto Detector : PEAK Mode : 14 Setting : 82 Plane : X with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="3">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2437.00</td><td>103.97</td><td>-----</td><td>-----</td><td>92.43</td><td>27.58</td><td>7.24</td><td>33.31</td><td>10.03</td><td>389</td><td>23 PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	2437.00	103.97	-----	-----	92.43	27.58	7.24	33.31	10.03	389	23 PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																														
1	2389.76	54.13	74.00	-19.87	42.95	27.30	7.19	33.34	10.03	389	23 PEAK																																																																																																													
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																														
1	2437.00	103.97	-----	-----	92.43	27.58	7.24	33.31	10.03	389	23 PEAK																																																																																																													
Avg	Site : 03CH11-HY Condition: AVG_BE_54 3m 91200_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:1.000kHz SMT:Auto Detector : PEAK Mode : 14 Setting : 82 Plane : X with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="3">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2389.76</td><td>44.27</td><td>54.00</td><td>-9.73</td><td>33.09</td><td>27.30</td><td>7.19</td><td>33.34</td><td>10.03</td><td>389</td><td>23 AVERAGE</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	2389.76	44.27	54.00	-9.73	33.09	27.30	7.19	33.34	10.03	389	23 AVERAGE	Site : 03CH11-HY Condition: AVG_54 3m 91200_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:1.000kHz SMT:Auto Detector : PEAK Mode : 14 Setting : 82 Plane : X with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="3">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2437.00</td><td>95.90</td><td>-----</td><td>-----</td><td>84.36</td><td>27.58</td><td>7.24</td><td>33.31</td><td>10.03</td><td>389</td><td>23 AVERAGE</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	2437.00	95.90	-----	-----	84.36	27.58	7.24	33.31	10.03	389	23 AVERAGE
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																														
1	2389.76	44.27	54.00	-9.73	33.09	27.30	7.19	33.34	10.03	389	23 AVERAGE																																																																																																													
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																														
1	2437.00	95.90	-----	-----	84.36	27.58	7.24	33.31	10.03	389	23 AVERAGE																																																																																																													

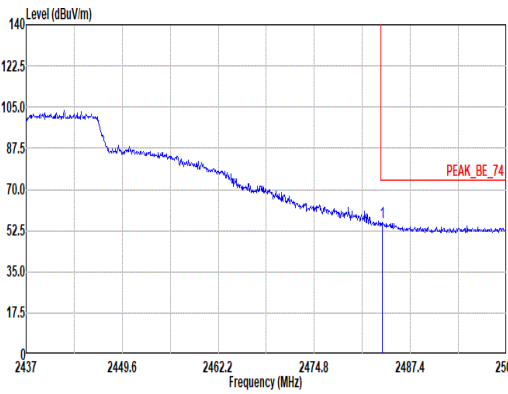
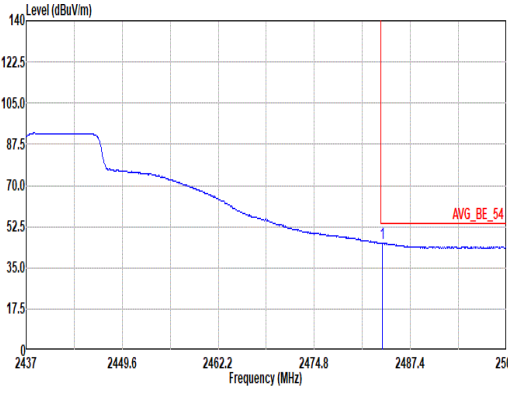


Mode	14																																																						
	Band Edge - R																																																						
	2400-2483.5_802.11ax HE20_CH06_Full RU_2437MHz																																																						
Pol.	Horizontal						Fundamental																																																
Peak	 Site : 03CH11-HY Condition: PEAK_BE_74 3m 91200_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto Detector : PEAK Mode : 14 Setting : 82 Plane : X with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.75</td><td>55.75</td><td>74.00</td><td>-18.25</td><td>43.84</td><td>27.84</td><td>7.32</td><td>33.28</td><td>10.03</td><td>309</td><td>23</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.75	55.75	74.00	-18.25	43.84	27.84	7.32	33.28	10.03	309	23	PEAK	Blank				
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	2483.75	55.75	74.00	-18.25	43.84	27.84	7.32	33.28	10.03	309	23	PEAK																																											
Avg	 Site : 03CH11-HY Condition: AVG_BE_54 3m 91200_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:1.000kHz SMT:Auto Detector : PEAK Mode : 14 Setting : 82 Plane : X with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.75</td><td>45.59</td><td>54.00</td><td>-8.41</td><td>33.68</td><td>27.84</td><td>7.32</td><td>33.28</td><td>10.03</td><td>309</td><td>23</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.75	45.59	54.00	-8.41	33.68	27.84	7.32	33.28	10.03	309	23	AVERAGE	Blank				
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	2483.75	45.59	54.00	-8.41	33.68	27.84	7.32	33.28	10.03	309	23	AVERAGE																																											

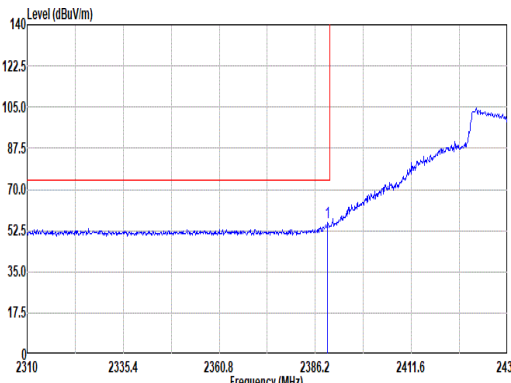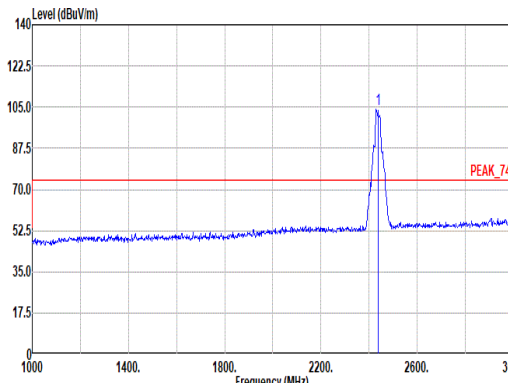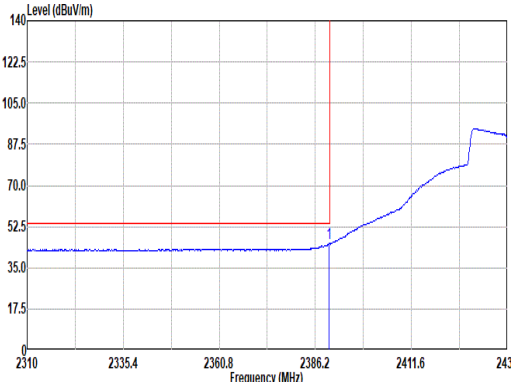
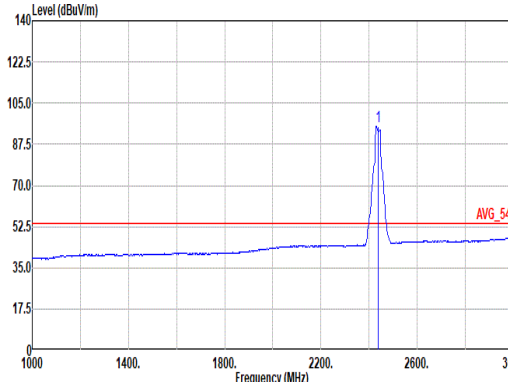


		14																																																																																																		
Mode	Band Edge - L																																																																																																			
	2400-2483.5_802.11ax HE20_CH06_Full RU_2437MHz																																																																																																			
Pol.	Vertical						Fundamental																																																																																													
Peak	 Site : 03CH11-HY Condition: PEAK_BE_74 3m 91200_01620_240828 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto Detector : PEAK Mode : 14 Setting : 82 Plane : X with adapter <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2389.50</td><td>56.01</td><td>74.00</td><td>-17.99</td><td>44.83</td><td>27.30</td><td>7.19</td><td>33.34</td><td>10.03</td><td>400</td><td>344</td><td>PEAK</td></tr></tbody></table>  Site : 03CH11-HY Condition: PEAK_74 3m 91200_01620_240828 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto Detector : PEAK Mode : 14 Setting : 82 Plane : X with adapter <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2437.00</td><td>104.10</td><td>-----</td><td>-----</td><td>92.56</td><td>27.58</td><td>7.24</td><td>33.31</td><td>10.03</td><td>400</td><td>344</td><td>PEAK</td></tr></tbody></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.50	56.01	74.00	-17.99	44.83	27.30	7.19	33.34	10.03	400	344	PEAK		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2437.00	104.10	-----	-----	92.56	27.58	7.24	33.31	10.03	400	344	PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2389.50	56.01	74.00	-17.99	44.83	27.30	7.19	33.34	10.03	400	344	PEAK																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																											
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2437.00	104.10	-----	-----	92.56	27.58	7.24	33.31	10.03	400	344	PEAK																																																																																								
Avg	 Site : 03CH11-HY Condition: AVG_BE_54 3m 91200_01620_240828 VERTICAL : RBW:1000.000kHz VBW:1.000kHz SMT:Auto Detector : PEAK Mode : 14 Setting : 82 Plane : X with adapter <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2389.88</td><td>45.38</td><td>54.00</td><td>-8.62</td><td>34.20</td><td>27.30</td><td>7.19</td><td>33.34</td><td>10.03</td><td>400</td><td>344</td><td>AVERAGE</td></tr></tbody></table>  Site : 03CH11-HY Condition: AVG_54 3m 91200_01620_240828 VERTICAL : RBW:1000.000kHz VBW:1.000kHz SMT:Auto Detector : PEAK Mode : 14 Setting : 82 Plane : X with adapter <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2437.00</td><td>95.36</td><td>-----</td><td>-----</td><td>83.82</td><td>27.58</td><td>7.24</td><td>33.31</td><td>10.03</td><td>400</td><td>344</td><td>AVERAGE</td></tr></tbody></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.88	45.38	54.00	-8.62	34.20	27.30	7.19	33.34	10.03	400	344	AVERAGE		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2437.00	95.36	-----	-----	83.82	27.58	7.24	33.31	10.03	400	344	AVERAGE
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																											
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2389.88	45.38	54.00	-8.62	34.20	27.30	7.19	33.34	10.03	400	344	AVERAGE																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																											
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2437.00	95.36	-----	-----	83.82	27.58	7.24	33.31	10.03	400	344	AVERAGE																																																																																								



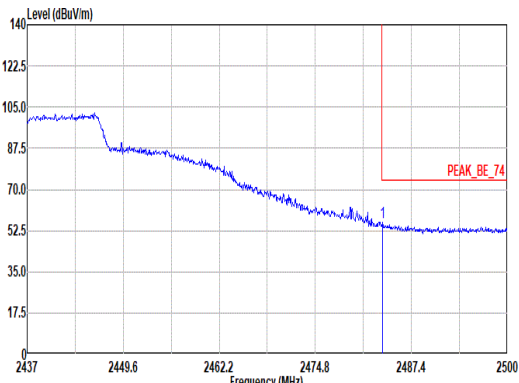
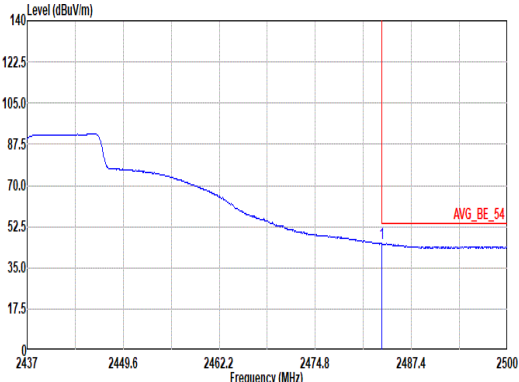


		14																																																						
Mode	Band Edge - R																																																							
	2400-2483.5_802.11ax HE20_CH06_Full RU_2437MHz																																																							
Pol.	Vertical										Fundamental																																													
Peak	 Site : 03CH11-HY Condition: PEAK_BE_74 3m 91200_01620_240828 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto Detector : PEAK Mode : 14 Setting : 82 Plane : X with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>cm</th><th>deg</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 2483.62</td><td>55.95</td><td>74.00</td><td>-18.05</td><td>44.04</td><td>27.84</td><td>7.32</td><td>33.28</td><td>10.03</td><td>400</td><td>344</td><td>PEAK</td></tr></table>											Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 2483.62	55.95	74.00	-18.05	44.04	27.84	7.32	33.28	10.03	400	344	PEAK	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																														
1 2483.62	55.95	74.00	-18.05	44.04	27.84	7.32	33.28	10.03	400	344	PEAK																																													
Avg	 Site : 03CH11-HY Condition: AVG_BE_54 3m 91200_01620_240828 VERTICAL : RBW:1000.000kHz VBW:1.000kHz SMT:Auto Detector : PEAK Mode : 14 Setting : 82 Plane : X with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>cm</th><th>deg</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 2483.56</td><td>45.24</td><td>54.00</td><td>-8.76</td><td>33.33</td><td>27.84</td><td>7.32</td><td>33.28</td><td>10.03</td><td>400</td><td>344</td><td>AVERAGE</td></tr></table>											Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 2483.56	45.24	54.00	-8.76	33.33	27.84	7.32	33.28	10.03	400	344	AVERAGE	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																														
1 2483.56	45.24	54.00	-8.76	33.33	27.84	7.32	33.28	10.03	400	344	AVERAGE																																													



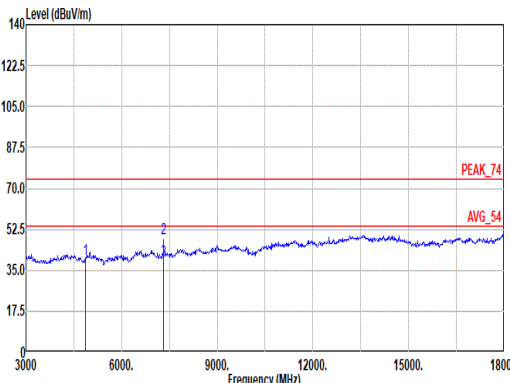
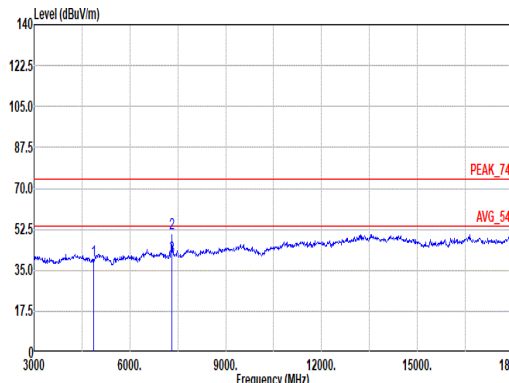


		14																																																																																																																																																														
Mode		Harmonic																																																																																																																																																														
		2400-2483.5_802.11ax HE20_CH06_Full RU_2437MHz																																																																																																																																																														
Pol.		Horizontal										Vertical																																																																																																																																																				
Peak Avg																																																																																																																																																																
		Site : 03CH11-HY Condition: PEAK_74 3m 91200_01620_240828 HORIZONTAL Mode : 14 Setting : 82 Plane : X with adapter <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>4874.00</td><td>39.64</td><td>74.00</td><td>-34.36</td><td>63.02</td><td>32.70</td><td>10.09</td><td>66.70</td><td>0.53</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>7311.00</td><td>48.67</td><td>74.00</td><td>-25.33</td><td>64.58</td><td>36.78</td><td>12.76</td><td>65.77</td><td>0.32</td><td>125</td><td>235</td><td>Peak</td></tr><tr><td>3</td><td>7311.00</td><td>38.90</td><td>54.00</td><td>-15.10</td><td>54.81</td><td>36.78</td><td>12.76</td><td>65.77</td><td>0.32</td><td>125</td><td>235</td><td>Average</td></tr></tbody></table>											Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4874.00	39.64	74.00	-34.36	63.02	32.70	10.09	66.70	0.53	--	--	Peak	2	7311.00	48.67	74.00	-25.33	64.58	36.78	12.76	65.77	0.32	125	235	Peak	3	7311.00	38.90	54.00	-15.10	54.81	36.78	12.76	65.77	0.32	125	235	Average	Site : 03CH11-HY Condition: PEAK_74 3m 91200_01620_240828 VERTICAL Mode : 14 Setting : 82 Plane : X with adapter <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>4874.00</td><td>39.24</td><td>74.00</td><td>-34.76</td><td>62.62</td><td>32.70</td><td>10.09</td><td>66.70</td><td>0.53</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>7311.00</td><td>50.76</td><td>74.00</td><td>-23.24</td><td>66.67</td><td>36.78</td><td>12.76</td><td>65.77</td><td>0.32</td><td>100</td><td>228</td><td>Peak</td></tr><tr><td>3</td><td>7311.00</td><td>40.87</td><td>54.00</td><td>-13.13</td><td>56.78</td><td>36.78</td><td>12.76</td><td>65.77</td><td>0.32</td><td>100</td><td>228</td><td>Average</td></tr></tbody></table>											Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4874.00	39.24	74.00	-34.76	62.62	32.70	10.09	66.70	0.53	--	--	Peak	2	7311.00	50.76	74.00	-23.24	66.67	36.78	12.76	65.77	0.32	100	228	Peak	3	7311.00	40.87	54.00	-13.13	56.78	36.78	12.76	65.77	0.32	100	228
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																						
1	4874.00	39.64	74.00	-34.36	63.02	32.70	10.09	66.70	0.53	--	--	Peak																																																																																																																																																				
2	7311.00	48.67	74.00	-25.33	64.58	36.78	12.76	65.77	0.32	125	235	Peak																																																																																																																																																				
3	7311.00	38.90	54.00	-15.10	54.81	36.78	12.76	65.77	0.32	125	235	Average																																																																																																																																																				
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																						
1	4874.00	39.24	74.00	-34.76	62.62	32.70	10.09	66.70	0.53	--	--	Peak																																																																																																																																																				
2	7311.00	50.76	74.00	-23.24	66.67	36.78	12.76	65.77	0.32	100	228	Peak																																																																																																																																																				
3	7311.00	40.87	54.00	-13.13	56.78	36.78	12.76	65.77	0.32	100	228	Average																																																																																																																																																				

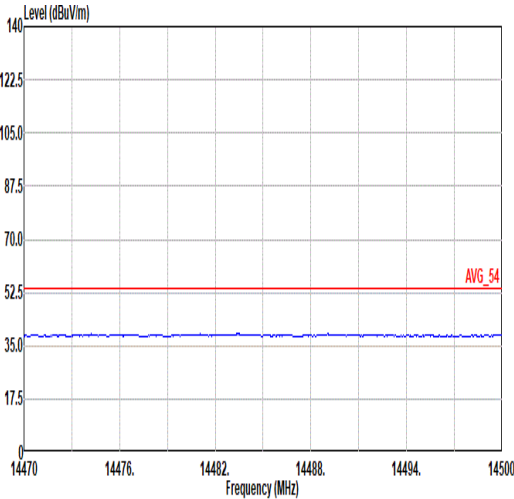
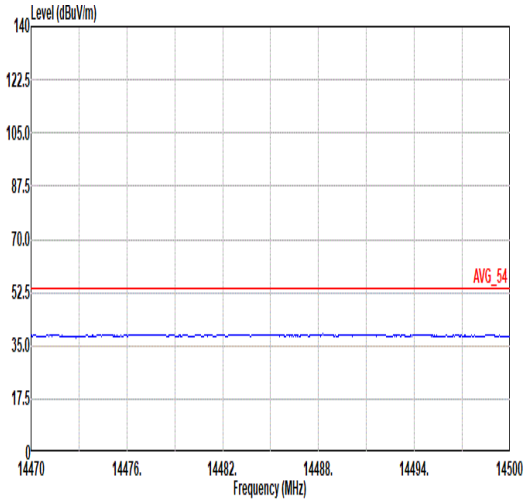
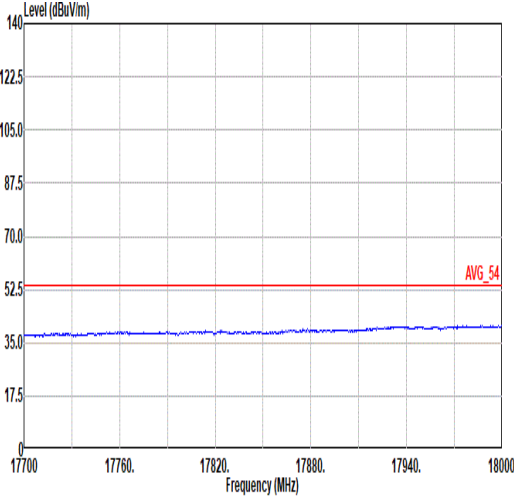
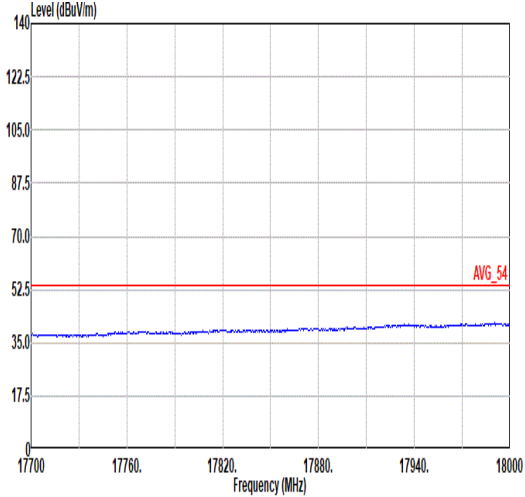


Mode	14	
	Harmonic	
	2400-2483.5_802.11ax HE20_CH06_Full RU_2437MHz	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	 Site : 03CH11-HY Condition: AVG_54 3m 91280_01620_240828 HORIZONTAL Mode : 14 Setting : 82 Plane : X with adapter	 Site : 03CH11-HY Condition: AVG_54 3m 91280_01620_240828 VERTICAL Mode : 14 Setting : 82 Plane : X with adapter
17.7G ~18G Avg	 Site : 03CH11-HY Condition: AVG_54 3m 91280_01620_240828 HORIZONTAL Mode : 14 Setting : 82 Plane : X with adapter	 Site : 03CH11-HY Condition: AVG_54 3m 91280_01620_240828 VERTICAL Mode : 14 Setting : 82 Plane : X with adapter

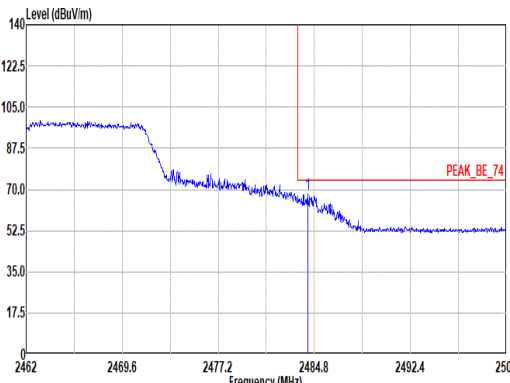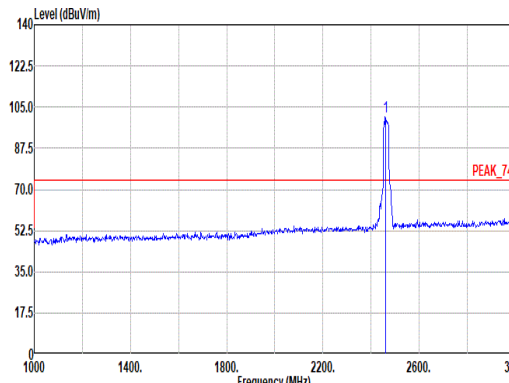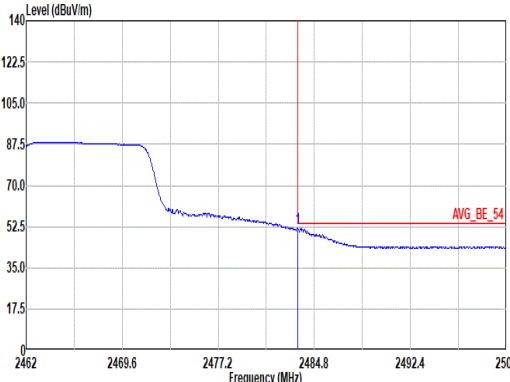
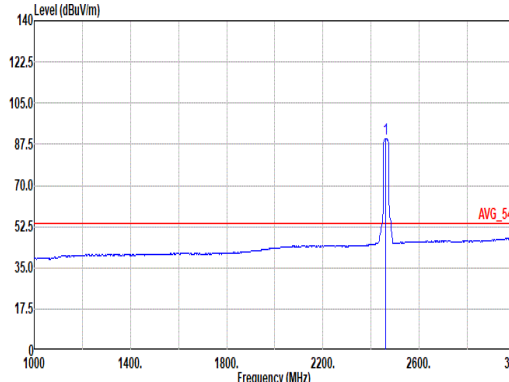


		15																																																																																																										
Mode	Band Edge																																																																																																											
	2400-2483.5_802.11ax HE20_CH11_Full RU_2462MHz																																																																																																											
Pol.	Horizontal						Fundamental																																																																																																					
Peak	 Site : 03CH11-HY Condition: PEAK_BE_74 3m 91200_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto Detector : PEAK Mode : 15 Setting : 64 Plane : X with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="3">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2484.27</td><td>68.38</td><td>74.00</td><td>-5.62</td><td>56.47</td><td>27.84</td><td>7.32</td><td>33.28</td><td>10.03</td><td>326</td><td>21 PEAK</td></tr></table>  Site : 03CH11-HY Condition: PEAK_74 3m 91200_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto Detector : PEAK Mode : 15 Setting : 64 Plane : X with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="3">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2462.00</td><td>100.72</td><td>-----</td><td>-----</td><td>89.11</td><td>27.60</td><td>7.28</td><td>33.30</td><td>10.03</td><td>326</td><td>21 PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	2484.27	68.38	74.00	-5.62	56.47	27.84	7.32	33.28	10.03	326	21 PEAK		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	2462.00	100.72	-----	-----	89.11	27.60	7.28	33.30	10.03	326	21 PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																		
1	2484.27	68.38	74.00	-5.62	56.47	27.84	7.32	33.28	10.03	326	21 PEAK																																																																																																	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																		
1	2462.00	100.72	-----	-----	89.11	27.60	7.28	33.30	10.03	326	21 PEAK																																																																																																	
Avg	 Site : 03CH11-HY Condition: AVG_BE_54 3m 91200_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:1.000kHz SMT:Auto Detector : PEAK Mode : 15 Setting : 64 Plane : X with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="3">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2483.51</td><td>51.71</td><td>54.00</td><td>-2.29</td><td>39.80</td><td>27.84</td><td>7.32</td><td>33.28</td><td>10.03</td><td>326</td><td>21 AVERAGE</td></tr></table>  Site : 03CH11-HY Condition: AVG_54 3m 91200_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:1.000kHz SMT:Auto Detector : PEAK Mode : 15 Setting : 64 Plane : X with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="3">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2462.00</td><td>90.05</td><td>-----</td><td>-----</td><td>78.43</td><td>27.60</td><td>7.28</td><td>33.29</td><td>10.03</td><td>326</td><td>21 AVERAGE</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	2483.51	51.71	54.00	-2.29	39.80	27.84	7.32	33.28	10.03	326	21 AVERAGE		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	2462.00	90.05	-----	-----	78.43	27.60	7.28	33.29	10.03	326	21 AVERAGE
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																		
1	2483.51	51.71	54.00	-2.29	39.80	27.84	7.32	33.28	10.03	326	21 AVERAGE																																																																																																	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																		
1	2462.00	90.05	-----	-----	78.43	27.60	7.28	33.29	10.03	326	21 AVERAGE																																																																																																	

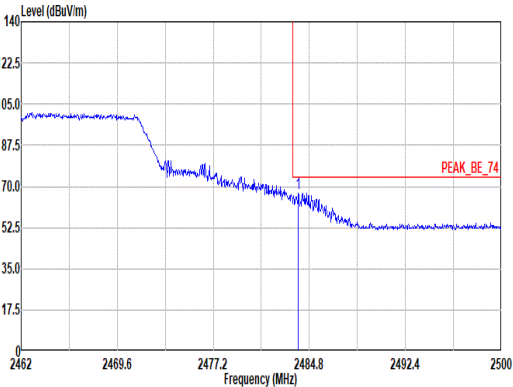
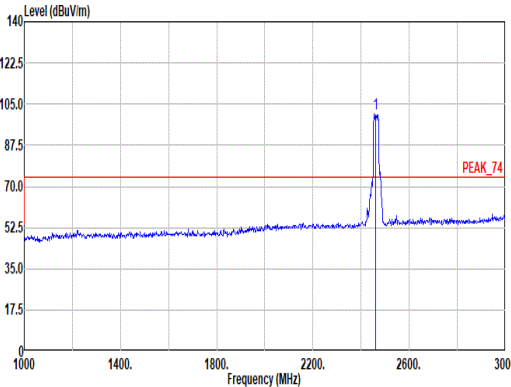
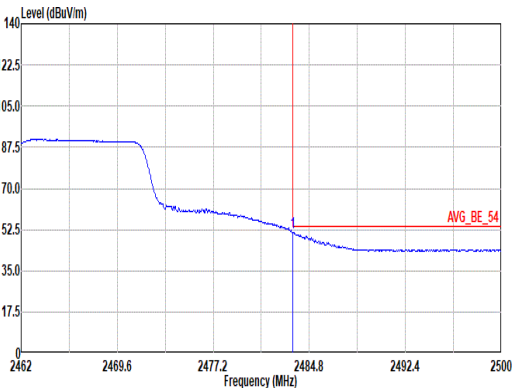
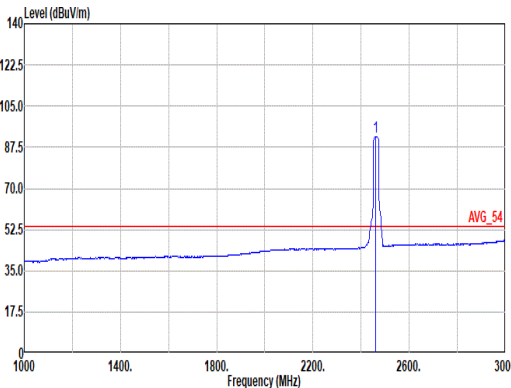


Mode	15																																																																																																		
	Band Edge																																																																																																		
	2400-2483.5_802.11ax HE20_CH11_Full RU_2462MHz																																																																																																		
Pol.	Vertical						Fundamental																																																																																												
Peak																																																																																																			
	Site : 03CH11-HY Condition: PEAK_BE_74 3m 91200_01620_240828 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto Detector : PEAK Mode : 15 Setting : 64 Plane : X with adapter <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th>PEAK</th></tr></thead><tbody><tr><td>1</td><td>2483.93</td><td>67.03</td><td>74.00</td><td>-6.97</td><td>55.12</td><td>27.84</td><td>7.32</td><td>33.28</td><td>10.03</td><td>176</td><td>360</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	PEAK	1	2483.93	67.03	74.00	-6.97	55.12	27.84	7.32	33.28	10.03	176	360	Site : 03CH11-HY Condition: PEAK_74 3m 91200_01620_240828 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto Detector : PEAK Mode : 15 Setting : 64 Plane : X with adapter <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th>PEAK</th></tr></thead><tbody><tr><td>1</td><td>2462.00</td><td>100.64</td><td>-----</td><td>-----</td><td>89.03</td><td>27.60</td><td>7.28</td><td>33.30</td><td>10.03</td><td>176</td><td>360</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	PEAK	1	2462.00	100.64	-----	-----	89.03	27.60	7.28	33.30	10.03	176
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	PEAK																																																																																								
1	2483.93	67.03	74.00	-6.97	55.12	27.84	7.32	33.28	10.03	176	360																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	PEAK																																																																																								
1	2462.00	100.64	-----	-----	89.03	27.60	7.28	33.30	10.03	176	360																																																																																								
Avg																																																																																																			
	Site : 03CH11-HY Condition: AVG_BE_54 3m 91200_01620_240828 VERTICAL : RBW:1000.000kHz VBW:1.000kHz SMT:Auto Detector : PEAK Mode : 15 Setting : 64 Plane : X with adapter <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th>AVERAGE</th></tr></thead><tbody><tr><td>1</td><td>2483.51</td><td>51.27</td><td>54.00</td><td>-2.73</td><td>39.36</td><td>27.84</td><td>7.32</td><td>33.28</td><td>10.03</td><td>176</td><td>360</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	AVERAGE	1	2483.51	51.27	54.00	-2.73	39.36	27.84	7.32	33.28	10.03	176	360	Site : 03CH11-HY Condition: AVG_54 3m 91200_01620_240828 VERTICAL : RBW:1000.000kHz VBW:1.000kHz SMT:Auto Detector : PEAK Mode : 15 Setting : 64 Plane : X with adapter <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th>AVERAGE</th></tr></thead><tbody><tr><td>1</td><td>2462.00</td><td>92.17</td><td>-----</td><td>-----</td><td>80.52</td><td>27.62</td><td>7.29</td><td>33.29</td><td>10.03</td><td>176</td><td>360</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	AVERAGE	1	2462.00	92.17	-----	-----	80.52	27.62	7.29	33.29	10.03	176
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	AVERAGE																																																																																								
1	2483.51	51.27	54.00	-2.73	39.36	27.84	7.32	33.28	10.03	176	360																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	AVERAGE																																																																																								
1	2462.00	92.17	-----	-----	80.52	27.62	7.29	33.29	10.03	176	360																																																																																								



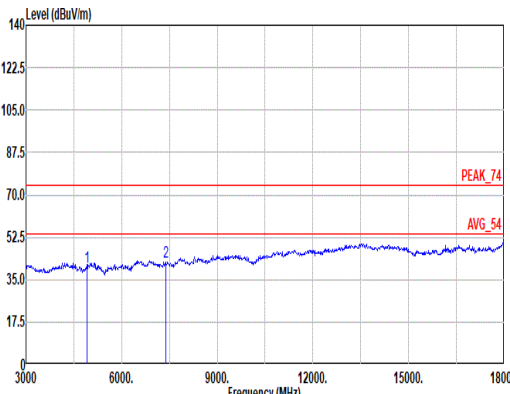
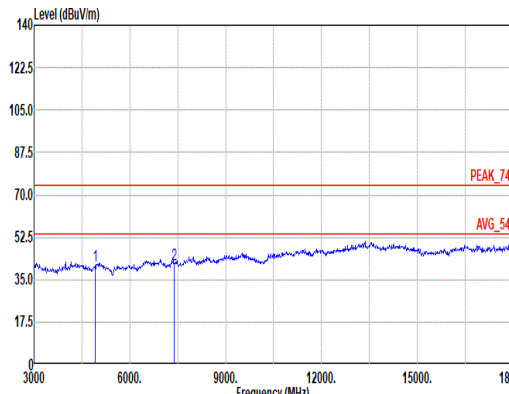


Mode	15																																																																																																																		
	Harmonic																																																																																																																		
	2400-2483.5_802.11ax HE20_CH11_Full RU_2462MHz																																																																																																																		
Pol.	Horizontal										Vertical																																																																																																								
Peak Avg	 Site : 03CH11-HY Condition: PEAK_74 3m 91280_01620_240828 HORIZONTAL Mode : 15 Setting : 64 Plane : X with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr><tr><td>1</td><td>4924.00</td><td>40.05</td><td>74.00</td><td>-33.95</td><td>63.01</td><td>32.90</td><td>10.24</td><td>66.66</td><td>0.56 -- -- Peak</td></tr><tr><td>2</td><td>7386.00</td><td>42.20</td><td>74.00</td><td>-31.80</td><td>58.53</td><td>36.48</td><td>12.76</td><td>65.86</td><td>0.29 -- -- Peak</td></tr></table>											Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1	4924.00	40.05	74.00	-33.95	63.01	32.90	10.24	66.66	0.56 -- -- Peak	2	7386.00	42.20	74.00	-31.80	58.53	36.48	12.76	65.86	0.29 -- -- Peak	 Site : 03CH11-HY Condition: PEAK_74 3m 91280_01620_240828 VERTICAL Mode : 15 Setting : 64 Plane : X with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr><tr><td>1</td><td>4924.00</td><td>40.72</td><td>74.00</td><td>-33.28</td><td>63.68</td><td>32.90</td><td>10.24</td><td>66.66</td><td>0.56 -- -- Peak</td></tr><tr><td>2</td><td>7386.00</td><td>41.42</td><td>74.00</td><td>-32.58</td><td>57.75</td><td>36.48</td><td>12.76</td><td>65.86</td><td>0.29 -- -- Peak</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1	4924.00	40.72	74.00	-33.28	63.68	32.90	10.24	66.66	0.56 -- -- Peak	2	7386.00	41.42	74.00	-32.58	57.75	36.48	12.76	65.86	0.29 -- -- Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																																																										
1	4924.00	40.05	74.00	-33.95	63.01	32.90	10.24	66.66	0.56 -- -- Peak																																																																																																										
2	7386.00	42.20	74.00	-31.80	58.53	36.48	12.76	65.86	0.29 -- -- Peak																																																																																																										
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																																																										
1	4924.00	40.72	74.00	-33.28	63.68	32.90	10.24	66.66	0.56 -- -- Peak																																																																																																										
2	7386.00	41.42	74.00	-32.58	57.75	36.48	12.76	65.86	0.29 -- -- Peak																																																																																																										

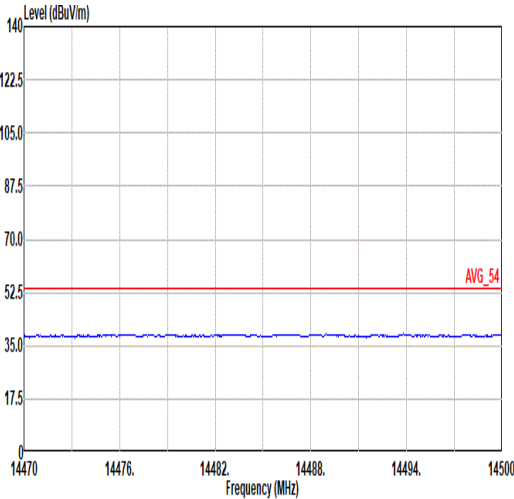
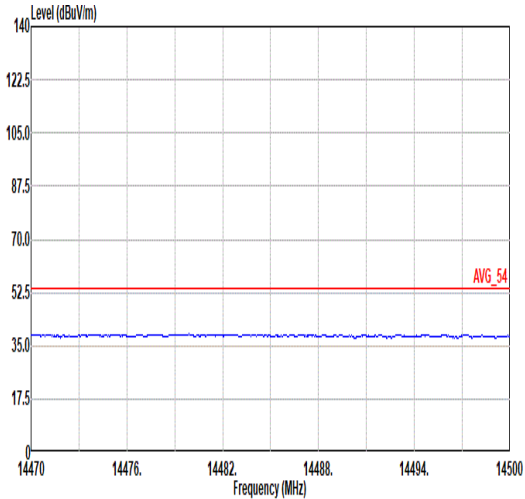
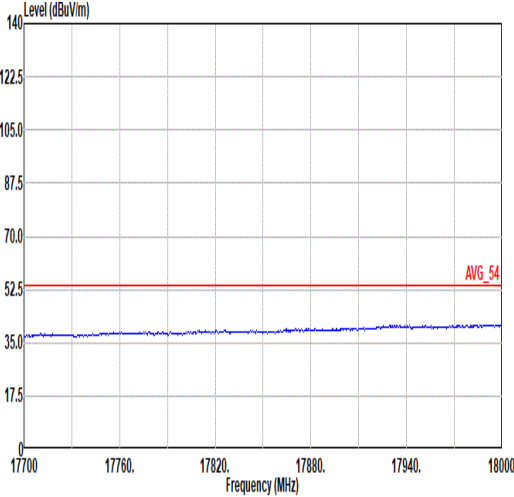
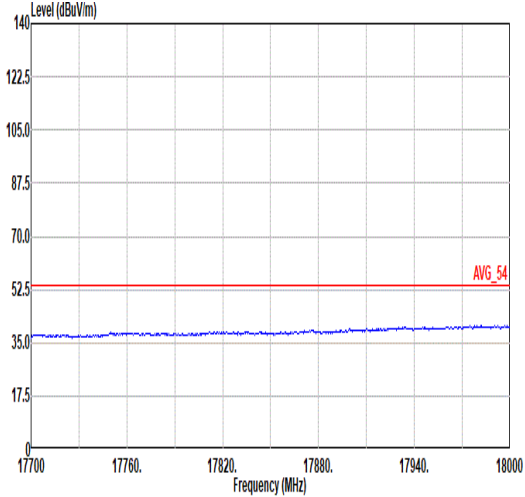


Mode	15	
	Harmonic	
	2400-2483.5_802.11ax HE20_CH11_Full RU_2462MHz	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	 Site : 03CH11-HY Condition: AVG_54 3m 91280_01620_240828 HORIZONTAL Mode : 15 Setting : 64 Plane : X with adapter	 Site : 03CH11-HY Condition: AVG_54 3m 91280_01620_240828 VERTICAL Mode : 15 Setting : 64 Plane : X with adapter
17.7G ~18G Avg	 Site : 03CH11-HY Condition: AVG_54 3m 91280_01620_240828 HORIZONTAL Mode : 15 Setting : 64 Plane : X with adapter	 Site : 03CH11-HY Condition: AVG_54 3m 91280_01620_240828 VERTICAL Mode : 15 Setting : 64 Plane : X with adapter

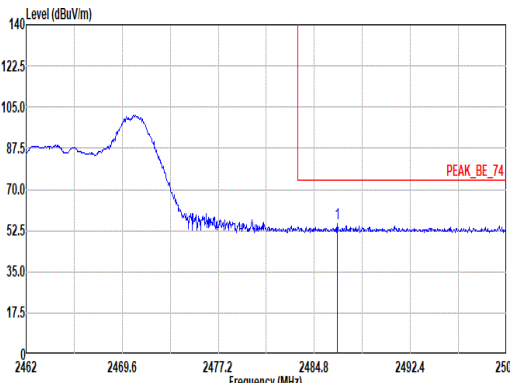
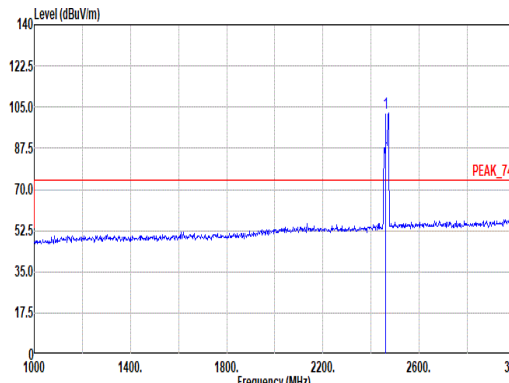
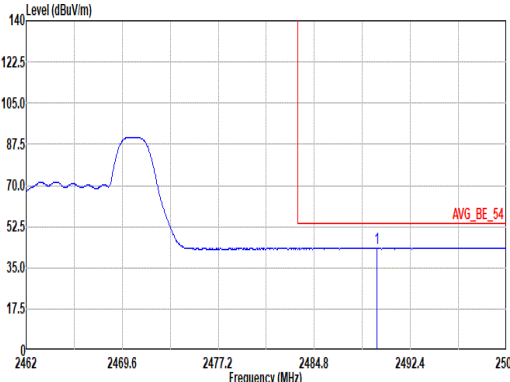
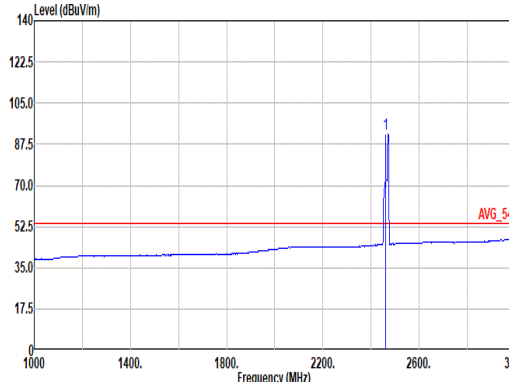


		16																																																																																																	
Mode	Band Edge																																																																																																		
	2400-2483.5_802.11ax HE20_CH11_Partial RU 26/8_2462MHz																																																																																																		
Pol.	Horizontal						Fundamental																																																																																												
Peak																																																																																																			
	Site : 03CH11-HY Condition: PEAK_BE_74 3m 91200_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto Detector : PEAK Mode : 16 Setting : 25 Plane : X with adapter <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2486.62</td><td>55.24</td><td>74.00</td><td>-18.76</td><td>43.30</td><td>27.87</td><td>7.32</td><td>33.28</td><td>10.03</td><td>219 41 PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2486.62	55.24	74.00	-18.76	43.30	27.87	7.32	33.28	10.03	219 41 PEAK	Site : 03CH11-HY Condition: PEAK_74 3m 91200_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto Detector : PEAK Mode : 16 Setting : 25 Plane : X with adapter <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2462.00</td><td>102.37</td><td>-----</td><td>-----</td><td>90.61</td><td>27.72</td><td>7.30</td><td>33.29</td><td>10.03</td><td>219 41 PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	102.37	-----	-----	90.61	27.72	7.30	33.29	10.03
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2486.62	55.24	74.00	-18.76	43.30	27.87	7.32	33.28	10.03	219 41 PEAK																																																																																									
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2462.00	102.37	-----	-----	90.61	27.72	7.30	33.29	10.03	219 41 PEAK																																																																																									
Avg																																																																																																			
	Site : 03CH11-HY Condition: AVG_BE_54 3m 91200_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:0.300kHz SMT:Auto Detector : PEAK Mode : 16 Setting : 25 Plane : X with adapter <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2489.78</td><td>43.33</td><td>54.00</td><td>-10.67</td><td>31.35</td><td>27.90</td><td>7.33</td><td>33.28</td><td>10.03</td><td>219 41 AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2489.78	43.33	54.00	-10.67	31.35	27.90	7.33	33.28	10.03	219 41 AVERAGE	Site : 03CH11-HY Condition: AVG_54 3m 91200_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:0.300kHz SMT:Auto Detector : PEAK Mode : 16 Setting : 25 Plane : X with adapter <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2462.00</td><td>91.97</td><td>-----</td><td>-----</td><td>80.23</td><td>27.70</td><td>7.30</td><td>33.29</td><td>10.03</td><td>219 41 AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	91.97	-----	-----	80.23	27.70	7.30	33.29	10.03
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2489.78	43.33	54.00	-10.67	31.35	27.90	7.33	33.28	10.03	219 41 AVERAGE																																																																																									
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2462.00	91.97	-----	-----	80.23	27.70	7.30	33.29	10.03	219 41 AVERAGE																																																																																									

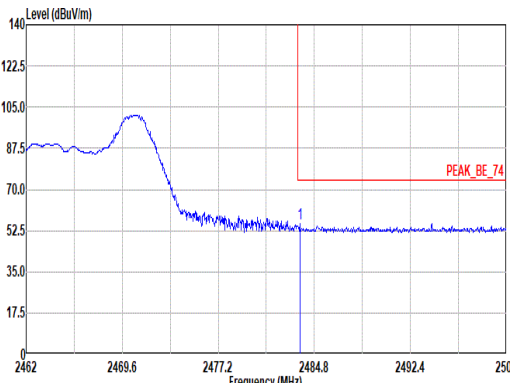
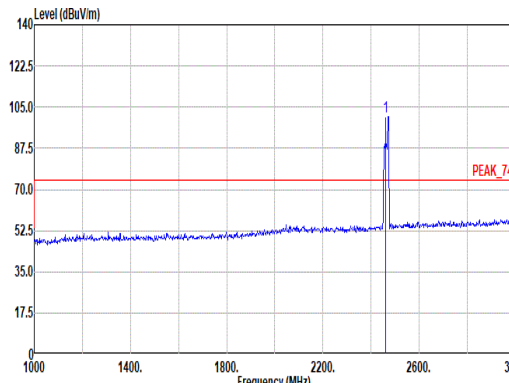
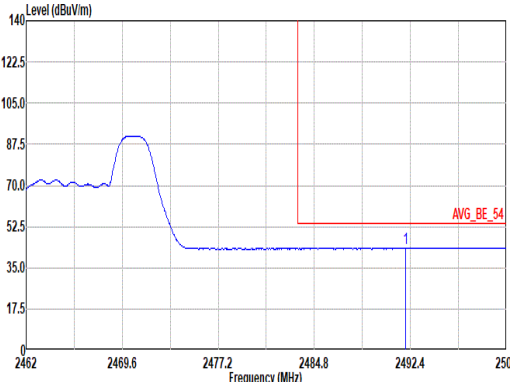
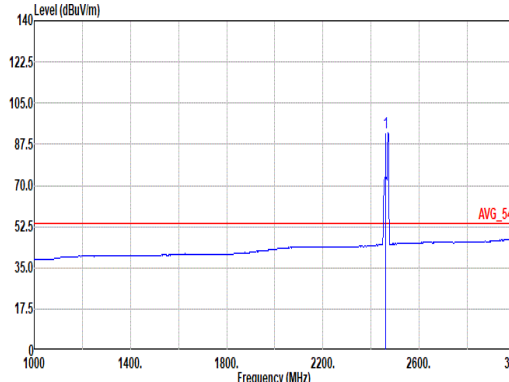


Mode	16																																																						
	Band Edge																																																						
	2400-2483.5_802.11ax HE20_CH11_Partial RU 26/8_2462MHz																																																						
Pol.	Vertical																																																						
Peak	 Site : 03CH11-HY Condition: PEAK_BE_74 3m 91200_01620_240828 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto Detector : PEAK Mode : 16 Setting : 25 Plane : X with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.66</td><td>55.54</td><td>74.00</td><td>-18.46</td><td>43.63</td><td>27.84</td><td>7.32</td><td>33.28</td><td>10.03</td><td>290 PEAK</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.66	55.54	74.00	-18.46	43.63	27.84	7.32	33.28	10.03	290 PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	2483.66	55.54	74.00	-18.46	43.63	27.84	7.32	33.28	10.03	290 PEAK																																													
 Site : 03CH11-HY Condition: PEAK_74 3m 91200_01620_240828 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto Detector : PEAK Mode : 16 Setting : 25 Plane : X with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2462.00</td><td>101.17</td><td>-----</td><td>-----</td><td>89.43</td><td>27.70</td><td>7.30</td><td>33.29</td><td>10.03</td><td>290 PEAK</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	101.17	-----	-----	89.43	27.70	7.30	33.29	10.03	290 PEAK	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	2462.00	101.17	-----	-----	89.43	27.70	7.30	33.29	10.03	290 PEAK																																													
Avg	 Site : 03CH11-HY Condition: AVG_BE_54 3m 91200_01620_240828 VERTICAL : RBW:1000.000kHz VBW:0.300kHz SMT:Auto Detector : PEAK Mode : 16 Setting : 25 Plane : X with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.66</td><td>55.54</td><td>74.00</td><td>-18.46</td><td>43.63</td><td>27.84</td><td>7.32</td><td>33.28</td><td>10.03</td><td>290 PEAK</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.66	55.54	74.00	-18.46	43.63	27.84	7.32	33.28	10.03	290 PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	2483.66	55.54	74.00	-18.46	43.63	27.84	7.32	33.28	10.03	290 PEAK																																													
 Site : 03CH11-HY Condition: AVG_54 3m 91200_01620_240828 VERTICAL : RBW:1000.000kHz VBW:0.300kHz SMT:Auto Detector : PEAK Mode : 16 Setting : 25 Plane : X with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2462.00</td><td>101.17</td><td>-----</td><td>-----</td><td>89.43</td><td>27.70</td><td>7.30</td><td>33.29</td><td>10.03</td><td>290 PEAK</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	101.17	-----	-----	89.43	27.70	7.30	33.29	10.03	290 PEAK	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	2462.00	101.17	-----	-----	89.43	27.70	7.30	33.29	10.03	290 PEAK																																													

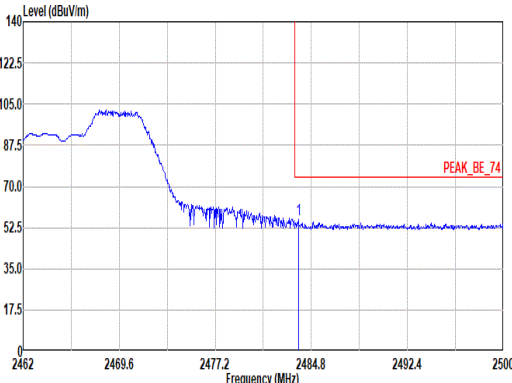
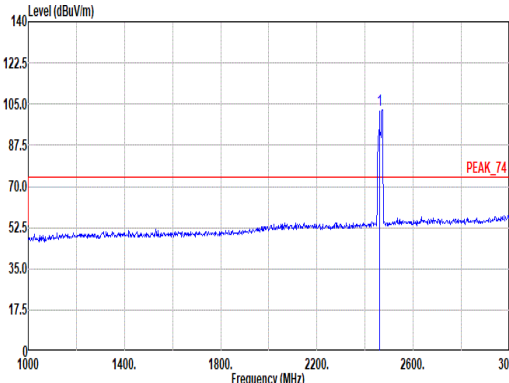
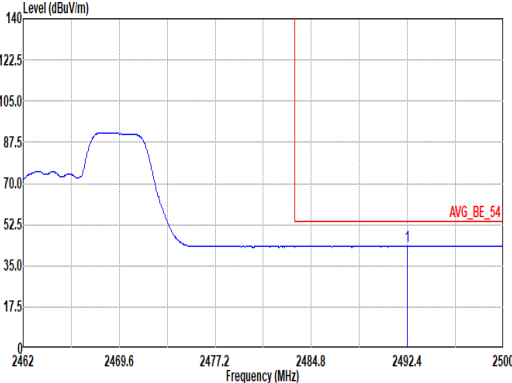
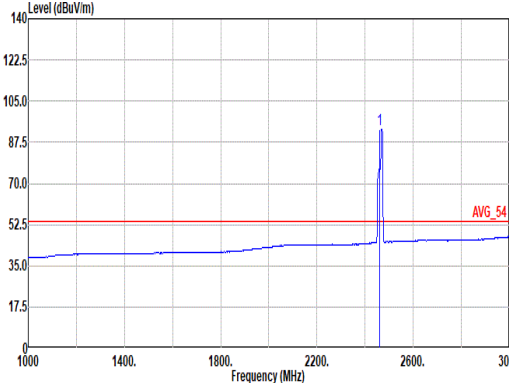


		17																																																						
Mode		Band Edge																																																						
		2400-2483.5_802.11ax HE20_CH11_Partial RU 52/40_2462MHz																																																						
Pol.		Horizontal																																																						
Peak																																																								
		Site : 03CH11-HY Condition: PEAK_BE_74 3m 91200_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto Detector : PEAK Mode : 17 Setting : 37 Plane : X with adapter <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>cm</th><th>deg</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th></th><th></th></tr></thead><tbody><tr><td>1</td><td>2483.77</td><td>56.13</td><td>74.00</td><td>-17.87</td><td>44.22</td><td>27.84</td><td>7.32</td><td>33.28</td><td>10.03</td><td>337</td><td>217</td><td>PEAK</td></tr></tbody></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB			1	2483.77	56.13	74.00	-17.87	44.22	27.84	7.32	33.28	10.03	337
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																
1	2483.77	56.13	74.00	-17.87	44.22	27.84	7.32	33.28	10.03	337	217	PEAK																																												
Fundamental																																																								
		Site : 03CH11-HY Condition: PEAK_74 3m 91200_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto Detector : PEAK Mode : 17 Setting : 37 Plane : X with adapter <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>cm</th><th>deg</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th></th><th></th></tr></thead><tbody><tr><td>1</td><td>2462.00</td><td>102.61</td><td>-----</td><td>-----</td><td>90.87</td><td>27.70</td><td>7.30</td><td>33.29</td><td>10.03</td><td>337</td><td>217</td><td>PEAK</td></tr></tbody></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB			1	2462.00	102.61	-----	-----	90.87	27.70	7.30	33.29	10.03	337
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																
1	2462.00	102.61	-----	-----	90.87	27.70	7.30	33.29	10.03	337	217	PEAK																																												
Avg																																																								
		Site : 03CH11-HY Condition: AVG_BE_54 3m 91200_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:0.300kHz SMT:Auto Detector : PEAK Mode : 17 Setting : 37 Plane : X with adapter <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>cm</th><th>deg</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th></th><th></th></tr></thead><tbody><tr><td>1</td><td>2492.40</td><td>43.41</td><td>54.00</td><td>-10.59</td><td>31.42</td><td>27.90</td><td>7.33</td><td>33.27</td><td>10.03</td><td>337</td><td>217</td><td>AVERAGE</td></tr></tbody></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB			1	2492.40	43.41	54.00	-10.59	31.42	27.90	7.33	33.27	10.03	337
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																
1	2492.40	43.41	54.00	-10.59	31.42	27.90	7.33	33.27	10.03	337	217	AVERAGE																																												
Fundamental																																																								
		Site : 03CH11-HY Condition: AVG_54 3m 91200_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:0.300kHz SMT:Auto Detector : PEAK Mode : 17 Setting : 37 Plane : X with adapter <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>cm</th><th>deg</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th></th><th></th></tr></thead><tbody><tr><td>1</td><td>2462.00</td><td>92.95</td><td>-----</td><td>-----</td><td>81.23</td><td>27.68</td><td>7.30</td><td>33.29</td><td>10.03</td><td>337</td><td>217</td><td>AVERAGE</td></tr></tbody></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB			1	2462.00	92.95	-----	-----	81.23	27.68	7.30	33.29	10.03	337
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																
1	2462.00	92.95	-----	-----	81.23	27.68	7.30	33.29	10.03	337	217	AVERAGE																																												

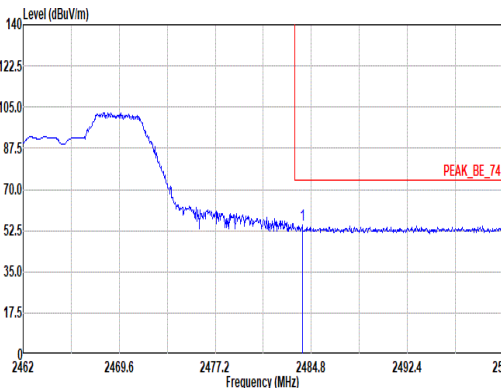
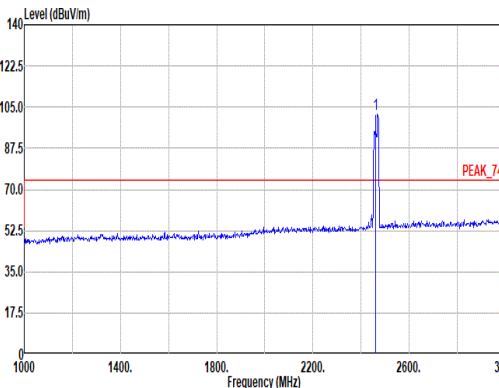
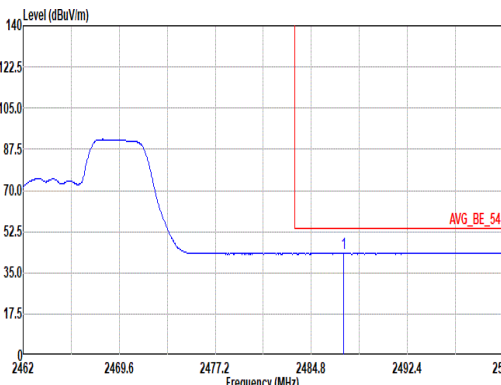
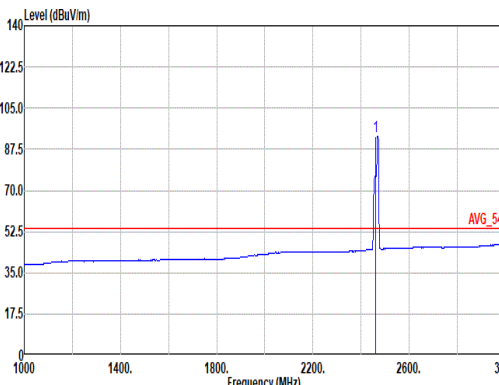


		17																																																																																																
Mode	Band Edge																																																																																																	
	2400-2483.5_802.11ax HE20_CH11_Partial RU 52/40_2462MHz																																																																																																	
Pol.	Vertical					Fundamental																																																																																												
Peak																																																																																																		
	Site : 03CH11-HY Condition: PEAK_BE_74 3m 91200_01620_240828 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto Detector : PEAK Mode : 17 Setting : 37 Plane : X with adapter <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2484.08</td><td>55.10</td><td>74.00</td><td>-18.90</td><td>43.19</td><td>27.84</td><td>7.32</td><td>33.28</td><td>10.03</td><td>211 326 PEAK</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor						MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2484.08	55.10	74.00	-18.90	43.19	27.84	7.32	33.28	10.03	211 326 PEAK	Site : 03CH11-HY Condition: PEAK_74 3m 91200_01620_240828 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto Detector : PEAK Mode : 17 Setting : 37 Plane : X with adapter <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2462.00</td><td>101.84</td><td>-----</td><td>-----</td><td>90.12</td><td>27.68</td><td>7.30</td><td>33.29</td><td>10.03</td><td>211 326 PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor						MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	101.84	-----	-----	90.12	27.68	7.30	33.29	10.03
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																									
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	2484.08	55.10	74.00	-18.90	43.19	27.84	7.32	33.28	10.03	211 326 PEAK																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																									
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	2462.00	101.84	-----	-----	90.12	27.68	7.30	33.29	10.03	211 326 PEAK																																																																																								
Avg																																																																																																		
	Site : 03CH11-HY Condition: AVG_BE_54 3m 91200_01620_240828 VERTICAL : RBW:1000.000kHz VBW:0.300kHz SMT:Auto Detector : PEAK Mode : 17 Setting : 37 Plane : X with adapter <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2487.35</td><td>43.45</td><td>54.00</td><td>-10.55</td><td>31.51</td><td>27.87</td><td>7.32</td><td>33.28</td><td>10.03</td><td>211 326 AVERAGE</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor						MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2487.35	43.45	54.00	-10.55	31.51	27.87	7.32	33.28	10.03	211 326 AVERAGE	Site : 03CH11-HY Condition: AVG_54 3m 91200_01620_240828 VERTICAL : RBW:1000.000kHz VBW:0.300kHz SMT:Auto Detector : PEAK Mode : 17 Setting : 37 Plane : X with adapter <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2462.00</td><td>93.11</td><td>-----</td><td>-----</td><td>81.39</td><td>27.68</td><td>7.30</td><td>33.29</td><td>10.03</td><td>211 326 AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor						MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	93.11	-----	-----	81.39	27.68	7.30	33.29	10.03
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																									
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	2487.35	43.45	54.00	-10.55	31.51	27.87	7.32	33.28	10.03	211 326 AVERAGE																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																									
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	2462.00	93.11	-----	-----	81.39	27.68	7.30	33.29	10.03	211 326 AVERAGE																																																																																								

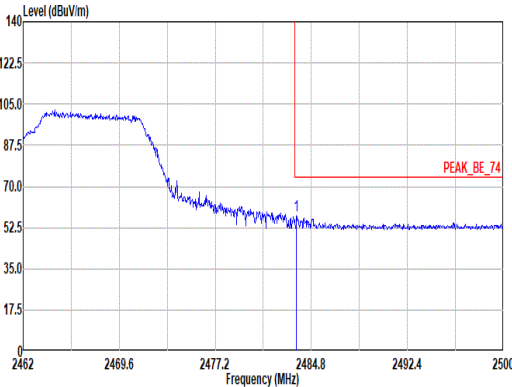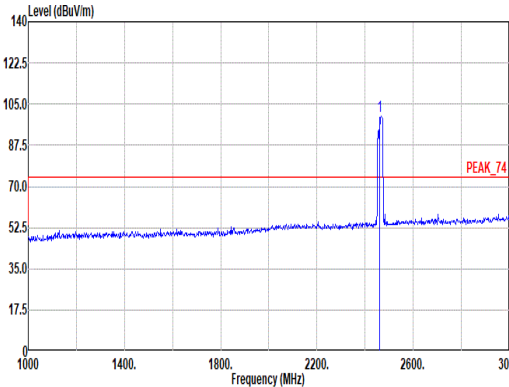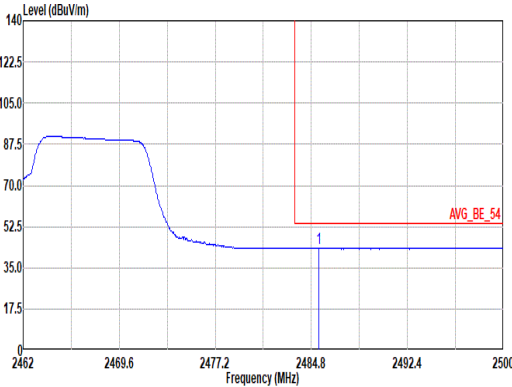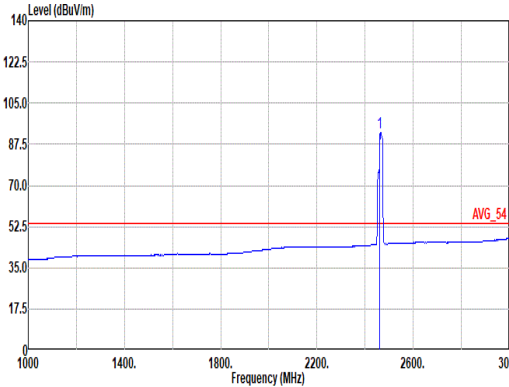

		18																																																																																																									
Mode	Band Edge																																																																																																										
	2400-2483.5_802.11ax HE20_CH11_Partial RU 106/54_2462MHz																																																																																																										
Pol.	Horizontal						Fundamental																																																																																																				
Peak																																																																																																											
	Site : 03CH11-HY Condition: PEAK_BE_74 3m 91200_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto Detector : PEAK Mode : 18 Setting : 46 Plane : X with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="3">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2483.62</td><td>57.57</td><td>74.00</td><td>-16.43</td><td>45.66</td><td>27.84</td><td>7.32</td><td>33.28</td><td>10.03</td><td>337</td><td>234 PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	2483.62	57.57	74.00	-16.43	45.66	27.84	7.32	33.28	10.03	337	234 PEAK	Site : 03CH11-HY Condition: PEAK_74 3m 91200_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto Detector : PEAK Mode : 18 Setting : 46 Plane : X with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="3">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2462.00</td><td>99.99</td><td>-----</td><td>-----</td><td>88.30</td><td>27.66</td><td>7.29</td><td>33.29</td><td>10.03</td><td>337</td><td>234 PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	2462.00	99.99	-----	-----	88.30	27.66	7.29	33.29	10.03	337
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																	
1	2483.62	57.57	74.00	-16.43	45.66	27.84	7.32	33.28	10.03	337	234 PEAK																																																																																																
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																	
1	2462.00	99.99	-----	-----	88.30	27.66	7.29	33.29	10.03	337	234 PEAK																																																																																																
Avg																																																																																																											
	Site : 03CH11-HY Condition: AVG_BE_54 3m 91200_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:0.300kHz SMT:Auto Detector : PEAK Mode : 18 Setting : 46 Plane : X with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="3">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2485.41</td><td>43.39</td><td>54.00</td><td>-10.61</td><td>31.47</td><td>27.85</td><td>7.32</td><td>33.28</td><td>10.03</td><td>337</td><td>234 AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	2485.41	43.39	54.00	-10.61	31.47	27.85	7.32	33.28	10.03	337	234 AVERAGE	Site : 03CH11-HY Condition: AVG_54 3m 91200_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:0.300kHz SMT:Auto Detector : PEAK Mode : 18 Setting : 46 Plane : X with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="3">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2462.00</td><td>92.25</td><td>-----</td><td>-----</td><td>80.58</td><td>27.64</td><td>7.29</td><td>33.29</td><td>10.03</td><td>337</td><td>234 AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	2462.00	92.25	-----	-----	80.58	27.64	7.29	33.29	10.03	337
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																	
1	2485.41	43.39	54.00	-10.61	31.47	27.85	7.32	33.28	10.03	337	234 AVERAGE																																																																																																
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																	
1	2462.00	92.25	-----	-----	80.58	27.64	7.29	33.29	10.03	337	234 AVERAGE																																																																																																

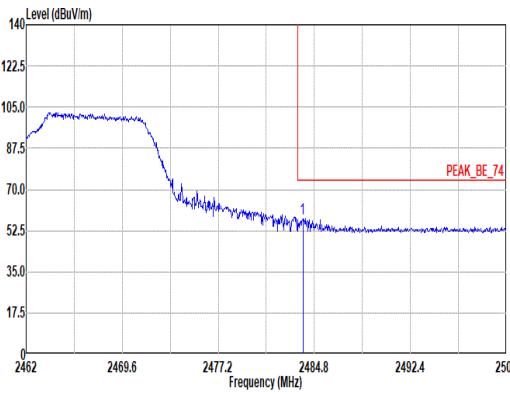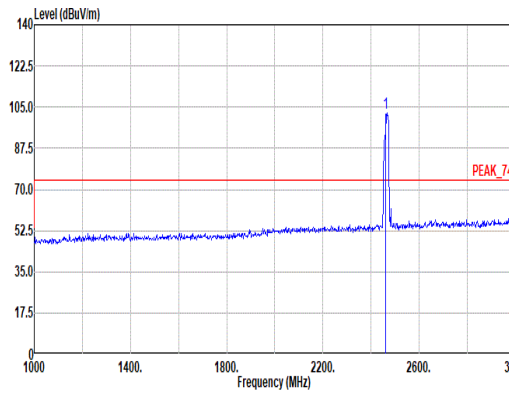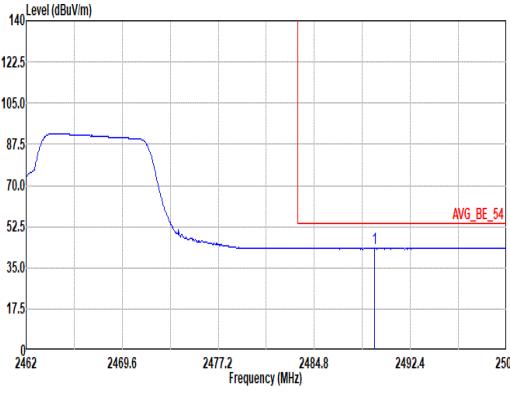
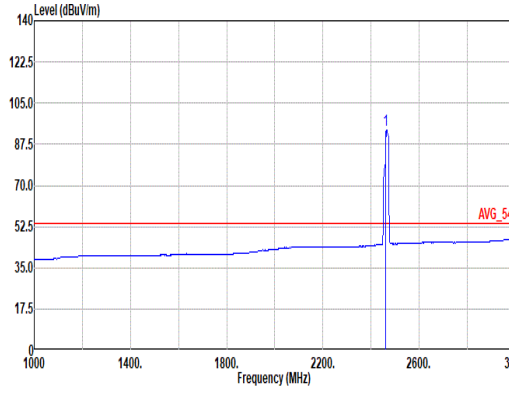


Mode	18																																																																																																		
	Band Edge																																																																																																		
	2400-2483.5_802.11ax HE20_CH11_Partial RU 106/54_2462MHz																																																																																																		
Pol.	Vertical						Fundamental																																																																																												
Peak																																																																																																			
	Site : 03CH11-HY Condition: PEAK_BE_74 3m 91200_01620_240828 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto Detector : PEAK Mode : 18 Setting : 46 Plane : X with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.89</td><td>57.85</td><td>74.00</td><td>-16.15</td><td>45.94</td><td>27.84</td><td>7.32</td><td>33.28</td><td>10.03</td><td>206</td><td>324</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.89	57.85	74.00	-16.15	45.94	27.84	7.32	33.28	10.03	206	324	PEAK	Site : 03CH11-HY Condition: PEAK_74 3m 91200_01620_240828 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto Detector : PEAK Mode : 18 Setting : 46 Plane : X with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2462.00</td><td>102.28</td><td>-----</td><td>-----</td><td>90.56</td><td>27.68</td><td>7.30</td><td>33.29</td><td>10.03</td><td>206</td><td>324</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	102.28	-----	-----	90.56	27.68	7.30	33.29	10.03	206	324
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2483.89	57.85	74.00	-16.15	45.94	27.84	7.32	33.28	10.03	206	324	PEAK																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2462.00	102.28	-----	-----	90.56	27.68	7.30	33.29	10.03	206	324	PEAK																																																																																							
Avg																																																																																																			
	Site : 03CH11-HY Condition: AVG_BE_54 3m 91200_01620_240828 VERTICAL : RBW:1000.000kHz VBW:0.300kHz SMT:Auto Detector : PEAK Mode : 18 Setting : 46 Plane : X with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2489.59</td><td>43.36</td><td>54.00</td><td>-10.64</td><td>31.38</td><td>27.90</td><td>7.33</td><td>33.28</td><td>10.03</td><td>206</td><td>324</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2489.59	43.36	54.00	-10.64	31.38	27.90	7.33	33.28	10.03	206	324	AVERAGE	Site : 03CH11-HY Condition: AVG_54 3m 91200_01620_240828 VERTICAL : RBW:1000.000kHz VBW:0.300kHz SMT:Auto Detector : PEAK Mode : 18 Setting : 46 Plane : X with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2462.00</td><td>93.42</td><td>-----</td><td>-----</td><td>81.75</td><td>27.64</td><td>7.29</td><td>33.29</td><td>10.03</td><td>206</td><td>324</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	93.42	-----	-----	81.75	27.64	7.29	33.29	10.03	206	324
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2489.59	43.36	54.00	-10.64	31.38	27.90	7.33	33.28	10.03	206	324	AVERAGE																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2462.00	93.42	-----	-----	81.75	27.64	7.29	33.29	10.03	206	324	AVERAGE																																																																																							







Mode	19																																																																																							
	SHF																																																																																							
	2400-2483.5_802.11g_CH10_Full RU_2457MHz																																																																																							
Pol.	Horizontal	Vertical																																																																																						
Peak	Site : 03CH11-HY Condition: PEAK_74 1m SHF_1224_240624 HORIZONTAL Mode : 19 Setting : 64 Plane : X with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>19602.03</td><td>40.98</td><td>74.00</td><td>-33.02</td><td>51.32</td><td>37.80</td><td>25.70</td><td>64.30</td><td>-9.54</td><td>--</td><td>PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	19602.03	40.98	74.00	-33.02	51.32	37.80	25.70	64.30	-9.54	--	PEAK	Site : 03CH11-HY Condition: PEAK_74 1m SHF_1224_240624 VERTICAL Mode : 19 Setting : 64 Plane : X with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>19158.51</td><td>40.98</td><td>74.00</td><td>-33.02</td><td>51.50</td><td>38.07</td><td>25.28</td><td>64.33</td><td>-9.54</td><td>--</td><td>PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	19158.51	40.98	74.00	-33.02	51.50	38.07	25.28	64.33	-9.54	--	PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																														
1	19602.03	40.98	74.00	-33.02	51.32	37.80	25.70	64.30	-9.54	--	PEAK																																																																													
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																														
1	19158.51	40.98	74.00	-33.02	51.50	38.07	25.28	64.33	-9.54	--	PEAK																																																																													



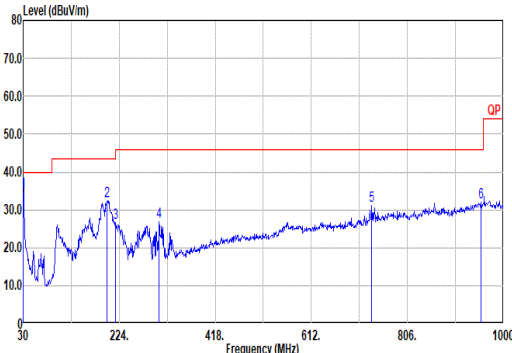
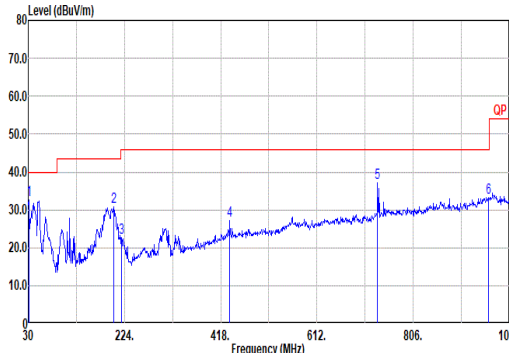


Mode	20																																																																																																																																																																																																																									
	LF																																																																																																																																																																																																																									
	2400-2483.5_802.11g_CH10_Full RU_2457MHz																																																																																																																																																																																																																									
Pol.	Horizontal	Vertical																																																																																																																																																																																																																								
QPI Peak	 Site : 03CH11-HY Condition: QP 3m B1LOG_37059&01_241127 HORIZONTAL Mode : 20 Setting : Plane : X with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th></tr><tr><td>1</td><td>30.00</td><td>34.73</td><td>40.00</td><td>-5.27</td><td>41.79</td><td>24.51</td><td>0.06</td><td>32.43</td><td>0.00</td><td>100</td><td>3</td><td>QP</td></tr><tr><td>2</td><td>199.75</td><td>32.25</td><td>43.50</td><td>-11.25</td><td>47.20</td><td>15.18</td><td>2.06</td><td>32.19</td><td>0.00</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>3</td><td>216.24</td><td>26.52</td><td>46.00</td><td>-19.48</td><td>41.52</td><td>15.04</td><td>2.15</td><td>32.19</td><td>0.00</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>4</td><td>304.51</td><td>26.87</td><td>46.00</td><td>-19.13</td><td>37.01</td><td>19.50</td><td>2.57</td><td>32.21</td><td>0.00</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>5</td><td>734.22</td><td>31.00</td><td>46.00</td><td>-15.00</td><td>31.10</td><td>28.07</td><td>3.95</td><td>32.12</td><td>0.00</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>6</td><td>954.41</td><td>31.96</td><td>46.00</td><td>-14.04</td><td>27.17</td><td>31.10</td><td>4.54</td><td>30.85</td><td>0.00</td><td>--</td><td>--</td><td>Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	1	30.00	34.73	40.00	-5.27	41.79	24.51	0.06	32.43	0.00	100	3	QP	2	199.75	32.25	43.50	-11.25	47.20	15.18	2.06	32.19	0.00	--	--	Peak	3	216.24	26.52	46.00	-19.48	41.52	15.04	2.15	32.19	0.00	--	--	Peak	4	304.51	26.87	46.00	-19.13	37.01	19.50	2.57	32.21	0.00	--	--	Peak	5	734.22	31.00	46.00	-15.00	31.10	28.07	3.95	32.12	0.00	--	--	Peak	6	954.41	31.96	46.00	-14.04	27.17	31.10	4.54	30.85	0.00	--	--	Peak	 Site : 03CH11-HY Condition: QP 3m B1LOG_37059&01_241127 VERTICAL Mode : 20 Setting : Plane : X with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th></tr><tr><td>1</td><td>30.97</td><td>32.52</td><td>40.00</td><td>-7.48</td><td>39.85</td><td>24.21</td><td>0.07</td><td>32.41</td><td>0.00</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>201.69</td><td>30.73</td><td>43.50</td><td>-12.77</td><td>45.65</td><td>15.20</td><td>2.07</td><td>32.19</td><td>0.00</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>3</td><td>218.18</td><td>22.62</td><td>46.00</td><td>-23.38</td><td>37.43</td><td>15.22</td><td>2.16</td><td>32.19</td><td>0.00</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>4</td><td>436.43</td><td>27.22</td><td>46.00</td><td>-18.78</td><td>33.22</td><td>23.08</td><td>3.08</td><td>32.16</td><td>0.00</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>5</td><td>734.22</td><td>37.04</td><td>46.00</td><td>-8.96</td><td>37.14</td><td>28.07</td><td>3.95</td><td>32.12</td><td>0.00</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>6</td><td>958.29</td><td>33.30</td><td>46.00</td><td>-12.70</td><td>28.36</td><td>31.21</td><td>4.54</td><td>30.81</td><td>0.00</td><td>--</td><td>--</td><td>Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	1	30.97	32.52	40.00	-7.48	39.85	24.21	0.07	32.41	0.00	--	--	Peak	2	201.69	30.73	43.50	-12.77	45.65	15.20	2.07	32.19	0.00	--	--	Peak	3	218.18	22.62	46.00	-23.38	37.43	15.22	2.16	32.19	0.00	--	--	Peak	4	436.43	27.22	46.00	-18.78	33.22	23.08	3.08	32.16	0.00	--	--	Peak	5	734.22	37.04	46.00	-8.96	37.14	28.07	3.95	32.12	0.00	--	--	Peak	6	958.29	33.30	46.00	-12.70	28.36	31.21	4.54	30.81	0.00	--	--	Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm																																																																																																																																																																																																																	
1	30.00	34.73	40.00	-5.27	41.79	24.51	0.06	32.43	0.00	100	3	QP																																																																																																																																																																																																														
2	199.75	32.25	43.50	-11.25	47.20	15.18	2.06	32.19	0.00	--	--	Peak																																																																																																																																																																																																														
3	216.24	26.52	46.00	-19.48	41.52	15.04	2.15	32.19	0.00	--	--	Peak																																																																																																																																																																																																														
4	304.51	26.87	46.00	-19.13	37.01	19.50	2.57	32.21	0.00	--	--	Peak																																																																																																																																																																																																														
5	734.22	31.00	46.00	-15.00	31.10	28.07	3.95	32.12	0.00	--	--	Peak																																																																																																																																																																																																														
6	954.41	31.96	46.00	-14.04	27.17	31.10	4.54	30.85	0.00	--	--	Peak																																																																																																																																																																																																														
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm																																																																																																																																																																																																																	
1	30.97	32.52	40.00	-7.48	39.85	24.21	0.07	32.41	0.00	--	--	Peak																																																																																																																																																																																																														
2	201.69	30.73	43.50	-12.77	45.65	15.20	2.07	32.19	0.00	--	--	Peak																																																																																																																																																																																																														
3	218.18	22.62	46.00	-23.38	37.43	15.22	2.16	32.19	0.00	--	--	Peak																																																																																																																																																																																																														
4	436.43	27.22	46.00	-18.78	33.22	23.08	3.08	32.16	0.00	--	--	Peak																																																																																																																																																																																																														
5	734.22	37.04	46.00	-8.96	37.14	28.07	3.95	32.12	0.00	--	--	Peak																																																																																																																																																																																																														
6	958.29	33.30	46.00	-12.70	28.36	31.21	4.54	30.81	0.00	--	--	Peak																																																																																																																																																																																																														

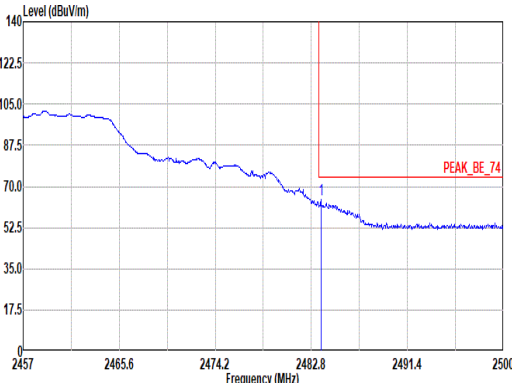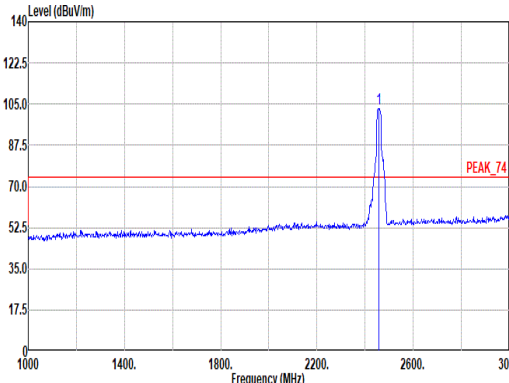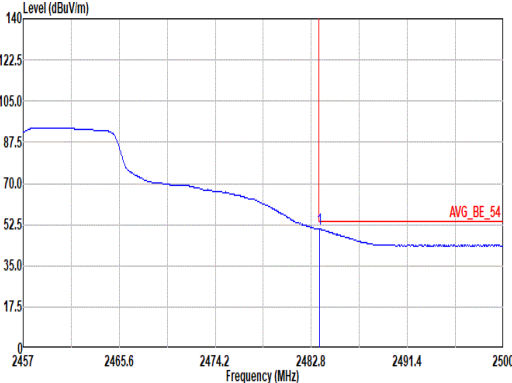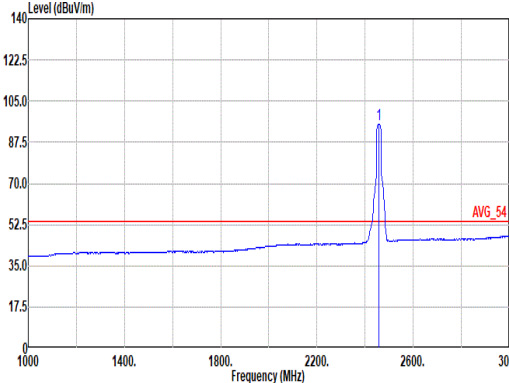

Mode	21																																																																																																	
	Band Edge																																																																																																	
	2400-2483.5_802.11g_CH10_2457MHz																																																																																																	
Pol.	Horizontal						Fundamental																																																																																											
Peak																																																																																																		
	Site : 03CH11-HY Condition: PEAK_BE_74 3m 91200_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto Detector : PEAK Mode : 22 Setting : 74 Plane : X with adapter <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2483.66</td><td>64.21</td><td>74.00</td><td>-9.79</td><td>52.14</td><td>27.84</td><td>7.32</td><td>33.12</td><td>10.03</td><td>299 225 PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor						MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.66	64.21	74.00	-9.79	52.14	27.84	7.32	33.12	10.03	299 225 PEAK	Site : 03CH11-HY Condition: PEAK_74 3m 91200_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto Detector : PEAK Mode : 22 Setting : 74 Plane : X with adapter <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2457.00</td><td>103.25</td><td>-----</td><td>-----</td><td>91.48</td><td>27.60</td><td>7.28</td><td>33.14</td><td>10.03</td><td>299 225 PEAK</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor						MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2457.00	103.25	-----	-----	91.48	27.60	7.28	33.14	10.03
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																									
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	2483.66	64.21	74.00	-9.79	52.14	27.84	7.32	33.12	10.03	299 225 PEAK																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																									
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	2457.00	103.25	-----	-----	91.48	27.60	7.28	33.14	10.03	299 225 PEAK																																																																																								
Avg																																																																																																		
	Site : 03CH11-HY Condition: AVG_BE_54 3m 91200_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:0.750kHz SMT:Auto Detector : PEAK Mode : 22 Setting : 74 Plane : X with adapter <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2483.53</td><td>50.61</td><td>54.00</td><td>-3.39</td><td>38.54</td><td>27.84</td><td>7.32</td><td>33.12</td><td>10.03</td><td>300 227 AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor						MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.53	50.61	54.00	-3.39	38.54	27.84	7.32	33.12	10.03	300 227 AVERAGE	Site : 03CH11-HY Condition: AVG_54 3m 91200_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:0.750kHz SMT:Auto Detector : PEAK Mode : 22 Setting : 74 Plane : X with adapter <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2457.00</td><td>95.30</td><td>-----</td><td>-----</td><td>83.53</td><td>27.60</td><td>7.28</td><td>33.14</td><td>10.03</td><td>299 225 AVERAGE</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor						MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2457.00	95.30	-----	-----	83.53	27.60	7.28	33.14	10.03
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																									
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	2483.53	50.61	54.00	-3.39	38.54	27.84	7.32	33.12	10.03	300 227 AVERAGE																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																									
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	2457.00	95.30	-----	-----	83.53	27.60	7.28	33.14	10.03	299 225 AVERAGE																																																																																								

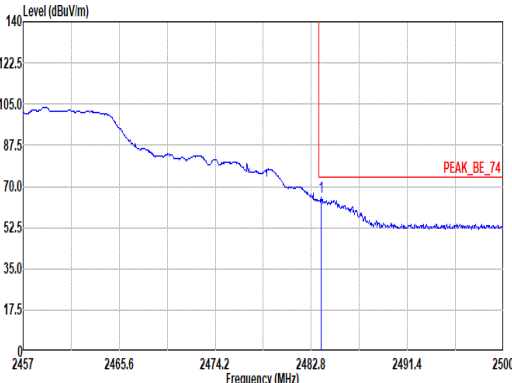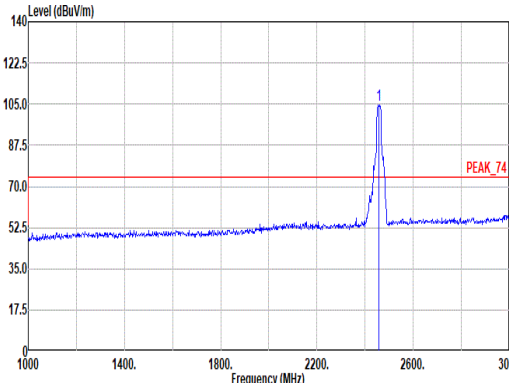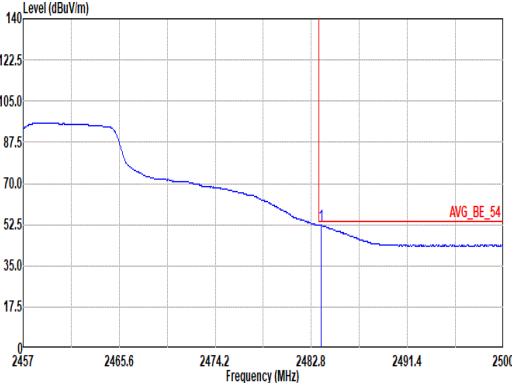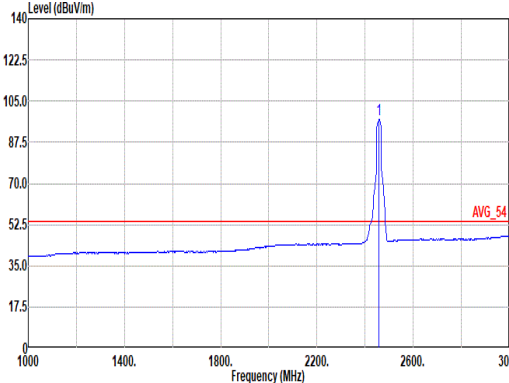

Mode	21																																																																																																	
	Band Edge																																																																																																	
	2400-2483.5_802.11g_CH10_2457MHz																																																																																																	
Pol.	Vertical						Fundamental																																																																																											
Peak																																																																																																		
	Site : 03CH11-HY Condition: PEAK_BE_74 3m 91200_01620_240828 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto Detector : PEAK Mode : 22 Setting : 74 Plane : X with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th>PEAK</th></tr><tr><td>1</td><td>2483.66</td><td>65.50</td><td>74.00</td><td>-8.50</td><td>53.43</td><td>27.84</td><td>7.32</td><td>33.12</td><td>10.03</td><td>122</td><td>298</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	PEAK	1	2483.66	65.50	74.00	-8.50	53.43	27.84	7.32	33.12	10.03	122	298	Site : 03CH11-HY Condition: PEAK_74 3m 91200_01620_240828 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto Detector : PEAK Mode : 22 Setting : 74 Plane : X with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th>PEAK</th></tr><tr><td>1</td><td>2457.00</td><td>104.48</td><td>-----</td><td>-----</td><td>92.71</td><td>27.60</td><td>7.28</td><td>33.14</td><td>10.03</td><td>122</td><td>298</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	PEAK	1	2457.00	104.48	-----	-----	92.71	27.60	7.28	33.14	10.03	122
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	PEAK																																																																																							
1	2483.66	65.50	74.00	-8.50	53.43	27.84	7.32	33.12	10.03	122	298																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	PEAK																																																																																							
1	2457.00	104.48	-----	-----	92.71	27.60	7.28	33.14	10.03	122	298																																																																																							
Avg																																																																																																		
	Site : 03CH11-HY Condition: AVG_BE_54 3m 91200_01620_240828 VERTICAL : RBW:1000.000kHz VBW:0.750kHz SMT:Auto Detector : PEAK Mode : 22 Setting : 74 Plane : X with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th>AVERAGE</th></tr><tr><td>1</td><td>2483.66</td><td>52.24</td><td>54.00</td><td>-1.76</td><td>40.17</td><td>27.84</td><td>7.32</td><td>33.12</td><td>10.03</td><td>122</td><td>298</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	AVERAGE	1	2483.66	52.24	54.00	-1.76	40.17	27.84	7.32	33.12	10.03	122	298	Site : 03CH11-HY Condition: AVG_54 3m 91200_01620_240828 VERTICAL : RBW:1000.000kHz VBW:0.750kHz SMT:Auto Detector : PEAK Mode : 22 Setting : 74 Plane : X with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th>AVERAGE</th></tr><tr><td>1</td><td>2457.00</td><td>96.90</td><td>-----</td><td>-----</td><td>85.21</td><td>27.60</td><td>7.28</td><td>33.14</td><td>10.03</td><td>122</td><td>298</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	AVERAGE	1	2457.00	96.90	-----	-----	85.21	27.60	7.28	33.14	10.03	122
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	AVERAGE																																																																																							
1	2483.66	52.24	54.00	-1.76	40.17	27.84	7.32	33.12	10.03	122	298																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	AVERAGE																																																																																							
1	2457.00	96.90	-----	-----	85.21	27.60	7.28	33.14	10.03	122	298																																																																																							



		22									
Mode	Band Edge										
	2400-2483.5_802.11n HT20_CH10_2457MHz										
Pol.	Horizontal										
Peak	Fundamental										
	Fundamental										
Peak	Horizontal										
	Fundamental										
Avg	Horizontal										
	Fundamental										

Level (dBuV/m)

140

122.5

105.0

87.5

70.0

52.5

35.0

17.5

0

2457

2465.6

2474.2

2482.8

2491.4

2500

Frequency (MHz)

Site : 03CH11-HY

Condition: PEAK_BE_74 3m 91200_01620_240828 HORIZONTAL

: RBW:1000.000kHz VBW:3000.000kHz SMT:Auto

Detector : PEAK

Mode : 23

Setting : 72

Plane : X with adapter

	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		
1	2483.57	66.89	74.00	-7.11	54.82	27.84	7.32	33.12	10.03	374	224	PEAK

Level (dBuV/m)

140

122.5

105.0

87.5

70.0

52.5

35.0

17.5

0

1000

1400

1800

2200

2600

3000

Frequency (MHz)

Site : 03CH11-HY

Condition: PEAK_74 3m 91200_01620_240828 HORIZONTAL

: RBW:1000.000kHz VBW:3000.000kHz SMT:Auto

Detector : PEAK

Mode : 23

Setting : 72

Plane : X with adapter

	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		
1	2457.00	103.26	-----	-----	91.49	27.60	7.28	33.14	10.03	374	224	PEAK

Level (dBuV/m)

140

122.5

105.0

87.5

70.0

52.5

35.0

17.5

0

2457

2465.6

2474.2

2482.8

2491.4

2500

Frequency (MHz)

Site : 03CH11-HY

Condition: AVG_BE_54 3m 91200_01620_240828 HORIZONTAL

: RBW:1000.000kHz VBW:0.750kHz SMT:Auto

Detector : PEAK

Mode : 23

Setting : 72

Plane : X with adapter

	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		
1	2483.53	51.27	54.00	-2.73	39.20	27.84	7.32	33.12	10.03	374	224	AVERAGE

Level (dBuV/m)

140

122.5

105.0

87.5

70.0

52.5

35.0

17.5

0

1000

1400

1800

2200

2600

3000

Frequency (MHz)

Site : 03CH11-HY

Condition: AVG_54 3m 91200_01620_240828 HORIZONTAL

: RBW:1000.000kHz VBW:0.750kHz SMT:Auto

Detector : PEAK





Mode : 23

Setting : 72





Plane : X with adapter

	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		
1	2457.00	95.21	-----	-----	83.44	27.60	7.28	33.14	10.03	374	224	AVERAGE

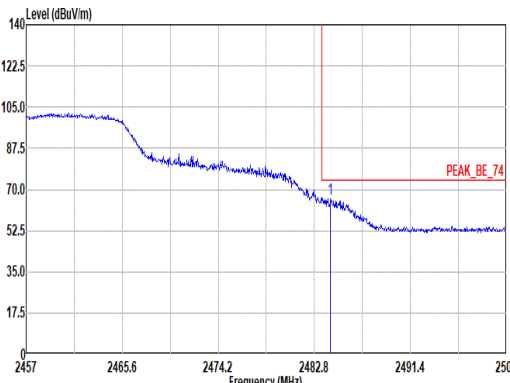
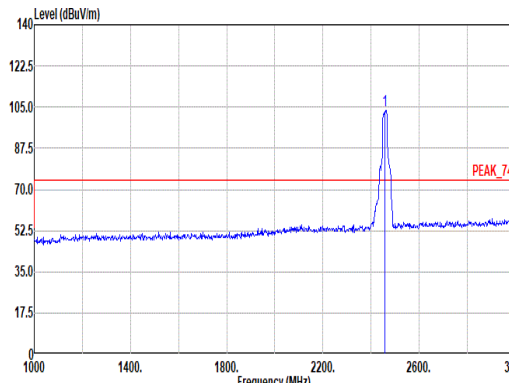
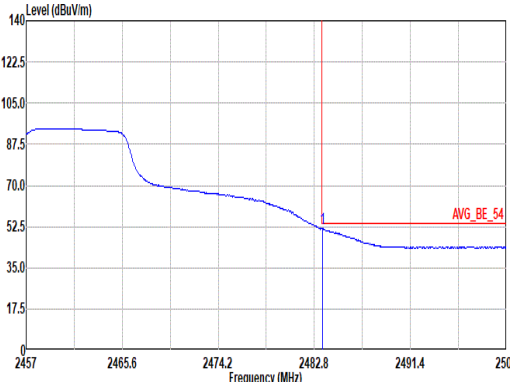
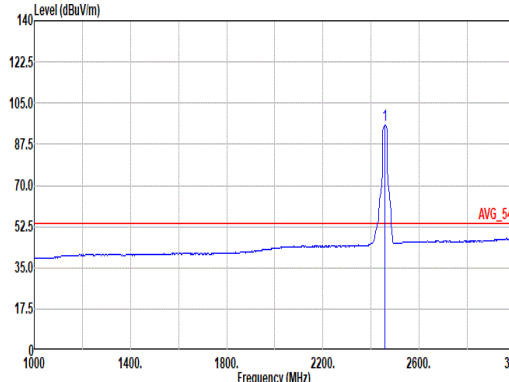


Mode	22																																																																																																	
	Band Edge																																																																																																	
	2400-2483.5_802.11n HT20_CH10_2457MHz																																																																																																	
Pol.	Vertical						Fundamental																																																																																											
Peak																																																																																																		
	Site : 03CH11-HY Condition: PEAK_BE_74 3m 91200_01620_240828 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto Detector : PEAK Mode : 23 Setting : 72 Plane : X with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2484.26</td><td>66.15</td><td>74.00</td><td>-7.85</td><td>54.07</td><td>27.84</td><td>7.32</td><td>33.11</td><td>10.03</td><td>200 296 PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2484.26	66.15	74.00	-7.85	54.07	27.84	7.32	33.11	10.03	200 296 PEAK	Site : 03CH11-HY Condition: PEAK_74 3m 91200_01620_240828 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto Detector : PEAK Mode : 23 Setting : 72 Plane : X with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2457.00</td><td>103.65</td><td>-----</td><td>-----</td><td>91.88</td><td>27.60</td><td>7.28</td><td>33.14</td><td>10.03</td><td>200 296 PEAK</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2457.00	103.65	-----	-----	91.88	27.60	7.28	33.14	10.03
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	2484.26	66.15	74.00	-7.85	54.07	27.84	7.32	33.11	10.03	200 296 PEAK																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	2457.00	103.65	-----	-----	91.88	27.60	7.28	33.14	10.03	200 296 PEAK																																																																																								
Avg																																																																																																		
	Site : 03CH11-HY Condition: AVG_BE_54 3m 91200_01620_240828 VERTICAL : RBW:1000.000kHz VBW:0.750kHz SMT:Auto Detector : PEAK Mode : 23 Setting : 72 Plane : X with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.53</td><td>51.54</td><td>54.00</td><td>-2.46</td><td>39.47</td><td>27.84</td><td>7.32</td><td>33.12</td><td>10.03</td><td>200 296 AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.53	51.54	54.00	-2.46	39.47	27.84	7.32	33.12	10.03	200 296 AVERAGE	Site : 03CH11-HY Condition: AVG_54 3m 91200_01620_240828 VERTICAL : RBW:1000.000kHz VBW:0.750kHz SMT:Auto Detector : PEAK Mode : 23 Setting : 72 Plane : X with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2457.00</td><td>95.60</td><td>-----</td><td>-----</td><td>83.83</td><td>27.60</td><td>7.28</td><td>33.14</td><td>10.03</td><td>200 296 AVERAGE</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2457.00	95.60	-----	-----	83.83	27.60	7.28	33.14	10.03
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	2483.53	51.54	54.00	-2.46	39.47	27.84	7.32	33.12	10.03	200 296 AVERAGE																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	2457.00	95.60	-----	-----	83.83	27.60	7.28	33.14	10.03	200 296 AVERAGE																																																																																								

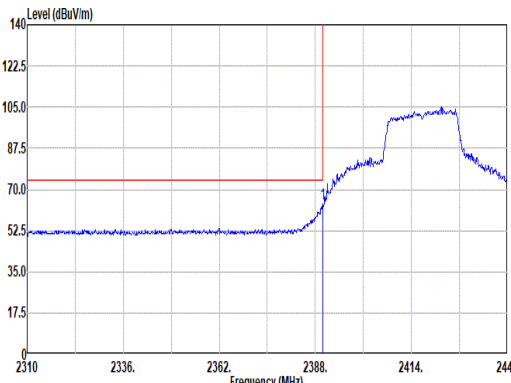
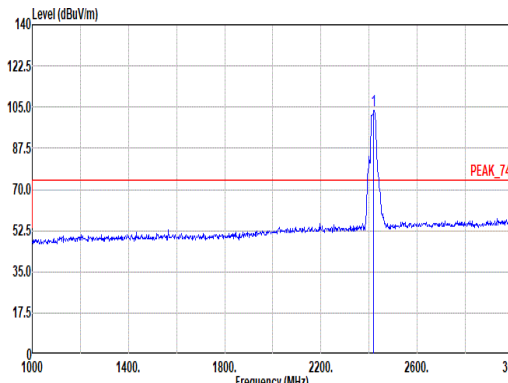
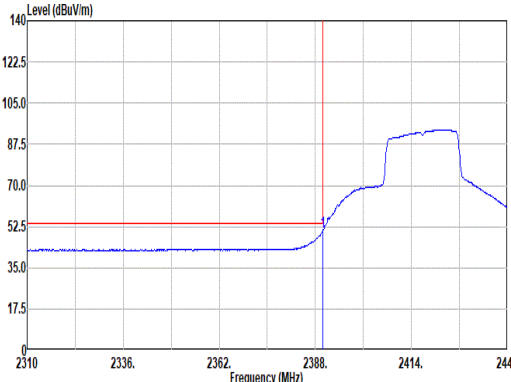
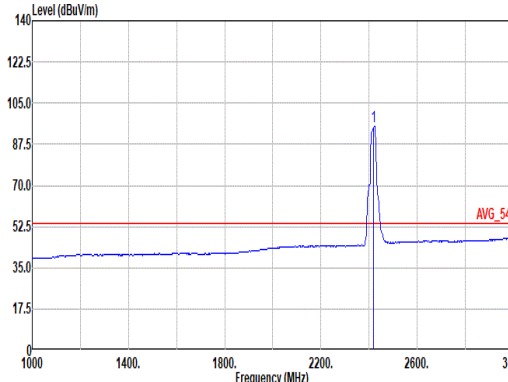


		23																																																																																																
Mode	Band Edge																																																																																																	
	2400-2483.5_802.11ax HE20_CH2_Full RU_2417MHz																																																																																																	
Pol.	Horizontal						Fundamental																																																																																											
Peak	 Site : 03CH11-HY Condition: PEAK_BE_74 3m 91200_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto Detector : PEAK Mode : 24 Setting : 74 Plane : X with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2389.95</td><td>63.94</td><td>74.00</td><td>-10.06</td><td>52.62</td><td>27.30</td><td>7.19</td><td>33.20</td><td>10.03</td><td>351</td><td>219</td><td>PEAK</td></tr></table>  Site : 03CH11-HY Condition: PEAK_74 3m 91200_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto Detector : PEAK Mode : 24 Setting : 74 Plane : X with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2417.00</td><td>103.75</td><td>-----</td><td>-----</td><td>92.16</td><td>27.50</td><td>7.23</td><td>33.17</td><td>10.03</td><td>351</td><td>219</td><td>PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	1	2389.95	63.94	74.00	-10.06	52.62	27.30	7.19	33.20	10.03	351	219	PEAK		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	1	2417.00	103.75	-----	-----	92.16	27.50	7.23	33.17	10.03	351	219	PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																								
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg																																																																																									
1	2389.95	63.94	74.00	-10.06	52.62	27.30	7.19	33.20	10.03	351	219	PEAK																																																																																						
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																									
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg																																																																																									
1	2417.00	103.75	-----	-----	92.16	27.50	7.23	33.17	10.03	351	219	PEAK																																																																																						
Avg	 Site : 03CH11-HY Condition: AVG_BE_54 3m 91200_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:1.000kHz SMT:Auto Detector : PEAK Mode : 24 Setting : 74 Plane : X with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2389.95</td><td>50.28</td><td>54.00</td><td>-3.72</td><td>38.96</td><td>27.30</td><td>7.19</td><td>33.20</td><td>10.03</td><td>351</td><td>219</td><td>AVERAGE</td></tr></table>  Site : 03CH11-HY Condition: AVG_54 3m 91200_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:1.000kHz SMT:Auto Detector : PEAK Mode : 24 Setting : 74 Plane : X with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2417.00</td><td>95.03</td><td>-----</td><td>-----</td><td>83.40</td><td>27.54</td><td>7.23</td><td>33.17</td><td>10.03</td><td>351</td><td>219</td><td>AVERAGE</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	1	2389.95	50.28	54.00	-3.72	38.96	27.30	7.19	33.20	10.03	351	219	AVERAGE		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	1	2417.00	95.03	-----	-----	83.40	27.54	7.23	33.17	10.03	351	219	AVERAGE
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																								
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg																																																																																									
1	2389.95	50.28	54.00	-3.72	38.96	27.30	7.19	33.20	10.03	351	219	AVERAGE																																																																																						
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																									
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg																																																																																									
1	2417.00	95.03	-----	-----	83.40	27.54	7.23	33.17	10.03	351	219	AVERAGE																																																																																						

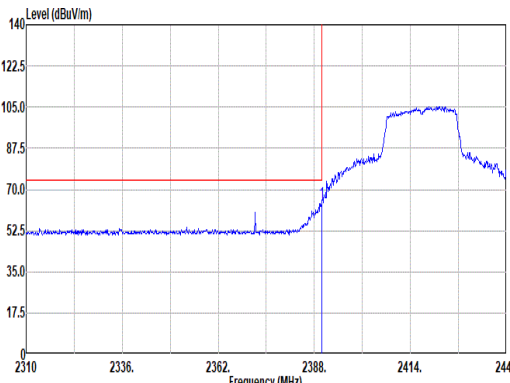
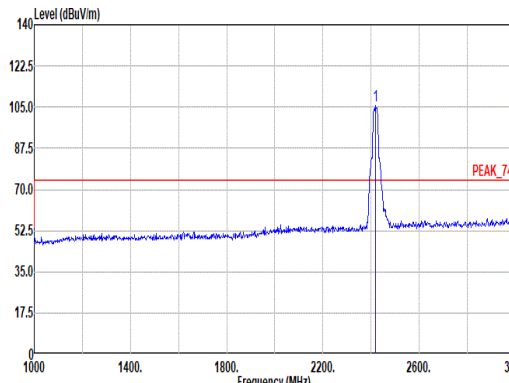
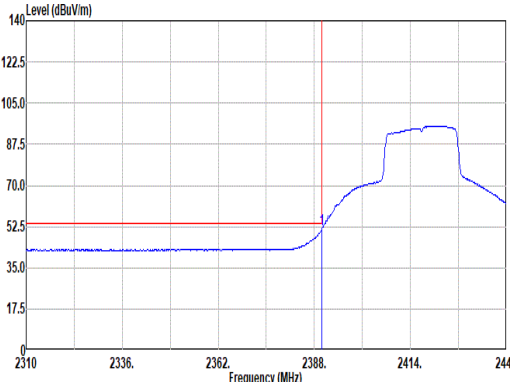
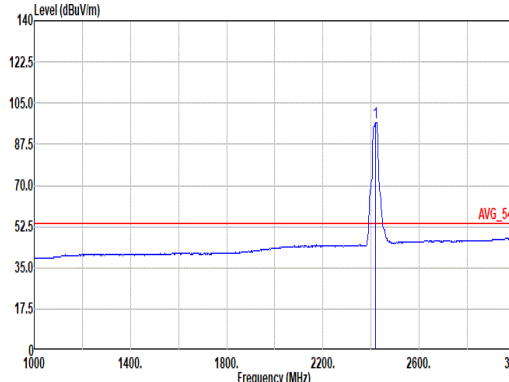


		23																																																																																																
Mode		Band Edge																																																																																																
		2400-2483.5_802.11ax HE20_CH2_Full RU_2417MHz																																																																																																
Pol.		Vertical						Fundamental																																																																																										
Peak																																																																																																		
	Site : 03CH11-HY Condition: PEAK_BE_74 3m 91200_01620_240828 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto Detector : PEAK Mode : 24 Setting : 74 Plane : X with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2389.95</td><td>64.66</td><td>74.00</td><td>-9.34</td><td>53.34</td><td>27.30</td><td>7.19</td><td>33.20</td><td>10.03</td><td>100</td><td>341</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.95	64.66	74.00	-9.34	53.34	27.30	7.19	33.20	10.03	100	341	PEAK	Site : 03CH11-HY Condition: PEAK_74 3m 91200_01620_240828 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto Detector : PEAK Mode : 24 Setting : 74 Plane : X with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2417.00</td><td>105.85</td><td>-----</td><td>-----</td><td>94.26</td><td>27.50</td><td>7.23</td><td>33.17</td><td>10.03</td><td>100</td><td>341</td><td>PEAK</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2417.00	105.85	-----	-----	94.26	27.50	7.23	33.17	10.03	100	341
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	2389.95	64.66	74.00	-9.34	53.34	27.30	7.19	33.20	10.03	100	341	PEAK																																																																																						
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	2417.00	105.85	-----	-----	94.26	27.50	7.23	33.17	10.03	100	341	PEAK																																																																																						
Avg																																																																																																		
	Site : 03CH11-HY Condition: AVG_BE_54 3m 91200_01620_240828 VERTICAL : RBW:1000.000kHz VBW:1.000kHz SMT:Auto Detector : PEAK Mode : 24 Setting : 74 Plane : X with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2389.95</td><td>51.07</td><td>54.00</td><td>-2.93</td><td>39.75</td><td>27.30</td><td>7.19</td><td>33.20</td><td>10.03</td><td>100</td><td>341</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.95	51.07	54.00	-2.93	39.75	27.30	7.19	33.20	10.03	100	341	AVERAGE	Site : 03CH11-HY Condition: AVG_54 3m 91200_01620_240828 VERTICAL : RBW:1000.000kHz VBW:1.000kHz SMT:Auto Detector : PEAK Mode : 24 Setting : 74 Plane : X with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2417.00</td><td>96.84</td><td>-----</td><td>-----</td><td>85.23</td><td>27.52</td><td>7.23</td><td>33.17</td><td>10.03</td><td>100</td><td>341</td><td>AVERAGE</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2417.00	96.84	-----	-----	85.23	27.52	7.23	33.17	10.03	100	341
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	2389.95	51.07	54.00	-2.93	39.75	27.30	7.19	33.20	10.03	100	341	AVERAGE																																																																																						
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	2417.00	96.84	-----	-----	85.23	27.52	7.23	33.17	10.03	100	341	AVERAGE																																																																																						

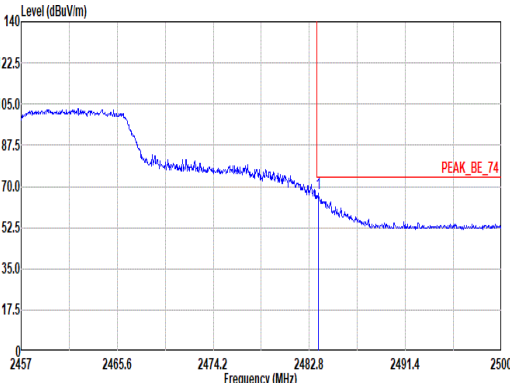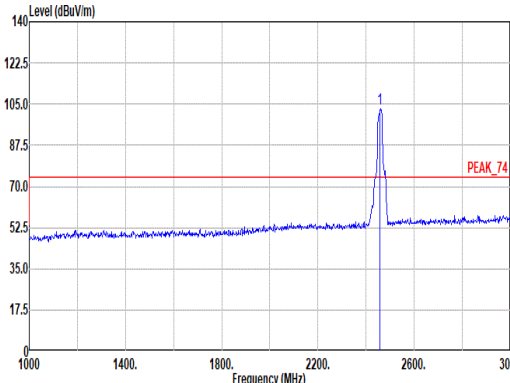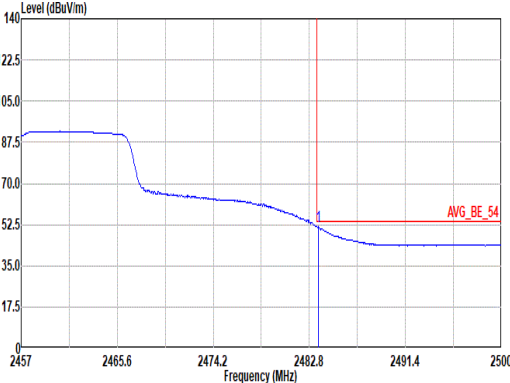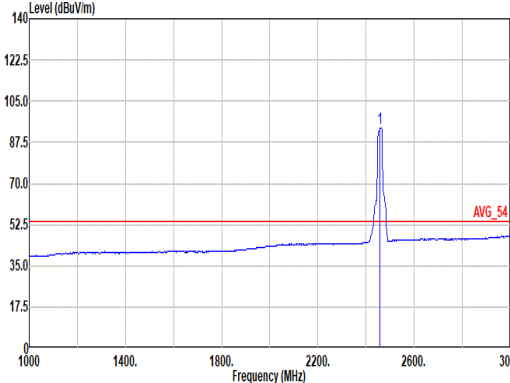

		24																																																				
Mode	Band Edge																																																					
	2400-2483.5_802.11ax HE20_CH10_Full RU_2457MHz																																																					
Pol.	Horizontal																																																					
Peak																																																						
	Site : 03CH11-HY Condition: PEAK_BE_74 3m 91200_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto Detector : PEAK Mode : 25 Setting : 70 Plane : X with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.62</td><td>67.11</td><td>74.00</td><td>-6.89</td><td>55.04</td><td>27.84</td><td>7.32</td><td>33.12</td><td>10.03</td><td>374 223 PEAK</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.62	67.11	74.00	-6.89	55.04	27.84	7.32	33.12	10.03
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																												
1	2483.62	67.11	74.00	-6.89	55.04	27.84	7.32	33.12	10.03	374 223 PEAK																																												
Fundamental																																																						
	Site : 03CH11-HY Condition: PEAK_74 3m 91200_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto Detector : PEAK Mode : 25 Setting : 70 Plane : X with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2457.00</td><td>102.83</td><td>-----</td><td>-----</td><td>91.02</td><td>27.62</td><td>7.29</td><td>33.13</td><td>10.03</td><td>374 223 PEAK</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2457.00	102.83	-----	-----	91.02	27.62	7.29	33.13	10.03
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																												
1	2457.00	102.83	-----	-----	91.02	27.62	7.29	33.13	10.03	374 223 PEAK																																												
Avg																																																						
	Site : 03CH11-HY Condition: AVG_BE_54 3m 91200_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:1.000kHz SMT:Auto Detector : PEAK Mode : 25 Setting : 70 Plane : X with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.62</td><td>51.61</td><td>54.00</td><td>-2.39</td><td>39.54</td><td>27.84</td><td>7.32</td><td>33.12</td><td>10.03</td><td>374 223 AVERAGE</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.62	51.61	54.00	-2.39	39.54	27.84	7.32	33.12	10.03
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																												
1	2483.62	51.61	54.00	-2.39	39.54	27.84	7.32	33.12	10.03	374 223 AVERAGE																																												
Fundamental																																																						
	Site : 03CH11-HY Condition: AVG_54 3m 91200_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:1.000kHz SMT:Auto Detector : PEAK Mode : 25 Setting : 70 Plane : X with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2457.00</td><td>93.66</td><td>-----</td><td>-----</td><td>81.89</td><td>27.60</td><td>7.28</td><td>33.14</td><td>10.03</td><td>374 223 AVERAGE</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2457.00	93.66	-----	-----	81.89	27.60	7.28	33.14	10.03
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																												
1	2457.00	93.66	-----	-----	81.89	27.60	7.28	33.14	10.03	374 223 AVERAGE																																												

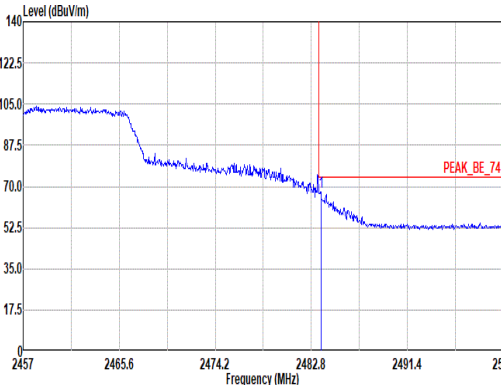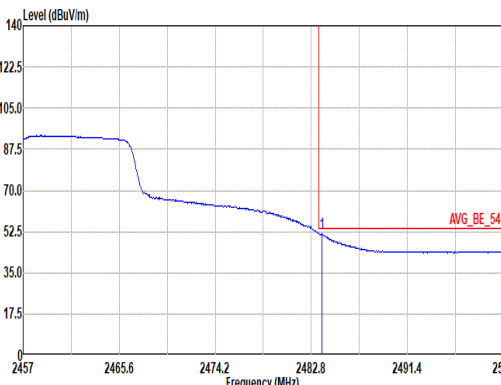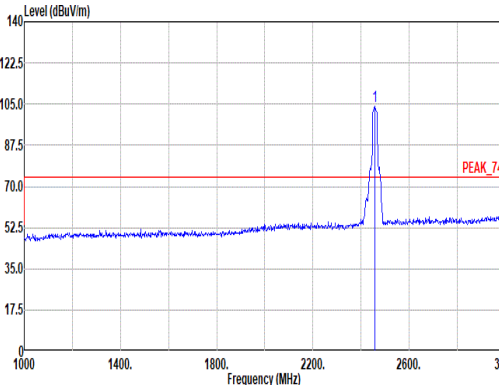
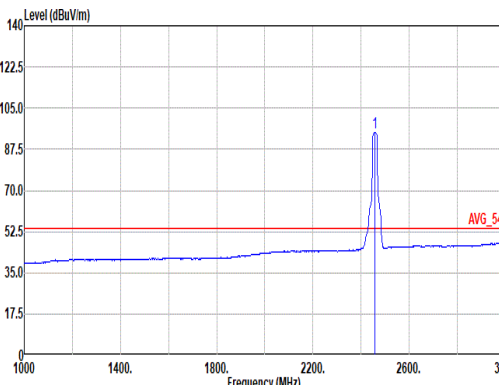


		24																																																				
Mode		Band Edge																																																				
		2400-2483.5_802.11ax HE20_CH10_Full RU_2457MHz																																																				
Pol.		Vertical					Fundamental																																															
Peak																																																						
		Site : 03CH11-HY Condition: PEAK_BE_74 3m 91200_01620_240828 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto Detector : PEAK Mode : 25 Setting : 70 Plane : X with adapter <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2483.66</td><td>67.64</td><td>74.00</td><td>-6.36</td><td>55.57</td><td>27.84</td><td>7.32</td><td>33.12</td><td>10.03</td><td>297 PEAK</td></tr></tbody></table>											Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.66	67.64	74.00	-6.36	55.57	27.84	7.32	33.12	10.03
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																												
1	2483.66	67.64	74.00	-6.36	55.57	27.84	7.32	33.12	10.03	297 PEAK																																												
Avg																																																						
		Site : 03CH11-HY Condition: AVG_BE_54 3m 91200_01620_240828 VERTICAL : RBW:1000.000kHz VBW:1.000kHz SMT:Auto Detector : PEAK Mode : 25 Setting : 70 Plane : X with adapter <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2483.75</td><td>51.64</td><td>54.00</td><td>-2.36</td><td>39.56</td><td>27.84</td><td>7.32</td><td>33.11</td><td>10.03</td><td>297 AVERAGE</td></tr></tbody></table>											Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.75	51.64	54.00	-2.36	39.56	27.84	7.32	33.11	10.03
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																												
1	2483.75	51.64	54.00	-2.36	39.56	27.84	7.32	33.11	10.03	297 AVERAGE																																												
																																																						
		Site : 03CH11-HY Condition: PEAK_74 3m 91200_01620_240828 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto Detector : PEAK Mode : 25 Setting : 70 Plane : X with adapter <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2457.00</td><td>104.01</td><td>-----</td><td>-----</td><td>92.24</td><td>27.60</td><td>7.28</td><td>33.14</td><td>10.03</td><td>297 PEAK</td></tr></tbody></table>											Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2457.00	104.01	-----	-----	92.24	27.60	7.28	33.14	10.03
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																												
1	2457.00	104.01	-----	-----	92.24	27.60	7.28	33.14	10.03	297 PEAK																																												
																																																						
		Site : 03CH11-HY Condition: AVG_54 3m 91200_01620_240828 VERTICAL : RBW:1000.000kHz VBW:1.000kHz SMT:Auto Detector : PEAK Mode : 25 Setting : 70 Plane : X with adapter <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2457.00</td><td>94.68</td><td>-----</td><td>-----</td><td>82.91</td><td>27.60</td><td>7.28</td><td>33.14</td><td>10.03</td><td>297 AVERAGE</td></tr></tbody></table>											Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2457.00	94.68	-----	-----	82.91	27.60	7.28	33.14	10.03
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																												
1	2457.00	94.68	-----	-----	82.91	27.60	7.28	33.14	10.03	297 AVERAGE																																												




Appendix D. Duty Cycle Plots

Band	Duty Cycle (%)	T(us)	1/T(kHz)	VBW Setting
802.11b	98.40	8610	-	10Hz
802.11g	90.56	1429	0.700	750Hz
2.4GHz 802.11n HT20	89.90	1335	0.749	750Hz
2.4GHz 802.11ax HE20 Full RU	87.51	1044	0.958	1kHz
2.4GHz 802.11ax HE20 26 RU	83.81	5280	0.189	300Hz
2.4GHz 802.11ax HE20 52 RU	83.83	5153	0.194	300Hz
2.4GHz 802.11ax HE20 106 RU	82.60	4770	0.210	300Hz

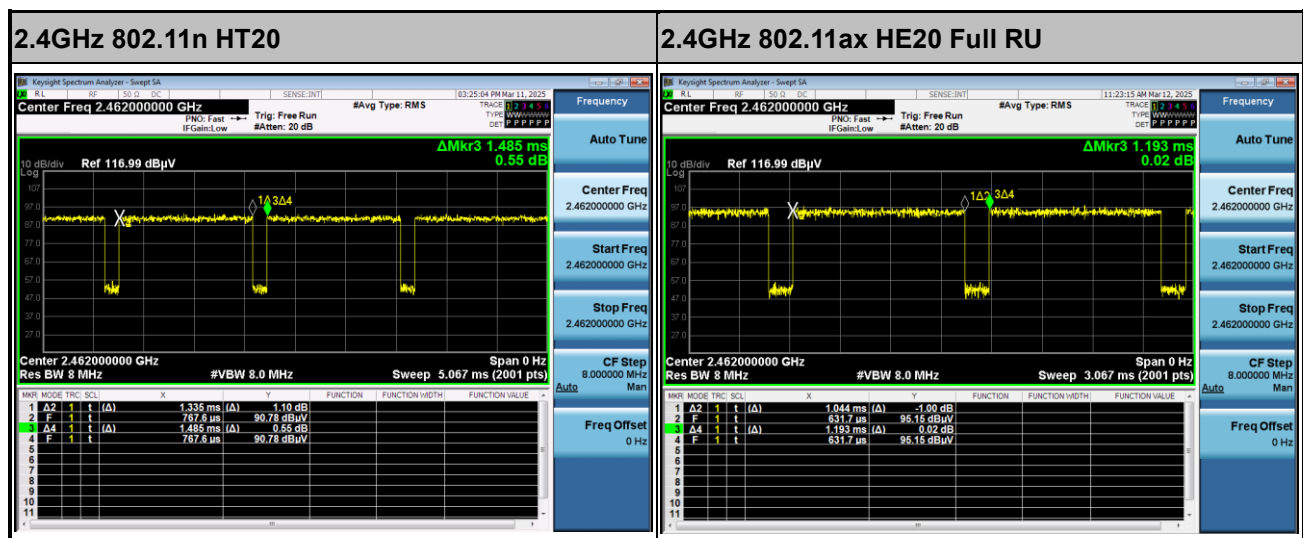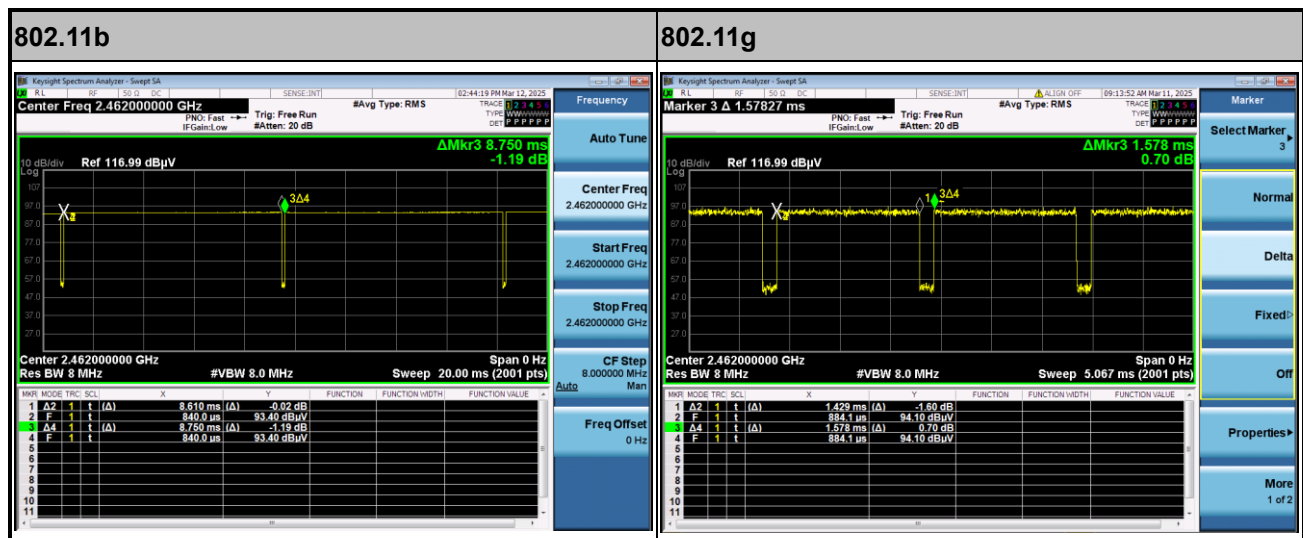





2.4GHz 802.11ax HE20 26 RU

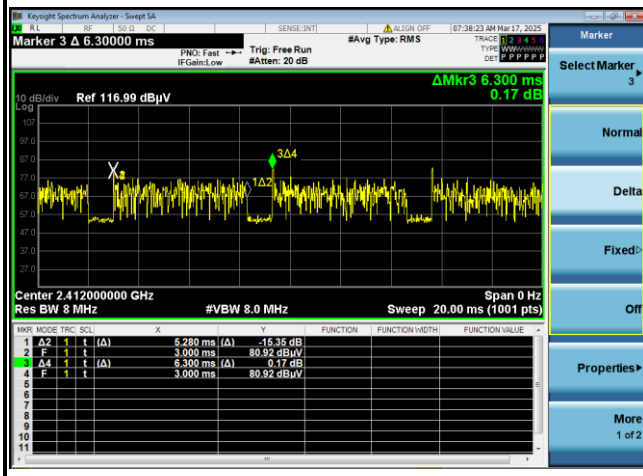

2.4GHz 802.11ax HE20 52 RU

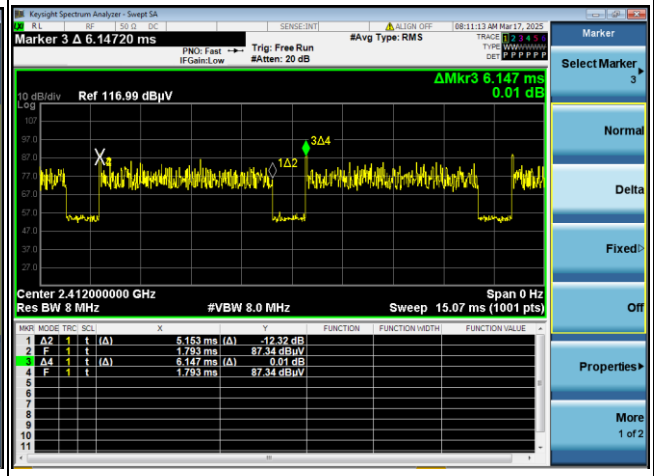

2.4GHz 802.11ax HE20 106 RU

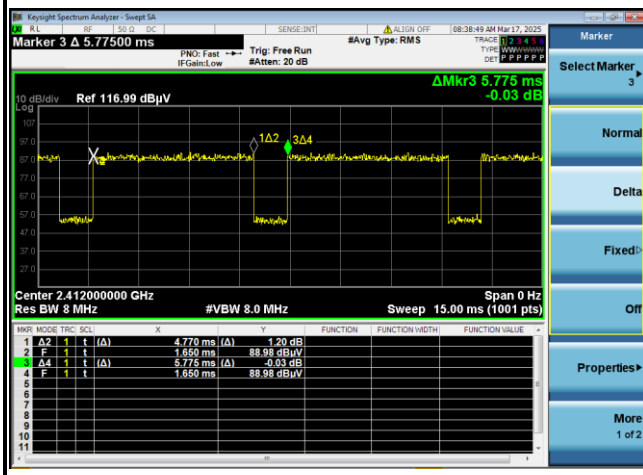

Appendix E. Spot Check Evaluation on G8AK3

Conducted power test and radiated spurious emission test configurations were selected from the worst cases identified in the reference model and tested to demonstrate the test data from reference model remains representative for the variant model.

The deviation between the spot check and the referenced values is within 3dB, therefore data referencing is justified according to the guidance in the ECR inquiry

Summary for power and RSE spot check for each FCC rule part is listed as below:

Test Item	Mode	A4RG1KAW Reference Worst Result	A4RG8AK3 Variant Check Result	Difference (dB)
Conducted Power (dBm)	BT	19.76	19.49	0.27
	BLE	19.53	19.40	0.13
	BLE ASK	19.64	19.32	0.32
	BLE GFSK	19.60	19.40	0.20
	WiFi 2.4GHz	20.90	20.80	0.10
	WiFi 5GHz	18.40	18.40	0.00
Radiated Band Edges and Spurious Emission (dBuV/m)	BT	-26.90	-29.46	2.56
	BLE	-8.96	-7.07	1.89
	BLE ASK	-28.11	-26.86	1.25
	BLE GFSK	-4.78	-5.00	0.22
	WiFi 2.4GHz	-1.76	-3.56	1.80
	WiFi 5GHz	-2.45	-2.80	0.35



Reference detail Section

Rule Part	Equipment Class	Wireless Technology	Rule Part & Frequency Band	Reference FCC ID (Parent)	Type Grant/ Permissive Change	Reference Exhibit	Full report referenced	FCC ID Filling (Variant)
15C	DTS	WiFi	§15.247 2.4GHz	A4RG1KAW	Original Grant	G1KAW_FCC Part 15C WLAN2.4G	Y	A4RG8AK3



List of Measuring Equipment

Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Hygrometer	TECPEL	DTM-303A	TP201996	N/A	Nov. 01, 2024	Mar. 26, 2025~ Mar. 27, 2025	Oct. 31, 2025	Conducted (TH05-HY)
Power Meter	Anritsu	ML2495A	1036004	N/A	Jul. 04, 2024	Mar. 26, 2025~ Mar. 27, 2025	Jul. 03, 2025	Conducted (TH05-HY)
Power Meter	Agilent	E4416A	GB41292344	N/A	Jun. 26, 2024	Mar. 26, 2025~ Mar. 27, 2025	Jun. 25, 2025	Conducted (TH05-HY)
Power Sensor	Anritsu	MA2411B	1027253	300MHz~40GHz	Jul. 04, 2024	Mar. 26, 2025~ Mar. 27, 2025	Jul. 03, 2025	Conducted (TH05-HY)
Power Sensor	DARE	RPR3006W	13I00030SNO 31 (NO:182)	9kHz~6GHz	Jan. 09, 2025	Mar. 26, 2025~ Mar. 27, 2025	Jan. 08, 2026	Conducted (TH05-HY)
Power Sensor	Agilent	E9327A	US40441548	50MHz~18GHz	Jun. 25, 2024	Mar. 26, 2025~ Mar. 27, 2025	Jun. 24, 2025	Conducted (TH05-HY)
Signal Analyzer	Rohde & Schwarz	FSV40	101566	10Hz~40GHz	Aug. 23, 2024	Mar. 26, 2025~ Mar. 27, 2025	Aug. 22, 2025	Conducted (TH05-HY)
Signal Analyzer	Rohde & Schwarz	FSV3044	101467	10HZ~44GHZ	Jan. 14, 2025	Mar. 26, 2025~ Mar. 27, 2025	Jan. 13, 2026	Conducted (TH05-HY)
Switch Control Mainframe	Burgeon	ETF-058	EC1300484 (BOX3)	N/A	May 20, 2024	Mar. 26, 2025~ Mar. 27, 2025	May 19, 2025	Conducted (TH05-HY)
Software	Sporton	BTWIFI_Final_v ersion_240513	N/A	Conducted Other Test Item	N/A	Mar. 26, 2025~ Mar. 27, 2025	N/A	Conducted (TH05-HY)
Bilog Antenna	TESEQ	CBL 6111D & 00800N1D01N- 06	37059 & 01	30MHz~1GHz	Nov. 27, 2024	Mar. 25, 2025 ~ Apr. 08, 2025	Nov. 26, 2025	Radiation (03CH11-HY)
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100488	9 kHz~30 MHz	Aug. 29, 2024	Mar. 25, 2025 ~ Apr. 08, 2025	Aug. 28, 2025	Radiation (03CH11-HY)
Horn Antenna	SCHWARZBECK	BBHA 9120 D	9120D-01620	1GHz~18GHz	Aug. 28, 2024	Mar. 25, 2025 ~ Apr. 08, 2025	Aug. 27, 2025	Radiation (03CH11-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA 9170	1224	18GHz~40GHz	Jun. 24, 2024	Mar. 25, 2025 ~ Apr. 08, 2025	Jun. 23, 2025	Radiation (03CH11-HY)
Amplifier	SONOMA	310N	187312	9kHz~1GHz	Dec. 07, 2024	Mar. 25, 2025 ~ Apr. 08, 2025	Dec. 06, 2025	Radiation (03CH11-HY)
Preamplifier	Keysight	83017A	MY53270080	1GHz~26.5GHz	Mar. 23, 2025	Mar. 25, 2025 ~ Apr. 08, 2025	Mar. 22, 2026	Radiation (03CH11-HY)
Preamplifier	E-INSTRUMENT TECH LTD.	ERA-100M-18G- 56-01-A70	EC1900249	1GHz~18GHz	Jan. 21, 2025	Mar. 25, 2025 ~ Apr. 08, 2025	Jan. 20, 2026	Radiation (03CH11-HY)
Preamplifier	EMEC	EM18G40G	060873	18GHz~40GHz	Sep. 02, 2024	Mar. 25, 2025 ~ Apr. 08, 2025	Sep. 01, 2025	Radiation (03CH11-HY)
Spectrum Analyzer	Keysight	N9010A	MY54200486	10Hz~44GHz	Oct. 14, 2024	Mar. 25, 2025 ~ Apr. 08, 2025	Oct. 13, 2025	Radiation (03CH11-HY)
EMI Test Receiver	Keysight	N9038A(MXE)	MY55420170	20MHz~8.4GHz	Jul. 19, 2024	Mar. 25, 2025 ~ Apr. 08, 2025	Jul. 18, 2025	Radiation (03CH11-HY)
Controller	EMEC	EM 1000	N/A	Control Turn table & Ant Mast	N/A	Mar. 25, 2025 ~ Apr. 08, 2025	N/A	Radiation (03CH11-HY)
Antenna Mast	EMEC	AM-BS-4500-B	N/A	1~4m	N/A	Mar. 25, 2025 ~ Apr. 08, 2025	N/A	Radiation (03CH11-HY)
Turn Table	EMEC	TT 2000	N/A	0~360 Degree	N/A	Mar. 25, 2025 ~ Apr. 08, 2025	N/A	Radiation (03CH11-HY)
Software	Audix	E3 6.2009-8-24	RK-001053	N/A	N/A	Mar. 25, 2025 ~ Apr. 08, 2025	N/A	Radiation (03CH11-HY)
Hygrometer	TECPEL	DTM-303B	TP200880	N/A	Aug. 29, 2024	Mar. 25, 2025 ~ Apr. 08, 2025	Aug. 28, 2025	Radiation (03CH11-HY)

**FCC RADIO TEST REPORT****Report No.: FR511002C**

Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
RF Cable	HUBER + SUHNER	SUCOFLEX 102	804013/2	30M~40G	May 05, 2025	Mar. 25, 2025 ~ Apr. 08, 2025	May 04, 2026	Radiation (03CH11-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	MY2859/2	30MHz~40GHz	May 05, 2025	Mar. 25, 2025 ~ Apr. 08, 2025	May 04, 2026	Radiation (03CH11-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	803951/2	9K~30M	May 05, 2025	Mar. 25, 2025 ~ Apr. 08, 2025	May 04, 2026	Radiation (03CH11-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	803951/2	30M~40G	May 05, 2025	Mar. 25, 2025 ~ Apr. 08, 2025	May 04, 2026	Radiation (03CH11-HY)
Filter	Wainwright	WHKX12-2700-3000-18000-60SS	SN3	3GHz High Pass Filter	Sep. 10, 2024	Mar. 25, 2025 ~ Apr. 08, 2025	Sep. 09, 2025	Radiation (03CH11-HY)
Filter	Wainwright	WLK4-1000-1530-8000-40SS	SN11	1.53GHz Low Pass Filter	Sep. 10, 2024	Mar. 25, 2025 ~ Apr. 08, 2025	Sep. 09, 2025	Radiation (03CH11-HY)
Attenuator	HONOVA	5910 SMA-50-005	0028	N/A	Sep. 10, 2024	Mar. 25, 2025 ~ Apr. 08, 2025	Sep. 09, 2025	Radiation (03CH11-HY)

————THE END————