




FCC RADIO TEST REPORT

FCC ID : A4RG8AK3
Equipment : Wireless Device
Model Name : G8AK3
Applicant : Google LLC
1600 Amphitheatre Parkway,
Mountain View, CA, 94043 USA
Standard : FCC Part 15 Subpart E §15.407

The product was received on Feb. 18, 2025 and testing was performed from Feb. 27, 2025 to Apr. 10, 2025. We, Sporton International Inc. Wensan Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval from Sporton International Inc. Wensan Laboratory, the test report shall not be reproduced except in full.



Approved by: Louis Wu

Sporton International Inc. Wensan Laboratory

No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan (R.O.C.)



Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
1 General Description	5
1.1 Product Feature of Equipment Under Test.....	5
1.2 Modification of EUT	5
1.3 Testing Location	6
1.4 Applicable Standards.....	6
2 Test Configuration of Equipment Under Test	7
2.1 Carrier Frequency and Channel	7
2.2 Test Mode.....	8
2.3 Connection Diagram of Test System.....	9
2.4 Support Unit used in test configuration and system	10
2.5 EUT Operation Test Setup	10
2.6 Measurement Results Explanation Example.....	10
3 Test Result	11
3.1 6dB and 26dB and 99% Occupied Bandwidth Measurement	11
3.2 Maximum E.I.R.P Output Power Measurement	12
3.3 Power Spectral Density Measurement	13
3.4 Unwanted Emissions Measurement.....	15
3.5 AC Conducted Emission Measurement.....	20
3.6 Antenna Requirements.....	22
4 List of Measuring Equipment.....	23
5 Measurement Uncertainty	25
Appendix A. Conducted Test Results	
Appendix B. AC Conducted Emission Test Result	
Appendix C. Radiated Spurious Emission Test Data	
Appendix D. Duty Cycle Plots	
Appendix E. Spot Check Evaluation on G8AK3	
Appendix F. Setup Photographs	



History of this test report

Report No.	Version	Description	Issue Date
FR511002F	01	Initial issue of report	Apr. 28, 2025



Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.1	15.407(e)	6dB & 26dB Bandwidth	Pass	-
3.1	2.1049	99% Occupied Bandwidth	Pass	-
3.2	15.407(a)	Maximum E.I.R.P Output Power	Pass	-
3.3	15.407(a)	Power Spectral Density	Pass	-
3.4	15.407(b)	Unwanted Emissions	Pass	-
3.5	15.207	AC Conducted Emission	Pass	-
3.6	15.203	Antenna Requirement	Pass	-

Conformity Assessment Condition:

1. ECR inquiry for data referencing from A4RG1KAW has been approved by FCC. The ECR inquiry and the associated document are submitted in the confidential exhibit.
2. A4RG8AK3 is different from FCC ID: A4RG1KAW (Reference model), in the following:
 - i. The only difference between A4RG1KAW and A4RG8AK3 are the LTE and NTN function, which is depopulated by hardware.
3. All the test results are referenced from A4RG1KAW (Sporton Test Report FR4D1914F), and spot check results to justify data referencing is presented in the Appendix E.
4. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacture who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
5. The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty".

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.

Reviewed by: Yun Huang

Report Producer: Michelle Chen



1 General Description

1.1 Product Feature of Equipment Under Test

Product Feature
General Specs Bluetooth, BLE, BLE ASK, BLE GFSK, Wi-Fi 2.4GHz 802.11b/g/n/ac/ax, Wi-Fi 5GHz 802.11a/n/ac/ax, NFC, UWB, 60GHz and GNSS.
Antenna Type WLAN: PIFA Antenna

EUT Information List	
S/N	Performed Test Item
51161WRBNL320F	RF Conducted Measurement
51161WRBNL31R4	Radiated Spurious Emission
51161WRBNL31TB	Conducted Emission

Antenna information		
5850 MHz ~ 5895 MHz	Peak Gain (dBi)	0.4

Remark: The EUT's information above is declared by manufacturer. Please refer to Disclaimer in report summary.

1.2 Modification of EUT

No modifications made to the EUT during the testing.



1.3 Testing Location

Test Site	Sporton International Inc. Wensan Laboratory
Test Site Location	No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan (R.O.C.) TEL: +886-3-327-0868 FAX: +886-3-327-0855
Test Site No.	Sporton Site No.
	TH05-HY, CO07-HY, 03CH23-HY

Note: The test site complies with ANSI C63.4 2014 requirement.

FCC designation No.: TW3786

1.4 Applicable Standards

According to the specifications declared by the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart E
- ♦ FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
- ♦ FCC KDB 414788 D01 Radiated Test Site v01r01.
- ♦ FCC KDB 291074 D02 EMC Measurement v01
- ♦ ANSI C63.10-2013

Remark:

1. All the test items were validated and recorded in accordance with the standards without any modification during the testing.
2. The TAF code is not including all the FCC KDB listed without accreditation.



2 Test Configuration of Equipment Under Test

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, the measured emission level of the EUT was maximized by rotating the EUT on a turntable, adjusting the orientation of the EUT and EUT antenna in three orthogonal axis (X: flat, Y: portrait, Z: landscape), and adjusting the measurement antenna orientation, following C63.10 exploratory test procedures and find Y plane with Adapter as worst plane.
- b. AC power line Conducted Emission was tested under maximum output power.

2.1 Carrier Frequency and Channel

Frequency Band	Bandwidth	Channel	Frequency (MHz)	Note
5850-5895 MHz (U-NII-4)	20 MHz	169	5845	Straddle
		173	5865	
		177	5885	
	40 MHz	167	5835	Straddle
		175	5875	
	80 MHz	171	5855	Straddle

Note: The channel noted with "straddle" spans 5.725-5.850 GHz and 5.850-5.895 GHz.

2.2 Test Mode

This device support 26/52/106/242/484/996-tone RU.

The PSD of partial RU is reduced to be smaller than full RU according to TCB workshop interim guidance Oct. 2022.

The 802.11ax mode is investigated among different tones, full resource units (RU), partial resource units. The partial RU has no higher power than full RU's, thus the full RU is chosen as main test configuration.

The 242-tone RU is covered by 20MHz channel, 484-tone RU is covered by 40MHz channel and 996-tone RU is covered by 80MHz channel.

The power for 802.11ac VHT20/40 mode is smaller than 802.11n mode, so all other conducted and radiated test is covered by 802.11n mode.


The final test modes include the worst data rates for each modulation shown in the table below.

Modulation	Data Rate
802.11a	6 Mbps
802.11n HT20	MCS0
802.11n HT40	MCS0
802.11ac VHT20 (Covered by HT20)	MCS0
802.11ac VHT40 (Covered by HT40)	MCS0
802.11ac VHT80	MCS0
802.11ax HE20	MCS0
802.11ax HE40	MCS0
802.11ax HE80	MCS0


Test Cases	
AC Conducted Emission	Mode 1 : WLAN (5GHz_11a Ch173) Tx + USB Cable (Charging from Adapter)
Remark: - For radiation spurious emission, the modulation and the data rate picked for testing are determined by the Max. RF conducted power. - The detailed Radiated test modes are shown in Appendix C.	

2.3 Connection Diagram of Test System

<AC Conducted Emission Mode>

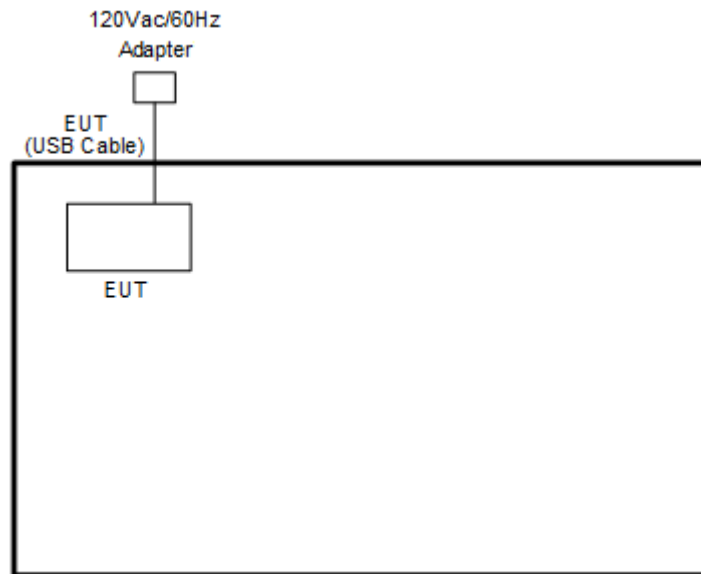

<WLAN Tx Mode>

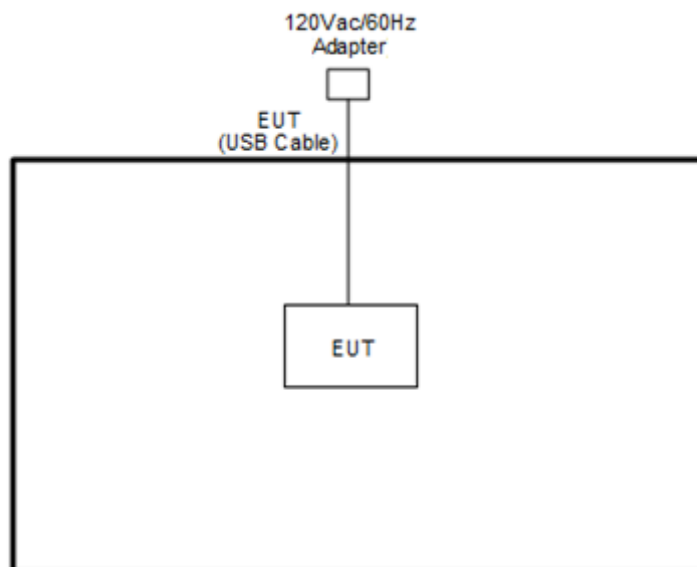



2.4 Support Unit used in test configuration and system

Item	Equipment	Brand Name	Model Name	FCC ID	Data Cable	Power Cord
1.	Adapter	N/A	N/A	N/A	N/A	N/A

2.5 EUT Operation Test Setup

The RF test items, utility “adb version 1.0.41” was installed in Notebook which was programmed in order to make the EUT get into the engineering modes to provide channel selection, power level, data rate and the application type and for continuous transmitting signals.

2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 4.2 dB and 10 dB attenuator.

$$\begin{aligned}\text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)} \\ &= 4.2 + 10 = 14.2 \text{ (dB)}\end{aligned}$$

3 Test Result

3.1 6dB and 26dB and 99% Occupied Bandwidth Measurement

3.1.1 Description of 6dB and 26dB and 99% Occupied Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.

26dB and 99% Occupied bandwidth are reporting only.

3.1.2 Measuring Instruments


Please refer to the measuring equipment list in this test report.

3.1.3 Test Procedures

The testing follows FCC KDB 291074 D02 EMC Measurement v01 Section 2.11 Minimum Emission bandwidth

1. Set RBW = 100 kHz.
2. Set the VBW $\geq 3 \times$ RBW.
3. Detector = Peak.
4. Trace mode = max hold
5. Measure the maximum width of the emission that is 6 dB down from the peak of the emission.
6. Measure and record the results in the test report.

3.1.4 Test Setup

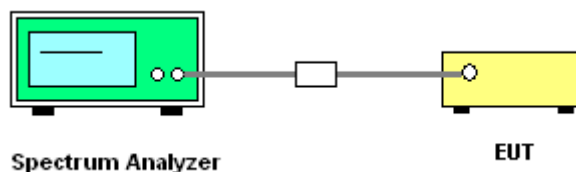

3.1.5 Test Result of 6dB and 26dB and 99% Occupied Bandwidth

Please refer to Appendix A.

3.2 Maximum E.I.R.P Output Power Measurement

3.2.1 Limit of Maximum E.I.R.P Output Power

For client devices operating under the control of an indoor access point in the 5.850-5.895 GHz band, the maximum power spectral density must not exceed 14 dBm e.i.r.p. in any 1-megahertz band, and the maximum e.i.r.p. over the frequency band of operation must not exceed 30 dBm. Client devices operating on a channel that spans the 5.725-5.850 GHz and 5.850-5.895 GHz bands must not exceed an e.i.r.p. of 30 dBm.

3.2.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.


3.2.3 Test Procedures

The testing follows Method PM-G of FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.

Method PM-G (Measurement using a gated RF average power meter):

1. Measurement is performed using a wideband RF power meter.
2. The EUT is configured to transmit at its maximum power control level.
3. Measure the average power of the transmitter.
4. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

3.2.4 Test Setup

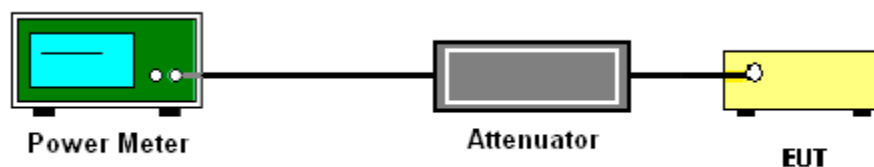

3.2.5 Test Result of Maximum Conducted Output Power

Please refer to Appendix A.



3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

1. For client devices operating under the control of an indoor access point in the 5.850-5.895 GHz band, the maximum power spectral density must not exceed 14 dBm e.i.r.p. in any 1-megahertz band.
2. For client devices operating on a channel that spans the 5.725-5.850 GHz and 5.850-5.895 GHz bands shall meet both 15.407(a)(3)(i) 30dBm/500kHz and 15.407(a)(3)(iii) 14dBm/MHz limit, where the stringent limit 14dBm/MHz is applied.
3. For an indoor access point operating on a channel that spans the 5.725-5.850 GHz and 5.850-5.895 GHz bands shall meet both 15.407(a)(3)(ii) 36dBm limit, where the stringent limit 20dBm/MHz is applied.

3.3.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.3.3 Test Procedures

The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.


Section F) Maximum power spectral density.

Method SA-2

(trace averaging across on and off times of the EUT transmissions, followed by duty cycle correction).

- Measure the duty cycle.
 - Set span to encompass the entire emission bandwidth (EBW) of the signal.
 - Set RBW = 1 MHz.
 - Set VBW $\geq$ 3 MHz.
 - Number of points in sweep $\geq$ 2 Span / RBW.
 - Sweep time = auto.
 - Detector = RMS
 - Trace average at least 100 traces in power averaging mode.
 - Add $10 \log(1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times. For example, add $10 \log(1/0.25) = 6$ dB if the duty cycle is 25 percent.
1. The RF output of EUT is connected to the spectrum analyzer by a low loss cable.
 2. Each plot has already offset with cable loss, and attenuator loss. Measure the PPSD and record it.

3.3.4 Test Setup



3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.

3.4 Unwanted Emissions Measurement

This section is to measure unwanted emissions through radiated measurement for band edge spurious emissions and out of band emissions measurement.

3.4.1 Limit of Unwanted Emissions

- (1) Unwanted spurious emissions fallen in restricted bands shall comply with the general field strength limits as the following table:

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

Note: The following formula is used to convert the EIRP to field strength.

$$E = \frac{1000000\sqrt{30P}}{3} \quad \mu\text{V/m, where P is the eirp (Watts)}$$

- (2) For transmitters operating solely in the 5.850-5.895 GHz band or operating on a channel that spans across 5.725-5.895 GHz:

15.407(b)(5)(ii), all emissions at or above 5.895 GHz shall not exceed an e.i.r.p. of –5 dBm/MHz and shall decrease linearly to an e.i.r.p. of –27 dBm/MHz at or above 5.925 GHz.

All emissions below 5.725 GHz shall not exceed an e.i.r.p. of –27 dBm/MHz at 5.65 GHz increasing linearly to 10 dBm/MHz at 5.7 GHz, and from 5.7 GHz increasing linearly to a level of 15.6 dBm/MHz at 5.72 GHz, and from 5.72 GHz increasing linearly to a level of 27 dBm/MHz at 5.725 GHz.

- (3) KDB789033 D02 v02r01 G)2)c)

Use guidance in KDB Publication 789033 for all measurements. Unwanted emissions outside of restricted bands are measured with an RMS detector. In addition, 15.35(b) applies where the peak emissions must be limited to no more than 20 dB above the average limit.

Unwanted band-edge emissions may be measured using the integration method as described in KDB Publication 789033 3. d) (ii). Emissions below 5725 MHz should be measured using peak-detection while emission above 5895 MHz should be measured using average.

Frequency(GHz)	EIRP (dBm)	Field Strength @3m distance (dBuV/m)	Note
Below 5.65	-27dBm/MHz	68.2	Peak
5.7	10dBm/MHz	105.2	Peak
5.72	15.6dBm/MHz	110.8	Peak
5.725	27dBm/MHz	122.2	Peak
5.895	-5dBm/MHz	90.2	Average
5.895	15dBm/MHz	110.2	Peak
Above 5.925	-27dBm/MHz	68.2	Average
Above 5.925	-7dBm/MHz	88.2	Peak

Note: Field strength at 3 m distance is converted to EIRP as the following equation:

$$\text{EIRP[dBm]} = \text{E[dB}\mu\text{V/m]} - 95.2$$

3.4.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.


3.4.3 Test Procedures

- The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
 Section G) Unwanted emissions measurement.
 - Procedure for Unwanted Emissions Measurements Below 1000 MHz
 - RBW = 120 kHz
 - VBW = 300 kHz
 - Detector = Peak
 - Trace mode = max hold
 - Procedures for Average Unwanted Emissions Measurements Above 1000 MHz
 - RBW = 1 MHz
 - VBW = 10 Hz, when duty cycle is no less than 98 percent.
 - VBW $\geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.
- The EUT was placed on a turntable with 0.8 meter for frequency below 1 GHz and 1.5 meter for frequency above 1 GHz respectively above ground.
- The EUT was placed at distance 3 meter from measurement antenna which was mounted on the top of a variable height antenna tower.


4. The measurement antenna is a broadband antenna and its height is adjusted between one meter and four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization.
5. For each suspected emission, the EUT was arranged to its worst case and then adjust the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
6. Radiated testing below 1GHz was performed by adjusting the antenna tower from 1m to 4m and by rotating the turn table from 0 degree to 360 degree to find the peak maximum hold reading. When there is no suspected emission found and the emission level is with at least 6dB margin against QP limit line, the position is marked as “-”.
7. Radiated testing above 1GHz was performed by adjusting the antenna tower from 1m to 4m and by rotating the turn table from 0 degree to 360 degree to find the peak maximum hold reading for scanning all frequencies. When there is no suspected emission found and the harmonic emission level is with at least 6dB margin against average limit line, the position is marked as “-”.

3.4.4 Test Setup


For radiated emissions below 30MHz

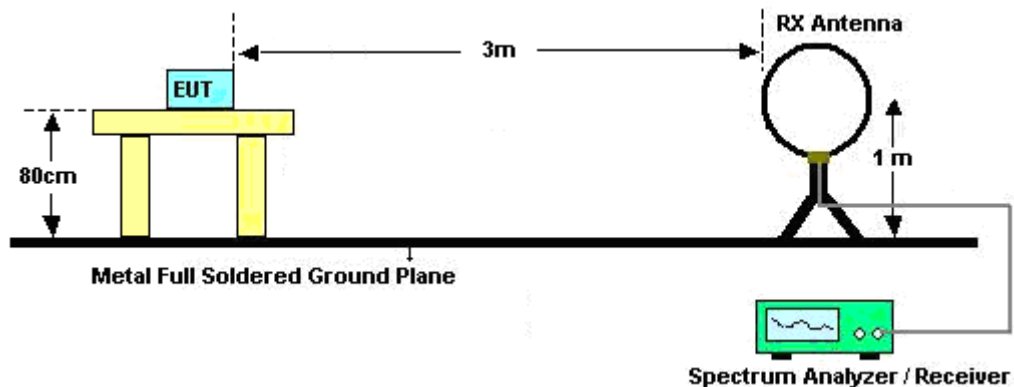


For radiated emissions from 30MHz to 1GHz

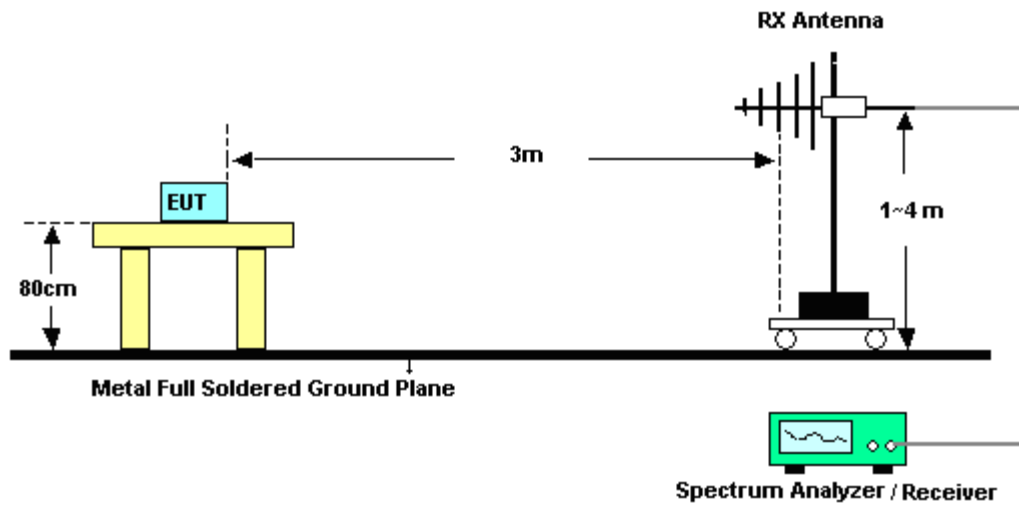

For radiated test from 1GHz to 18GHz

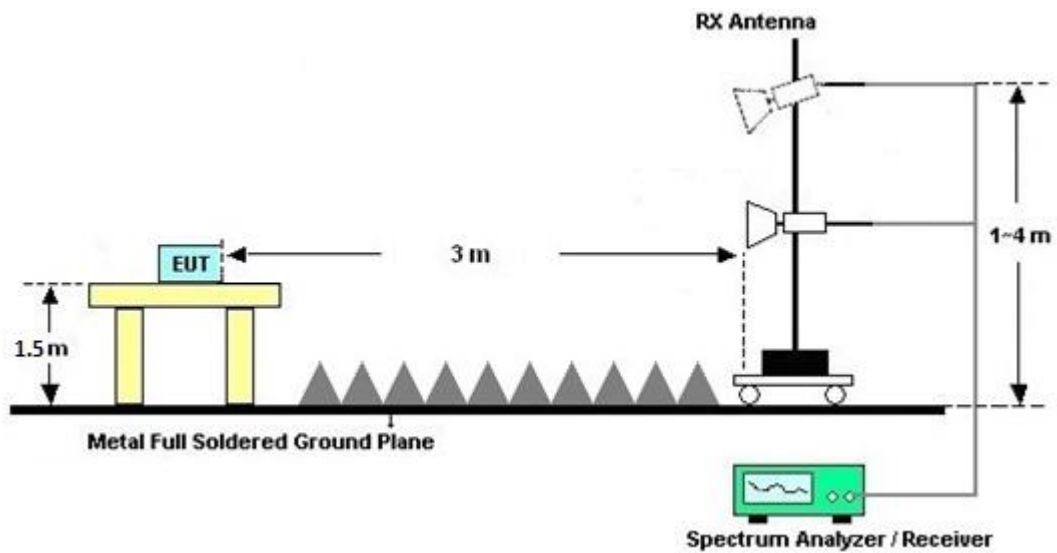

For radiated test above 18GHz

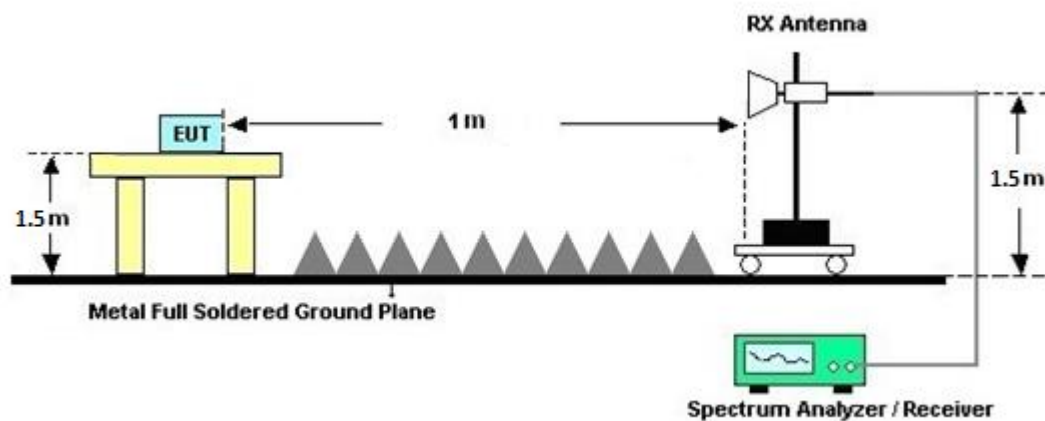

**3.4.5 Test Results of Radiated Emissions (9 kHz ~ 30 MHz)**

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is adequate comparison measurement of both open-field test site and alternative test site - semi-Anechoic chamber according to 414788 D01 Radiated Test Site v01r01, and the result came out very similar.

3.4.6 Test Results of Radiated Spurious Emissions and Radiated Band Edges

Please refer to Appendix C.

3.4.7 Duty Cycle

Please refer to Appendix D.

3.4.8 Test Result of Unwanted Radiated Emission (30MHz ~ 10th Harmonic)

Please refer to Appendix C.

3.5 AC Conducted Emission Measurement

3.5.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.5.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.5.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN shall be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.

3.5.4 Test Setup

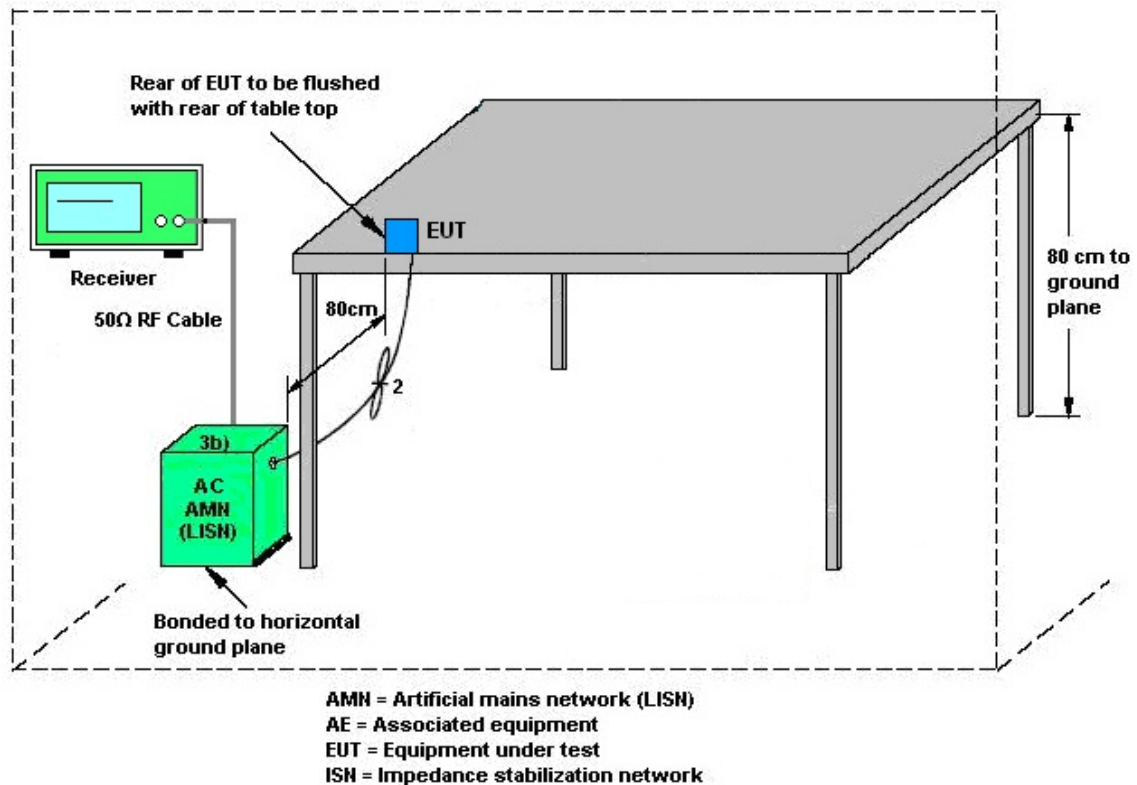

3.5.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



3.6 Antenna Requirements

3.6.1 Standard Applicable

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §§ 15.211, 15.213, 15.217, 15.219, 15.221, or § 15.236. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with § 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

3.6.2 Antenna Anti-Replacement Construction

- b) Unique (non-standard) antenna connector.
- (3) Use of a standard connector is also allowed if the connector is within the transmitter enclosure and can only be accessed by disassembly of the transmitter, where such disassembly is not normally required. The user manual must not show that user has access to the connector.



4 List of Measuring Equipment

Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100488	9 kHz~30 MHz	Aug. 29, 2024	Mar. 14, 2025~ Mar. 28, 2025	Aug. 28, 2025	Radiation (03CH23-HY)
Bilog Antenna	TESEQ & WOKEN	CBL 6111D & 00802N1D-06	62028 & 003	30MHz~1GHz	Nov. 27, 2024	Mar. 14, 2025~ Mar. 28, 2025	Nov. 26, 2025	Radiation (03CH23-HY)
Amplifier	SONOMA	310N	421582	9kHz~1GHz	Jul. 14, 2024	Mar. 14, 2025~ Mar. 28, 2025	Jul. 13, 2025	Radiation (03CH23-HY)
Amplifier	EMEC	EM01G18GA	060878	N/A	Sep. 27, 2024	Mar. 14, 2025~ Mar. 28, 2025	Sep. 26, 2025	Radiation (03CH23-HY)
Double Ridged Guide Horn Antenna	RFSPIN	DRH18-E	LE2C05A18E N	1GHz~18GHz	Jun. 20, 2024	Mar. 14, 2025~ Mar. 28, 2025	Jun. 19, 2025	Radiation (03CH23-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA 9170	1224	18GHz~40GHz	Jun. 24, 2024	Mar. 14, 2025~ Mar. 28, 2025	Jun. 23, 2025	Radiation (03CH23-HY)
Preamplifier	EMEC	EM18G40G	060873	18GHz~40GHz	Sep. 02, 2024	Mar. 14, 2025~ Mar. 28, 2025	Sep. 01, 2025	Radiation (03CH23-HY)
Signal Analyzer	Keysight	N9010B	MY62170337	N/A	Aug. 21, 2024	Mar. 14, 2025~ Mar. 28, 2025	Aug. 20, 2025	Radiation (03CH23-HY)
Hygrometer	TECPEL	DTM-303B	TP211542	N/A	Oct. 21, 2024	Mar. 14, 2025~ Mar. 28, 2025	Oct. 20, 2025	Radiation (03CH23-HY)
Controller	EMEC	EM1000	N/A	Control Turn table & Ant Mast	N/A	Mar. 14, 2025~ Mar. 28, 2025	N/A	Radiation (03CH23-HY)
Antenna Mast	ChainTek	MBS-520-1	N/A	1m~4m	N/A	Mar. 14, 2025~ Mar. 28, 2025	N/A	Radiation (03CH23-HY)
Turn Table	ChainTek	T-200-S-1	N/A	0~360 Degree	N/A	Mar. 14, 2025~ Mar. 28, 2025	N/A	Radiation (03CH23-HY)
Software	Audix	E3 6.09824_2019 122	RK-002348	N/A	N/A	Mar. 14, 2025~ Mar. 28, 2025	N/A	Radiation (03CH23-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	803951/2	9kHz~30MHz	Mar. 05, 2025	Mar. 14, 2025~ Mar. 28, 2025	Mar. 04, 2026	Radiation (03CH23-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	804395/2	N/A	Nov. 26, 2024	Mar. 14, 2025~ Mar. 28, 2025	Nov. 25, 2025	Radiation (03CH23-HY)
RF Cable	EMC	EMC101Y	231115/23111 9/231122	N/A	Nov. 26, 2024	Mar. 14, 2025~ Mar. 28, 2025	Nov. 25, 2025	Radiation (03CH23-HY)
Hygrometer	TECPEL	DTM-303A	TP201996	N/A	Nov. 01, 2024	Feb. 27, 2025~ Mar. 12, 2025	Oct. 30, 2025	Conducted (TH05-HY)
Power Sensor	DARE	RPR3006W	13I00030SNO 31 (NO:182)	9kHz~6GHz	Jan. 09, 2025	Feb. 27, 2025~ Mar. 12, 2025	Jan. 08, 2026	Conducted (TH05-HY)
Signal Analyzer	Rohde & Schwarz	FSV3044	101467	10HZ~44GHZ	Jan. 14, 2025	Feb. 27, 2025~ Mar. 12, 2025	Jan. 13, 2026	Conducted (TH05-HY)
Switch Control Mainframe	Burgeon	ETF-058	EC1300484 (BOX3)	N/A	May 20, 2024	Feb. 27, 2025~ Mar. 12, 2025	May 19, 2025	Conducted (TH05-HY)
Software	Sporton	BTWIFI_Final_ version_24051 3	N/A	Conducted Other Test Item	N/A	Feb. 27, 2025~ Mar. 12, 2025	N/A	Conducted (TH05-HY)



Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
AC Power Source	ACPOWER	AFC-11003G	F317040033	N/A	N/A	Mar. 28, 2025	N/A	Conduction (CO07-HY)
Software	Rohde & Schwarz	EMC32 V10.30	N/A	N/A	N/A	Mar. 28, 2025	N/A	Conduction (CO07-HY)
Pulse Limiter	SCHWARZBECK	VTSD 9561-FN	9561-FN00373	9kHz-200MHz	Oct. 23, 2024	Mar. 28, 2025	Oct. 22, 2025	Conduction (CO07-HY)
RF Cable	HUBER + SUHNER	RG 214/U	1358175	9kHz~30MHz	Mar. 03, 2025	Mar. 28, 2025	Mar. 02, 2026	Conduction (CO07-HY)
Two-Line V-Network	TESEQ	NNB 51	45051	N/A	Mar. 24, 2025	Mar. 28, 2025	Mar. 23, 2026	Conduction (CO07-HY)
EMI Test Receiver	Rohde & Schwarz	ESR3	102317	9kHz~3.6GHz	Sep. 23, 2024	Mar. 28, 2025	Sep. 22, 2025	Conduction (CO07-HY)



5 Measurement Uncertainty

Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	3.7 dB
--	--------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	6.6 dB
--	--------

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 6000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.4 dB
--	--------

Uncertainty of Radiated Emission Measurement (6000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.8 dB
--	--------

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.7 dB
--	--------

Appendix A. Test Result of Conducted Test Items

Test Engineer:	Willy Chang	Temperature:	21~25	°C
Test Date:	2025/02/27~2025/03/12	Relative Humidity:	51~54	%

TEST RESULTS DATA
6dB and 26dB EBW and 99% OBW

UNII-4 single antenna												
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Bandwidth (MHz)		26dB Bandwidth (MHz)		6 dB Bandwidth (MHz)		6 dB Bandwidth Min. Limit (MHz)	Pass/Fail
					Ant 0	Ant 1	Ant 0	Ant 1	Ant 0	Ant 1		
11a	6Mbps	1	169	5845	19.57	-	39.18	-	16.35	-	0.5	Pass
11a	6Mbps	1	173	5865	20.25	-	38.62	-	16.35	-	0.5	Pass
11a	6Mbps	1	177	5885	20.61	-	39.23	-	16.36	-	0.5	Pass
HT20	MCS0	1	169	5845	20.91	-	42.67	-	17.58	-	0.5	Pass
HT20	MCS0	1	173	5865	20.50	-	43.30	-	17.58	-	0.5	Pass
HT20	MCS0	1	177	5885	20.10	-	44.68	-	17.58	-	0.5	Pass
HT40	MCS0	1	167	5835	38.33	-	91.02	-	36.38	-	0.5	Pass
HT40	MCS0	1	175	5875	38.17	-	89.10	-	36.35	-	0.5	Pass
VHT80	MCS0	1	171	5855	76.08	-	162.21	-	76.06	-	0.5	Pass

TEST RESULTS DATA
Average Power Table

UNII-4 single antenna													
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Average Conducted Power (dBm)			DG (dBi)		EIRP Power (dBm)		EIRP Power Limit (dBm)	
					Ant 0	Ant 1	SUM	Ant 0	Ant 1	Ant 0	Ant 1	Ant 0	Ant 1
11a	6Mbps	1	169	5845	18.40	-		0.40	-	18.80	-	30	-
11a	6Mbps	1	173	5865	18.50	-		0.40	-	18.90	-	30	-
11a	6Mbps	1	177	5885	18.50	-		0.40	-	18.90	-	30	-
HT20	MCS0	1	169	5845	18.20	-		0.40	-	18.60	-	30	-
HT20	MCS0	1	173	5865	18.40	-		0.40	-	18.80	-	30	-
HT20	MCS0	1	177	5885	18.20	-		0.40	-	18.60	-	30	-
HT40	MCS0	1	167	5835	17.10	-		0.40	-	17.50	-	30	-
HT40	MCS0	1	175	5875	17.10	-		0.40	-	17.50	-	30	-
VHT20	MCS0	1	169	5845	18.10	-		0.40	-	18.50	-	30	-
VHT20	MCS0	1	173	5865	18.30	-		0.40	-	18.70	-	30	-
VHT20	MCS0	1	177	5885	18.10	-		0.40	-	18.50	-	30	-
VHT40	MCS0	1	167	5835	17.00	-		0.40	-	17.40	-	30	-
VHT40	MCS0	1	175	5875	17.00	-		0.40	-	17.40	-	30	-
VHT80	MCS0	1	171	5855	16.30	-		0.40	-	16.70	-	30	-

TEST RESULTS DATA
Power Spectral Density

UNII-4 single antenna																
Mod.	Data Rate	NTx	CH.	Freq. (MHz)	Duty Factor (dB)		Average Power Density with Duty Factor (dBm/MHz)			DG (dBi)		EIRP PSD (dBm/MHz)		EIRP PSD Limit (dBm/MHz)		Pass /Fail
					Ant 0	Ant 1	Ant 0	Ant 1	SUM	Ant 0	Ant 1	Ant 0	Ant 1	Ant 0	Ant 1	
11a	6Mbps	1	169	5845	0.43	-	6.49	-		0.40	-	6.89	-	14.00	-	Pass
11a	6Mbps	1	173	5865	0.43	-	6.26	-		0.40	-	6.66	-	14.00	-	Pass
11a	6Mbps	1	177	5885	0.43	-	6.33	-		0.40	-	6.73	-	14.00	-	Pass
HT20	MCS0	1	169	5845	0.46	-	6.04	-		0.40	-	6.44	-	14.00	-	Pass
HT20	MCS0	1	173	5865	0.46	-	6.05	-		0.40	-	6.45	-	14.00	-	Pass
HT20	MCS0	1	177	5885	0.46	-	6.03	-		0.40	-	6.43	-	14.00	-	Pass
HT40	MCS0	1	167	5835	0.25	-	1.74	-		0.40	-	2.14	-	14.00	-	Pass
HT40	MCS0	1	175	5875	0.25	-	1.99	-		0.40	-	2.39	-	14.00	-	Pass
VHT80	MCS0	1	171	5855	0.52	-	-1.32	-		0.40	-	-0.92	-	14.00	-	Pass

TEST RESULTS DATA
6dB and 26dB EBW and 99% OBW

UNII-4 single antenna													
Mod.	Data Rate	NTx	CH.	Freq. (MHz)	RU Config	99% Bandwidth (MHz)		26dB Bandwidth (MHz)		6 dB Bandwidth (MHz)		6 dB Bandwidth Min. Limit (MHz)	Pass/Fail
						Ant 0	Ant 1	Ant 0	Ant 1	Ant 0	Ant 1		
HE20	MCS0	1	169	5845	Full	20.03	-	39.83	-	19.01	-	0.5	Pass
HE20	MCS0	1	173	5865	Full	19.86	-	43.40	-	19.01	-	0.5	Pass
HE20	MCS0	1	177	5885	Full	19.71	-	43.02	-	18.97	-	0.5	Pass
HE40	MCS0	1	167	5835	Full	38.34	-	75.76	-	37.63	-	0.5	Pass
HE40	MCS0	1	175	5875	Full	38.31	-	81.18	-	37.55	-	0.5	Pass
HE80	MCS0	1	171	5855	Full	77.28	-	103.52	-	77.14	-	0.5	Pass

TEST RESULTS DATA
Average Power Table



UNII-4 single antenna														
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config	Average Conducted Power (dBm)			DG (dBi)		EIRP Power (dBm)		EIRP Power Limit (dBm)	
						Ant 0	Ant 1	SUM	Ant 0	Ant 1	Ant 0	Ant 1	Ant 0	Ant 1
HE20	MCS0	1	169	5845	Full	18.30	-		0.40	-	18.70	-	30	-
HE20	MCS0	1	169	5845	26/0	8.80	-		0.40	-	9.20	-	30	-
HE20	MCS0	1	169	5845	52/37	11.80	-		0.40	-	12.20	-	30	-
HE20	MCS0	1	169	5845	106/53	15.10	-		0.40	-	15.50	-	30	-
HE20	MCS0	1	173	5865	Full	18.50	-		0.40	-	18.90	-	30	-
HE20	MCS0	1	173	5865	26/4	9.20	-		0.40	-	9.60	-	30	-
HE20	MCS0	1	173	5865	52/38	11.70	-		0.40	-	12.10	-	30	-
HE20	MCS0	1	173	5865	106/53	14.80	-		0.40	-	15.20	-	30	-
HE20	MCS0	1	177	5885	Full	18.30	-		0.40	-	18.70	-	30	-
HE20	MCS0	1	177	5885	26/8	9.00	-		0.40	-	9.40	-	30	-
HE20	MCS0	1	177	5885	52/40	11.20	-		0.40	-	11.60	-	30	-
HE20	MCS0	1	177	5885	106/54	14.70	-		0.40	-	15.10	-	30	-
HE40	MCS0	1	167	5835	Full	17.20	-		0.40	-	17.60	-	30	-
HE40	MCS0	1	175	5875	Full	17.20	-		0.40	-	17.60	-	30	-
HE80	MCS0	1	171	5855	Full	16.40	-		0.40	-	16.80	-	30	-

TEST RESULTS DATA
Power Spectral Density

UNII-4 single antenna																	
Mod.	Data Rate	Ntx	CH.	Freq. (MHz)	RU Config	Duty Factor (dB)		Average Power Density with Duty Factor (dBm/MHz)			DG (dBi)		EIRP PSD (dBm/MHz)		EIRP PSD Limit (dBm/MHz)		Pass /Fail
						Ant 0	Ant 1	Ant 0	Ant 1	SUM	Ant 0	Ant 1	Ant 0	Ant 1	Ant 0	Ant 1	
HE20	MCS0	1	169	5845	Full	0.58	-	5.84	-		0.40	-	6.24	-	14.00	-	Pass
HE20	MCS0	1	169	5845	26/0	0.75	-	5.76	-		0.40	-	6.16	-	14.00	-	Pass
HE20	MCS0	1	169	5845	52/37	0.77	-	5.72	-		0.40	-	6.12	-	14.00	-	Pass
HE20	MCS0	1	169	5845	106/53	0.83	-	5.73	-		0.40	-	6.13	-	14.00	-	Pass
HE20	MCS0	1	173	5865	Full	0.58	-	5.80	-		0.40	-	6.20	-	14.00	-	Pass
HE20	MCS0	1	173	5865	26/4	0.75	-	5.51	-		0.40	-	5.91	-	14.00	-	Pass
HE20	MCS0	1	173	5865	52/38	0.77	-	5.66	-		0.40	-	6.06	-	14.00	-	Pass
HE20	MCS0	1	173	5865	106/53	0.83	-	5.69	-		0.40	-	6.09	-	14.00	-	Pass
HE20	MCS0	1	177	5885	Full	0.58	-	5.62	-		0.40	-	6.02	-	14.00	-	Pass
HE20	MCS0	1	177	5885	26/8	0.75	-	5.55	-		0.40	-	5.95	-	14.00	-	Pass
HE20	MCS0	1	177	5885	52/40	0.77	-	5.32	-		0.40	-	5.72	-	14.00	-	Pass
HE20	MCS0	1	177	5885	106/54	0.83	-	5.58	-		0.40	-	5.98	-	14.00	-	Pass
HE40	MCS0	1	167	5835	Full	0.32	-	1.81	-		0.40	-	2.21	-	14.00	-	Pass
HE40	MCS0	1	175	5875	Full	0.32	-	2.06	-		0.40	-	2.46	-	14.00	-	Pass
HE80	MCS0	1	171	5855	Full	0.62	-	-1.21	-		0.40	-	-0.81	-	14.00	-	Pass




6dB Bandwidth






<802.11n HT20>

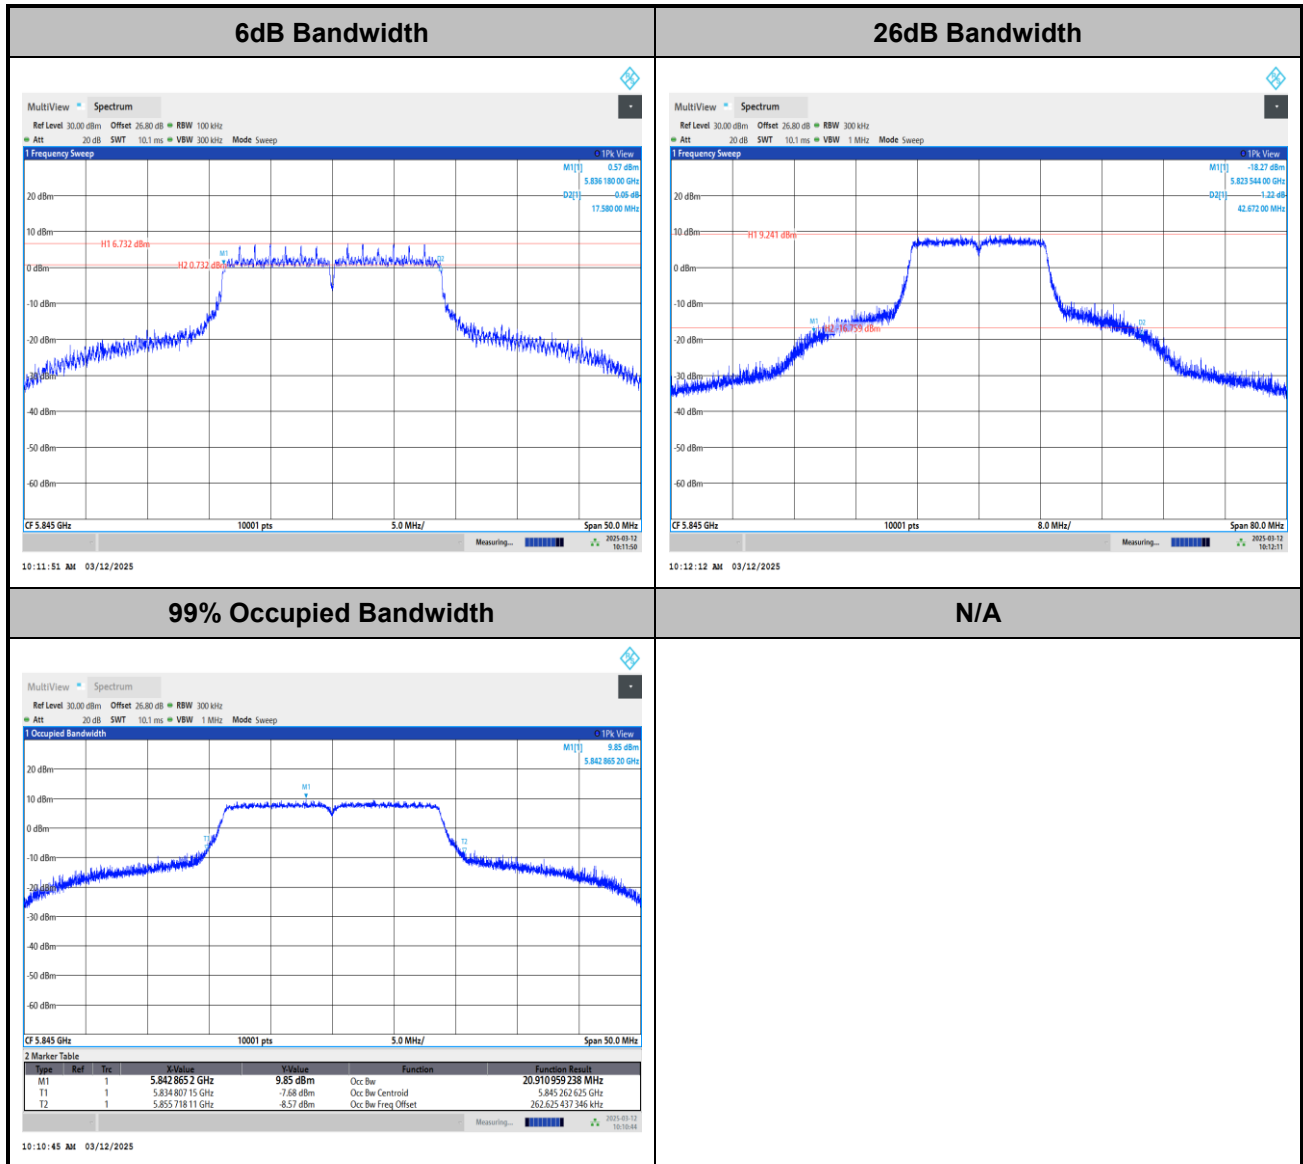

Note: The occupied channel bandwidth is maintained within the band of operation.


<802.11n HT40>

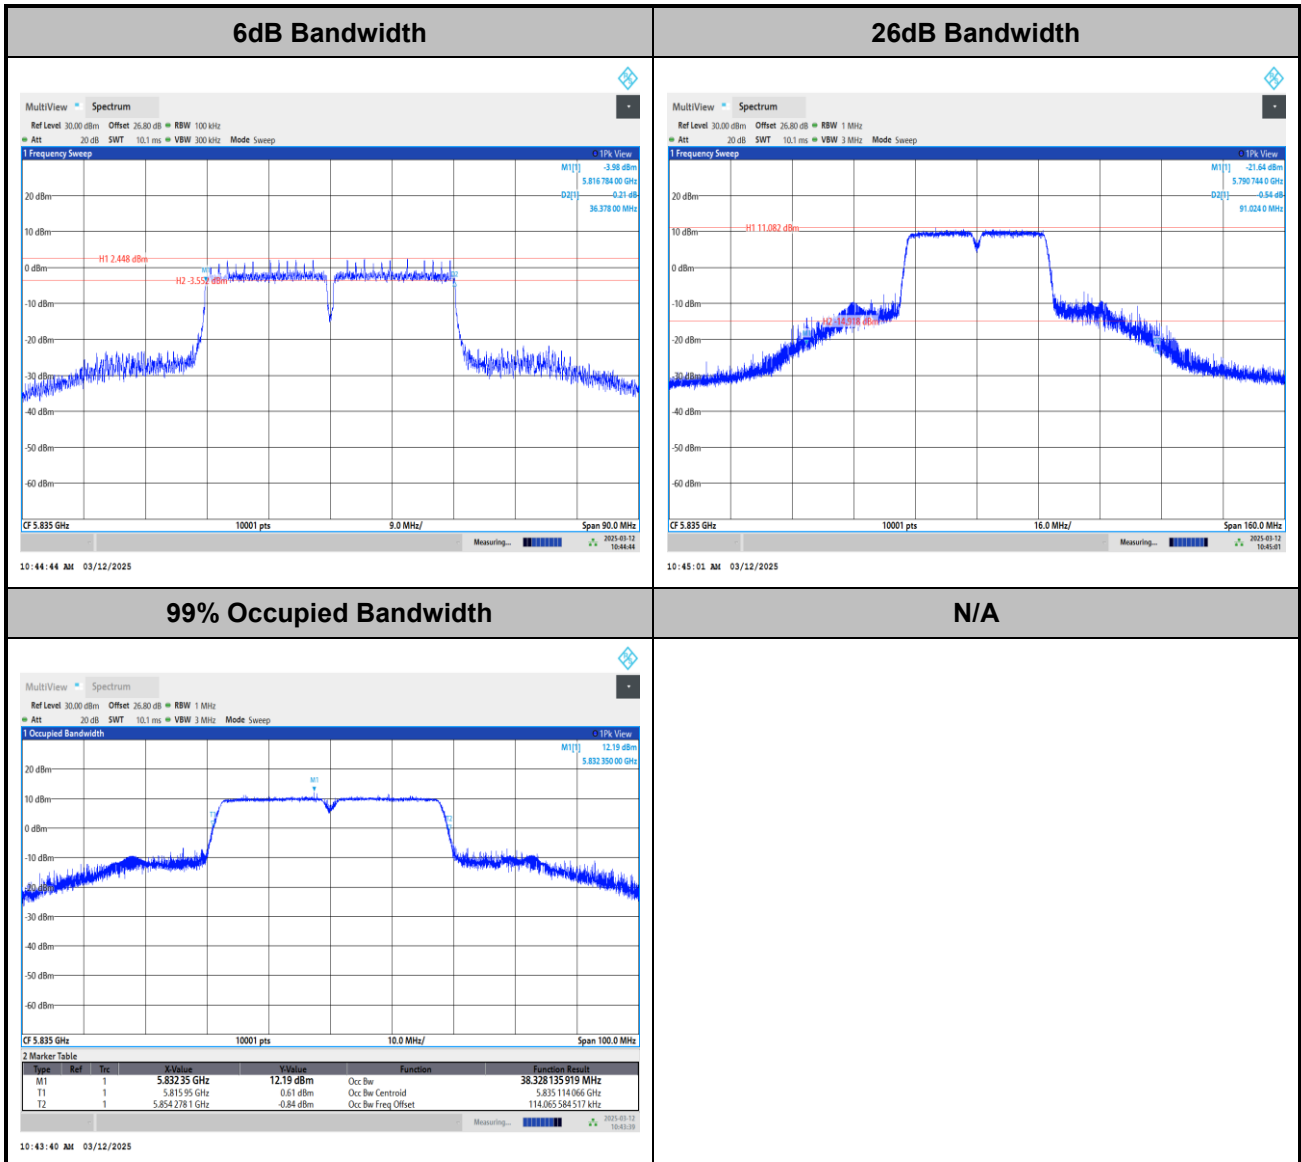

Note: The occupied channel bandwidth is maintained within the band of operation.




<802.11ac VHT80>

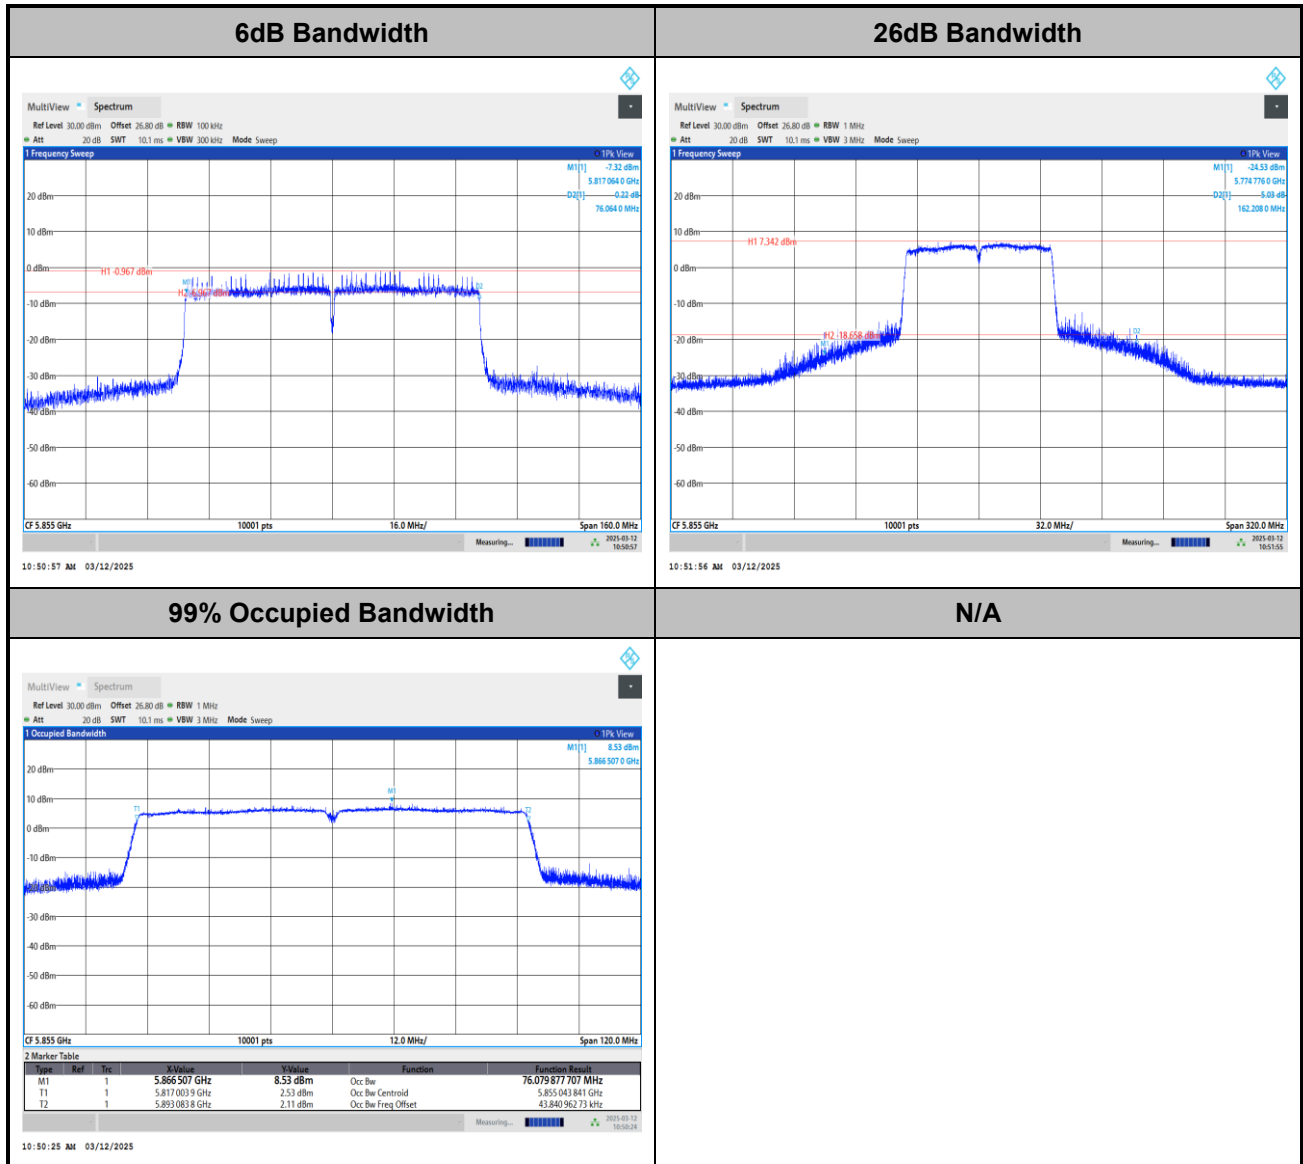

Note: The occupied channel bandwidth is maintained within the band of operation.




<802.11ax HE20>

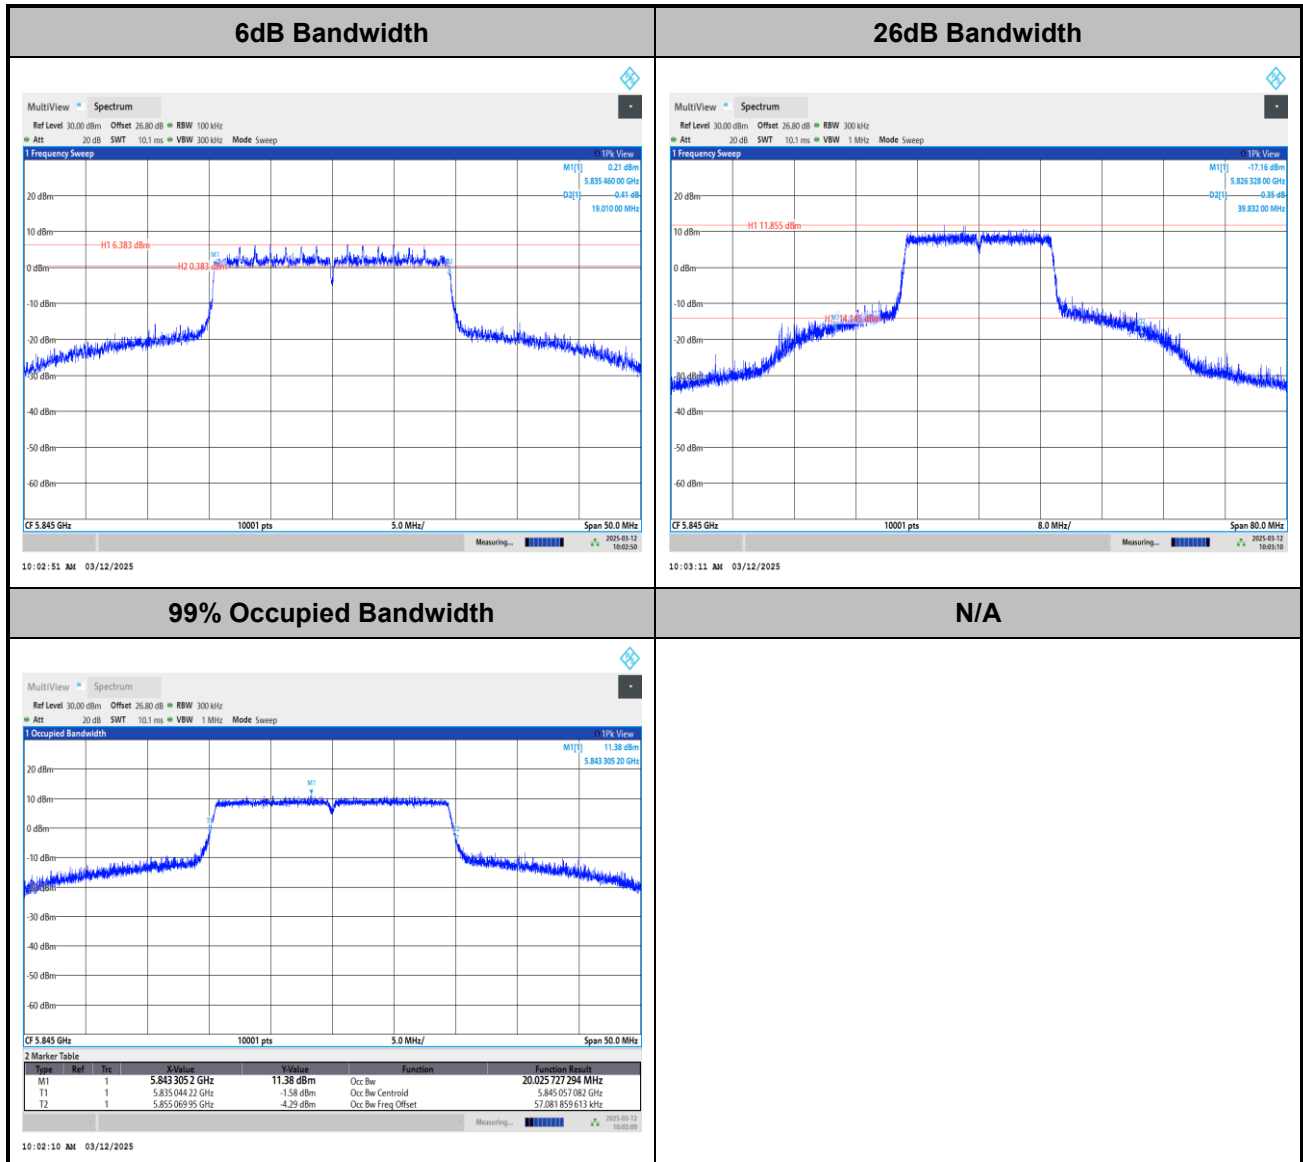

Note: The occupied channel bandwidth is maintained within the band of operation.




<802.11ax HE40>

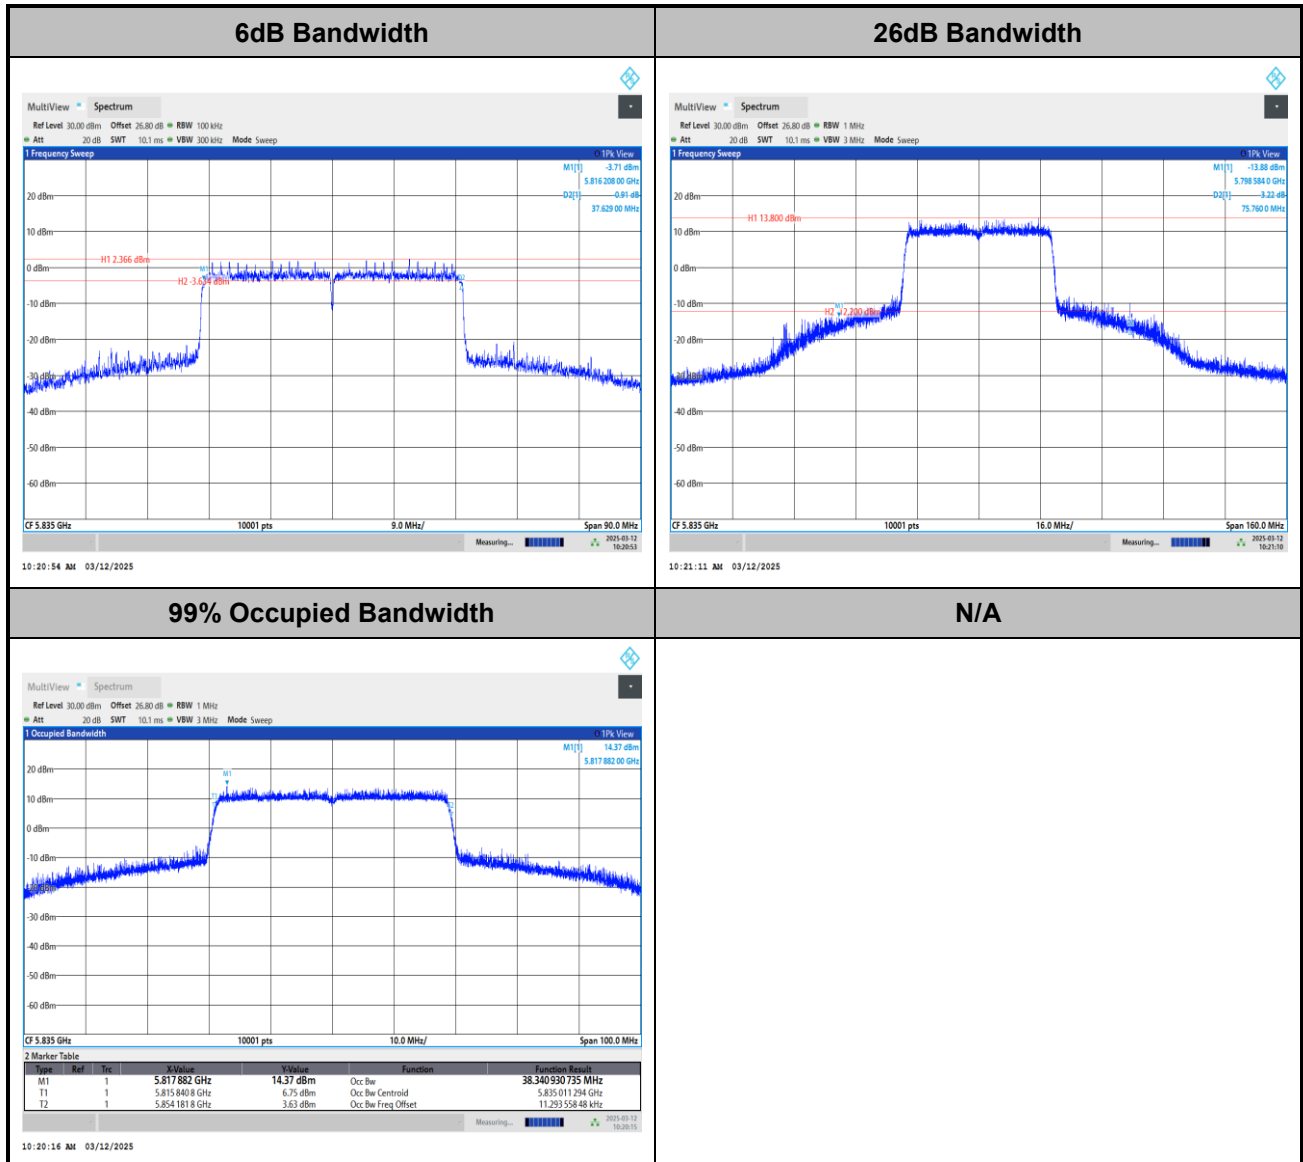

Note: The occupied channel bandwidth is maintained within the band of operation.


<802.11ax HE80>

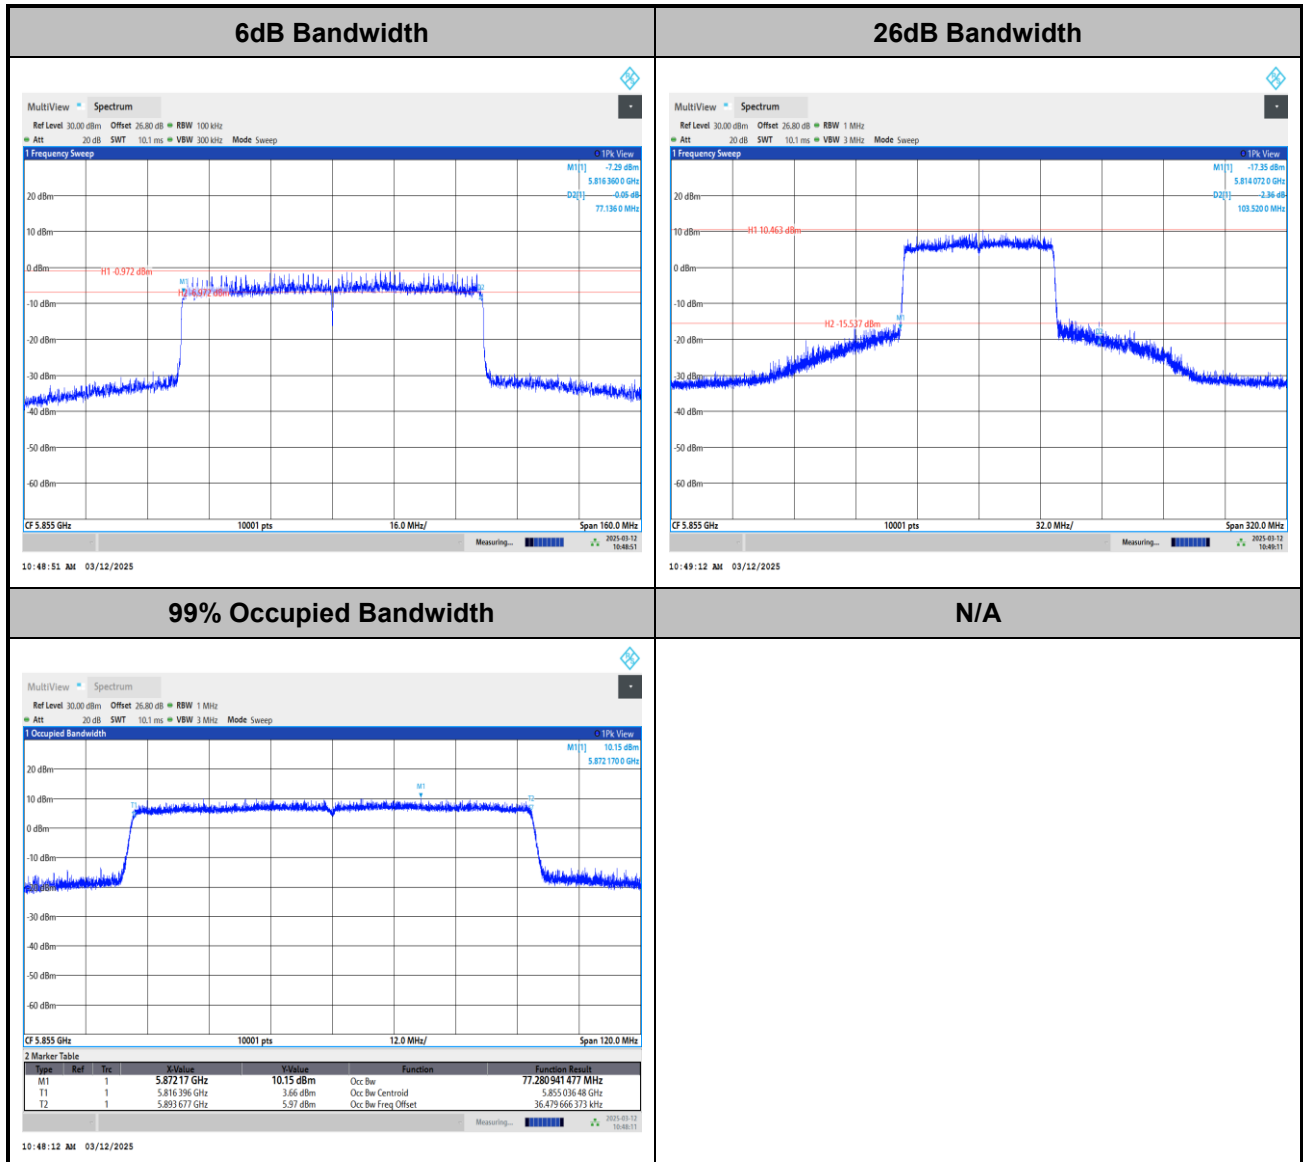


Note: The occupied channel bandwidth is maintained within the band of operation.

**Test Result of Power Spectral Density**

<802.11a>

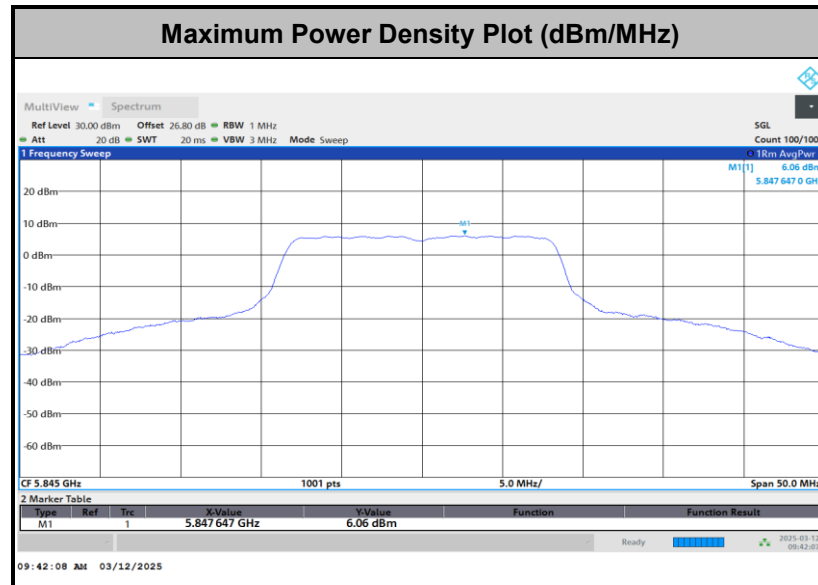


<802.11n HT20>

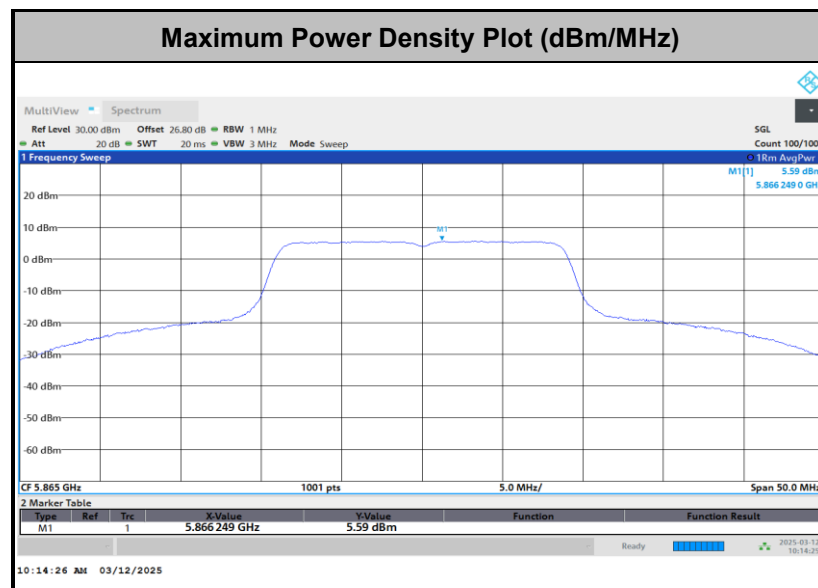




<802.11n HT40>

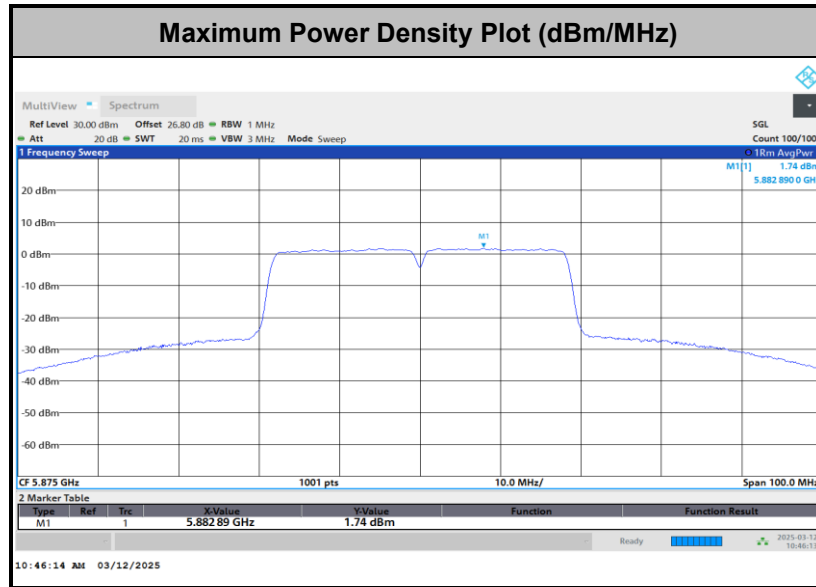


<802.11ac VHT80>

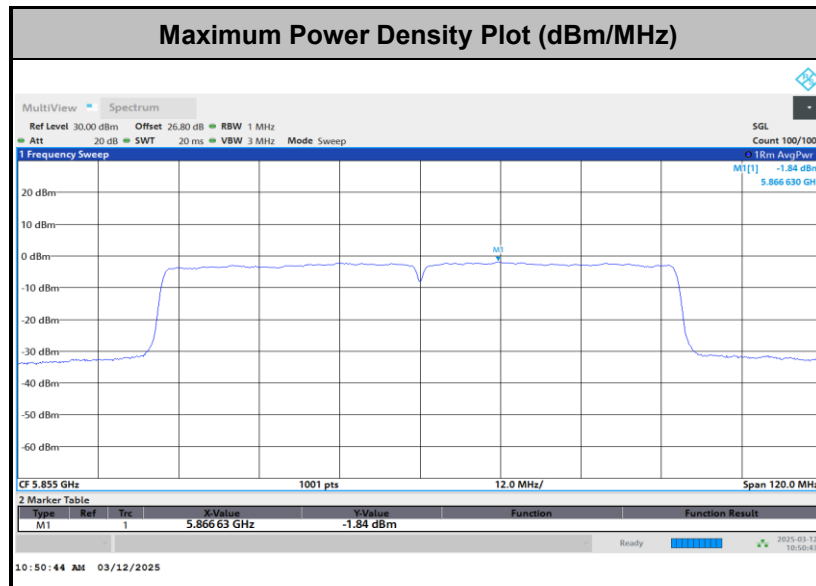




<802.11ax HE20>

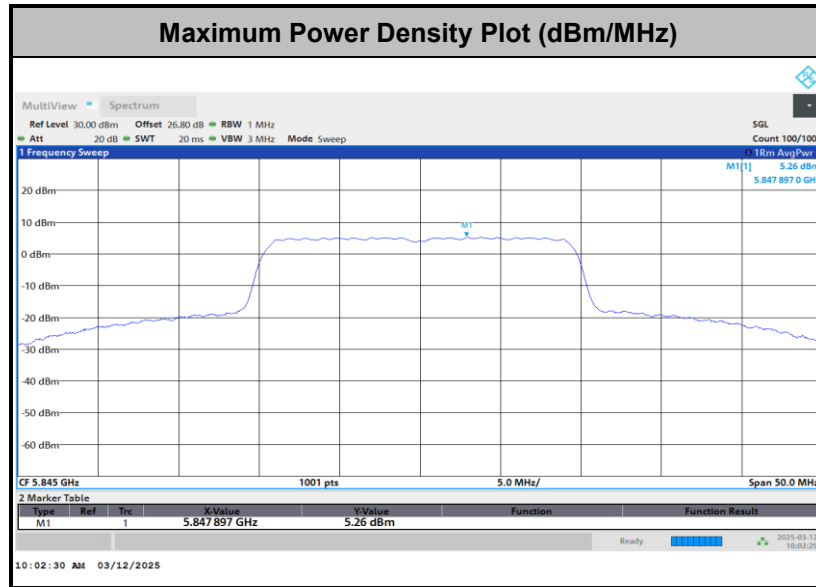


<802.11ax HE40>

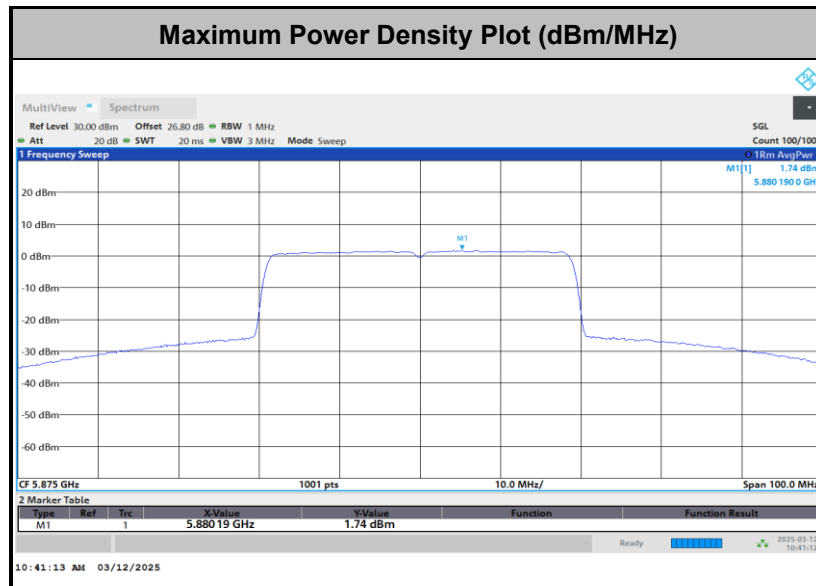



<802.11ax HE80>

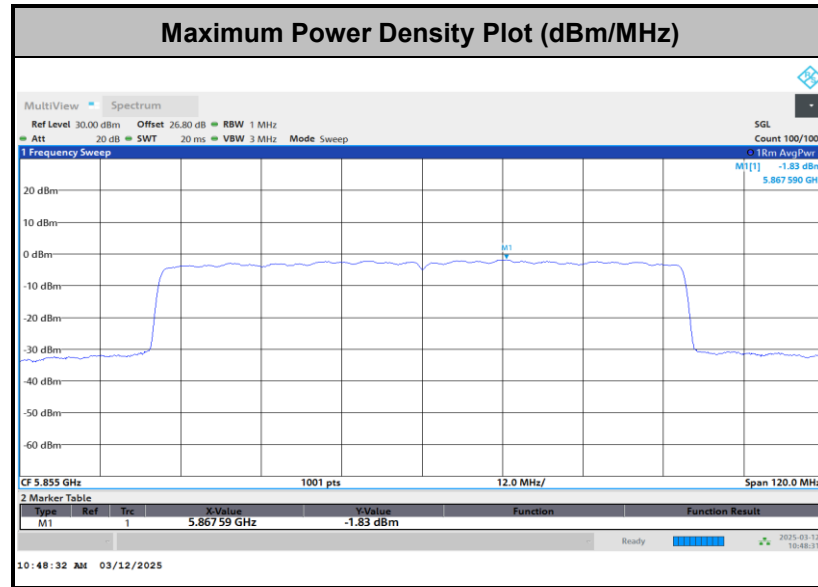



Appendix B. AC Conducted Emission Test Results


Test Engineer :	Louis Chung	Temperature :	21.3~22.4℃
		Relative Humidity :	53.9~64.4%

EUT Information

Test Mode :
Test Voltage :
Phase :

Mode 1
120Vac/60Hz
Line

Full Spectrum

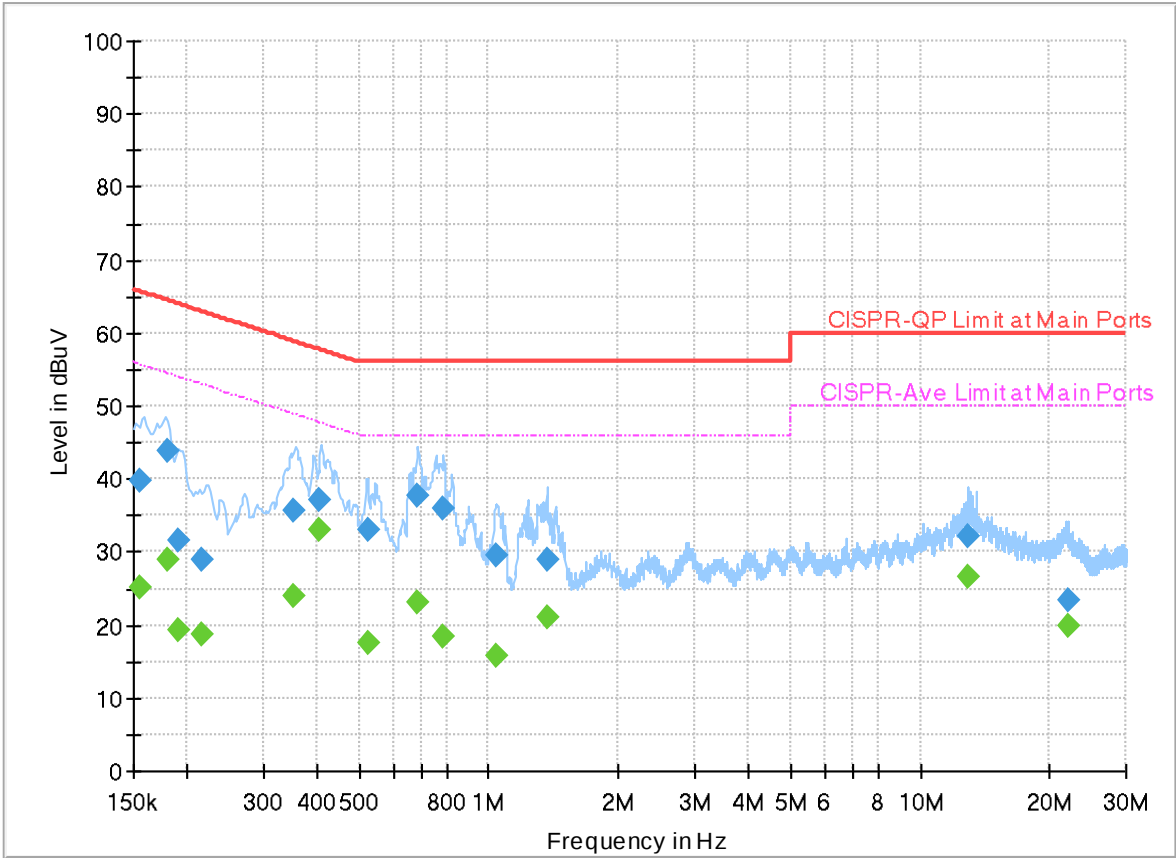

Final_Result


Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	PE	Corr. (dB)
0.154500	---	25.10	55.75	30.65	L1	FLO	20.0
0.154500	39.69	---	65.75	26.06	L1	FLO	20.0
0.179430	---	28.97	54.51	25.54	L1	FLO	20.0
0.179430	43.97	---	64.51	20.54	L1	FLO	20.0
0.190140	---	19.32	54.03	34.71	L1	FLO	20.0
0.190140	31.63	---	64.03	32.40	L1	FLO	20.0
0.215250	---	18.67	53.00	34.33	L1	FLO	20.0
0.215250	29.05	---	63.00	33.95	L1	FLO	20.0
0.353220	---	23.90	48.89	24.99	L1	FLO	20.0
0.353220	35.57	---	58.89	23.32	L1	FLO	20.0
0.405330	---	33.05	47.74	14.69	L1	FLO	20.0
0.405330	37.22	---	57.74	20.52	L1	FLO	20.0
0.525570	---	17.54	46.00	28.46	L1	FLO	20.0
0.525570	33.05	---	56.00	22.95	L1	FLO	20.0
0.681990	---	23.07	46.00	22.93	L1	FLO	20.0
0.681990	37.72	---	56.00	18.28	L1	FLO	20.0
0.785400	---	18.29	46.00	27.71	L1	FLO	20.0
0.785400	35.82	---	56.00	20.18	L1	FLO	20.0
1.039920	---	15.87	46.00	30.13	L1	FLO	20.0

1.039920	29.41	---	56.00	26.59	L1	FLO	20.0
1.369500	---	21.10	46.00	24.90	L1	FLO	20.0
1.369500	28.93	---	56.00	27.07	L1	FLO	20.0
12.958260	---	26.66	50.00	23.34	L1	FLO	20.5
12.958260	32.11	---	60.00	27.89	L1	FLO	20.5
21.944310	---	19.85	50.00	30.15	L1	FLO	20.8
21.944310	23.38	---	60.00	36.62	L1	FLO	20.8

EUT Information

Test Mode : Mode 1
Test Voltage : 120Vac/60Hz
Phase : Neutral

Full Spectrum

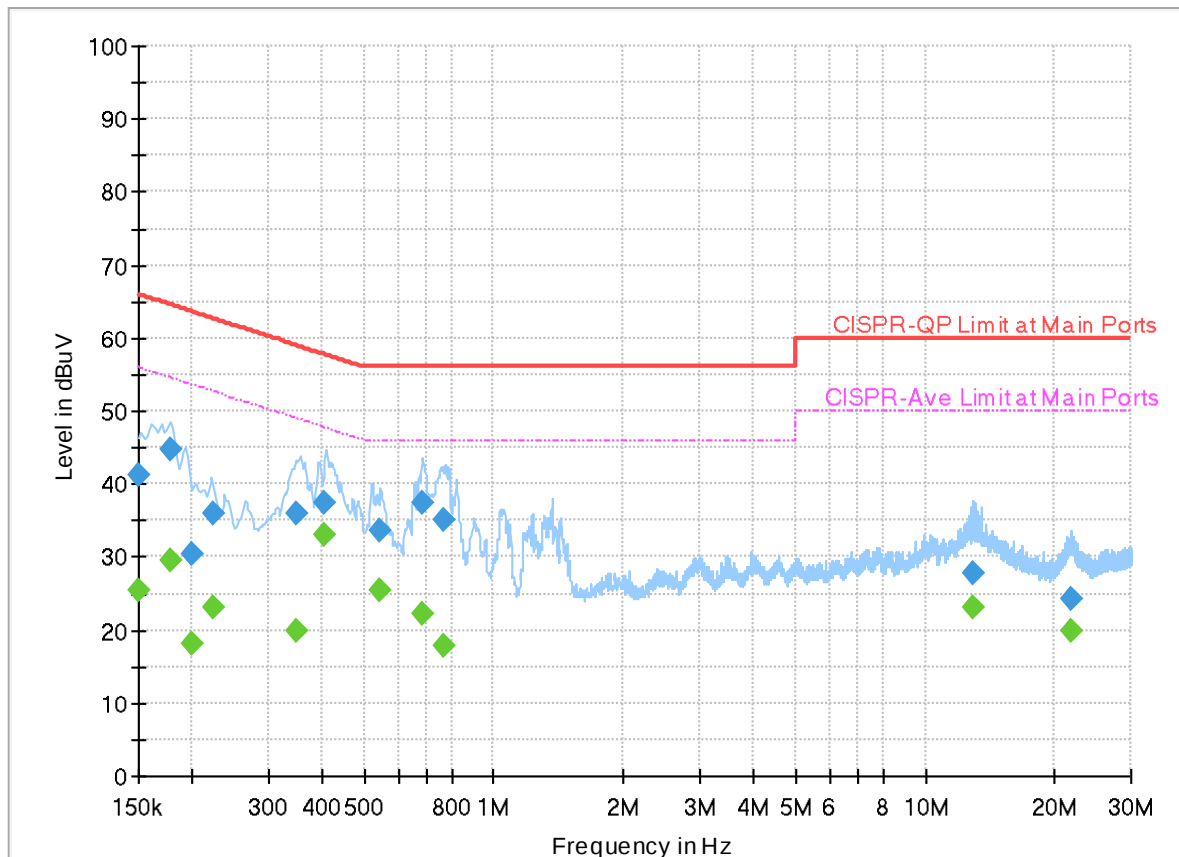

Final_Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	PE	Corr. (dB)
0.150000	---	25.54	56.00	30.46	N	FLO	20.0
0.150000	41.11	---	66.00	24.89	N	FLO	20.0
0.178260	---	29.54	54.57	25.03	N	FLO	20.0
0.178260	44.82	---	64.57	19.75	N	FLO	20.0
0.199500	---	18.25	53.63	35.38	N	FLO	20.0
0.199500	30.50	---	63.63	33.13	N	FLO	20.0
0.224160	---	23.15	52.66	29.51	N	FLO	20.0
0.224160	35.92	---	62.66	26.74	N	FLO	20.0
0.350250	---	19.88	48.96	29.08	N	FLO	20.0
0.350250	36.07	---	58.96	22.89	N	FLO	20.0
0.405420	---	33.13	47.74	14.61	N	FLO	20.0
0.405420	37.34	---	57.74	20.40	N	FLO	20.0
0.545640	---	25.58	46.00	20.42	N	FLO	20.0
0.545640	33.64	---	56.00	22.36	N	FLO	20.0
0.681900	---	22.25	46.00	23.75	N	FLO	20.0
0.681900	37.53	---	56.00	18.47	N	FLO	20.0
0.768570	---	17.72	46.00	28.28	N	FLO	20.0
0.768570	35.03	---	56.00	20.97	N	FLO	20.0
12.850980	---	23.08	50.00	26.92	N	FLO	20.5

12.850980	27.66	---	60.00	32.34	N	FLO	20.5
21.900750	---	19.74	50.00	30.26	N	FLO	20.8
21.900750	24.32	---	60.00	35.68	N	FLO	20.8



Appendix C. Radiated Spurious Emission Test Data

Test Engineer :	Leo Li, Karl Hou and Lucifer Jiang	Temperature :	21.7~22.5°C
		Relative Humidity :	51~57%

Note symbol

-L	Low channel location
-R	High channel location

**C1. Radiated Spurious Emission Test Modes**

Mode	Band	Band (GHz)	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 1	U-NII-4	5.85-5.895	802.11a	169	5845	6Mbps	-	-
Mode 2	U-NII-4	5.85-5.895	802.11a	173	5865	6Mbps	-	-
Mode 3	U-NII-4	5.85-5.895	802.11a	177	5885	6Mbps	-	-
Mode 4	U-NII-4	5.85-5.895	802.11n HT20	169	5845	MCS0	-	-
Mode 5	U-NII-4	5.85-5.895	802.11n HT20	173	5865	MCS0	-	-
Mode 6	U-NII-4	5.85-5.895	802.11n HT20	177	5885	MCS0	-	-
Mode 7	U-NII-4	5.85-5.895	802.11n HT40	167	5835	MCS0	-	-
Mode 8	U-NII-4	5.85-5.895	802.11n HT40	175	5875	MCS0	-	-
Mode 9	U-NII-4	5.85-5.895	802.11ac VHT80	171	5855	MCS0	-	-
Mode 10	U-NII-4	5.85-5.895	802.11ax HE20	169	5845	MCS0	Full RU	-
Mode 11	U-NII-4	5.85-5.895	802.11ax HE20	173	5865	MCS0	Full RU	-



Mode	Band	Band (GHz)	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 12	U-NII-4	5.85-5.895	802.11ax HE20	177	5885	MCS0	Full RU	-
Mode 13	U-NII-4	5.85-5.895	802.11ax HE20	177	5885	MCS0	Partial RU 26/8	-
Mode 14	U-NII-4	5.85-5.895	802.11ax HE20	177	5885	MCS0	Partial RU 52/40	-
Mode 15	U-NII-4	5.85-5.895	802.11ax HE20	177	5885	MCS0	Partial RU 106/54	-
Mode 16	U-NII-4	5.85-5.895	802.11ax HE40	167	5835	MCS0	Full RU	-
Mode 17	U-NII-4	5.85-5.895	802.11ax HE40	175	5875	MCS0	Full RU	-
Mode 18	U-NII-4	5.85-5.895	802.11ax HE80	171	5855	MCS0	Full RU	-
Mode 19	U-NII-4	5.85-5.895	802.11ax HE80	171	5855	MCS0	Full RU	LF
Mode 20	U-NII-4	5.85-5.895	802.11ax HE80	171	5855	MCS0	Full RU	SHF



C2. Summary of each worse mode

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	RU	Remark
1	802.11a	169	5639.53	52.47	68.20	-15.73	H	Peak	Pass	-	Band Edge
	802.11a	169	11690.00	41.45	54.00	-12.55	H	Avg.	Pass	-	Harmonic
2	802.11a	173	5618.00	52.26	68.20	-15.94	H	Peak	Pass	-	Band Edge
	802.11a	173	11730.00	41.16	54.00	-12.84	H	Avg.	Pass	-	Harmonic
3	802.11a	177	5895.25	81.28	90.02	-8.74	H	Avg.	Pass	-	Band Edge
	802.11a	177	11770.00	41.27	54.00	-12.73	H	Avg.	Pass	-	Harmonic
4	802.11n HT20	169	5600.89	52.22	68.20	-15.98	H	Peak	Pass	-	Band Edge
	802.11n HT20	169	11690.00	41.87	54.00	-12.13	H	Avg.	Pass	-	Harmonic
5	802.11n HT20	173	5618.88	52.10	68.20	-16.10	V	Peak	Pass	-	Band Edge
	802.11n HT20	173	11730.00	41.27	54.00	-12.73	H	Avg.	Pass	-	Harmonic
6	802.11n HT20	177	5895.25	82.23	90.02	-7.79	H	Avg.	Pass	-	Band Edge



Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	RU	Remark
6	802.11n HT20	177	11770.00	41.25	54.00	-12.75	V	Avg.	Pass	-	Harmonic
7	802.11n HT40	167	5619.77	52.46	68.20	-15.74	H	Peak	Pass	-	Band Edge
	802.11n HT40	167	11670.00	41.36	54.00	-12.64	H	Avg.	Pass	-	Harmonic
8	802.11n HT40	175	5925.00	59.32	68.20	-8.88	H	Avg.	Pass	-	Band Edge
	802.11n HT40	175	11750.00	41.26	54.00	-12.74	V	Avg.	Pass	-	Harmonic
9	802.11ac VHT80	171	5925.50	61.93	68.20	-6.27	H	Avg.	Pass	-	Band Edge
	802.11ac VHT80	171	11710.00	41.27	54.00	-12.73	H	Avg.	Pass	-	Harmonic
10	802.11ax HE20	169	5631.27	52.09	68.20	-16.11	V	Peak	Pass	Full RU	Band Edge
	802.11ax HE20	169	11690.00	41.96	54.00	-12.04	V	Avg.	Pass	Full RU	Harmonic
11	802.11ax HE20	173	5624.19	51.76	68.20	-16.44	H	Peak	Pass	Full RU	Band Edge
	802.11ax HE20	173	11730.00	41.83	54.00	-12.17	H	Avg.	Pass	Full RU	Harmonic






Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	RU	Remark
12	802.11ax HE20	177	5925.50	53.81	68.20	-14.39	H	Avg.	Pass	Full RU	Band Edge
	802.11ax HE20	177	11770.00	41.92	54.00	-12.08	H	Avg.	Pass	Full RU	Harmonic
13	802.11ax HE20	177	5620.95	52.09	68.20	-16.11	V	Peak	Pass	Partial RU 26/8	Band Edge
14	802.11ax HE20	177	5630.68	52.75	68.20	-15.45	V	Peak	Pass	Partial RU 52/40	Band Edge
15	802.11ax HE20	177	5625.96	51.24	68.20	-16.96	V	Peak	Pass	Partial RU 106/54	Band Edge
16	802.11ax HE40	167	5641.01	51.95	68.20	-16.25	V	Peak	Pass	Full RU	Band Edge
	802.11ax HE40	167	11670.00	41.29	54.00	-12.71	V	Avg.	Pass	Full RU	Harmonic
17	802.11ax HE40	175	5925.00	60.00	68.20	-8.20	H	Avg.	Pass	Full RU	Band Edge
	802.11ax HE40	175	11750.00	41.25	54.00	-12.75	V	Avg.	Pass	Full RU	Harmonic
18	802.11ax HE80	171	5928.00	62.08	68.20	-6.12	H	Avg.	Pass	Full RU	Band Edge
	802.11ax HE80	171	11710.00	41.31	54.00	-12.69	H	Avg.	Pass	Full RU	Harmonic



Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	RU	Remark
19	802.11ax HE80	171	33.88	32.86	40.00	-7.14	V	Peak	Pass	Full RU	LF
20	802.11ax HE80	171	39381.22	38.69	54.00	-15.31	V	Avg.	Pass	Full RU	SHF

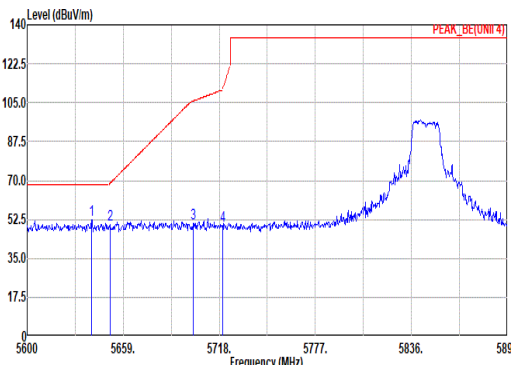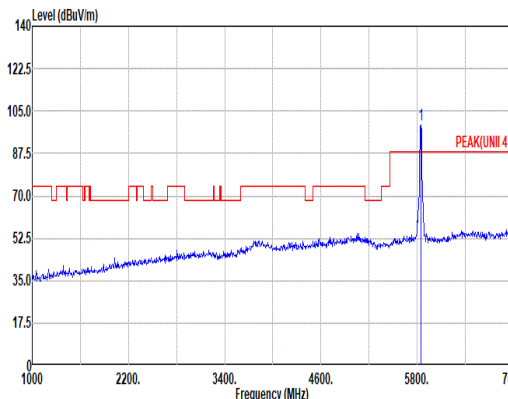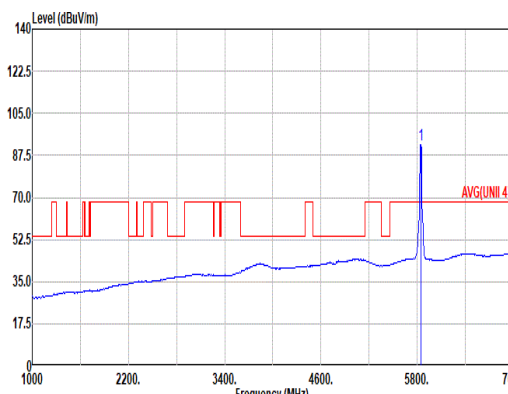

Mode	1																																																																																																															
	Band Edge - L																																																																																																															
	U-NII-4_5.85-5.895_802.11a_CH169_5845MHz																																																																																																															
Pol.	Horizontal	Fundamental																																																																																																														
Peak	 Site : 03CH23-HY Condition: PEAK_BE(UNII 4) 3m DRH18-E_LE2C05A18EN_240620 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th></th></tr><tr><td>1</td><td>5639.53</td><td>52.47</td><td>68.20</td><td>-15.73</td><td>38.41</td><td>33.44</td><td>11.17</td><td>34.45</td><td>3.90 300 344 Peak</td></tr><tr><td>2</td><td>5651.04</td><td>50.32</td><td>68.97</td><td>-18.65</td><td>36.17</td><td>33.51</td><td>11.18</td><td>34.45</td><td>3.91 300 344 Peak</td></tr><tr><td>3</td><td>5701.78</td><td>50.58</td><td>105.70</td><td>-55.12</td><td>36.12</td><td>33.00</td><td>11.20</td><td>34.45</td><td>3.91 300 344 Peak</td></tr><tr><td>4</td><td>5728.07</td><td>49.92</td><td>110.95</td><td>-61.03</td><td>35.42</td><td>33.84</td><td>11.20</td><td>34.45</td><td>3.91 300 344 Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB		1	5639.53	52.47	68.20	-15.73	38.41	33.44	11.17	34.45	3.90 300 344 Peak	2	5651.04	50.32	68.97	-18.65	36.17	33.51	11.18	34.45	3.91 300 344 Peak	3	5701.78	50.58	105.70	-55.12	36.12	33.00	11.20	34.45	3.91 300 344 Peak	4	5728.07	49.92	110.95	-61.03	35.42	33.84	11.20	34.45	3.91 300 344 Peak	 Site : 03CH23-HY Condition: PEAK(UNII 4) 3m DRH18-E_LE2C05A18EN_240620 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th></th></tr><tr><td>1</td><td>5845.00</td><td>99.35</td><td>-----</td><td>-----</td><td>84.65</td><td>33.98</td><td>11.27</td><td>34.46</td><td>3.91 300 344 Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB		1	5845.00	99.35	-----	-----	84.65	33.98	11.27	34.46	3.91 300 344 Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																						
Freq	Level	Line	Level	Factor	Loss	Factor																																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																																								
1	5639.53	52.47	68.20	-15.73	38.41	33.44	11.17	34.45	3.90 300 344 Peak																																																																																																							
2	5651.04	50.32	68.97	-18.65	36.17	33.51	11.18	34.45	3.91 300 344 Peak																																																																																																							
3	5701.78	50.58	105.70	-55.12	36.12	33.00	11.20	34.45	3.91 300 344 Peak																																																																																																							
4	5728.07	49.92	110.95	-61.03	35.42	33.84	11.20	34.45	3.91 300 344 Peak																																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																							
Freq	Level	Line	Level	Factor	Loss	Factor																																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																																								
1	5845.00	99.35	-----	-----	84.65	33.98	11.27	34.46	3.91 300 344 Peak																																																																																																							
Avg	Blank	 Site : 03CH23-HY Condition: AVG(UNII 4) 3m DRH18-E_LE2C05A18EN_240620 HORIZONTAL : RBW:1000.000kHz VBW:0.750kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th></th></tr><tr><td>1</td><td>5845.00</td><td>91.78</td><td>-----</td><td>-----</td><td>77.08</td><td>33.98</td><td>11.27</td><td>34.46</td><td>3.91 300 344 Average</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB		1	5845.00	91.78	-----	-----	77.08	33.98	11.27	34.46	3.91 300 344 Average																																																																						
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																							
Freq	Level	Line	Level	Factor	Loss	Factor																																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																																								
1	5845.00	91.78	-----	-----	77.08	33.98	11.27	34.46	3.91 300 344 Average																																																																																																							





		1									
Mode	Band Edge - R										
	U-NII-4_5.85-5.895_802.11a_CH169_5845MHz										
Pol.	Horizontal										
Peak											



Mode	1																																																																																																															
	Band Edge - L																																																																																																															
	U-NII-4_5.85-5.895_802.11a_CH169_5845MHz																																																																																																															
Pol.	Vertical	Fundamental																																																																																																														
Peak	Level (dBuV/m) vs Frequency (MHz) from 5600 to 5895 MHz. The plot shows a blue signal line with several peaks and a red limit line. A peak at 5845 MHz is labeled 'PEAK_BE(UNII 4)'. Site : 03CH23-HY Condition: PEAK_BE(UNII 4) 3m DRH18-E_LE2C05A18EN_240620 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 5612.98</td><td>51.75</td><td>68.20 -16.45</td><td>37.86</td><td>33.28</td><td>11.16</td><td>34.45</td><td>3.90</td><td>183</td><td>149 Peak</td></tr><tr><td>2 5650.15</td><td>49.96</td><td>68.31 -18.35</td><td>35.82</td><td>33.50</td><td>11.18</td><td>34.45</td><td>3.91</td><td>183</td><td>149 Peak</td></tr><tr><td>3 5700.30</td><td>50.70</td><td>105.28 -54.58</td><td>36.24</td><td>33.00</td><td>11.20</td><td>34.45</td><td>3.91</td><td>183</td><td>149 Peak</td></tr><tr><td>4 5720.07</td><td>49.98</td><td>110.95 -60.97</td><td>35.48</td><td>33.84</td><td>11.20</td><td>34.45</td><td>3.91</td><td>183</td><td>149 Peak</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor				MHz	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 5612.98	51.75	68.20 -16.45	37.86	33.28	11.16	34.45	3.90	183	149 Peak	2 5650.15	49.96	68.31 -18.35	35.82	33.50	11.18	34.45	3.91	183	149 Peak	3 5700.30	50.70	105.28 -54.58	36.24	33.00	11.20	34.45	3.91	183	149 Peak	4 5720.07	49.98	110.95 -60.97	35.48	33.84	11.20	34.45	3.91	183	149 Peak	Level (dBuV/m) vs Frequency (MHz) from 1000 to 7000 MHz. The plot shows a blue signal line with a sharp peak at 5845 MHz labeled 'PEAK(UNII 4)' and a red limit line. Site : 03CH23-HY Condition: PEAK(UNII 4) 3m DRH18-E_LE2C05A18EN_240620 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 5845.00</td><td>104.05</td><td>-----</td><td>89.33</td><td>34.00</td><td>11.28</td><td>34.46</td><td>3.90</td><td>183</td><td>149 Peak</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor				MHz	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 5845.00	104.05	-----	89.33	34.00	11.28	34.46	3.90	183	149 Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																						
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																										
MHz	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																							
1 5612.98	51.75	68.20 -16.45	37.86	33.28	11.16	34.45	3.90	183	149 Peak																																																																																																							
2 5650.15	49.96	68.31 -18.35	35.82	33.50	11.18	34.45	3.91	183	149 Peak																																																																																																							
3 5700.30	50.70	105.28 -54.58	36.24	33.00	11.20	34.45	3.91	183	149 Peak																																																																																																							
4 5720.07	49.98	110.95 -60.97	35.48	33.84	11.20	34.45	3.91	183	149 Peak																																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																							
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																										
MHz	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																							
1 5845.00	104.05	-----	89.33	34.00	11.28	34.46	3.90	183	149 Peak																																																																																																							
Avg	Blank	Level (dBuV/m) vs Frequency (MHz) from 1000 to 7000 MHz. The plot shows a blue signal line with a peak at 5845 MHz labeled 'AVG(UNII 4)' and a red limit line. Site : 03CH23-HY Condition: AVG(UNII 4) 3m DRH18-E_LE2C05A18EN_240620 VERTICAL : RBW:1000.000kHz VBW:0.750kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 5845.00</td><td>96.27</td><td>-----</td><td>81.55</td><td>34.00</td><td>11.28</td><td>34.46</td><td>3.90</td><td>183</td><td>149 Average</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor				MHz	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 5845.00	96.27	-----	81.55	34.00	11.28	34.46	3.90	183	149 Average																																																																						
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																							
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																										
MHz	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																							
1 5845.00	96.27	-----	81.55	34.00	11.28	34.46	3.90	183	149 Average																																																																																																							

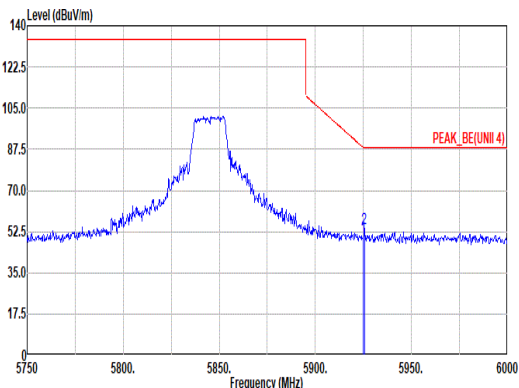
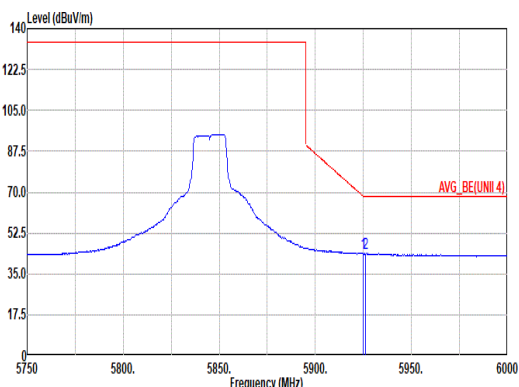


Mode	1																																																										
	Band Edge - R																																																										
	U-NII-4_5.85-5.895_802.11a_CH169_5845MHz																																																										
Pol.	Vertical	Fundamental																																																									
Peak	 Site : 03CH23-HY Condition: PEAK_BE(UNII 4) 3m DRH18-E_LE2C05A18EN_240620 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5924.75</td><td>50.10</td><td>88.38</td><td>-38.28</td><td>35.34</td><td>34.00</td><td>11.35</td><td>34.47</td><td>3.88</td><td>183</td><td>149</td><td>Peak</td></tr><tr><td>2</td><td>5925.50</td><td>53.84</td><td>88.20</td><td>-34.36</td><td>39.08</td><td>34.00</td><td>11.35</td><td>34.47</td><td>3.88</td><td>183</td><td>149</td><td>Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5924.75	50.10	88.38	-38.28	35.34	34.00	11.35	34.47	3.88	183	149	Peak	2	5925.50	53.84	88.20	-34.36	39.08	34.00	11.35	34.47	3.88	183	149	Peak	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																	
1	5924.75	50.10	88.38	-38.28	35.34	34.00	11.35	34.47	3.88	183	149	Peak																																															
2	5925.50	53.84	88.20	-34.36	39.08	34.00	11.35	34.47	3.88	183	149	Peak																																															
Avg	 Site : 03CH23-HY Condition: AVG_BE(UNII 4) 3m DRH18-E_LE2C05A18EN_240620 VERTICAL : RBW:1000.000kHz VBW:0.750kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5924.98</td><td>43.68</td><td>68.21</td><td>-24.53</td><td>28.92</td><td>34.00</td><td>11.35</td><td>34.47</td><td>3.88</td><td>183</td><td>149</td><td>Average</td></tr><tr><td>2</td><td>5926.00</td><td>43.68</td><td>68.20</td><td>-24.52</td><td>28.92</td><td>34.00</td><td>11.35</td><td>34.47</td><td>3.88</td><td>183</td><td>149</td><td>Average</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5924.98	43.68	68.21	-24.53	28.92	34.00	11.35	34.47	3.88	183	149	Average	2	5926.00	43.68	68.20	-24.52	28.92	34.00	11.35	34.47	3.88	183	149	Average	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																	
1	5924.98	43.68	68.21	-24.53	28.92	34.00	11.35	34.47	3.88	183	149	Average																																															
2	5926.00	43.68	68.20	-24.52	28.92	34.00	11.35	34.47	3.88	183	149	Average																																															



Mode	1																																																																																																																																							
	Harmonic																																																																																																																																							
	U-NII-4_5.85-5.895_802.11a_CH169_5845MHz																																																																																																																																							
Pol.	Horizontal	Vertical																																																																																																																																						
Peak Avg	Site : 03CH23-HY Condition: PEAK(UNII 4) 3m DRH18-E_LE2C05A18EN_240620 HORIZONTAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>11690.00</td><td>52.64</td><td>74.00</td><td>-21.36</td><td>36.32</td><td>38.60</td><td>15.83</td><td>40.37</td><td>2.26</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>11690.00</td><td>41.45</td><td>54.00</td><td>-12.55</td><td>25.13</td><td>38.60</td><td>15.83</td><td>40.37</td><td>2.26</td><td>--</td><td>Average</td></tr><tr><td>3</td><td>17535.00</td><td>55.49</td><td>88.20</td><td>-32.71</td><td>39.20</td><td>40.10</td><td>19.47</td><td>46.39</td><td>3.11</td><td>--</td><td>Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11690.00	52.64	74.00	-21.36	36.32	38.60	15.83	40.37	2.26	--	Peak	2	11690.00	41.45	54.00	-12.55	25.13	38.60	15.83	40.37	2.26	--	Average	3	17535.00	55.49	88.20	-32.71	39.20	40.10	19.47	46.39	3.11	--	Peak	Site : 03CH23-HY Condition: PEAK(UNII 4) 3m DRH18-E_LE2C05A18EN_240620 VERTICAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>11690.00</td><td>51.71</td><td>74.00</td><td>-22.29</td><td>35.39</td><td>38.60</td><td>15.83</td><td>40.37</td><td>2.26</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>11690.00</td><td>41.34</td><td>54.00</td><td>-12.66</td><td>25.02</td><td>38.60</td><td>15.83</td><td>40.37</td><td>2.26</td><td>--</td><td>Average</td></tr><tr><td>3</td><td>17535.00</td><td>55.06</td><td>88.20</td><td>-33.14</td><td>38.77</td><td>40.10</td><td>19.47</td><td>46.39</td><td>3.11</td><td>--</td><td>Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11690.00	51.71	74.00	-22.29	35.39	38.60	15.83	40.37	2.26	--	Peak	2	11690.00	41.34	54.00	-12.66	25.02	38.60	15.83	40.37	2.26	--	Average	3	17535.00	55.06	88.20	-33.14	38.77	40.10	19.47	46.39	3.11	--	Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																														
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																														
1	11690.00	52.64	74.00	-21.36	36.32	38.60	15.83	40.37	2.26	--	Peak																																																																																																																													
2	11690.00	41.45	54.00	-12.55	25.13	38.60	15.83	40.37	2.26	--	Average																																																																																																																													
3	17535.00	55.49	88.20	-32.71	39.20	40.10	19.47	46.39	3.11	--	Peak																																																																																																																													
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																															
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																														
1	11690.00	51.71	74.00	-22.29	35.39	38.60	15.83	40.37	2.26	--	Peak																																																																																																																													
2	11690.00	41.34	54.00	-12.66	25.02	38.60	15.83	40.37	2.26	--	Average																																																																																																																													
3	17535.00	55.06	88.20	-33.14	38.77	40.10	19.47	46.39	3.11	--	Peak																																																																																																																													

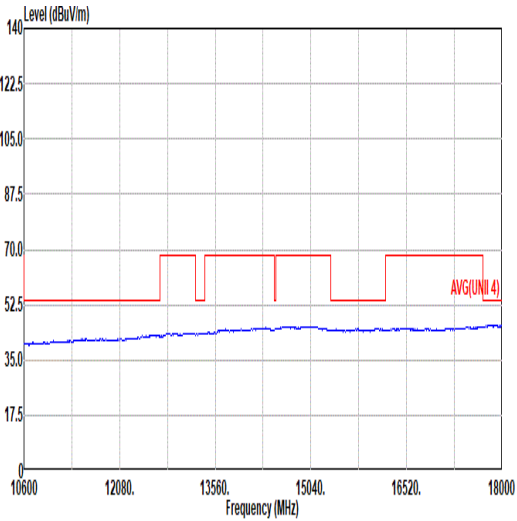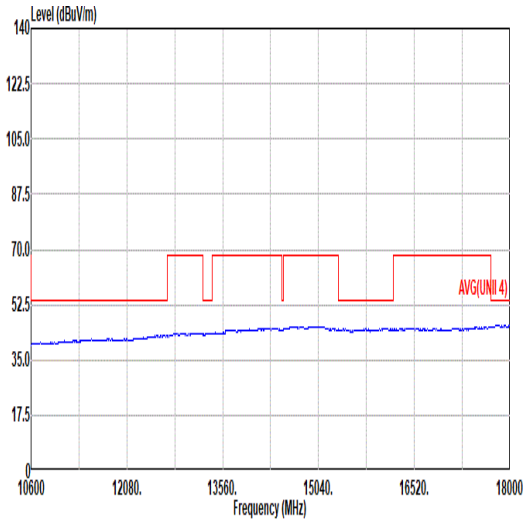

Mode	1	
	Harmonic	
	U-NII-4_5.85-5.895_802.11a_CH169_5845MHz	
Pol.	Horizontal	Vertical
10.6G ~18G Avg	 Site : 03CH23-HY Condition: AVG(UNI 4) 3m DRH18-E_LE2C05A18EN_240620 HORIZONTAL	 Site : 03CH23-HY Condition: AVG(UNI 4) 3m DRH18-E_LE2C05A18EN_240620 VERTICAL



		2									
Mode	Band Edge - L										
	U-NII-4_5.85-5.895_802.11a_CH173_5865MHz										
Pol.	Horizontal										
Peak											





Mode	2																																																								
	Band Edge - R																																																								
	U-NII-4_5.85-5.895_802.11a_CH173_5865MHz																																																								
Pol.	Horizontal	Fundamental																																																							
Peak	Site : 03CH23-HY Condition: PEAK_BE(UNII 4) 3m DRH18-E_LE2C05A18EN_240620 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5924.00</td><td>52.28</td><td>88.93</td><td>-36.65</td><td>37.52</td><td>34.00</td><td>11.35</td><td>34.47</td><td>3.88</td><td>272</td><td>0 Peak</td></tr><tr><td>2</td><td>5929.25</td><td>52.53</td><td>88.20</td><td>-35.67</td><td>37.78</td><td>34.00</td><td>11.35</td><td>34.47</td><td>3.87</td><td>272</td><td>0 Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5924.00	52.28	88.93	-36.65	37.52	34.00	11.35	34.47	3.88	272	0 Peak	2	5929.25	52.53	88.20	-35.67	37.78	34.00	11.35	34.47	3.87	272	0 Peak	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																															
1	5924.00	52.28	88.93	-36.65	37.52	34.00	11.35	34.47	3.88	272	0 Peak																																														
2	5929.25	52.53	88.20	-35.67	37.78	34.00	11.35	34.47	3.87	272	0 Peak																																														
Avg	Site : 03CH23-HY Condition: AVG_BE(UNII 4) 3m DRH18-E_LE2C05A18EN_240620 HORIZONTAL : RBW:1000.000kHz VBW:0.750kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5924.98</td><td>43.68</td><td>68.21</td><td>-24.53</td><td>28.92</td><td>34.00</td><td>11.35</td><td>34.47</td><td>3.88</td><td>272</td><td>0 Average</td></tr><tr><td>2</td><td>5926.75</td><td>43.69</td><td>68.20</td><td>-24.51</td><td>28.93</td><td>34.00</td><td>11.35</td><td>34.47</td><td>3.88</td><td>272</td><td>0 Average</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5924.98	43.68	68.21	-24.53	28.92	34.00	11.35	34.47	3.88	272	0 Average	2	5926.75	43.69	68.20	-24.51	28.93	34.00	11.35	34.47	3.88	272	0 Average	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																															
1	5924.98	43.68	68.21	-24.53	28.92	34.00	11.35	34.47	3.88	272	0 Average																																														
2	5926.75	43.69	68.20	-24.51	28.93	34.00	11.35	34.47	3.88	272	0 Average																																														



		2																																																																																																																																							
Mode	Band Edge - L																																																																																																																																								
	U-NII-4_5.85-5.895_802.11a_CH173_5865MHz																																																																																																																																								
Pol.	Vertical					Fundamental																																																																																																																																			
Peak																																																																																																																																									
	Site : 03CH23-HY Condition: PEAK_BE(UNII 4) 3m DRH18-E_LE2C05A18EN_240620 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5618.59</td><td>52.22</td><td>68.20</td><td>-15.98</td><td>38.29</td><td>33.31</td><td>11.17</td><td>34.45</td><td>3.90</td><td>300</td><td>186</td><td>Peak</td></tr><tr><td>2</td><td>5650.74</td><td>50.25</td><td>68.75</td><td>-18.50</td><td>36.11</td><td>33.50</td><td>11.18</td><td>34.45</td><td>3.91</td><td>300</td><td>186</td><td>Peak</td></tr><tr><td>3</td><td>5700.30</td><td>49.91</td><td>105.28</td><td>-55.37</td><td>35.45</td><td>33.00</td><td>11.20</td><td>34.45</td><td>3.91</td><td>300</td><td>186</td><td>Peak</td></tr><tr><td>4</td><td>5720.07</td><td>47.71</td><td>110.95</td><td>-63.24</td><td>33.21</td><td>33.84</td><td>11.20</td><td>34.45</td><td>3.91</td><td>300</td><td>186</td><td>Peak</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5618.59	52.22	68.20	-15.98	38.29	33.31	11.17	34.45	3.90	300	186	Peak	2	5650.74	50.25	68.75	-18.50	36.11	33.50	11.18	34.45	3.91	300	186	Peak	3	5700.30	49.91	105.28	-55.37	35.45	33.00	11.20	34.45	3.91	300	186	Peak	4	5720.07	47.71	110.95	-63.24	33.21	33.84	11.20	34.45	3.91	300	186	Peak	Site : 03CH23-HY Condition: PEAK(UNII 4) 3m DRH18-E_LE2C05A18EN_240620 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5865.00</td><td>83.16</td><td>-----</td><td>-----</td><td>68.43</td><td>34.00</td><td>11.30</td><td>34.46</td><td>3.89</td><td>300</td><td>186</td><td>Peak</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5865.00	83.16	-----	-----	68.43	34.00	11.30	34.46	3.89	300	186
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																															
1	5618.59	52.22	68.20	-15.98	38.29	33.31	11.17	34.45	3.90	300	186	Peak																																																																																																																													
2	5650.74	50.25	68.75	-18.50	36.11	33.50	11.18	34.45	3.91	300	186	Peak																																																																																																																													
3	5700.30	49.91	105.28	-55.37	35.45	33.00	11.20	34.45	3.91	300	186	Peak																																																																																																																													
4	5720.07	47.71	110.95	-63.24	33.21	33.84	11.20	34.45	3.91	300	186	Peak																																																																																																																													
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																															
1	5865.00	83.16	-----	-----	68.43	34.00	11.30	34.46	3.89	300	186	Peak																																																																																																																													
Avg	Blank																																																																																																																																								
						Site : 03CH23-HY Condition: AVG(UNII 4) 3m DRH18-E_LE2C05A18EN_240620 VERTICAL : RBW:1000.000kHz VBW:0.750kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5865.00</td><td>76.62</td><td>-----</td><td>-----</td><td>61.89</td><td>34.00</td><td>11.30</td><td>34.46</td><td>3.89</td><td>300</td><td>186</td><td>Average</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5865.00	76.62	-----	-----	61.89	34.00	11.30	34.46	3.89	300	186	Average																																																																																		
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																															
1	5865.00	76.62	-----	-----	61.89	34.00	11.30	34.46	3.89	300	186	Average																																																																																																																													

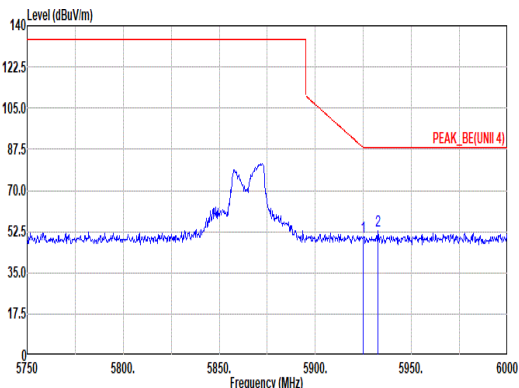
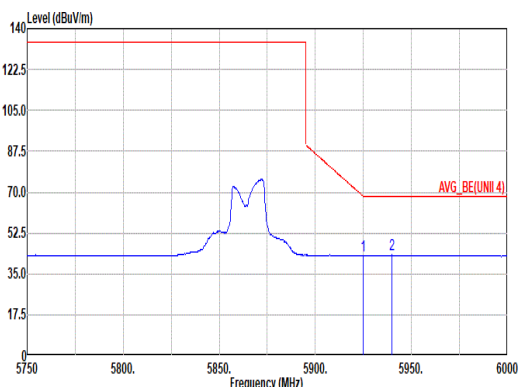


Mode	2																																																										
	Band Edge - R																																																										
	U-NII-4_5.85-5.895_802.11a_CH173_5865MHz																																																										
Pol.	Vertical	Fundamental																																																									
Peak	 Site : 03CH23-HY Condition: PEAK_BE(UNII 4) 3m DRH18-E_LE2C05A18EN_240620 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5924.98</td><td>50.10</td><td>88.21</td><td>-38.11</td><td>35.34</td><td>34.00</td><td>11.35</td><td>34.47</td><td>3.88</td><td>300</td><td>186</td><td>Peak</td></tr><tr><td>2</td><td>5932.75</td><td>52.90</td><td>88.20</td><td>-35.30</td><td>38.14</td><td>34.00</td><td>11.36</td><td>34.47</td><td>3.87</td><td>300</td><td>186</td><td>Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5924.98	50.10	88.21	-38.11	35.34	34.00	11.35	34.47	3.88	300	186	Peak	2	5932.75	52.90	88.20	-35.30	38.14	34.00	11.36	34.47	3.87	300	186	Peak	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																	
1	5924.98	50.10	88.21	-38.11	35.34	34.00	11.35	34.47	3.88	300	186	Peak																																															
2	5932.75	52.90	88.20	-35.30	38.14	34.00	11.36	34.47	3.87	300	186	Peak																																															
Avg	 Site : 03CH23-HY Condition: AVG_BE(UNII 4) 3m DRH18-E_LE2C05A18EN_240620 VERTICAL : RBW:1000.000kHz VBW:0.750kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5924.75</td><td>42.93</td><td>68.38</td><td>-25.45</td><td>28.17</td><td>34.00</td><td>11.35</td><td>34.47</td><td>3.88</td><td>300</td><td>186</td><td>Average</td></tr><tr><td>2</td><td>5939.75</td><td>43.14</td><td>68.20</td><td>-25.06</td><td>28.38</td><td>34.00</td><td>11.36</td><td>34.47</td><td>3.87</td><td>300</td><td>186</td><td>Average</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5924.75	42.93	68.38	-25.45	28.17	34.00	11.35	34.47	3.88	300	186	Average	2	5939.75	43.14	68.20	-25.06	28.38	34.00	11.36	34.47	3.87	300	186	Average	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																	
1	5924.75	42.93	68.38	-25.45	28.17	34.00	11.35	34.47	3.88	300	186	Average																																															
2	5939.75	43.14	68.20	-25.06	28.38	34.00	11.36	34.47	3.87	300	186	Average																																															






Mode	2																																																																																																																																							
	Harmonic																																																																																																																																							
	U-NII-4_5.85-5.895_802.11a_CH173_5865MHz																																																																																																																																							
Pol.	Horizontal	Vertical																																																																																																																																						
Peak Avg	Site : 03CH23-HY Condition: PEAK(UNII 4) 3m DRH18-E_LE2C05A18EN_240620 HORIZONTAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>11730.00</td><td>51.18</td><td>74.00</td><td>-22.82</td><td>34.87</td><td>38.60</td><td>15.86</td><td>40.41</td><td>2.26</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>11730.00</td><td>41.16</td><td>54.00</td><td>-12.84</td><td>24.85</td><td>38.60</td><td>15.86</td><td>40.41</td><td>2.26</td><td>--</td><td>Average</td></tr><tr><td>3</td><td>17595.00</td><td>55.88</td><td>88.20</td><td>-32.32</td><td>39.41</td><td>40.19</td><td>19.51</td><td>46.36</td><td>3.13</td><td>--</td><td>Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11730.00	51.18	74.00	-22.82	34.87	38.60	15.86	40.41	2.26	--	Peak	2	11730.00	41.16	54.00	-12.84	24.85	38.60	15.86	40.41	2.26	--	Average	3	17595.00	55.88	88.20	-32.32	39.41	40.19	19.51	46.36	3.13	--	Peak	Site : 03CH23-HY Condition: PEAK(UNII 4) 3m DRH18-E_LE2C05A18EN_240620 VERTICAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>11730.00</td><td>52.13</td><td>74.00</td><td>-21.87</td><td>35.82</td><td>38.60</td><td>15.86</td><td>40.41</td><td>2.26</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>11730.00</td><td>41.02</td><td>54.00</td><td>-12.98</td><td>24.71</td><td>38.60</td><td>15.86</td><td>40.41</td><td>2.26</td><td>--</td><td>Average</td></tr><tr><td>3</td><td>17595.00</td><td>55.15</td><td>88.20</td><td>-33.05</td><td>38.60</td><td>40.19</td><td>19.51</td><td>46.36</td><td>3.13</td><td>--</td><td>Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11730.00	52.13	74.00	-21.87	35.82	38.60	15.86	40.41	2.26	--	Peak	2	11730.00	41.02	54.00	-12.98	24.71	38.60	15.86	40.41	2.26	--	Average	3	17595.00	55.15	88.20	-33.05	38.60	40.19	19.51	46.36	3.13	--	Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																														
1	11730.00	51.18	74.00	-22.82	34.87	38.60	15.86	40.41	2.26	--	Peak																																																																																																																													
2	11730.00	41.16	54.00	-12.84	24.85	38.60	15.86	40.41	2.26	--	Average																																																																																																																													
3	17595.00	55.88	88.20	-32.32	39.41	40.19	19.51	46.36	3.13	--	Peak																																																																																																																													
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																														
1	11730.00	52.13	74.00	-21.87	35.82	38.60	15.86	40.41	2.26	--	Peak																																																																																																																													
2	11730.00	41.02	54.00	-12.98	24.71	38.60	15.86	40.41	2.26	--	Average																																																																																																																													
3	17595.00	55.15	88.20	-33.05	38.60	40.19	19.51	46.36	3.13	--	Peak																																																																																																																													

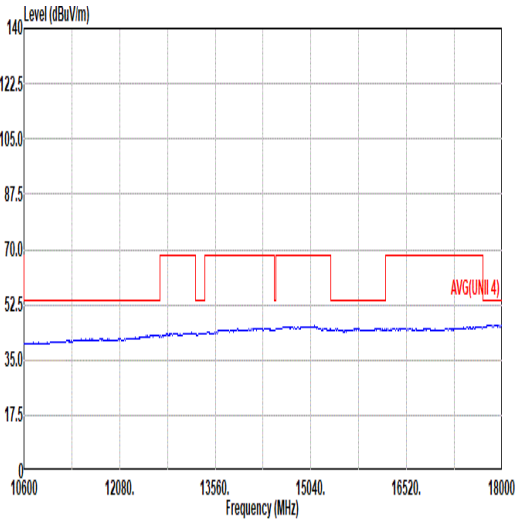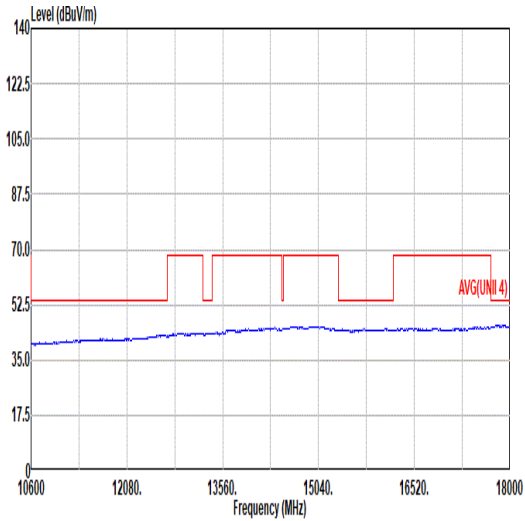

Mode	2	
	Harmonic	
	U-NII-4_5.85-5.895_802.11a_CH173_5865MHz	
Pol.	Horizontal	Vertical
10.6G ~18G Avg	 Site : 03CH23-HY Condition: AVG(UNI 4) 3m DRH18-E_LE2C05A18EN_240620 HORIZONTAL	 Site : 03CH23-HY Condition: AVG(UNI 4) 3m DRH18-E_LE2C05A18EN_240620 VERTICAL

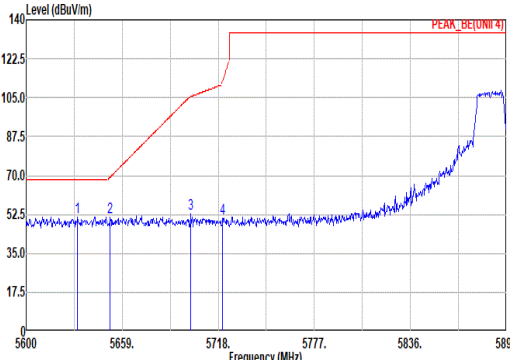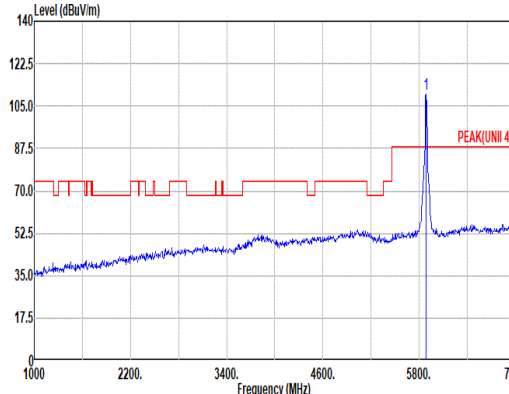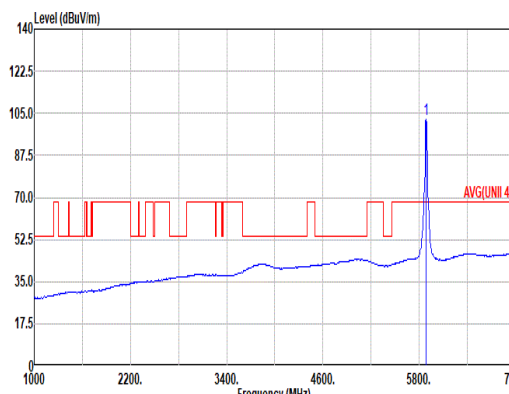

		3																																																																																																																																									
Mode	Band Edge - L																																																																																																																																										
	U-NII-4_5.85-5.895_802.11a_CH177_5885MHz																																																																																																																																										
Pol.	Horizontal										Fundamental																																																																																																																																
Peak	 Site : 03CH23-HY Condition: PEAK_BE(UNII 4) 3m DRH18-E_LE2C05A18EN_240620 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5631.57</td><td>51.46</td><td>68.20</td><td>-16.74</td><td>37.45</td><td>33.39</td><td>11.17</td><td>34.45</td><td>3.90</td><td>100</td><td>273 Peak</td></tr><tr><td>2</td><td>5651.63</td><td>51.47</td><td>69.41</td><td>-17.94</td><td>37.32</td><td>33.51</td><td>11.18</td><td>34.45</td><td>3.91</td><td>100</td><td>273 Peak</td></tr><tr><td>3</td><td>5701.19</td><td>52.93</td><td>105.53</td><td>-52.60</td><td>38.47</td><td>33.00</td><td>11.20</td><td>34.45</td><td>3.91</td><td>100</td><td>273 Peak</td></tr><tr><td>4</td><td>5728.66</td><td>50.89</td><td>112.29</td><td>-61.40</td><td>36.39</td><td>33.84</td><td>11.20</td><td>34.45</td><td>3.91</td><td>100</td><td>273 Peak</td></tr></tbody></table>											Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5631.57	51.46	68.20	-16.74	37.45	33.39	11.17	34.45	3.90	100	273 Peak	2	5651.63	51.47	69.41	-17.94	37.32	33.51	11.18	34.45	3.91	100	273 Peak	3	5701.19	52.93	105.53	-52.60	38.47	33.00	11.20	34.45	3.91	100	273 Peak	4	5728.66	50.89	112.29	-61.40	36.39	33.84	11.20	34.45	3.91	100	273 Peak	 Site : 03CH23-HY Condition: PEAK(UNII 4) 3m DRH18-E_LE2C05A18EN_240620 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5885.00</td><td>109.81</td><td>-----</td><td>-----</td><td>95.07</td><td>34.00</td><td>11.31</td><td>34.46</td><td>3.89</td><td>100</td><td>273 Peak</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5885.00	109.81	-----	-----	95.07	34.00	11.31	34.46	3.89	100	273 Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																	
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																
1	5631.57	51.46	68.20	-16.74	37.45	33.39	11.17	34.45	3.90	100	273 Peak																																																																																																																																
2	5651.63	51.47	69.41	-17.94	37.32	33.51	11.18	34.45	3.91	100	273 Peak																																																																																																																																
3	5701.19	52.93	105.53	-52.60	38.47	33.00	11.20	34.45	3.91	100	273 Peak																																																																																																																																
4	5728.66	50.89	112.29	-61.40	36.39	33.84	11.20	34.45	3.91	100	273 Peak																																																																																																																																
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																		
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																
1	5885.00	109.81	-----	-----	95.07	34.00	11.31	34.46	3.89	100	273 Peak																																																																																																																																
Avg	Blank										 Site : 03CH23-HY Condition: AVG(UNII 4) 3m DRH18-E_LE2C05A18EN_240620 HORIZONTAL : RBW:1000.000kHz VBW:0.750kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5885.00</td><td>102.41</td><td>-----</td><td>-----</td><td>87.67</td><td>34.00</td><td>11.31</td><td>34.46</td><td>3.89</td><td>100</td><td>273 Average</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5885.00	102.41	-----	-----	87.67	34.00	11.31	34.46	3.89	100	273 Average																																																																																		
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																	
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																
1	5885.00	102.41	-----	-----	87.67	34.00	11.31	34.46	3.89	100	273 Average																																																																																																																																





Mode	3																																																										
	Band Edge - R																																																										
	U-NII-4_5.85-5.895_802.11a_CH177_5885MHz																																																										
Pol.	Horizontal	Fundamental																																																									
Peak	Site : 03CH23-HY Condition: PEAK_BE(UNII 4) 3m DRH18-E_LE2C05A18EN_240620 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5897.50</td><td>89.80</td><td>108.36</td><td>-18.56</td><td>75.05</td><td>34.00</td><td>11.32</td><td>34.46</td><td>3.89</td><td>100</td><td>273</td><td>Peak</td></tr><tr><td>2</td><td>5926.75</td><td>68.62</td><td>88.20</td><td>-19.58</td><td>53.86</td><td>34.00</td><td>11.35</td><td>34.47</td><td>3.88</td><td>100</td><td>273</td><td>Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5897.50	89.80	108.36	-18.56	75.05	34.00	11.32	34.46	3.89	100	273	Peak	2	5926.75	68.62	88.20	-19.58	53.86	34.00	11.35	34.47	3.88	100	273	Peak	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																	
1	5897.50	89.80	108.36	-18.56	75.05	34.00	11.32	34.46	3.89	100	273	Peak																																															
2	5926.75	68.62	88.20	-19.58	53.86	34.00	11.35	34.47	3.88	100	273	Peak																																															
Avg	Site : 03CH23-HY Condition: AVG_BE(UNII 4) 3m DRH18-E_LE2C05A18EN_240620 HORIZONTAL : RBW:1000.000kHz VBW:0.750kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5895.25</td><td>81.28</td><td>90.02</td><td>-8.74</td><td>66.53</td><td>34.00</td><td>11.32</td><td>34.46</td><td>3.89</td><td>100</td><td>273</td><td>Average</td></tr><tr><td>2</td><td>5925.00</td><td>56.30</td><td>68.20</td><td>-11.90</td><td>41.54</td><td>34.00</td><td>11.35</td><td>34.47</td><td>3.88</td><td>100</td><td>273</td><td>Average</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5895.25	81.28	90.02	-8.74	66.53	34.00	11.32	34.46	3.89	100	273	Average	2	5925.00	56.30	68.20	-11.90	41.54	34.00	11.35	34.47	3.88	100	273	Average	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																	
1	5895.25	81.28	90.02	-8.74	66.53	34.00	11.32	34.46	3.89	100	273	Average																																															
2	5925.00	56.30	68.20	-11.90	41.54	34.00	11.35	34.47	3.88	100	273	Average																																															





Mode	3																																																																																																															
	Band Edge - L																																																																																																															
	U-NII-4_5.85-5.895_802.11a_CH177_5885MHz																																																																																																															
Pol.	Vertical	Fundamental																																																																																																														
Peak	Level (dBuV/m) vs Frequency (MHz) from 5600 to 5895 MHz. The plot shows a red limit line and a blue signal line. A peak is labeled PEAK_BE(UNII 4). Site : 03CH23-HY Condition: PEAK_BE(UNII 4) 3m DRH18-E_LE2C05A18EN_240620 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th></th></tr></thead><tbody><tr><td>1</td><td>5613.57</td><td>52.07</td><td>68.20</td><td>-16.13</td><td>38.18</td><td>33.28</td><td>11.16</td><td>34.45</td><td>3.90 100 140 Peak</td></tr><tr><td>2</td><td>5650.15</td><td>51.24</td><td>68.31</td><td>-17.07</td><td>37.10</td><td>33.50</td><td>11.18</td><td>34.45</td><td>3.91 100 140 Peak</td></tr><tr><td>3</td><td>5701.48</td><td>50.73</td><td>105.62</td><td>-54.89</td><td>36.27</td><td>33.00</td><td>11.20</td><td>34.45</td><td>3.91 100 140 Peak</td></tr><tr><td>4</td><td>5720.07</td><td>48.93</td><td>110.95</td><td>-62.02</td><td>34.43</td><td>33.84</td><td>11.20</td><td>34.45</td><td>3.91 100 140 Peak</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB		1	5613.57	52.07	68.20	-16.13	38.18	33.28	11.16	34.45	3.90 100 140 Peak	2	5650.15	51.24	68.31	-17.07	37.10	33.50	11.18	34.45	3.91 100 140 Peak	3	5701.48	50.73	105.62	-54.89	36.27	33.00	11.20	34.45	3.91 100 140 Peak	4	5720.07	48.93	110.95	-62.02	34.43	33.84	11.20	34.45	3.91 100 140 Peak	Level (dBuV/m) vs Frequency (MHz) from 1000 to 7000 MHz. The plot shows a red limit line and a blue signal line. A peak is labeled PEAK(UNII 4). Site : 03CH23-HY Condition: PEAK(UNII 4) 3m DRH18-E_LE2C05A18EN_240620 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th></th></tr></thead><tbody><tr><td>1</td><td>5885.00</td><td>107.46</td><td>-----</td><td>-----</td><td>92.71</td><td>34.00</td><td>11.32</td><td>34.46</td><td>3.89 100 140 Peak</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB		1	5885.00	107.46	-----	-----	92.71	34.00	11.32	34.46	3.89 100 140 Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																						
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																																								
1	5613.57	52.07	68.20	-16.13	38.18	33.28	11.16	34.45	3.90 100 140 Peak																																																																																																							
2	5650.15	51.24	68.31	-17.07	37.10	33.50	11.18	34.45	3.91 100 140 Peak																																																																																																							
3	5701.48	50.73	105.62	-54.89	36.27	33.00	11.20	34.45	3.91 100 140 Peak																																																																																																							
4	5720.07	48.93	110.95	-62.02	34.43	33.84	11.20	34.45	3.91 100 140 Peak																																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																							
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																																								
1	5885.00	107.46	-----	-----	92.71	34.00	11.32	34.46	3.89 100 140 Peak																																																																																																							
Avg	Blank	Level (dBuV/m) vs Frequency (MHz) from 1000 to 7000 MHz. The plot shows a red limit line and a blue signal line. A peak is labeled AVG(UNII 4). Site : 03CH23-HY Condition: AVG(UNII 4) 3m DRH18-E_LE2C05A18EN_240620 VERTICAL : RBW:1000.000kHz VBW:0.750kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th></th></tr></thead><tbody><tr><td>1</td><td>5885.00</td><td>99.78</td><td>-----</td><td>-----</td><td>85.03</td><td>34.00</td><td>11.32</td><td>34.46</td><td>3.89 100 140 Average</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB		1	5885.00	99.78	-----	-----	85.03	34.00	11.32	34.46	3.89 100 140 Average																																																																						
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																							
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																																								
1	5885.00	99.78	-----	-----	85.03	34.00	11.32	34.46	3.89 100 140 Average																																																																																																							

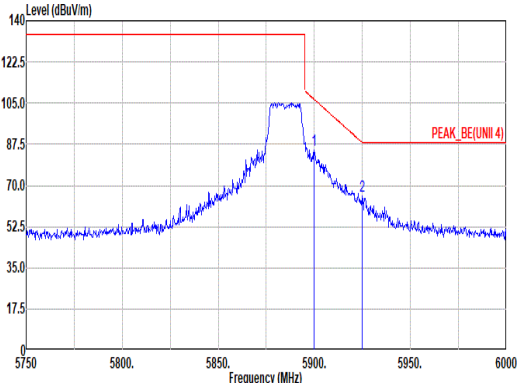
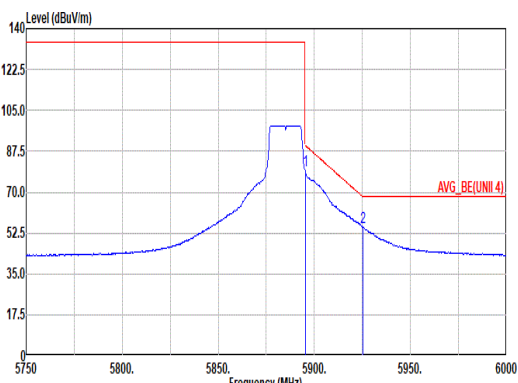


Mode	3																																																									
	Band Edge - R																																																									
	U-NII-4_5.85-5.895_802.11a_CH177_5885MHz																																																									
Pol.	Vertical	Fundamental																																																								
Peak	 Site : 03CH23-HY Condition: PEAK_BE(UNII 4) 3m DRH18-E_LE2C05A18EN_240620 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5900.00</td><td>85.24</td><td>106.53</td><td>-21.29</td><td>70.50</td><td>34.00</td><td>11.32</td><td>34.46</td><td>3.88</td><td>100</td><td>140</td><td>Peak</td></tr><tr><td>2</td><td>5925.00</td><td>65.68</td><td>88.20</td><td>-22.52</td><td>50.92</td><td>34.00</td><td>11.35</td><td>34.47</td><td>3.88</td><td>100</td><td>140</td><td>Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	1	5900.00	85.24	106.53	-21.29	70.50	34.00	11.32	34.46	3.88	100	140	Peak	2	5925.00	65.68	88.20	-22.52	50.92	34.00	11.35	34.47	3.88	100	140	Peak	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																	
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																				
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg																																																	
1	5900.00	85.24	106.53	-21.29	70.50	34.00	11.32	34.46	3.88	100	140	Peak																																														
2	5925.00	65.68	88.20	-22.52	50.92	34.00	11.35	34.47	3.88	100	140	Peak																																														
Avg	 Site : 03CH23-HY Condition: AVG_BE(UNII 4) 3m DRH18-E_LE2C05A18EN_240620 VERTICAL : RBW:1000.000kHz VBW:0.750kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5895.25</td><td>79.20</td><td>90.02</td><td>-10.82</td><td>64.45</td><td>34.00</td><td>11.32</td><td>34.46</td><td>3.89</td><td>100</td><td>140</td><td>Average</td></tr><tr><td>2</td><td>5925.25</td><td>55.12</td><td>68.20</td><td>-13.08</td><td>40.36</td><td>34.00</td><td>11.35</td><td>34.47</td><td>3.88</td><td>100</td><td>140</td><td>Average</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	1	5895.25	79.20	90.02	-10.82	64.45	34.00	11.32	34.46	3.89	100	140	Average	2	5925.25	55.12	68.20	-13.08	40.36	34.00	11.35	34.47	3.88	100	140	Average	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																	
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																				
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg																																																	
1	5895.25	79.20	90.02	-10.82	64.45	34.00	11.32	34.46	3.89	100	140	Average																																														
2	5925.25	55.12	68.20	-13.08	40.36	34.00	11.35	34.47	3.88	100	140	Average																																														


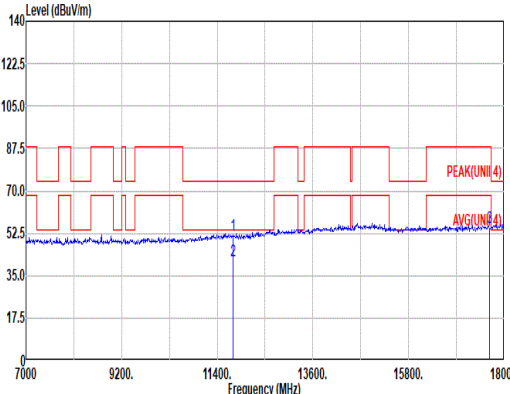
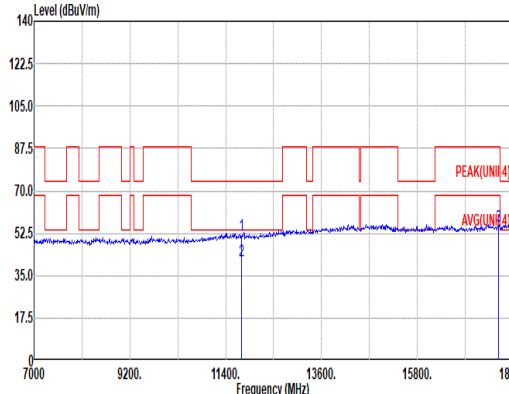


Mode	3																																																																																																																																							
	Harmonic																																																																																																																																							
	U-NII-4_5.85-5.895_802.11a_CH177_5885MHz																																																																																																																																							
Pol.	Horizontal	Vertical																																																																																																																																						
Peak Avg	 Site : 03CH23-HY Condition: PEAK(UNII 4) 3m DRH18-E_LE2C05A18EN_240620 HORIZONTAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>11770.00</td><td>51.61</td><td>74.00</td><td>-22.39</td><td>35.27</td><td>38.64</td><td>15.89</td><td>40.45</td><td>2.26</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>11770.00</td><td>41.27</td><td>54.00</td><td>-12.73</td><td>24.93</td><td>38.64</td><td>15.89</td><td>40.45</td><td>2.26</td><td>--</td><td>Average</td></tr><tr><td>3</td><td>17655.00</td><td>55.04</td><td>88.20</td><td>-33.16</td><td>38.56</td><td>40.11</td><td>19.55</td><td>46.33</td><td>3.15</td><td>--</td><td>Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11770.00	51.61	74.00	-22.39	35.27	38.64	15.89	40.45	2.26	--	Peak	2	11770.00	41.27	54.00	-12.73	24.93	38.64	15.89	40.45	2.26	--	Average	3	17655.00	55.04	88.20	-33.16	38.56	40.11	19.55	46.33	3.15	--	Peak	 Site : 03CH23-HY Condition: PEAK(UNII 4) 3m DRH18-E_LE2C05A18EN_240620 VERTICAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>11770.00</td><td>51.00</td><td>74.00</td><td>-22.20</td><td>35.46</td><td>38.64</td><td>15.89</td><td>40.45</td><td>2.26</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>11770.00</td><td>41.13</td><td>54.00</td><td>-12.87</td><td>24.79</td><td>38.64</td><td>15.89</td><td>40.45</td><td>2.26</td><td>--</td><td>Average</td></tr><tr><td>3</td><td>17655.00</td><td>55.54</td><td>88.20</td><td>-32.66</td><td>39.06</td><td>40.11</td><td>19.55</td><td>46.33</td><td>3.15</td><td>--</td><td>Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11770.00	51.00	74.00	-22.20	35.46	38.64	15.89	40.45	2.26	--	Peak	2	11770.00	41.13	54.00	-12.87	24.79	38.64	15.89	40.45	2.26	--	Average	3	17655.00	55.54	88.20	-32.66	39.06	40.11	19.55	46.33	3.15	--	Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																														
1	11770.00	51.61	74.00	-22.39	35.27	38.64	15.89	40.45	2.26	--	Peak																																																																																																																													
2	11770.00	41.27	54.00	-12.73	24.93	38.64	15.89	40.45	2.26	--	Average																																																																																																																													
3	17655.00	55.04	88.20	-33.16	38.56	40.11	19.55	46.33	3.15	--	Peak																																																																																																																													
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																														
1	11770.00	51.00	74.00	-22.20	35.46	38.64	15.89	40.45	2.26	--	Peak																																																																																																																													
2	11770.00	41.13	54.00	-12.87	24.79	38.64	15.89	40.45	2.26	--	Average																																																																																																																													
3	17655.00	55.54	88.20	-32.66	39.06	40.11	19.55	46.33	3.15	--	Peak																																																																																																																													

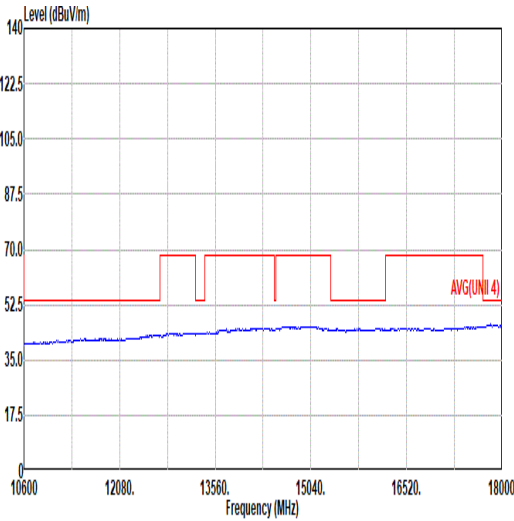
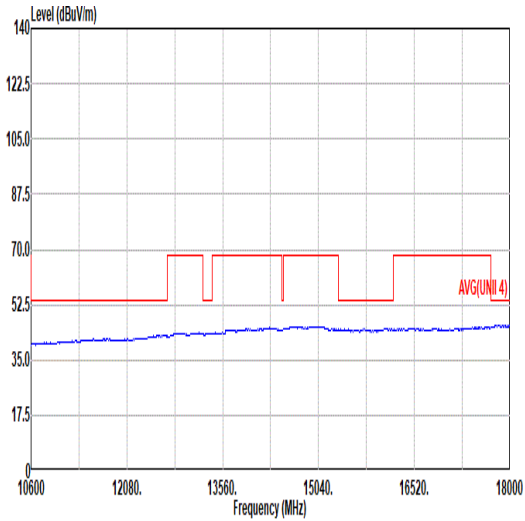


Mode	3	
	Harmonic	
	U-NII-4_5.85-5.895_802.11a_CH177_5885MHz	
Pol.	Horizontal	Vertical
10.6G ~18G Avg	 Site : 03CH23-HY Condition: AVG(UNI 4) 3m DRH18-E_LE2C05A18EN_240620 HORIZONTAL	 Site : 03CH23-HY Condition: AVG(UNI 4) 3m DRH18-E_LE2C05A18EN_240620 VERTICAL

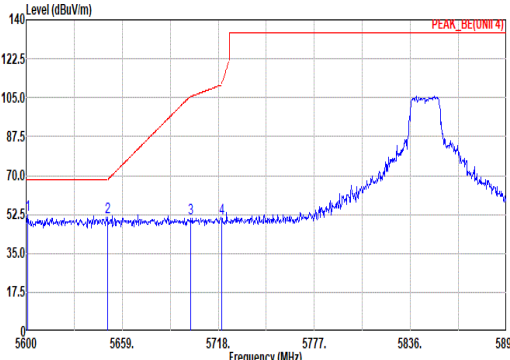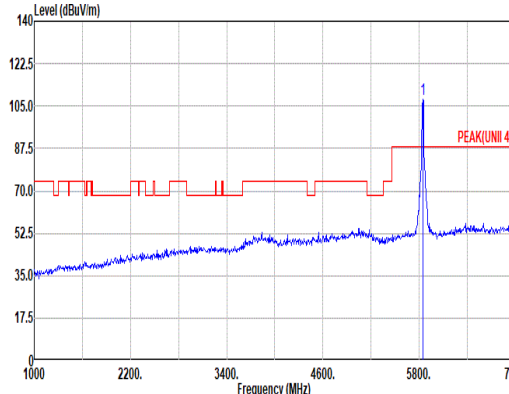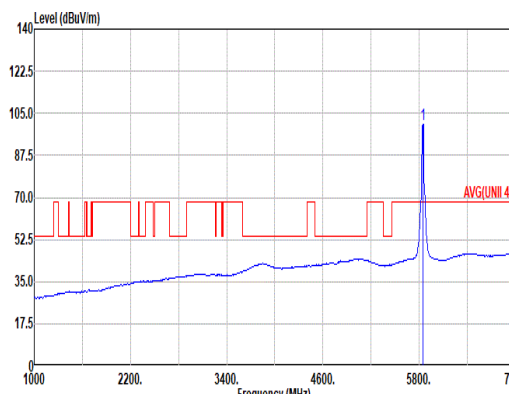

		4																																																																																																																							
Mode	Band Edge - L																																																																																																																								
	U-NII-4_5.85-5.895_802.11n HT20_CH169_5845MHz																																																																																																																								
Pol.	Horizontal										Fundamental																																																																																																														
Peak	 Site : 03CH23-HY Condition: PEAK_BE(UNII 4) 3m DRH18-E_LE2C05A18EN_240620 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th></th></tr></thead><tbody><tr><td>1</td><td>5600.89</td><td>52.22</td><td>68.20</td><td>-15.98</td><td>38.40</td><td>33.21</td><td>11.16</td><td>34.45</td><td>3.90 101 266 Peak</td></tr><tr><td>2</td><td>5650.15</td><td>51.20</td><td>68.31</td><td>-17.11</td><td>37.06</td><td>33.50</td><td>11.18</td><td>34.45</td><td>3.91 101 266 Peak</td></tr><tr><td>3</td><td>5701.19</td><td>50.93</td><td>105.53</td><td>-54.60</td><td>36.47</td><td>33.00</td><td>11.20</td><td>34.45</td><td>3.91 101 266 Peak</td></tr><tr><td>4</td><td>5720.07</td><td>50.73</td><td>110.95</td><td>-60.22</td><td>36.23</td><td>33.84</td><td>11.20</td><td>34.45</td><td>3.91 101 266 Peak</td></tr></tbody></table>											Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB		1	5600.89	52.22	68.20	-15.98	38.40	33.21	11.16	34.45	3.90 101 266 Peak	2	5650.15	51.20	68.31	-17.11	37.06	33.50	11.18	34.45	3.91 101 266 Peak	3	5701.19	50.93	105.53	-54.60	36.47	33.00	11.20	34.45	3.91 101 266 Peak	4	5720.07	50.73	110.95	-60.22	36.23	33.84	11.20	34.45	3.91 101 266 Peak	 Site : 03CH23-HY Condition: PEAK(UNII 4) 3m DRH18-E_LE2C05A18EN_240620 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th></th></tr></thead><tbody><tr><td>1</td><td>5845.00</td><td>107.72</td><td>-----</td><td>-----</td><td>93.00</td><td>34.00</td><td>11.28</td><td>34.46</td><td>3.90 101 266 Peak</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB		1	5845.00	107.72	-----	-----	93.00	34.00	11.28	34.46	3.90 101 266 Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																																																	
1	5600.89	52.22	68.20	-15.98	38.40	33.21	11.16	34.45	3.90 101 266 Peak																																																																																																																
2	5650.15	51.20	68.31	-17.11	37.06	33.50	11.18	34.45	3.91 101 266 Peak																																																																																																																
3	5701.19	50.93	105.53	-54.60	36.47	33.00	11.20	34.45	3.91 101 266 Peak																																																																																																																
4	5720.07	50.73	110.95	-60.22	36.23	33.84	11.20	34.45	3.91 101 266 Peak																																																																																																																
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																																																	
1	5845.00	107.72	-----	-----	93.00	34.00	11.28	34.46	3.90 101 266 Peak																																																																																																																
Avg	Blank										 Site : 03CH23-HY Condition: AVG(UNII 4) 3m DRH18-E_LE2C05A18EN_240620 HORIZONTAL : RBW:1000.000kHz VBW:0.820kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th></th></tr></thead><tbody><tr><td>1</td><td>5845.00</td><td>100.23</td><td>-----</td><td>-----</td><td>85.51</td><td>34.00</td><td>11.28</td><td>34.46</td><td>3.90 101 266 Average</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB		1	5845.00	100.23	-----	-----	85.51	34.00	11.28	34.46	3.90 101 266 Average																																																																						
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																																																	
1	5845.00	100.23	-----	-----	85.51	34.00	11.28	34.46	3.90 101 266 Average																																																																																																																

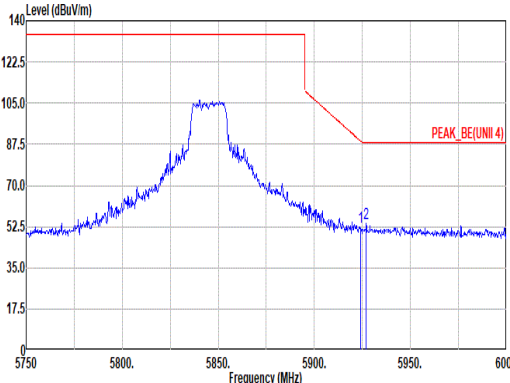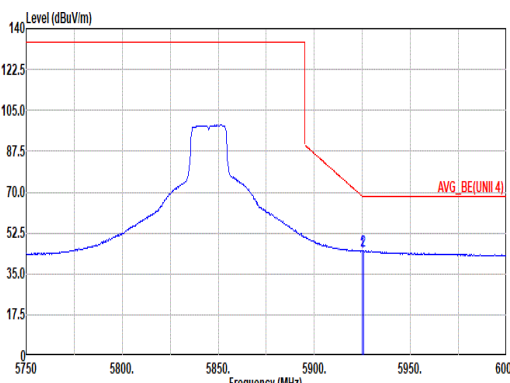

Mode	4																																																									
	Band Edge - R																																																									
	U-NII-4_5.85-5.895_802.11n HT20_CH169_5845MHz																																																									
Pol.	Horizontal	Fundamental																																																								
Peak	 Site : 03CH23-HY Condition: PEAK_BE(UNII 4) 3m DRH18-E_LE2C05A18EN_240620 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5924.00</td><td>52.44</td><td>88.93</td><td>-36.49</td><td>37.68</td><td>34.00</td><td>11.35</td><td>34.47</td><td>3.88</td><td>101</td><td>266</td><td>Peak</td></tr><tr><td>2</td><td>5927.00</td><td>53.78</td><td>88.20</td><td>-34.42</td><td>39.02</td><td>34.00</td><td>11.35</td><td>34.47</td><td>3.88</td><td>101</td><td>266</td><td>Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	1	5924.00	52.44	88.93	-36.49	37.68	34.00	11.35	34.47	3.88	101	266	Peak	2	5927.00	53.78	88.20	-34.42	39.02	34.00	11.35	34.47	3.88	101	266	Peak	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																	
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																				
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg																																																	
1	5924.00	52.44	88.93	-36.49	37.68	34.00	11.35	34.47	3.88	101	266	Peak																																														
2	5927.00	53.78	88.20	-34.42	39.02	34.00	11.35	34.47	3.88	101	266	Peak																																														
Avg	 Site : 03CH23-HY Condition: AVG_BE(UNII 4) 3m DRH18-E_LE2C05A18EN_240620 HORIZONTAL : RBW:1000.000kHz VBW:0.820kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5924.98</td><td>44.59</td><td>68.21</td><td>-23.62</td><td>29.83</td><td>34.00</td><td>11.35</td><td>34.47</td><td>3.88</td><td>101</td><td>266</td><td>Average</td></tr><tr><td>2</td><td>5925.58</td><td>44.88</td><td>68.20</td><td>-23.32</td><td>30.12</td><td>34.00</td><td>11.35</td><td>34.47</td><td>3.88</td><td>101</td><td>266</td><td>Average</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	1	5924.98	44.59	68.21	-23.62	29.83	34.00	11.35	34.47	3.88	101	266	Average	2	5925.58	44.88	68.20	-23.32	30.12	34.00	11.35	34.47	3.88	101	266	Average	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																	
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																				
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg																																																	
1	5924.98	44.59	68.21	-23.62	29.83	34.00	11.35	34.47	3.88	101	266	Average																																														
2	5925.58	44.88	68.20	-23.32	30.12	34.00	11.35	34.47	3.88	101	266	Average																																														



Mode	4																																																																																																															
	Band Edge - L																																																																																																															
	U-NII-4_5.85-5.895_802.11n HT20_CH169_5845MHz																																																																																																															
Pol.	Vertical	Fundamental																																																																																																														
Peak	Level (dBuV/m) vs Frequency (MHz) from 5600 to 5895 MHz. The plot shows a red limit line and a blue signal line. A peak is labeled PEAK_BE(UNII 4). Site : 03CH23-HY Condition: PEAK_BE(UNII 4) 3m DRH18-E_LE2C05A18EN_240620 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th></th></tr><tr><td>1</td><td>5646.61</td><td>52.03</td><td>68.20</td><td>-16.17</td><td>37.92</td><td>33.48</td><td>11.18</td><td>34.45</td><td>3.90 100 140 Peak</td></tr><tr><td>2</td><td>5650.15</td><td>50.59</td><td>68.31</td><td>-17.72</td><td>36.45</td><td>33.50</td><td>11.18</td><td>34.45</td><td>3.91 100 140 Peak</td></tr><tr><td>3</td><td>5700.01</td><td>51.45</td><td>105.20</td><td>-53.75</td><td>36.99</td><td>33.00</td><td>11.20</td><td>34.45</td><td>3.91 100 140 Peak</td></tr><tr><td>4</td><td>5720.07</td><td>50.41</td><td>110.95</td><td>-60.54</td><td>35.91</td><td>33.84</td><td>11.20</td><td>34.45</td><td>3.91 100 140 Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB		1	5646.61	52.03	68.20	-16.17	37.92	33.48	11.18	34.45	3.90 100 140 Peak	2	5650.15	50.59	68.31	-17.72	36.45	33.50	11.18	34.45	3.91 100 140 Peak	3	5700.01	51.45	105.20	-53.75	36.99	33.00	11.20	34.45	3.91 100 140 Peak	4	5720.07	50.41	110.95	-60.54	35.91	33.84	11.20	34.45	3.91 100 140 Peak	Level (dBuV/m) vs Frequency (MHz) from 1000 to 7000 MHz. The plot shows a red limit line and a blue signal line. A peak is labeled PEAK(UNII 4). Site : 03CH23-HY Condition: PEAK(UNII 4) 3m DRH18-E_LE2C05A18EN_240620 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th></th></tr><tr><td>1</td><td>5845.00</td><td>106.99</td><td>-----</td><td>-----</td><td>92.27</td><td>34.00</td><td>11.28</td><td>34.46</td><td>3.90 100 140 Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB		1	5845.00	106.99	-----	-----	92.27	34.00	11.28	34.46	3.90 100 140 Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																						
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																																								
1	5646.61	52.03	68.20	-16.17	37.92	33.48	11.18	34.45	3.90 100 140 Peak																																																																																																							
2	5650.15	50.59	68.31	-17.72	36.45	33.50	11.18	34.45	3.91 100 140 Peak																																																																																																							
3	5700.01	51.45	105.20	-53.75	36.99	33.00	11.20	34.45	3.91 100 140 Peak																																																																																																							
4	5720.07	50.41	110.95	-60.54	35.91	33.84	11.20	34.45	3.91 100 140 Peak																																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																							
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																																								
1	5845.00	106.99	-----	-----	92.27	34.00	11.28	34.46	3.90 100 140 Peak																																																																																																							
Avg	Blank	Level (dBuV/m) vs Frequency (MHz) from 1000 to 7000 MHz. The plot shows a red limit line and a blue signal line. A peak is labeled AVG(UNII 4). Site : 03CH23-HY Condition: AVG(UNII 4) 3m DRH18-E_LE2C05A18EN_240620 VERTICAL : RBW:1000.000kHz VBW:0.820kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th></th></tr><tr><td>1</td><td>5845.00</td><td>99.09</td><td>-----</td><td>-----</td><td>84.37</td><td>34.00</td><td>11.28</td><td>34.46</td><td>3.90 100 140 Average</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB		1	5845.00	99.09	-----	-----	84.37	34.00	11.28	34.46	3.90 100 140 Average																																																																						
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																							
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																																								
1	5845.00	99.09	-----	-----	84.37	34.00	11.28	34.46	3.90 100 140 Average																																																																																																							





Mode	4																																																										
	Band Edge - R																																																										
	U-NII-4_5.85-5.895_802.11n HT20_CH169_5845MHz																																																										
Pol.	Vertical	Fundamental																																																									
Peak	Site : 03CH23-HY Condition: PEAK_BE(UNII 4) 3m DRH18-E_LE2C05A18EN_240620 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5924.98</td><td>51.78</td><td>88.21</td><td>-36.43</td><td>37.02</td><td>34.00</td><td>11.35</td><td>34.47</td><td>3.88</td><td>100</td><td>140</td><td>Peak</td></tr><tr><td>2</td><td>5986.25</td><td>53.06</td><td>88.20</td><td>-35.14</td><td>38.27</td><td>34.00</td><td>11.41</td><td>34.47</td><td>3.85</td><td>100</td><td>140</td><td>Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5924.98	51.78	88.21	-36.43	37.02	34.00	11.35	34.47	3.88	100	140	Peak	2	5986.25	53.06	88.20	-35.14	38.27	34.00	11.41	34.47	3.85	100	140	Peak	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																	
1	5924.98	51.78	88.21	-36.43	37.02	34.00	11.35	34.47	3.88	100	140	Peak																																															
2	5986.25	53.06	88.20	-35.14	38.27	34.00	11.41	34.47	3.85	100	140	Peak																																															
Avg	Site : 03CH23-HY Condition: AVG_BE(UNII 4) 3m DRH18-E_LE2C05A18EN_240620 VERTICAL : RBW:1000.000kHz VBW:0.820kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5924.98</td><td>44.11</td><td>68.21</td><td>-24.10</td><td>29.35</td><td>34.00</td><td>11.35</td><td>34.47</td><td>3.88</td><td>100</td><td>140</td><td>Average</td></tr><tr><td>2</td><td>5931.25</td><td>44.27</td><td>68.20</td><td>-23.93</td><td>29.52</td><td>34.00</td><td>11.35</td><td>34.47</td><td>3.87</td><td>100</td><td>140</td><td>Average</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5924.98	44.11	68.21	-24.10	29.35	34.00	11.35	34.47	3.88	100	140	Average	2	5931.25	44.27	68.20	-23.93	29.52	34.00	11.35	34.47	3.87	100	140	Average	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																	
1	5924.98	44.11	68.21	-24.10	29.35	34.00	11.35	34.47	3.88	100	140	Average																																															
2	5931.25	44.27	68.20	-23.93	29.52	34.00	11.35	34.47	3.87	100	140	Average																																															






Mode	4																																																																																																																																							
	Harmonic																																																																																																																																							
	U-NII-4_5.85-5.895_802.11n HT20_CH169_5845MHz																																																																																																																																							
Pol.	Horizontal	Vertical																																																																																																																																						
Peak Avg	Site : 03CH23-HY Condition: PEAK(UNII 4) 3m DRH18-E_LE2C05A18EN_240620 HORIZONTAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>11690.00</td><td>51.61</td><td>74.00</td><td>-22.39</td><td>35.29</td><td>38.60</td><td>15.83</td><td>40.37</td><td>2.26</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>11690.00</td><td>41.87</td><td>54.00</td><td>-12.13</td><td>25.55</td><td>38.60</td><td>15.83</td><td>40.37</td><td>2.26</td><td>--</td><td>Average</td></tr><tr><td>3</td><td>17535.00</td><td>55.51</td><td>88.20</td><td>-32.69</td><td>39.22</td><td>40.10</td><td>19.47</td><td>46.39</td><td>3.11</td><td>--</td><td>Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11690.00	51.61	74.00	-22.39	35.29	38.60	15.83	40.37	2.26	--	Peak	2	11690.00	41.87	54.00	-12.13	25.55	38.60	15.83	40.37	2.26	--	Average	3	17535.00	55.51	88.20	-32.69	39.22	40.10	19.47	46.39	3.11	--	Peak	Site : 03CH23-HY Condition: PEAK(UNII 4) 3m DRH18-E_LE2C05A18EN_240620 VERTICAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>11690.00</td><td>51.63</td><td>74.00</td><td>-22.37</td><td>35.31</td><td>38.60</td><td>15.83</td><td>40.37</td><td>2.26</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>11690.00</td><td>41.83</td><td>54.00</td><td>-12.17</td><td>25.51</td><td>38.60</td><td>15.83</td><td>40.37</td><td>2.26</td><td>--</td><td>Average</td></tr><tr><td>3</td><td>17535.00</td><td>56.17</td><td>88.20</td><td>-32.03</td><td>39.88</td><td>40.10</td><td>19.47</td><td>46.39</td><td>3.11</td><td>--</td><td>Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11690.00	51.63	74.00	-22.37	35.31	38.60	15.83	40.37	2.26	--	Peak	2	11690.00	41.83	54.00	-12.17	25.51	38.60	15.83	40.37	2.26	--	Average	3	17535.00	56.17	88.20	-32.03	39.88	40.10	19.47	46.39	3.11	--	Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																														
1	11690.00	51.61	74.00	-22.39	35.29	38.60	15.83	40.37	2.26	--	Peak																																																																																																																													
2	11690.00	41.87	54.00	-12.13	25.55	38.60	15.83	40.37	2.26	--	Average																																																																																																																													
3	17535.00	55.51	88.20	-32.69	39.22	40.10	19.47	46.39	3.11	--	Peak																																																																																																																													
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																														
1	11690.00	51.63	74.00	-22.37	35.31	38.60	15.83	40.37	2.26	--	Peak																																																																																																																													
2	11690.00	41.83	54.00	-12.17	25.51	38.60	15.83	40.37	2.26	--	Average																																																																																																																													
3	17535.00	56.17	88.20	-32.03	39.88	40.10	19.47	46.39	3.11	--	Peak																																																																																																																													

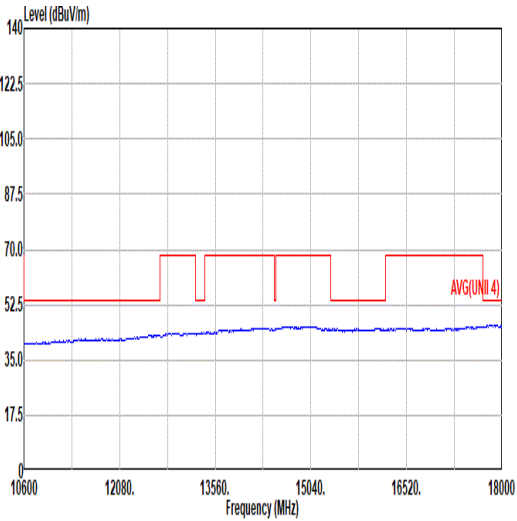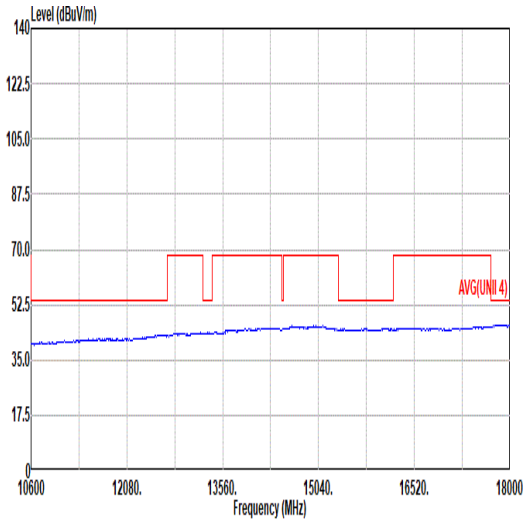

Mode	4	
	Harmonic	
	U-NII-4_5.85-5.895_802.11n HT20_CH169_5845MHz	
Pol.	Horizontal	Vertical
10.6G ~18G Avg	 Site : 03CH23-HY Condition: AVG(UNI 4) 3m DRH18-E_LE2C05A18EN_240620 HORIZONTAL	 Site : 03CH23-HY Condition: AVG(UNI 4) 3m DRH18-E_LE2C05A18EN_240620 VERTICAL

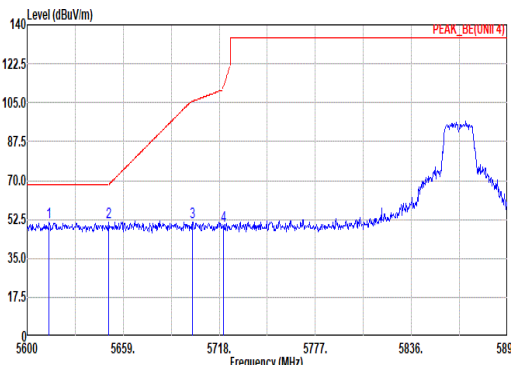
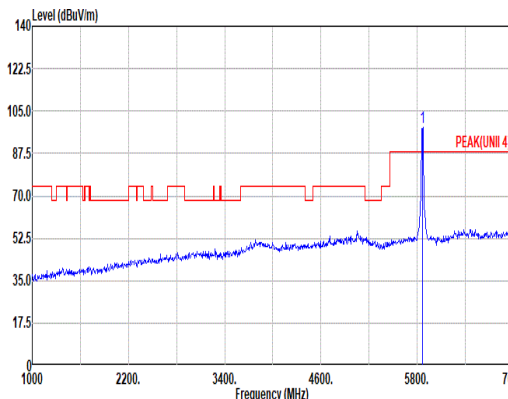
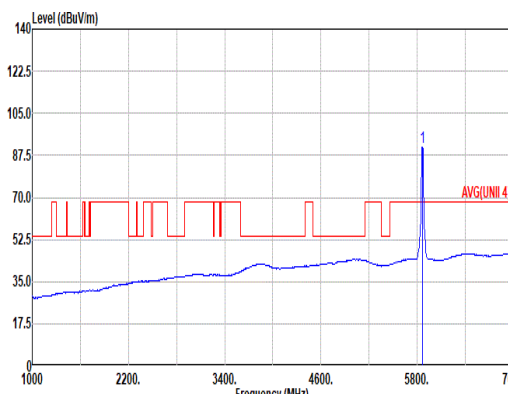


		5																																																																																																														
Mode	Band Edge - L																																																																																																															
	U-NII-4_5.85-5.895_802.11n HT20_CH173_5865MHz																																																																																																															
Pol.	Horizontal	Fundamental																																																																																																														
Peak	 Site : 03CH23-HY Condition: PEAK_BE(UNII 4) 3m DRH18-E_LE2C05A18EN_240620 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th></th></tr></thead><tbody><tr><td>1</td><td>5613.57</td><td>51.22</td><td>68.20</td><td>-16.98</td><td>37.33</td><td>33.28</td><td>11.16</td><td>34.45</td><td>3.90 311 360 Peak</td></tr><tr><td>2</td><td>5650.15</td><td>51.32</td><td>68.31</td><td>-16.99</td><td>37.18</td><td>33.50</td><td>11.18</td><td>34.45</td><td>3.91 311 360 Peak</td></tr><tr><td>3</td><td>5701.48</td><td>51.15</td><td>105.62</td><td>-54.47</td><td>36.69</td><td>33.80</td><td>11.20</td><td>34.45</td><td>3.91 311 360 Peak</td></tr><tr><td>4</td><td>5720.36</td><td>49.78</td><td>111.62</td><td>-61.84</td><td>35.28</td><td>33.84</td><td>11.20</td><td>34.45</td><td>3.91 311 360 Peak</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB		1	5613.57	51.22	68.20	-16.98	37.33	33.28	11.16	34.45	3.90 311 360 Peak	2	5650.15	51.32	68.31	-16.99	37.18	33.50	11.18	34.45	3.91 311 360 Peak	3	5701.48	51.15	105.62	-54.47	36.69	33.80	11.20	34.45	3.91 311 360 Peak	4	5720.36	49.78	111.62	-61.84	35.28	33.84	11.20	34.45	3.91 311 360 Peak	 Site : 03CH23-HY Condition: PEAK(UNII 4) 3m DRH18-E_LE2C05A18EN_240620 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th></th></tr></thead><tbody><tr><td>1</td><td>5865.00</td><td>98.32</td><td>-----</td><td>-----</td><td>83.59</td><td>34.00</td><td>11.30</td><td>34.46</td><td>3.89 311 360 Peak</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB		1	5865.00	98.32	-----	-----	83.59	34.00	11.30	34.46	3.89 311 360 Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																						
Freq	Level	Line Margin	Level	Factor	Loss	Factor																																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																																								
1	5613.57	51.22	68.20	-16.98	37.33	33.28	11.16	34.45	3.90 311 360 Peak																																																																																																							
2	5650.15	51.32	68.31	-16.99	37.18	33.50	11.18	34.45	3.91 311 360 Peak																																																																																																							
3	5701.48	51.15	105.62	-54.47	36.69	33.80	11.20	34.45	3.91 311 360 Peak																																																																																																							
4	5720.36	49.78	111.62	-61.84	35.28	33.84	11.20	34.45	3.91 311 360 Peak																																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																							
Freq	Level	Line Margin	Level	Factor	Loss	Factor																																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																																								
1	5865.00	98.32	-----	-----	83.59	34.00	11.30	34.46	3.89 311 360 Peak																																																																																																							
Avg	Blank	 Site : 03CH23-HY Condition: AVG(UNII 4) 3m DRH18-E_LE2C05A18EN_240620 HORIZONTAL : RBW:1000.000kHz VBW:0.820kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th></th></tr></thead><tbody><tr><td>1</td><td>5865.00</td><td>90.68</td><td>-----</td><td>-----</td><td>75.95</td><td>34.00</td><td>11.29</td><td>34.46</td><td>3.90 311 360 Average</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB		1	5865.00	90.68	-----	-----	75.95	34.00	11.29	34.46	3.90 311 360 Average																																																																						
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																							
Freq	Level	Line Margin	Level	Factor	Loss	Factor																																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																																								
1	5865.00	90.68	-----	-----	75.95	34.00	11.29	34.46	3.90 311 360 Average																																																																																																							





Mode	5																																																										
	Band Edge - R																																																										
	U-NII-4_5.85-5.895_802.11n HT20_CH173_5865MHz																																																										
Pol.	Horizontal	Fundamental																																																									
Peak	Site : 03CH23-HY Condition: PEAK_BE(UNII 4) 3m DRH18-E_LE2C05A18EN_240620 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5923.25</td><td>51.43</td><td>89.48</td><td>-38.05</td><td>36.67</td><td>34.00</td><td>11.35</td><td>34.47</td><td>3.88</td><td>311</td><td>360</td><td>Peak</td></tr><tr><td>2</td><td>5968.75</td><td>52.37</td><td>88.20</td><td>-35.83</td><td>37.59</td><td>34.00</td><td>11.39</td><td>34.47</td><td>3.86</td><td>311</td><td>360</td><td>Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5923.25	51.43	89.48	-38.05	36.67	34.00	11.35	34.47	3.88	311	360	Peak	2	5968.75	52.37	88.20	-35.83	37.59	34.00	11.39	34.47	3.86	311	360	Peak	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																	
1	5923.25	51.43	89.48	-38.05	36.67	34.00	11.35	34.47	3.88	311	360	Peak																																															
2	5968.75	52.37	88.20	-35.83	37.59	34.00	11.39	34.47	3.86	311	360	Peak																																															
Avg	Site : 03CH23-HY Condition: AVG_BE(UNII 4) 3m DRH18-E_LE2C05A18EN_240620 HORIZONTAL : RBW:1000.000kHz VBW:0.820kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5924.98</td><td>43.28</td><td>68.21</td><td>-24.93</td><td>28.52</td><td>34.00</td><td>11.35</td><td>34.47</td><td>3.88</td><td>311</td><td>360</td><td>Average</td></tr><tr><td>2</td><td>5926.00</td><td>43.30</td><td>68.20</td><td>-24.90</td><td>28.54</td><td>34.00</td><td>11.35</td><td>34.47</td><td>3.88</td><td>311</td><td>360</td><td>Average</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5924.98	43.28	68.21	-24.93	28.52	34.00	11.35	34.47	3.88	311	360	Average	2	5926.00	43.30	68.20	-24.90	28.54	34.00	11.35	34.47	3.88	311	360	Average	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																	
1	5924.98	43.28	68.21	-24.93	28.52	34.00	11.35	34.47	3.88	311	360	Average																																															
2	5926.00	43.30	68.20	-24.90	28.54	34.00	11.35	34.47	3.88	311	360	Average																																															

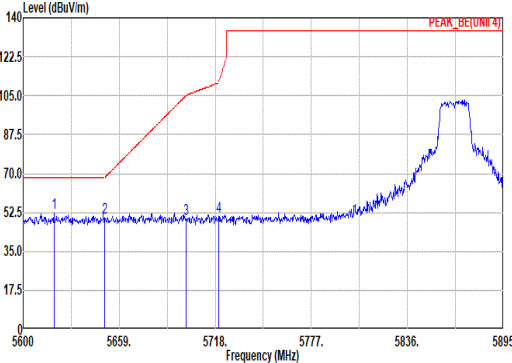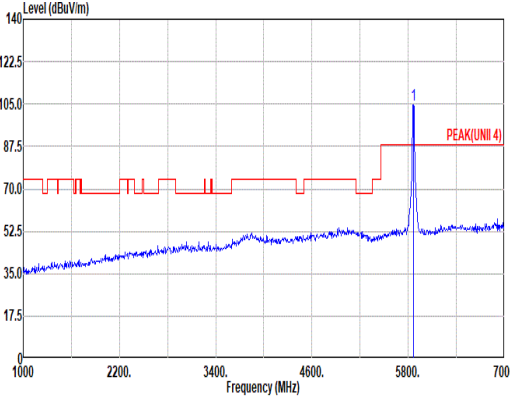
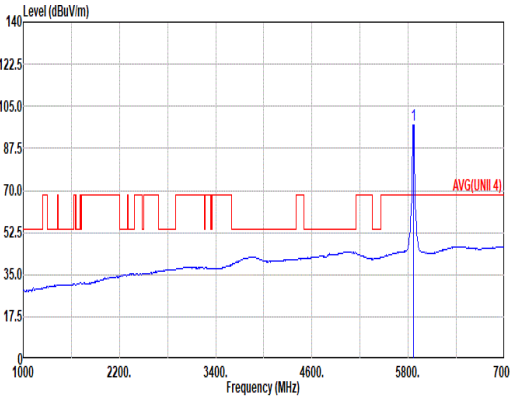


Mode	5																																																																																																																	
	Band Edge - L																																																																																																																	
	U-NII-4_5.85-5.895_802.11n HT20_CH173_5865MHz																																																																																																																	
Pol.	Vertical						Fundamental																																																																																																											
Peak																																																																																																																		
	Site : 03CH23-HY Condition: PEAK_BE(UNII 4) 3m DRH18-E_LE2C05A18EN_240620 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5618.88</td><td>52.10</td><td>68.20</td><td>-16.10</td><td>38.17</td><td>33.31</td><td>11.17</td><td>34.45</td><td>3.90</td><td>100</td><td>117 Peak</td></tr><tr><td>2</td><td>5650.15</td><td>50.35</td><td>68.31</td><td>-17.96</td><td>36.21</td><td>33.50</td><td>11.18</td><td>34.45</td><td>3.91</td><td>100</td><td>117 Peak</td></tr><tr><td>3</td><td>5700.01</td><td>49.78</td><td>105.20</td><td>-55.42</td><td>35.32</td><td>33.00</td><td>11.20</td><td>34.45</td><td>3.91</td><td>100</td><td>117 Peak</td></tr><tr><td>4</td><td>5720.07</td><td>50.90</td><td>110.95</td><td>-60.05</td><td>36.40</td><td>33.84</td><td>11.20</td><td>34.45</td><td>3.91</td><td>100</td><td>117 Peak</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	1	5618.88	52.10	68.20	-16.10	38.17	33.31	11.17	34.45	3.90	100	117 Peak	2	5650.15	50.35	68.31	-17.96	36.21	33.50	11.18	34.45	3.91	100	117 Peak	3	5700.01	49.78	105.20	-55.42	35.32	33.00	11.20	34.45	3.91	100	117 Peak	4	5720.07	50.90	110.95	-60.05	36.40	33.84	11.20	34.45	3.91	100	117 Peak	Site : 03CH23-HY Condition: PEAK(UNII 4) 3m DRH18-E_LE2C05A18EN_240620 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5865.00</td><td>104.66</td><td>-----</td><td>-----</td><td>89.93</td><td>34.00</td><td>11.29</td><td>34.46</td><td>3.90</td><td>100</td><td>117 Peak</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	1	5865.00	104.66	-----	-----	89.93	34.00	11.29	34.46	3.90	100
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg																																																																																																								
1	5618.88	52.10	68.20	-16.10	38.17	33.31	11.17	34.45	3.90	100	117 Peak																																																																																																							
2	5650.15	50.35	68.31	-17.96	36.21	33.50	11.18	34.45	3.91	100	117 Peak																																																																																																							
3	5700.01	49.78	105.20	-55.42	35.32	33.00	11.20	34.45	3.91	100	117 Peak																																																																																																							
4	5720.07	50.90	110.95	-60.05	36.40	33.84	11.20	34.45	3.91	100	117 Peak																																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg																																																																																																								
1	5865.00	104.66	-----	-----	89.93	34.00	11.29	34.46	3.90	100	117 Peak																																																																																																							
Avg	Blank																																																																																																																	
							Site : 03CH23-HY Condition: AVG(UNII 4) 3m DRH18-E_LE2C05A18EN_240620 VERTICAL : RBW:1000.000kHz VBW:0.820kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5865.00</td><td>97.40</td><td>-----</td><td>-----</td><td>82.67</td><td>34.00</td><td>11.30</td><td>34.46</td><td>3.89</td><td>100</td><td>117 Average</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	1	5865.00	97.40	-----	-----	82.67	34.00	11.30	34.46	3.89	100	117 Average																																																																					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg																																																																																																								
1	5865.00	97.40	-----	-----	82.67	34.00	11.30	34.46	3.89	100	117 Average																																																																																																							

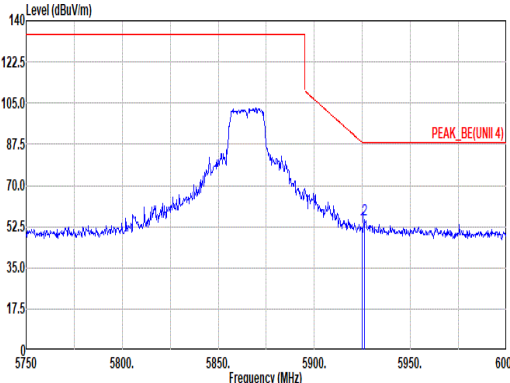
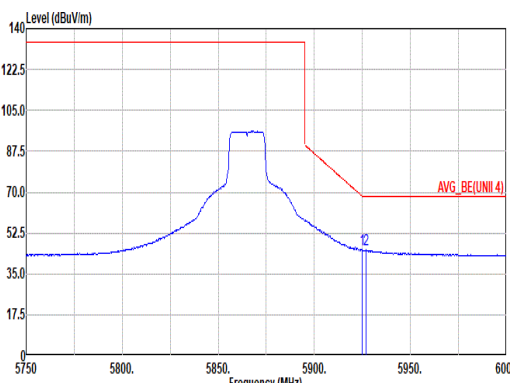


Mode	5																																																										
	Band Edge - R																																																										
	U-NII-4_5.85-5.895_802.11n HT20_CH173_5865MHz																																																										
Pol.	Vertical	Fundamental																																																									
Peak	 Site : 03CH23-HY Condition: PEAK_BE(UNII 4) 3m DRH18-E_LE2C05A18EN_240620 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5924.75</td><td>52.53</td><td>88.38</td><td>-35.85</td><td>37.77</td><td>34.00</td><td>11.35</td><td>34.47</td><td>3.88</td><td>100</td><td>117</td><td>Peak</td></tr><tr><td>2</td><td>5926.00</td><td>55.64</td><td>88.20</td><td>-32.56</td><td>40.88</td><td>34.00</td><td>11.35</td><td>34.47</td><td>3.88</td><td>100</td><td>117</td><td>Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5924.75	52.53	88.38	-35.85	37.77	34.00	11.35	34.47	3.88	100	117	Peak	2	5926.00	55.64	88.20	-32.56	40.88	34.00	11.35	34.47	3.88	100	117	Peak	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																	
1	5924.75	52.53	88.38	-35.85	37.77	34.00	11.35	34.47	3.88	100	117	Peak																																															
2	5926.00	55.64	88.20	-32.56	40.88	34.00	11.35	34.47	3.88	100	117	Peak																																															
Avg	 Site : 03CH23-HY Condition: AVG_BE(UNII 4) 3m DRH18-E_LE2C05A18EN_240620 VERTICAL : RBW:1000.000kHz VBW:0.820kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5924.75</td><td>45.35</td><td>68.38</td><td>-23.03</td><td>30.59</td><td>34.00</td><td>11.35</td><td>34.47</td><td>3.88</td><td>100</td><td>117</td><td>Average</td></tr><tr><td>2</td><td>5926.75</td><td>45.22</td><td>68.20</td><td>-22.98</td><td>30.46</td><td>34.00</td><td>11.35</td><td>34.47</td><td>3.88</td><td>100</td><td>117</td><td>Average</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5924.75	45.35	68.38	-23.03	30.59	34.00	11.35	34.47	3.88	100	117	Average	2	5926.75	45.22	68.20	-22.98	30.46	34.00	11.35	34.47	3.88	100	117	Average	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																	
1	5924.75	45.35	68.38	-23.03	30.59	34.00	11.35	34.47	3.88	100	117	Average																																															
2	5926.75	45.22	68.20	-22.98	30.46	34.00	11.35	34.47	3.88	100	117	Average																																															


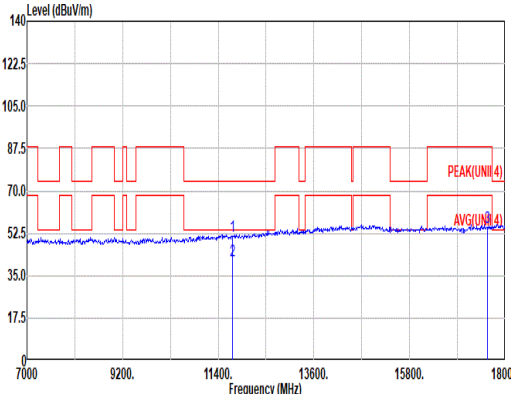
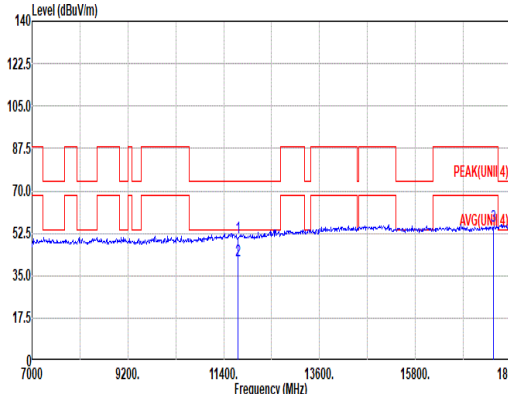


Mode	5																																																																																																																																							
	Harmonic																																																																																																																																							
	U-NII-4_5.85-5.895_802.11n HT20_CH173_5865MHz																																																																																																																																							
Pol.	Horizontal	Vertical																																																																																																																																						
Peak																																																																																																																																								
Avg	Site : 03CH23-HY Condition: PEAK(UNII 4) 3m DRH18-E_LE2C05A18EN_240620 HORIZONTAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>11730.00</td><td>51.39</td><td>74.00</td><td>-22.61</td><td>35.08</td><td>38.60</td><td>15.86</td><td>40.41</td><td>2.26</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>11730.00</td><td>41.27</td><td>54.00</td><td>-12.73</td><td>24.96</td><td>38.60</td><td>15.86</td><td>40.41</td><td>2.26</td><td>--</td><td>Average</td></tr><tr><td>3</td><td>17595.00</td><td>55.19</td><td>88.20</td><td>-33.01</td><td>38.72</td><td>40.19</td><td>19.51</td><td>46.36</td><td>3.13</td><td>--</td><td>Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11730.00	51.39	74.00	-22.61	35.08	38.60	15.86	40.41	2.26	--	Peak	2	11730.00	41.27	54.00	-12.73	24.96	38.60	15.86	40.41	2.26	--	Average	3	17595.00	55.19	88.20	-33.01	38.72	40.19	19.51	46.36	3.13	--	Peak	Site : 03CH23-HY Condition: PEAK(UNII 4) 3m DRH18-E_LE2C05A18EN_240620 VERTICAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>11730.00</td><td>50.88</td><td>74.00</td><td>-23.12</td><td>34.57</td><td>38.60</td><td>15.86</td><td>40.41</td><td>2.26</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>11730.00</td><td>41.18</td><td>54.00</td><td>-12.82</td><td>24.87</td><td>38.60</td><td>15.86</td><td>40.41</td><td>2.26</td><td>--</td><td>Average</td></tr><tr><td>3</td><td>17595.00</td><td>55.27</td><td>88.20</td><td>-32.93</td><td>38.00</td><td>40.19</td><td>19.51</td><td>46.36</td><td>3.13</td><td>--</td><td>Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11730.00	50.88	74.00	-23.12	34.57	38.60	15.86	40.41	2.26	--	Peak	2	11730.00	41.18	54.00	-12.82	24.87	38.60	15.86	40.41	2.26	--	Average	3	17595.00	55.27	88.20	-32.93	38.00	40.19	19.51	46.36	3.13	--	Peak
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																														
1	11730.00	51.39	74.00	-22.61	35.08	38.60	15.86	40.41	2.26	--	Peak																																																																																																																													
2	11730.00	41.27	54.00	-12.73	24.96	38.60	15.86	40.41	2.26	--	Average																																																																																																																													
3	17595.00	55.19	88.20	-33.01	38.72	40.19	19.51	46.36	3.13	--	Peak																																																																																																																													
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																														
1	11730.00	50.88	74.00	-23.12	34.57	38.60	15.86	40.41	2.26	--	Peak																																																																																																																													
2	11730.00	41.18	54.00	-12.82	24.87	38.60	15.86	40.41	2.26	--	Average																																																																																																																													
3	17595.00	55.27	88.20	-32.93	38.00	40.19	19.51	46.36	3.13	--	Peak																																																																																																																													

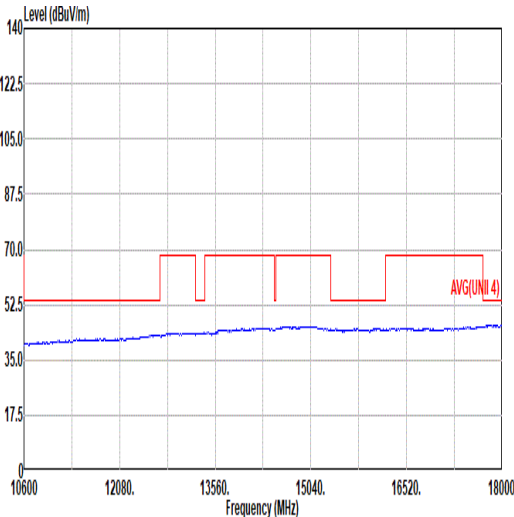
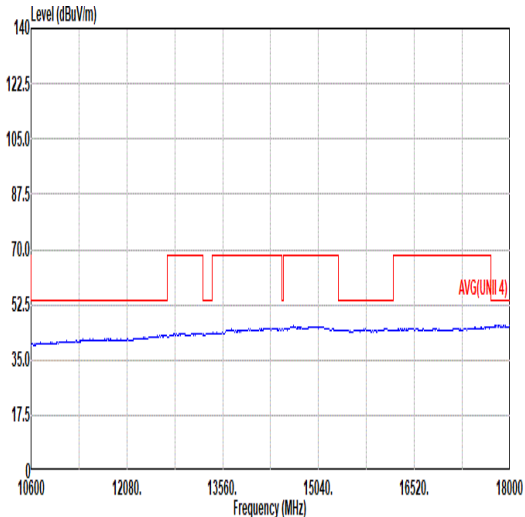


Mode	5	
	Harmonic	
	U-NII-4_5.85-5.895_802.11n HT20_CH173_5865MHz	
Pol.	Horizontal	Vertical
10.6G ~18G Avg	 Site : 03CH23-HY Condition: AVG(UNI 4) 3m DRH18-E_LE2C05A18EN_240620 HORIZONTAL	 Site : 03CH23-HY Condition: AVG(UNI 4) 3m DRH18-E_LE2C05A18EN_240620 VERTICAL

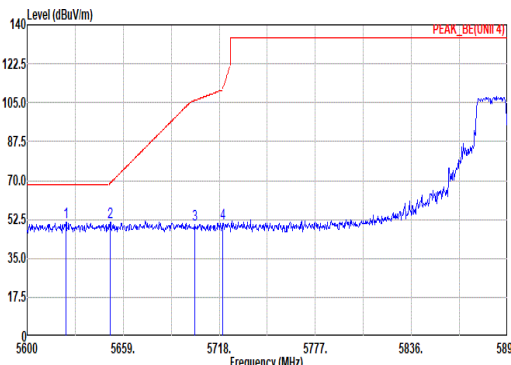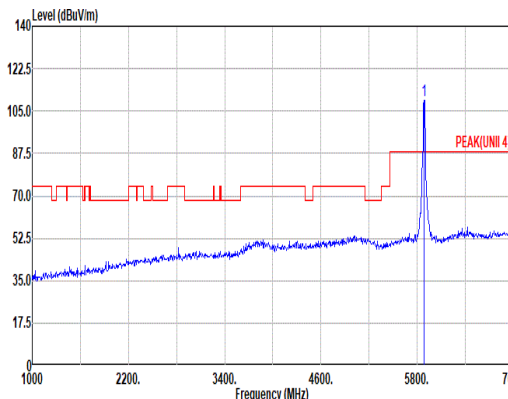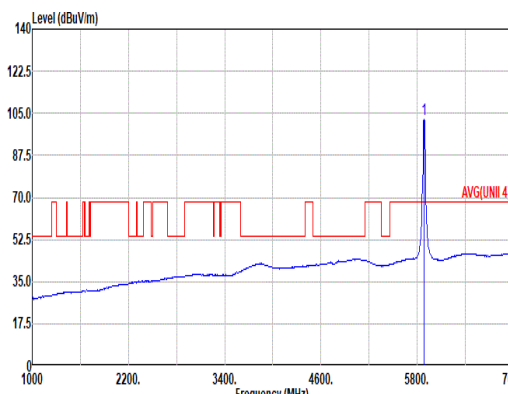

Mode	6																																																																																																																																								
	Band Edge - L																																																																																																																																								
	U-NII-4_5.85-5.895_802.11n HT20_CH177_5885MHz																																																																																																																																								
Pol.	Horizontal						Fundamental																																																																																																																																		
Peak																																																																																																																																									
	Site : 03CH23-HY Condition: PEAK_BE(UNII 4) 3m DRH18-E_LE2C05A18EN_240620 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5623.90</td><td>51.27</td><td>68.20</td><td>-16.93</td><td>37.31</td><td>33.34</td><td>11.17</td><td>34.45</td><td>3.90</td><td>100</td><td>274</td><td>Peak</td></tr><tr><td>2</td><td>5651.04</td><td>51.15</td><td>68.97</td><td>-17.82</td><td>37.00</td><td>33.51</td><td>11.18</td><td>34.45</td><td>3.91</td><td>100</td><td>274</td><td>Peak</td></tr><tr><td>3</td><td>5702.96</td><td>50.25</td><td>106.03</td><td>-55.78</td><td>35.78</td><td>33.81</td><td>11.20</td><td>34.45</td><td>3.91</td><td>100</td><td>274</td><td>Peak</td></tr><tr><td>4</td><td>5728.07</td><td>50.88</td><td>110.95</td><td>-60.07</td><td>36.38</td><td>33.84</td><td>11.20</td><td>34.45</td><td>3.91</td><td>100</td><td>274</td><td>Peak</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5623.90	51.27	68.20	-16.93	37.31	33.34	11.17	34.45	3.90	100	274	Peak	2	5651.04	51.15	68.97	-17.82	37.00	33.51	11.18	34.45	3.91	100	274	Peak	3	5702.96	50.25	106.03	-55.78	35.78	33.81	11.20	34.45	3.91	100	274	Peak	4	5728.07	50.88	110.95	-60.07	36.38	33.84	11.20	34.45	3.91	100	274	Peak	Site : 03CH23-HY Condition: PEAK(UNII 4) 3m DRH18-E_LE2C05A18EN_240620 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5885.00</td><td>109.47</td><td>-----</td><td>-----</td><td>94.73</td><td>34.00</td><td>11.31</td><td>34.46</td><td>3.89</td><td>100</td><td>274</td><td>Peak</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5885.00	109.47	-----	-----	94.73	34.00	11.31	34.46	3.89	100	274
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																
1	5623.90	51.27	68.20	-16.93	37.31	33.34	11.17	34.45	3.90	100	274	Peak																																																																																																																													
2	5651.04	51.15	68.97	-17.82	37.00	33.51	11.18	34.45	3.91	100	274	Peak																																																																																																																													
3	5702.96	50.25	106.03	-55.78	35.78	33.81	11.20	34.45	3.91	100	274	Peak																																																																																																																													
4	5728.07	50.88	110.95	-60.07	36.38	33.84	11.20	34.45	3.91	100	274	Peak																																																																																																																													
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																															
1	5885.00	109.47	-----	-----	94.73	34.00	11.31	34.46	3.89	100	274	Peak																																																																																																																													
Avg	Blank																																																																																																																																								
							Site : 03CH23-HY Condition: AVG(UNII 4) 3m DRH18-E_LE2C05A18EN_240620 HORIZONTAL : RBW:1000.000kHz VBW:0.820kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5885.00</td><td>102.57</td><td>-----</td><td>-----</td><td>87.82</td><td>34.00</td><td>11.32</td><td>34.46</td><td>3.89</td><td>100</td><td>274</td><td>Average</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5885.00	102.57	-----	-----	87.82	34.00	11.32	34.46	3.89	100	274	Average																																																																																	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																															
1	5885.00	102.57	-----	-----	87.82	34.00	11.32	34.46	3.89	100	274	Average																																																																																																																													

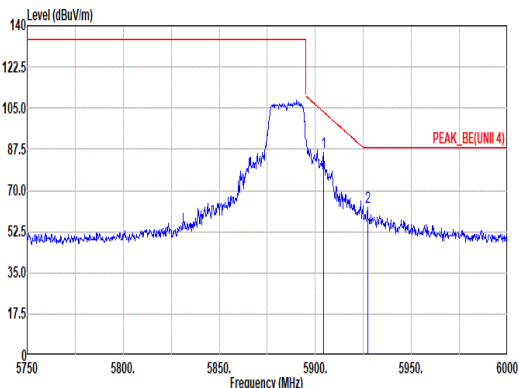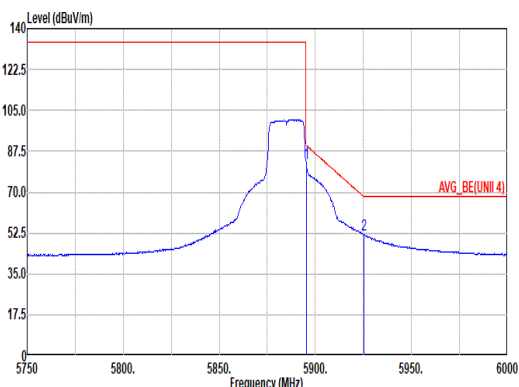

Mode	6																																																								
	Band Edge - R																																																								
	U-NII-4_5.85-5.895_802.11n HT20_CH177_5885MHz																																																								
Pol.	Horizontal	Fundamental																																																							
Peak	 Site : 03CH23-HY Condition: PEAK_BE(UNII 4) 3m DRH18-E_LE2C05A18EN_240620 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5904.25</td><td>86.04</td><td>103.40</td><td>-17.36</td><td>71.29</td><td>34.00</td><td>11.33</td><td>34.46</td><td>3.88</td><td>100</td><td>274 Peak</td></tr><tr><td>2</td><td>5927.25</td><td>62.93</td><td>88.20</td><td>-25.27</td><td>48.17</td><td>34.00</td><td>11.35</td><td>34.47</td><td>3.88</td><td>100</td><td>274 Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm	deg	1	5904.25	86.04	103.40	-17.36	71.29	34.00	11.33	34.46	3.88	100	274 Peak	2	5927.25	62.93	88.20	-25.27	48.17	34.00	11.35	34.47	3.88	100	274 Peak	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																	
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm	deg																																															
1	5904.25	86.04	103.40	-17.36	71.29	34.00	11.33	34.46	3.88	100	274 Peak																																														
2	5927.25	62.93	88.20	-25.27	48.17	34.00	11.35	34.47	3.88	100	274 Peak																																														
Avg	 Site : 03CH23-HY Condition: AVG_BE(UNII 4) 3m DRH18-E_LE2C05A18EN_240620 HORIZONTAL : RBW:1000.000kHz VBW:0.820kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5895.25</td><td>82.23</td><td>90.02</td><td>-7.79</td><td>67.48</td><td>34.00</td><td>11.32</td><td>34.46</td><td>3.89</td><td>100</td><td>274 Average</td></tr><tr><td>2</td><td>5925.25</td><td>51.75</td><td>68.20</td><td>-16.45</td><td>36.99</td><td>34.00</td><td>11.35</td><td>34.47</td><td>3.88</td><td>100</td><td>274 Average</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm	deg	1	5895.25	82.23	90.02	-7.79	67.48	34.00	11.32	34.46	3.89	100	274 Average	2	5925.25	51.75	68.20	-16.45	36.99	34.00	11.35	34.47	3.88	100	274 Average	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																	
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm	deg																																															
1	5895.25	82.23	90.02	-7.79	67.48	34.00	11.32	34.46	3.89	100	274 Average																																														
2	5925.25	51.75	68.20	-16.45	36.99	34.00	11.35	34.47	3.88	100	274 Average																																														



6

Mode

Band Edge - L


U-NII-4_5.85-5.895_802.11n HT20_CH177_5885MHz

Pol.

Vertical


Fundamental

Peak

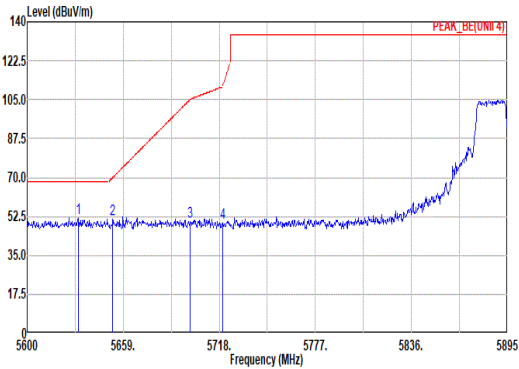

Site : 03CH23-HY
Condition: PEAK_BE(UNII 4) 3m DRH18-E_LE2C05A18EN_240620 VERTICAL
: RBW:1000.000kHz VBW:3000.000kHz SMT:Auto

	Limit			Read		Ant	Cable	Preamp	Aux	APos	TPos	Remark
Freq	Level	Line Margin		Level	Factor		Loss	Factor	Factor			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	5631.27	51.81	68.20	-16.39	37.00	33.39	11.17	34.45	3.90	100	142	Peak
2	5652.51	51.18	70.07	-18.89	37.02	33.52	11.18	34.45	3.91	100	142	Peak
3	5700.30	50.34	105.28	-54.94	35.00	33.00	11.20	34.45	3.91	100	142	Peak
4	5720.07	49.52	110.95	-61.43	35.02	33.84	11.20	34.45	3.91	100	142	Peak

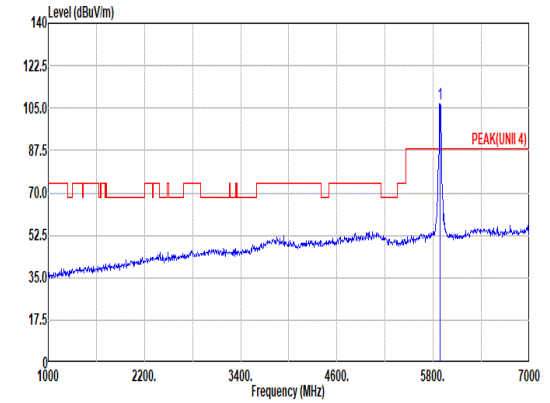


Site : 03CH23-HY
Condition: PEAK(UNII 4) 3m DRH18-E_LE2C05A18EN_240620 VERTICAL
: RBW:1000.000kHz VBW:3000.000kHz SMT:Auto

		Limit		Read	Ant	Cable	Preamp	Aux	APos	TPos	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg
1	5885.00	106.75	-----	-----	92.00	34.00	11.32	34.46	3.89	100	142 Peak

Avg



Blank

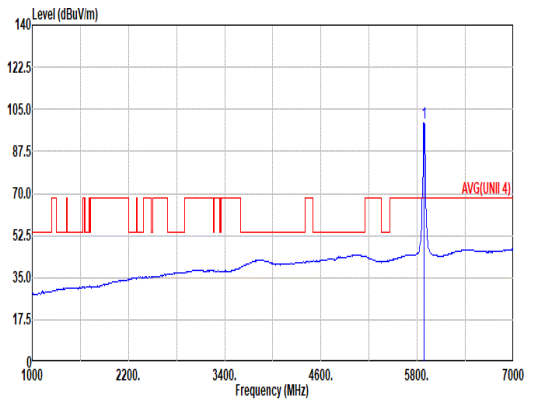

Site : 03CH23-HY
Condition: AVG(UNII 4) 3m DRH18-E_LE2C05A18EN_240620 VERTICAL
: RBW:1000.000kHz VBW:0.820kHz SMT:Auto

		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor			Remark		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		
1	5885.00	99.39	-----	-----	84.64	34.00	11.32	34.46	3.89	100	142	Average

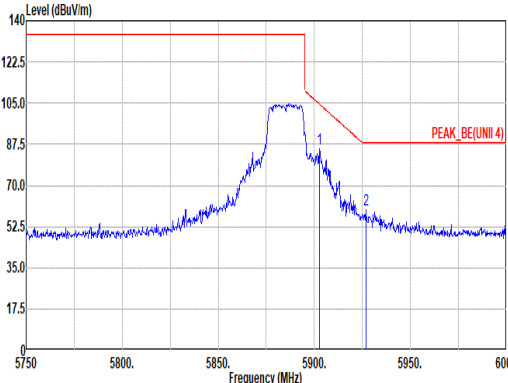
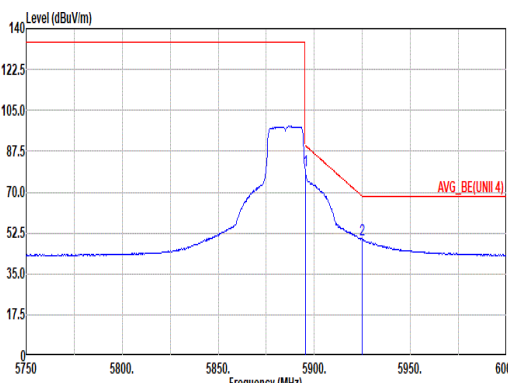


Mode	6																																																										
	Band Edge - R																																																										
	U-NII-4_5.85-5.895_802.11n HT20_CH177_5885MHz																																																										
Pol.	Vertical	Fundamental																																																									
Peak	 Site : 03CH23-HY Condition: PEAK_BE(UNII 4) 3m DRH18-E_LE2C05A18EN_240620 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5902.75</td><td>85.65</td><td>104.51</td><td>-18.86</td><td>70.90</td><td>34.00</td><td>11.33</td><td>34.46</td><td>3.88</td><td>100</td><td>142</td><td>Peak</td></tr><tr><td>2</td><td>5926.75</td><td>59.47</td><td>88.20</td><td>-28.73</td><td>44.71</td><td>34.00</td><td>11.35</td><td>34.47</td><td>3.88</td><td>100</td><td>142</td><td>Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm	deg	1	5902.75	85.65	104.51	-18.86	70.90	34.00	11.33	34.46	3.88	100	142	Peak	2	5926.75	59.47	88.20	-28.73	44.71	34.00	11.35	34.47	3.88	100	142	Peak	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																			
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm	deg																																																	
1	5902.75	85.65	104.51	-18.86	70.90	34.00	11.33	34.46	3.88	100	142	Peak																																															
2	5926.75	59.47	88.20	-28.73	44.71	34.00	11.35	34.47	3.88	100	142	Peak																																															
Avg	 Site : 03CH23-HY Condition: AVG_BE(UNII 4) 3m DRH18-E_LE2C05A18EN_240620 VERTICAL : RBW:1000.000kHz VBW:0.820kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5895.25</td><td>79.13</td><td>90.02</td><td>-10.89</td><td>64.30</td><td>34.00</td><td>11.32</td><td>34.46</td><td>3.89</td><td>100</td><td>142</td><td>Average</td></tr><tr><td>2</td><td>5925.00</td><td>49.88</td><td>68.20</td><td>-18.32</td><td>35.12</td><td>34.00</td><td>11.35</td><td>34.47</td><td>3.88</td><td>100</td><td>142</td><td>Average</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm	deg	1	5895.25	79.13	90.02	-10.89	64.30	34.00	11.32	34.46	3.89	100	142	Average	2	5925.00	49.88	68.20	-18.32	35.12	34.00	11.35	34.47	3.88	100	142	Average	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																			
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm	deg																																																	
1	5895.25	79.13	90.02	-10.89	64.30	34.00	11.32	34.46	3.89	100	142	Average																																															
2	5925.00	49.88	68.20	-18.32	35.12	34.00	11.35	34.47	3.88	100	142	Average																																															



Mode	6																																																																																																																																							
	Harmonic																																																																																																																																							
	U-NII-4_5.85-5.895_802.11n HT20_CH177_5885MHz																																																																																																																																							
Pol.	Horizontal	Vertical																																																																																																																																						
Peak Avg	Site : 03CH23-HY Condition: PEAK(UNII 4) 3m DRH18-E_LE2C05A18EN_240620 HORIZONTAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>11770.00</td><td>50.87</td><td>74.00</td><td>-23.13</td><td>34.53</td><td>38.64</td><td>15.89</td><td>40.45</td><td>2.26</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>11770.00</td><td>41.22</td><td>54.00</td><td>-12.78</td><td>24.88</td><td>38.64</td><td>15.89</td><td>40.45</td><td>2.26</td><td>--</td><td>Average</td></tr><tr><td>3</td><td>17655.00</td><td>55.20</td><td>88.20</td><td>-33.00</td><td>38.72</td><td>40.11</td><td>19.55</td><td>46.33</td><td>3.15</td><td>--</td><td>Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11770.00	50.87	74.00	-23.13	34.53	38.64	15.89	40.45	2.26	--	Peak	2	11770.00	41.22	54.00	-12.78	24.88	38.64	15.89	40.45	2.26	--	Average	3	17655.00	55.20	88.20	-33.00	38.72	40.11	19.55	46.33	3.15	--	Peak	Site : 03CH23-HY Condition: PEAK(UNII 4) 3m DRH18-E_LE2C05A18EN_240620 VERTICAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>11770.00</td><td>51.45</td><td>74.00</td><td>-22.55</td><td>35.11</td><td>38.64</td><td>15.89</td><td>40.45</td><td>2.26</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>11770.00</td><td>41.25</td><td>54.00</td><td>-12.75</td><td>24.91</td><td>38.64</td><td>15.89</td><td>40.45</td><td>2.26</td><td>--</td><td>Average</td></tr><tr><td>3</td><td>17655.00</td><td>55.45</td><td>88.20</td><td>-32.75</td><td>38.97</td><td>40.11</td><td>19.55</td><td>46.33</td><td>3.15</td><td>--</td><td>Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11770.00	51.45	74.00	-22.55	35.11	38.64	15.89	40.45	2.26	--	Peak	2	11770.00	41.25	54.00	-12.75	24.91	38.64	15.89	40.45	2.26	--	Average	3	17655.00	55.45	88.20	-32.75	38.97	40.11	19.55	46.33	3.15	--	Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																														
1	11770.00	50.87	74.00	-23.13	34.53	38.64	15.89	40.45	2.26	--	Peak																																																																																																																													
2	11770.00	41.22	54.00	-12.78	24.88	38.64	15.89	40.45	2.26	--	Average																																																																																																																													
3	17655.00	55.20	88.20	-33.00	38.72	40.11	19.55	46.33	3.15	--	Peak																																																																																																																													
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																														
1	11770.00	51.45	74.00	-22.55	35.11	38.64	15.89	40.45	2.26	--	Peak																																																																																																																													
2	11770.00	41.25	54.00	-12.75	24.91	38.64	15.89	40.45	2.26	--	Average																																																																																																																													
3	17655.00	55.45	88.20	-32.75	38.97	40.11	19.55	46.33	3.15	--	Peak																																																																																																																													

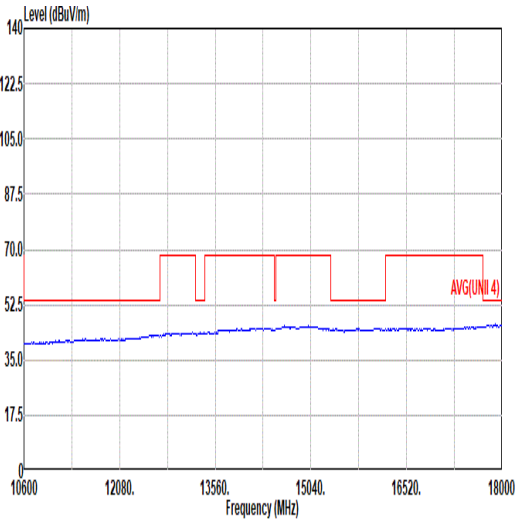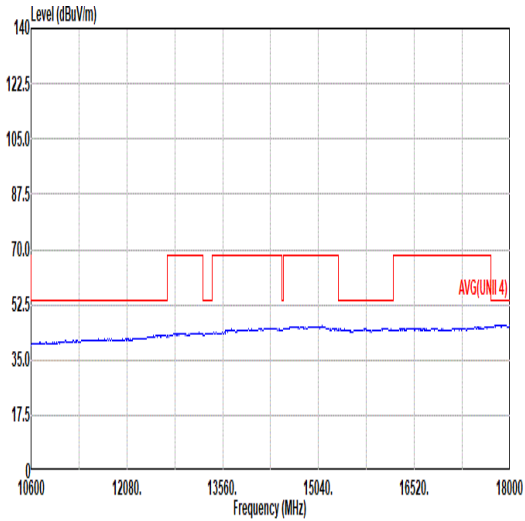

Mode	6	
	Harmonic	
	U-NII-4_5.85-5.895_802.11n HT20_CH177_5885MHz	
Pol.	Horizontal	Vertical
10.6G ~18G Avg	 Site : 03CH23-HY Condition: AVG(UNII 4) 3m DRH18-E_LE2C05A18EN_240620 HORIZONTAL	 Site : 03CH23-HY Condition: AVG(UNII 4) 3m DRH18-E_LE2C05A18EN_240620 VERTICAL



7

Mode

Band Edge - L


U-NII-4_5.85-5.895_802.11n HT40_CH167_5835MHz

Pol.

Horizontal


Fundamental

Peak

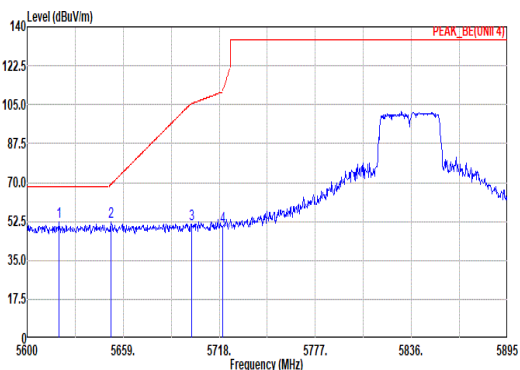

Site : 03CH23-HY
Condition: PEAK_BE(UNII 4) 3m DRH18-E_LE2C05A18EN_240620 HORIZONTAL
: RBW:1000.000kHz VBW:3000.000kHz SMT:Auto

	Freq	Level	Limit Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	
1	5619.77	52.46	68.20	-15.74	38.52	33.32	11.17	34.45	3.90	104	265 Peak
2	5651.33	52.55	69.19	-16.64	38.40	33.51	11.18	34.45	3.91	104	265 Peak
3	5700.89	51.41	105.45	-54.04	36.95	33.00	11.20	34.45	3.91	104	265 Peak
4	5720.07	50.31	110.95	-60.64	35.81	33.84	11.20	34.45	3.91	104	265 Peak

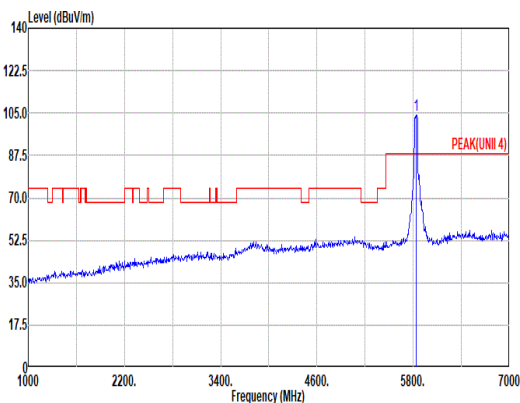


Site : 03CH23-HY
Condition: PEAK(UNII 4) 3m DRH18-E_LE2C05A18EN_240620 HORIZONTAL
: RBW:1000.000kHz VBW:3000.000kHz SMT:Auto

		Limit		Read	Ant	Cable	Preamp	Aux	APos	TPos	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg
1	5835.00	104.17	-----	89.47	33.98	11.27	34.46	3.91	104	265	Peak

Avg

Blank

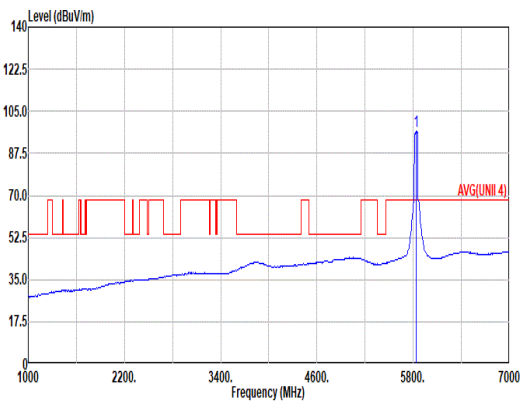

Site : 03CH23-HY
Condition: AVG(UNII 4) 3m DRH18-E_LE2C05A18EN_240620 HORIZONTAL
: RBW:1000.000kHz VBW:0.430kHz SMT:Auto

		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor				Remark		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		
1	5835.00	96.58	-----	-----	81.88	33.98	11.27	34.46	3.91	104	265	Average



		7									
Mode	Band Edge - R										
	U-NII-4_5.85-5.895_802.11n HT40_CH167_5835MHz										
Pol.	Horizontal										
Peak											



7

Mode

Band Edge - L


U-NII-4_5.85-5.895_802.11n HT40_CH167_5835MHz

Pol.

Vertical


Fundamental

Peak

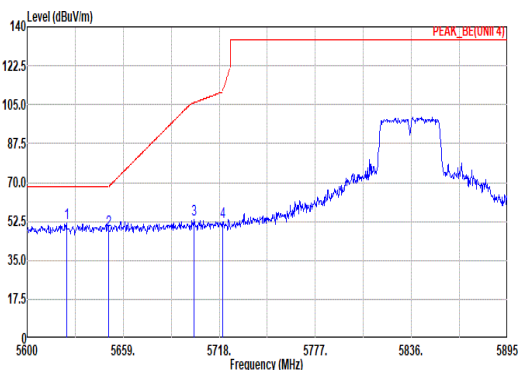

Site : 03CH23-HY
Condition: PEAK_BE(UNII 4) 3m DRH18-E_LE2C05A18EN_240620 VERTICAL
: RBW:1000.000kHz VBW:3000.000kHz SMT:Auto

	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	
Freq	Level	Line	Factor	Loss	Factor	Factor			Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm
1	5624.19	51.64	68.20	-16.56	37.67	33.35	11.17	34.45	3.90
2	5650.15	48.80	68.31	-19.51	34.66	33.50	11.18	34.45	3.91
3	5702.37	53.18	105.86	-52.68	38.72	33.00	11.20	34.45	3.91
4	5728.07	52.25	110.95	-58.70	37.75	33.84	11.20	34.45	3.91

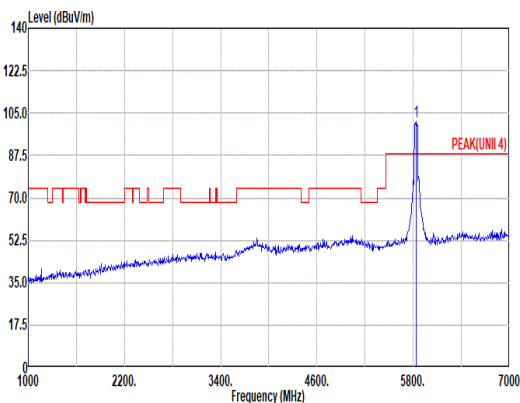


Site : 03CH23-HY
Condition: PEAK(UNII 4) 3m DRH18-E_LE2C05A18EN_240620 VERTICAL
: RBW:1000.000kHz VBW:3000.000kHz SMT:Auto

	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	
Freq	Level	Line	Factor	Loss	Factor	Factor			Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm
1	5835.00	101.18	-----	-----	86.50	33.97	11.26	34.46	3.91

Avg


Blank

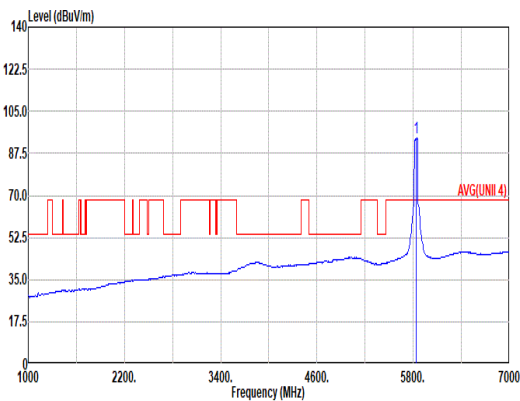

Site : 03CH23-HY
Condition: AVG(UNII 4) 3m DRH18-E_LE2C05A18EN_240620 VERTICAL
: RBW:1000.000kHz VBW:0.430kHz SMT:Auto

	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	
Freq	Level	Line	Factor	Loss	Factor	Factor			Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm
1	5835.00	93.86	-----	-----	79.16	33.98	11.27	34.46	3.91

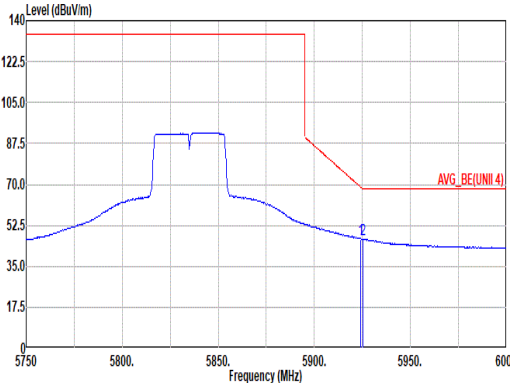

Mode	7																																																										
	Band Edge - R																																																										
	U-NII-4_5.85-5.895_802.11n HT40_CH167_5835MHz																																																										
Pol.	Vertical	Fundamental																																																									
Avg	 Site : 03CH23-HY Condition: AVG_BE(U-NII 4) 3m DRH10-E_LE2C05A18EN_240620 VERTICAL : RBW:1000.000kHz VBW:0.430kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5924.00</td><td>46.57</td><td>68.93</td><td>-22.36</td><td>31.81</td><td>34.00</td><td>11.35</td><td>34.47</td><td>3.88</td><td>100</td><td>138</td><td>Average</td></tr><tr><td>2</td><td>5925.25</td><td>46.74</td><td>68.20</td><td>-21.46</td><td>31.98</td><td>34.00</td><td>11.35</td><td>34.47</td><td>3.88</td><td>100</td><td>138</td><td>Average</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm	deg	1	5924.00	46.57	68.93	-22.36	31.81	34.00	11.35	34.47	3.88	100	138	Average	2	5925.25	46.74	68.20	-21.46	31.98	34.00	11.35	34.47	3.88	100	138	Average	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																			
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm	deg																																																	
1	5924.00	46.57	68.93	-22.36	31.81	34.00	11.35	34.47	3.88	100	138	Average																																															
2	5925.25	46.74	68.20	-21.46	31.98	34.00	11.35	34.47	3.88	100	138	Average																																															



7

Mode


Harmonic

U-NII-4_5.85-5.895_802.11n HT40_CH167_5835MHz

Pol.


Horizontal

Vertical

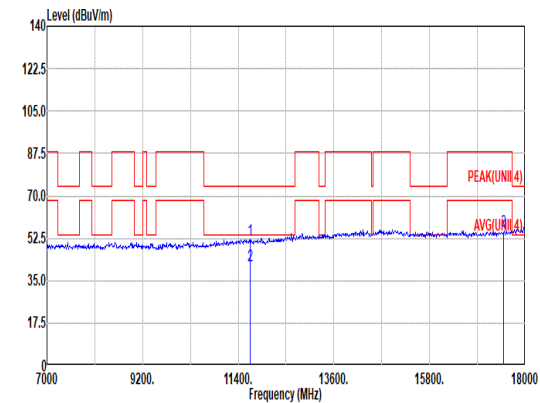Peak
Avg

Site : 03CH23-HY
Condition: PEAK(UNII 4) 3m DRH18-E_LE2C05A18EN_240620 HORIZONTAL



	Freq	Limit		Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark
		Level	Line Margin	Level	Factor	Loss	Factor	Factor			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg
1	11670.00	51.71	74.00	-22.29	35.37	38.60	15.82	40.34	2.26	--	-- Peak
2	11670.00	41.36	54.00	-12.64	25.02	38.60	15.82	40.34	2.26	--	-- Average
3	17505.00	55.60	88.20	-32.60	39.37	40.10	19.44	46.41	3.10	--	-- Peak

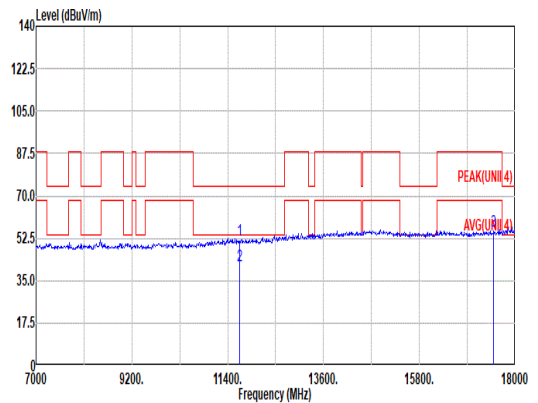

Site : 03CH23-HY
Condition: PEAK(UNII 4) 3m DRH18-E_LE2C05A18EN_240620 VERTICAL

	Freq	Limit		Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark
		Level	Line Margin	Level	Factor	Loss	Factor	Factor			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg
1	11670.00	52.03	74.00	-21.97	35.69	38.60	15.82	40.34	2.26	--	-- Peak
2	11670.00	41.18	54.00	-12.82	24.84	38.60	15.82	40.34	2.26	--	-- Average
3	17505.00	55.44	88.20	-32.76	39.21	40.10	19.44	46.41	3.10	--	-- Peak

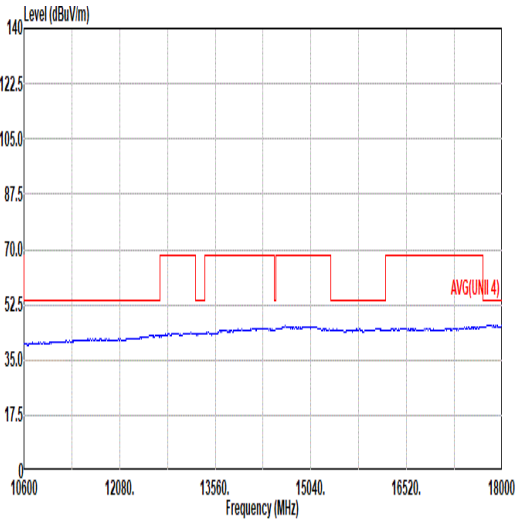
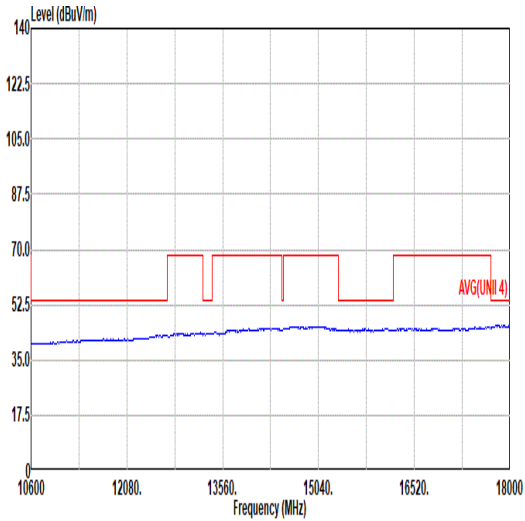


Mode	7	
	Harmonic	
	U-NII-4_5.85-5.895_802.11n HT40_CH167_5835MHz	
Pol.	Horizontal	Vertical
10.6G ~18G Avg	 Site : 03CH23-HY Condition: AVG(UNI 4) 3m DRH18-E_LE2C05A18EN_240620 HORIZONTAL	 Site : 03CH23-HY Condition: AVG(UNI 4) 3m DRH18-E_LE2C05A18EN_240620 VERTICAL



		8									
Mode	Band Edge - L										
	U-NII-4_5.85-5.895_802.11n HT40_CH175_5875MHz										
Pol.	Horizontal										
Peak	</										

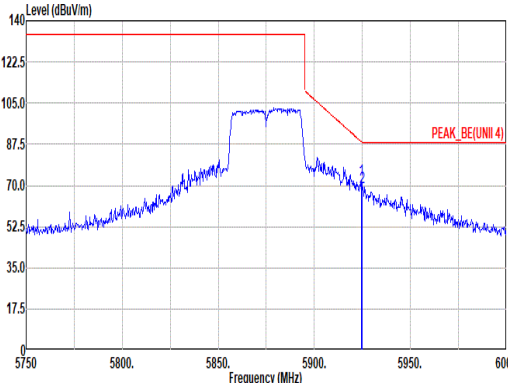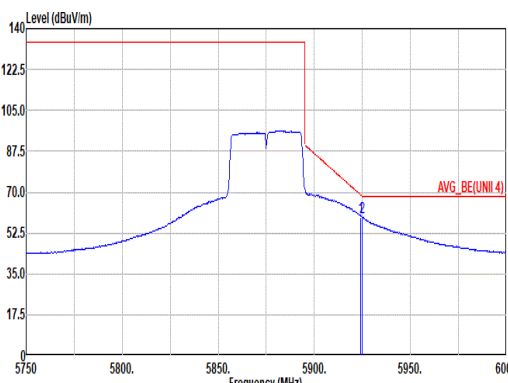

Mode	8																																																										
	Band Edge - R																																																										
	U-NII-4_5.85-5.895_802.11n HT40_CH175_5875MHz																																																										
Pol.	Horizontal	Fundamental																																																									
Peak	 Site : 03CH23-HY Condition: PEAK_BE(UNII 4) 3m DRH18-E_LE2C05A18EN_240620 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5924.50</td><td>72.49</td><td>88.57</td><td>-16.08</td><td>57.73</td><td>34.00</td><td>11.35</td><td>34.47</td><td>3.88</td><td>100</td><td>265</td><td>Peak</td></tr><tr><td>2</td><td>5925.00</td><td>69.30</td><td>88.20</td><td>-18.90</td><td>54.54</td><td>34.00</td><td>11.35</td><td>34.47</td><td>3.88</td><td>100</td><td>265</td><td>Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5924.50	72.49	88.57	-16.08	57.73	34.00	11.35	34.47	3.88	100	265	Peak	2	5925.00	69.30	88.20	-18.90	54.54	34.00	11.35	34.47	3.88	100	265	Peak	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																	
1	5924.50	72.49	88.57	-16.08	57.73	34.00	11.35	34.47	3.88	100	265	Peak																																															
2	5925.00	69.30	88.20	-18.90	54.54	34.00	11.35	34.47	3.88	100	265	Peak																																															
Avg	 Site : 03CH23-HY Condition: AVG_BE(UNII 4) 3m DRH18-E_LE2C05A18EN_240620 HORIZONTAL : RBW:1000.000kHz VBW:0.430kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5924.00</td><td>59.32</td><td>68.93</td><td>-9.61</td><td>44.56</td><td>34.00</td><td>11.35</td><td>34.47</td><td>3.88</td><td>100</td><td>265</td><td>Average</td></tr><tr><td>2</td><td>5925.00</td><td>59.32</td><td>68.20</td><td>-8.88</td><td>44.56</td><td>34.00</td><td>11.35</td><td>34.47</td><td>3.88</td><td>100</td><td>265</td><td>Average</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5924.00	59.32	68.93	-9.61	44.56	34.00	11.35	34.47	3.88	100	265	Average	2	5925.00	59.32	68.20	-8.88	44.56	34.00	11.35	34.47	3.88	100	265	Average	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																	
1	5924.00	59.32	68.93	-9.61	44.56	34.00	11.35	34.47	3.88	100	265	Average																																															
2	5925.00	59.32	68.20	-8.88	44.56	34.00	11.35	34.47	3.88	100	265	Average																																															





Mode	8																																																																																																																						
	Band Edge - L																																																																																																																						
	U-NII-4_5.85-5.895_802.11n HT40_CH175_5875MHz																																																																																																																						
Pol.	Vertical					Fundamental																																																																																																																	
Peak																																																																																																																							
	Site : 03CH23-HY Condition: PEAK_BE(UNII 4) 3m DRH18-E_LE2C05A18EN_240620 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 5609.74</td><td>51.79</td><td>68.20</td><td>-16.41</td><td>37.92</td><td>33.26</td><td>11.16</td><td>34.45</td><td>3.90</td><td>100 139 Peak</td></tr><tr><td>2 5650.74</td><td>50.36</td><td>68.75</td><td>-18.39</td><td>36.22</td><td>33.50</td><td>11.18</td><td>34.45</td><td>3.91</td><td>100 139 Peak</td></tr><tr><td>3 5701.19</td><td>51.27</td><td>105.53</td><td>-54.26</td><td>36.81</td><td>33.00</td><td>11.20</td><td>34.45</td><td>3.91</td><td>100 139 Peak</td></tr><tr><td>4 5721.25</td><td>51.24</td><td>113.64</td><td>-62.40</td><td>36.74</td><td>33.84</td><td>11.20</td><td>34.45</td><td>3.91</td><td>100 139 Peak</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5609.74	51.79	68.20	-16.41	37.92	33.26	11.16	34.45	3.90	100 139 Peak	2 5650.74	50.36	68.75	-18.39	36.22	33.50	11.18	34.45	3.91	100 139 Peak	3 5701.19	51.27	105.53	-54.26	36.81	33.00	11.20	34.45	3.91	100 139 Peak	4 5721.25	51.24	113.64	-62.40	36.74	33.84	11.20	34.45	3.91	100 139 Peak	Site : 03CH23-HY Condition: PEAK(UNII 4) 3m DRH18-E_LE2C05A18EN_240620 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 5875.00</td><td>102.23</td><td>-----</td><td>-----</td><td>87.50</td><td>34.00</td><td>11.30</td><td>34.46</td><td>3.89</td><td>100 139 Peak</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5875.00	102.23	-----	-----	87.50	34.00	11.30	34.46	3.89
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																														
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																														
1 5609.74	51.79	68.20	-16.41	37.92	33.26	11.16	34.45	3.90	100 139 Peak																																																																																																														
2 5650.74	50.36	68.75	-18.39	36.22	33.50	11.18	34.45	3.91	100 139 Peak																																																																																																														
3 5701.19	51.27	105.53	-54.26	36.81	33.00	11.20	34.45	3.91	100 139 Peak																																																																																																														
4 5721.25	51.24	113.64	-62.40	36.74	33.84	11.20	34.45	3.91	100 139 Peak																																																																																																														
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																														
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																														
1 5875.00	102.23	-----	-----	87.50	34.00	11.30	34.46	3.89	100 139 Peak																																																																																																														
Avg	Blank																																																																																																																						
						Site : 03CH23-HY Condition: AVG(UNII 4) 3m DRH18-E_LE2C05A18EN_240620 VERTICAL : RBW:1000.000kHz VBW:0.430kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 5875.00</td><td>94.78</td><td>-----</td><td>-----</td><td>80.05</td><td>34.00</td><td>11.30</td><td>34.46</td><td>3.89</td><td>100 139 Average</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5875.00	94.78	-----	-----	80.05	34.00	11.30	34.46	3.89	100 139 Average																																																																					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																														
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																														
1 5875.00	94.78	-----	-----	80.05	34.00	11.30	34.46	3.89	100 139 Average																																																																																																														





Mode	8																																																										
	Band Edge - R																																																										
	U-NII-4_5.85-5.895_802.11n HT40_CH175_5875MHz																																																										
Pol.	Vertical	Fundamental																																																									
Peak	Site : 03CH23-HY Condition: PEAK_BE(UNII 4) 3m DRH18-E_LE2C05A18EN_240620 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5923.75</td><td>68.75</td><td>89.11</td><td>-20.36</td><td>53.99</td><td>34.00</td><td>11.35</td><td>34.47</td><td>3.88</td><td>100</td><td>139</td><td>Peak</td></tr><tr><td>2</td><td>5926.00</td><td>66.80</td><td>88.20</td><td>-21.40</td><td>52.04</td><td>34.00</td><td>11.35</td><td>34.47</td><td>3.88</td><td>100</td><td>139</td><td>Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5923.75	68.75	89.11	-20.36	53.99	34.00	11.35	34.47	3.88	100	139	Peak	2	5926.00	66.80	88.20	-21.40	52.04	34.00	11.35	34.47	3.88	100	139	Peak	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																	
1	5923.75	68.75	89.11	-20.36	53.99	34.00	11.35	34.47	3.88	100	139	Peak																																															
2	5926.00	66.80	88.20	-21.40	52.04	34.00	11.35	34.47	3.88	100	139	Peak																																															
Avg	Site : 03CH23-HY Condition: AVG_BE(UNII 4) 3m DRH18-E_LE2C05A18EN_240620 VERTICAL : RBW:1000.000kHz VBW:0.430kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5923.00</td><td>57.86</td><td>69.66</td><td>-11.80</td><td>43.10</td><td>34.00</td><td>11.35</td><td>34.47</td><td>3.88</td><td>100</td><td>139</td><td>Average</td></tr><tr><td>2</td><td>5925.00</td><td>56.18</td><td>68.20</td><td>-12.02</td><td>41.42</td><td>34.00</td><td>11.35</td><td>34.47</td><td>3.88</td><td>100</td><td>139</td><td>Average</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5923.00	57.86	69.66	-11.80	43.10	34.00	11.35	34.47	3.88	100	139	Average	2	5925.00	56.18	68.20	-12.02	41.42	34.00	11.35	34.47	3.88	100	139	Average	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																	
1	5923.00	57.86	69.66	-11.80	43.10	34.00	11.35	34.47	3.88	100	139	Average																																															
2	5925.00	56.18	68.20	-12.02	41.42	34.00	11.35	34.47	3.88	100	139	Average																																															

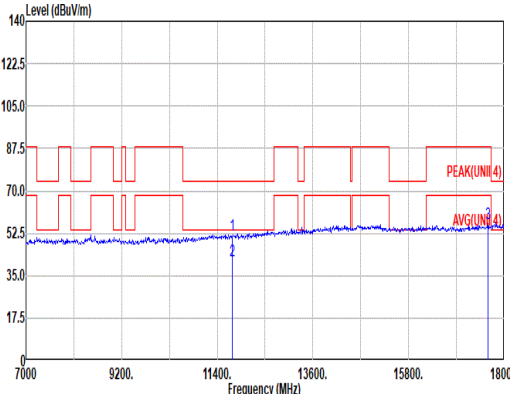
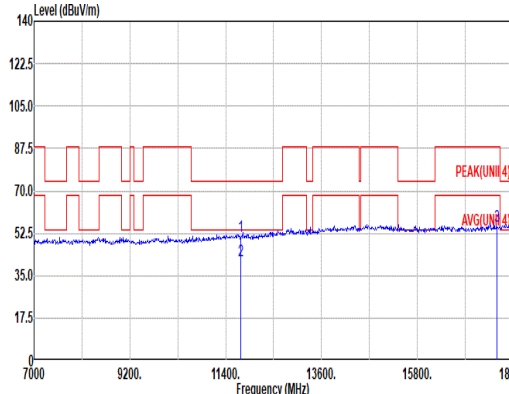


Mode	8																																																																																																																																							
	Harmonic																																																																																																																																							
	U-NII-4_5.85-5.895_802.11n HT40_CH175_5875MHz																																																																																																																																							
Pol.	Horizontal	Vertical																																																																																																																																						
Peak Avg	 Site : 03CH23-HY Condition: PEAK(UNII 4) 3m DRH18-E_LE2C05A18EN_240620 HORIZONTAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>11750.00</td><td>51.99</td><td>74.00</td><td>-22.01</td><td>35.69</td><td>38.60</td><td>15.87</td><td>40.43</td><td>2.26</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>11750.00</td><td>41.22</td><td>54.00</td><td>-12.78</td><td>24.92</td><td>38.60</td><td>15.87</td><td>40.43</td><td>2.26</td><td>--</td><td>Average</td></tr><tr><td>3</td><td>17625.00</td><td>56.53</td><td>88.20</td><td>-31.67</td><td>40.06</td><td>40.15</td><td>19.53</td><td>46.35</td><td>3.14</td><td>--</td><td>Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11750.00	51.99	74.00	-22.01	35.69	38.60	15.87	40.43	2.26	--	Peak	2	11750.00	41.22	54.00	-12.78	24.92	38.60	15.87	40.43	2.26	--	Average	3	17625.00	56.53	88.20	-31.67	40.06	40.15	19.53	46.35	3.14	--	Peak	 Site : 03CH23-HY Condition: PEAK(UNII 4) 3m DRH18-E_LE2C05A18EN_240620 VERTICAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>11750.00</td><td>51.41</td><td>74.00</td><td>-22.59</td><td>35.11</td><td>38.60</td><td>15.87</td><td>40.43</td><td>2.26</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>11750.00</td><td>41.26</td><td>54.00</td><td>-12.74</td><td>24.96</td><td>38.60</td><td>15.87</td><td>40.43</td><td>2.26</td><td>--</td><td>Average</td></tr><tr><td>3</td><td>17625.00</td><td>55.37</td><td>88.20</td><td>-32.83</td><td>38.90</td><td>40.15</td><td>19.53</td><td>46.35</td><td>3.14</td><td>--</td><td>Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11750.00	51.41	74.00	-22.59	35.11	38.60	15.87	40.43	2.26	--	Peak	2	11750.00	41.26	54.00	-12.74	24.96	38.60	15.87	40.43	2.26	--	Average	3	17625.00	55.37	88.20	-32.83	38.90	40.15	19.53	46.35	3.14	--	Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																														
1	11750.00	51.99	74.00	-22.01	35.69	38.60	15.87	40.43	2.26	--	Peak																																																																																																																													
2	11750.00	41.22	54.00	-12.78	24.92	38.60	15.87	40.43	2.26	--	Average																																																																																																																													
3	17625.00	56.53	88.20	-31.67	40.06	40.15	19.53	46.35	3.14	--	Peak																																																																																																																													
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																														
1	11750.00	51.41	74.00	-22.59	35.11	38.60	15.87	40.43	2.26	--	Peak																																																																																																																													
2	11750.00	41.26	54.00	-12.74	24.96	38.60	15.87	40.43	2.26	--	Average																																																																																																																													
3	17625.00	55.37	88.20	-32.83	38.90	40.15	19.53	46.35	3.14	--	Peak																																																																																																																													

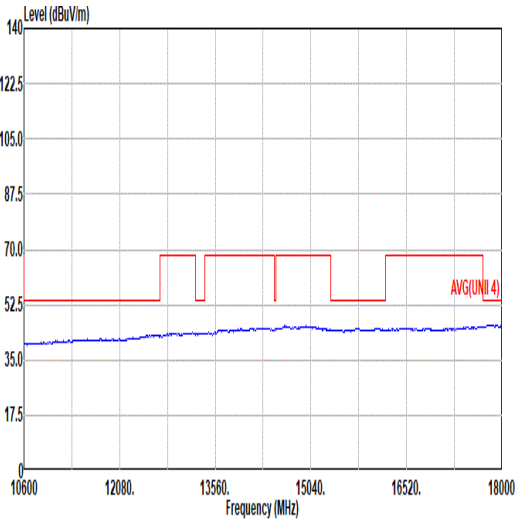
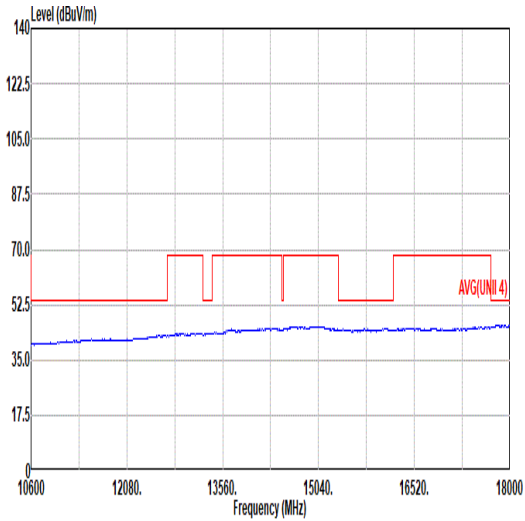


Mode	8	
	Harmonic	
	U-NII-4_5.85-5.895_802.11n HT40_CH175_5875MHz	
Pol.	Horizontal	Vertical
10.6G ~18G Avg	 Site : 03CH23-HY Condition: AVG(UNI 4) 3m DRH18-E_LE2C05A18EN_240620 HORIZONTAL	 Site : 03CH23-HY Condition: AVG(UNI 4) 3m DRH18-E_LE2C05A18EN_240620 VERTICAL


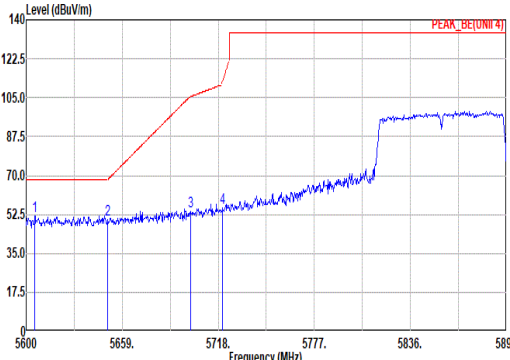
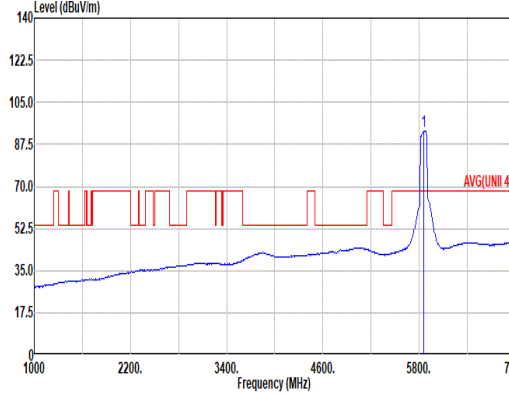


		9																																																																														
Mode		Band Edge - L																																																																														
		U-NII-4_5.85-5.895_802.11ac VHT80_CH171_5855MHz																																																																														
Pol.		Horizontal					Fundamental																																																																									
Peak																																																																																
		Site : 03CH23-HY Condition: PEAK_BE(UNII 4) 3m DRH18-E_LE2C05A18EN_240620 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 5605.31</td><td>51.97</td><td>68.20</td><td>-16.23</td><td>38.13</td><td>33.23</td><td>11.16</td><td>34.45</td><td>3.90</td><td>100 266 Peak</td></tr><tr><td>2 5650.15</td><td>50.06</td><td>68.31</td><td>-18.25</td><td>35.92</td><td>33.50</td><td>11.18</td><td>34.45</td><td>3.91</td><td>100 266 Peak</td></tr><tr><td>3 5701.19</td><td>54.07</td><td>105.53</td><td>-51.46</td><td>39.61</td><td>33.00</td><td>11.20</td><td>34.45</td><td>3.91</td><td>100 266 Peak</td></tr><tr><td>4 5720.66</td><td>55.68</td><td>112.29</td><td>-56.61</td><td>41.18</td><td>33.84</td><td>11.20</td><td>34.45</td><td>3.91</td><td>100 266 Peak</td></tr></tbody></table>											Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5605.31	51.97	68.20	-16.23	38.13	33.23	11.16	34.45	3.90	100 266 Peak	2 5650.15	50.06	68.31	-18.25	35.92	33.50	11.18	34.45	3.91	100 266 Peak	3 5701.19	54.07	105.53	-51.46	39.61	33.00	11.20	34.45	3.91	100 266 Peak	4 5720.66	55.68	112.29	-56.61	41.18	33.84	11.20	34.45	3.91
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																							
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																							
1 5605.31	51.97	68.20	-16.23	38.13	33.23	11.16	34.45	3.90	100 266 Peak																																																																							
2 5650.15	50.06	68.31	-18.25	35.92	33.50	11.18	34.45	3.91	100 266 Peak																																																																							
3 5701.19	54.07	105.53	-51.46	39.61	33.00	11.20	34.45	3.91	100 266 Peak																																																																							
4 5720.66	55.68	112.29	-56.61	41.18	33.84	11.20	34.45	3.91	100 266 Peak																																																																							
Avg		Blank																																																																														
							Site : 03CH23-HY Condition: AVG(UNII 4) 3m DRH18-E_LE2C05A18EN_240620 HORIZONTAL : RBW:1000.000kHz VBW:0.910kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 5855.00</td><td>93.20</td><td>-----</td><td>-----</td><td>78.47</td><td>34.00</td><td>11.29</td><td>34.46</td><td>3.90</td><td>100 266 Average</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5855.00	93.20	-----	-----	78.47	34.00	11.29	34.46	3.90	100 266 Average																													
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																							
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																							
1 5855.00	93.20	-----	-----	78.47	34.00	11.29	34.46	3.90	100 266 Average																																																																							

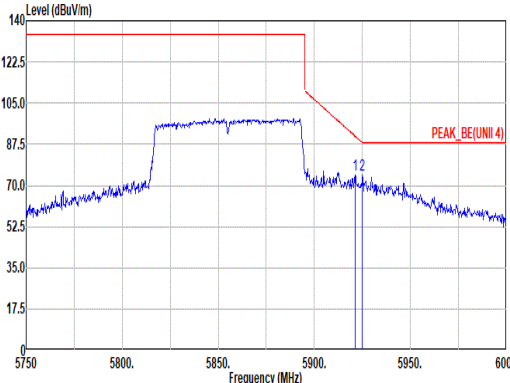
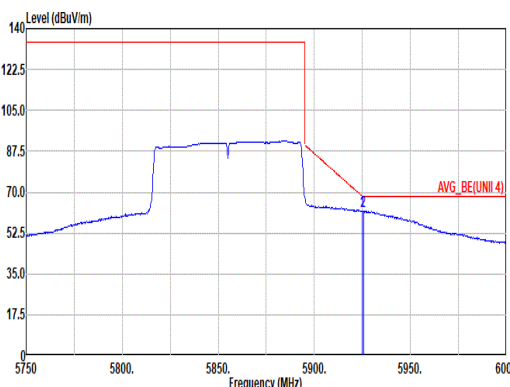


Mode	9																																																										
	Band Edge - R																																																										
	U-NII-4_5.85-5.895_802.11ac VHT80_CH171_5855MHz																																																										
Pol.	Horizontal	Fundamental																																																									
Peak	 Site : 03CH23-HY Condition: PEAK_BE(UNII 4) 3m DRH18-E_LE2C05A18EN_240620 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5921.25</td><td>74.60</td><td>90.94</td><td>-16.34</td><td>59.84</td><td>34.00</td><td>11.35</td><td>34.47</td><td>3.88</td><td>100</td><td>266</td><td>Peak</td></tr><tr><td>2</td><td>5925.00</td><td>74.23</td><td>88.20</td><td>-13.97</td><td>59.47</td><td>34.00</td><td>11.35</td><td>34.47</td><td>3.88</td><td>100</td><td>266</td><td>Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5921.25	74.60	90.94	-16.34	59.84	34.00	11.35	34.47	3.88	100	266	Peak	2	5925.00	74.23	88.20	-13.97	59.47	34.00	11.35	34.47	3.88	100	266	Peak	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																	
1	5921.25	74.60	90.94	-16.34	59.84	34.00	11.35	34.47	3.88	100	266	Peak																																															
2	5925.00	74.23	88.20	-13.97	59.47	34.00	11.35	34.47	3.88	100	266	Peak																																															
Avg	 Site : 03CH23-HY Condition: AVG_BE(UNII 4) 3m DRH18-E_LE2C05A18EN_240620 HORIZONTAL : RBW:1000.000kHz VBW:0.910kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5925.00</td><td>61.86</td><td>68.20</td><td>-6.34</td><td>47.10</td><td>34.00</td><td>11.35</td><td>34.47</td><td>3.88</td><td>100</td><td>266</td><td>Average</td></tr><tr><td>2</td><td>5925.50</td><td>61.93</td><td>68.20</td><td>-6.27</td><td>47.17</td><td>34.00</td><td>11.35</td><td>34.47</td><td>3.88</td><td>100</td><td>266</td><td>Average</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5925.00	61.86	68.20	-6.34	47.10	34.00	11.35	34.47	3.88	100	266	Average	2	5925.50	61.93	68.20	-6.27	47.17	34.00	11.35	34.47	3.88	100	266	Average	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																	
1	5925.00	61.86	68.20	-6.34	47.10	34.00	11.35	34.47	3.88	100	266	Average																																															
2	5925.50	61.93	68.20	-6.27	47.17	34.00	11.35	34.47	3.88	100	266	Average																																															

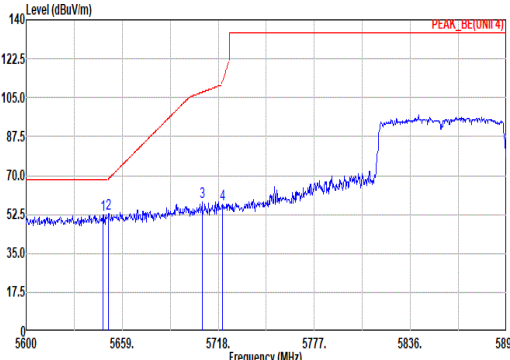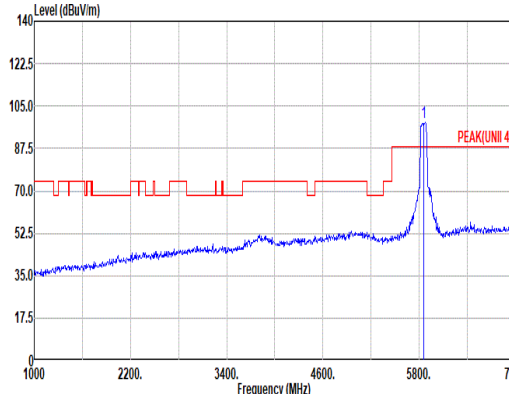
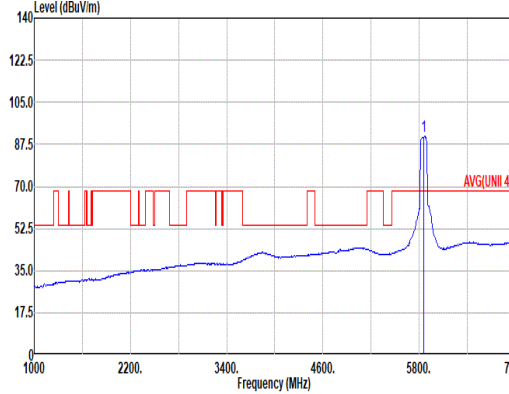


Mode	9																																																																																																																																								
	Band Edge - L																																																																																																																																								
	U-NII-4_5.85-5.895_802.11ac VHT80_CH171_5855MHz																																																																																																																																								
Pol.	Vertical						Fundamental																																																																																																																																		
Peak																																																																																																																																									
	Site : 03CH23-HY Condition: PEAK_BE(UNII 4) 3m DRH18-E_LE2C05A18EN_240620 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5647.20</td><td>52.22</td><td>68.20</td><td>-15.98</td><td>38.11</td><td>33.48</td><td>11.18</td><td>34.45</td><td>3.90</td><td>100</td><td>145 Peak</td></tr><tr><td>2</td><td>5650.74</td><td>52.60</td><td>68.75</td><td>-16.15</td><td>38.46</td><td>33.50</td><td>11.18</td><td>34.45</td><td>3.91</td><td>100</td><td>145 Peak</td></tr><tr><td>3</td><td>5707.97</td><td>58.12</td><td>107.43</td><td>-49.31</td><td>43.64</td><td>33.82</td><td>11.20</td><td>34.45</td><td>3.91</td><td>100</td><td>145 Peak</td></tr><tr><td>4</td><td>5728.36</td><td>57.04</td><td>111.62</td><td>-54.58</td><td>42.54</td><td>33.84</td><td>11.20</td><td>34.45</td><td>3.91</td><td>100</td><td>145 Peak</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor						MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5647.20	52.22	68.20	-15.98	38.11	33.48	11.18	34.45	3.90	100	145 Peak	2	5650.74	52.60	68.75	-16.15	38.46	33.50	11.18	34.45	3.91	100	145 Peak	3	5707.97	58.12	107.43	-49.31	43.64	33.82	11.20	34.45	3.91	100	145 Peak	4	5728.36	57.04	111.62	-54.58	42.54	33.84	11.20	34.45	3.91	100	145 Peak	Site : 03CH23-HY Condition: PEAK(UNII 4) 3m DRH18-E_LE2C05A18EN_240620 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5855.00</td><td>90.34</td><td>-----</td><td>-----</td><td>83.61</td><td>34.00</td><td>11.30</td><td>34.46</td><td>3.89</td><td>100</td><td>145 Peak</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor						MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5855.00	90.34	-----	-----	83.61	34.00	11.30	34.46	3.89	100
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																															
1	5647.20	52.22	68.20	-15.98	38.11	33.48	11.18	34.45	3.90	100	145 Peak																																																																																																																														
2	5650.74	52.60	68.75	-16.15	38.46	33.50	11.18	34.45	3.91	100	145 Peak																																																																																																																														
3	5707.97	58.12	107.43	-49.31	43.64	33.82	11.20	34.45	3.91	100	145 Peak																																																																																																																														
4	5728.36	57.04	111.62	-54.58	42.54	33.84	11.20	34.45	3.91	100	145 Peak																																																																																																																														
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																															
1	5855.00	90.34	-----	-----	83.61	34.00	11.30	34.46	3.89	100	145 Peak																																																																																																																														
Avg	Blank																																																																																																																																								
							Site : 03CH23-HY Condition: AVG(UNII 4) 3m DRH18-E_LE2C05A18EN_240620 VERTICAL : RBW:1000.000kHz VBW:0.910kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5855.00</td><td>90.98</td><td>-----</td><td>-----</td><td>76.25</td><td>34.00</td><td>11.30</td><td>34.46</td><td>3.89</td><td>100</td><td>145 Average</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor						MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5855.00	90.98	-----	-----	76.25	34.00	11.30	34.46	3.89	100	145 Average																																																																																
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																															
1	5855.00	90.98	-----	-----	76.25	34.00	11.30	34.46	3.89	100	145 Average																																																																																																																														

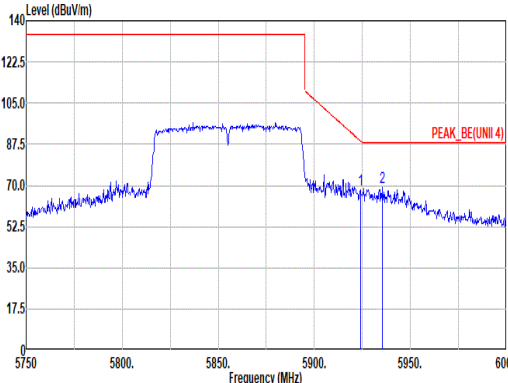
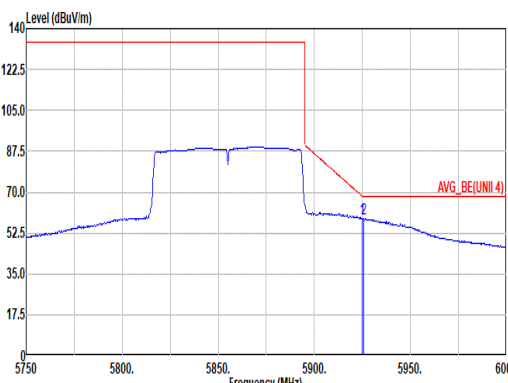


		9																																																																													
Mode	Band Edge - R																																																																														
	U-NII-4_5.85-5.895_802.11ac VHT80_CH171_5855MHz																																																																														
Pol.	Vertical											Fundamental																																																																			
Peak	 Site : 03CH23-HY Condition: PEAK_BE(UNII 4) 3m DRH18-E_LE2C05A18EN_240620 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5924.00</td><td>67.91</td><td>88.93</td><td>-21.02</td><td>53.15</td><td>34.00</td><td>11.35</td><td>34.47</td><td>3.88</td><td>100</td><td>145</td><td>Peak</td></tr><tr><td>2</td><td>5935.50</td><td>69.28</td><td>88.20</td><td>-18.92</td><td>54.52</td><td>34.00</td><td>11.36</td><td>34.47</td><td>3.87</td><td>100</td><td>145</td><td>Peak</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5924.00	67.91	88.93	-21.02	53.15	34.00	11.35	34.47	3.88	100	145	Peak	2	5935.50	69.28	88.20	-18.92	54.52	34.00	11.36	34.47	3.87	100	145	Peak	Blank										
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																					
1	5924.00	67.91	88.93	-21.02	53.15	34.00	11.35	34.47	3.88	100	145	Peak																																																																			
2	5935.50	69.28	88.20	-18.92	54.52	34.00	11.36	34.47	3.87	100	145	Peak																																																																			
Avg	 Site : 03CH23-HY Condition: AVG_BE(UNII 4) 3m DRH18-E_LE2C05A18EN_240620 VERTICAL : RBW:1000.000kHz VBW:0.910kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5924.75</td><td>58.58</td><td>68.38</td><td>-9.80</td><td>43.62</td><td>34.00</td><td>11.35</td><td>34.47</td><td>3.88</td><td>100</td><td>145</td><td>Average</td></tr><tr><td>2</td><td>5925.75</td><td>58.76</td><td>68.20</td><td>-9.44</td><td>44.00</td><td>34.00</td><td>11.35</td><td>34.47</td><td>3.88</td><td>100</td><td>145</td><td>Average</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5924.75	58.58	68.38	-9.80	43.62	34.00	11.35	34.47	3.88	100	145	Average	2	5925.75	58.76	68.20	-9.44	44.00	34.00	11.35	34.47	3.88	100	145	Average	Blank										
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																					
1	5924.75	58.58	68.38	-9.80	43.62	34.00	11.35	34.47	3.88	100	145	Average																																																																			
2	5925.75	58.76	68.20	-9.44	44.00	34.00	11.35	34.47	3.88	100	145	Average																																																																			


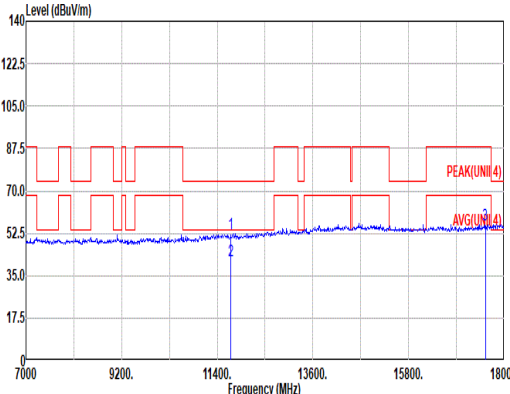
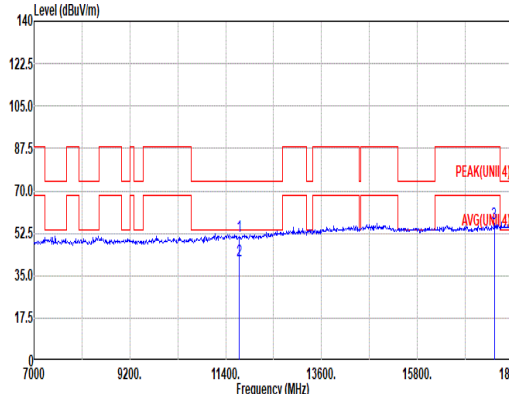


Mode	9																																																																																																																																							
	Harmonic																																																																																																																																							
	U-NII-4_5.85-5.895_802.11ac VHT80_CH171_5855MHz																																																																																																																																							
Pol.	Horizontal	Vertical																																																																																																																																						
Peak Avg	 Site : 03CH23-HY Condition: PEAK(UNII 4) 3m DRH18-E_LE2C05A18EN_240620 HORIZONTAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>11710.00</td><td>52.07</td><td>74.00</td><td>-21.93</td><td>35.75</td><td>38.60</td><td>15.85</td><td>40.39</td><td>2.26</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>11710.00</td><td>41.27</td><td>54.00</td><td>-12.73</td><td>24.95</td><td>38.60</td><td>15.85</td><td>40.39</td><td>2.26</td><td>--</td><td>Average</td></tr><tr><td>3</td><td>17565.00</td><td>55.99</td><td>88.20</td><td>-32.21</td><td>39.63</td><td>40.13</td><td>19.49</td><td>46.38</td><td>3.12</td><td>--</td><td>Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11710.00	52.07	74.00	-21.93	35.75	38.60	15.85	40.39	2.26	--	Peak	2	11710.00	41.27	54.00	-12.73	24.95	38.60	15.85	40.39	2.26	--	Average	3	17565.00	55.99	88.20	-32.21	39.63	40.13	19.49	46.38	3.12	--	Peak	 Site : 03CH23-HY Condition: PEAK(UNII 4) 3m DRH18-E_LE2C05A18EN_240620 VERTICAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>11710.00</td><td>51.43</td><td>74.00</td><td>-22.57</td><td>35.11</td><td>38.60</td><td>15.85</td><td>40.39</td><td>2.26</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>11710.00</td><td>41.18</td><td>54.00</td><td>-12.82</td><td>24.86</td><td>38.60</td><td>15.85</td><td>40.39</td><td>2.26</td><td>--</td><td>Average</td></tr><tr><td>3</td><td>17565.00</td><td>56.32</td><td>88.20</td><td>-31.88</td><td>39.96</td><td>40.13</td><td>19.49</td><td>46.38</td><td>3.12</td><td>--</td><td>Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11710.00	51.43	74.00	-22.57	35.11	38.60	15.85	40.39	2.26	--	Peak	2	11710.00	41.18	54.00	-12.82	24.86	38.60	15.85	40.39	2.26	--	Average	3	17565.00	56.32	88.20	-31.88	39.96	40.13	19.49	46.38	3.12	--	Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																														
1	11710.00	52.07	74.00	-21.93	35.75	38.60	15.85	40.39	2.26	--	Peak																																																																																																																													
2	11710.00	41.27	54.00	-12.73	24.95	38.60	15.85	40.39	2.26	--	Average																																																																																																																													
3	17565.00	55.99	88.20	-32.21	39.63	40.13	19.49	46.38	3.12	--	Peak																																																																																																																													
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																														
1	11710.00	51.43	74.00	-22.57	35.11	38.60	15.85	40.39	2.26	--	Peak																																																																																																																													
2	11710.00	41.18	54.00	-12.82	24.86	38.60	15.85	40.39	2.26	--	Average																																																																																																																													
3	17565.00	56.32	88.20	-31.88	39.96	40.13	19.49	46.38	3.12	--	Peak																																																																																																																													

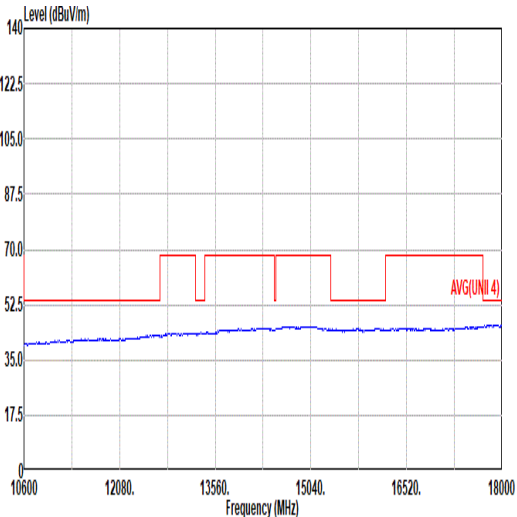
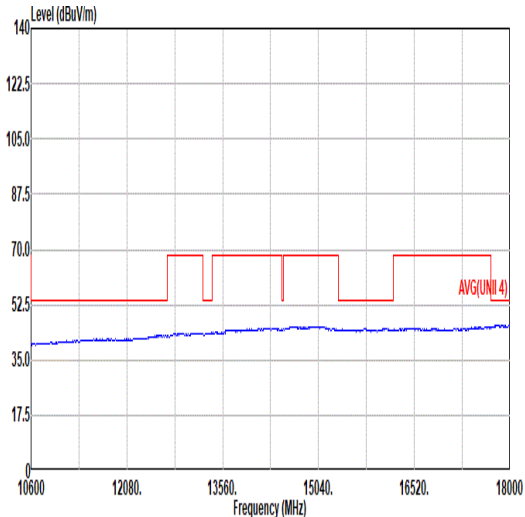


Mode	9	
	Harmonic	
	U-NII-4_5.85-5.895_802.11ac VHT80_CH171_5855MHz	
Pol.	Horizontal	Vertical
10.6G ~18G Avg	 Site : 03CH23-HY Condition: AVG(UNI 4) 3m DRH18-E_LE2C05A18EN_240620 HORIZONTAL	 Site : 03CH23-HY Condition: AVG(UNI 4) 3m DRH18-E_LE2C05A18EN_240620 VERTICAL

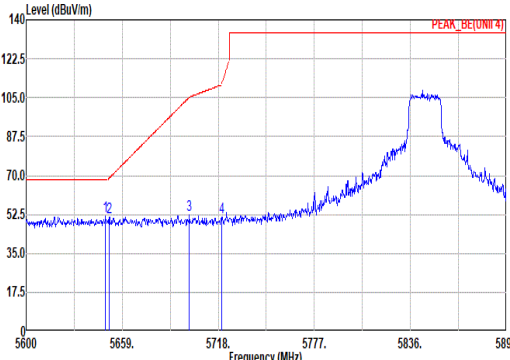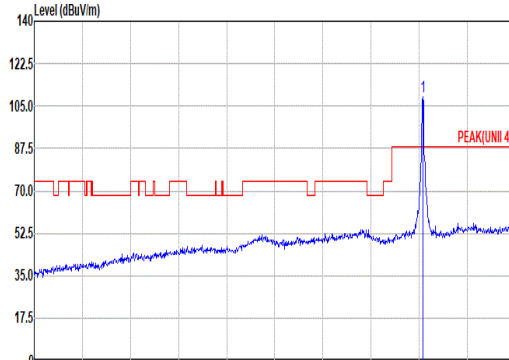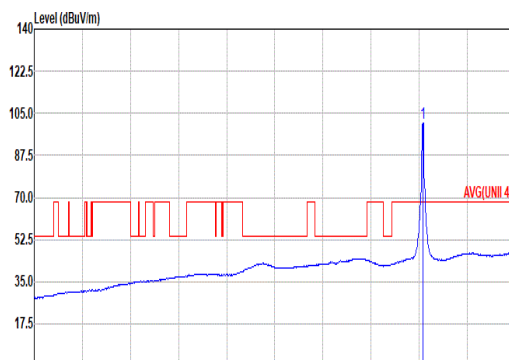

Mode	10																																																																																																																						
	Band Edge - L																																																																																																																						
	U-NII-4_5.85-5.895_802.11ax HE20_CH169_Full RU_5845MHz																																																																																																																						
Pol.	Horizontal					Fundamental																																																																																																																	
Peak																																																																																																																							
	Site : 03CH23-HY Condition: PEAK_BE(UNII 4) 3m DRH18-E_LE2C05A18EN_240620 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th></th></tr></thead><tbody><tr><td>1</td><td>5648.68</td><td>51.85</td><td>68.20</td><td>-16.35</td><td>37.73</td><td>33.49</td><td>11.18</td><td>34.45</td><td>3.90 102 266 Peak</td></tr><tr><td>2</td><td>5651.04</td><td>51.51</td><td>68.97</td><td>-17.46</td><td>37.36</td><td>33.51</td><td>11.18</td><td>34.45</td><td>3.91 102 266 Peak</td></tr><tr><td>3</td><td>5700.30</td><td>52.43</td><td>105.28</td><td>-52.85</td><td>37.97</td><td>33.00</td><td>11.20</td><td>34.45</td><td>3.91 102 266 Peak</td></tr><tr><td>4</td><td>5720.07</td><td>51.10</td><td>110.95</td><td>-59.85</td><td>36.60</td><td>33.84</td><td>11.20</td><td>34.45</td><td>3.91 102 266 Peak</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB		1	5648.68	51.85	68.20	-16.35	37.73	33.49	11.18	34.45	3.90 102 266 Peak	2	5651.04	51.51	68.97	-17.46	37.36	33.51	11.18	34.45	3.91 102 266 Peak	3	5700.30	52.43	105.28	-52.85	37.97	33.00	11.20	34.45	3.91 102 266 Peak	4	5720.07	51.10	110.95	-59.85	36.60	33.84	11.20	34.45	3.91 102 266 Peak	Site : 03CH23-HY Condition: PEAK(UNII 4) 3m DRH18-E_LE2C05A18EN_240620 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th></th></tr></thead><tbody><tr><td>1</td><td>5845.00</td><td>100.80</td><td>-----</td><td>-----</td><td>94.10</td><td>33.98</td><td>11.27</td><td>34.46</td><td>3.91 102 266 Peak</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB		1	5845.00	100.80	-----	-----	94.10	33.98	11.27	34.46
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																																															
1	5648.68	51.85	68.20	-16.35	37.73	33.49	11.18	34.45	3.90 102 266 Peak																																																																																																														
2	5651.04	51.51	68.97	-17.46	37.36	33.51	11.18	34.45	3.91 102 266 Peak																																																																																																														
3	5700.30	52.43	105.28	-52.85	37.97	33.00	11.20	34.45	3.91 102 266 Peak																																																																																																														
4	5720.07	51.10	110.95	-59.85	36.60	33.84	11.20	34.45	3.91 102 266 Peak																																																																																																														
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																																															
1	5845.00	100.80	-----	-----	94.10	33.98	11.27	34.46	3.91 102 266 Peak																																																																																																														
Avg	Blank																																																																																																																						
						Site : 03CH23-HY Condition: AVG(UNII 4) 3m DRH18-E_LE2C05A18EN_240620 HORIZONTAL : RBW:1000.000kHz VBW:1.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th></th></tr></thead><tbody><tr><td>1</td><td>5845.00</td><td>100.74</td><td>-----</td><td>-----</td><td>86.04</td><td>33.98</td><td>11.27</td><td>34.46</td><td>3.91 102 266 Average</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB		1	5845.00	100.74	-----	-----	86.04	33.98	11.27	34.46	3.91 102 266 Average																																																																					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																																															
1	5845.00	100.74	-----	-----	86.04	33.98	11.27	34.46	3.91 102 266 Average																																																																																																														

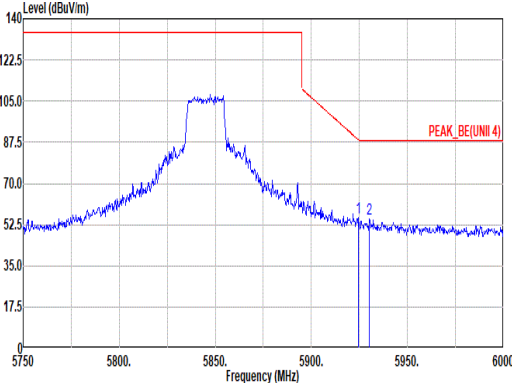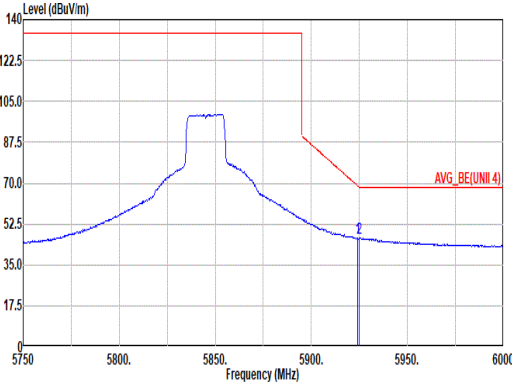

Mode	10																																																										
	Band Edge - R																																																										
	U-NII-4_5.85-5.895_802.11ax HE20_CH169_Full RU_5845MHz																																																										
Pol.	Horizontal	Fundamental																																																									
Peak	 Site : 03CH23-HY Condition: PEAK_BE(UNII 4) 3m DRH18-E_LE2C05A18EN_240620 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5924.50</td><td>55.29</td><td>88.57</td><td>-33.28</td><td>40.53</td><td>34.00</td><td>11.35</td><td>34.47</td><td>3.88</td><td>102</td><td>266</td><td>Peak</td></tr><tr><td>2</td><td>5930.25</td><td>55.14</td><td>88.20</td><td>-33.06</td><td>40.39</td><td>34.00</td><td>11.35</td><td>34.47</td><td>3.87</td><td>102</td><td>266</td><td>Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5924.50	55.29	88.57	-33.28	40.53	34.00	11.35	34.47	3.88	102	266	Peak	2	5930.25	55.14	88.20	-33.06	40.39	34.00	11.35	34.47	3.87	102	266	Peak	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																	
1	5924.50	55.29	88.57	-33.28	40.53	34.00	11.35	34.47	3.88	102	266	Peak																																															
2	5930.25	55.14	88.20	-33.06	40.39	34.00	11.35	34.47	3.87	102	266	Peak																																															
Avg	 Site : 03CH23-HY Condition: AVG_BE(UNII 4) 3m DRH18-E_LE2C05A18EN_240620 HORIZONTAL : RBW:1000.000kHz VBW:1.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5924.00</td><td>46.56</td><td>68.93</td><td>-22.37</td><td>31.00</td><td>34.00</td><td>11.35</td><td>34.47</td><td>3.88</td><td>102</td><td>266</td><td>Average</td></tr><tr><td>2</td><td>5925.00</td><td>46.56</td><td>68.20</td><td>-21.64</td><td>31.00</td><td>34.00</td><td>11.35</td><td>34.47</td><td>3.88</td><td>102</td><td>266</td><td>Average</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5924.00	46.56	68.93	-22.37	31.00	34.00	11.35	34.47	3.88	102	266	Average	2	5925.00	46.56	68.20	-21.64	31.00	34.00	11.35	34.47	3.88	102	266	Average	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																	
1	5924.00	46.56	68.93	-22.37	31.00	34.00	11.35	34.47	3.88	102	266	Average																																															
2	5925.00	46.56	68.20	-21.64	31.00	34.00	11.35	34.47	3.88	102	266	Average																																															