

Date: 2025-03-21

#01_WLAN2.4GHz_802.11b 1Mbps_Front_10mm_Ch11

Communication System: IEEE 802.11b WiFi 2.4 GHz; Frequency: 2462.000 MHz

Medium: HSL_2450_250321 Medium parameters used: $f = 2462.000$ MHz; $\sigma = 1.84$ S/m; $\epsilon_r = 39.0$

Ambient Temperature: 23.1°C; Liquid Temperature: 22.1°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7785; ConvF(6.25, 6.58, 6.44); Calibrated: 2024-11-28
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1694; Calibrated: 2024-11-19
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: WLAN, 10415-AAA

Area Scan (80.0 mm x 80.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.210 W/kg; SAR (10g) = 0.107 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = 0.04 dB

SAR (1g) = 0.213 W/kg; SAR (8g) = 0.139 W/kg; SAR (10g) = 0.112 W/kg

Smallest distance from peaks to all points 3 dB below = 17.7 mm

Ratio of SAR at M2 to SAR at M1 = 84.6 %

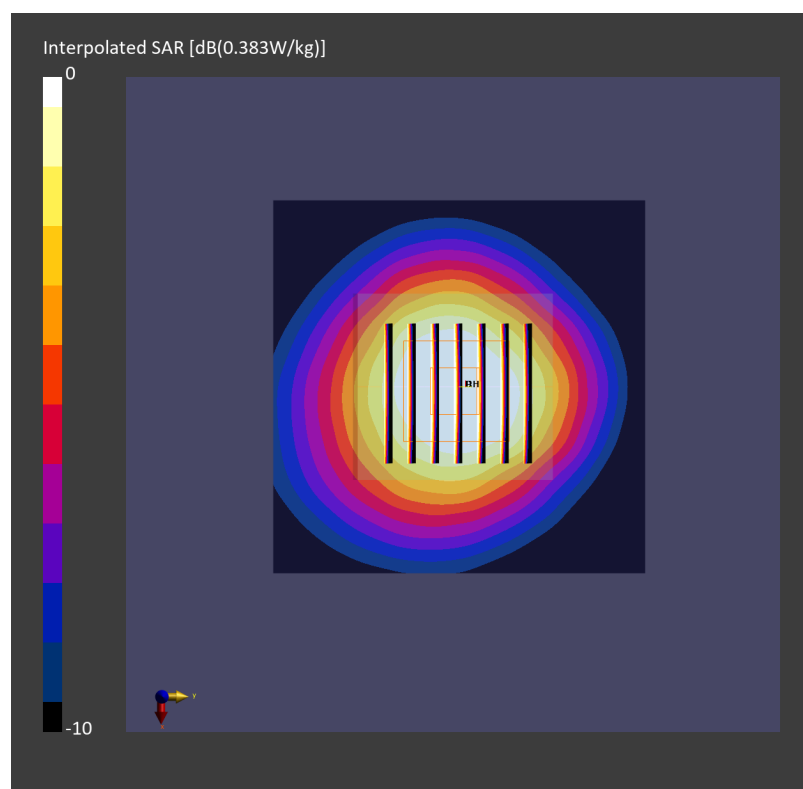

Date: 2025-04-01

#02_WLAN5GHz_802.11a 6Mbps_Front_10mm_Ch64

Communication System: IEEE 802.11a/h WiFi 5 GHz; Frequency: 5320.000 MHz

Medium: HSL_5G_250401 Medium parameters used: $f = 5320.000$ MHz; $\sigma = 4.76$ S/m; $\epsilon_r = 36.8$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7694; ConvF(5.25, 5.13, 5.73); Calibrated: 2024-11-18
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1697; Calibrated: 2024-11-14
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2127; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: WLAN, 10062-CAE

Area Scan (80.0 mm x 80.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.112 W/kg; SAR (10g) = 0.040 W/kg;


Zoom Scan (24.0 mm x 24.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = 0.04 dB

SAR (1g) = 0.117 W/kg; SAR (8g) = 0.047 W/kg; SAR (10g) = 0.041 W/kg

Smallest distance from peaks to all points 3 dB below = 8.1 mm

Ratio of SAR at M2 to SAR at M1 = 63.8 %

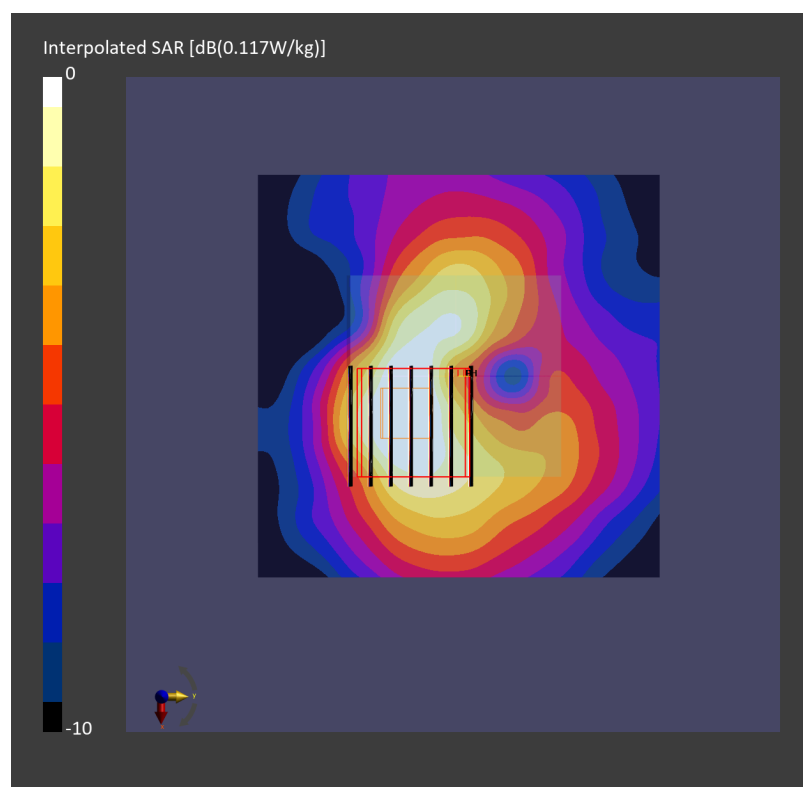

Date: 2025-04-01

#03_WLAN5GHz_802.11a 6Mbps_Front_10mm_Ch132

Communication System: IEEE 802.11a/h WiFi 5 GHz; Frequency: 5660.000 MHz

Medium: HSL_5G_250401 Medium parameters used: $f = 5660.000$ MHz; $\sigma = 5.10$ S/m; $\epsilon_r = 36.3$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7694; ConvF(4.9, 4.79, 5.35); Calibrated: 2024-11-18
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1697; Calibrated: 2024-11-14
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2127; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: WLAN, 10062-CAE

Area Scan (80.0 mm x 80.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.174 W/kg; SAR (10g) = 0.062 W/kg;


Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = -0.11 dB

SAR (1g) = 0.199 W/kg; SAR (8g) = 0.080 W/kg; SAR (10g) = 0.071 W/kg

Smallest distance from peaks to all points 3 dB below = 7.2 mm

Ratio of SAR at M2 to SAR at M1 = 60.3 %

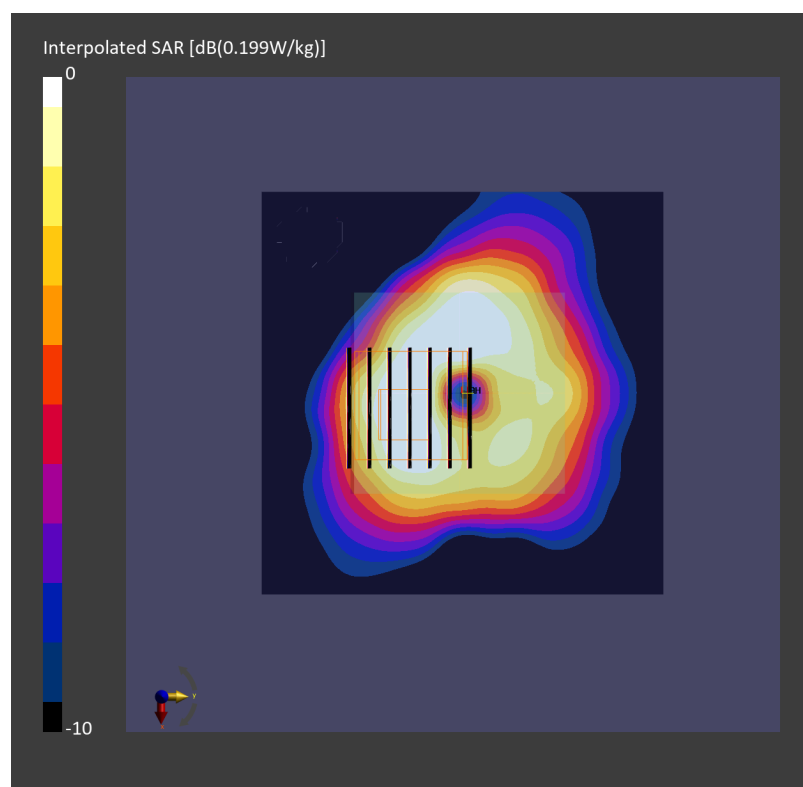

Date: 2025-04-01

#04_WLAN5GHz_802.11a 6Mbps_Front_10mm_Ch165

Communication System: IEEE 802.11a/h WiFi 5 GHz; Frequency: 5825.000 MHz

Medium: HSL_5G_250401 Medium parameters used: $f = 5825.000$ MHz; $\sigma = 5.28$ S/m; $\epsilon_r = 36.1$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7694; ConvF(4.82, 4.7, 5.25); Calibrated: 2024-11-18
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1697; Calibrated: 2024-11-14
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2127; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: WLAN, 10062-CAE

Area Scan (80.0 mm x 80.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.109 W/kg; SAR (10g) = 0.041 W/kg;


Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = 0.02 dB

SAR (1g) = 0.132 W/kg; SAR (8g) = 0.053 W/kg; SAR (10g) = 0.047 W/kg

Smallest distance from peaks to all points 3 dB below = 7.2 mm

Ratio of SAR at M2 to SAR at M1 = 57.6 %

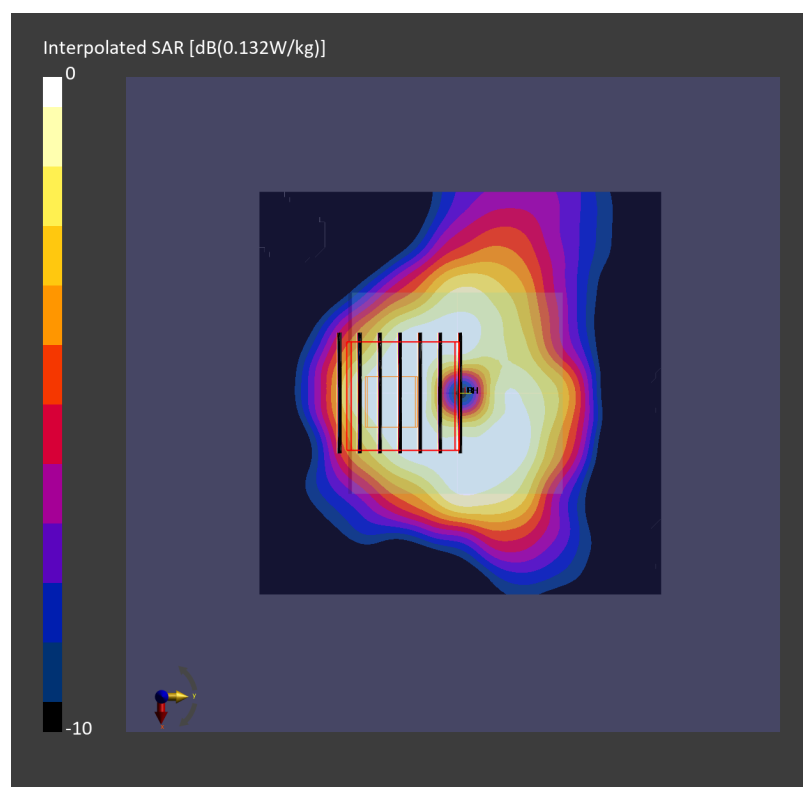

Date: 2025-04-01

#05_WLAN5GHz_802.11a 6Mbps_Front_10mm_Ch169

Communication System: IEEE 802.11a/h WiFi 5 GHz; Frequency: 5845.000 MHz

Medium: HSL_5G_250401 Medium parameters used: $f = 5845.000$ MHz; $\sigma = 5.31$ S/m; $\epsilon_r = 36.0$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7694; ConvF(4.82, 4.7, 5.25); Calibrated: 2024-11-18
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1697; Calibrated: 2024-11-14
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2127; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: WLAN, 10062-CAE

Area Scan (80.0 mm x 80.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.110 W/kg; SAR (10g) = 0.041 W/kg;


Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = 0.14 dB

SAR (1g) = 0.126 W/kg; SAR (8g) = 0.050 W/kg; SAR (10g) = 0.045 W/kg

Smallest distance from peaks to all points 3 dB below = 6.4 mm

Ratio of SAR at M2 to SAR at M1 = 60.2 %

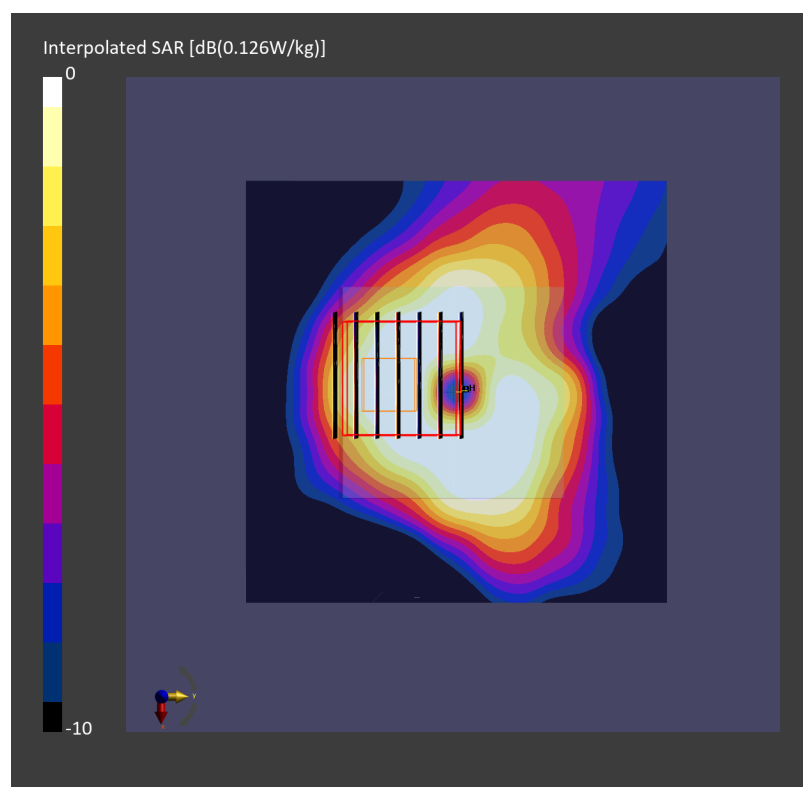

Date: 2025-03-21

#06_Bluetooth_1Mbps_Front_10mm_Ch39

Communication System: IEEE 802.15.1 Bluetooth; Frequency: 2441.000 MHz

Medium: HSL_2450_250321 Medium parameters used: $f = 2441.000$ MHz; $\sigma = 1.82$ S/m; $\epsilon_r = 39.1$

Ambient Temperature: 23.1°C; Liquid Temperature: 22.1°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7785; ConvF(6.25, 6.58, 6.44); Calibrated: 2024-11-28
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1694; Calibrated: 2024-11-19
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: Bluetooth, 10032-CAA

Area Scan (80.0 mm x 80.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.093 W/kg; SAR (10g) = 0.051 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = -0.04 dB

SAR (1g) = 0.098 W/kg; SAR (8g) = 0.061 W/kg; SAR (10g) = 0.057 W/kg

Smallest distance from peaks to all points 3 dB below = 13.9 mm

Ratio of SAR at M2 to SAR at M1 = 85.1 %

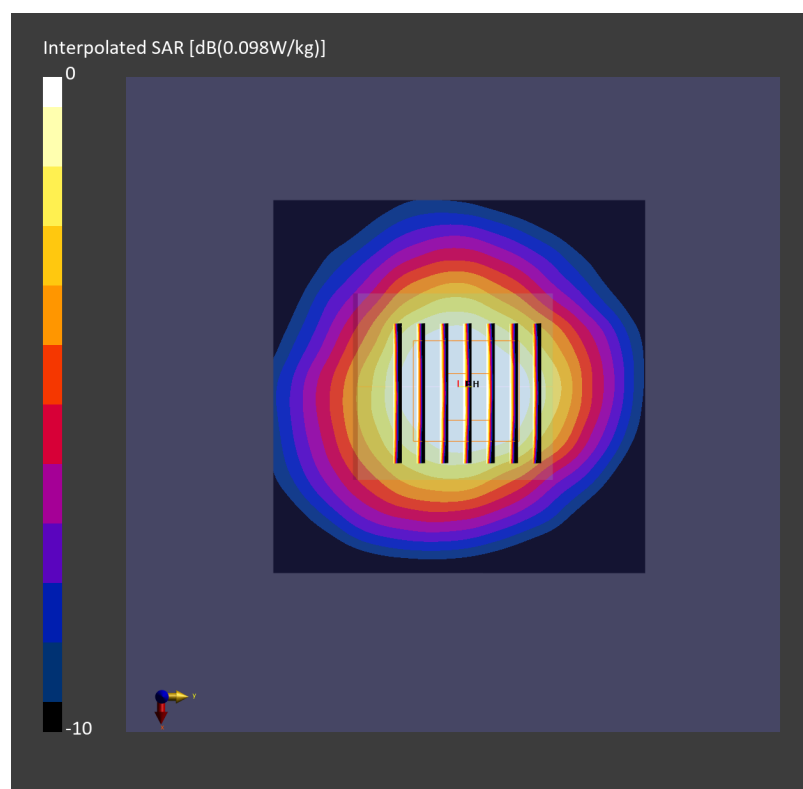

Date: 2025-03-21

#07_WLAN2.4GHz_802.11b 1Mbps_Back_0mm_Ch11

Communication System: IEEE 802.11b WiFi 2.4 GHz; Frequency: 2462.000 MHz

Medium: HSL_2450_250321 Medium parameters used: $f = 2462.000$ MHz; $\sigma = 1.84$ S/m; $\epsilon_r = 39.0$

Ambient Temperature: 23.1°C; Liquid Temperature: 22.1°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7785; ConvF(6.25, 6.58, 6.44); Calibrated: 2024-11-28
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1694; Calibrated: 2024-11-19
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: WLAN, 10415-AAA

Area Scan (80.0 mm x 80.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.103 W/kg; SAR (10g) = 0.049 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = 0.04 dB

SAR (1g) = 0.111 W/kg; SAR (8g) = 0.063 W/kg; SAR (10g) = 0.054 W/kg

Smallest distance from peaks to all points 3 dB below = 12.2 mm

Ratio of SAR at M2 to SAR at M1 = 85.7 %

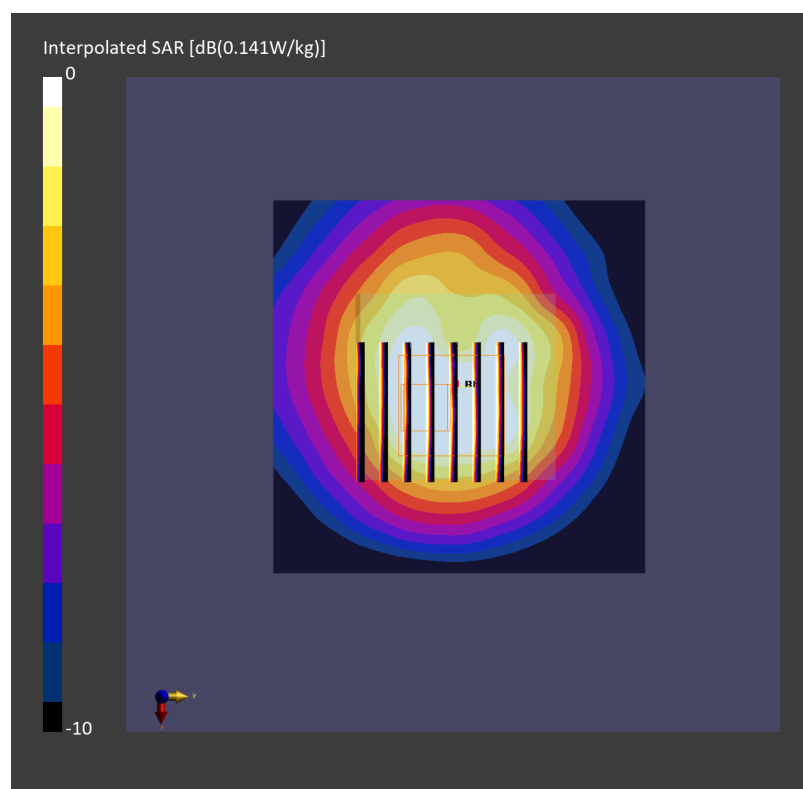

Date: 2025-04-01

#08_WLAN5GHz_802.11a 6Mbps_Back_0mm_Ch64

Communication System: IEEE 802.11a/h WiFi 5 GHz; Frequency: 5320.000 MHz

Medium: HSL_5G_250401 Medium parameters used: $f = 5320.000$ MHz; $\sigma = 4.76$ S/m; $\epsilon_r = 36.8$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7694; ConvF(5.25, 5.13, 5.73); Calibrated: 2024-11-18
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1697; Calibrated: 2024-11-14
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2127; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: WLAN, 10062-CAE

Area Scan (80.0 mm x 80.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.203 W/kg; SAR (10g) = 0.056 W/kg;


Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = -0.02 dB

SAR (1g) = 0.202 W/kg; SAR (8g) = 0.055 W/kg; SAR (10g) = 0.049 W/kg

Smallest distance from peaks to all points 3 dB below = 5.4 mm

Ratio of SAR at M2 to SAR at M1 = 59.2 %

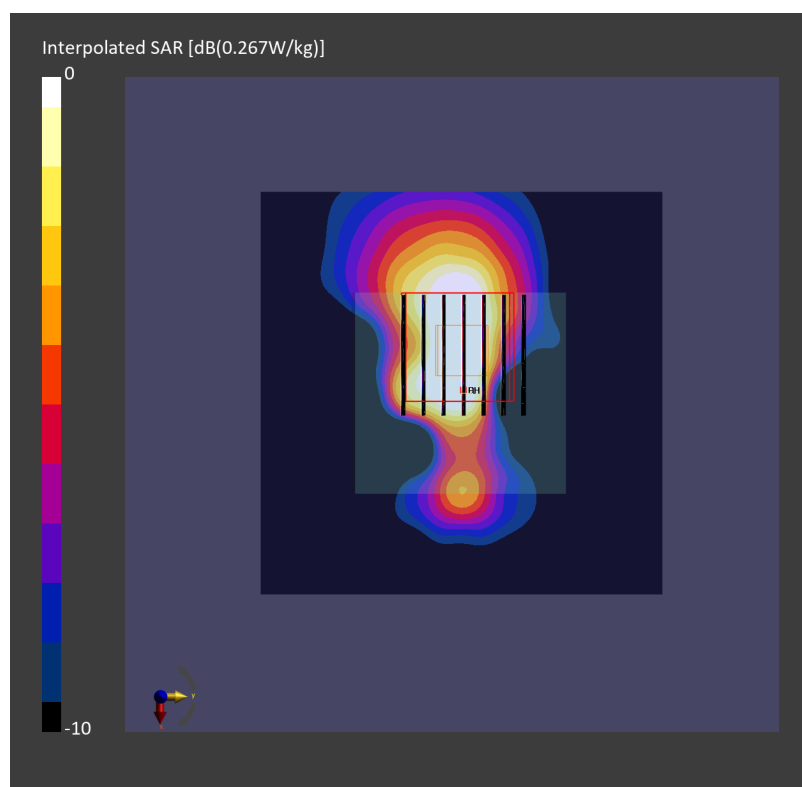

Date: 2025-04-01

#09_WLAN5GHz_802.11a 6Mbps_Back_0mm_Ch132

Communication System: IEEE 802.11a/h WiFi 5 GHz; Frequency: 5660.000 MHz

Medium: HSL_5G_250401 Medium parameters used: $f = 5660.000$ MHz; $\sigma = 5.10$ S/m; $\epsilon_r = 36.3$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7694; ConvF(4.9, 4.79, 5.35); Calibrated: 2024-11-18
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1697; Calibrated: 2024-11-14
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2127; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: WLAN, 10062-CAE

Area Scan (80.0 mm x 80.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.058 W/kg; SAR (10g) = 0.022 W/kg;


Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = -0.05 dB

SAR (1g) = 0.055 W/kg; SAR (8g) = 0.020 W/kg; SAR (10g) = 0.017 W/kg

Smallest distance from peaks to all points 3 dB below = 4.6 mm

Ratio of SAR at M2 to SAR at M1 = 71.8 %

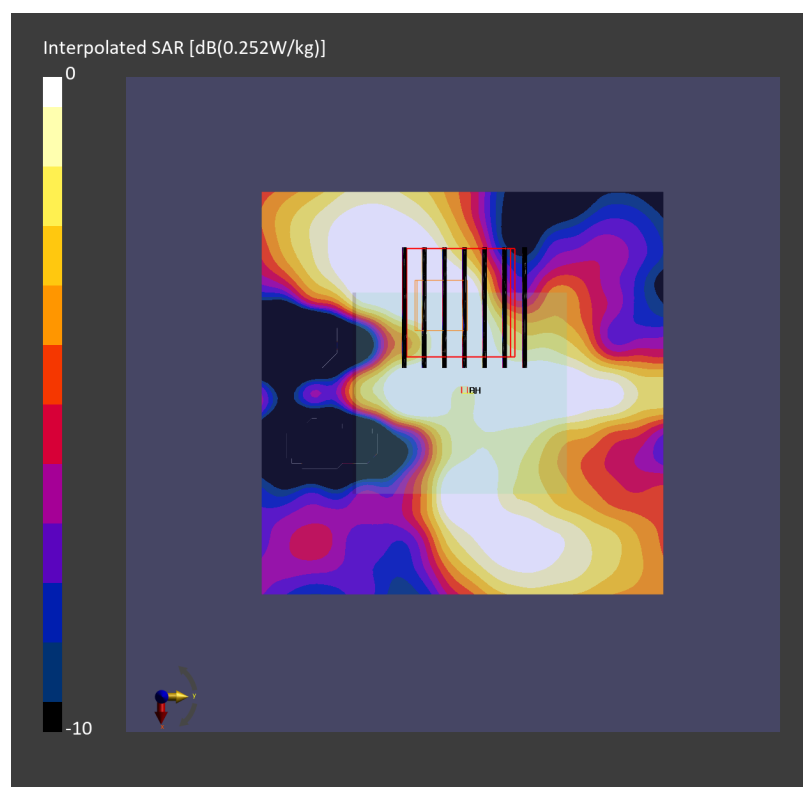

Date: 2025-04-01

#10_WLAN5GHz_802.11a 6Mbps_Back_0mm_Ch165

Communication System: IEEE 802.11a/h WiFi 5 GHz; Frequency: 5825.000 MHz

Medium: HSL_5G_250401 Medium parameters used: $f = 5825.000$ MHz; $\sigma = 5.28$ S/m; $\epsilon_r = 36.1$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7694; ConvF(4.82, 4.7, 5.25); Calibrated: 2024-11-18
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1697; Calibrated: 2024-11-14
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2127; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: WLAN, 10062-CAE

Area Scan (80.0 mm x 80.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.056 W/kg; SAR (10g) = 0.018 W/kg;


Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = 0.09 dB

SAR (1g) = 0.049 W/kg; SAR (8g) = 0.012 W/kg; SAR (10g) = 0.01 W/kg

Smallest distance from peaks to all points 3 dB below = 3.2 mm

Ratio of SAR at M2 to SAR at M1 = 68.2 %

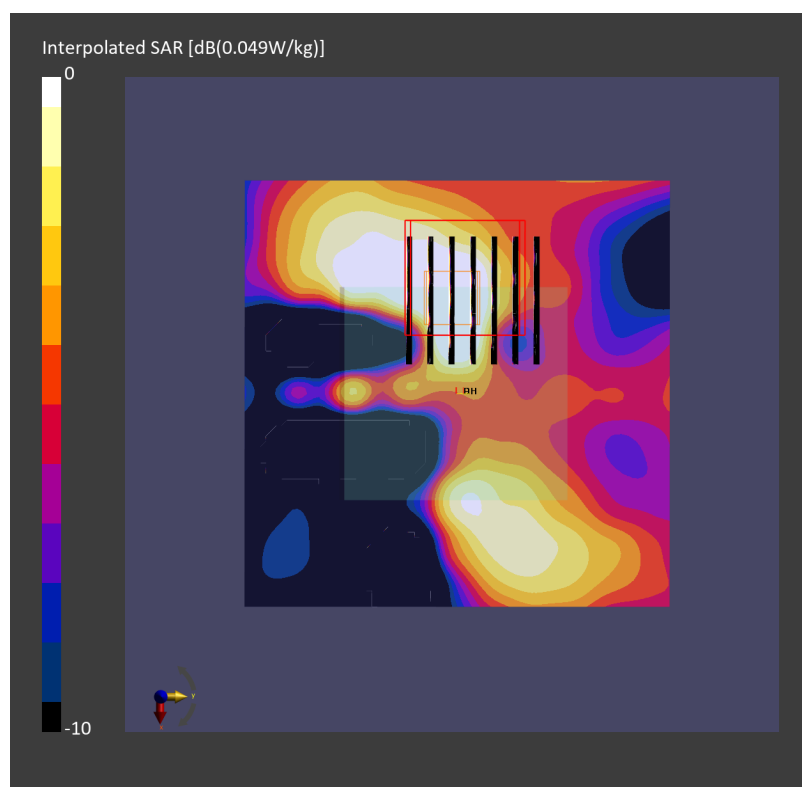

Date: 2025-04-01

#11_WLAN5GHz_802.11a 6Mbps_Back_0mm_Ch169

Communication System: IEEE 802.11a/h WiFi 5 GHz; Frequency: 5845.000 MHz

Medium: HSL_5G_250401 Medium parameters used: $f = 5845.000$ MHz; $\sigma = 5.31$ S/m; $\epsilon_r = 36.0$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7694; ConvF(4.82, 4.7, 5.25); Calibrated: 2024-11-18
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1697; Calibrated: 2024-11-14
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2127; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: WLAN, 10062-CAE

Area Scan (80.0 mm x 80.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.047 W/kg; SAR (10g) = 0.016 W/kg;


Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = 0.02 dB

SAR (1g) = 0.047 W/kg; SAR (8g) = 0.016 W/kg; SAR (10g) = 0.014 W/kg

Smallest distance from peaks to all points 3 dB below = 4.0 mm

Ratio of SAR at M2 to SAR at M1 = 64.9 %

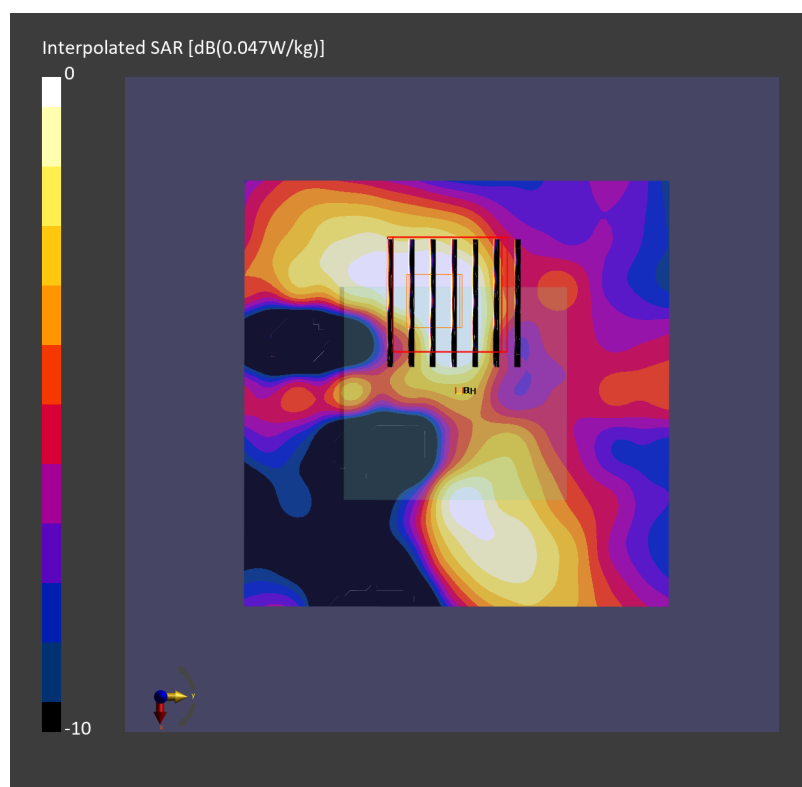

Date: 2025-03-21

#12_Bluetooth_1Mbps_Back_0mm_Ch39

Communication System: IEEE 802.15.1 Bluetooth; Frequency: 2441.000 MHz

Medium: HSL_2450_250321 Medium parameters used: $f = 2441.000$ MHz; $\sigma = 1.82$ S/m; $\epsilon_r = 39.1$

Ambient Temperature: 23.1°C; Liquid Temperature: 22.1°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7785; ConvF(6.25, 6.58, 6.44); Calibrated: 2024-11-28
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1694; Calibrated: 2024-11-19
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: Bluetooth, 10032-CAA

Area Scan (80.0 mm x 80.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.024 W/kg; SAR (10g) = 0.012 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 4.9 mm x 4.9 mm x 1.5 mm

Power Drift = -0.09 dB

SAR (1g) = 0.01 W/kg; SAR (8g) = 0.005 W/kg; SAR (10g) = 0.005 W/kg

Smallest distance from peaks to all points 3 dB below = 6.0 mm

Ratio of SAR at M2 to SAR at M1 = 89.4 %

