



FCC RADIO TEST REPORT

FCC ID : A4RGLBW0
Equipment : Phone
Model Name : GLBW0
Applicant : Google LLC
11600 Amphitheatre Parkway,
Mountain View, CA, 94043 USA
Standard : FCC Part 15 Subpart E §15.407

The product was received on Nov. 27, 2024 and testing was performed from Jan. 21, 2025 to Mar. 21, 2025. We, Sporton International Inc. Wensan Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval from Sporton International Inc. Wensan Laboratory, the test report shall not be reproduced except in full.

Louis Wu

Approved by: Louis Wu

Sporton International Inc. Wensan Laboratory

No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan (R.O.C.)



Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
1 General Description	5
1.1 Product Feature of Equipment Under Test.....	5
1.2 Modification of EUT	7
1.3 Testing Location	7
1.4 Applicable Standards.....	7
2 Test Configuration of Equipment Under Test	8
2.1 Carrier Frequency and Channel	8
2.2 Test Mode.....	9
2.3 Connection Diagram of Test System.....	10
2.4 Support Unit used in test configuration and system	11
2.5 EUT Operation Test Setup	11
2.6 Measurement Results Explanation Example.....	12
3 Test Result	13
3.1 6dB and 26dB and 99% Occupied Bandwidth Measurement	13
3.2 Maximum E.I.R.P Output Power Measurement	14
3.3 Power Spectral Density Measurement	15
3.4 Unwanted Emissions Measurement.....	17
3.5 AC Conducted Emission Measurement.....	22
3.6 Antenna Requirements.....	24
4 List of Measuring Equipment.....	25
5 Measurement Uncertainty	26
Appendix A. Conducted Test Results	
Appendix B. AC Conducted Emission Test Result	
Appendix C. Radiated Spurious Emission Test Data	
Appendix D. Duty Cycle Plots	
Appendix E. Setup Photographs	

History of this test report

Report No.	Version	Description	Issue Date
FR4N0919F	01	Initial issue of report	Apr. 21, 2025
FR4N0919F	02	Revise section 1.1.1 and appendix D This report is an updated version, replacing the report issued on Apr. 21, 2025.	Apr. 24, 2025
FR4N0919F	03	Revise section 2.2, section 3.3.3 and appendix A This report is an updated version, replacing the report issued on Apr. 24, 2025.	May 16, 2025
FR4N0919F	04	Removed the blank page. (P.21) This report is an updated version, replacing the report issued on May 16, 2025.	May 21, 2025

Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.1	15.407(e)	6dB & 26dB Bandwidth	Pass	-
3.1	2.1049	99% Occupied Bandwidth	Pass	-
3.2	15.407(a)	Maximum E.I.R.P Output Power	Pass	-
3.3	15.407(a)	Power Spectral Density	Pass	-
3.4	15.407(b)	Unwanted Emissions	Pass	-
3.5	15.207	AC Conducted Emission	Pass	-
3.6	15.203	Antenna Requirement	Pass	-

Conformity Assessment Condition:

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacture who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2. The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty".

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.

Reviewed by: William Chen

Report Producer: Michelle Chen

1 General Description

1.1 Product Feature of Equipment Under Test

Product Feature		
General Specs GSM/WCDMA/LTE/5G NR/NTN, Bluetooth, BLE, BLE channel sounding, Wi-Fi 802.11ax, NFC, WPC Rx and GNSS Rx.		
Antenna Type WLAN: <Ant. 4>: ILA Antenna <Ant. 3>: IFA Antenna		
EUT Information List		
S/N	Performed Test Item	
4C291FDCR0001G	RF Conducted Measurement	
4C271FDCR000L6	Radiated Spurious Emission	
4B121FDCR0006U	Conducted Emission	
Antenna information		
5850 MHz ~ 5895 MHz	Peak Gain (dBi)	Ant. 4: -4.7 Ant. 3: -0.1

Remark: The EUT's information above is declared by manufacturer. Please refer to Disclaimer in report summary.

1.1.1 Antenna Directional Gain

Follows FCC KDB 662911 D01 Multiple Transmitter Output v02r01 F2)f)ii)

Directional gain = G_{ANT} + Array Gain, where Array Gain is as follows:

For power measurements on IEEE 802.11 devices,

Array Gain = 0 dB (i.e., no array gain) for $N_{ANT} \leq 4$.

G_{ANT} is set equal to the gain of the antenna having the highest gain.

For PSD measurements, the directional gain calculation.

Array Gain = $10 \log(N_{ANT}/N_{SS})$ dB.

$$DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right]$$

where

Each antenna is driven by no more than one spatial stream;

N_{SS} = the number of independent spatial streams of data;

N_{ANT} = the total number of antennas

$g_{j,k} = 10^{G_k/20}$ if the k th antenna is being fed by spatial stream j , or zero if it is not;
 G_k is the gain in dBi of the k th antenna.

As minimum $N_{SS}=1$ is supported by EUT, the formula can be simplified as:

Directional gain = $10 \cdot \log[(10^{G_1/20} + 10^{G_2/20} + \dots + 10^{G_N/20})^2 / N_{ANT}]$ dBi

Where $G_1, G_2, \dots, G_N$ denote single antenna gain.

The directional gain "DG" is calculated as following table.

UNII-4			DG	DG
			for	for
	Ant 4	Ant 3	Power	PSD
	(dBi)	(dBi)	(dBi)	(dBi)
	-4.70	-0.10	-0.10	0.91

Calculation example:

If a device has two antenna, $G_{ANT4} = -4.70$ dBi; $G_{ANT3} = -0.10$ dBi

Directional gain of power measurement = $\max(-4.70, -0.10) + 0 = -0.10$ dBi

Directional gain of PSD derived from formula which is

$$10 \times \log \left\{ \left[10^{(-4.70 \text{ dBi} / 20)} + 10^{(-0.10 \text{ dBi} / 20)} \right]^2 / 2 \right\}$$

$$= -0.91 \text{ dBi}$$

1.2 Modification of EUT

No modifications made to the EUT during the testing.

1.3 Testing Location

Test Site	Sporton International Inc. Wensan Laboratory
Test Site Location	No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan (R.O.C.) TEL: +886-3-327-0868 FAX: +886-3-327-0855
Test Site No.	Sporton Site No. TH05-HY, CO07-HY, 03CH20-HY

Note: The test site complies with ANSI C63.4 2014 requirement.

FCC designation No.: TW3786

1.4 Applicable Standards

According to the specifications declared by the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart E
- ♦ FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
- ♦ FCC KDB 414788 D01 Radiated Test Site v01r01.
- ♦ FCC KDB 662911 D01 Multiple Transmitter Output v02r01.
- ♦ FCC KDB 291074 D02 EMC Measurement v01
- ♦ ANSI C63.10-2013

Remark:

1. All the test items were validated and recorded in accordance with the standards without any modification during the testing.
2. The TAF code is not including all the FCC KDB listed without accreditation.

2 Test Configuration of Equipment Under Test

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, the measured emission level of the EUT was maximized by rotating the EUT on a turntable, adjusting the orientation of the EUT and EUT antenna in three orthogonal axis (X: flat, Y: portrait, Z: landscape), and accessory (Adapter or Earphone), and adjusting the measurement antenna orientation, following C63.10 exploratory test procedures and find Z plane with Adapter as worst plane.
- b. AC power line Conducted Emission was tested under maximum output power.

2.1 Carrier Frequency and Channel

Frequency Band	Bandwidth	Channel	Frequency (MHz)	Note
5850-5895 MHz (U-NII-4)	20 MHz	169	5845	Straddle
		173	5865	
		177	5885	
	40 MHz	167	5835	Straddle
		175	5875	
	80 MHz	171	5855	Straddle

Note: The channel noted with "straddle" spans 5.725-5.850 GHz and 5.850-5.895 GHz.

2.2 Test Mode

This device support 26/52/106/242/484/996-tone RU.

The PSD of partial RU is reduced to be smaller than full RU according to TCB workshop interim guidance Oct. 2022.

The 802.11ax mode is investigated among different tones, full resource units (RU), partial resource units. The partial RU has no higher power than full RU's, thus the full RU is chosen as main test configuration.

The 242-tone RU is covered by 20MHz channel, 484-tone RU is covered by 40MHz channel and 996-tone RU is covered by 80MHz channel.

The power for 802.11n and 802.11ac mode is smaller than 802.11ax mode, so all other conducted and radiated test is covered by 802.11ax mode.

The final test modes include the worst data rates for each modulation shown in the table below.


MIMO Mode


Modulation	Data Rate
802.11a	6 Mbps
802.11n HT20 (Covered by HE20)	MCS0
802.11n HT40 (Covered by HE40)	MCS0
802.11ac VHT20 (Covered by HE20)	MCS0
802.11ac VHT40 (Covered by HE40)	MCS0
802.11ac VHT80 (Covered by HE80)	MCS0
802.11ax HE20	MCS0
802.11ax HE40	MCS0
802.11ax HE80	MCS0

Test Cases	
AC Conducted Emission	Mode 1 : WLAN (5GHz) Link + USB Cable 2 (Charging from AC Adapter)
Remark: 1. For Radiated Test Cases, the tests were performed with USB Cable 2. 2. During the preliminary test, both charging modes (Adapter mode and WPC Rx mode) were verified. It is determined that the adaptor mode is the worst case for official test. 3. The detailed Radiated test modes are shown in Appendix C. 4. For radiation spurious emission, the modulation and the data rate picked for testing are determined by the Max. RF conducted power.	

2.3 Connection Diagram of Test System

<AC Conducted Emission Mode>

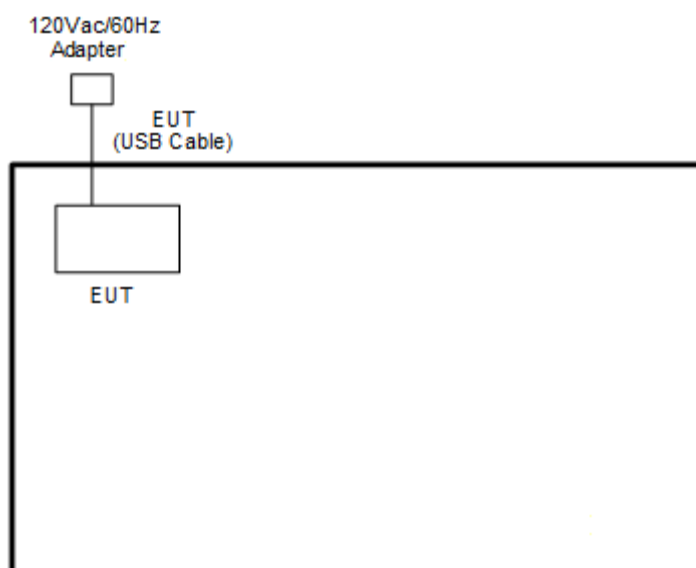
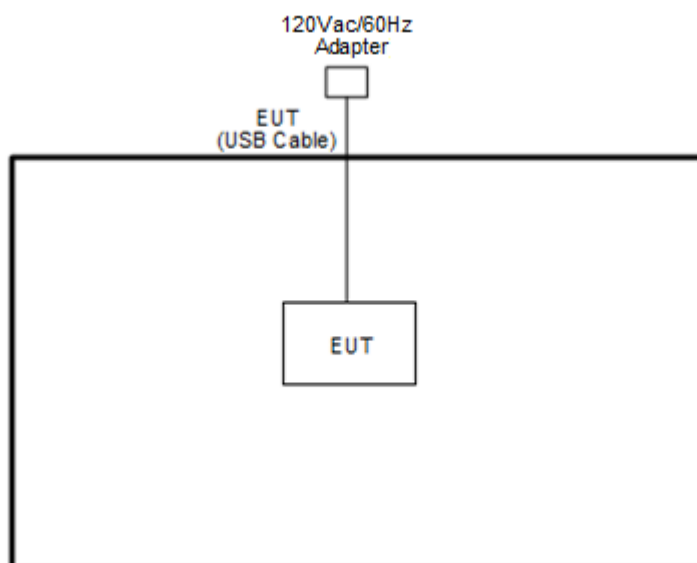
<WLAN Tx Mode>


2.4 Support Unit used in test configuration and system

Item	Equipment	Brand Name	Model Name	FCC ID	Data Cable	Power Cord
1.	Adapter	N/A	GW8L7	N/A	N/A	N/A

2.5 EUT Operation Test Setup

The RF test items, utility “WLAN_DUT_Control_GUI_11-15-24” was installed in Notebook which was programmed in order to make the EUT get into the engineering modes to provide channel selection, power level, data rate and the application type and for continuous transmitting signals.

2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 4.2 dB and 10 dB attenuator.

$$\begin{aligned}\text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)} \\ &= 4.2 + 10 = 14.2 \text{ (dB)}\end{aligned}$$

3 Test Result

3.1 6dB and 26dB and 99% Occupied Bandwidth Measurement

3.1.1 Description of 6dB and 26dB and 99% Occupied Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.

26dB and 99% Occupied bandwidth are reporting only.

3.1.2 Measuring Instruments


Please refer to the measuring equipment list in this test report.

3.1.3 Test Procedures

The testing follows FCC KDB 291074 D02 EMC Measurement v01 Section 2.11 Minimum Emission bandwidth

1. Set RBW = 100 kHz.
2. Set the VBW $\geq 3 \times$ RBW.
3. Detector = Peak.
4. Trace mode = max hold
5. Measure the maximum width of the emission that is 6 dB down from the peak of the emission.
6. Measure and record the results in the test report.

3.1.4 Test Setup



3.1.5 Test Result of 6dB and 26dB and 99% Occupied Bandwidth

Please refer to Appendix A.

Note: The EBW spectrum setting is as following table for different nominal bandwidth.

Setting	11a/HE20	11a/HE20	HE40	HE80	HE80
Measured	< 40MHz	> 40MHz		< 150MHz	> 150MHz
RBW	300kHz	500kHz	1MHz	1MHz	2MHz
VBW	1MHz	2MHz	3MHz	3MHz	10MHz

3.2 Maximum E.I.R.P Output Power Measurement

3.2.1 Limit of Maximum E.I.R.P Output Power

For client devices operating under the control of an indoor access point in the 5.850-5.895 GHz band, the maximum power spectral density must not exceed 14 dBm e.i.r.p. in any 1-megahertz band, and the maximum e.i.r.p. over the frequency band of operation must not exceed 30 dBm. Client devices operating on a channel that spans the 5.725-5.850 GHz and 5.850-5.895 GHz bands must not exceed an e.i.r.p. of 30 dBm.

3.2.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.


3.2.3 Test Procedures

The testing follows Method PM-G of FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.

Method PM-G (Measurement using a gated RF average power meter):

1. Measurement is performed using a wideband RF power meter.
2. The EUT is configured to transmit at its maximum power control level.
3. Measure the average power of the transmitter.
4. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.
5. For MIMO mode, calculation method follows FCC KDB 662911 D01 Multiple Transmitter Output v02r01.

3.2.4 Test Setup

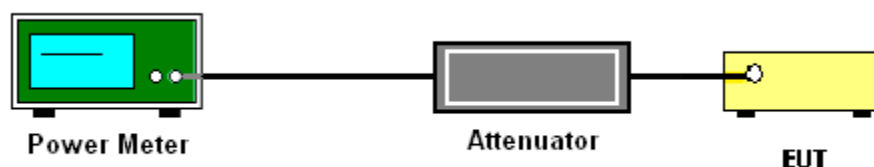

3.2.5 Test Result of Maximum Conducted Output Power

Please refer to Appendix A.

3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

1. For client devices operating under the control of an indoor access point in the 5.850-5.895 GHz band, the maximum power spectral density must not exceed 14 dBm e.i.r.p. in any 1-megahertz band.
2. For client devices operating on a channel that spans the 5.725-5.850 GHz and 5.850-5.895 GHz bands shall meet both 15.407(a)(3)(i) 30dBm/500kHz and 15.407(a)(3)(iii) 14dBm/MHz limit, where the stringent limit 14dBm/MHz is applied.
3. For an indoor access point operating on a channel that spans the 5.725-5.850 GHz and 5.850-5.895 GHz bands shall meet both 15.407(a)(3)(ii) 36dBm limit, where the stringent limit 20dBm/MHz is applied.

3.3.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.3.3 Test Procedures

The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
Section F) Maximum power spectral density.

Method SA-2


(trace averaging across on and off times of the EUT transmissions, followed by duty cycle correction).

- Measure the duty cycle.
 - Set span to encompass the entire emission bandwidth (EBW) of the signal.
 - Set RBW = 1 MHz.
 - Set VBW $\geq$ 3 MHz.
 - Number of points in sweep $\geq$ 2 Span / RBW.
 - Sweep time = auto.
 - Detector = RMS
 - Trace average at least 100 traces in power averaging mode.
 - Add $10 \log(1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times. For example, add $10 \log(1/0.25) = 6$ dB if the duty cycle is 25 percent.
1. The RF output of EUT is connected to the spectrum analyzer by a low loss cable.
 2. Each plot has already offset with cable loss, and attenuator loss. Measure the PPSD and record it.
 3. For MIMO mode, calculation method follows FCC KDB 662911 D01 Multiple Transmitter Output v02r01.

Method (a): Measure and sum the spectra across the outputs.

The total final Power Spectral Density is from a device with 2 transmitter outputs. The spectrum measurements of the individual outputs are all performed with the same span and number of points; the spectrum value in the first spectral bin of output 1 is summed with that in the first spectral bin of output 2 to obtain the value for the first frequency bin of the summed spectrum.

3.3.4 Test Setup

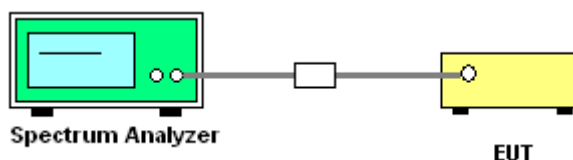

3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.

3.4 Unwanted Emissions Measurement

This section is to measure unwanted emissions through radiated measurement for band edge spurious emissions and out of band emissions measurement.

3.4.1 Limit of Unwanted Emissions

- (1) Unwanted spurious emissions fallen in restricted bands shall comply with the general field strength limits as the following table:

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

Note: The following formula is used to convert the EIRP to field strength.

$$E = \frac{1000000\sqrt{30P}}{3} \quad \mu\text{V/m, where P is the eirp (Watts)}$$

- (2) For transmitters operating solely in the 5.850-5.895 GHz band or operating on a channel that spans across 5.725-5.895 GHz:

15.407(b)(5)(ii), all emissions at or above 5.895 GHz shall not exceed an e.i.r.p. of -5 dBm/MHz and shall decrease linearly to an e.i.r.p. of -27 dBm/MHz at or above 5.925 GHz.

All emissions below 5.725 GHz shall not exceed an e.i.r.p. of -27 dBm/MHz at 5.65 GHz increasing linearly to 10 dBm/MHz at 5.7 GHz, and from 5.7 GHz increasing linearly to a level of 15.6 dBm/MHz at 5.72 GHz, and from 5.72 GHz increasing linearly to a level of 27 dBm/MHz at 5.725 GHz.

- (3) KDB789033 D02 v02r01 G)2)c)

Use guidance in KDB Publication 789033 for all measurements. Unwanted emissions outside of restricted bands are measured with an RMS detector. In addition, 15.35(b) applies where the peak emissions must be limited to no more than 20 dB above the average limit.

Unwanted band-edge emissions may be measured using the integration method as described in KDB Publication 789033 3. d) (ii). Emissions below 5725 MHz should be measured using peak-detection while emission above 5895 MHz should be measured using average.

Frequency(GHz)	EIRP (dBm)	Field Strength @3m distance (dBuV/m)	Note
Below 5.65	-27dBm/MHz	68.2	Peak
5.7	10dBm/MHz	105.2	Peak
5.72	15.6dBm/MHz	110.8	Peak
5.725	27dBm/MHz	122.2	Peak
5.895	-5dBm/MHz	90.2	Average
5.895	15dBm/MHz	110.2	Peak
Above 5.925	-27dBm/MHz	68.2	Average
Above 5.925	-7dBm/MHz	88.2	Peak

Note: Field strength at 3 m distance is converted to EIRP as the following equation:

$$\text{EIRP[dBm]} = \text{E[dB}\mu\text{V/m]} - 95.2$$

3.4.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.


3.4.3 Test Procedures

- The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
Section G) Unwanted emissions measurement.
 - Procedure for Unwanted Emissions Measurements Below 1000 MHz
 - RBW = 120 kHz
 - VBW = 300 kHz
 - Detector = Peak
 - Trace mode = max hold
 - Procedures for Average Unwanted Emissions Measurements Above 1000 MHz
 - RBW = 1 MHz
 - VBW = 10 Hz, when duty cycle is no less than 98 percent.
 - VBW $\geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.
- The EUT was placed on a turntable with 0.8 meter for frequency below 1 GHz and 1.5 meter for frequency above 1 GHz respectively above ground.
- The EUT was placed at distance 3 meter from measurement antenna which was mounted on the top of a variable height antenna tower.


4. The measurement antenna is a broadband antenna and its height is adjusted between one meter and four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization.
5. For each suspected emission, the EUT was arranged to its worst case and then adjust the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
6. Radiated testing below 1GHz was performed by adjusting the antenna tower from 1m to 4m and by rotating the turn table from 0 degree to 360 degree to find the peak maximum hold reading. When there is no suspected emission found and the emission level is with at least 6dB margin against QP limit line, the position is marked as “-”.
7. Radiated testing above 1GHz was performed by adjusting the antenna tower from 1m to 4m and by rotating the turn table from 0 degree to 360 degree to find the peak maximum hold reading for scanning all frequencies. When there is no suspected emission found and the harmonic emission level is with at least 6dB margin against average limit line, the position is marked as “-”.

3.4.4 Test Setup


For radiated emissions below 30MHz

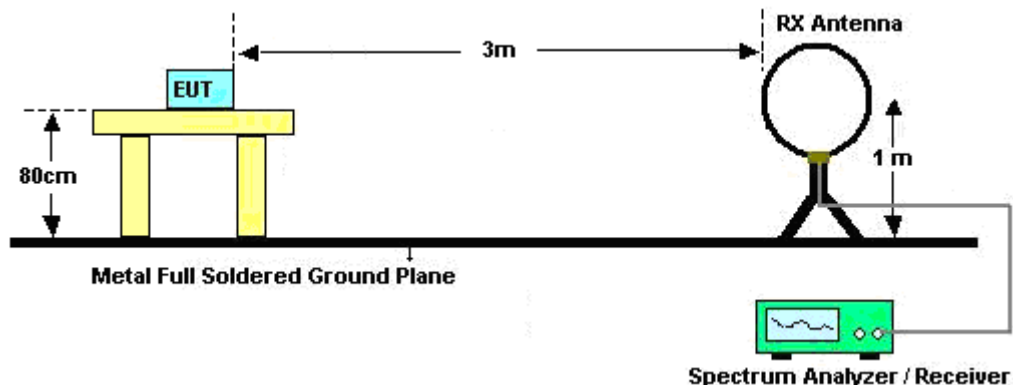


For radiated emissions from 30MHz to 1GHz

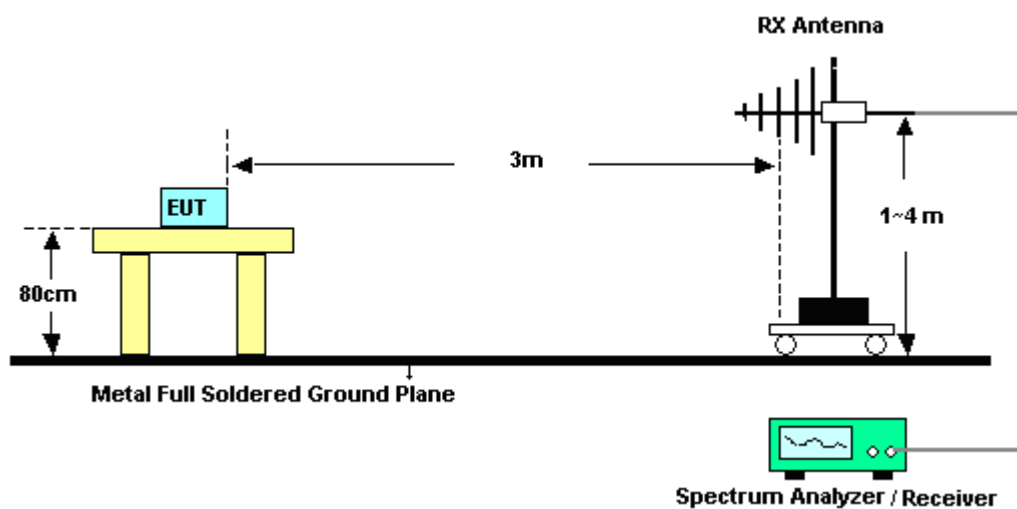

For radiated test from 1GHz to 18GHz

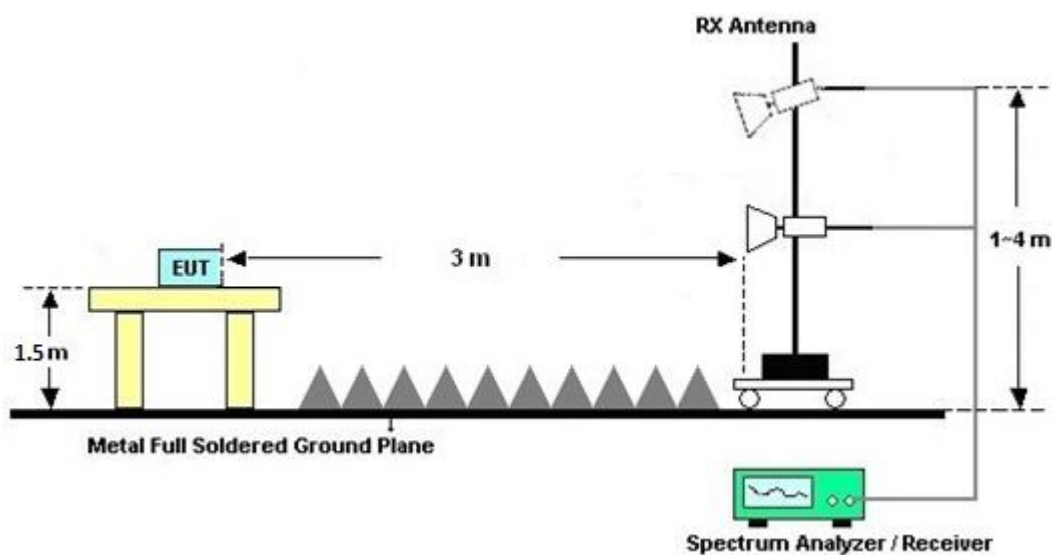

For radiated test above 18GHz

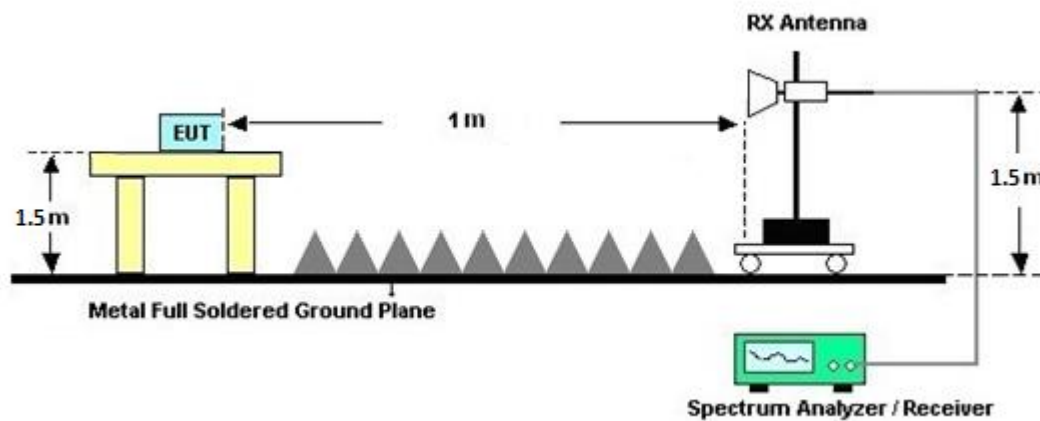



3.4.5 Test Results of Radiated Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is adequate comparison measurement of both open-field test site and alternative test site - semi-Anechoic chamber according to 414788 D01 Radiated Test Site v01r01, and the result came out very similar.

3.4.6 Test Results of Radiated Spurious Emissions (above 18 GHz)

For frequency above 18GHz, the pre-scanned result is 20dB lower than the limit line is not reported.

3.4.7 Test Result of Radiated Band Edges

Please refer to Appendix C.

3.4.8 Duty Cycle

Please refer to Appendix D.

3.4.9 Test Result of Unwanted Radiated Emission (30MHz ~ 10th Harmonic)

Please refer to Appendix C.

3.5 AC Conducted Emission Measurement

3.5.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.5.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.5.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN shall be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.

3.5.4 Test Setup

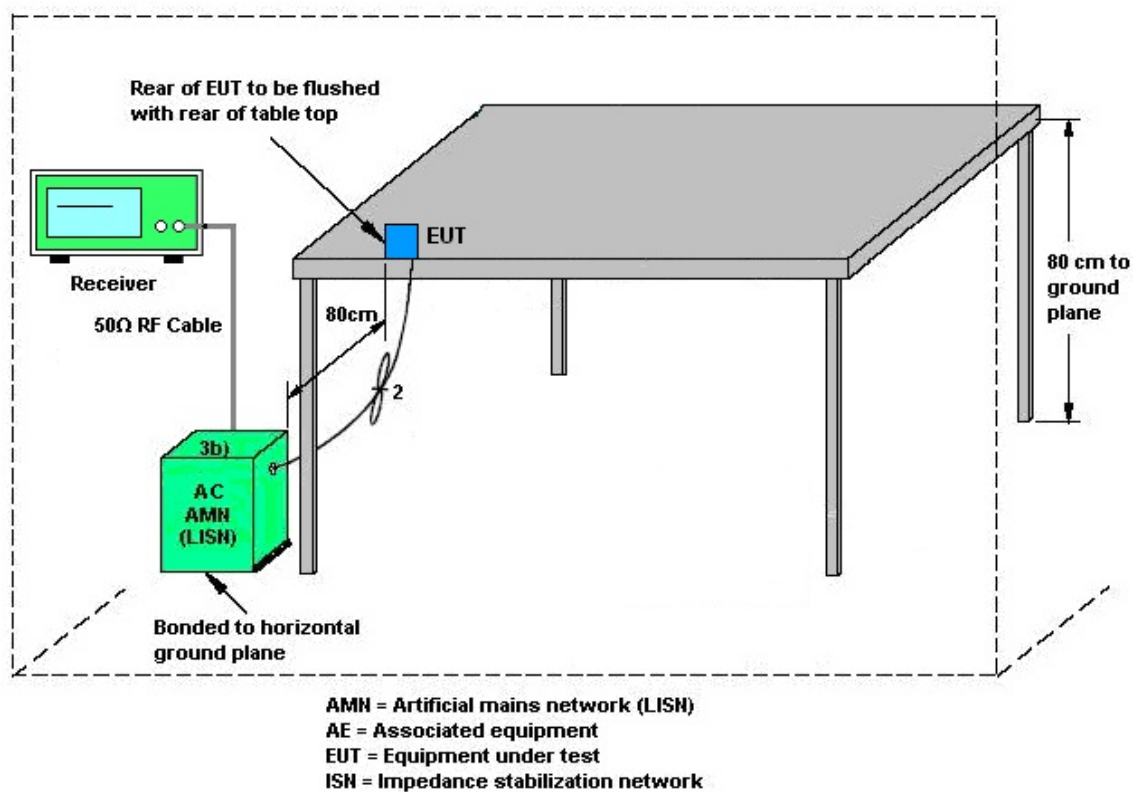

3.5.5 Test Result of AC Conducted Emission

Please refer to Appendix B.

3.6 Antenna Requirements

3.6.1 Standard Applicable

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §§ 15.211, 15.213, 15.217, 15.219, 15.221, or § 15.236. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with § 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

3.6.2 Antenna Anti-Replacement Construction

- b) Unique (non-standard) antenna connector.
- (3) Use of a standard connector is also allowed if the connector is within the transmitter enclosure and can only be accessed by disassembly of the transmitter, where such disassembly is not normally required. The user manual must not show that user has access to the connector.



4 List of Measuring Equipment

Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
EMI Test Receiver	Keysight	N9038A(MXE)	MY54130085	N/A	Oct. 16, 2024	Jan. 21, 2025~ Feb. 24, 2025	Oct. 15, 2025	Radiation (03CH20-HY)
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100488	9 kHz~30 MHz	Aug. 29, 2024	Jan. 21, 2025~ Feb. 24, 2025	Aug. 28, 2025	Radiation (03CH20-HY)
Preamplifier	EMEC	EM18G40G	060873	18GHz~40GHz	Sep. 02, 2024	Jan. 21, 2025~ Feb. 24, 2025	Sep. 01, 2025	Radiation (03CH20-HY)
Controller	ChainTek	3000-1	N/A	Control Turn table & Ant Mast	N/A	Jan. 21, 2025~ Feb. 24, 2025	N/A	Radiation (03CH20-HY)
Antenna Mast	ChainTek	MBS-520-1	N/A	1m~4m	N/A	Jan. 21, 2025~ Feb. 24, 2025	N/A	Radiation (03CH20-HY)
Turn Table	ChainTek	T-200-S-1	N/A	0~360 Degree	N/A	Jan. 21, 2025~ Feb. 24, 2025	N/A	Radiation (03CH20-HY)
Signal Analyzer	Keysight	N9010B	MY60240520	N/A	Dec. 09, 2024	Jan. 21, 2025~ Feb. 24, 2025	Dec. 08, 2025	Radiation (03CH20-HY)
Bilog Antenna	TESEQ	CBL 6111D&00802 N1D01N-06	55606 & 08	30MHz~1GHz	Nov. 27, 2024	Jan. 21, 2025~ Feb. 24, 2025	Nov. 26, 2025	Radiation (03CH20-HY)
Horn Antenna	SCHWARZBECK	BBHA 9120 D	02360	1GHz-18GHz	Nov. 01, 2024	Jan. 21, 2025~ Feb. 24, 2025	Oct. 31, 2025	Radiation (03CH20-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA 9170	1224	18GHz-40GHz	Jun. 24, 2024	Jan. 21, 2025~ Feb. 24, 2025	Jun. 23, 2025	Radiation (03CH20-HY)
Preamplifier	COM-POWER	PAM-103	18020201	1MHz-1000MHz	Dec. 31, 2024	Jan. 21, 2025~ Feb. 24, 2025	Dec. 30, 2025	Radiation (03CH20-HY)
Amplifier	EMCI	EMC118A45SE	980792	N/A	Nov. 12, 2024	Jan. 21, 2025~ Feb. 24, 2025	Nov. 11, 2025	Radiation (03CH20-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	519229/2,804 015/2,804027 /2	N/A	Jan. 16, 2025	Jan. 21, 2025~ Feb. 24, 2025	Jan. 15, 2026	Radiation (03CH20-HY)
Hygrometer	TECPEL	DTM-303A	TP211382	N/A	Mar. 27, 2024	Jan. 21, 2025~ Feb. 24, 2025	Mar. 26, 2025	Radiation (03CH20-HY)
Software	Audix	N/A	RK-002156	N/A	N/A	Jan. 21, 2025~ Feb. 24, 2025	N/A	Radiation (03CH20-HY)
AC Power Source	ACPOWER	AFC-11003G	F317040033	N/A	N/A	Mar. 19, 2025~ Mar. 21, 2025	N/A	Conduction (CO07-HY)
Software	Rohde & Schwarz	EMC32 V10.30	N/A	N/A	N/A	Mar. 19, 2025~ Mar. 21, 2025	N/A	Conduction (CO07-HY)
Pulse Limiter	SCHWARZBECK	VTSD 9561-FN	9561-F N00373	9kHz-200MHz	Oct. 23, 2024	Mar. 19, 2025~ Mar. 21, 2025	Oct. 22, 2025	Conduction (CO07-HY)
RF Cable	HUBER + SUHNER	RG 214/U	1358175	9kHz~30MHz	Mar. 03, 2025	Mar. 19, 2025~ Mar. 21, 2025	Mar. 02, 2026	Conduction (CO07-HY)
Lisn	Rohde & Schwarz	ENV216	100080	9kHz~30MHz	Dec. 12, 2024	Mar. 15, 2025	Dec. 11, 2025	Conduction (CO07-HY)
EMI Test Receiver	Rohde & Schwarz	ESR3	102317	9kHz~3.6GHz	Sep. 23, 2024	Mar. 19, 2025~ Mar. 21, 2025	Sep. 22, 2025	Conduction (CO07-HY)
Hygrometer	TECPEL	DTM-303A	TP201996	N/A	Nov. 01, 2024	Feb. 03, 2025~ Mar. 13, 2025	Oct. 31, 2025	Conducted (TH05-HY)
Power Sensor	DARE	RPR3006W	13I00030SNO 31 (NO:182)	9kHz~6GHz	Jan. 09, 2025	Feb. 03, 2025~ Mar. 13, 2025	Jan. 08, 2026	Conducted (TH05-HY)
Signal Analyzer	Rohde & Schwarz	FSV3044	101467	10Hz~44GHz	Jan. 14, 2025	Feb. 03, 2025~ Mar. 13, 2025	Jan. 13, 2026	Conducted (TH05-HY)
Switch Control Mainframe	Burgeon	ETF-058	EC1300484 (BOX3)	N/A	May 20, 2024	Feb. 03, 2025~ Mar. 13, 2025	May 19, 2025	Conducted (TH05-HY)
Software	Sporton	BTWIFI_Final version_240513	N/A	Conducted Other Test Item	N/A	Feb. 03, 2025~ Mar. 13, 2025	N/A	Conducted (TH05-HY)

5 Measurement Uncertainty

Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	3.7 dB
---	--------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	6.7 dB
---	--------

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 6000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	5.4 dB
---	--------

Uncertainty of Radiated Emission Measurement (6000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	5.6 dB
---	--------

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	5.7 dB
---	--------



Appendix A. Test Result of Conducted Test Items

Test Engineer:	Howard Tsai and Mina Liu	Temperature:	21~25	°C
Test Date:	2025/02/03~2025/04/25	Relative Humidity:	51~54	%

MIMO <Ant. 4+3>

Test Result

6dB and 26dB EBW and 99% OBW

UNII-4 MIMO												
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Bandwidth (MHz)		26dB Bandwidth (MHz)		6 dB Bandwidth (MHz)		6 dB Bandwidth Min. Limit (MHz)	Pass Fail
					Ant4	Ant3	Ant4	Ant3	Ant4	Ant3		
11a	6M	2	169	5845	32.37	35.56	52.32	55.72	16.28	16.3	0.5	Pass
11a	6M	2	173	5865	32.37	36.01	50.22	53.81	16.35	16.3	0.5	Pass
11a	6M	2	177	5885	32.42	35.71	50.9	54.98	16.3	16.3	0.5	Pass

**Average Output Power**

UNII-4 MIMO													
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Average Conducted Power (dBm)			DG (dBi)		E.I.R.P Power (dBm)		EIRP Limit (dBm)	
					Ant4	Ant3	SUM	Ant4	Ant3	Ant4	Ant3	Ant4	Ant3
11a	6M	2Tx	169	5845	18.96	18.35	21.68	-0.1		21.58		30	
11a	6M	2Tx	173	5865	18.81	17.99	21.43	-0.1		21.33		30	
11a	6M	2Tx	177	5885	18.94	17.80	21.42	-0.1		21.32		30	
HT20	MCS0	2Tx	169	5845	18.84	18.43	21.65	-0.1		21.55		30	
HT20	MCS0	2Tx	173	5865	18.58	18.21	21.41	-0.1		21.31		30	
HT20	MCS0	2Tx	177	5885	18.69	18.05	21.39	-0.1		21.29		30	
HT40	MCS0	2Tx	167	5835	18.80	18.20	21.52	-0.1		21.42		30	
HT40	MCS0	2Tx	175	5875	18.71	17.80	21.29	-0.1		21.19		30	
VHT20	MCS0	2Tx	169	5845	18.89	18.50	21.71	-0.1		21.61		30	
VHT20	MCS0	2Tx	173	5865	18.67	18.25	21.48	-0.1		21.38		30	
VHT20	MCS0	2Tx	177	5885	18.89	18.1	21.52	-0.1		21.42		30	
VHT40	MCS0	2Tx	167	5835	18.90	18.30	21.62	-0.1		21.52		30	
VHT40	MCS0	2Tx	175	5875	18.81	17.90	21.39	-0.1		21.29		30	
VHT80	MCS0	2Tx	171	5855	18.46	18.52	21.50	-0.1		21.40		30	

**Power Spectral Density**

UNII-4 MIMO																
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)		Average Power Density with Duty Factor (dBm/1MHz)			DG (dBi)		EIRP PSD (dBm/MHz)		EIRP PSD Limit (dBm/MHz)		Pass /Fail
					Ant4	Ant3	Ant4	Ant3	SUM	Ant4	Ant3	Ant4	Ant3	Ant4	Ant3	
11a	6M	2	169	5845	0.02	0.02				11.11	0.91	12.02		14.0		Pass
11a	6M	2	173	5865	0.01	0.02				10.82	0.91	11.73		14.0		Pass
11a	6M	2	177	5885	0.02	0.02				10.8	0.91	11.71		14.0		Pass

**6dB and 26dB EBW and 99% OBW**

UNII-4 MIMO													
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	99% Bandwidth (MHz)		26dB Bandwidth (MHz)		6 dB Bandwidth (MHz)		6 dB Bandwidth Min. Limit (MHz)	Pass Fail
						Ant4	Ant3	Ant4	Ant3	Ant4	Ant3		
HE20	MCS0	2	169	5845	Full	32.81	37.98	51.97	64.23	18.44	17.84	0.5	Pass
HE20	MCS0	2	173	5865	Full	32.87	38.42	53.32	65.82	18.52	18.52	0.5	Pass
HE20	MCS0	2	177	5885	Full	32.15	38.27	52.66	65.53	18.63	18.23	0.5	Pass
HE40	MCS0	2	167	5835	Full	70.16	74.01	118.48	109.68	37.47	37.56	0.5	Pass
HE40	MCS0	2	175	5875	Full	70.59	73.66	116.43	115.01	37.23	37.0	0.5	Pass
HE80	MCS0	2	171	5855	Full	95.1	103.42	207.26	257.02	75.15	75.12	0.5	Pass

**Average Output Power**

UNII-4 MIMO														
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Average Conducted Power (dBm)			DG (dBi)		E.I.R.P Power (dBm)		EIRP Limit (dBm)	
						Ant4	Ant3	SUM	Ant4	Ant3	Ant4	Ant3	Ant4	Ant3
HE20	MCS0	2Tx	169	5845	Full/RU	18.96	18.72	21.85	-0.1		21.75		30	
HE20	MCS0	2Tx	169	5845	26RU/0	10.61	10.44	13.54	-0.1		13.44		30	
HE20	MCS0	2Tx	169	5845	52RU/37	12.17	12.94	15.58	-0.1		15.48		30	
HE20	MCS0	2Tx	169	5845	106RU/53	15.69	16.2	18.96	-0.1		18.86		30	
HE20	MCS0	2Tx	173	5865	Full/RU	18.82	18.38	21.62	-0.1		21.52		30	
HE20	MCS0	2Tx	173	5865	26RU/4	10.59	10.03	13.33	-0.1		13.23		30	
HE20	MCS0	2Tx	173	5865	52RU/38	12.69	13.22	15.97	-0.1		15.87		30	
HE20	MCS0	2Tx	173	5865	106RU/53	15.56	15.98	18.79	-0.1		18.69		30	
HE20	MCS0	2Tx	177	5885	Full/RU	18.95	18.18	21.59	-0.1		21.49		30	
HE20	MCS0	2Tx	177	5885	26RU/8	9.57	8.76	12.19	-0.1		12.09		30	
HE20	MCS0	2Tx	177	5885	52RU/40	12.66	12.75	15.72	-0.1		15.62		30	
HE20	MCS0	2Tx	177	5885	106RU/54	15.76	15.63	18.71	-0.1		18.61		30	
HE40	MCS0	2Tx	167	5835	Full/RU	19.00	18.34	21.69	-0.1		21.59		30	
HE40	MCS0	2Tx	175	5875	Full/RU	18.91	17.90	21.44	-0.1		21.34		30	
HE80	MCS0	2Tx	171	5855	Full/RU	18.89	18.31	21.62	-0.1		21.52		30	


**Power Spectral Density**

UNII-4 MIMO																	
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Duty Factor (dB)		Average Power Density with Duty Factor (dBm/1MHz)			DG (dBi)		EIRP PSD (dBm/MHz)		EIRP PSD Limit (dBm/MHz)		Pass /Fail
						Ant4	Ant3	Ant4	Ant3	SUM	Ant4	Ant3	Ant4	Ant3	Ant4	Ant3	
HE20	MCS0	2	169	5845	Full	0.03	0.03	-		10.65	0.91		11.56		14.0		Pass
HE20	MCS0	2	169	5845	26/0	0.02	0.03	-		10.53	0.91		11.44		14.0		Pass
HE20	MCS0	2	169	5845	52/37	0.02	0.03	-		9.49	0.91		10.4		14.0		Pass
HE20	MCS0	2	169	5845	106/53	0.03	0.03	-		9.88	0.91		10.79		14.0		Pass
HE20	MCS0	2	173	5865	Full	0.03	0.03	-		10.36	0.91		11.27		14.0		Pass
HE20	MCS0	2	173	5865	26/4	0.02	0.03	-		9.21	0.91		10.12		14.0		Pass
HE20	MCS0	2	173	5865	52/38	0.02	0.03	-		9.91	0.91		10.82		14.0		Pass
HE20	MCS0	2	173	5865	106/53	0.03	0.03	-		9.67	0.91		10.58		14.0		Pass
HE20	MCS0	2	177	5885	Full	0.03	0.03	-		10.35	0.91		11.26		14.0		Pass
HE20	MCS0	2	177	5885	26/8	0.02	0.03	-		9.27	0.91		10.18		14.0		Pass
HE20	MCS0	2	177	5885	52/40	0.02	0.03	-		9.75	0.91		10.66		14.0		Pass
HE20	MCS0	2	177	5885	106/54	0.03	0.03	-		9.75	0.91		10.66		14.0		Pass
HE40	MCS0	2	167	5835	Full	0.06	0.06	-		7.74	0.91		8.65		14.0		Pass
HE40	MCS0	2	175	5875	Full	0.06	0.05	-		7.49	0.91		8.4		14.0		Pass
HE80	MCS0	2	171	5855	Full	0.12	0.12	-		4.66	0.91		5.57		14.0		Pass

**Test Result of 6dB and 26dB and 99% Occupied Bandwidth**

MIMO <Ant. 4+3>


<802.11a>

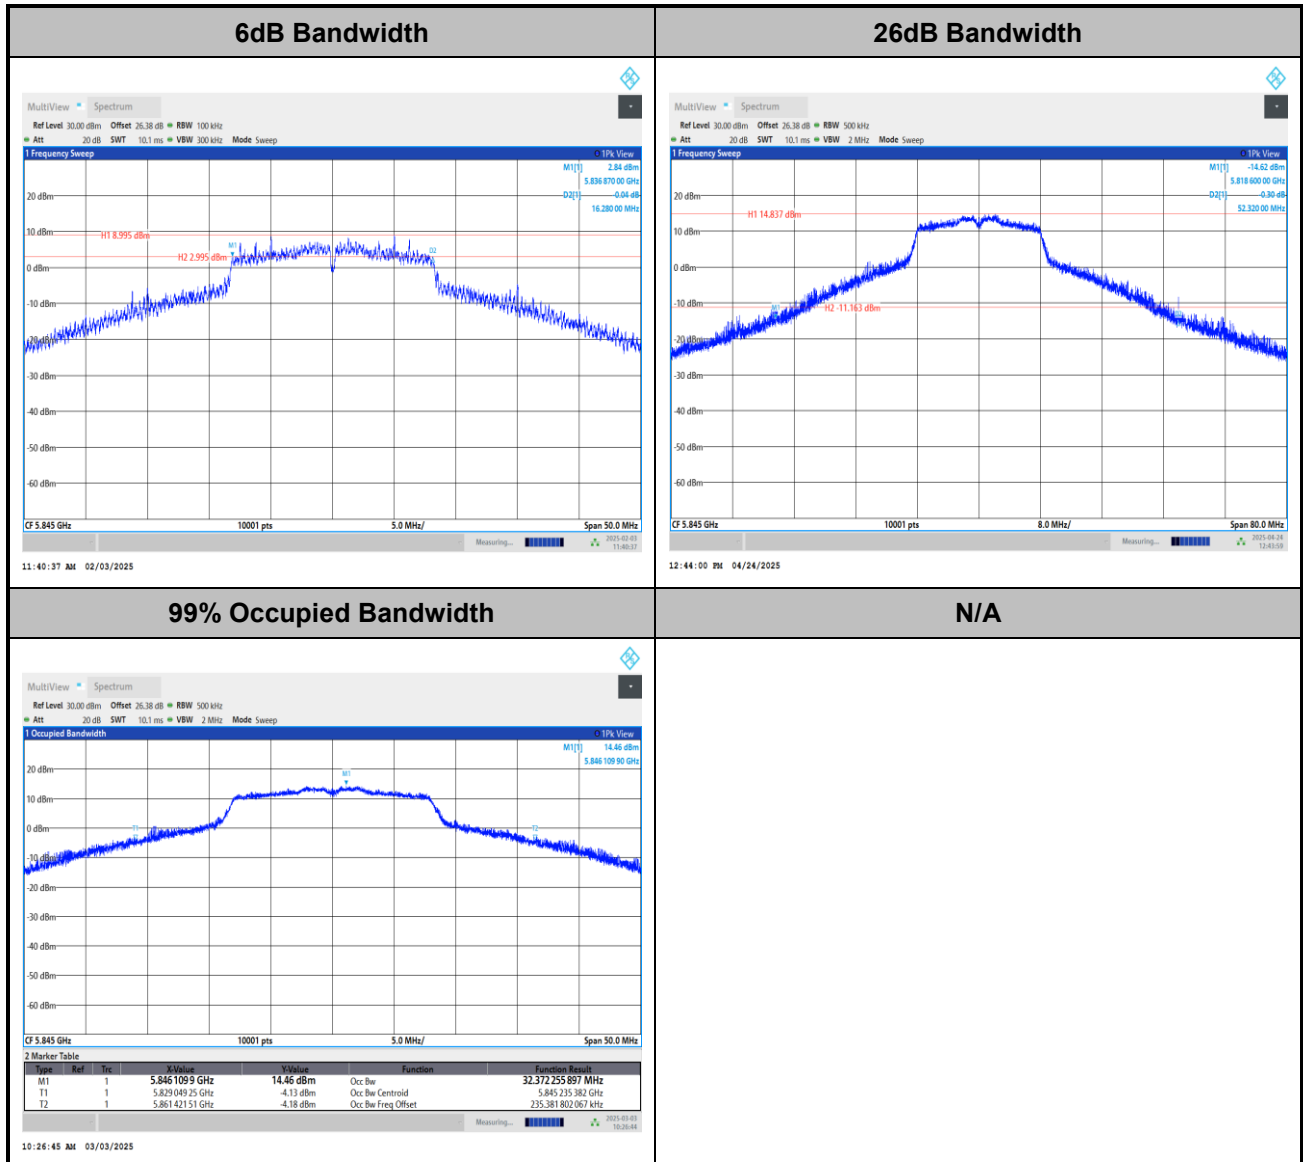

Note: The occupied channel bandwidth is maintained within the band of operation.




<802.11ax HE20>

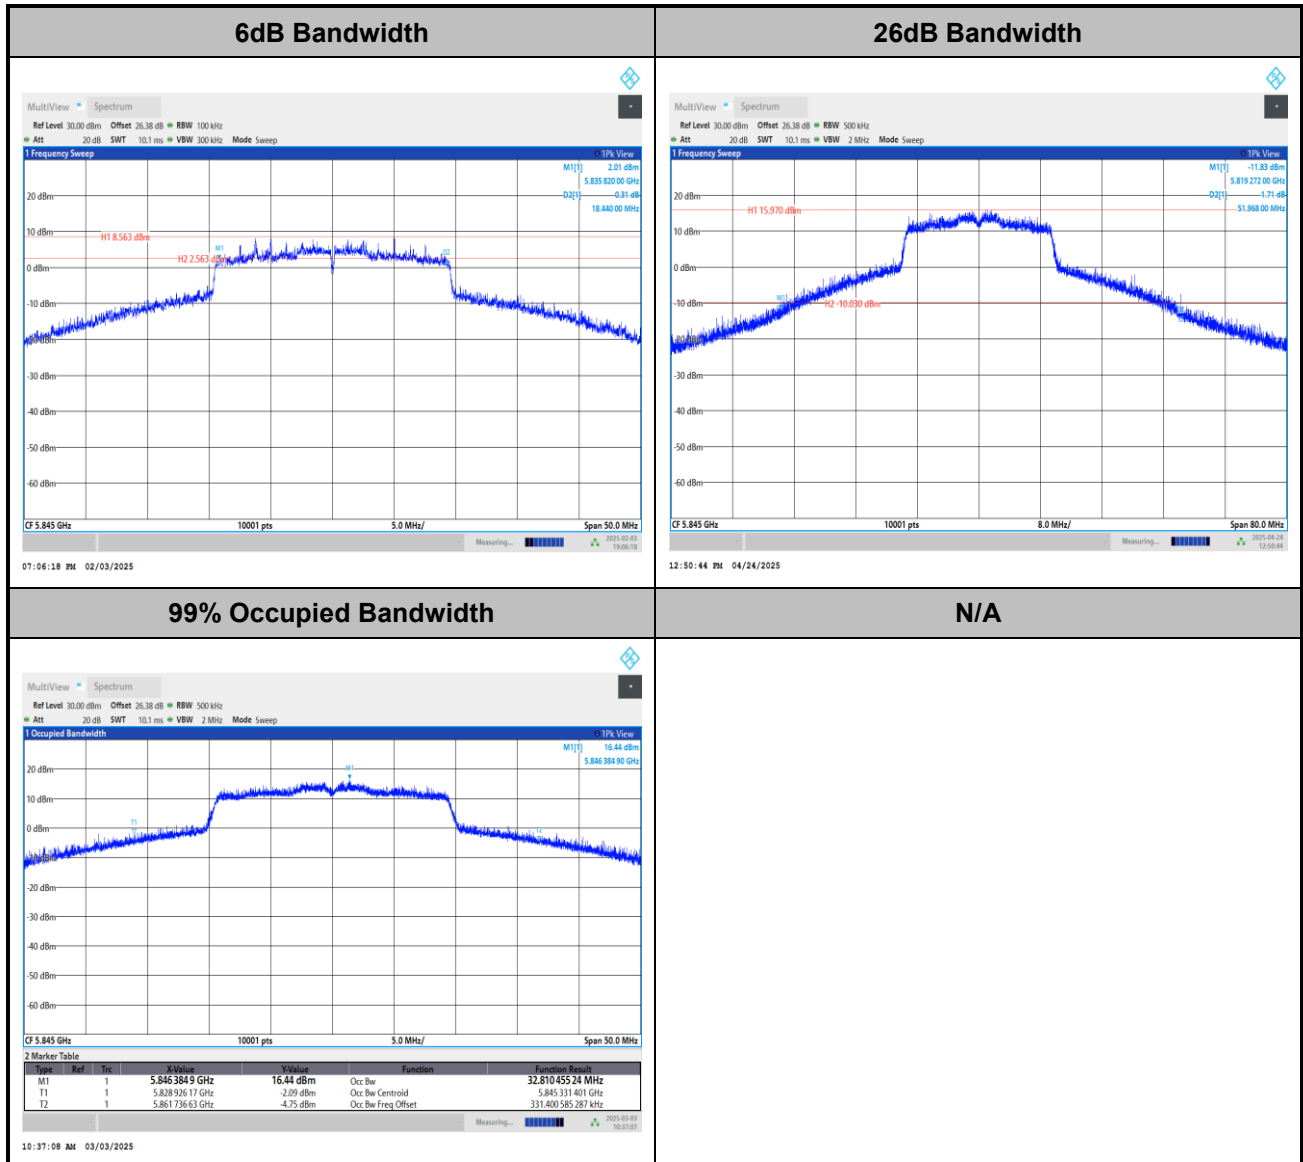

Note: The occupied channel bandwidth is maintained within the band of operation.




<802.11ax HE40>

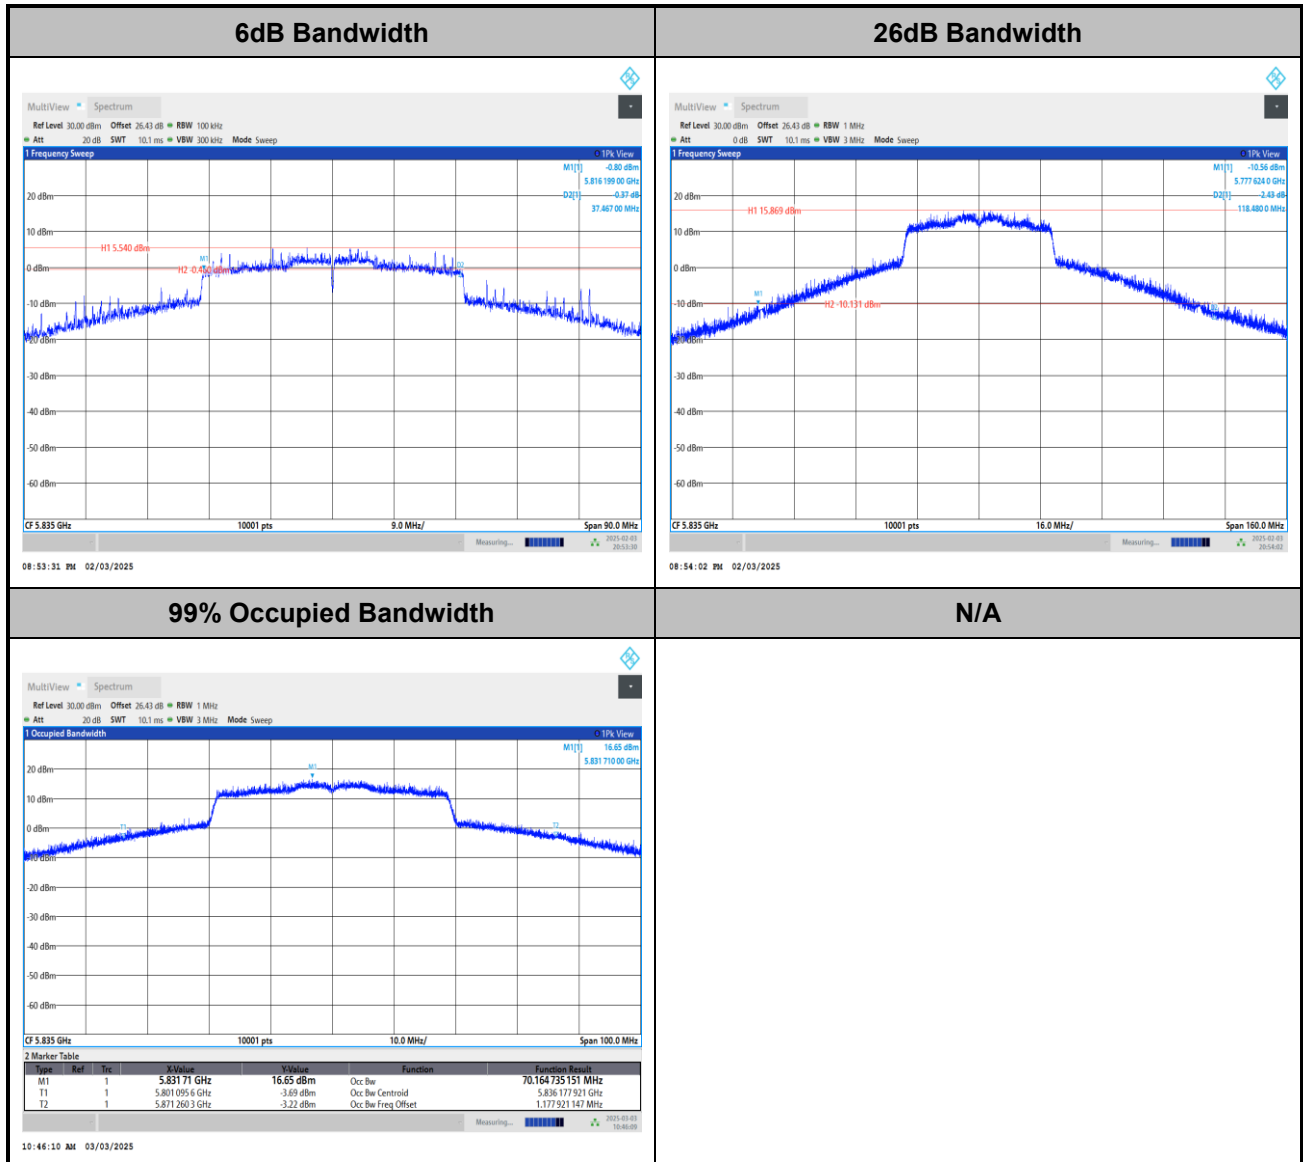

Note: The occupied channel bandwidth is maintained within the band of operation.




<802.11ax HE80>

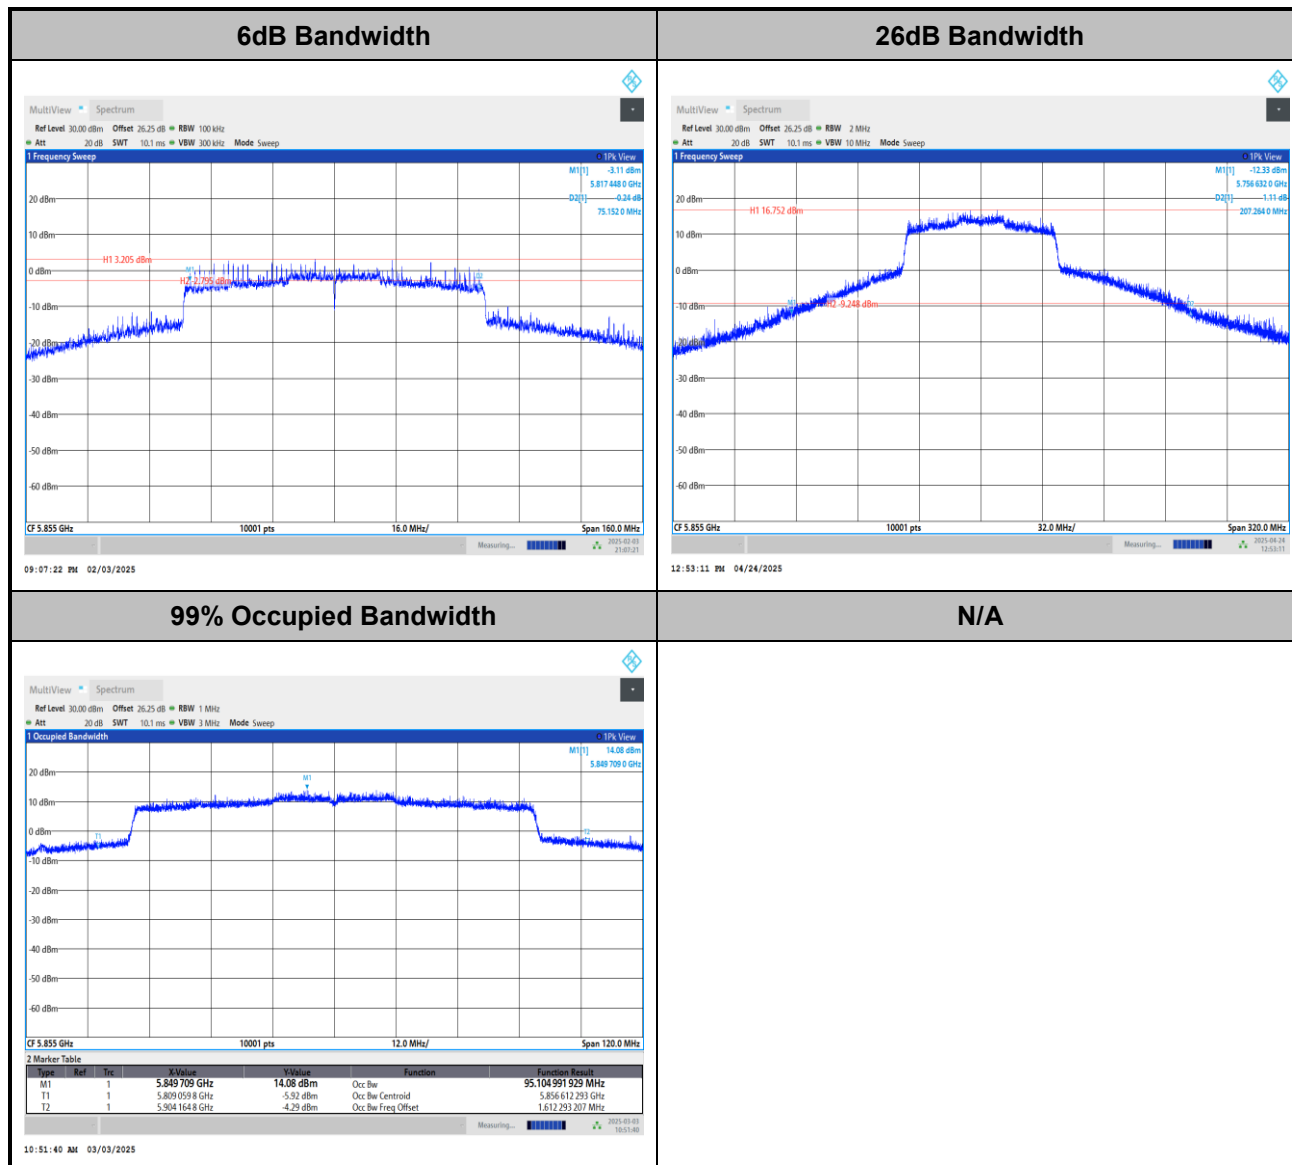


Note: The occupied channel bandwidth is maintained within the band of operation.

**Test Result of Power Spectral Density**

<802.11a>

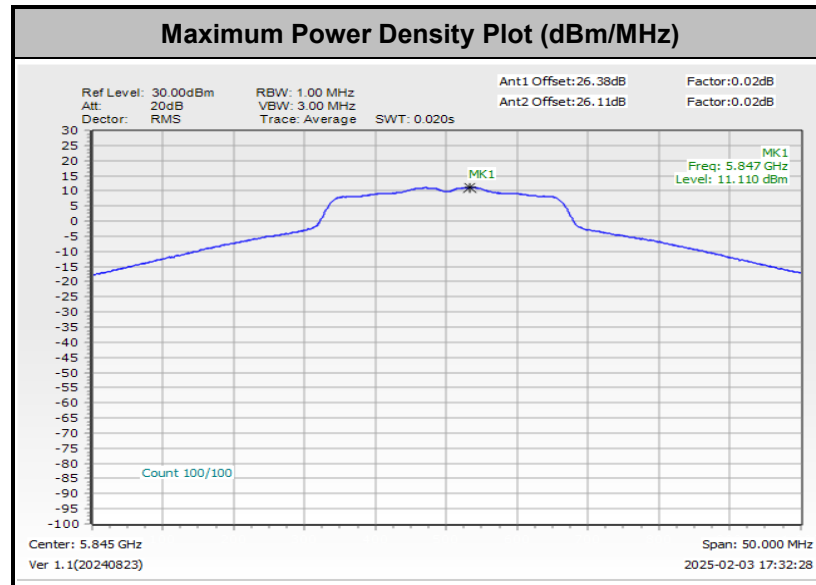


Remark: The test plot is showing a bin by bin combined result mathematically adds two traces.

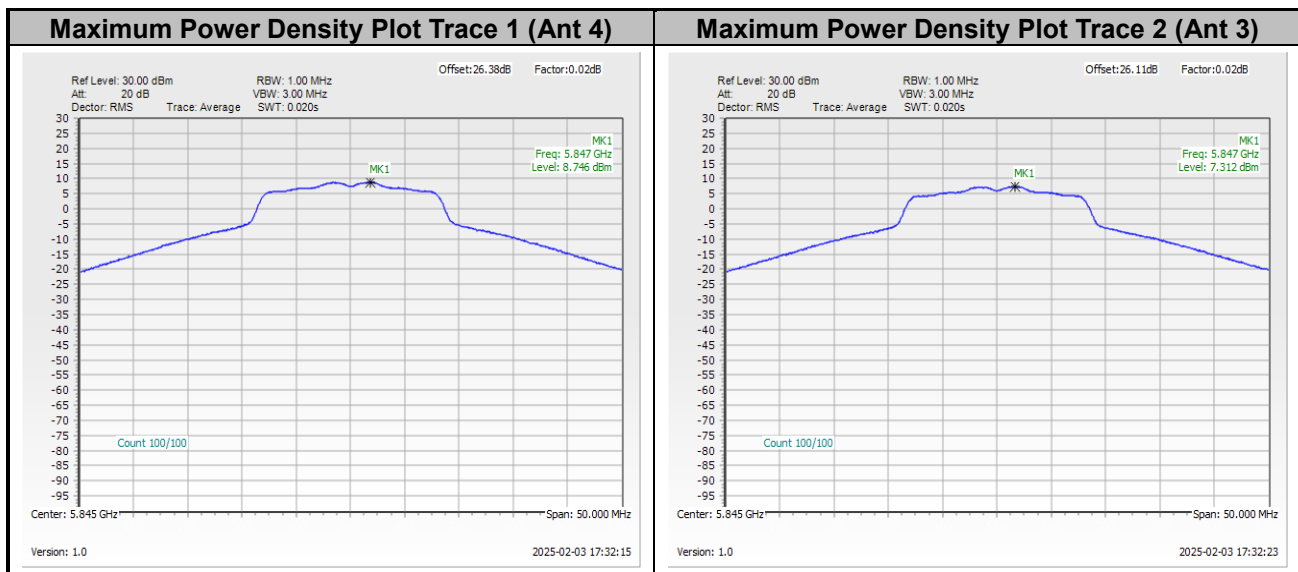




<802.11ax HE20>

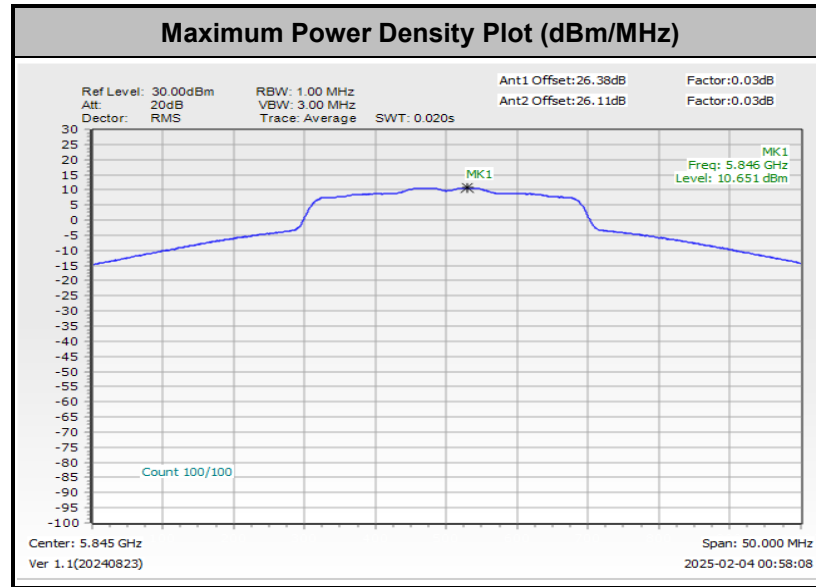


Remark: The test plot is showing a bin by bin combined result mathematically adds two traces.

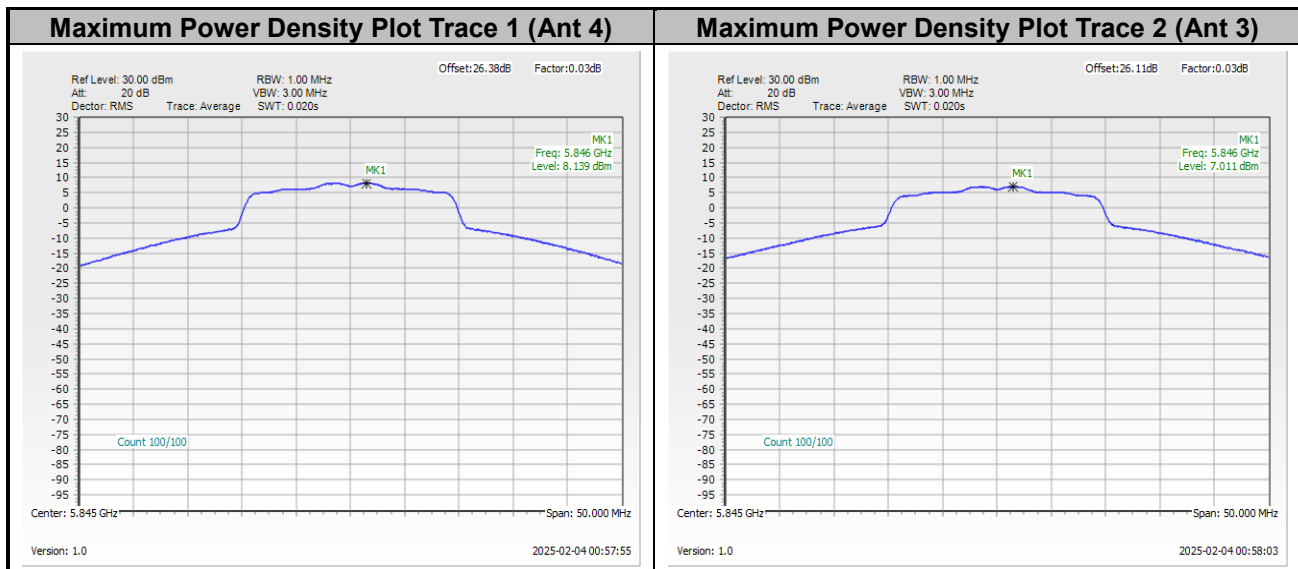




<802.11ax HE40>

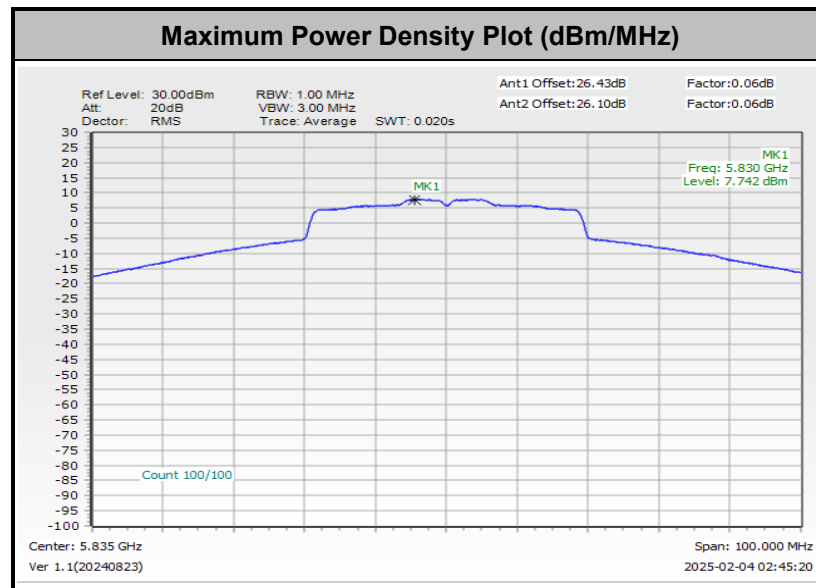


Remark: The test plot is showing a bin by bin combined result mathematically adds two traces.

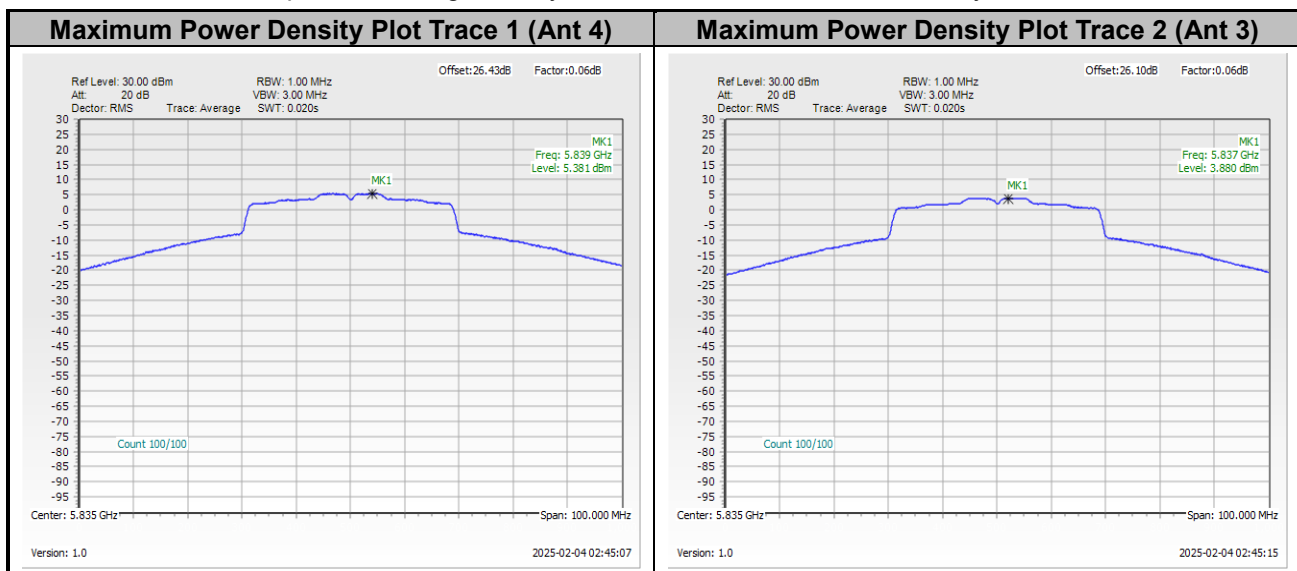




<802.11ax HE80>

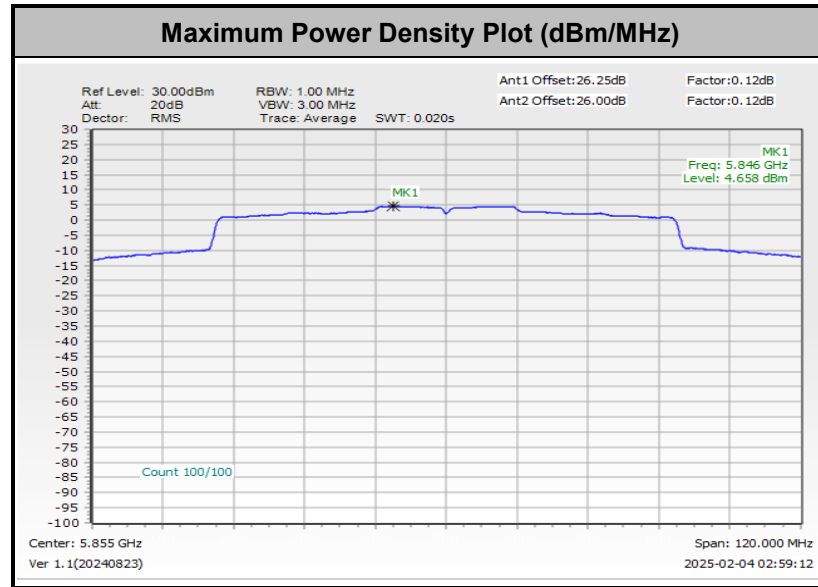

Remark: The test plot is showing a bin by bin combined result mathematically adds two traces.

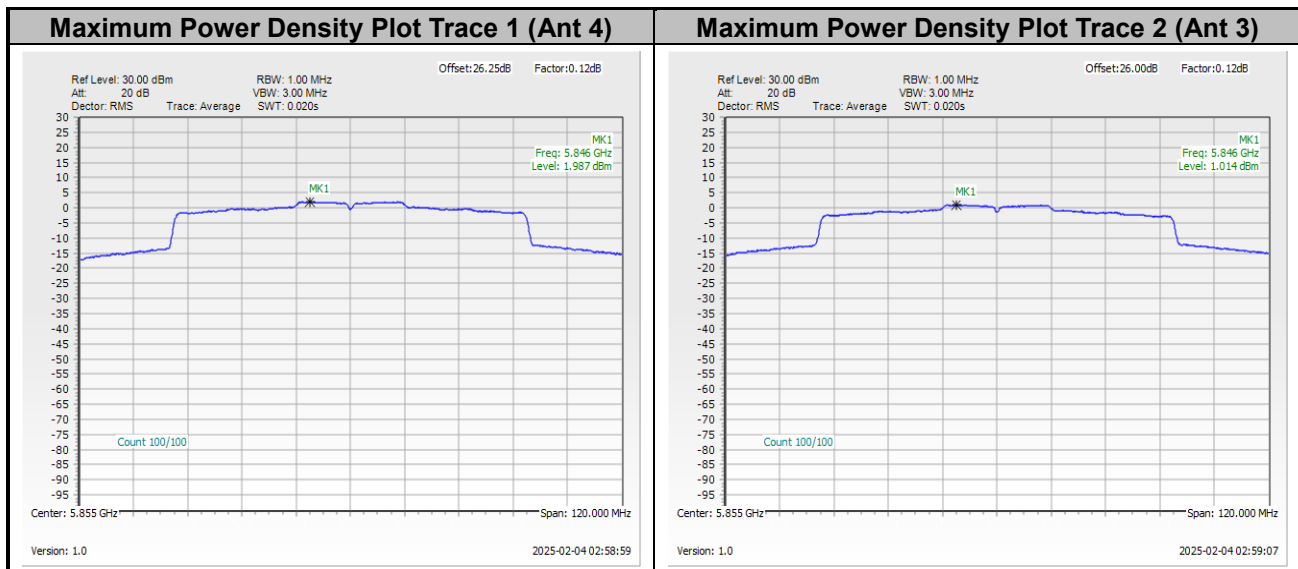




Appendix B. AC Conducted Emission Test Results

Test Engineer :	Louis Chung	Temperature :	16.1~22.7℃
		Relative Humidity :	45.9~48.9%

EUT Information

Report NO : 4N0919
 Test Mode : Mode 1
 Test Voltage : 120Vac/60Hz
 Phase : Line

Full Spectrum

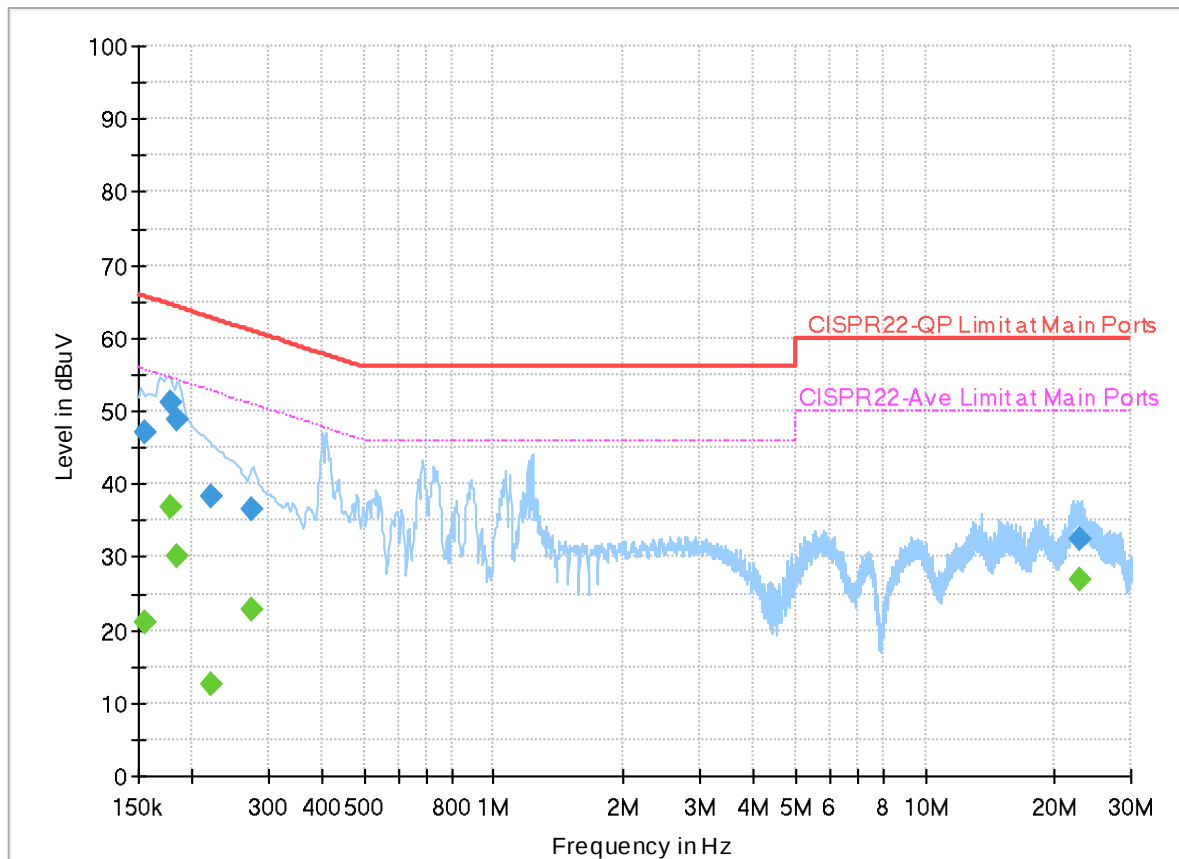


Final_Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.154500	---	21.12	55.75	34.63	L1	OFF	19.8
0.154500	47.17	---	65.75	18.58	L1	OFF	19.8
0.177000	---	36.87	54.63	17.76	L1	OFF	19.8
0.177000	51.08	---	64.63	13.55	L1	OFF	19.8
0.183750	---	30.11	54.31	24.20	L1	OFF	19.8
0.183750	48.85	---	64.31	15.46	L1	OFF	19.8
0.222000	---	12.66	52.74	40.08	L1	OFF	19.8
0.222000	38.43	---	62.74	24.31	L1	OFF	19.8
0.273750	---	22.87	51.00	28.13	L1	OFF	19.8
0.273750	36.51	---	61.00	24.49	L1	OFF	19.8
22.899750	---	27.01	50.00	22.99	L1	OFF	20.7
22.899750	32.39	---	60.00	27.61	L1	OFF	20.7

EUT Information

Report NO : 4N0919
 Test Mode : Mode 1
 Test Voltage : 120Vac/60Hz
 Phase : Neutral

Full Spectrum

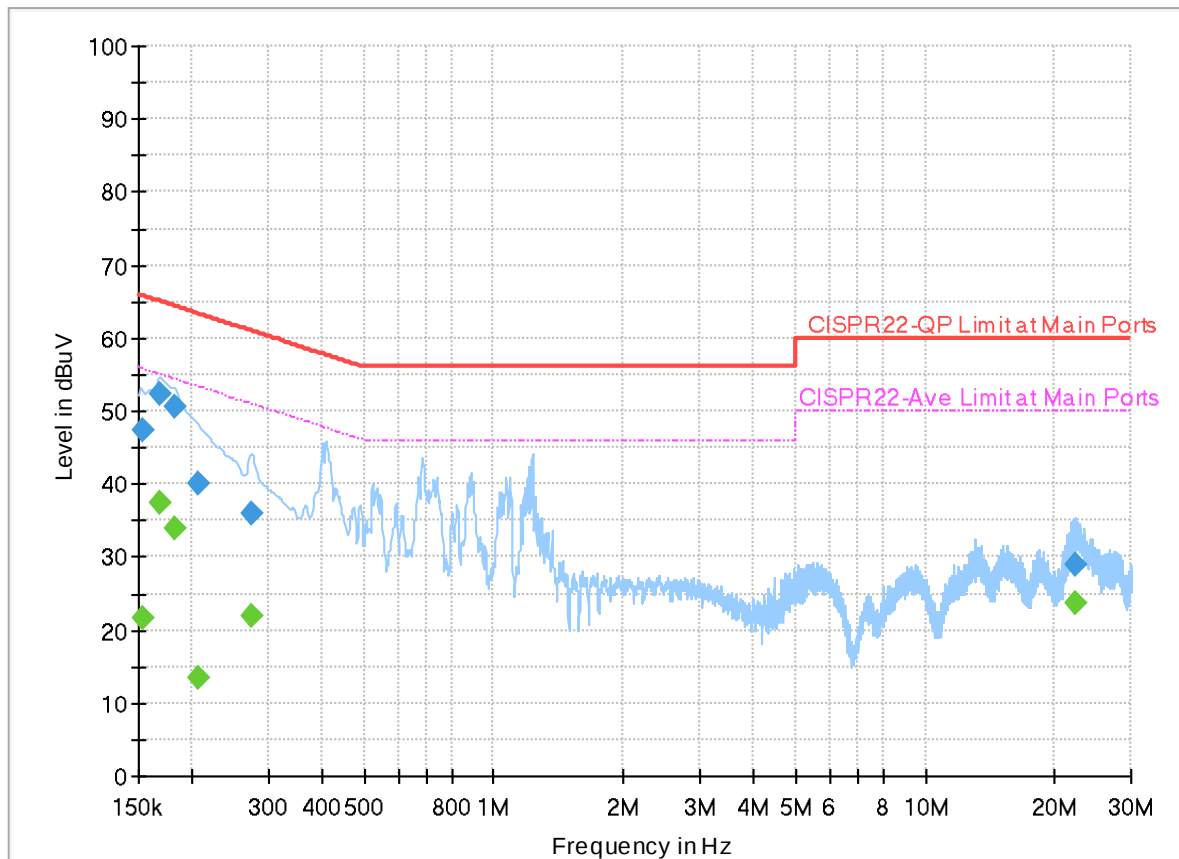

Final_Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.153420	47.40	---	65.81	18.41	N	OFF	19.8
0.153420	---	21.52	55.81	34.29	N	OFF	19.8
0.168765	52.28	---	65.02	12.74	N	OFF	19.8
0.168765	---	37.41	55.02	17.61	N	OFF	19.8
0.181860	50.54	---	64.40	13.86	N	OFF	19.8
0.181860	---	34.00	54.40	20.40	N	OFF	19.8
0.206250	40.10	---	63.36	23.26	N	OFF	19.8
0.206250	---	13.39	53.36	39.97	N	OFF	19.8
0.275775	36.07	---	60.94	24.87	N	OFF	19.8
0.275775	---	21.88	50.94	29.06	N	OFF	19.8
22.351920	29.04	---	60.00	30.96	N	OFF	20.8
22.351920	---	23.62	50.00	26.38	N	OFF	20.8



Appendix C. Radiated Spurious Emission Test Data

Test Engineer :	Ken Kuo, Tim Lee, and Wilson Wu	Temperature :	21.7~23.5°C
		Relative Humidity :	55.2~62.4%

Note symbol

-L	Low channel location
-R	High channel location



C1. Radiated Spurious Emission Test Modes

Mode	Band	Band (GHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 61	U-NII-4	5.85-5.895	4+3	802.11a	169	5845	6Mbps	-	-
Mode 62	U-NII-4	5.85-5.895	4+3	802.11a	173	5865	6Mbps	-	-
Mode 63	U-NII-4	5.85-5.895	4+3	802.11a	177	5885	6Mbps	-	-
Mode 64	U-NII-4	5.85-5.895	4+3	802.11ax HE20	169	5845	MCS0	Full RU	-
Mode 65	U-NII-4	5.85-5.895	4+3	802.11ax HE20	169	5845	MCS0	Partial_26/0RU	-
Mode 66	U-NII-4	5.85-5.895	4+3	802.11ax HE20	169	5845	MCS0	Partial_52/37RU	-
Mode 67	U-NII-4	5.85-5.895	4+3	802.11ax HE20	169	5845	MCS0	Partial_106/53RU	-
Mode 68	U-NII-4	5.85-5.895	4+3	802.11ax HE20	173	5865	MCS0	Full RU	-
Mode 69	U-NII-4	5.85-5.895	4+3	802.11ax HE20	177	5885	MCS0	Full RU	-
Mode 70	U-NII-4	5.85-5.895	4+3	802.11ax HE20	177	5885	MCS0	Partial_26/8RU	-
Mode 71	U-NII-4	5.85-5.895	4+3	802.11ax HE20	177	5885	MCS0	Partial_52/40RU	-



Mode	Band	Band (GHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 72	U-NII-4	5.85-5.895	4+3	802.11ax HE20	177	5885	MCS0	Partial_106/54RU	-
Mode 73	U-NII-4	5.85-5.895	4+3	802.11ax HE40	167	5835	MCS0	Full RU	-
Mode 74	U-NII-4	5.85-5.895	4+3	802.11ax HE40	175	5875	MCS0	Full RU	-
Mode 75	U-NII-4	5.85-5.895	4+3	802.11ax HE80	171	5855	MCS0	Full RU	-
Mode 78	U-NII-4	5.85-5.895	4+3	802.11ax HE20	177	5885	MCS0	Partial_26/8RU	LF
Mode 81	U-NII-4	5.85-5.895	4+3	802.11ax HE20	177	5885	MCS0	Partial_26/8RU	SHF



C2. Summary of each worse mode

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	RU	Remark
61	802.11a	169	5601.18	47.85	68.20	-20.35	H	Peak	Pass	-	Band Edge
	802.11a	169	11690.00	40.70	54.00	-13.30	V	Avg.	Pass	-	Harmonic
62	802.11a	173	5646.02	48.62	68.20	-19.58	H	Peak	Pass	-	Band Edge
	802.11a	173	17595.00	55.45	68.20	-12.75	H	Peak	Pass	-	Harmonic
63	802.11a	177	5899.00	88.86	107.26	-18.40	H	Avg.	Pass	-	Band Edge
	802.11a	177	17655.00	55.20	68.20	-13.00	H	Peak	Pass	-	Harmonic
64	802.11ax HE20	169	5636.88	47.62	68.20	-20.58	H	Peak	Pass	Full RU	Band Edge
	802.11ax HE20	169	11690.00	40.93	54.00	-13.07	V	Avg.	Pass	Full RU	Harmonic
65	802.11ax HE20	169	5603.54	47.73	68.20	-20.47	H	Peak	Pass	Partial_26/0RU	Band Edge
	802.11ax HE20	169	11690.00	41.05	54.00	-12.95	H	Avg.	Pass	Partial_26/0RU	Harmonic
66	802.11ax HE20	169	5631.86	47.68	68.20	-20.52	H	Peak	Pass	Partial_52/37RU	Band Edge






Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	RU	Remark
66	802.11ax HE20	169	11690.00	41.01	54.00	-12.99	V	Avg.	Pass	Partial_52/37RU	Harmonic
67	802.11ax HE20	169	5624.19	47.94	68.20	-20.26	H	Peak	Pass	Partial_106/53RU	Band Edge
	802.11ax HE20	169	11690.00	40.96	54.00	-13.04	V	Avg.	Pass	Partial_106/53RU	Harmonic
68	802.11ax HE20	173	5640.71	47.67	68.20	-20.53	V	Peak	Pass	Full RU	Band Edge
	802.11ax HE20	173	17595.00	56.19	68.20	-12.01	H	Peak	Pass	Full RU	Harmonic
69	802.11ax HE20	177	5649.56	47.59	68.20	-20.61	H	Peak	Pass	Full RU	Band Edge
	802.11ax HE20	177	17655.00	55.25	68.20	-12.95	H	Peak	Pass	Full RU	Harmonic
70	802.11ax HE20	177	5927.00	85.79	88.20	-2.41	H	Avg.	Pass	Partial_26/8RU	Band Edge
	802.11ax HE20	177	-	-	-	-	-	-	-	Partial_26/8RU	Harmonic
71	802.11ax HE20	177	5895.25	97.79	110.02	-12.23	H	Avg.	Pass	Partial_52/40RU	Band Edge
	802.11ax HE20	177	-	-	-	-	-	-	-	Partial_52/40RU	Harmonic





Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	RU	Remark
72	802.11ax HE20	177	5895.25	96.62	110.02	-13.40	H	Avg.	Pass	Partial_106/54RU	Band Edge
	802.11ax HE20	177	-	-	-	-	-	-	-	Partial_106/54RU	Harmonic
73	802.11ax HE40	167	5646.32	55.64	68.20	-12.56	H	Peak	Pass	Full RU	Band Edge
	802.11ax HE40	167	17505.00	55.94	68.20	-12.26	H	Peak	Pass	Full RU	Harmonic
74	802.11ax HE40	175	5924.25	76.88	88.75	-11.87	H	Avg.	Pass	Full RU	Band Edge
	802.11ax HE40	175	17625.00	55.84	68.20	-12.36	V	Peak	Pass	Full RU	Harmonic
75	802.11ax HE80	171	5648.68	63.58	68.20	-4.62	H	Peak	Pass	Full RU	Band Edge
	802.11ax HE80	171	11710.00	41.44	54.00	-12.56	V	Avg.	Pass	Full RU	Harmonic
78	LF	177	55.22	34.83	40.00	-5.17	V	QP	Pass	-	LF
81	SHF	177	39494.00	45.10	54.00	-8.90	V	Avg.	Pass	-	SHF

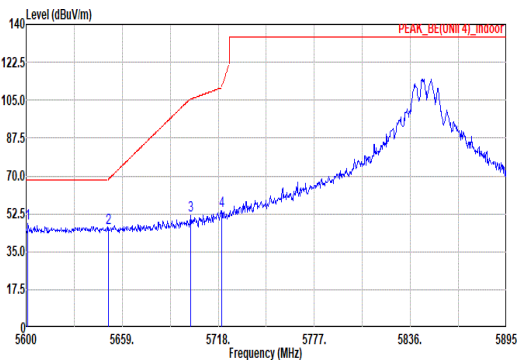
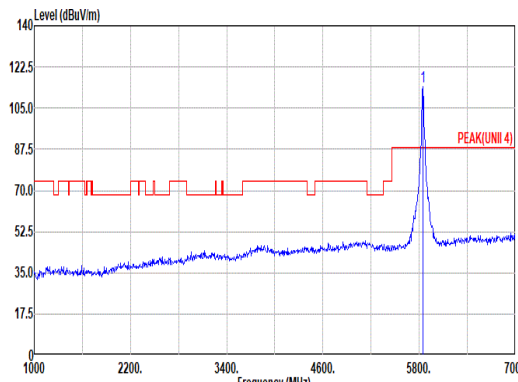
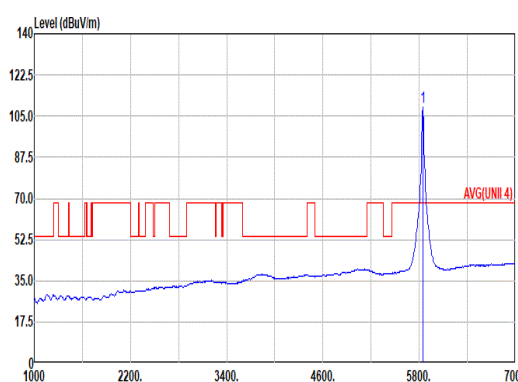


	61																																																																																																																																			
Mode	Band Edge - L																																																																																																																																			
	U-NII-4_5.85-5.895_802.11a_CH169_5845MHz																																																																																																																																			
ANT	4+3																																																																																																																																			
Pol.	Horizontal						Fundamental																																																																																																																													
Peak	 Site : 03CH20-HY Condition: PEAK_BE(UNII 4)_indoor 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5601.18</td><td>47.85</td><td>68.20</td><td>-20.35</td><td>39.42</td><td>33.00</td><td>13.34</td><td>37.91</td><td>0.00</td><td>251 62 PEAK</td></tr><tr><td>2</td><td>5650.74</td><td>46.12</td><td>68.75</td><td>-22.63</td><td>37.42</td><td>33.21</td><td>13.41</td><td>37.92</td><td>0.00</td><td>251 62 PEAK</td></tr><tr><td>3</td><td>5701.19</td><td>51.52</td><td>105.53</td><td>-54.01</td><td>42.36</td><td>33.60</td><td>13.48</td><td>37.92</td><td>0.00</td><td>251 62 PEAK</td></tr><tr><td>4</td><td>5720.07</td><td>54.06</td><td>110.95</td><td>-56.89</td><td>44.84</td><td>33.64</td><td>13.50</td><td>37.92</td><td>0.00</td><td>251 62 PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5601.18	47.85	68.20	-20.35	39.42	33.00	13.34	37.91	0.00	251 62 PEAK	2	5650.74	46.12	68.75	-22.63	37.42	33.21	13.41	37.92	0.00	251 62 PEAK	3	5701.19	51.52	105.53	-54.01	42.36	33.60	13.48	37.92	0.00	251 62 PEAK	4	5720.07	54.06	110.95	-56.89	44.84	33.64	13.50	37.92	0.00	251 62 PEAK	 Site : 03CH20-HY Condition: PEAK(UNII 4) 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5845.00</td><td>114.30</td><td>-----</td><td>-----</td><td>104.28</td><td>34.27</td><td>13.67</td><td>37.92</td><td>0.00</td><td>251 62 PEAK</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5845.00	114.30	-----	-----	104.28	34.27	13.67	37.92	0.00	251 62 PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																										
1	5601.18	47.85	68.20	-20.35	39.42	33.00	13.34	37.91	0.00	251 62 PEAK																																																																																																																										
2	5650.74	46.12	68.75	-22.63	37.42	33.21	13.41	37.92	0.00	251 62 PEAK																																																																																																																										
3	5701.19	51.52	105.53	-54.01	42.36	33.60	13.48	37.92	0.00	251 62 PEAK																																																																																																																										
4	5720.07	54.06	110.95	-56.89	44.84	33.64	13.50	37.92	0.00	251 62 PEAK																																																																																																																										
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																										
1	5845.00	114.30	-----	-----	104.28	34.27	13.67	37.92	0.00	251 62 PEAK																																																																																																																										
Avg	Blank						 Site : 03CH20-HY Condition: AVG(UNII 4) 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5845.00</td><td>108.59</td><td>-----</td><td>-----</td><td>98.57</td><td>34.27</td><td>13.67</td><td>37.92</td><td>0.00</td><td>251 62 AVERAGE</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5845.00	108.59	-----	-----	98.57	34.27	13.67	37.92	0.00	251 62 AVERAGE																																																																													
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																										
1	5845.00	108.59	-----	-----	98.57	34.27	13.67	37.92	0.00	251 62 AVERAGE																																																																																																																										

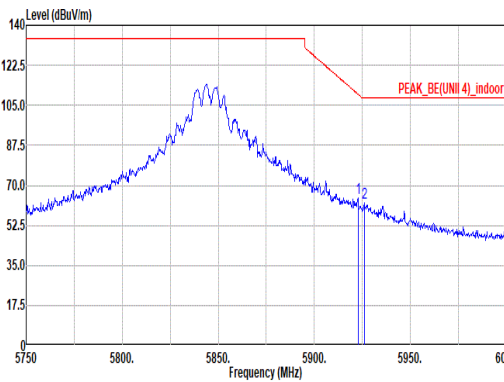
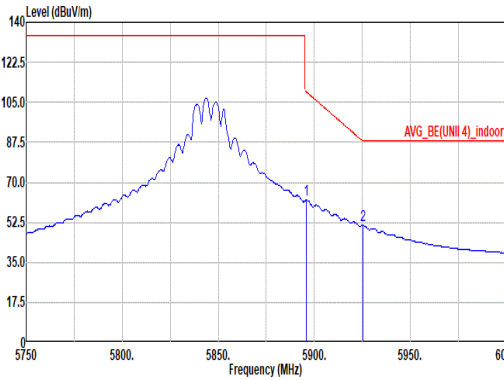


Mode	61																																																										
	Band Edge - R																																																										
	U-NII-4_5.85-5.895_802.11a_CH169_5845MHz																																																										
ANT	4+3																																																										
Pol.	Horizontal						Fundamental																																																				
Peak							Blank																																																				
	Site : 03CH20-HY Condition: PEAK_BE(UNII 4)_indoor 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>5922.75</td><td>64.34</td><td>109.85</td><td>-45.51</td><td>54.19</td><td>34.30</td><td>13.78</td><td>37.93</td><td>0.00</td><td>251</td><td>62</td><td>PEAK</td></tr><tr><td>2</td><td>5926.00</td><td>62.12</td><td>108.20</td><td>-46.08</td><td>51.97</td><td>34.30</td><td>13.78</td><td>37.93</td><td>0.00</td><td>251</td><td>62</td><td>PEAK</td></tr></table>												Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5922.75	64.34	109.85	-45.51	54.19	34.30	13.78	37.93	0.00	251	62	PEAK	2	5926.00	62.12	108.20	-46.08	51.97	34.30
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																														
	MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																															
1	5922.75	64.34	109.85	-45.51	54.19	34.30	13.78	37.93	0.00	251	62	PEAK																																															
2	5926.00	62.12	108.20	-46.08	51.97	34.30	13.78	37.93	0.00	251	62	PEAK																																															
Avg							Blank																																																				
	Site : 03CH20-HY Condition: AVG_BE(UNII 4)_indoor 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>5896.00</td><td>62.23</td><td>109.46</td><td>-47.23</td><td>52.12</td><td>34.30</td><td>13.74</td><td>37.93</td><td>0.00</td><td>251</td><td>62</td><td>AVERAGE</td></tr><tr><td>2</td><td>5925.25</td><td>51.23</td><td>88.20</td><td>-36.97</td><td>41.08</td><td>34.30</td><td>13.78</td><td>37.93</td><td>0.00</td><td>251</td><td>62</td><td>AVERAGE</td></tr></table>												Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5896.00	62.23	109.46	-47.23	52.12	34.30	13.74	37.93	0.00	251	62	AVERAGE	2	5925.25	51.23	88.20	-36.97	41.08	34.30
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																														
	MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																															
1	5896.00	62.23	109.46	-47.23	52.12	34.30	13.74	37.93	0.00	251	62	AVERAGE																																															
2	5925.25	51.23	88.20	-36.97	41.08	34.30	13.78	37.93	0.00	251	62	AVERAGE																																															

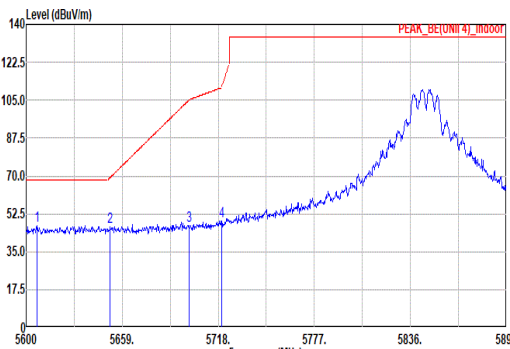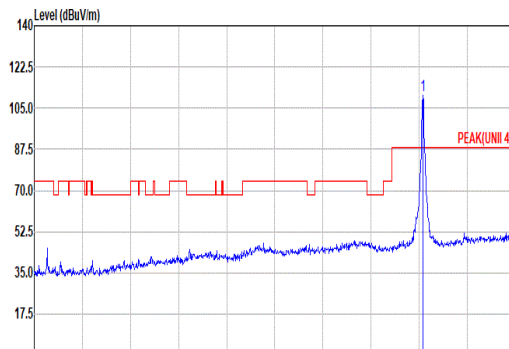
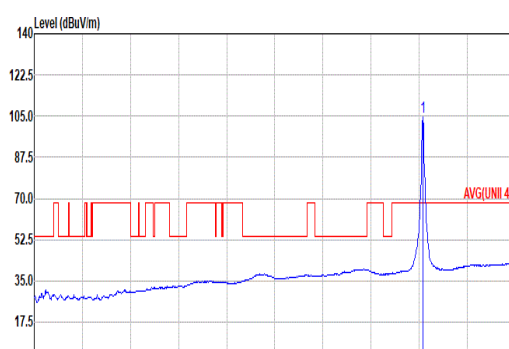


Mode	61																																																																																																																															
	Band Edge - L																																																																																																																															
	U-NII-4_5.85-5.895_802.11a_CH169_5845MHz																																																																																																																															
ANT	4+3																																																																																																																															
Pol.	Vertical						Fundamental																																																																																																																									
Peak	 Level (dBuV/m) Frequency (MHz) PEAK_BE(UNII 4)_INDOOR Site : 03CH20-HY Condition: PEAK_BE(UNII 4)_indoor 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5606.79</td><td>47.22</td><td>68.20</td><td>-20.98</td><td>38.75</td><td>33.03</td><td>13.35</td><td>37.91</td><td>0.00</td><td>384</td><td>360</td><td>PEAK</td></tr><tr><td>2</td><td>5651.63</td><td>46.50</td><td>69.41</td><td>-22.91</td><td>37.80</td><td>33.21</td><td>13.41</td><td>37.92</td><td>0.00</td><td>384</td><td>360</td><td>PEAK</td></tr><tr><td>3</td><td>5700.01</td><td>47.16</td><td>105.20</td><td>-58.04</td><td>38.00</td><td>33.60</td><td>13.48</td><td>37.92</td><td>0.00</td><td>384</td><td>360</td><td>PEAK</td></tr><tr><td>4</td><td>5720.07</td><td>48.90</td><td>110.95</td><td>-62.05</td><td>39.68</td><td>33.64</td><td>13.50</td><td>37.92</td><td>0.00</td><td>384</td><td>360</td><td>PEAK</td></tr></tbody></table>							Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg	1	5606.79	47.22	68.20	-20.98	38.75	33.03	13.35	37.91	0.00	384	360	PEAK	2	5651.63	46.50	69.41	-22.91	37.80	33.21	13.41	37.92	0.00	384	360	PEAK	3	5700.01	47.16	105.20	-58.04	38.00	33.60	13.48	37.92	0.00	384	360	PEAK	4	5720.07	48.90	110.95	-62.05	39.68	33.64	13.50	37.92	0.00	384	360	PEAK	 Level (dBuV/m) Frequency (MHz) PEAK(UNII 4) Site : 03CH20-HY Condition: PEAK(UNII 4) 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5845.00</td><td>110.24</td><td>-----</td><td>-----</td><td>100.20</td><td>34.29</td><td>13.67</td><td>37.92</td><td>0.00</td><td>384</td><td>360</td><td>PEAK</td></tr></tbody></table>						Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg	1	5845.00	110.24	-----	-----	100.20	34.29	13.67	37.92	0.00	384	360	PEAK
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg																																																																																																																				
1	5606.79	47.22	68.20	-20.98	38.75	33.03	13.35	37.91	0.00	384	360	PEAK																																																																																																																				
2	5651.63	46.50	69.41	-22.91	37.80	33.21	13.41	37.92	0.00	384	360	PEAK																																																																																																																				
3	5700.01	47.16	105.20	-58.04	38.00	33.60	13.48	37.92	0.00	384	360	PEAK																																																																																																																				
4	5720.07	48.90	110.95	-62.05	39.68	33.64	13.50	37.92	0.00	384	360	PEAK																																																																																																																				
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg																																																																																																																				
1	5845.00	110.24	-----	-----	100.20	34.29	13.67	37.92	0.00	384	360	PEAK																																																																																																																				
Avg	Blank						 Level (dBuV/m) Frequency (MHz) AVG(UNII 4) Site : 03CH20-HY Condition: AVG(UNII 4) 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5845.00</td><td>104.64</td><td>-----</td><td>-----</td><td>94.62</td><td>34.27</td><td>13.67</td><td>37.92</td><td>0.00</td><td>384</td><td>360</td><td>AVERAGE</td></tr></tbody></table>						Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg	1	5845.00	104.64	-----	-----	94.62	34.27	13.67	37.92	0.00	384	360	AVERAGE																																																																														
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg																																																																																																																				
1	5845.00	104.64	-----	-----	94.62	34.27	13.67	37.92	0.00	384	360	AVERAGE																																																																																																																				

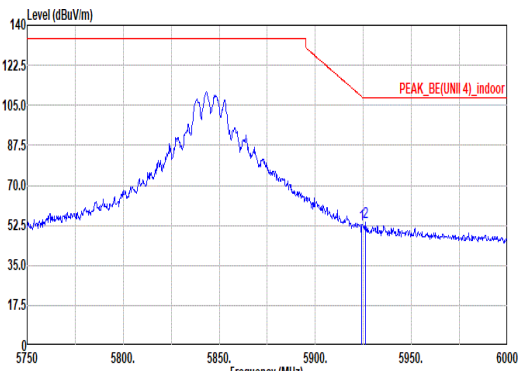
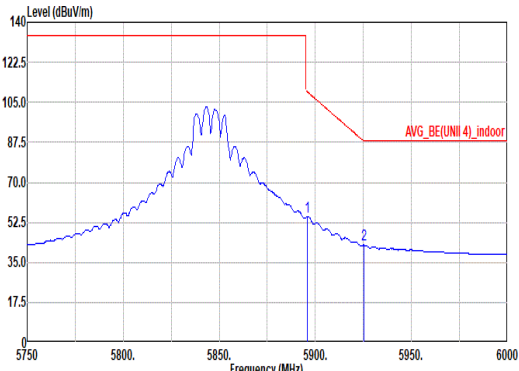


Mode	61																																																			
	Band Edge - R																																																			
	U-NII-4_5.85-5.895_802.11a_CH169_5845MHz																																																			
ANT	4+3																																																			
Pol.	Vertical	Fundamental																																																		
Peak	 Site : 03CH20-HY Condition: PEAK_BE(UNII 4)_indoor 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr><tr><td>1</td><td>5924.25</td><td>52.06</td><td>108.75</td><td>-55.89</td><td>42.71</td><td>34.30</td><td>13.78</td><td>37.93</td><td>0.00 384 360 PEAK</td></tr><tr><td>2</td><td>5926.00</td><td>54.02</td><td>108.20</td><td>-54.18</td><td>43.87</td><td>34.30</td><td>13.78</td><td>37.93</td><td>0.00 384 360 PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1	5924.25	52.06	108.75	-55.89	42.71	34.30	13.78	37.93	0.00 384 360 PEAK	2	5926.00	54.02	108.20	-54.18	43.87	34.30	13.78	37.93	0.00 384 360 PEAK	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																											
1	5924.25	52.06	108.75	-55.89	42.71	34.30	13.78	37.93	0.00 384 360 PEAK																																											
2	5926.00	54.02	108.20	-54.18	43.87	34.30	13.78	37.93	0.00 384 360 PEAK																																											
Avg	 Site : 03CH20-HY Condition: AVG_BE(UNII 4)_indoor 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr><tr><td>1</td><td>5895.75</td><td>55.07</td><td>109.65</td><td>-54.58</td><td>44.96</td><td>34.30</td><td>13.74</td><td>37.93</td><td>0.00 384 360 AVERAGE</td></tr><tr><td>2</td><td>5925.25</td><td>42.62</td><td>88.20</td><td>-45.58</td><td>32.47</td><td>34.30</td><td>13.78</td><td>37.93</td><td>0.00 384 360 AVERAGE</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1	5895.75	55.07	109.65	-54.58	44.96	34.30	13.74	37.93	0.00 384 360 AVERAGE	2	5925.25	42.62	88.20	-45.58	32.47	34.30	13.78	37.93	0.00 384 360 AVERAGE	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																											
1	5895.75	55.07	109.65	-54.58	44.96	34.30	13.74	37.93	0.00 384 360 AVERAGE																																											
2	5925.25	42.62	88.20	-45.58	32.47	34.30	13.78	37.93	0.00 384 360 AVERAGE																																											


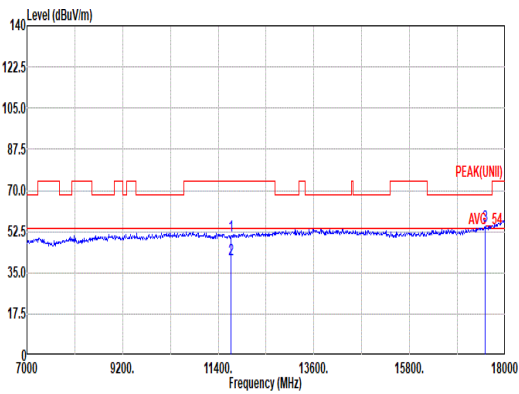
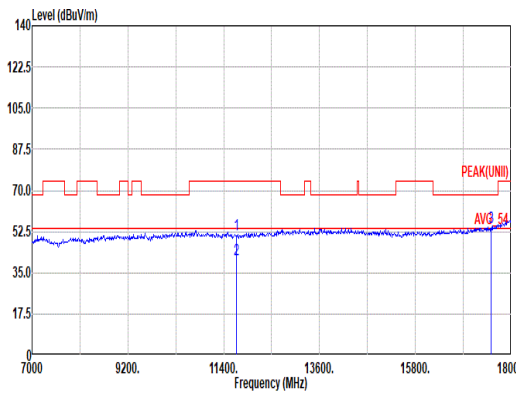


Mode	61																																																																																																																																																						
	Harmonic																																																																																																																																																						
	U-NII-4_5.85-5.895_802.11a_CH169_5845MHz																																																																																																																																																						
ANT	4+3																																																																																																																																																						
Pol.	Horizontal						Vertical																																																																																																																																																
Peak Avg																																																																																																																																																							
	Site : 03CH20-HY Condition: PEAK(UNII) 3m HF_91280_02360_241101 HORIZONTAL						Site : 03CH20-HY Condition: PEAK(UNII) 3m HF_91280_02360_241101 VERTICAL																																																																																																																																																
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>11690.00</td><td>50.86</td><td>74.00</td><td>-23.14</td><td>34.59</td><td>38.62</td><td>19.58</td><td>42.63</td><td>0.70</td><td>100</td><td>6</td><td>PEAK</td></tr><tr><td>2</td><td>11690.00</td><td>40.50</td><td>54.00</td><td>-13.50</td><td>24.23</td><td>38.62</td><td>19.58</td><td>42.63</td><td>0.70</td><td>100</td><td>6</td><td>AVERAGE</td></tr><tr><td>3</td><td>17535.00</td><td>54.80</td><td>68.20</td><td>-13.40</td><td>34.41</td><td>40.41</td><td>24.20</td><td>44.87</td><td>0.65</td><td>--</td><td>--</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11690.00	50.86	74.00	-23.14	34.59	38.62	19.58	42.63	0.70	100	6	PEAK	2	11690.00	40.50	54.00	-13.50	24.23	38.62	19.58	42.63	0.70	100	6	AVERAGE	3	17535.00	54.80	68.20	-13.40	34.41	40.41	24.20	44.87	0.65	--	--	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>11690.00</td><td>51.17</td><td>74.00</td><td>-22.83</td><td>34.90</td><td>38.62</td><td>19.58</td><td>42.63</td><td>0.70</td><td>255</td><td>1</td><td>PEAK</td></tr><tr><td>2</td><td>11690.00</td><td>40.70</td><td>54.00</td><td>-13.30</td><td>24.43</td><td>38.62</td><td>19.58</td><td>42.63</td><td>0.70</td><td>255</td><td>1</td><td>AVERAGE</td></tr><tr><td>3</td><td>17535.00</td><td>54.32</td><td>68.20</td><td>-13.88</td><td>33.93</td><td>40.41</td><td>24.20</td><td>44.87</td><td>0.65</td><td>--</td><td>--</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11690.00	51.17	74.00	-22.83	34.90	38.62	19.58	42.63	0.70	255	1	PEAK	2	11690.00	40.70	54.00	-13.30	24.43	38.62	19.58	42.63	0.70	255	1	AVERAGE	3	17535.00	54.32	68.20	-13.88	33.93	40.41	24.20	44.87	0.65	--	--
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																													
1	11690.00	50.86	74.00	-23.14	34.59	38.62	19.58	42.63	0.70	100	6	PEAK																																																																																																																																											
2	11690.00	40.50	54.00	-13.50	24.23	38.62	19.58	42.63	0.70	100	6	AVERAGE																																																																																																																																											
3	17535.00	54.80	68.20	-13.40	34.41	40.41	24.20	44.87	0.65	--	--	PEAK																																																																																																																																											
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																													
1	11690.00	51.17	74.00	-22.83	34.90	38.62	19.58	42.63	0.70	255	1	PEAK																																																																																																																																											
2	11690.00	40.70	54.00	-13.30	24.43	38.62	19.58	42.63	0.70	255	1	AVERAGE																																																																																																																																											
3	17535.00	54.32	68.20	-13.88	33.93	40.41	24.20	44.87	0.65	--	--	PEAK																																																																																																																																											

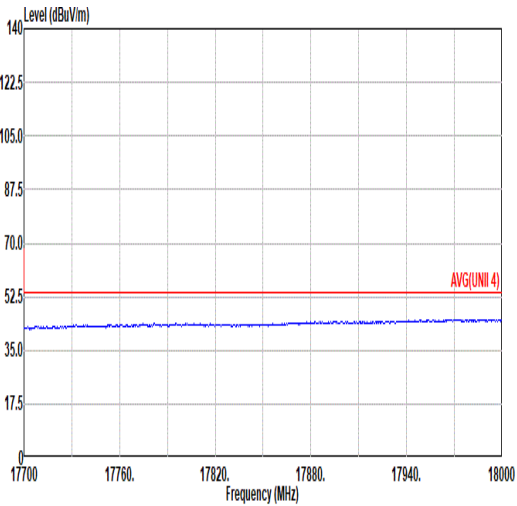
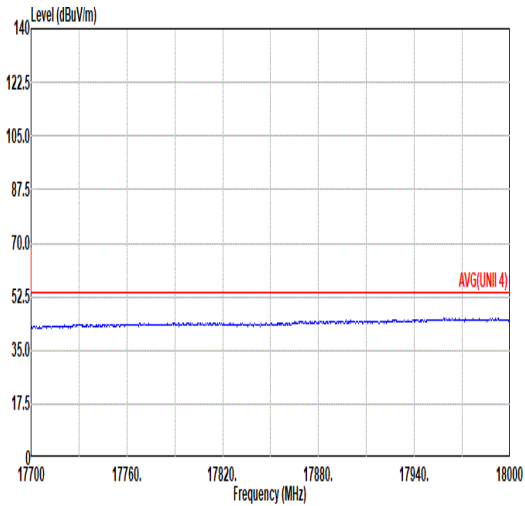


Mode	61	
	Harmonic	
	U-NII-4_5.85-5.895_802.11a_CH169_5845MHz	
ANT	4+3	
Pol.	Horizontal	Vertical
17.7G ~18G Avg	 Site : 03CH20-HY Condition: AVG(UNII 4) 3m HF_91200_02360_241101 HORIZONTAL	 Site : 03CH20-HY Condition: AVG(UNII 4) 3m HF_91200_02360_241101 VERTICAL

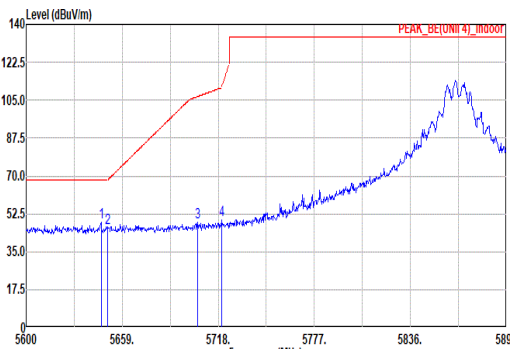
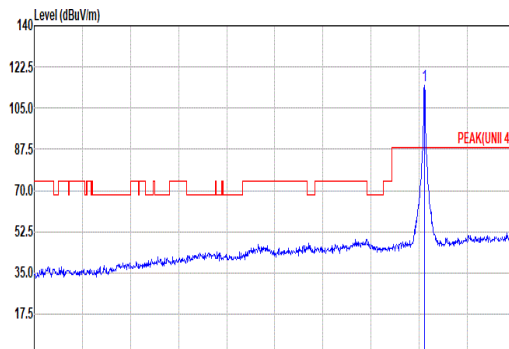
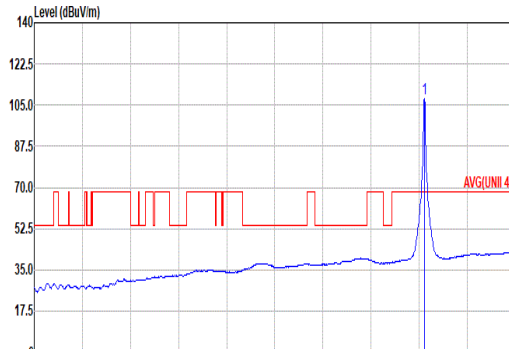


	62																																																																																																																																								
Mode	Band Edge - L																																																																																																																																								
	U-NII-4_5.85-5.895_802.11a_CH173_5865MHZ																																																																																																																																								
ANT	4+3																																																																																																																																								
Pol.	Horizontal						Fundamental																																																																																																																																		
Peak	 Site : 03CH20-HY Condition: PEAK_BE(UNII 4)_indoor 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5646.02</td><td>48.62</td><td>68.20</td><td>-19.58</td><td>39.96</td><td>33.18</td><td>13.40</td><td>37.92</td><td>0.00</td><td>242</td><td>57 PEAK</td></tr><tr><td>2</td><td>5650.15</td><td>46.11</td><td>68.31</td><td>-22.20</td><td>37.42</td><td>33.20</td><td>13.41</td><td>37.92</td><td>0.00</td><td>242</td><td>57 PEAK</td></tr><tr><td>3</td><td>5705.32</td><td>48.78</td><td>106.69</td><td>-57.91</td><td>39.61</td><td>33.61</td><td>13.48</td><td>37.92</td><td>0.00</td><td>242</td><td>57 PEAK</td></tr><tr><td>4</td><td>5720.07</td><td>49.62</td><td>110.95</td><td>-61.33</td><td>40.40</td><td>33.64</td><td>13.50</td><td>37.92</td><td>0.00</td><td>242</td><td>57 PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5646.02	48.62	68.20	-19.58	39.96	33.18	13.40	37.92	0.00	242	57 PEAK	2	5650.15	46.11	68.31	-22.20	37.42	33.20	13.41	37.92	0.00	242	57 PEAK	3	5705.32	48.78	106.69	-57.91	39.61	33.61	13.48	37.92	0.00	242	57 PEAK	4	5720.07	49.62	110.95	-61.33	40.40	33.64	13.50	37.92	0.00	242	57 PEAK	 Site : 03CH20-HY Condition: PEAK(UNII 4) 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5865.00</td><td>114.66</td><td>-----</td><td>-----</td><td>104.58</td><td>34.30</td><td>13.70</td><td>37.92</td><td>0.00</td><td>242</td><td>57 PEAK</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5865.00	114.66	-----	-----	104.58	34.30	13.70	37.92	0.00	242	57 PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																															
1	5646.02	48.62	68.20	-19.58	39.96	33.18	13.40	37.92	0.00	242	57 PEAK																																																																																																																														
2	5650.15	46.11	68.31	-22.20	37.42	33.20	13.41	37.92	0.00	242	57 PEAK																																																																																																																														
3	5705.32	48.78	106.69	-57.91	39.61	33.61	13.48	37.92	0.00	242	57 PEAK																																																																																																																														
4	5720.07	49.62	110.95	-61.33	40.40	33.64	13.50	37.92	0.00	242	57 PEAK																																																																																																																														
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																															
1	5865.00	114.66	-----	-----	104.58	34.30	13.70	37.92	0.00	242	57 PEAK																																																																																																																														
Avg	Blank						 Site : 03CH20-HY Condition: AVG(UNII 4) 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5865.00</td><td>107.77</td><td>-----</td><td>-----</td><td>97.69</td><td>34.30</td><td>13.70</td><td>37.92</td><td>0.00</td><td>242</td><td>57 AVERAGE</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5865.00	107.77	-----	-----	97.69	34.30	13.70	37.92	0.00	242	57 AVERAGE																																																																																	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																															
1	5865.00	107.77	-----	-----	97.69	34.30	13.70	37.92	0.00	242	57 AVERAGE																																																																																																																														

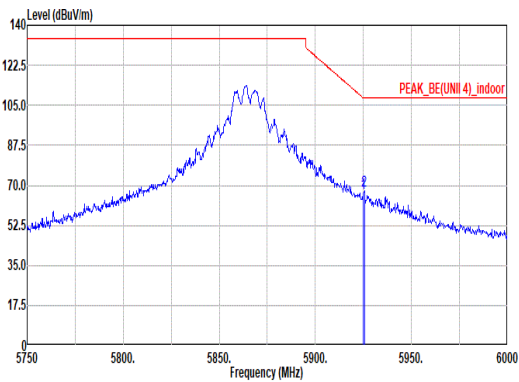
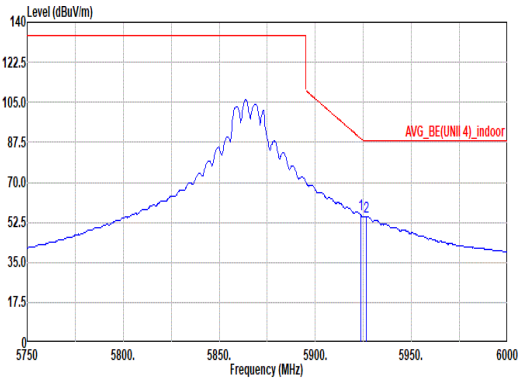


Mode	62																																																																				
	Band Edge - R																																																																				
	U-NII-4_5.85-5.895_802.11a_CH173_5865MHz																																																																				
ANT	4+3																																																																				
Pol.	Horizontal																																																																				
Peak	 Site : 03CH20-HY Condition: PEAK_BE(UNII 4)_indoor 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5924.75</td><td>66.36</td><td>108.38</td><td>-42.02</td><td>56.21</td><td>34.30</td><td>13.78</td><td>37.93</td><td>0.00</td><td>242</td><td>57</td><td>PEAK</td></tr><tr><td>2</td><td>5925.50</td><td>67.76</td><td>108.20</td><td>-40.44</td><td>57.61</td><td>34.30</td><td>13.78</td><td>37.93</td><td>0.00</td><td>242</td><td>57</td><td>PEAK</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5924.75	66.36	108.38	-42.02	56.21	34.30	13.78	37.93	0.00	242	57	PEAK	2	5925.50	67.76	108.20	-40.44	57.61	34.30	13.78	37.93	0.00	242	57	PEAK	Blank
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																											
1	5924.75	66.36	108.38	-42.02	56.21	34.30	13.78	37.93	0.00	242	57	PEAK																																																									
2	5925.50	67.76	108.20	-40.44	57.61	34.30	13.78	37.93	0.00	242	57	PEAK																																																									
Avg	 Site : 03CH20-HY Condition: AVG_BE(UNII 4)_indoor 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5923.50</td><td>56.05</td><td>89.30</td><td>-33.25</td><td>45.90</td><td>34.30</td><td>13.78</td><td>37.93</td><td>0.00</td><td>242</td><td>57</td><td>AVERAGE</td></tr><tr><td>2</td><td>5926.50</td><td>55.18</td><td>88.20</td><td>-33.02</td><td>45.03</td><td>34.30</td><td>13.78</td><td>37.93</td><td>0.00</td><td>242</td><td>57</td><td>AVERAGE</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5923.50	56.05	89.30	-33.25	45.90	34.30	13.78	37.93	0.00	242	57	AVERAGE	2	5926.50	55.18	88.20	-33.02	45.03	34.30	13.78	37.93	0.00	242	57	AVERAGE	Blank
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																											
1	5923.50	56.05	89.30	-33.25	45.90	34.30	13.78	37.93	0.00	242	57	AVERAGE																																																									
2	5926.50	55.18	88.20	-33.02	45.03	34.30	13.78	37.93	0.00	242	57	AVERAGE																																																									

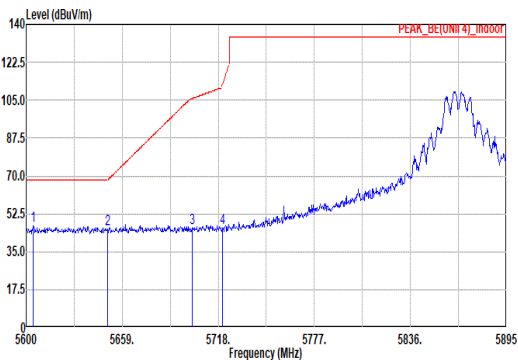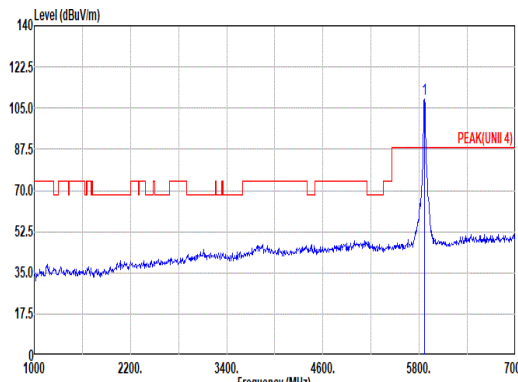
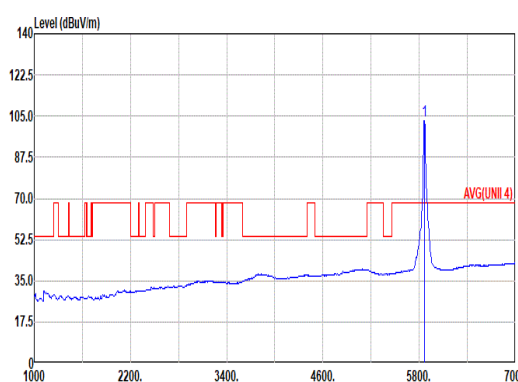


Mode	62																																																																																																																																						
	Band Edge - L																																																																																																																																						
	U-NII-4_5.85-5.895_802.11a_CH173_5865MHz																																																																																																																																						
ANT	4+3																																																																																																																																						
Pol.	Vertical							Fundamental																																																																																																																															
Peak	 Level (dBuV/m) Frequency (MHz) PEAK_BE(UNII 4)_INDOOR Site : 03CH20-HY Condition: PEAK_BE(UNII 4)_indoor 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Freq</th><th>Limit</th><th>Level</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5604.43</td><td>47.05</td><td>68.20</td><td>-21.15</td><td>38.59</td><td>33.02</td><td>13.35</td><td>37.91</td><td>0.00</td><td>398</td><td>360</td><td>PEAK</td></tr><tr><td>2</td><td>5650.15</td><td>45.45</td><td>68.31</td><td>-22.86</td><td>36.76</td><td>33.20</td><td>13.41</td><td>37.92</td><td>0.00</td><td>398</td><td>360</td><td>PEAK</td></tr><tr><td>3</td><td>5701.78</td><td>46.15</td><td>105.70</td><td>-59.55</td><td>36.99</td><td>33.60</td><td>13.48</td><td>37.92</td><td>0.00</td><td>398</td><td>360</td><td>PEAK</td></tr><tr><td>4</td><td>5720.66</td><td>46.20</td><td>112.29</td><td>-66.09</td><td>36.98</td><td>33.64</td><td>13.50</td><td>37.92</td><td>0.00</td><td>398</td><td>360</td><td>PEAK</td></tr></tbody></table>								Freq	Limit	Level	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg	1	5604.43	47.05	68.20	-21.15	38.59	33.02	13.35	37.91	0.00	398	360	PEAK	2	5650.15	45.45	68.31	-22.86	36.76	33.20	13.41	37.92	0.00	398	360	PEAK	3	5701.78	46.15	105.70	-59.55	36.99	33.60	13.48	37.92	0.00	398	360	PEAK	4	5720.66	46.20	112.29	-66.09	36.98	33.64	13.50	37.92	0.00	398	360	PEAK	 Level (dBuV/m) Frequency (MHz) PEAK(UNII 4) Site : 03CH20-HY Condition: PEAK(UNII 4) 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Freq</th><th>Limit</th><th>Level</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5865.00</td><td>100.65</td><td>-----</td><td>-----</td><td>98.57</td><td>34.30</td><td>13.70</td><td>37.92</td><td>0.00</td><td>398</td><td>360</td><td>PEAK</td></tr></tbody></table>								Freq	Limit	Level	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg	1	5865.00	100.65	-----	-----	98.57	34.30	13.70	37.92	0.00	398	360	PEAK
	Freq	Limit	Level	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg																																																																																																																										
1	5604.43	47.05	68.20	-21.15	38.59	33.02	13.35	37.91	0.00	398	360	PEAK																																																																																																																											
2	5650.15	45.45	68.31	-22.86	36.76	33.20	13.41	37.92	0.00	398	360	PEAK																																																																																																																											
3	5701.78	46.15	105.70	-59.55	36.99	33.60	13.48	37.92	0.00	398	360	PEAK																																																																																																																											
4	5720.66	46.20	112.29	-66.09	36.98	33.64	13.50	37.92	0.00	398	360	PEAK																																																																																																																											
	Freq	Limit	Level	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg																																																																																																																										
1	5865.00	100.65	-----	-----	98.57	34.30	13.70	37.92	0.00	398	360	PEAK																																																																																																																											
Avg	Blank							 Level (dBuV/m) Frequency (MHz) AVG(UNII 4) Site : 03CH20-HY Condition: AVG(UNII 4) 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><thead><tr><th></th><th>Freq</th><th>Limit</th><th>Level</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5865.00</td><td>103.20</td><td>-----</td><td>-----</td><td>93.12</td><td>34.30</td><td>13.70</td><td>37.92</td><td>0.00</td><td>398</td><td>360</td><td>AVERAGE</td></tr></tbody></table>								Freq	Limit	Level	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg	1	5865.00	103.20	-----	-----	93.12	34.30	13.70	37.92	0.00	398	360	AVERAGE																																																																																
	Freq	Limit	Level	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg																																																																																																																										
1	5865.00	103.20	-----	-----	93.12	34.30	13.70	37.92	0.00	398	360	AVERAGE																																																																																																																											

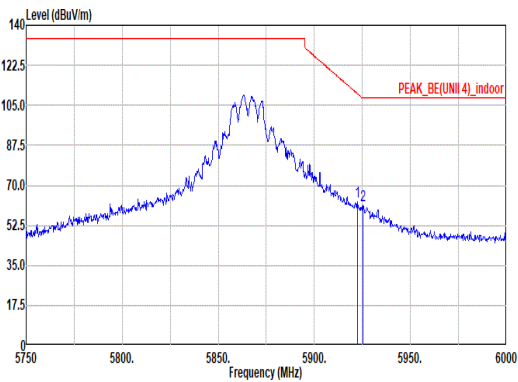
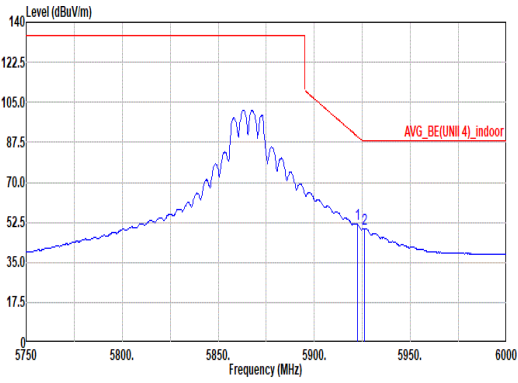


Mode	62																																																																				
	Band Edge - R																																																																				
	U-NII-4_5.85-5.895_802.11a_CH173_5865MHz																																																																				
ANT	4+3																																																																				
Pol.	Vertical						Fundamental																																																														
Peak	 Site : 03CH20-HY Condition: PEAK_BE(UNII 4)_indoor 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5922.50</td><td>62.62</td><td>110.03</td><td>-47.41</td><td>52.47</td><td>34.30</td><td>13.78</td><td>37.93</td><td>0.00</td><td>398</td><td>360</td><td>PEAK</td></tr><tr><td>2</td><td>5925.25</td><td>61.44</td><td>108.20</td><td>-46.76</td><td>51.29</td><td>34.30</td><td>13.78</td><td>37.93</td><td>0.00</td><td>398</td><td>360</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5922.50	62.62	110.03	-47.41	52.47	34.30	13.78	37.93	0.00	398	360	PEAK	2	5925.25	61.44	108.20	-46.76	51.29	34.30	13.78	37.93	0.00	398	360	PEAK	Blank					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																											
1	5922.50	62.62	110.03	-47.41	52.47	34.30	13.78	37.93	0.00	398	360	PEAK																																																									
2	5925.25	61.44	108.20	-46.76	51.29	34.30	13.78	37.93	0.00	398	360	PEAK																																																									
Avg	 Site : 03CH20-HY Condition: AVG_BE(UNII 4)_indoor 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5922.50</td><td>51.57</td><td>90.03</td><td>-38.46</td><td>41.42</td><td>34.30</td><td>13.78</td><td>37.93</td><td>0.00</td><td>398</td><td>360</td><td>AVERAGE</td></tr><tr><td>2</td><td>5926.00</td><td>49.92</td><td>88.20</td><td>-38.28</td><td>39.77</td><td>34.30</td><td>13.78</td><td>37.93</td><td>0.00</td><td>398</td><td>360</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5922.50	51.57	90.03	-38.46	41.42	34.30	13.78	37.93	0.00	398	360	AVERAGE	2	5926.00	49.92	88.20	-38.28	39.77	34.30	13.78	37.93	0.00	398	360	AVERAGE	Blank					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																											
1	5922.50	51.57	90.03	-38.46	41.42	34.30	13.78	37.93	0.00	398	360	AVERAGE																																																									
2	5926.00	49.92	88.20	-38.28	39.77	34.30	13.78	37.93	0.00	398	360	AVERAGE																																																									

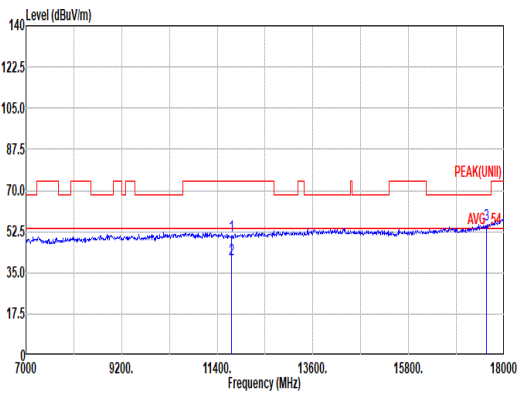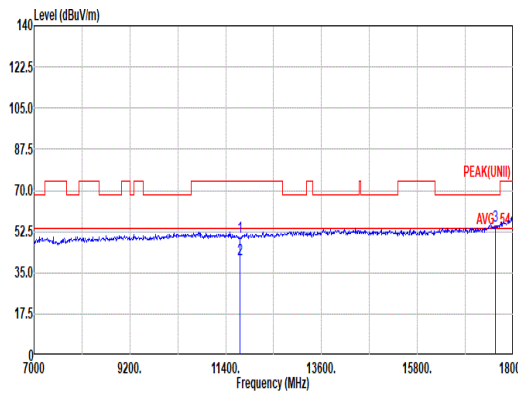

Mode	62																																																																																																																																																	
	Harmonic																																																																																																																																																	
	U-NII-4_5.85-5.895_802.11a_CH173_5865MHz																																																																																																																																																	
ANT	4+3																																																																																																																																																	
Pol.	Horizontal						Vertical																																																																																																																																											
Peak Avg																																																																																																																																																		
	Site : 03CH20-HY Condition: PEAK(UNII) 3m HF_91280_02360_241101 HORIZONTAL						Site : 03CH20-HY Condition: PEAK(UNII) 3m HF_91280_02360_241101 VERTICAL																																																																																																																																											
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>11730.00</td><td>50.90</td><td>74.00</td><td>-23.10</td><td>34.70</td><td>38.54</td><td>19.62</td><td>42.66</td><td>0.70</td><td>300</td><td>32 PEAK</td></tr><tr><td>2</td><td>11730.00</td><td>40.54</td><td>54.00</td><td>-13.46</td><td>24.34</td><td>38.54</td><td>19.62</td><td>42.66</td><td>0.70</td><td>300</td><td>32 Average</td></tr><tr><td>3</td><td>17595.00</td><td>55.45</td><td>68.20</td><td>-12.75</td><td>34.91</td><td>40.59</td><td>24.24</td><td>44.95</td><td>0.66</td><td>--</td><td>-- PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11730.00	50.90	74.00	-23.10	34.70	38.54	19.62	42.66	0.70	300	32 PEAK	2	11730.00	40.54	54.00	-13.46	24.34	38.54	19.62	42.66	0.70	300	32 Average	3	17595.00	55.45	68.20	-12.75	34.91	40.59	24.24	44.95	0.66	--	-- PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>11730.00</td><td>50.32</td><td>74.00</td><td>-23.68</td><td>34.12</td><td>38.54</td><td>19.62</td><td>42.66</td><td>0.70</td><td>400</td><td>178 PEAK</td></tr><tr><td>2</td><td>11730.00</td><td>40.45</td><td>54.00</td><td>-13.55</td><td>24.25</td><td>38.54</td><td>19.62</td><td>42.66</td><td>0.70</td><td>400</td><td>178 Average</td></tr><tr><td>3</td><td>17595.00</td><td>54.70</td><td>68.20</td><td>-13.50</td><td>34.16</td><td>40.59</td><td>24.24</td><td>44.95</td><td>0.66</td><td>--</td><td>-- PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11730.00	50.32	74.00	-23.68	34.12	38.54	19.62	42.66	0.70	400	178 PEAK	2	11730.00	40.45	54.00	-13.55	24.25	38.54	19.62	42.66	0.70	400	178 Average	3	17595.00	54.70	68.20	-13.50	34.16	40.59	24.24	44.95	0.66	--	-- PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																								
1	11730.00	50.90	74.00	-23.10	34.70	38.54	19.62	42.66	0.70	300	32 PEAK																																																																																																																																							
2	11730.00	40.54	54.00	-13.46	24.34	38.54	19.62	42.66	0.70	300	32 Average																																																																																																																																							
3	17595.00	55.45	68.20	-12.75	34.91	40.59	24.24	44.95	0.66	--	-- PEAK																																																																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																								
1	11730.00	50.32	74.00	-23.68	34.12	38.54	19.62	42.66	0.70	400	178 PEAK																																																																																																																																							
2	11730.00	40.45	54.00	-13.55	24.25	38.54	19.62	42.66	0.70	400	178 Average																																																																																																																																							
3	17595.00	54.70	68.20	-13.50	34.16	40.59	24.24	44.95	0.66	--	-- PEAK																																																																																																																																							

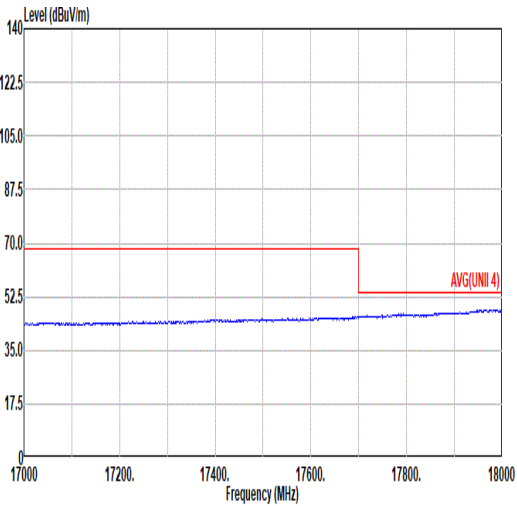
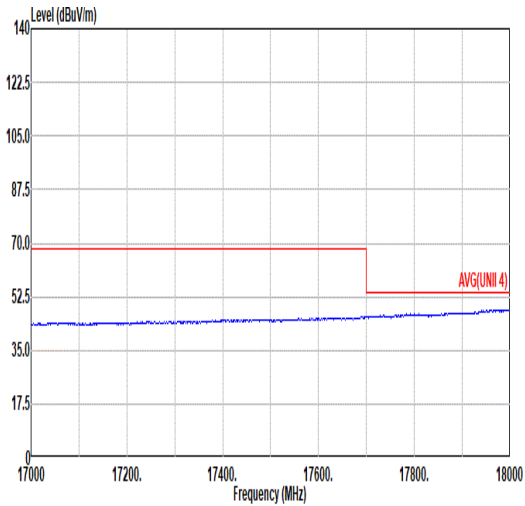


Mode	62	
	Harmonic	
	U-NII-4_5.85-5.895_802.11a_CH173_5865MHz	
ANT	4+3	
Pol.	Horizontal	Vertical
17G ~18G Avg	 Site : 03CH20-HY Condition: AVG(UNII 4) 3m HF_91200_02360_241101 HORIZONTAL	 Site : 03CH20-HY Condition: AVG(UNII 4) 3m HF_91200_02360_241101 VERTICAL






Mode	63																																																																																																																																										
	Band Edge - L																																																																																																																																										
	U-NII-4_5.85-5.895_802.11a_CH177_5885MHz																																																																																																																																										
ANT	4+3																																																																																																																																										
Pol.	Horizontal						Fundamental																																																																																																																																				
Peak	Site : 03CH20-HY Condition: PEAK_BE(UNII 4)_indoor 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5637.76</td><td>46.88</td><td>68.20</td><td>-21.32</td><td>38.26</td><td>33.15</td><td>13.39</td><td>37.92</td><td>0.00</td><td>248</td><td>60</td><td>PEAK</td></tr><tr><td>2</td><td>5651.04</td><td>45.26</td><td>68.97</td><td>-23.71</td><td>36.56</td><td>33.21</td><td>13.41</td><td>37.92</td><td>0.00</td><td>248</td><td>60</td><td>PEAK</td></tr><tr><td>3</td><td>5700.01</td><td>46.92</td><td>105.20</td><td>-58.28</td><td>37.76</td><td>33.60</td><td>13.48</td><td>37.92</td><td>0.00</td><td>248</td><td>60</td><td>PEAK</td></tr><tr><td>4</td><td>5720.07</td><td>45.86</td><td>110.95</td><td>-65.09</td><td>36.64</td><td>33.64</td><td>13.50</td><td>37.92</td><td>0.00</td><td>248</td><td>60</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5637.76	46.88	68.20	-21.32	38.26	33.15	13.39	37.92	0.00	248	60	PEAK	2	5651.04	45.26	68.97	-23.71	36.56	33.21	13.41	37.92	0.00	248	60	PEAK	3	5700.01	46.92	105.20	-58.28	37.76	33.60	13.48	37.92	0.00	248	60	PEAK	4	5720.07	45.86	110.95	-65.09	36.64	33.64	13.50	37.92	0.00	248	60	PEAK	Site : 03CH20-HY Condition: PEAK(UNII 4) 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5885.00</td><td>114.09</td><td>-----</td><td>-----</td><td>104.00</td><td>34.30</td><td>13.72</td><td>37.93</td><td>0.00</td><td>248</td><td>60</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5885.00	114.09	-----	-----	104.00	34.30	13.72	37.93	0.00	248	60	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																	
1	5637.76	46.88	68.20	-21.32	38.26	33.15	13.39	37.92	0.00	248	60	PEAK																																																																																																																															
2	5651.04	45.26	68.97	-23.71	36.56	33.21	13.41	37.92	0.00	248	60	PEAK																																																																																																																															
3	5700.01	46.92	105.20	-58.28	37.76	33.60	13.48	37.92	0.00	248	60	PEAK																																																																																																																															
4	5720.07	45.86	110.95	-65.09	36.64	33.64	13.50	37.92	0.00	248	60	PEAK																																																																																																																															
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																	
1	5885.00	114.09	-----	-----	104.00	34.30	13.72	37.93	0.00	248	60	PEAK																																																																																																																															
Avg	Blank						Site : 03CH20-HY Condition: AVG(UNII 4) 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5885.00</td><td>109.25</td><td>-----</td><td>-----</td><td>99.16</td><td>34.30</td><td>13.72</td><td>37.93</td><td>0.00</td><td>248</td><td>60</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5885.00	109.25	-----	-----	99.16	34.30	13.72	37.93	0.00	248	60	AVERAGE																																																																																			
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																	
1	5885.00	109.25	-----	-----	99.16	34.30	13.72	37.93	0.00	248	60	AVERAGE																																																																																																																															

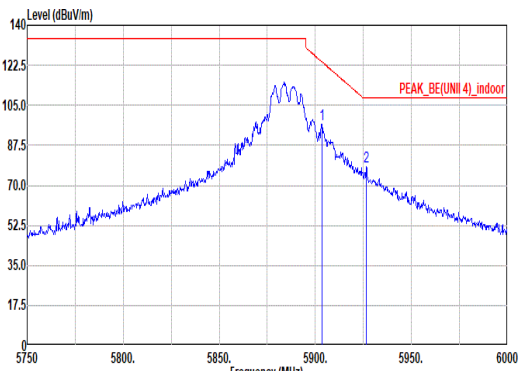
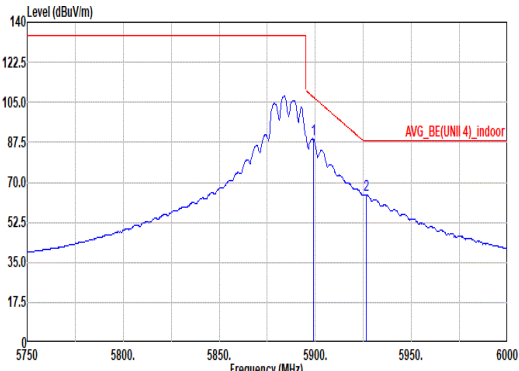


Mode	63																																																													
	Band Edge - R																																																													
	U-NII-4_5.85-5.895_802.11a_CH177_5885MHz																																																													
ANT	4+3																																																													
Pol.	Horizontal						Fundamental																																																							
Peak							Blank																																																							
	Site : 03CH20-HY Condition: PEAK_BE(UNII 4)_indoor 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5903.50</td><td>96.67</td><td>123.96</td><td>-27.29</td><td>86.55</td><td>34.30</td><td>13.75</td><td>37.93</td><td>0.00</td><td>248</td><td>60</td><td>PEAK</td></tr><tr><td>2</td><td>5926.50</td><td>78.05</td><td>108.20</td><td>-30.15</td><td>67.90</td><td>34.30</td><td>13.78</td><td>37.93</td><td>0.00</td><td>248</td><td>60</td><td>PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm	deg	1	5903.50	96.67	123.96	-27.29	86.55	34.30	13.75	37.93	0.00	248	60	PEAK	2	5926.50	78.05	108.20	-30.15	67.90
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																						
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm	deg																																																				
1	5903.50	96.67	123.96	-27.29	86.55	34.30	13.75	37.93	0.00	248	60	PEAK																																																		
2	5926.50	78.05	108.20	-30.15	67.90	34.30	13.78	37.93	0.00	248	60	PEAK																																																		
Avg							Blank																																																							
	Site : 03CH20-HY Condition: AVG_BE(UNII 4)_indoor 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5899.00</td><td>88.86</td><td>107.26</td><td>-18.40</td><td>78.75</td><td>34.30</td><td>13.74</td><td>37.93</td><td>0.00</td><td>248</td><td>60</td><td>AVERAGE</td></tr><tr><td>2</td><td>5926.50</td><td>64.52</td><td>88.20</td><td>-23.68</td><td>54.37</td><td>34.30</td><td>13.78</td><td>37.93</td><td>0.00</td><td>248</td><td>60</td><td>AVERAGE</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm	deg	1	5899.00	88.86	107.26	-18.40	78.75	34.30	13.74	37.93	0.00	248	60	AVERAGE	2	5926.50	64.52	88.20	-23.68	54.37
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																						
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm	deg																																																				
1	5899.00	88.86	107.26	-18.40	78.75	34.30	13.74	37.93	0.00	248	60	AVERAGE																																																		
2	5926.50	64.52	88.20	-23.68	54.37	34.30	13.78	37.93	0.00	248	60	AVERAGE																																																		

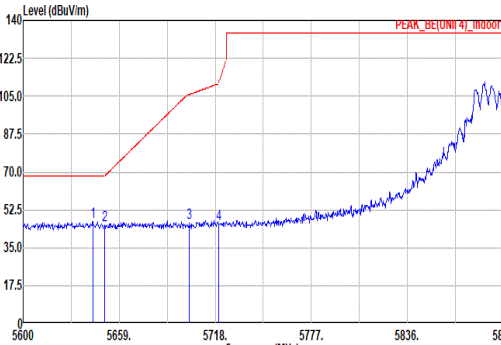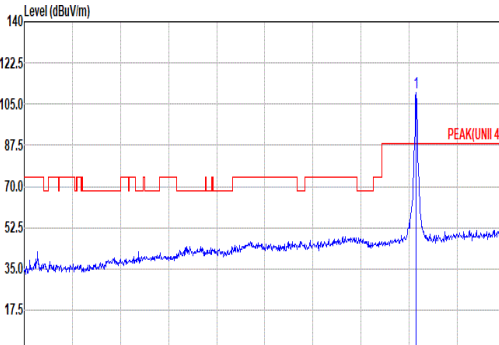
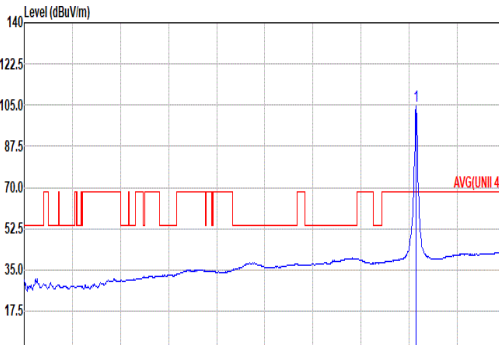


	63																																																																																																																																																
Mode	Band Edge - L																																																																																																																																																
	U-NII-4_5.85-5.895_802.11a_CH177_5885MHz																																																																																																																																																
ANT	4+3																																																																																																																																																
Pol.	Vertical						Fundamental																																																																																																																																										
Peak	 Level (dBuV/m) Frequency (MHz) PEAK_BE(UNII 4)_indoor Site : 03CH20-HY Condition: PEAK_BE(UNII 4)_indoor 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5642.78</td><td>46.86</td><td>68.20</td><td>-21.34</td><td>38.21</td><td>33.17</td><td>13.40</td><td>37.92</td><td>0.00</td><td>400</td><td>360</td><td>PEAK</td></tr><tr><td>2</td><td>5658.15</td><td>45.38</td><td>68.31</td><td>-22.93</td><td>36.69</td><td>33.20</td><td>13.41</td><td>37.92</td><td>0.00</td><td>400</td><td>360</td><td>PEAK</td></tr><tr><td>3</td><td>5702.07</td><td>46.42</td><td>105.78</td><td>-59.36</td><td>37.26</td><td>33.60</td><td>13.48</td><td>37.92</td><td>0.00</td><td>400</td><td>360</td><td>PEAK</td></tr><tr><td>4</td><td>5728.07</td><td>46.07</td><td>110.95</td><td>-64.88</td><td>36.85</td><td>33.64</td><td>13.50</td><td>37.92</td><td>0.00</td><td>400</td><td>360</td><td>PEAK</td></tr></tbody></table>													Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg	1	5642.78	46.86	68.20	-21.34	38.21	33.17	13.40	37.92	0.00	400	360	PEAK	2	5658.15	45.38	68.31	-22.93	36.69	33.20	13.41	37.92	0.00	400	360	PEAK	3	5702.07	46.42	105.78	-59.36	37.26	33.60	13.48	37.92	0.00	400	360	PEAK	4	5728.07	46.07	110.95	-64.88	36.85	33.64	13.50	37.92	0.00	400	360	PEAK	 Level (dBuV/m) Frequency (MHz) PEAK(UNII 4) Site : 03CH20-HY Condition: PEAK(UNII 4) 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5885.00</td><td>109.81</td><td>-----</td><td>-----</td><td>99.71</td><td>34.30</td><td>13.73</td><td>37.93</td><td>0.00</td><td>400</td><td>360</td><td>PEAK</td></tr></tbody></table>													Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg	1	5885.00	109.81	-----	-----	99.71	34.30	13.73	37.93	0.00	400	360	PEAK
		Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg																																																																																																																																				
1	5642.78	46.86	68.20	-21.34	38.21	33.17	13.40	37.92	0.00	400	360	PEAK																																																																																																																																					
2	5658.15	45.38	68.31	-22.93	36.69	33.20	13.41	37.92	0.00	400	360	PEAK																																																																																																																																					
3	5702.07	46.42	105.78	-59.36	37.26	33.60	13.48	37.92	0.00	400	360	PEAK																																																																																																																																					
4	5728.07	46.07	110.95	-64.88	36.85	33.64	13.50	37.92	0.00	400	360	PEAK																																																																																																																																					
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg																																																																																																																																				
1	5885.00	109.81	-----	-----	99.71	34.30	13.73	37.93	0.00	400	360	PEAK																																																																																																																																					
Avg	Blank						 Level (dBuV/m) Frequency (MHz) AVG(UNII 4) Site : 03CH20-HY Condition: AVG(UNII 4) 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5885.00</td><td>104.78</td><td>-----</td><td>-----</td><td>94.69</td><td>34.30</td><td>13.72</td><td>37.93</td><td>0.00</td><td>400</td><td>360</td><td>AVERAGE</td></tr></tbody></table>							Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg	1	5885.00	104.78	-----	-----	94.69	34.30	13.72	37.93	0.00	400	360	AVERAGE																																																																																												
		Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg																																																																																																																																				
1	5885.00	104.78	-----	-----	94.69	34.30	13.72	37.93	0.00	400	360	AVERAGE																																																																																																																																					

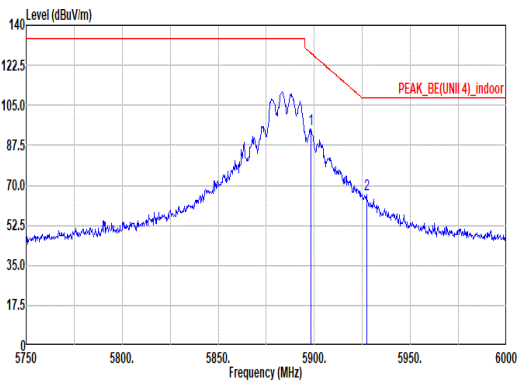
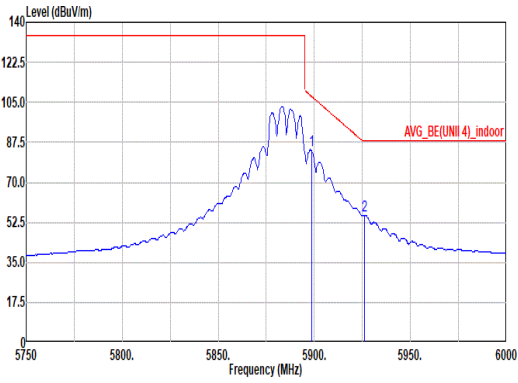


Mode	63																																																																				
	Band Edge - R																																																																				
	U-NII-4_5.85-5.895_802.11a_CH177_5885MHz																																																																				
ANT	4+3																																																																				
Pol.	Vertical						Fundamental																																																														
Peak	 Site : 03CH20-HY Condition: PEAK_BE(UNII 4)_indoor 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5898.25</td><td>94.39</td><td>127.81</td><td>-33.42</td><td>84.28</td><td>34.30</td><td>13.74</td><td>37.93</td><td>0.00</td><td>400</td><td>360</td><td>PEAK</td></tr><tr><td>2</td><td>5927.25</td><td>66.06</td><td>108.20</td><td>-42.14</td><td>55.91</td><td>34.30</td><td>13.78</td><td>37.93</td><td>0.00</td><td>400</td><td>360</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5898.25	94.39	127.81	-33.42	84.28	34.30	13.74	37.93	0.00	400	360	PEAK	2	5927.25	66.06	108.20	-42.14	55.91	34.30	13.78	37.93	0.00	400	360	PEAK	Blank					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																											
1	5898.25	94.39	127.81	-33.42	84.28	34.30	13.74	37.93	0.00	400	360	PEAK																																																									
2	5927.25	66.06	108.20	-42.14	55.91	34.30	13.78	37.93	0.00	400	360	PEAK																																																									
Avg	 Site : 03CH20-HY Condition: AVG_BE(UNII 4)_indoor 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5898.50</td><td>84.00</td><td>107.63</td><td>-23.63</td><td>73.09</td><td>34.30</td><td>13.74</td><td>37.93</td><td>0.00</td><td>400</td><td>360</td><td>AVERAGE</td></tr><tr><td>2</td><td>5926.25</td><td>55.70</td><td>88.20</td><td>-32.50</td><td>45.55</td><td>34.30</td><td>13.78</td><td>37.93</td><td>0.00</td><td>400</td><td>360</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5898.50	84.00	107.63	-23.63	73.09	34.30	13.74	37.93	0.00	400	360	AVERAGE	2	5926.25	55.70	88.20	-32.50	45.55	34.30	13.78	37.93	0.00	400	360	AVERAGE	Blank					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																											
1	5898.50	84.00	107.63	-23.63	73.09	34.30	13.74	37.93	0.00	400	360	AVERAGE																																																									
2	5926.25	55.70	88.20	-32.50	45.55	34.30	13.78	37.93	0.00	400	360	AVERAGE																																																									


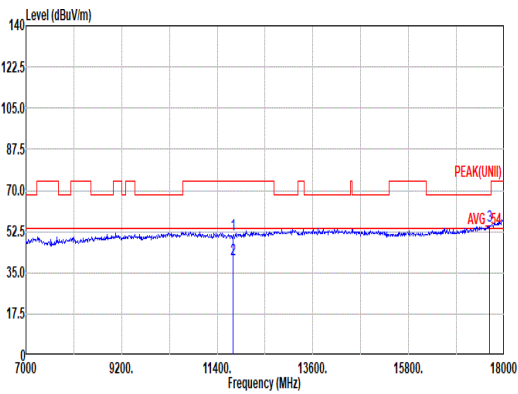
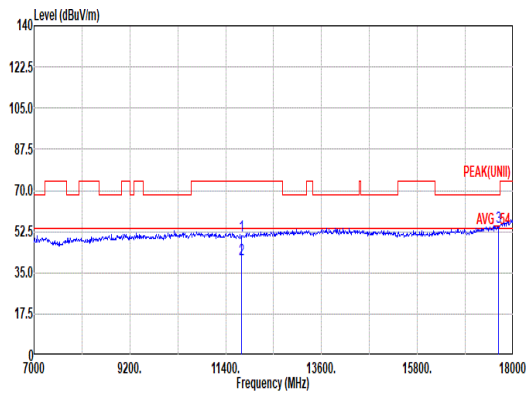


Mode	63																																																																																																																																																																											
	Harmonic																																																																																																																																																																											
	U-NII-4_5.85-5.895_802.11a_CH177_5885MHz																																																																																																																																																																											
ANT	4+3																																																																																																																																																																											
Pol.	Horizontal						Vertical																																																																																																																																																																					
Peak Avg																																																																																																																																																																												
	Site : 03CH20-HY Condition: PEAK(UNII) 3m HF_91280_02360_241101 HORIZONTAL						Site : 03CH20-HY Condition: PEAK(UNII) 3m HF_91280_02360_241101 VERTICAL																																																																																																																																																																					
<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>11770.00</td><td>51.07</td><td>74.00</td><td>-22.93</td><td>34.84</td><td>38.58</td><td>19.65</td><td>42.69</td><td>0.69</td><td>203</td><td>131</td><td>PEAK</td></tr><tr><td>2</td><td>11770.00</td><td>40.73</td><td>54.00</td><td>-13.27</td><td>24.50</td><td>38.58</td><td>19.65</td><td>42.69</td><td>0.69</td><td>203</td><td>131</td><td>AVERAGE</td></tr><tr><td>3</td><td>17655.00</td><td>55.20</td><td>68.20</td><td>-13.00</td><td>34.44</td><td>40.83</td><td>24.29</td><td>45.03</td><td>0.67</td><td>--</td><td>--</td><td>PEAK</td></tr></table>															Limit		Read		Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg		1	11770.00	51.07	74.00	-22.93	34.84	38.58	19.65	42.69	0.69	203	131	PEAK	2	11770.00	40.73	54.00	-13.27	24.50	38.58	19.65	42.69	0.69	203	131	AVERAGE	3	17655.00	55.20	68.20	-13.00	34.44	40.83	24.29	45.03	0.67	--	--	PEAK	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>11770.00</td><td>50.88</td><td>74.00</td><td>-23.12</td><td>34.65</td><td>38.58</td><td>19.65</td><td>42.69</td><td>0.69</td><td>169</td><td>0</td><td>PEAK</td></tr><tr><td>2</td><td>11770.00</td><td>40.65</td><td>54.00</td><td>-13.35</td><td>24.42</td><td>38.58</td><td>19.65</td><td>42.69</td><td>0.69</td><td>169</td><td>0</td><td>AVERAGE</td></tr><tr><td>3</td><td>17655.00</td><td>54.59</td><td>68.20</td><td>-13.61</td><td>33.83</td><td>40.83</td><td>24.29</td><td>45.03</td><td>0.67</td><td>--</td><td>--</td><td>PEAK</td></tr></table>								Limit		Read		Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg		1	11770.00	50.88	74.00	-23.12	34.65	38.58	19.65	42.69	0.69	169	0	PEAK	2	11770.00	40.65	54.00	-13.35	24.42	38.58	19.65	42.69	0.69	169	0	AVERAGE	3	17655.00	54.59	68.20	-13.61	33.83	40.83	24.29	45.03	0.67	--	--	PEAK
		Limit		Read		Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg																																																																																																																																																																	
1	11770.00	51.07	74.00	-22.93	34.84	38.58	19.65	42.69	0.69	203	131	PEAK																																																																																																																																																																
2	11770.00	40.73	54.00	-13.27	24.50	38.58	19.65	42.69	0.69	203	131	AVERAGE																																																																																																																																																																
3	17655.00	55.20	68.20	-13.00	34.44	40.83	24.29	45.03	0.67	--	--	PEAK																																																																																																																																																																
		Limit		Read		Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg																																																																																																																																																																	
1	11770.00	50.88	74.00	-23.12	34.65	38.58	19.65	42.69	0.69	169	0	PEAK																																																																																																																																																																
2	11770.00	40.65	54.00	-13.35	24.42	38.58	19.65	42.69	0.69	169	0	AVERAGE																																																																																																																																																																
3	17655.00	54.59	68.20	-13.61	33.83	40.83	24.29	45.03	0.67	--	--	PEAK																																																																																																																																																																

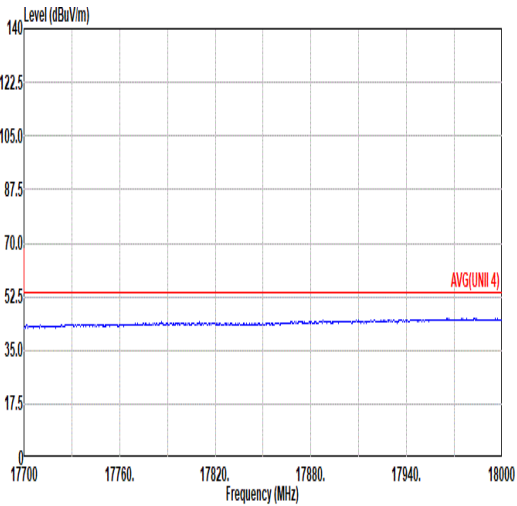
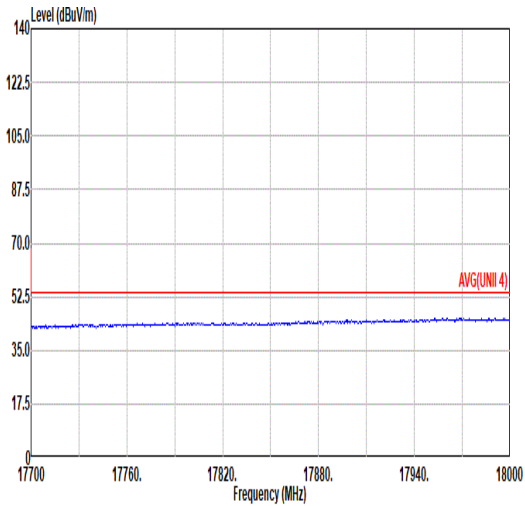


Mode	63	
	Harmonic	
	U-NII-4_5.85-5.895_802.11a_CH177_5885MHz	
ANT	4+3	
Pol.	Horizontal	Vertical
17.7G ~18G Avg	 Site : 03CH20-HY Condition: AVG(UNII 4) 3m HF_91200_02360_241101 HORIZONTAL	 Site : 03CH20-HY Condition: AVG(UNII 4) 3m HF_91200_02360_241101 VERTICAL

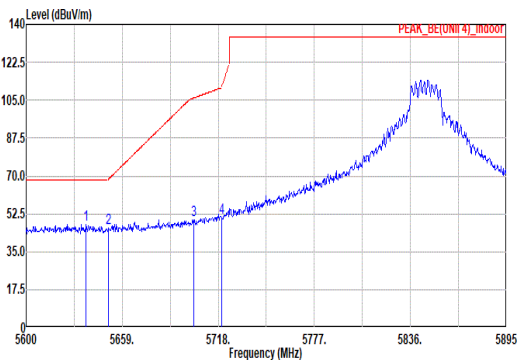
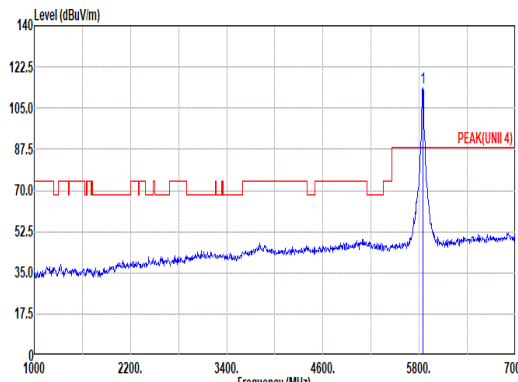
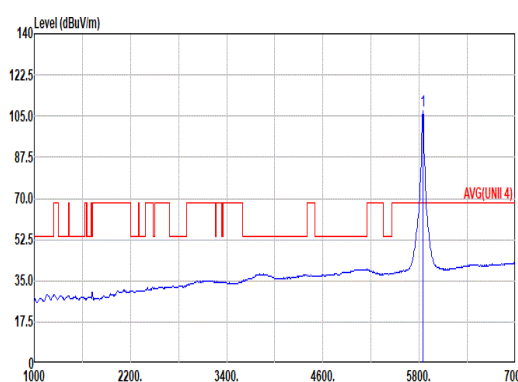


Mode	64																																																																																																																																										
	Band Edge - L																																																																																																																																										
	U-NII-4_5.85-5.895_802.11ax HE20_CH169_Full RU_5845MHz																																																																																																																																										
ANT	4+3																																																																																																																																										
Pol.	Horizontal						Fundamental																																																																																																																																				
Peak	 Site : 03CH20-HY Condition: PEAK_BE(UNII 4)_indoor 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5636.88</td><td>47.62</td><td>68.20</td><td>-20.58</td><td>39.00</td><td>33.15</td><td>13.39</td><td>37.92</td><td>0.00</td><td>242</td><td>59</td><td>PEAK</td></tr><tr><td>2</td><td>5650.45</td><td>46.15</td><td>68.53</td><td>-22.38</td><td>37.46</td><td>33.20</td><td>13.41</td><td>37.92</td><td>0.00</td><td>242</td><td>59</td><td>PEAK</td></tr><tr><td>3</td><td>5702.96</td><td>49.88</td><td>106.03</td><td>-56.15</td><td>40.71</td><td>33.61</td><td>13.48</td><td>37.92</td><td>0.00</td><td>242</td><td>59</td><td>PEAK</td></tr><tr><td>4</td><td>5720.07</td><td>50.53</td><td>110.95</td><td>-60.42</td><td>41.31</td><td>33.64</td><td>13.50</td><td>37.92</td><td>0.00</td><td>242</td><td>59</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5636.88	47.62	68.20	-20.58	39.00	33.15	13.39	37.92	0.00	242	59	PEAK	2	5650.45	46.15	68.53	-22.38	37.46	33.20	13.41	37.92	0.00	242	59	PEAK	3	5702.96	49.88	106.03	-56.15	40.71	33.61	13.48	37.92	0.00	242	59	PEAK	4	5720.07	50.53	110.95	-60.42	41.31	33.64	13.50	37.92	0.00	242	59	PEAK	 Site : 03CH20-HY Condition: PEAK(UNII 4) 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5845.00</td><td>113.41</td><td>-----</td><td>-----</td><td>103.37</td><td>34.29</td><td>13.67</td><td>37.92</td><td>0.00</td><td>242</td><td>59</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5845.00	113.41	-----	-----	103.37	34.29	13.67	37.92	0.00	242	59	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																	
1	5636.88	47.62	68.20	-20.58	39.00	33.15	13.39	37.92	0.00	242	59	PEAK																																																																																																																															
2	5650.45	46.15	68.53	-22.38	37.46	33.20	13.41	37.92	0.00	242	59	PEAK																																																																																																																															
3	5702.96	49.88	106.03	-56.15	40.71	33.61	13.48	37.92	0.00	242	59	PEAK																																																																																																																															
4	5720.07	50.53	110.95	-60.42	41.31	33.64	13.50	37.92	0.00	242	59	PEAK																																																																																																																															
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																	
1	5845.00	113.41	-----	-----	103.37	34.29	13.67	37.92	0.00	242	59	PEAK																																																																																																																															
Avg	Blank						 Site : 03CH20-HY Condition: AVG(UNII 4) 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5845.00</td><td>107.21</td><td>-----</td><td>-----</td><td>97.17</td><td>34.29</td><td>13.67</td><td>37.92</td><td>0.00</td><td>242</td><td>59</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5845.00	107.21	-----	-----	97.17	34.29	13.67	37.92	0.00	242	59	AVERAGE																																																																																			
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																	
1	5845.00	107.21	-----	-----	97.17	34.29	13.67	37.92	0.00	242	59	AVERAGE																																																																																																																															

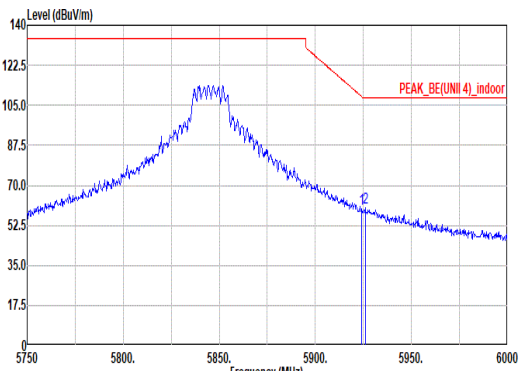
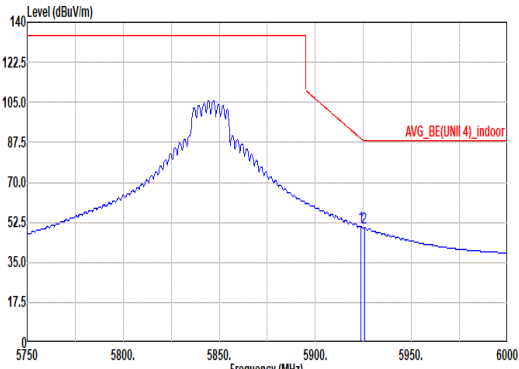


Mode	64																																																																				
	Band Edge - R																																																																				
	U-NII-4_5.85-5.895_802.11ax HE20_CH169_Full RU_5845MHz																																																																				
ANT	4+3																																																																				
Pol.	Horizontal																																																																				
Peak	 Site : 03CH20-HY Condition: PEAK_BE(UNII 4)_indoor 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5924.25</td><td>59.79</td><td>108.75</td><td>-48.96</td><td>49.64</td><td>34.30</td><td>13.78</td><td>37.93</td><td>0.00</td><td>242</td><td>59</td><td>PEAK</td></tr><tr><td>2</td><td>5926.00</td><td>60.39</td><td>108.20</td><td>-47.81</td><td>50.24</td><td>34.30</td><td>13.78</td><td>37.93</td><td>0.00</td><td>242</td><td>59</td><td>PEAK</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5924.25	59.79	108.75	-48.96	49.64	34.30	13.78	37.93	0.00	242	59	PEAK	2	5926.00	60.39	108.20	-47.81	50.24	34.30	13.78	37.93	0.00	242	59	PEAK	Fundamental
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																											
1	5924.25	59.79	108.75	-48.96	49.64	34.30	13.78	37.93	0.00	242	59	PEAK																																																									
2	5926.00	60.39	108.20	-47.81	50.24	34.30	13.78	37.93	0.00	242	59	PEAK																																																									
Avg	 Site : 03CH20-HY Condition: AVG_BE(UNII 4)_indoor 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5923.75</td><td>50.82</td><td>89.11</td><td>-38.29</td><td>40.67</td><td>34.30</td><td>13.78</td><td>37.93</td><td>0.00</td><td>242</td><td>59</td><td>AVERAGE</td></tr><tr><td>2</td><td>5925.50</td><td>50.18</td><td>88.20</td><td>-38.02</td><td>40.03</td><td>34.30</td><td>13.78</td><td>37.93</td><td>0.00</td><td>242</td><td>59</td><td>AVERAGE</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5923.75	50.82	89.11	-38.29	40.67	34.30	13.78	37.93	0.00	242	59	AVERAGE	2	5925.50	50.18	88.20	-38.02	40.03	34.30	13.78	37.93	0.00	242	59	AVERAGE	Blank
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																											
1	5923.75	50.82	89.11	-38.29	40.67	34.30	13.78	37.93	0.00	242	59	AVERAGE																																																									
2	5925.50	50.18	88.20	-38.02	40.03	34.30	13.78	37.93	0.00	242	59	AVERAGE																																																									

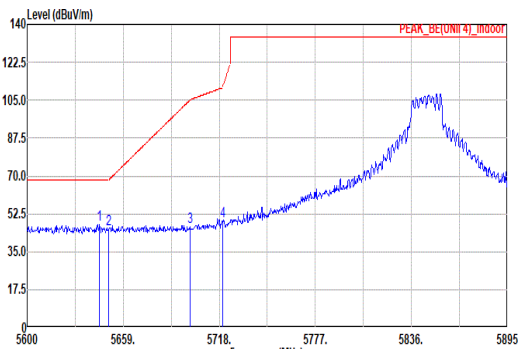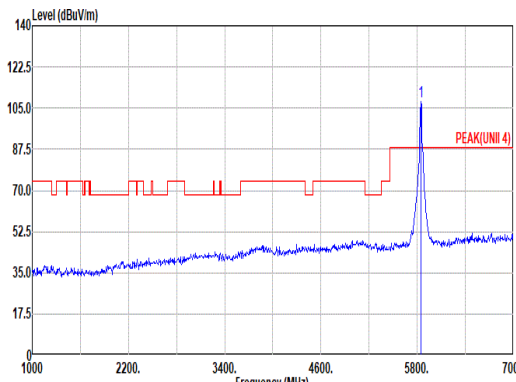
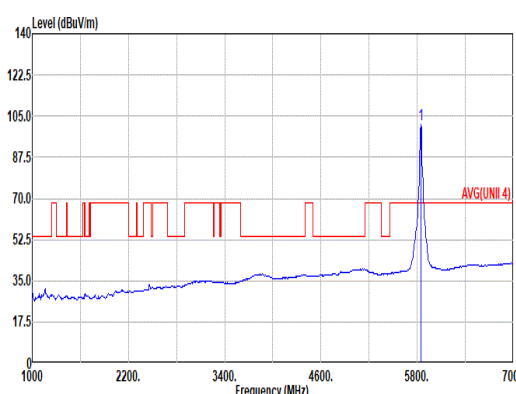


Mode	64																																																																																																																																									
	Band Edge - L																																																																																																																																									
	U-NII-4_5.85-5.895_802.11ax HE20_CH169_Full RU_5845MHz																																																																																																																																									
ANT	4+3																																																																																																																																									
Pol.	Vertical						Fundamental																																																																																																																																			
Peak	 Site : 03CH20-HY Condition: PEAK_BE(UNII 4)_indoor 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5644.55</td><td>47.60</td><td>68.20</td><td>-20.60</td><td>36.94</td><td>33.18</td><td>13.40</td><td>37.92</td><td>0.00</td><td>357</td><td>360</td><td>PEAK</td></tr><tr><td>2</td><td>5650.15</td><td>45.59</td><td>68.31</td><td>-22.72</td><td>36.90</td><td>33.20</td><td>13.41</td><td>37.92</td><td>0.00</td><td>357</td><td>360</td><td>PEAK</td></tr><tr><td>3</td><td>5700.01</td><td>46.70</td><td>105.20</td><td>-58.50</td><td>37.54</td><td>33.60</td><td>13.48</td><td>37.92</td><td>0.00</td><td>357</td><td>360</td><td>PEAK</td></tr><tr><td>4</td><td>5720.07</td><td>49.32</td><td>110.95</td><td>-61.63</td><td>40.10</td><td>33.64</td><td>13.50</td><td>37.92</td><td>0.00</td><td>357</td><td>360</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5644.55	47.60	68.20	-20.60	36.94	33.18	13.40	37.92	0.00	357	360	PEAK	2	5650.15	45.59	68.31	-22.72	36.90	33.20	13.41	37.92	0.00	357	360	PEAK	3	5700.01	46.70	105.20	-58.50	37.54	33.60	13.48	37.92	0.00	357	360	PEAK	4	5720.07	49.32	110.95	-61.63	40.10	33.64	13.50	37.92	0.00	357	360	PEAK	 Site : 03CH20-HY Condition: PEAK(UNII 4) 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5845.00</td><td>100.02</td><td>-----</td><td>-----</td><td>97.98</td><td>34.29</td><td>13.67</td><td>37.92</td><td>0.00</td><td>357</td><td>360</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5845.00	100.02	-----	-----	97.98	34.29	13.67	37.92	0.00	357	360	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																	
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																	
1	5644.55	47.60	68.20	-20.60	36.94	33.18	13.40	37.92	0.00	357	360	PEAK																																																																																																																														
2	5650.15	45.59	68.31	-22.72	36.90	33.20	13.41	37.92	0.00	357	360	PEAK																																																																																																																														
3	5700.01	46.70	105.20	-58.50	37.54	33.60	13.48	37.92	0.00	357	360	PEAK																																																																																																																														
4	5720.07	49.32	110.95	-61.63	40.10	33.64	13.50	37.92	0.00	357	360	PEAK																																																																																																																														
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																	
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																
1	5845.00	100.02	-----	-----	97.98	34.29	13.67	37.92	0.00	357	360	PEAK																																																																																																																														
Avg	Blank						 Site : 03CH20-HY Condition: AVG(UNII 4) 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5845.00</td><td>101.34</td><td>-----</td><td>-----</td><td>91.30</td><td>34.29</td><td>13.67</td><td>37.92</td><td>0.00</td><td>357</td><td>360</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5845.00	101.34	-----	-----	91.30	34.29	13.67	37.92	0.00	357	360	AVERAGE																																																																																		
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																	
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																
1	5845.00	101.34	-----	-----	91.30	34.29	13.67	37.92	0.00	357	360	AVERAGE																																																																																																																														

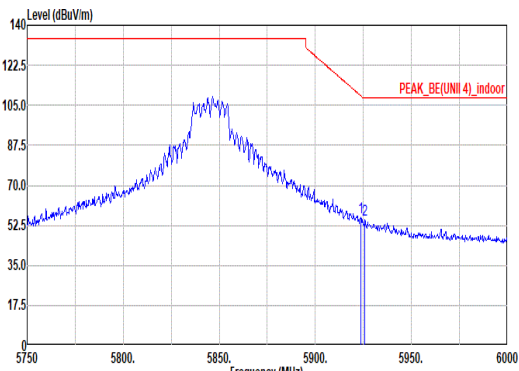
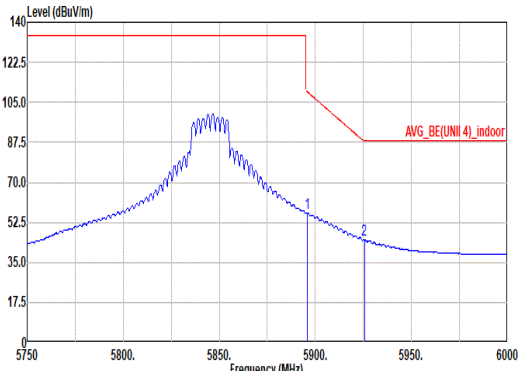


Mode	64																																																			
	Band Edge - R																																																			
	U-NII-4_5.85-5.895_802.11ax HE20_CH169_Full RU_5845MHz																																																			
ANT	4+3																																																			
Pol.	Vertical	Fundamental																																																		
Peak	 Site : 03CH20-HY Condition: PEAK_BE(UNII 4)_indoor 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr><tr><td>1</td><td>5923.75</td><td>55.75</td><td>109.11</td><td>-53.36</td><td>45.60</td><td>34.30</td><td>13.78</td><td>37.93</td><td>0.00 357 360 PEAK</td></tr><tr><td>2</td><td>5925.75</td><td>54.82</td><td>108.20</td><td>-53.38</td><td>44.67</td><td>34.30</td><td>13.78</td><td>37.93</td><td>0.00 357 360 PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1	5923.75	55.75	109.11	-53.36	45.60	34.30	13.78	37.93	0.00 357 360 PEAK	2	5925.75	54.82	108.20	-53.38	44.67	34.30	13.78	37.93	0.00 357 360 PEAK	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																											
1	5923.75	55.75	109.11	-53.36	45.60	34.30	13.78	37.93	0.00 357 360 PEAK																																											
2	5925.75	54.82	108.20	-53.38	44.67	34.30	13.78	37.93	0.00 357 360 PEAK																																											
Avg	 Site : 03CH20-HY Condition: AVG_BE(UNII 4)_indoor 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr><tr><td>1</td><td>5895.75</td><td>56.74</td><td>109.65</td><td>-52.91</td><td>46.63</td><td>34.30</td><td>13.74</td><td>37.93</td><td>0.00 357 360 AVERAGE</td></tr><tr><td>2</td><td>5925.50</td><td>44.96</td><td>88.20</td><td>-43.24</td><td>34.81</td><td>34.30</td><td>13.78</td><td>37.93</td><td>0.00 357 360 AVERAGE</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1	5895.75	56.74	109.65	-52.91	46.63	34.30	13.74	37.93	0.00 357 360 AVERAGE	2	5925.50	44.96	88.20	-43.24	34.81	34.30	13.78	37.93	0.00 357 360 AVERAGE	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																											
1	5895.75	56.74	109.65	-52.91	46.63	34.30	13.74	37.93	0.00 357 360 AVERAGE																																											
2	5925.50	44.96	88.20	-43.24	34.81	34.30	13.78	37.93	0.00 357 360 AVERAGE																																											


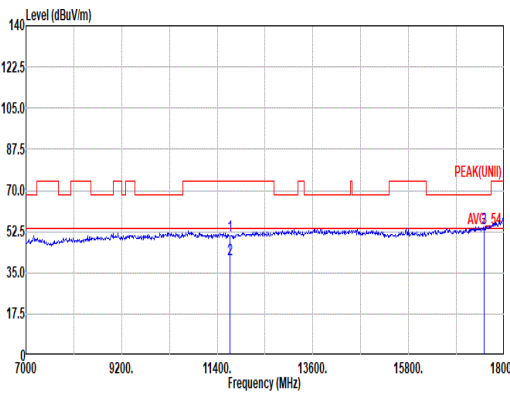
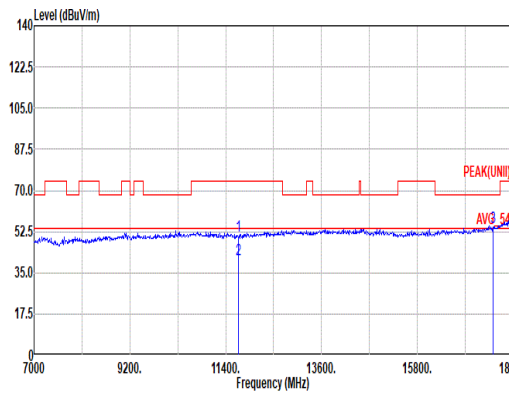


Mode	64												
	Harmonic												
	U-NII-4_5.85-5.895_802.11ax HE20_CH169_Full RU_5845MHz												
ANT	4+3												
Pol.	Horizontal						Vertical						
Peak Avg													
	Site : 03CH20-HY Condition: PEAK(UNII) 3m HF_91280_02360_241101 HORIZONTAL						Site : 03CH20-HY Condition: PEAK(UNII) 3m HF_91280_02360_241101 VERTICAL						
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	11690.00	50.68	74.00	-23.32	34.41	38.62	19.58	42.63	0.70	395	194	PEAK	
2	11690.00	40.65	54.00	-13.35	24.38	38.62	19.58	42.63	0.70	395	194	AVERAGE	
3	17535.00	53.94	68.20	-14.26	33.55	40.41	24.20	44.87	0.65	--	--	PEAK	
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	11690.00	50.86	74.00	-23.14	34.59	38.62	19.58	42.63	0.70	400	235	PEAK	
2	11690.00	40.93	54.00	-13.07	24.66	38.62	19.58	42.63	0.70	400	235	AVERAGE	
3	17535.00	54.46	68.20	-13.74	34.07	40.41	24.20	44.87	0.65	--	--	PEAK	

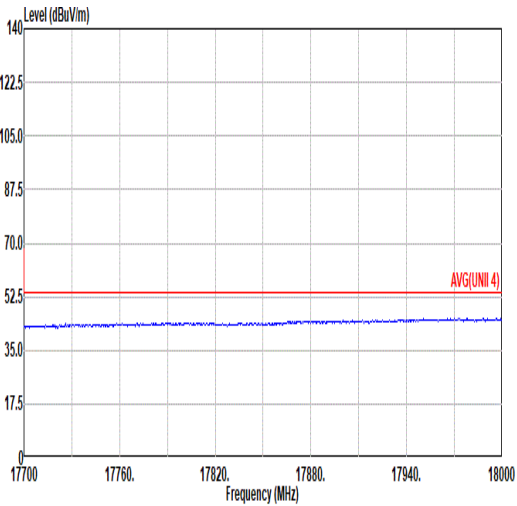
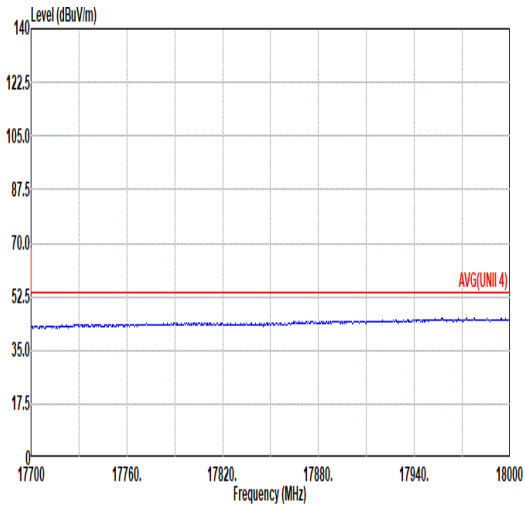


Mode	64	
	Harmonic	
	U-NII-4_5.85-5.895_802.11ax HE20_CH169_Full RU_5845MHz	
ANT	4+3	
Pol.	Horizontal	Vertical
17.7G ~18G Avg	 Site : 03CH20-HY Condition: AVG(UNII 4) 3m HF_91200_02360_241101 HORIZONTAL	 Site : 03CH20-HY Condition: AVG(UNII 4) 3m HF_91200_02360_241101 VERTICAL

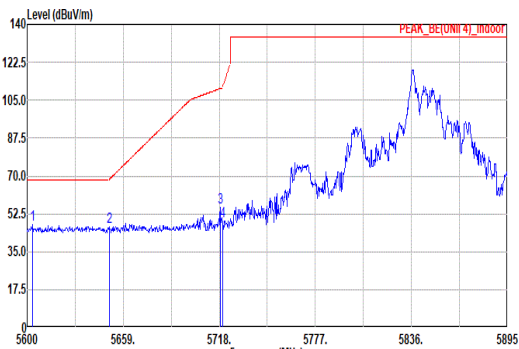
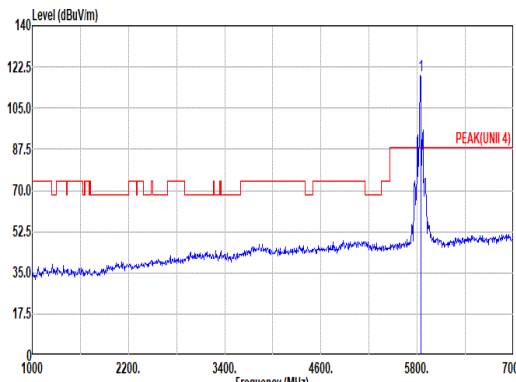
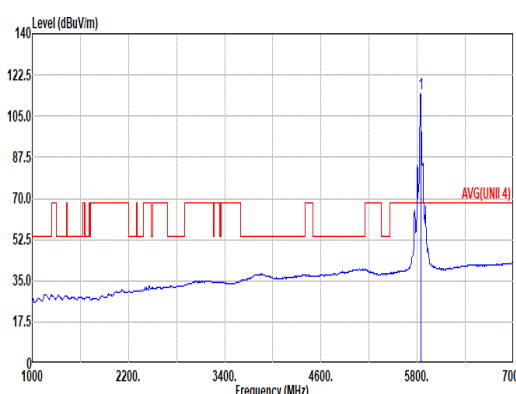


Mode	65																																																																																																																																				
	Band Edge - L																																																																																																																																				
	U-NII-4_5.85-5.895_802.11ax HE20_CH169_Partial_26/0RU_5845MHz																																																																																																																																				
ANT	4+3																																																																																																																																				
Pol.	Horizontal						Fundamental																																																																																																																														
Peak	 Site : 03CH20-HY Condition: PEAK_BE(UNII 4)_indoor 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5603.54</td><td>47.73</td><td>68.20</td><td>-20.47</td><td>39.29</td><td>33.01</td><td>13.34</td><td>37.91</td><td>0.00</td><td>234</td><td>59 PEAK</td></tr><tr><td>2</td><td>5650.45</td><td>46.74</td><td>68.53</td><td>-21.79</td><td>38.05</td><td>33.20</td><td>13.41</td><td>37.92</td><td>0.00</td><td>234</td><td>59 PEAK</td></tr><tr><td>3</td><td>5718.59</td><td>55.40</td><td>110.41</td><td>-55.01</td><td>46.18</td><td>33.64</td><td>13.50</td><td>37.92</td><td>0.00</td><td>234</td><td>59 PEAK</td></tr><tr><td>4</td><td>5720.07</td><td>48.89</td><td>110.95</td><td>-62.06</td><td>39.67</td><td>33.64</td><td>13.50</td><td>37.92</td><td>0.00</td><td>234</td><td>59 PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5603.54	47.73	68.20	-20.47	39.29	33.01	13.34	37.91	0.00	234	59 PEAK	2	5650.45	46.74	68.53	-21.79	38.05	33.20	13.41	37.92	0.00	234	59 PEAK	3	5718.59	55.40	110.41	-55.01	46.18	33.64	13.50	37.92	0.00	234	59 PEAK	4	5720.07	48.89	110.95	-62.06	39.67	33.64	13.50	37.92	0.00	234	59 PEAK	 Site : 03CH20-HY Condition: PEAK(UNII 4) 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5845.00</td><td>118.79</td><td>-----</td><td>-----</td><td>108.81</td><td>34.24</td><td>13.66</td><td>37.92</td><td>0.00</td><td>234</td><td>59 PEAK</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5845.00	118.79	-----	-----	108.81	34.24	13.66	37.92	0.00	234	59 PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																											
1	5603.54	47.73	68.20	-20.47	39.29	33.01	13.34	37.91	0.00	234	59 PEAK																																																																																																																										
2	5650.45	46.74	68.53	-21.79	38.05	33.20	13.41	37.92	0.00	234	59 PEAK																																																																																																																										
3	5718.59	55.40	110.41	-55.01	46.18	33.64	13.50	37.92	0.00	234	59 PEAK																																																																																																																										
4	5720.07	48.89	110.95	-62.06	39.67	33.64	13.50	37.92	0.00	234	59 PEAK																																																																																																																										
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																											
1	5845.00	118.79	-----	-----	108.81	34.24	13.66	37.92	0.00	234	59 PEAK																																																																																																																										
Avg	Blank						 Site : 03CH20-HY Condition: AVG(UNII 4) 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5845.00</td><td>114.80</td><td>-----</td><td>-----</td><td>104.82</td><td>34.24</td><td>13.66</td><td>37.92</td><td>0.00</td><td>234</td><td>59 AVERAGE</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5845.00	114.80	-----	-----	104.82	34.24	13.66	37.92	0.00	234	59 AVERAGE																																																																															
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																											
1	5845.00	114.80	-----	-----	104.82	34.24	13.66	37.92	0.00	234	59 AVERAGE																																																																																																																										

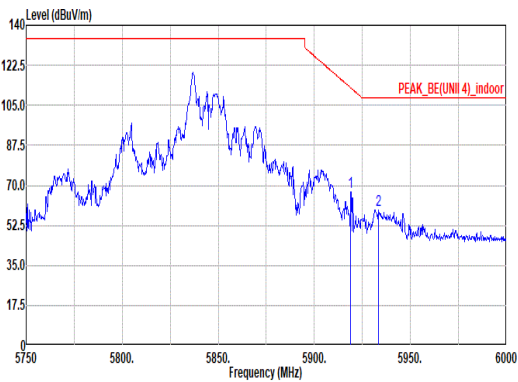
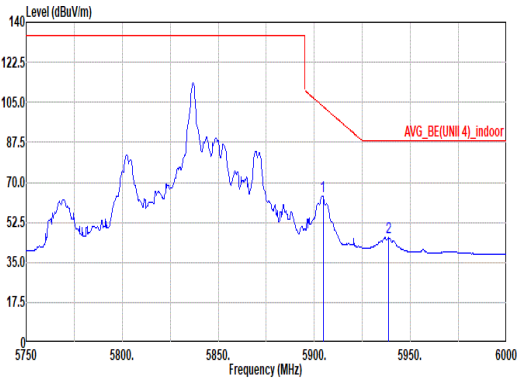


Mode	65																																																																	
	Band Edge - R																																																																	
	U-NII-4_5.85-5.895_802.11ax HE20_CH169_Partial_26/0RU_5845MHz																																																																	
ANT	4+3																																																																	
Pol.	Horizontal						Fundamental																																																											
Peak	 Site : 03CH20-HY Condition: PEAK_BE(UNII 4)_indoor 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5919.00</td><td>67.21</td><td>112.59</td><td>-45.38</td><td>57.07</td><td>34.30</td><td>13.77</td><td>37.93</td><td>0.00</td><td>234</td><td>59 PEAK</td></tr><tr><td>2</td><td>5933.50</td><td>59.37</td><td>108.20</td><td>-48.83</td><td>49.21</td><td>34.30</td><td>13.79</td><td>37.93</td><td>0.00</td><td>234</td><td>59 PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm	deg	1	5919.00	67.21	112.59	-45.38	57.07	34.30	13.77	37.93	0.00	234	59 PEAK	2	5933.50	59.37	108.20	-48.83	49.21	34.30	13.79	37.93	0.00	234	59 PEAK	Blank				
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																									
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm	deg																																																								
1	5919.00	67.21	112.59	-45.38	57.07	34.30	13.77	37.93	0.00	234	59 PEAK																																																							
2	5933.50	59.37	108.20	-48.83	49.21	34.30	13.79	37.93	0.00	234	59 PEAK																																																							
Avg	 Site : 03CH20-HY Condition: AVG_BE(UNII 4)_indoor 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5904.50</td><td>63.93</td><td>103.22</td><td>-39.29</td><td>53.81</td><td>34.30</td><td>13.75</td><td>37.93</td><td>0.00</td><td>234</td><td>59 AVERAGE</td></tr><tr><td>2</td><td>5938.75</td><td>45.96</td><td>88.20</td><td>-42.24</td><td>35.79</td><td>34.30</td><td>13.80</td><td>37.93</td><td>0.00</td><td>234</td><td>59 AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm	deg	1	5904.50	63.93	103.22	-39.29	53.81	34.30	13.75	37.93	0.00	234	59 AVERAGE	2	5938.75	45.96	88.20	-42.24	35.79	34.30	13.80	37.93	0.00	234	59 AVERAGE	Blank				
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																									
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm	deg																																																								
1	5904.50	63.93	103.22	-39.29	53.81	34.30	13.75	37.93	0.00	234	59 AVERAGE																																																							
2	5938.75	45.96	88.20	-42.24	35.79	34.30	13.80	37.93	0.00	234	59 AVERAGE																																																							

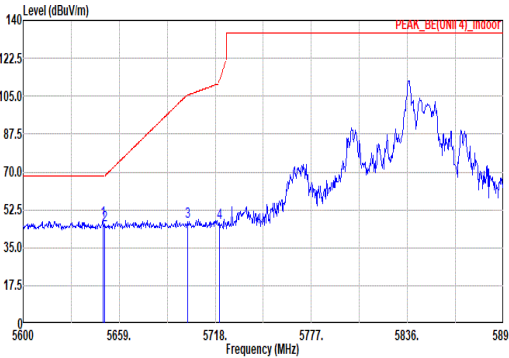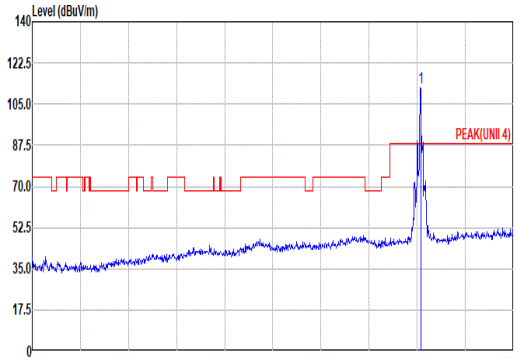
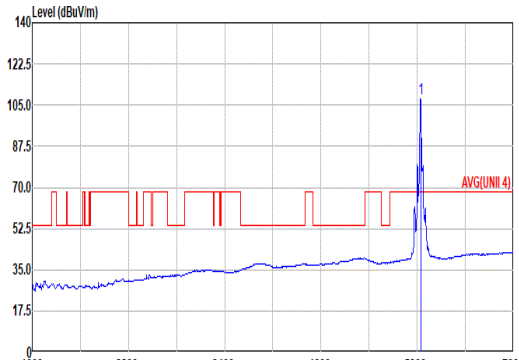


Mode	65																																																																																																																							
	Band Edge - L																																																																																																																							
	U-NII-4_5.85-5.895_802.11ax HE20_CH169_Partial_26/0RU_5845MHz																																																																																																																							
ANT	4+3																																																																																																																							
Pol.	Vertical						Fundamental																																																																																																																	
Peak	 Level (dBuV/m) Frequency (MHz) PEAK_BE(UNII 4)_INDOOR Site : 03CH20-HY Condition: PEAK_BE(UNII 4)_indoor 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5648.97</td><td>47.39</td><td>68.20</td><td>-20.81</td><td>38.70</td><td>33.20</td><td>13.41</td><td>37.92</td><td>0.00</td><td>395</td><td>360</td><td>PEAK</td></tr><tr><td>2</td><td>5650.15</td><td>45.35</td><td>68.31</td><td>-22.96</td><td>36.66</td><td>33.20</td><td>13.41</td><td>37.92</td><td>0.00</td><td>395</td><td>360</td><td>PEAK</td></tr><tr><td>3</td><td>5700.89</td><td>47.14</td><td>105.45</td><td>-58.31</td><td>37.98</td><td>33.60</td><td>13.48</td><td>37.92</td><td>0.00</td><td>395</td><td>360</td><td>PEAK</td></tr><tr><td>4</td><td>5720.36</td><td>46.47</td><td>111.62</td><td>-65.15</td><td>37.25</td><td>33.64</td><td>13.50</td><td>37.92</td><td>0.00</td><td>395</td><td>360</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			cm	deg	1	5648.97	47.39	68.20	-20.81	38.70	33.20	13.41	37.92	0.00	395	360	PEAK	2	5650.15	45.35	68.31	-22.96	36.66	33.20	13.41	37.92	0.00	395	360	PEAK	3	5700.89	47.14	105.45	-58.31	37.98	33.60	13.48	37.92	0.00	395	360	PEAK	4	5720.36	46.47	111.62	-65.15	37.25	33.64	13.50	37.92	0.00	395	360	PEAK	 Level (dBuV/m) Frequency (MHz) PEAK(UNII 4) Site : 03CH20-HY Condition: PEAK(UNII 4) 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5845.00</td><td>111.90</td><td>-----</td><td>-----</td><td>101.92</td><td>34.24</td><td>13.66</td><td>37.92</td><td>0.00</td><td>395</td><td>360</td><td>PEAK</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			cm	deg	1	5845.00	111.90	-----	-----	101.92	34.24	13.66	37.92	0.00	395	360	PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																														
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			cm	deg																																																																																																														
1	5648.97	47.39	68.20	-20.81	38.70	33.20	13.41	37.92	0.00	395	360	PEAK																																																																																																												
2	5650.15	45.35	68.31	-22.96	36.66	33.20	13.41	37.92	0.00	395	360	PEAK																																																																																																												
3	5700.89	47.14	105.45	-58.31	37.98	33.60	13.48	37.92	0.00	395	360	PEAK																																																																																																												
4	5720.36	46.47	111.62	-65.15	37.25	33.64	13.50	37.92	0.00	395	360	PEAK																																																																																																												
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																															
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			cm	deg																																																																																																														
1	5845.00	111.90	-----	-----	101.92	34.24	13.66	37.92	0.00	395	360	PEAK																																																																																																												
Avg	Blank						 Level (dBuV/m) Frequency (MHz) AVG(UNII 4) Site : 03CH20-HY Condition: AVG(UNII 4) 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5845.00</td><td>107.76</td><td>-----</td><td>-----</td><td>97.78</td><td>34.24</td><td>13.66</td><td>37.92</td><td>0.00</td><td>395</td><td>360</td><td>AVERAGE</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			cm	deg	1	5845.00	107.76	-----	-----	97.78	34.24	13.66	37.92	0.00	395	360	AVERAGE																																																																										
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																															
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			cm	deg																																																																																																														
1	5845.00	107.76	-----	-----	97.78	34.24	13.66	37.92	0.00	395	360	AVERAGE																																																																																																												

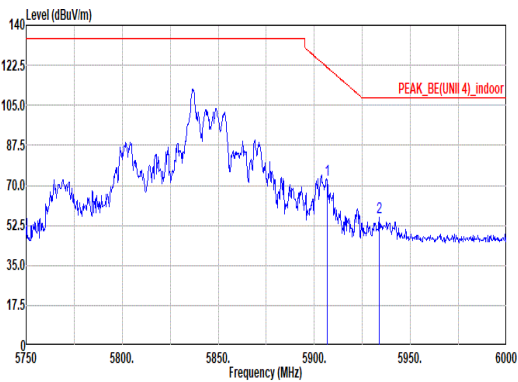
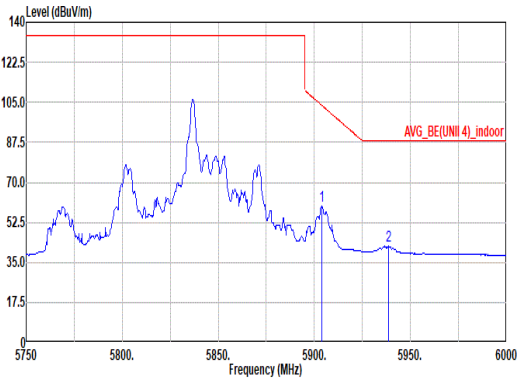


Mode	65																																																			
	Band Edge - R																																																			
	U-NII-4_5.85-5.895_802.11ax HE20_CH169_Partial_26/0RU_5845MHz																																																			
ANT	4+3																																																			
Pol.	Vertical	Fundamental																																																		
Peak	 Site : 03CH20-HY Condition: PEAK_BE(UNII 4)_indoor 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 5906.75</td><td>72.46</td><td>121.57</td><td>-49.11</td><td>62.34</td><td>34.30</td><td>13.75</td><td>37.93</td><td>0.00</td><td>395 360 PEAK</td></tr><tr><td>2 5933.75</td><td>56.09</td><td>108.20</td><td>-52.11</td><td>45.93</td><td>34.30</td><td>13.79</td><td>37.93</td><td>0.00</td><td>395 360 PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm	deg	1 5906.75	72.46	121.57	-49.11	62.34	34.30	13.75	37.93	0.00	395 360 PEAK	2 5933.75	56.09	108.20	-52.11	45.93	34.30	13.79	37.93	0.00	395 360 PEAK	Blank
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																										
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																														
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm	deg																																											
1 5906.75	72.46	121.57	-49.11	62.34	34.30	13.75	37.93	0.00	395 360 PEAK																																											
2 5933.75	56.09	108.20	-52.11	45.93	34.30	13.79	37.93	0.00	395 360 PEAK																																											
Avg	 Site : 03CH20-HY Condition: AVG_BE(UNII 4)_indoor 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 5904.00</td><td>59.59</td><td>103.59</td><td>-44.00</td><td>49.47</td><td>34.30</td><td>13.75</td><td>37.93</td><td>0.00</td><td>395 360 AVERAGE</td></tr><tr><td>2 5938.50</td><td>42.08</td><td>88.20</td><td>-46.12</td><td>31.91</td><td>34.30</td><td>13.80</td><td>37.93</td><td>0.00</td><td>395 360 AVERAGE</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm	deg	1 5904.00	59.59	103.59	-44.00	49.47	34.30	13.75	37.93	0.00	395 360 AVERAGE	2 5938.50	42.08	88.20	-46.12	31.91	34.30	13.80	37.93	0.00	395 360 AVERAGE	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																											
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																														
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm	deg																																											
1 5904.00	59.59	103.59	-44.00	49.47	34.30	13.75	37.93	0.00	395 360 AVERAGE																																											
2 5938.50	42.08	88.20	-46.12	31.91	34.30	13.80	37.93	0.00	395 360 AVERAGE																																											


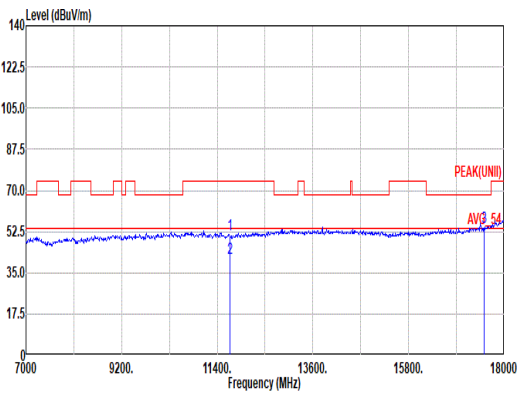
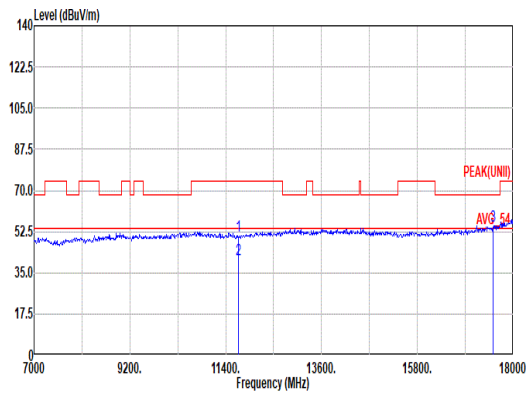


Mode	65												
	Harmonic												
	U-NII-4_5.85-5.895_802.11ax HE20_CH169_Partial_26/0RU_5845MHz												
ANT	4+3												
Pol.	Horizontal						Vertical						
Peak Avg													
	Site : 03CH20-HY Condition: PEAK(UNII) 3m HF_91280_02360_241101 HORIZONTAL						Site : 03CH20-HY Condition: PEAK(UNII) 3m HF_91280_02360_241101 VERTICAL						
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	11690.00	51.34	74.00	-22.66	35.07	38.62	19.58	42.63	0.70	198	359	PEAK	
2	11690.00	41.05	54.00	-12.95	24.78	38.62	19.58	42.63	0.70	198	359	AVERAGE	
3	17535.00	54.61	68.20	-13.59	34.22	40.41	24.20	44.87	0.65	--	--	PEAK	
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	11690.00	50.57	74.00	-23.43	34.30	38.62	19.58	42.63	0.70	302	15	PEAK	
2	11690.00	40.74	54.00	-13.26	24.47	38.62	19.58	42.63	0.70	302	15	AVERAGE	
3	17535.00	55.14	68.20	-13.06	34.75	40.41	24.20	44.87	0.65	--	--	PEAK	

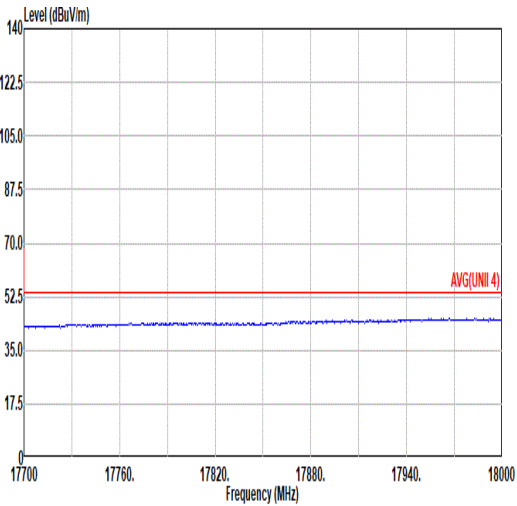
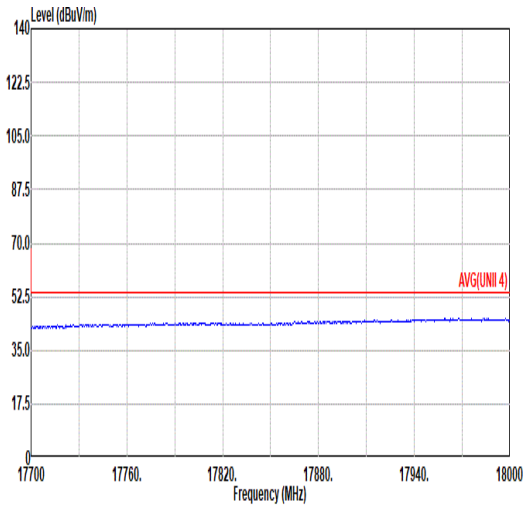


Mode	65	
	Harmonic	
	U-NII-4_5.85-5.895_802.11ax HE20_CH169_Partial_26/0RU_5845MHz	
ANT	4+3	
Pol.	Horizontal	Vertical
17.7G ~18G Avg	 Site : 03CH20-HY Condition: AVG(UNII 4) 3m HF_91200_02360_241101 HORIZONTAL	 Site : 03CH20-HY Condition: AVG(UNII 4) 3m HF_91200_02360_241101 VERTICAL

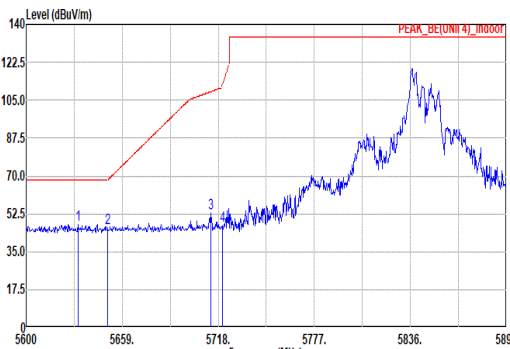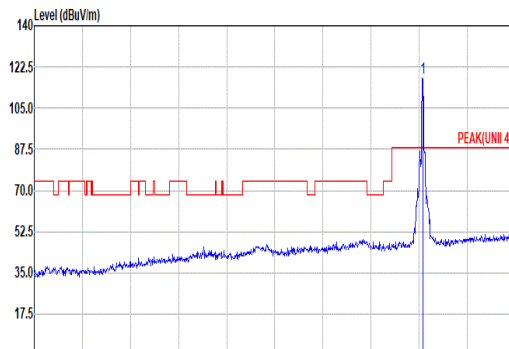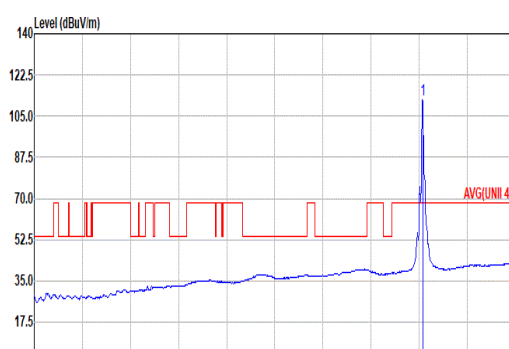

Mode	66																																																																																																																																								
	Band Edge - L																																																																																																																																								
	U-NII-4_5.85-5.895_802.11ax HE20_CH169_Partial_52/37RU_5845MHz																																																																																																																																								
ANT	4+3																																																																																																																																								
Pol.	Horizontal						Fundamental																																																																																																																																		
Peak	 Site : 03CH20-HY Condition: PEAK_BE(UNII 4)_indoor 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5631.86</td><td>47.68</td><td>68.20</td><td>-20.52</td><td>39.09</td><td>33.13</td><td>13.38</td><td>37.92</td><td>0.00</td><td>243</td><td>65</td><td>PEAK</td></tr><tr><td>2</td><td>5650.15</td><td>45.96</td><td>68.31</td><td>-22.35</td><td>37.27</td><td>33.20</td><td>13.41</td><td>37.92</td><td>0.00</td><td>243</td><td>65</td><td>PEAK</td></tr><tr><td>3</td><td>5713.28</td><td>52.65</td><td>108.92</td><td>-56.27</td><td>43.45</td><td>33.63</td><td>13.49</td><td>37.92</td><td>0.00</td><td>243</td><td>65</td><td>PEAK</td></tr><tr><td>4</td><td>5720.36</td><td>46.78</td><td>111.62</td><td>-64.84</td><td>37.56</td><td>33.64</td><td>13.50</td><td>37.92</td><td>0.00</td><td>243</td><td>65</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5631.86	47.68	68.20	-20.52	39.09	33.13	13.38	37.92	0.00	243	65	PEAK	2	5650.15	45.96	68.31	-22.35	37.27	33.20	13.41	37.92	0.00	243	65	PEAK	3	5713.28	52.65	108.92	-56.27	43.45	33.63	13.49	37.92	0.00	243	65	PEAK	4	5720.36	46.78	111.62	-64.84	37.56	33.64	13.50	37.92	0.00	243	65	PEAK	 Site : 03CH20-HY Condition: PEAK(UNII 4) 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5845.00</td><td>117.61</td><td>-----</td><td>-----</td><td>107.63</td><td>34.24</td><td>13.66</td><td>37.92</td><td>0.00</td><td>243</td><td>65</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5845.00	117.61	-----	-----	107.63	34.24	13.66	37.92	0.00	243	65	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																
1	5631.86	47.68	68.20	-20.52	39.09	33.13	13.38	37.92	0.00	243	65	PEAK																																																																																																																													
2	5650.15	45.96	68.31	-22.35	37.27	33.20	13.41	37.92	0.00	243	65	PEAK																																																																																																																													
3	5713.28	52.65	108.92	-56.27	43.45	33.63	13.49	37.92	0.00	243	65	PEAK																																																																																																																													
4	5720.36	46.78	111.62	-64.84	37.56	33.64	13.50	37.92	0.00	243	65	PEAK																																																																																																																													
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																
1	5845.00	117.61	-----	-----	107.63	34.24	13.66	37.92	0.00	243	65	PEAK																																																																																																																													
Avg	Blank						 Site : 03CH20-HY Condition: AVG(UNII 4) 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBW:0.750kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5845.00</td><td>112.00</td><td>-----</td><td>-----</td><td>102.02</td><td>34.24</td><td>13.66</td><td>37.92</td><td>0.00</td><td>243</td><td>65</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5845.00	112.00	-----	-----	102.02	34.24	13.66	37.92	0.00	243	65	AVERAGE																																																																																		
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																
1	5845.00	112.00	-----	-----	102.02	34.24	13.66	37.92	0.00	243	65	AVERAGE																																																																																																																													

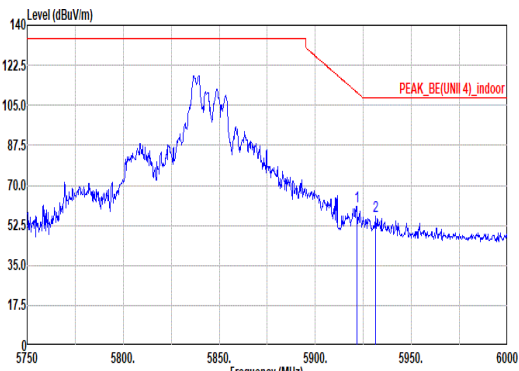
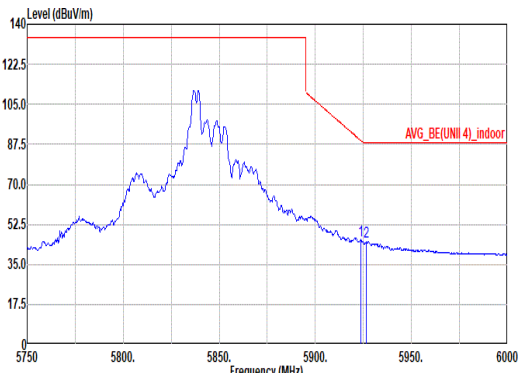


Mode	66																																																																	
	Band Edge - R																																																																	
	U-NII-4_5.85-5.895_802.11ax HE20_CH169_Partial_52/37RU_5845MHz																																																																	
ANT	4+3																																																																	
Pol.	Horizontal										Fundamental																																																							
Peak	 Site : 03CH20-HY Condition: PEAK_BE(UNII 4)_indoor 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5921.50</td><td>60.95</td><td>110.76</td><td>-49.81</td><td>50.81</td><td>34.30</td><td>13.77</td><td>37.93</td><td>0.00</td><td>243</td><td>65 PEAK</td></tr><tr><td>2</td><td>5931.50</td><td>56.58</td><td>108.20</td><td>-51.62</td><td>46.42</td><td>34.30</td><td>13.79</td><td>37.93</td><td>0.00</td><td>243</td><td>65 PEAK</td></tr></table>											Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5921.50	60.95	110.76	-49.81	50.81	34.30	13.77	37.93	0.00	243	65 PEAK	2	5931.50	56.58	108.20	-51.62	46.42	34.30	13.79	37.93	0.00	243	65 PEAK	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																								
1	5921.50	60.95	110.76	-49.81	50.81	34.30	13.77	37.93	0.00	243	65 PEAK																																																							
2	5931.50	56.58	108.20	-51.62	46.42	34.30	13.79	37.93	0.00	243	65 PEAK																																																							
Avg	 Site : 03CH20-HY Condition: AVG_BE(UNII 4)_indoor 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBW:0.750kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5923.75</td><td>45.68</td><td>89.11</td><td>-43.43</td><td>35.53</td><td>34.30</td><td>13.78</td><td>37.93</td><td>0.00</td><td>243</td><td>65 AVERAGE</td></tr><tr><td>2</td><td>5926.50</td><td>44.70</td><td>88.20</td><td>-43.50</td><td>34.55</td><td>34.30</td><td>13.78</td><td>37.93</td><td>0.00</td><td>243</td><td>65 AVERAGE</td></tr></table>											Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5923.75	45.68	89.11	-43.43	35.53	34.30	13.78	37.93	0.00	243	65 AVERAGE	2	5926.50	44.70	88.20	-43.50	34.55	34.30	13.78	37.93	0.00	243	65 AVERAGE	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																								
1	5923.75	45.68	89.11	-43.43	35.53	34.30	13.78	37.93	0.00	243	65 AVERAGE																																																							
2	5926.50	44.70	88.20	-43.50	34.55	34.30	13.78	37.93	0.00	243	65 AVERAGE																																																							





Mode	66																																																																																																																																								
	Band Edge - L																																																																																																																																								
	U-NII-4_5.85-5.895_802.11ax HE20_CH169_Partial_52/37RU_5845MHz																																																																																																																																								
ANT	4+3																																																																																																																																								
Pol.	Vertical						Fundamental																																																																																																																																		
Peak	Site : 03CH20-HY Condition: PEAK_BE(UNII 4)_indoor 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5641.60</td><td>47.31</td><td>68.20</td><td>-20.89</td><td>38.66</td><td>33.17</td><td>13.40</td><td>37.92</td><td>0.00</td><td>306</td><td>360</td><td>PEAK</td></tr><tr><td>2</td><td>5650.15</td><td>45.87</td><td>68.31</td><td>-22.44</td><td>37.18</td><td>33.20</td><td>13.41</td><td>37.92</td><td>0.00</td><td>306</td><td>360</td><td>PEAK</td></tr><tr><td>3</td><td>5704.73</td><td>47.66</td><td>106.52</td><td>-58.86</td><td>38.49</td><td>33.61</td><td>13.48</td><td>37.92</td><td>0.00</td><td>306</td><td>360</td><td>PEAK</td></tr><tr><td>4</td><td>5720.07</td><td>45.34</td><td>110.95</td><td>-65.61</td><td>36.12</td><td>33.64</td><td>13.50</td><td>37.92</td><td>0.00</td><td>306</td><td>360</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5641.60	47.31	68.20	-20.89	38.66	33.17	13.40	37.92	0.00	306	360	PEAK	2	5650.15	45.87	68.31	-22.44	37.18	33.20	13.41	37.92	0.00	306	360	PEAK	3	5704.73	47.66	106.52	-58.86	38.49	33.61	13.48	37.92	0.00	306	360	PEAK	4	5720.07	45.34	110.95	-65.61	36.12	33.64	13.50	37.92	0.00	306	360	PEAK	Site : 03CH20-HY Condition: PEAK(UNII 4) 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5845.00</td><td>113.52</td><td>-----</td><td>-----</td><td>103.54</td><td>34.24</td><td>13.66</td><td>37.92</td><td>0.00</td><td>306</td><td>360</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5845.00	113.52	-----	-----	103.54	34.24	13.66	37.92	0.00	306	360	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																
1	5641.60	47.31	68.20	-20.89	38.66	33.17	13.40	37.92	0.00	306	360	PEAK																																																																																																																													
2	5650.15	45.87	68.31	-22.44	37.18	33.20	13.41	37.92	0.00	306	360	PEAK																																																																																																																													
3	5704.73	47.66	106.52	-58.86	38.49	33.61	13.48	37.92	0.00	306	360	PEAK																																																																																																																													
4	5720.07	45.34	110.95	-65.61	36.12	33.64	13.50	37.92	0.00	306	360	PEAK																																																																																																																													
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																
1	5845.00	113.52	-----	-----	103.54	34.24	13.66	37.92	0.00	306	360	PEAK																																																																																																																													
Avg	Blank						Site : 03CH20-HY Condition: AVG(UNII 4) 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:0.750kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5845.00</td><td>107.88</td><td>-----</td><td>-----</td><td>97.90</td><td>34.24</td><td>13.66</td><td>37.92</td><td>0.00</td><td>306</td><td>360</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5845.00	107.88	-----	-----	97.90	34.24	13.66	37.92	0.00	306	360	AVERAGE																																																																																		
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																
1	5845.00	107.88	-----	-----	97.90	34.24	13.66	37.92	0.00	306	360	AVERAGE																																																																																																																													

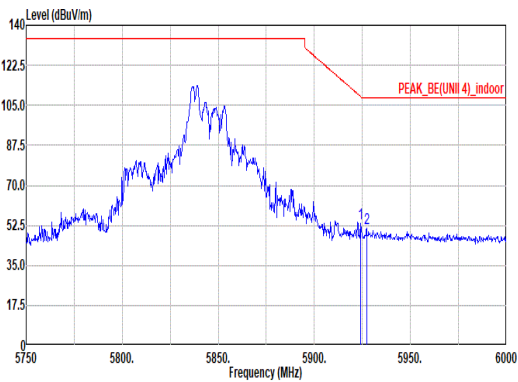
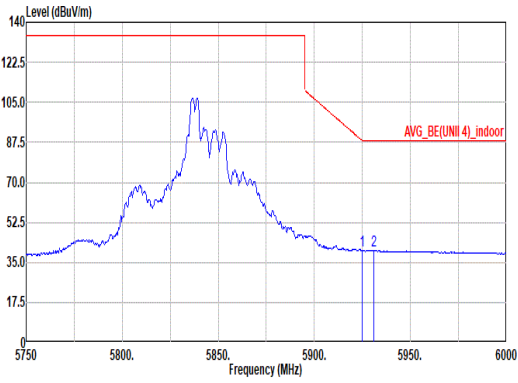


Mode	66																																																																	
	Band Edge - R																																																																	
	U-NII-4_5.85-5.895_802.11ax HE20_CH169_Partial_52/37RU_5845MHz																																																																	
ANT	4+3																																																																	
Pol.	Vertical						Fundamental																																																											
Peak	 Site : 03CH20-HY Condition: PEAK_BE(UNIII 4)_indoor 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5924.00</td><td>53.37</td><td>108.93</td><td>-55.56</td><td>43.22</td><td>34.30</td><td>13.78</td><td>37.93</td><td>0.00</td><td>360</td><td>PEAK</td></tr><tr><td>2</td><td>5927.25</td><td>51.09</td><td>108.20</td><td>-57.11</td><td>40.94</td><td>34.30</td><td>13.78</td><td>37.93</td><td>0.00</td><td>360</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm	deg	1	5924.00	53.37	108.93	-55.56	43.22	34.30	13.78	37.93	0.00	360	PEAK	2	5927.25	51.09	108.20	-57.11	40.94	34.30	13.78	37.93	0.00	360	PEAK	Blank				
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																									
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm	deg																																																								
1	5924.00	53.37	108.93	-55.56	43.22	34.30	13.78	37.93	0.00	360	PEAK																																																							
2	5927.25	51.09	108.20	-57.11	40.94	34.30	13.78	37.93	0.00	360	PEAK																																																							
Avg	 Site : 03CH20-HY Condition: AVG_BE(UNII 4)_indoor 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:0.750kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5924.75</td><td>40.32</td><td>88.38</td><td>-48.06</td><td>30.17</td><td>34.30</td><td>13.78</td><td>37.93</td><td>0.00</td><td>360</td><td>AVERAGE</td></tr><tr><td>2</td><td>5931.00</td><td>40.38</td><td>88.20</td><td>-47.82</td><td>30.22</td><td>34.30</td><td>13.79</td><td>37.93</td><td>0.00</td><td>360</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm	deg	1	5924.75	40.32	88.38	-48.06	30.17	34.30	13.78	37.93	0.00	360	AVERAGE	2	5931.00	40.38	88.20	-47.82	30.22	34.30	13.79	37.93	0.00	360	AVERAGE	Blank				
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																									
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm	deg																																																								
1	5924.75	40.32	88.38	-48.06	30.17	34.30	13.78	37.93	0.00	360	AVERAGE																																																							
2	5931.00	40.38	88.20	-47.82	30.22	34.30	13.79	37.93	0.00	360	AVERAGE																																																							


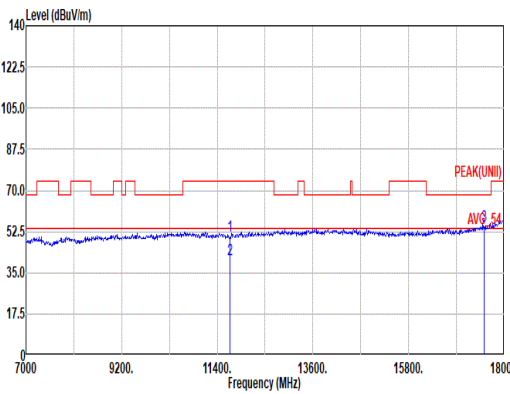
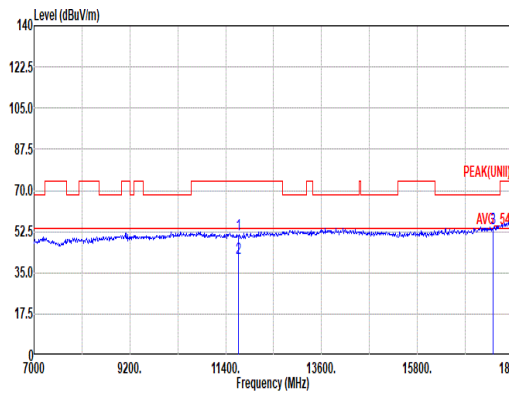


		66																																																																																																																																																																							
Mode		Harmonic																																																																																																																																																																							
		U-NII-4_5.85-5.895_802.11ax HE20_CH169_Partial_52/37RU_5845MHz																																																																																																																																																																							
ANT		4+3																																																																																																																																																																							
Pol.		Horizontal												Vertical																																																																																																																																																											
Peak Avg																																																																																																																																																																									
	Site : 03CH20-HY Condition: PEAK(UNII) 3m HF_91280_02360_241101 HORIZONTAL																Site : 03CH20-HY Condition: PEAK(UNII) 3m HF_91280_02360_241101 VERTICAL																																																																																																																																																								
		<table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>11690.00</td><td>50.86</td><td>74.00</td><td>-23.14</td><td></td><td>34.59</td><td>38.62</td><td>19.58</td><td>42.63</td><td>0.70</td><td>100</td><td>255</td><td>PEAK</td></tr><tr><td>2</td><td>11690.00</td><td>40.60</td><td>54.00</td><td>-13.40</td><td></td><td>24.33</td><td>38.62</td><td>19.58</td><td>42.63</td><td>0.70</td><td>100</td><td>255</td><td>AVERAGE</td></tr><tr><td>3</td><td>17535.00</td><td>54.73</td><td>68.20</td><td>-13.47</td><td></td><td>34.34</td><td>40.41</td><td>24.20</td><td>44.87</td><td>0.65</td><td>--</td><td>--</td><td>PEAK</td></tr></table>															Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	11690.00	50.86	74.00	-23.14		34.59	38.62	19.58	42.63	0.70	100	255	PEAK	2	11690.00	40.60	54.00	-13.40		24.33	38.62	19.58	42.63	0.70	100	255	AVERAGE	3	17535.00	54.73	68.20	-13.47		34.34	40.41	24.20	44.87	0.65	--	--	PEAK	<table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>11690.00</td><td>51.48</td><td>74.00</td><td>-22.52</td><td></td><td>35.21</td><td>38.62</td><td>19.58</td><td>42.63</td><td>0.70</td><td>347</td><td>0</td><td>PEAK</td></tr><tr><td>2</td><td>11690.00</td><td>41.01</td><td>54.00</td><td>-12.99</td><td></td><td>24.74</td><td>38.62</td><td>19.58</td><td>42.63</td><td>0.70</td><td>347</td><td>0</td><td>AVERAGE</td></tr><tr><td>3</td><td>17535.00</td><td>54.13</td><td>68.20</td><td>-14.07</td><td></td><td>33.74</td><td>40.41</td><td>24.20</td><td>44.87</td><td>0.65</td><td>--</td><td>--</td><td>PEAK</td></tr></table>															Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	11690.00	51.48	74.00	-22.52		35.21	38.62	19.58	42.63	0.70	347	0	PEAK	2	11690.00	41.01	54.00	-12.99		24.74	38.62	19.58	42.63	0.70	347	0	AVERAGE	3	17535.00	54.13	68.20	-14.07		33.74	40.41	24.20	44.87	0.65	--	--	PEAK
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																													
1	11690.00	50.86	74.00	-23.14		34.59	38.62	19.58	42.63	0.70	100	255	PEAK																																																																																																																																																												
2	11690.00	40.60	54.00	-13.40		24.33	38.62	19.58	42.63	0.70	100	255	AVERAGE																																																																																																																																																												
3	17535.00	54.73	68.20	-13.47		34.34	40.41	24.20	44.87	0.65	--	--	PEAK																																																																																																																																																												
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																													
1	11690.00	51.48	74.00	-22.52		35.21	38.62	19.58	42.63	0.70	347	0	PEAK																																																																																																																																																												
2	11690.00	41.01	54.00	-12.99		24.74	38.62	19.58	42.63	0.70	347	0	AVERAGE																																																																																																																																																												
3	17535.00	54.13	68.20	-14.07		33.74	40.41	24.20	44.87	0.65	--	--	PEAK																																																																																																																																																												

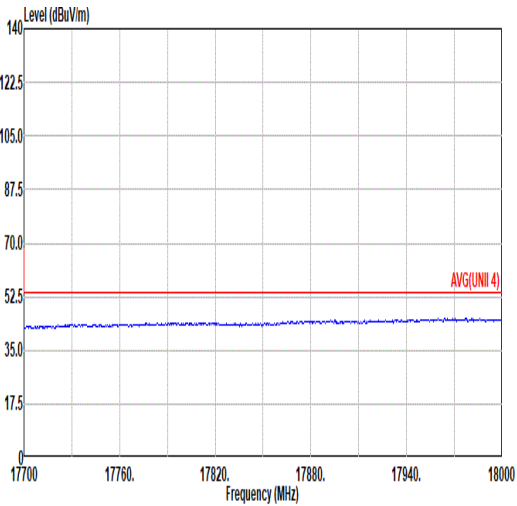
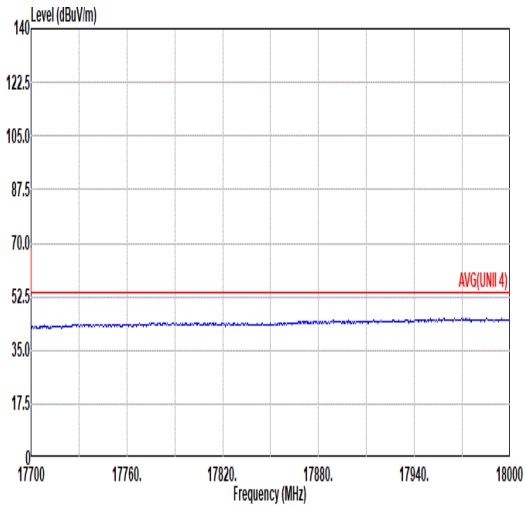


Mode	66	
	Harmonic	
	U-NII-4_5.85-5.895_802.11ax HE20_CH169_Partial_52/37RU_5845MHz	
ANT	4+3	
Pol.	Horizontal	Vertical
17.7G ~18G Avg	 Site : 03CH20-HY Condition: AVG(UNI 4) 3m HF_91200_02360_241101 HORIZONTAL	 Site : 03CH20-HY Condition: AVG(UNI 4) 3m HF_91200_02360_241101 VERTICAL

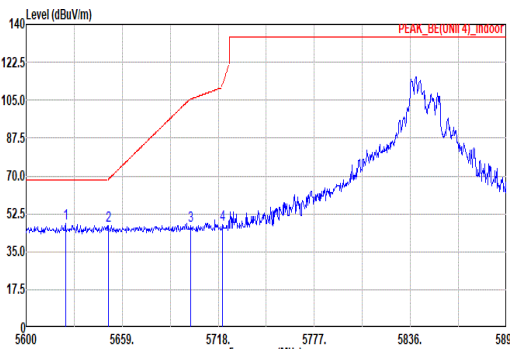
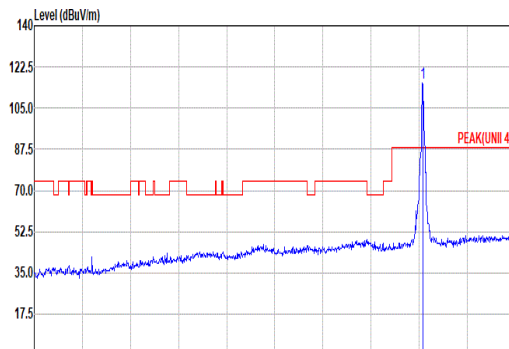
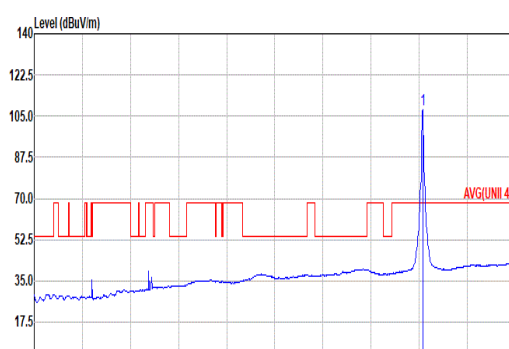


	67																																																																																																																																								
Mode	Band Edge - L																																																																																																																																								
	U-NII-4_5.85-5.895_802.11ax HE20_CH169_Partial_106/53RU_5845MHz																																																																																																																																								
ANT	4+3																																																																																																																																								
Pol.	Horizontal						Fundamental																																																																																																																																		
Peak	 Site : 03CH20-HY Condition: PEAK_BE(UNII 4)_indoor 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5624.19</td><td>47.94</td><td>68.20</td><td>-20.26</td><td>39.38</td><td>33.10</td><td>13.37</td><td>37.91</td><td>0.00</td><td>256</td><td>78</td><td>PEAK</td></tr><tr><td>2</td><td>5650.45</td><td>47.20</td><td>68.53</td><td>-21.33</td><td>38.51</td><td>33.20</td><td>13.41</td><td>37.92</td><td>0.00</td><td>256</td><td>78</td><td>PEAK</td></tr><tr><td>3</td><td>5701.19</td><td>47.06</td><td>105.53</td><td>-58.47</td><td>37.90</td><td>33.60</td><td>13.48</td><td>37.92</td><td>0.00</td><td>256</td><td>78</td><td>PEAK</td></tr><tr><td>4</td><td>5720.66</td><td>47.34</td><td>112.29</td><td>-64.95</td><td>38.12</td><td>33.64</td><td>13.50</td><td>37.92</td><td>0.00</td><td>256</td><td>78</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5624.19	47.94	68.20	-20.26	39.38	33.10	13.37	37.91	0.00	256	78	PEAK	2	5650.45	47.20	68.53	-21.33	38.51	33.20	13.41	37.92	0.00	256	78	PEAK	3	5701.19	47.06	105.53	-58.47	37.90	33.60	13.48	37.92	0.00	256	78	PEAK	4	5720.66	47.34	112.29	-64.95	38.12	33.64	13.50	37.92	0.00	256	78	PEAK	 Site : 03CH20-HY Condition: PEAK(UNII 4) 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5845.00</td><td>115.93</td><td>-----</td><td>-----</td><td>105.95</td><td>34.24</td><td>13.66</td><td>37.92</td><td>0.00</td><td>256</td><td>78</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5845.00	115.93	-----	-----	105.95	34.24	13.66	37.92	0.00	256	78	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																
1	5624.19	47.94	68.20	-20.26	39.38	33.10	13.37	37.91	0.00	256	78	PEAK																																																																																																																													
2	5650.45	47.20	68.53	-21.33	38.51	33.20	13.41	37.92	0.00	256	78	PEAK																																																																																																																													
3	5701.19	47.06	105.53	-58.47	37.90	33.60	13.48	37.92	0.00	256	78	PEAK																																																																																																																													
4	5720.66	47.34	112.29	-64.95	38.12	33.64	13.50	37.92	0.00	256	78	PEAK																																																																																																																													
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																
1	5845.00	115.93	-----	-----	105.95	34.24	13.66	37.92	0.00	256	78	PEAK																																																																																																																													
Avg	Blank						 Site : 03CH20-HY Condition: AVG(UNII 4) 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBW:0.820kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5845.00</td><td>107.99</td><td>-----</td><td>-----</td><td>97.97</td><td>34.27</td><td>13.67</td><td>37.92</td><td>0.00</td><td>256</td><td>78</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5845.00	107.99	-----	-----	97.97	34.27	13.67	37.92	0.00	256	78	AVERAGE																																																																																		
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																
1	5845.00	107.99	-----	-----	97.97	34.27	13.67	37.92	0.00	256	78	AVERAGE																																																																																																																													

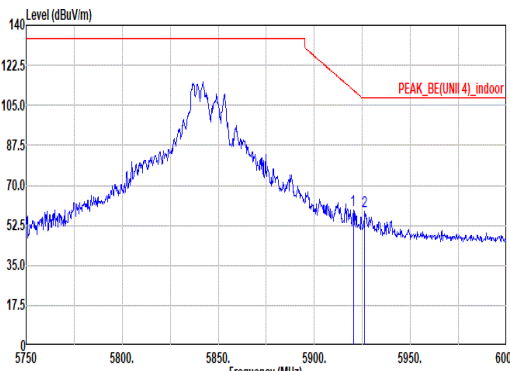
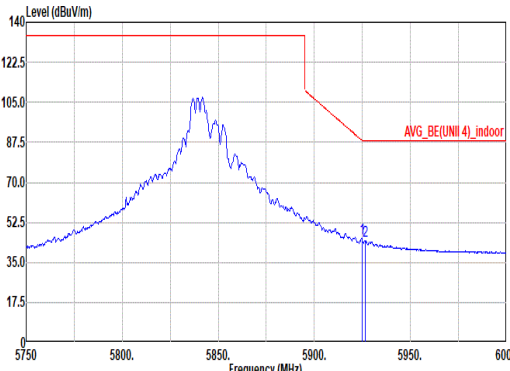


Mode	67																																																																		
	Band Edge - R																																																																		
	U-NII-4_5.85-5.895_802.11ax HE20_CH169_Partial_106/53RU_5845MHz																																																																		
ANT	4+3																																																																		
Pol.	Horizontal						Fundamental																																																												
Peak	 Site : 03CH20-HY Condition: PEAK_BE(UNII 4)_indoor 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>5920.25</td><td>59.40</td><td>111.68</td><td>-52.28</td><td></td><td>49.26</td><td>34.30</td><td>13.77</td><td>37.93</td><td>0.00</td><td>256</td><td>78</td><td>PEAK</td></tr><tr><td>2</td><td>5926.25</td><td>58.49</td><td>108.20</td><td>-49.71</td><td></td><td>48.34</td><td>34.30</td><td>13.78</td><td>37.93</td><td>0.00</td><td>256</td><td>78</td><td>PEAK</td></tr></table>							Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5920.25	59.40	111.68	-52.28		49.26	34.30	13.77	37.93	0.00	256	78	PEAK	2	5926.25	58.49	108.20	-49.71		48.34	34.30	13.78	37.93	0.00	256	78	PEAK	Blank				
		Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																					
	MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																							
1	5920.25	59.40	111.68	-52.28		49.26	34.30	13.77	37.93	0.00	256	78	PEAK																																																						
2	5926.25	58.49	108.20	-49.71		48.34	34.30	13.78	37.93	0.00	256	78	PEAK																																																						
Avg	 Site : 03CH20-HY Condition: AVG_BE(UNII 4)_indoor 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBW:0.020kHz SMT:Auto <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>5924.75</td><td>45.40</td><td>88.38</td><td>-42.98</td><td></td><td>35.25</td><td>34.30</td><td>13.78</td><td>37.93</td><td>0.00</td><td>256</td><td>78</td><td>AVERAGE</td></tr><tr><td>2</td><td>5926.50</td><td>44.45</td><td>88.20</td><td>-43.75</td><td></td><td>34.30</td><td>34.30</td><td>13.78</td><td>37.93</td><td>0.00</td><td>256</td><td>78</td><td>AVERAGE</td></tr></table>							Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5924.75	45.40	88.38	-42.98		35.25	34.30	13.78	37.93	0.00	256	78	AVERAGE	2	5926.50	44.45	88.20	-43.75		34.30	34.30	13.78	37.93	0.00	256	78	AVERAGE	Blank				
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																						
	MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																							
1	5924.75	45.40	88.38	-42.98		35.25	34.30	13.78	37.93	0.00	256	78	AVERAGE																																																						
2	5926.50	44.45	88.20	-43.75		34.30	34.30	13.78	37.93	0.00	256	78	AVERAGE																																																						

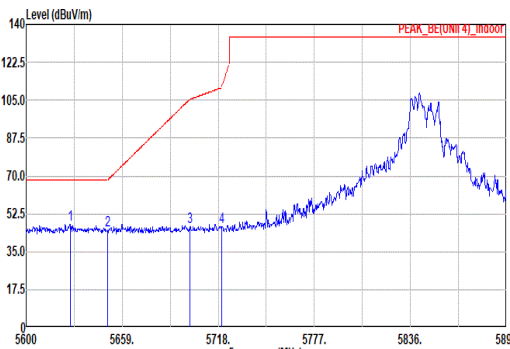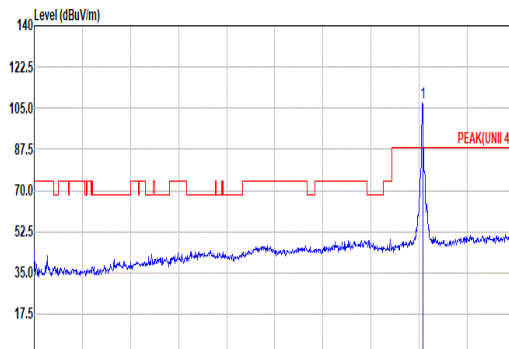
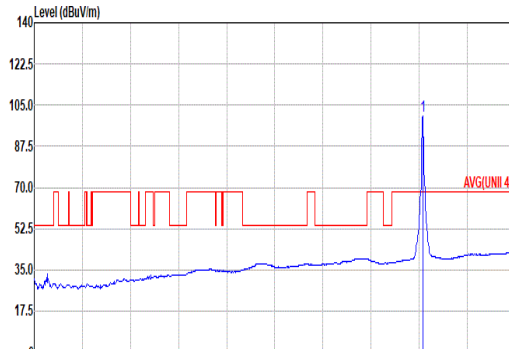


Mode	67																																																																																																																																								
	Band Edge - L																																																																																																																																								
	U-NII-4_5.85-5.895_802.11ax HE20_CH169_Partial_106/53RU_5845MHz																																																																																																																																								
ANT	4+3																																																																																																																																								
Pol.	Vertical						Fundamental																																																																																																																																		
Peak	 Site : 03CH20-HY Condition: PEAK_BE(UNII 4)_indoor 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5627.14</td><td>47.58</td><td>68.20</td><td>-20.62</td><td>39.01</td><td>33.11</td><td>13.38</td><td>37.92</td><td>0.00</td><td>397</td><td>360</td><td>PEAK</td></tr><tr><td>2</td><td>5650.15</td><td>44.93</td><td>68.31</td><td>-23.38</td><td>36.24</td><td>33.20</td><td>13.41</td><td>37.92</td><td>0.00</td><td>397</td><td>360</td><td>PEAK</td></tr><tr><td>3</td><td>5700.60</td><td>46.42</td><td>105.37</td><td>-58.95</td><td>37.26</td><td>33.60</td><td>13.48</td><td>37.92</td><td>0.00</td><td>397</td><td>360</td><td>PEAK</td></tr><tr><td>4</td><td>5720.07</td><td>46.52</td><td>110.95</td><td>-64.43</td><td>37.30</td><td>33.64</td><td>13.50</td><td>37.92</td><td>0.00</td><td>397</td><td>360</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dB	dB/m	dB	dB	cm	deg	1	5627.14	47.58	68.20	-20.62	39.01	33.11	13.38	37.92	0.00	397	360	PEAK	2	5650.15	44.93	68.31	-23.38	36.24	33.20	13.41	37.92	0.00	397	360	PEAK	3	5700.60	46.42	105.37	-58.95	37.26	33.60	13.48	37.92	0.00	397	360	PEAK	4	5720.07	46.52	110.95	-64.43	37.30	33.64	13.50	37.92	0.00	397	360	PEAK	 Site : 03CH20-HY Condition: PEAK(UNII 4) 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5845.00</td><td>107.25</td><td>-----</td><td>-----</td><td>97.27</td><td>34.24</td><td>13.66</td><td>37.92</td><td>0.00</td><td>397</td><td>360</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dB	dB/m	dB	dB	cm	deg	1	5845.00	107.25	-----	-----	97.27	34.24	13.66	37.92	0.00	397	360	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																																																																																			
MHz	dBuV/m	dBuV/m	dB	dB	dB/m	dB	dB	cm	deg																																																																																																																																
1	5627.14	47.58	68.20	-20.62	39.01	33.11	13.38	37.92	0.00	397	360	PEAK																																																																																																																													
2	5650.15	44.93	68.31	-23.38	36.24	33.20	13.41	37.92	0.00	397	360	PEAK																																																																																																																													
3	5700.60	46.42	105.37	-58.95	37.26	33.60	13.48	37.92	0.00	397	360	PEAK																																																																																																																													
4	5720.07	46.52	110.95	-64.43	37.30	33.64	13.50	37.92	0.00	397	360	PEAK																																																																																																																													
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																																																																																			
MHz	dBuV/m	dBuV/m	dB	dB	dB/m	dB	dB	cm	deg																																																																																																																																
1	5845.00	107.25	-----	-----	97.27	34.24	13.66	37.92	0.00	397	360	PEAK																																																																																																																													
Avg	Blank						 Site : 03CH20-HY Condition: AVG(UNII 4) 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:0.820kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5845.00</td><td>100.26</td><td>-----</td><td>-----</td><td>90.24</td><td>34.27</td><td>13.67</td><td>37.92</td><td>0.00</td><td>397</td><td>360</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dB	dB/m	dB	dB	cm	deg	1	5845.00	100.26	-----	-----	90.24	34.27	13.67	37.92	0.00	397	360	AVERAGE																																																																																		
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																																																																																			
MHz	dBuV/m	dBuV/m	dB	dB	dB/m	dB	dB	cm	deg																																																																																																																																
1	5845.00	100.26	-----	-----	90.24	34.27	13.67	37.92	0.00	397	360	AVERAGE																																																																																																																													

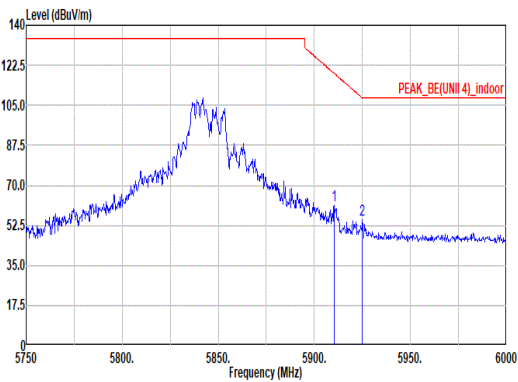
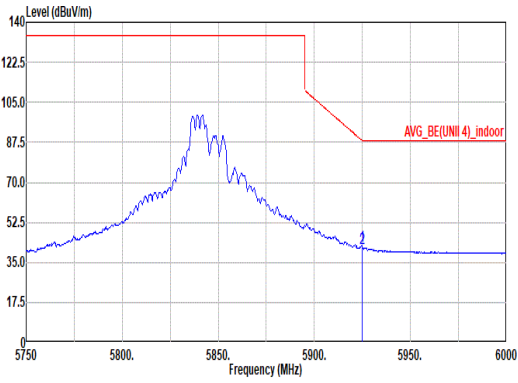


Mode	67																																																																			
	Band Edge - R																																																																			
	U-NII-4_5.85-5.895_802.11ax HE20_CH169_Partial_106/53RU_5845MHz																																																																			
ANT	4+3																																																																			
Pol.	Vertical						Fundamental																																																													
Peak	 Site : 03CH20-HY Condition: PEAK_BE(UNII 4)_indoor 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5910.25</td><td>61.35</td><td>119.00</td><td>-57.65</td><td>51.22</td><td>34.30</td><td>13.76</td><td>37.93</td><td>0.00</td><td>397</td><td>360</td><td>PEAK</td></tr><tr><td>2</td><td>5925.00</td><td>54.94</td><td>108.20</td><td>-53.26</td><td>44.79</td><td>34.30</td><td>13.78</td><td>37.93</td><td>0.00</td><td>397</td><td>360</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5910.25	61.35	119.00	-57.65	51.22	34.30	13.76	37.93	0.00	397	360	PEAK	2	5925.00	54.94	108.20	-53.26	44.79	34.30	13.78	37.93	0.00	397	360	PEAK	Blank				
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																										
1	5910.25	61.35	119.00	-57.65	51.22	34.30	13.76	37.93	0.00	397	360	PEAK																																																								
2	5925.00	54.94	108.20	-53.26	44.79	34.30	13.78	37.93	0.00	397	360	PEAK																																																								
Avg	 Site : 03CH20-HY Condition: AVG_BE(UNII 4)_indoor 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:0.020kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5924.75</td><td>42.35</td><td>88.38</td><td>-46.03</td><td>32.20</td><td>34.30</td><td>13.78</td><td>37.93</td><td>0.00</td><td>397</td><td>360</td><td>AVERAGE</td></tr><tr><td>2</td><td>5925.00</td><td>41.46</td><td>88.20</td><td>-46.74</td><td>31.31</td><td>34.30</td><td>13.78</td><td>37.93</td><td>0.00</td><td>397</td><td>360</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5924.75	42.35	88.38	-46.03	32.20	34.30	13.78	37.93	0.00	397	360	AVERAGE	2	5925.00	41.46	88.20	-46.74	31.31	34.30	13.78	37.93	0.00	397	360	AVERAGE	Blank				
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																										
1	5924.75	42.35	88.38	-46.03	32.20	34.30	13.78	37.93	0.00	397	360	AVERAGE																																																								
2	5925.00	41.46	88.20	-46.74	31.31	34.30	13.78	37.93	0.00	397	360	AVERAGE																																																								


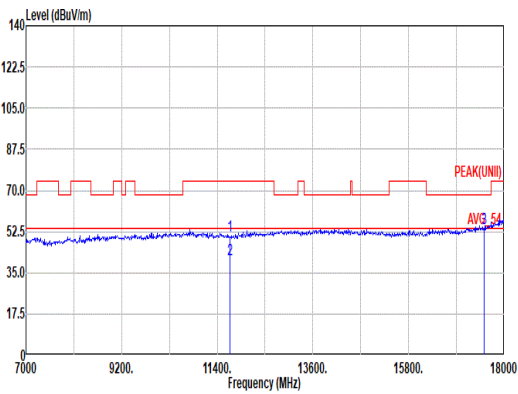
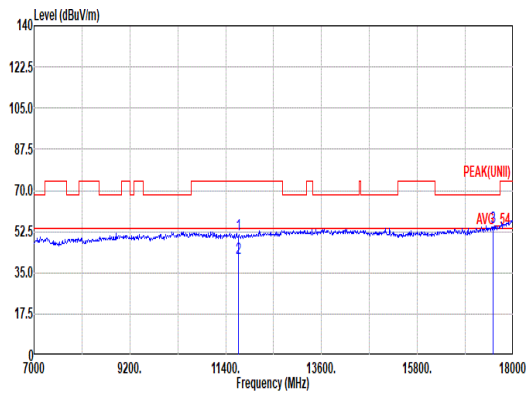


Mode	67												
	Harmonic												
	U-NII-4_5.85-5.895_802.11ax HE20_CH169_Partial_106/53RU_5845MHz												
ANT	4+3												
Pol.	Horizontal						Vertical						
Peak Avg													
	Site : 03CH20-HY Condition: PEAK(UNII) 3m HF_91280_02360_241101 HORIZONTAL						Site : 03CH20-HY Condition: PEAK(UNII) 3m HF_91280_02360_241101 VERTICAL						
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	11690.00	50.79	74.00	-23.21	34.52	38.62	19.58	42.63	0.70	298	239	PEAK	
2	11690.00	40.61	54.00	-13.39	24.34	38.62	19.58	42.63	0.70	298	239	AVERAGE	
3	17535.00	53.63	68.20	-14.57	33.24	40.41	24.20	44.87	0.65	--	--	PEAK	
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	11690.00	50.99	74.00	-23.01	34.72	38.62	19.58	42.63	0.70	399	6	PEAK	
2	11690.00	40.96	54.00	-13.04	24.69	38.62	19.58	42.63	0.70	399	6	AVERAGE	
3	17535.00	54.41	68.20	-13.79	34.02	40.41	24.20	44.87	0.65	--	--	PEAK	

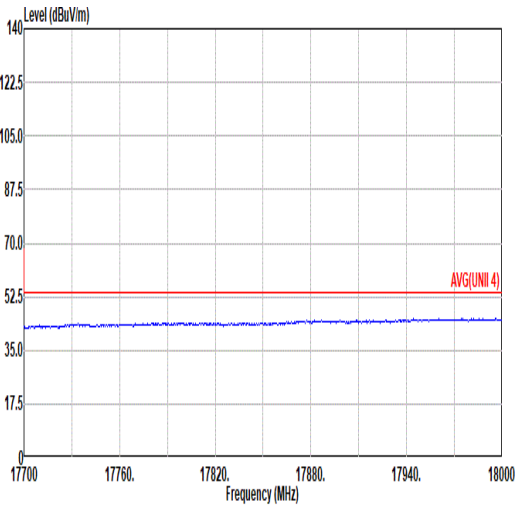
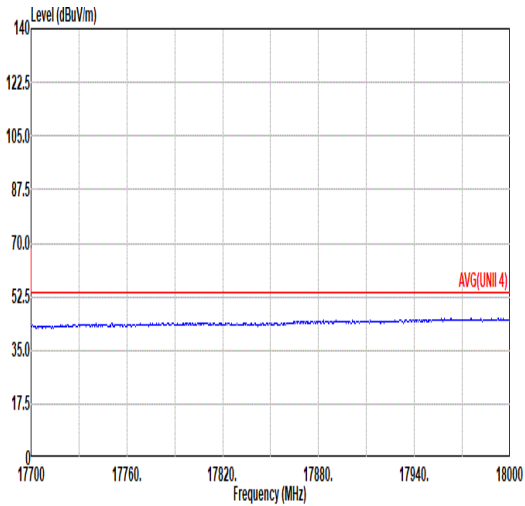


Mode	67	
	Harmonic	
	U-NII-4_5.85-5.895_802.11ax HE20_CH169_Partial_106/53RU_5845MHz	
ANT	4+3	
Pol.	Horizontal	Vertical
17.7G ~18G Avg	 Site : 03CH20-HY Condition: AVG(UNI 4) 3m HF_91200_02360_241101 HORIZONTAL	 Site : 03CH20-HY Condition: AVG(UNI 4) 3m HF_91200_02360_241101 VERTICAL

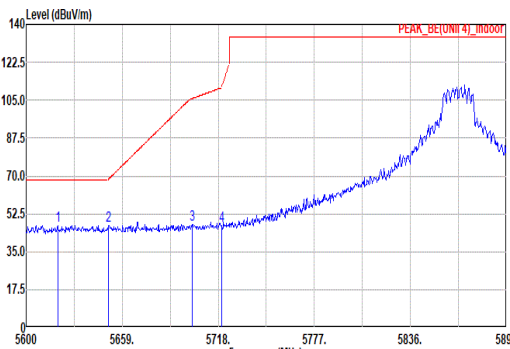
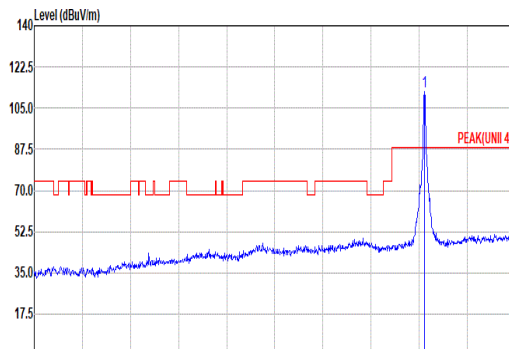
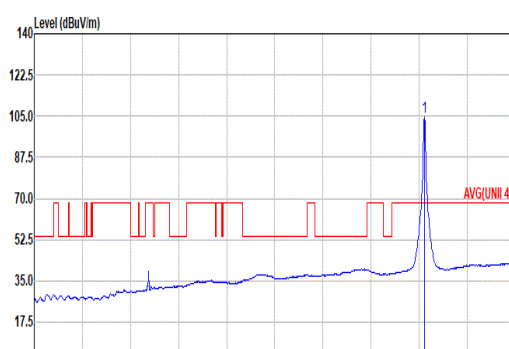


Mode	68																																																																																																																																										
	Band Edge - L																																																																																																																																										
	U-NII-4_5.85-5.895_802.11ax HE20_CH173_Full RU_5865MHz																																																																																																																																										
ANT	4+3																																																																																																																																										
Pol.	Horizontal						Fundamental																																																																																																																																				
Peak	 Site : 03CH20-HY Condition: PEAK_BE(UNII 4)_indoor 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5619.47</td><td>47.10</td><td>68.20</td><td>-21.10</td><td>38.56</td><td>33.08</td><td>13.37</td><td>37.91</td><td>0.00</td><td>200</td><td>60</td><td>PEAK</td></tr><tr><td>2</td><td>5650.74</td><td>47.21</td><td>68.75</td><td>-21.54</td><td>38.51</td><td>33.21</td><td>13.41</td><td>37.92</td><td>0.00</td><td>200</td><td>60</td><td>PEAK</td></tr><tr><td>3</td><td>5701.78</td><td>47.58</td><td>105.70</td><td>-58.12</td><td>38.42</td><td>33.60</td><td>13.48</td><td>37.92</td><td>0.00</td><td>200</td><td>60</td><td>PEAK</td></tr><tr><td>4</td><td>5720.07</td><td>47.03</td><td>110.95</td><td>-63.92</td><td>37.81</td><td>33.64</td><td>13.50</td><td>37.92</td><td>0.00</td><td>200</td><td>60</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5619.47	47.10	68.20	-21.10	38.56	33.08	13.37	37.91	0.00	200	60	PEAK	2	5650.74	47.21	68.75	-21.54	38.51	33.21	13.41	37.92	0.00	200	60	PEAK	3	5701.78	47.58	105.70	-58.12	38.42	33.60	13.48	37.92	0.00	200	60	PEAK	4	5720.07	47.03	110.95	-63.92	37.81	33.64	13.50	37.92	0.00	200	60	PEAK	 Site : 03CH20-HY Condition: PEAK(UNII 4) 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5865.00</td><td>112.19</td><td>-----</td><td>-----</td><td>102.11</td><td>34.30</td><td>13.70</td><td>37.92</td><td>0.00</td><td>200</td><td>60</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5865.00	112.19	-----	-----	102.11	34.30	13.70	37.92	0.00	200	60	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																	
1	5619.47	47.10	68.20	-21.10	38.56	33.08	13.37	37.91	0.00	200	60	PEAK																																																																																																																															
2	5650.74	47.21	68.75	-21.54	38.51	33.21	13.41	37.92	0.00	200	60	PEAK																																																																																																																															
3	5701.78	47.58	105.70	-58.12	38.42	33.60	13.48	37.92	0.00	200	60	PEAK																																																																																																																															
4	5720.07	47.03	110.95	-63.92	37.81	33.64	13.50	37.92	0.00	200	60	PEAK																																																																																																																															
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																	
1	5865.00	112.19	-----	-----	102.11	34.30	13.70	37.92	0.00	200	60	PEAK																																																																																																																															
Avg	Blank						 Site : 03CH20-HY Condition: AVG(UNII 4) 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5865.00</td><td>104.66</td><td>-----</td><td>-----</td><td>94.58</td><td>34.30</td><td>13.70</td><td>37.92</td><td>0.00</td><td>200</td><td>60</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5865.00	104.66	-----	-----	94.58	34.30	13.70	37.92	0.00	200	60	AVERAGE																																																																																			
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																	
1	5865.00	104.66	-----	-----	94.58	34.30	13.70	37.92	0.00	200	60	AVERAGE																																																																																																																															

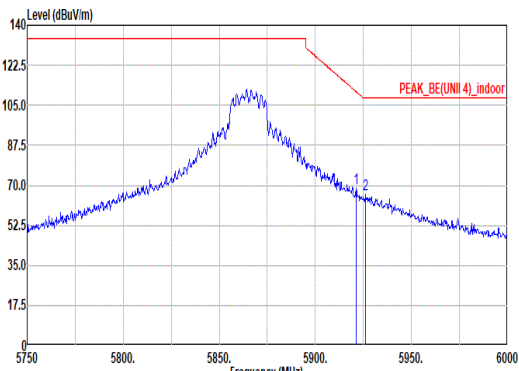
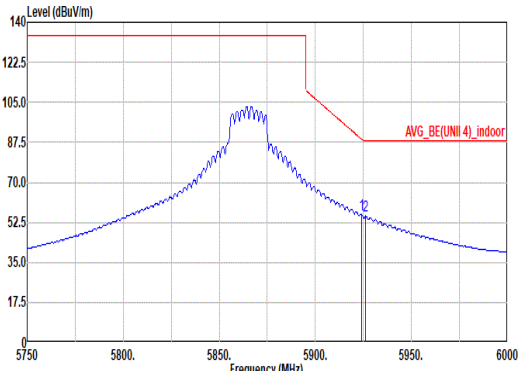


Mode	68																																																													
	Band Edge - R																																																													
	U-NII-4_5.85-5.895_802.11ax HE20_CH173_Full RU_5865MHz																																																													
ANT	4+3																																																													
Pol.	Horizontal						Fundamental																																																							
Peak							Blank																																																							
	Site : 03CH20-HY Condition: PEAK_BE(UNII 4)_indoor 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5921.25</td><td>68.70</td><td>110.94</td><td>-42.24</td><td>58.56</td><td>34.30</td><td>13.77</td><td>37.93</td><td>0.00</td><td>200</td><td>60</td><td>PEAK</td></tr><tr><td>2</td><td>5926.25</td><td>66.29</td><td>108.20</td><td>-41.91</td><td>56.14</td><td>34.30</td><td>13.78</td><td>37.93</td><td>0.00</td><td>200</td><td>60</td><td>PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5921.25	68.70	110.94	-42.24	58.56	34.30	13.77	37.93	0.00	200	60	PEAK	2	5926.25	66.29	108.20	-41.91	56.14
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																				
1	5921.25	68.70	110.94	-42.24	58.56	34.30	13.77	37.93	0.00	200	60	PEAK																																																		
2	5926.25	66.29	108.20	-41.91	56.14	34.30	13.78	37.93	0.00	200	60	PEAK																																																		
Avg							Blank																																																							
	Site : 03CH20-HY Condition: AVG_BE(UNII 4)_indoor 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5924.25</td><td>55.96</td><td>88.75</td><td>-32.79</td><td>45.81</td><td>34.30</td><td>13.78</td><td>37.93</td><td>0.00</td><td>200</td><td>60</td><td>AVERAGE</td></tr><tr><td>2</td><td>5926.25</td><td>55.24</td><td>88.20</td><td>-32.96</td><td>45.09</td><td>34.30</td><td>13.78</td><td>37.93</td><td>0.00</td><td>200</td><td>60</td><td>AVERAGE</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5924.25	55.96	88.75	-32.79	45.81	34.30	13.78	37.93	0.00	200	60	AVERAGE	2	5926.25	55.24	88.20	-32.96	45.09
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																				
1	5924.25	55.96	88.75	-32.79	45.81	34.30	13.78	37.93	0.00	200	60	AVERAGE																																																		
2	5926.25	55.24	88.20	-32.96	45.09	34.30	13.78	37.93	0.00	200	60	AVERAGE																																																		

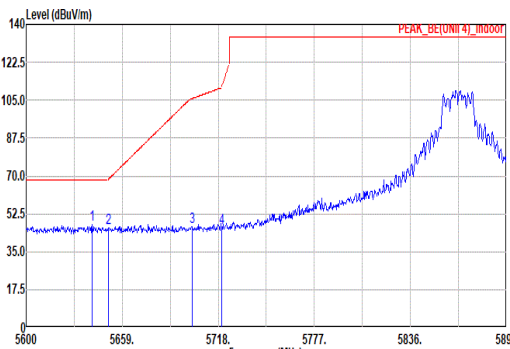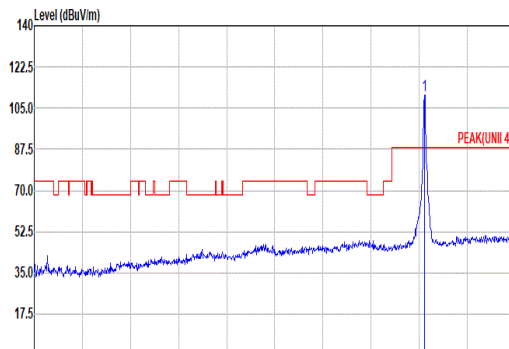
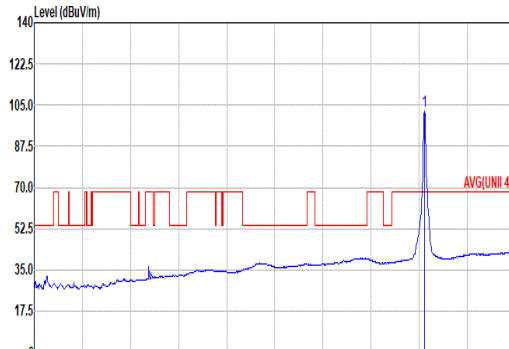


Mode	68																																																																																																																																
	Band Edge - L																																																																																																																																
	U-NII-4_5.85-5.895_802.11ax HE20_CH173_Full RU_5865MHz																																																																																																																																
ANT	4+3																																																																																																																																
Pol.	Vertical						Fundamental																																																																																																																										
Peak	 Level (dBuV/m) Frequency (MHz) PEAK_BE(UNII 4)_M0000 Site : 03CH20-HY Condition: PEAK_BE(UNII 4)_indoor 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>5648.71</td><td>47.67</td><td>68.20</td><td>-20.53</td><td>39.04</td><td>33.16</td><td>13.39</td><td>37.92</td><td>0.00</td><td>399</td><td>360</td><td>PEAK</td></tr><tr><td>2</td><td>5650.74</td><td>45.85</td><td>68.75</td><td>-22.90</td><td>37.15</td><td>33.21</td><td>13.41</td><td>37.92</td><td>0.00</td><td>399</td><td>360</td><td>PEAK</td></tr><tr><td>3</td><td>5701.78</td><td>46.66</td><td>105.70</td><td>-59.04</td><td>37.50</td><td>33.60</td><td>13.48</td><td>37.92</td><td>0.00</td><td>399</td><td>360</td><td>PEAK</td></tr><tr><td>4</td><td>5720.07</td><td>45.79</td><td>110.95</td><td>-65.16</td><td>36.57</td><td>33.64</td><td>13.50</td><td>37.92</td><td>0.00</td><td>399</td><td>360</td><td>PEAK</td></tr></tbody></table>							Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5648.71	47.67	68.20	-20.53	39.04	33.16	13.39	37.92	0.00	399	360	PEAK	2	5650.74	45.85	68.75	-22.90	37.15	33.21	13.41	37.92	0.00	399	360	PEAK	3	5701.78	46.66	105.70	-59.04	37.50	33.60	13.48	37.92	0.00	399	360	PEAK	4	5720.07	45.79	110.95	-65.16	36.57	33.64	13.50	37.92	0.00	399	360	PEAK	 Level (dBuV/m) Frequency (MHz) PEAK(UNII 4) Site : 03CH20-HY Condition: PEAK(UNII 4) 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>5865.00</td><td>110.56</td><td>-----</td><td>-----</td><td>100.48</td><td>34.30</td><td>13.70</td><td>37.92</td><td>0.00</td><td>399</td><td>360</td><td>PEAK</td></tr></tbody></table>							Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5865.00	110.56	-----	-----	100.48	34.30	13.70	37.92	0.00	399	360	PEAK
	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																						
1	5648.71	47.67	68.20	-20.53	39.04	33.16	13.39	37.92	0.00	399	360	PEAK																																																																																																																					
2	5650.74	45.85	68.75	-22.90	37.15	33.21	13.41	37.92	0.00	399	360	PEAK																																																																																																																					
3	5701.78	46.66	105.70	-59.04	37.50	33.60	13.48	37.92	0.00	399	360	PEAK																																																																																																																					
4	5720.07	45.79	110.95	-65.16	36.57	33.64	13.50	37.92	0.00	399	360	PEAK																																																																																																																					
	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																						
1	5865.00	110.56	-----	-----	100.48	34.30	13.70	37.92	0.00	399	360	PEAK																																																																																																																					
Avg	Blank						 Level (dBuV/m) Frequency (MHz) AVG(UNII 4) Site : 03CH20-HY Condition: AVG(UNII 4) 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>5865.00</td><td>102.74</td><td>-----</td><td>-----</td><td>92.66</td><td>34.30</td><td>13.70</td><td>37.92</td><td>0.00</td><td>399</td><td>360</td><td>AVERAGE</td></tr></tbody></table>							Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5865.00	102.74	-----	-----	92.66	34.30	13.70	37.92	0.00	399	360	AVERAGE																																																																														
	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																						
1	5865.00	102.74	-----	-----	92.66	34.30	13.70	37.92	0.00	399	360	AVERAGE																																																																																																																					

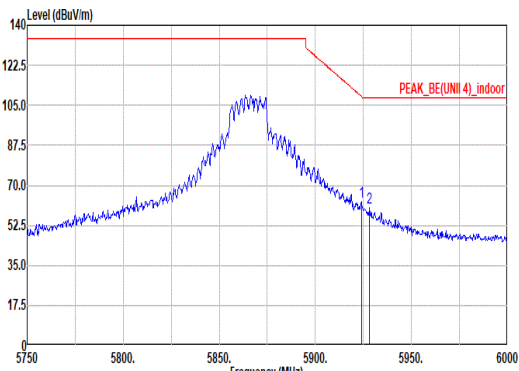
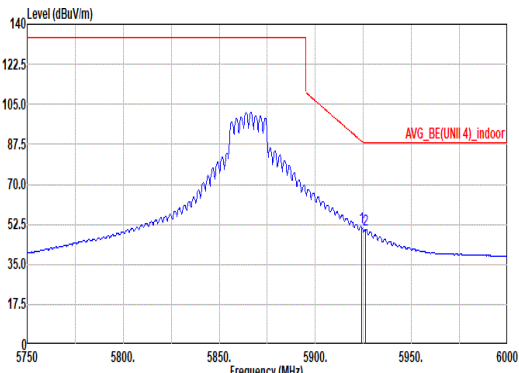


Mode	68																																																			
	Band Edge - R																																																			
	U-NII-4_5.85-5.895_802.11ax HE20_CH173_Full RU_5865MHz																																																			
ANT	4+3																																																			
Pol.	Vertical	Fundamental																																																		
Peak	 Site : 03CH20-HY Condition: PEAK_BE(UNII 4)_indoor 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 5924.00</td><td>62.68</td><td>108.93</td><td>-46.25</td><td>52.53</td><td>34.30</td><td>13.78</td><td>37.93</td><td>0.00</td><td>399 360 PEAK</td></tr><tr><td>2 5928.25</td><td>60.06</td><td>108.20</td><td>-48.14</td><td>49.91</td><td>34.30</td><td>13.78</td><td>37.93</td><td>0.00</td><td>399 360 PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5924.00	62.68	108.93	-46.25	52.53	34.30	13.78	37.93	0.00	399 360 PEAK	2 5928.25	60.06	108.20	-48.14	49.91	34.30	13.78	37.93	0.00	399 360 PEAK	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																											
1 5924.00	62.68	108.93	-46.25	52.53	34.30	13.78	37.93	0.00	399 360 PEAK																																											
2 5928.25	60.06	108.20	-48.14	49.91	34.30	13.78	37.93	0.00	399 360 PEAK																																											
Avg	 Site : 03CH20-HY Condition: AVG_BE(UNII 4)_indoor 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 5924.00</td><td>51.38</td><td>88.93</td><td>-37.55</td><td>41.23</td><td>34.30</td><td>13.78</td><td>37.93</td><td>0.00</td><td>399 360 AVERAGE</td></tr><tr><td>2 5926.25</td><td>50.32</td><td>88.20</td><td>-37.88</td><td>40.17</td><td>34.30</td><td>13.78</td><td>37.93</td><td>0.00</td><td>399 360 AVERAGE</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5924.00	51.38	88.93	-37.55	41.23	34.30	13.78	37.93	0.00	399 360 AVERAGE	2 5926.25	50.32	88.20	-37.88	40.17	34.30	13.78	37.93	0.00	399 360 AVERAGE	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																											
1 5924.00	51.38	88.93	-37.55	41.23	34.30	13.78	37.93	0.00	399 360 AVERAGE																																											
2 5926.25	50.32	88.20	-37.88	40.17	34.30	13.78	37.93	0.00	399 360 AVERAGE																																											


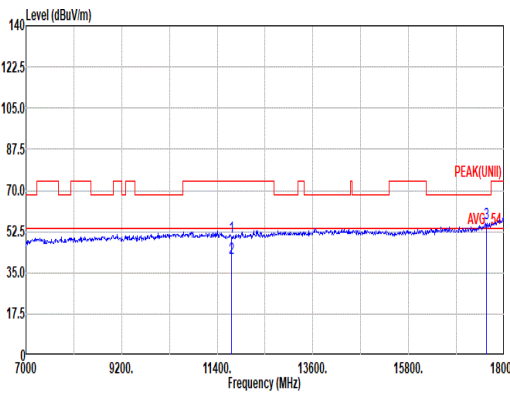
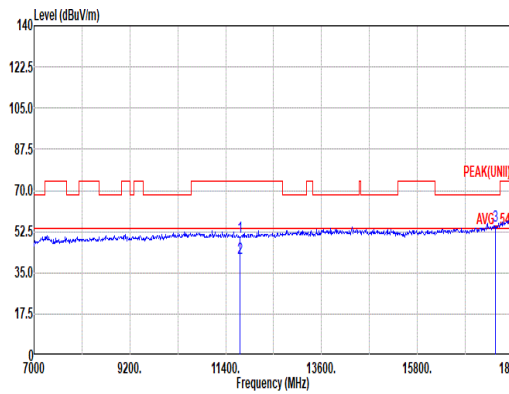


Mode	68																																																																														
	Harmonic																																																																														
	U-NII-4_5.85-5.895_802.11ax HE20_CH173_Full RU_5865MHz																																																																														
ANT	4+3																																																																														
Pol.	Horizontal						Vertical																																																																								
Peak Avg																																																																															
	Site : 03CH20-HY Condition: PEAK(UNII) 3m HF_91280_02360_241101 HORIZONTAL						Site : 03CH20-HY Condition: PEAK(UNII) 3m HF_91280_02360_241101 VERTICAL																																																																								
<table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>11730.00</td><td>50.25</td><td>74.00</td><td>-23.75</td><td>34.05</td><td>38.54</td><td>19.62</td><td>42.66</td><td>0.70</td><td>200</td><td>160</td><td>PEAK</td></tr><tr><td>2</td><td>11730.00</td><td>41.25</td><td>54.00</td><td>-12.75</td><td>25.05</td><td>38.54</td><td>19.62</td><td>42.66</td><td>0.70</td><td>200</td><td>160</td><td>Average</td></tr><tr><td>3</td><td>17595.00</td><td>56.19</td><td>68.20</td><td>-12.01</td><td>35.65</td><td>40.59</td><td>24.24</td><td>44.95</td><td>0.66</td><td>--</td><td>--</td><td>PEAK</td></tr></table>														Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg	1	11730.00	50.25	74.00	-23.75	34.05	38.54	19.62	42.66	0.70	200	160	PEAK	2	11730.00	41.25	54.00	-12.75	25.05	38.54	19.62	42.66	0.70	200	160	Average	3	17595.00	56.19	68.20	-12.01	35.65	40.59	24.24	44.95	0.66	--	--	PEAK
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																		
	MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg																																																																		
1	11730.00	50.25	74.00	-23.75	34.05	38.54	19.62	42.66	0.70	200	160	PEAK																																																																			
2	11730.00	41.25	54.00	-12.75	25.05	38.54	19.62	42.66	0.70	200	160	Average																																																																			
3	17595.00	56.19	68.20	-12.01	35.65	40.59	24.24	44.95	0.66	--	--	PEAK																																																																			

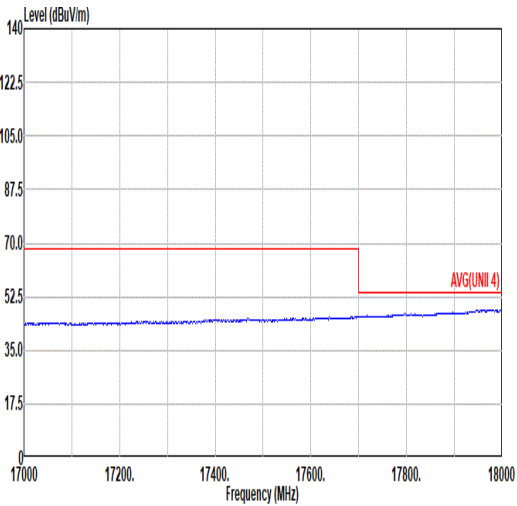
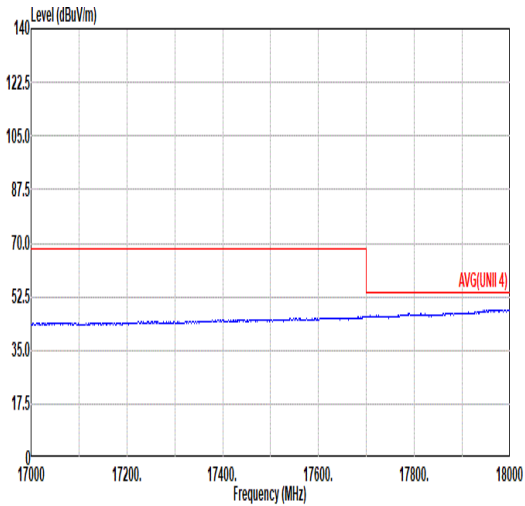


Mode	68	
	Harmonic	
	U-NII-4_5.85-5.895_802.11ax HE20_CH173_Full RU_5865MHz	
ANT	4+3	
Pol.	Horizontal	Vertical
17G ~18G Avg	 Site : 03CH20-HY Condition: AVG(UNII 4) 3m HF_91200_02360_241101 HORIZONTAL	 Site : 03CH20-HY Condition: AVG(UNII 4) 3m HF_91200_02360_241101 VERTICAL

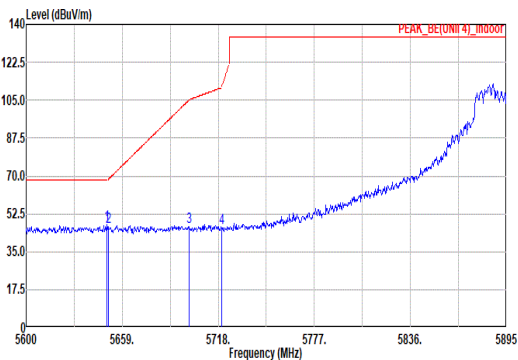
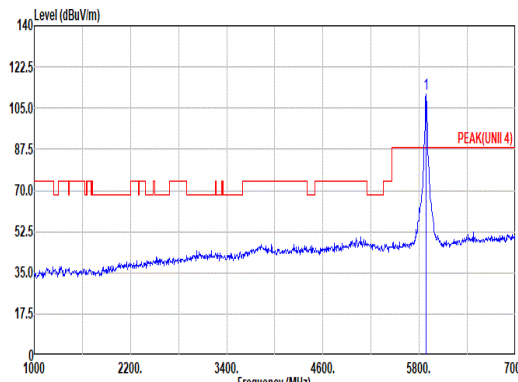
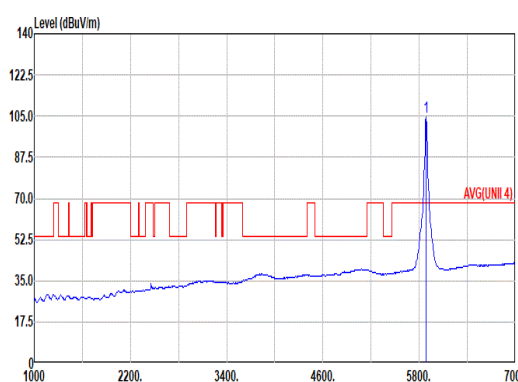


Mode	69																																																																																																																																										
	Band Edge - L																																																																																																																																										
	U-NII-4_5.85-5.895_802.11ax HE20_CH177_Full RU_5885MHz																																																																																																																																										
ANT	4+3																																																																																																																																										
Pol.	Horizontal						Fundamental																																																																																																																																				
Peak	 Site : 03CH20-HY Condition: PEAK_BE(UNII 4)_indoor 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5649.56</td><td>47.59</td><td>68.20</td><td>-20.61</td><td>38.90</td><td>33.20</td><td>13.41</td><td>37.92</td><td>0.00</td><td>200</td><td>60</td><td>PEAK</td></tr><tr><td>2</td><td>5650.74</td><td>46.71</td><td>68.75</td><td>-22.04</td><td>38.01</td><td>33.21</td><td>13.41</td><td>37.92</td><td>0.00</td><td>200</td><td>60</td><td>PEAK</td></tr><tr><td>3</td><td>5700.01</td><td>46.35</td><td>105.20</td><td>-58.85</td><td>37.19</td><td>33.60</td><td>13.48</td><td>37.92</td><td>0.00</td><td>200</td><td>60</td><td>PEAK</td></tr><tr><td>4</td><td>5720.07</td><td>46.02</td><td>110.95</td><td>-64.93</td><td>36.00</td><td>33.64</td><td>13.50</td><td>37.92</td><td>0.00</td><td>200</td><td>60</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5649.56	47.59	68.20	-20.61	38.90	33.20	13.41	37.92	0.00	200	60	PEAK	2	5650.74	46.71	68.75	-22.04	38.01	33.21	13.41	37.92	0.00	200	60	PEAK	3	5700.01	46.35	105.20	-58.85	37.19	33.60	13.48	37.92	0.00	200	60	PEAK	4	5720.07	46.02	110.95	-64.93	36.00	33.64	13.50	37.92	0.00	200	60	PEAK	 Site : 03CH20-HY Condition: PEAK(UNII 4) 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5885.00</td><td>111.16</td><td>-----</td><td>-----</td><td>101.06</td><td>34.30</td><td>13.73</td><td>37.93</td><td>0.00</td><td>200</td><td>60</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5885.00	111.16	-----	-----	101.06	34.30	13.73	37.93	0.00	200	60	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																	
1	5649.56	47.59	68.20	-20.61	38.90	33.20	13.41	37.92	0.00	200	60	PEAK																																																																																																																															
2	5650.74	46.71	68.75	-22.04	38.01	33.21	13.41	37.92	0.00	200	60	PEAK																																																																																																																															
3	5700.01	46.35	105.20	-58.85	37.19	33.60	13.48	37.92	0.00	200	60	PEAK																																																																																																																															
4	5720.07	46.02	110.95	-64.93	36.00	33.64	13.50	37.92	0.00	200	60	PEAK																																																																																																																															
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																	
1	5885.00	111.16	-----	-----	101.06	34.30	13.73	37.93	0.00	200	60	PEAK																																																																																																																															
Avg	Blank						 Site : 03CH20-HY Condition: AVG(UNII 4) 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5885.00</td><td>104.64</td><td>-----</td><td>-----</td><td>94.55</td><td>34.30</td><td>13.72</td><td>37.93</td><td>0.00</td><td>200</td><td>60</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5885.00	104.64	-----	-----	94.55	34.30	13.72	37.93	0.00	200	60	AVERAGE																																																																																			
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																	
1	5885.00	104.64	-----	-----	94.55	34.30	13.72	37.93	0.00	200	60	AVERAGE																																																																																																																															

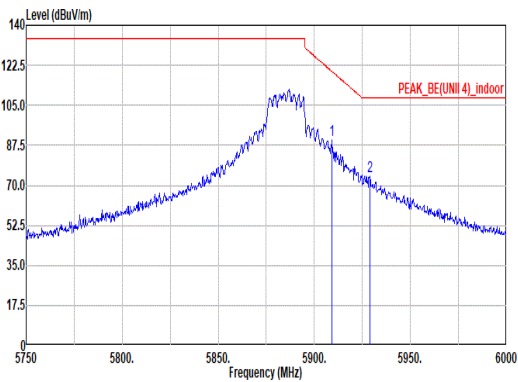
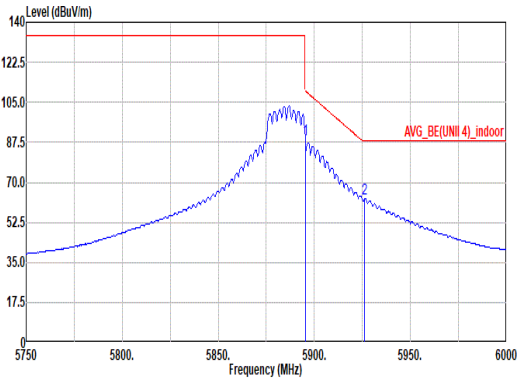


Mode	69																																																																			
	Band Edge - R																																																																			
	U-NII-4_5.85-5.895_802.11ax HE20_CH177_Full RU_5885MHz																																																																			
ANT	4+3																																																																			
Pol.	Horizontal						Fundamental																																																													
Peak	 Site : 03CH20-HY Condition: PEAK_BE(UNI 4)_indoor 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5909.25</td><td>89.86</td><td>119.74</td><td>-29.88</td><td>79.73</td><td>34.30</td><td>13.76</td><td>37.93</td><td>0.00</td><td>200</td><td>60</td><td>PEAK</td></tr><tr><td>2</td><td>5929.00</td><td>74.17</td><td>108.20</td><td>-34.03</td><td>64.02</td><td>34.30</td><td>13.78</td><td>37.93</td><td>0.00</td><td>200</td><td>60</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm	deg	1	5909.25	89.86	119.74	-29.88	79.73	34.30	13.76	37.93	0.00	200	60	PEAK	2	5929.00	74.17	108.20	-34.03	64.02	34.30	13.78	37.93	0.00	200	60	PEAK	Blank				
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																												
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm	deg																																																										
1	5909.25	89.86	119.74	-29.88	79.73	34.30	13.76	37.93	0.00	200	60	PEAK																																																								
2	5929.00	74.17	108.20	-34.03	64.02	34.30	13.78	37.93	0.00	200	60	PEAK																																																								
Avg	 Site : 03CH20-HY Condition: AVG_BE(UNI 4)_indoor 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5895.25</td><td>89.01</td><td>110.02</td><td>-21.01</td><td>78.90</td><td>34.30</td><td>13.74</td><td>37.93</td><td>0.00</td><td>200</td><td>60</td><td>AVERAGE</td></tr><tr><td>2</td><td>5926.25</td><td>62.00</td><td>88.20</td><td>-25.40</td><td>52.65</td><td>34.30</td><td>13.78</td><td>37.93</td><td>0.00</td><td>200</td><td>60</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm	deg	1	5895.25	89.01	110.02	-21.01	78.90	34.30	13.74	37.93	0.00	200	60	AVERAGE	2	5926.25	62.00	88.20	-25.40	52.65	34.30	13.78	37.93	0.00	200	60	AVERAGE	Blank				
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																												
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm	deg																																																										
1	5895.25	89.01	110.02	-21.01	78.90	34.30	13.74	37.93	0.00	200	60	AVERAGE																																																								
2	5926.25	62.00	88.20	-25.40	52.65	34.30	13.78	37.93	0.00	200	60	AVERAGE																																																								

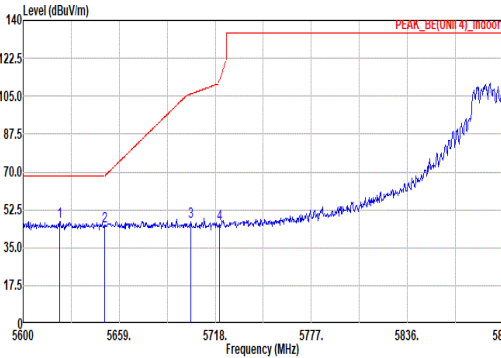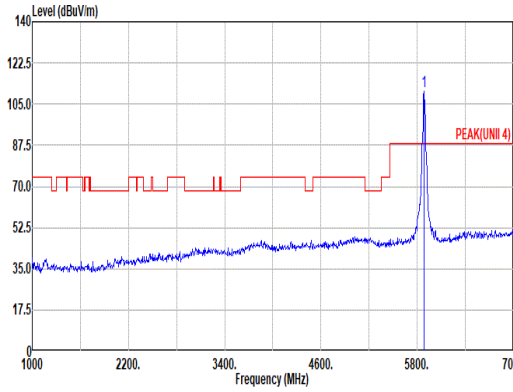
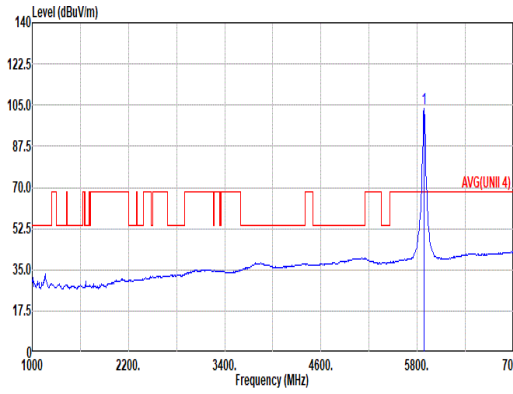


Mode	69																																																																																																																							
	Band Edge - L																																																																																																																							
	U-NII-4_5.85-5.895_802.11ax HE20_CH177_Full RU_5885MHz																																																																																																																							
ANT	4+3																																																																																																																							
Pol.	Vertical					Fundamental																																																																																																																		
Peak	 Level (dBuV/m) Frequency (MHz) PEAK_BE(UNII 4)_indoor Site : 03CH20-HY Condition: PEAK_BE(UNII 4)_indoor 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr></thead><tbody><tr><td>1</td><td>5622.42</td><td>46.81</td><td>68.20</td><td>-21.39</td><td>38.26</td><td>33.09</td><td>13.37</td><td>37.91</td><td>0.00 400 1 PEAK</td></tr><tr><td>2</td><td>5658.15</td><td>45.15</td><td>68.31</td><td>-23.16</td><td>36.46</td><td>33.20</td><td>13.41</td><td>37.92</td><td>0.00 400 1 PEAK</td></tr><tr><td>3</td><td>5702.96</td><td>47.13</td><td>106.03</td><td>-58.90</td><td>37.96</td><td>33.61</td><td>13.48</td><td>37.92</td><td>0.00 400 1 PEAK</td></tr><tr><td>4</td><td>5728.36</td><td>45.82</td><td>111.62</td><td>-65.80</td><td>36.60</td><td>33.64</td><td>13.50</td><td>37.92</td><td>0.00 400 1 PEAK</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1	5622.42	46.81	68.20	-21.39	38.26	33.09	13.37	37.91	0.00 400 1 PEAK	2	5658.15	45.15	68.31	-23.16	36.46	33.20	13.41	37.92	0.00 400 1 PEAK	3	5702.96	47.13	106.03	-58.90	37.96	33.61	13.48	37.92	0.00 400 1 PEAK	4	5728.36	45.82	111.62	-65.80	36.60	33.64	13.50	37.92	0.00 400 1 PEAK	 Level (dBuV/m) Frequency (MHz) PEAK(UNII 4) Site : 03CH20-HY Condition: PEAK(UNII 4) 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr></thead><tbody><tr><td>1</td><td>5885.00</td><td>110.61</td><td>-----</td><td>-----</td><td>100.52</td><td>34.30</td><td>13.72</td><td>37.93</td><td>0.00 400 1 PEAK</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1	5885.00	110.61	-----	-----	100.52	34.30	13.72	37.93	0.00 400 1 PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																																																															
1	5622.42	46.81	68.20	-21.39	38.26	33.09	13.37	37.91	0.00 400 1 PEAK																																																																																																															
2	5658.15	45.15	68.31	-23.16	36.46	33.20	13.41	37.92	0.00 400 1 PEAK																																																																																																															
3	5702.96	47.13	106.03	-58.90	37.96	33.61	13.48	37.92	0.00 400 1 PEAK																																																																																																															
4	5728.36	45.82	111.62	-65.80	36.60	33.64	13.50	37.92	0.00 400 1 PEAK																																																																																																															
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																																																															
1	5885.00	110.61	-----	-----	100.52	34.30	13.72	37.93	0.00 400 1 PEAK																																																																																																															
Avg	Blank					 Level (dBuV/m) Frequency (MHz) AVG(UNII 4) Site : 03CH20-HY Condition: AVG(UNII 4) 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr></thead><tbody><tr><td>1</td><td>5885.00</td><td>103.72</td><td>-----</td><td>-----</td><td>93.63</td><td>34.30</td><td>13.72</td><td>37.93</td><td>0.00 400 1 AVERAGE</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1	5885.00	103.72	-----	-----	93.63	34.30	13.72	37.93	0.00 400 1 AVERAGE																																																																						
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																																																															
1	5885.00	103.72	-----	-----	93.63	34.30	13.72	37.93	0.00 400 1 AVERAGE																																																																																																															

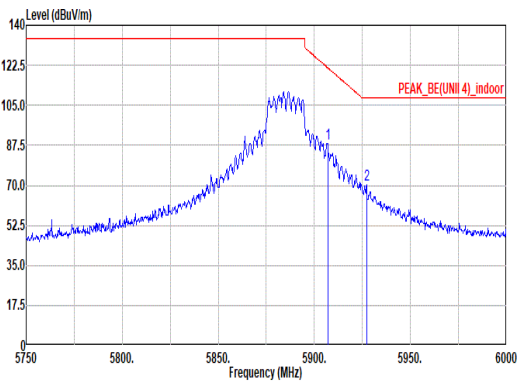
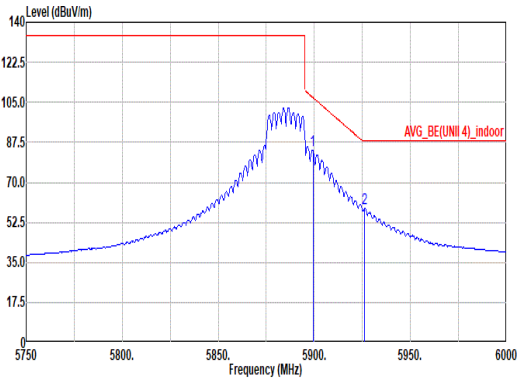


Mode	69																																																																			
	Band Edge - R																																																																			
	U-NII-4_5.85-5.895_802.11ax HE20_CH177_Full RU_5885MHz																																																																			
ANT	4+3																																																																			
Pol.	Vertical						Fundamental																																																													
Peak	 Site : 03CH20-HY Condition: PEAK_BE(UNII 4)_indoor 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>5907.00</td><td>88.28</td><td>121.39</td><td>-33.11</td><td>78.16</td><td>34.30</td><td>13.75</td><td>37.93</td><td>0.00</td><td>400</td><td></td><td></td><td>1 PEAK</td></tr><tr><td>2</td><td>5927.25</td><td>70.40</td><td>108.20</td><td>-37.80</td><td>60.25</td><td>34.30</td><td>13.78</td><td>37.93</td><td>0.00</td><td>400</td><td></td><td></td><td>1 PEAK</td></tr></table>							Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5907.00	88.28	121.39	-33.11	78.16	34.30	13.75	37.93	0.00	400			1 PEAK	2	5927.25	70.40	108.20	-37.80	60.25	34.30	13.78	37.93	0.00	400			1 PEAK	Blank					
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																							
	MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																								
1	5907.00	88.28	121.39	-33.11	78.16	34.30	13.75	37.93	0.00	400			1 PEAK																																																							
2	5927.25	70.40	108.20	-37.80	60.25	34.30	13.78	37.93	0.00	400			1 PEAK																																																							
Avg	 Site : 03CH20-HY Condition: AVG_BE(UNII 4)_indoor 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>5899.25</td><td>83.90</td><td>107.08</td><td>-23.18</td><td>73.79</td><td>34.30</td><td>13.74</td><td>37.93</td><td>0.00</td><td>400</td><td></td><td></td><td>1 AVERAGE</td></tr><tr><td>2</td><td>5926.25</td><td>58.48</td><td>88.20</td><td>-29.72</td><td>48.33</td><td>34.30</td><td>13.78</td><td>37.93</td><td>0.00</td><td>400</td><td></td><td></td><td>1 AVERAGE</td></tr></table>							Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5899.25	83.90	107.08	-23.18	73.79	34.30	13.74	37.93	0.00	400			1 AVERAGE	2	5926.25	58.48	88.20	-29.72	48.33	34.30	13.78	37.93	0.00	400			1 AVERAGE	Blank					
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																							
	MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																								
1	5899.25	83.90	107.08	-23.18	73.79	34.30	13.74	37.93	0.00	400			1 AVERAGE																																																							
2	5926.25	58.48	88.20	-29.72	48.33	34.30	13.78	37.93	0.00	400			1 AVERAGE																																																							


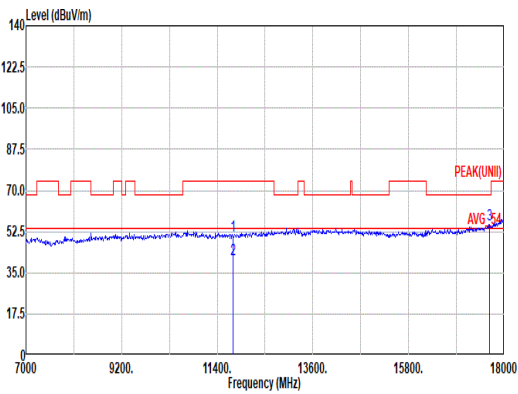
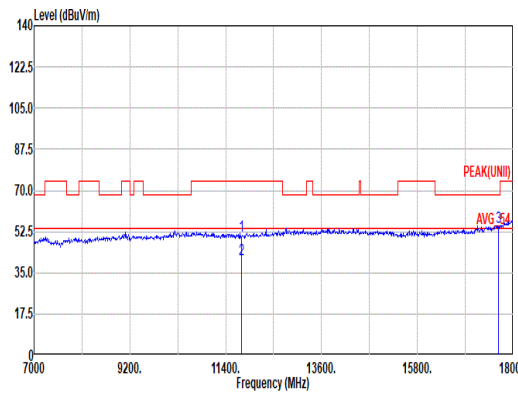


Mode	69												
	Harmonic												
	U-NII-4_5.85-5.895_802.11ax HE20_CH177_Full RU_5885MHz												
ANT	4+3												
Pol.	Horizontal						Vertical						
Peak Avg													
	Site : 03CH20-HY Condition: PEAK(UNII) 3m HF_91280_02360_241101 HORIZONTAL						Site : 03CH20-HY Condition: PEAK(UNII) 3m HF_91280_02360_241101 VERTICAL						
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	11770.00	50.94	74.00	-23.06	34.71	38.58	19.65	42.69	0.69	302	68	PEAK	
2	11770.00	40.72	54.00	-13.28	24.49	38.58	19.65	42.69	0.69	302	68	AVERAGE	
3	17655.00	55.25	68.20	-12.95	34.49	40.83	24.29	45.03	0.67	--	--	PEAK	
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	11770.00	50.88	74.00	-23.12	34.65	38.58	19.65	42.69	0.69	400	128	PEAK	
2	11770.00	40.56	54.00	-13.44	24.33	38.58	19.65	42.69	0.69	400	128	AVERAGE	
3	17655.00	54.44	68.20	-13.76	33.68	40.83	24.29	45.03	0.67	--	--	PEAK	

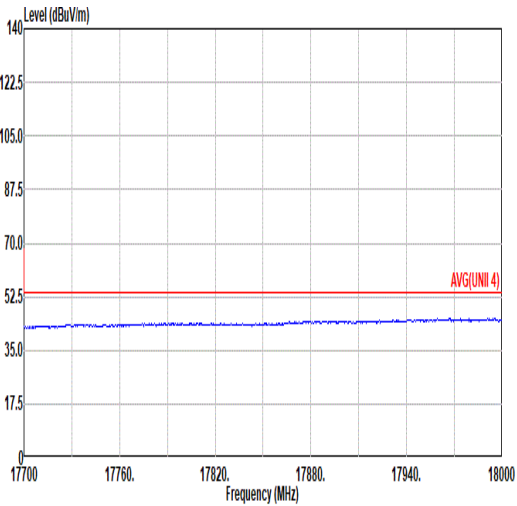
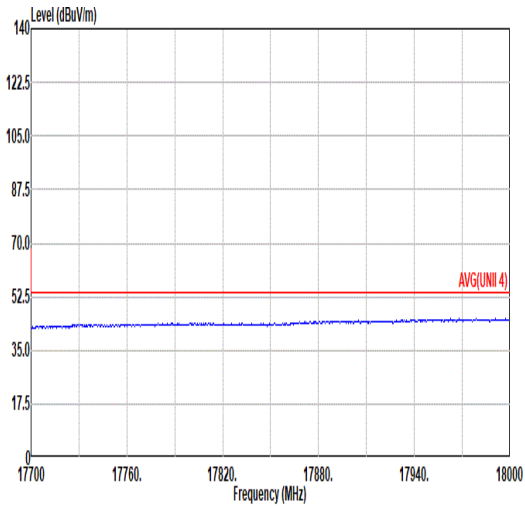


Mode	69	
	Harmonic	
	U-NII-4_5.85-5.895_802.11ax HE20_CH177_Full RU_5885MHz	
ANT	4+3	
Pol.	Horizontal	Vertical
17.7G ~18G Avg	 Site : 03CH20-HY Condition: AVG(UNII 4) 3m HF_91200_02360_241101 HORIZONTAL	 Site : 03CH20-HY Condition: AVG(UNII 4) 3m HF_91200_02360_241101 VERTICAL

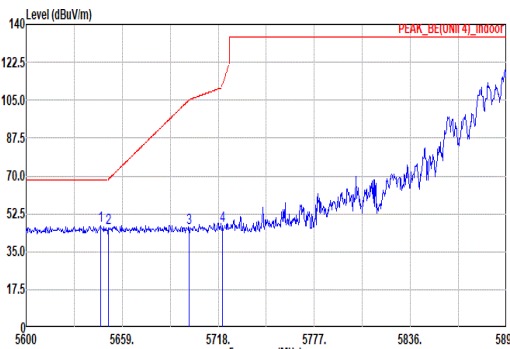
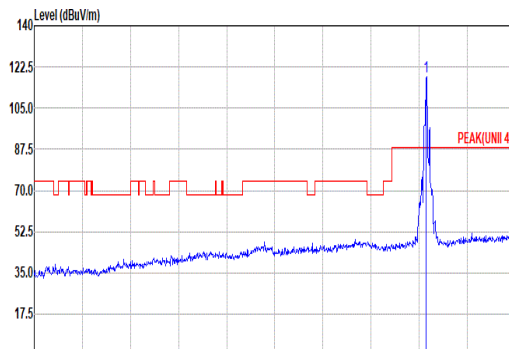
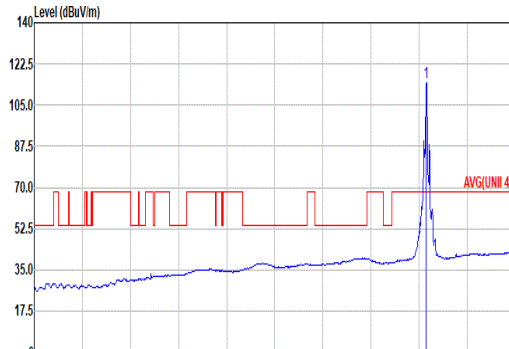


	70																																																																																																																																								
Mode	Band Edge - L																																																																																																																																								
	U-NII-4_5.85-5.895_802.11ax HE20_CH177_Partial_26/8RU_5885MHz																																																																																																																																								
ANT	4+3																																																																																																																																								
Pol.	Horizontal						Fundamental																																																																																																																																		
Peak	 Site : 03CH20-HY Condition: PEAK_BE(UNII 4)_indoor 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5645.73</td><td>47.10</td><td>68.20</td><td>-21.10</td><td>38.44</td><td>33.18</td><td>13.40</td><td>37.92</td><td>0.00</td><td>239</td><td>60</td><td>PEAK</td></tr><tr><td>2</td><td>5650.45</td><td>45.78</td><td>68.53</td><td>-22.75</td><td>37.09</td><td>33.20</td><td>13.41</td><td>37.92</td><td>0.00</td><td>239</td><td>60</td><td>PEAK</td></tr><tr><td>3</td><td>5700.01</td><td>46.18</td><td>105.20</td><td>-59.02</td><td>37.02</td><td>33.60</td><td>13.48</td><td>37.92</td><td>0.00</td><td>239</td><td>60</td><td>PEAK</td></tr><tr><td>4</td><td>5720.36</td><td>46.79</td><td>111.62</td><td>-64.83</td><td>37.57</td><td>33.64</td><td>13.50</td><td>37.92</td><td>0.00</td><td>239</td><td>60</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5645.73	47.10	68.20	-21.10	38.44	33.18	13.40	37.92	0.00	239	60	PEAK	2	5650.45	45.78	68.53	-22.75	37.09	33.20	13.41	37.92	0.00	239	60	PEAK	3	5700.01	46.18	105.20	-59.02	37.02	33.60	13.48	37.92	0.00	239	60	PEAK	4	5720.36	46.79	111.62	-64.83	37.57	33.64	13.50	37.92	0.00	239	60	PEAK	 Site : 03CH20-HY Condition: PEAK(UNII 4) 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5885.00</td><td>118.55</td><td>-----</td><td>-----</td><td>100.44</td><td>34.30</td><td>13.74</td><td>37.93</td><td>0.00</td><td>239</td><td>60</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5885.00	118.55	-----	-----	100.44	34.30	13.74	37.93	0.00	239	60	PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																															
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																
1	5645.73	47.10	68.20	-21.10	38.44	33.18	13.40	37.92	0.00	239	60	PEAK																																																																																																																													
2	5650.45	45.78	68.53	-22.75	37.09	33.20	13.41	37.92	0.00	239	60	PEAK																																																																																																																													
3	5700.01	46.18	105.20	-59.02	37.02	33.60	13.48	37.92	0.00	239	60	PEAK																																																																																																																													
4	5720.36	46.79	111.62	-64.83	37.57	33.64	13.50	37.92	0.00	239	60	PEAK																																																																																																																													
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																
1	5885.00	118.55	-----	-----	100.44	34.30	13.74	37.93	0.00	239	60	PEAK																																																																																																																													
Avg	Blank						 Site : 03CH20-HY Condition: AVG(UNII 4) 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5885.00</td><td>114.44</td><td>-----</td><td>-----</td><td>104.33</td><td>34.30</td><td>13.74</td><td>37.93</td><td>0.00</td><td>239</td><td>60</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5885.00	114.44	-----	-----	104.33	34.30	13.74	37.93	0.00	239	60	AVERAGE																																																																																		
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																															
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																
1	5885.00	114.44	-----	-----	104.33	34.30	13.74	37.93	0.00	239	60	AVERAGE																																																																																																																													

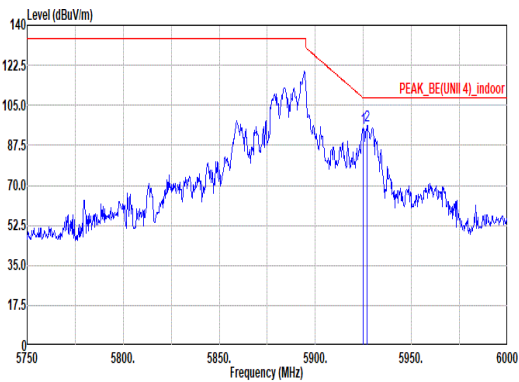
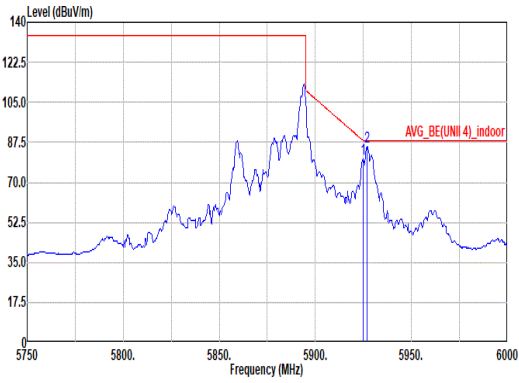


Mode	70																																																																			
	Band Edge - R																																																																			
	U-NII-4_5.85-5.895_802.11ax HE20_CH177_Partial_26/8RU_5885MHz																																																																			
ANT	4+3																																																																			
Pol.	Horizontal						Fundamental																																																													
Peak	 Site : 03CH20-HY Condition: PEAK_BE(UNII 4)_indoor 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5925.00</td><td>95.18</td><td>108.20</td><td>-13.02</td><td>85.03</td><td>34.30</td><td>13.78</td><td>37.93</td><td>0.00</td><td>239</td><td>60</td><td>PEAK</td></tr><tr><td>2</td><td>5927.00</td><td>96.41</td><td>108.20</td><td>-11.79</td><td>86.26</td><td>34.30</td><td>13.78</td><td>37.93</td><td>0.00</td><td>239</td><td>60</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm	deg	1	5925.00	95.18	108.20	-13.02	85.03	34.30	13.78	37.93	0.00	239	60	PEAK	2	5927.00	96.41	108.20	-11.79	86.26	34.30	13.78	37.93	0.00	239	60	PEAK	Blank					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																											
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																														
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm	deg																																																											
1	5925.00	95.18	108.20	-13.02	85.03	34.30	13.78	37.93	0.00	239	60	PEAK																																																								
2	5927.00	96.41	108.20	-11.79	86.26	34.30	13.78	37.93	0.00	239	60	PEAK																																																								
Avg	 Site : 03CH20-HY Condition: AVG_BE(UNII 4)_indoor 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5924.75</td><td>80.13</td><td>88.38</td><td>-0.25</td><td>69.98</td><td>34.30</td><td>13.78</td><td>37.93</td><td>0.00</td><td>239</td><td>60</td><td>AVERAGE</td></tr><tr><td>2</td><td>5927.00</td><td>85.79</td><td>88.20</td><td>-2.41</td><td>75.64</td><td>34.30</td><td>13.78</td><td>37.93</td><td>0.00</td><td>239</td><td>60</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm	deg	1	5924.75	80.13	88.38	-0.25	69.98	34.30	13.78	37.93	0.00	239	60	AVERAGE	2	5927.00	85.79	88.20	-2.41	75.64	34.30	13.78	37.93	0.00	239	60	AVERAGE	Blank					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																											
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																														
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm	deg																																																											
1	5924.75	80.13	88.38	-0.25	69.98	34.30	13.78	37.93	0.00	239	60	AVERAGE																																																								
2	5927.00	85.79	88.20	-2.41	75.64	34.30	13.78	37.93	0.00	239	60	AVERAGE																																																								

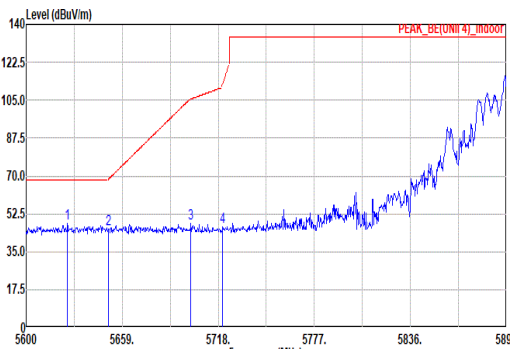
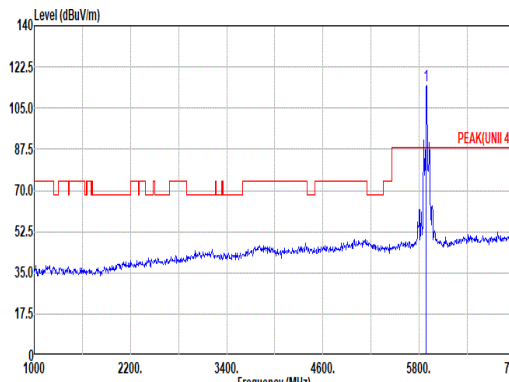
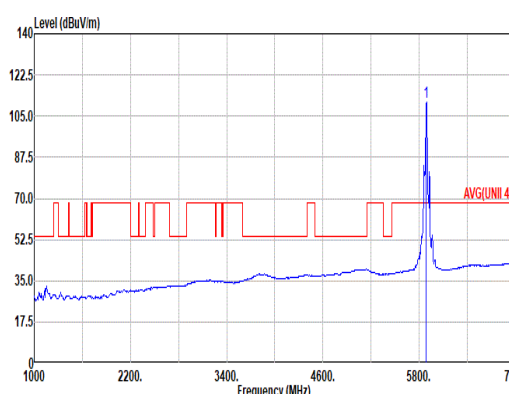


	70																																																																																																																																
Mode	Band Edge - L																																																																																																																																
	U-NII-4_5.85-5.895_802.11ax HE20_CH177_Partial_26/8RU_5885MHz																																																																																																																																
ANT	4+3																																																																																																																																
Pol.	Vertical						Fundamental																																																																																																																										
Peak	 Level (dBuV/m) Frequency (MHz) PEAK_BE(UNII 4)_IND007 Site : 03CH20-HY Condition: PEAK_BE(UNII 4)_indoor 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th></th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5625.37</td><td>48.05</td><td>68.20</td><td>-20.15</td><td>39.50</td><td>33.10</td><td>13.37</td><td>37.92</td><td>0.00</td><td>398</td><td>360</td><td>PEAK</td></tr><tr><td>2</td><td>5650.74</td><td>45.67</td><td>68.75</td><td>-23.08</td><td>36.97</td><td>33.21</td><td>13.41</td><td>37.92</td><td>0.00</td><td>398</td><td>360</td><td>PEAK</td></tr><tr><td>3</td><td>5701.19</td><td>47.93</td><td>105.53</td><td>-57.60</td><td>38.77</td><td>33.60</td><td>13.48</td><td>37.92</td><td>0.00</td><td>398</td><td>360</td><td>PEAK</td></tr><tr><td>4</td><td>5720.66</td><td>46.39</td><td>112.29</td><td>-65.90</td><td>37.17</td><td>33.64</td><td>13.50</td><td>37.92</td><td>0.00</td><td>398</td><td>360</td><td>PEAK</td></tr></tbody></table>							Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB		cm	deg	1	5625.37	48.05	68.20	-20.15	39.50	33.10	13.37	37.92	0.00	398	360	PEAK	2	5650.74	45.67	68.75	-23.08	36.97	33.21	13.41	37.92	0.00	398	360	PEAK	3	5701.19	47.93	105.53	-57.60	38.77	33.60	13.48	37.92	0.00	398	360	PEAK	4	5720.66	46.39	112.29	-65.90	37.17	33.64	13.50	37.92	0.00	398	360	PEAK	 Level (dBuV/m) Frequency (MHz) PEAK(UNII 4) Site : 03CH20-HY Condition: PEAK(UNII 4) 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th></th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5885.00</td><td>114.60</td><td>-----</td><td>-----</td><td>104.49</td><td>34.30</td><td>13.74</td><td>37.93</td><td>0.00</td><td>398</td><td>360</td><td>PEAK</td></tr></tbody></table>							Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB		cm	deg	1	5885.00	114.60	-----	-----	104.49	34.30	13.74	37.93	0.00	398	360	PEAK
		Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB		cm	deg																																																																																																																					
1	5625.37	48.05	68.20	-20.15	39.50	33.10	13.37	37.92	0.00	398	360	PEAK																																																																																																																					
2	5650.74	45.67	68.75	-23.08	36.97	33.21	13.41	37.92	0.00	398	360	PEAK																																																																																																																					
3	5701.19	47.93	105.53	-57.60	38.77	33.60	13.48	37.92	0.00	398	360	PEAK																																																																																																																					
4	5720.66	46.39	112.29	-65.90	37.17	33.64	13.50	37.92	0.00	398	360	PEAK																																																																																																																					
	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB		cm	deg																																																																																																																					
1	5885.00	114.60	-----	-----	104.49	34.30	13.74	37.93	0.00	398	360	PEAK																																																																																																																					
Avg	Blank						 Level (dBuV/m) Frequency (MHz) AVG(UNII 4) Site : 03CH20-HY Condition: AVG(UNII 4) 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th></th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5885.00</td><td>111.06</td><td>-----</td><td>-----</td><td>100.95</td><td>34.30</td><td>13.74</td><td>37.93</td><td>0.00</td><td>398</td><td>360</td><td>AVERAGE</td></tr></tbody></table>							Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB		cm	deg	1	5885.00	111.06	-----	-----	100.95	34.30	13.74	37.93	0.00	398	360	AVERAGE																																																																														
		Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB		cm	deg																																																																																																																					
1	5885.00	111.06	-----	-----	100.95	34.30	13.74	37.93	0.00	398	360	AVERAGE																																																																																																																					

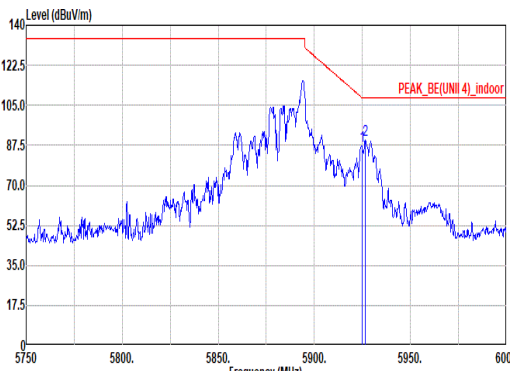
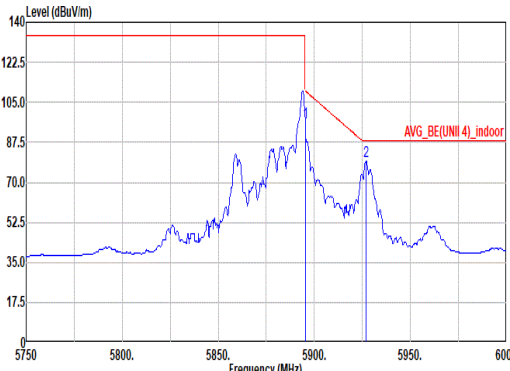


Mode	70																																																															
	Band Edge - R																																																															
	U-NII-4_5.85-5.895_802.11ax HE20_CH177_Partial_26/8RU_5885MHz																																																															
ANT	4+3																																																															
Pol.	Vertical						Fundamental																																																									
Peak	 Site : 03CH20-HY Condition: PEAK_BE(UNII 4)_indoor 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>5924.75</td><td>87.31</td><td>108.38</td><td>-21.07</td><td>77.16</td><td>34.30</td><td>13.78</td><td>37.93</td><td>0.00</td><td>398</td><td>360</td><td>PEAK</td></tr><tr><td>2</td><td>5926.58</td><td>89.74</td><td>108.20</td><td>-18.46</td><td>79.59</td><td>34.30</td><td>13.78</td><td>37.93</td><td>0.00</td><td>398</td><td>360</td><td>PEAK</td></tr></table>							Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5924.75	87.31	108.38	-21.07	77.16	34.30	13.78	37.93	0.00	398	360	PEAK	2	5926.58	89.74	108.20	-18.46	79.59	34.30	13.78	37.93	0.00	398	360	PEAK	Blank					
	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																					
1	5924.75	87.31	108.38	-21.07	77.16	34.30	13.78	37.93	0.00	398	360	PEAK																																																				
2	5926.58	89.74	108.20	-18.46	79.59	34.30	13.78	37.93	0.00	398	360	PEAK																																																				
Avg	 Site : 03CH20-HY Condition: AVG_BE(UNII 4)_indoor 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>5895.25</td><td>95.94</td><td>110.02</td><td>-14.08</td><td>85.83</td><td>34.30</td><td>13.74</td><td>37.93</td><td>0.00</td><td>398</td><td>360</td><td>AVERAGE</td></tr><tr><td>2</td><td>5927.00</td><td>79.35</td><td>88.20</td><td>-8.85</td><td>69.20</td><td>34.30</td><td>13.78</td><td>37.93</td><td>0.00</td><td>398</td><td>360</td><td>AVERAGE</td></tr></table>							Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5895.25	95.94	110.02	-14.08	85.83	34.30	13.74	37.93	0.00	398	360	AVERAGE	2	5927.00	79.35	88.20	-8.85	69.20	34.30	13.78	37.93	0.00	398	360	AVERAGE	Blank					
	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																					
1	5895.25	95.94	110.02	-14.08	85.83	34.30	13.74	37.93	0.00	398	360	AVERAGE																																																				
2	5927.00	79.35	88.20	-8.85	69.20	34.30	13.78	37.93	0.00	398	360	AVERAGE																																																				

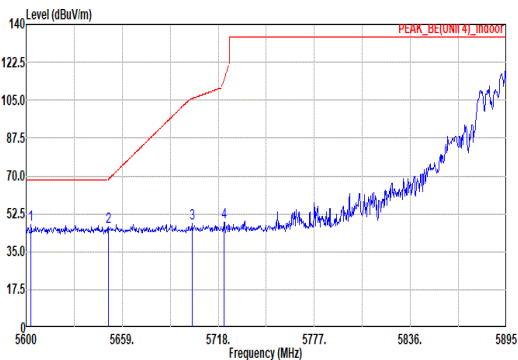
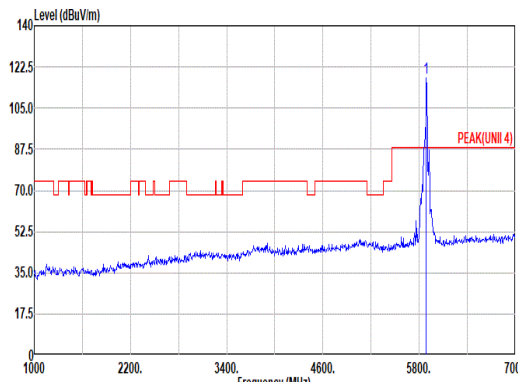
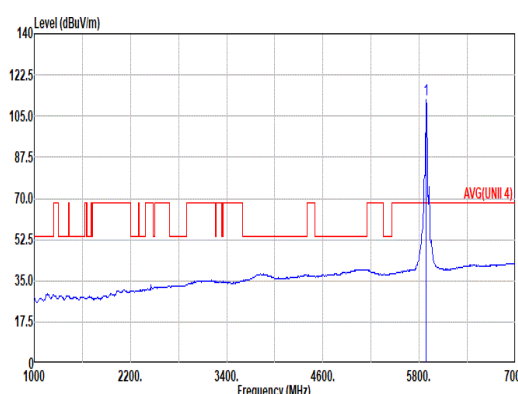


	71																																																																																																																																			
Mode	Band Edge - L																																																																																																																																			
	U-NII-4_5.85-5.895_802.11ax HE20_CH177_Partial_52/40RU_5885MHz																																																																																																																																			
ANT	4+3																																																																																																																																			
Pol.	Horizontal						Fundamental																																																																																																																													
Peak	 Level (dBuV/m) Frequency (MHz) PEAK_BE(UNII 4)_indoor Site : 03CH20-HY Condition: PEAK_BE(UNII 4)_indoor 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5602.95</td><td>47.42</td><td>68.20</td><td>-20.78</td><td>38.98</td><td>33.01</td><td>13.34</td><td>37.91</td><td>0.00</td><td>242 59 PEAK</td></tr><tr><td>2</td><td>5650.45</td><td>46.23</td><td>68.53</td><td>-22.30</td><td>37.54</td><td>33.20</td><td>13.41</td><td>37.92</td><td>0.00</td><td>242 59 PEAK</td></tr><tr><td>3</td><td>5701.78</td><td>48.01</td><td>105.70</td><td>-57.69</td><td>38.85</td><td>33.60</td><td>13.48</td><td>37.92</td><td>0.00</td><td>242 59 PEAK</td></tr><tr><td>4</td><td>5721.54</td><td>48.79</td><td>114.31</td><td>-65.52</td><td>39.57</td><td>33.64</td><td>13.50</td><td>37.92</td><td>0.00</td><td>242 59 PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5602.95	47.42	68.20	-20.78	38.98	33.01	13.34	37.91	0.00	242 59 PEAK	2	5650.45	46.23	68.53	-22.30	37.54	33.20	13.41	37.92	0.00	242 59 PEAK	3	5701.78	48.01	105.70	-57.69	38.85	33.60	13.48	37.92	0.00	242 59 PEAK	4	5721.54	48.79	114.31	-65.52	39.57	33.64	13.50	37.92	0.00	242 59 PEAK	 Level (dBuV/m) Frequency (MHz) PEAK(UNII 4) Site : 03CH20-HY Condition: PEAK(UNII 4) 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5885.00</td><td>117.69</td><td>-----</td><td>-----</td><td>107.59</td><td>34.30</td><td>13.73</td><td>37.93</td><td>0.00</td><td>242 59 PEAK</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5885.00	117.69	-----	-----	107.59	34.30	13.73	37.93	0.00	242 59 PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																										
1	5602.95	47.42	68.20	-20.78	38.98	33.01	13.34	37.91	0.00	242 59 PEAK																																																																																																																										
2	5650.45	46.23	68.53	-22.30	37.54	33.20	13.41	37.92	0.00	242 59 PEAK																																																																																																																										
3	5701.78	48.01	105.70	-57.69	38.85	33.60	13.48	37.92	0.00	242 59 PEAK																																																																																																																										
4	5721.54	48.79	114.31	-65.52	39.57	33.64	13.50	37.92	0.00	242 59 PEAK																																																																																																																										
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																										
1	5885.00	117.69	-----	-----	107.59	34.30	13.73	37.93	0.00	242 59 PEAK																																																																																																																										
Avg	Blank						 Level (dBuV/m) Frequency (MHz) AVG(UNII 4) Site : 03CH20-HY Condition: AVG(UNII 4) 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBW:0.750kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5885.00</td><td>111.82</td><td>-----</td><td>-----</td><td>101.72</td><td>34.30</td><td>13.73</td><td>37.93</td><td>0.00</td><td>242 59 AVERAGE</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5885.00	111.82	-----	-----	101.72	34.30	13.73	37.93	0.00	242 59 AVERAGE																																																																													
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																										
1	5885.00	111.82	-----	-----	101.72	34.30	13.73	37.93	0.00	242 59 AVERAGE																																																																																																																										

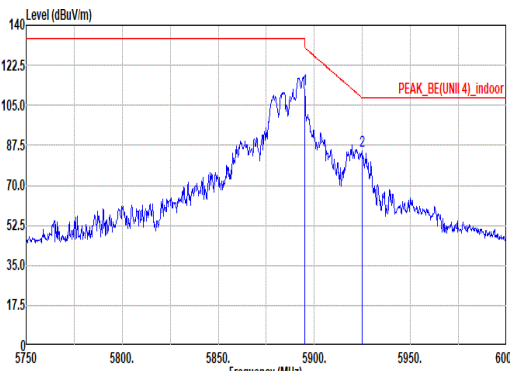
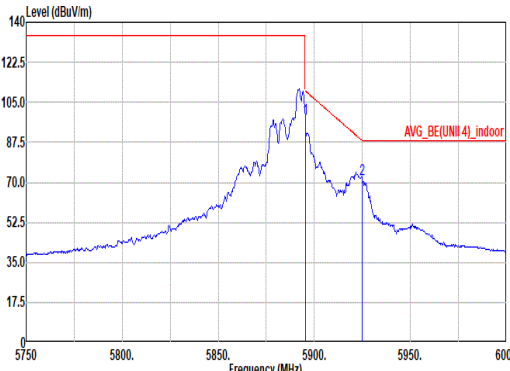


Mode	71																																																																	
	Band Edge - R																																																																	
	U-NII-4_5.85-5.895_802.11ax HE20_CH177_Partial_52/40RU_5885MHz																																																																	
ANT	4+3																																																																	
Pol.	Horizontal						Fundamental																																																											
Peak	 Site : 03CH20-HY Condition: PEAK_BE(UNII 4)_indoor 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5895.00</td><td>112.23</td><td>130.20</td><td>-17.97</td><td>102.12</td><td>34.30</td><td>13.74</td><td>37.93</td><td>0.00</td><td>242</td><td>59 PEAK</td></tr><tr><td>2</td><td>5925.00</td><td>65.06</td><td>108.20</td><td>-23.14</td><td>74.91</td><td>34.30</td><td>13.78</td><td>37.93</td><td>0.00</td><td>242</td><td>59 PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5895.00	112.23	130.20	-17.97	102.12	34.30	13.74	37.93	0.00	242	59 PEAK	2	5925.00	65.06	108.20	-23.14	74.91	34.30	13.78	37.93	0.00	242	59 PEAK	Blank				
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																								
1	5895.00	112.23	130.20	-17.97	102.12	34.30	13.74	37.93	0.00	242	59 PEAK																																																							
2	5925.00	65.06	108.20	-23.14	74.91	34.30	13.78	37.93	0.00	242	59 PEAK																																																							
Avg	 Site : 03CH20-HY Condition: AVG_BE(UNII 4)_indoor 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBW:0.750kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5895.25</td><td>97.79</td><td>110.02</td><td>-12.23</td><td>87.68</td><td>34.30</td><td>13.74</td><td>37.93</td><td>0.00</td><td>242</td><td>59 AVERAGE</td></tr><tr><td>2</td><td>5925.00</td><td>71.17</td><td>88.20</td><td>-17.03</td><td>61.02</td><td>34.30</td><td>13.78</td><td>37.93</td><td>0.00</td><td>242</td><td>59 AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5895.25	97.79	110.02	-12.23	87.68	34.30	13.74	37.93	0.00	242	59 AVERAGE	2	5925.00	71.17	88.20	-17.03	61.02	34.30	13.78	37.93	0.00	242	59 AVERAGE	Blank				
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																								
1	5895.25	97.79	110.02	-12.23	87.68	34.30	13.74	37.93	0.00	242	59 AVERAGE																																																							
2	5925.00	71.17	88.20	-17.03	61.02	34.30	13.78	37.93	0.00	242	59 AVERAGE																																																							

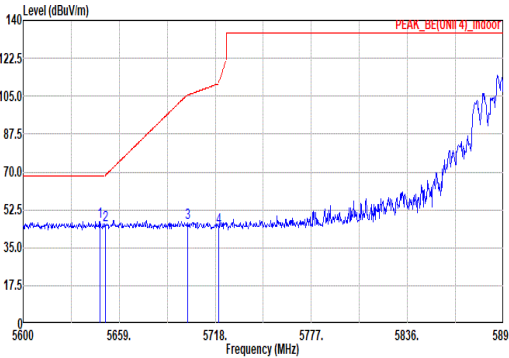
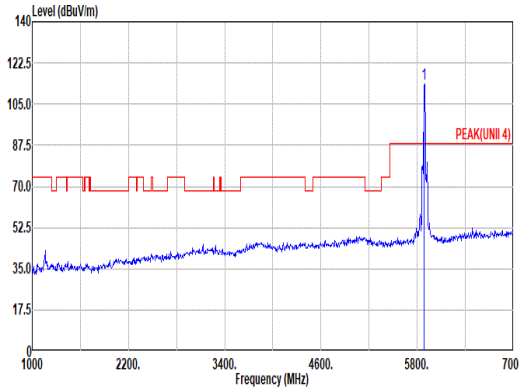
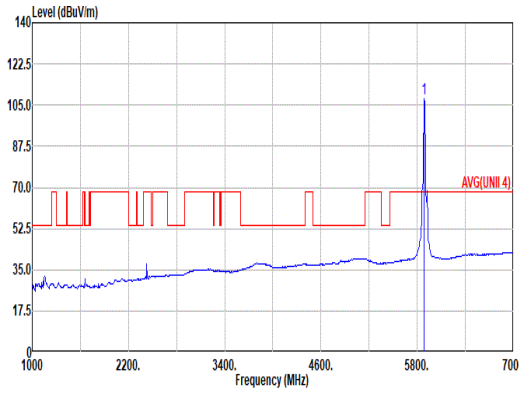


		71																																																																																																																																						
Mode	Band Edge - L																																																																																																																																							
	U-NII-4_5.85-5.895_802.11ax HE20_CH177_Partial_52/40RU_5885MHz																																																																																																																																							
ANT	4+3																																																																																																																																							
Pol.	Vertical						Fundamental																																																																																																																																	
Peak	 Level (dBuV/m) Frequency (MHz) PEAK_BE(UNII 4)_indoor Site : 03CH20-HY Condition: PEAK_BE(UNII 4)_indoor 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5647.20</td><td>47.16</td><td>68.20</td><td>-21.04</td><td>38.49</td><td>33.19</td><td>13.40</td><td>37.92</td><td>0.00</td><td>395</td><td>360</td><td>PEAK</td></tr><tr><td>2</td><td>5650.45</td><td>45.30</td><td>68.53</td><td>-23.23</td><td>36.61</td><td>33.20</td><td>13.41</td><td>37.92</td><td>0.00</td><td>395</td><td>360</td><td>PEAK</td></tr><tr><td>3</td><td>5700.89</td><td>46.48</td><td>105.45</td><td>-58.97</td><td>37.32</td><td>33.60</td><td>13.48</td><td>37.92</td><td>0.00</td><td>395</td><td>360</td><td>PEAK</td></tr><tr><td>4</td><td>5720.07</td><td>44.30</td><td>110.95</td><td>-66.65</td><td>35.08</td><td>33.64</td><td>13.50</td><td>37.92</td><td>0.00</td><td>395</td><td>360</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5647.20	47.16	68.20	-21.04	38.49	33.19	13.40	37.92	0.00	395	360	PEAK	2	5650.45	45.30	68.53	-23.23	36.61	33.20	13.41	37.92	0.00	395	360	PEAK	3	5700.89	46.48	105.45	-58.97	37.32	33.60	13.48	37.92	0.00	395	360	PEAK	4	5720.07	44.30	110.95	-66.65	35.08	33.64	13.50	37.92	0.00	395	360	PEAK	 Level (dBuV/m) Frequency (MHz) PEAK(UNII 4) Site : 03CH20-HY Condition: PEAK(UNII 4) 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5885.00</td><td>113.78</td><td>-----</td><td>-----</td><td>103.67</td><td>34.30</td><td>13.74</td><td>37.93</td><td>0.00</td><td>395</td><td>360</td><td>PEAK</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5885.00	113.78	-----	-----	103.67	34.30	13.74	37.93	0.00	395	360	PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																														
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																															
1	5647.20	47.16	68.20	-21.04	38.49	33.19	13.40	37.92	0.00	395	360	PEAK																																																																																																																												
2	5650.45	45.30	68.53	-23.23	36.61	33.20	13.41	37.92	0.00	395	360	PEAK																																																																																																																												
3	5700.89	46.48	105.45	-58.97	37.32	33.60	13.48	37.92	0.00	395	360	PEAK																																																																																																																												
4	5720.07	44.30	110.95	-66.65	35.08	33.64	13.50	37.92	0.00	395	360	PEAK																																																																																																																												
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																															
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																															
1	5885.00	113.78	-----	-----	103.67	34.30	13.74	37.93	0.00	395	360	PEAK																																																																																																																												
Avg	Blank						 Level (dBuV/m) Frequency (MHz) AVG(UNII 4) Site : 03CH20-HY Condition: AVG(UNII 4) 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:0.750kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5885.00</td><td>107.78</td><td>-----</td><td>-----</td><td>97.68</td><td>34.30</td><td>13.73</td><td>37.93</td><td>0.00</td><td>395</td><td>360</td><td>AVERAGE</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5885.00	107.78	-----	-----	97.68	34.30	13.73	37.93	0.00	395	360	AVERAGE																																																																																		
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																															
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																															
1	5885.00	107.78	-----	-----	97.68	34.30	13.73	37.93	0.00	395	360	AVERAGE																																																																																																																												

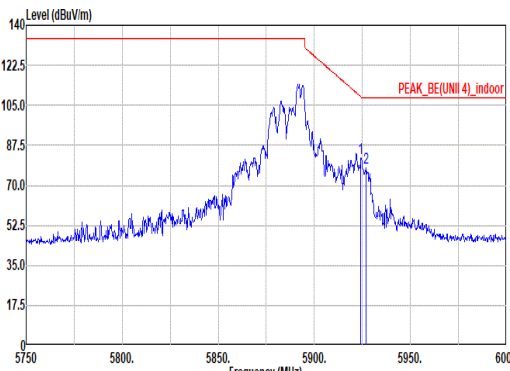
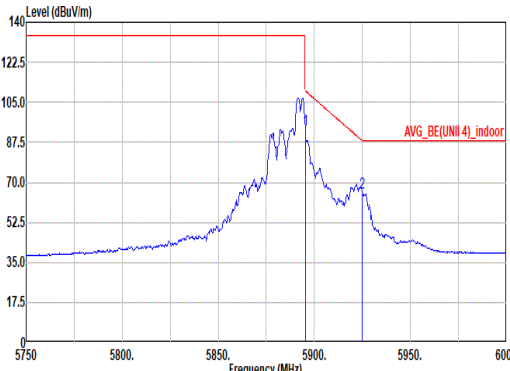


Mode	71																																																															
	Band Edge - R																																																															
	U-NII-4_5.85-5.895_802.11ax HE20_CH177_Partial_52/40RU_5885MHz																																																															
ANT	4+3																																																															
Pol.	Vertical						Fundamental																																																									
Peak	 Site : 03CH20-HY Condition: PEAK_BE(UNII 4)_indoor 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>5924.25</td><td>82.09</td><td>108.75</td><td>-26.66</td><td>71.94</td><td>34.30</td><td>13.78</td><td>37.93</td><td>0.00</td><td>395</td><td>360</td><td>PEAK</td></tr><tr><td>2</td><td>5927.00</td><td>77.88</td><td>108.20</td><td>-30.32</td><td>67.73</td><td>34.30</td><td>13.78</td><td>37.93</td><td>0.00</td><td>395</td><td>360</td><td>PEAK</td></tr></table>							Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5924.25	82.09	108.75	-26.66	71.94	34.30	13.78	37.93	0.00	395	360	PEAK	2	5927.00	77.88	108.20	-30.32	67.73	34.30	13.78	37.93	0.00	395	360	PEAK	Blank					
	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																					
1	5924.25	82.09	108.75	-26.66	71.94	34.30	13.78	37.93	0.00	395	360	PEAK																																																				
2	5927.00	77.88	108.20	-30.32	67.73	34.30	13.78	37.93	0.00	395	360	PEAK																																																				
Avg	 Site : 03CH20-HY Condition: AVG_BE(UNII 4)_indoor 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:0.750kHz SMT:Auto <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>5895.25</td><td>92.92</td><td>110.02</td><td>-17.10</td><td>82.81</td><td>34.30</td><td>13.74</td><td>37.93</td><td>0.00</td><td>395</td><td>360</td><td>AVERAGE</td></tr><tr><td>2</td><td>5925.00</td><td>65.57</td><td>88.20</td><td>-22.63</td><td>55.42</td><td>34.30</td><td>13.78</td><td>37.93</td><td>0.00</td><td>395</td><td>360</td><td>AVERAGE</td></tr></table>							Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5895.25	92.92	110.02	-17.10	82.81	34.30	13.74	37.93	0.00	395	360	AVERAGE	2	5925.00	65.57	88.20	-22.63	55.42	34.30	13.78	37.93	0.00	395	360	AVERAGE	Blank					
	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																					
1	5895.25	92.92	110.02	-17.10	82.81	34.30	13.74	37.93	0.00	395	360	AVERAGE																																																				
2	5925.00	65.57	88.20	-22.63	55.42	34.30	13.78	37.93	0.00	395	360	AVERAGE																																																				

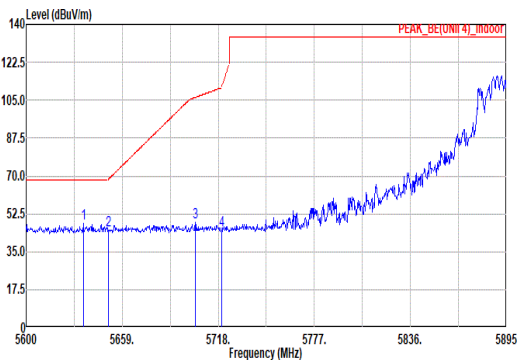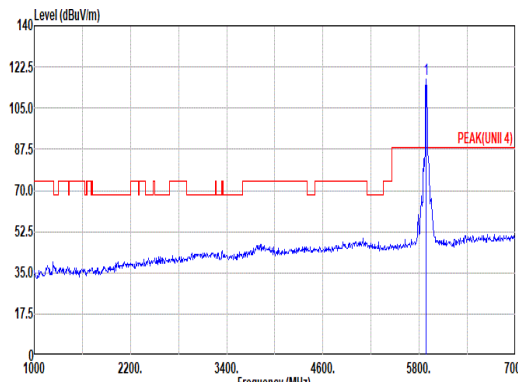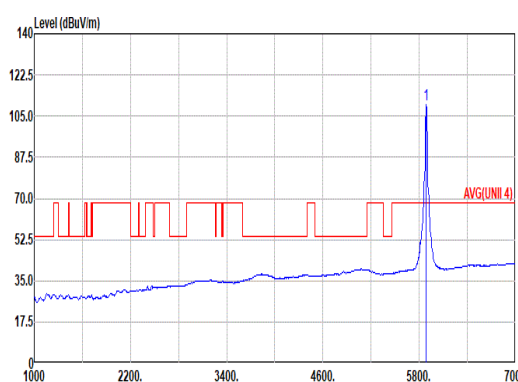

Mode	72																																																																																																																																			
	Band Edge - L																																																																																																																																			
	U-NII-4_5.85-5.895_802.11ax HE20_CH177_Partial_106/54RU_5885MHz																																																																																																																																			
ANT	4+3																																																																																																																																			
Pol.	Horizontal						Fundamental																																																																																																																													
Peak	 Site : 03CH20-HY Condition: PEAK_BE(UNII 4)_indoor 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5635.11</td><td>48.00</td><td>68.20</td><td>-20.20</td><td>39.39</td><td>33.14</td><td>13.39</td><td>37.92</td><td>0.00</td><td>242 62 PEAK</td></tr><tr><td>2</td><td>5650.74</td><td>45.00</td><td>68.75</td><td>-23.75</td><td>36.30</td><td>33.21</td><td>13.41</td><td>37.92</td><td>0.00</td><td>242 62 PEAK</td></tr><tr><td>3</td><td>5703.84</td><td>48.71</td><td>106.28</td><td>-57.57</td><td>39.54</td><td>33.61</td><td>13.48</td><td>37.92</td><td>0.00</td><td>242 62 PEAK</td></tr><tr><td>4</td><td>5720.07</td><td>45.02</td><td>110.95</td><td>-65.93</td><td>35.00</td><td>33.64</td><td>13.50</td><td>37.92</td><td>0.00</td><td>242 62 PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5635.11	48.00	68.20	-20.20	39.39	33.14	13.39	37.92	0.00	242 62 PEAK	2	5650.74	45.00	68.75	-23.75	36.30	33.21	13.41	37.92	0.00	242 62 PEAK	3	5703.84	48.71	106.28	-57.57	39.54	33.61	13.48	37.92	0.00	242 62 PEAK	4	5720.07	45.02	110.95	-65.93	35.00	33.64	13.50	37.92	0.00	242 62 PEAK	 Site : 03CH20-HY Condition: PEAK(UNII 4) 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5885.00</td><td>117.19</td><td>-----</td><td>-----</td><td>107.10</td><td>34.30</td><td>13.72</td><td>37.93</td><td>0.00</td><td>242 62 PEAK</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5885.00	117.19	-----	-----	107.10	34.30	13.72	37.93	0.00	242 62 PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																										
1	5635.11	48.00	68.20	-20.20	39.39	33.14	13.39	37.92	0.00	242 62 PEAK																																																																																																																										
2	5650.74	45.00	68.75	-23.75	36.30	33.21	13.41	37.92	0.00	242 62 PEAK																																																																																																																										
3	5703.84	48.71	106.28	-57.57	39.54	33.61	13.48	37.92	0.00	242 62 PEAK																																																																																																																										
4	5720.07	45.02	110.95	-65.93	35.00	33.64	13.50	37.92	0.00	242 62 PEAK																																																																																																																										
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																										
1	5885.00	117.19	-----	-----	107.10	34.30	13.72	37.93	0.00	242 62 PEAK																																																																																																																										
Avg	Blank						 Site : 03CH20-HY Condition: AVG(UNII 4) 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBW:0.820kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5885.00</td><td>109.76</td><td>-----</td><td>-----</td><td>99.67</td><td>34.30</td><td>13.72</td><td>37.93</td><td>0.00</td><td>242 62 AVERAGE</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5885.00	109.76	-----	-----	99.67	34.30	13.72	37.93	0.00	242 62 AVERAGE																																																																													
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																										
1	5885.00	109.76	-----	-----	99.67	34.30	13.72	37.93	0.00	242 62 AVERAGE																																																																																																																										

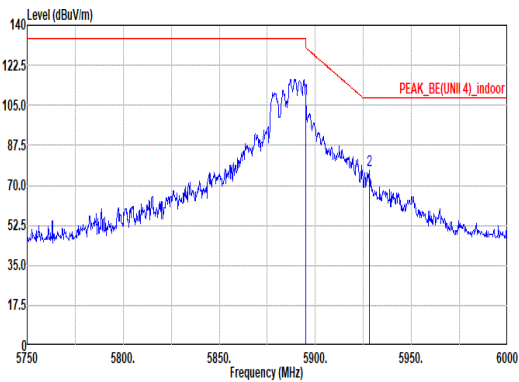
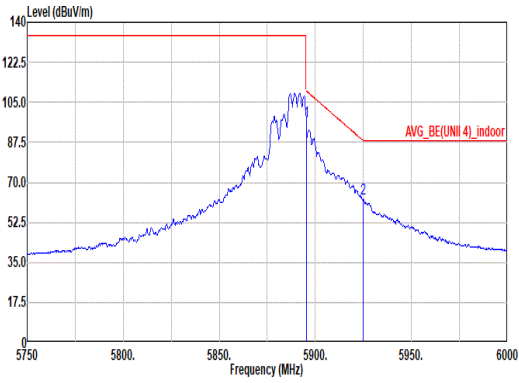


Mode	72																																																																				
	Band Edge - R																																																																				
	U-NII-4_5.85-5.895_802.11ax HE20_CH177_Partial_106/54RU_5885MHz																																																																				
ANT	4+3																																																																				
Pol.	Horizontal						Fundamental																																																														
Peak	 Site : 03CH20-HY Condition: PEAK_BE(UNII 4)_indoor 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5895.00</td><td>107.74</td><td>130.20</td><td>-22.46</td><td>97.63</td><td>34.30</td><td>13.74</td><td>37.93</td><td>0.00</td><td>242</td><td>62</td><td>PEAK</td></tr><tr><td>2</td><td>5928.25</td><td>76.58</td><td>108.20</td><td>-31.62</td><td>66.43</td><td>34.30</td><td>13.78</td><td>37.93</td><td>0.00</td><td>242</td><td>62</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5895.00	107.74	130.20	-22.46	97.63	34.30	13.74	37.93	0.00	242	62	PEAK	2	5928.25	76.58	108.20	-31.62	66.43	34.30	13.78	37.93	0.00	242	62	PEAK	Blank					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																											
1	5895.00	107.74	130.20	-22.46	97.63	34.30	13.74	37.93	0.00	242	62	PEAK																																																									
2	5928.25	76.58	108.20	-31.62	66.43	34.30	13.78	37.93	0.00	242	62	PEAK																																																									
Avg	 Site : 03CH20-HY Condition: AVG_BE(UNII 4)_indoor 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBW:0.020kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5895.25</td><td>96.62</td><td>110.02</td><td>-13.40</td><td>86.51</td><td>34.30</td><td>13.74</td><td>37.93</td><td>0.00</td><td>242</td><td>62</td><td>AVERAGE</td></tr><tr><td>2</td><td>5925.00</td><td>62.70</td><td>88.20</td><td>-25.50</td><td>52.55</td><td>34.30</td><td>13.78</td><td>37.93</td><td>0.00</td><td>242</td><td>62</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5895.25	96.62	110.02	-13.40	86.51	34.30	13.74	37.93	0.00	242	62	AVERAGE	2	5925.00	62.70	88.20	-25.50	52.55	34.30	13.78	37.93	0.00	242	62	AVERAGE	Blank					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																											
1	5895.25	96.62	110.02	-13.40	86.51	34.30	13.74	37.93	0.00	242	62	AVERAGE																																																									
2	5925.00	62.70	88.20	-25.50	52.55	34.30	13.78	37.93	0.00	242	62	AVERAGE																																																									






Mode	72																																																																																																																																
	Band Edge - L																																																																																																																																
	U-NII-4_5.85-5.895_802.11ax HE20_CH177_Partial_106/54RU_5885MHz																																																																																																																																
ANT	4+3																																																																																																																																
Pol.	Vertical	Fundamental																																																																																																																															
Peak	Level (dBuV/m) Frequency (MHz) PEAK_BE(UNII 4)_100000 Site : 03CH20-HY Condition: PEAK_BE(UNII 4)_indoor 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5647.50</td><td>47.44</td><td>68.20</td><td>-20.76</td><td>38.77</td><td>33.19</td><td>13.40</td><td>37.92</td><td>0.00</td><td>396</td><td>360</td><td>PEAK</td></tr><tr><td>2</td><td>5651.33</td><td>46.22</td><td>69.19</td><td>-22.97</td><td>37.52</td><td>33.21</td><td>13.41</td><td>37.92</td><td>0.00</td><td>396</td><td>360</td><td>PEAK</td></tr><tr><td>3</td><td>5700.60</td><td>45.53</td><td>105.37</td><td>-59.84</td><td>36.37</td><td>33.60</td><td>13.48</td><td>37.92</td><td>0.00</td><td>396</td><td>360</td><td>PEAK</td></tr><tr><td>4</td><td>5720.07</td><td>45.24</td><td>110.95</td><td>-65.71</td><td>36.02</td><td>33.64</td><td>13.50</td><td>37.92</td><td>0.00</td><td>396</td><td>360</td><td>PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5647.50	47.44	68.20	-20.76	38.77	33.19	13.40	37.92	0.00	396	360	PEAK	2	5651.33	46.22	69.19	-22.97	37.52	33.21	13.41	37.92	0.00	396	360	PEAK	3	5700.60	45.53	105.37	-59.84	36.37	33.60	13.48	37.92	0.00	396	360	PEAK	4	5720.07	45.24	110.95	-65.71	36.02	33.64	13.50	37.92	0.00	396	360	PEAK	Level (dBuV/m) Frequency (MHz) PEAK(UNII 4) Site : 03CH20-HY Condition: PEAK(UNII 4) 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5885.00</td><td>111.02</td><td>-----</td><td>-----</td><td>100.93</td><td>34.30</td><td>13.72</td><td>37.93</td><td>0.00</td><td>396</td><td>360</td><td>PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5885.00	111.02	-----	-----	100.93	34.30	13.72	37.93	0.00	396	360	PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																							
1	5647.50	47.44	68.20	-20.76	38.77	33.19	13.40	37.92	0.00	396	360	PEAK																																																																																																																					
2	5651.33	46.22	69.19	-22.97	37.52	33.21	13.41	37.92	0.00	396	360	PEAK																																																																																																																					
3	5700.60	45.53	105.37	-59.84	36.37	33.60	13.48	37.92	0.00	396	360	PEAK																																																																																																																					
4	5720.07	45.24	110.95	-65.71	36.02	33.64	13.50	37.92	0.00	396	360	PEAK																																																																																																																					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																							
1	5885.00	111.02	-----	-----	100.93	34.30	13.72	37.93	0.00	396	360	PEAK																																																																																																																					
Avg	Blank	Level (dBuV/m) Frequency (MHz) AVG(UNII 4) Site : 03CH20-HY Condition: AVG(UNII 4) 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:0.820kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5885.00</td><td>104.97</td><td>-----</td><td>-----</td><td>94.87</td><td>34.30</td><td>13.73</td><td>37.93</td><td>0.00</td><td>396</td><td>360</td><td>AVERAGE</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5885.00	104.97	-----	-----	94.87	34.30	13.73	37.93	0.00	396	360	AVERAGE																																																																																			
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																							
1	5885.00	104.97	-----	-----	94.87	34.30	13.73	37.93	0.00	396	360	AVERAGE																																																																																																																					

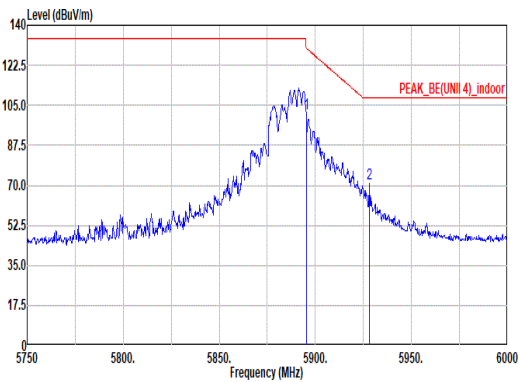
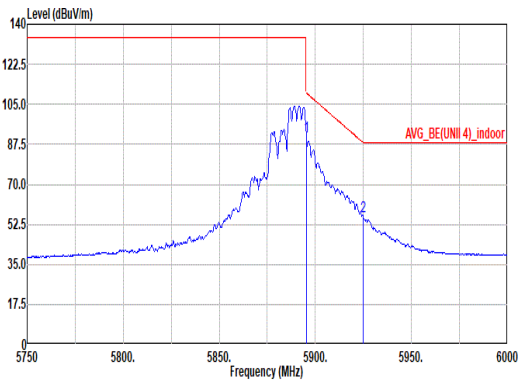


Mode	72																																																										
	Band Edge - R																																																										
	U-NII-4_5.85-5.895_802.11ax HE20_CH177_Partial_106/54RU_5885MHz																																																										
ANT	4+3																																																										
Pol.	Vertical	Fundamental																																																									
Peak	 Site : 03CH20-HY Condition: PEAK_BE(UNII 4)_indoor 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5895.25</td><td>101.21</td><td>130.02</td><td>-28.81</td><td>91.10</td><td>34.30</td><td>13.74</td><td>37.93</td><td>0.00</td><td>396</td><td>360</td><td>PEAK</td></tr><tr><td>2</td><td>5928.25</td><td>70.93</td><td>108.20</td><td>-37.27</td><td>60.78</td><td>34.30</td><td>13.78</td><td>37.93</td><td>0.00</td><td>396</td><td>360</td><td>PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm	deg	1	5895.25	101.21	130.02	-28.81	91.10	34.30	13.74	37.93	0.00	396	360	PEAK	2	5928.25	70.93	108.20	-37.27	60.78	34.30	13.78	37.93	0.00	396	360	PEAK	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																			
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm	deg																																																	
1	5895.25	101.21	130.02	-28.81	91.10	34.30	13.74	37.93	0.00	396	360	PEAK																																															
2	5928.25	70.93	108.20	-37.27	60.78	34.30	13.78	37.93	0.00	396	360	PEAK																																															
Avg	 Site : 03CH20-HY Condition: AVG_BE(UNII 4)_indoor 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:0.020kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5895.25</td><td>90.95</td><td>110.02</td><td>-19.07</td><td>80.04</td><td>34.30</td><td>13.74</td><td>37.93</td><td>0.00</td><td>396</td><td>360</td><td>AVERAGE</td></tr><tr><td>2</td><td>5925.00</td><td>55.83</td><td>88.20</td><td>-32.37</td><td>45.68</td><td>34.30</td><td>13.78</td><td>37.93</td><td>0.00</td><td>396</td><td>360</td><td>AVERAGE</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm	deg	1	5895.25	90.95	110.02	-19.07	80.04	34.30	13.74	37.93	0.00	396	360	AVERAGE	2	5925.00	55.83	88.20	-32.37	45.68	34.30	13.78	37.93	0.00	396	360	AVERAGE	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																			
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm	deg																																																	
1	5895.25	90.95	110.02	-19.07	80.04	34.30	13.74	37.93	0.00	396	360	AVERAGE																																															
2	5925.00	55.83	88.20	-32.37	45.68	34.30	13.78	37.93	0.00	396	360	AVERAGE																																															

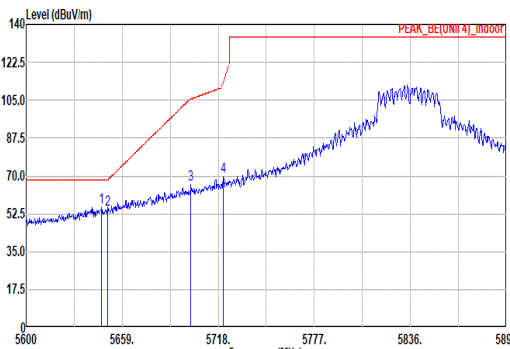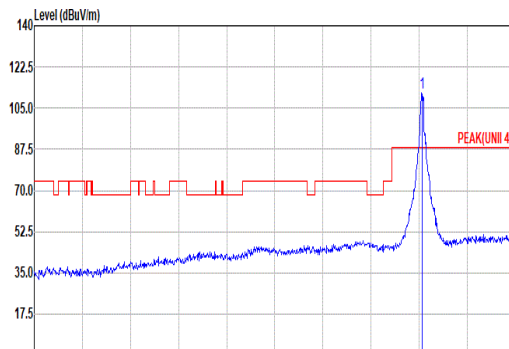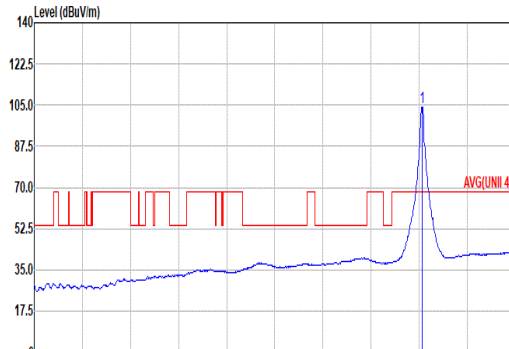

Mode	73																																																																																																																																										
	Band Edge - L																																																																																																																																										
	U-NII-4_5.85-5.895_802.11ax HE40_CH167_Full RU_5835MHz																																																																																																																																										
ANT	4+3																																																																																																																																										
Pol.	Horizontal						Fundamental																																																																																																																																				
Peak	 Site : 03CH20-HY Condition: PEAK_BE(UNII 4)_indoor 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5646.32</td><td>55.64</td><td>68.20</td><td>-12.56</td><td>46.97</td><td>33.19</td><td>13.40</td><td>37.92</td><td>0.00</td><td>250</td><td>59</td><td>PEAK</td></tr><tr><td>2</td><td>5650.15</td><td>54.47</td><td>68.31</td><td>-13.84</td><td>45.78</td><td>33.20</td><td>13.41</td><td>37.92</td><td>0.00</td><td>250</td><td>59</td><td>PEAK</td></tr><tr><td>3</td><td>5701.19</td><td>65.93</td><td>105.53</td><td>-39.60</td><td>56.77</td><td>33.60</td><td>13.48</td><td>37.92</td><td>0.00</td><td>250</td><td>59</td><td>PEAK</td></tr><tr><td>4</td><td>5720.95</td><td>69.57</td><td>112.97</td><td>-43.40</td><td>60.35</td><td>33.64</td><td>13.50</td><td>37.92</td><td>0.00</td><td>250</td><td>59</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5646.32	55.64	68.20	-12.56	46.97	33.19	13.40	37.92	0.00	250	59	PEAK	2	5650.15	54.47	68.31	-13.84	45.78	33.20	13.41	37.92	0.00	250	59	PEAK	3	5701.19	65.93	105.53	-39.60	56.77	33.60	13.48	37.92	0.00	250	59	PEAK	4	5720.95	69.57	112.97	-43.40	60.35	33.64	13.50	37.92	0.00	250	59	PEAK	 Site : 03CH20-HY Condition: PEAK(UNII 4) 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5835.00</td><td>111.41</td><td>-----</td><td>-----</td><td>101.46</td><td>34.22</td><td>13.65</td><td>37.92</td><td>0.00</td><td>250</td><td>59</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5835.00	111.41	-----	-----	101.46	34.22	13.65	37.92	0.00	250	59	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																	
1	5646.32	55.64	68.20	-12.56	46.97	33.19	13.40	37.92	0.00	250	59	PEAK																																																																																																																															
2	5650.15	54.47	68.31	-13.84	45.78	33.20	13.41	37.92	0.00	250	59	PEAK																																																																																																																															
3	5701.19	65.93	105.53	-39.60	56.77	33.60	13.48	37.92	0.00	250	59	PEAK																																																																																																																															
4	5720.95	69.57	112.97	-43.40	60.35	33.64	13.50	37.92	0.00	250	59	PEAK																																																																																																																															
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																	
1	5835.00	111.41	-----	-----	101.46	34.22	13.65	37.92	0.00	250	59	PEAK																																																																																																																															
Avg	Blank						 Site : 03CH20-HY Condition: AVG(UNII 4) 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5835.00</td><td>104.15</td><td>-----</td><td>-----</td><td>94.17</td><td>34.24</td><td>13.66</td><td>37.92</td><td>0.00</td><td>250</td><td>59</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5835.00	104.15	-----	-----	94.17	34.24	13.66	37.92	0.00	250	59	AVERAGE																																																																																			
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																	
1	5835.00	104.15	-----	-----	94.17	34.24	13.66	37.92	0.00	250	59	AVERAGE																																																																																																																															

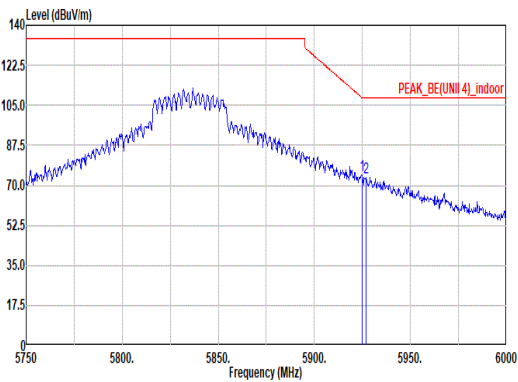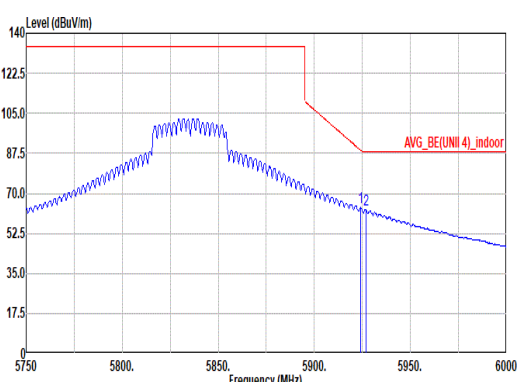

Mode	73																																																																			
	Band Edge - R																																																																			
	U-NII-4_5.85-5.895_802.11ax HE40_CH167_Full RU_5835MHz																																																																			
ANT	4+3																																																																			
Pol.	Horizontal						Fundamental																																																													
Peak	 Site : 03CH20-HY Condition: PEAK_BE(UNII 4)_indoor 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5924.75</td><td>74.66</td><td>108.38</td><td>-33.72</td><td>64.51</td><td>34.30</td><td>13.78</td><td>37.93</td><td>0.00</td><td>250</td><td>59</td><td>PEAK</td></tr><tr><td>2</td><td>5926.75</td><td>73.51</td><td>108.20</td><td>-34.69</td><td>63.36</td><td>34.30</td><td>13.78</td><td>37.93</td><td>0.00</td><td>250</td><td>59</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm	deg	1	5924.75	74.66	108.38	-33.72	64.51	34.30	13.78	37.93	0.00	250	59	PEAK	2	5926.75	73.51	108.20	-34.69	63.36	34.30	13.78	37.93	0.00	250	59	PEAK	Blank				
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																												
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm	deg																																																										
1	5924.75	74.66	108.38	-33.72	64.51	34.30	13.78	37.93	0.00	250	59	PEAK																																																								
2	5926.75	73.51	108.20	-34.69	63.36	34.30	13.78	37.93	0.00	250	59	PEAK																																																								
Avg	 Site : 03CH20-HY Condition: AVG_BE(UNII 4)_indoor 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5924.25</td><td>63.66</td><td>88.75</td><td>-25.09</td><td>53.51</td><td>34.30</td><td>13.78</td><td>37.93</td><td>0.00</td><td>250</td><td>59</td><td>AVERAGE</td></tr><tr><td>2</td><td>5926.75</td><td>62.93</td><td>88.20</td><td>-25.27</td><td>52.78</td><td>34.30</td><td>13.78</td><td>37.93</td><td>0.00</td><td>250</td><td>59</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm	deg	1	5924.25	63.66	88.75	-25.09	53.51	34.30	13.78	37.93	0.00	250	59	AVERAGE	2	5926.75	62.93	88.20	-25.27	52.78	34.30	13.78	37.93	0.00	250	59	AVERAGE	Blank				
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																												
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm	deg																																																										
1	5924.25	63.66	88.75	-25.09	53.51	34.30	13.78	37.93	0.00	250	59	AVERAGE																																																								
2	5926.75	62.93	88.20	-25.27	52.78	34.30	13.78	37.93	0.00	250	59	AVERAGE																																																								