


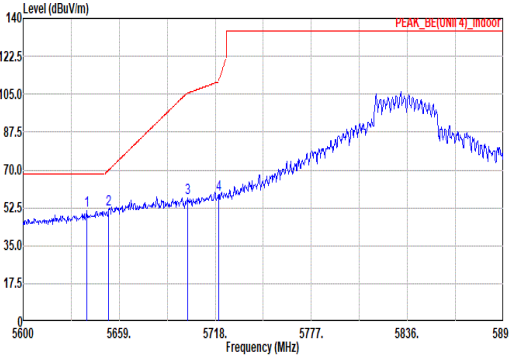
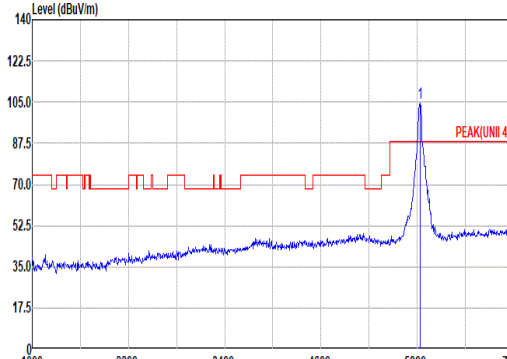



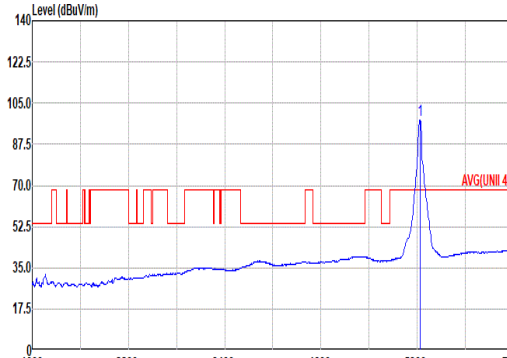


	73																																																																																																																																												
Mode	Band Edge - L																																																																																																																																												
	U-NII-4_5.85-5.895_802.11ax HE40_CH167_Full RU_5835MHz																																																																																																																																												
ANT	4+3																																																																																																																																												
Pol.	Vertical						Fundamental																																																																																																																																						
Peak	 Level (dBuV/m) Frequency (MHz) PEAK_BE(UNII 4)_Indoor Site : 03CH20-HY Condition: PEAK_BE(UNII 4)_indoor 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>5639.24</td><td>51.05</td><td>68.20</td><td>-17.15</td><td>42.42</td><td>33.16</td><td>13.39</td><td>37.92</td><td>0.00</td><td>394</td><td>360</td><td>PEAK</td></tr><tr><td>2</td><td>5652.51</td><td>51.78</td><td>70.07</td><td>-18.29</td><td>43.07</td><td>33.22</td><td>13.41</td><td>37.92</td><td>0.00</td><td>394</td><td>360</td><td>PEAK</td></tr><tr><td>3</td><td>5701.19</td><td>57.15</td><td>105.53</td><td>-48.38</td><td>47.99</td><td>33.60</td><td>13.48</td><td>37.92</td><td>0.00</td><td>394</td><td>360</td><td>PEAK</td></tr><tr><td>4</td><td>5720.07</td><td>58.82</td><td>110.95</td><td>-52.13</td><td>49.60</td><td>33.64</td><td>13.50</td><td>37.92</td><td>0.00</td><td>394</td><td>360</td><td>PEAK</td></tr></tbody></table>													Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5639.24	51.05	68.20	-17.15	42.42	33.16	13.39	37.92	0.00	394	360	PEAK	2	5652.51	51.78	70.07	-18.29	43.07	33.22	13.41	37.92	0.00	394	360	PEAK	3	5701.19	57.15	105.53	-48.38	47.99	33.60	13.48	37.92	0.00	394	360	PEAK	4	5720.07	58.82	110.95	-52.13	49.60	33.64	13.50	37.92	0.00	394	360	PEAK	 Level (dBuV/m) Frequency (MHz) PEAK(UNII 4) Site : 03CH20-HY Condition: PEAK(UNII 4) 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>5835.00</td><td>104.66</td><td>-----</td><td>-----</td><td>94.68</td><td>34.24</td><td>13.66</td><td>37.92</td><td>0.00</td><td>394</td><td>360</td><td>PEAK</td></tr></tbody></table>													Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5835.00	104.66	-----	-----	94.68	34.24	13.66	37.92	0.00	394	360	PEAK
		Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																		
1	5639.24	51.05	68.20	-17.15	42.42	33.16	13.39	37.92	0.00	394	360	PEAK																																																																																																																																	
2	5652.51	51.78	70.07	-18.29	43.07	33.22	13.41	37.92	0.00	394	360	PEAK																																																																																																																																	
3	5701.19	57.15	105.53	-48.38	47.99	33.60	13.48	37.92	0.00	394	360	PEAK																																																																																																																																	
4	5720.07	58.82	110.95	-52.13	49.60	33.64	13.50	37.92	0.00	394	360	PEAK																																																																																																																																	
	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																		
1	5835.00	104.66	-----	-----	94.68	34.24	13.66	37.92	0.00	394	360	PEAK																																																																																																																																	
Avg	Blank												 Level (dBuV/m) Frequency (MHz) AVG(UNII 4) Site : 03CH20-HY Condition: AVG(UNII 4) 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>5835.00</td><td>97.66</td><td>-----</td><td>-----</td><td>87.71</td><td>34.22</td><td>13.65</td><td>37.92</td><td>0.00</td><td>394</td><td>360</td><td>AVERAGE</td></tr></tbody></table>													Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5835.00	97.66	-----	-----	87.71	34.22	13.65	37.92	0.00	394	360	AVERAGE																																																																														
	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																		
1	5835.00	97.66	-----	-----	87.71	34.22	13.65	37.92	0.00	394	360	AVERAGE																																																																																																																																	


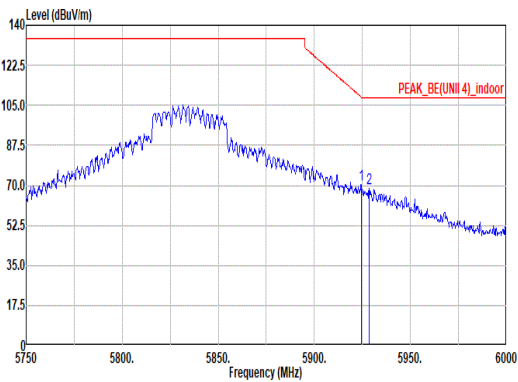


Mode	73																																																			
	Band Edge - R																																																			
	U-NII-4_5.85-5.895_802.11ax HE40_CH167_Full RU_5835MHz																																																			
ANT	4+3																																																			
Pol.	Vertical	Fundamental																																																		
Peak	 Site : 03CH20-HY Condition: PEAK_BE(UNII 4)_indoor 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 5924.50</td><td>70.48</td><td>108.57</td><td>-38.09</td><td>60.33</td><td>34.30</td><td>13.78</td><td>37.93</td><td>0.00</td><td>394 360 PEAK</td></tr><tr><td>2 5928.50</td><td>68.44</td><td>108.20</td><td>-39.76</td><td>58.29</td><td>34.30</td><td>13.78</td><td>37.93</td><td>0.00</td><td>394 360 PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm	deg	1 5924.50	70.48	108.57	-38.09	60.33	34.30	13.78	37.93	0.00	394 360 PEAK	2 5928.50	68.44	108.20	-39.76	58.29	34.30	13.78	37.93	0.00	394 360 PEAK	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																											
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																														
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm	deg																																											
1 5924.50	70.48	108.57	-38.09	60.33	34.30	13.78	37.93	0.00	394 360 PEAK																																											
2 5928.50	68.44	108.20	-39.76	58.29	34.30	13.78	37.93	0.00	394 360 PEAK																																											
Avg	 Site : 03CH20-HY Condition: AVG_BE(UNII 4)_indoor 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 5924.00</td><td>58.59</td><td>88.93</td><td>-30.34</td><td>48.44</td><td>34.30</td><td>13.78</td><td>37.93</td><td>0.00</td><td>394 360 AVERAGE</td></tr><tr><td>2 5926.25</td><td>57.90</td><td>88.20</td><td>-30.30</td><td>47.75</td><td>34.30</td><td>13.78</td><td>37.93</td><td>0.00</td><td>394 360 AVERAGE</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm	deg	1 5924.00	58.59	88.93	-30.34	48.44	34.30	13.78	37.93	0.00	394 360 AVERAGE	2 5926.25	57.90	88.20	-30.30	47.75	34.30	13.78	37.93	0.00	394 360 AVERAGE	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																											
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																														
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm	deg																																											
1 5924.00	58.59	88.93	-30.34	48.44	34.30	13.78	37.93	0.00	394 360 AVERAGE																																											
2 5926.25	57.90	88.20	-30.30	47.75	34.30	13.78	37.93	0.00	394 360 AVERAGE																																											



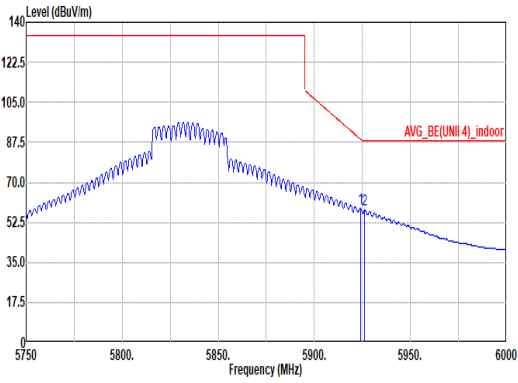


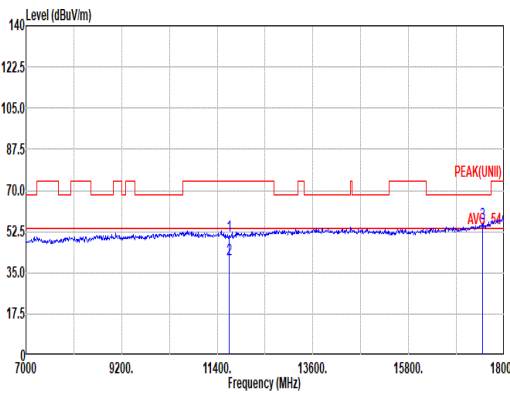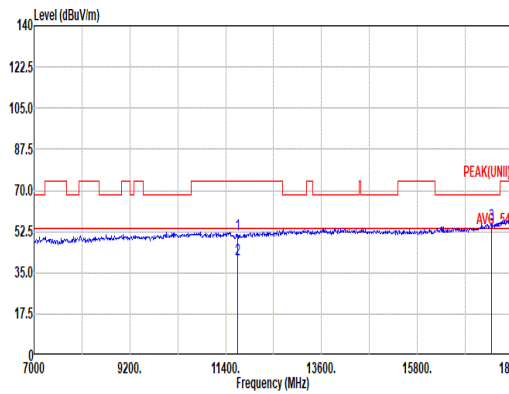Mode	73																																																																																																																									
	Harmonic																																																																																																																									
	U-NII-4_5.85-5.895_802.11ax HE40_CH167_Full RU_5835MHz																																																																																																																									
ANT	4+3																																																																																																																									
Pol.	Horizontal	Vertical																																																																																																																								
Peak Avg	 Site : 03CH20-HY Condition: PEAK(UNII) 3m HF_91280_02360_241101 HORIZONTAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr><tr><td>1 11670.00</td><td>50.90</td><td>74.00</td><td>-23.10</td><td>34.59</td><td>38.66</td><td>19.56</td><td>42.61</td><td>0.70</td><td>203 83 PEAK</td></tr><tr><td>2 11670.00</td><td>40.55</td><td>54.00</td><td>-13.45</td><td>24.24</td><td>38.66</td><td>19.56</td><td>42.61</td><td>0.70</td><td>203 83 Average</td></tr><tr><td>3 17505.00</td><td>55.94</td><td>68.20</td><td>-12.26</td><td>35.72</td><td>40.23</td><td>24.18</td><td>44.84</td><td>0.65</td><td>-- -- PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1 11670.00	50.90	74.00	-23.10	34.59	38.66	19.56	42.61	0.70	203 83 PEAK	2 11670.00	40.55	54.00	-13.45	24.24	38.66	19.56	42.61	0.70	203 83 Average	3 17505.00	55.94	68.20	-12.26	35.72	40.23	24.18	44.84	0.65	-- -- PEAK	 Site : 03CH20-HY Condition: PEAK(UNII) 3m HF_91280_02360_241101 VERTICAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr><tr><td>1 11670.00</td><td>51.10</td><td>74.00</td><td>-22.90</td><td>34.79</td><td>38.66</td><td>19.56</td><td>42.61</td><td>0.70</td><td>400 174 PEAK</td></tr><tr><td>2 11670.00</td><td>40.58</td><td>54.00</td><td>-13.42</td><td>24.27</td><td>38.66</td><td>19.56</td><td>42.61</td><td>0.70</td><td>400 174 Average</td></tr><tr><td>3 17505.00</td><td>55.30</td><td>68.20</td><td>-12.90</td><td>35.00</td><td>40.23</td><td>24.18</td><td>44.84</td><td>0.65</td><td>-- -- PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1 11670.00	51.10	74.00	-22.90	34.79	38.66	19.56	42.61	0.70	400 174 PEAK	2 11670.00	40.58	54.00	-13.42	24.27	38.66	19.56	42.61	0.70	400 174 Average	3 17505.00	55.30	68.20	-12.90	35.00	40.23	24.18	44.84	0.65	-- -- PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																																																																	
1 11670.00	50.90	74.00	-23.10	34.59	38.66	19.56	42.61	0.70	203 83 PEAK																																																																																																																	
2 11670.00	40.55	54.00	-13.45	24.24	38.66	19.56	42.61	0.70	203 83 Average																																																																																																																	
3 17505.00	55.94	68.20	-12.26	35.72	40.23	24.18	44.84	0.65	-- -- PEAK																																																																																																																	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																																																																	
1 11670.00	51.10	74.00	-22.90	34.79	38.66	19.56	42.61	0.70	400 174 PEAK																																																																																																																	
2 11670.00	40.58	54.00	-13.42	24.27	38.66	19.56	42.61	0.70	400 174 Average																																																																																																																	
3 17505.00	55.30	68.20	-12.90	35.00	40.23	24.18	44.84	0.65	-- -- PEAK																																																																																																																	

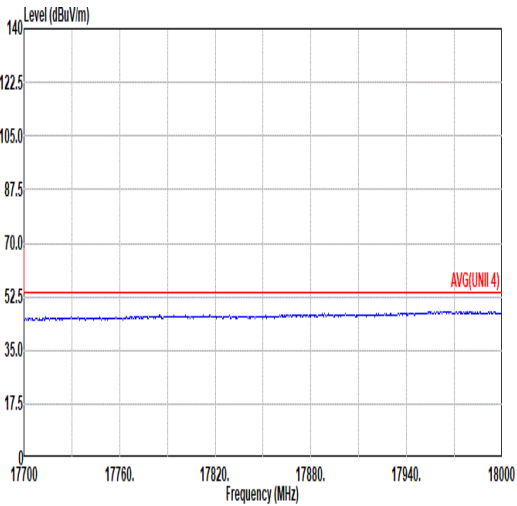
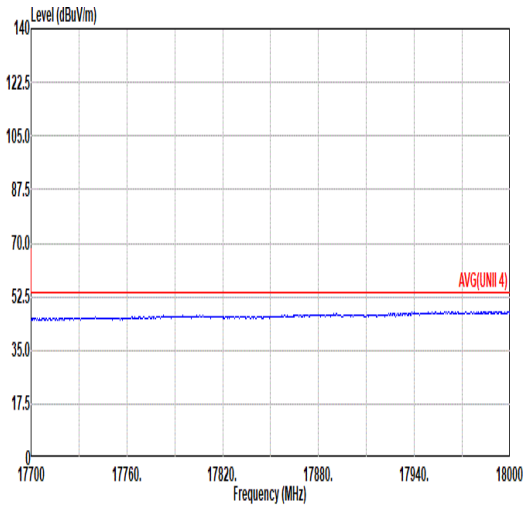


Mode	73	
	Harmonic	
	U-NII-4_5.85-5.895_802.11ax HE40_CH167_Full RU_5835MHz	
ANT	4+3	
Pol.	Horizontal	Vertical
17.7G ~18G Avg	 Site : 03CH20-HY Condition: AVG(UNII 4) 3m HF_91200_02360_241101 HORIZONTAL	 Site : 03CH20-HY Condition: AVG(UNII 4) 3m HF_91200_02360_241101 VERTICAL

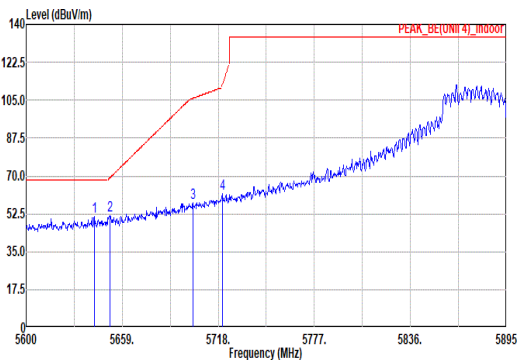
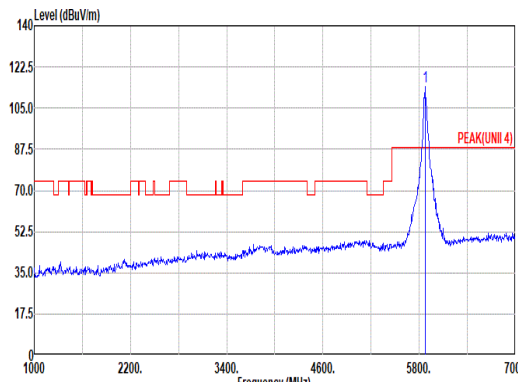
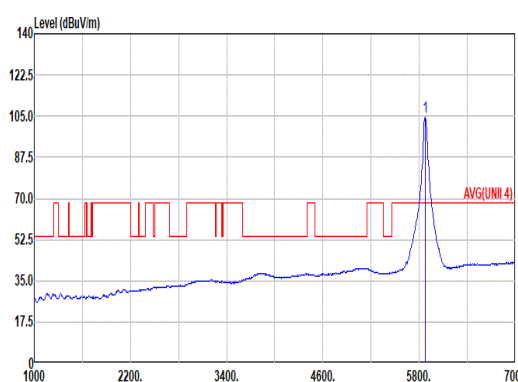


	74																																																																																																																																										
Mode	Band Edge - L																																																																																																																																										
	U-NII-4_5.85-5.895_802.11ax HE40_CH175_Full RU_5875MHz																																																																																																																																										
ANT	4+3																																																																																																																																										
Pol.	Horizontal						Fundamental																																																																																																																																				
Peak	 Site : 03CH20-HY Condition: PEAK_BE(UNII 4)_indoor 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5641.89</td><td>51.44</td><td>68.20</td><td>-16.76</td><td>42.79</td><td>33.17</td><td>13.40</td><td>37.92</td><td>0.00</td><td>252</td><td>63</td><td>PEAK</td></tr><tr><td>2</td><td>5651.63</td><td>51.83</td><td>69.41</td><td>-17.58</td><td>43.13</td><td>33.21</td><td>13.41</td><td>37.92</td><td>0.00</td><td>252</td><td>63</td><td>PEAK</td></tr><tr><td>3</td><td>5702.37</td><td>57.82</td><td>105.86</td><td>-48.04</td><td>48.66</td><td>33.60</td><td>13.48</td><td>37.92</td><td>0.00</td><td>252</td><td>63</td><td>PEAK</td></tr><tr><td>4</td><td>5720.36</td><td>61.70</td><td>111.62</td><td>-49.92</td><td>52.48</td><td>33.64</td><td>13.50</td><td>37.92</td><td>0.00</td><td>252</td><td>63</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5641.89	51.44	68.20	-16.76	42.79	33.17	13.40	37.92	0.00	252	63	PEAK	2	5651.63	51.83	69.41	-17.58	43.13	33.21	13.41	37.92	0.00	252	63	PEAK	3	5702.37	57.82	105.86	-48.04	48.66	33.60	13.48	37.92	0.00	252	63	PEAK	4	5720.36	61.70	111.62	-49.92	52.48	33.64	13.50	37.92	0.00	252	63	PEAK	 Site : 03CH20-HY Condition: PEAK(UNII 4) 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5875.00</td><td>114.31</td><td>-----</td><td>-----</td><td>104.22</td><td>34.30</td><td>13.71</td><td>37.92</td><td>0.00</td><td>252</td><td>63</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5875.00	114.31	-----	-----	104.22	34.30	13.71	37.92	0.00	252	63	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																	
1	5641.89	51.44	68.20	-16.76	42.79	33.17	13.40	37.92	0.00	252	63	PEAK																																																																																																																															
2	5651.63	51.83	69.41	-17.58	43.13	33.21	13.41	37.92	0.00	252	63	PEAK																																																																																																																															
3	5702.37	57.82	105.86	-48.04	48.66	33.60	13.48	37.92	0.00	252	63	PEAK																																																																																																																															
4	5720.36	61.70	111.62	-49.92	52.48	33.64	13.50	37.92	0.00	252	63	PEAK																																																																																																																															
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																	
1	5875.00	114.31	-----	-----	104.22	34.30	13.71	37.92	0.00	252	63	PEAK																																																																																																																															
Avg	Blank						 Site : 03CH20-HY Condition: AVG(UNII 4) 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5875.00</td><td>104.74</td><td>-----</td><td>-----</td><td>94.65</td><td>34.30</td><td>13.72</td><td>37.93</td><td>0.00</td><td>252</td><td>63</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5875.00	104.74	-----	-----	94.65	34.30	13.72	37.93	0.00	252	63	AVERAGE																																																																																			
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																	
1	5875.00	104.74	-----	-----	94.65	34.30	13.72	37.93	0.00	252	63	AVERAGE																																																																																																																															

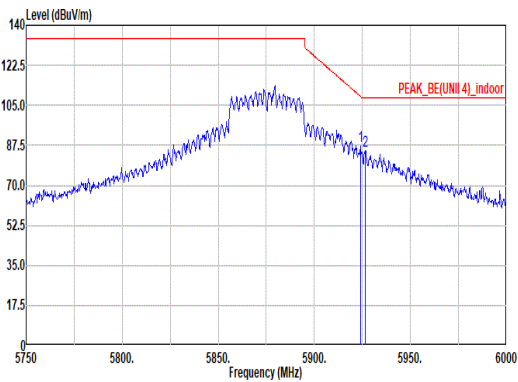
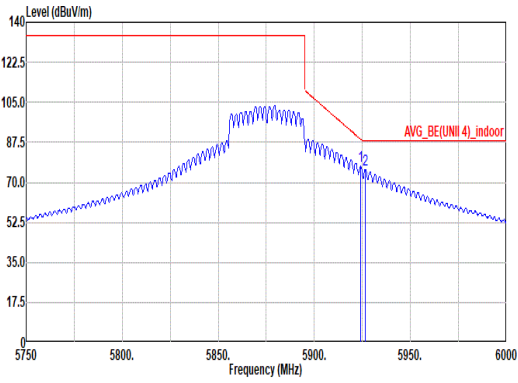


Mode	74																																																																			
	Band Edge - R																																																																			
	U-NII-4_5.85-5.895_802.11ax HE40_CH175_Full RU_5875MHz																																																																			
ANT	4+3																																																																			
Pol.	Horizontal						Fundamental																																																													
Peak	 Site : 03CH20-HY Condition: PEAK_BE(UNII 4)_indoor 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5924.00</td><td>87.08</td><td>108.93</td><td>-21.85</td><td>76.93</td><td>34.30</td><td>13.78</td><td>37.93</td><td>0.00</td><td>252</td><td>63</td><td>PEAK</td></tr><tr><td>2</td><td>5926.58</td><td>85.11</td><td>108.20</td><td>-23.09</td><td>74.96</td><td>34.30</td><td>13.78</td><td>37.93</td><td>0.00</td><td>252</td><td>63</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5924.00	87.08	108.93	-21.85	76.93	34.30	13.78	37.93	0.00	252	63	PEAK	2	5926.58	85.11	108.20	-23.09	74.96	34.30	13.78	37.93	0.00	252	63	PEAK	Blank				
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																										
1	5924.00	87.08	108.93	-21.85	76.93	34.30	13.78	37.93	0.00	252	63	PEAK																																																								
2	5926.58	85.11	108.20	-23.09	74.96	34.30	13.78	37.93	0.00	252	63	PEAK																																																								
Avg	 Site : 03CH20-HY Condition: AVG_BE(UNII 4)_indoor 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5924.25</td><td>76.88</td><td>88.75</td><td>-11.87</td><td>66.73</td><td>34.30</td><td>13.78</td><td>37.93</td><td>0.00</td><td>252</td><td>63</td><td>AVERAGE</td></tr><tr><td>2</td><td>5926.58</td><td>75.53</td><td>88.20</td><td>-12.67</td><td>65.38</td><td>34.30</td><td>13.78</td><td>37.93</td><td>0.00</td><td>252</td><td>63</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5924.25	76.88	88.75	-11.87	66.73	34.30	13.78	37.93	0.00	252	63	AVERAGE	2	5926.58	75.53	88.20	-12.67	65.38	34.30	13.78	37.93	0.00	252	63	AVERAGE	Blank				
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																										
1	5924.25	76.88	88.75	-11.87	66.73	34.30	13.78	37.93	0.00	252	63	AVERAGE																																																								
2	5926.58	75.53	88.20	-12.67	65.38	34.30	13.78	37.93	0.00	252	63	AVERAGE																																																								

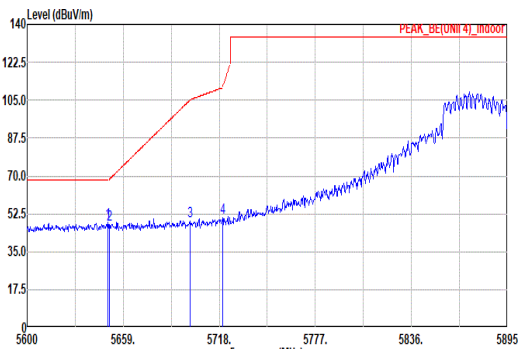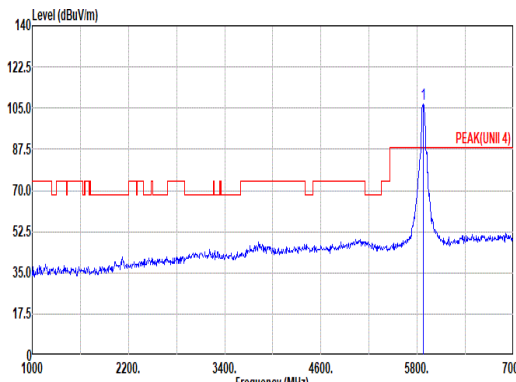
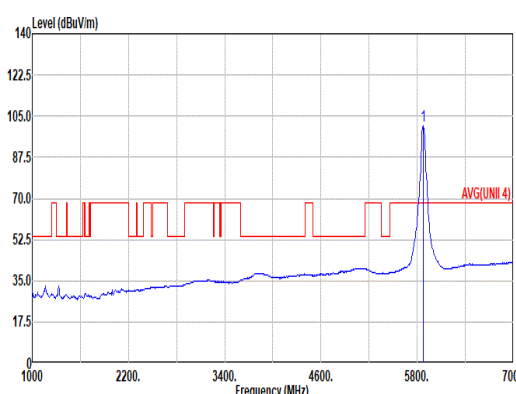


Mode	74																																																																																																																																														
	Band Edge - L																																																																																																																																														
	U-NII-4_5.85-5.895_802.11ax HE40_CH175_Full RU_5875MHz																																																																																																																																														
ANT	4+3																																																																																																																																														
Pol.	Vertical						Fundamental																																																																																																																																								
Peak	 Level (dBuV/m) Frequency (MHz) PEAK_BE(UNII 4)_M0001 Site : 03CH20-HY Condition: PEAK_BE(UNII 4)_indoor 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5649.56</td><td>48.49</td><td>68.20</td><td>-19.71</td><td>39.80</td><td>33.20</td><td>13.41</td><td>37.92</td><td>0.00</td><td>400</td><td>8</td><td>PEAK</td></tr><tr><td>2</td><td>5650.45</td><td>47.42</td><td>68.53</td><td>-21.11</td><td>38.73</td><td>33.20</td><td>13.41</td><td>37.92</td><td>0.00</td><td>400</td><td>8</td><td>PEAK</td></tr><tr><td>3</td><td>5700.01</td><td>48.92</td><td>105.20</td><td>-56.28</td><td>39.76</td><td>33.60</td><td>13.48</td><td>37.92</td><td>0.00</td><td>400</td><td>8</td><td>PEAK</td></tr><tr><td>4</td><td>5720.07</td><td>50.92</td><td>110.95</td><td>-60.03</td><td>41.70</td><td>33.64</td><td>13.50</td><td>37.92</td><td>0.00</td><td>400</td><td>8</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5649.56	48.49	68.20	-19.71	39.80	33.20	13.41	37.92	0.00	400	8	PEAK	2	5650.45	47.42	68.53	-21.11	38.73	33.20	13.41	37.92	0.00	400	8	PEAK	3	5700.01	48.92	105.20	-56.28	39.76	33.60	13.48	37.92	0.00	400	8	PEAK	4	5720.07	50.92	110.95	-60.03	41.70	33.64	13.50	37.92	0.00	400	8	PEAK	 Level (dBuV/m) Frequency (MHz) PEAK(UNII 4) Site : 03CH20-HY Condition: PEAK(UNII 4) 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5875.00</td><td>106.88</td><td>-----</td><td>-----</td><td>96.79</td><td>34.30</td><td>13.72</td><td>37.93</td><td>0.00</td><td>400</td><td>8</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5875.00	106.88	-----	-----	96.79	34.30	13.72	37.93	0.00	400	8	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																						
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																				
1	5649.56	48.49	68.20	-19.71	39.80	33.20	13.41	37.92	0.00	400	8	PEAK																																																																																																																																			
2	5650.45	47.42	68.53	-21.11	38.73	33.20	13.41	37.92	0.00	400	8	PEAK																																																																																																																																			
3	5700.01	48.92	105.20	-56.28	39.76	33.60	13.48	37.92	0.00	400	8	PEAK																																																																																																																																			
4	5720.07	50.92	110.95	-60.03	41.70	33.64	13.50	37.92	0.00	400	8	PEAK																																																																																																																																			
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																						
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																				
1	5875.00	106.88	-----	-----	96.79	34.30	13.72	37.93	0.00	400	8	PEAK																																																																																																																																			
Avg	Blank						 Level (dBuV/m) Frequency (MHz) AVG(UNII 4) Site : 03CH20-HY Condition: AVG(UNII 4) 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5875.00</td><td>101.14</td><td>-----</td><td>-----</td><td>91.05</td><td>34.30</td><td>13.71</td><td>37.92</td><td>0.00</td><td>400</td><td>8</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5875.00	101.14	-----	-----	91.05	34.30	13.71	37.92	0.00	400	8	AVERAGE																																																																																					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																						
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																				
1	5875.00	101.14	-----	-----	91.05	34.30	13.71	37.92	0.00	400	8	AVERAGE																																																																																																																																			

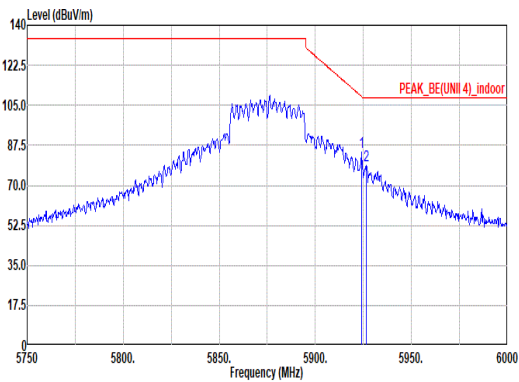
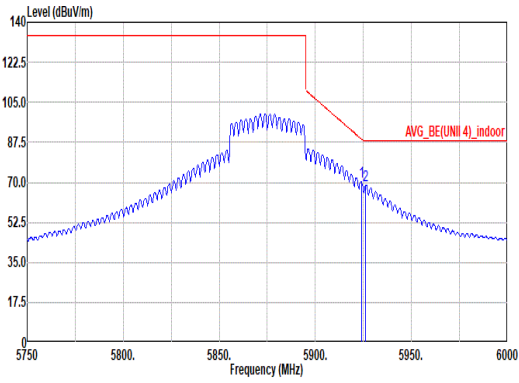


Mode	74																																																																			
	Band Edge - R																																																																			
	U-NII-4_5.85-5.895_802.11ax HE40_CH175_Full RU_5875MHz																																																																			
ANT	4+3																																																																			
Pol.	Vertical						Fundamental																																																													
Peak	 Site : 03CH20-HY Condition: PEAK_BE(UNII 4)_indoor 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5924.25</td><td>84.41</td><td>108.75</td><td>-24.34</td><td>74.26</td><td>34.30</td><td>13.78</td><td>37.93</td><td>0.00</td><td>400</td><td>8</td><td>PEAK</td></tr><tr><td>2</td><td>5926.50</td><td>78.72</td><td>108.20</td><td>-29.48</td><td>68.57</td><td>34.30</td><td>13.78</td><td>37.93</td><td>0.00</td><td>400</td><td>8</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm	deg	1	5924.25	84.41	108.75	-24.34	74.26	34.30	13.78	37.93	0.00	400	8	PEAK	2	5926.50	78.72	108.20	-29.48	68.57	34.30	13.78	37.93	0.00	400	8	PEAK	Blank					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																											
Freq	Level	Line	Level	Factor	Loss	Factor	Factor																																																													
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm	deg																																																											
1	5924.25	84.41	108.75	-24.34	74.26	34.30	13.78	37.93	0.00	400	8	PEAK																																																								
2	5926.50	78.72	108.20	-29.48	68.57	34.30	13.78	37.93	0.00	400	8	PEAK																																																								
Avg	 Site : 03CH20-HY Condition: AVG_BE(UNII 4)_indoor 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5924.00</td><td>70.46</td><td>88.93</td><td>-18.47</td><td>60.31</td><td>34.30</td><td>13.78</td><td>37.93</td><td>0.00</td><td>400</td><td>8</td><td>AVERAGE</td></tr><tr><td>2</td><td>5926.25</td><td>68.86</td><td>88.20</td><td>-19.34</td><td>58.71</td><td>34.30</td><td>13.78</td><td>37.93</td><td>0.00</td><td>400</td><td>8</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm	deg	1	5924.00	70.46	88.93	-18.47	60.31	34.30	13.78	37.93	0.00	400	8	AVERAGE	2	5926.25	68.86	88.20	-19.34	58.71	34.30	13.78	37.93	0.00	400	8	AVERAGE	Blank					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																											
Freq	Level	Line	Level	Factor	Loss	Factor	Factor																																																													
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm	deg																																																											
1	5924.00	70.46	88.93	-18.47	60.31	34.30	13.78	37.93	0.00	400	8	AVERAGE																																																								
2	5926.25	68.86	88.20	-19.34	58.71	34.30	13.78	37.93	0.00	400	8	AVERAGE																																																								


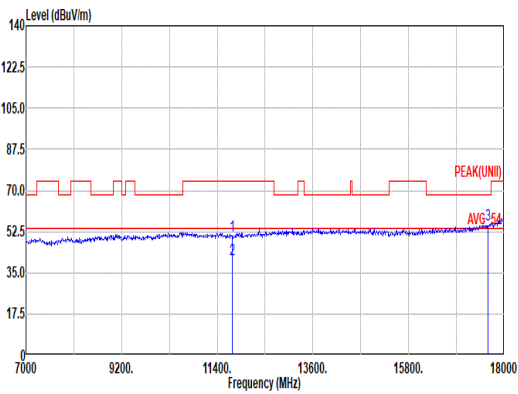
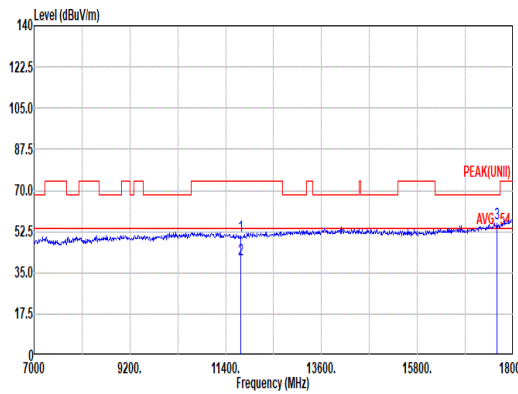


Mode	74												
	Harmonic												
	U-NII-4_5.85-5.895_802.11ax HE40_CH175_Full RU_5875MHz												
ANT	4+3												
Pol.	Horizontal						Vertical						
Peak Avg													
	Site : 03CH20-HY Condition: PEAK(UNII) 3m HF_91280_02360_241101 HORIZONTAL						Site : 03CH20-HY Condition: PEAK(UNII) 3m HF_91280_02360_241101 VERTICAL						
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	11750.00	50.82	74.00	-23.18	34.67	38.50	19.63	42.67	0.69	300	287	PEAK	
2	11750.00	40.45	54.00	-13.55	24.30	38.50	19.63	42.67	0.69	300	287	Average	
3	17625.00	55.50	68.20	-12.70	34.85	40.70	24.27	44.99	0.67	--	--	PEAK	
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	11750.00	50.89	74.00	-23.11	34.74	38.50	19.63	42.67	0.69	300	12	PEAK	
2	11750.00	40.43	54.00	-13.57	24.28	38.50	19.63	42.67	0.69	300	12	Average	
3	17625.00	55.84	68.20	-12.36	35.19	40.70	24.27	44.99	0.67	--	--	PEAK	

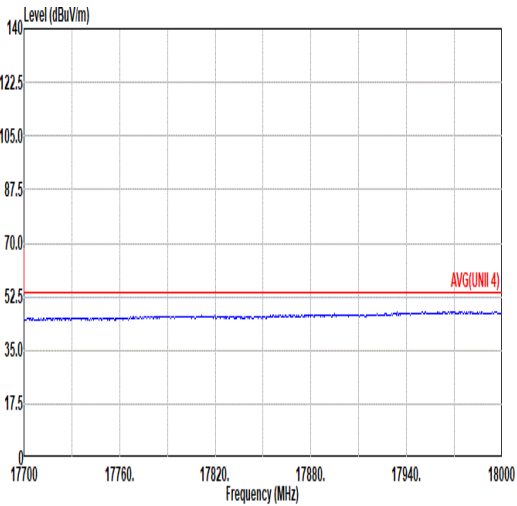
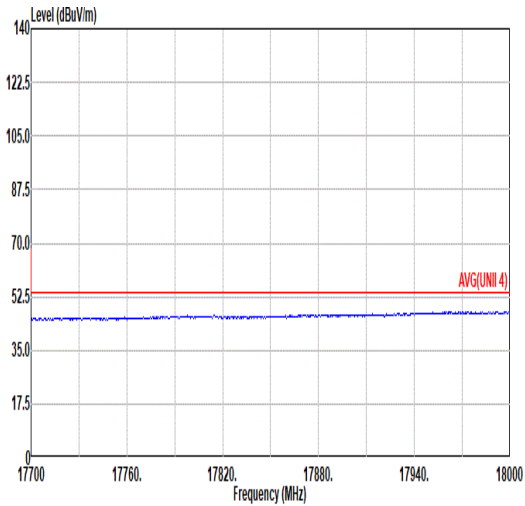


Mode	74	
	Harmonic	
	U-NII-4_5.85-5.895_802.11ax HE40_CH175_Full RU_5875MHz	
ANT	4+3	
Pol.	Horizontal	Vertical
17.7G ~18G Avg	 Site : 03CH20-HY Condition: AVG(UNII 4) 3m HF_91200_02360_241101 HORIZONTAL	 Site : 03CH20-HY Condition: AVG(UNII 4) 3m HF_91200_02360_241101 VERTICAL

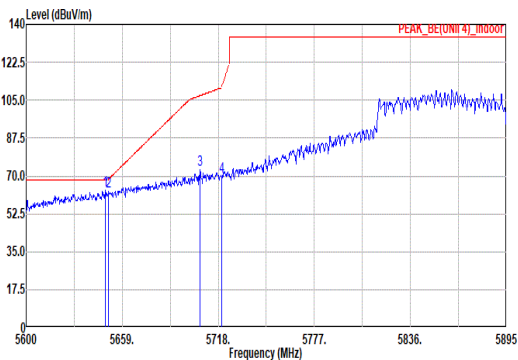
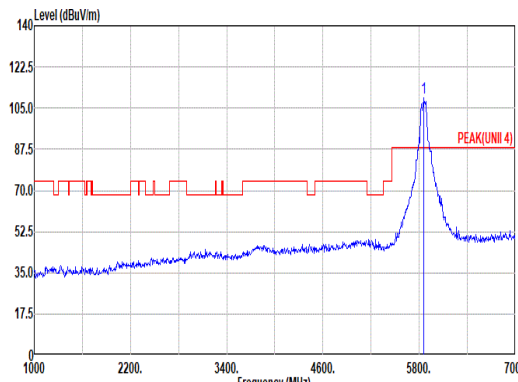
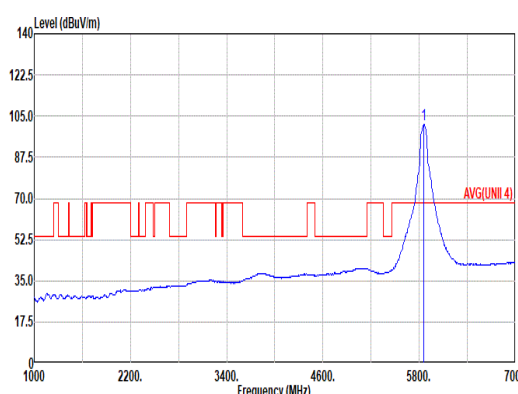


Mode	75																																																																																																																																										
	Band Edge - L																																																																																																																																										
	U-NII-4_5.85-5.895_802.11ax HE80_CH171_Full RU_5855MHz																																																																																																																																										
ANT	4+3																																																																																																																																										
Pol.	Horizontal						Fundamental																																																																																																																																				
Peak	 Site : 03CH20-HY Condition: PEAK_BE(UNII 4)_indoor 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5648.68</td><td>63.58</td><td>68.20</td><td>-4.62</td><td>54.90</td><td>33.19</td><td>13.41</td><td>37.92</td><td>0.00</td><td>246</td><td>64</td><td>PEAK</td></tr><tr><td>2</td><td>5658.74</td><td>62.98</td><td>68.75</td><td>-5.77</td><td>54.28</td><td>33.21</td><td>13.41</td><td>37.92</td><td>0.00</td><td>246</td><td>64</td><td>PEAK</td></tr><tr><td>3</td><td>5706.79</td><td>72.71</td><td>107.10</td><td>-34.39</td><td>63.54</td><td>33.61</td><td>13.48</td><td>37.92</td><td>0.00</td><td>246</td><td>64</td><td>PEAK</td></tr><tr><td>4</td><td>5728.07</td><td>69.98</td><td>110.95</td><td>-40.97</td><td>68.76</td><td>33.64</td><td>13.50</td><td>37.92</td><td>0.00</td><td>246</td><td>64</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5648.68	63.58	68.20	-4.62	54.90	33.19	13.41	37.92	0.00	246	64	PEAK	2	5658.74	62.98	68.75	-5.77	54.28	33.21	13.41	37.92	0.00	246	64	PEAK	3	5706.79	72.71	107.10	-34.39	63.54	33.61	13.48	37.92	0.00	246	64	PEAK	4	5728.07	69.98	110.95	-40.97	68.76	33.64	13.50	37.92	0.00	246	64	PEAK	 Site : 03CH20-HY Condition: PEAK(UNII 4) 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5855.00</td><td>109.39</td><td>-----</td><td>-----</td><td>99.32</td><td>34.30</td><td>13.69</td><td>37.92</td><td>0.00</td><td>246</td><td>64</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5855.00	109.39	-----	-----	99.32	34.30	13.69	37.92	0.00	246	64	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																	
1	5648.68	63.58	68.20	-4.62	54.90	33.19	13.41	37.92	0.00	246	64	PEAK																																																																																																																															
2	5658.74	62.98	68.75	-5.77	54.28	33.21	13.41	37.92	0.00	246	64	PEAK																																																																																																																															
3	5706.79	72.71	107.10	-34.39	63.54	33.61	13.48	37.92	0.00	246	64	PEAK																																																																																																																															
4	5728.07	69.98	110.95	-40.97	68.76	33.64	13.50	37.92	0.00	246	64	PEAK																																																																																																																															
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																	
1	5855.00	109.39	-----	-----	99.32	34.30	13.69	37.92	0.00	246	64	PEAK																																																																																																																															
Avg	Blank						 Site : 03CH20-HY Condition: AVG(UNII 4) 3m HF_91200_02360_241101 Horizontal : RBW:1000.000kHz VBW:1.500kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5855.00</td><td>101.65</td><td>-----</td><td>-----</td><td>91.57</td><td>34.30</td><td>13.70</td><td>37.92</td><td>0.00</td><td>246</td><td>64</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5855.00	101.65	-----	-----	91.57	34.30	13.70	37.92	0.00	246	64	AVERAGE																																																																																			
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																	
1	5855.00	101.65	-----	-----	91.57	34.30	13.70	37.92	0.00	246	64	AVERAGE																																																																																																																															

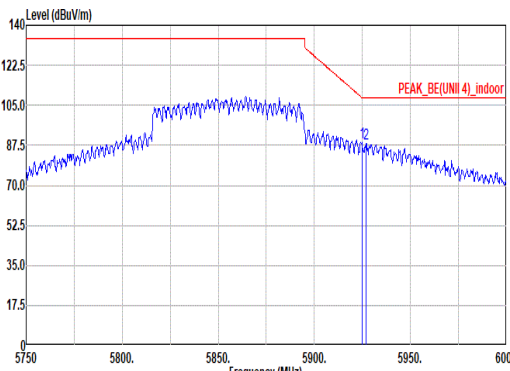
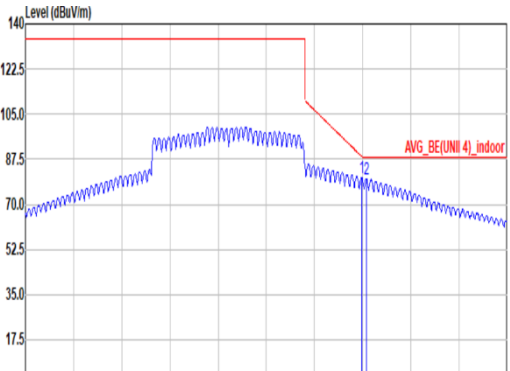


Mode	75																																																			
	Band Edge - R																																																			
	U-NII-4_5.85-5.895_802.11ax HE80_CH171_Full RU_5855MHz																																																			
ANT	4+3																																																			
Pol.	Horizontal	Fundamental																																																		
Peak	 Site : 03CH20-HY Condition: PEAK_BE(UNII 4)_indoor 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 5924.75</td><td>88.84</td><td>108.38</td><td>-19.54</td><td>78.69</td><td>34.30</td><td>13.78</td><td>37.93</td><td>0.00</td><td>246 64 PEAK</td></tr><tr><td>2 5927.00</td><td>88.20</td><td>108.20</td><td>-20.00</td><td>78.05</td><td>34.30</td><td>13.78</td><td>37.93</td><td>0.00</td><td>246 64 PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm	deg	1 5924.75	88.84	108.38	-19.54	78.69	34.30	13.78	37.93	0.00	246 64 PEAK	2 5927.00	88.20	108.20	-20.00	78.05	34.30	13.78	37.93	0.00	246 64 PEAK	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																											
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																														
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm	deg																																											
1 5924.75	88.84	108.38	-19.54	78.69	34.30	13.78	37.93	0.00	246 64 PEAK																																											
2 5927.00	88.20	108.20	-20.00	78.05	34.30	13.78	37.93	0.00	246 64 PEAK																																											
Avg	 Site : 03CH20-HY Condition: AVG_BE(UNII 4)_indoor 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBW:1.500kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 5924.50</td><td>80.39</td><td>88.57</td><td>-8.18</td><td>70.24</td><td>34.30</td><td>13.78</td><td>37.93</td><td>0.00</td><td>246 64 AVERAGE</td></tr><tr><td>2 5926.75</td><td>79.90</td><td>88.20</td><td>-8.30</td><td>69.75</td><td>34.30</td><td>13.78</td><td>37.93</td><td>0.00</td><td>246 64 AVERAGE</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm	deg	1 5924.50	80.39	88.57	-8.18	70.24	34.30	13.78	37.93	0.00	246 64 AVERAGE	2 5926.75	79.90	88.20	-8.30	69.75	34.30	13.78	37.93	0.00	246 64 AVERAGE	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																											
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																														
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm	deg																																											
1 5924.50	80.39	88.57	-8.18	70.24	34.30	13.78	37.93	0.00	246 64 AVERAGE																																											
2 5926.75	79.90	88.20	-8.30	69.75	34.30	13.78	37.93	0.00	246 64 AVERAGE																																											

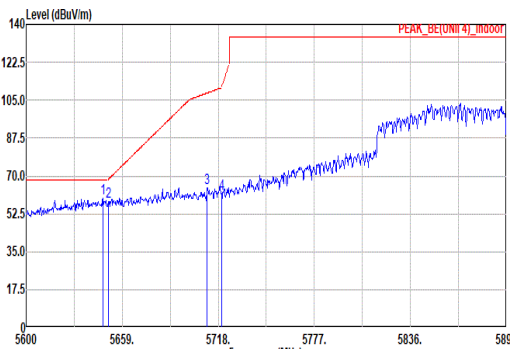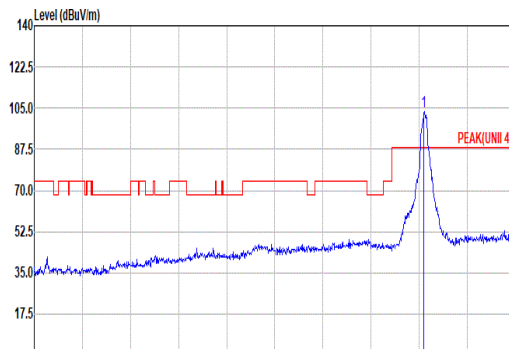
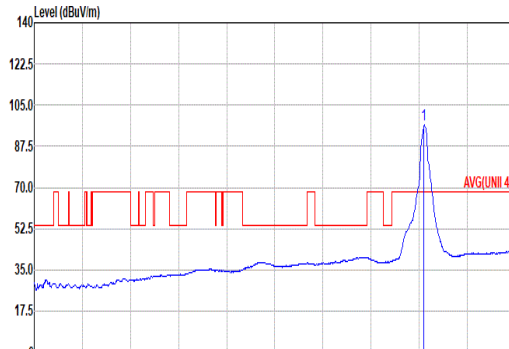


	75																																																																																																																								
Mode	Band Edge - L																																																																																																																								
	U-NII-4_5.85-5.895_802.11ax HE80_CH171_Full RU_5855MHz																																																																																																																								
ANT	4+3																																																																																																																								
Pol.	Vertical						Fundamental																																																																																																																		
Peak	 Level (dBuV/m) Frequency (MHz) PEAK_BE(UNII 4)_Indoor Site : 03CH20-HY Condition: PEAK_BE(UNII 4)_indoor 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5647.20</td><td>59.93</td><td>68.20</td><td>-8.27</td><td>51.26</td><td>33.19</td><td>13.40</td><td>37.92</td><td>0.00</td><td>395</td><td>4</td><td>PEAK</td></tr><tr><td>2</td><td>5650.45</td><td>58.33</td><td>68.53</td><td>-10.20</td><td>49.64</td><td>33.20</td><td>13.41</td><td>37.92</td><td>0.00</td><td>395</td><td>4</td><td>PEAK</td></tr><tr><td>3</td><td>5711.22</td><td>64.44</td><td>108.34</td><td>-43.90</td><td>55.25</td><td>33.62</td><td>13.49</td><td>37.92</td><td>0.00</td><td>395</td><td>4</td><td>PEAK</td></tr><tr><td>4</td><td>5720.07</td><td>61.63</td><td>110.95</td><td>-49.32</td><td>52.41</td><td>33.64</td><td>13.50</td><td>37.92</td><td>0.00</td><td>395</td><td>4</td><td>PEAK</td></tr></tbody></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			cm	deg	1	5647.20	59.93	68.20	-8.27	51.26	33.19	13.40	37.92	0.00	395	4	PEAK	2	5650.45	58.33	68.53	-10.20	49.64	33.20	13.41	37.92	0.00	395	4	PEAK	3	5711.22	64.44	108.34	-43.90	55.25	33.62	13.49	37.92	0.00	395	4	PEAK	4	5720.07	61.63	110.95	-49.32	52.41	33.64	13.50	37.92	0.00	395	4	PEAK	 Level (dBuV/m) Frequency (MHz) PEAK(UNII 4) Site : 03CH20-HY Condition: PEAK(UNII 4) 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5855.00</td><td>103.66</td><td>-----</td><td>-----</td><td>93.58</td><td>34.30</td><td>13.70</td><td>37.92</td><td>0.00</td><td>395</td><td>4</td><td>PEAK</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			cm	deg	1	5855.00	103.66	-----	-----	93.58	34.30	13.70	37.92	0.00	395	4	PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																															
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			cm	deg																																																																																																															
1	5647.20	59.93	68.20	-8.27	51.26	33.19	13.40	37.92	0.00	395	4	PEAK																																																																																																													
2	5650.45	58.33	68.53	-10.20	49.64	33.20	13.41	37.92	0.00	395	4	PEAK																																																																																																													
3	5711.22	64.44	108.34	-43.90	55.25	33.62	13.49	37.92	0.00	395	4	PEAK																																																																																																													
4	5720.07	61.63	110.95	-49.32	52.41	33.64	13.50	37.92	0.00	395	4	PEAK																																																																																																													
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			cm	deg																																																																																																															
1	5855.00	103.66	-----	-----	93.58	34.30	13.70	37.92	0.00	395	4	PEAK																																																																																																													
Avg	Blank						 Level (dBuV/m) Frequency (MHz) AVG(UNII 4) Site : 03CH20-HY Condition: AVG(UNII 4) 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:1.500kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5855.00</td><td>96.59</td><td>-----</td><td>-----</td><td>86.51</td><td>34.30</td><td>13.70</td><td>37.92</td><td>0.00</td><td>395</td><td>4</td><td>AVERAGE</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			cm	deg	1	5855.00	96.59	-----	-----	86.51	34.30	13.70	37.92	0.00	395	4	AVERAGE																																																																											
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																															
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			cm	deg																																																																																																															
1	5855.00	96.59	-----	-----	86.51	34.30	13.70	37.92	0.00	395	4	AVERAGE																																																																																																													

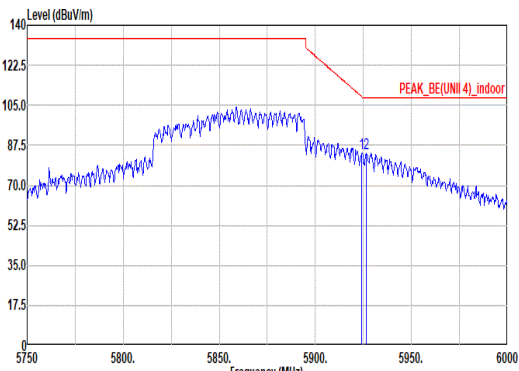
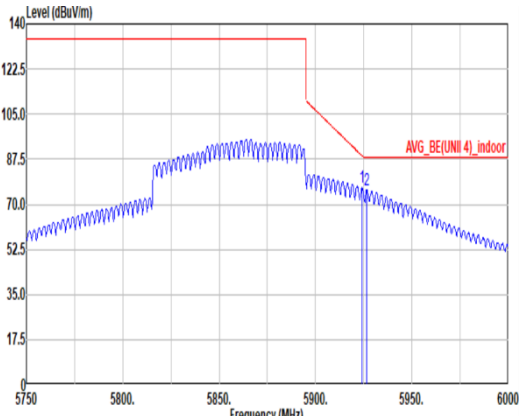


Mode	75																																																								
	Band Edge - R																																																								
	U-NII-4_5.85-5.895_802.11ax HE80_CH171_Full RU_5855MHz																																																								
ANT	4+3																																																								
Pol.	Vertical	Fundamental																																																							
Peak	 Site : 03CH20-HY Condition: PEAK_BE(UNII 4)_indoor 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5924.25</td><td>84.18</td><td>108.75</td><td>-24.57</td><td>74.03</td><td>34.30</td><td>13.78</td><td>37.93</td><td>0.00</td><td>395</td><td>4 PEAK</td></tr><tr><td>2</td><td>5926.50</td><td>84.24</td><td>108.20</td><td>-23.96</td><td>74.09</td><td>34.30</td><td>13.78</td><td>37.93</td><td>0.00</td><td>395</td><td>4 PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5924.25	84.18	108.75	-24.57	74.03	34.30	13.78	37.93	0.00	395	4 PEAK	2	5926.50	84.24	108.20	-23.96	74.09	34.30	13.78	37.93	0.00	395	4 PEAK	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																															
1	5924.25	84.18	108.75	-24.57	74.03	34.30	13.78	37.93	0.00	395	4 PEAK																																														
2	5926.50	84.24	108.20	-23.96	74.09	34.30	13.78	37.93	0.00	395	4 PEAK																																														
Avg	 Site : 03CH20-HY Condition: AVG_BE(UNII 4)_indoor 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:1.500kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5924.25</td><td>76.37</td><td>88.75</td><td>-12.38</td><td>66.22</td><td>34.30</td><td>13.78</td><td>37.93</td><td>0.00</td><td>395</td><td>4 AVERAGE</td></tr><tr><td>2</td><td>5926.50</td><td>75.66</td><td>88.20</td><td>-12.54</td><td>65.51</td><td>34.30</td><td>13.78</td><td>37.93</td><td>0.00</td><td>395</td><td>4 AVERAGE</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5924.25	76.37	88.75	-12.38	66.22	34.30	13.78	37.93	0.00	395	4 AVERAGE	2	5926.50	75.66	88.20	-12.54	65.51	34.30	13.78	37.93	0.00	395	4 AVERAGE	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																															
1	5924.25	76.37	88.75	-12.38	66.22	34.30	13.78	37.93	0.00	395	4 AVERAGE																																														
2	5926.50	75.66	88.20	-12.54	65.51	34.30	13.78	37.93	0.00	395	4 AVERAGE																																														

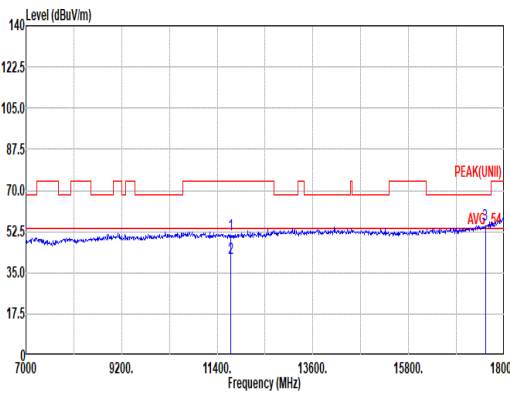
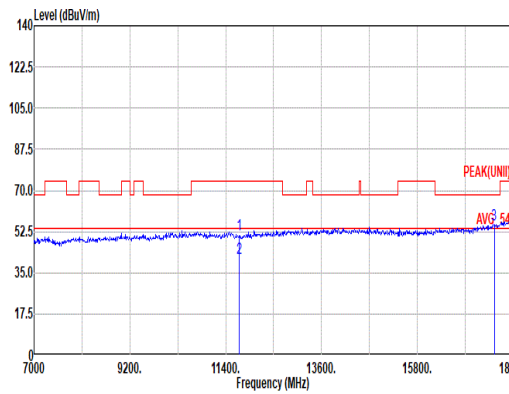


Mode	75											
	Harmonic											
	U-NII-4_5.85-5.895_802.11ax HE80_CH171_Full RU_5855MHz											
ANT	4+3											
Pol.	Horizontal						Vertical					
Peak Avg												
	Site : 03CH20-HY Condition: PEAK(UNII) 3m HF_91280_02360_241101 HORIZONTAL						Site : 03CH20-HY Condition: PEAK(UNII) 3m HF_91280_02360_241101 VERTICAL					
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	11710.00	51.31	74.00	-22.69	35.07	38.58	19.60	42.64	0.70	300	127	PEAK
2	11710.00	41.42	54.00	-12.58	25.18	38.58	19.60	42.64	0.70	300	127	Average
3	17565.00	55.49	68.20	-12.71	34.99	40.53	24.22	44.91	0.66	--	--	PEAK
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	11710.00	51.34	74.00	-22.66	35.10	38.58	19.60	42.64	0.70	300	59	PEAK
2	11710.00	41.44	54.00	-12.56	25.20	38.58	19.60	42.64	0.70	300	59	Average
3	17565.00	55.35	68.20	-12.85	34.85	40.53	24.22	44.91	0.66	--	--	PEAK



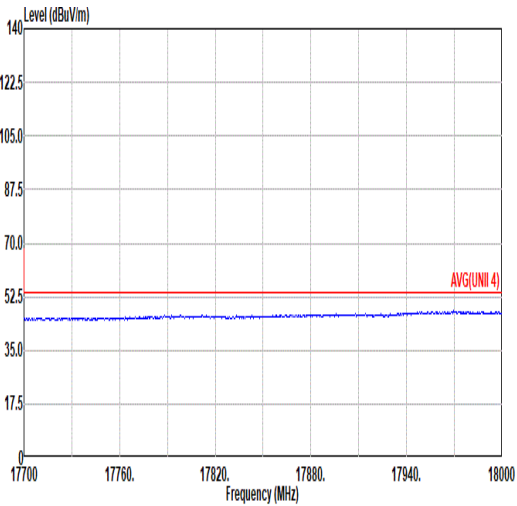
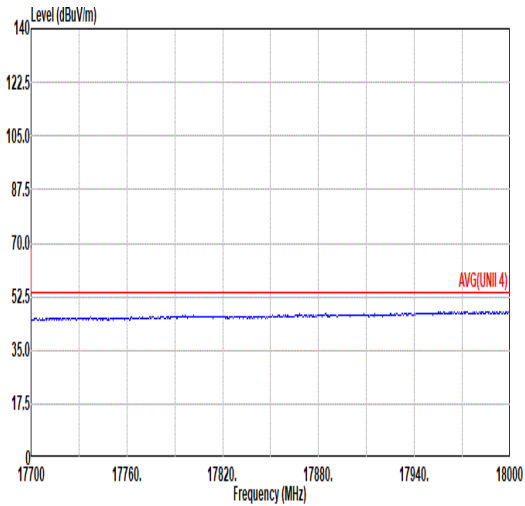


Mode	75	
	Harmonic	
	U-NII-4_5.85-5.895_802.11ax HE80_CH171_Full RU_5855MHz	
ANT	4+3	
Pol.	Horizontal	Vertical
17.7G ~18G Avg	 Site : 03CH20-HY Condition: AVG(UNII 4) 3m HF_91200_02360_241101 HORIZONTAL	 Site : 03CH20-HY Condition: AVG(UNII 4) 3m HF_91200_02360_241101 VERTICAL

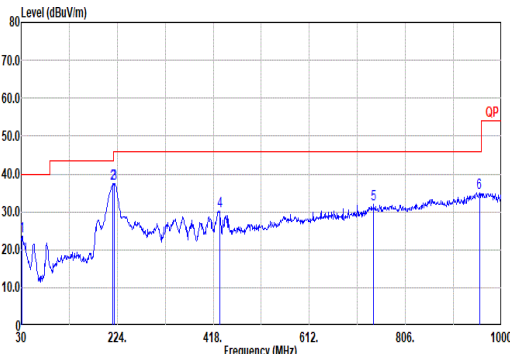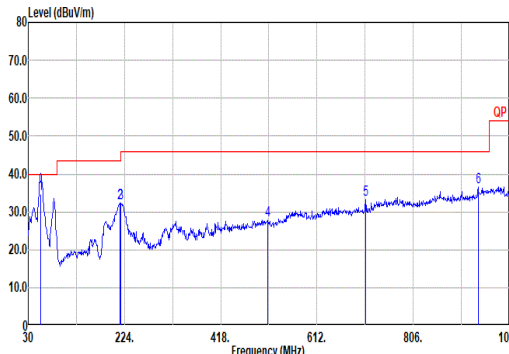

Mode	78																																																																																																																																																																																					
	LF																																																																																																																																																																																					
	U-NII-4_5.85-5.895_802.11ax HE20_CH177_Partial_26/8RU_5885MHz																																																																																																																																																																																					
ANT	4+3																																																																																																																																																																																					
Pol.	Horizontal	Vertical																																																																																																																																																																																				
QP/ Peak	 Site : 03CH20-HY Condition: QP 3m Bilog_55606 & 08_241127 HORIZONTAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr><tr><td>1</td><td>30.97</td><td>23.69</td><td>40.00</td><td>-16.31</td><td>34.09</td><td>24.12</td><td>0.98</td><td>35.75</td><td>0.25 -- -- Peak</td></tr><tr><td>2</td><td>215.27</td><td>37.37</td><td>43.50</td><td>-6.13</td><td>54.84</td><td>15.20</td><td>2.61</td><td>35.48</td><td>0.20 -- -- Peak</td></tr><tr><td>3</td><td>218.18</td><td>37.46</td><td>46.00</td><td>-8.54</td><td>54.75</td><td>15.35</td><td>2.63</td><td>35.47</td><td>0.20 -- -- Peak</td></tr><tr><td>4</td><td>430.61</td><td>30.26</td><td>46.00</td><td>-15.74</td><td>38.63</td><td>22.76</td><td>3.67</td><td>34.94</td><td>0.14 -- -- Peak</td></tr><tr><td>5</td><td>741.98</td><td>31.90</td><td>46.00</td><td>-14.10</td><td>32.77</td><td>28.09</td><td>4.82</td><td>33.92</td><td>0.14 -- -- Peak</td></tr><tr><td>6</td><td>955.38</td><td>35.00</td><td>46.00</td><td>-11.00</td><td>31.67</td><td>30.94</td><td>5.44</td><td>33.14</td><td>0.09 -- -- Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1	30.97	23.69	40.00	-16.31	34.09	24.12	0.98	35.75	0.25 -- -- Peak	2	215.27	37.37	43.50	-6.13	54.84	15.20	2.61	35.48	0.20 -- -- Peak	3	218.18	37.46	46.00	-8.54	54.75	15.35	2.63	35.47	0.20 -- -- Peak	4	430.61	30.26	46.00	-15.74	38.63	22.76	3.67	34.94	0.14 -- -- Peak	5	741.98	31.90	46.00	-14.10	32.77	28.09	4.82	33.92	0.14 -- -- Peak	6	955.38	35.00	46.00	-11.00	31.67	30.94	5.44	33.14	0.09 -- -- Peak	 Site : 03CH20-HY Condition: QP 3m Bilog_55606 & 08_241127 VERTICAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr><tr><td>1</td><td>55.22</td><td>34.83</td><td>40.00</td><td>-5.17</td><td>56.25</td><td>12.77</td><td>1.31</td><td>35.73</td><td>0.23 100 360 QP</td></tr><tr><td>2</td><td>215.27</td><td>32.27</td><td>43.50</td><td>-11.23</td><td>49.74</td><td>15.20</td><td>2.61</td><td>35.48</td><td>0.20 -- -- Peak</td></tr><tr><td>3</td><td>217.21</td><td>32.16</td><td>46.00</td><td>-13.84</td><td>49.53</td><td>15.28</td><td>2.62</td><td>35.47</td><td>0.20 -- -- Peak</td></tr><tr><td>4</td><td>512.09</td><td>27.85</td><td>46.00</td><td>-18.15</td><td>34.46</td><td>24.00</td><td>3.99</td><td>34.73</td><td>0.13 -- -- Peak</td></tr><tr><td>5</td><td>709.97</td><td>33.23</td><td>46.00</td><td>-12.77</td><td>35.63</td><td>26.78</td><td>4.71</td><td>34.05</td><td>0.16 -- -- Peak</td></tr><tr><td>6</td><td>936.95</td><td>36.39</td><td>46.00</td><td>-9.61</td><td>34.07</td><td>30.00</td><td>5.40</td><td>33.20</td><td>0.12 -- -- Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1	55.22	34.83	40.00	-5.17	56.25	12.77	1.31	35.73	0.23 100 360 QP	2	215.27	32.27	43.50	-11.23	49.74	15.20	2.61	35.48	0.20 -- -- Peak	3	217.21	32.16	46.00	-13.84	49.53	15.28	2.62	35.47	0.20 -- -- Peak	4	512.09	27.85	46.00	-18.15	34.46	24.00	3.99	34.73	0.13 -- -- Peak	5	709.97	33.23	46.00	-12.77	35.63	26.78	4.71	34.05	0.16 -- -- Peak	6	936.95	36.39	46.00	-9.61	34.07	30.00	5.40	33.20	0.12 -- -- Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																												
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																																																																																																																													
1	30.97	23.69	40.00	-16.31	34.09	24.12	0.98	35.75	0.25 -- -- Peak																																																																																																																																																																													
2	215.27	37.37	43.50	-6.13	54.84	15.20	2.61	35.48	0.20 -- -- Peak																																																																																																																																																																													
3	218.18	37.46	46.00	-8.54	54.75	15.35	2.63	35.47	0.20 -- -- Peak																																																																																																																																																																													
4	430.61	30.26	46.00	-15.74	38.63	22.76	3.67	34.94	0.14 -- -- Peak																																																																																																																																																																													
5	741.98	31.90	46.00	-14.10	32.77	28.09	4.82	33.92	0.14 -- -- Peak																																																																																																																																																																													
6	955.38	35.00	46.00	-11.00	31.67	30.94	5.44	33.14	0.09 -- -- Peak																																																																																																																																																																													
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																																																																																																																													
1	55.22	34.83	40.00	-5.17	56.25	12.77	1.31	35.73	0.23 100 360 QP																																																																																																																																																																													
2	215.27	32.27	43.50	-11.23	49.74	15.20	2.61	35.48	0.20 -- -- Peak																																																																																																																																																																													
3	217.21	32.16	46.00	-13.84	49.53	15.28	2.62	35.47	0.20 -- -- Peak																																																																																																																																																																													
4	512.09	27.85	46.00	-18.15	34.46	24.00	3.99	34.73	0.13 -- -- Peak																																																																																																																																																																													
5	709.97	33.23	46.00	-12.77	35.63	26.78	4.71	34.05	0.16 -- -- Peak																																																																																																																																																																													
6	936.95	36.39	46.00	-9.61	34.07	30.00	5.40	33.20	0.12 -- -- Peak																																																																																																																																																																													

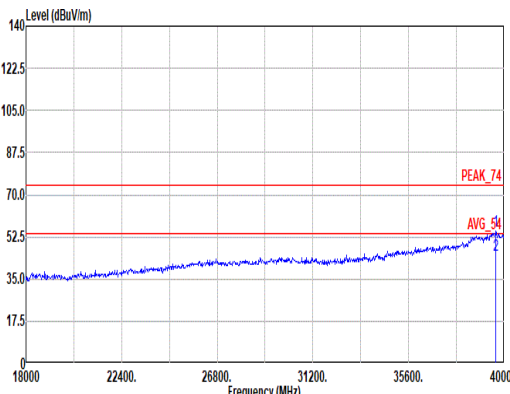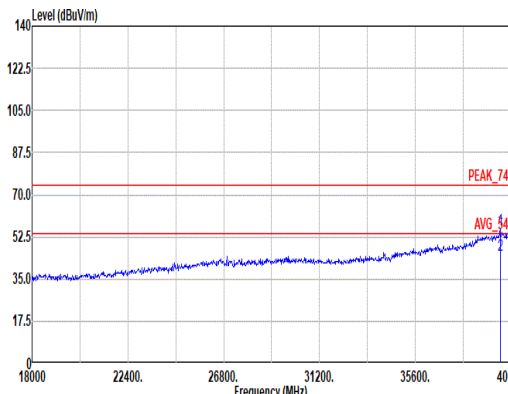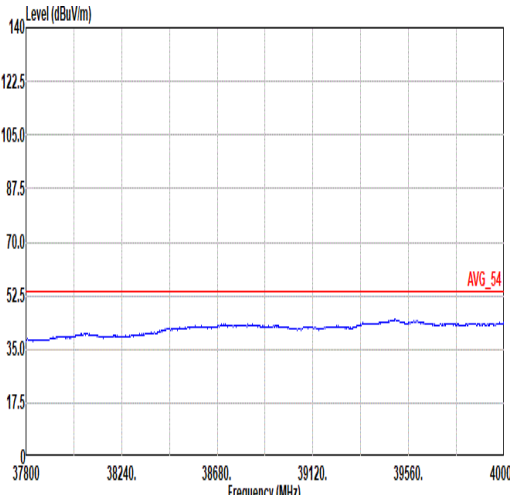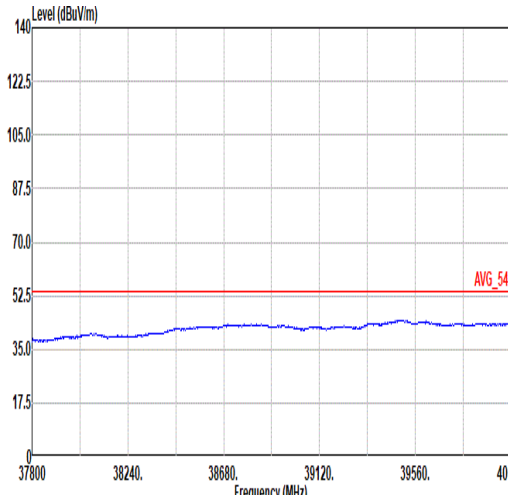

Mode	81																																																																																																					
	SHF																																																																																																					
	U-NII-4_5.85-5.895_802.11ax HE20_CH177_Partial_26/8RU_5885MHz																																																																																																					
ANT	4+3																																																																																																					
Pol.	Horizontal	Vertical																																																																																																				
Peak	 Site : 03CH20-HY Condition: PEAK_74 1m 8BHA9170_1224_240624 HORIZONTAL <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr></thead><tbody><tr><td>1 39626.00</td><td>55.14</td><td>74.00</td><td>-18.86</td><td>38.60</td><td>45.29</td><td>36.79</td><td>56.00</td><td>-9.54</td><td>-- -- Peak</td></tr><tr><td>2 39626.00</td><td>44.95</td><td>54.00</td><td>-9.05</td><td>28.41</td><td>45.29</td><td>36.79</td><td>56.00</td><td>-9.54</td><td>-- -- Average</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1 39626.00	55.14	74.00	-18.86	38.60	45.29	36.79	56.00	-9.54	-- -- Peak	2 39626.00	44.95	54.00	-9.05	28.41	45.29	36.79	56.00	-9.54	-- -- Average	 Site : 03CH20-HY Condition: PEAK_74 1m 8BHA9170_1224_240624 VERTICAL <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr></thead><tbody><tr><td>1 39494.00</td><td>55.23</td><td>74.00</td><td>-18.77</td><td>38.55</td><td>45.74</td><td>36.68</td><td>56.20</td><td>-9.54</td><td>-- -- Peak</td></tr><tr><td>2 39494.00</td><td>45.10</td><td>54.00</td><td>-8.90</td><td>28.42</td><td>45.74</td><td>36.68</td><td>56.20</td><td>-9.54</td><td>-- -- Average</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1 39494.00	55.23	74.00	-18.77	38.55	45.74	36.68	56.20	-9.54	-- -- Peak	2 39494.00	45.10	54.00	-8.90	28.42	45.74	36.68	56.20	-9.54	-- -- Average
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																																													
1 39626.00	55.14	74.00	-18.86	38.60	45.29	36.79	56.00	-9.54	-- -- Peak																																																																																													
2 39626.00	44.95	54.00	-9.05	28.41	45.29	36.79	56.00	-9.54	-- -- Average																																																																																													
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																																													
1 39494.00	55.23	74.00	-18.77	38.55	45.74	36.68	56.20	-9.54	-- -- Peak																																																																																													
2 39494.00	45.10	54.00	-8.90	28.42	45.74	36.68	56.20	-9.54	-- -- Average																																																																																													
Avg	 Site : 03CH20-HY Condition: AVG_54 1m 8BHA9170_1224_240624 HORIZONTAL	 Site : 03CH20-HY Condition: AVG_54 1m 8BHA9170_1224_240624 VERTICAL																																																																																																				





Appendix D. Duty Cycle Plots


<For Radiated Spurious Emission test>

Antenna	Band	Duty Cycle(%)	T(us)	1/T(kHz)	VBW Setting
4+3	802.11a	99.46	-	-	10Hz
4+3	5GHz 802.11ax HE20 Full RU	99.24	-	-	10Hz
4+3	5GHz 802.11ax HE20 26 RU	98.24	-	-	10Hz
4+3	5GHz 802.11ax HE20 52 RU	97.99	1460	0.68	750Hz
4+3	5GHz 802.11ax HE20 106 RU	97.74	1300	0.77	820Hz
4+3	5GHz 802.11ax HE40 Full RU	98.66	-	-	10Hz
4+3	5GHz 802.11ax HE80 Full RU	97.61	735	1.36	1.5kHz

MIMO <Ant. 4+3>

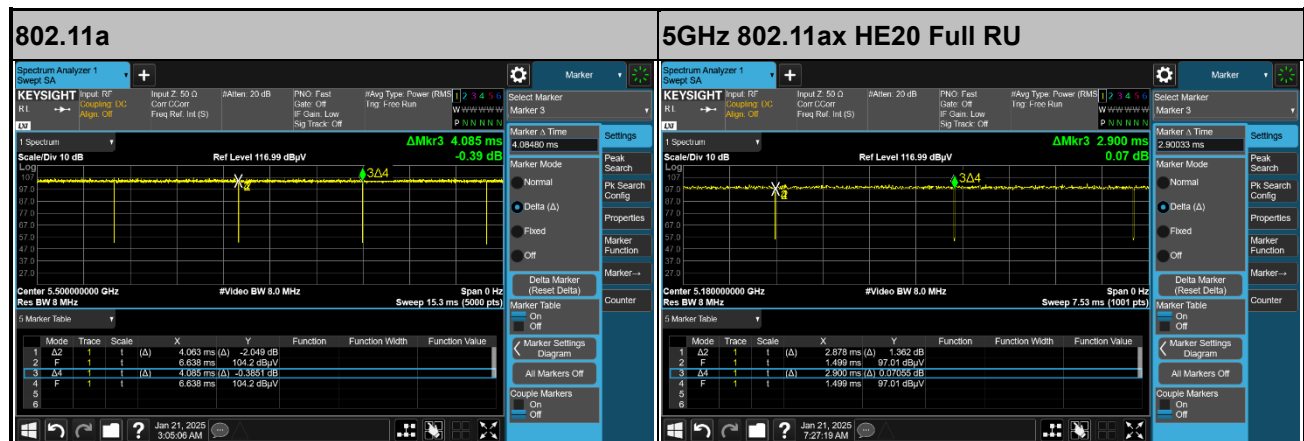

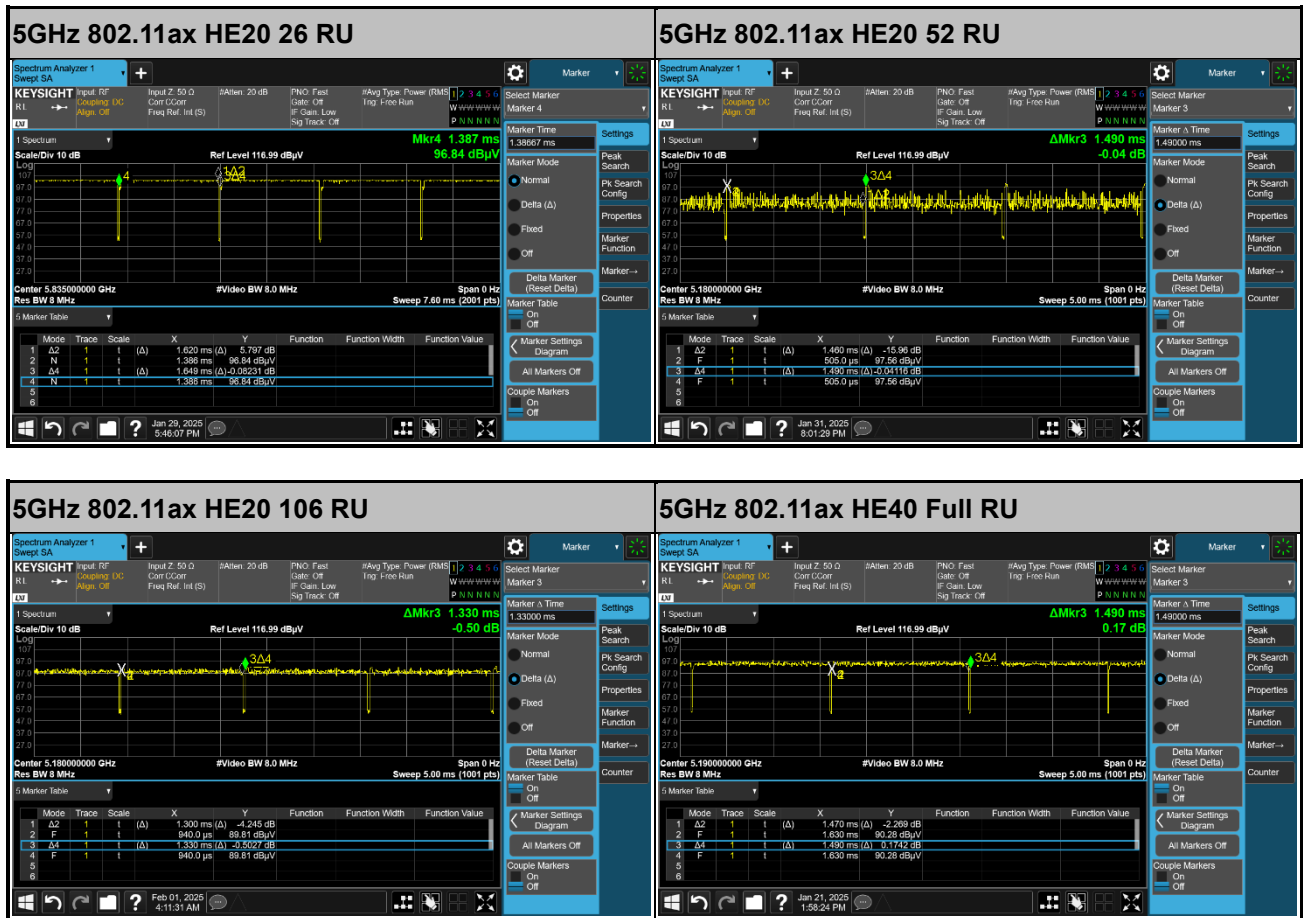

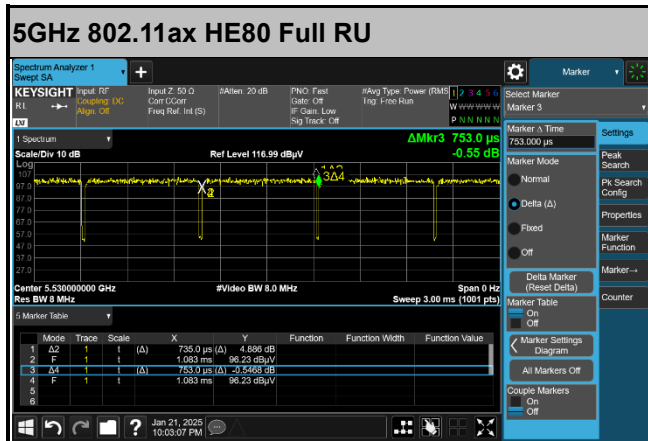

<For Conducted test>


Antenna	Band	Duty Cycle(%)	T(us)	Duty Factor(dB)
4+3	802.11a for Ant.4	99.51	4065	0.02
4+3	802.11a for Ant.3	99.51	4067	0.02
4+3	5GHz 802.11ax HE20 Full RU for Ant. 4	99.41	2880	0.03
4+3	5GHz 802.11ax HE20 Full RU for Ant. 3	99.31	2880	0.03
4+3	5GHz 802.11ax HE20 26 RU for Ant. 4	99.49	5313	0.02
4+3	5GHz 802.11ax HE20 26 RU for Ant. 3	99.36	5306	0.03
4+3	5GHz 802.11ax HE20 52 RU for Ant. 4	99.50	5147	0.02
4+3	5GHz 802.11ax HE20 52 RU for Ant. 3	99.36	5147	0.03
4+3	5GHz 802.11ax HE20 106 RU for Ant. 4	99.31	4767	0.03
4+3	5GHz 802.11ax HE20 106 RU for Ant. 3	99.31	4767	0.03
4+3	5GHz 802.11ax HE40 for Ant. 4	98.66	1470	0.06
4+3	5GHz 802.11ax HE40 for Ant. 3	98.59	1470	0.06
4+3	5GHz 802.11ax HE80 for Ant. 4	97.35	735	0.12
4+3	5GHz 802.11ax HE80 for Ant. 3	97.35	736	0.12

Note: The duty factor applied for each channel is verified before PSD measurement, there might be negligible factor delta between low, middle and high channels so table above is just for reference only.



MIMO <Ant. 4+3>

802.11a

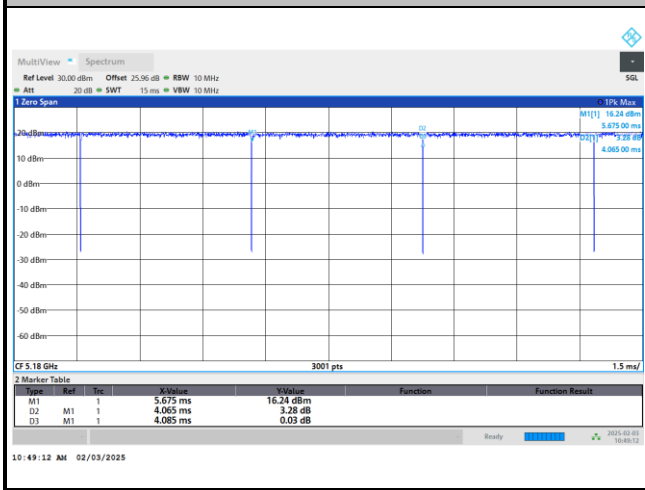

—THE END—