

Date: 2025-02-21

#01_GSM850_GPRS (4 Tx slots)_Right Cheek_0mm_Ch251

Communication System: GPRS-FDD ; Frequency: 848.800 MHz

Medium: HSL_850_250221 Medium parameters used: $f = 848.800$ MHz; $\sigma = 0.932$ S/m; $\epsilon_r = 42.8$

Ambient Temperature: 23.1°C; Liquid Temperature: 22.1°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7695; ConvF(9.78, 9.7, 10.56); Calibrated: 2024-12-02
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1707; Calibrated: 2024-12-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2145; Section: RightHead
- Measurement Software: 16.2.4.2524
- UID: GSM, 10028-DAC

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.604 W/kg; SAR (10g) = 0.397 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.03 dB

SAR (1g) = 0.561 W/kg; SAR (8g) = 0.355 W/kg; SAR (10g) = 0.323 W/kg

Smallest distance from peaks to all points 3 dB below = 6.5 mm

Ratio of SAR at M2 to SAR at M1 = 71.1 %

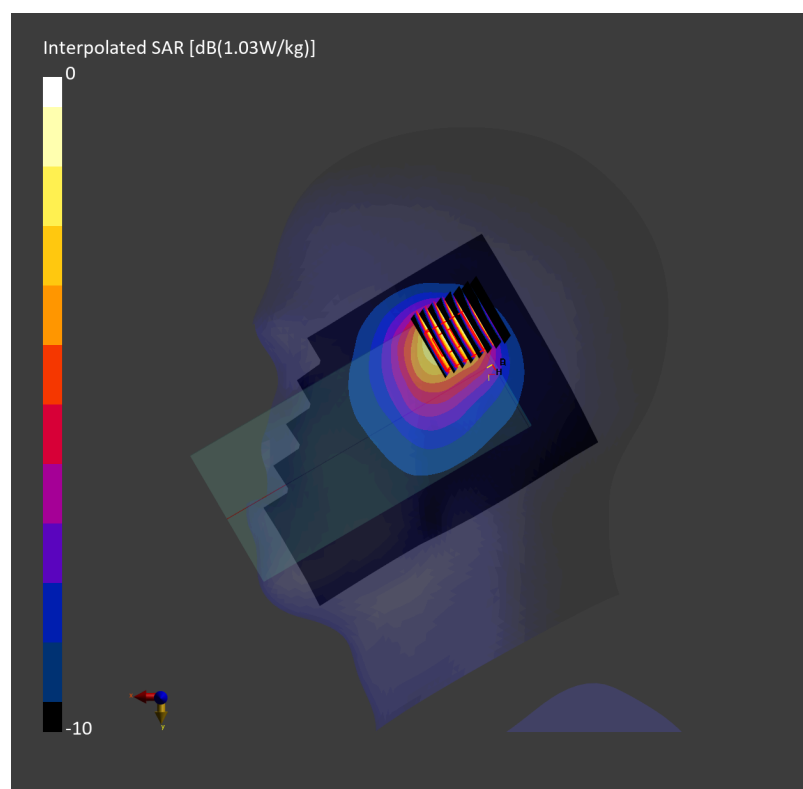

Date: 2025-02-02

#02_GSM1900_GPRS (4 Tx slots)_Right Cheek_0mm_Ch661

Communication System: GPRS-FDD ; Frequency: 1880.000 MHz

Medium: HSL_1900_250202 Medium parameters used: $f = 1880.000$ MHz; $\sigma = 1.41$ S/m; $\epsilon_r = 39.1$

Ambient Temperature: 23.4°C; Liquid Temperature: 22.4°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7694; ConvF(7.62, 7.44, 8.32); Calibrated: 2024-11-18
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1697; Calibrated: 2024-11-14
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2127; Section: RightHead
- Measurement Software: 16.2.4.2524
- UID: GSM, 10028-DAC

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.377 W/kg; SAR (10g) = 0.217 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.13 dB

SAR (1g) = 0.412 W/kg; SAR (8g) = 0.279 W/kg; SAR (10g) = 0.262 W/kg

Smallest distance from peaks to all points 3 dB below = 12.1 mm

Ratio of SAR at M2 to SAR at M1 = 91.0 %

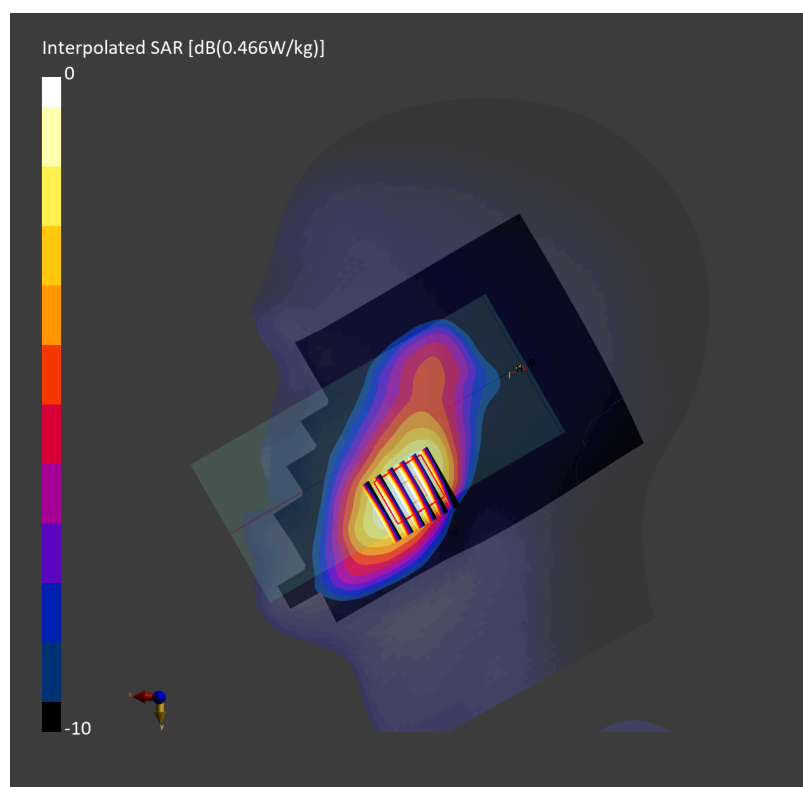

Date: 2025-02-03

#03_WCDMA II_RMC 12.2Kbps_Right Cheek_0mm_Ch9400


Communication System: UMTS-FDD; Frequency: 1880.000 MHz
Medium: HSL_1900_250203 Medium parameters used: $f = 1880.000$ MHz; $\sigma = 1.37$ S/m; $\epsilon_r = 40.6$
Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7785; ConvF(6.72, 7.08, 6.92); Calibrated: 2024-11-28
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1694; Calibrated: 2024-11-19
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: RightHead
- Measurement Software: 16.2.4.2524
- UID: WCDMA, 10011-CAC

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
SAR (1g) = 0.426 W/kg; SAR (10g) = 0.241 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
Power Drift = -0.15 dB
SAR (1g) = 0.441 W/kg; SAR (8g) = 0.296 W/kg; SAR (10g) = 0.278 W/kg
Smallest distance from peaks to all points 3 dB below = 12.3 mm
Ratio of SAR at M2 to SAR at M1 = 92.3 %

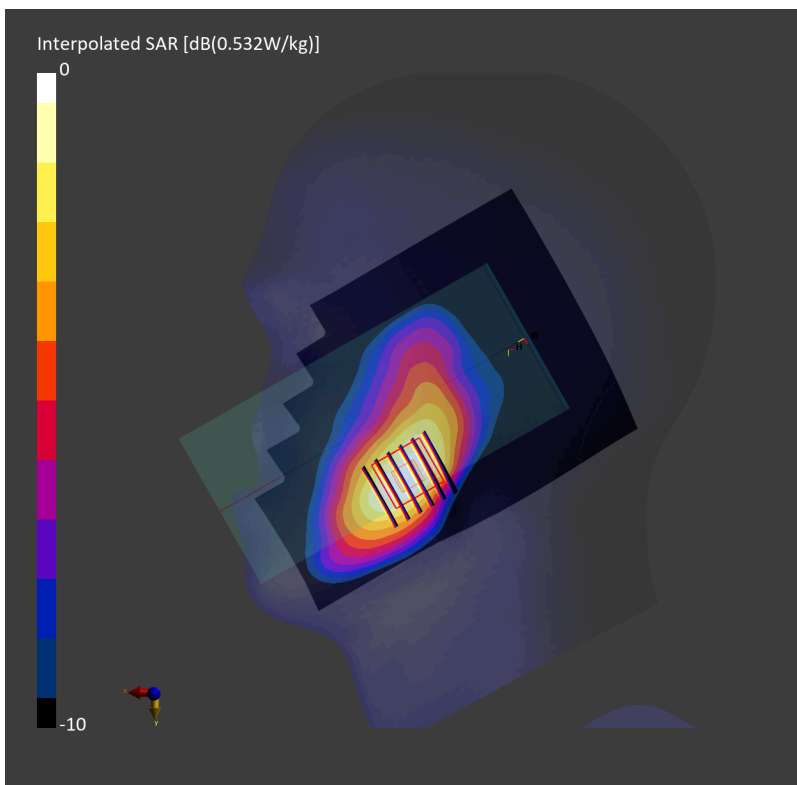

Date: 2025-02-03

#04_WCDMA IV_RMC 12.2Kbps_Right Cheek_0mm_Ch1413

Communication System: UMTS-FDD ; Frequency: 1732.600 MHz

Medium: HSL_1750_250203 Medium parameters used: $f = 1732.600$ MHz; $\sigma = 1.35$ S/m; $\epsilon_r = 40.8$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7785; ConvF(6.82, 7.18, 7.03); Calibrated: 2024-11-28
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1694; Calibrated: 2024-11-19
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: RightHead
- Measurement Software: 16.2.4.2524
- UID: WCDMA, 10011-CAC

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.347 W/kg; SAR (10g) = 0.205 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.01 dB

SAR (1g) = 0.360 W/kg; SAR (8g) = 0.251 W/kg; SAR (10g) = 0.237 W/kg

Smallest distance from peaks to all points 3 dB below = 12.6 mm

Ratio of SAR at M2 to SAR at M1 = 93.1 %

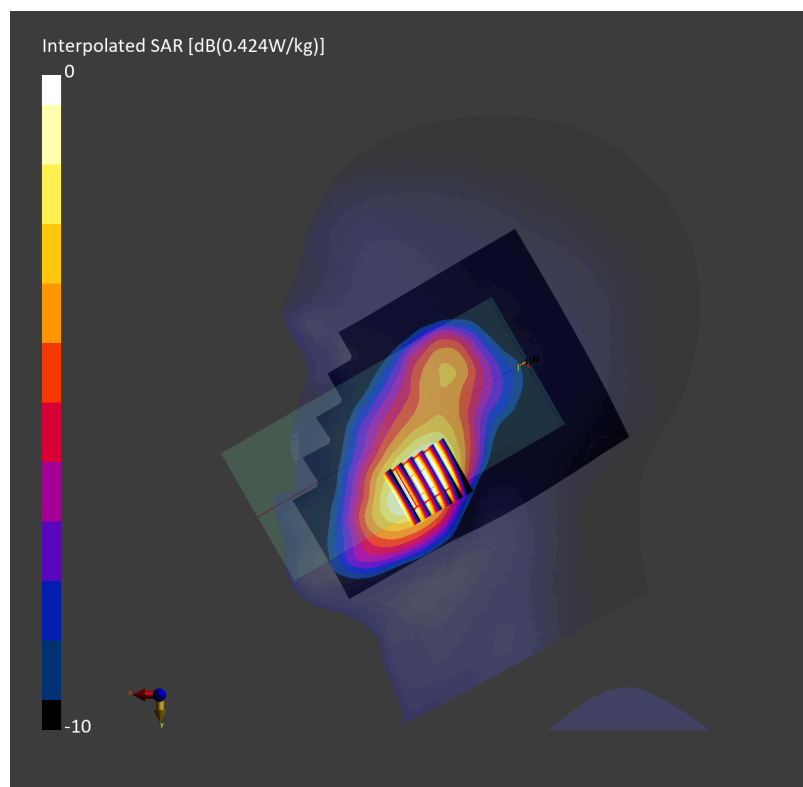

Date: 2025-01-31

#05_WCDMA V_RMC 12.2Kbps_Right Cheek_0mm_Ch4233

Communication System: UMTS-FDD ; Frequency: 846.600 MHz

Medium: HSL_850_250131 Medium parameters used: $f = 846.600$ MHz; $\sigma = 0.924$ S/m; $\epsilon_r = 41.4$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7694; ConvF(8.87, 8.66, 9.68); Calibrated: 2024-11-18
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1697; Calibrated: 2024-11-14
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2127; Section: RightHead
- Measurement Software: 16.2.4.2524
- UID: WCDMA, 10011-CAC

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.619 W/kg; SAR (10g) = 0.412 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 4.6 mm x 4.6 mm x 1.4 mm

Power Drift = -0.00 dB

SAR (1g) = 0.596 W/kg; SAR (8g) = 0.396 W/kg; SAR (10g) = 0.365 W/kg

Smallest distance from peaks to all points 3 dB below = 5.6 mm

Ratio of SAR at M2 to SAR at M1 = 72.3 %

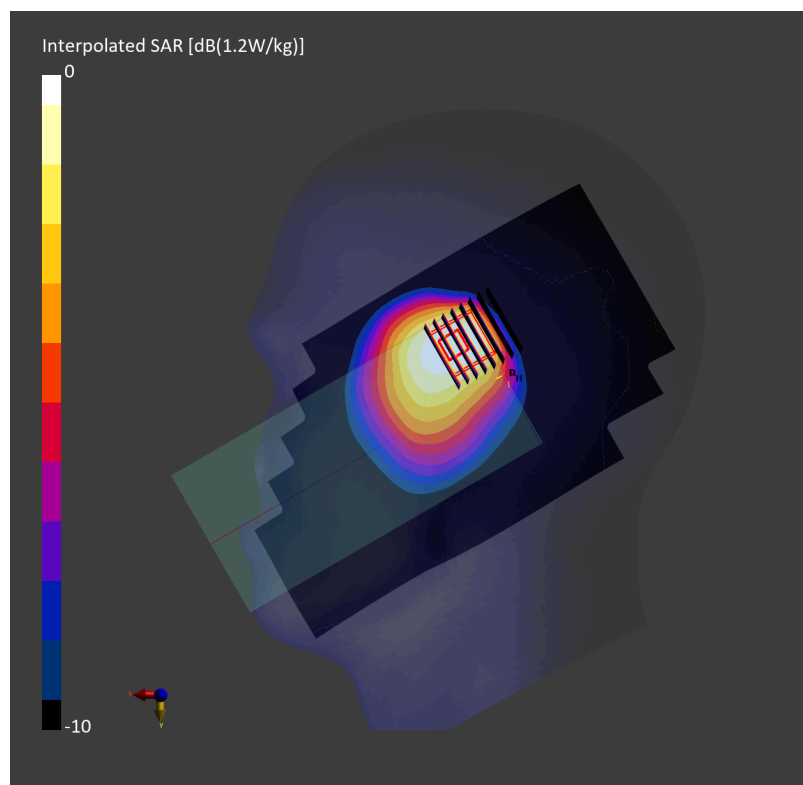

Date: 2025-02-07

#06_LTE Band 7_20M_QPSK_1_0_Right Cheek_0mm_Ch21100

Communication System: LTE-FDD ; Frequency: 2535.000 MHz

Medium: HSL_2600_250207 Medium parameters used: $f = 2535.000$ MHz; $\sigma = 1.89$ S/m; $\epsilon_r = 38.7$

Ambient Temperature: 23.6°C; Liquid Temperature: 22.6°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7695; ConvF(7.12, 7.06, 7.69); Calibrated: 2024-12-02
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1707; Calibrated: 2024-12-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2145; Section: RightHead
- Measurement Software: 16.2.4.2524
- UID: LTE-FDD, 10169-CAF

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.597 W/kg; SAR (10g) = 0.304 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = 0.01 dB

SAR (1g) = 0.616 W/kg; SAR (8g) = 0.365 W/kg; SAR (10g) = 0.336 W/kg

Smallest distance from peaks to all points 3 dB below = 10.7 mm

Ratio of SAR at M2 to SAR at M1 = 88.2 %

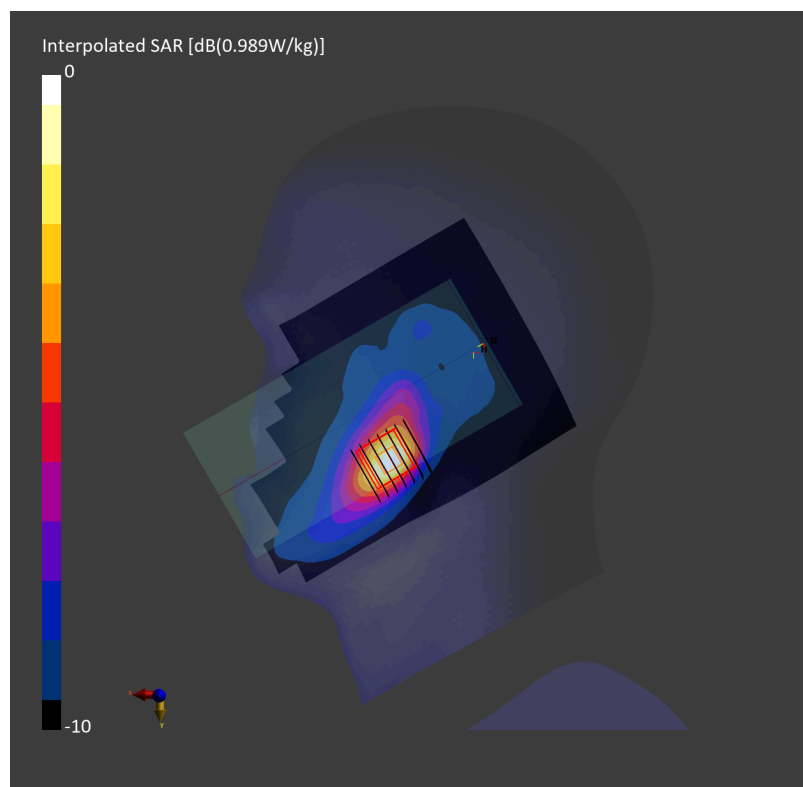

Date: 2025-02-01

#07_LTE Band 12_10M_QPSK_25_0_Right Cheek_0mm_Ch23095

Communication System: LTE-FDD; Frequency: 707.500 MHz

Medium: HSL_750_250201 Medium parameters used: $f = 707.500$ MHz; $\sigma = 0.892$ S/m; $\epsilon_r = 42.5$

Ambient Temperature: 23.7°C; Liquid Temperature: 22.7°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7694; ConvF(9.17, 8.96, 10.01); Calibrated: 2024-11-18
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1697; Calibrated: 2024-11-14
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2127; Section: RightHead
- Measurement Software: 16.2.4.2524
- UID: LTE-FDD, 10175-CAH

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.400 W/kg; SAR (10g) = 0.265 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.4 mm

Power Drift = 0.04 dB

SAR (1g) = 0.352 W/kg; SAR (8g) = 0.232 W/kg; SAR (10g) = 0.212 W/kg

Smallest distance from peaks to all points 3 dB below = 7.1 mm

Ratio of SAR at M2 to SAR at M1 = 72.4 %

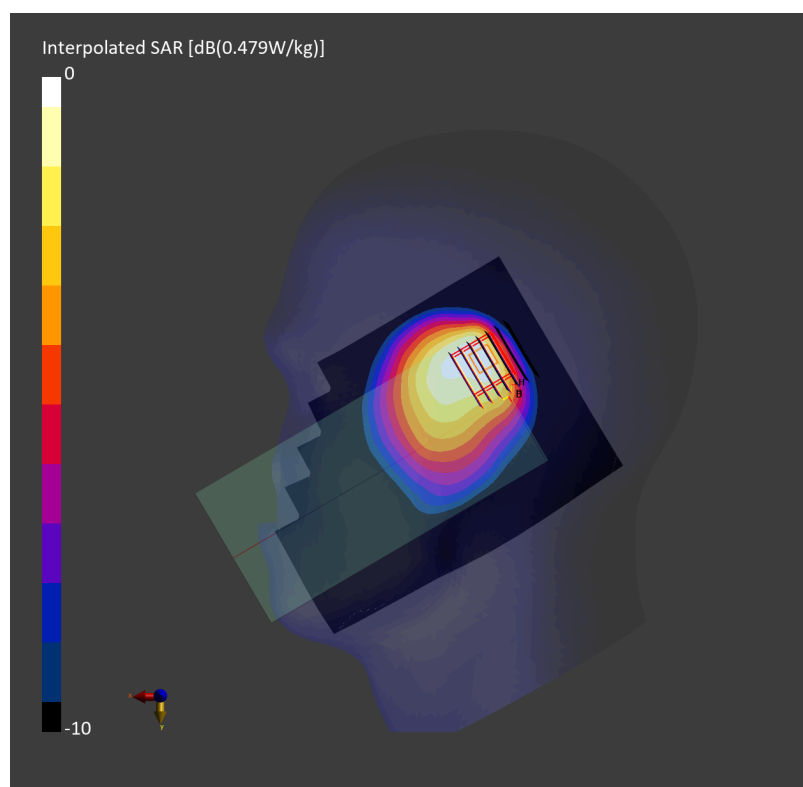

Date: 2025-02-01

#08_LTE Band 13_10M_QPSK_25_0_Right Cheek_0mm_Ch23230

Communication System: LTE-FDD; Frequency: 782.000 MHz

Medium: HSL_750_250201 Medium parameters used: $f = 782.000$ MHz; $\sigma = 0.918$ S/m; $\epsilon_r = 42.5$

Ambient Temperature: 23.7°C; Liquid Temperature: 22.7°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7694; ConvF(9.17, 8.96, 10.01); Calibrated: 2024-11-18
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1697; Calibrated: 2024-11-14
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2127; Section: RightHead
- Measurement Software: 16.2.4.2524
- UID: LTE-FDD, 10154-CAH

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.585 W/kg; SAR (10g) = 0.384 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.1 mm x 5.1 mm x 1.5 mm

Power Drift = 0.08 dB

SAR (1g) = 0.535 W/kg; SAR (8g) = 0.351 W/kg; SAR (10g) = 0.321 W/kg

Smallest distance from peaks to all points 3 dB below = 7.8 mm

Ratio of SAR at M2 to SAR at M1 = 74.4 %

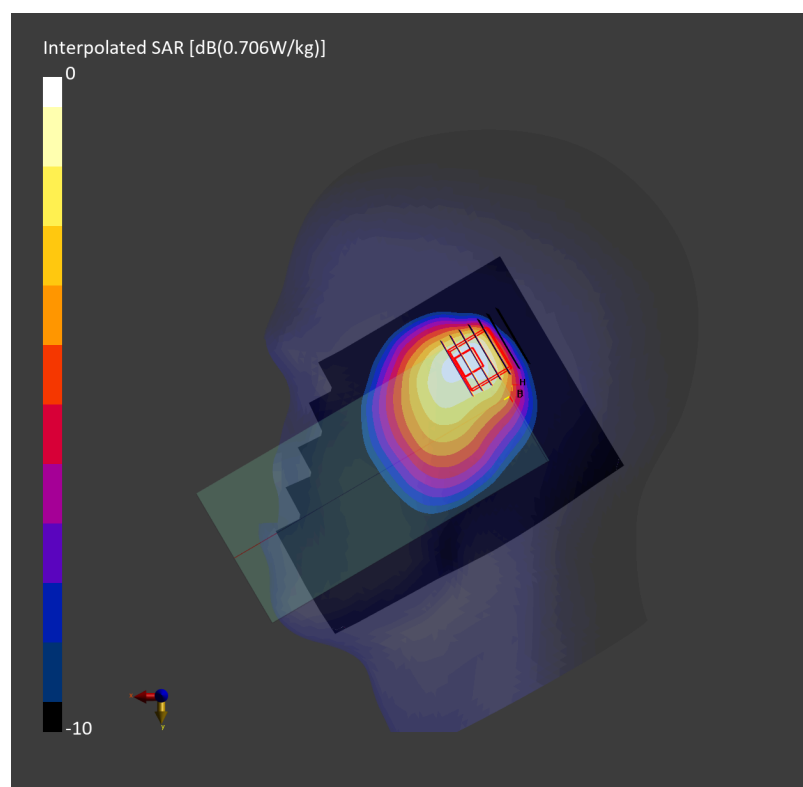

Date: 2025-02-01

#09_LTE Band 14_10M_QPSK_25_0_Right Cheek_0mm_Ch23330

Communication System: LTE-FDD ; Frequency: 793.000 MHz

Medium: HSL_750_250201 Medium parameters used: $f = 793.000$ MHz; $\sigma = 0.911$ S/m; $\epsilon_r = 41.9$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.3°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7694; ConvF(9.17, 8.96, 10.01); Calibrated: 2024-11-18
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1697; Calibrated: 2024-11-14
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2127; Section: RightHead
- Measurement Software: 16.2.4.2524
- UID: LTE-FDD, 10154-CAH

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.559 W/kg; SAR (10g) = 0.376 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.03 dB

SAR (1g) = 0.543 W/kg; SAR (8g) = 0.371 W/kg; SAR (10g) = 0.341 W/kg

Smallest distance from peaks to all points 3 dB below = 6.5 mm

Ratio of SAR at M2 to SAR at M1 = 72.4 %

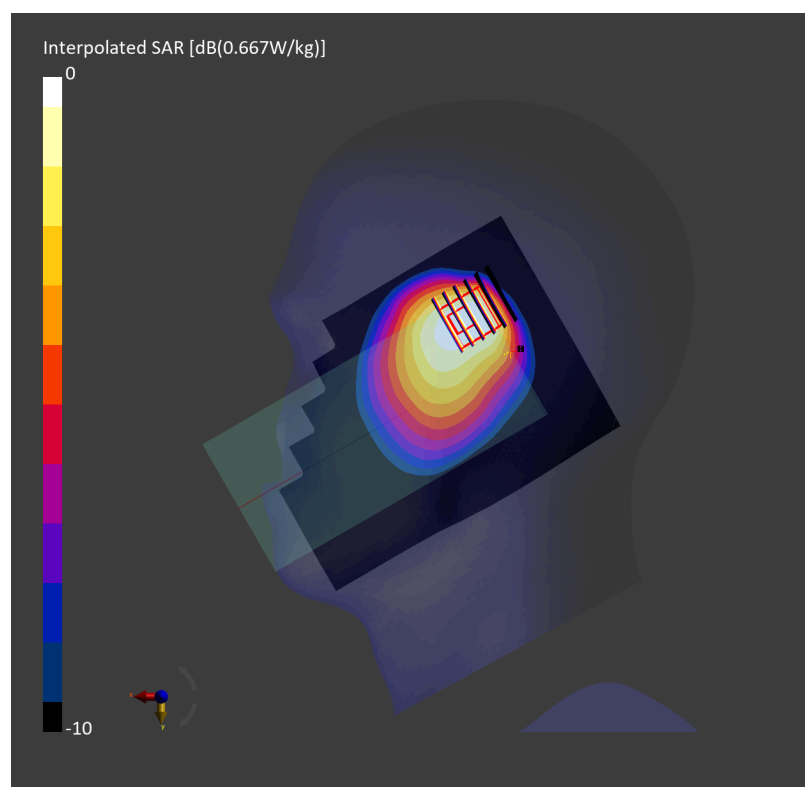

Date: 2025-02-04

#10_LTE Band 25_20M_QPSK_50_0_Right Cheek_0mm_Ch26340

Communication System: LTE-FDD ; Frequency: 1880.000 MHz

Medium: HSL_1900_250204 Medium parameters used: $f = 1880.000$ MHz; $\sigma = 1.36$ S/m; $\epsilon_r = 40.8$

Ambient Temperature: 23.4°C; Liquid Temperature: 22.4°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7695; ConvF(7.84, 7.77, 8.46); Calibrated: 2024-12-02
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1707; Calibrated: 2024-12-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2145; Section: RightHead
- Measurement Software: 16.2.4.2524
- UID: LTE-FDD, 10297-AAE

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.430 W/kg; SAR (10g) = 0.235 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.01 dB

SAR (1g) = 0.490 W/kg; SAR (8g) = 0.258 W/kg; SAR (10g) = 0.237 W/kg

Smallest distance from peaks to all points 3 dB below = 7.2 mm

Ratio of SAR at M2 to SAR at M1 = 77.5 %

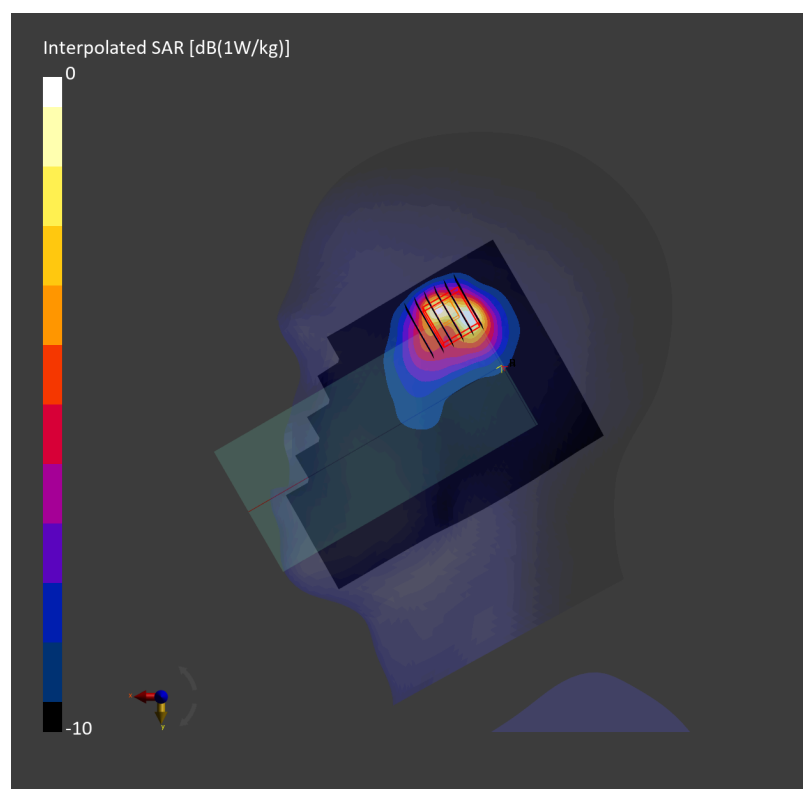

Date: 2025-02-03

#11_LTE Band 26_15M_QPSK_36_0_Right Cheek_0mm_Ch26865

Communication System: LTE-FDD; Frequency: 831.500 MHz

Medium: HSL_850_250203 Medium parameters used: $f = 831.500$ MHz; $\sigma = 0.926$ S/m; $\epsilon_r = 41.9$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.3°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7694; ConvF(8.87, 8.66, 9.68); Calibrated: 2024-11-18
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1697; Calibrated: 2024-11-14
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2127; Section: RightHead
- Measurement Software: 16.2.4.2524
- UID: LTE-FDD, 10160-CAF

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.556 W/kg; SAR (10g) = 0.366 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.04 dB

SAR (1g) = 0.517 W/kg; SAR (8g) = 0.342 W/kg; SAR (10g) = 0.316 W/kg

Smallest distance from peaks to all points 3 dB below = 6.0 mm

Ratio of SAR at M2 to SAR at M1 = 72.7 %

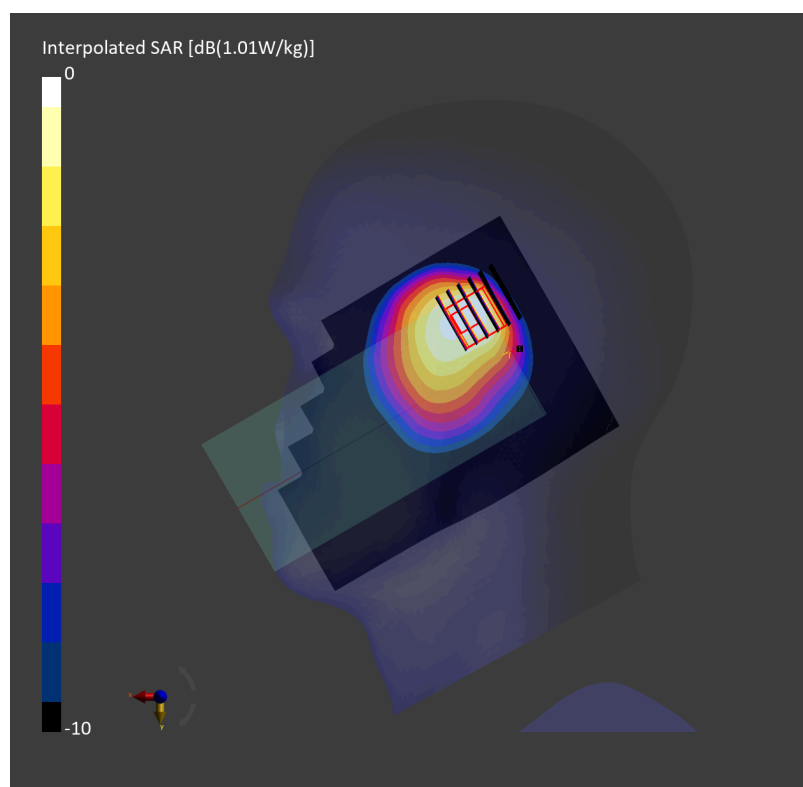

Date: 2025-03-02

#12_LTE Band 30_10M_QPSK_1_0_Right Cheek_0mm_Ch27710

Communication System: LTE-FDD; Frequency: 2310.000 MHz

Medium: HSL_2300_250302 Medium parameters used: $f = 2310.000$ MHz; $\sigma = 1.63$ S/m; $\epsilon_r = 39.1$

Ambient Temperature: 23.6°C; Liquid Temperature: 22.6°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7695; ConvF(7.48, 7.42, 8.08); Calibrated: 2024-12-02
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1707; Calibrated: 2024-12-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2145; Section: RightHead
- Measurement Software: 16.2.4.2524
- UID: LTE-FDD, 10175-CAH

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.474 W/kg; SAR (10g) = 0.251 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = -0.12 dB

SAR (1g) = 0.499 W/kg; SAR (8g) = 0.303 W/kg; SAR (10g) = 0.281 W/kg

Smallest distance from peaks to all points 3 dB below = 10.0 mm

Ratio of SAR at M2 to SAR at M1 = 89.8 %

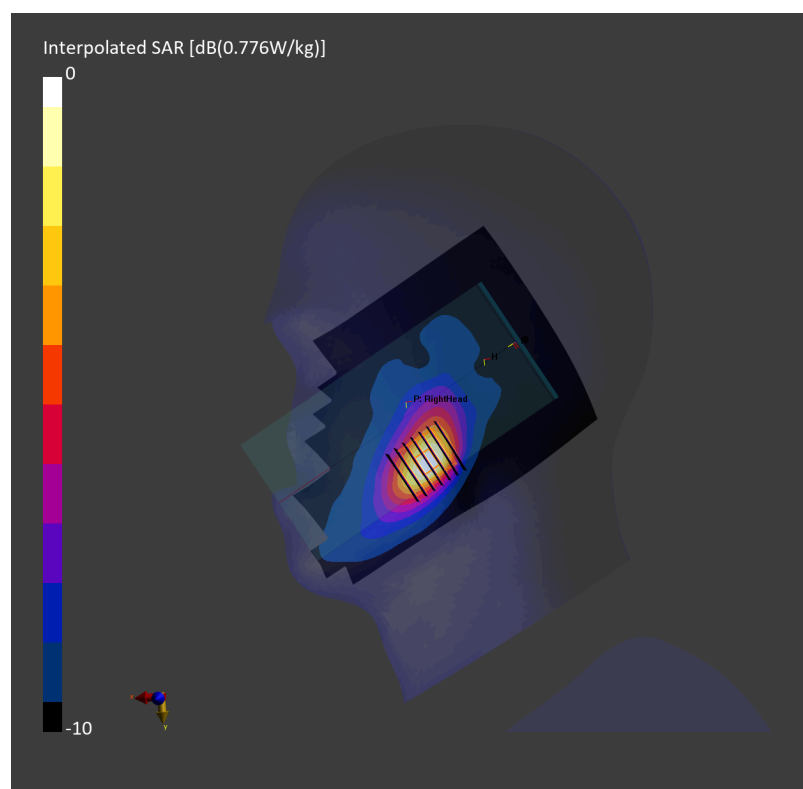

Date: 2025-03-05

#13_LTE Band 38_20M_QPSK_1_0_Right Cheek_0mm_Ch38000

Communication System: LTE-TDD; Frequency: 2595.000 MHz

Medium: HSL_2600_250305 Medium parameters used: $f = 2595.000$ MHz; $\sigma = 1.98$ S/m; $\epsilon_r = 38.9$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7695; ConvF(7.12, 7.06, 7.69); Calibrated: 2024-12-02
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1707; Calibrated: 2024-12-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2145; Section: RightHead
- Measurement Software: 16.2.4.2524
- UID: LTE-TDD, 10435-AAG

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.493 W/kg; SAR (10g) = 0.250 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = -0.14 dB

SAR (1g) = 0.514 W/kg; SAR (8g) = 0.300 W/kg; SAR (10g) = 0.276 W/kg

Smallest distance from peaks to all points 3 dB below = 10.6 mm

Ratio of SAR at M2 to SAR at M1 = 88.1 %

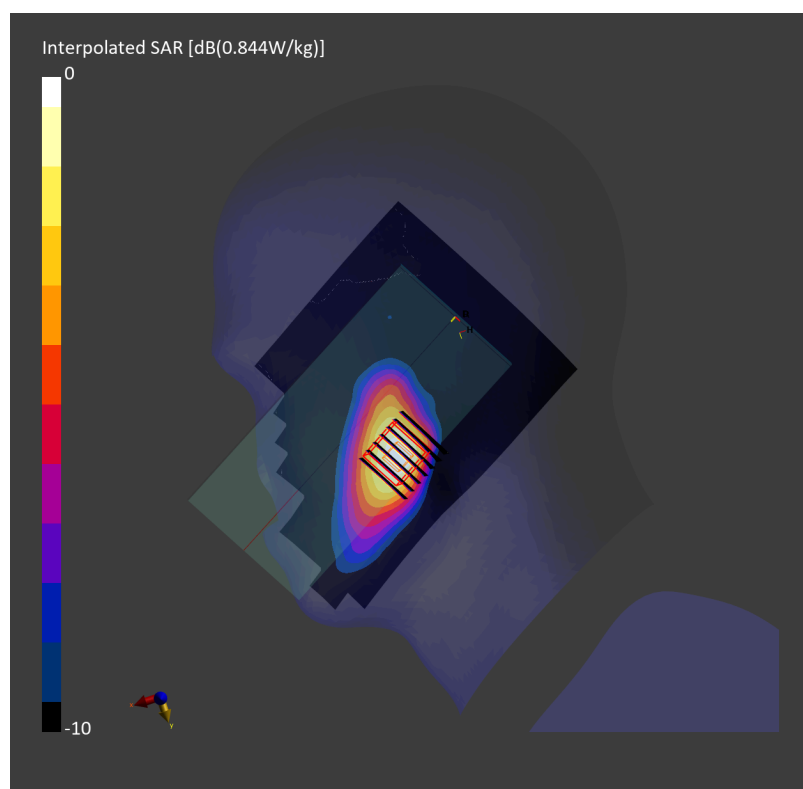

Date: 2025-02-07

#14_LTE Band 41_20M_QPSK_1_0_Right Cheek_0mm_Ch40620

Communication System: LTE-TDD ; Frequency: 2593.000 MHz

Medium: HSL_2600_250207 Medium parameters used: $f = 2593.000$ MHz; $\sigma = 1.93$ S/m; $\epsilon_r = 38.6$

Ambient Temperature: 23.6°C; Liquid Temperature: 22.6°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7695; ConvF(7.12, 7.06, 7.69); Calibrated: 2024-12-02
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1707; Calibrated: 2024-12-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2145; Section: RightHead
- Measurement Software: 16.2.4.2524
- UID: LTE-TDD, 10435-AAG

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.503 W/kg; SAR (10g) = 0.252 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = 0.02 dB

SAR (1g) = 0.531 W/kg; SAR (8g) = 0.303 W/kg; SAR (10g) = 0.278 W/kg

Smallest distance from peaks to all points 3 dB below = 10.7 mm

Ratio of SAR at M2 to SAR at M1 = 87.0 %

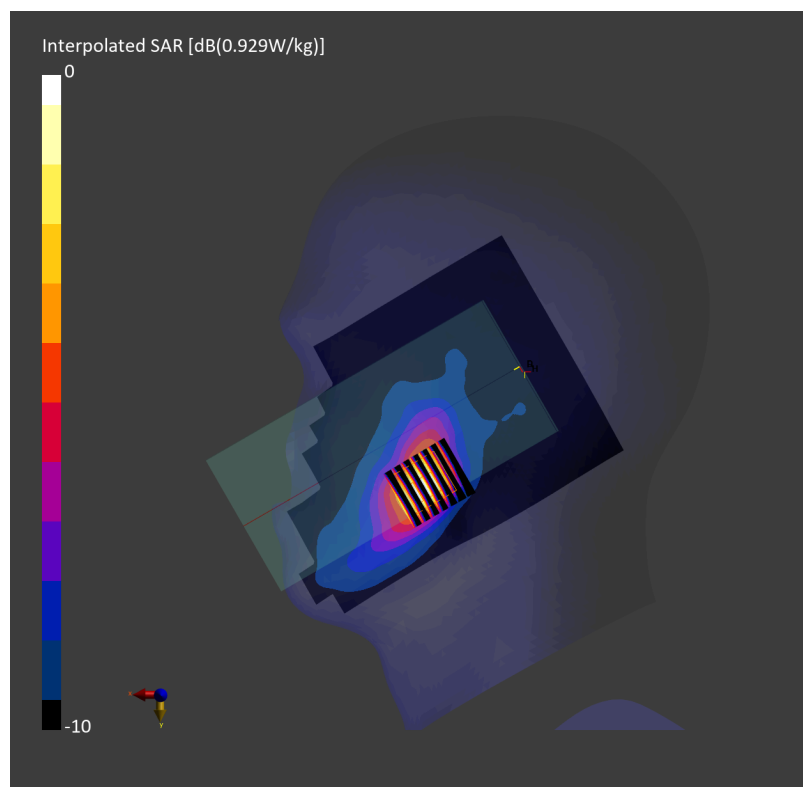

Date: 2025-03-03

#15_LTE Band 48_20M_QPSK_1_0_Right Cheek_0mm_Ch55830

Communication System: LTE-TDD; Frequency: 3609.000 MHz

Medium: HSL_3700_250303 Medium parameters used: $f = 3609.000$ MHz; $\sigma = 3.07$ S/m; $\epsilon_r = 37.6$

Ambient Temperature: 23.6°C; Liquid Temperature: 22.6°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7695; ConvF(6.53, 6.47, 7.05); Calibrated: 2024-12-02
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1707; Calibrated: 2024-12-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2145; Section: RightHead
- Measurement Software: 16.2.4.2524
- UID: LTE-TDD, 10435-AAG

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.091 W/kg; SAR (10g) = 0.041 W/kg;


Zoom Scan (28.0 mm x 28.0 mm x 28.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.4 mm

Power Drift = 0.15 dB

SAR (1g) = 0.096 W/kg; SAR (8g) = 0.047 W/kg; SAR (10g) = 0.042 W/kg

Smallest distance from peaks to all points 3 dB below = 8.2 mm

Ratio of SAR at M2 to SAR at M1 = 85.1 %

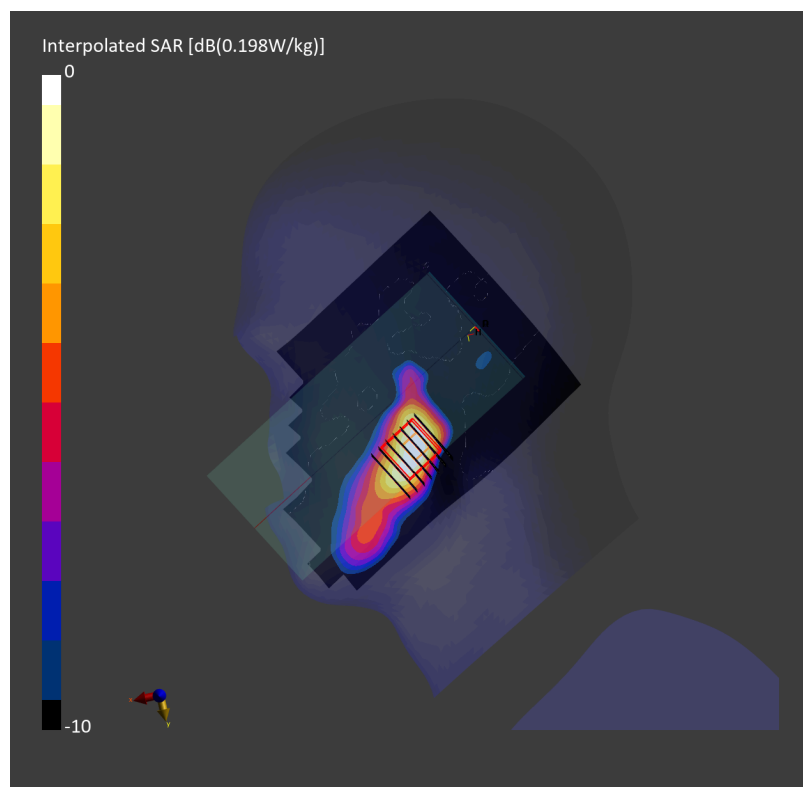

Date: 2025-02-10

#16_LTE Band 66_20M_QPSK_50_0_Right Cheek_0mm_Ch132322

Communication System: LTE-FDD ; Frequency: 1745.000 MHz

Medium: HSL_1750_250210 Medium parameters used: $f = 1745.000$ MHz; $\sigma = 1.37$ S/m; $\epsilon_r = 40.7$

Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7695; ConvF(8.21, 8.13, 8.86); Calibrated: 2024-12-02
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1707; Calibrated: 2024-12-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2145; Section: RightHead
- Measurement Software: 16.2.4.2524
- UID: LTE-FDD, 10297-AAE

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.513 W/kg; SAR (10g) = 0.269 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.6 mm x 5.6 mm x 1.5 mm

Power Drift = 0.03 dB

SAR (1g) = 0.607 W/kg; SAR (8g) = 0.299 W/kg; SAR (10g) = 0.272 W/kg

Smallest distance from peaks to all points 3 dB below = 5.8 mm

Ratio of SAR at M2 to SAR at M1 = 76.7 %

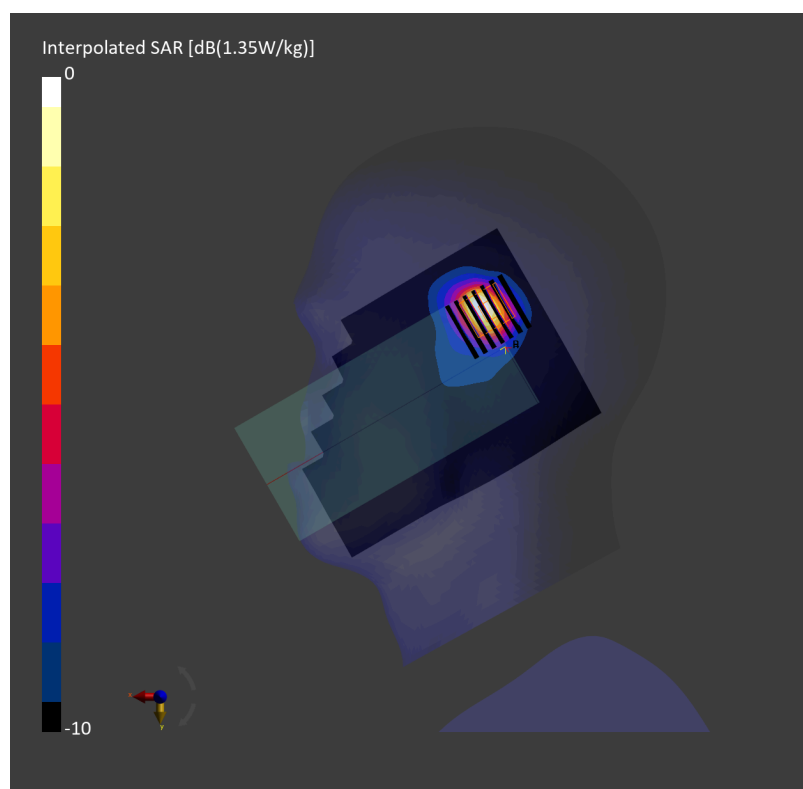

Date: 2025-01-25

#17_LTE Band 71_20M_QPSK_1_0_Right Cheek_0mm_Ch133297

Communication System: LTE-FDD ; Frequency: 680.500 MHz

Medium: HSL_750_250125 Medium parameters used: $f = 680.500$ MHz; $\sigma = 0.875$ S/m; $\epsilon_r = 42.6$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7695; ConvF(10.08, 9.99, 10.88); Calibrated: 2024-12-02
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1707; Calibrated: 2024-12-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2145; Section: RightHead
- Measurement Software: 16.2.4.2524
- UID: LTE-FDD, 10169-CAF

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.614 W/kg; SAR (10g) = 0.408 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.5 mm x 5.5 mm x 1.5 mm

Power Drift = 0.01 dB

SAR (1g) = 0.546 W/kg; SAR (8g) = 0.371 W/kg; SAR (10g) = 0.345 W/kg

Smallest distance from peaks to all points 3 dB below = 7.8 mm

Ratio of SAR at M2 to SAR at M1 = 71.6 %

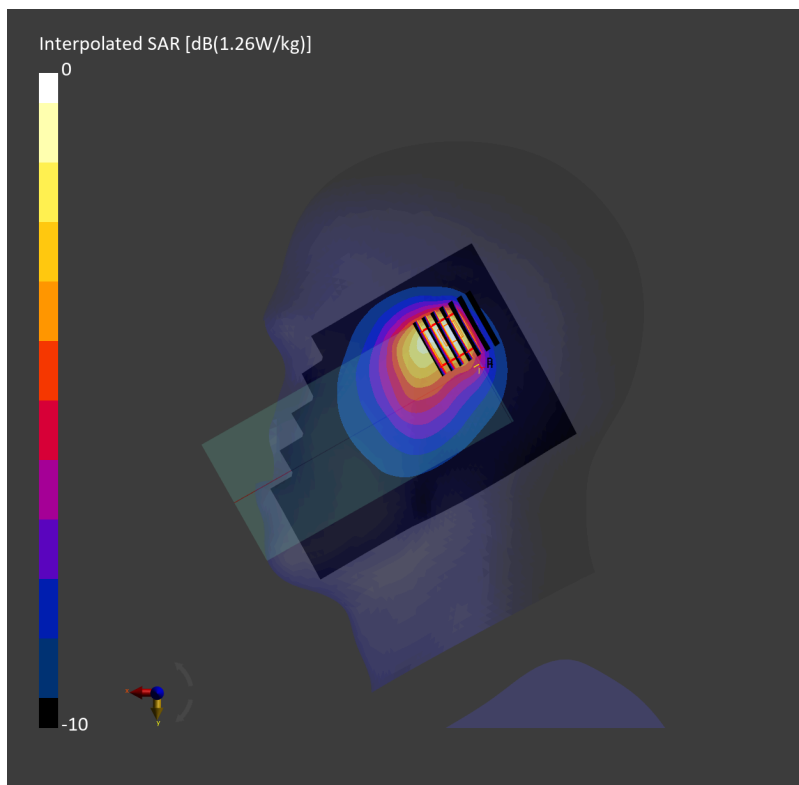

Date: 2025-02-23

#18_FR1 n7_50M_BPSK_135_68_Right Cheek_0mm_Ch507000

Communication System: 5G NR; Frequency: 2535.000 MHz

Medium: HSL_2600_250223 Medium parameters used: $f = 2535.000$ MHz; $\sigma = 1.93$ S/m; $\epsilon_r = 39.5$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.3°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7695; ConvF(7.12, 7.06, 7.69); Calibrated: 2024-12-02
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1707; Calibrated: 2024-12-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2145; Section: RightHead
- Measurement Software: 16.2.4.2524
- UID: 5G NR FR1 FDD, 10943-AAD

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.596 W/kg; SAR (10g) = 0.303 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = 0.04 dB

SAR (1g) = 0.617 W/kg; SAR (8g) = 0.364 W/kg; SAR (10g) = 0.335 W/kg

Smallest distance from peaks to all points 3 dB below = 10.1 mm

Ratio of SAR at M2 to SAR at M1 = 88.8 %

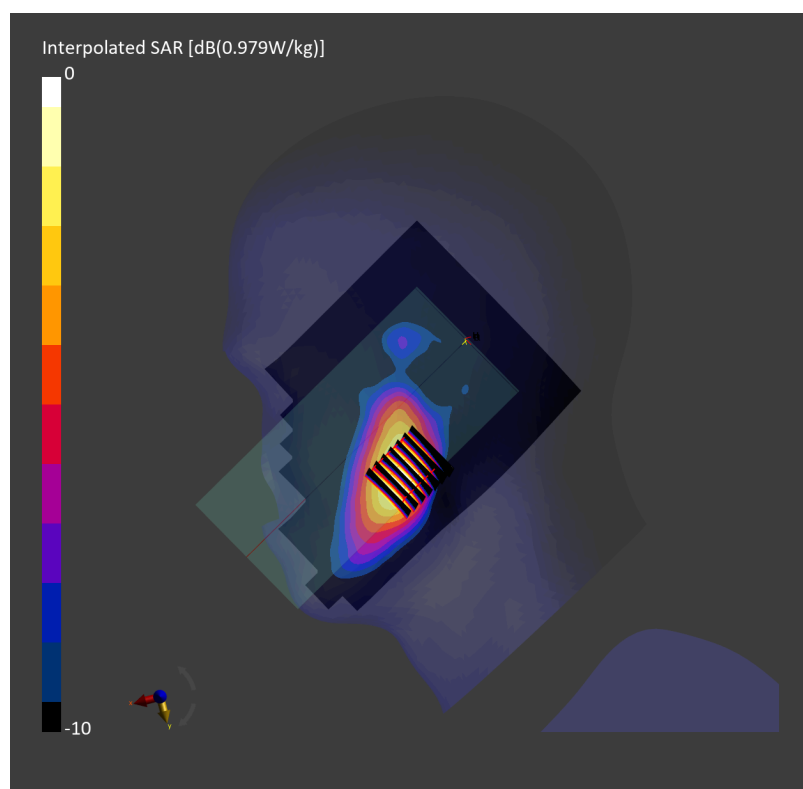

Date: 2025-02-24

#19_FR1 n12_15M_BPSK_36_22_Right Cheek_0mm_Ch141500

Communication System: 5G NR; Frequency: 707.500 MHz

Medium: HSL_750_250224 Medium parameters used: $f = 707.500$ MHz; $\sigma = 0.873$ S/m; $\epsilon_r = 43.2$

Ambient Temperature: 23.4°C; Liquid Temperature: 22.4°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7695; ConvF(10.08, 9.99, 10.88); Calibrated: 2024-12-02
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1707; Calibrated: 2024-12-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2145; Section: RightHead
- Measurement Software: 16.2.4.2524
- UID: 5G NR FR1 FDD, 10938-AAC

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.703 W/kg; SAR (10g) = 0.463 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.00 dB

SAR (1g) = 0.651 W/kg; SAR (8g) = 0.420 W/kg; SAR (10g) = 0.389 W/kg

Smallest distance from peaks to all points 3 dB below = 6.0 mm

Ratio of SAR at M2 to SAR at M1 = 61.5 %

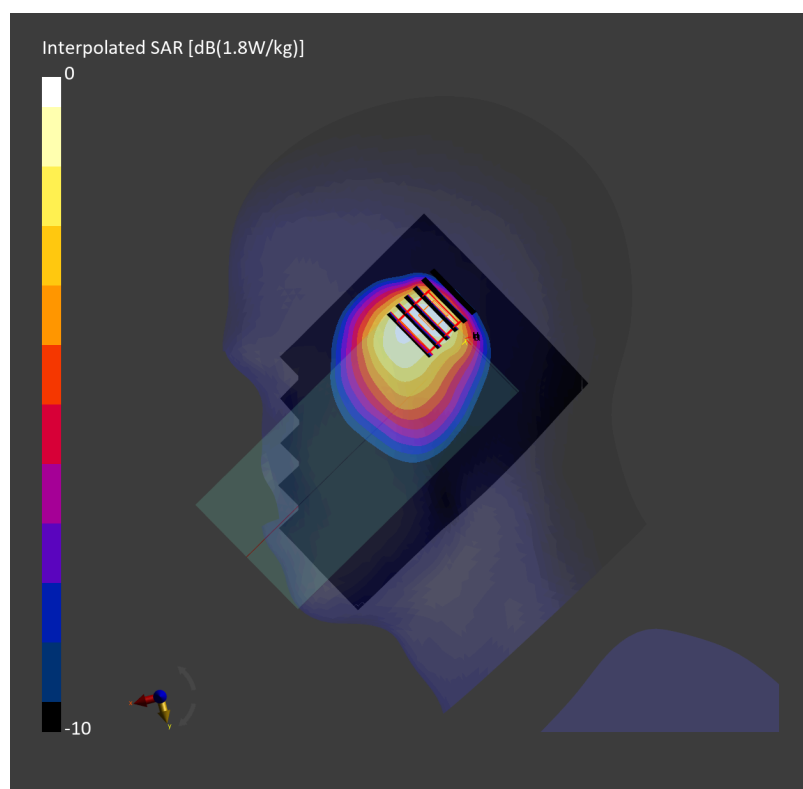

Date: 2025-02-24

#20_FR1 n14_10M_BPSK_1_1_Right Cheek_0mm_Ch158600

Communication System: 5G NR; Frequency: 793.000 MHz

Medium: HSL_750_250224 Medium parameters used: $f = 793.000$ MHz; $\sigma = 0.901$ S/m; $\epsilon_r = 42.5$

Ambient Temperature: 23.4°C; Liquid Temperature: 22.4°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7695; ConvF(10.08, 9.99, 10.88); Calibrated: 2024-12-02
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1707; Calibrated: 2024-12-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2145; Section: RightHead
- Measurement Software: 16.2.4.2524
- UID: 5G NR FR1 FDD, 10929-AAD

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.712 W/kg; SAR (10g) = 0.475 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 4.6 mm x 4.6 mm x 1.4 mm

Power Drift = 0.00 dB

SAR (1g) = 0.690 W/kg; SAR (8g) = 0.449 W/kg; SAR (10g) = 0.413 W/kg

Smallest distance from peaks to all points 3 dB below = 5.6 mm

Ratio of SAR at M2 to SAR at M1 = 66.7 %

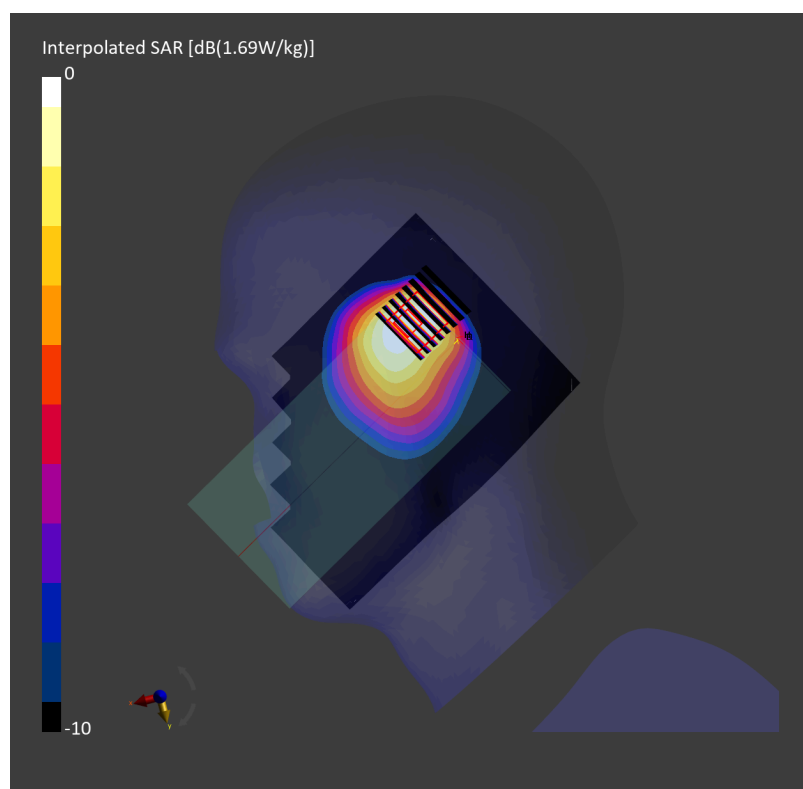

Date: 2025-02-25

#21_FR1 n25_40M_BPSK_108_54_Left Cheek_0mm_Ch376500

Communication System: 5G NR; Frequency: 1882.500 MHz

Medium: HSL_1900_250225 Medium parameters used: $f = 1882.500$ MHz; $\sigma = 1.42$ S/m; $\epsilon_r = 39.7$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7695; ConvF(7.84, 7.77, 8.46); Calibrated: 2024-12-02
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1707; Calibrated: 2024-12-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2145; Section: LeftHead
- Measurement Software: 16.2.4.2524
- UID: 5G NR FR1 FDD, 10942-AAC

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.426 W/kg; SAR (10g) = 0.233 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.9 mm x 5.9 mm x 1.5 mm

Power Drift = -0.02 dB

SAR (1g) = 0.593 W/kg; SAR (8g) = 0.304 W/kg; SAR (10g) = 0.276 W/kg

Smallest distance from peaks to all points 3 dB below = 7.2 mm

Ratio of SAR at M2 to SAR at M1 = 86.2 %

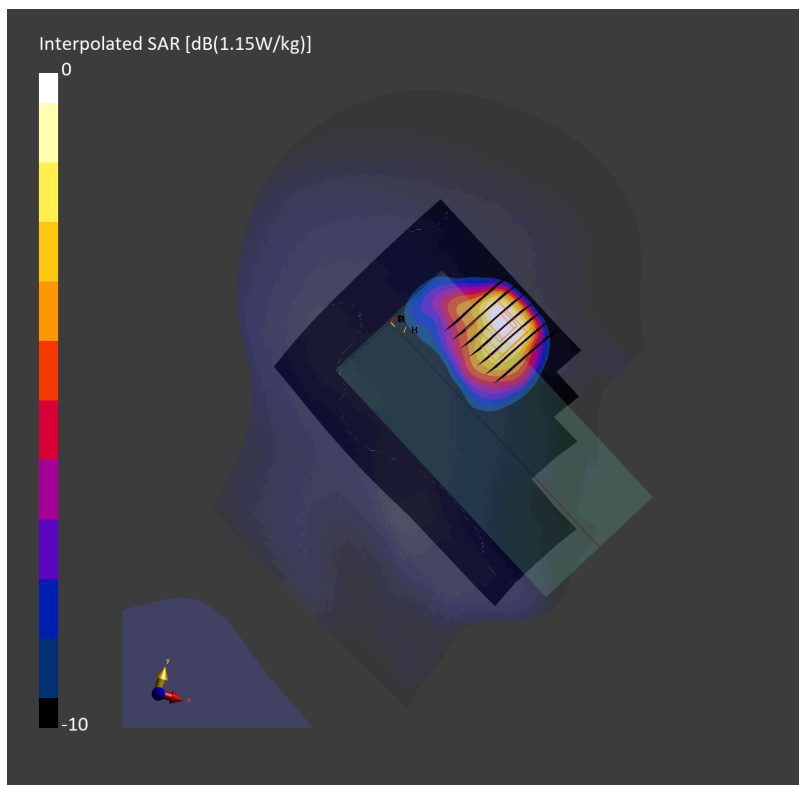

Date: 2025-02-24

#22_FR1 n26_20M_BPSK_50_28_Right Cheek_0mm_Ch166300

Communication System: 5G NR; Frequency: 831.500 MHz

Medium: HSL_850_250224 Medium parameters used: $f = 831.500$ MHz; $\sigma = 0.917$ S/m; $\epsilon_r = 42.6$

Ambient Temperature: 23.4°C; Liquid Temperature: 22.4°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7695; ConvF(9.78, 9.7, 10.56); Calibrated: 2024-12-02
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1707; Calibrated: 2024-12-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2145; Section: RightHead
- Measurement Software: 16.2.4.2524
- UID: 5G NR FR1 FDD, 10939-AAC

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.741 W/kg; SAR (10g) = 0.494 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 4.6 mm x 4.6 mm x 1.4 mm

Power Drift = 0.02 dB

SAR (1g) = 0.722 W/kg; SAR (8g) = 0.473 W/kg; SAR (10g) = 0.433 W/kg

Smallest distance from peaks to all points 3 dB below = 5.0 mm

Ratio of SAR at M2 to SAR at M1 = 67.6 %

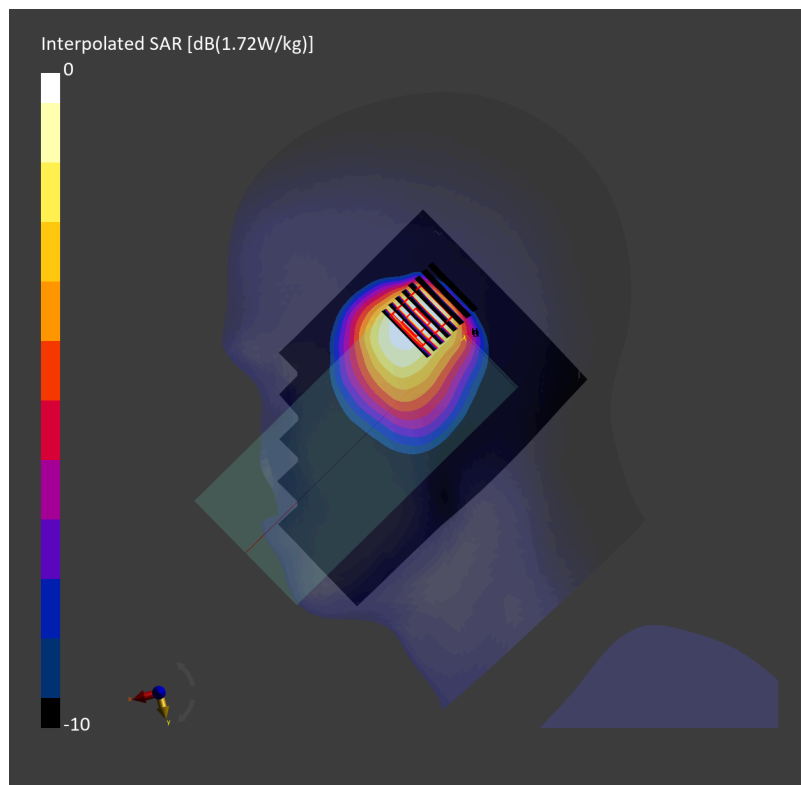

Date: 2025-03-02

#23_FR1 n30_10M_BPSK_25_14_Right Cheek_0mm_Ch462000

Communication System: 5G NR; Frequency: 2310.000 MHz

Medium: HSL_2300_250302 Medium parameters used: $f = 2310.000$ MHz; $\sigma = 1.63$ S/m; $\epsilon_r = 39.1$

Ambient Temperature: 23.6°C; Liquid Temperature: 22.6°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7695; ConvF(7.48, 7.42, 8.08); Calibrated: 2024-12-02
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1707; Calibrated: 2024-12-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2145; Section: RightHead
- Measurement Software: 16.2.4.2524
- UID: 5G NR FR1 FDD, 10937-AAD

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.397 W/kg; SAR (10g) = 0.210 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = 0.08 dB

SAR (1g) = 0.414 W/kg; SAR (8g) = 0.253 W/kg; SAR (10g) = 0.235 W/kg

Smallest distance from peaks to all points 3 dB below = 10.9 mm

Ratio of SAR at M2 to SAR at M1 = 89.5 %

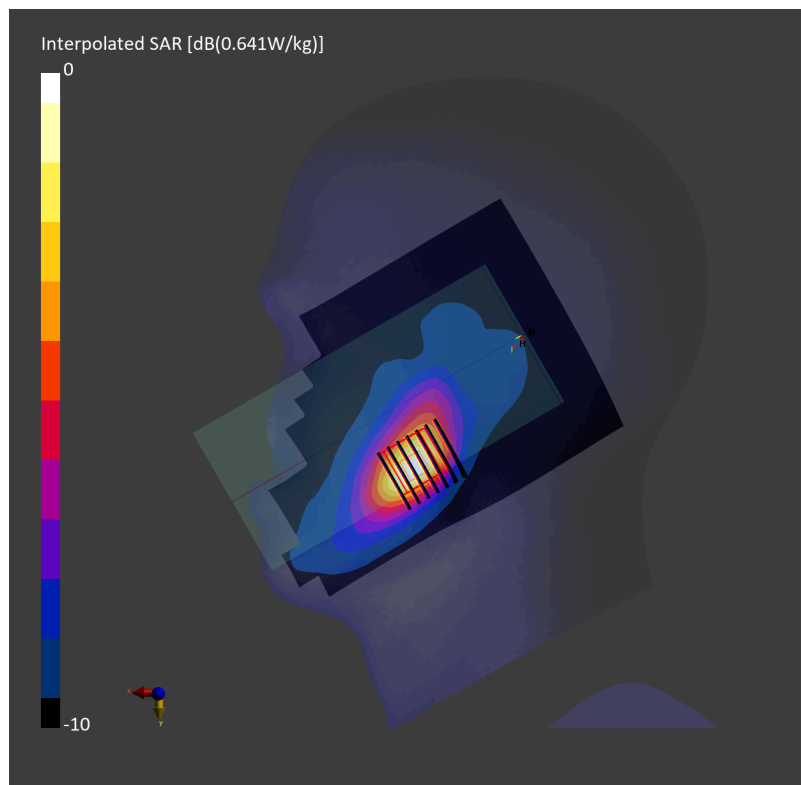

Date: 2025-03-05

#24_FR1 n38_40M_BPSK_1_1_Right Cheek_0mm_Ch519000

Communication System: 5G NR; Frequency: 2595.000 MHz

Medium: HSL_2600_250305 Medium parameters used: $f = 2595.000$ MHz; $\sigma = 1.98$ S/m; $\epsilon_r = 38.9$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7695; ConvF(7.12, 7.06, 7.69); Calibrated: 2024-12-02
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1707; Calibrated: 2024-12-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2145; Section: RightHead
- Measurement Software: 16.2.4.2524
- UID: 5G NR FR1 TDD, 10903-AAD

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.648 W/kg; SAR (10g) = 0.328 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = -0.13 dB

SAR (1g) = 0.680 W/kg; SAR (8g) = 0.397 W/kg; SAR (10g) = 0.365 W/kg

Smallest distance from peaks to all points 3 dB below = 10.6 mm

Ratio of SAR at M2 to SAR at M1 = 88.9 %

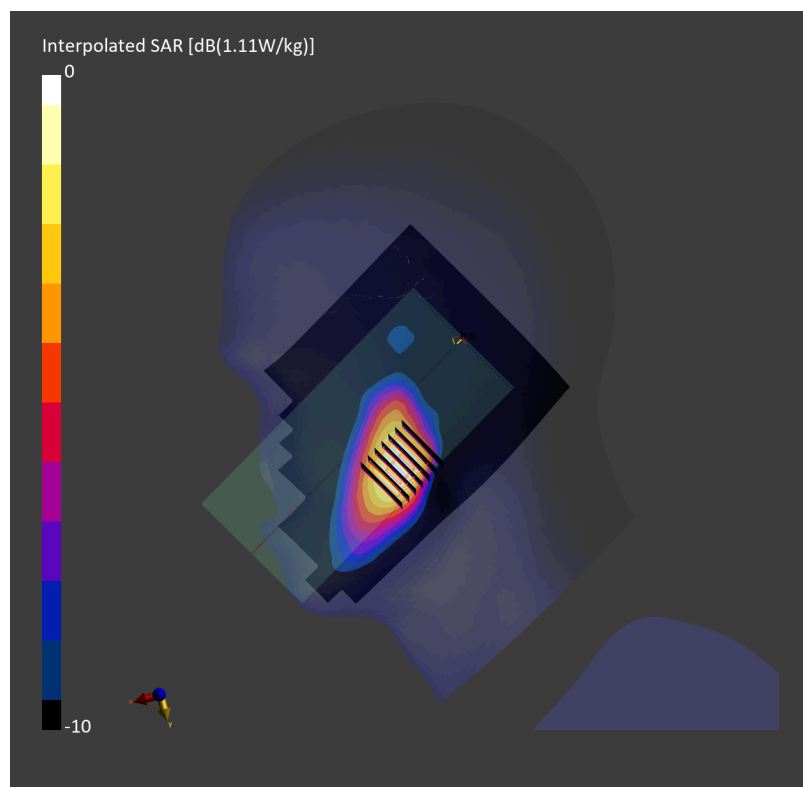

Date: 2025-02-15

#25_FR1 n41_100M_BPSK_135_69_Left Cheek_0mm_Ch518598

Communication System: 5G NR ; Frequency: 2592.990 MHz

Medium: HSL_2600_250215 Medium parameters used: $f = 2592.990$ MHz; $\sigma = 1.92$ S/m; $\epsilon_r = 38.7$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7695; ConvF(7.12, 7.06, 7.69); Calibrated: 2024-12-02
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1707; Calibrated: 2024-12-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2145; Section: LeftHead
- Measurement Software: 16.2.4.2524
- UID: 5G NR FR1 TDD, 10917-AAD

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.804 W/kg; SAR (10g) = 0.387 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = -0.02 dB

SAR (1g) = 0.785 W/kg; SAR (8g) = 0.494 W/kg; SAR (10g) = 0.344 W/kg

Smallest distance from peaks to all points 3 dB below = 7.4 mm

Ratio of SAR at M2 to SAR at M1 = 74.1 %

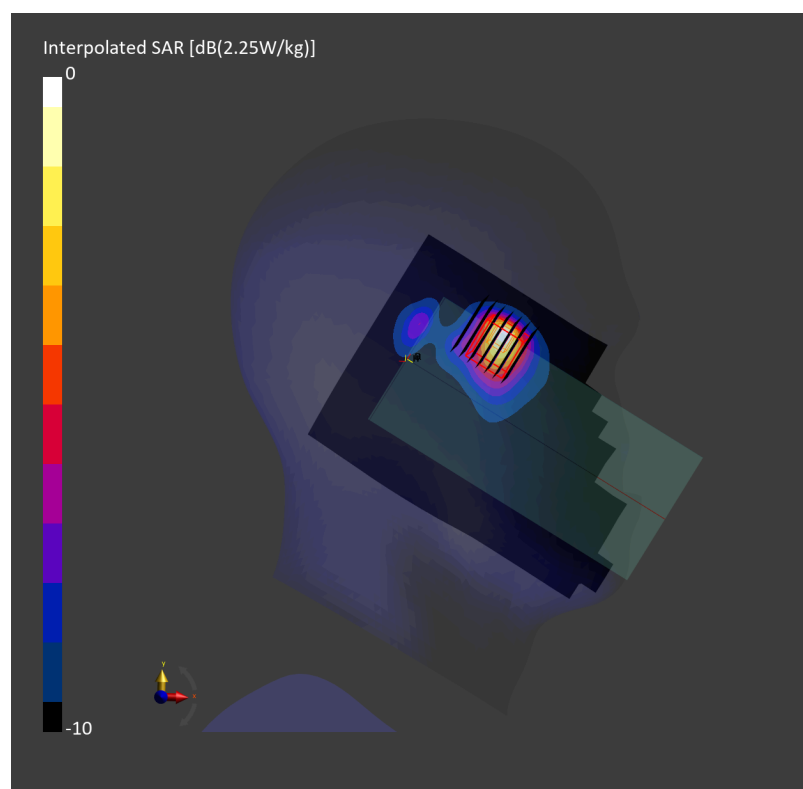

Date: 2025-02-25

#26_FR1 n66_40M_BPSK_108_54_Left Cheek_0mm_Ch349000

Communication System: 5G NR; Frequency: 1745.000 MHz

Medium: HSL_1750_250225 Medium parameters used: $f = 1745.000$ MHz; $\sigma = 1.35$ S/m; $\epsilon_r = 41.2$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7695; ConvF(8.21, 8.13, 8.86); Calibrated: 2024-12-02
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1707; Calibrated: 2024-12-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2145; Section: LeftHead
- Measurement Software: 16.2.4.2524
- UID: 5G NR FR1 FDD, 10942-AAC

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.403 W/kg; SAR (10g) = 0.223 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.5 mm x 5.5 mm x 1.5 mm

Power Drift = -0.04 dB

SAR (1g) = 0.598 W/kg; SAR (8g) = 0.308 W/kg; SAR (10g) = 0.280 W/kg

Smallest distance from peaks to all points 3 dB below = 7.2 mm

Ratio of SAR at M2 to SAR at M1 = 83.5 %

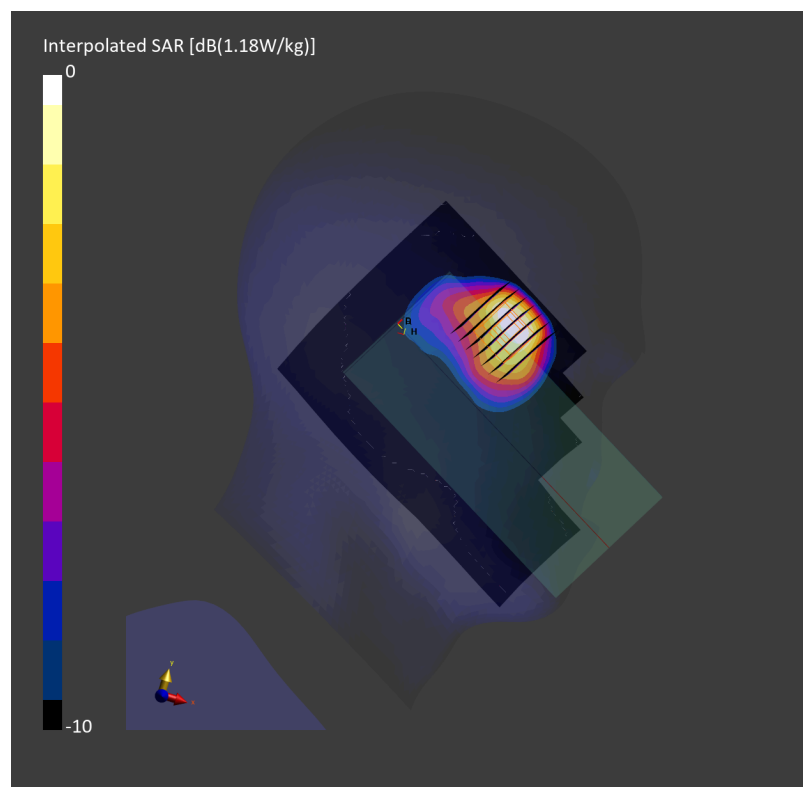

Date: 2025-02-24

#27_FR1 n71_20M_BPSK_1_1_Right Tilted_0mm_Ch136100

Communication System: 5G NR; Frequency: 680.500 MHz

Medium: HSL_750_250224 Medium parameters used: $f = 680.500$ MHz; $\sigma = 0.857$ S/m; $\epsilon_r = 43.2$

Ambient Temperature: 23.4°C; Liquid Temperature: 22.4°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7695; ConvF(10.08, 9.99, 10.88); Calibrated: 2024-12-02
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1707; Calibrated: 2024-12-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2145; Section: RightHead
- Measurement Software: 16.2.4.2524
- UID: 5G NR FR1 FDD, 10931-AAC

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.546 W/kg; SAR (10g) = 0.314 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 4.6 mm x 4.6 mm x 1.4 mm

Power Drift = 0.01 dB

SAR (1g) = 0.557 W/kg; SAR (8g) = 0.292 W/kg; SAR (10g) = 0.271 W/kg

Smallest distance from peaks to all points 3 dB below = 5.0 mm

Ratio of SAR at M2 to SAR at M1 = 57.9 %

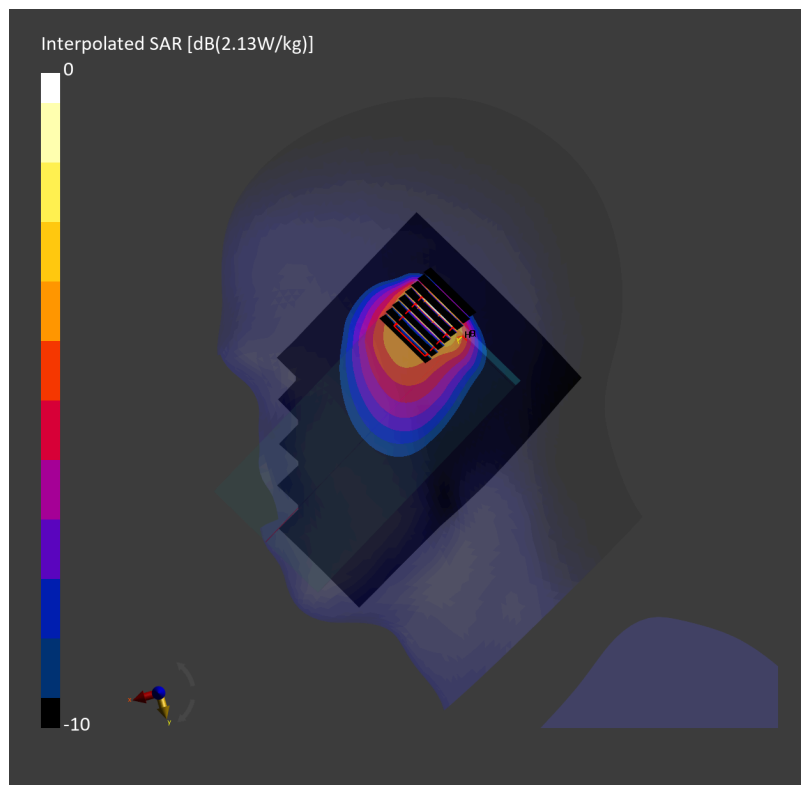

Date: 2025-03-03

#28_FR1 n77_100M_BPSK_135_69_Right Cheek_0mm_Ch656000

Communication System: 5G NR ; Frequency: 3840.000 MHz

Medium: HSL_3900_250303 Medium parameters used: $f = 3840.000$ MHz; $\sigma = 3.29$ S/m; $\epsilon_r = 37.3$

Ambient Temperature: 23.6°C; Liquid Temperature: 22.6°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7695; ConvF(6.45, 6.4, 6.97); Calibrated: 2024-12-02
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1707; Calibrated: 2024-12-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2145; Section: RightHead
- Measurement Software: 16.2.4.2524
- UID: 5G NR FR1 TDD, 10917-AAD

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.626 W/kg; SAR (10g) = 0.227 W/kg;

Zoom Scan (28.0 mm x 28.0 mm x 28.0 mm): Measurement Grid: 3.9 mm x 3.9 mm x 1.4 mm

Power Drift = -0.08 dB

SAR (1g) = 0.673 W/kg; SAR (8g) = 0.258 W/kg; SAR (10g) = 0.229 W/kg

Smallest distance from peaks to all points 3 dB below = 5.0 mm

Ratio of SAR at M2 to SAR at M1 = 69.8 %

