



FCC RADIO TEST REPORT

FCC ID : A4RGQML3
Equipment : Phone
Applicant : Google LLC
1600 Amphitheatre Parkway,
Mountain View, California, 94043 USA
Standard : FCC 47 CFR Part 2, 22(H), 24(E), 27(L)

The product was received on Mar. 25, 2022 and testing was performed from Mar. 28, 2022 to May 17, 2022. We, Sporton International Inc. EMC & Wireless Communications Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures given in ANSI / TIA-603-E and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval from Sporton International Inc. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.

Louis Wu

Approved by: Louis Wu

Sporton International Inc. EMC & Wireless Communications Laboratory
No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C.)



Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
1 General Description	5
1.1 Product Feature of Equipment Under Test	5
1.2 Product Specification of Equipment Under Test	6
1.3 Modification of EUT	7
1.4 Testing Location	8
1.5 Applicable Standards	8
2 Test Configuration of Equipment Under Test	9
2.1 Test Mode.....	9
2.2 Connection Diagram of Test System	10
2.3 Support Unit used in test configuration	10
2.4 Measurement Results Explanation Example	11
2.5 Frequency List of Low/Middle/High Channels	11
3 Conducted Test Result	12
3.1 Measuring Instruments.....	12
3.2 Conducted Output Power and ERP/EIRP	13
3.3 Peak-to-Average Ratio	14
3.4 99% Occupied Bandwidth and 26dB Bandwidth Measurement.....	15
3.5 Conducted Band Edge	16
3.6 Conducted Spurious Emission	17
3.7 Frequency Stability	18
4 Radiated Test Items	19
4.1 Measuring Instruments.....	19
4.2 Test Setup	19
4.3 Test Result of Radiated Test.....	20
4.4 Field Strength of Spurious Radiation Measurement	21
5 List of Measuring Equipment.....	22
6 Uncertainty of Evaluation	23
Appendix A. Test Results of Conducted Test	
Appendix B. Test Results of Radiated Test	
Appendix C. Test Setup Photographs	



History of this test report

Report No.	Version	Description	Issue Date
FG1O2843-05A	01	Initial issue of report	Jun. 09, 2022

Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.2	§2.1046	Conducted Output Power	Pass	-
	§22.913 (a)(5)	Effective Radiated Power (GSM850) (WCDMA Band V)		
	§24.232 (c)	Equivalent Isotropic Radiated Power (GSM1900) (WCDMA Band II)		
	§27.50 (d)(4)	Equivalent Isotropic Radiated Power (WCDMA Band IV)		
3.3	§24.232 (d)	Peak-to-Average Ratio	Pass	
3.4	§2.1049 §22.917 (b) §24.238 (b) §27.53 (g)	Occupied Bandwidth (GSM850) (WCDMA Band V) (GSM1900) (WCDMA Band II) (WCDMA Band IV)	Pass	-
3.5	§2.1051 §22.917 (a) §24.238 (a) §27.53 (g)	Band Edge Measurement (GSM850) (WCDMA Band V) (GSM1900) (WCDMA Band II) (WCDMA Band IV)	Pass	-
3.6	§2.1051 §22.917 (a) §24.238 (a) §27.53 (g)	Conducted Emission (GSM850) (WCDMA Band V) (GSM1900) (WCDMA Band II) (WCDMA Band IV)	Pass	-
3.7	§2.1055 §22.355 §24.235 §27.54	Frequency Stability Temperature & Voltage	Pass	-
4.4	§2.1053 §22.917 (a) §24.238 (a) §27.53 (h)	Field Strength of Spurious Radiation (GSM850) (WCDMA Band V) (GSM1900) (WCDMA Band II) (WCDMA Band IV)	Pass	21.01 dB under the limit at 5550.000 MHz for Primary Antenna 33.85 dB under the limit at 1648.000 MHz for ASDIV Antenna

Declaration of Conformity:

- The test results (PASS/FAIL) with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers. It's means measurement values may risk exceeding the limit of regulation standards, if measurement uncertainty is include in test results.
- The measurement uncertainty please refer to this report "Uncertainty of Evaluation".

Comments and Explanations:

The product specifications of the EUT presented in the report are declared by the manufacturer who shall take full responsibility for the authenticity.

Reviewed by: William Chen
Report Producer: Clio Lo



1 General Description

1.1 Product Feature of Equipment Under Test

Product Feature	
Equipment	Phone
FCC ID	A4RGQML3
EUT supports Radios application	GSM/EGPRS/WCDMA/HSPA/LTE/5G NR/NFC/GNSS/ WPC/WPT WLAN 11b/g/n HT20 WLAN 11a/n HT20/HT40 WLAN 11ac VHT20/VHT40/VHT80/VHT160 WLAN 11ax HE20/HE40/HE80/HE160 Bluetooth BR/EDR/LE

Remark: The above EUT's information was declared by manufacturer.

EUT Information List	
S/N	Performed Test Item
23091FDH20003S	Conducted Measurement ERP/EIRP
23121FDH200048	Radiated Spurious Emission

1.2 Product Specification of Equipment Under Test

Product Specification is subject to this standard	
Tx Frequency	GSM/GPRS/EDGE: 850: 824.2 MHz ~ 848.8 MHz 1900: 1850.2 MHz ~ 1909.8 MHz WCDMA: Band V: 826.4 MHz ~ 846.6 MHz Band II: 1852.4 MHz ~ 1907.6 MHz Band IV: 1712.4 MHz ~ 1752.6 MHz
Rx Frequency	GSM/GPRS/EDGE: 850: 869.2 MHz ~ 893.8 MHz 1900: 1930.2 MHz ~ 1989.8 MHz WCDMA: Band V: 871.4 MHz ~ 891.6 MHz Band II: 1932.4 MHz ~ 1987.6 MHz Band IV: 2112.4 MHz ~ 2152.6 MHz
Maximum Output Power to Antenna	<Primary Antenna> GSM/GPRS/EDGE: <Ant. 0> 850: 32.19 dBm <Ant. 2> 1900: 29.83 dBm WCDMA: <Ant. 0> Band V: 24.69 dBm <Ant. 2> Band II: 24.59 dBm Band IV: 24.76 dBm <ASDIV Antenna> GSM/GPRS/EDGE: <Ant. 1> 850: 32.65 dBm <Ant. 0> 1900: 29.00 dBm WCDMA: <Ant. 1> Band V: 24.72 dBm <Ant. 0> Band II: 23.95 dBm Band IV: 23.72 dBm
Antenna Type	<Primary Antenna>: <Ant. 0>: IFA Antenna type <Ant. 2>: IFA Antenna type <ASDIV Antenna>: <Ant. 0>: IFA Antenna type <Ant. 1>: IFA Antenna type

Product Specification is subject to this standard	
Type of Modulation	GSM / GPRS: GMSK EDGE(MCS 0-4): GMSK / (MCS 5-9): 8PSK WCDMA: QPSK (Uplink) HSDPA: 64QAM (Downlink) HSUPA: QPSK (Uplink)

<Primary Antenna>

Radio Tech	Band Number	Antenna name	Gain
GSM	850	Ant 0	-3.6
GSM	1900	Ant 2	0.4
WCDMA	B2	Ant 2	0.4
WCDMA	B4	Ant 2	-0.4
WCDMA	B5	Ant 0	-3.6

<ASDIV Antenna>

Radio Tech	Band Number	Antenna name	Gain
GSM	850	Ant 1	-4.5
GSM	1900	Ant 0	-1.3
WCDMA	B2	Ant 0	-1.3
WCDMA	B4	Ant 0	-0.5
WCDMA	B5	Ant 1	-4.5

Remark: The above EUT's information was declared by manufacturer. Please refer to Comments and Explanations in report summary.

1.3 Modification of EUT

No modifications made to the EUT during the testing.



1.4 Testing Location

Test Site	Sporton International Inc. EMC & Wireless Communications Laboratory
Test Site Location	No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C.) TEL: +886-3-327-3456 FAX: +886-3-328-4978
Test Site No.	Sporton Site No. TH03-HY
Test Engineer	Oscar Chi
Temperature (°C)	23~24
Relative Humidity (%)	53~54

Test Site	Sporton International Inc. Wensan Laboratory
Test Site Location	No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan (R.O.C.) TEL: +886-3-327-0868 FAX: +886-3-327-0855
Test Site No.	Sporton Site No. 03CH20-HY (TAF Code: 3786)
Test Engineer	Bill Cheng, JC Liang and Bigshow Wang
Temperature (°C)	18~21
Relative Humidity (%)	67~70
Remark	The Radiated Emission test item subcontracted to Sporton International Inc. Wensan Laboratory.

Note: The test site complies with ANSI C63.4 2014 requirement.

FCC Designation No.: TW1190 and TW3786

1.5 Applicable Standards

According to the specifications declared by the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ ANSI C63.26-2015
- ♦ ANSI / TIA-603-E
- ♦ FCC 47 CFR Part 2, 22(H), 24(E), 27(L)
- ♦ FCC KDB 971168 D01 Power Meas. License Digital Systems v03r01
- ♦ FCC KDB 412172 D01 Determining ERP and EIRP v01r01
- ♦ FCC KDB 414788 D01 Radiated Test Site v01r01

Remark:

1. All the test items were validated and recorded in accordance with the standards without any modification during the testing.
2. The TAF code is not including all the FCC KDB listed without accreditation.

2 Test Configuration of Equipment Under Test

2.1 Test Mode

Antenna port conducted and radiated test items were performed according to KDB 971168 D01 Power Meas. License Digital Systems v03r01 with maximum output power.

For radiated measurement, the measured emission level of the EUT was maximized by rotating the EUT on a turntable, adjusting the orientation of the EUT and EUT antenna in three orthogonal axis (X: flat, Y: portrait, Z: landscape) and accessory (Adapter or Earphone), and adjusting the measurement antenna orientation, following C63.26 exploratory test procedures and find **<Primary Antenna>**: Y Plane with Adapter for Cellular Band, X Plane with Adapter for PCS Band, Z Plane with Adapter for AWS Band; **<ASDIV Antenna>**: X Plane with Adapter for Cellular Band, Z Plane with Adapter for PCS Band and AWS Band as worst plane.

Radiated emissions were investigated as following frequency range:

1. 30 MHz to 9000 MHz for GSM850 and WCDMA Band V
2. 30 MHz to 18000 MHz for WCDMA Band IV
3. 30 MHz to 19100 MHz for GSM1900 and WCDMA Band II

All modes, data rates and positions were investigated.

Test modes are chosen to be reported as the worst case configuration below:


Test Modes		
Band	Radiated TCs	Conducted TCs
GSM850	■ GPRS Class 8 Link ■ EDGE Class 8 Link	■ GPRS Class 8 Link ■ EDGE Class 8 Link
GSM1900	■ GPRS Class 8 Link ■ EDGE Class 8 Link	■ GPRS Class 8 Link ■ EDGE Class 8 Link
WCDMA Band V	■ RMC 12.2Kbps Link	■ RMC 12.2Kbps Link
WCDMA Band II	■ RMC 12.2Kbps Link	■ RMC 12.2Kbps Link
WCDMA Band IV	■ RMC 12.2Kbps Link	■ RMC 12.2Kbps Link

Remark:

1. During the preliminary test, both charging modes (Adapter mode and WPC Charging mode) were verified. It is determined that the adaptor mode is the worst case for official test.
2. All the radiated test cases were performed with Adapter 2 and USB Cable 1.

2.2 Connection Diagram of Test System

<EUT with Adapter>

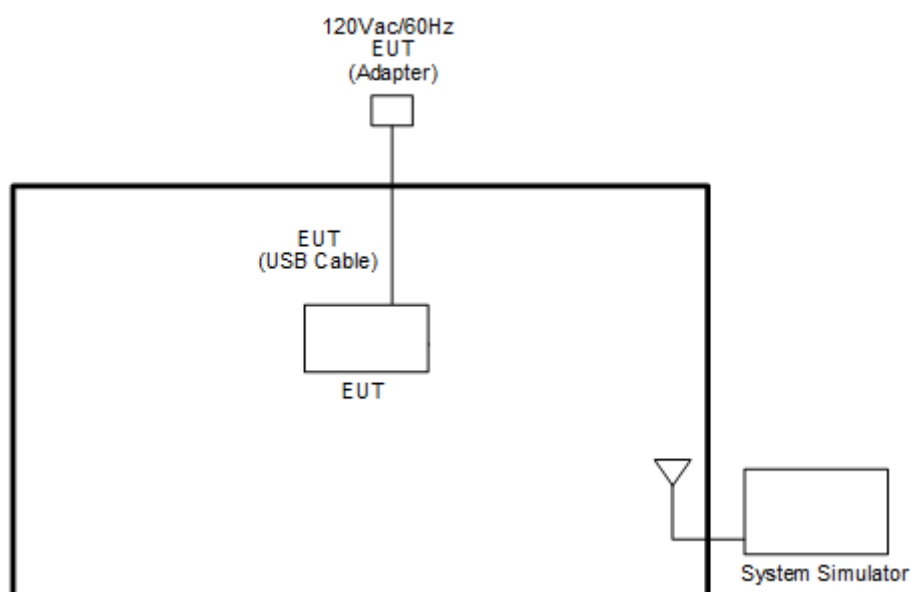

2.3 Support Unit used in test configuration

Item	Equipment	Brand Name	Model No.	FCC ID	Data Cable	Power Cord
1.	System Simulator	Anritsu	MT8821C	N/A	N/A	Unshielded, 1.8 m
2.	System Simulator	Anritsu	MT8000A	N/A	N/A	Unshielded, 1.8 m

2.4 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between RF conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level will be exactly the RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

The following shows an offset computation example with RF cable loss 4.2 dB and a 10 dB attenuator.

Example:

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)} \\ &= 4.2 + 10 = 14.2 \text{ (dB)} \end{aligned}$$

2.5 Frequency List of Low/Middle/High Channels

Frequency List				
Band	Channel/Frequency(MHz)	Lowest	Middle	Highest
GSM850	Channel	128	189	251
	Frequency	824.2	836.4	848.8
WCDMA Band V	Channel	4132	4182	4233
	Frequency	826.4	836.4	846.6
GSM1900	Channel	512	661	810
	Frequency	1850.2	1880.0	1909.8
WCDMA Band II	Channel	9262	9400	9538
	Frequency	1852.4	1880.0	1907.6
WCDMA Band IV	Channel	1312	1413	1513
	Frequency	1712.4	1732.6	1752.6

3 Conducted Test Result

3.1 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.1.1 Test Setup


3.1.2 Conducted Output Power



3.1.3 Peak-to-Average Ratio, Occupied Bandwidth, Conducted Band-Edge and Conducted Spurious Emission



3.1.4 Frequency Stability

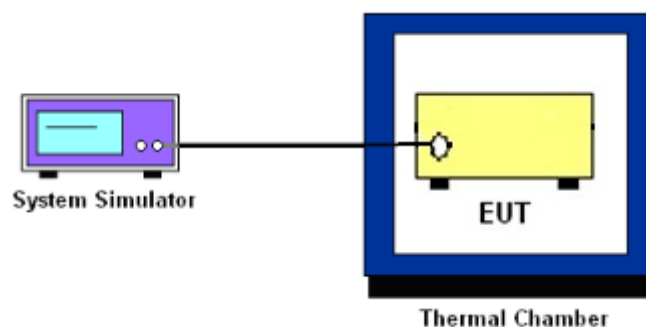

3.1.5 Test Result of Conducted Test

Please refer to Appendix A.



3.2 Conducted Output Power and ERP/EIRP

3.2.1 Description of the Conducted Output Power and ERP/EIRP

A system simulator was used to establish communication with the EUT. Its parameters were set to enforce EUT transmitting at the maximum power. The measured power in the radio frequency on the transmitter output terminals shall be reported.

The ERP of mobile transmitters must not exceed 7 Watts for GSM850 and WCDMA Band V

The EIRP of mobile transmitters must not exceed 2 Watts for GSM1900 and WCDMA Band II

The EIRP of mobile transmitters must not exceed 1 Watts for WCDMA Band IV

According to KDB 412172 D01 Power Approach,

$EIRP = P_T + G_T - L_C$, $ERP = EIRP - 2.15$, where

P_T = transmitter output power in dBm

G_T = gain of the transmitting antenna in dBi

L_C = signal attenuation in the connecting cable between the transmitter and antenna in dB

3.2.2 Test Procedures

1. The transmitter output port is connected to the system simulator.
2. Set EUT at maximum power through system simulator.
3. Select the lowest, middle, and the highest channels for each band and different modulation.
4. Measure the maximum burst average power for GSM and maximum average power for other modulation signal.



3.3 Peak-to-Average Ratio

3.3.1 Description of the PAR Measurement

The peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

3.3.2 Test Procedures

The testing follows ANSI C63.26-2015 Section 5.2.6

1. The EUT is connected to spectrum analyzer and system simulator via a power divider.
2. Set EUT to transmit at maximum output power.
3. When the duty cycle is less than 98%, then signal gating will be implemented on the spectrum analyzer by triggering from the system simulator.
4. Set the CCDF (Complementary Cumulative Distribution Function) option of the spectrum analyzer.
5. Record the maximum PAPR level associated with a probability of 0.1%.

3.4 99% Occupied Bandwidth and 26dB Bandwidth Measurement

3.4.1 Description of 99% Occupied Bandwidth and 26dB Bandwidth Measurement

The occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

The 26 dB emission bandwidth is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated 26 dB below the maximum in-band spectral density of the modulated signal. Spectral density (power per unit bandwidth) is to be measured with a detector of resolution bandwidth equal to approximately 1.0% of the emission bandwidth.

3.4.2 Test Procedures

The testing follows ANSI C63.26-2015 Section 5.4.3 (26dB) and Section 5.4.4 (99OB)

1. The EUT is connected to spectrum analyzer and system simulator via a power divider.
2. The spectrum analyzer center frequency is set to the nominal EUT channel center frequency.
The span range for the spectrum analyzer shall be between two and five times the anticipated OBW.
3. The nominal resolution bandwidth (RBW) shall be in the range of 1 to 5 % of the anticipated OBW, and the VBW shall be at least 3 times the RBW.
4. Set the detection mode to peak, and the trace mode to max hold.
5. Determine the reference value: Set the EUT to transmit a modulated signal. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace.
(This is the reference value)
6. Determine the “-26 dB down amplitude” as equal to (Reference Value – X).
7. Place two markers, one at the lowest and the other at the highest frequency of the envelope of the spectral display such that each marker is at or slightly below the “-X dB down amplitude” determined in step 6. If a marker is below this “-X dB down amplitude” value it shall be placed as close as possible to this value. The OBW is the positive frequency difference between the two markers.
8. Use the 99 % power bandwidth function of the spectrum analyzer and report the measured bandwidth.



3.5 Conducted Band Edge

3.5.1 Description of Conducted Band Edge Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.

3.5.2 Test Procedures

The testing follows FCC KDB 971168 D01 v03r01 Section 6.1.

1. The EUT is connected to the spectrum analyzer and system simulator via a power divider.
2. The RF output of EUT is connected to the spectrum analyzer by an RF cable and attenuator. The path loss is compensated to the results for each measurement.
3. The band edges of low and high channels for the highest RF powers are measured.
4. The RF fundamental frequency shall be excluded against the limit line in the operating frequency band.
5. The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)



3.6 Conducted Spurious Emission

3.6.1 Description of Conducted Spurious Emission Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.

It is measured by means of a calibrated spectrum analyzer and scanned from 30 MHz up to a frequency including its 10th harmonic.

3.6.2 Test Procedures

The testing follows FCC KDB 971168 D01 v03r01 Section 6.1.

1. The EUT is connected to the spectrum analyzer and system simulator via a power divider.
2. The RF output of EUT is connected to the spectrum analyzer by an RF cable and attenuator. The path loss is compensated to the results for each measurement.
3. The middle channel for the highest RF power within the transmitting frequency is measured.
4. The conducted spurious emission for the whole frequency range is taken.
5. The RF fundamental frequency shall be excluded against the limit line in the operating frequency band.
6. The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)

3.7 Frequency Stability

3.7.1 Description of Frequency Stability Measurement

22.355

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within $\pm 0.00025\%$ ($\pm 2.5\text{ppm}$) of the center frequency.

24.235 & 27.54

The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

3.7.2 Test Procedures for Temperature Variation

The testing follows FCC KDB 971168 D01 v03r01 Section 9.0.

1. The EUT is set up in the thermal chamber and connected with the system simulator.
2. With power OFF, the temperature is decreased to -30°C and the EUT is stabilized before testing. Power is applied and the maximum change in frequency is recorded within one minute.
3. With power OFF, the temperature is raised in 10°C steps up to 50°C . The EUT is stabilized at each step for at least half an hour. Power is applied and the maximum frequency change is recorded within one minute.

3.7.3 Test Procedures for Voltage Variation

The testing follows FCC KDB 971168 D01 v03r01 Section 9.0.

1. The EUT is placed in a temperature chamber at $20\pm 5^{\circ}\text{C}$ and connected with the system simulator.
2. The power supply voltage to the EUT is varied from 85% to 115% of the nominal value measured at the input to the EUT.
3. The variation in frequency is measured for the worst case.


4 Radiated Test Items

4.1 Measuring Instruments


Please refer to the measuring equipment list in this test report.

4.2 Test Setup


For radiated test below 30MHz

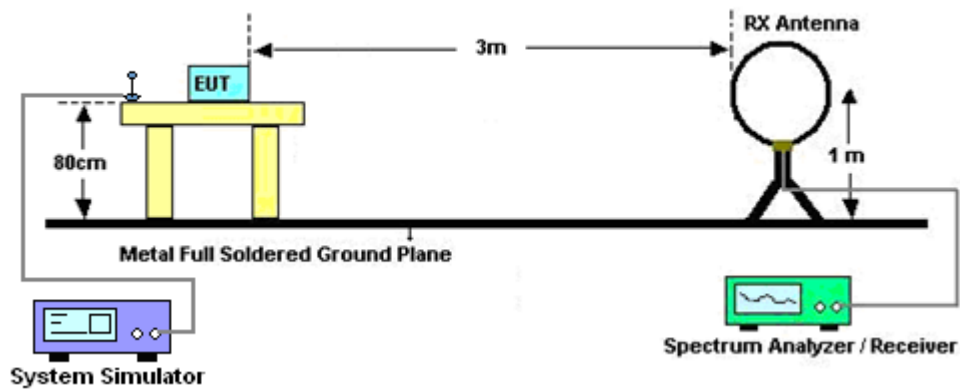


For radiated test from 30MHz to 1GHz

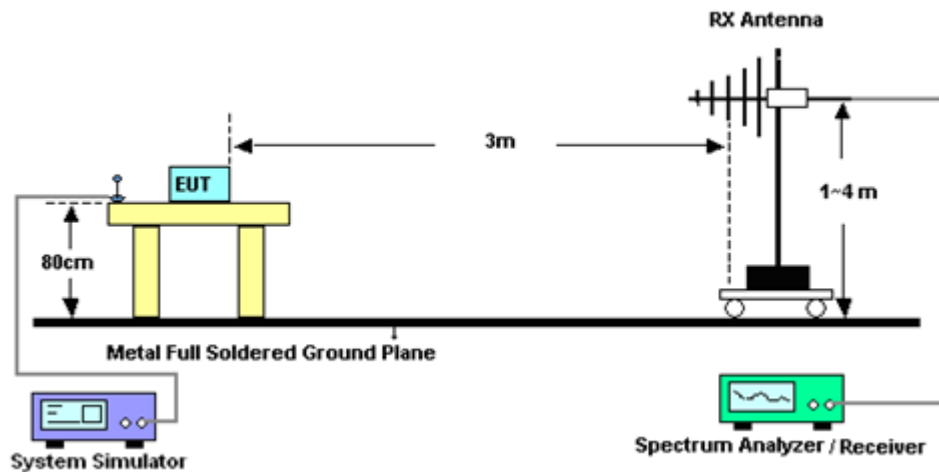

For radiated test from 1GHz to 18GHz

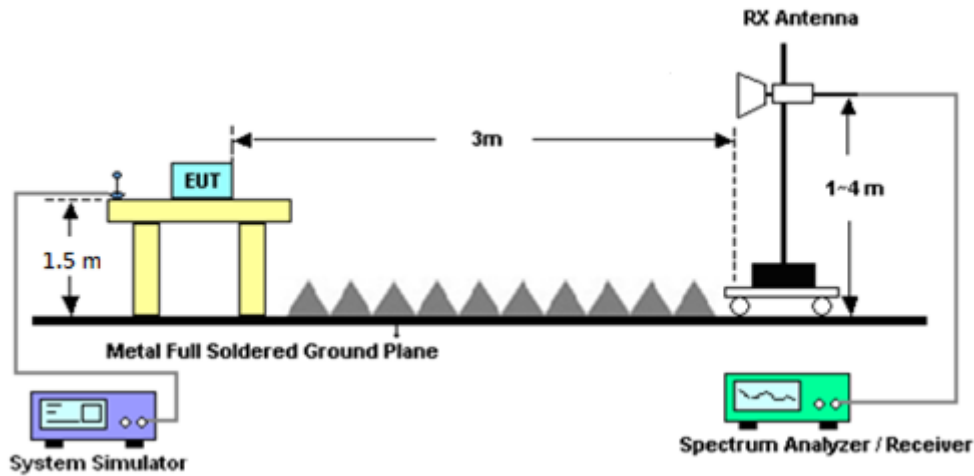

For radiated test above 18GHz

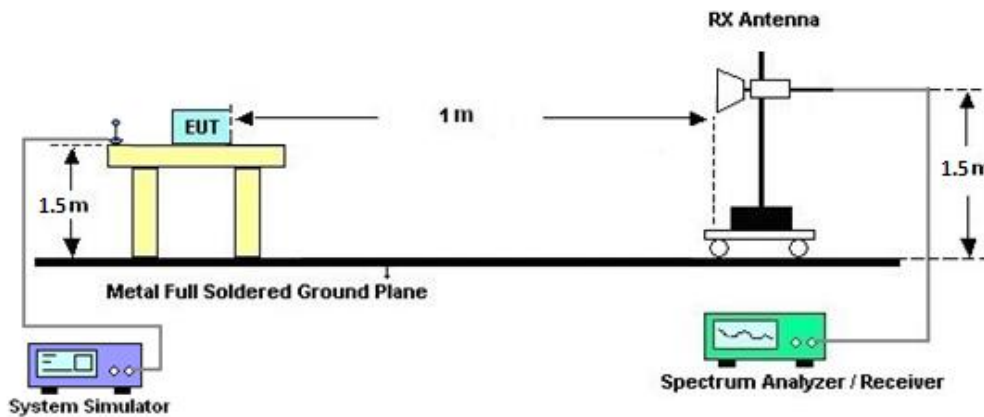

4.3 Test Result of Radiated Test

Please refer to Appendix B.

Note:

The low frequency, which starts from 9 kHz to 30 MHz, is pre-scanned and the result which is 20 dB lower than the limit line is not reported.

There is adequate comparison measurement of both open-field test site and alternative test site - semi-Anechoic chamber according to 414788 D01 Radiated Test Site v01r01, and the result came out very similar.



4.4 Field Strength of Spurious Radiation Measurement

4.4.1 Description of Field Strength of Spurious Radiated Measurement

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB. The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

4.4.2 Test Procedures

The testing follows FCC KDB 971168 D01 v03r01 Section 7 and ANSI / TIA-603-E Section 2.2.12.

1. The EUT is placed on a rotatable wooden table 0.8 meters for frequency below 1 GHz and 1.5 meter for frequency above 1 GHz above the ground.
2. The EUT is set 3 meters away from the receiving antenna, which is mounted on the antenna tower.
3. The table is rotated 360 degrees to determine the position of the highest spurious emission.
4. The height of the receiving antenna is varied between one meter and four meters to search for the maximum spurious emission for both horizontal and vertical polarizations.
5. Make the measurement with the spectrum analyzer's RBW = 1 MHz, VBW = 3 MHz, taking record of maximum spurious emission.
6. A horn antenna is substituted in place of the EUT and is driven by a signal generator.
7. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
8. Take the record of output power at antenna port.
9. Repeat step 7 to step 8 for another polarization.
10. $EIRP \text{ (dBm)} = S.G. \text{ Power} - Tx \text{ Cable Loss} + Tx \text{ Antenna Gain}$
11. $ERP \text{ (dBm)} = EIRP - 2.15$
12. The RF fundamental frequency shall be excluded against the limit line in the operating frequency band.
13. The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)



5 List of Measuring Equipment

Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Hygrometer	TECPEL	DTM-303B	TP210073	N/A	Nov. 16, 2021	Mar. 28, 2022~ Apr. 06, 2022	Nov. 15, 2022	Conducted (TH03-HY)
Spectrum Analyzer	Rohde & Schwarz	FSP30	101329	9kHz~30GHz	Sep. 30, 2021	Mar. 28, 2022~ Apr. 06, 2022	Sep. 29, 2022	Conducted (TH03-HY)
Temperature & Humidity Cabinet Chamber	ESPEC	LHU-113	1012005860	-20°C~85°C	Dec. 09, 2021	Mar. 28, 2022~ Apr. 06, 2022	Dec. 08, 2022	Conducted (TH03-HY)
Programmable Power Supply	GW Instek	PSS-2005	EL890001	1V~20V 0.5A~4A	Oct. 06, 2021	Mar. 28, 2022~ Apr. 06, 2022	Oct. 05, 2022	Conducted (TH03-HY)
Base Station(Measur e)	Rohde & Schwarz	CMU200	117995	GSM / GPRS / WCDMA / CDMA	Jul. 13, 2021	Mar. 28, 2022~ Apr. 06, 2022	Jul. 12, 2022	Conducted (TH03-HY)
Power Divider	Warison	WCOU-0.4-26. 5S-20	#A	N/A	Nov. 01, 2021	Mar. 28, 2022~ Apr. 06, 2022	Oct. 31, 2022	Conducted (TH03-HY)
EMI Test Receicver	Keysight	N9010B	MY60241055	10Hz~44GHz	Jul. 12, 2021	Apr. 16, 2022~ May 17, 2022	Jul. 11, 2022	Radiation (03CH20-HY)
Preamplifier	COM-POWER	PAM-103	18020201	1MHz-1000MHz	Jan. 03, 2022	Apr. 16, 2022~ May 17, 2022	Jan. 02, 2023	Radiation (03CH20-HY)
Amplifier	EMCI	EMC118A45SE	980792	N/A	Nov. 15, 2021	Apr. 16, 2022~ May 17, 2022	Nov. 14, 2022	Radiation (03CH20-HY)
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100315	9 kHz~30 MHz	Jan. 07, 2022	Apr. 16, 2022~ May 17, 2022	Jan. 06, 2023	Radiation (03CH20-HY)
Bilog Antenna	TESEQ	CBL 6111D&00802N 1D01N-06	55606 & 08	30MHz~1GHz	Oct. 17 , 2021	Apr. 16, 2022~ May 17, 2022	Oct. 16 , 2022	Radiation (03CH20-HY)
Bilog Antenna	TESEQ	CBL 6111D&00802N 1D01N-06	37059 & 01	30MHz~1GHz	Oct. 09 , 2021	Apr. 16, 2022~ May 17, 2022	Oct. 08 , 2022	Radiation (03CH20-HY)
Horn Antenna	SCHWARZBE CK	BBHA 9120 D	9120D-02294	1GHz~18GHz	Jun. 23, 2021	Apr. 16, 2022~ May 17, 2022	Jun. 22, 2022	Radiation (03CH20-HY)
Horn Antenna	SCHWARZBE CK	BBHA 9120 D	02360	1GHz~18GHz	Nov. 02, 2021	Apr. 16, 2022~ May 17, 2022	Nov. 01, 2022	Radiation (03CH20-HY)
Hygrometer	TECPEL	DTM-303B	TP200889	N/A	Sep. 30, 2021	Apr. 16, 2022~ May 17, 2022	Sep. 29, 2022	Radiation (03CH20-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	519229/2,8040 15/2,804027/2	N/A	Jan. 19, 2022	Apr. 16, 2022~ May 17, 2022	Jan. 18, 2023	Radiation (03CH20-HY)
Software	Audix	E3 6.2009-8-24	RK-002156	N/A	N/A	Apr. 16, 2022~ May 17, 2022	N/A	Radiation (03CH20-HY)
Antenna Mast	EMEC	AM-BS-4500-B	N/A	1m~4m	N/A	Apr. 16, 2022~ May 17, 2022	N/A	Radiation (03CH20-HY)
Turn Table	EMEC	TT2000	N/A	0~360 Degree	N/A	Apr. 16, 2022~ May 17, 2022	N/A	Radiation (03CH20-HY)
Controller	EMEC	EM1000	N/A	Control Turn table & Ant Mast	N/A	Apr. 16, 2022~ May 17, 2022	N/A	Radiation (03CH20-HY)
Signal Generator	Rohde & Schwarz	SMF100A	101107	100kHz~40GHz	Dec. 08, 2021	Apr. 16, 2022~ May 17, 2022	Dec. 07, 2022	Radiation (03CH20-HY)



6 Uncertainty of Evaluation

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	3.33 dB
--	---------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	3.40 dB
--	---------

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.43 dB
--	---------



Appendix A. Test Results of Conducted Test

Conducted Output Power(Average power) & ERP / EIRP

<Primary Antenna>

GSM850 Maximum Average Power [dBm] (GT - LC = -3.6 dB)					
Channel	128	189	251	ERP (dBm)	ERP (W)
Frequency	824.2	836.4	848.8		
GSM	32.08	32.11	32.00	26.44	0.4406
GPRS class 8	32.19	32.16	32.13		
GPRS class 10	31.50	31.45	31.41		
GPRS class 11	29.99	29.90	29.91		
GPRS class 12	28.75	28.59	28.53		
EGPRS class 8	27.23	27.11	27.00	21.48	0.1406
EGPRS class 10	26.49	26.55	26.56		
EGPRS class 11	26.36	26.42	26.28		
EGPRS class 12	23.81	23.63	23.73		
Limit	ERP < 7W			Result	Pass

GSM1900 Maximum Average Power [dBm] (GT - LC = 0.4 dB)					
Channel	512	661	810	EIRP (dBm)	EIRP (W)
Frequency	1850.2	1880	1909.8		
GSM	29.75	29.69	29.55	30.23	1.0544
GPRS class 8	29.83	29.75	29.64		
GPRS class 10	28.60	28.50	28.38		
GPRS class 11	27.75	27.65	27.52		
GPRS class 12	26.45	26.44	26.21		
EGPRS class 8	25.06	25.14	25.02	25.54	0.3581
EGPRS class 10	23.92	24.04	23.80		
EGPRS class 11	23.75	23.88	23.90		
EGPRS class 12	22.02	22.08	22.00		
Limit	EIRP < 2W			Result	Pass



WCDMA Band V Maximum Average Power [dBm] (GT - LC = -3.6 dB)					
Channel	4132	4182	4233	ERP (dBm)	ERP (W)
Frequency	826.4	836.4	846.6		
RMC 12.2K	24.65	24.69	24.65		
HSDPA Subtest-1	24.65	24.65	24.62		
HSDPA Subtest-2	24.46	24.48	24.45		
HSDPA Subtest-3	23.97	23.96	23.96		
HSDPA Subtest-4	23.52	23.55	23.50		
HSUPA Subtest-1	24.04	24.03	24.03		
HSUPA Subtest-2	22.05	22.04	22.00		
HSUPA Subtest-3	23.01	23.04	23.08		
HSUPA Subtest-4	22.04	22.09	22.08		
HSUPA Subtest-5	24.60	24.60	24.60		
Limit	ERP < 7W			Result	Pass

WCDMA Band II Maximum Average Power [dBm] (GT - LC = 0.4 dB)					
Channel	9262	9400	9538	EIRP (dBm)	EIRP (W)
Frequency	1852.4	1880	1907.6		
RMC 12.2K	24.54	24.59	24.52		
HSDPA Subtest-1	24.57	24.52	24.51		
HSDPA Subtest-2	24.58	24.53	24.40		
HSDPA Subtest-3	24.15	24.04	23.92		
HSDPA Subtest-4	23.61	23.50	23.30		
HSUPA Subtest-1	23.89	23.83	23.80		
HSUPA Subtest-2	21.84	21.84	21.80		
HSUPA Subtest-3	23.65	23.68	23.56		
HSUPA Subtest-4	21.96	22.00	21.90		
HSUPA Subtest-5	23.82	23.81	23.80		
Limit	EIRP < 2W			Result	Pass

WCDMA Band IV Maximum Average Power [dBm] (GT - LC = -0.4 dB)					
Channel	1312	1413	1513	EIRP (dBm)	EIRP (W)
Frequency	1712.4	1732.6	1752.6		
RMC 12.2K	24.60	24.52	24.76		
HSDPA Subtest-1	24.71	24.41	24.67		
HSDPA Subtest-2	24.62	24.26	24.57		
HSDPA Subtest-3	24.11	23.78	24.09		
HSDPA Subtest-4	24.14	23.80	24.05		
HSUPA Subtest-1	23.88	23.89	23.88		
HSUPA Subtest-2	21.82	21.88	21.89		
HSUPA Subtest-3	23.56	23.62	23.76		
HSUPA Subtest-4	21.87	21.80	21.82		
HSUPA Subtest-5	24.60	24.60	24.75		
Limit	EIRP < 1W			Result	Pass


<ASDIV Antenna>

GSM850 Maximum Average Power [dBm] (GT - LC = -4.5 dB)					
Channel	128	189	251	ERP (dBm)	ERP (W)
Frequency	824.2	836.4	848.8		
GSM	32.57	32.46	32.38	26.00	0.3981
GPRS class 8	32.65	32.53	32.44		
GPRS class 10	31.55	31.33	31.39		
GPRS class 11	30.14	30.04	29.94		
GPRS class 12	28.76	28.55	28.63		
EGPRS class 8	27.04	27.08	27.09	20.44	0.1107
EGPRS class 10	26.64	26.63	26.46		
EGPRS class 11	26.53	26.53	26.33		
EGPRS class 12	23.96	23.85	23.84		
Limit	ERP < 7W			Result	Pass

GSM1900 Maximum Average Power [dBm] (GT - LC = -1.3 dB)					
Channel	512	661	810	EIRP (dBm)	EIRP (W)
Frequency	1850.2	1880	1909.8		
GSM	28.04	28.89	28.72	27.70	0.5888
GPRS class 8	29.00	28.95	28.80		
GPRS class 10	27.86	27.69	27.47		
GPRS class 11	27.29	27.08	26.83		
GPRS class 12	25.99	25.68	25.57		
EGPRS class 8	24.57	24.38	24.43	23.27	0.2123
EGPRS class 10	23.60	23.42	23.05		
EGPRS class 11	23.45	23.08	23.03		
EGPRS class 12	21.83	21.44	21.18		
Limit	EIRP < 2W			Result	Pass



WCDMA Band V Maximum Average Power [dBm] (GT - LC = -4.5 dB)					
Channel	4132	4182	4233	ERP (dBm)	ERP (W)
Frequency	826.4	836.4	846.6		
RMC 12.2K	24.71	24.72	24.62		
HSDPA Subtest-1	24.68	24.71	24.67		
HSDPA Subtest-2	24.51	24.54	24.48		
HSDPA Subtest-3	24.00	24.00	23.98		
HSDPA Subtest-4	23.53	23.55	23.52		
HSUPA Subtest-1	23.68	23.70	24.60		
HSUPA Subtest-2	22.03	22.06	22.02		
HSUPA Subtest-3	22.95	23.01	22.99		
HSUPA Subtest-4	22.04	22.07	22.01		
HSUPA Subtest-5	24.70	24.69	24.59		
Limit	ERP < 7W			Result	Pass

WCDMA Band II Maximum Average Power [dBm] (GT - LC = -1.3 dB)					
Channel	9262	9400	9538	EIRP (dBm)	EIRP (W)
Frequency	1852.4	1880	1907.6		
RMC 12.2K	23.83	23.95	23.75		
HSDPA Subtest-1	23.87	23.76	23.70		
HSDPA Subtest-2	23.88	23.67	23.65		
HSDPA Subtest-3	23.36	23.24	23.19		
HSDPA Subtest-4	22.80	22.64	22.56		
HSUPA Subtest-1	22.93	22.89	22.81		
HSUPA Subtest-2	22.13	20.82	22.20		
HSUPA Subtest-3	22.92	22.91	22.73		
HSUPA Subtest-4	22.11	22.19	22.07		
HSUPA Subtest-5	23.81	23.82	23.80		
Limit	EIRP < 2W			Result	Pass

WCDMA Band IV Maximum Average Power [dBm] (GT - LC = -0.5 dB)					
Channel	1312	1413	1513	EIRP (dBm)	EIRP (W)
Frequency	1712.4	1732.6	1752.6		
RMC 12.2K	23.68	23.56	23.72		
HSDPA Subtest-1	23.61	23.56	23.62		
HSDPA Subtest-2	23.55	23.42	23.52		
HSDPA Subtest-3	23.04	22.98	23.03		
HSDPA Subtest-4	23.05	22.95	23.04		
HSUPA Subtest-1	22.81	22.85	22.81		
HSUPA Subtest-2	20.86	20.88	21.98		
HSUPA Subtest-3	22.80	22.64	22.81		
HSUPA Subtest-4	20.89	21.71	21.60		
HSUPA Subtest-5	23.70	23.68	23.70		
Limit	EIRP < 1W			Result	Pass









A2. GSM

Peak-to-Average Ratio







Mode	GSM850		Limit: 13dB
Mod.	GPRS class 8	EDGE class 8	Result
Lowest CH	0.28	3.08	PASS
Middle CH	0.24	3.00	
Highest CH	0.28	2.88	

Mode	GSM1900		Limit: 13dB
Mod.	GPRS class 8	EDGE class 8	Result
Lowest CH	0.32	3.04	PASS
Middle CH	0.36	3.20	
Highest CH	0.40	3.36	

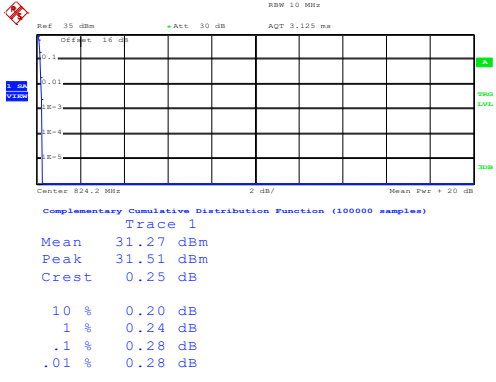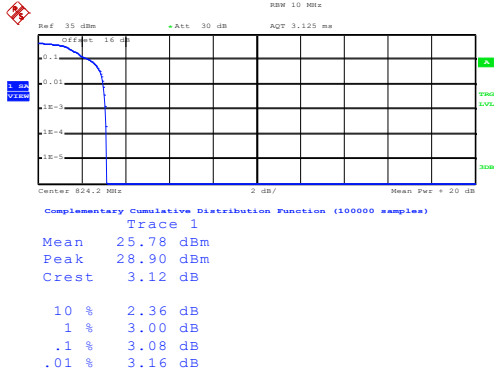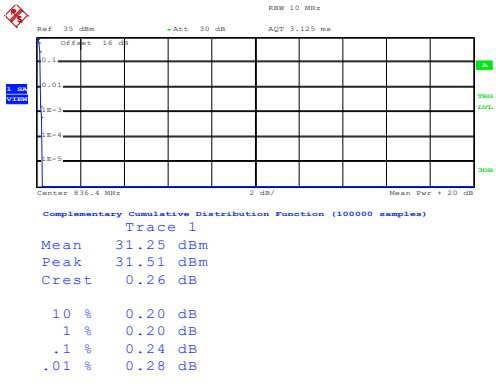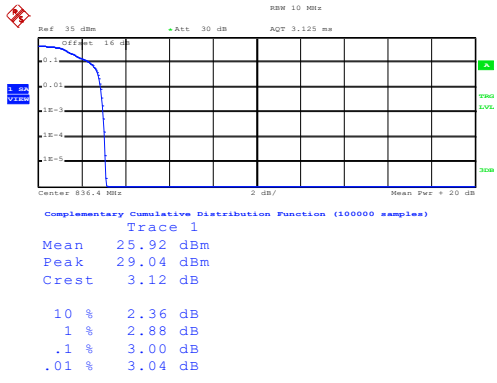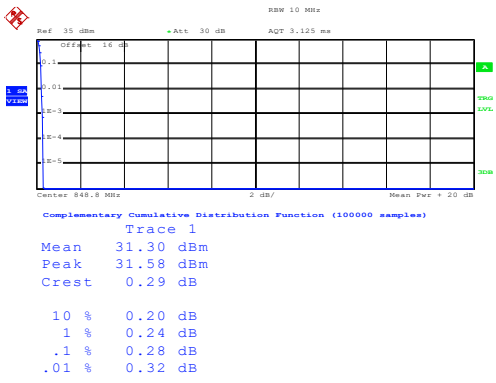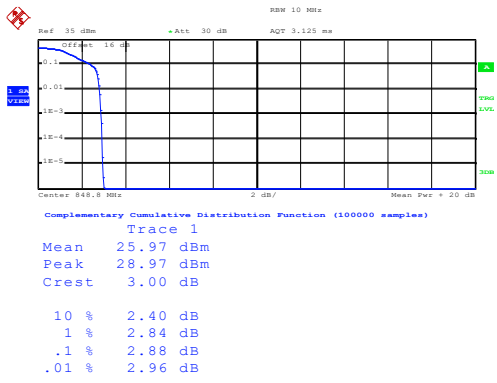

GSM850 (GPRS class 8)		GSM850 (EDGE class 8)	
Lowest Channel		Lowest Channel	
 Center 824.2 MHz 2 dB/ Mean Pwr + 20 dB Complementary Cumulative Distribution Function (100000 samples) Trace 1 Mean 31.27 dBm Peak 31.51 dBm Crest 0.25 dB 10 % 0.20 dB 1 % 0.24 dB .1 % 0.28 dB .01 % 0.28 dB Date: 28.MAR.2022 10:38:30		 Center 824.2 MHz 2 dB/ Mean Pwr + 20 dB Complementary Cumulative Distribution Function (100000 samples) Trace 1 Mean 25.78 dBm Peak 28.90 dBm Crest 3.12 dB 10 % 2.36 dB 1 % 3.00 dB .1 % 3.08 dB .01 % 3.16 dB Date: 28.MAR.2022 15:24:51	
Middle Channel		Middle Channel	
 Center 836.4 MHz 2 dB/ Mean Pwr + 20 dB Complementary Cumulative Distribution Function (100000 samples) Trace 1 Mean 31.25 dBm Peak 31.51 dBm Crest 0.26 dB 10 % 0.20 dB 1 % 0.20 dB .1 % 0.24 dB .01 % 0.28 dB Date: 28.MAR.2022 10:38:49		 Center 836.4 MHz 2 dB/ Mean Pwr + 20 dB Complementary Cumulative Distribution Function (100000 samples) Trace 1 Mean 25.92 dBm Peak 29.04 dBm Crest 3.12 dB 10 % 2.36 dB 1 % 2.88 dB .1 % 3.00 dB .01 % 3.04 dB Date: 28.MAR.2022 15:25:10	
Highest Channel		Highest Channel	
 Center 848.8 MHz 2 dB/ Mean Pwr + 20 dB Complementary Cumulative Distribution Function (100000 samples) Trace 1 Mean 31.30 dBm Peak 31.58 dBm Crest 0.29 dB 10 % 0.20 dB 1 % 0.24 dB .1 % 0.28 dB .01 % 0.32 dB Date: 28.MAR.2022 10:39:06		 Center 848.8 MHz 2 dB/ Mean Pwr + 20 dB Complementary Cumulative Distribution Function (100000 samples) Trace 1 Mean 25.97 dBm Peak 28.97 dBm Crest 3.00 dB 10 % 2.40 dB 1 % 2.84 dB .1 % 2.88 dB .01 % 2.96 dB Date: 28.MAR.2022 15:25:29	

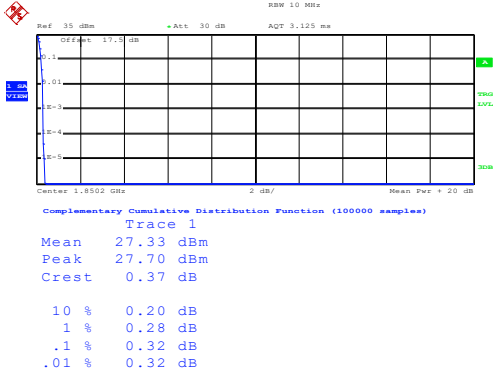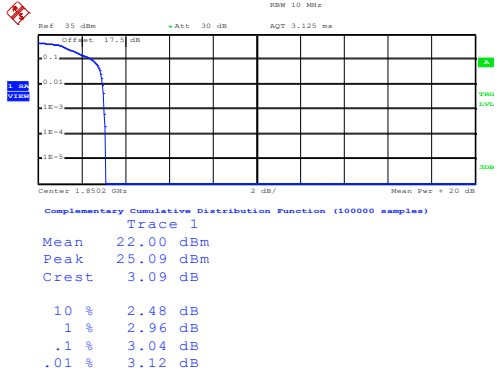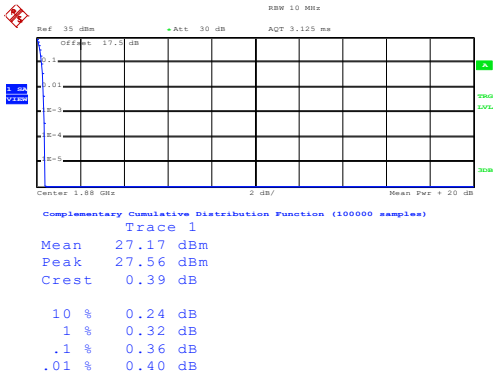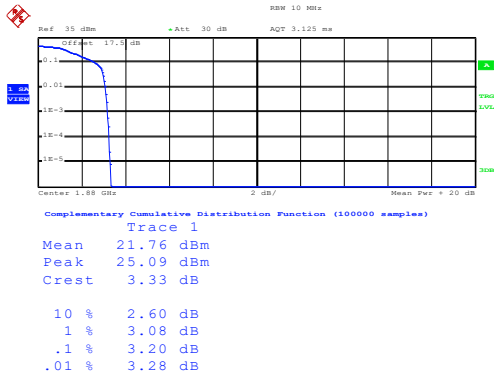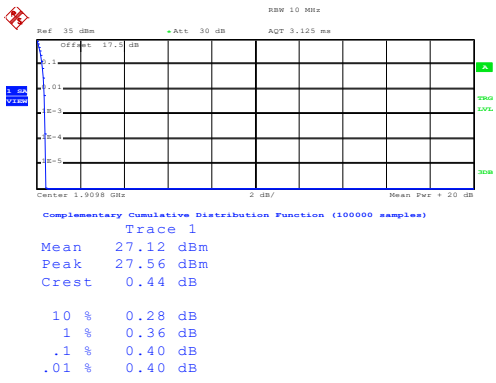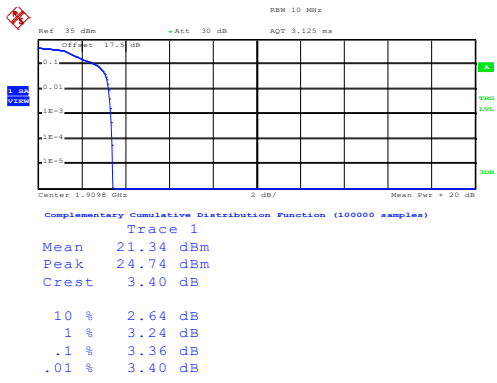

GSM1900 (GPRS class 8)		GSM1900 (EDGE class 8)	
Lowest Channel		Lowest Channel	
 Ref: 35 dBm Att: 30 dB AGT: 3.125 ms Center: 1.8502 GHz 2 dB/ Mean Pwr: +20 dB Complementary Cumulative Distribution Function (100000 samples) Trace 1 Mean: 27.33 dBm Peak: 27.70 dBm Crest: 0.37 dB 10 %: 0.20 dB 1 %: 0.28 dB .1 %: 0.32 dB .01 %: 0.32 dB Date: 28.MAR.2022 11:04:56		 Ref: 35 dBm Att: 30 dB AGT: 3.125 ms Center: 1.8502 GHz 2 dB/ Mean Pwr: +20 dB Complementary Cumulative Distribution Function (100000 samples) Trace 1 Mean: 22.00 dBm Peak: 25.09 dBm Crest: 3.09 dB 10 %: 2.48 dB 1 %: 2.96 dB .1 %: 3.04 dB .01 %: 3.12 dB Date: 28.MAR.2022 15:43:30	
Middle Channel		Middle Channel	
 Ref: 35 dBm Att: 30 dB AGT: 3.125 ms Center: 1.88 GHz 2 dB/ Mean Pwr: +20 dB Complementary Cumulative Distribution Function (100000 samples) Trace 1 Mean: 27.17 dBm Peak: 27.56 dBm Crest: 0.39 dB 10 %: 0.24 dB 1 %: 0.32 dB .1 %: 0.36 dB .01 %: 0.40 dB Date: 28.MAR.2022 11:05:18		 Ref: 35 dBm Att: 30 dB AGT: 3.125 ms Center: 1.88 GHz 2 dB/ Mean Pwr: +20 dB Complementary Cumulative Distribution Function (100000 samples) Trace 1 Mean: 21.76 dBm Peak: 25.09 dBm Crest: 3.33 dB 10 %: 2.60 dB 1 %: 3.08 dB .1 %: 3.20 dB .01 %: 3.28 dB Date: 28.MAR.2022 15:43:55	
Highest Channel		Highest Channel	
 Ref: 35 dBm Att: 30 dB AGT: 3.125 ms Center: 1.9098 GHz 2 dB/ Mean Pwr: +20 dB Complementary Cumulative Distribution Function (100000 samples) Trace 1 Mean: 27.12 dBm Peak: 27.56 dBm Crest: 0.44 dB 10 %: 0.28 dB 1 %: 0.36 dB .1 %: 0.40 dB .01 %: 0.40 dB Date: 28.MAR.2022 11:05:40		 Ref: 35 dBm Att: 30 dB AGT: 3.125 ms Center: 1.9098 GHz 2 dB/ Mean Pwr: +20 dB Complementary Cumulative Distribution Function (100000 samples) Trace 1 Mean: 21.34 dBm Peak: 24.74 dBm Crest: 3.40 dB 10 %: 2.64 dB 1 %: 3.24 dB .1 %: 3.36 dB .01 %: 3.40 dB Date: 28.MAR.2022 15:44:19	


**26dB Bandwidth**

Mode	GSM850: 26dB BW(MHz)	
Mod.	GPRS class 8	EDGE class 8
Lowest CH	0.292	0.309
Middle CH	0.300	0.305
Highest CH	0.305	0.316

Mode	GSM1900: 26dB BW(MHz)	
Mod.	GPRS class 8	EDGE class 8
Lowest CH	0.318	0.305
Middle CH	0.297	0.314
Highest CH	0.315	0.307

GSM850 (GPRS class 8)


Lowest Channel

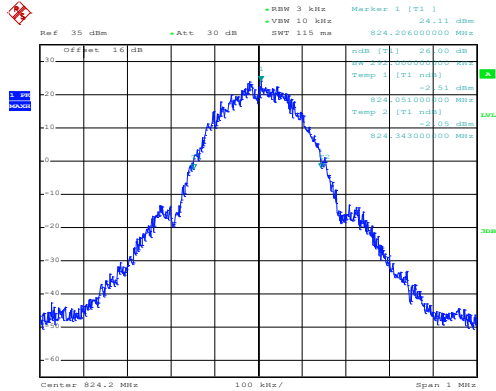

Date: 28.MAR.2022 10:23:06


GSM850 (EDGE class 8)

Lowest Channel

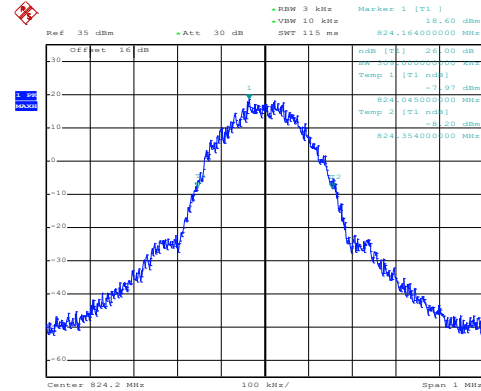


Date: 28.MAR.2022 15:09:10

Middle Channel

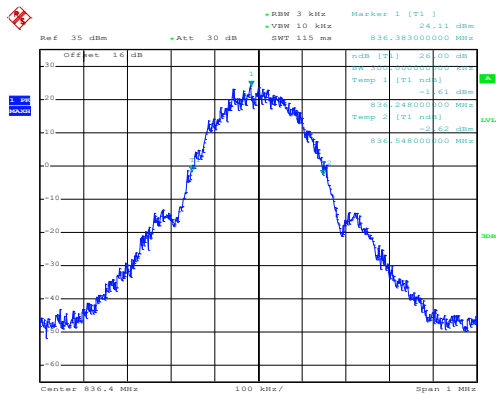


Date: 28.MAR.2022 10:24:00

Middle Channel

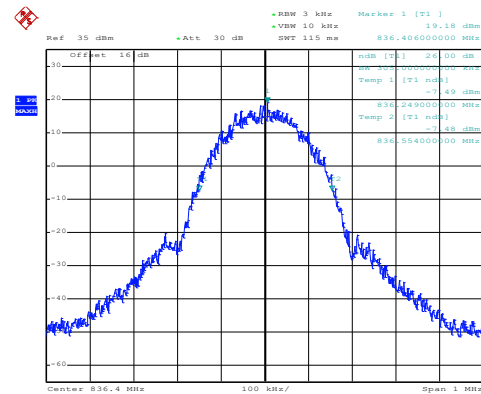


Date: 28.MAR.2022 15:09:49

Highest Channel

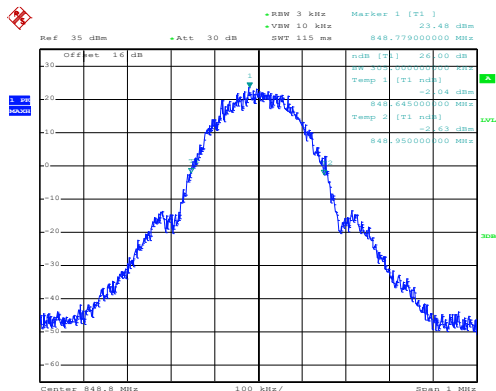


Date: 28.MAR.2022 10:24:35

Highest Channel

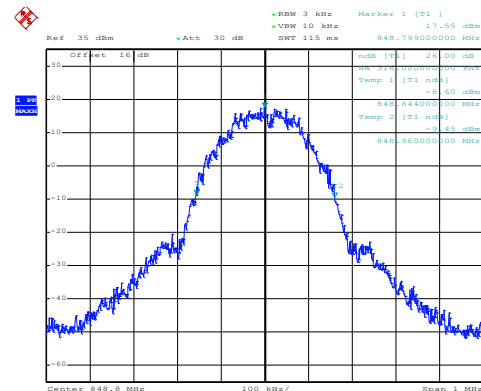


Date: 28.MAR.2022 15:10:25

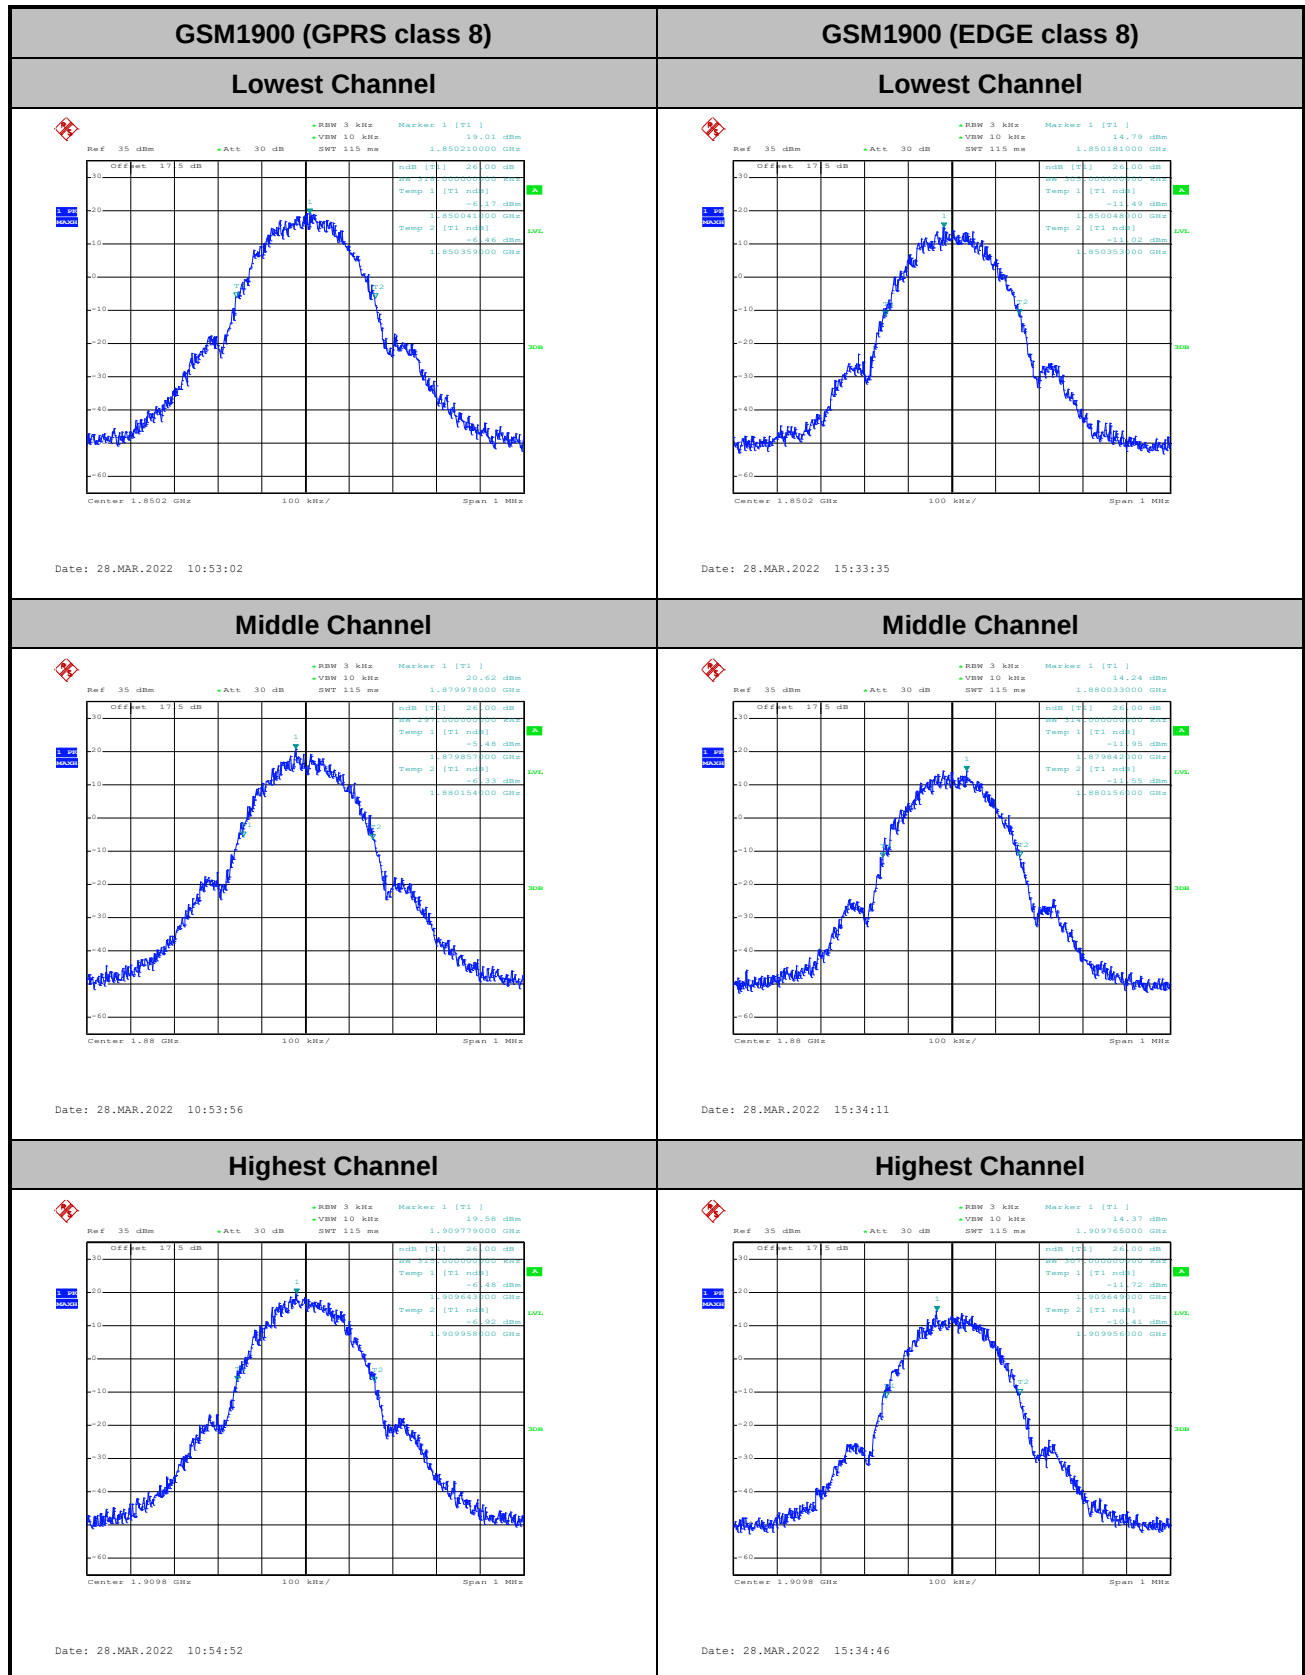

**Occupied Bandwidth**

Mode	GSM850: 99% OBW (MHz)	
Mod.	GPRS class 8	EDGE class 8
Lowest CH	0.243	0.248
Middle CH	0.245	0.250
Highest CH	0.243	0.253

Mode	GSM1900: 99% OBW (MHz)	
Mod.	GPRS class 8	EDGE class 8
Lowest CH	0.248	0.244
Middle CH	0.243	0.251
Highest CH	0.246	0.250

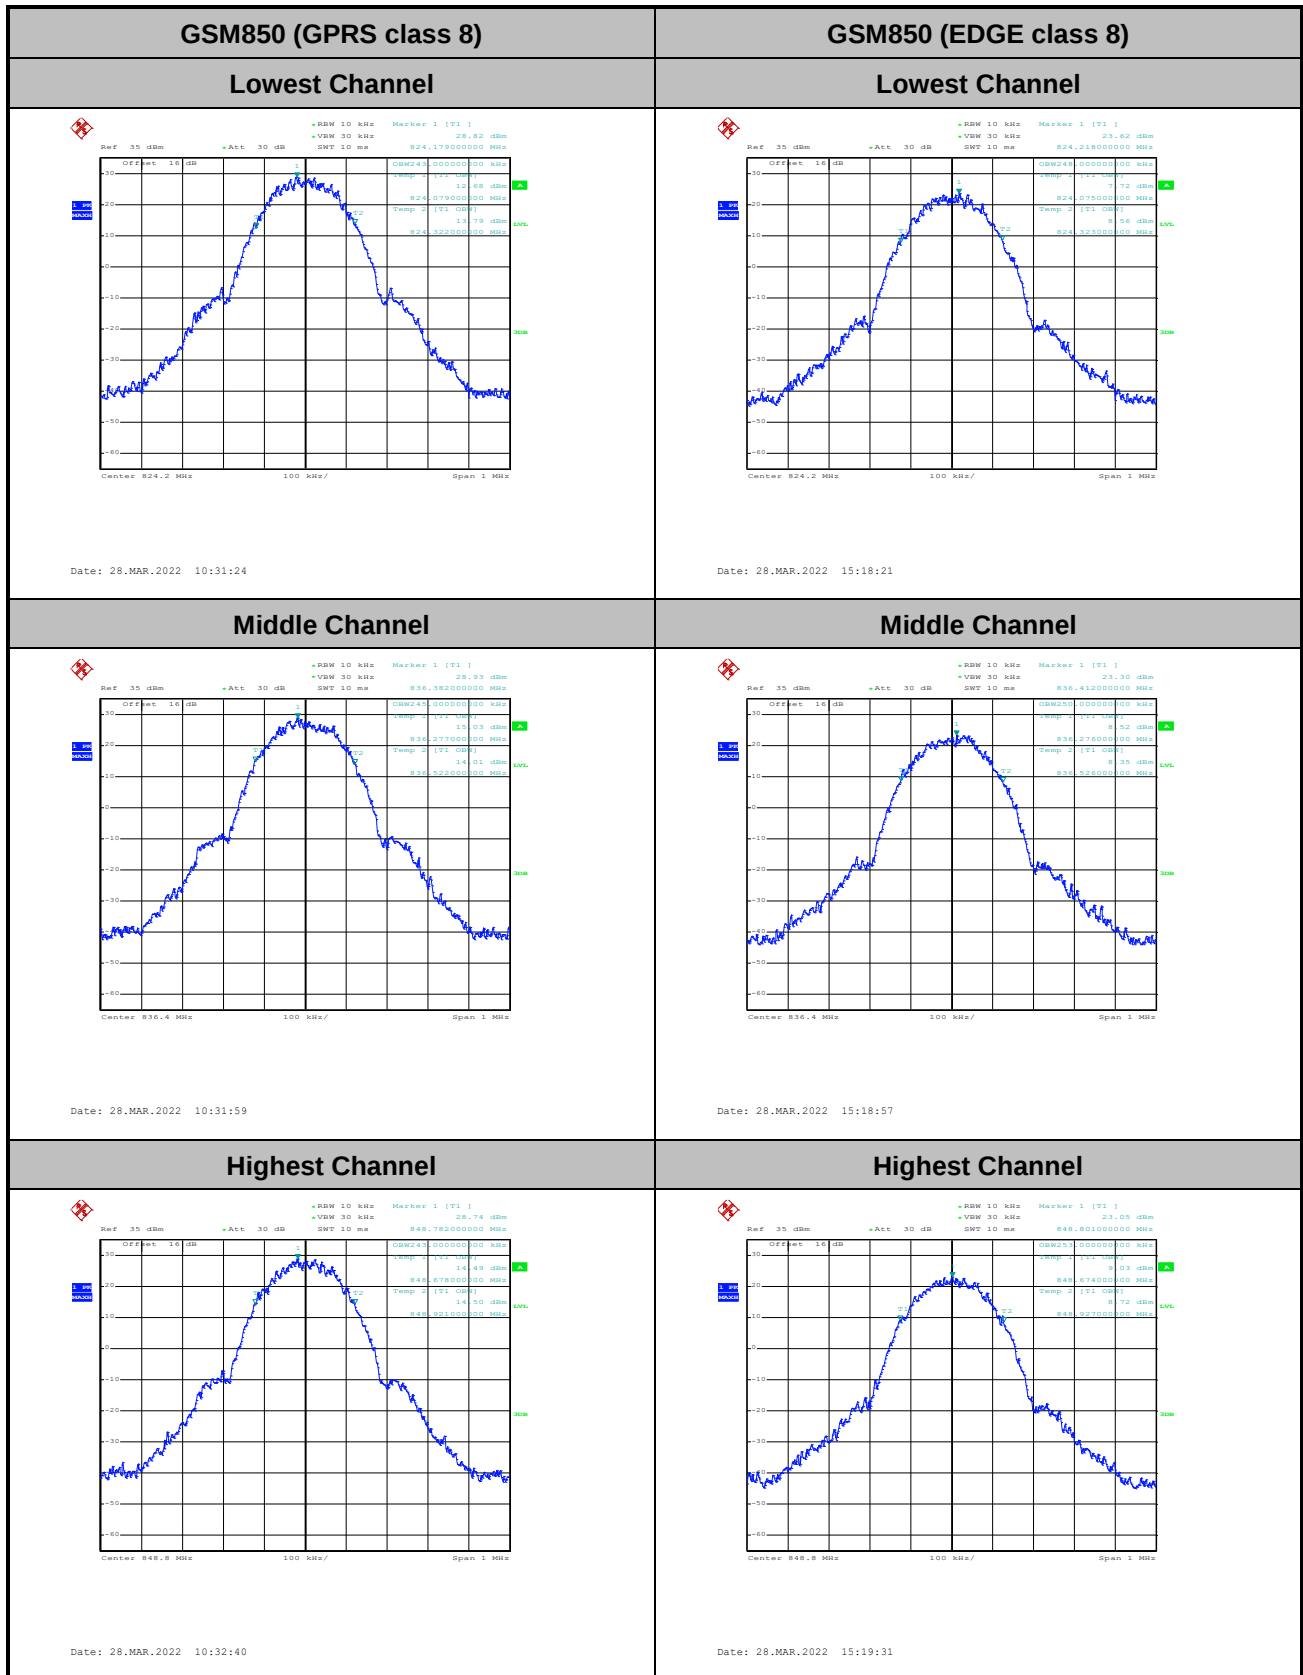




GSM1900 (GPRS class 8)		GSM1900 (EDGE class 8)	
Lowest Channel		Lowest Channel	
Ref: 35 dBm Att: 30 dB BW: 10 kHz Marker 1 [T1] 24.10 dBm VSW: 30 kHz SWT: 10 ms 1.850204000 GHz OSW24: 0.00000000 kHz Temp: 1 [T1] 0.00 dB Temp: 2 [T2] 0.00 dB LVL: 0.00 dBm ZSW: 0.00 dBm Center: 1.8502 GHz Span: 1 MHz Date: 28.MAR.2022 10:59:41		Ref: 35 dBm Att: 30 dB BW: 10 kHz Marker 1 [T1] 19.20 dBm VSW: 30 kHz SWT: 10 ms 1.850186000 GHz OSW24: 0.00000000 kHz Temp: 1 [T1] 0.00 dB Temp: 2 [T2] 0.00 dB LVL: 0.00 dBm ZSW: 0.00 dBm Center: 1.8502 GHz Span: 1 MHz Date: 28.MAR.2022 15:38:15	
Middle Channel		Middle Channel	
Ref: 35 dBm Att: 30 dB BW: 10 kHz Marker 1 [T1] 24.77 dBm VSW: 30 kHz SWT: 10 ms 1.879983000 GHz OSW24: 0.00000000 kHz Temp: 1 [T1] 0.00 dB Temp: 2 [T2] 0.00 dB LVL: 0.00 dBm ZSW: 0.00 dBm Center: 1.88 GHz Span: 1 MHz Date: 28.MAR.2022 11:00:20		Ref: 35 dBm Att: 30 dB BW: 10 kHz Marker 1 [T1] 20.01 dBm VSW: 30 kHz SWT: 10 ms 1.880004000 GHz OSW24: 0.00000000 kHz Temp: 1 [T1] 0.00 dB Temp: 2 [T2] 0.00 dB LVL: 0.00 dBm ZSW: 0.00 dBm Center: 1.88 GHz Span: 1 MHz Date: 28.MAR.2022 15:38:50	
Highest Channel		Highest Channel	
Ref: 35 dBm Att: 30 dB BW: 10 kHz Marker 1 [T1] 23.66 dBm VSW: 30 kHz SWT: 10 ms 1.909773000 GHz OSW24: 0.00000000 kHz Temp: 1 [T1] 0.00 dB Temp: 2 [T2] 0.00 dB LVL: 0.00 dBm ZSW: 0.00 dBm Center: 1.9098 GHz Span: 1 MHz Date: 28.MAR.2022 11:00:58		Ref: 35 dBm Att: 30 dB BW: 10 kHz Marker 1 [T1] 19.08 dBm VSW: 30 kHz SWT: 10 ms 1.909833000 GHz OSW24: 0.00000000 kHz Temp: 1 [T1] 0.00 dB Temp: 2 [T2] 0.00 dB LVL: 0.00 dBm ZSW: 0.00 dBm Center: 1.9098 GHz Span: 1 MHz Date: 28.MAR.2022 15:39:28	



Conducted Band Edge


GSM850 (GPRS class 8)

Lowest Band Edge

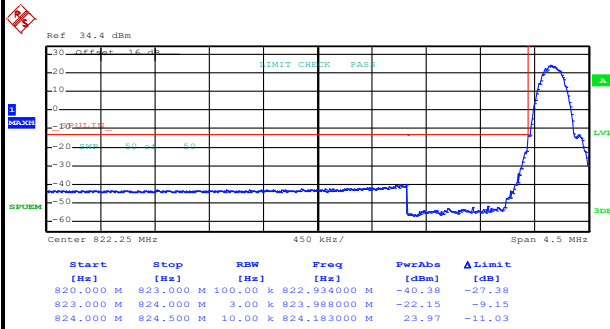

Date: 28.MAR.2022 10:34:44


Highest Band Edge

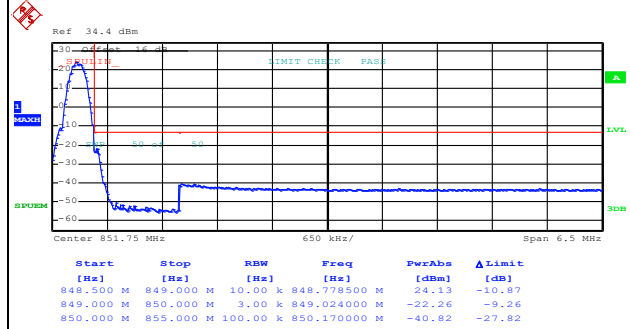

Date: 28.MAR.2022 10:36:20


GSM850 (EDGE class 8)

Lowest Band Edge

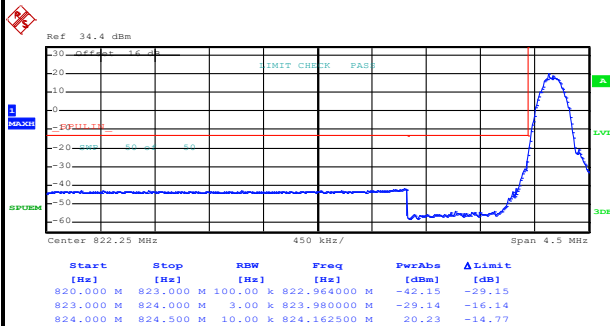

Date: 28.MAR.2022 15:21:10

Highest Band Edge

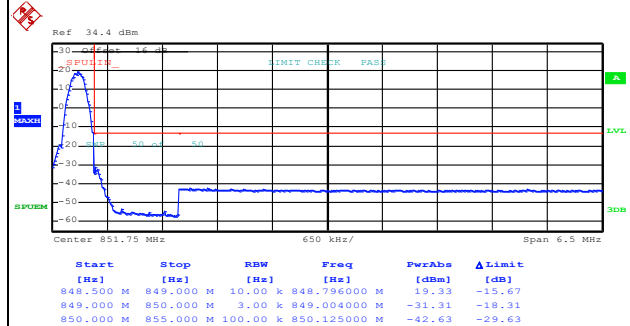


Date: 28.MAR.2022 15:22:44




GSM1900 (GPRS class 8)

Lowest Band Edge

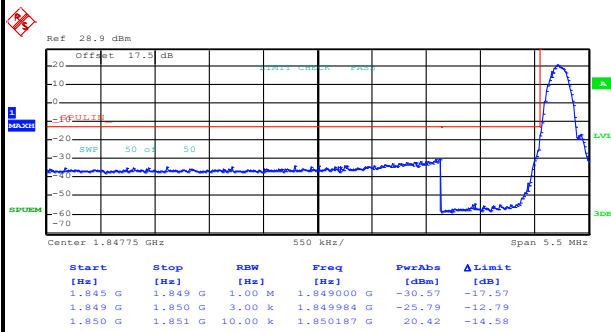

Date: 28.MAR.2022 11:02:43


Highest Band Edge

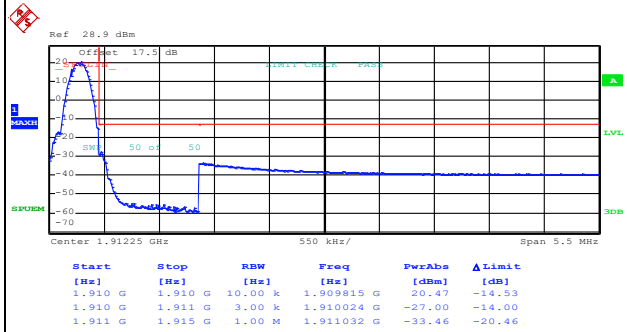

Date: 28.MAR.2022 11:04:20


GSM1900 (EDGE class 8)

Lowest Band Edge

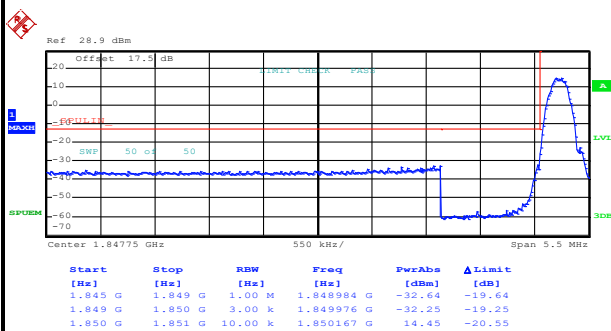

Date: 28.MAR.2022 15:41:15







Highest Band Edge

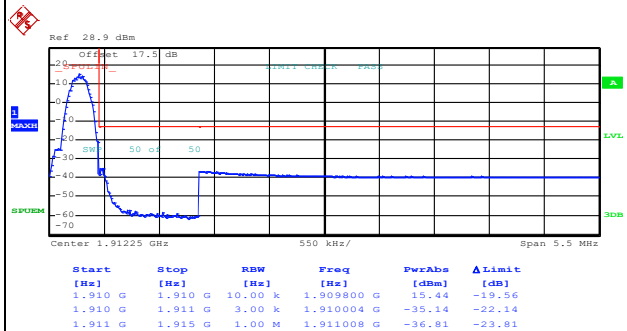







Date: 28.MAR.2022 15:42:55



Conducted Spurious Emission

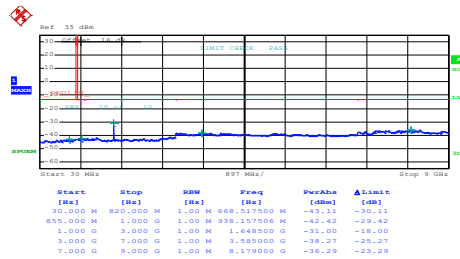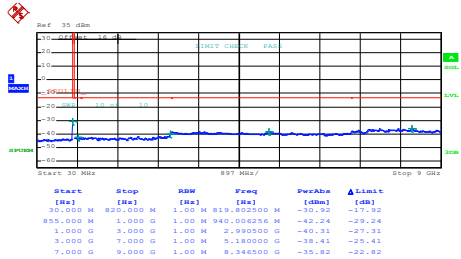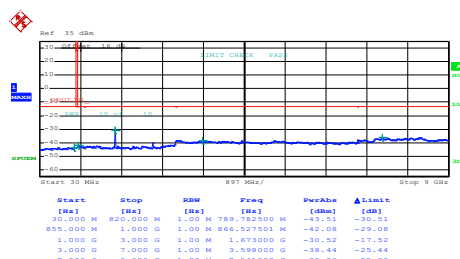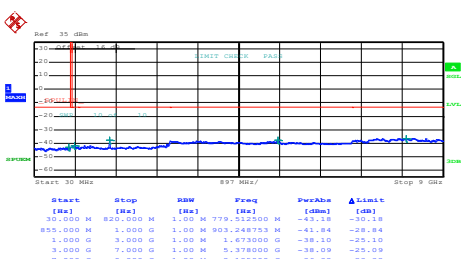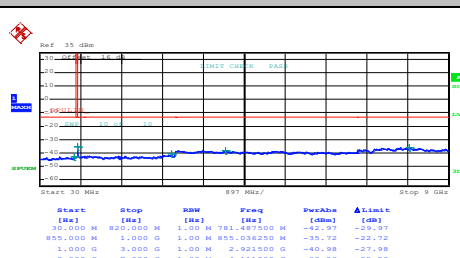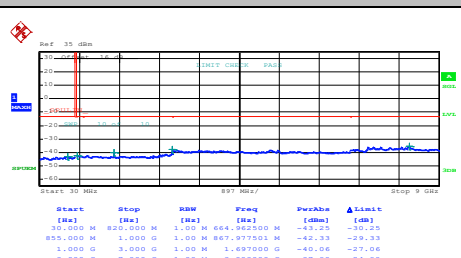GSM850 (GPRS class 8)		GSM850 (EDGE class 8)																																																																									
Lowest Channel		Lowest Channel																																																																									
<table><tr><th>Start [MHz]</th><th>Stop [MHz]</th><th>RBW [Hz]</th><th>Freq [MHz]</th><th>PerAbn [dBm]</th><th>ΔLimit [dB]</th></tr><tr><td>30.000 M</td><td>820.000 M</td><td>1.00 M</td><td>668.517500 M</td><td>-43.11</td><td>-30.11</td></tr><tr><td>855.000 M</td><td>1.000 G</td><td>1.00 M</td><td>938.157506 M</td><td>-42.42</td><td>-29.42</td></tr><tr><td>1.000 G</td><td>3.000 G</td><td>1.00 M</td><td>1.648500 G</td><td>-32.00</td><td>-18.00</td></tr><tr><td>3.000 G</td><td>7.000 G</td><td>1.00 M</td><td>3.585000 G</td><td>-38.27</td><td>-25.27</td></tr><tr><td>7.000 G</td><td>9.000 G</td><td>1.00 M</td><td>8.179000 G</td><td>-36.29</td><td>-23.29</td></tr></table> Date: 28.MAR.2022 10:25:39		Start [MHz]	Stop [MHz]	RBW [Hz]	Freq [MHz]	PerAbn [dBm]	ΔLimit [dB]	30.000 M	820.000 M	1.00 M	668.517500 M	-43.11	-30.11	855.000 M	1.000 G	1.00 M	938.157506 M	-42.42	-29.42	1.000 G	3.000 G	1.00 M	1.648500 G	-32.00	-18.00	3.000 G	7.000 G	1.00 M	3.585000 G	-38.27	-25.27	7.000 G	9.000 G	1.00 M	8.179000 G	-36.29	-23.29	<table><tr><th>Start [MHz]</th><th>Stop [MHz]</th><th>RBW [Hz]</th><th>Freq [MHz]</th><th>PerAbn [dBm]</th><th>ΔLimit [dB]</th></tr><tr><td>30.000 M</td><td>820.000 M</td><td>1.00 M</td><td>819.802500 M</td><td>-30.92</td><td>-17.92</td></tr><tr><td>855.000 M</td><td>1.000 G</td><td>1.00 M</td><td>940.006256 M</td><td>-42.24</td><td>-29.24</td></tr><tr><td>1.000 G</td><td>3.000 G</td><td>1.00 M</td><td>2.990500 G</td><td>-40.31</td><td>-27.31</td></tr><tr><td>3.000 G</td><td>7.000 G</td><td>1.00 M</td><td>5.180000 G</td><td>-38.41</td><td>-25.41</td></tr><tr><td>7.000 G</td><td>9.000 G</td><td>1.00 M</td><td>8.346500 G</td><td>-35.82</td><td>-22.82</td></tr></table> Date: 28.MAR.2022 15:15:53		Start [MHz]	Stop [MHz]	RBW [Hz]	Freq [MHz]	PerAbn [dBm]	ΔLimit [dB]	30.000 M	820.000 M	1.00 M	819.802500 M	-30.92	-17.92	855.000 M	1.000 G	1.00 M	940.006256 M	-42.24	-29.24	1.000 G	3.000 G	1.00 M	2.990500 G	-40.31	-27.31	3.000 G	7.000 G	1.00 M	5.180000 G	-38.41	-25.41	7.000 G	9.000 G	1.00 M	8.346500 G	-35.82	-22.82
Start [MHz]	Stop [MHz]	RBW [Hz]	Freq [MHz]	PerAbn [dBm]	ΔLimit [dB]																																																																						
30.000 M	820.000 M	1.00 M	668.517500 M	-43.11	-30.11																																																																						
855.000 M	1.000 G	1.00 M	938.157506 M	-42.42	-29.42																																																																						
1.000 G	3.000 G	1.00 M	1.648500 G	-32.00	-18.00																																																																						
3.000 G	7.000 G	1.00 M	3.585000 G	-38.27	-25.27																																																																						
7.000 G	9.000 G	1.00 M	8.179000 G	-36.29	-23.29																																																																						
Start [MHz]	Stop [MHz]	RBW [Hz]	Freq [MHz]	PerAbn [dBm]	ΔLimit [dB]																																																																						
30.000 M	820.000 M	1.00 M	819.802500 M	-30.92	-17.92																																																																						
855.000 M	1.000 G	1.00 M	940.006256 M	-42.24	-29.24																																																																						
1.000 G	3.000 G	1.00 M	2.990500 G	-40.31	-27.31																																																																						
3.000 G	7.000 G	1.00 M	5.180000 G	-38.41	-25.41																																																																						
7.000 G	9.000 G	1.00 M	8.346500 G	-35.82	-22.82																																																																						
Middle Channel		Middle Channel																																																																									
<table><tr><th>Start [MHz]</th><th>Stop [MHz]</th><th>RBW [Hz]</th><th>Freq [MHz]</th><th>PerAbn [dBm]</th><th>ΔLimit [dB]</th></tr><tr><td>30.000 M</td><td>820.000 M</td><td>1.00 M</td><td>789.782500 M</td><td>-43.51</td><td>-30.51</td></tr><tr><td>855.000 M</td><td>1.000 G</td><td>1.00 M</td><td>866.527501 M</td><td>-42.08</td><td>-29.08</td></tr><tr><td>1.000 G</td><td>3.000 G</td><td>1.00 M</td><td>1.673500 G</td><td>-30.52</td><td>-17.52</td></tr><tr><td>3.000 G</td><td>7.000 G</td><td>1.00 M</td><td>3.598000 G</td><td>-38.44</td><td>-25.44</td></tr><tr><td>7.000 G</td><td>9.000 G</td><td>1.00 M</td><td>7.941000 G</td><td>-35.93</td><td>-22.93</td></tr></table> Date: 28.MAR.2022 10:26:31		Start [MHz]	Stop [MHz]	RBW [Hz]	Freq [MHz]	PerAbn [dBm]	ΔLimit [dB]	30.000 M	820.000 M	1.00 M	789.782500 M	-43.51	-30.51	855.000 M	1.000 G	1.00 M	866.527501 M	-42.08	-29.08	1.000 G	3.000 G	1.00 M	1.673500 G	-30.52	-17.52	3.000 G	7.000 G	1.00 M	3.598000 G	-38.44	-25.44	7.000 G	9.000 G	1.00 M	7.941000 G	-35.93	-22.93	<table><tr><th>Start [MHz]</th><th>Stop [MHz]</th><th>RBW [Hz]</th><th>Freq [MHz]</th><th>PerAbn [dBm]</th><th>ΔLimit [dB]</th></tr><tr><td>30.000 M</td><td>820.000 M</td><td>1.00 M</td><td>779.512500 M</td><td>-43.18</td><td>-30.18</td></tr><tr><td>855.000 M</td><td>1.000 G</td><td>1.00 M</td><td>903.248753 M</td><td>-41.84</td><td>-28.84</td></tr><tr><td>1.000 G</td><td>3.000 G</td><td>1.00 M</td><td>1.673500 G</td><td>-38.10</td><td>-25.10</td></tr><tr><td>3.000 G</td><td>7.000 G</td><td>1.00 M</td><td>5.378000 G</td><td>-38.09</td><td>-25.09</td></tr><tr><td>7.000 G</td><td>9.000 G</td><td>1.00 M</td><td>8.185000 G</td><td>-36.38</td><td>-23.38</td></tr></table> Date: 28.MAR.2022 15:16:47		Start [MHz]	Stop [MHz]	RBW [Hz]	Freq [MHz]	PerAbn [dBm]	ΔLimit [dB]	30.000 M	820.000 M	1.00 M	779.512500 M	-43.18	-30.18	855.000 M	1.000 G	1.00 M	903.248753 M	-41.84	-28.84	1.000 G	3.000 G	1.00 M	1.673500 G	-38.10	-25.10	3.000 G	7.000 G	1.00 M	5.378000 G	-38.09	-25.09	7.000 G	9.000 G	1.00 M	8.185000 G	-36.38	-23.38
Start [MHz]	Stop [MHz]	RBW [Hz]	Freq [MHz]	PerAbn [dBm]	ΔLimit [dB]																																																																						
30.000 M	820.000 M	1.00 M	789.782500 M	-43.51	-30.51																																																																						
855.000 M	1.000 G	1.00 M	866.527501 M	-42.08	-29.08																																																																						
1.000 G	3.000 G	1.00 M	1.673500 G	-30.52	-17.52																																																																						
3.000 G	7.000 G	1.00 M	3.598000 G	-38.44	-25.44																																																																						
7.000 G	9.000 G	1.00 M	7.941000 G	-35.93	-22.93																																																																						
Start [MHz]	Stop [MHz]	RBW [Hz]	Freq [MHz]	PerAbn [dBm]	ΔLimit [dB]																																																																						
30.000 M	820.000 M	1.00 M	779.512500 M	-43.18	-30.18																																																																						
855.000 M	1.000 G	1.00 M	903.248753 M	-41.84	-28.84																																																																						
1.000 G	3.000 G	1.00 M	1.673500 G	-38.10	-25.10																																																																						
3.000 G	7.000 G	1.00 M	5.378000 G	-38.09	-25.09																																																																						
7.000 G	9.000 G	1.00 M	8.185000 G	-36.38	-23.38																																																																						
Highest Channel		Highest Channel																																																																									
<table><tr><th>Start [MHz]</th><th>Stop [MHz]</th><th>RBW [Hz]</th><th>Freq [MHz]</th><th>PerAbn [dBm]</th><th>ΔLimit [dB]</th></tr><tr><td>30.000 M</td><td>820.000 M</td><td>1.00 M</td><td>781.487500 M</td><td>-42.97</td><td>-29.97</td></tr><tr><td>855.000 M</td><td>1.000 G</td><td>1.00 M</td><td>855.036250 M</td><td>-35.72</td><td>-22.72</td></tr><tr><td>1.000 G</td><td>3.000 G</td><td>1.00 M</td><td>2.921500 G</td><td>-40.98</td><td>-27.98</td></tr><tr><td>3.000 G</td><td>7.000 G</td><td>1.00 M</td><td>4.111000 G</td><td>-38.28</td><td>-25.28</td></tr><tr><td>7.000 G</td><td>9.000 G</td><td>1.00 M</td><td>8.140000 G</td><td>-36.15</td><td>-23.15</td></tr></table> Date: 28.MAR.2022 10:27:24		Start [MHz]	Stop [MHz]	RBW [Hz]	Freq [MHz]	PerAbn [dBm]	ΔLimit [dB]	30.000 M	820.000 M	1.00 M	781.487500 M	-42.97	-29.97	855.000 M	1.000 G	1.00 M	855.036250 M	-35.72	-22.72	1.000 G	3.000 G	1.00 M	2.921500 G	-40.98	-27.98	3.000 G	7.000 G	1.00 M	4.111000 G	-38.28	-25.28	7.000 G	9.000 G	1.00 M	8.140000 G	-36.15	-23.15	<table><tr><th>Start [MHz]</th><th>Stop [MHz]</th><th>RBW [Hz]</th><th>Freq [MHz]</th><th>PerAbn [dBm]</th><th>ΔLimit [dB]</th></tr><tr><td>30.000 M</td><td>820.000 M</td><td>1.00 M</td><td>664.962500 M</td><td>-43.25</td><td>-30.25</td></tr><tr><td>855.000 M</td><td>1.000 G</td><td>1.00 M</td><td>687.977501 M</td><td>-42.33</td><td>-29.33</td></tr><tr><td>1.000 G</td><td>3.000 G</td><td>1.00 M</td><td>1.697000 G</td><td>-40.06</td><td>-27.06</td></tr><tr><td>3.000 G</td><td>7.000 G</td><td>1.00 M</td><td>3.003000 G</td><td>-37.90</td><td>-24.90</td></tr><tr><td>7.000 G</td><td>9.000 G</td><td>1.00 M</td><td>8.341000 G</td><td>-35.42</td><td>-22.42</td></tr></table> Date: 28.MAR.2022 15:17:39		Start [MHz]	Stop [MHz]	RBW [Hz]	Freq [MHz]	PerAbn [dBm]	ΔLimit [dB]	30.000 M	820.000 M	1.00 M	664.962500 M	-43.25	-30.25	855.000 M	1.000 G	1.00 M	687.977501 M	-42.33	-29.33	1.000 G	3.000 G	1.00 M	1.697000 G	-40.06	-27.06	3.000 G	7.000 G	1.00 M	3.003000 G	-37.90	-24.90	7.000 G	9.000 G	1.00 M	8.341000 G	-35.42	-22.42
Start [MHz]	Stop [MHz]	RBW [Hz]	Freq [MHz]	PerAbn [dBm]	ΔLimit [dB]																																																																						
30.000 M	820.000 M	1.00 M	781.487500 M	-42.97	-29.97																																																																						
855.000 M	1.000 G	1.00 M	855.036250 M	-35.72	-22.72																																																																						
1.000 G	3.000 G	1.00 M	2.921500 G	-40.98	-27.98																																																																						
3.000 G	7.000 G	1.00 M	4.111000 G	-38.28	-25.28																																																																						
7.000 G	9.000 G	1.00 M	8.140000 G	-36.15	-23.15																																																																						
Start [MHz]	Stop [MHz]	RBW [Hz]	Freq [MHz]	PerAbn [dBm]	ΔLimit [dB]																																																																						
30.000 M	820.000 M	1.00 M	664.962500 M	-43.25	-30.25																																																																						
855.000 M	1.000 G	1.00 M	687.977501 M	-42.33	-29.33																																																																						
1.000 G	3.000 G	1.00 M	1.697000 G	-40.06	-27.06																																																																						
3.000 G	7.000 G	1.00 M	3.003000 G	-37.90	-24.90																																																																						
7.000 G	9.000 G	1.00 M	8.341000 G	-35.42	-22.42																																																																						

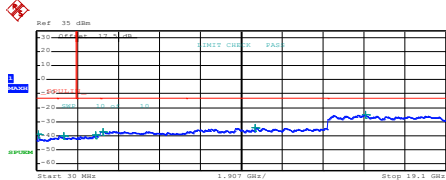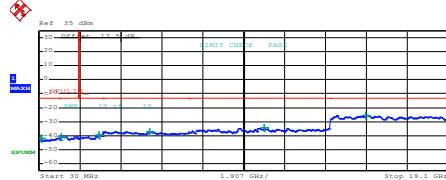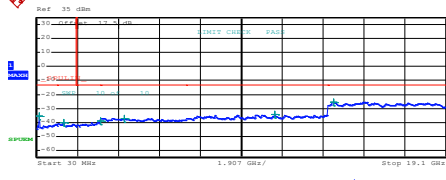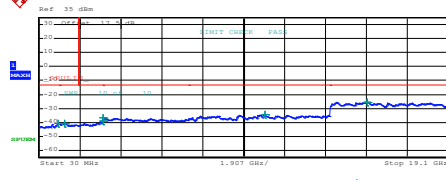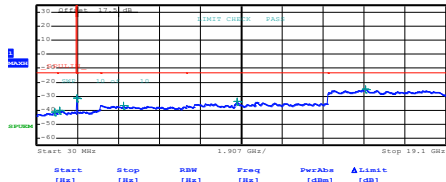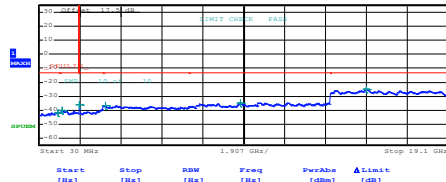

GSM1900 (GPRS class 8)		GSM1900 (EDGE class 8)																																																																																																	
Lowest Channel		Lowest Channel																																																																																																	
 <table><tr><th>Start</th><th>Stop</th><th>RBW</th><th>Freq</th><th>PwrAve</th><th>ΔLimit</th></tr><tr><th>[Hz]</th><th>[Hz]</th><th>[Hz]</th><th>[Hz]</th><th>[dBm]</th><th>[dB]</th></tr><tr><td>30.000 M</td><td>1.000 G</td><td>1.00 M</td><td>1.11.965000 M</td><td>-39.13</td><td>-26.13</td></tr><tr><td>1.000 G</td><td>1.845 G</td><td>1.00 M</td><td>1.294694 G</td><td>-40.10</td><td>-27.10</td></tr><tr><td>1.845 G</td><td>3.000 G</td><td>1.00 M</td><td>2.799230 G</td><td>-39.45</td><td>-26.45</td></tr><tr><td>3.000 G</td><td>7.000 G</td><td>1.00 M</td><td>3.138000 G</td><td>-36.98</td><td>-23.98</td></tr><tr><td>7.000 G</td><td>13.600 G</td><td>1.00 M</td><td>10.216675 G</td><td>-34.43</td><td>-21.43</td></tr><tr><td>13.600 G</td><td>19.100 G</td><td>1.00 M</td><td>15.351062 G</td><td>-29.03</td><td>-12.03</td></tr></table> Date: 28.MAR.2022 10:56:29		Start	Stop	RBW	Freq	PwrAve	ΔLimit	[Hz]	[Hz]	[Hz]	[Hz]	[dBm]	[dB]	30.000 M	1.000 G	1.00 M	1.11.965000 M	-39.13	-26.13	1.000 G	1.845 G	1.00 M	1.294694 G	-40.10	-27.10	1.845 G	3.000 G	1.00 M	2.799230 G	-39.45	-26.45	3.000 G	7.000 G	1.00 M	3.138000 G	-36.98	-23.98	7.000 G	13.600 G	1.00 M	10.216675 G	-34.43	-21.43	13.600 G	19.100 G	1.00 M	15.351062 G	-29.03	-12.03	 <table><tr><th>Start</th><th>Stop</th><th>RBW</th><th>Freq</th><th>PwrAve</th><th>ΔLimit</th></tr><tr><th>[Hz]</th><th>[Hz]</th><th>[Hz]</th><th>[Hz]</th><th>[dBm]</th><th>[dB]</th></tr><tr><td>30.000 M</td><td>1.000 G</td><td>1.00 M</td><td>1.17.300000 M</td><td>-41.69</td><td>-28.69</td></tr><tr><td>1.000 G</td><td>1.845 G</td><td>1.00 M</td><td>1.055770 G</td><td>-40.49</td><td>-27.49</td></tr><tr><td>1.845 G</td><td>3.000 G</td><td>1.00 M</td><td>2.822874 G</td><td>-39.34</td><td>-26.34</td></tr><tr><td>3.000 G</td><td>7.000 G</td><td>1.00 M</td><td>5.179000 G</td><td>-37.01</td><td>-24.01</td></tr><tr><td>7.000 G</td><td>13.600 G</td><td>1.00 M</td><td>10.516190 G</td><td>-34.57</td><td>-21.57</td></tr><tr><td>13.600 G</td><td>19.100 G</td><td>1.00 M</td><td>15.263750 G</td><td>-29.30</td><td>-12.30</td></tr></table> Date: 28.MAR.2022 15:35:46		Start	Stop	RBW	Freq	PwrAve	ΔLimit	[Hz]	[Hz]	[Hz]	[Hz]	[dBm]	[dB]	30.000 M	1.000 G	1.00 M	1.17.300000 M	-41.69	-28.69	1.000 G	1.845 G	1.00 M	1.055770 G	-40.49	-27.49	1.845 G	3.000 G	1.00 M	2.822874 G	-39.34	-26.34	3.000 G	7.000 G	1.00 M	5.179000 G	-37.01	-24.01	7.000 G	13.600 G	1.00 M	10.516190 G	-34.57	-21.57	13.600 G	19.100 G	1.00 M	15.263750 G	-29.30	-12.30
Start	Stop	RBW	Freq	PwrAve	ΔLimit																																																																																														
[Hz]	[Hz]	[Hz]	[Hz]	[dBm]	[dB]																																																																																														
30.000 M	1.000 G	1.00 M	1.11.965000 M	-39.13	-26.13																																																																																														
1.000 G	1.845 G	1.00 M	1.294694 G	-40.10	-27.10																																																																																														
1.845 G	3.000 G	1.00 M	2.799230 G	-39.45	-26.45																																																																																														
3.000 G	7.000 G	1.00 M	3.138000 G	-36.98	-23.98																																																																																														
7.000 G	13.600 G	1.00 M	10.216675 G	-34.43	-21.43																																																																																														
13.600 G	19.100 G	1.00 M	15.351062 G	-29.03	-12.03																																																																																														
Start	Stop	RBW	Freq	PwrAve	ΔLimit																																																																																														
[Hz]	[Hz]	[Hz]	[Hz]	[dBm]	[dB]																																																																																														
30.000 M	1.000 G	1.00 M	1.17.300000 M	-41.69	-28.69																																																																																														
1.000 G	1.845 G	1.00 M	1.055770 G	-40.49	-27.49																																																																																														
1.845 G	3.000 G	1.00 M	2.822874 G	-39.34	-26.34																																																																																														
3.000 G	7.000 G	1.00 M	5.179000 G	-37.01	-24.01																																																																																														
7.000 G	13.600 G	1.00 M	10.516190 G	-34.57	-21.57																																																																																														
13.600 G	19.100 G	1.00 M	15.263750 G	-29.30	-12.30																																																																																														
Middle Channel		Middle Channel																																																																																																	
 <table><tr><th>Start</th><th>Stop</th><th>RBW</th><th>Freq</th><th>PwrAve</th><th>ΔLimit</th></tr><tr><th>[Hz]</th><th>[Hz]</th><th>[Hz]</th><th>[Hz]</th><th>[dBm]</th><th>[dB]</th></tr><tr><td>30.000 M</td><td>1.000 G</td><td>1.00 M</td><td>1.41.792500 M</td><td>-35.45</td><td>-22.45</td></tr><tr><td>1.000 G</td><td>1.845 G</td><td>1.00 M</td><td>1.277893 G</td><td>-40.30</td><td>-27.30</td></tr><tr><td>1.845 G</td><td>3.000 G</td><td>1.00 M</td><td>2.988372 G</td><td>-39.11</td><td>-26.11</td></tr><tr><td>3.000 G</td><td>7.000 G</td><td>1.00 M</td><td>4.093000 G</td><td>-37.05</td><td>-24.05</td></tr><tr><td>7.000 G</td><td>13.600 G</td><td>1.00 M</td><td>11.110970 G</td><td>-34.53</td><td>-21.53</td></tr><tr><td>13.600 G</td><td>19.100 G</td><td>1.00 M</td><td>15.875000 G</td><td>-29.25</td><td>-12.25</td></tr></table> Date: 28.MAR.2022 10:57:25		Start	Stop	RBW	Freq	PwrAve	ΔLimit	[Hz]	[Hz]	[Hz]	[Hz]	[dBm]	[dB]	30.000 M	1.000 G	1.00 M	1.41.792500 M	-35.45	-22.45	1.000 G	1.845 G	1.00 M	1.277893 G	-40.30	-27.30	1.845 G	3.000 G	1.00 M	2.988372 G	-39.11	-26.11	3.000 G	7.000 G	1.00 M	4.093000 G	-37.05	-24.05	7.000 G	13.600 G	1.00 M	11.110970 G	-34.53	-21.53	13.600 G	19.100 G	1.00 M	15.875000 G	-29.25	-12.25	 <table><tr><th>Start</th><th>Stop</th><th>RBW</th><th>Freq</th><th>PwrAve</th><th>ΔLimit</th></tr><tr><th>[Hz]</th><th>[Hz]</th><th>[Hz]</th><th>[Hz]</th><th>[dBm]</th><th>[dB]</th></tr><tr><td>30.000 M</td><td>1.000 G</td><td>1.00 M</td><td>891.845000 M</td><td>-40.92</td><td>-27.92</td></tr><tr><td>1.000 G</td><td>1.845 G</td><td>1.00 M</td><td>1.197519 G</td><td>-40.78</td><td>-27.78</td></tr><tr><td>1.845 G</td><td>3.000 G</td><td>1.00 M</td><td>2.897288 G</td><td>-38.08</td><td>-25.08</td></tr><tr><td>3.000 G</td><td>7.000 G</td><td>1.00 M</td><td>3.010000 G</td><td>-36.68</td><td>-23.68</td></tr><tr><td>7.000 G</td><td>13.600 G</td><td>1.00 M</td><td>10.594100 G</td><td>-34.56</td><td>-21.56</td></tr><tr><td>13.600 G</td><td>19.100 G</td><td>1.00 M</td><td>15.338688 G</td><td>-29.37</td><td>-12.37</td></tr></table> Date: 28.MAR.2022 15:36:40		Start	Stop	RBW	Freq	PwrAve	ΔLimit	[Hz]	[Hz]	[Hz]	[Hz]	[dBm]	[dB]	30.000 M	1.000 G	1.00 M	891.845000 M	-40.92	-27.92	1.000 G	1.845 G	1.00 M	1.197519 G	-40.78	-27.78	1.845 G	3.000 G	1.00 M	2.897288 G	-38.08	-25.08	3.000 G	7.000 G	1.00 M	3.010000 G	-36.68	-23.68	7.000 G	13.600 G	1.00 M	10.594100 G	-34.56	-21.56	13.600 G	19.100 G	1.00 M	15.338688 G	-29.37	-12.37
Start	Stop	RBW	Freq	PwrAve	ΔLimit																																																																																														
[Hz]	[Hz]	[Hz]	[Hz]	[dBm]	[dB]																																																																																														
30.000 M	1.000 G	1.00 M	1.41.792500 M	-35.45	-22.45																																																																																														
1.000 G	1.845 G	1.00 M	1.277893 G	-40.30	-27.30																																																																																														
1.845 G	3.000 G	1.00 M	2.988372 G	-39.11	-26.11																																																																																														
3.000 G	7.000 G	1.00 M	4.093000 G	-37.05	-24.05																																																																																														
7.000 G	13.600 G	1.00 M	11.110970 G	-34.53	-21.53																																																																																														
13.600 G	19.100 G	1.00 M	15.875000 G	-29.25	-12.25																																																																																														
Start	Stop	RBW	Freq	PwrAve	ΔLimit																																																																																														
[Hz]	[Hz]	[Hz]	[Hz]	[dBm]	[dB]																																																																																														
30.000 M	1.000 G	1.00 M	891.845000 M	-40.92	-27.92																																																																																														
1.000 G	1.845 G	1.00 M	1.197519 G	-40.78	-27.78																																																																																														
1.845 G	3.000 G	1.00 M	2.897288 G	-38.08	-25.08																																																																																														
3.000 G	7.000 G	1.00 M	3.010000 G	-36.68	-23.68																																																																																														
7.000 G	13.600 G	1.00 M	10.594100 G	-34.56	-21.56																																																																																														
13.600 G	19.100 G	1.00 M	15.338688 G	-29.37	-12.37																																																																																														
Highest Channel		Highest Channel																																																																																																	
 <table><tr><th>Start</th><th>Stop</th><th>RBW</th><th>Freq</th><th>PwrAve</th><th>ΔLimit</th></tr><tr><th>[Hz]</th><th>[Hz]</th><th>[Hz]</th><th>[Hz]</th><th>[dBm]</th><th>[dB]</th></tr><tr><td>30.000 M</td><td>1.000 G</td><td>1.00 M</td><td>852.360000 M</td><td>-41.52</td><td>-28.52</td></tr><tr><td>1.000 G</td><td>1.845 G</td><td>1.00 M</td><td>1.103300 G</td><td>-40.32</td><td>-27.32</td></tr><tr><td>1.845 G</td><td>3.000 G</td><td>1.00 M</td><td>1.915271 G</td><td>-31.66</td><td>-18.66</td></tr><tr><td>3.000 G</td><td>7.000 G</td><td>1.00 M</td><td>4.089000 G</td><td>-36.79</td><td>-23.79</td></tr><tr><td>7.000 G</td><td>13.600 G</td><td>1.00 M</td><td>9.390025 G</td><td>-33.89</td><td>-20.89</td></tr><tr><td>13.600 G</td><td>19.100 G</td><td>1.00 M</td><td>15.355875 G</td><td>-24.86</td><td>-11.86</td></tr></table> Date: 28.MAR.2022 10:58:23		Start	Stop	RBW	Freq	PwrAve	ΔLimit	[Hz]	[Hz]	[Hz]	[Hz]	[dBm]	[dB]	30.000 M	1.000 G	1.00 M	852.360000 M	-41.52	-28.52	1.000 G	1.845 G	1.00 M	1.103300 G	-40.32	-27.32	1.845 G	3.000 G	1.00 M	1.915271 G	-31.66	-18.66	3.000 G	7.000 G	1.00 M	4.089000 G	-36.79	-23.79	7.000 G	13.600 G	1.00 M	9.390025 G	-33.89	-20.89	13.600 G	19.100 G	1.00 M	15.355875 G	-24.86	-11.86	 <table><tr><th>Start</th><th>Stop</th><th>RBW</th><th>Freq</th><th>PwrAve</th><th>ΔLimit</th></tr><tr><th>[Hz]</th><th>[Hz]</th><th>[Hz]</th><th>[Hz]</th><th>[dBm]</th><th>[dB]</th></tr><tr><td>30.000 M</td><td>1.000 G</td><td>1.00 M</td><td>901.787500 M</td><td>-41.69</td><td>-28.69</td></tr><tr><td>1.000 G</td><td>1.845 G</td><td>1.00 M</td><td>1.086703 G</td><td>-40.09</td><td>-27.09</td></tr><tr><td>1.845 G</td><td>3.000 G</td><td>1.00 M</td><td>1.915271 G</td><td>-35.80</td><td>-22.80</td></tr><tr><td>3.000 G</td><td>7.000 G</td><td>1.00 M</td><td>3.109000 G</td><td>-36.77</td><td>-23.77</td></tr><tr><td>7.000 G</td><td>13.600 G</td><td>1.00 M</td><td>9.438075 G</td><td>-34.61</td><td>-21.61</td></tr><tr><td>13.600 G</td><td>19.100 G</td><td>1.00 M</td><td>15.275438 G</td><td>-24.71</td><td>-11.71</td></tr></table> Date: 28.MAR.2022 15:37:34		Start	Stop	RBW	Freq	PwrAve	ΔLimit	[Hz]	[Hz]	[Hz]	[Hz]	[dBm]	[dB]	30.000 M	1.000 G	1.00 M	901.787500 M	-41.69	-28.69	1.000 G	1.845 G	1.00 M	1.086703 G	-40.09	-27.09	1.845 G	3.000 G	1.00 M	1.915271 G	-35.80	-22.80	3.000 G	7.000 G	1.00 M	3.109000 G	-36.77	-23.77	7.000 G	13.600 G	1.00 M	9.438075 G	-34.61	-21.61	13.600 G	19.100 G	1.00 M	15.275438 G	-24.71	-11.71
Start	Stop	RBW	Freq	PwrAve	ΔLimit																																																																																														
[Hz]	[Hz]	[Hz]	[Hz]	[dBm]	[dB]																																																																																														
30.000 M	1.000 G	1.00 M	852.360000 M	-41.52	-28.52																																																																																														
1.000 G	1.845 G	1.00 M	1.103300 G	-40.32	-27.32																																																																																														
1.845 G	3.000 G	1.00 M	1.915271 G	-31.66	-18.66																																																																																														
3.000 G	7.000 G	1.00 M	4.089000 G	-36.79	-23.79																																																																																														
7.000 G	13.600 G	1.00 M	9.390025 G	-33.89	-20.89																																																																																														
13.600 G	19.100 G	1.00 M	15.355875 G	-24.86	-11.86																																																																																														
Start	Stop	RBW	Freq	PwrAve	ΔLimit																																																																																														
[Hz]	[Hz]	[Hz]	[Hz]	[dBm]	[dB]																																																																																														
30.000 M	1.000 G	1.00 M	901.787500 M	-41.69	-28.69																																																																																														
1.000 G	1.845 G	1.00 M	1.086703 G	-40.09	-27.09																																																																																														
1.845 G	3.000 G	1.00 M	1.915271 G	-35.80	-22.80																																																																																														
3.000 G	7.000 G	1.00 M	3.109000 G	-36.77	-23.77																																																																																														
7.000 G	13.600 G	1.00 M	9.438075 G	-34.61	-21.61																																																																																														
13.600 G	19.100 G	1.00 M	15.275438 G	-24.71	-11.71																																																																																														

Frequency Stability

Test Conditions	Middle Channel	GSM850 (GPRS class 8)	GSM850 (EDGE class 8)	Limit 2.5ppm
Temperature (°C)	Voltage (Volt)	Deviation (ppm)		Result
50	Normal Voltage	0.0155	0.0108	PASS
40	Normal Voltage	0.0060	0.0084	
30	Normal Voltage	0.0000	0.0036	
20(Ref.)	Normal Voltage	0.0000	0.0000	
10	Normal Voltage	0.0012	0.0012	
0	Normal Voltage	0.0024	0.0036	
-10	Normal Voltage	0.0084	0.0072	
-20	Normal Voltage	0.0120	0.0108	
-30	Normal Voltage	0.0120	0.0155	
20	Maximum Voltage	0.0012	0.0024	
20	Normal Voltage	0.0000	0.0000	
20	Battery End Point	0.0036	0.0036	

Test Conditions	Middle Channel	GSM1900 (GPRS class 8)	GSM1900 (EDGE class 8)	Limit Note 2.
Temperature (°C)	Voltage (Volt)	Deviation (ppm)		Result
50	Normal Voltage	0.0032	0.0048	PASS
40	Normal Voltage	0.0011	0.0027	
30	Normal Voltage	0.0011	0.0005	
20(Ref.)	Normal Voltage	0.0000	0.0000	
10	Normal Voltage	0.0000	0.0016	
0	Normal Voltage	0.0000	0.0000	
-10	Normal Voltage	0.0005	0.0000	
-20	Normal Voltage	0.0021	0.0011	
-30	Normal Voltage	0.0021	0.0032	
20	Maximum Voltage	0.0011	0.0011	
20	Normal Voltage	0.0000	0.0016	
20	Battery End Point	0.0016	0.0032	

Note:

1. Normal Voltage = 3.86 V. ; Battery End Point (BEP) = 3.40 V. ; Maximum Voltage = 4.45 V.
2. The frequency fundamental emissions stay within the authorized frequency block.









A3. WCDMA

Peak-to-Average Ratio

Mode	WCDMA Band V	WCDMA Band II	WCDMA Band IV	Limit: 13dB
Mod.	RMC 12.2Kbps	RMC 12.2Kbps	RMC 12.2Kbps	Result
Lowest CH	3.12	3.04	3.08	PASS
Middle CH	3.16	3.00	3.04	
Highest CH	3.16	2.96	3.08	

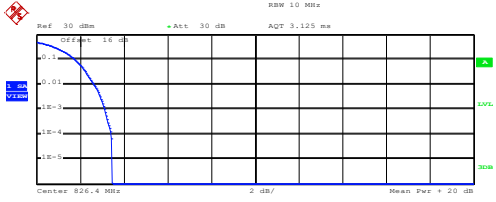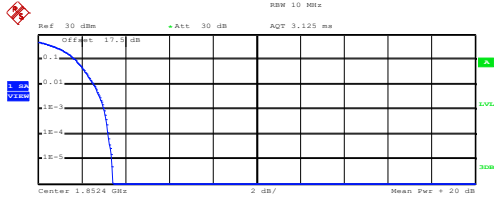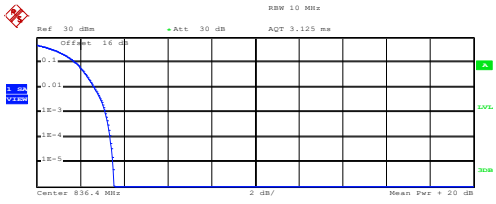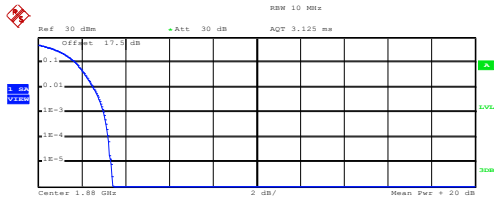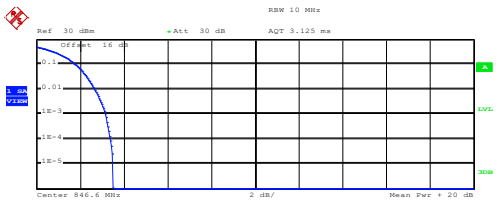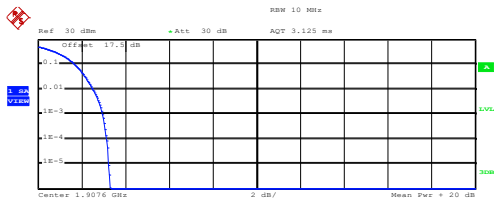


WCDMA Band V (RMC 12.2Kbps)	WCDMA Band II (RMC 12.2Kbps)
Lowest Channel	Lowest Channel
 Center 826.4 MHz 2 dB/ Mean Pwr + 20 dB Complementary Cumulative Distribution Function (100000 samples) Trace 1 Mean 18.67 dBm Peak 22.14 dBm Crest 3.47 dB 10 % 1.76 dB 1 % 2.64 dB .1 % 3.12 dB .01 % 3.40 dB Date: 28.MAR.2022 15:02:37	 Center 1.8524 GHz 2 dB/ Mean Pwr + 20 dB Complementary Cumulative Distribution Function (100000 samples) Trace 1 Mean 21.48 dBm Peak 24.89 dBm Crest 3.41 dB 10 % 1.72 dB 1 % 2.56 dB .1 % 3.04 dB .01 % 3.20 dB Date: 28.MAR.2022 11:55:28
Middle Channel	Middle Channel
 Center 836.4 MHz 2 dB/ Mean Pwr + 20 dB Complementary Cumulative Distribution Function (100000 samples) Trace 1 Mean 19.67 dBm Peak 23.20 dBm Crest 3.53 dB 10 % 1.80 dB 1 % 2.64 dB .1 % 3.16 dB .01 % 3.36 dB Date: 28.MAR.2022 15:02:56	 Center 1.88 GHz 2 dB/ Mean Pwr + 20 dB Complementary Cumulative Distribution Function (100000 samples) Trace 1 Mean 21.48 dBm Peak 24.89 dBm Crest 3.41 dB 10 % 1.72 dB 1 % 2.52 dB .1 % 3.00 dB .01 % 3.20 dB Date: 28.MAR.2022 11:55:44
Highest Channel	Highest Channel
 Center 846.6 MHz 2 dB/ Mean Pwr + 20 dB Complementary Cumulative Distribution Function (100000 samples) Trace 1 Mean 19.62 dBm Peak 23.13 dBm Crest 3.51 dB 10 % 1.80 dB 1 % 2.68 dB .1 % 3.16 dB .01 % 3.40 dB Date: 28.MAR.2022 15:03:18	 Center 1.9076 GHz 2 dB/ Mean Pwr + 20 dB Complementary Cumulative Distribution Function (100000 samples) Trace 1 Mean 21.38 dBm Peak 24.68 dBm Crest 3.30 dB 10 % 1.68 dB 1 % 2.52 dB .1 % 2.96 dB .01 % 3.16 dB Date: 28.MAR.2022 11:56:00




WCDMA Band IV (RMC 12.2Kbps)

Lowest Channel

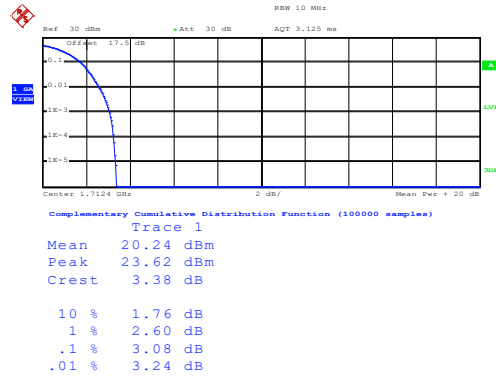


Date: 28.MAR.2022 14:31:31

Middle Channel

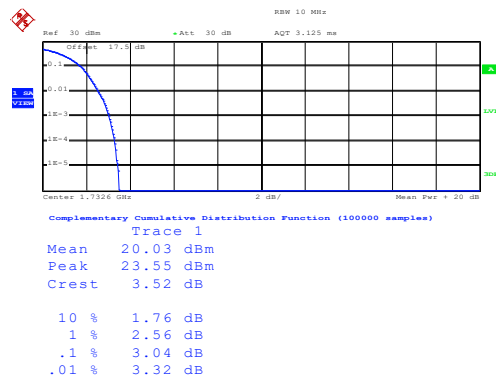

Date: 28.MAR.2022 14:31:51

Highest Channel

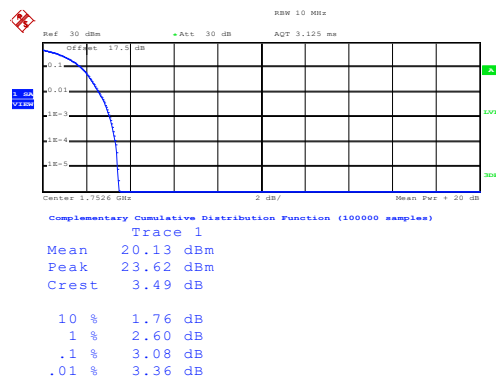

Date: 28.MAR.2022 14:32:09


**26dB Bandwidth**

Mode	WCDMA Band V: 26dB BW(MHz)	WCDMA Band II: 26dB BW(MHz)	WCDMA Band IV: 26dB BW(MHz)
Mod.	RMC 12.2Kbps	RMC 12.2Kbps	RMC 12.2Kbps
Lowest CH	4.72	4.74	4.75
Middle CH	4.75	4.75	4.72
Highest CH	4.72	4.76	4.74



WCDMA Band V (RMC 12.2Kbps)


Lowest Channel

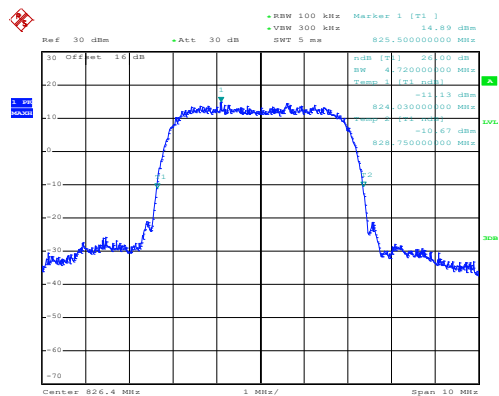

Date: 28.MAR.2022 14:36:54


WCDMA Band II (RMC 12.2Kbps)

Lowest Channel

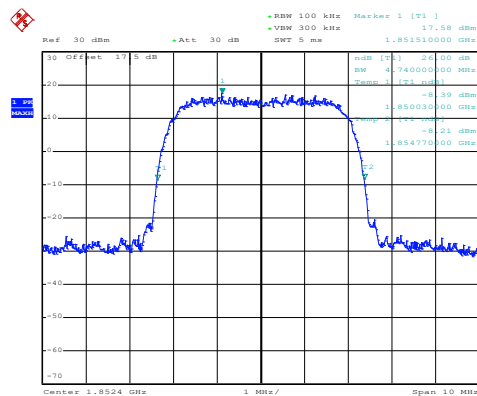


Date: 28.MAR.2022 11:37:06

Middle Channel

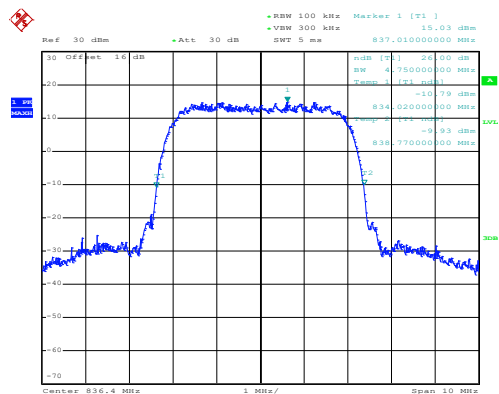


Date: 28.MAR.2022 14:44:23

Middle Channel

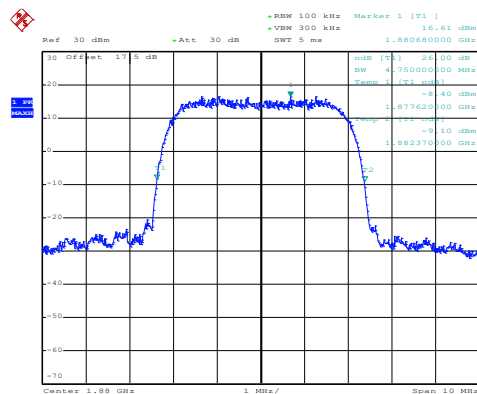


Date: 28.MAR.2022 11:31:00

Highest Channel

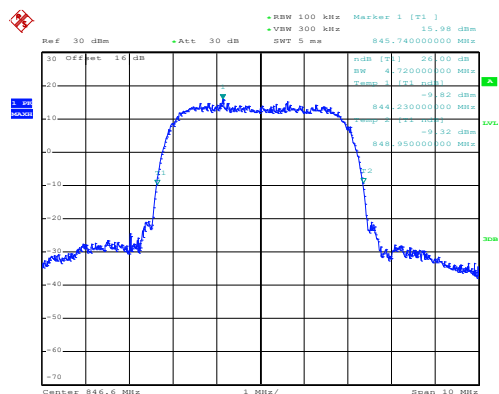

Date: 28.MAR.2022 14:38:18


Highest Channel

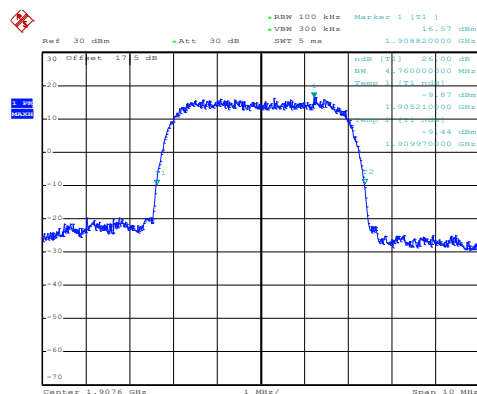

Date: 28.MAR.2022 11:36:13


WCDMA Band IV (RMC 12.2Kbps)

Lowest Channel

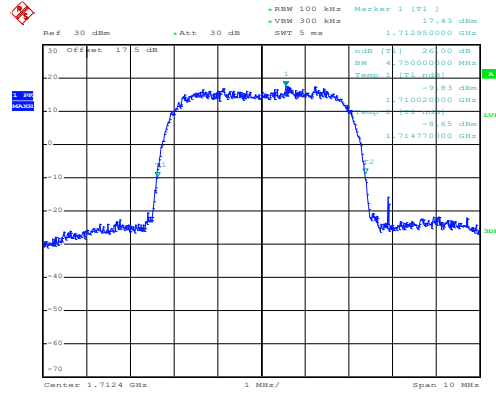


Date: 28.MAR.2022 14:02:33

Middle Channel

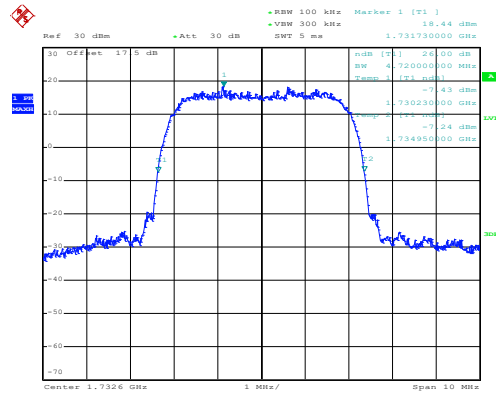

Date: 28.MAR.2022 13:49:34

Highest Channel

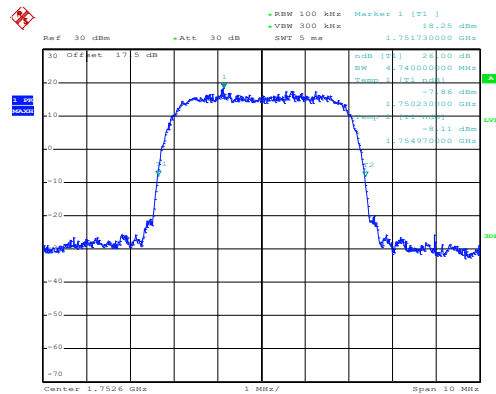

Date: 28.MAR.2022 13:45:14


**Occupied Bandwidth**

Mode	WCDMA Band V: 99% OBW(MHz)	WCDMA Band II: 99% OBW(MHz)	WCDMA Band IV: 99% OBW(MHz)
Mod.	RMC 12.2Kbps	RMC 12.2Kbps	RMC 12.2Kbps
Lowest CH	4.17	4.17	4.17
Middle CH	4.17	4.17	4.17
Highest CH	4.17	4.17	4.18




WCDMA Band V (RMC 12.2Kbps)

Lowest Channel

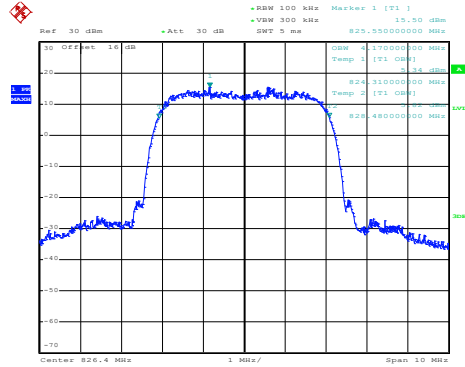


WCDMA Band II (RMC 12.2Kbps)


Lowest Channel

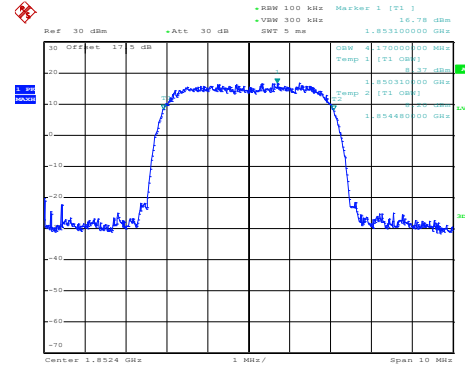


Middle Channel

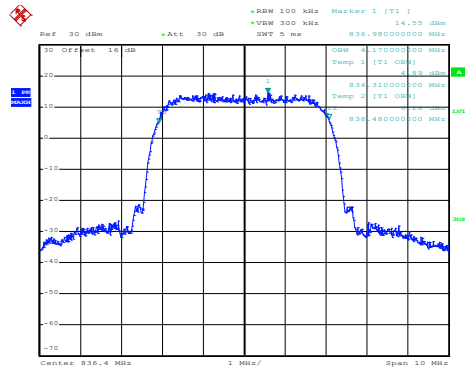


Middle Channel

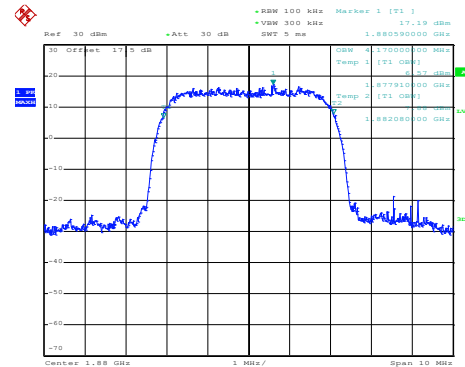

Highest Channel

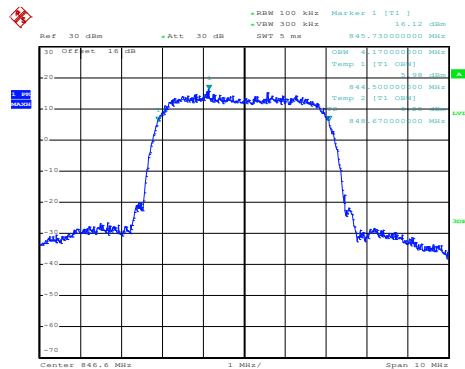


Highest Channel

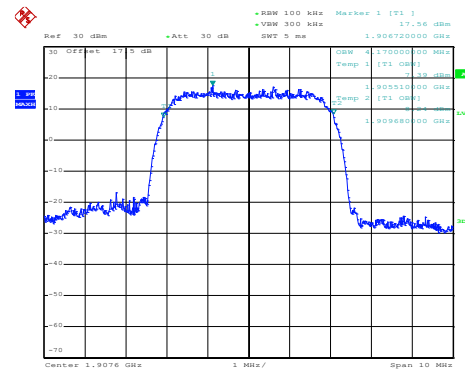




WCDMA Band IV (RMC 12.2Kbps)

Lowest Channel

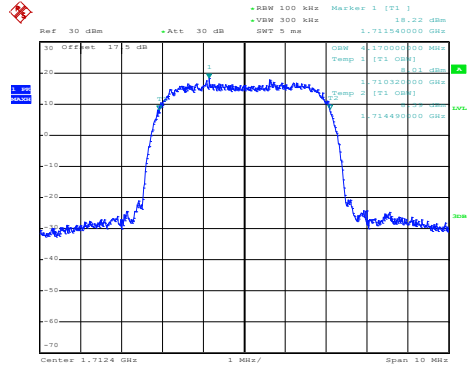


Date: 28.MAR.2022 14:13:51

Middle Channel

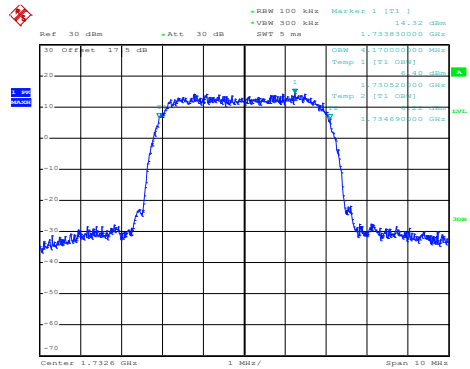

Date: 28.MAR.2022 14:24:22

Highest Channel

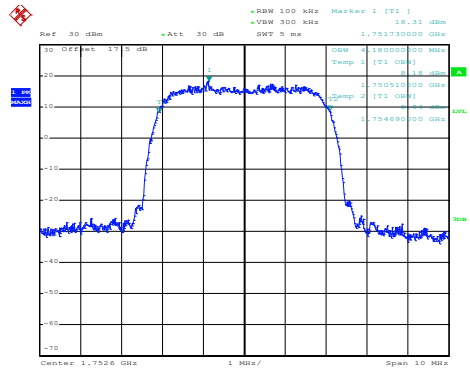


Date: 28.MAR.2022 14:15:18



Conducted Band Edge


WCDMA Band V (RMC 12.2Kbps)

Lowest Band Edge

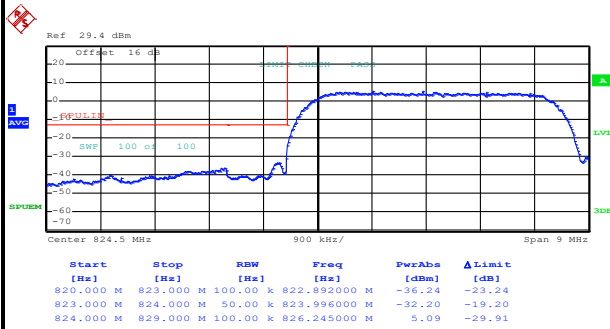

Date: 28.MAR.2022 14:58:47


Highest Band Edge

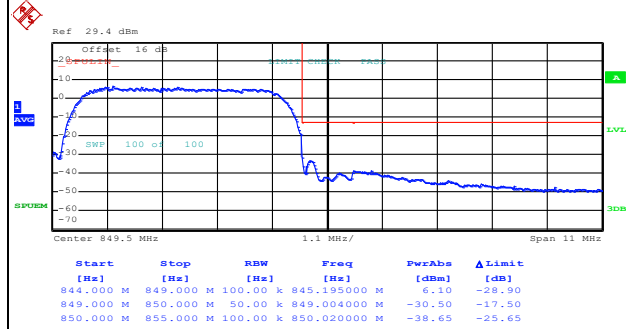

Date: 28.MAR.2022 15:01:41


WCDMA Band II (RMC 12.2Kbps)

Lowest Band Edge

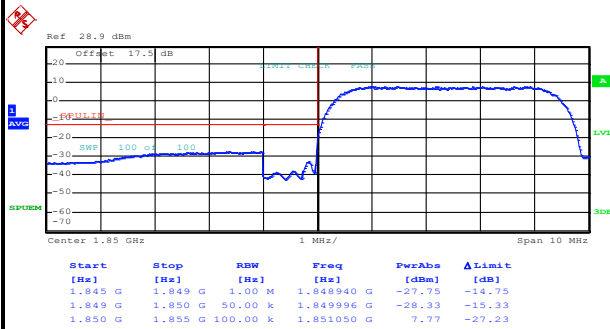

Date: 28.MAR.2022 11:52:07

Highest Band Edge

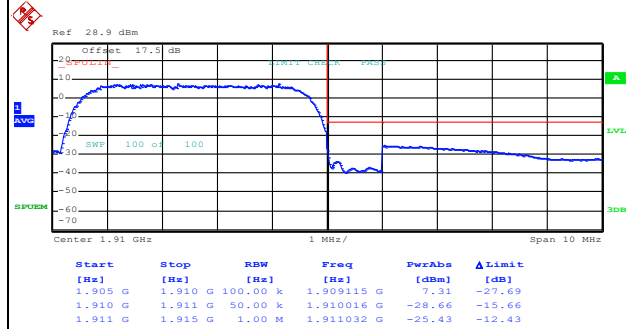


Date: 28.MAR.2022 11:54:59




WCDMA Band IV (RMC 12.2Kbps)

Lowest Band Edge

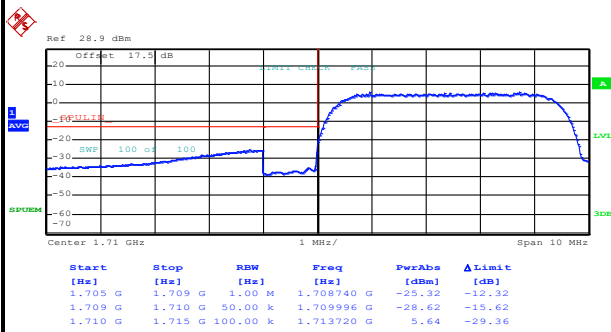

Date: 28.MAR.2022 14:28:08

Highest Band Edge

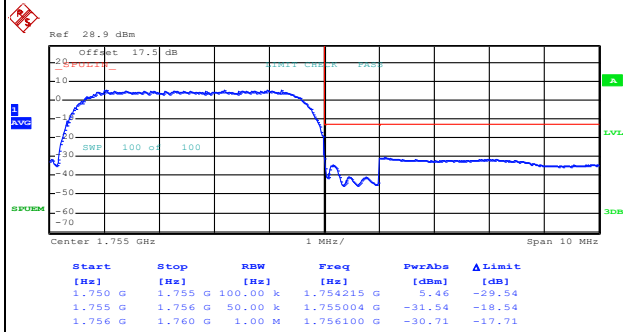


Date: 28.MAR.2022 14:31:03



Conducted Spurious Emission

WCDMA Band V (RMC 12.2Kbps)


Lowest Channel

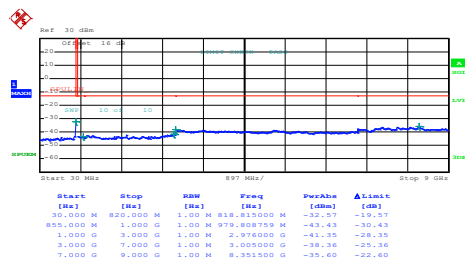

Date: 28.MAR.2022 14:46:21


WCDMA Band II (RMC 12.2Kbps)

Lowest Channel

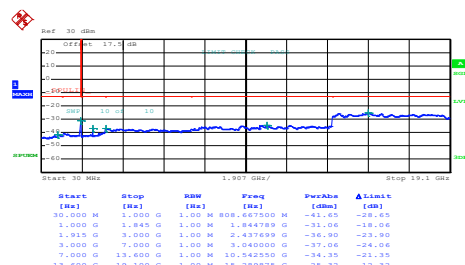


Date: 28.MAR.2022 11:39:23

Middle Channel

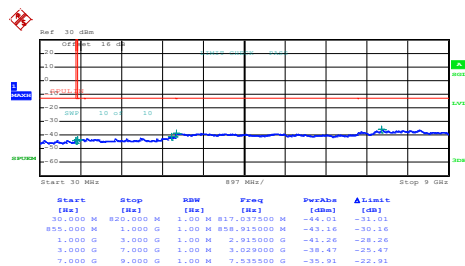


Date: 28.MAR.2022 14:47:21

Middle Channel

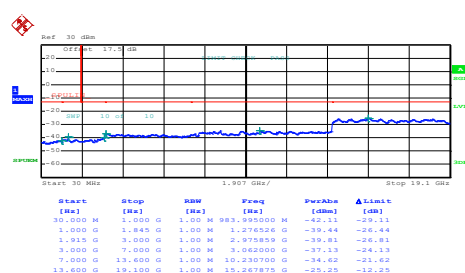


Date: 28.MAR.2022 11:40:19

Highest Channel

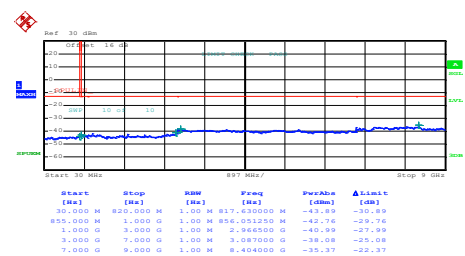

Date: 28.MAR.2022 14:48:17


Highest Channel

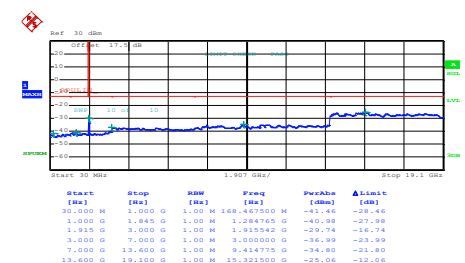

Date: 28.MAR.2022 11:41:14


WCDMA Band IV (RMC 12.2Kbps)

Lowest Channel

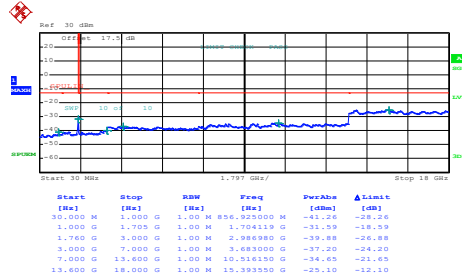


Date: 28.MAR.2022 14:04:58

Middle Channel

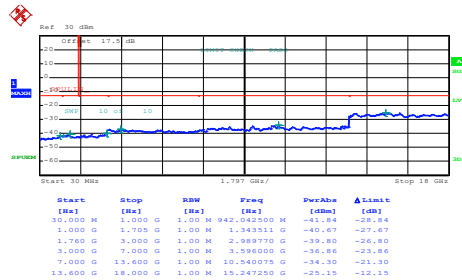

Date: 28.MAR.2022 14:05:54

Highest Channel

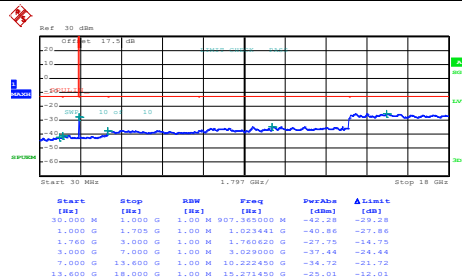

Date: 28.MAR.2022 14:06:53

**Frequency Stability**

Test Conditions	Middle Channel	WCDMA Band V (RMC 12.2Kbps)	Limit 2.5ppm
Temperature (°C)	Voltage (Volt)	Deviation (ppm)	Result
50	Normal Voltage	0.0132	PASS
40	Normal Voltage	0.0096	
30	Normal Voltage	0.0036	
20(Ref.)	Normal Voltage	0.0000	
10	Normal Voltage	0.0000	
0	Normal Voltage	0.0024	
-10	Normal Voltage	0.0024	
-20	Normal Voltage	0.0024	
-30	Normal Voltage	0.0060	
20	Maximum Voltage	0.0012	
20	Normal Voltage	0.0000	
20	Battery End Point	0.0024	

Test Conditions	Middle Channel	WCDMA Band II (RMC 12.2Kbps)	Limit Note 2.
Temperature (°C)	Voltage (Volt)	Deviation (ppm)	Result
50	Normal Voltage	0.0064	PASS
40	Normal Voltage	0.0043	
30	Normal Voltage	0.0032	
20(Ref.)	Normal Voltage	0.0000	
10	Normal Voltage	0.0005	
0	Normal Voltage	0.0027	
-10	Normal Voltage	0.0048	
-20	Normal Voltage	0.0074	
-30	Normal Voltage	0.0096	
20	Maximum Voltage	0.0011	
20	Normal Voltage	0.0000	
20	Battery End Point	0.0021	

Note:

1. Normal Voltage = 3.86 V. ; Battery End Point (BEP) = 3.40 V. ; Maximum Voltage = 4.45 V.
2. The frequency fundamental emissions stay within the authorized frequency block.

Test Conditions	Middle Channel	WCDMA Band IV (RMC 12.2Kbps)	Limit Note 2.
Temperature (°C)	Voltage (Volt)	Deviation (ppm)	Result
50	Normal Voltage	0.0052	PASS
40	Normal Voltage	0.0035	
30	Normal Voltage	0.0017	
20(Ref.)	Normal Voltage	0.0000	
10	Normal Voltage	0.0000	
0	Normal Voltage	0.0017	
-10	Normal Voltage	0.0000	
-20	Normal Voltage	0.0029	
-30	Normal Voltage	0.0052	
20	Maximum Voltage	0.0006	
20	Normal Voltage	0.0000	
20	Battery End Point	0.0012	

Note:

1. Normal Voltage = 3.86 V. ; Battery End Point (BEP) = 3.40 V. ; Maximum Voltage = 4.45 V.
2. The frequency fundamental emissions stay within the authorized frequency block.



Appendix B. Test Results of Radiated Test

<Primary Antenna>

<Ant. 0>

GPRS 850

GPRS 850									
Channel	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	1648	-55.38	-13	-42.38	-65.25	-57.79	4.92	9.48	H
	2472	-59.43	-13	-46.43	-72.33	-61.71	6.07	10.50	H
	3296	-61.86	-13	-48.86	-78.44	-63.77	7.03	11.09	H
									H
									H
									H
	1648	-52.46	-13	-39.46	-62.1	-54.87	4.92	9.48	V
	2472	-55.52	-13	-42.52	-68.37	-57.80	6.07	10.50	V
	3296	-62.29	-13	-49.29	-78.62	-64.20	7.03	11.09	V
									V
									V
									V
Middle	1672	-51.47	-13	-38.47	-61.33	-53.99	4.96	9.63	H
	2512	-61.93	-13	-48.93	-75	-64.16	6.12	10.50	H
	3344	-62.37	-13	-49.37	-78.87	-64.33	7.08	11.19	H
									H
									H
									H
	1672	-50.95	-13	-37.95	-60.59	-53.47	4.96	9.63	V
	2512	-57.13	-13	-44.13	-70.1	-59.36	6.12	10.50	V
	3344	-63.06	-13	-50.06	-79.31	-65.02	7.08	11.19	V
									V
									V
									V



Highest	1696	-54.51	-13	-41.51	-64.37	-57.14	4.99	9.78	H
	2544	-61.48	-13	-48.48	-74.77	-63.67	6.16	10.50	H
	3392	-62.74	-13	-49.74	-79.15	-64.74	7.13	11.28	H
									H
									H
									H
	1696	-51.77	-13	-38.77	-61.42	-54.40	4.99	9.78	V
	2544	-61.53	-13	-48.53	-74.69	-63.72	6.16	10.50	V
	3392	-62.48	-13	-49.48	-78.64	-64.48	7.13	11.28	V
									V
									V
									V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

**EDGE 850**

EDGE 850									
Channel	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	1648	-57.50	-13	-44.50	-67.41	-59.91	4.92	9.48	H
	2472	-55.40	-13	-42.40	-68.3	-57.68	6.07	10.50	H
	3296	-62.36	-13	-49.36	-78.94	-64.27	7.03	11.09	H
									H
									H
									H
									H
	1648	-60.04	-13	-47.04	-69.68	-62.45	4.92	9.48	V
	2472	-60.34	-13	-47.34	-73.19	-62.62	6.07	10.50	V
	3296	-62.61	-13	-49.61	-78.94	-64.52	7.03	11.09	V
									V
									V
									V
									V
Middle	1672	-58.44	-13	-45.44	-68.3	-60.96	4.96	9.63	H
	2512	-43.60	-13	-30.60	-56.67	-45.83	6.12	10.50	H
	3345	-62.33	-13	-49.33	-78.83	-64.29	7.08	11.19	H
									H
									H
									H
									H
	1672	-56.37	-13	-43.37	-66.01	-58.89	4.96	9.63	V
	2512	-52.70	-13	-39.70	-65.67	-54.93	6.12	10.50	V
	3345	-62.73	-13	-49.73	-78.98	-64.69	7.08	11.19	V
									V
									V
									V
									V



Highest	1696	-49.12	-13	-36.12	-58.98	-51.75	4.99	9.78	H
	2544	-60.81	-13	-47.81	-74.1	-63.00	6.16	10.50	H
	3392	-62.75	-13	-49.75	-79.16	-64.75	7.13	11.28	H
									H
									H
									H
									H
	1696	-56.40	-13	-43.40	-66.05	-59.03	4.99	9.78	V
	2544	-60.88	-13	-47.88	-74.04	-63.07	6.16	10.50	V
	3392	-62.74	-13	-49.74	-78.9	-64.74	7.13	11.28	V
									V
									V
									V
									V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

**WCDMA Band V**

WCDMA Band V									
Channel	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	1652	-65.01	-13	-52.01	-74.86	-67.44	4.93	9.51	H
	2479	-63.94	-13	-50.94	-76.86	-66.21	6.08	10.50	H
	3304	-62.34	-13	-49.34	-78.9	-64.26	7.04	11.11	H
									H
									H
									H
									H
	1652	-66.73	-13	-53.73	-76.36	-69.16	4.93	9.51	V
	2479	-64.49	-13	-51.49	-77.36	-66.76	6.08	10.50	V
	3304	-62.48	-13	-49.48	-78.79	-64.40	7.04	11.11	V
									V
									V
									V
									V
Middle	1672	-62.86	-13	-49.86	-72.72	-65.38	4.96	9.63	H
	2509	-65.02	-13	-52.02	-78.06	-67.25	6.12	10.50	H
	3345	-62.71	-13	-49.71	-79.21	-64.67	7.08	11.19	H
									H
									H
									H
									H
	1672	-64.72	-13	-51.72	-74.36	-67.24	4.96	9.63	V
	2509	-65.19	-13	-52.19	-78.13	-67.42	6.12	10.50	V
	3345	-62.93	-13	-49.93	-79.18	-64.89	7.08	11.19	V
									V
									V
									V
									V



Highest	1696	-60.85	-13	-47.85	-70.71	-63.48	4.99	9.78	H
	2539	-64.44	-13	-51.44	-77.7	-66.63	6.16	10.50	H
	3386	-62.73	-13	-49.73	-79.15	-64.73	7.13	11.27	H
									H
									H
									H
									H
	1696	-62.67	-13	-49.67	-72.32	-65.30	4.99	9.78	V
	2539	-64.39	-13	-51.39	-77.52	-66.58	6.16	10.50	V
	3386	-62.66	-13	-49.66	-78.83	-64.66	7.13	11.27	V
									V
									V
									V
									V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



<Ant. 2>

WCDMA Band IV

WCDMA Band IV									
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	3424	-62.26	-13	-49.26	-79.48	-66.58	7.17	11.49	H
	5136	-57.93	-13	-44.93	-79.84	-60.72	8.83	11.62	H
	6848	-56.73	-13	-43.73	-82.12	-57.67	10.26	11.20	H
									H
									H
									H
									H
	3424	-62.55	-13	-49.55	-79.59	-66.87	7.17	11.49	V
	5136	-58.10	-13	-45.10	-79.95	-60.89	8.83	11.62	V
	6848	-56.20	-13	-43.20	-82.4	-57.14	10.26	11.20	V
									V
									V
									V
									V
Middle	3462	-61.55	-13	-48.55	-78.77	-66.09	7.21	11.75	H
	5196	-58.42	-13	-45.42	-80.41	-61.43	8.88	11.88	H
	6928	-56.26	-13	-43.26	-81.71	-57.39	10.32	11.46	H
									H
									H
									H
									H
	3462	-61.37	-13	-48.37	-78.51	-65.91	7.21	11.75	V
	5196	-58.41	-13	-45.41	-80.34	-61.42	8.88	11.88	V
	6928	-55.45	-13	-42.45	-81.68	-56.58	10.32	11.46	V
									V
									V
									V
									V



Highest	3504	-62.66	-13	-49.66	-79.89	-67.30	7.25	11.90	H
	5257	-58.86	-13	-45.86	-80.89	-61.93	8.93	12.00	H
	7008	-56.05	-13	-43.05	-81.61	-57.03	10.39	11.37	H
									H
									H
									H
									H
	3504	-78.83	-13	-65.83	-79.83	-83.47	7.25	11.90	V
	5257	-79.80	-13	-66.80	-80.8	-82.87	8.93	12.00	V
	7008	-80.68	-13	-67.68	-80.69	-81.66	10.39	11.37	V
									V
									V
									V
									V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

**GPRS 1900**

GPRS 1900									
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	3702	-58.70	-13	-45.70	-76.93	-63.10	7.50	11.90	H
	5550	-44.99	-13	-31.99	-67.3	-48.30	9.19	12.50	H
	7404	-56.00	-13	-43.00	-82.31	-56.54	10.68	11.22	H
									H
									H
									H
									H
	3702	-57.98	-13	-44.98	-75.82	-62.38	7.50	11.90	V
	5550	-44.77	-13	-31.77	-67.03	-48.08	9.19	12.50	V
	7404	-55.33	-13	-42.33	-81.99	-55.87	10.68	11.22	V
									V
									V
									V
									V
Middle	3762	-58.05	-13	-45.05	-76.65	-62.23	7.57	11.75	H
	5640	-51.09	-13	-38.09	-73.7	-54.06	9.27	12.24	H
	7518	-55.92	-13	-42.92	-82.26	-56.73	10.76	11.57	H
									H
									H
									H
									H
	3762	-58.47	-13	-45.47	-76.76	-62.65	7.57	11.75	V
	5640	-50.43	-13	-37.43	-73.07	-53.40	9.27	12.24	V
	7518	-55.31	-13	-42.31	-81.87	-56.12	10.76	11.57	V
									V
									V
									V
									V



Highest	3816	-59.95	-13	-46.95	-78.84	-63.85	7.64	11.54	H
	5730	-39.30	-13	-26.30	-62.3	-41.83	9.35	11.88	H
	7636	-55.19	-13	-42.19	-81.78	-55.97	10.85	11.63	H
	9546	-44.13	-13	-31.13	-72.78	-43.59	12.12	11.58	H
									H
									H
									H
	3816	-60.32	-13	-47.32	-78.96	-64.22	7.64	11.54	V
	5730	-54.44	-13	-41.44	-7.764	-56.97	9.35	11.88	V
	7636	-54.83	-13	-41.83	-81.69	-55.61	10.85	11.63	V
	9546	-53.59	-13	-40.59	-81.68	-53.05	12.12	11.58	V
									V
									V
									V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

**EDGE 1900**

EDGE 1900									
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	3700	-60.62	-13	-47.62	-78.84	-65.03	7.49	11.90	H
	5550	-34.77	-13	-21.77	-57.08	-38.08	9.19	12.50	H
	7398	-55.52	-13	-42.52	-81.83	-56.04	10.67	11.19	H
	9252	-52.82	-13	-39.82	-81.42	-52.09	11.94	11.20	H
									H
									H
									H
	3700	-61.03	-13	-48.03	-78.87	-65.44	7.49	11.90	V
	5550	-34.01	-13	-21.01	-56.27	-37.32	9.19	12.50	V
	7398	-55.15	-13	-42.15	-81.81	-55.67	10.67	11.19	V
	9252	-49.11	-13	-36.11	-77.1	-48.38	11.94	11.20	V
									V
									V
									V
Middle	3760	-60.22	-13	-47.22	-78.82	-64.41	7.57	11.76	H
	5640	-53.70	-13	-40.70	-76.31	-56.67	9.27	12.24	H
	7520	-55.44	-13	-42.44	-81.79	-56.26	10.76	11.58	H
									H
									H
									H
									H
	3760	-60.52	-13	-47.52	-78.8	-64.71	7.57	11.76	V
	5640	-45.90	-13	-32.90	-68.54	-48.87	9.27	12.24	V
	7520	-55.25	-13	-42.25	-81.81	-56.07	10.76	11.58	V
									V
									V
									V
									V



Highest	3816	-59.81	-13	-46.81	-78.7	-63.71	7.64	11.54	H
	5730	-51.58	-13	-38.58	-74.58	-54.11	9.35	11.88	H
	7639	-54.89	-13	-41.89	-81.49	-55.66	10.85	11.62	H
									H
									H
									H
									H
	3816	-60.31	-13	-47.31	-78.94	-64.21	7.64	11.54	V
	5730	-57.26	-13	-44.26	-80.46	-59.79	9.35	11.88	V
	7639	-54.60	-13	-41.60	-81.46	-55.37	10.85	11.62	V
									V
									V
									V
									V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

**WCDMA Band II**

WCDMA Band II									
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	3702	-60.80	-13	-47.80	-79.14	-65.20	7.50	11.90	H
	5557	-57.50	-13	-44.50	-79.93	-60.79	9.19	12.49	H
	7410	-55.69	-13	-42.69	-82.07	-56.24	10.68	11.24	H
									H
									H
									H
									H
	3702	-60.69	-13	-47.69	-78.6	-65.09	7.50	11.90	V
	5557	-58.64	-13	-45.64	-81.02	-61.93	9.19	12.49	V
	7410	-55.37	-13	-42.37	-82.09	-55.93	10.68	11.24	V
									V
									V
									V
									V
Middle	3762	-60.60	-13	-47.60	-79.24	-64.78	7.57	11.75	H
	5640	-57.87	-13	-44.87	-80.57	-60.84	9.27	12.24	H
	7520	-55.91	-13	-42.91	-82.29	-56.73	10.76	11.58	H
									H
									H
									H
									H
	3762	-60.87	-13	-47.87	-79.18	-65.05	7.57	11.75	V
	5640	-56.68	-13	-43.68	-79.41	-59.65	9.27	12.24	V
	7520	-55.57	-13	-42.57	-82.16	-56.39	10.76	11.58	V
									V
									V
									V
									V



Highest	3816	-60.30	-13	-47.30	-79.19	-64.20	7.64	11.54	H
	5773	-57.78	-13	-44.78	-80.99	-60.14	9.39	11.75	H
	7630	-55.47	-13	-42.47	-82.03	-56.26	10.85	11.64	H
									H
									H
									H
									H
	3816	-60.42	-13	-47.42	-79	-64.32	7.64	11.54	V
	5773	-57.40	-13	-44.40	-80.89	-59.76	9.39	11.75	V
	7630	-55.22	-13	-42.22	-82.05	-56.01	10.85	11.64	V
									V
									V
									V
									V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



<ASDIV Antenna>

<Ant. 1>

GPRS 850

GPRS 850									
Channel	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	1648	-46.85	-13	-33.85	-56.72	-49.26	4.92	9.48	H
	2472	-63.79	-13	-50.79	-76.69	-66.07	6.07	10.50	H
	3296	-61.84	-13	-48.84	-78.42	-63.75	7.03	11.09	H
									H
									H
									H
	1648	-48.31	-13	-35.31	-57.95	-50.72	4.92	9.48	V
	2472	-64.20	-13	-51.20	-77.05	-66.48	6.07	10.50	V
	3296	-62.12	-13	-49.12	-78.45	-64.03	7.03	11.09	V
									V
									V
									V
Middle	1672	-49.00	-13	-36.00	-58.86	-51.52	4.96	9.63	H
	2509	-64.31	-13	-51.31	-77.35	-66.54	6.12	10.50	H
	3344	-62.48	-13	-49.48	-78.98	-64.44	7.08	11.19	H
									H
									H
									H
	1672	-50.78	-13	-37.78	-60.42	-53.30	4.96	9.63	V
	2509	-64.81	-13	-51.81	-77.75	-67.04	6.12	10.50	V
	3344	-62.68	-13	-49.68	-78.93	-64.64	7.08	11.19	V
									V
									V
									V



Highest	1696	-50.60	-13	-37.60	-60.46	-53.23	4.99	9.78	H
	2544	-53.67	-13	-40.67	-669.6	-55.86	6.16	10.50	H
	3395	-62.45	-13	-49.45	-78.86	-64.45	7.14	11.29	H
									H
									H
									H
	1696	-49.97	-13	-36.97	-59.62	-52.60	4.99	9.78	V
	2544	-61.35	-13	-48.35	-74.51	-63.54	6.16	10.50	V
	3395	-62.68	-13	-49.68	-78.84	-64.68	7.14	11.29	V
									V
									V
									V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

**EDGE 850**

EDGE 850									
Channel	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	1648	-67.08	-13	-54.08	-76.95	-69.49	4.92	1648	H
	2472	-64.40	-13	-51.40	-77.3	-66.68	6.07	2472	H
	3296	-61.94	-13	-48.94	-78.52	-63.85	7.03	3296	H
									H
									H
									H
									H
	1648	-66.91	-13	-53.91	-76.55	-69.32	4.92	9.48	V
	2472	-64.17	-13	-51.17	-77.02	-66.45	6.07	10.50	V
	3296	-62.27	-13	-49.27	-78.6	-64.18	7.03	11.09	V
									V
									V
									V
									V
Middle	1672	-56.90	-13	-43.90	-66.76	-59.42	4.96	9.63	H
	2509	-64.89	-13	-51.89	-77.93	-67.12	6.12	10.50	H
	3345	-62.44	-13	-49.44	-78.94	-64.40	7.08	11.19	H
									H
									H
									H
									H
	1672	-61.22	-13	-48.22	-70.86	-63.74	4.96	9.63	V
	2509	-64.55	-13	-51.55	-77.49	-66.78	6.12	10.50	V
	3345	-62.73	-13	-49.73	-78.98	-64.69	7.08	11.19	V
									V
									V
									V
									V



Highest	1696	-56.86	-13	-43.86	-66.7	-59.49	4.99	9.78	H
	2546	-64.16	-13	-51.16	-77.46	-66.34	6.17	10.50	H
	3392	-62.43	-13	-49.43	-78.84	-64.43	7.13	11.28	H
									H
									H
									H
									H
	1696	-59.93	-13	-46.93	-69.58	-62.56	4.99	9.78	V
	2546	-63.89	-13	-50.89	-77.15	-66.07	6.17	10.50	V
	3392	-62.65	-13	-49.65	-78.81	-64.65	7.13	11.28	V
									V
									V
									V
									V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

**WCDMA Band V**

WCDMA Band V									
Channel	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	1652	-66.99	-13	-53.99	-76.84	-69.42	4.93	9.51	H
	2479	-64.68	-13	-51.68	-77.6	-66.95	6.08	10.50	H
	3304	-62.20	-13	-49.20	-78.76	-64.12	7.04	11.11	H
									H
									H
									H
									H
	1652	-67.21	-13	-54.21	-76.84	-69.64	4.93	9.51	V
	2479	-64.54	-13	-51.54	-77.41	-66.81	6.08	10.50	V
	3304	-62.83	-13	-49.83	-79.14	-64.75	7.04	11.11	V
									V
									V
									V
									V
Middle	1672	-66.20	-13	-53.20	-76.06	-68.72	4.96	9.63	H
	2509	-64.97	-13	-51.97	-78.01	-67.20	6.12	10.50	H
	3345	-62.73	-13	-49.73	-79.23	-64.69	7.08	11.19	H
									H
									H
									H
									H
	1672	-66.12	-13	-53.12	-75.76	-68.64	4.96	9.63	V
	2509	-65.36	-13	-52.36	-78.3	-67.59	6.12	10.50	V
	3345	-62.53	-13	-49.53	-78.78	-64.49	7.08	11.19	V
									V
									V
									V
									V



Highest	1696	-65.98	-13	-52.98	-75.84	-68.61	4.99	9.78	H
	2539	-64.26	-13	-51.26	-77.52	-66.45	6.16	10.50	H
	3386	-62.66	-13	-49.66	-79.08	-64.66	7.13	11.27	H
									H
									H
									H
									H
	1696	-66.54	-13	-53.54	-76.19	-69.17	4.99	9.78	V
	2539	-64.75	-13	-51.75	-77.88	-66.94	6.16	10.50	V
	3386	-62.77	-13	-49.77	-78.94	-64.77	7.13	11.27	V
									V
									V
									V
									V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



<Ant. 0>

WCDMA Band IV

WCDMA Band IV									
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	3426	-61.73	-13	-48.73	-78.95	-66.07	7.17	11.51	H
	5137	-57.60	-13	-44.60	-79.51	-60.39	8.83	11.62	H
	6850	-56.81	-13	-43.81	-82.21	-57.75	10.26	11.20	H
									H
									H
									H
									H
	3426	-62.28	-13	-49.28	-79.32	-66.62	7.17	11.51	V
	5137	-58.19	-13	-45.19	-80.04	-60.98	8.83	11.62	V
	6850	-55.72	-13	-42.72	-81.92	-56.66	10.26	11.20	V
									V
									V
									V
									V
Middle	3465	-62.10	-13	-49.10	-79.32	-66.65	7.21	11.76	H
	5198	-58.70	-13	-45.70	-80.7	-61.71	8.88	11.89	H
	6930	-56.48	-13	-43.48	-81.94	-57.62	10.32	11.46	H
									H
									H
									H
									H
	3465	-62.08	-13	-49.08	-79.22	-66.63	7.21	11.76	V
	5198	-58.45	-13	-45.45	-80.38	-61.46	8.88	11.89	V
	6930	-55.80	-13	-42.80	-82.03	-56.94	10.32	11.46	V
									V
									V
									V
									V



Highest	3504	-62.66	-13	-49.66	-79.89	-67.31	7.25	11.90	H
	5258	-58.78	-13	-45.78	-80.81	-61.85	8.93	12.00	H
	7010	-55.62	-13	-42.62	-81.18	-56.59	10.39	11.36	H
									H
									H
									H
									H
	3504	-62.30	-13	-49.30	-79.52	-66.94	7.25	11.90	V
	5258	-58.83	-13	-45.83	-80.76	-61.90	8.93	12.00	V
	7010	-55.22	-13	-42.22	-81.49	-56.19	10.39	11.36	V
									V
									V
									V
									V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

**GPRS 1900**

GPRS 1900									
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	3702	-52.88	-13	-39.88	-71.11	-57.28	7.50	11.90	H
	5550	-51.80	-13	-38.80	-74.11	-55.11	9.19	12.50	H
	7400	-55.57	-13	-42.57	-81.88	-56.09	10.68	11.20	H
									H
									H
									H
									H
	3702	-52.25	-13	-39.25	-70.09	-56.65	7.50	11.90	V
	5550	-54.24	-13	-41.24	-76.5	-57.55	9.19	12.50	V
	7400	-54.93	-13	-41.93	-81.59	-55.45	10.68	11.20	V
									V
									V
									V
									V
Middle	3760	-48.55	-13	-35.55	-67.15	-52.74	7.57	11.76	H
	5640	-54.29	-13	-41.29	-76.9	-57.26	9.27	12.24	H
	7520	-55.29	-13	-42.29	-81.64	-56.11	10.76	11.58	H
									H
									H
									H
									H
	3760	-46.93	-13	-33.93	-65.22	-51.12	7.57	11.76	V
	5640	-57.32	-13	-44.32	-79.96	-60.29	9.27	12.24	V
	7520	-54.87	-13	-41.87	-81.43	-55.69	10.76	11.58	V
									V
									V
									V
									V



Highest	3822	-57.83	-13	-44.83	-76.74	-61.70	7.64	11.51	H
	5730	-49.01	-13	-36.01	-72.01	-51.54	9.35	11.88	H
	7640	-54.93	-13	-41.93	-81.53	-55.70	10.85	11.62	H
									H
									H
									H
									H
	3822	-55.65	-13	-42.65	-74.3	-59.52	7.64	11.51	V
	5730	-54.95	-13	-41.95	-77.79	-57.48	9.35	11.88	V
	7640	-54.60	-13	-41.60	-81.46	-55.37	10.85	11.62	V
									V
									V
									V
									V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

**EDGE 1900**

EDGE 1900									
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	3702	-52.84	-13	-39.84	-71.07	-57.24	7.50	11.90	H
	5550	-54.72	-13	-41.72	-77.03	-58.03	9.19	12.50	H
	7400	-54.90	-13	-41.90	-81.21	-55.42	10.68	11.20	H
									H
									H
									H
									H
	3702	-54.88	-13	-41.88	-72.72	-59.28	7.50	11.90	V
	5550	-53.80	-13	-40.80	-76.06	-57.11	9.19	12.50	V
	7400	-55.05	-13	-42.05	-81.71	-55.57	10.68	11.20	V
									V
									V
									V
									V
Middle	3760	-58.71	-13	-45.71	-77.31	-62.90	7.57	11.76	H
	5640	-57.30	-13	-44.30	-79.91	-60.27	9.27	12.24	H
	7520	-55.46	-13	-42.46	-81.81	-56.28	10.76	11.58	H
									H
									H
									H
									H
	3760	-58.79	-13	-45.79	-77.07	-62.98	7.57	11.76	V
	5640	-57.45	-13	-44.45	-80.09	-60.42	9.27	12.24	V
	7520	-55.04	-13	-42.04	-81.6	-55.86	10.76	11.58	V
									V
									V
									V
									V



Highest	3822	-54.58	-13	-41.58	-73.49	-58.45	7.64	11.51	H
	5729	-57.20	-13	-44.20	-80.19	-59.73	9.35	11.88	H
	7639	-54.90	-13	-41.90	-81.5	-55.67	10.85	11.62	H
									H
									H
									H
									H
	3822	-54.84	-13	-41.84	-73.49	-58.71	7.64	11.51	V
	5729	-56.75	-13	-43.75	-79.94	-59.28	9.35	11.88	V
	7639	-54.61	-13	-41.61	-81.47	-55.38	10.85	11.62	V
									V
									V
									V
									V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

**WCDMA Band II**

WCDMA Band II									
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	3704	-60.90	-13	-47.90	-79.24	-65.29	7.50	11.89	H
	5556	-55.89	-13	-42.89	-78.32	-59.19	9.19	12.49	H
	7408	-55.90	-13	-42.90	-82.29	-56.45	10.68	11.23	H
									H
									H
									H
									H
	3704	-61.10	-13	-48.10	-79.07	-65.49	7.50	11.89	V
	5556	-58.31	-13	-45.31	-80.68	-61.61	9.19	12.49	V
	7408	-55.37	-13	-42.37	-82.1	-55.92	10.68	11.23	V
									V
									V
									V
									V
Middle	3760	-60.69	-13	-47.69	-79.33	-64.88	7.57	11.76	H
	5640	-54.80	-13	-41.80	-77.5	-57.77	9.27	12.24	H
	7520	-55.86	-13	-42.86	-82.23	-56.68	10.76	11.58	H
									H
									H
									H
									H
	3760	-60.88	-13	-47.88	-79.2	-65.07	7.57	11.76	V
	5640	-57.39	-13	-44.39	-80.12	-60.36	9.27	12.24	V
	7520	-55.54	-13	-42.54	-82.13	-56.36	10.76	11.58	V
									V
									V
									V
									V



Highest	3822	-57.83	-13	-44.83	-76.74	-61.70	7.64	11.51	H
	5730	-49.01	-13	-36.01	-72.01	-51.54	9.35	11.88	H
	7640	-54.93	-13	-41.93	-81.53	-55.70	10.85	11.62	H
									H
									H
									H
									H
	3822	-55.65	-13	-42.65	-74.3	-59.52	7.64	11.51	V
	5730	-54.95	-13	-41.95	-77.79	-57.48	9.35	11.88	V
	7640	-54.60	-13	-41.60	-81.46	-55.37	10.85	11.62	V
									V
									V
									V
									V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

————THE END————