


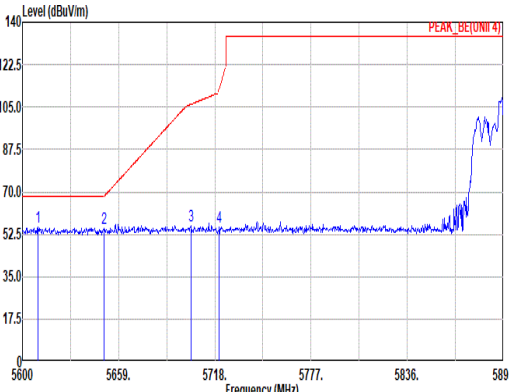
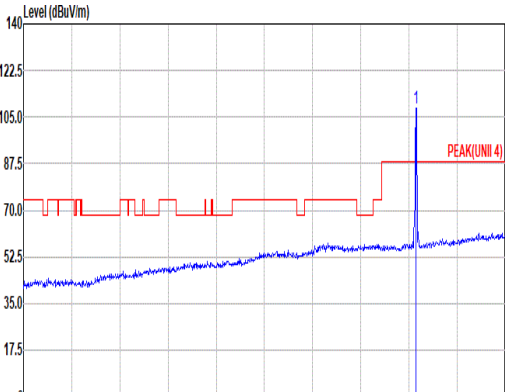




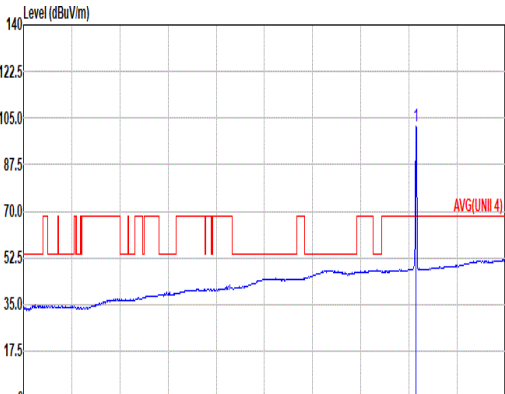


Mode	75																																																																																																																							
	Band Edge - L																																																																																																																							
	U-NII-4_5.85-5.895_802.11ax HE20_CH177_Partial 26/8_5885MHz																																																																																																																							
ANT	4+3																																																																																																																							
Pol.	Horizontal					Fundamental																																																																																																																		
Peak	 Site : 03CH12-HY Condition: PEAK_BE(UNII 4) 3m 91200-02114-240711 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5609.74</td><td>55.68 68.20 -12.52</td><td>44.60</td><td>33.12</td><td>11.24</td><td>33.28</td><td>0.00</td><td>153</td><td>25 PEAK</td></tr><tr><td>2</td><td>5650.15</td><td>54.83 68.31 -13.48</td><td>43.73</td><td>33.20</td><td>11.22</td><td>33.32</td><td>0.00</td><td>153</td><td>25 PEAK</td></tr><tr><td>3</td><td>5703.55</td><td>55.76 106.19 -50.43</td><td>44.32</td><td>33.61</td><td>11.20</td><td>33.37</td><td>0.00</td><td>153</td><td>25 PEAK</td></tr><tr><td>4</td><td>5720.66</td><td>55.42 112.29 -56.87</td><td>43.94</td><td>33.68</td><td>11.19</td><td>33.39</td><td>0.00</td><td>153</td><td>25 PEAK</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5609.74	55.68 68.20 -12.52	44.60	33.12	11.24	33.28	0.00	153	25 PEAK	2	5650.15	54.83 68.31 -13.48	43.73	33.20	11.22	33.32	0.00	153	25 PEAK	3	5703.55	55.76 106.19 -50.43	44.32	33.61	11.20	33.37	0.00	153	25 PEAK	4	5720.66	55.42 112.29 -56.87	43.94	33.68	11.19	33.39	0.00	153	25 PEAK	 Site : 03CH12-HY Condition: PEAK(UNII 4) 3m 91200-02114-240711 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5885.00</td><td>108.45 -----</td><td>96.27</td><td>34.28</td><td>11.47</td><td>33.57</td><td>0.00</td><td>153</td><td>25 PEAK</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5885.00	108.45 -----	96.27	34.28	11.47	33.57	0.00	153	25 PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																														
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																															
1	5609.74	55.68 68.20 -12.52	44.60	33.12	11.24	33.28	0.00	153	25 PEAK																																																																																																															
2	5650.15	54.83 68.31 -13.48	43.73	33.20	11.22	33.32	0.00	153	25 PEAK																																																																																																															
3	5703.55	55.76 106.19 -50.43	44.32	33.61	11.20	33.37	0.00	153	25 PEAK																																																																																																															
4	5720.66	55.42 112.29 -56.87	43.94	33.68	11.19	33.39	0.00	153	25 PEAK																																																																																																															
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																															
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																															
1	5885.00	108.45 -----	96.27	34.28	11.47	33.57	0.00	153	25 PEAK																																																																																																															
Avg.	Blank					 Site : 03CH12-HY Condition: AVG(UNII 4) 3m 91200-02114-240711 HORIZONTAL : RBW:1000.000kHz VBW:1.000kHz SWT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5885.00</td><td>101.87 -----</td><td>89.72</td><td>34.26</td><td>11.45</td><td>33.56</td><td>0.00</td><td>153</td><td>25 AVERAGE</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5885.00	101.87 -----	89.72	34.26	11.45	33.56	0.00	153	25 AVERAGE																																																																						
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																															
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																															
1	5885.00	101.87 -----	89.72	34.26	11.45	33.56	0.00	153	25 AVERAGE																																																																																																															


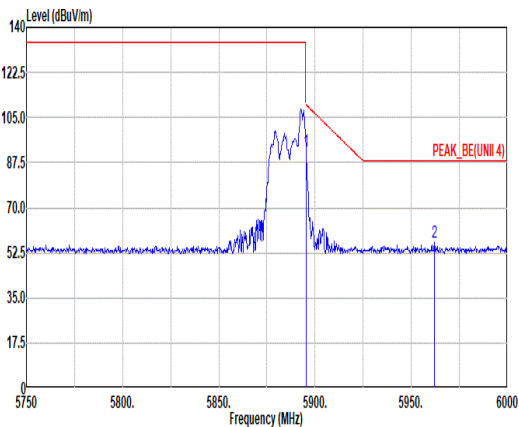


Mode	75																																																																			
	Band Edge - R																																																																			
	U-NII-4_5.85-5.895_802.11ax HE20_CH177_Partial 26/8_5885MHz																																																																			
ANT	4+3																																																																			
Pol.	Horizontal						Fundamental																																																													
Peak	 Site : 03CH12-HY Condition: PEAK_BE(UNII 4) 3m 91200-02114-240711 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5895.25</td><td>92.18</td><td>110.02</td><td>-17.84</td><td>80.00</td><td>34.28</td><td>11.47</td><td>33.57</td><td>0.00</td><td>153</td><td>25</td><td>PEAK</td></tr><tr><td>2</td><td>5962.00</td><td>56.74</td><td>88.20</td><td>-31.46</td><td>44.40</td><td>34.28</td><td>11.69</td><td>33.63</td><td>0.00</td><td>153</td><td>25</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm	deg	1	5895.25	92.18	110.02	-17.84	80.00	34.28	11.47	33.57	0.00	153	25	PEAK	2	5962.00	56.74	88.20	-31.46	44.40	34.28	11.69	33.63	0.00	153	25	PEAK	Blank				
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																												
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm	deg																																																										
1	5895.25	92.18	110.02	-17.84	80.00	34.28	11.47	33.57	0.00	153	25	PEAK																																																								
2	5962.00	56.74	88.20	-31.46	44.40	34.28	11.69	33.63	0.00	153	25	PEAK																																																								
Avg.	 Site : 03CH12-HY Condition: AVG_BE(UNII 4) 3m 91200-02114-240711 HORIZONTAL : RBW:1000.000kHz VBW:1.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5895.25</td><td>87.93</td><td>90.02</td><td>-2.09</td><td>75.75</td><td>34.28</td><td>11.47</td><td>33.57</td><td>0.00</td><td>153</td><td>25</td><td>AVERAGE</td></tr><tr><td>2</td><td>5927.75</td><td>46.41</td><td>68.20</td><td>-21.79</td><td>34.13</td><td>34.30</td><td>11.58</td><td>33.60</td><td>0.00</td><td>153</td><td>25</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm	deg	1	5895.25	87.93	90.02	-2.09	75.75	34.28	11.47	33.57	0.00	153	25	AVERAGE	2	5927.75	46.41	68.20	-21.79	34.13	34.30	11.58	33.60	0.00	153	25	AVERAGE	Blank				
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																												
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm	deg																																																										
1	5895.25	87.93	90.02	-2.09	75.75	34.28	11.47	33.57	0.00	153	25	AVERAGE																																																								
2	5927.75	46.41	68.20	-21.79	34.13	34.30	11.58	33.60	0.00	153	25	AVERAGE																																																								

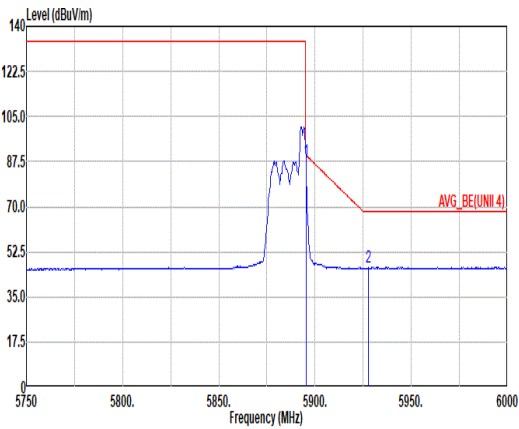

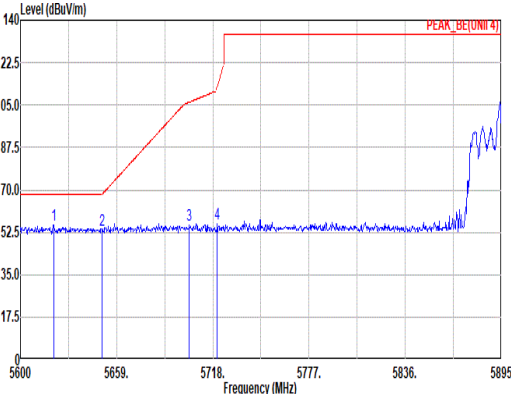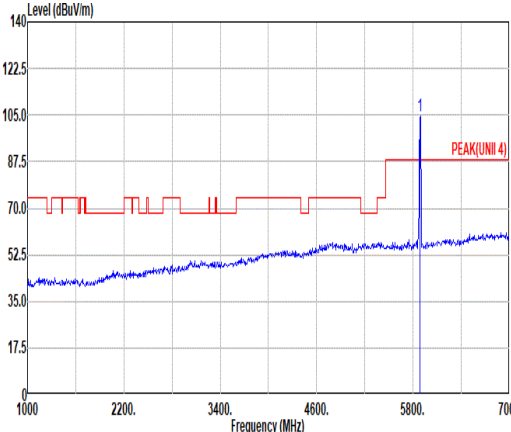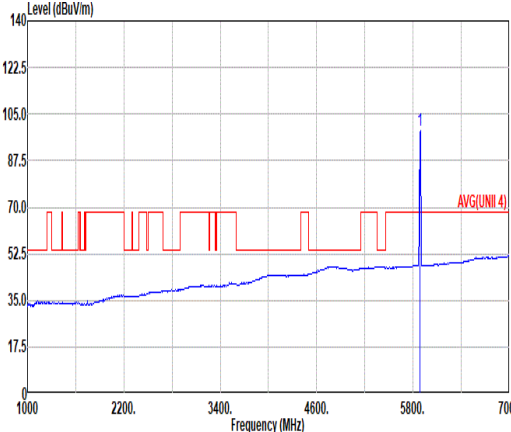Mode	75																																																																																																																									
	Band Edge - L																																																																																																																									
	U-NII-4_5.85-5.895_802.11ax HE20_CH177_Partial 26/8_5885MHz																																																																																																																									
ANT	4+3																																																																																																																									
Pol.	Vertical						Fundamental																																																																																																																			
Peak	 Level (dBuV/m) Frequency (MHz) Site : 03CH12-HY Condition: PEAK_BE(UNII 4) 3m 91200-02114-240711 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5620.36</td><td>55.59 68.20 -12.61</td><td>44.51</td><td>33.14</td><td>11.23</td><td>33.29</td><td>0.00</td><td>200</td><td>206 PEAK</td></tr><tr><td>2</td><td>5650.15</td><td>53.39 68.31 -14.92</td><td>42.29</td><td>33.20</td><td>11.22</td><td>33.32</td><td>0.00</td><td>200</td><td>206 PEAK</td></tr><tr><td>3</td><td>5703.55</td><td>55.51 106.19 -50.68</td><td>44.07</td><td>33.61</td><td>11.20</td><td>33.37</td><td>0.00</td><td>200</td><td>206 PEAK</td></tr><tr><td>4</td><td>5720.66</td><td>56.24 112.29 -56.05</td><td>44.76</td><td>33.68</td><td>11.19</td><td>33.39</td><td>0.00</td><td>200</td><td>206 PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor				MHz	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5620.36	55.59 68.20 -12.61	44.51	33.14	11.23	33.29	0.00	200	206 PEAK	2	5650.15	53.39 68.31 -14.92	42.29	33.20	11.22	33.32	0.00	200	206 PEAK	3	5703.55	55.51 106.19 -50.68	44.07	33.61	11.20	33.37	0.00	200	206 PEAK	4	5720.66	56.24 112.29 -56.05	44.76	33.68	11.19	33.39	0.00	200	206 PEAK	 Level (dBuV/m) Frequency (MHz) Site : 03CH12-HY Condition: PEAK(UNII 4) 3m 91200-02114-240711 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5885.00</td><td>104.86 -----</td><td>92.68</td><td>34.28</td><td>11.47</td><td>33.57</td><td>0.00</td><td>200</td><td>206 PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor				MHz	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5885.00	104.86 -----	92.68	34.28	11.47	33.57	0.00	200	206 PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																																				
MHz	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																	
1	5620.36	55.59 68.20 -12.61	44.51	33.14	11.23	33.29	0.00	200	206 PEAK																																																																																																																	
2	5650.15	53.39 68.31 -14.92	42.29	33.20	11.22	33.32	0.00	200	206 PEAK																																																																																																																	
3	5703.55	55.51 106.19 -50.68	44.07	33.61	11.20	33.37	0.00	200	206 PEAK																																																																																																																	
4	5720.66	56.24 112.29 -56.05	44.76	33.68	11.19	33.39	0.00	200	206 PEAK																																																																																																																	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																	
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																																				
MHz	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																	
1	5885.00	104.86 -----	92.68	34.28	11.47	33.57	0.00	200	206 PEAK																																																																																																																	
Avg.	Blank						 Level (dBuV/m) Frequency (MHz) Site : 03CH12-HY Condition: AVG(UNII 4) 3m 91200-02114-240711 VERTICAL : RBW:1000.000kHz VBW:1.000kHz SWT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5885.00</td><td>99.00 -----</td><td>86.82</td><td>34.28</td><td>11.47</td><td>33.57</td><td>0.00</td><td>200</td><td>206 AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor				MHz	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5885.00	99.00 -----	86.82	34.28	11.47	33.57	0.00	200	206 AVERAGE																																																																						
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																	
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																																				
MHz	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																	
1	5885.00	99.00 -----	86.82	34.28	11.47	33.57	0.00	200	206 AVERAGE																																																																																																																	

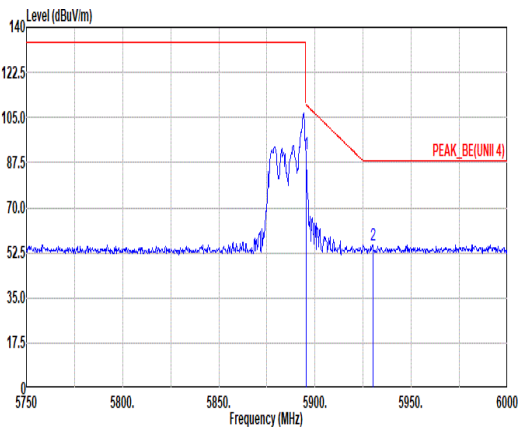
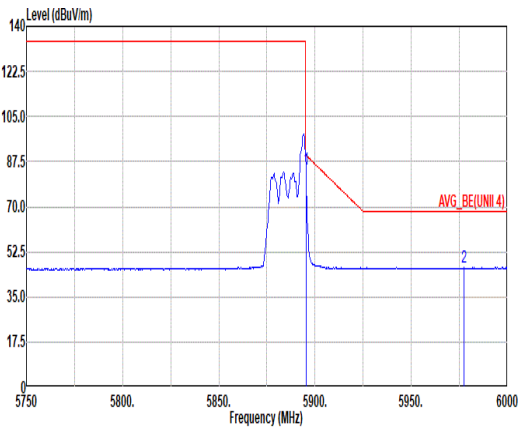


Mode	75																																																																				
	Band Edge - R																																																																				
	U-NII-4_5.85-5.895_802.11ax HE20_CH177_Partial 26/8_5885MHz																																																																				
ANT	4+3																																																																				
Pol.	Vertical						Fundamental																																																														
Peak	 Site : 03CH12-HY Condition: PEAK_BE(UNII 4) 3m 91200-02114-240711 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5895.25</td><td>90.97</td><td>110.02</td><td>-19.05</td><td>78.79</td><td>34.28</td><td>11.47</td><td>33.57</td><td>0.00</td><td>200</td><td>206</td><td>PEAK</td></tr><tr><td>2</td><td>5930.00</td><td>55.67</td><td>88.20</td><td>-32.53</td><td>43.39</td><td>34.30</td><td>11.58</td><td>33.60</td><td>0.00</td><td>200</td><td>206</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm	deg	1	5895.25	90.97	110.02	-19.05	78.79	34.28	11.47	33.57	0.00	200	206	PEAK	2	5930.00	55.67	88.20	-32.53	43.39	34.30	11.58	33.60	0.00	200	206	PEAK	Blank					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																													
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm	deg																																																											
1	5895.25	90.97	110.02	-19.05	78.79	34.28	11.47	33.57	0.00	200	206	PEAK																																																									
2	5930.00	55.67	88.20	-32.53	43.39	34.30	11.58	33.60	0.00	200	206	PEAK																																																									
Avg.	 Site : 03CH12-HY Condition: AVG_BE(UNII 4) 3m 91200-02114-240711 VERTICAL : RBW:1000.000kHz VBW:1.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5895.25</td><td>84.32</td><td>90.02</td><td>-5.70</td><td>72.14</td><td>34.28</td><td>11.47</td><td>33.57</td><td>0.00</td><td>200</td><td>206</td><td>AVERAGE</td></tr><tr><td>2</td><td>5977.50</td><td>46.37</td><td>68.20</td><td>-21.83</td><td>34.04</td><td>34.24</td><td>11.74</td><td>33.65</td><td>0.00</td><td>200</td><td>206</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm	deg	1	5895.25	84.32	90.02	-5.70	72.14	34.28	11.47	33.57	0.00	200	206	AVERAGE	2	5977.50	46.37	68.20	-21.83	34.04	34.24	11.74	33.65	0.00	200	206	AVERAGE	Blank					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																													
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm	deg																																																											
1	5895.25	84.32	90.02	-5.70	72.14	34.28	11.47	33.57	0.00	200	206	AVERAGE																																																									
2	5977.50	46.37	68.20	-21.83	34.04	34.24	11.74	33.65	0.00	200	206	AVERAGE																																																									






		76									
Mode	Band Edge - L										
	U-NII-4_5.85-5.895_802.11ax HE20_CH177_Partial 52/40_5885MHz										
ANT	4+3										
Pol.	Horizontal										
Peak											

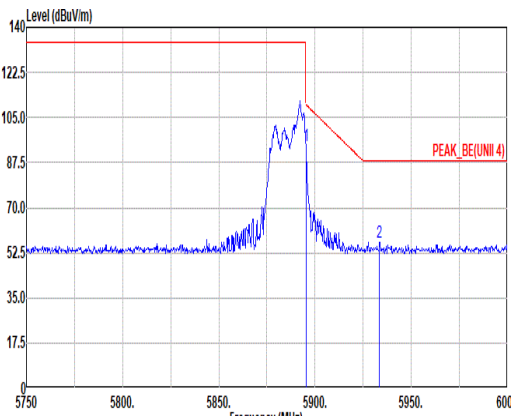
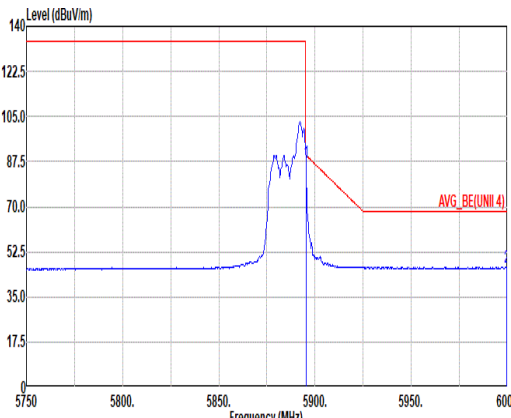


Mode	76																																																															
	Band Edge - R																																																															
	U-NII-4_5.85-5.895_802.11ax HE20_CH177_Partial 52/40_5885MHz																																																															
ANT	4+3																																																															
Pol.	Horizontal						Fundamental																																																									
Peak	 Site : 03CH12-HY Condition: PEAK_BE(UNII 4) 3m 91200-02114-240711 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>5895.25</td><td>94.18</td><td>110.02</td><td>-15.84</td><td>82.00</td><td>34.28</td><td>11.47</td><td>33.57</td><td>0.00</td><td>149</td><td>24</td><td>PEAK</td></tr><tr><td>2</td><td>5933.50</td><td>56.30</td><td>88.20</td><td>-31.90</td><td>44.01</td><td>34.30</td><td>11.59</td><td>33.60</td><td>0.00</td><td>149</td><td>24</td><td>PEAK</td></tr></table>							Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5895.25	94.18	110.02	-15.84	82.00	34.28	11.47	33.57	0.00	149	24	PEAK	2	5933.50	56.30	88.20	-31.90	44.01	34.30	11.59	33.60	0.00	149	24	PEAK	Blank					
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																					
1	5895.25	94.18	110.02	-15.84	82.00	34.28	11.47	33.57	0.00	149	24	PEAK																																																				
2	5933.50	56.30	88.20	-31.90	44.01	34.30	11.59	33.60	0.00	149	24	PEAK																																																				
Avg.	 Site : 03CH12-HY Condition: AVG_BE(UNII 4) 3m 91200-02114-240711 HORIZONTAL : RBW:1000.000kHz VBW:1.000kHz SMT:Auto <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>5895.25</td><td>87.30</td><td>90.02</td><td>-2.72</td><td>75.12</td><td>34.28</td><td>11.47</td><td>33.57</td><td>0.00</td><td>149</td><td>24</td><td>AVERAGE</td></tr><tr><td>2</td><td>5999.50</td><td>46.52</td><td>68.20</td><td>-21.68</td><td>34.18</td><td>34.20</td><td>11.81</td><td>33.67</td><td>0.00</td><td>149</td><td>24</td><td>AVERAGE</td></tr></table>							Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5895.25	87.30	90.02	-2.72	75.12	34.28	11.47	33.57	0.00	149	24	AVERAGE	2	5999.50	46.52	68.20	-21.68	34.18	34.20	11.81	33.67	0.00	149	24	AVERAGE	Blank					
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																					
1	5895.25	87.30	90.02	-2.72	75.12	34.28	11.47	33.57	0.00	149	24	AVERAGE																																																				
2	5999.50	46.52	68.20	-21.68	34.18	34.20	11.81	33.67	0.00	149	24	AVERAGE																																																				

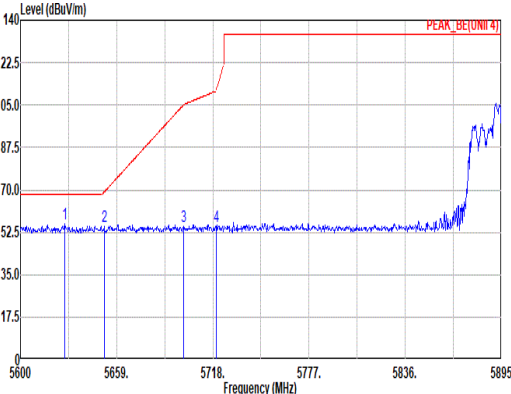
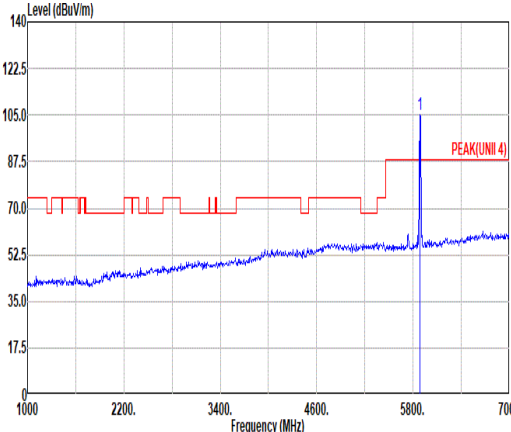
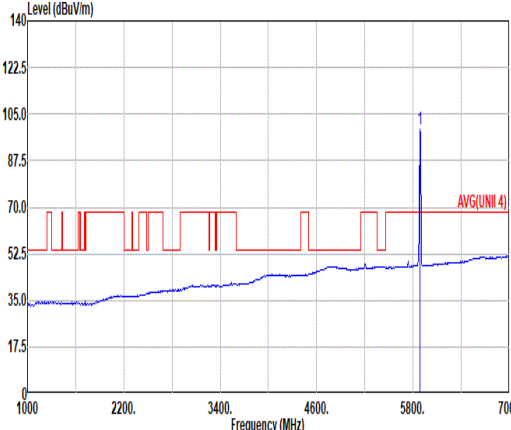


Mode	76																																																																																																																																										
	Band Edge - L																																																																																																																																										
	U-NII-4_5.85-5.895_802.11ax HE20_CH177_Partial 52/40_5885MHz																																																																																																																																										
ANT	4+3																																																																																																																																										
Pol.	Vertical						Fundamental																																																																																																																																				
Peak	 Site : 03CH12-HY Condition: PEAK_BE(UNII 4) 3m 91200-02114-240711 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5627.14</td><td>56.24</td><td>68.20</td><td>-11.96</td><td>45.16</td><td>33.15</td><td>11.23</td><td>33.30</td><td>0.00</td><td>200</td><td>200</td><td>PEAK</td></tr><tr><td>2</td><td>5651.33</td><td>54.74</td><td>69.19</td><td>-14.45</td><td>43.63</td><td>33.21</td><td>11.22</td><td>33.32</td><td>0.00</td><td>200</td><td>200</td><td>PEAK</td></tr><tr><td>3</td><td>5700.01</td><td>55.21</td><td>105.20</td><td>-49.99</td><td>43.78</td><td>33.60</td><td>11.20</td><td>33.37</td><td>0.00</td><td>200</td><td>200</td><td>PEAK</td></tr><tr><td>4</td><td>5720.07</td><td>54.68</td><td>110.95</td><td>-56.27</td><td>43.20</td><td>33.68</td><td>11.19</td><td>33.39</td><td>0.00</td><td>200</td><td>200</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5627.14	56.24	68.20	-11.96	45.16	33.15	11.23	33.30	0.00	200	200	PEAK	2	5651.33	54.74	69.19	-14.45	43.63	33.21	11.22	33.32	0.00	200	200	PEAK	3	5700.01	55.21	105.20	-49.99	43.78	33.60	11.20	33.37	0.00	200	200	PEAK	4	5720.07	54.68	110.95	-56.27	43.20	33.68	11.19	33.39	0.00	200	200	PEAK	 Site : 03CH12-HY Condition: PEAK(UNII 4) 3m 91200-02114-240711 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5885.00</td><td>105.34</td><td>-----</td><td>-----</td><td>93.19</td><td>34.26</td><td>11.45</td><td>33.56</td><td>0.00</td><td>200</td><td>200</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5885.00	105.34	-----	-----	93.19	34.26	11.45	33.56	0.00	200	200	PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																	
1	5627.14	56.24	68.20	-11.96	45.16	33.15	11.23	33.30	0.00	200	200	PEAK																																																																																																																															
2	5651.33	54.74	69.19	-14.45	43.63	33.21	11.22	33.32	0.00	200	200	PEAK																																																																																																																															
3	5700.01	55.21	105.20	-49.99	43.78	33.60	11.20	33.37	0.00	200	200	PEAK																																																																																																																															
4	5720.07	54.68	110.95	-56.27	43.20	33.68	11.19	33.39	0.00	200	200	PEAK																																																																																																																															
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																	
1	5885.00	105.34	-----	-----	93.19	34.26	11.45	33.56	0.00	200	200	PEAK																																																																																																																															
Avg.	Blank						 Site : 03CH12-HY Condition: AVG(UNII 4) 3m 91200-02114-240711 VERTICAL : RBW:1000.000kHz VBW:1.000kHz SWT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5885.00</td><td>99.00</td><td>-----</td><td>-----</td><td>86.93</td><td>34.26</td><td>11.45</td><td>33.56</td><td>0.00</td><td>200</td><td>200</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5885.00	99.00	-----	-----	86.93	34.26	11.45	33.56	0.00	200	200	AVERAGE																																																																																			
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																	
1	5885.00	99.00	-----	-----	86.93	34.26	11.45	33.56	0.00	200	200	AVERAGE																																																																																																																															

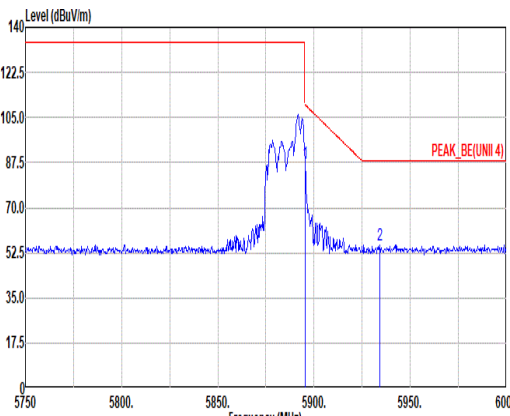
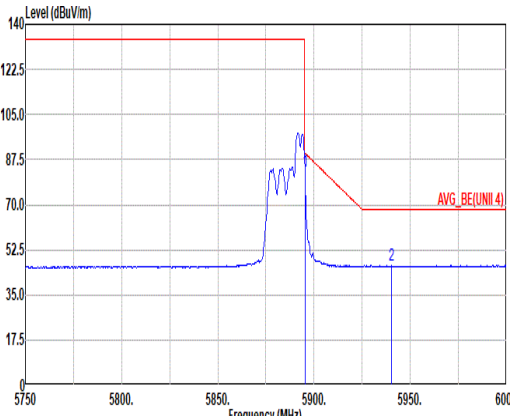


Mode	76																																																																				
	Band Edge - R																																																																				
	U-NII-4_5.85-5.895_802.11ax HE20_CH177_Partial 52/40_5885MHz																																																																				
ANT	4+3																																																																				
Pol.	Vertical						Fundamental																																																														
Peak	 Site : 03CH12-HY Condition: PEAK_BE(UNII 4) 3m 91200-02114-240711 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5895.50</td><td>87.33</td><td>109.83</td><td>-22.50</td><td>75.15</td><td>34.28</td><td>11.47</td><td>33.57</td><td>0.00</td><td>200</td><td>200</td><td>PEAK</td></tr><tr><td>2</td><td>5934.00</td><td>55.64</td><td>88.20</td><td>-32.56</td><td>43.34</td><td>34.30</td><td>11.60</td><td>33.60</td><td>0.00</td><td>200</td><td>200</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5895.50	87.33	109.83	-22.50	75.15	34.28	11.47	33.57	0.00	200	200	PEAK	2	5934.00	55.64	88.20	-32.56	43.34	34.30	11.60	33.60	0.00	200	200	PEAK	Blank					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																											
1	5895.50	87.33	109.83	-22.50	75.15	34.28	11.47	33.57	0.00	200	200	PEAK																																																									
2	5934.00	55.64	88.20	-32.56	43.34	34.30	11.60	33.60	0.00	200	200	PEAK																																																									
Avg.	 Site : 03CH12-HY Condition: AVG_BE(UNII 4) 3m 91200-02114-240711 VERTICAL : RBW:1000.000kHz VBW:1.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5895.25</td><td>82.99</td><td>90.02</td><td>-7.03</td><td>70.81</td><td>34.28</td><td>11.47</td><td>33.57</td><td>0.00</td><td>200</td><td>200</td><td>AVERAGE</td></tr><tr><td>2</td><td>5940.25</td><td>46.44</td><td>68.20</td><td>-21.76</td><td>34.13</td><td>34.30</td><td>11.62</td><td>33.61</td><td>0.00</td><td>200</td><td>200</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5895.25	82.99	90.02	-7.03	70.81	34.28	11.47	33.57	0.00	200	200	AVERAGE	2	5940.25	46.44	68.20	-21.76	34.13	34.30	11.62	33.61	0.00	200	200	AVERAGE	Blank					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																											
1	5895.25	82.99	90.02	-7.03	70.81	34.28	11.47	33.57	0.00	200	200	AVERAGE																																																									
2	5940.25	46.44	68.20	-21.76	34.13	34.30	11.62	33.61	0.00	200	200	AVERAGE																																																									

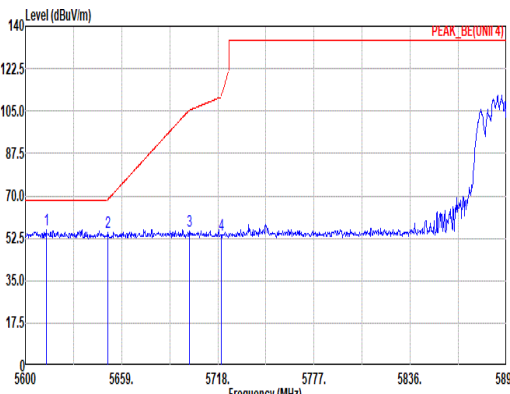
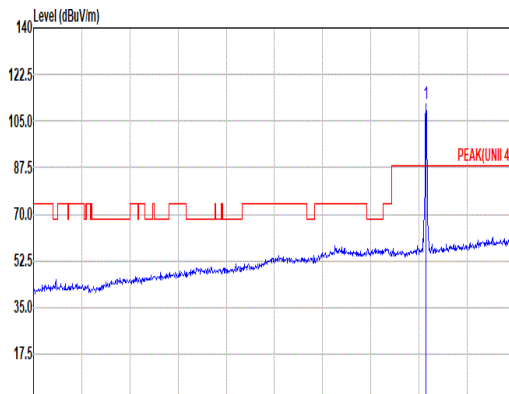
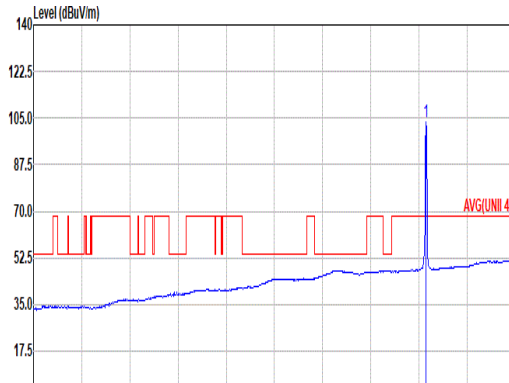


		77																																																																																																																																								
Mode	Band Edge - L																																																																																																																																									
	U-NII-4_5.85-5.895_802.11ax HE20_CH177_Partial 106/54_5885MHz																																																																																																																																									
ANT	4+3																																																																																																																																									
Pol.	Horizontal						Fundamental																																																																																																																																			
Peak	 Level (dBuV/m) Frequency (MHz) Site : 03CH12-HY Condition: PEAK_BE(UNII 4) 3m 91200-02114-240711 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5612.69</td><td>55.93</td><td>68.20</td><td>-12.27</td><td>44.85</td><td>33.13</td><td>11.23</td><td>33.28</td><td>0.00</td><td>155</td><td>25</td><td>PEAK</td></tr><tr><td>2</td><td>5650.74</td><td>55.19</td><td>68.75</td><td>-13.56</td><td>44.08</td><td>33.21</td><td>11.22</td><td>33.32</td><td>0.00</td><td>155</td><td>25</td><td>PEAK</td></tr><tr><td>3</td><td>5700.60</td><td>55.36</td><td>105.37</td><td>-50.01</td><td>43.93</td><td>33.60</td><td>11.20</td><td>33.37</td><td>0.00</td><td>155</td><td>25</td><td>PEAK</td></tr><tr><td>4</td><td>5720.07</td><td>54.10</td><td>110.95</td><td>-56.85</td><td>42.62</td><td>33.68</td><td>11.19</td><td>33.39</td><td>0.00</td><td>155</td><td>25</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5612.69	55.93	68.20	-12.27	44.85	33.13	11.23	33.28	0.00	155	25	PEAK	2	5650.74	55.19	68.75	-13.56	44.08	33.21	11.22	33.32	0.00	155	25	PEAK	3	5700.60	55.36	105.37	-50.01	43.93	33.60	11.20	33.37	0.00	155	25	PEAK	4	5720.07	54.10	110.95	-56.85	42.62	33.68	11.19	33.39	0.00	155	25	PEAK	 Level (dBuV/m) Frequency (MHz) Site : 03CH12-HY Condition: PEAK(UNII 4) 3m 91200-02114-240711 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5885.00</td><td>111.27</td><td>-----</td><td>-----</td><td>99.12</td><td>34.26</td><td>11.45</td><td>33.56</td><td>0.00</td><td>155</td><td>25</td><td>PEAK</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5885.00	111.27	-----	-----	99.12	34.26	11.45	33.56	0.00	155	25	PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																
1	5612.69	55.93	68.20	-12.27	44.85	33.13	11.23	33.28	0.00	155	25	PEAK																																																																																																																														
2	5650.74	55.19	68.75	-13.56	44.08	33.21	11.22	33.32	0.00	155	25	PEAK																																																																																																																														
3	5700.60	55.36	105.37	-50.01	43.93	33.60	11.20	33.37	0.00	155	25	PEAK																																																																																																																														
4	5720.07	54.10	110.95	-56.85	42.62	33.68	11.19	33.39	0.00	155	25	PEAK																																																																																																																														
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																
1	5885.00	111.27	-----	-----	99.12	34.26	11.45	33.56	0.00	155	25	PEAK																																																																																																																														
Avg.	Blank						 Level (dBuV/m) Frequency (MHz) Site : 03CH12-HY Condition: AVG(UNII 4) 3m 91200-02114-240711 HORIZONTAL : RBW:1000.000kHz VBW:1.000kHz SWT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5885.00</td><td>103.66</td><td>-----</td><td>-----</td><td>91.51</td><td>34.26</td><td>11.45</td><td>33.56</td><td>0.00</td><td>155</td><td>25</td><td>AVERAGE</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5885.00	103.66	-----	-----	91.51	34.26	11.45	33.56	0.00	155	25	AVERAGE																																																																																			
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																
1	5885.00	103.66	-----	-----	91.51	34.26	11.45	33.56	0.00	155	25	AVERAGE																																																																																																																														

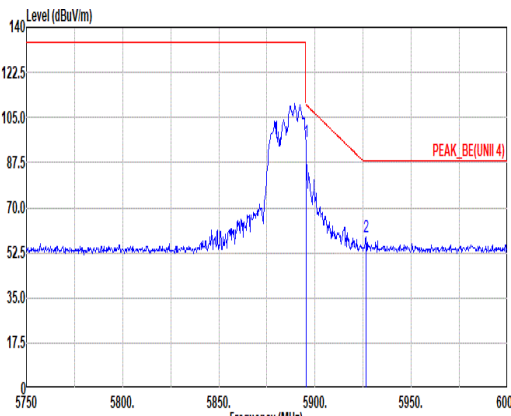
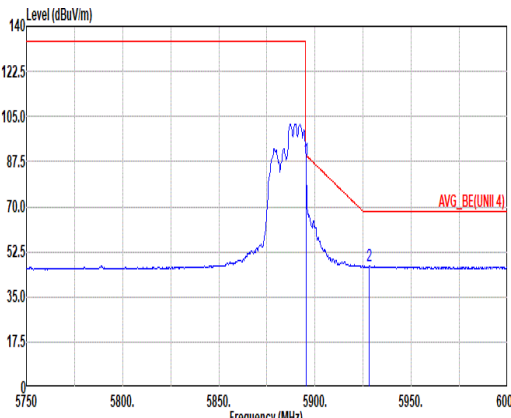


Mode	77																																																							
	Band Edge - R																																																							
	U-NII-4_5.85-5.895_802.11ax HE20_CH177_Partial 106/54_5885MHz																																																							
ANT	4+3																																																							
Pol.	Horizontal	Fundamental																																																						
Peak	 Site : 03CH12-HY Condition: PEAK_BE(UNII 4) 3m 91200-02114-240711 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>5895.25</td><td>95.70</td><td>110.02</td><td>-14.32</td><td>83.52</td><td>34.28</td><td>11.47</td><td>33.57</td><td>0.00</td><td>155</td><td>25</td><td>PEAK</td></tr><tr><td>2</td><td>5926.50</td><td>58.90</td><td>88.20</td><td>-29.30</td><td>46.63</td><td>34.30</td><td>11.57</td><td>33.60</td><td>0.00</td><td>155</td><td>25</td><td>PEAK</td></tr></table>		Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5895.25	95.70	110.02	-14.32	83.52	34.28	11.47	33.57	0.00	155	25	PEAK	2	5926.50	58.90	88.20	-29.30	46.63	34.30	11.57	33.60	0.00	155	25	PEAK	Blank
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																											
	MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																												
1	5895.25	95.70	110.02	-14.32	83.52	34.28	11.47	33.57	0.00	155	25	PEAK																																												
2	5926.50	58.90	88.20	-29.30	46.63	34.30	11.57	33.60	0.00	155	25	PEAK																																												
Avg.	 Site : 03CH12-HY Condition: AVG_BE(UNII 4) 3m 91200-02114-240711 HORIZONTAL : RBW:1000.000kHz VBW:1.000kHz SMT:Auto <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>5895.25</td><td>88.39</td><td>90.02</td><td>-1.63</td><td>76.21</td><td>34.28</td><td>11.47</td><td>33.57</td><td>0.00</td><td>155</td><td>25</td><td>AVERAGE</td></tr><tr><td>2</td><td>5928.00</td><td>46.97</td><td>68.20</td><td>-21.23</td><td>34.69</td><td>34.30</td><td>11.58</td><td>33.60</td><td>0.00</td><td>155</td><td>25</td><td>AVERAGE</td></tr></table>		Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5895.25	88.39	90.02	-1.63	76.21	34.28	11.47	33.57	0.00	155	25	AVERAGE	2	5928.00	46.97	68.20	-21.23	34.69	34.30	11.58	33.60	0.00	155	25	AVERAGE	Blank
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																											
	MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																												
1	5895.25	88.39	90.02	-1.63	76.21	34.28	11.47	33.57	0.00	155	25	AVERAGE																																												
2	5928.00	46.97	68.20	-21.23	34.69	34.30	11.58	33.60	0.00	155	25	AVERAGE																																												

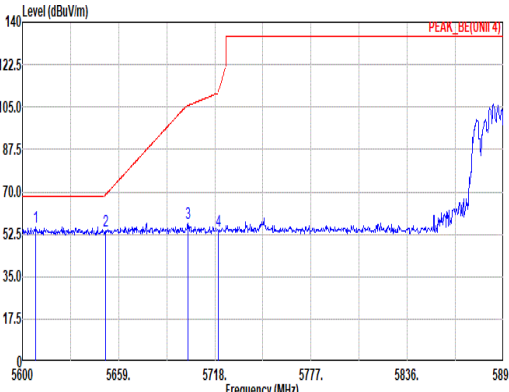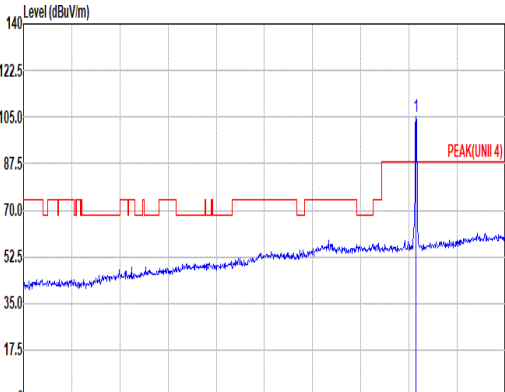
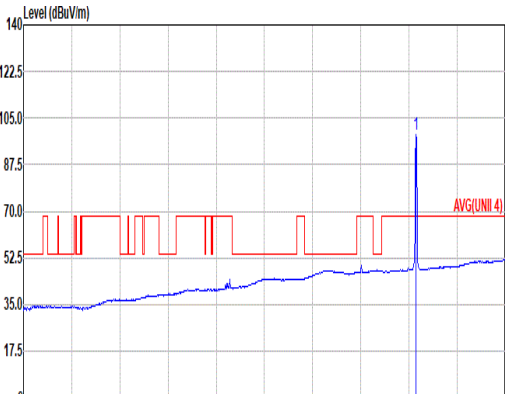


		77																																																																																																																																			
Mode	Band Edge - L																																																																																																																																				
	U-NII-4_5.85-5.895_802.11ax HE20_CH177_Partial 106/54_5885MHz																																																																																																																																				
ANT	4+3																																																																																																																																				
Pol.	Vertical						Fundamental																																																																																																																														
Peak	 Site : 03CH12-HY Condition: PEAK_BE(UNII 4) 3m 91200-02114-240711 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5600.26</td><td>55.53</td><td>68.20</td><td>-12.67</td><td>44.45</td><td>33.12</td><td>11.24</td><td>33.28</td><td>0.00</td><td>200</td><td>206</td><td>PEAK</td></tr><tr><td>2</td><td>5651.04</td><td>53.77</td><td>68.97</td><td>-15.20</td><td>42.66</td><td>33.21</td><td>11.22</td><td>33.32</td><td>0.00</td><td>200</td><td>206</td><td>PEAK</td></tr><tr><td>3</td><td>5701.48</td><td>56.92</td><td>105.62</td><td>-48.70</td><td>45.48</td><td>33.61</td><td>11.20</td><td>33.37</td><td>0.00</td><td>200</td><td>206</td><td>PEAK</td></tr><tr><td>4</td><td>5720.07</td><td>53.99</td><td>110.95</td><td>-56.96</td><td>42.51</td><td>33.68</td><td>11.19</td><td>33.39</td><td>0.00</td><td>200</td><td>206</td><td>PEAK</td></tr></tbody></table>							Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg	1	5600.26	55.53	68.20	-12.67	44.45	33.12	11.24	33.28	0.00	200	206	PEAK	2	5651.04	53.77	68.97	-15.20	42.66	33.21	11.22	33.32	0.00	200	206	PEAK	3	5701.48	56.92	105.62	-48.70	45.48	33.61	11.20	33.37	0.00	200	206	PEAK	4	5720.07	53.99	110.95	-56.96	42.51	33.68	11.19	33.39	0.00	200	206	PEAK	 Site : 03CH12-HY Condition: PEAK(UNII 4) 3m 91200-02114-240711 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5885.00</td><td>105.22</td><td>-----</td><td>-----</td><td>93.07</td><td>34.26</td><td>11.45</td><td>33.56</td><td>0.00</td><td>200</td><td>206</td><td>PEAK</td></tr></tbody></table>							Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg	1	5885.00	105.22	-----	-----	93.07	34.26	11.45	33.56	0.00	200	206	PEAK
		Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg																																																																																																																								
1	5600.26	55.53	68.20	-12.67	44.45	33.12	11.24	33.28	0.00	200	206	PEAK																																																																																																																									
2	5651.04	53.77	68.97	-15.20	42.66	33.21	11.22	33.32	0.00	200	206	PEAK																																																																																																																									
3	5701.48	56.92	105.62	-48.70	45.48	33.61	11.20	33.37	0.00	200	206	PEAK																																																																																																																									
4	5720.07	53.99	110.95	-56.96	42.51	33.68	11.19	33.39	0.00	200	206	PEAK																																																																																																																									
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg																																																																																																																								
1	5885.00	105.22	-----	-----	93.07	34.26	11.45	33.56	0.00	200	206	PEAK																																																																																																																									
Avg.	Blank						 Site : 03CH12-HY Condition: AVG(UNII 4) 3m 91200-02114-240711 VERTICAL : RBW:1000.000kHz VBW:1.000kHz SWT:Auto <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5885.00</td><td>98.68</td><td>-----</td><td>-----</td><td>86.53</td><td>34.26</td><td>11.45</td><td>33.56</td><td>0.00</td><td>200</td><td>206</td><td>AVERAGE</td></tr></tbody></table>							Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg	1	5885.00	98.68	-----	-----	86.53	34.26	11.45	33.56	0.00	200	206	AVERAGE																																																																																
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg																																																																																																																								
1	5885.00	98.68	-----	-----	86.53	34.26	11.45	33.56	0.00	200	206	AVERAGE																																																																																																																									

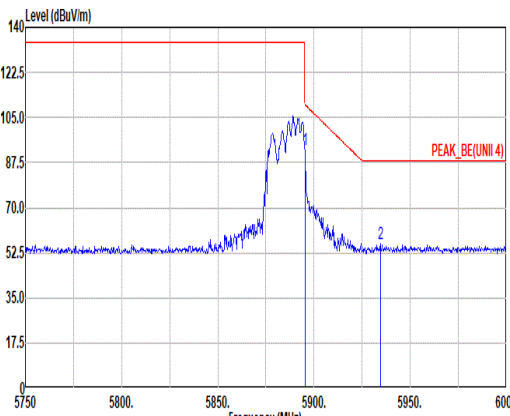
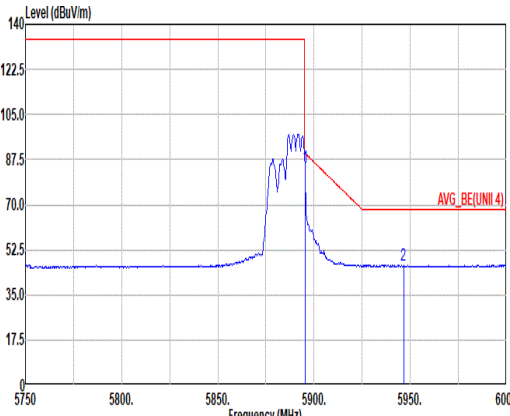


Mode	77																																																							
	Band Edge - R																																																							
	U-NII-4_5.85-5.895_802.11ax HE20_CH177_Partial 106/54_5885MHz																																																							
ANT	4+3																																																							
Pol.	Vertical	Fundamental																																																						
Peak	 Site : 03CH12-HY Condition: PEAK_BE(UNII 4) 3m 91200-02114-240711 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>5895.25</td><td>92.50</td><td>110.02</td><td>-17.52</td><td>80.32</td><td>34.28</td><td>11.47</td><td>33.57</td><td>0.00</td><td>200</td><td>206</td><td>PEAK</td></tr><tr><td>2</td><td>5934.50</td><td>56.05</td><td>88.20</td><td>-32.15</td><td>43.75</td><td>34.30</td><td>11.60</td><td>33.60</td><td>0.00</td><td>200</td><td>206</td><td>PEAK</td></tr></table>		Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5895.25	92.50	110.02	-17.52	80.32	34.28	11.47	33.57	0.00	200	206	PEAK	2	5934.50	56.05	88.20	-32.15	43.75	34.30	11.60	33.60	0.00	200	206	PEAK	Blank
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																											
	MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																												
1	5895.25	92.50	110.02	-17.52	80.32	34.28	11.47	33.57	0.00	200	206	PEAK																																												
2	5934.50	56.05	88.20	-32.15	43.75	34.30	11.60	33.60	0.00	200	206	PEAK																																												
Avg.	 Site : 03CH12-HY Condition: AVG_BE(UNII 4) 3m 91200-02114-240711 VERTICAL : RBW:1000.000kHz VBW:1.000kHz SMT:Auto <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>5895.25</td><td>84.42</td><td>110.02</td><td>-5.60</td><td>72.24</td><td>34.28</td><td>11.47</td><td>33.57</td><td>0.00</td><td>200</td><td>206</td><td>AVERAGE</td></tr><tr><td>2</td><td>5934.50</td><td>46.48</td><td>88.20</td><td>-21.72</td><td>34.16</td><td>34.30</td><td>11.64</td><td>33.62</td><td>0.00</td><td>200</td><td>206</td><td>AVERAGE</td></tr></table>		Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5895.25	84.42	110.02	-5.60	72.24	34.28	11.47	33.57	0.00	200	206	AVERAGE	2	5934.50	46.48	88.20	-21.72	34.16	34.30	11.64	33.62	0.00	200	206	AVERAGE	Blank
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																											
	MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																												
1	5895.25	84.42	110.02	-5.60	72.24	34.28	11.47	33.57	0.00	200	206	AVERAGE																																												
2	5934.50	46.48	88.20	-21.72	34.16	34.30	11.64	33.62	0.00	200	206	AVERAGE																																												

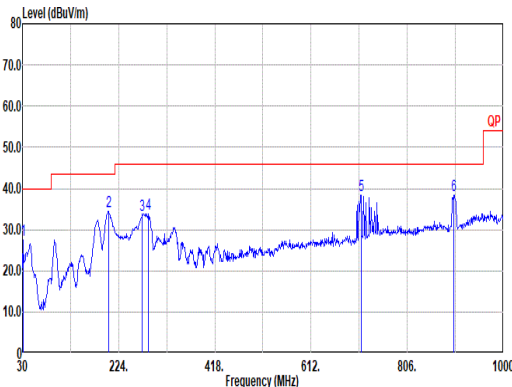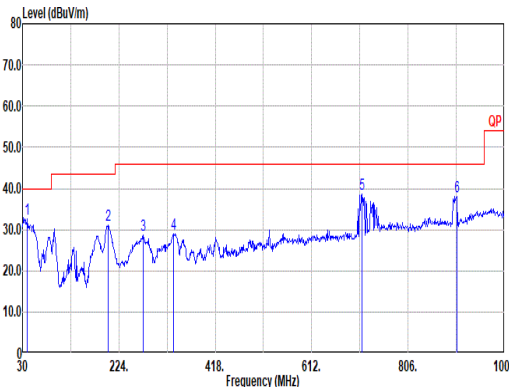

Mode	78															
	LF															
	U-NII-4_5.85-5.895_802.11ax HE20_CH177_Partial 106/54_5885MHz															
ANT	4+3															
Pol.	Horizontal								Vertical							
QPI Peak																
	Site : 03CH12-HY															
	Condition: QP 3m Bilog_37059_20231103 HORIZONTAL															
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg				
1	30.97	27.62	40.00	-12.38	31.84	24.41	1.09	29.77	0.05	--	--	Peak				
2	203.63	34.42	43.50	-9.08	46.60	15.00	2.42	29.78	0.10	--	--	Peak				
3	271.53	33.66	46.00	-12.34	41.49	18.90	2.73	29.62	0.16	--	--	Peak				
4	284.14	33.77	46.00	-12.23	41.40	18.96	2.81	29.59	0.19	--	--	Peak				
5	712.88	38.46	46.00	-7.54	35.77	27.01	4.36	28.99	0.31	--	--	Peak				
6	900.09	38.45	46.00	-7.55	32.69	29.20	4.73	28.51	0.34	--	--	Peak				
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg				
1	39.70	32.62	40.00	-7.38	41.09	20.07	1.09	29.66	0.03	--	--	Peak				
2	201.69	31.16	43.50	-12.34	43.37	15.06	2.42	29.79	0.10	--	--	Peak				
3	272.50	28.61	46.00	-17.39	36.49	18.85	2.73	29.62	0.16	--	--	Peak				
4	334.58	28.99	46.00	-17.01	35.23	20.08	3.04	29.53	0.17	--	--	Peak				
5	713.85	38.79	46.00	-7.21	36.04	27.06	4.37	28.99	0.31	--	--	Peak				
6	903.97	38.10	46.00	-7.90	32.31	29.18	4.75	28.49	0.35	--	--	Peak				

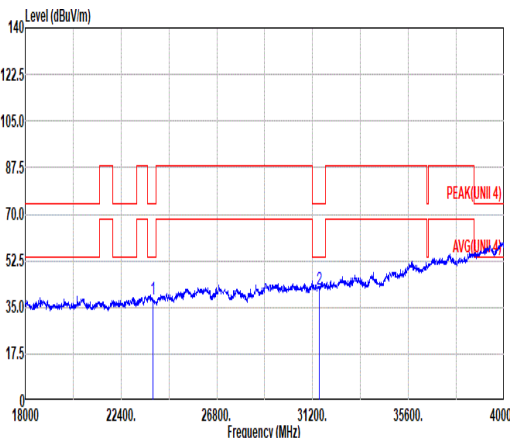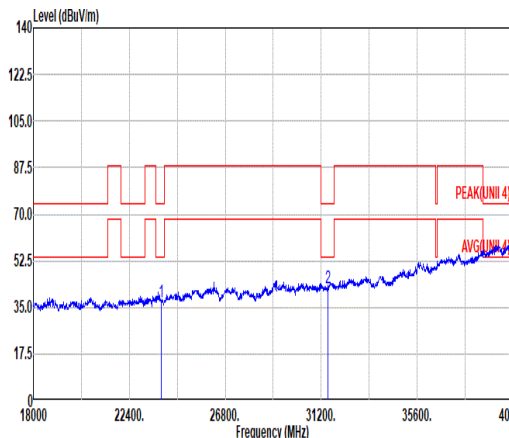

Mode	79																																																														
	SHF																																																														
	U-NII-4_5.85-5.895_802.11ax HE20_CH177_Partial 106/54_5885MHz																																																														
ANT	4+3																																																														
Pol.	Horizontal						Vertical																																																								
Peak																																																															
	Site : 03CH12-HY Condition: PEAK(UNII 4) 1m SHF_00993_231124 HORIZONTAL																																																														
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 23874.00</td><td>38.28</td><td>74.00</td><td>-35.72</td><td>37.49</td><td>38.40</td><td>24.93</td><td>53.00</td><td>-9.54</td><td>150</td><td>216 Peak</td></tr><tr><td>2 31497.00</td><td>41.51</td><td>74.00</td><td>-32.49</td><td>34.64</td><td>40.51</td><td>30.80</td><td>54.90</td><td>-9.54</td><td>150</td><td>259 Peak</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 23874.00	38.28	74.00	-35.72	37.49	38.40	24.93	53.00	-9.54	150	216 Peak	2 31497.00	41.51	74.00	-32.49	34.64	40.51	30.80	54.90	-9.54	150
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																					
1 23874.00	38.28	74.00	-35.72	37.49	38.40	24.93	53.00	-9.54	150	216 Peak																																																					
2 31497.00	41.51	74.00	-32.49	34.64	40.51	30.80	54.90	-9.54	150	259 Peak																																																					
Site : 03CH12-HY Condition: PEAK(UNII 4) 1m SHF_00993_231124 VERTICAL																																																															
<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 23874.00</td><td>37.15</td><td>74.00</td><td>-36.85</td><td>36.36</td><td>38.40</td><td>24.93</td><td>53.00</td><td>-9.54</td><td>150</td><td>166 Peak</td></tr><tr><td>2 31497.00</td><td>42.41</td><td>74.00</td><td>-31.59</td><td>35.54</td><td>40.51</td><td>30.80</td><td>54.90</td><td>-9.54</td><td>150</td><td>26 Peak</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 23874.00	37.15	74.00	-36.85	36.36	38.40	24.93	53.00	-9.54	150	166 Peak	2 31497.00	42.41	74.00	-31.59	35.54	40.51	30.80	54.90	-9.54	150	26 Peak
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																					
1 23874.00	37.15	74.00	-36.85	36.36	38.40	24.93	53.00	-9.54	150	166 Peak																																																					
2 31497.00	42.41	74.00	-31.59	35.54	40.51	30.80	54.90	-9.54	150	26 Peak																																																					




Appendix D. Duty Cycle Plots

<For Radiated Spurious Emission test>


Antenna	Band	Duty Cycle(%)	T(us)	1/T(kHz)	VBW Setting
4+3	802.11a	93.44	1425	0.70	1kHz
4+3	5GHz 802.11ax HE20 Full RU	91.19	1035	0.97	1kHz
4+3	5GHz 802.11ax HE20 26 RU	97.88	1617	0.62	1kHz
4+3	5GHz 802.11ax HE20 52 RU	97.98	1458	0.69	1kHz
4+3	5GHz 802.11ax HE20 106 RU	97.60	1302	0.77	1kHz
4+3	5GHz 802.11ax HE40 Full RU	90.99	1010	0.99	1kHz
4+3	5GHz 802.11ax HE80 Full RU	86.39	730	1.37	3kHz

MIMO <Ant. 4+3>

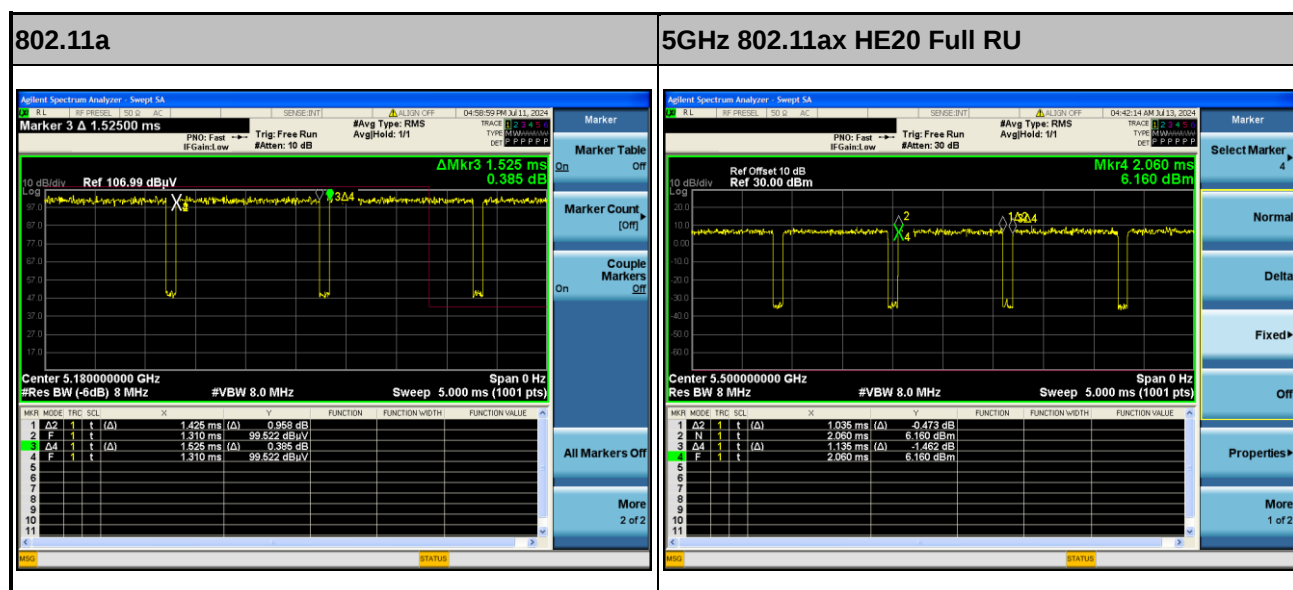





5GHz 802.11ax HE20 26 RU

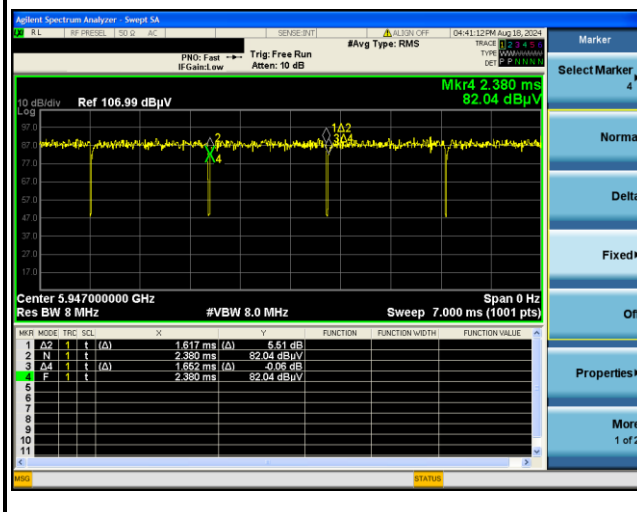


5GHz 802.11ax HE20 52 RU

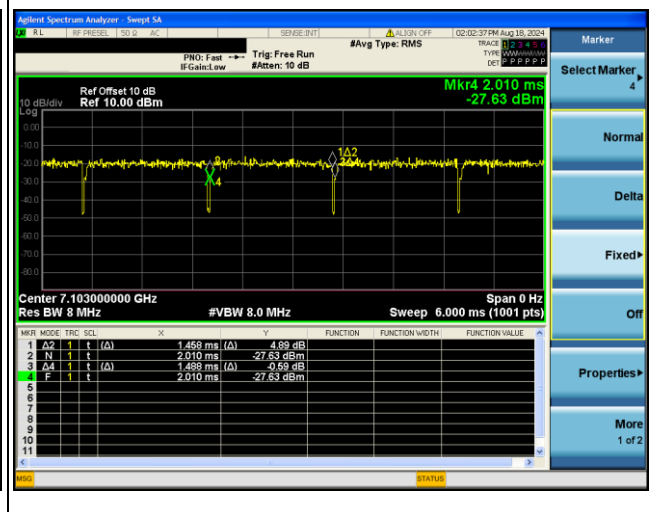


5GHz 802.11ax HE20 106 RU

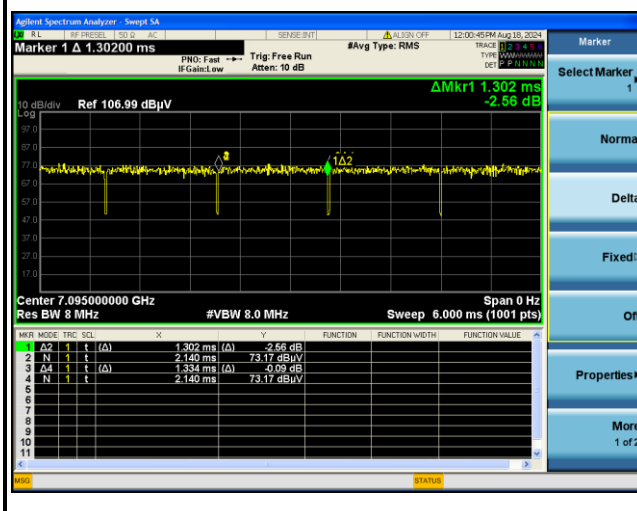

5GHz 802.11ax HE40 Full RU

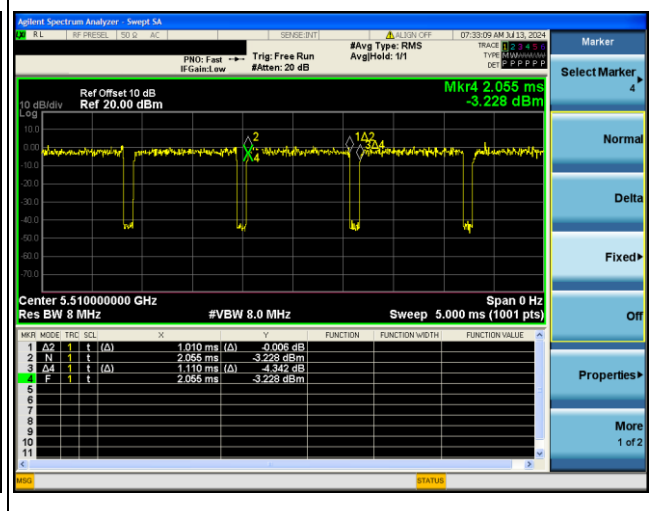

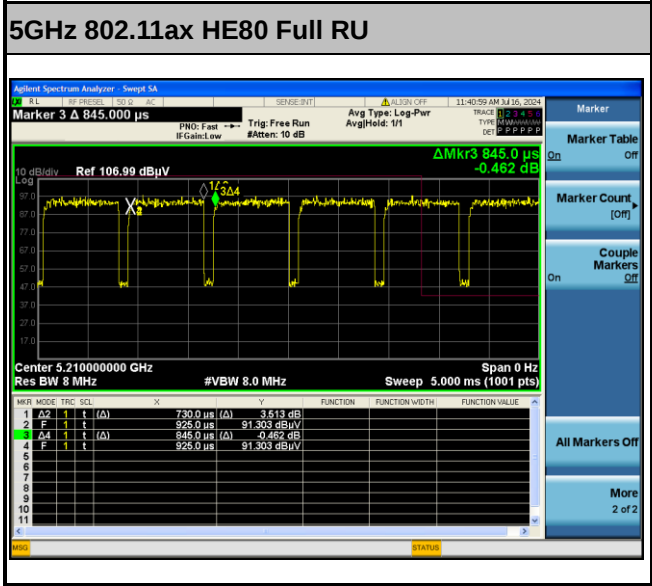


<For Conducted test>

Antenna	Band	Duty Cycle(%)	T(us)	Duty Factor(dB)
4+3	802.11a for Ant.4	93.72	1432	0.28
4+3	802.11a for Ant.3	93.46	1430	0.29
4+3	5GHz 802.11n HT20 Full RU for Ant. 4	93.06	1340	0.31
4+3	5GHz 802.11n HT20 Full RU for Ant. 3	93.06	1340	0.31
4+3	5GHz 802.11n HT40 Full RU for Ant. 4	92.70	1270	1370
4+3	5GHz 802.11n HT40 Full RU for Ant. 3	92.70	1270	1370
4+3	5GHz 802.11ac VHT20 for Ant. 4	93.08	1345	0.31
4+3	5GHz 802.11ac VHT20 for Ant. 3	92.82	1344	0.32
4+3	5GHz 802.11ac VHT40 for Ant. 4	88.40	1280	0.54
4+3	5GHz 802.11ac VHT40 for Ant. 3	88.40	1280	0.54
4+3	5GHz 802.11ac VHT80 for Ant. 4	89.90	890	0.46
4+3	5GHz 802.11ac VHT80 for Ant. 3	89.90	890	0.46
4+3	5GHz 802.11ax HE20 Full RU for Ant. 4	91.27	1045	0.40
4+3	5GHz 802.11ax HE20 Full RU for Ant. 3	91.27	1045	0.40
4+3	5GHz 802.11ax HE20 26 RU for Ant. 4	89.47	850	0.48
4+3	5GHz 802.11ax HE20 26 RU for Ant. 3	89.47	850	0.48
4+3	5GHz 802.11ax HE20 52 RU for Ant. 4	88.64	780	0.52
4+3	5GHz 802.11ax HE20 52 RU for Ant. 3	88.57	775	0.53
4+3	5GHz 802.11ax HE20 106 RU for Ant. 4	87.42	695	0.58
4+3	5GHz 802.11ax HE20 106 RU for Ant. 3	87.34	690	0.59
4+3	5GHz 802.11ax HE40 for Ant. 4	91.15	1030	0.40
4+3	5GHz 802.11ax HE40 for Ant. 3	91.11	1025	0.40
4+3	5GHz 802.11ax HE80 for Ant. 4	88.24	750	0.54
4+3	5GHz 802.11ax HE80 for Ant. 3	88.24	750	0.54



MIMO <Ant. 4+3>

802.11a

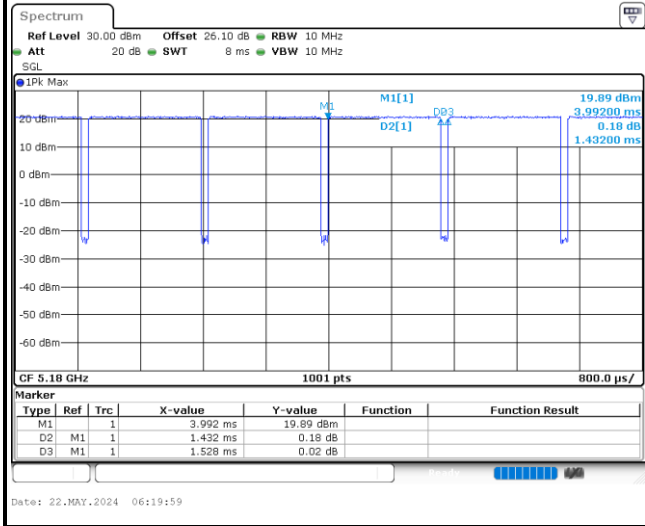

Appendix E. Spot Check Evaluation on GTF7P, G3Y12

Conducted power test and radiated spurious emission test configurations were selected from the worst cases identified in the reference model and tested to demonstrate the test data from reference model remains representative for the variant model.

The deviation between the spot check and the referenced values is within 3dB, therefore data referencing is justified according to the guidance in the ECR inquiry

Test Item	Mode	A4RGXQ96 Parent Worst Result	A4RGTF7P Variant Check Result	Difference (dB)
Conducted Power (dBm)	WWAN GPRS 850 Class 8 CH128	32.60	32.32	0.28
	WWAN GPRS 1900 Class 8 CH512	29.28	29.21	0.07
	WWAN WCDMA Band V RMC 12.2K CH4182	24.77	24.62	0.15
	WWAN LTE Band 5 10MHz 1RB0 QPSK Mid	24.72	24.71	0.01
	WWAN LTE Band 7 20MHz 1RB0 QPSK Mid	24.45	24.33	0.12
	WWAN LTE Band 12 10MHz 1RB0 QPSK Mid	24.66	24.66	0.00
	WWAN LTE Band 26 (90S) 5MHz 1RB0 QPSK High	24.70	24.65	0.05
	WWAN LTE Band 41 HPUE 15MHz 1RB37 QPSK Mid	26.43	26.36	0.07
	WWAN NR n5 10MHz 1RB1 QPSK Low	25.18	25.02	0.16
	WWAN NR n7 25MHz 1RB1 QPSK High	24.83	24.58	0.25
	WWAN NR n12 15MHz 36RB18 BPSK Low	24.88	24.84	0.04
	WWAN NR n26 5MHz 1RB23 QPSK Low	25.19	24.92	0.27
	WWAN NR n41 HPUE 100MHz 1RB1 QPSK Low	27.15	26.96	0.19
	WWAN NR n77 HPUE 50MHz 1RB1 QPSK Low	27.20	26.93	0.27

Test Item	Mode	ANT	A4RGXQ96 Parent Worst Result	A4RGTF7P Variant Check Result	Difference (dB)
Conducted Power (dBm)	BT (BR 1Mbps CH39)	4	20.69	20.59	0.10
	BLE / BT EDR (BLE 2Mbps CH19)	4	20.20	20.16	0.04
	BLE CS GFSK_DTS (2Mbps CH38)	4	20.50	20.30	0.20
	BLE CS ASK_FHSS (2Mbps CH38)	4	20.29	20.12	0.17
	WiFi 2.4GHz (HE20 CH06 Full RU)	4+3	23.98	23.85	0.13
	WiFi 5GHz (11a CH169)	4+3	22.55	22.29	0.26
	WiFi 6GHz (11a CH049)	4+3	21.69	21.60	0.09



Test Item	Mode	ANT	A4RGXQ96 Parent Worst Result	A4RGTF7P Variant Check Result	Difference (dB)
Field Strength (dBuV/m)	NFC 13.56MHz	-	25.45	23.86	1.59
Radiated Spurious Emission (dBuV/m)	NFC 13.56MHz	-	-3.19	-3.27	0.08
Radiated Spurious Emission (dBm)	WWAN GSM 850 CH189	0	-18.90	-21.23	2.33
	WWAN GSM 1900 CH512	2	-20.77	-22.79	2.02
	WWAN WCDMA Band V CH4132	0	-41.92	-43.94	2.02
	WWAN LTE Band 26 10MHz 1RB0 QPSK High	0	-32.45	-32.71	0.26
	WWAN LTE Band 7 10MHz 1RB0 QPSK High	0	-21.91	-23.47	1.56
	WWAN LTE Band 12 10MHz 1RB0 QPSK Low	1	-32.20	-33.22	1.02
	WWAN LTE Band 26 (90S) 15MHz 1RB0 QPSK Mid	0	-20.42	-22.30	1.88
	WWAN LTE Band 41 HPUE 10MHz 1RB0 QPSK Low	0	-10.25	-11.23	0.98
	WWAN NR n26 20MHz 1RB1 BPSK High	1	-29.65	-31.05	1.40
	WWAN NR n7 20MHz 1RB1 BPSK Low	0	-21.64	-21.87	0.23
	WWAN NR n12 10MHz 1RB1 BPSK Low	1	-35.23	-36.03	0.80
	WWAN NR n26 (90S) 15MHz 1RB1 BPSK Mid	1	-31.65	-33.29	1.64
	WWAN NR n41 20MHz 1RB1 BPSK Mid	2	-12.22	-14.37	2.15
	WWAN NR n77 HPUE (27Q) 20MHz 1RB1 BPSK Low	6	-20.74	-22.69	1.95
		2	-37.09	-39.98	2.89

Test Item	Mode	ANT	A4RGXQ96 Parent Worst Result	A4RGTF7P Variant Check Result	Difference (dB)
Radiated Spurious Emission (dBuV/m)	BT (BR 1Mbps CH78)	4	-16.58	-19.44	2.86
	BLE / BT EDR (BLE 1Mbps CH39)	4	-4.11	-6.08	1.97
	BLE CS GFSK_DTS (2Mbps CH76)	3	-1.95	-2.16	0.21
	BLE CS ASK_FHSS (2Mbps CH76)	3	-10.53	-11.69	1.16
	WiFi 2.4GHz (HE20 CH12 Full RU)	4+3	-1.58	-2.78	1.20
	WiFi 5GHz (HE20 CH136 Full RU)	4+3	-1.52	-2.24	0.72
	WiFi 6GHz (11a CH001)	4+3	-1.89	-2.39	0.50

Note: BLE CS means BLE Channel Sounding.



Reference detail Section

Rule Part	Equipment Class	Wireless Technology	Rule Part & Frequency Band	Reference FCC ID (Parent)	Type Grant/ Permissive Change	Reference Exhibit	Full report referenced	FCC ID Filling (Variant)
15E	NII	WiFi	§15.407 5GHz	A4RGXQ96	Original Grant	GXQ96_FCC Part 15E UNII-4	Y	A4RGTF7P



List of Measuring Equipment

Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
LOOP Antenna	Rohde & Schwarz	HFH2-Z2	100488	9 kHz~30 MHz	Sep. 12, 2023	Aug. 08, 2024 ~ Aug. 12, 2024	Sep. 11, 2024	Radiation (03CH21-HY)
Bilog Antenna	TESEQ & WOKEN	CBL 6111D & 00802N1D-06	63303 & 001	30MHz~1GHz	Oct. 15, 2023	Aug. 08, 2024 ~ Aug. 12, 2024	Oct. 14, 2024	Radiation (03CH21-HY)
Double Ridge Horn Antenna	ETS-Lindgren	3117	00227880	1GHz~18GHz	Oct. 04, 2023	Aug. 08, 2024 ~ Aug. 12, 2024	Oct. 03, 2024	Radiation (03CH21-HY)
Double Ridged Guide Horn Antenna	RFSPIN	DRH18-E	LE2C03A18EN	1GHz~18GHz	Jul. 11, 2024	Aug. 08, 2024 ~ Aug. 12, 2024	Jul. 10, 2025	Radiation (03CH21-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA 9170	1223	18GHz~40GHz	Jun. 24, 2024	Aug. 08, 2024 ~ Aug. 12, 2024	Jun. 23, 2025	Radiation (03CH21-HY)
Amplifier	SONOMA	310N	421580	30MHz~1GHz	Jul. 14, 2024	Aug. 08, 2024 ~ Aug. 12, 2024	Jul. 13, 2025	Radiation (03CH21-HY)
Amplifier	EMEC	EM01G18GA	060876	1GHz~18GHz	Sep. 28, 2023	Aug. 08, 2024 ~ Aug. 12, 2024	Sep. 27, 2024	Radiation (03CH21-HY)
Preamplifier	EMEC	EM18G40G	060871	18GHz~40GHz	Aug. 30, 2023	Aug. 08, 2024 ~ Aug. 12, 2024	Aug. 29, 2024	Radiation (03CH21-HY)
Spectrum Analyzer	Keysight	N9010B	MY62170358	10Hz~44GHz	Aug. 28, 2023	Aug. 08, 2024 ~ Aug. 12, 2024	Aug. 27, 2024	Radiation (03CH21-HY)
Signal Generator	Rohde & Schwarz	SMW200A	111391	N/A	Jan. 23, 2024	Aug. 08, 2024 ~ Aug. 12, 2024	Jan. 22, 2025	Radiation (03CH21-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	803951/2	9K~30M	Mar. 06, 2024	Aug. 08, 2024 ~ Aug. 12, 2024	Mar. 05, 2025	Radiation (03CH21-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	804397/2,804612/2,804614/2	30MHz~40GHz	Oct. 24, 2023	Aug. 08, 2024 ~ Aug. 12, 2024	Oct. 23, 2024	Radiation (03CH21-HY)
Hygrometer	TECPEL	DTM-303A	TP211568	N/A	Oct. 30, 2023	Aug. 08, 2024 ~ Aug. 12, 2024	Oct. 29, 2024	Radiation (03CH21-HY)
Controller	EMEC	EM 1000	N/A	Control Turn table & Ant Mast	N/A	Aug. 08, 2024 ~ Aug. 12, 2024	N/A	Radiation (03CH21-HY)
Antenna Mast	EMEC	AM-BS-4500-B	N/A	1~4m	N/A	Aug. 08, 2024 ~ Aug. 12, 2024	N/A	Radiation (03CH21-HY)
Turn Table	EMEC	TT 2000	N/A	0~360 Degree	N/A	Aug. 08, 2024 ~ Aug. 12, 2024	N/A	Radiation (03CH21-HY)
Software	Audix	E3 6.2009-8-24	RK-002349	N/A	N/A	Aug. 08, 2024 ~ Aug. 12, 2024	N/A	Radiation (03CH21-HY)
DC Power Supply	GW Instek	GPE2323	GET910884	0V~64V ;0A~6A	Nov. 16, 2023	Jul. 31, 2024~ Aug. 03, 2024	Nov. 15, 2024	Conducted (TH03-HY)
Signal Analyzer	Rohde & Schwarz	FSV3044	101049	10Hz~44GHz	Sep. 26, 2023	Jul. 31, 2024~ Aug. 03, 2024	Sep. 25, 2024	Conducted (TH03-HY)
Temperature Chamber	ESPEC	SU-241	92003713	-30℃ ~95℃	May 14, 2024	Jul. 31, 2024~ Aug. 03, 2024	May 13, 2025	Conducted (TH03-HY)
Hygrometer	TECPEL	DTM-303B	TP200886	NA	Mar. 14, 2024	Jul. 31, 2024~ Aug. 03, 2024	Mar. 13, 2025	Conducted (TH03-HY)
Base Station (Measure)	Anritsu	MT8000A	6262148275	FR1	Oct. 24, 2023	Jul. 31, 2024~ Aug. 03, 2024	Oct. 23, 2024	Conducted (TH03-HY)
Coupler	MVE	MVE-4816-10	A400024	N/A	Jun. 27, 2024	Jul. 31, 2024~ Aug. 03, 2024	Jun. 26, 2025	Conducted (TH03-HY)
Software 1	Sporton	FCC 5GNR_FSV3044_20231106	N/A	Conducted Test Item	N/A	Jul. 31, 2024~ Aug. 03, 2024	N/A	Conducted (TH03-HY)

—THE END—