



FCC RADIO TEST REPORT

BLUETOOTH BR

FCC ID : A4RGU0NP
Equipment : Phone
Model Name : GU0NP, GM66V
Applicant : Google LLC
1600 Amphitheatre Parkway,
Mountain View, CA, 94043 USA
Standard : FCC Part 15 Subpart C §15.247

The product was received on Feb. 27, 2025 and testing was performed from Mar. 06, 2025 to Apr. 25, 2025. We, Sporton International Inc. Wensan Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval from Sporton International Inc. Wensan Laboratory, the test report shall not be reproduced except in full.

Louis Wu

Approved by: Louis Wu

Sporton International Inc. Wensan Laboratory

No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan (R.O.C.)



Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
1 General Description.....	5
1.1 Product Feature of Equipment Under Test.....	5
1.2 Modification of EUT	6
1.3 Testing Location	7
1.4 Applicable Standards.....	7
2 Test Configuration of Equipment Under Test	8
2.1 Carrier Frequency Channel	8
2.2 Test Mode.....	9
2.3 Connection Diagram of Test System.....	10
2.4 Support Unit used in test configuration and system	10
2.5 EUT Operation Test Setup	11
2.6 Measurement Results Explanation Example.....	11
3 Test Result.....	12
3.1 Number of Channel Measurement	12
3.2 Hopping Channel Separation Measurement	13
3.3 Dwell Time Measurement.....	14
3.4 20dB and 99% Bandwidth Measurement	15
3.5 Output Power Measurement.....	16
3.6 Conducted Band Edges Measurement.....	17
3.7 Conducted Spurious Emission Measurement	18
3.8 Radiated Band Edges and Spurious Emission Measurement	19
3.9 AC Conducted Emission Measurement.....	23
3.10 Antenna Requirements.....	25
4 List of Measuring Equipment	26
5 Measurement Uncertainty	28
Appendix A. Conducted Test Results	
Appendix B. AC Conducted Emission Test Result	
Appendix C. Radiated Spurious Emission Test Data	
Appendix D. Duty Cycle Plots	
Appendix E. Setup Photographs	



History of this test report

Report No.	Version	Description	Issue Date
FR4N0920A	01	Initial issue of report	May 19, 2025
FR4N0920A	02	Revise Appendix C This report is an updated version, replacing the report issued on May 19, 2025.	Jun. 03, 2025

Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.1	15.247(a)(1)	Number of Channels	Pass	-
3.2	15.247(a)(1)	Hopping Channel Separation	Pass	-
3.3	15.247(a)(1)	Dwell Time of Each Channel	Pass	-
3.4	15.247(a)(1)	20dB Bandwidth	Pass	-
3.4	2.1049	99% Occupied Bandwidth	Pass	-
3.5	15.247(b)(1) 15.247(b)(4)	Peak Output Power	Pass	-
3.6	15.247(d)	Conducted Band Edges	Pass	-
3.7	15.247(d)	Conducted Spurious Emission	Pass	-
3.8	15.247(d)	Radiated Band Edges and Radiated Spurious Emission	Pass	-
3.9	15.207	AC Conducted Emission	Pass	-
3.10	15.203	Antenna Requirement	Pass	-

Conformity Assessment Condition:

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacture who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2. The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty".

Disclaimer:

1. The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.
2. The GU0NP and GM66V are 100% identical in Hardware / Software to each other, and only have different model names for marketing segmentation. The test sample are all model GU0NP.

Reviewed by: William Chen

Report Producer: Lucy Wu

1 General Description

1.1 Product Feature of Equipment Under Test

Product Feature
General Specs GSM/WCDMA/LTE/5G NR/NTN, Bluetooth, BLE, BLE channel sounding, Thread, Wi-Fi 802.11be, NFC, WPC Rx, UWB and GNSS Rx.
Antenna Type Bluetooth: <Ant. 4> : ILA Antenna <Ant. 3> : IFA Antenna

EUT Information List	
S/N	Performed Test Item
52171FDCG0005B	RF Conducted Measurement
52181FDCG0008Q	Radiated Spurious Emission
52181FDCG0008P	Conducted Emission

Antenna information (Open Mode)		
2400 MHz ~ 2483.5 MHz	Peak Gain (dBi)	Ant.4: -2.36
		Ant.3: -2.55

Antenna information (Close Mode)		
2400 MHz ~ 2483.5 MHz	Peak Gain (dBi)	Ant.4: -2.26
		Ant.3: -2.53

Remark:

1. MIMO Ant. 4+3 Directional Gain is a calculated result from MIMO Ant. 4 and MIMO Ant. 3. The formula used in calculation is documented in section 1.1.1.
2. Power of MIMO Ant. 4 + Ant. 3 is a calculated result from sum of the power MIMO Ant. 4 and MIMO Ant. 3.
3. The EUT's information above is declared by manufacturer. Please refer to Disclaimer in report summary.

1.1.1 Antenna Directional Gain

Follows FCC KDB 662911 D01 Multiple Transmitter Output v02r01 F2)f)ii)

Directional gain = G_{ANT} + Array Gain, where Array Gain is as follows:

G_{ANT} is set equal to the gain of the antenna having the highest gain.

For the directional gain calculation.

$$DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right]$$

where

Each antenna is driven by no more than one spatial stream;

N_{SS} = the number of independent spatial streams of data;

N_{ANT} = the total number of antennas

$g_{j,k} = 10^{G_k/20}$ if the k th antenna is being fed by spatial stream j , or zero if it is not;
 G_k is the gain in dBi of the k th antenna.

As minimum $N_{SS}=1$ is supported by EUT, the formula can be simplified as:

Directional gain = $10 \cdot \log[(10^{G_1/20} + 10^{G_2/20} + \dots + 10^{G_N/20})^2 / N_{ANT}]$ dBi

Where $G_1, G_2, \dots, G_N$ denote single antenna gain.

The directional gain "DG" is calculated as following table.

			DG for Power	DG for PSD	Power Limit Reduction	PSD Limit Reduction
	Ant 4 (dBi)	Ant 3 (dBi)	(dBi)	(dBi)	(dB)	(dB)
Bluetooth	-2.26	-2.53	0.62	0.62	0.00	0.00

Calculation example:

If a device has two antenna, $G_{ANT4} = -2.26$ dBi; $G_{ANT3} = -2.53$ dBi

Directional gain derived from formula which is

$$10 \times \log \{ \{ [10^{(-2.26 \text{ dBi} / 20)} + 10^{(-2.53 \text{ dBi} / 20)}]^2 \} / 2 \}$$

$$= 0.62 \text{ dBi}$$

Power and PSD limit reduction = Composite gain – 6dBi, (min = 0)

Note: The antenna gain is from both open mode and close mode with highest number.

1.2 Modification of EUT

No modifications made to the EUT during the testing.

1.3 Testing Location

Test Site	Sporton International Inc. Wensan Laboratory
Test Site Location	No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan (R.O.C.) TEL: +886-3-327-0868 FAX: +886-3-327-0855
Test Site No.	Sporton Site No. TH05-HY, CO07-HY, 03CH11-HY

Note: The test site complies with ANSI C63.4 2014 requirement.

FCC designation No.: TW3786

1.4 Applicable Standards

According to the specifications declared by the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart C §15.247
- ♦ FCC KDB Publication No. 558074 D01 15.247 Meas Guidance v05r02
- ♦ FCC KDB 414788 D01 Radiated Test Site v01r01
- ♦ FCC KDB 662911 D01 Multiple Transmitter Output v02r01.
- ♦ ANSI C63.10-2013

Remark:

1. All the test items were validated and recorded in accordance with the standards without any modification during the testing.
2. The TAF code is not including all the FCC KDB listed without accreditation.



2 Test Configuration of Equipment Under Test

2.1 Carrier Frequency Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	0	2402	27	2429	54	2456
	1	2403	28	2430	55	2457
	2	2404	29	2431	56	2458
	3	2405	30	2432	57	2459
	4	2406	31	2433	58	2460
	5	2407	32	2434	59	2461
	6	2408	33	2435	60	2462
	7	2409	34	2436	61	2463
	8	2410	35	2437	62	2464
	9	2411	36	2438	63	2465
	10	2412	37	2439	64	2466
	11	2413	38	2440	65	2467
	12	2414	39	2441	66	2468
	13	2415	40	2442	67	2469
	14	2416	41	2443	68	2470
	15	2417	42	2444	69	2471
	16	2418	43	2445	70	2472
	17	2419	44	2446	71	2473
	18	2420	45	2447	72	2474
	19	2421	46	2448	73	2475
	20	2422	47	2449	74	2476
	21	2423	48	2450	75	2477
	22	2424	49	2451	76	2478
	23	2425	50	2452	77	2479
	24	2426	51	2453	78	2480
	25	2427	52	2454	-	-
	26	2428	53	2455	-	-

2.2 Test Mode


- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, the measured emission level of the EUT was maximized by rotating the EUT on a turntable, adjusting the orientation of the EUT (Open and Close) and EUT antenna in three orthogonal axis (X: flat, Y: portrait, Z: landscape) and accessory (Adapter or Earphone), and adjusting the measurement antenna orientation, following C63.10 exploratory test procedures and find X Plane (Open) with Adapter as worst plane.
- b. The SISO mode conducted power is covered by MIMO mode per chain, so only the MIMO mode is tested.
- c. AC power line Conducted Emission was tested under maximum output power.

The following summary table is showing all test modes to demonstrate in compliance with the standard.


Summary table of Test Cases	
Test Item	Data Rate / Modulation
Conducted Test Cases	Bluetooth BR 1Mbps GFSK
	Mode 1: CH00_2402 MHz
	Mode 2: CH39_2441 MHz
	Mode 3: CH78_2480 MHz
AC Conducted Emission	Mode 1 :Bluetooth BDR (1Mbps) Channel 39 Tx + USB Cable 1 (Charging from AC Adapter)
Remark: - For Radiated Test Cases, the tests were performed with USB Cable 1. - During the preliminary test, both charging modes (Adapter mode and WPC Rx mode) were verified. It is determined that the adaptor mode is the worst case for official test. - The detailed Radiated test modes are shown in Appendix C.	

2.3 Connection Diagram of Test System

<AC Conducted Emission Mode>

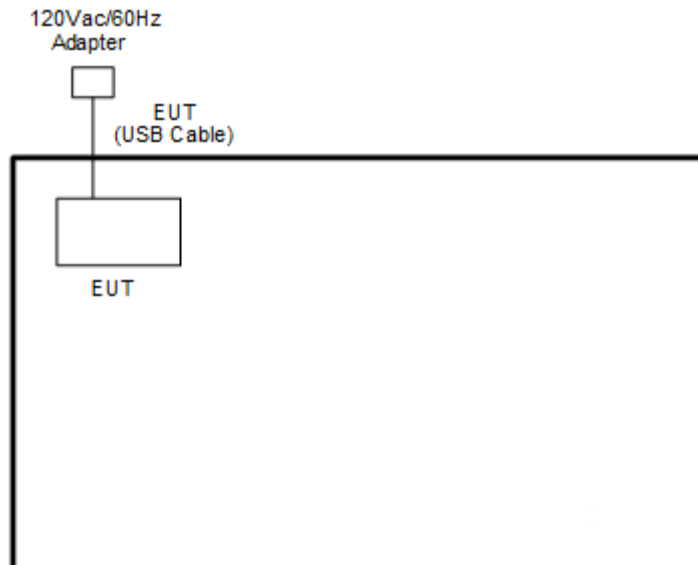

<Bluetooth Tx Mode>

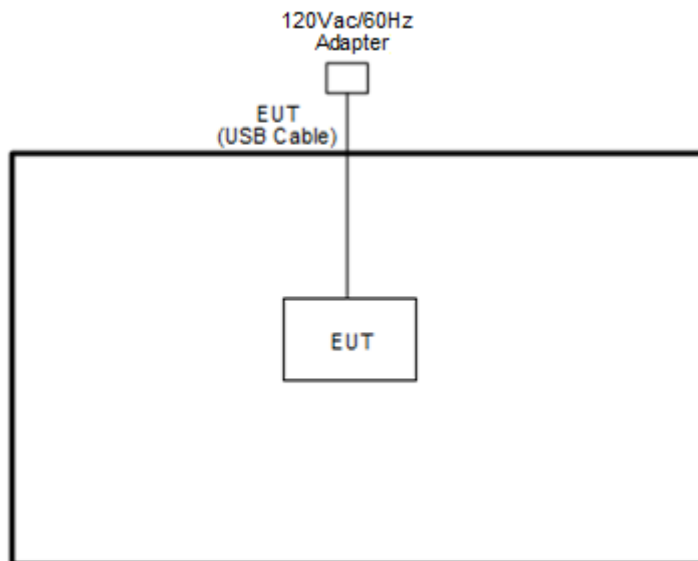

2.4 Support Unit used in test configuration and system

Item	Equipment	Brand Name	Model Name	FCC ID	Data Cable	Power Cord
1.	Adapter	N/A	GW8L7	N/A	N/A	N/A



2.5 EUT Operation Test Setup

The RF test items, utility "BT_DUT_Control_GUI.exe ver.03-11-24" for FHSS was installed in Notebook which was programmed in order to make the EUT get into the engineering modes to provide channel selection, power level, data rate and the application type and for continuous transmitting signals.

2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example:

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 4.2 dB and 10 dB attenuator.

$$\begin{aligned}\text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)} \\ &= 4.2 + 10 = 14.2 \text{ (dB)}\end{aligned}$$

3 Test Result

3.1 Number of Channel Measurement

3.1.1 Limits of Number of Hopping Frequency

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.


3.1.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.1.3 Test Procedure

1. The testing follows ANSI C63.10-2013 clause 7.8.3.
2. The RF output of EUT is connected to the spectrum analyzer by RF cable and attenuator. The path loss is compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Enable the EUT hopping function.
5. Use the following spectrum analyzer settings: Span = the frequency band of operation;
RBW = 300 kHz; VBW $\geq$ RBW; Sweep = auto; Detector function = peak; Trace = max hold.
6. The number of hopping frequency used is defined as the number of total channel.
7. Record the measurement data derived from spectrum analyzer.

3.1.4 Test Setup

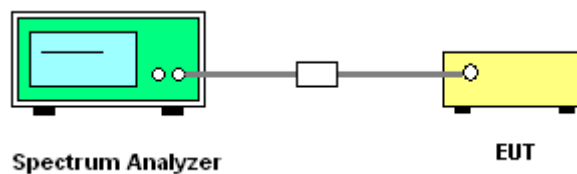

3.1.5 Test Result of Number of Hopping Frequency

Please refer to Appendix A.

3.2 Hopping Channel Separation Measurement

3.2.1 Limit of Hopping Channel Separation

Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater.


3.2.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.2.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 7.8.2.
2. The RF output of EUT is connected to the spectrum analyzer by RF cable and attenuator. The path loss is compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Enable the EUT hopping function.
5. Use the following spectrum analyzer settings:
Span = wide enough to capture the peaks of two adjacent channels;
RBW = 300 kHz; VBW $\geq$ RBW; Sweep = auto; Detector function = peak; Trace = max hold.
6. Measure and record the results in the test report.

3.2.4 Test Setup

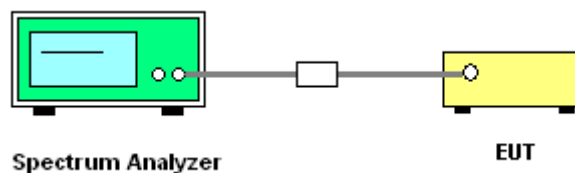

3.2.5 Test Result of Hopping Channel Separation

Please refer to Appendix A.

3.3 Dwell Time Measurement

3.3.1 Limit of Dwell Time

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.


3.3.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.3.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 7.8.4.
2. The RF output of EUT is connected to the spectrum analyzer by RF cable and attenuator. The path loss is compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Enable the EUT hopping function.
5. Use the following spectrum analyzer settings: Span = zero span, centered on a hopping channel; RBW = 1 MHz; VBW $\geq$ RBW; Sweep = as necessary to capture the entire dwell time per hopping channel; Detector function = peak; Trace = max hold.
6. Measure and record the results in the test report.

3.3.4 Test Setup

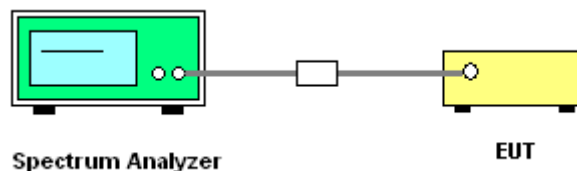

3.3.5 Test Result of Dwell Time

Please refer to Appendix A.

3.4 20dB and 99% Bandwidth Measurement

3.4.1 Limit of 20dB and 99% Bandwidth

Reporting only


3.4.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.4.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 6.9.2 and 6.9.3.
2. The RF output of EUT is connected to the spectrum analyzer by RF cable and attenuator. The path loss is compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Use the following spectrum analyzer settings for 20 dB Bandwidth measurement.
Span = approximately 2 to 5 times the 20 dB bandwidth, centered on a hopping channel;
RBW $\geq$ 1% of the 20 dB bandwidth; VBW $\geq$ RBW; Sweep = auto; Detector function = peak;
Trace = max hold.
5. Use the following spectrum analyzer settings for 99 % Bandwidth measurement.
Span = approximately 1.5 to 5 times the 99% bandwidth, centered on a hopping channel;
RBW $\geq$ 1-5% of the 99% bandwidth; VBW $\geq$ 3 * RBW; Sweep = auto; Detector function = peak;
Trace = max hold.
6. Measure and record the results in the test report.

3.4.4 Test Setup

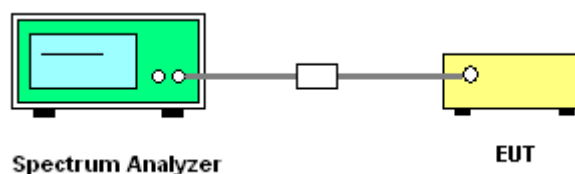

3.4.5 Test Result of 20dB Bandwidth

Please refer to Appendix A.

3.4.6 Test Result of 99% Occupied Bandwidth

Please refer to Appendix A.

3.5 Output Power Measurement

3.5.1 Limit of Output Power

The maximum peak conducted output power of the intentional radiator shall not exceed the following:
For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band 0.125 watts.
If directional gain of transmitting antennas is greater than 6 dBi, the power shall be reduced by the same level in dB comparing to gain minus 6 dBi.


3.5.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.5.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 7.8.5.
2. The RF output of EUT is connected to the power meter by RF cable and attenuator. The path loss is compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Measure the conducted output power with cable loss and record the results in the test report.
5. Measure and record the results in the test report.

3.5.4 Test Setup

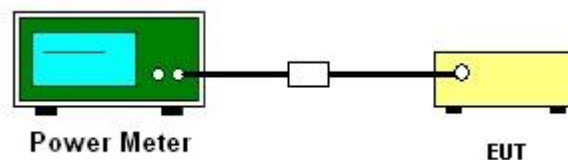

3.5.5 Test Result of Peak Output Power

Please refer to Appendix A.

3.5.6 Test Result of Average Output Power (Reporting Only)

Please refer to Appendix A.

3.6 Conducted Band Edges Measurement

3.6.1 Limit of Band Edges

In any 100 kHz bandwidth outside the intentional radiation frequency band, the radio frequency power shall be at least 20 dB below the highest level of the radiated power. In addition, radiated emissions which fall in the restricted bands must also comply with the radiated emission limits.


3.6.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.6.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 7.8.6.
2. Set the maximum power setting and enable the EUT to transmit continuously.
3. Set RBW = 100 kHz, VBW = 300 kHz. Band edge emissions must be at least 20 dB down from the highest emission level within the authorized band as measured with a 100 kHz RBW. The attenuation shall be 30 dB instead of 20 dB when RMS conducted output power procedure is used.
4. Enable hopping function of the EUT and then repeat step 2 and 3.
5. Measure and record the results in the test report.

3.6.4 Test Setup

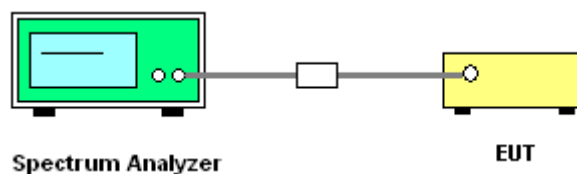

3.6.5 Test Result of Conducted Band Edges

Please refer to Appendix A.

3.6.6 Test Result of Conducted Hopping Mode Band Edges

Please refer to Appendix A.

3.7 Conducted Spurious Emission Measurement

3.7.1 Limit of Spurious Emission Measurement

In any 100 kHz bandwidth outside the intentional radiation frequency band, the radio frequency power shall be at least 20 dB below the highest level of the radiated power. In addition, radiated emissions which fall in the restricted bands must also comply with the radiated emission limits.


3.7.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.7.3 Test Procedure

1. The testing follows ANSI C63.10-2013 clause 7.8.8.
2. The RF output of EUT is connected to the spectrum analyzer by RF cable and attenuator. The path loss is compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Set RBW = 100 kHz, VBW = 300 kHz, scan up through 10th harmonic. All harmonics / spurious must be at least 20 dB down from the highest emission level within the authorized band as measured with a 100 kHz RBW.
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

3.7.4 Test Setup

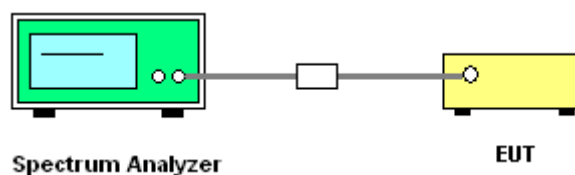

3.7.5 Test Result of Conducted Spurious Emission

Please refer to Appendix A.

3.8 Radiated Band Edges and Spurious Emission Measurement

3.8.1 Limit of Radiated Band Edges and Spurious Emission

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics / spurious must be at least 20 dB below the highest emission level within the authorized band. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.8.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.


3.8.3 Test Procedures

1. The EUT is placed on a turntable with 0.8 meter for frequency below 1 GHz and 1.5 meter for frequency above 1 GHz respectively above ground.
2. The EUT is set 3 meters away from the receiving antenna, which is mounted on the top of a variable height antenna tower.
3. For each suspected emission, the EUT is arranged to its worst case and then tune the Antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level to comply with the guidelines.
4. Set the maximum power setting and enable the EUT to transmit continuously.
5. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW = 100 kHz for $f < 1$ GHz, RBW = 1 MHz for $f > 1$ GHz ; VBW $\geq$ RBW; Sweep = auto; Detector function = peak; Trace = max hold for peak
 - (3) For average measurement: use duty cycle correction factor method per 15.35(c).
Duty cycle = On time/100 milliseconds
On time = $N_1 * L_1 + N_2 * L_2 + \dots + N_{n-1} * L_{n-1} + N_n * L_n$
Where N_1 is number of type 1 pulses, L_1 is length of type 1 pulses, etc.
Average Emission Level = Peak Emission Level + $20 * \log$ (Duty cycle)
6. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
7. Radiated testing below 1 GHz is performed by adjusting the antenna tower from 1 m to 4 m and by rotating the turn table from 0 degree to 360 degrees to find the peak maximum hold reading. When there is no suspected emission found and the emission level is with at least 6 dB margin against QP limit line, the position is marked as “-”.
8. Radiated testing above 1 GHz is performed by adjusting the antenna tower from 1 m to 4 m and by rotating the turn table from 0 degree to 360 degrees to find the peak maximum hold reading for scanning all frequencies. When there is no suspected emission found and the harmonic emission level is with at least 6 dB margin against average limit line, the position is marked as “-”.


Note: The average levels are calculated from the peak level corrected with duty cycle correction factor (-24.76dB) derived from $20 \log$ (dwell time/100ms). This correction is only for signals that hop with the fundamental signal, such as band-edge and harmonic. Other spurious signals that are independent of the hopping signal would not use this correction.

3.8.4 Test Setup


For radiated test below 30MHz

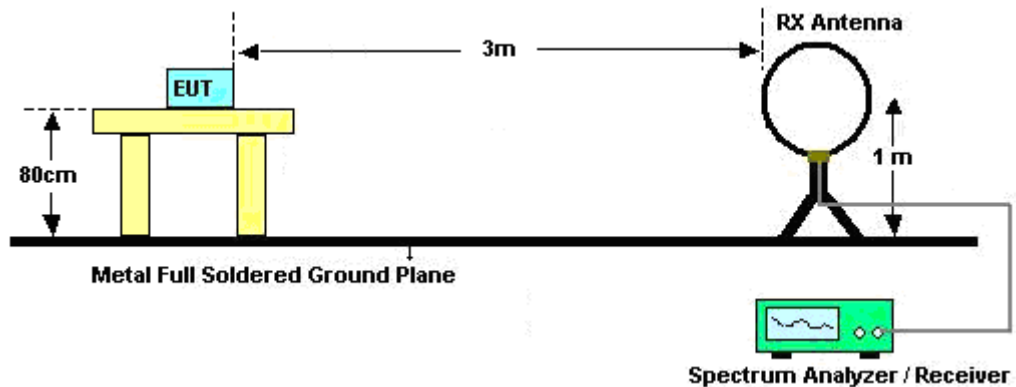


For radiated test from 30MHz to 1GHz

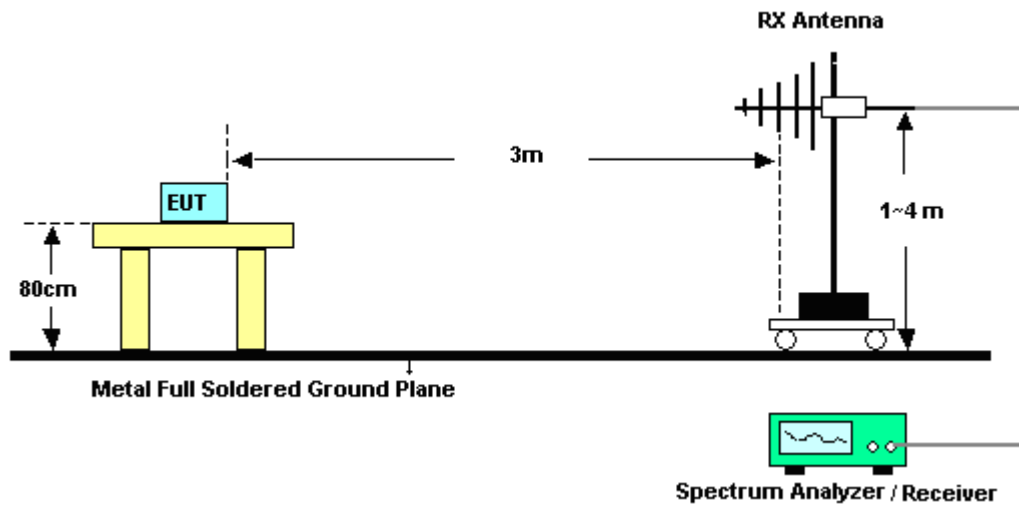

For radiated test from 1GHz to 18GHz

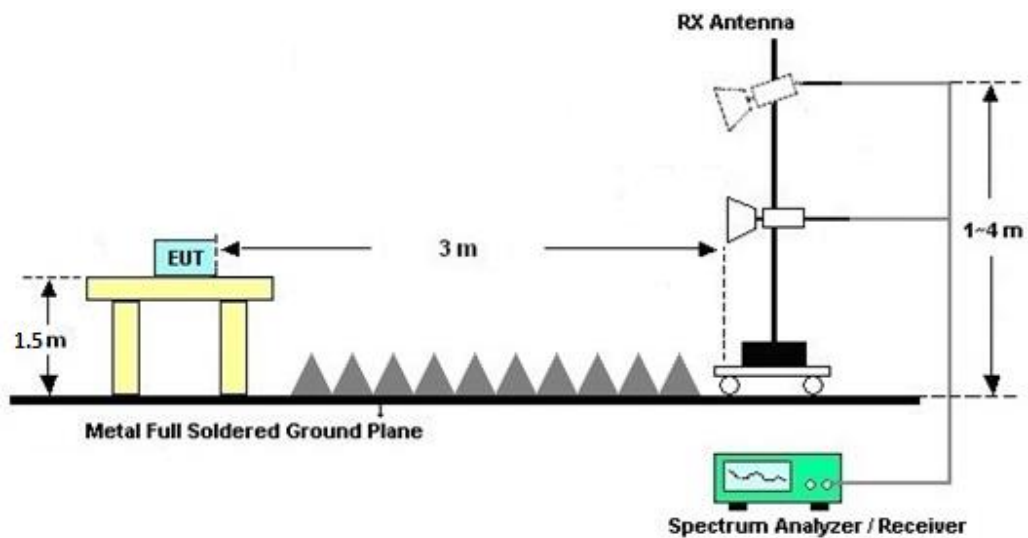

For radiated test above 18GHz

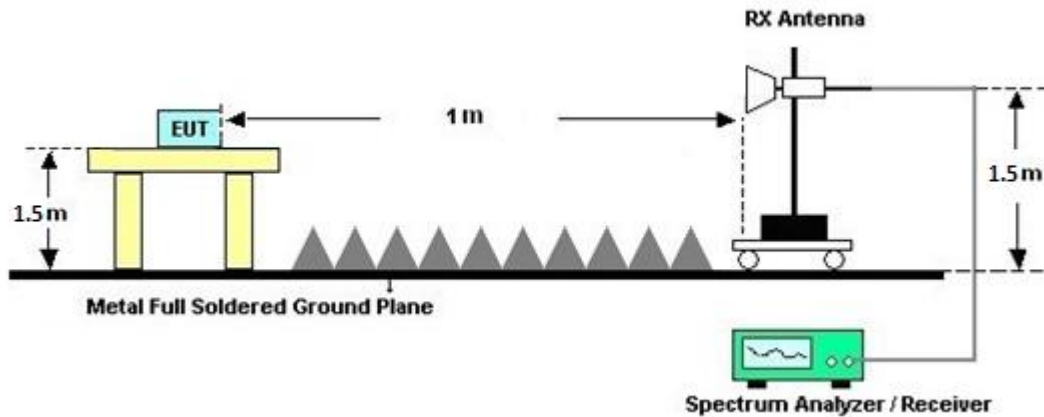

3.8.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which starts from 9 kHz to 30 MHz, is pre-scanned and the result which is 20 dB lower than the limit line is not reported.

There is adequate comparison measurement of both open-field test site and alternative test site - semi-Anechoic chamber according to 414788 D01 Radiated Test Site v01r01, and the result comes out very similar.

3.8.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix C.

3.8.7 Duty Cycle

Please refer to Appendix D.

3.8.8 Test Result of Radiated Spurious Emission (30MHz ~ 10th Harmonic)

Please refer to Appendix C.

3.9 AC Conducted Emission Measurement

3.9.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.9.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.9.3 Test Procedures

1. The EUT is placed 0.4 meter away from the conducting wall of the shielding room, and is kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN shall be used.
6. Both Line and Neutral shall be tested in order to find out the maximum conducted emission.
7. The frequency range from 150 kHz to 30 MHz is scanned.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9 kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.

3.9.4 Test Setup

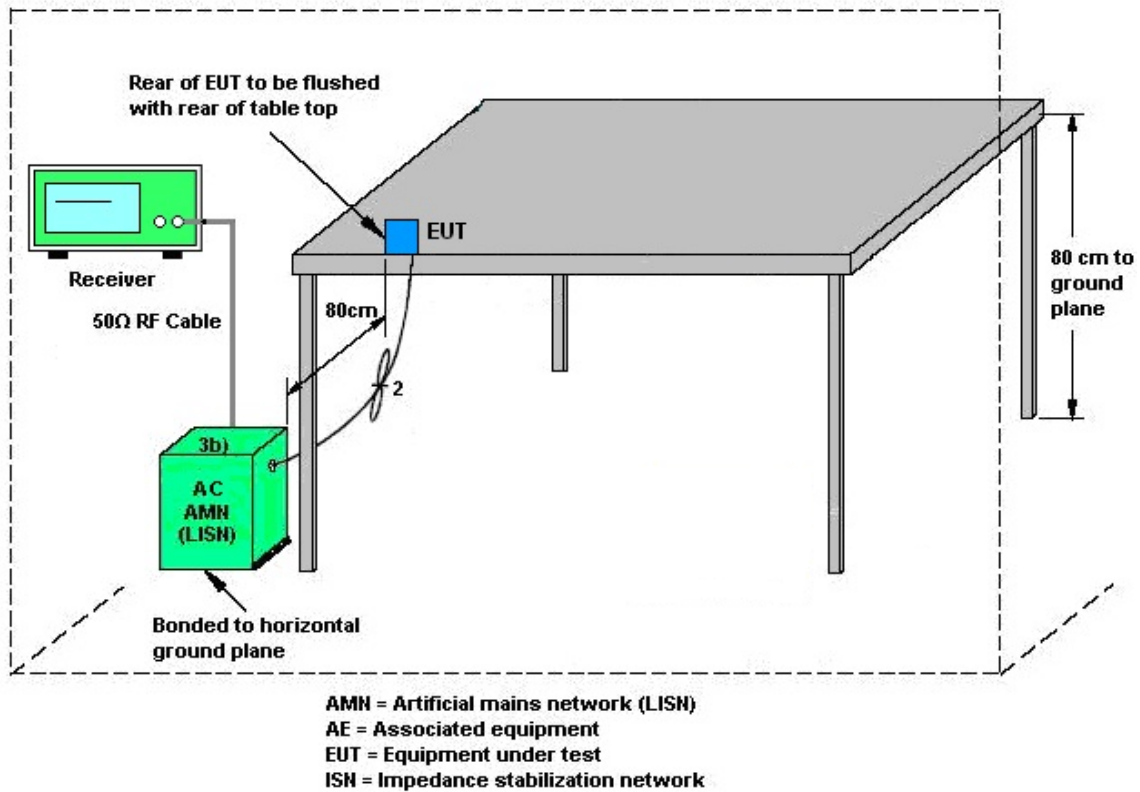

3.9.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



3.10 Antenna Requirements

3.10.1 Standard Applicable

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of § 15.211, 15.213, 15.217, 15.219, 15.221, or § 15.236. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with § 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

3.10.2 Antenna Anti-Replacement Construction

- b) Unique (non-standard) antenna connector.
- (3) Use of a standard connector is also allowed if the connector is within the transmitter enclosure and can only be accessed by disassembly of the transmitter, where such disassembly is not normally required. The user manual must not show that user has access to the connector.



4 List of Measuring Equipment

Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Bilog Antenna	TESEQ	CBL 6111D & 00800N1D01N-06	37059 & 01	30MHz~1GHz	Nov. 27, 2024	Mar. 06, 2025~ Apr. 22, 2025	Nov. 26, 2025	Radiation (03CH11-HY)
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100488	9kHz~30MHz	Aug. 29, 2024	Mar. 06, 2025~ Apr. 22, 2025	Aug. 28, 2025	Radiation (03CH11-HY)
Horn Antenna	SCHWARZBECK	BBHA 9120 D	9120D-01620	1GHz~18GHz	Aug. 28, 2024	Mar. 06, 2025~ Apr. 22, 2025	Aug. 27, 2025	Radiation (03CH11-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA 9170	1223	18GHz~40GHz	Jun. 24, 2024	Mar. 06, 2025~ Apr. 22, 2025	Jun. 23, 2025	Radiation (03CH11-HY)
Amplifier	SONOMA	310N	187312	9kHz~1GHz	Dec. 07, 2024	Mar. 06, 2025~ Apr. 22, 2025	Dec. 06, 2025	Radiation (03CH11-HY)
Preamplifier	Keysight	83017A	MY53270080	1GHz~26.5GHz	Mar. 25, 2024	Mar. 06, 2025~ Mar. 23, 2025	Mar. 24, 2025	Radiation (03CH11-HY)
Preamplifier	Keysight	83017A	MY53270080	1GHz~26.5GHz	Mar. 24, 2025	Mar. 24, 2025~ Apr. 22, 2025	Mar. 23, 2026	Radiation (03CH11-HY)
Preamplifier	E-INSTRUMENT TECH LTD.	ERA-100M-18G-56-01-A70	EC1900249	1GHz~18GHz	Jan. 21, 2025	Mar. 06, 2025~ Apr. 22, 2025	Jan. 20, 2026	Radiation (03CH11-HY)
Preamplifier	EMEC	EM18G40G	060871	18GHz~40GHz	Aug. 23, 2024	Mar. 06, 2025~ Apr. 22, 2025	Aug. 22, 2025	Radiation (03CH11-HY)
Spectrum Analyzer	Keysight	N9010A	MY54200486	10Hz~44GHz	Oct. 14, 2024	Mar. 06, 2025~ Apr. 22, 2025	Oct. 13, 2025	Radiation (03CH11-HY)
EMI Test Receiver	Keysight	N9038A(MXE)	MY55420170	20MHz~8.4GHz	Jul. 19, 2024	Mar. 06, 2025~ Apr. 22, 2025	Jul. 18, 2025	Radiation (03CH11-HY)
Controller	EMEC	EM 1000	N/A	Control Turn table & Ant Mast	N/A	Mar. 06, 2025~ Apr. 22, 2025	N/A	Radiation (03CH11-HY)
Antenna Mast	EMEC	AM-BS-4500-B	N/A	1~4m	N/A	Mar. 06, 2025~ Apr. 22, 2025	N/A	Radiation (03CH11-HY)
Turn Table	EMEC	TT 2000	N/A	0~360 Degree	N/A	Mar. 06, 2025~ Apr. 22, 2025	N/A	Radiation (03CH11-HY)
Software	Audix	E3 6.2009-8-24	RK-001053	N/A	N/A	Mar. 06, 2025~ Apr. 22, 2025	N/A	Radiation (03CH11-HY)
Hygrometer	TECPEL	DTM-303B	TP200880	N/A	Aug. 29, 2024	Mar. 06, 2025~ Apr. 22, 2025	Aug. 28, 2025	Radiation (03CH11-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	804013/2	30M~40G	Mar. 05, 2025	Mar. 06, 2025~ Apr. 22, 2025	Mar. 04, 2026	Radiation (03CH11-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	MY2859/2	30MHz~40GHz	Mar. 05, 2025	Mar. 06, 2025~ Apr. 22, 2025	Mar. 04, 2026	Radiation (03CH11-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	803951/2	9k~30M	Mar. 05, 2025	Mar. 06, 2025~ Apr. 22, 2025	Mar. 04, 2026	Radiation (03CH11-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	803951/2	30M~40G	Mar. 05, 2025	Mar. 06, 2025~ Apr. 22, 2025	Mar. 04, 2026	Radiation (03CH11-HY)
Filter	Wainwright	WHKX12-2700-3000-18000-60SS	SN3	3GHz High Pass Filter	Sep. 10, 2024	Mar. 06, 2025~ Apr. 22, 2025	Sep. 09, 2025	Radiation (03CH11-HY)
Filter	Wainwright	WHKX8-5872.5-6750-18000-40SS	SN3	6.75GHz High Pass Filter	Sep. 10, 2024	Mar. 06, 2025~ Apr. 22, 2025	Sep. 09, 2025	Radiation (03CH11-HY)
Filter	Wainwright	WLK4-1000-1530-8000-40SS	SN11	1.53GHz Low Pass Filter	Sep. 10, 2024	Mar. 06, 2025~ Apr. 22, 2025	Sep. 09, 2025	Radiation (03CH11-HY)
Attenuator	HONOVA	5910 SMA-50-005	0028	N/A	Sep. 10, 2024	Mar. 06, 2025~ Apr. 22, 2025	Sep. 09, 2025	Radiation (03CH11-HY)
Filter	Wainwright	WLK10-4630-5093-11000-40SS	SN1	4.5GHz Low Pass Filter	Sep. 10, 2024	Mar. 06, 2025~ Apr. 22, 2025	Sep. 09, 2025	Radiation (03CH11-HY)



Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Hygrometer	TECPEL	DTM-303A	TP201996	N/A	Nov. 01, 2024	Mar. 21, 2025~ Apr. 02, 2025	Oct. 31, 2025	Conducted (TH05-HY)
Power Meter	Anritsu	ML2495A	1036004	N/A	Jul. 04, 2024	Mar. 21, 2025~ Apr. 02, 2025	Jul. 03, 2025	Conducted (TH05-HY)
Power Sensor	Anritsu	MA2411B	1027253	300MHz~40GHz	Jul. 04, 2024	Mar. 21, 2025~ Apr. 02, 2025	Jul. 03, 2025	Conducted (TH05-HY)
Signal Analyzer	Rohde & Schwarz	FSV40	101566	10Hz~40GHz	Aug. 23, 2024	Mar. 21, 2025~ Apr. 02, 2025	Aug. 22, 2025	Conducted (TH05-HY)
Switch Control Mainframe	Burgeon	ETF-058	EC1300484 (BOX3)	N/A	May 20, 2024	Mar. 21, 2025~ Apr. 02, 2025	May 19, 2025	Conducted (TH05-HY)
Software	Sporton	BTWIFI_Final_ version_24051 3	N/A	Conducted Other Test Item	N/A	Mar. 21, 2025~ Apr. 02, 2025	N/A	Conducted (TH05-HY)
AC Power Source	ACPOWER	AFC-11003G	F317040033	N/A	N/A	Apr. 25, 2025	N/A	Conduction (CO07-HY)
Software	Rohde & Schwarz	EMC32 V10.30	N/A	N/A	N/A	Apr. 25, 2025	N/A	Conduction (CO07-HY)
Pulse Limiter	SCHWARZBECK	VTSD 9561-F N	9561-F N00373	9kHz~200MHz	Oct. 23, 2024	Apr. 25, 2025	Oct. 22, 2025	Conduction (CO07-HY)
RF Cable	HUBER + SUHNER	RG 214/U	1358175	9kHz~30MHz	Mar. 03, 2025	Apr. 25, 2025	Mar. 02, 2026	Conduction (CO07-HY)
Two-Line V-Network	TESEQ	NNB 51	45051	N/A	Mar. 24, 2025	Apr. 25, 2025	Mar. 23, 2026	Conduction (CO07-HY)
EMI Test Receiver	Rohde & Schwarz	ESR3	102317	9kHz~3.6GHz	Sep. 23, 2024	Apr. 25, 2025	Sep. 22, 2025	Conduction (CO07-HY)

5 Measurement Uncertainty

Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	3.7 dB
---	--------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	6.4 dB
---	--------

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 6000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.1 dB
---	--------

Uncertainty of Radiated Emission Measurement (6000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.3 dB
---	--------

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.3 dB
---	--------

Appendix A. Test Result of Conducted Test Items

Test Engineer:	Benny Ku and Junyu Jhou	Temperature:	21~25	°C
Test Date:	2025/3/21~2025/4/2	Relative Humidity:	51~54	%

TEST RESULTS DATA**20dB and 99% Occupied Bandwidth and Hopping Channel Separation**

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	20dB BW (MHz)		99% Bandwidth (MHz)		Hopping Channel Separation Measurement (MHz)		Hopping Channel Separation Measurement Limit (MHz)		Pass /Fail
					Ant 3	Ant 4	Ant 3	Ant 4	Ant 3	Ant 4	Ant 3	Ant 4	
DH	1Mbps	2	0	2402	1.037	1.036	0.968	0.969	1.289	1.155	1.0365	1.0362	Pass
DH	1Mbps	2	39	2441	1.037	1.035	0.968	0.967	1.168	1.155	1.0368	1.0350	Pass
DH	1Mbps	2	78	2480	1.037	1.036	0.966	0.965	1.172	1.311	1.0365	1.0362	Pass

TEST RESULTS DATA**Dwell Time**

Mod.	Hopping Channel Number Rate	Hops Over Occupancy Time(hops)	Package Transfer Time (msec)	Dwell Time (sec)	Limits (sec)	Pass /Fail
Nomal	79	106.67	2.89	0.31	0.4	Pass
AFH	20	53.33	2.89	0.15	0.4	Pass

TEST RESULTS DATA**Peak Power Table**

DH	CH.	NTX	Peak Power Ant 3 (dBm)	Peak Power Ant 4 (dBm)	Peak Power Total (dBm)	Power Limit (dBm)	Test Result
DH1	0	2	19.01	19.05	22.04	30.00	Pass
	39	2	19.06	18.55	21.82	30.00	Pass
	78	2	19.65	19.82	22.75	30.00	Pass

TEST RESULTS DATA**Average Power Table**
(Reporting Only)

DH	CH.	NTX	Average Power Ant 3 (dBm)	Average Power Ant 4 (dBm)	Average Power Total (dBm)	Duty Factor (dB)
DH1	0	2	18.92	18.83	21.89	5.15
	39	2	18.91	18.50	21.72	5.15
	78	2	19.51	19.64	22.59	5.15

TEST RESULTS DATA**Number of Hopping Frequency**

Number of Hopping (Channel)	Adaptive Frequency Hopping (Channel)	Limits (Channel)	Pass/Fail
79	20	> 15	Pass






MIMO <Ant. 4>


Number of Hopping Frequency



**Hopping Channel Separation**




<1Mbps>

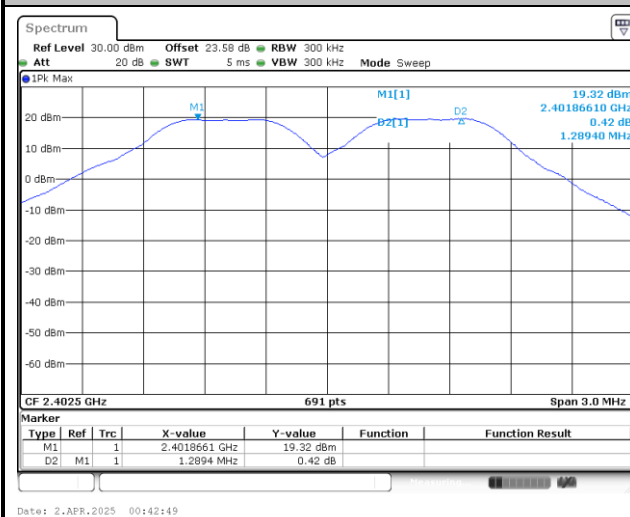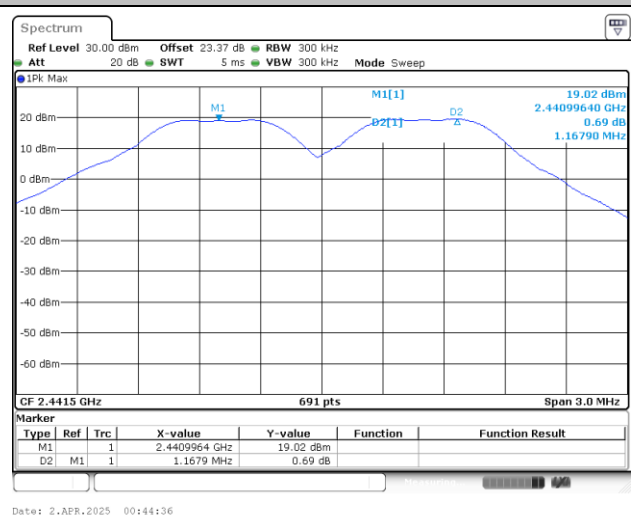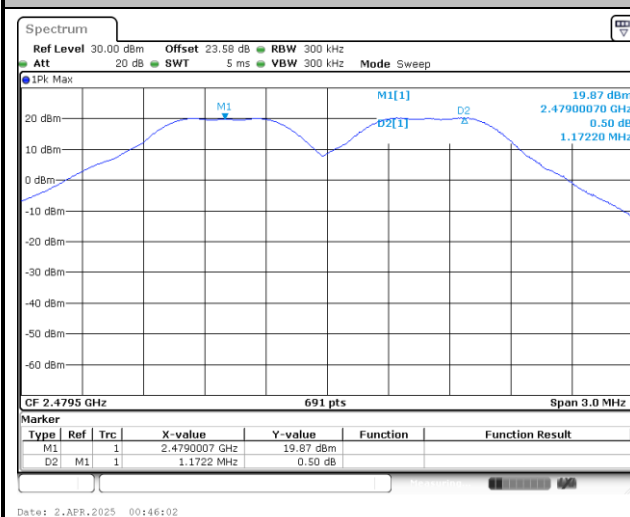Channel Separation Plot on Channel 00 - 01**Channel Separation Plot on Channel 39 - 40****Channel Separation Plot on Channel 77 - 78**

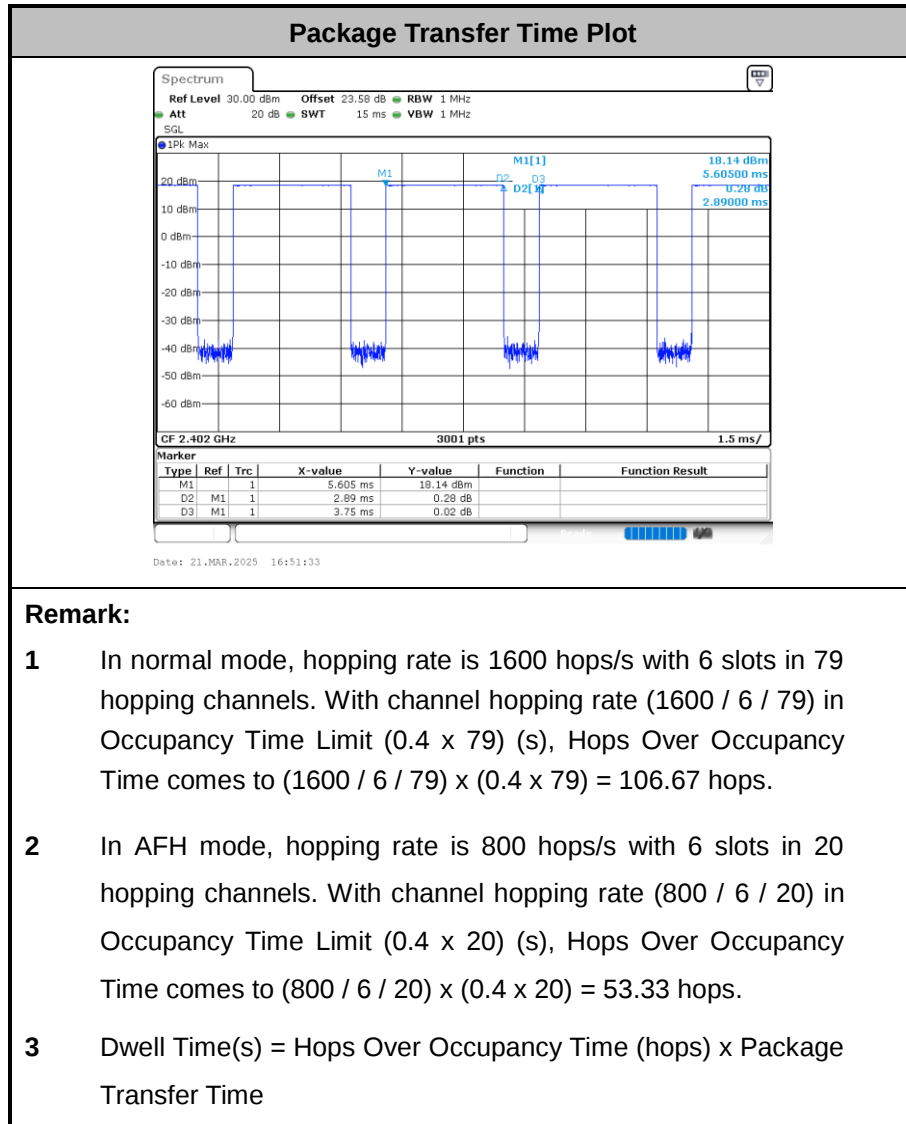Dwell Time


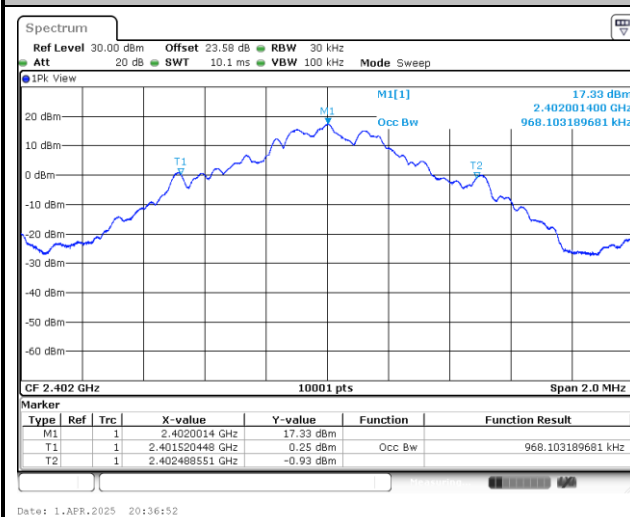
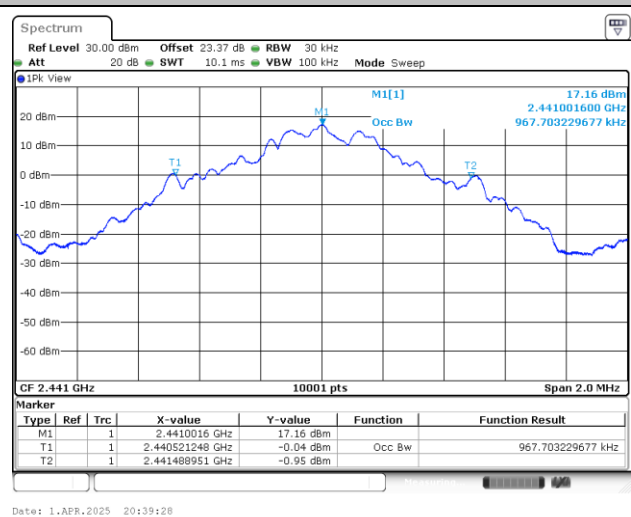
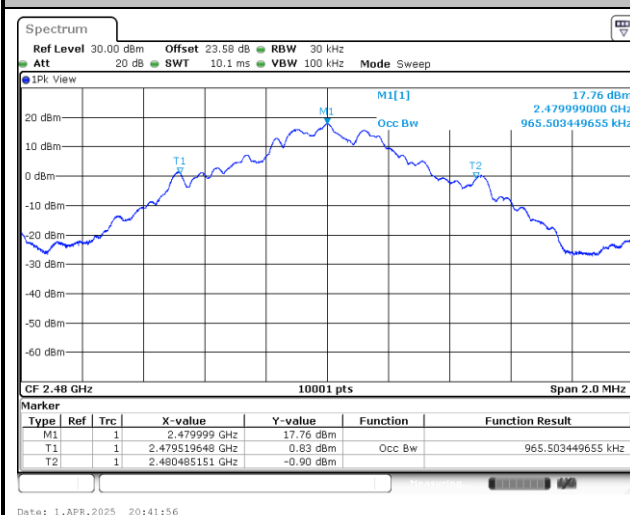
**20dB Bandwidth**

<1Mbps>

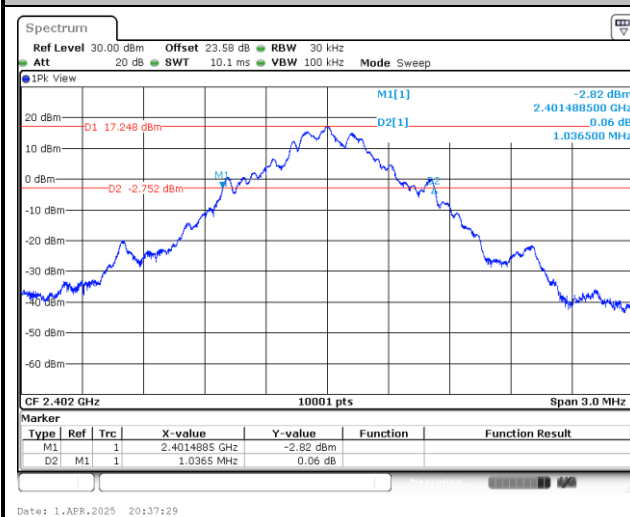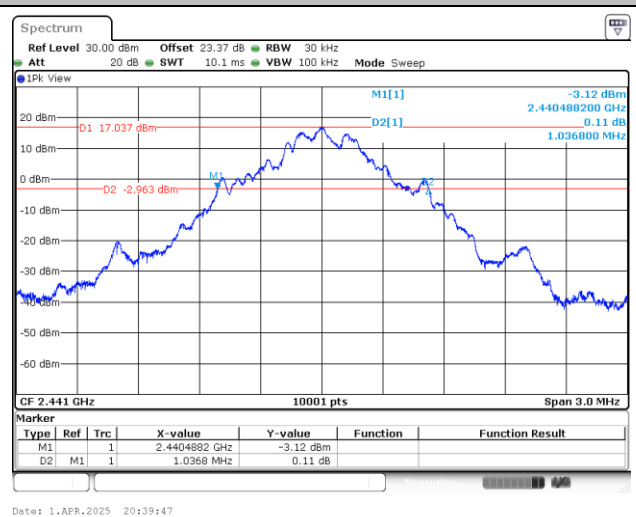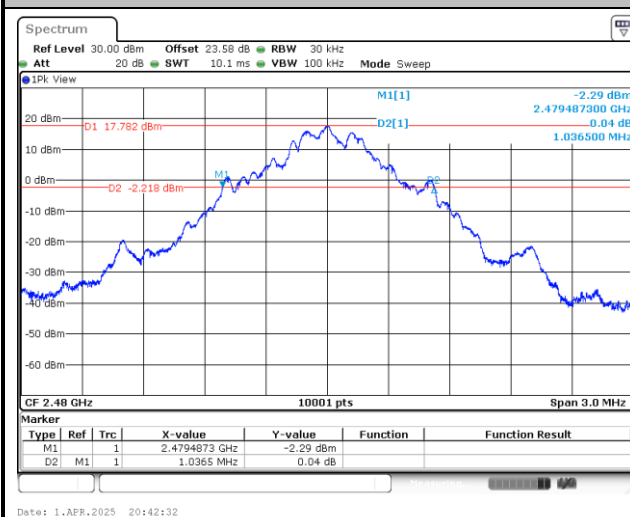20 dB Bandwidth Plot in Channel 00**20 dB Bandwidth Plot in Channel 39****20 dB Bandwidth Plot in Channel 78**

**99% Occupied Bandwidth**


<1Mbps>

99% Occupied Bandwidth on Channel 00**99% Occupied Bandwidth on Channel 39****99% Occupied Bandwidth on Channel 78**




Band Edges

<1Mbps>

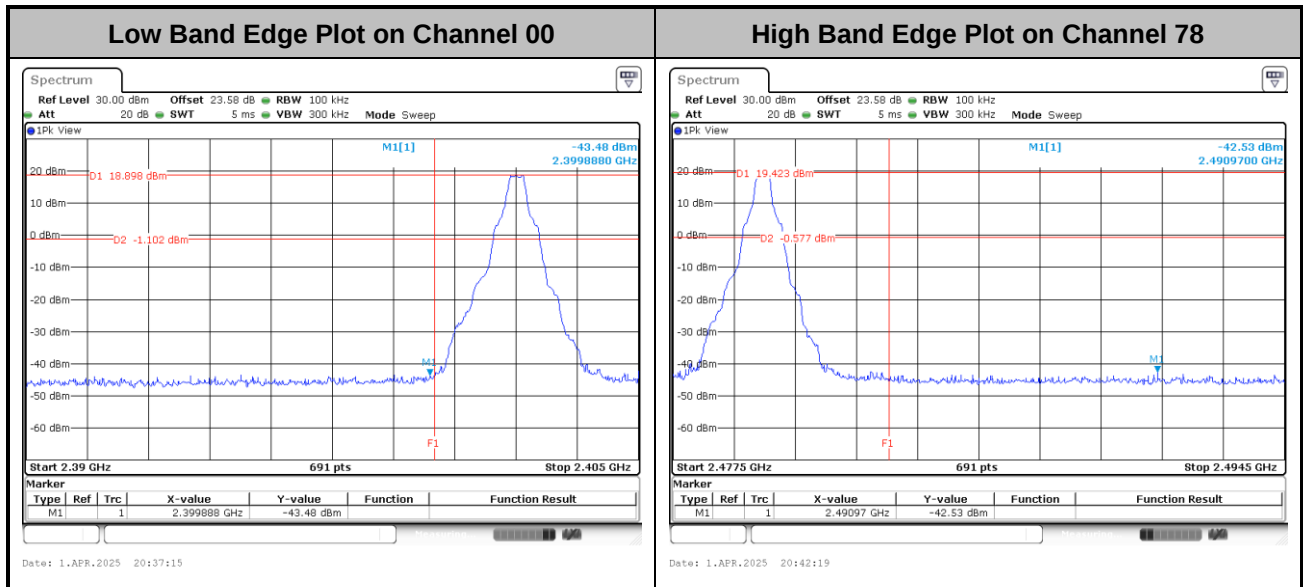







**Hopping Mode Band Edges**

<1Mbps>

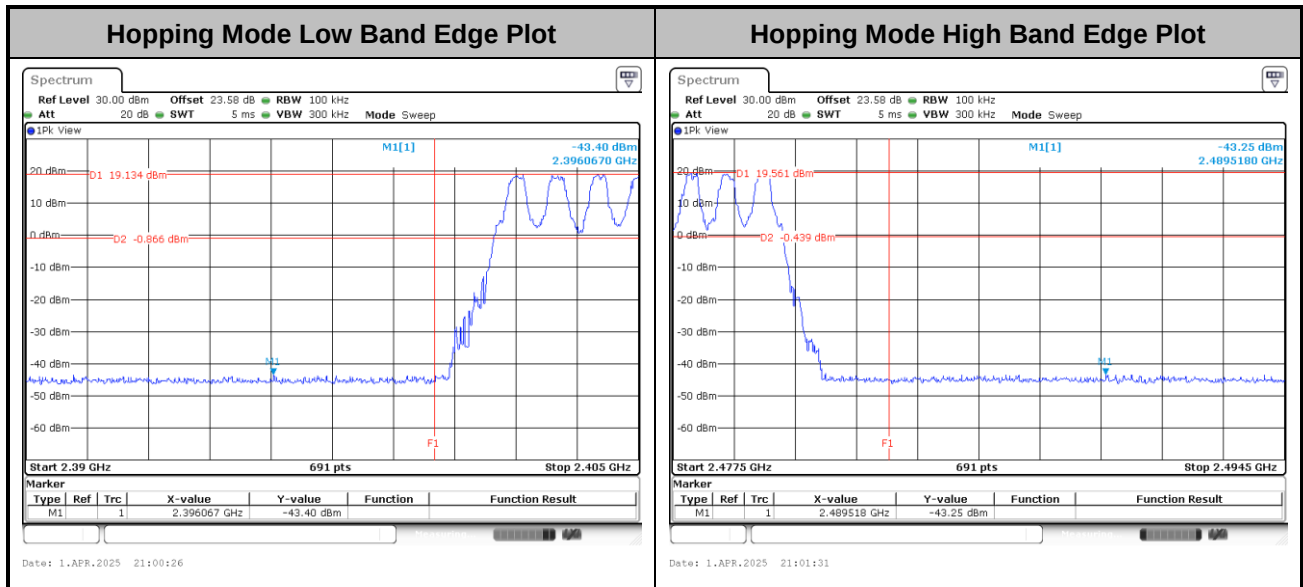

**Conducted Spurious Emission**


<1Mbps>

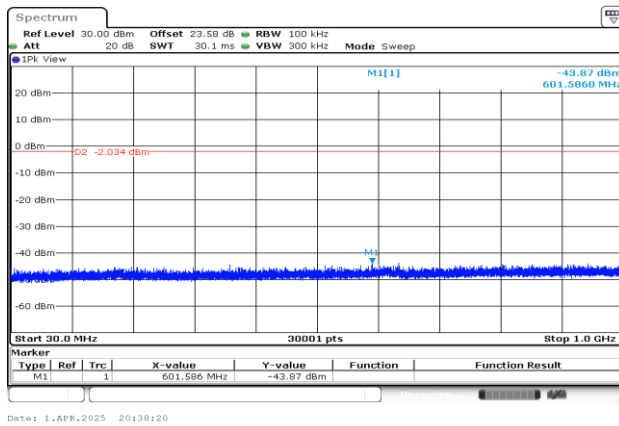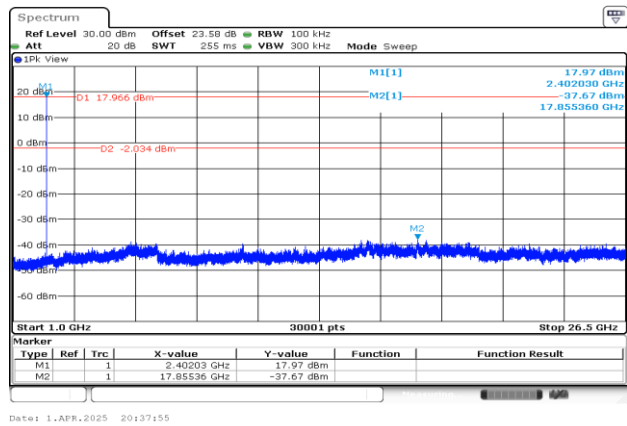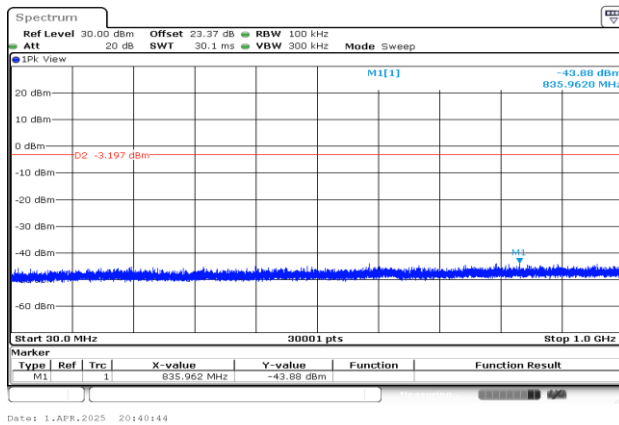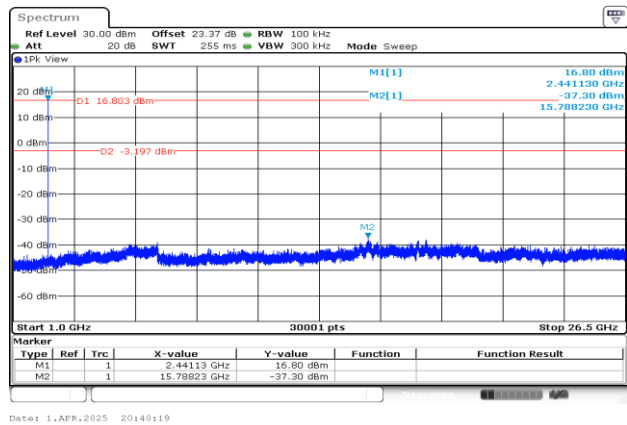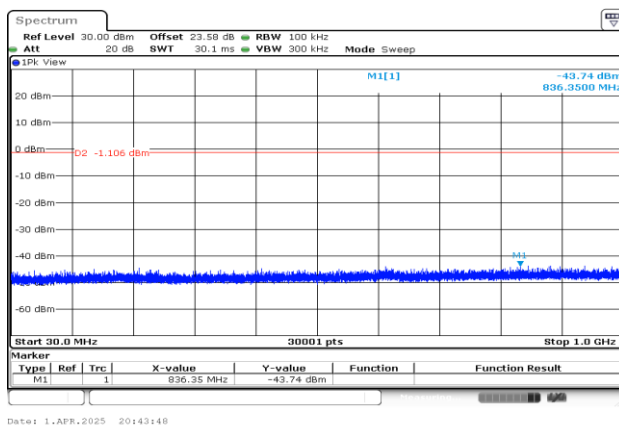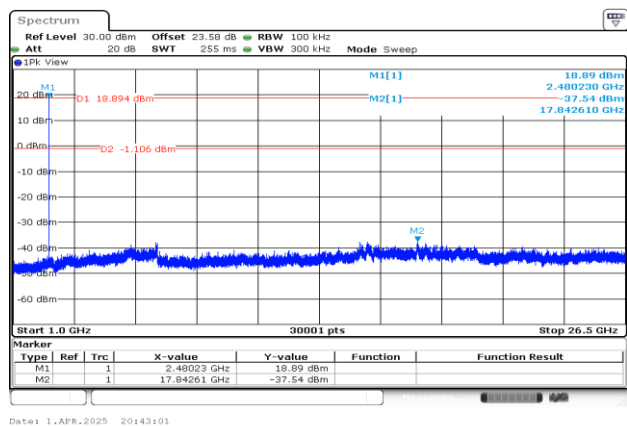CSE Plot on Low Ch between 30MHz ~ 1 GHz**CSE Plot on Low Ch between 1GHz ~ 26.5GHz****CSE Plot on Mid. Ch between 30MHz ~ 1 GHz****CSE Plot on Mid. Ch between 1GHz ~ 26.5GHz****CSE Plot on High Ch between 30MHz ~ 1 GHz****CSE Plot on High Ch between 1GHz ~ 26.5GHz**






MIMO <Ant. 3>


Number of Hopping Frequency

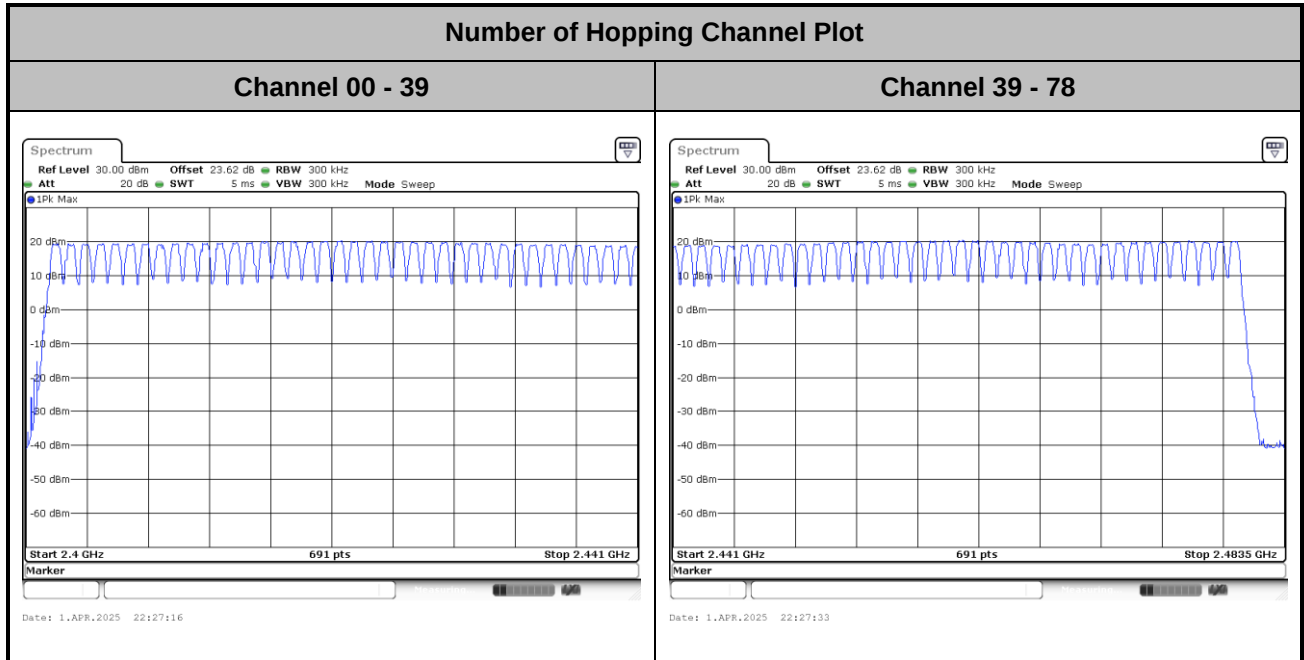

**Hopping Channel Separation**




<1Mbps>

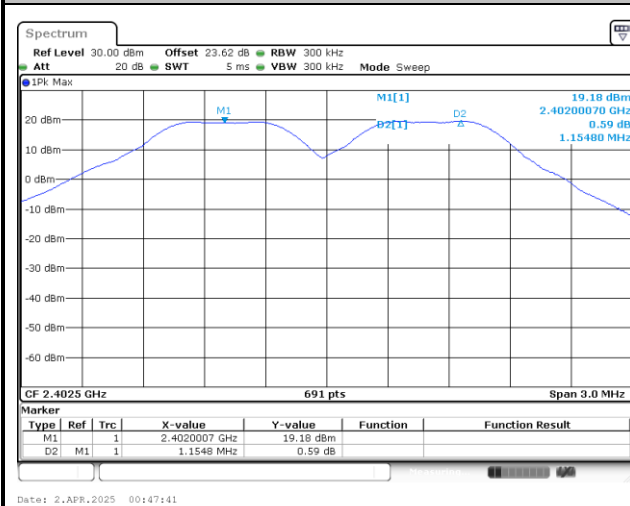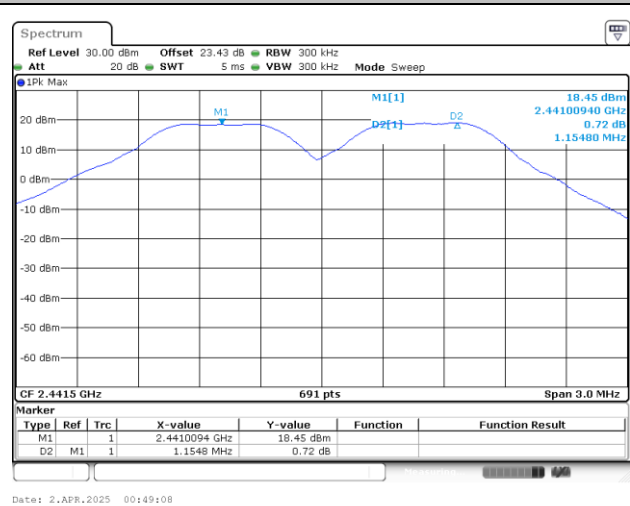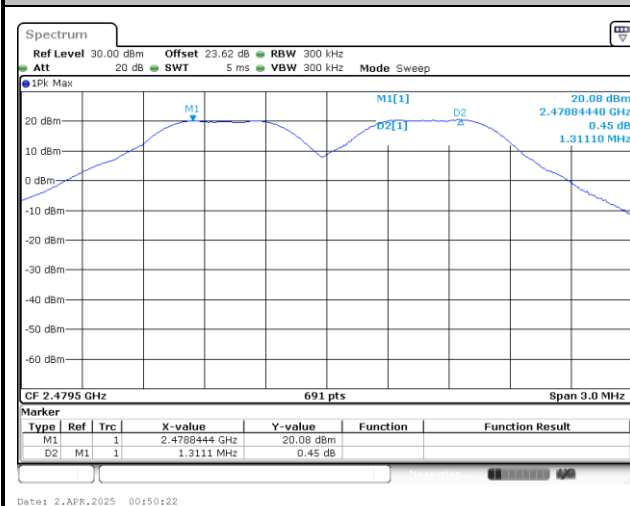Channel Separation Plot on Channel 00 - 01**Channel Separation Plot on Channel 39 - 40****Channel Separation Plot on Channel 77 - 78**

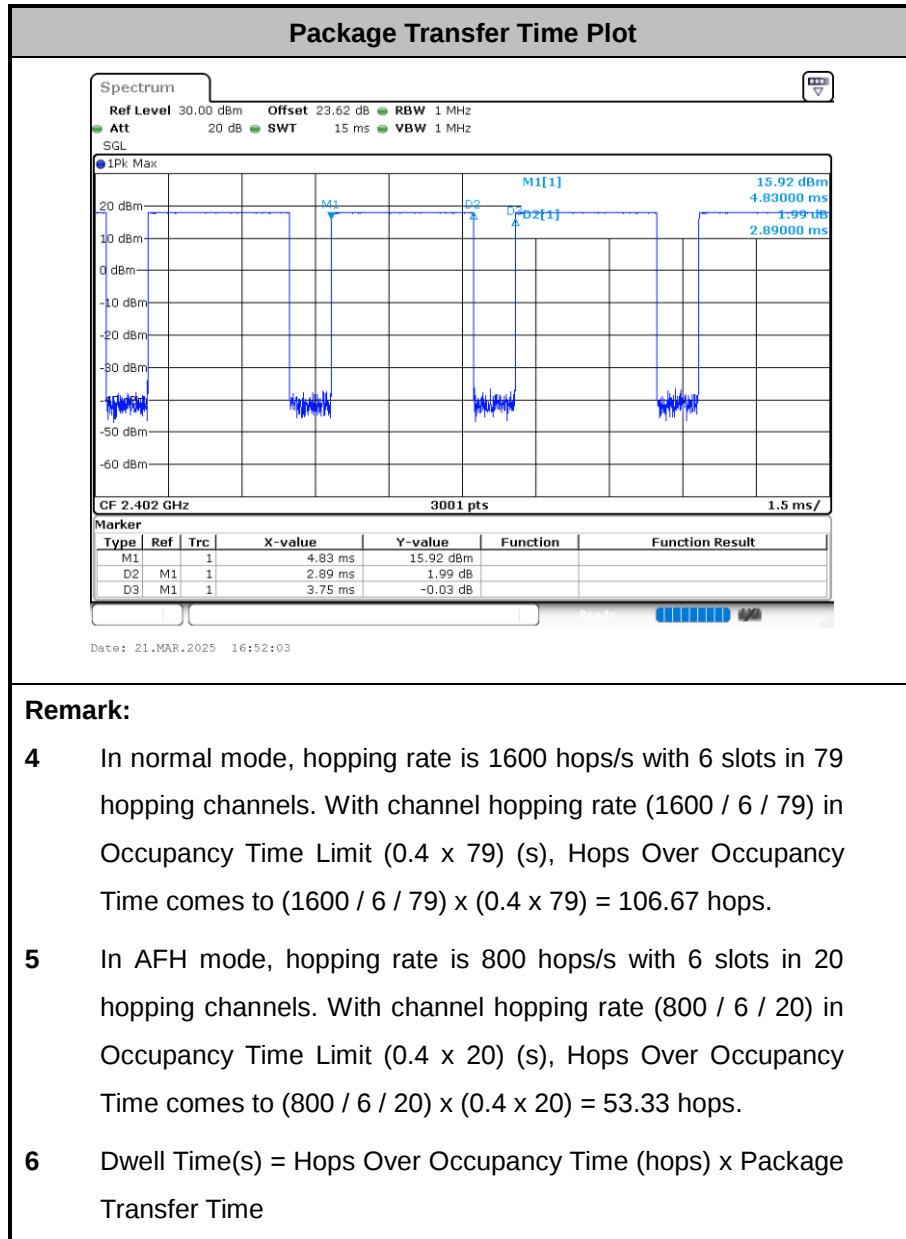Dwell Time


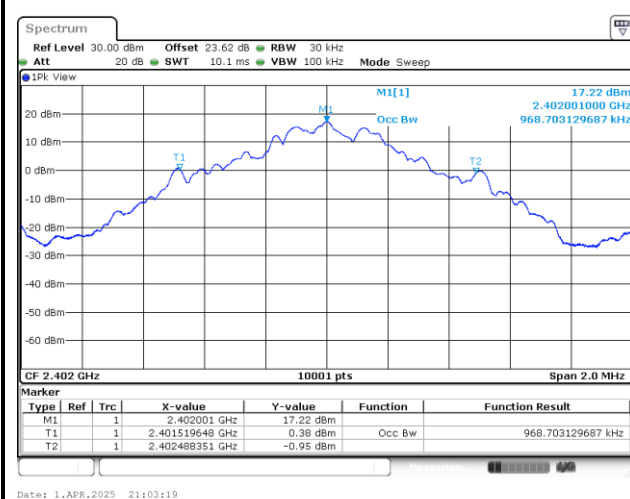
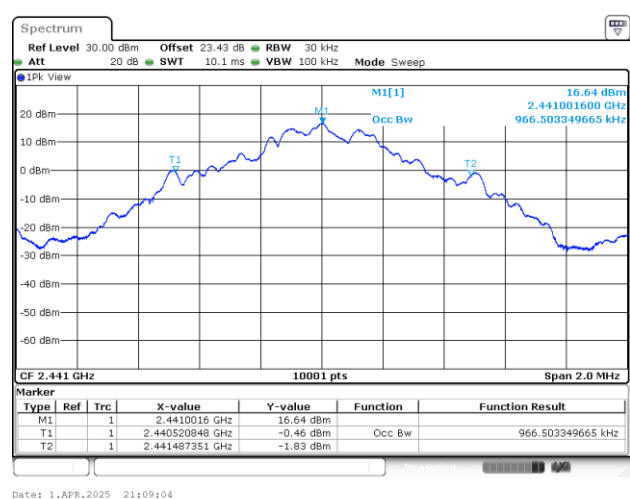
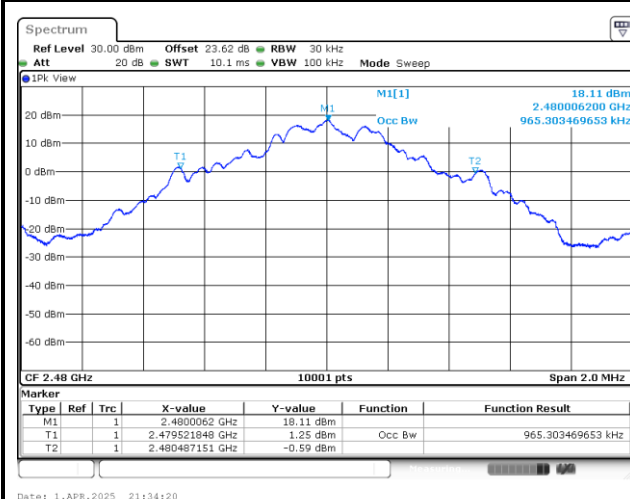
**20dB Bandwidth**

<1Mbps>

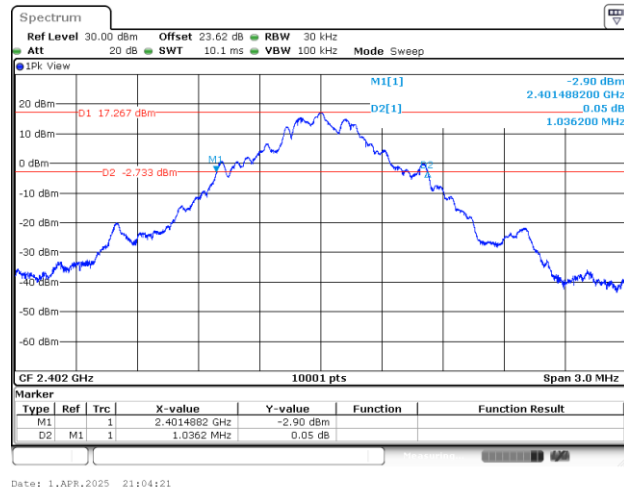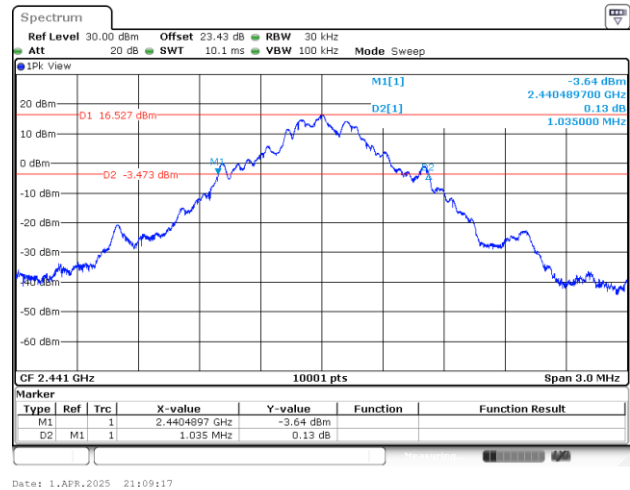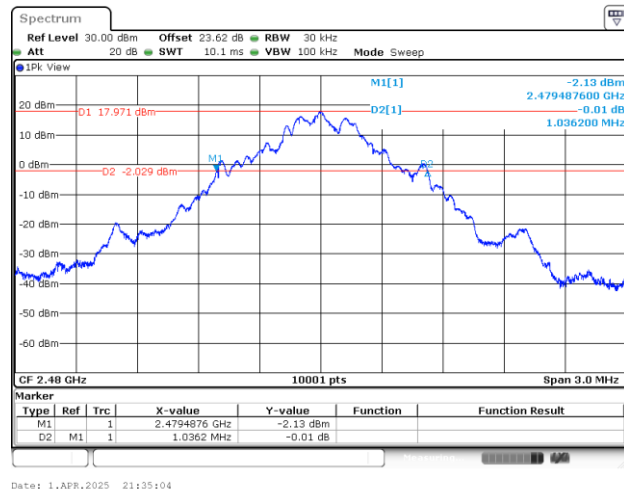20 dB Bandwidth Plot in Channel 00**20 dB Bandwidth Plot in Channel 39****20 dB Bandwidth Plot in Channel 78**


**99% Occupied Bandwidth**

<1Mbps>

99% Occupied Bandwidth on Channel 00**99% Occupied Bandwidth on Channel 39****99% Occupied Bandwidth on Channel 78**


**Band Edges**

<1Mbps>

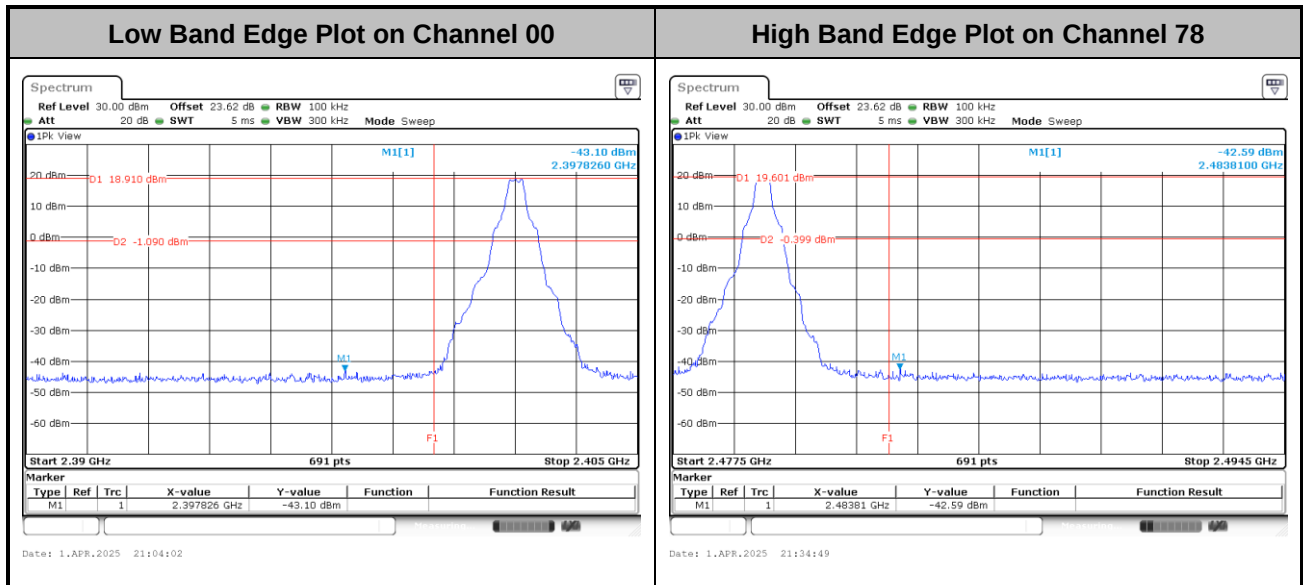







**Hopping Mode Band Edges**

<1Mbps>

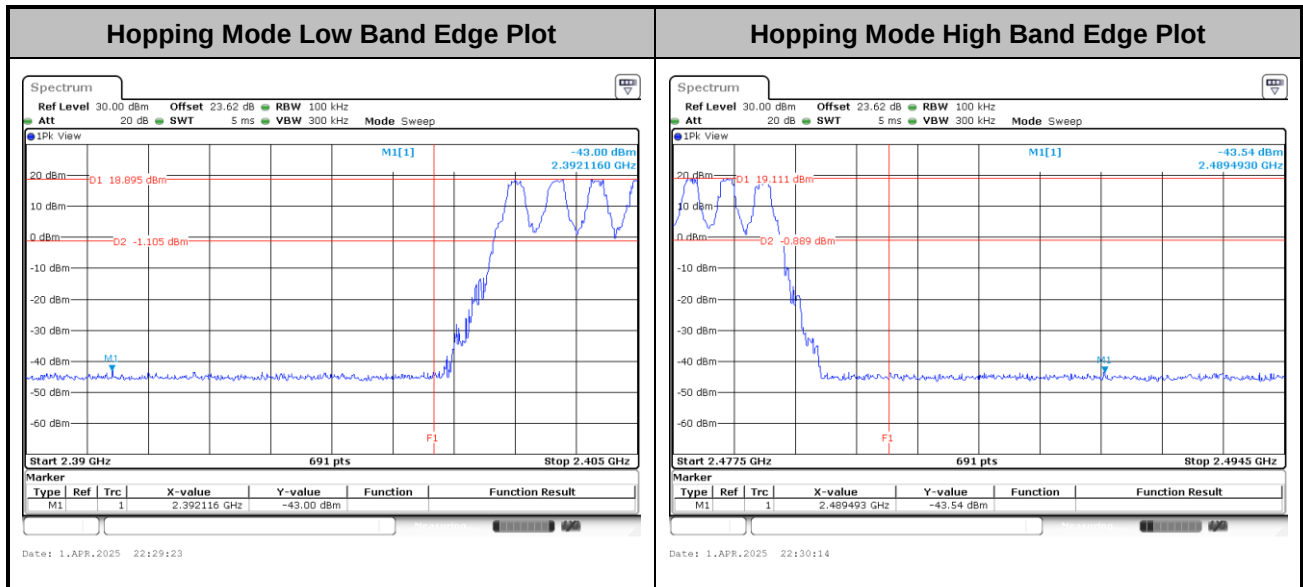

**Conducted Spurious Emission**

<1Mbps>

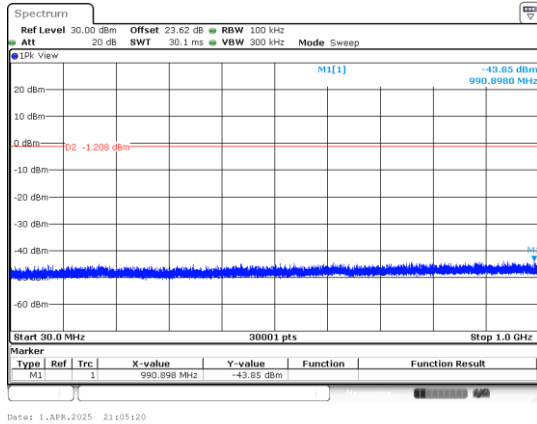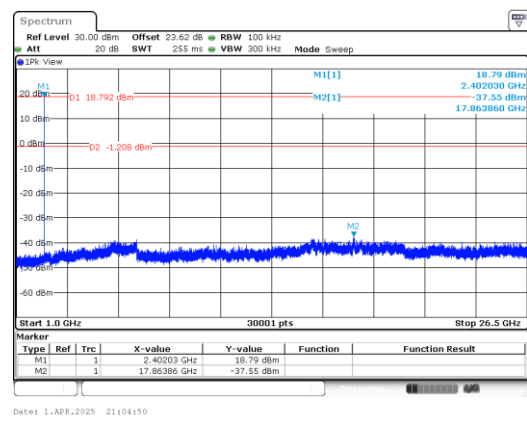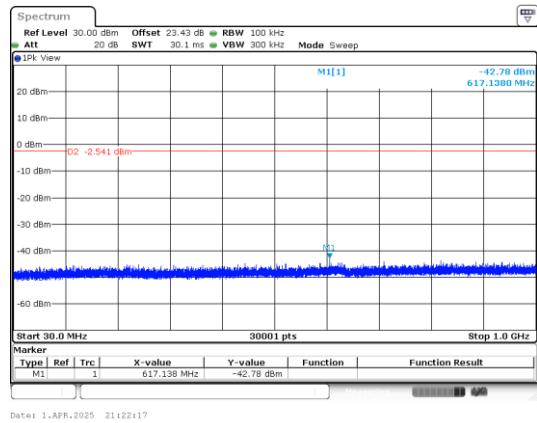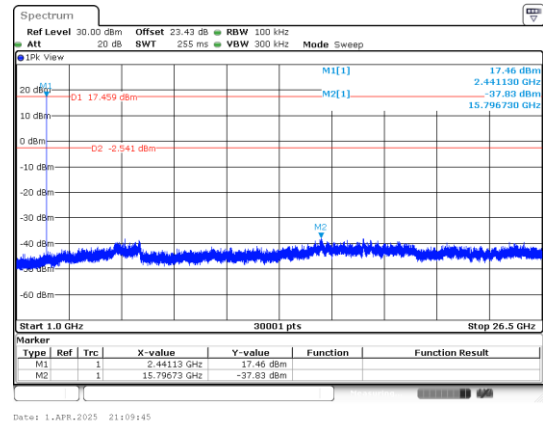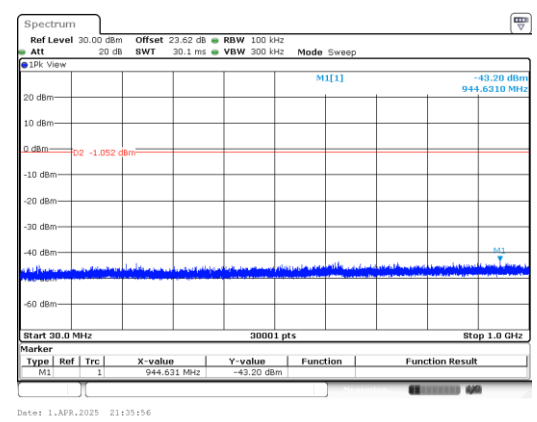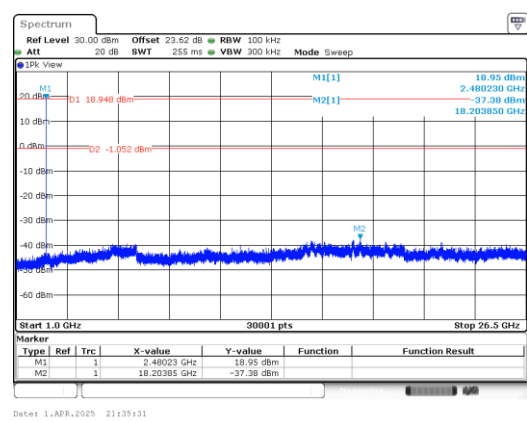CSE Plot on Low Ch between 30MHz ~ 1 GHz**CSE Plot on Low Ch between 1GHz ~ 26.5GHz****CSE Plot on Mid. Ch between 30MHz ~ 1 GHz****CSE Plot on Mid. Ch between 1GHz ~ 26.5GHz****CSE Plot on High Ch between 30MHz ~ 1 GHz****CSE Plot on High Ch between 1GHz ~ 26.5GHz**




Appendix B. AC Conducted Emission Test Results

Test Engineer :	Louis Chung	Temperature :	21.9~23.7℃
		Relative Humidity :	45.3~47.2%

EUT Information

Report NO : 4N0920
Test Mode : Mode 1
Test Voltage : 120Vac/60Hz
Phase : Line

Full Spectrum

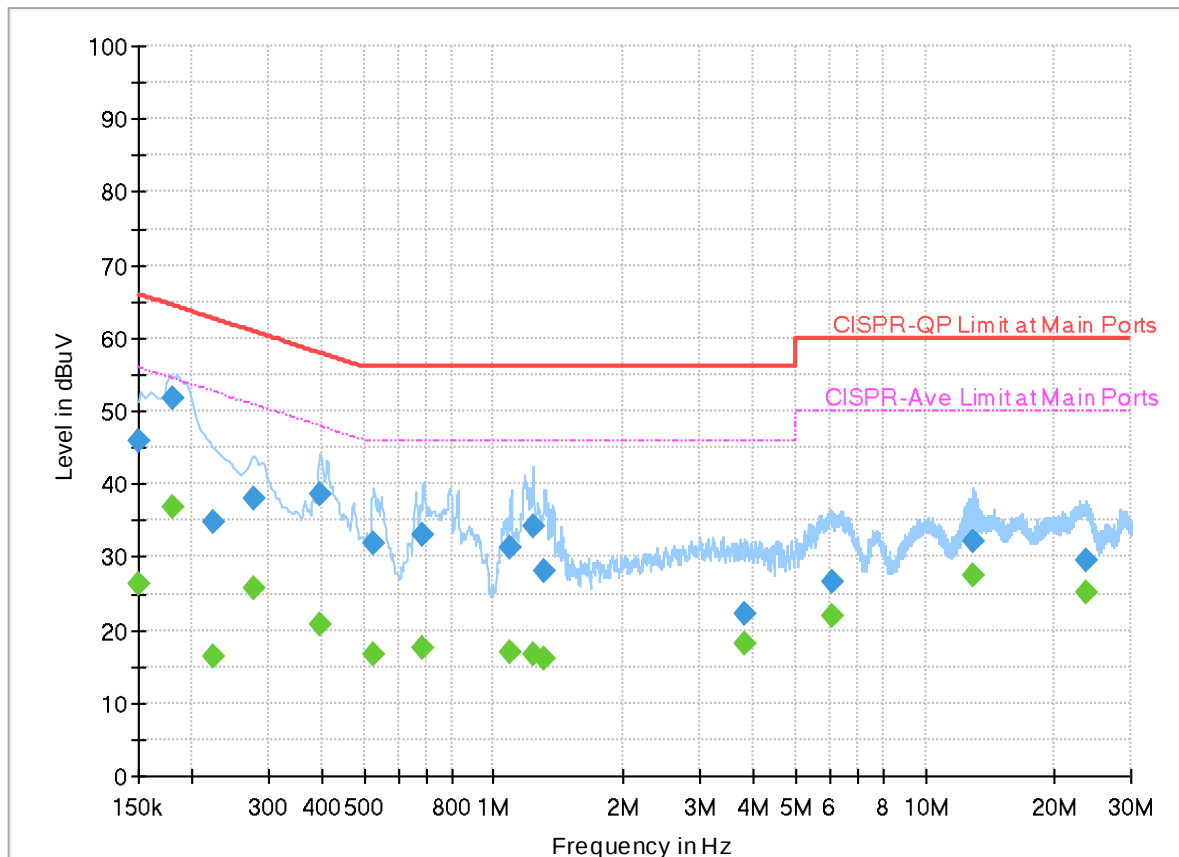

Final_Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	PE	Corr. (dB)
0.150810	---	26.22	55.96	29.74	L1	FLO	20.0
0.150810	46.02	---	65.96	19.94	L1	FLO	20.0
0.179970	---	36.78	54.49	17.71	L1	FLO	20.0
0.179970	51.80	---	64.49	12.69	L1	FLO	20.0
0.224430	---	16.43	52.65	36.22	L1	FLO	20.0
0.224430	34.73	---	62.65	27.92	L1	FLO	20.0
0.277980	---	25.68	50.88	25.20	L1	FLO	20.0
0.277980	37.92	---	60.88	22.96	L1	FLO	20.0
0.395790	---	20.66	47.94	27.28	L1	FLO	20.0
0.395790	38.46	---	57.94	19.48	L1	FLO	20.0
0.526650	---	16.77	46.00	29.23	L1	FLO	20.0
0.526650	31.87	---	56.00	24.13	L1	FLO	20.0
0.683520	---	17.53	46.00	28.47	L1	FLO	20.0
0.683520	33.01	---	56.00	22.99	L1	FLO	20.0
1.095000	---	17.02	46.00	28.98	L1	FLO	20.0
1.095000	31.21	---	56.00	24.79	L1	FLO	20.0
1.238820	---	16.68	46.00	29.32	L1	FLO	20.0
1.238820	34.14	---	56.00	21.86	L1	FLO	20.0
1.299750	---	16.11	46.00	29.89	L1	FLO	20.0


1.299750	28.07	---	56.00	27.93	L1	FLO	20.0
3.828210	---	18.01	46.00	27.99	L1	FLO	20.1
3.828210	22.25	---	56.00	33.75	L1	FLO	20.1
6.108000	---	21.86	50.00	28.14	L1	FLO	20.2
6.108000	26.67	---	60.00	33.33	L1	FLO	20.2
12.947820	---	27.62	50.00	22.38	L1	FLO	20.5
12.947820	32.27	---	60.00	27.73	L1	FLO	20.5
23.700750	---	25.01	50.00	24.99	L1	FLO	20.9
23.700750	29.52	---	60.00	30.48	L1	FLO	20.9

EUT Information

Report NO :
Test Mode :
Test Voltage :
Phase :

4N0920
Mode 1
120Vac/60Hz
Neutral

Full Spectrum

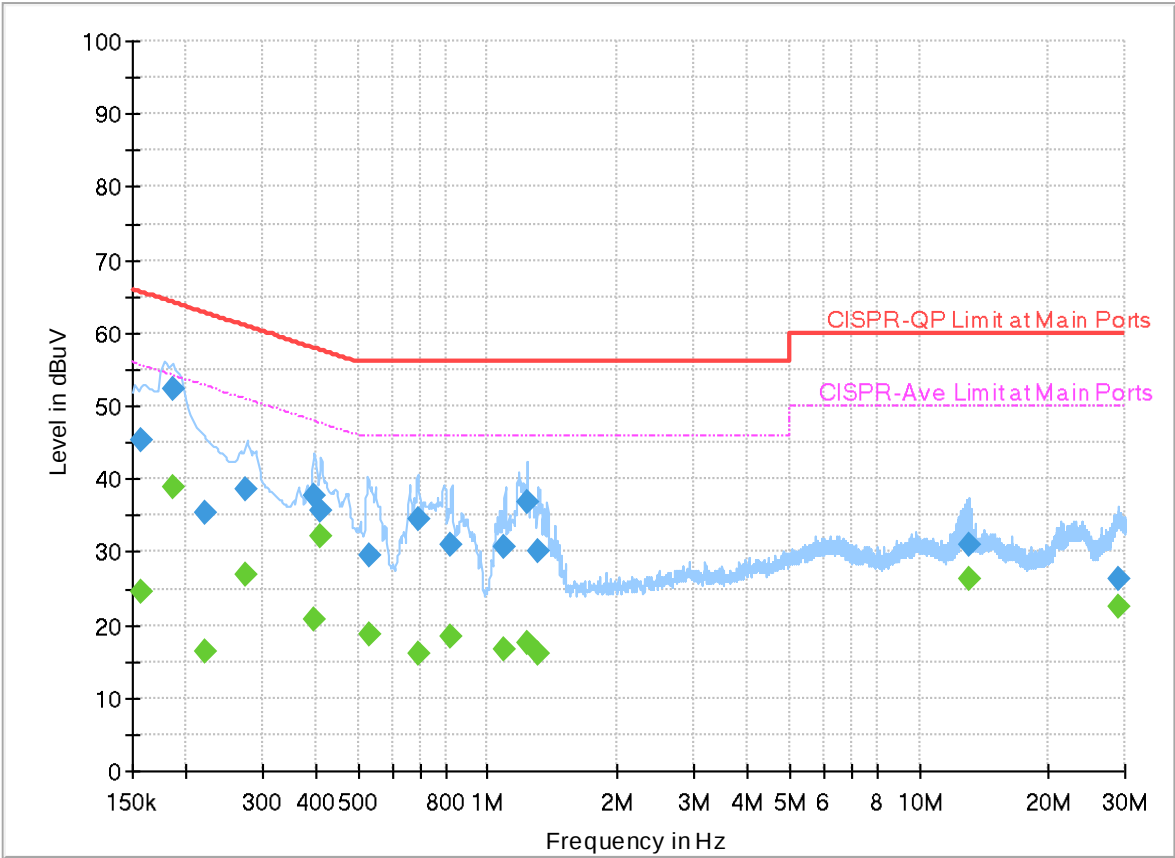

Final_Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	PE	Corr. (dB)
0.156750	---	24.62	55.63	31.01	N	FLO	20.0
0.156750	45.29	---	65.63	20.34	N	FLO	20.0
0.185460	---	38.94	54.24	15.30	N	FLO	20.0
0.185460	52.22	---	64.24	12.02	N	FLO	20.0
0.219750	---	16.41	52.83	36.42	N	FLO	20.0
0.219750	35.48	---	62.83	27.35	N	FLO	20.0
0.273750	---	26.84	51.00	24.16	N	FLO	20.0
0.273750	38.72	---	61.00	22.28	N	FLO	20.0
0.396870	---	20.62	47.92	27.30	N	FLO	20.0
0.396870	37.72	---	57.92	20.20	N	FLO	20.0
0.406590	---	32.08	47.72	15.64	N	FLO	20.0
0.406590	35.72	---	57.72	22.00	N	FLO	20.0
0.532500	---	18.79	46.00	27.21	N	FLO	20.0
0.532500	29.58	---	56.00	26.42	N	FLO	20.0
0.687210	---	16.11	46.00	29.89	N	FLO	20.0
0.687210	34.54	---	56.00	21.46	N	FLO	20.0
0.820500	---	18.54	46.00	27.46	N	FLO	20.0
0.820500	30.85	---	56.00	25.15	N	FLO	20.0
1.095000	---	16.63	46.00	29.37	N	FLO	20.0

1.095000	30.63	---	56.00	25.37	N	FLO	20.0
1.235940	---	17.51	46.00	28.49	N	FLO	20.0
1.235940	36.79	---	56.00	19.21	N	FLO	20.0
1.312620	---	16.15	46.00	29.85	N	FLO	20.0
1.312620	30.06	---	56.00	25.94	N	FLO	20.0
13.048710	---	26.33	50.00	23.67	N	FLO	20.5
13.048710	30.91	---	60.00	29.09	N	FLO	20.5
28.970250	---	22.37	50.00	27.63	N	FLO	21.0
28.970250	26.25	---	60.00	33.75	N	FLO	21.0



Appendix C. Radiated Spurious Emission Test Data

Test Engineer :	Daniel Lee, Fu Chen and Troye Hsieh	Temperature :	19~22.5°C
		Relative Humidity :	50.1~65.7%

Note symbol

-L	Low channel location
-R	High channel location

C1. Radiated Spurious Emission Test Modes

Mode	Band (MHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 1	2400-2483.5	4+3	Bluetooth BR_GFSK	00	2402	1Mbps	-	-
Mode 2	2400-2483.5	4+3	Bluetooth BR_GFSK	39	2441	1Mbps	-	-
Mode 3	2400-2483.5	4+3	Bluetooth BR_GFSK	78	2480	1Mbps	-	-
Mode 13	2400-2483.5	4+3	Bluetooth BR_GFSK	78	2480	1Mbps	-	SHF
Mode 14	2400-2483.5	4+3	Bluetooth BR_GFSK	78	2480	1Mbps	-	LF





C2. Summary of each worse mode

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	RU	Remark
1	Bluetooth BR_GFSK	00	2389.58	49.83	74.00	-24.17	H	Peak	Pass	-	Band Edge
	Bluetooth BR_GFSK	00	4804.00	41.95	74.00	-32.05	V	Peak	Pass	-	Harmonic
2	Bluetooth BR_GFSK	39	2488.91	51.27	74.00	-22.73	H	Peak	Pass	-	Band Edge
	Bluetooth BR_GFSK	39	7323.00	45.35	74.00	-28.65	V	Peak	Pass	-	Harmonic
3	Bluetooth BR_GFSK	78	2483.52	61.24	74.00	-12.76	H	Peak	Pass	-	Band Edge
	Bluetooth BR_GFSK	78	7440.00	43.98	74.00	-30.02	H	Peak	Pass	-	Harmonic
13	SHF	78	25641.68	35.18	74.00	-38.82	V	Peak	Pass	-	SHF
14	LF	78	32.91	29.71	40.00	-10.29	V	QP	Pass	-	LF



Mode	1																																																																																																															
	Band Edge																																																																																																															
	2400-2483.5_Bluetooth BR_GFSK_CH00_2402MHz																																																																																																															
ANT	4+3																																																																																																															
Pol.	Horizontal	Fundamental																																																																																																														
Peak	Level (dBuV/m) Date: 2025-04-09 Site : 03CH11-HY Condition: PEAK_BE_74 3m 91200_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2389.58</td><td>49.83</td><td>74.00</td><td>-24.17</td><td>38.51</td><td>27.30</td><td>7.19</td><td>33.20</td><td>10.03</td><td>151</td><td>159</td><td>PEAK</td></tr><tr><td>2</td><td>2389.58</td><td>25.07</td><td>74.00</td><td>-48.93</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>AVERAGE</td></tr></table>		Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dB	dB	dB/m	dB	dB	dB	cm	deg		1	2389.58	49.83	74.00	-24.17	38.51	27.30	7.19	33.20	10.03	151	159	PEAK	2	2389.58	25.07	74.00	-48.93	--	--	--	--	--	--	--	--	AVERAGE	Level (dBuV/m) Date: 2025-04-09 Site : 03CH11-HY Condition: PEAK_74 3m 91200_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2402.00</td><td>115.14</td><td>-----</td><td>-----</td><td>103.70</td><td>27.40</td><td>7.20</td><td>33.19</td><td>10.03</td><td>151</td><td>159</td><td>PEAK</td></tr><tr><td>2</td><td>2402.00</td><td>90.38</td><td>-----</td><td>-----</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>AVERAGE</td></tr></table>		Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dB	dB	dB/m	dB	dB	dB	cm	deg		1	2402.00	115.14	-----	-----	103.70	27.40	7.20	33.19	10.03	151	159	PEAK	2	2402.00	90.38	-----	-----	--	--	--	--	--	--	--	--	AVERAGE
		Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dB	dB	dB/m	dB	dB	dB	cm	deg																																																																																																				
1	2389.58	49.83	74.00	-24.17	38.51	27.30	7.19	33.20	10.03	151	159	PEAK																																																																																																				
2	2389.58	25.07	74.00	-48.93	--	--	--	--	--	--	--	--	AVERAGE																																																																																																			
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dB	dB	dB/m	dB	dB	dB	cm	deg																																																																																																				
1	2402.00	115.14	-----	-----	103.70	27.40	7.20	33.19	10.03	151	159	PEAK																																																																																																				
2	2402.00	90.38	-----	-----	--	--	--	--	--	--	--	--	AVERAGE																																																																																																			



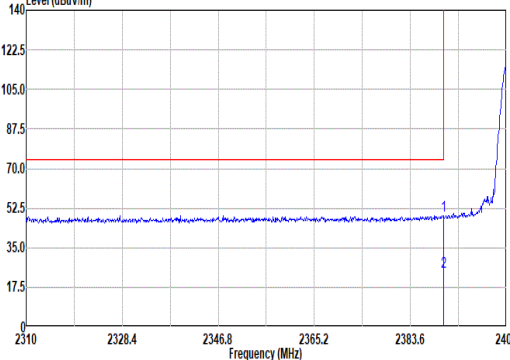
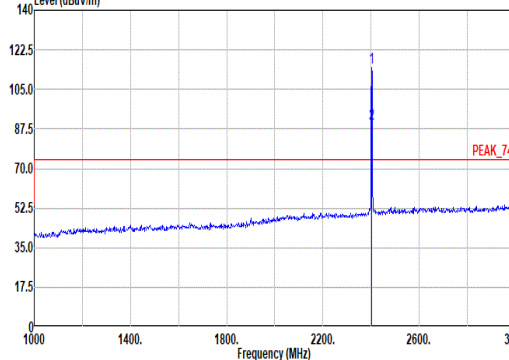


Mode	1																																																																																																															
	Band Edge																																																																																																															
	2400-2483.5_Bluetooth BR_GFSK_CH00_2402MHz																																																																																																															
ANT	4+3																																																																																																															
Pol.	Vertical	Fundamental																																																																																																														
Peak	Level (dBuV/m) Date: 2025-04-09  Site : 03CH11-HY Condition: PEAK_BE_74 3m 91200_01620_240828 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Freq</th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2309.95</td><td>49.13</td><td>74.00</td><td>-24.87</td><td>37.81</td><td>27.30</td><td>7.19</td><td>33.20</td><td>10.03</td><td>395 46 PEAK</td></tr><tr><td>2</td><td>2309.95</td><td>24.37</td><td>74.00</td><td>-49.63</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>-- AVERAGE</td></tr></table>		Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2309.95	49.13	74.00	-24.87	37.81	27.30	7.19	33.20	10.03	395 46 PEAK	2	2309.95	24.37	74.00	-49.63	--	--	--	--	--	-- AVERAGE	Level (dBuV/m) Date: 2025-04-09  Site : 03CH11-HY Condition: PEAK_74 3m 91200_01620_240828 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Freq</th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2402.00</td><td>114.48</td><td>-----</td><td>-----</td><td>103.04</td><td>27.40</td><td>7.20</td><td>33.19</td><td>10.03</td><td>395 46 PEAK</td></tr><tr><td>2</td><td>2402.00</td><td>89.72</td><td>-----</td><td>-----</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>-- AVERAGE</td></tr></table>		Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2402.00	114.48	-----	-----	103.04	27.40	7.20	33.19	10.03	395 46 PEAK	2	2402.00	89.72	-----	-----	--	--	--	--	--	-- AVERAGE
		Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																					
	MHz	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																						
1	2309.95	49.13	74.00	-24.87	37.81	27.30	7.19	33.20	10.03	395 46 PEAK																																																																																																						
2	2309.95	24.37	74.00	-49.63	--	--	--	--	--	-- AVERAGE																																																																																																						
	Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																						
	MHz	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																						
1	2402.00	114.48	-----	-----	103.04	27.40	7.20	33.19	10.03	395 46 PEAK																																																																																																						
2	2402.00	89.72	-----	-----	--	--	--	--	--	-- AVERAGE																																																																																																						





Mode	1																																																																																																																			
	Harmonic																																																																																																																			
	2400-2483.5_Bluetooth BR_GFSK_CH00_2402MHz																																																																																																																			
ANT	4+3																																																																																																																			
Pol.	Horizontal	Vertical																																																																																																																		
Peak Avg	Level (dBuV/m) Date: 2025-04-09 Site : 03CH11-HY Condition: PEAK_74 3m 91280_01620_240828 HORIZONTAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4804.00</td><td>40.74</td><td>74.00</td><td>-33.26</td><td>63.71</td><td>32.32</td><td>10.97</td><td>66.76</td><td>0.50</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>4804.00</td><td>15.98</td><td>54.00</td><td>-38.02</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>Average</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4804.00	40.74	74.00	-33.26	63.71	32.32	10.97	66.76	0.50	--	--	Peak	2	4804.00	15.98	54.00	-38.02	--	--	--	--	--	--	--	Average	Level (dBuV/m) Date: 2025-04-09 Site : 03CH11-HY Condition: PEAK_74 3m 91280_01620_240828 VERTICAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4804.00</td><td>41.95</td><td>74.00</td><td>-32.05</td><td>64.92</td><td>32.32</td><td>10.97</td><td>66.76</td><td>0.50</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>4804.00</td><td>17.19</td><td>54.00</td><td>-36.81</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>Average</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4804.00	41.95	74.00	-32.05	64.92	32.32	10.97	66.76	0.50	--	--	Peak	2	4804.00	17.19	54.00	-36.81	--	--	--	--	--	--	--	Average
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																										
1	4804.00	40.74	74.00	-33.26	63.71	32.32	10.97	66.76	0.50	--	--	Peak																																																																																																								
2	4804.00	15.98	54.00	-38.02	--	--	--	--	--	--	--	Average																																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																										
1	4804.00	41.95	74.00	-32.05	64.92	32.32	10.97	66.76	0.50	--	--	Peak																																																																																																								
2	4804.00	17.19	54.00	-36.81	--	--	--	--	--	--	--	Average																																																																																																								

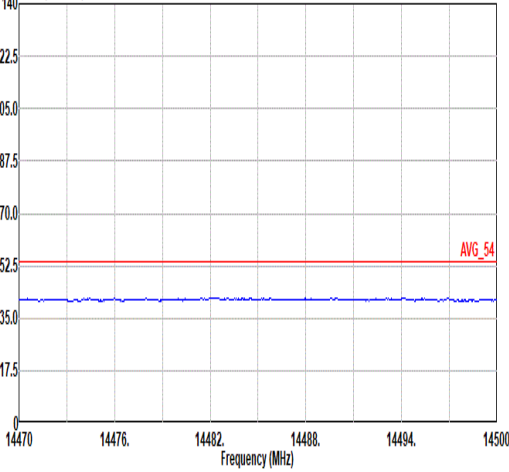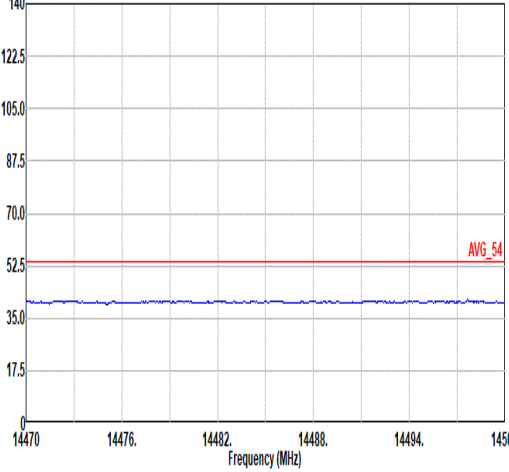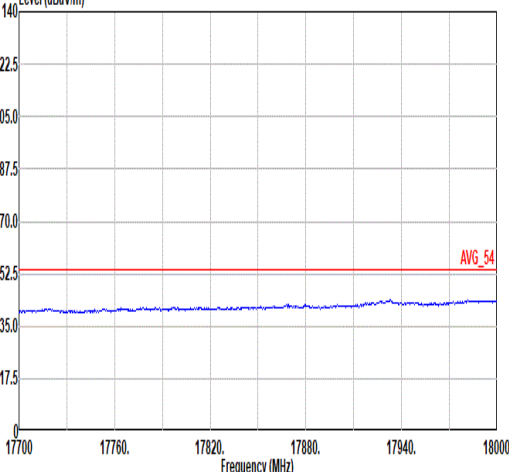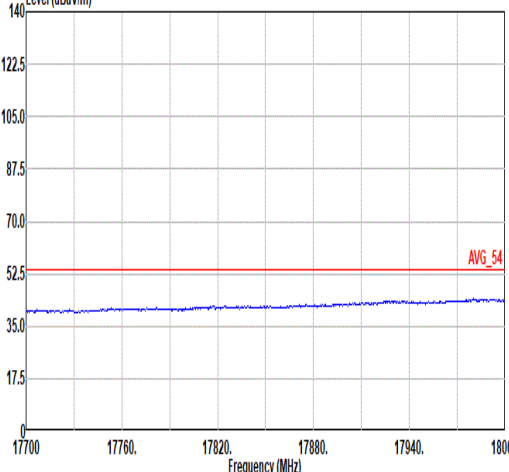

Mode	1	
	Harmonic	
	2400-2483.5_Bluetooth BR_GFSK_CH00_2402MHz	
ANT	4+3	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	Level (dBuV/m) Date: 2025-04-09  Site : 03CH11-HY Condition: AVG_54 3m 91280_01620_240828 HORIZONTAL	Level (dBuV/m) Date: 2025-04-09  Site : 03CH11-HY Condition: AVG_54 3m 91280_01620_240828 VERTICAL
	Level (dBuV/m) Date: 2025-04-09  Site : 03CH11-HY Condition: AVG_54 3m 91280_01620_240828 HORIZONTAL	Level (dBuV/m) Date: 2025-04-09  Site : 03CH11-HY Condition: AVG_54 3m 91280_01620_240828 VERTICAL

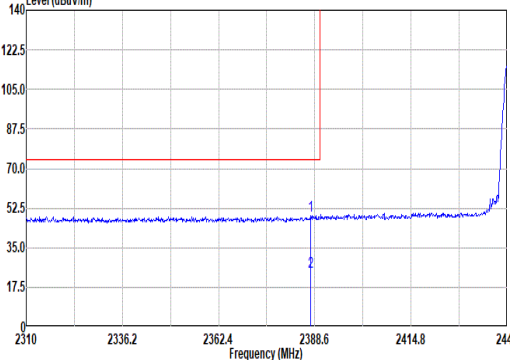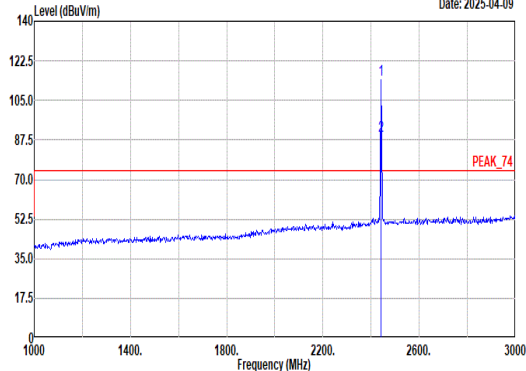

Mode	2																																																																																																																													
	Band Edge - L																																																																																																																													
	2400-2483.5_Bluetooth BR_GFSK_CH39_2441MHz																																																																																																																													
ANT	4+3																																																																																																																													
Pol.	Horizontal						Fundamental																																																																																																																							
Peak	Level (dBuV/m) Date: 2025-04-09  Site : 03CH11-HY Condition: PEAK_BE_74 3m 91200_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2387.55</td><td>49.13</td><td>74.00</td><td>-24.87</td><td>37.84</td><td>27.28</td><td>7.18</td><td>33.20</td><td>10.03</td><td>105</td><td>162</td><td>PEAK</td></tr><tr><td>2</td><td>2387.55</td><td>24.37</td><td>74.00</td><td>-49.63</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2387.55	49.13	74.00	-24.87	37.84	27.28	7.18	33.20	10.03	105	162	PEAK	2	2387.55	24.37	74.00	-49.63	--	--	--	--	--	--	--	AVERAGE	Level (dBuV/m) Date: 2025-04-09  Site : 03CH11-HY Condition: PEAK_74 3m 91200_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2441.00</td><td>113.96</td><td>-----</td><td>-----</td><td>102.22</td><td>27.60</td><td>7.26</td><td>33.15</td><td>10.03</td><td>105</td><td>162</td><td>PEAK</td></tr><tr><td>2</td><td>2441.00</td><td>89.20</td><td>-----</td><td>-----</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2441.00	113.96	-----	-----	102.22	27.60	7.26	33.15	10.03	105	162	PEAK	2	2441.00	89.20	-----	-----	--	--	--	--	--	--	--	AVERAGE
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																				
1	2387.55	49.13	74.00	-24.87	37.84	27.28	7.18	33.20	10.03	105	162	PEAK																																																																																																																		
2	2387.55	24.37	74.00	-49.63	--	--	--	--	--	--	--	AVERAGE																																																																																																																		
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																				
1	2441.00	113.96	-----	-----	102.22	27.60	7.26	33.15	10.03	105	162	PEAK																																																																																																																		
2	2441.00	89.20	-----	-----	--	--	--	--	--	--	--	AVERAGE																																																																																																																		



		2																																																																																																																							
Mode		Band Edge - L																																																																																																																							
		2400-2483.5_Bluetooth BR_GFSK_CH39_2441MHz																																																																																																																							
ANT		4+3																																																																																																																							
Pol.		Vertical						Fundamental																																																																																																																	
Peak	Level (dBuV/m) Date: 2025-04-09 140 122.5 105.0 87.5 70.0 52.5 35.0 17.5 0 2310 2336.2 2362.4 2388.6 2414.8 2441 Frequency (MHz) Site : 03CH11-HY Condition: PEAK_BE_74 3m 91200_01620_240828 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Freq</th><th>Limit</th><th>Level</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th><th></th></tr><tr><td>1</td><td>2385.59</td><td>49.91</td><td>74.00</td><td>-24.09</td><td>38.65</td><td>27.26</td><td>7.18</td><td>33.21</td><td>10.03</td><td>384</td><td>46</td><td>PEAK</td></tr><tr><td>2</td><td>2385.59</td><td>25.15</td><td>74.00</td><td>-48.85</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>AVERAGE</td></tr></table>													Freq	Limit	Level	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg				1	2385.59	49.91	74.00	-24.09	38.65	27.26	7.18	33.21	10.03	384	46	PEAK	2	2385.59	25.15	74.00	-48.85	--	--	--	--	--	--	--	AVERAGE	Level (dBuV/m) Date: 2025-04-09 140 122.5 105.0 87.5 70.0 52.5 35.0 17.5 0 1000 1400 1800 2200 2600 3000 Frequency (MHz) Site : 03CH11-HY Condition: PEAK_74 3m 91200_01620_240828 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Freq</th><th>Limit</th><th>Level</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th><th></th></tr><tr><td>1</td><td>2441.00</td><td>113.01</td><td>-----</td><td>-----</td><td>101.27</td><td>27.60</td><td>7.26</td><td>33.15</td><td>10.03</td><td>384</td><td>46</td><td>PEAK</td></tr><tr><td>2</td><td>2441.00</td><td>88.25</td><td>-----</td><td>-----</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>AVERAGE</td></tr></table>		Freq	Limit	Level	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg				1	2441.00	113.01	-----	-----	101.27	27.60	7.26	33.15	10.03	384	46	PEAK	2	2441.00	88.25	-----	-----	--	--	--	--	--	--	--	AVERAGE
		Freq	Limit	Level	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																											
		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																														
1	2385.59	49.91	74.00	-24.09	38.65	27.26	7.18	33.21	10.03	384	46	PEAK																																																																																																													
2	2385.59	25.15	74.00	-48.85	--	--	--	--	--	--	--	AVERAGE																																																																																																													
	Freq	Limit	Level	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																															
1	2441.00	113.01	-----	-----	101.27	27.60	7.26	33.15	10.03	384	46	PEAK																																																																																																													
2	2441.00	88.25	-----	-----	--	--	--	--	--	--	--	AVERAGE																																																																																																													







Mode	2																																																					
	Band Edge - R																																																					
	2400-2483.5_Bluetooth BR_GFSK_CH39_2441MHz																																																					
ANT	4+3																																																					
Pol.	Vertical	Fundamental																																																				
Peak	Date: 2025-04-09 Site : 03CH11-HY Condition: PEAK_BE_74 3m 91200_01620_240828 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2496.64</td><td>50.71</td><td>74.00</td><td>-23.29</td><td>38.54</td><td>27.90</td><td>7.34</td><td>33.10</td><td>10.03</td><td>304</td><td>46</td><td>PEAK</td></tr><tr><td>2</td><td>2496.64</td><td>25.95</td><td>74.00</td><td>-48.05</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>AVERAGE</td></tr></table>		Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2496.64	50.71	74.00	-23.29	38.54	27.90	7.34	33.10	10.03	304	46	PEAK	2	2496.64	25.95	74.00	-48.05	--	--	--	--	--	--	--	AVERAGE	Blank
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																											
1	2496.64	50.71	74.00	-23.29	38.54	27.90	7.34	33.10	10.03	304	46	PEAK																																										
2	2496.64	25.95	74.00	-48.05	--	--	--	--	--	--	--	AVERAGE																																										



Mode	2																																																																																																																																																																								
	Harmonic																																																																																																																																																																								
	2400-2483.5_Bluetooth BR_GFSK_CH39_2441MHz																																																																																																																																																																								
ANT	4+3																																																																																																																																																																								
Pol.	Horizontal						Vertical																																																																																																																																																																		
Peak Avg	Level (dBuV/m) Date: 2025-04-09 Site : 03CH11-HY Condition: PEAK_74 3m 91280_01620_240828 HORIZONTAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4882.00</td><td>41.13</td><td>74.00</td><td>-32.87</td><td>63.21</td><td>32.73</td><td>11.34</td><td>66.69</td><td>0.54</td><td>--</td><td>PEAK</td></tr><tr><td>2</td><td>4882.00</td><td>16.37</td><td>54.00</td><td>-37.63</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>AVERAGE</td></tr><tr><td>3</td><td>7323.00</td><td>43.71</td><td>74.00</td><td>-30.29</td><td>57.84</td><td>36.75</td><td>14.60</td><td>65.79</td><td>0.31</td><td>--</td><td>PEAK</td></tr><tr><td>4</td><td>7323.00</td><td>18.95</td><td>54.00</td><td>-35.05</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4882.00	41.13	74.00	-32.87	63.21	32.73	11.34	66.69	0.54	--	PEAK	2	4882.00	16.37	54.00	-37.63	--	--	--	--	--	--	AVERAGE	3	7323.00	43.71	74.00	-30.29	57.84	36.75	14.60	65.79	0.31	--	PEAK	4	7323.00	18.95	54.00	-35.05	--	--	--	--	--	--	AVERAGE	Level (dBuV/m) Date: 2025-04-09 Site : 03CH11-HY Condition: PEAK_74 3m 91280_01620_240828 VERTICAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4882.00</td><td>42.45</td><td>74.00</td><td>-31.55</td><td>64.53</td><td>32.73</td><td>11.34</td><td>66.69</td><td>0.54</td><td>--</td><td>PEAK</td></tr><tr><td>2</td><td>4882.00</td><td>17.69</td><td>54.00</td><td>-36.31</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>AVERAGE</td></tr><tr><td>3</td><td>7323.00</td><td>45.35</td><td>74.00</td><td>-28.65</td><td>59.48</td><td>36.75</td><td>14.60</td><td>65.79</td><td>0.31</td><td>144</td><td>254 PEAK</td></tr><tr><td>4</td><td>7323.00</td><td>20.59</td><td>54.00</td><td>-33.41</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>AVERAGE</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4882.00	42.45	74.00	-31.55	64.53	32.73	11.34	66.69	0.54	--	PEAK	2	4882.00	17.69	54.00	-36.31	--	--	--	--	--	--	AVERAGE	3	7323.00	45.35	74.00	-28.65	59.48	36.75	14.60	65.79	0.31	144	254 PEAK	4	7323.00	20.59	54.00	-33.41	--	--	--	--	--	--	AVERAGE
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																															
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																															
1	4882.00	41.13	74.00	-32.87	63.21	32.73	11.34	66.69	0.54	--	PEAK																																																																																																																																																														
2	4882.00	16.37	54.00	-37.63	--	--	--	--	--	--	AVERAGE																																																																																																																																																														
3	7323.00	43.71	74.00	-30.29	57.84	36.75	14.60	65.79	0.31	--	PEAK																																																																																																																																																														
4	7323.00	18.95	54.00	-35.05	--	--	--	--	--	--	AVERAGE																																																																																																																																																														
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																															
1	4882.00	42.45	74.00	-31.55	64.53	32.73	11.34	66.69	0.54	--	PEAK																																																																																																																																																														
2	4882.00	17.69	54.00	-36.31	--	--	--	--	--	--	AVERAGE																																																																																																																																																														
3	7323.00	45.35	74.00	-28.65	59.48	36.75	14.60	65.79	0.31	144	254 PEAK																																																																																																																																																														
4	7323.00	20.59	54.00	-33.41	--	--	--	--	--	--	AVERAGE																																																																																																																																																														

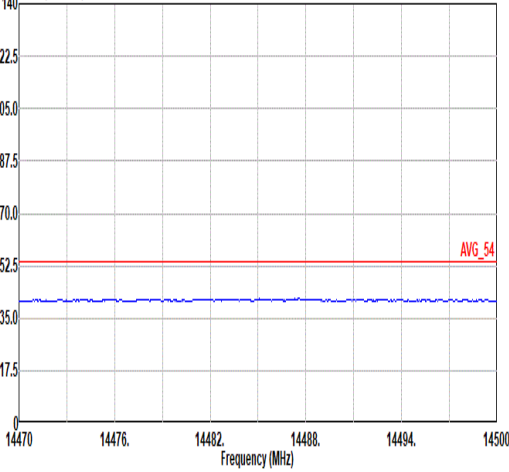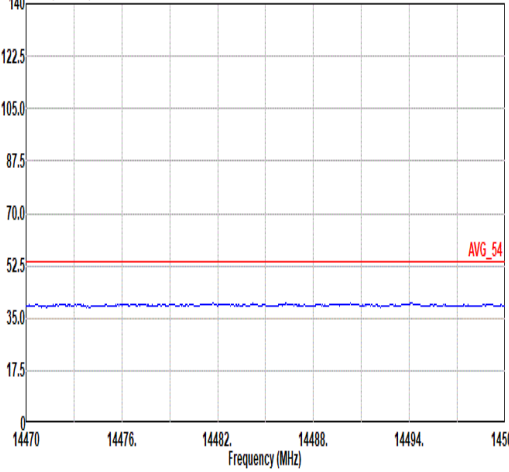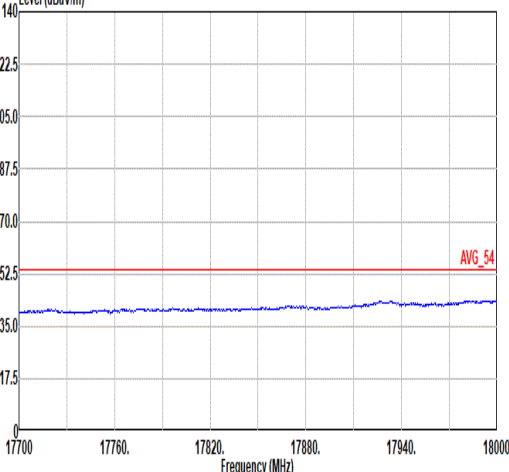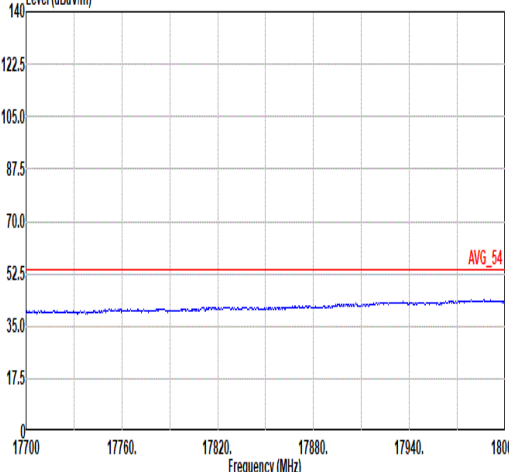

Mode	2	
	Harmonic	
	2400-2483.5_Bluetooth BR_GFSK_CH39_2441MHz	
ANT	4+3	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	Level (dBuV/m) Date: 2025-04-09  Site : 03CH11-HY Condition: AVG_54 3m 91280_01620_240828 HORIZONTAL	Level (dBuV/m) Date: 2025-04-09  Site : 03CH11-HY Condition: AVG_54 3m 91280_01620_240828 VERTICAL
	Level (dBuV/m) Date: 2025-04-09  Site : 03CH11-HY Condition: AVG_54 3m 91280_01620_240828 HORIZONTAL	Level (dBuV/m) Date: 2025-04-09  Site : 03CH11-HY Condition: AVG_54 3m 91280_01620_240828 VERTICAL



Mode	3																																																																																																																												
	Band Edge																																																																																																																												
	2400-2483.5_Bluetooth BR_GFSK_CH78_2480MHz																																																																																																																												
ANT	4+3																																																																																																																												
Pol.	Horizontal							Fundamental																																																																																																																					
Peak	Level (dBuV/m) Date: 2025-04-09 Site : 03CH11-HY Condition: PEAK_BE_74 3m 91200_01620_248028 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2483.52</td><td>61.24</td><td>74.00</td><td>-12.76</td><td>49.17</td><td>27.04</td><td>7.32</td><td>33.12</td><td>10.03</td><td>100</td><td>157</td><td>PEAK</td></tr><tr><td>2</td><td>2483.52</td><td>36.48</td><td>74.00</td><td>-37.52</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>AVERAGE</td></tr></table>								Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2483.52	61.24	74.00	-12.76	49.17	27.04	7.32	33.12	10.03	100	157	PEAK	2	2483.52	36.48	74.00	-37.52	--	--	--	--	--	--	--	--	AVERAGE	Level (dBuV/m) Date: 2025-04-09 Site : 03CH11-HY Condition: PEAK_74 3m 91200_01620_248028 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2480.00</td><td>116.07</td><td>-----</td><td>-----</td><td>-----</td><td>104.05</td><td>27.00</td><td>7.31</td><td>33.12</td><td>10.03</td><td>100</td><td>157</td><td>PEAK</td></tr><tr><td>2</td><td>2480.00</td><td>91.31</td><td>-----</td><td>-----</td><td>-----</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>AVERAGE</td></tr></table>								Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2480.00	116.07	-----	-----	-----	104.05	27.00	7.31	33.12	10.03	100	157	PEAK	2	2480.00	91.31	-----	-----	-----	--	--	--	--	--	--	--	AVERAGE
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																
	MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																	
1	2483.52	61.24	74.00	-12.76	49.17	27.04	7.32	33.12	10.03	100	157	PEAK																																																																																																																	
2	2483.52	36.48	74.00	-37.52	--	--	--	--	--	--	--	--	AVERAGE																																																																																																																
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																
	MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																	
1	2480.00	116.07	-----	-----	-----	104.05	27.00	7.31	33.12	10.03	100	157	PEAK																																																																																																																
2	2480.00	91.31	-----	-----	-----	--	--	--	--	--	--	--	AVERAGE																																																																																																																







Mode	3																																																																																																																													
	Band Edge																																																																																																																													
	2400-2483.5_Bluetooth BR_GFSK_CH78_2480MHz																																																																																																																													
ANT	4+3																																																																																																																													
Pol.	Vertical						Fundamental																																																																																																																							
Peak	Level (dBuV/m) Date: 2025-04-09 Site : 03CH11-HY Condition: PEAK_BE_74 3m 91200_01620_248028 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.92</td><td>56.13</td><td>74.00</td><td>-17.87</td><td>44.05</td><td>27.84</td><td>7.32</td><td>33.11</td><td>10.03</td><td>369</td><td>43</td><td>PEAK</td></tr><tr><td>2</td><td>2483.92</td><td>31.37</td><td>74.00</td><td>-42.63</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.92	56.13	74.00	-17.87	44.05	27.84	7.32	33.11	10.03	369	43	PEAK	2	2483.92	31.37	74.00	-42.63	--	--	--	--	--	--	--	AVERAGE	Level (dBuV/m) Date: 2025-04-09 Site : 03CH11-HY Condition: PEAK_74 3m 91200_01620_248028 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2480.00</td><td>115.28</td><td>-----</td><td>-----</td><td>103.26</td><td>27.80</td><td>7.31</td><td>33.12</td><td>10.03</td><td>369</td><td>43</td><td>PEAK</td></tr><tr><td>2</td><td>2480.00</td><td>90.52</td><td>-----</td><td>-----</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	115.28	-----	-----	103.26	27.80	7.31	33.12	10.03	369	43	PEAK	2	2480.00	90.52	-----	-----	--	--	--	--	--	--	--	AVERAGE
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																				
1	2483.92	56.13	74.00	-17.87	44.05	27.84	7.32	33.11	10.03	369	43	PEAK																																																																																																																		
2	2483.92	31.37	74.00	-42.63	--	--	--	--	--	--	--	AVERAGE																																																																																																																		
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																				
1	2480.00	115.28	-----	-----	103.26	27.80	7.31	33.12	10.03	369	43	PEAK																																																																																																																		
2	2480.00	90.52	-----	-----	--	--	--	--	--	--	--	AVERAGE																																																																																																																		



Mode	3																																																																																																																																																					
	Harmonic																																																																																																																																																					
	2400-2483.5_Bluetooth BR_GFSK_CH78_2480MHz																																																																																																																																																					
ANT	4+3																																																																																																																																																					
Pol.	Horizontal					Vertical																																																																																																																																																
Peak Avg	Level (dBuV/m) Date: 2025-04-09 Site : 03CH11-HY Condition: PEAK_74 3m 91280_01620_240828 HORIZONTAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr><tr><td>1 4960.00</td><td>43.14</td><td>74.00</td><td>-30.86</td><td>64.48</td><td>33.02</td><td>11.70</td><td>66.63</td><td>0.57</td><td>-- -- PEAK</td></tr><tr><td>2 4960.00</td><td>18.38</td><td>54.00</td><td>-35.62</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>-- -- AVERAGE</td></tr><tr><td>3 7440.00</td><td>43.98</td><td>74.00</td><td>-30.02</td><td>58.64</td><td>36.24</td><td>14.71</td><td>65.93</td><td>0.32</td><td>-- -- PEAK</td></tr><tr><td>4 7440.00</td><td>19.22</td><td>54.00</td><td>-34.78</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>-- -- AVERAGE</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1 4960.00	43.14	74.00	-30.86	64.48	33.02	11.70	66.63	0.57	-- -- PEAK	2 4960.00	18.38	54.00	-35.62	--	--	--	--	--	-- -- AVERAGE	3 7440.00	43.98	74.00	-30.02	58.64	36.24	14.71	65.93	0.32	-- -- PEAK	4 7440.00	19.22	54.00	-34.78	--	--	--	--	--	-- -- AVERAGE	Level (dBuV/m) Date: 2025-04-09 Site : 03CH11-HY Condition: PEAK_74 3m 91280_01620_240828 VERTICAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr><tr><td>1 4960.00</td><td>43.55</td><td>74.00</td><td>-30.45</td><td>64.89</td><td>33.02</td><td>11.70</td><td>66.63</td><td>0.57</td><td>-- -- PEAK</td></tr><tr><td>2 4960.00</td><td>18.79</td><td>54.00</td><td>-35.21</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>-- -- AVERAGE</td></tr><tr><td>3 7440.00</td><td>43.19</td><td>74.00</td><td>-30.81</td><td>57.85</td><td>36.24</td><td>14.71</td><td>65.93</td><td>0.32</td><td>-- -- PEAK</td></tr><tr><td>4 7440.00</td><td>18.43</td><td>54.00</td><td>-35.57</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>-- -- AVERAGE</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1 4960.00	43.55	74.00	-30.45	64.89	33.02	11.70	66.63	0.57	-- -- PEAK	2 4960.00	18.79	54.00	-35.21	--	--	--	--	--	-- -- AVERAGE	3 7440.00	43.19	74.00	-30.81	57.85	36.24	14.71	65.93	0.32	-- -- PEAK	4 7440.00	18.43	54.00	-35.57	--	--	--	--	--	-- -- AVERAGE
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																												
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																																																																																													
1 4960.00	43.14	74.00	-30.86	64.48	33.02	11.70	66.63	0.57	-- -- PEAK																																																																																																																																													
2 4960.00	18.38	54.00	-35.62	--	--	--	--	--	-- -- AVERAGE																																																																																																																																													
3 7440.00	43.98	74.00	-30.02	58.64	36.24	14.71	65.93	0.32	-- -- PEAK																																																																																																																																													
4 7440.00	19.22	54.00	-34.78	--	--	--	--	--	-- -- AVERAGE																																																																																																																																													
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																																																																																													
1 4960.00	43.55	74.00	-30.45	64.89	33.02	11.70	66.63	0.57	-- -- PEAK																																																																																																																																													
2 4960.00	18.79	54.00	-35.21	--	--	--	--	--	-- -- AVERAGE																																																																																																																																													
3 7440.00	43.19	74.00	-30.81	57.85	36.24	14.71	65.93	0.32	-- -- PEAK																																																																																																																																													
4 7440.00	18.43	54.00	-35.57	--	--	--	--	--	-- -- AVERAGE																																																																																																																																													

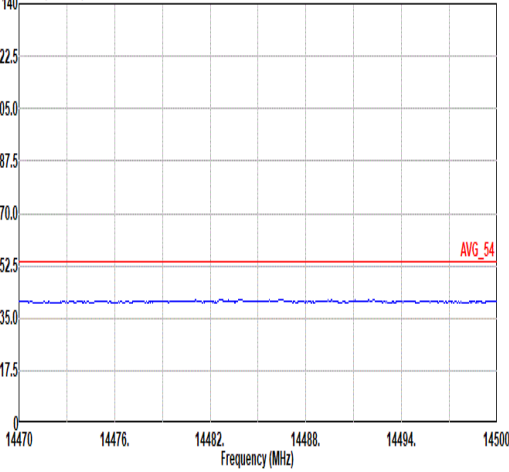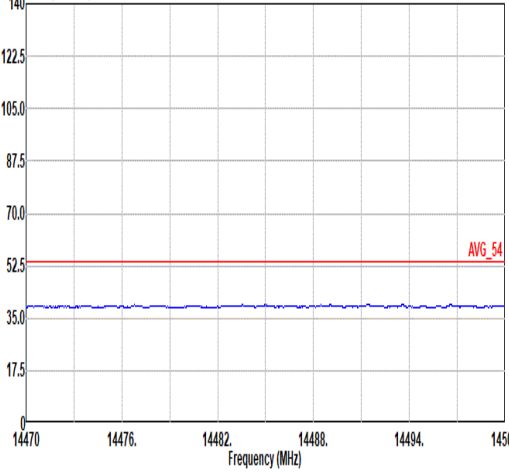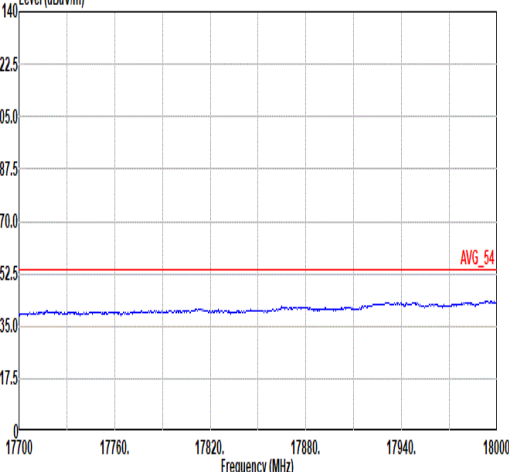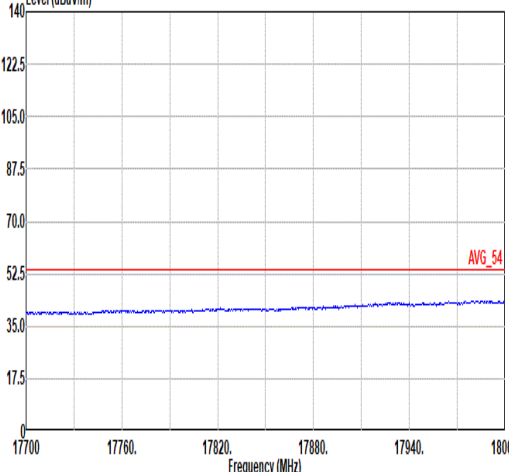

Mode	3	
	Harmonic	
	2400-2483.5_Bluetooth BR_GFSK_CH78_2480MHz	
ANT	4+3	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	Level (dBuV/m) Date: 2025-04-09  Site : 03CH11-HY Condition: AVG_54 3m 91280_01620_240828 HORIZONTAL	Level (dBuV/m) Date: 2025-04-09  Site : 03CH11-HY Condition: AVG_54 3m 91280_01620_240828 VERTICAL
	Level (dBuV/m) Date: 2025-04-09  Site : 03CH11-HY Condition: AVG_54 3m 91280_01620_240828 HORIZONTAL	Level (dBuV/m) Date: 2025-04-09  Site : 03CH11-HY Condition: AVG_54 3m 91280_01620_240828 VERTICAL



Mode	13																																																																																																																			
	SHF																																																																																																																			
	2400-2483.5_Bluetooth BR_GFSK_CH78_2480MHz																																																																																																																			
ANT	4+3																																																																																																																			
Pol.	Horizontal	Vertical																																																																																																																		
Peak	Level (dBuV/m) Date: 2025-04-18 Site : 03CH11-HY Condition: PEAK_74 1m SHF_1223_240624 HORIZONTAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>25600.00</td><td>34.90</td><td>74.00</td><td>-39.10</td><td>35.99</td><td>39.20</td><td>29.75</td><td>60.50</td><td>-9.54</td><td>100</td><td>15</td><td>PEAK</td></tr><tr><td>2</td><td>25600.00</td><td>10.93</td><td>54.00</td><td>-43.07</td><td>12.02</td><td>39.20</td><td>29.75</td><td>60.50</td><td>-9.54</td><td>100</td><td>15</td><td>AVERAGE</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	25600.00	34.90	74.00	-39.10	35.99	39.20	29.75	60.50	-9.54	100	15	PEAK	2	25600.00	10.93	54.00	-43.07	12.02	39.20	29.75	60.50	-9.54	100	15	AVERAGE	Level (dBuV/m) Date: 2025-04-18 Site : 03CH11-HY Condition: PEAK_74 1m SHF_1223_240624 VERTICAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>25641.68</td><td>35.18</td><td>74.00</td><td>-38.82</td><td>36.24</td><td>39.20</td><td>29.78</td><td>60.50</td><td>-9.54</td><td>100</td><td>50</td><td>PEAK</td></tr><tr><td>2</td><td>25641.68</td><td>10.42</td><td>54.00</td><td>-43.58</td><td>11.48</td><td>39.20</td><td>29.78</td><td>60.50</td><td>-9.54</td><td>100</td><td>50</td><td>AVERAGE</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	25641.68	35.18	74.00	-38.82	36.24	39.20	29.78	60.50	-9.54	100	50	PEAK	2	25641.68	10.42	54.00	-43.58	11.48	39.20	29.78	60.50	-9.54	100	50	AVERAGE
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																										
1	25600.00	34.90	74.00	-39.10	35.99	39.20	29.75	60.50	-9.54	100	15	PEAK																																																																																																								
2	25600.00	10.93	54.00	-43.07	12.02	39.20	29.75	60.50	-9.54	100	15	AVERAGE																																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																										
1	25641.68	35.18	74.00	-38.82	36.24	39.20	29.78	60.50	-9.54	100	50	PEAK																																																																																																								
2	25641.68	10.42	54.00	-43.58	11.48	39.20	29.78	60.50	-9.54	100	50	AVERAGE																																																																																																								




Mode	14																																																																																																																																																																																					
	LF																																																																																																																																																																																					
	2400-2483.5_Bluetooth BR_GFSK_CH78_2480MHz																																																																																																																																																																																					
ANT	4+3																																																																																																																																																																																					
Pol.	Horizontal	Vertical																																																																																																																																																																																				
QPI Peak	Level (dBuV/m) Date: 2025-04-18 Site : 03CH11-HY Condition: QP 3m B1L06_37059801_241127 HORIZONTAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr><tr><td>1</td><td>32.91</td><td>27.82</td><td>40.00</td><td>-12.18</td><td>35.99</td><td>23.26</td><td>0.89</td><td>32.37</td><td>0.05 100 359 QP</td></tr><tr><td>2</td><td>93.05</td><td>33.01</td><td>43.50</td><td>-10.49</td><td>48.58</td><td>15.28</td><td>1.43</td><td>32.32</td><td>0.04 -- -- Peak</td></tr><tr><td>3</td><td>158.04</td><td>27.22</td><td>43.50</td><td>-16.28</td><td>40.58</td><td>16.89</td><td>1.88</td><td>32.26</td><td>0.13 -- -- Peak</td></tr><tr><td>4</td><td>178.41</td><td>32.08</td><td>43.50</td><td>-11.42</td><td>46.82</td><td>15.36</td><td>1.97</td><td>32.22</td><td>0.15 -- -- Peak</td></tr><tr><td>5</td><td>883.60</td><td>30.78</td><td>46.00</td><td>-15.22</td><td>28.61</td><td>29.19</td><td>4.27</td><td>31.48</td><td>0.19 -- -- Peak</td></tr><tr><td>6</td><td>949.56</td><td>33.24</td><td>46.00</td><td>-12.76</td><td>28.47</td><td>30.93</td><td>4.53</td><td>30.90</td><td>0.21 -- -- Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1	32.91	27.82	40.00	-12.18	35.99	23.26	0.89	32.37	0.05 100 359 QP	2	93.05	33.01	43.50	-10.49	48.58	15.28	1.43	32.32	0.04 -- -- Peak	3	158.04	27.22	43.50	-16.28	40.58	16.89	1.88	32.26	0.13 -- -- Peak	4	178.41	32.08	43.50	-11.42	46.82	15.36	1.97	32.22	0.15 -- -- Peak	5	883.60	30.78	46.00	-15.22	28.61	29.19	4.27	31.48	0.19 -- -- Peak	6	949.56	33.24	46.00	-12.76	28.47	30.93	4.53	30.90	0.21 -- -- Peak	Level (dBuV/m) Date: 2025-04-18 Site : 03CH11-HY Condition: QP 3m B1L06_37059801_241127 VERTICAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr><tr><td>1</td><td>32.91</td><td>29.71</td><td>40.00</td><td>-10.29</td><td>37.88</td><td>23.26</td><td>0.89</td><td>32.37</td><td>0.05 100 290 QP</td></tr><tr><td>2</td><td>67.83</td><td>30.17</td><td>40.00</td><td>-9.83</td><td>48.80</td><td>12.39</td><td>1.25</td><td>32.32</td><td>0.05 -- -- Peak</td></tr><tr><td>3</td><td>91.11</td><td>32.29</td><td>43.50</td><td>-11.21</td><td>48.03</td><td>15.14</td><td>1.40</td><td>32.33</td><td>0.05 -- -- Peak</td></tr><tr><td>4</td><td>175.50</td><td>30.88</td><td>43.50</td><td>-12.62</td><td>45.46</td><td>15.54</td><td>1.96</td><td>32.23</td><td>0.15 -- -- Peak</td></tr><tr><td>5</td><td>927.25</td><td>33.26</td><td>46.00</td><td>-12.74</td><td>29.91</td><td>29.82</td><td>4.43</td><td>31.12</td><td>0.22 -- -- Peak</td></tr><tr><td>6</td><td>953.44</td><td>33.83</td><td>46.00</td><td>-12.17</td><td>28.86</td><td>31.08</td><td>4.53</td><td>30.86</td><td>0.22 -- -- Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1	32.91	29.71	40.00	-10.29	37.88	23.26	0.89	32.37	0.05 100 290 QP	2	67.83	30.17	40.00	-9.83	48.80	12.39	1.25	32.32	0.05 -- -- Peak	3	91.11	32.29	43.50	-11.21	48.03	15.14	1.40	32.33	0.05 -- -- Peak	4	175.50	30.88	43.50	-12.62	45.46	15.54	1.96	32.23	0.15 -- -- Peak	5	927.25	33.26	46.00	-12.74	29.91	29.82	4.43	31.12	0.22 -- -- Peak	6	953.44	33.83	46.00	-12.17	28.86	31.08	4.53	30.86	0.22 -- -- Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																												
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																																																																																																																													
1	32.91	27.82	40.00	-12.18	35.99	23.26	0.89	32.37	0.05 100 359 QP																																																																																																																																																																													
2	93.05	33.01	43.50	-10.49	48.58	15.28	1.43	32.32	0.04 -- -- Peak																																																																																																																																																																													
3	158.04	27.22	43.50	-16.28	40.58	16.89	1.88	32.26	0.13 -- -- Peak																																																																																																																																																																													
4	178.41	32.08	43.50	-11.42	46.82	15.36	1.97	32.22	0.15 -- -- Peak																																																																																																																																																																													
5	883.60	30.78	46.00	-15.22	28.61	29.19	4.27	31.48	0.19 -- -- Peak																																																																																																																																																																													
6	949.56	33.24	46.00	-12.76	28.47	30.93	4.53	30.90	0.21 -- -- Peak																																																																																																																																																																													
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																																																																																																																													
1	32.91	29.71	40.00	-10.29	37.88	23.26	0.89	32.37	0.05 100 290 QP																																																																																																																																																																													
2	67.83	30.17	40.00	-9.83	48.80	12.39	1.25	32.32	0.05 -- -- Peak																																																																																																																																																																													
3	91.11	32.29	43.50	-11.21	48.03	15.14	1.40	32.33	0.05 -- -- Peak																																																																																																																																																																													
4	175.50	30.88	43.50	-12.62	45.46	15.54	1.96	32.23	0.15 -- -- Peak																																																																																																																																																																													
5	927.25	33.26	46.00	-12.74	29.91	29.82	4.43	31.12	0.22 -- -- Peak																																																																																																																																																																													
6	953.44	33.83	46.00	-12.17	28.86	31.08	4.53	30.86	0.22 -- -- Peak																																																																																																																																																																													



Appendix D. Duty Cycle Plots

MIMO <Ant. 4+3>

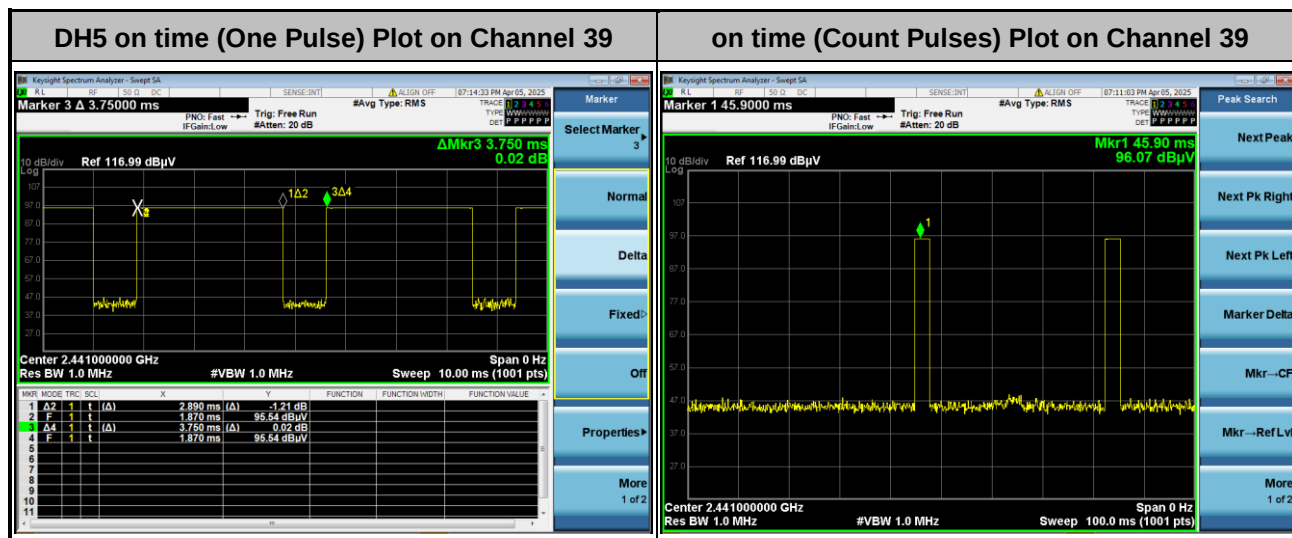

Note:

1. Worst case Duty cycle = on time/100 milliseconds = $2 \times 2.89 / 100 = 5.78 \%$
2. Worst case Duty cycle correction factor = $20 \times \log(\text{Duty cycle}) = -24.76 \text{ dB}$
3. DH5 has the highest duty cycle worst case and is reported.

Duty Cycle Correction Factor Consideration for AFH mode:

Bluetooth normal hopping rate is 1600Hz and reduced to 800Hz in AFH mode; due to the reduced number of hopping frequencies, with the same packet configuration the dwell time in each channel frequency within 100msec period is longer in AFH mode than normal mode.

In AFH mode, the minimum hopping frequencies are 20, to get the longest dwell time DH5 packet is observed; the on time period to have DH5 packet completing one hopping sequence is

$$2.89 \text{ ms} \times 20 \text{ channels} = 57.8 \text{ ms}$$

There cannot be 2 complete hopping sequences within 100ms period, considering the random hopping behavior, maximum 2 hops can be possibly observed within the period. $[100 \text{ ms} / 57.8 \text{ ms}] = 2 \text{ hops}$

Thus, the maximum possible ON time:

$$2.89 \text{ ms} \times 2 = 5.78 \text{ ms}$$

Worst case Duty Cycle Correction factor, which is derived from the maximum possible ON time,

$$20 \times \log(5.78 \text{ ms}/100 \text{ ms}) = -24.76 \text{ dB}$$

—————THE END—————