



FCC RADIO TEST REPORT

FCC ID : A4RGU0NP
Equipment : Phone
Model Name : GU0NP, GM66V
Applicant : Google LLC
1600 Amphitheatre Parkway,
Mountain View, CA, 94043 USA
Standard : FCC Part 15 Subpart E §15.407

The product was received on Feb. 27, 2025 and testing was performed from Mar.05, 2025 to Apr.30, 2025. We, Sporton International Inc. Wensan Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval from Sporton International Inc. Wensan Laboratory, the test report shall not be reproduced except in full.

Louis Wu

Approved by: Louis Wu

Sporton International Inc. Wensan Laboratory

No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan (R.O.C.)



Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
1 General Description	5
1.1 Product Feature of Equipment Under Test.....	5
1.2 Modification of EUT	7
1.3 Testing Location	7
1.4 Applicable Standards.....	7
2 Test Configuration of Equipment Under Test	8
2.1 Carrier Frequency and Channel	8
2.2 Test Mode	10
2.3 Connection Diagram of Test System.....	12
2.4 Support Unit used in test configuration and system	13
2.5 EUT Operation Test Setup	13
2.6 Measurement Results Explanation Example.....	14
3 Test Result	15
3.1 26dB & 99% Occupied Bandwidth Measurement	15
3.2 Maximum Conducted Output Power Measurement	17
3.3 Power Spectral Density Measurement	19
3.4 Unwanted Emissions Measurement	22
3.5 AC Conducted Emission Measurement.....	27
3.6 Antenna Requirements.....	29
4 List of Measuring Equipment.....	30
5 Measurement Uncertainty	32
Appendix A. Conducted Test Results	
Appendix B. AC Conducted Emission Test Result	
Appendix C. Radiated Spurious Emission Test Data	
Appendix D. Duty Cycle Plots	
Appendix E. Setup Photographs	



History of this test report

Report No.	Version	Description	Issue Date
FR4N0920E	01	Initial issue of report	May 22, 2025
FR4N0920E	02	Removed the blank page and Appendix A This report is an updated version, replacing the report issued on May 22, 2025	Jun. 03, 2025

Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.1	15.403	26dB Bandwidth	Pass	-
3.1	2.1049	99% Occupied Bandwidth	Pass	-
3.2	15.407(a)	Maximum Conducted Output Power	Pass	-
3.3	15.407(a)	Power Spectral Density	Pass	-
3.4	15.407(b)	Unwanted Emissions	Pass	-
3.5	15.207	AC Conducted Emission	Pass	-
3.6	15.203	Antenna Requirement	Pass	-

Conformity Assessment Condition:

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacture who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2. The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty".

Disclaimer:

1. The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.
2. The GU0NP and GM66V are 100% identical in Hardware / Software to each other, and only have different model names for marketing segmentation. The test sample are all model GU0NP.

Reviewed by: William Chen

Report Producer: Josie Hsu

1 General Description

1.1 Product Feature of Equipment Under Test

Product Feature
General Specs GSM/WCDMA/LTE/5G NR/NTN, Bluetooth, BLE, BLE channel sounding, Thread, Wi-Fi 802.11be, NFC, WPC Rx, UWB and GNSS Rx.
Antenna Type WLAN: <Ant. 4>: ILA Antenna <Ant. 3>: IFA Antenna

EUT Information List	
S/N	Performed Test Item
52171FDCG0005B	RF Conducted Measurement
52181FDCG0008P	Radiated Spurious Emission
52181FDCG0008P	Conducted Emission

Antenna information (Open Mode)		
5150 MHz ~ 5250 MHz	Peak Gain (dBi)	<5G_Ant4 + 5G_Ant3> Correlated: -2.42 Uncorrelated: -5.37
5250 MHz ~ 5350 MHz	Peak Gain (dBi)	Ant. 4: -3.36 Ant. 3: -3.75
5470 MHz ~ 5725 MHz	Peak Gain (dBi)	Ant. 4: -2.04 Ant. 3: -4.34
5725 MHz ~ 5850 MHz	Peak Gain (dBi)	Ant. 4: -1.42 Ant. 3: -4.09

Antenna information (Close Mode)		
5150 MHz ~ 5250 MHz	Peak Gain (dBi)	<5G_Ant4 + 5G_Ant3> Correlated: -2.14 Uncorrelated: -5.06
5250 MHz ~ 5350 MHz	Peak Gain (dBi)	Ant. 4: -2.22 Ant. 3: -4.87
5470 MHz ~ 5725 MHz	Peak Gain (dBi)	Ant. 4: -1.37 Ant. 3: -3.35
5725 MHz ~ 5850 MHz	Peak Gain (dBi)	Ant. 4: -5.49 Ant. 3: -3.98

Remark:

1. The EUT's information above is declared by manufacturer. Please refer to Disclaimer in report summary.
2. The correlated antenna gain is provided by the MIMO antenna report using KDB 662911 D01 from manufacturer.

1.1.1 Antenna Directional Gain

<For CDD Mode>

Follows FCC KDB 662911 D01 Multiple Transmitter Output v02r01 F)2)f)ii)

Directional gain = G_{ANT} + Array Gain, where Array Gain is as follows:

For power measurements on IEEE 802.11 devices,

Array Gain = 0 dB (i.e., no array gain) for $N_{ANT} \leq 4$.

G_{ANT} is set equal to the gain of the antenna having the highest gain.

For PSD measurements, the directional gain calculation.

$$DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right]$$

where

Each antenna is driven by no more than one spatial stream;

N_{SS} = the number of independent spatial streams of data;

N_{ANT} = the total number of antennas

$g_{j,k} = 10^{G_k / 20}$ if the k th antenna is being fed by spatial stream j , or zero if it is not;
 G_k is the gain in dBi of the k th antenna.

As minimum $N_{SS}=1$ is supported by EUT, the formula can be simplified as:

Directional gain = $10 \cdot \log[(10^{G_1 / 20} + 10^{G_2 / 20} + \dots + 10^{G_N / 20})^2 / N_{ANT}]$ dBi

Where $G_1, G_2, \dots, G_N$ denote single antenna gain.

The directional gain "DG" is calculated as following table.

			DG	DG	Power	PSD
			for	for	Limit	Limit
	Ant 4	Ant 3	Power	PSD	Reduction	Reduction
	(dBi)	(dBi)	(dBi)	(dBi)	(dB)	(dB)
Band II	-2.22	-3.75	-2.22	0.06	0.00	0.00
Band III	-1.37	-3.35	-1.37	0.71	0.00	0.00
Band IV	-1.42	-3.98	-1.42	0.40	0.00	0.00

Calculation example:

If a device has two antenna, $G_{ANT4} = -2.22$ dBi; $G_{ANT3} = -3.75$ dBi

Directional gain of power measurement = $\max(-2.22, -3.75) + 0 = -2.22$ dBi

Directional gain of PSD derived from formula which is

$10 \times \log \{ \{ [10^{(-2.22 \text{ dBi} / 20)} + 10^{(-3.75 \text{ dBi} / 20)}]^2 / 2 \}$
 $= 0.06$ dBi

Power and PSD limit reduction = Composite gain – 6dBi, (min = 0)

Note: The antenna gain is from both open mode and close mode with highest number.

1.2 Modification of EUT

No modifications made to the EUT during the testing.

1.3 Testing Location

Test Site	Sporton International Inc. Wensan Laboratory
Test Site Location	No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan (R.O.C.) TEL: +886-3-327-0868 FAX: +886-3-327-0855
Test Site No.	Sporton Site No. TH05-HY, CO07-HY, 03CH15-HY

Note: The test site complies with ANSI C63.4 2014 requirement.

FCC designation No.: TW3786

1.4 Applicable Standards

According to the specifications declared by the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart E
- ♦ FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
- ♦ FCC KDB 414788 D01 Radiated Test Site v01r01.
- ♦ FCC KDB 662911 D01 Multiple Transmitter Output v02r01.
- ♦ ANSI C63.10-2013

Remark:

1. All the test items were validated and recorded in accordance with the standards without any modification during the testing.
2. The TAF code is not including all the FCC KDB listed without accreditation.

2 Test Configuration of Equipment Under Test

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, the measured emission level of the EUT was maximized by rotating the EUT on a turntable, adjusting the orientation of the EUT (Open and Close) and EUT antenna in three orthogonal axis (X: flat, Y: portrait, Z: landscape) and accessory (Adapter or Earphone), and adjusting the measurement antenna orientation, following C63.10 exploratory test procedures and find X plane with Adapter (Close Mode) for MIMO<Ant. 4+3> for Band 1-3 and. Z plane with Adapter (Open Mode) for MIMO<Ant. 4+3> for Band 4 as worst plane
- b. AC power line Conducted Emission was tested under maximum output power.

2.1 Carrier Frequency and Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
5150-5250 MHz Band 1 (U-NII-1)	36	5180	44	5220
	38*	5190	46*	5230
	40	5200	48	5240
	42#	5210		
Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
5250-5350 MHz Band 2 (U-NII-2A)	52	5260	60	5300
	54*	5270	62*	5310
	56	5280	64	5320
	58#	5290		
Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
5470-5725 MHz Band 3 (U-NII-2C)	100	5500	112	5560
	102*	5510	116	5580
	104	5520	132	5660
	106#	5530	134*	5670
	108	5540	136	5680
	110*	5550	140	5700

Frequency Band	Channel	Freq. (MHz)
5150-5350 MHz	50@	5250
5470-5725 MHz	114@	5570

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
5725-5850 MHz Band 4 (U-NII-3)	149	5745	157	5785
	151*	5755	159*	5795
	153	5765	161	5805
	155#	5775	165	5825

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
TDWR Channel	118*	5590	124	5620
	120	5600	126*	5630
	122#	5610	128	5640

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
Straddle Channel	138#	5690	144	5720
	142*	5710		

Note:

1. The above Frequency and Channel with "*" are 802.11n HT40 and 802.11ac VHT40 and 802.11ax HE40 and 802.11be EHT40.
2. The above Frequency and Channel with "#" are 802.11ac VHT80 and 802.11ax HE80 and 802.11be EHT80.
3. The above Frequency and Channel with "@" are 802.11ac VHT160 and 802.11ax HE160 and 802.11be EHT160.

2.2 Test Mode

This device supports WiFi 802.11be 20MHz bandwidth for 2.4GHz and 160MHz bandwidth for both 5GHz and 6GHz.

This device supports 26/52/106/242/484/996 single tone RU modes for 802.11ax/be modes and the 242/484/996-tone RU modes are covered by 20/40/80MHz channels.

This device supports MRU 52T+26T/106T+26T (small RU) and punctured modes 484+242-tone, 996+484+242-tone, and 996+484-tone (large RU) for 802.11be mode.

The PSD of partial RU/MRU modes are reduced to be smaller than full RU according to TCB workshop interim guidance Oct. 2022.

The 802.11ax/be modes are investigated among full RU, single RU and MRU modes for emission spot check and the 11ax modes are covered by 11be modes.

The PSD and power of partial RU and MRU are less than full RU configurations so the full RU is chosen as main test configuration.

The power for 802.11n, 802.11ac and 802.11ax mode is smaller than 802.11be mode, so all other conducted and radiated test is covered by 802.11be mode.

The final test modes include the worst data rates for each modulation shown in the table below.

MIMO Mode

Modulation	Data Rate
802.11a	6 Mbps
802.11n HT20 (Covered by EHT20)	MCS0
802.11n HT40 (Covered by EHT40)	MCS0
802.11ac VHT20 (Covered by EHT20)	MCS0
802.11ac VHT40 (Covered by EHT40)	MCS0
802.11ac VHT80 (Covered by EHT80)	MCS0
802.11ac VHT160 (Covered by EHT160)	MCS0
802.11ax HE20 (Covered by EHT20)	MCS0
802.11ax HE40 (Covered by EHT40)	MCS0
802.11ax HE80 (Covered by EHT80)	MCS0
802.11ax HE160 (Covered by EHT160)	MCS0
802.11be EHT20	MCS0
802.11be EHT40	MCS0
802.11be EHT80	MCS0
802.11be EHT160	MCS0

Index of MRU and puncture mode mapping
Small MRU

MRU	26T	52T	106T
52T+26T	70	71	72
106T+26T	82		83

Large MRU

484+242-tone MRU			
2	1	4	3
80MHz puncture 20			
8	4	2	1

996+484+242-tone MRU							
2	1	4	3	6	5	8	7
160MHz puncture 20							
128	64	32	16	8	4	2	1


996+484-tone MRU			
2	1	4	3
160MHz puncture 40			
192	48	12	3


Note: The RF waveform is identical for large MRU and puncture modes.

Test Cases	
AC Conducted Emission	Mode 1 : WLAN (5GHz) 11a Tx+ USB Cable 1 (Charging from AC Adapter)
Remark: 1. For Radiated Test Cases, the tests were performed with USB Cable 1. 2. The detailed Radiated test modes are shown in Appendix C. 3. During the preliminary test, both charging modes (Adapter mode and WPC Rx mode) were verified. It is determined that the adaptor mode is the worst case for official test. 4. For radiation spurious emission, the modulation and the data rate picked for testing are determined by the Max. RF conducted power.	

2.3 Connection Diagram of Test System

<AC Conducted Emission Mode>

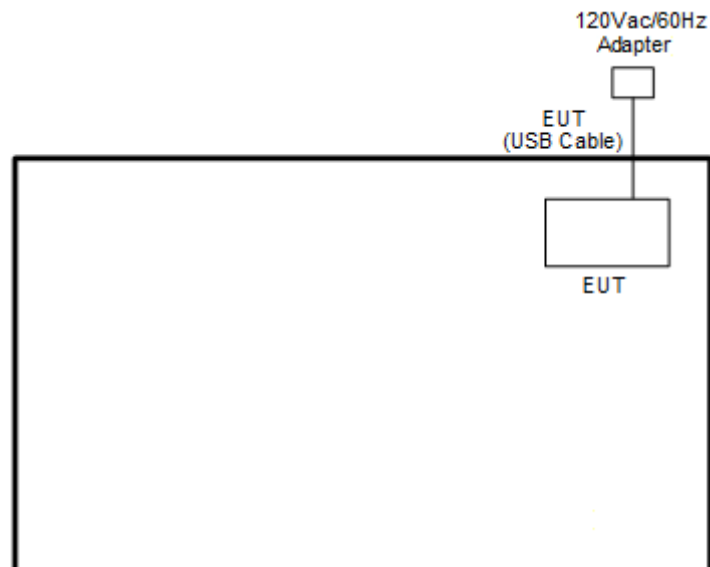
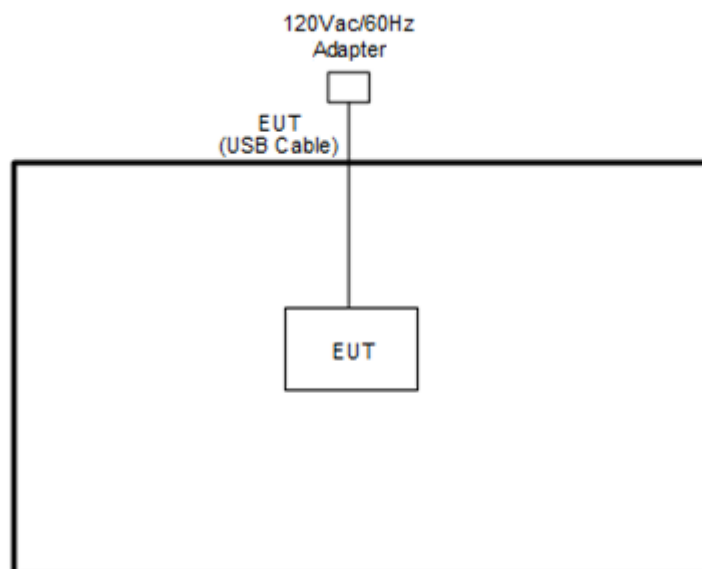
<WLAN Tx Mode>

2.4 Support Unit used in test configuration and system

Item	Equipment	Brand Name	Model Name	FCC ID	Data Cable	Power Cord
1.	Adapter	N/A	GW8L7	N/A	N/A	N/A

2.5 EUT Operation Test Setup

The RF test items, utility “WLAN_DUT_Control_GUI_10-15-24” was installed in Notebook which was programmed in order to make the EUT get into the engineering modes to provide channel selection, power level, data rate and the application type and for continuous transmitting signals.

2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 4.2 dB and 10 dB attenuator.

$$\begin{aligned}\text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)}. \\ &= 4.2 + 10 = 14.2 \text{ (dB)}\end{aligned}$$

3 Test Result

3.1 26dB & 99% Occupied Bandwidth Measurement

3.1.1 Description of 6dB and 26dB and 99% Occupied Bandwidth

The 6 dB bandwidth shall be at least 500kHz for 5725-5850MHz.

There is no restriction limits for 26dB and 99% Occupied bandwidth.

For Straddle Channel, according to KDB 789033 D02 General UNII Test Procedures New Rules v02r01, if the power and PSD of the devices are uniform and comply with the lower limits specified for the U-NII-2 bands, a single measurement over the entire emission bandwidth can be performed to show compliance.

3.1.2 Measuring Instruments


Please refer to the measuring equipment list in this test report.

3.1.3 Test Procedures

1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
Section C) Emission bandwidth
2. Set RBW = approximately 1% of the emission bandwidth.
3. Set the VBW > RBW.
4. Detector = Peak.
5. Trace mode = max hold
6. Measure the maximum width of the emission that is 26 dB down from the peak of the emission.
Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.
7. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set 1-5% of the emission bandwidth and set the Video bandwidth (VBW) $\geq 3 * RBW$.
8. Measure and record the results in the test report.
9. For 6dB Bandwidth Measurement
 - (1) The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
 - (2) Section C) Emission bandwidth for the band 5.725-5.85 GHz
 - (3) Set RBW = 100 kHz.
 - (4) Set the VBW $\geq 3 \times RBW$.
 - (5) Detector = Peak.
 - (6) Trace mode = max hold
 - (7) Measure the maximum width of the emission that is 6 dB down from the peak of the emission.

(8) Measure and record the results in the test report.

3.1.4 Test Setup



3.1.5 Test Result of 6dB and 26dB and 99% Occupied Bandwidth

Please refer to Appendix A.

3.2 Maximum Conducted Output Power Measurement

3.2.1 Limit of Maximum Conducted Output Power

<FCC 14-30 CFR 15.407>

For the 5.15–5.25 GHz bands:

■ For mobile and portable client devices in the 5.15–5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW. For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W.

For the 5.25–5.725 GHz bands:

■ The maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or 11 dBm 10 log B, where B is the 26 dB emission bandwidth in megahertz.

For Straddle Channel, according to KDB 789033 D02 General UNII Test Procedures New Rules v02r01, if the power and PSD of the devices are uniform and comply with the lower limits specified for the U-NII-2 bands, a single measurement over the entire emission bandwidth can be performed to show compliance.

For the band 5.725–5.85 GHz bands:

■ The maximum conducted output power over the frequency band of operation shall not exceed 1 W.

For Straddle Channel, according to KDB 789033 D02 General UNII Test Procedures New Rules v02r01, if the power and PSD of the devices are uniform and comply with the lower limits specified for the U-NII-2 bands, a single measurement over the entire emission bandwidth can be performed to show compliance.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Note that U-NII-2 band, devices with a maximum e.i.r.p. greater than 500 mW shall implement TPC in order to have the capability to operate at least 6 dB below the maximum permitted e.i.r.p. of 1 W.

3.2.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.2.3 Test Procedures


The testing follows Method PM-G of FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.

Method PM-G (Measurement using a gated RF average power meter):

1. Measurement is performed using a wideband RF power meter.
2. The EUT is configured to transmit at its maximum power control level.
3. Measure the average power of the transmitter.
4. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.
5. For MIMO mode, calculation method follows FCC KDB 662911 D01 Multiple Transmitter Output v02r01

For Straddle Channel, according to KDB 789033 D02 General UNII Test Procedures New Rules v02r01, if the power and PSD of the devices are uniform and comply with the lower limits specified for the U-NII-2 bands, a single measurement over the entire emission bandwidth can be performed to show compliance.

3.2.4 Test Setup

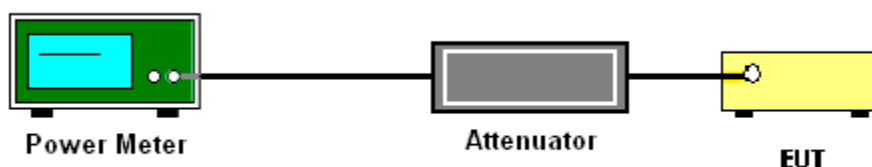

3.2.5 Test Result of Maximum Conducted Output Power

Please refer to Appendix A.



3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

<FCC 14-30 CFR 15.407>

For the 5.15–5.25 GHz bands:

For mobile and portable client devices in the 5.15–5.25 GHz band, the maximum power spectral density shall not exceed 11 dBm in any 1.0 MHz band. For an indoor access point operating in the band 5.15-5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1.0 MHz band.

For the 5.25–5.725 GHz bands:

The maximum power spectral density shall not exceed 11 dBm in any 1.0 MHz band.

For the 5.725–5.85 GHz bands:

The maximum power spectral density shall not exceed 30 dBm in any 500-kHz band.

For Straddle Channel, according to KDB 789033 D02 General UNII Test Procedures New Rules v02r01, if the power and PSD of the devices are uniform and comply with the lower limits specified for the U-NII-2 bands, a single measurement over the entire emission bandwidth can be performed to show compliance.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.3.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.3.3 Test Procedures

For the band 5.15-5.725 GHz

The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.

Section F) Maximum power spectral density.

Method SA-2

(trace averaging across on and off times of the EUT transmissions, followed by duty cycle correction).

- Measure the duty cycle.
 - Set span to encompass the entire emission bandwidth (EBW) of the signal.
 - Set RBW = 1 MHz.
 - Set VBW $\geq$ 3 MHz.
 - Number of points in sweep $\geq$ 2 Span / RBW.
 - Sweep time = auto.
 - Detector = RMS
 - Trace average at least 100 traces in power averaging mode.
 - Add $10 \log(1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times. For example, add $10 \log(1/0.25) = 6$ dB if the duty cycle is 25 percent.
1. The RF output of EUT is connected to the spectrum analyzer by a low loss cable.
 2. Each plot has already offset with cable loss, and attenuator loss. Measure the PPSD and record it.
 3. For MIMO mode, calculation method follows FCC KDB 662911 D01 Multiple Transmitter Output v02r01.

Method (a): Measure and sum the spectra across the outputs.

The total final Power Spectral Density is from a device with 2 transmitter outputs. The spectrum measurements of the individual outputs are all performed with the same span and number of points; the spectrum value in the first spectral bin of output 1 is summed with that in the first spectral bin of output 2 to obtain the value for the first frequency bin of the summed spectrum.

For the band 5.725–5.85 GHz

The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.

Section F) Maximum power spectral density.

Method SA-2


(trace averaging across on and off times of the EUT transmissions, followed by duty cycle correction).

- Measure the duty cycle.
 - Set span to encompass the entire emission bandwidth (EBW) of the signal.
 - Set RBW = 300kHz.
 - Set VBW ≥ 1 MHz.
 - Add $10 \log(500 \text{ kHz/RBW})$ to the measured result, whereas RBW ($<500 \text{ kHz}$) is the reduced resolution bandwidth of the spectrum analyzer set during measurement
 - Number of points in sweep $\geq 2 \text{ Span} / \text{RBW}$.
 - Sweep time = auto.
 - Detector = RMS
 - Trace average at least 100 traces in power averaging mode.
 - Add $10 \log(1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times. For example, add $10 \log(1/0.25) = 6 \text{ dB}$ if the duty cycle is 25 percent.
1. The RF output of EUT is connected to the spectrum analyzer by a low loss cable.
 2. Each plot has already offset with cable loss, and attenuator loss. Measure the PPSD and record it.
 3. For MIMO mode, calculation method follows FCC KDB 662911 D01 Multiple Transmitter Output v02r01.

Method (c): Measure and add $10 \log(N_{\text{ANT}}) \text{ dB}$.

With this technique, spectrum measurements are performed at each output of the device, but rather than summing the spectra or the spectral peaks across the outputs, the quantity $10 \log(N_{\text{ANT}}) \text{ dB}$ is added to each spectrum value before comparing to the emission limit. The addition of $10 \log(N_{\text{ANT}}) \text{ dB}$ serves to apportion the emission limit among the N_{ANT} outputs so that each output is permitted to contribute no more than $1/N_{\text{ANT}}^{\text{th}}$ of the PSD limit.

3.3.4 Test Setup

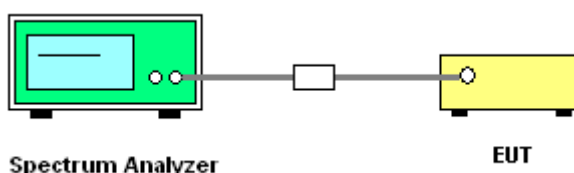

3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.

3.4 Unwanted Emissions Measurement

This section is to measure unwanted emissions through radiated measurement for band edge spurious emissions and out of band emissions measurement.

3.4.1 Limit of Unwanted Emissions

- (1) For transmitters operating in the 5150-5250 MHz band: all emissions outside of the 5150-5350 MHz band shall not exceed an EIRP of -27dBm/MHz .

For transmitters operating in the 5250-5350 MHz band: all emissions outside of the 5150-5350 MHz band shall not exceed an EIRP of -27 dBm/MHz . Devices operating in the 5250-5350 MHz band that generate emissions in the 5150-5250 MHz band must meet all applicable technical requirements for operation in the 5150-5250 MHz band (including indoor use) or alternatively meet an out-of-band emission EIRP limit of -27 dBm/MHz in the 5150-5250 MHz band.

For transmitters operating in the 5470-5600 MHz and 5650-5725MHz band: all emissions outside of the 5470-5600 MHz and 5650-5725MHz band shall not exceed an EIRP of -27 dBm/MHz .

For transmitters operating in the 5.725-5.85 GHz band:

15.407(b)(4)(i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

- (2) Unwanted spurious emissions falls in restricted bands shall comply with the general field strength limits as below table:

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

Note: The following formula is used to convert the EIRP to field strength.

$$E = \frac{1000000\sqrt{30P}}{3} \mu\text{V/m, where P is the eirp (Watts)}$$

EIRP (dBm)	Field Strength at 3m (dBμV/m)
- 27	68.3

(3) KDB789033 D02 v02r01 G)2)c)

(i) Sections 15.407(b)(1-3) specifies the unwanted emissions limit for the U-NII-1 and U-NII-2 bands. As specified, emissions above 1000 MHz that are outside of the restricted bands are subject to a peak emission limit of -27 dBm/MHz.

(ii) Section 15.407(b)(4) specifies the unwanted emissions limit for the U-NII-3 band. A band emissions mask is specified in Section 15.407(b)(4)(i). The emission limits are based on the use of a peak detector.

3.4.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.4.3 Test Procedures

- The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01. Section G) Unwanted emissions measurement.

(1) Procedure for Unwanted Emissions Measurements Below 1000 MHz

- RBW = 120 kHz
- VBW = 300 kHz
- Detector = Peak
- Trace mode = max hold

(2) Procedure for Peak Unwanted Emissions Measurements Above 1000 MHz

- RBW = 1 MHz
- VBW ≥ 3 MHz
- Detector = Peak
- Sweep time = auto
- Trace mode = max hold


(3) Procedures for Average Unwanted Emissions Measurements Above 1000 MHz

- RBW = 1 MHz
- VBW = 10 Hz, when duty cycle is no less than 98 percent.
- VBW ≥ 1/T, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.


2. The EUT is placed on a turntable with 0.8 meter for frequency below 1 GHz and 1.5 meter for frequency above 1 GHz respectively above ground.
3. The EUT is set 3 meters away from the receiving antenna which is mounted on the top of a variable height antenna tower.
4. The antenna is a broadband antenna and its height is adjusted between one meter and four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
5. For each suspected emission, the EUT is arranged to its worst case and then adjust the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
6. Radiated testing below 1 GHz is performed by adjusting the antenna tower from 1 m to 4 m and by rotating the turn table from 0 degree to 360 degrees to find the peak maximum hold reading. When there is no suspected emission found and the emission level is with at least 6 dB margin against QP limit line, the position is marked as “-”.
7. Radiated testing above 1 GHz is performed by adjusting the antenna tower from 1 m to 4 m and by rotating the turn table from 0 degree to 360 degrees to find the peak maximum hold reading for scanning all frequencies. When there is no suspected emission found and the harmonic emission level is with at least 6 dB margin against average limit line, the position is marked as “-”.

3.4.4 Test Setup


For radiated emissions below 30MHz

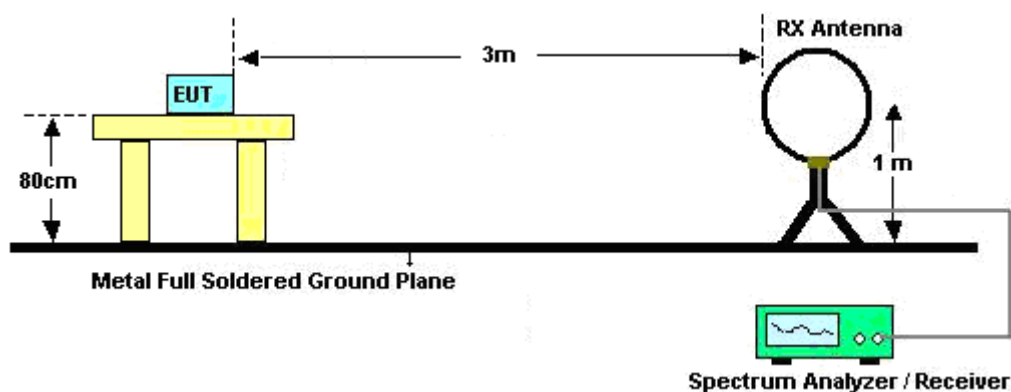


For radiated emissions from 30MHz to 1GHz

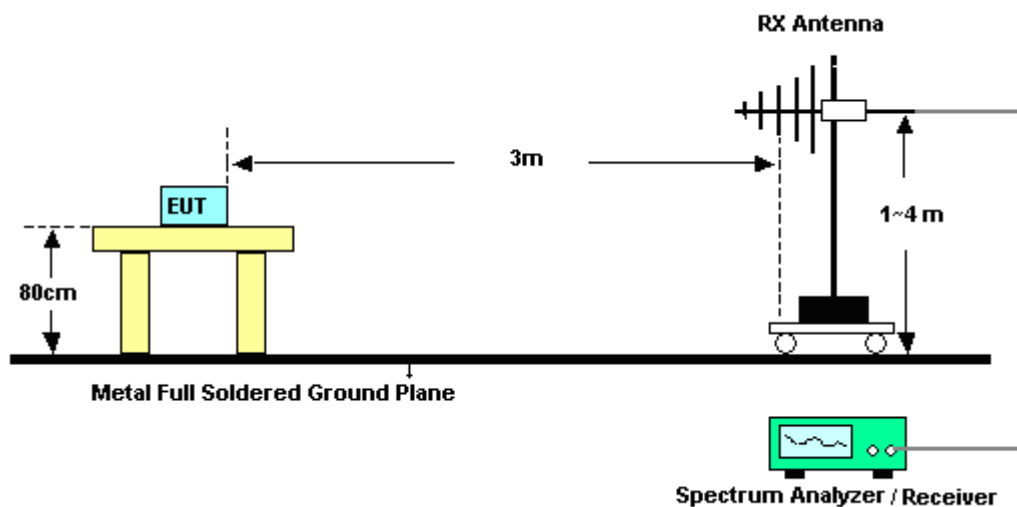

For radiated test from 1GHz to 18GHz

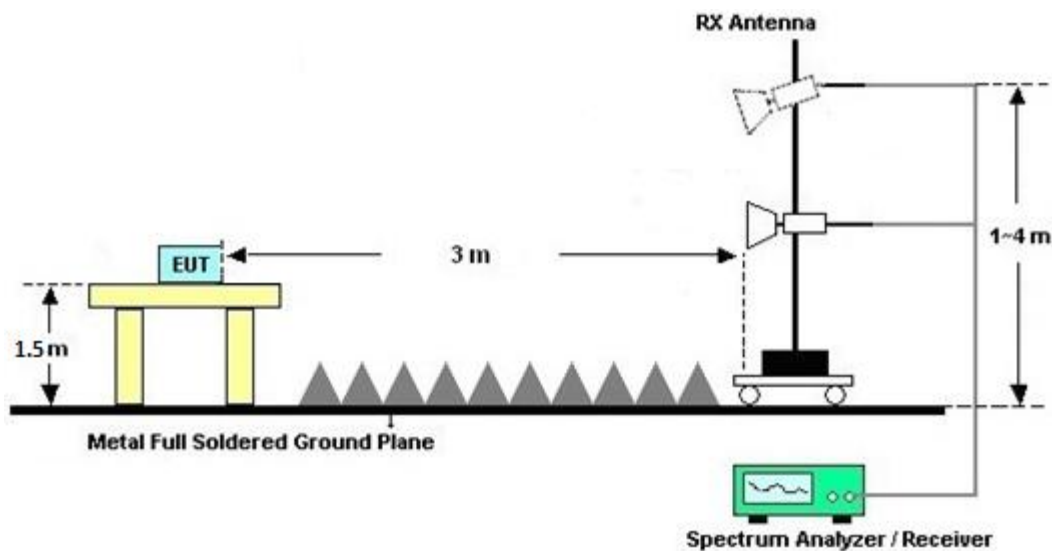

For radiated test above 18GHz

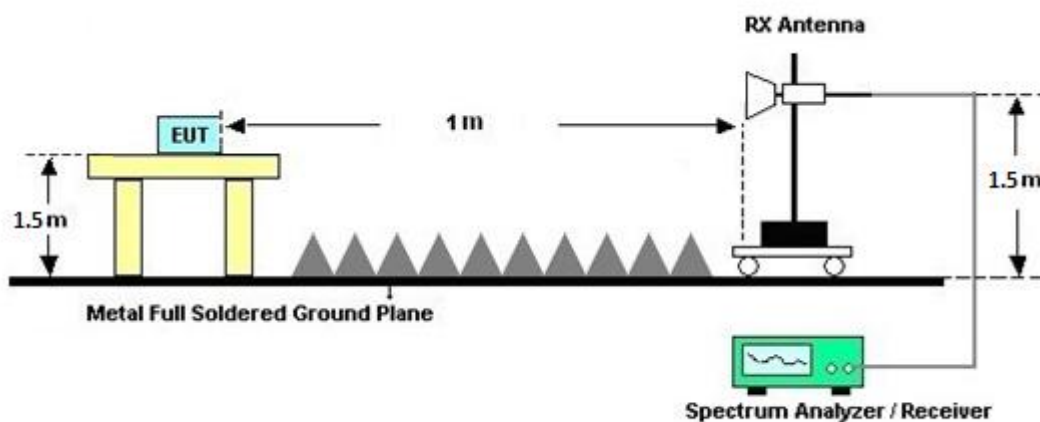

3.4.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which starts from 9 kHz to 30 MHz, is pre-scanned and the result which is 20 dB lower than the limit line is not reported.

There is adequate comparison measurement of both open-field test site and alternative test site - semi-Anechoic chamber according to 414788 D01 Radiated Test Site v01r01, and the result came out very similar.

3.4.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix C.

3.4.7 Duty Cycle

Please refer to Appendix D.

3.4.8 Test Result of Radiated Spurious Emissions (30MHz ~ 10th Harmonic)

Please refer to Appendix C.

3.5 AC Conducted Emission Measurement

3.5.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.5.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.5.3 Test Procedures

1. The EUT is placed 0.4 meter away from the conducting wall of the shielding room, and is kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN shall be used.
6. Both Line and Neutral shall be tested in order to find out the maximum conducted emission.
7. The frequency range from 150 kHz to 30 MHz is scanned.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.

3.5.4 Test Setup

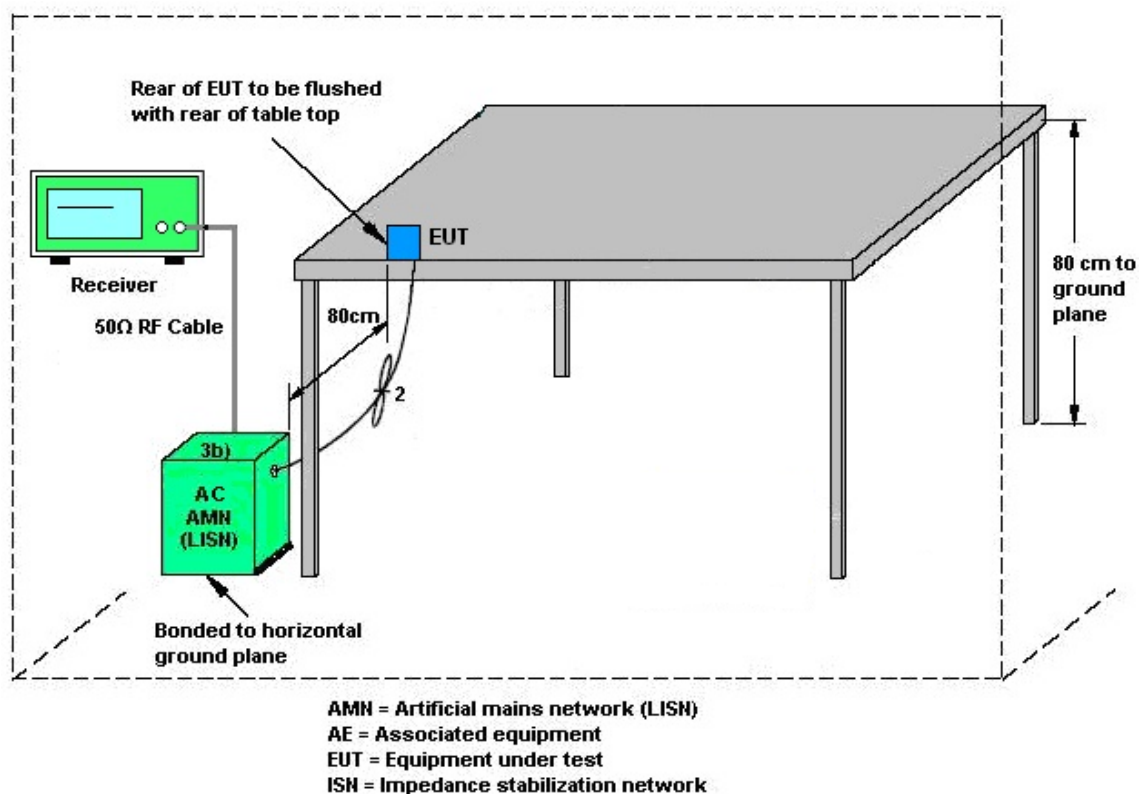

3.5.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



3.6 Antenna Requirements

3.6.1 Standard Applicable

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §15.211, 15.213, 15.217, 15.219, 15.221, or § 15.236. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with § 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

3.6.2 Antenna Anti-Replacement Construction

b) Unique (non-standard) antenna connector.

Use of a standard connector is also allowed if the connector is within the transmitter enclosure and can only be accessed by disassembly of the transmitter, where such disassembly is not normally required. The user manual must not show that user has access to the connector.



4 List of Measuring Equipment

Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100488	9 kHz~30 MHz	Aug. 29, 2024	Mar. 14, 2025~ Apr. 22, 2025	Aug. 28, 2025	Radiation (03CH15-HY)
Bilog Antenna	TESEQ	CBL 6111D & 00800N1D01N- 06	41912 & 05	30MHz~1GHz	Mar. 01, 2024	Mar. 14, 2025~ Apr. 22, 2025	Feb. 28, 2025	Radiation (03CH15-HY)
Horn Antenna	SCHWARZBE CK	BBHA 9120 D	9120D-02294	1GHz~18GHz	Jun. 20, 2024	Mar. 14, 2025~ Apr. 22, 2025	Jun. 19, 2025	Radiation (03CH15-HY)
SHF-EHF Horn Antenna	SCHWARZBE CK	BBHA 9170	1224	18GHz~40GHz	Jun. 24, 2024	Mar. 14, 2025~ Apr. 22, 2025	Jun. 23, 2025	Radiation (03CH15-HY)
Amplifier	EMEC	EM1G18G	060837	1GHz~18GHz	Feb. 13, 2025	Mar. 14, 2025~ Apr. 22, 2025	Feb. 12, 2026	Radiation (03CH15-HY)
Preamplifier	EM Electronics	EM01G18G	060802	1GHz~18GHz	Feb. 14, 2025	Mar. 14, 2025~ Apr. 22, 2025	Feb. 13, 2026	Radiation (03CH15-HY)
Preamplifier	EMEC	EM18G40G	060801	18GHz~40GHz	May 27, 2024	Mar. 14, 2025~ Apr. 22, 2025	May 26, 2025	Radiation (03CH15-HY)
Spectrum Analyzer	Keysight	N9010B	MY60241058	10Hz~44Gz	Jul. 11, 2024	Mar. 14, 2025~ Apr. 22, 2025	Jul. 10, 2025	Radiation (03CH15-HY)
EMI Receiver	Keysight	N9038A(MXE)	MY54130085	20MHz~8.4GHz	Oct. 16, 2024	Mar. 14, 2025~ Apr. 22, 2025	Oct. 15, 2025	Radiation (03CH15-HY)
Antenna Mast	ChainTek	MBS-520-1	N/A	1m~4m	N/A	Mar. 14, 2025~ Apr. 22, 2025	N/A	Radiation (03CH15-HY)
Turn Table	ChainTek	T-200-S-1	N/A	0~360 Degree	N/A	Mar. 14, 2025~ Apr. 22, 2025	N/A	Radiation (03CH15-HY)
Software	Audix	E3_V9_230621	RK-002394	N/A	N/A	Mar. 14, 2025~ Apr. 22, 2025	N/A	Radiation (03CH15-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104, 102E	MY582185/4, 519228/2,803 950/2	N/A	Jun. 11, 2024	Mar. 14, 2025~ Apr. 22, 2025	Jun. 10, 2025	Radiation (03CH15-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	804011/2,804 012/2	18-40G	Dec. 31, 2024	Mar. 14, 2025~ Apr. 22, 2025	Dec. 30, 2025	Radiation (03CH15-HY)
Filter	Wainwright	WHKX8-5872.5- 6750-18000- 40ST	SN6	6.75GHz High Pass Filter	Jun. 05, 2024	Mar. 14, 2025~ Apr. 22, 2025	Jun. 04, 2025	Radiation (03CH15-HY)
Filter	wright	WLJ4-1000- 1530-6000- 40ST	SN4	1.53GHz Low Pass Filter	Jun. 05, 2024	Mar. 14, 2025~ Apr. 22, 2025	Jun. 04, 2025	Radiation (03CH15-HY)
Hygrometer	TECEPEL	DTM-302	SN4	N/A	Aug. 29, 2024	Mar. 14, 2025~ Apr. 22, 2025	Aug. 28, 2025	Radiation (03CH15-HY)



Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Hygrometer	TECPEL	DTM-303A	TP201996	N/A	Nov. 01, 2024	Mar.05, 2025~ Apr.24, 2025	Oct. 31, 2025	Conducted (TH05-HY)
Power Sensor	DARE	RPR3006W	13I00030SNO 31 (NO:182)	9kHz~6GHz	Jan. 09, 2025	Mar.05, 2025~ Apr.24, 2025	Jan. 08, 2026	Conducted (TH05-HY)
Signal Analyzer	Rohde & Schwarz	FSV40	101566	10Hz~40GHz	Aug. 23, 2024	Mar.05, 2025~ Apr.24, 2025	Aug. 22, 2025	Conducted (TH05-HY)
Switch Control Mainframe	Burgeon	ETF-058	EC1300484 (BOX3)	N/A	May 20, 2024	Mar.05, 2025~ Apr.24, 2025	May 19, 2025	Conducted (TH05-HY)
Software	Sporton	BTWIFI_Final_ version_240513	N/A	Conducted Other Test Item	N/A	Mar.05, 2025~ Apr.24, 2025	N/A	Conducted (TH05-HY)
AC Power Source	ACPOWER	AFC-11003G	F317040033	N/A	N/A	Apr. 30, 2025	N/A	Conduction (CO07-HY)
Software	Rohde & Schwarz	EMC32 V10.30	N/A	N/A	N/A	Apr. 30, 2025	N/A	Conduction (CO07-HY)
Pulse Limiter	SCHWARZBECK	VTSD 9561-F N	9561-F N00373	9kHz-200MHz	Oct. 23, 2024	Apr. 30, 2025	Oct. 22, 2025	Conduction (CO07-HY)
RF Cable	HUBER + SUHNER	RG 214/U	1358175	9kHz~30MHz	Mar. 03, 2025	Apr. 30, 2025	Mar. 02, 2026	Conduction (CO07-HY)
Two-Line V-Network	TESEQ	NNB 51	45051	N/A	Mar. 24, 2025	Apr. 30, 2025	Mar. 23, 2026	Conduction (CO07-HY)
EMI Test Receiver	Rohde & Schwarz	ESR3	102317	9kHz~3.6GHz	Sep. 23, 2024	Apr. 30, 2025	Sep. 22, 2025	Conduction (CO07-HY)

5 Measurement Uncertainty

Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	3.7 dB
--	--------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	6.3 dB
--	--------

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 6000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.4 dB
--	--------

Uncertainty of Radiated Emission Measurement (6000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.4 dB
--	--------

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.2 dB
--	--------

Appendix A. Test Result of Conducted Test Items

Test Engineer:	Benny Ku/Junyu Jhou	Temperature:	21~25	°C
Test Date:	2025/3/5~2025/4/24	Relative Humidity:	51~54	%

TEST RESULTS DATA
26dB and 99% OBW

U-NII-1 MIMO														
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	99% Bandwidth (MHz)		26 dB Bandwidth (MHz)		IC 99% Bandwidth Power Limit (dBm)		IC 99% Bandwidth EIRP Limit (dBm)			Note
					Ant 4	Ant 3	Ant 4	Ant 3	Ant 4	Ant 3	Ant 4	Ant 3		
11a	6Mbps	2	36	5180	18.69	18.01	37.79	32.24	-		22.55		-	
11a	6Mbps	2	44	5220	17.86	17.26	31.01	27.58	-		22.37			
11a	6Mbps	2	48	5240	17.71	17.28	28.78	27.89	-		22.37			

TEST RESULTS DATA
Average Power Table

FCC U-NII-1 MIMO												
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Average Conducted Power (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		Pass/Fail
					Ant 4	Ant 3	SUM	Ant 4	Ant 3	Ant 4	Ant 3	
11a	6Mbps	2	36	5180	19.12	18.60	21.88	24.00		-5.06		Pass
11a	6Mbps	2	44	5220	18.70	18.11	21.43	24.00		-5.06		Pass
11a	6Mbps	2	48	5240	18.60	18.55	21.59	24.00		-5.06		Pass
HT20	MCS0	2	36	5180	19.46	19.03	22.26	24.00		-5.06		Pass
HT20	MCS0	2	44	5220	19.34	18.81	22.09	24.00		-5.06		Pass
HT20	MCS0	2	48	5240	19.23	19.16	22.21	24.00		-5.06		Pass
HT40	MCS0	2	38	5190	18.01	17.50	20.77	24.00		-5.06		Pass
HT40	MCS0	2	46	5230	19.56	19.44	22.51	24.00		-5.06		Pass
VHT20	MCS0	2	36	5180	19.46	19.03	22.26	24.00		-5.06		Pass
VHT20	MCS0	2	44	5220	19.34	18.81	22.09	24.00		-5.06		Pass
VHT20	MCS0	2	48	5240	19.23	19.16	22.21	24.00		-5.06		Pass
VHT40	MCS0	2	38	5190	18.01	17.50	20.77	24.00		-5.06		Pass
VHT40	MCS0	2	46	5230	19.56	19.44	22.51	24.00		-5.06		Pass
VHT80	MCS0	2	42	5210	16.27	16.25	19.27	24.00		-5.06		Pass
VHT160	MCS0	2	50	5250	13.21	12.34	15.81	24.00		-5.06		Pass

TEST RESULTS DATA
Power Spectral Density

FCC U-NII-1 MIMO														
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Duty Factor (dB)		Average Power Density with Duty Factor (dBm/MHz)			Average PSD Limit (dBm/MHz)		DG (dBi)		Pass /Fail
					Ant 4	Ant 3	Ant 4	Ant 3	SUM	Ant 4	Ant 3	Ant 4	Ant 3	
11a	6Mbps	2	36	5180	0.02	0.02	-		10.95	11.00		-2.14	-	Pass
11a	6Mbps	2	44	5220	0.02	0.02			10.62	11.00		-2.14		Pass
11a	6Mbps	2	48	5240	0.02	0.02			10.58	11.00		-2.14		Pass

TEST RESULTS DATA
26dB and 99% OBW

U-NII-2A MIMO															
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	99% Bandwidth (MHz)		26 dB Bandwidth (MHz)		IC 99% Bandwidth Power Limit (dBm)		IC 99% Bandwidth EIRP Limit (dBm)		FCC 26dB Bandwidth Power Limit (dBm)		Note
					Ant 4	Ant 3	Ant 4	Ant 3	Ant 4	Ant 3	Ant 4	Ant 3	Ant 4	Ant 3	
11a	6Mbps	2	52	5260	17.90	17.04	30.56	27.42	23.31		29.31		23.98		-
11a	6Mbps	2	60	5300	18.81	17.17	32.89	26.93	23.35		29.35		23.98		
11a	6Mbps	2	64	5320	17.71	17.08	29.21	24.36	23.32		29.32		23.98		

TEST RESULTS DATA
Average Power Table

FCC U-NII-2A MIMO													
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Average Conducted Power (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		EIRP Power Limit (dBm)	Pass/Fail
					Ant 4	Ant 3	SUM	Ant 4	Ant 3	Ant 4	Ant 3		
11a	6Mbps	2	52	5260	18.92	18.48	21.72	23.98		-2.22		30	Pass
11a	6Mbps	2	60	5300	18.99	18.35	21.69	23.98		-2.22		30	Pass
11a	6Mbps	2	64	5320	18.78	18.37	21.59	23.98		-2.22		30	Pass
HT20	MCS0	2	52	5260	19.63	19.25	22.45	23.98		-2.22		30	Pass
HT20	MCS0	2	60	5300	19.25	18.88	22.08	23.98		-2.22		30	Pass
HT20	MCS0	2	64	5320	18.81	18.14	21.50	23.98		-2.22		30	Pass
HT40	MCS0	2	54	5270	19.88	19.08	22.51	23.98		-2.22		30	Pass
HT40	MCS0	2	62	5310	17.45	17.00	20.24	23.98		-2.22		30	Pass
VHT20	MCS0	2	52	5260	19.63	19.25	22.45	23.98		-2.22		30	Pass
VHT20	MCS0	2	60	5300	19.25	18.88	22.08	23.98		-2.22		30	Pass
VHT20	MCS0	2	64	5320	18.81	18.14	21.50	23.98		-2.22		30	Pass
VHT40	MCS0	2	54	5270	19.88	19.08	22.51	23.98		-2.22		30	Pass
VHT40	MCS0	2	62	5310	17.45	17.00	20.24	23.98		-2.22		30	Pass
VHT80	MCS0	2	58	5290	15.98	15.42	18.72	23.98		-2.22		30	Pass

TEST RESULTS DATA
Power Spectral Density

U-NII-2A MIMO														
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Duty Factor (dB)		Average Power Density with Duty Factor (dBm/MHz)			Average PSD Limit (dBm/MHz)		DG (dBi)		Pass /Fail
					Ant 4	Ant 3	Ant 4	Ant 3	SUM	Ant 4	Ant 3	Ant 4	Ant 3	
11a	6Mbps	2	52	5260	0.02	0.02	-		10.73	11.00		0.06	-	Pass
11a	6Mbps	2	60	5300	0.02	0.02			10.74	11.00		0.06		Pass
11a	6Mbps	2	64	5320	0.02	0.02			10.64	11.00		0.06		Pass

TEST RESULTS DATA
26dB and 99% OBW

U-NII-2C MIMO																
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	99% Bandwidth In U-NII 2C (MHz)		26 dB Bandwidth In U-NII 2C (MHz)		IC 99% Bandwidth Power Limit (dBm)		IC 99% Bandwidth EIRP Limit (dBm)		FCC 26dB Bandwidth Power Limit (dBm)		6 dB Bandwidth for Straddle Channel (MHz)	
					Ant 4	Ant 3	Ant 4	Ant 3	Ant 4	Ant 3	Ant 4	Ant 3	Ant 4	Ant 3	Ant 4	Ant 3
11a	6Mbps	2	100	5500	17.39	17.05	27.37	24.41	23.32		29.32		23.98		----	----
11a	6Mbps	2	116	5580	17.63	17.19	28.56	27.85	23.35		29.35		23.98		----	----
11a	6Mbps	2	140	5700	18.05	17.12	30.63	27.78	23.34		29.34		23.98		----	----

U-NII-2C straddle channel MIMO																
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	99% Bandwidth In U-NII 2C (MHz)		26 dB Bandwidth In U-NII 2C (MHz)		IC 99% Bandwidth Power Limit (dBm)		IC 99% Bandwidth EIRP Limit (dBm)		FCC 26dB Bandwidth Power Limit (dBm)		6 dB Bandwidth for Straddle Channel (MHz)	
					Ant 4	Ant 3	Ant 4	Ant 3	Ant 4	Ant 3	Ant 4	Ant 3	Ant 4	Ant 3	Ant 4	Ant 3
11a	6Mbps	2	144	5720	14.05	13.51	21.44	18.71	23.35		29.35		23.98		3.185	3.195
6dB Bandwidth Limit ≥ 500kHz															Pass	

TEST RESULTS DATA
Average Power Table

FCC U-NII-2C MIMO													
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Average Conducted Power (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		EIRP Power Limit (dBm)	Pass/Fail
					Ant 4	Ant 3	SUM	Ant 4	Ant 3	Ant 4	Ant 3		
11a	6Mbps	2	100	5500	18.94	18.61	21.79	23.98		-1.37		30	Pass
11a	6Mbps	2	116	5580	18.91	18.57	21.75	23.98		-1.37		30	Pass
11a	6Mbps	2	140	5700	19.02	18.77	21.91	23.98		-1.37		30	Pass
HT20	MCS0	2	100	5500	19.36	19.14	22.26	23.98		-1.37		30	Pass
HT20	MCS0	2	116	5580	19.58	19.46	22.53	23.98		-1.37		30	Pass
HT20	MCS0	2	140	5700	16.97	16.35	19.68	23.98		-1.37		30	Pass
HT40	MCS0	2	102	5510	16.27	15.79	19.05	23.98		-1.37		30	Pass
HT40	MCS0	2	110	5550	19.70	19.51	22.62	23.98		-1.37		30	Pass
HT40	MCS0	2	134	5670	19.23	18.95	22.10	23.98		-1.37		30	Pass
VHT20	MCS0	2	100	5500	19.36	19.14	22.26	23.98		-1.37		30	Pass
VHT20	MCS0	2	116	5580	19.58	19.46	22.53	23.98		-1.37		30	Pass
VHT20	MCS0	2	140	5700	16.97	16.35	19.68	23.98		-1.37		30	Pass
VHT40	MCS0	2	102	5510	16.27	15.79	19.05	23.98		-1.37		30	Pass
VHT40	MCS0	2	110	5550	19.70	19.51	22.62	23.98		-1.37		30	Pass
VHT40	MCS0	2	134	5670	19.23	18.95	22.10	23.98		-1.37		30	Pass
VHT80	MCS0	2	106	5530	15.16	14.30	17.76	23.98		-1.37		30	Pass
VHT80	MCS0	2	122	5610	19.47	19.23	22.36	23.98		-1.37		30	Pass
VHT160	MCS0	2	114	5570	13.02	12.27	15.67	23.98		-1.37		30	Pass

FCC U-NII-2C straddle channel MIMO													
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Average Conducted Power (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		EIRP Power Limit (dBm)	Pass/Fail
					Ant 4	Ant 3	SUM	Ant 4	Ant 3	Ant 4	Ant 3		
11a	6Mbps	2	144	5720	19.13	19.06	22.11	23.98		-1.37		30	Pass
HT20	MCS0	2	144	5720	19.60	19.48	22.55	23.98		-1.37		30	Pass
HT40	MCS0	2	142	5710	19.79	19.63	22.72	23.98		-1.37		30	Pass
VHT20	MCS0	2	144	5720	19.60	19.48	22.55	23.98		-1.37		30	Pass
VHT40	MCS0	2	142	5710	19.79	19.63	22.72	23.98		-1.37		30	Pass
VHT80	MCS0	2	138	5690	19.68	19.13	22.42	23.98		-1.37		30	Pass

TEST RESULTS DATA
Power Spectral Density

U-NII-2C MIMO														
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Duty Factor (dB)		Average Power Density with Duty Factor (dBm/MHz)			Average PSD Limit (dBm/MHz)		DG (dBi)		Pass /Fail
					Ant 4	Ant 3	Ant 4	Ant 3	SUM	Ant 4	Ant 3	Ant 4	Ant 3	
11a	6Mbps	2	100	5500	0.02	0.02	-		10.72	11.00		0.71		Pass
11a	6Mbps	2	116	5580	0.02	0.02			10.82	11.00		0.71		Pass
11a	6Mbps	2	140	5700	0.02	0.02			10.64	11.00		0.71		Pass

U-NII-2C straddle channel MIMO														
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Duty Factor (dB)		Average Power Density (dBm/MHz)			Average PSD Limit (dBm/MHz)		DG (dBi)		Pass /Fail
					Ant 4	Ant 3	Ant 4	Ant 3	SUM	Ant 4	Ant 3	Ant 4	Ant 3	
11a	6Mbps	2	144	5720	0.02	0.02	-		10.89	11.00		0.71	-	Pass

TEST RESULTS DATA
Average Power Table

FCC U-NII-1 MIMO													
Mod.	Data Rate	N _{rx}	CH.	Freq. (MHz)	RU Config	Average Conducted Power (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		Pass/Fail
						Ant 4	Ant 3	SUM	Ant 4	Ant 3	Ant 4	Ant 3	
HE20	MCS0	2	36	5180	Full	19.46	19.03	22.26	24.00		-5.06		Pass
HE20	MCS0	2	44	5220	Full	19.34	18.81	22.09	24.00		-5.06		Pass
HE20	MCS0	2	48	5240	Full	19.23	19.16	22.21	24.00		-5.06		Pass
HE40	MCS0	2	38	5190	Full	18.01	17.50	20.77	24.00		-5.06		Pass
HE40	MCS0	2	46	5230	Full	19.56	19.44	22.51	24.00		-5.06		Pass
HE80	MCS0	2	42	5210	Full	16.27	16.25	19.27	24.00		-5.06		Pass
HE160	MCS0	2	50	5250	Full	13.21	12.34	15.81	24.00		-5.06		Pass

TEST RESULTS DATA
Average Power Table

FCC U-NII-2A MIMO														
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	RU Config	Average Conducted Power (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		EIRP Power Limit (dBm)	Pass/Fail
						Ant 4	Ant 3	SUM	Ant 4	Ant 3	Ant 4	Ant 3		
HE20	MCS0	2	52	5260	Full	19.63	19.25	22.45	23.98		-2.22		30	Pass
HE20	MCS0	2	60	5300	Full	19.25	18.88	22.08	23.98		-2.22		30	Pass
HE20	MCS0	2	64	5320	Full	18.81	18.14	21.50	23.98		-2.22		30	Pass
HE40	MCS0	2	54	5270	Full	19.88	19.08	22.51	23.98		-2.22		30	Pass
HE40	MCS0	2	62	5310	Full	17.45	17.00	20.24	23.98		-2.22		30	Pass
HE80	MCS0	2	58	5290	Full	15.98	15.42	18.72	23.98		-2.22		30	Pass

TEST RESULTS DATA
Average Power Table

FCC U-NII-2C MIMO														
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	RU Config	Average Conducted Power (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		EIRP Power Limit (dBm)	Pass/Fail
						Ant 4	Ant 3	SUM	Ant 4	Ant 3	Ant 4	Ant 3		
HE20	MCS0	2	100	5500	Full	19.36	19.14	22.26	23.98		-1.37		30	Pass
HE20	MCS0	2	116	5580	Full	19.58	19.46	22.53	23.98		-1.37		30	Pass
HE20	MCS0	2	140	5700	Full	16.97	16.35	19.68	23.98		-1.37		30	Pass
HE40	MCS0	2	102	5510	Full	16.27	15.79	19.05	23.98		-1.37		30	Pass
HE40	MCS0	2	110	5550	Full	19.70	19.51	22.62	23.98		-1.37		30	Pass
HE40	MCS0	2	134	5670	Full	19.23	18.95	22.10	23.98		-1.37		30	Pass
HE80	MCS0	2	106	5530	Full	15.16	14.30	17.76	23.98		-1.37		30	Pass
HE80	MCS0	2	122	5610	Full	19.47	19.23	22.36	23.98		-1.37		30	Pass
HE160	MCS0	2	114	5570	Full	13.02	12.27	15.67	23.98		-1.37		30	Pass

FCC U-NII-2C straddle channel MIMO														
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	RU Config	Average Conducted Power (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		EIRP Power Limit (dBm)	Pass/Fail
						Ant 4	Ant 3	SUM	Ant 4	Ant 3	Ant 4	Ant 3		
HE20	MCS0	2	144	5720	Full	19.60	19.48	22.55	23.98		-1.37		30	Pass
HE40	MCS0	2	142	5710	Full	19.79	19.63	22.72	23.98		-1.37		30	Pass
HE80	MCS0	2	138	5690	Full	19.68	19.13	22.42	23.98		-1.37		30	Pass

TEST RESULTS DATA
26dB and 99% OBW

U-NII-1 MIMO															
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	RU Config.	99% Bandwidth (MHz)		26 dB Bandwidth (MHz)		IC 99% Bandwidth Power Limit (dBm)		IC 99% Bandwidth EIRP Limit (dBm)			Note
						Ant 4	Ant 3	Ant 4	Ant 3	Ant 4	Ant 3	Ant 4	Ant 3		
EHT20	MCS0	2	36	5180	Full	19.78	19.65	36.82	32.94	-	-	22.93			
EHT20	MCS0	2	44	5220	Full	19.78	19.41	38.42	33.27	-	-	22.88			
EHT20	MCS0	2	48	5240	Full	19.56	19.38	33.36	34.54	-	-	22.87			
EHT40	MCS0	2	38	5190	Full	38.31	38.12	62.18	54.14	-	-	23.01			
EHT40	MCS0	2	46	5230	Full	39.43	38.52	74.22	62.48	-	-	23.01			
EHT80	MCS0	2	42	5210	Full	77.10	77.08	82.78	81.82	-	-	23.01			
EHT160	MCS0	2	50	5250	Full	156.90	156.58	257.23	165.70	-	-	23.01			

TEST RESULTS DATA
Average Power Table

FCC U-NII-1 MIMO														
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	RU Config.	Average Conducted Power (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)			Pass/Fail
						Ant 4	Ant 3	SUM	Ant 4	Ant 3	Ant 4	Ant 3		
EHT20	MCS0	2	36	5180	Full	19.56	19.13	22.36	24.00	-5.06				Pass
EHT20	MCS0	2	36	5180	26/0	11.03	10.05	13.58	24.00	-5.06				Pass
EHT20	MCS0	2	36	5180	52/37	13.76	12.85	16.34	24.00	-5.06				Pass
EHT20	MCS0	2	36	5180	106/53	16.79	15.97	19.41	24.00	-5.06				Pass
EHT20	MCS0	2	36	5180	52T+26T/70	15.90	15.17	18.56	24.00	-5.06				Pass
EHT20	MCS0	2	36	5180	106T+26T/82	17.61	17.14	20.39	24.00	-5.06				Pass
EHT20	MCS0	2	44	5220	Full	19.44	18.91	22.19	24.00	-5.06				Pass
EHT20	MCS0	2	44	5220	26/4	11.37	10.69	14.05	24.00	-5.06				Pass
EHT20	MCS0	2	44	5220	52/38	13.44	12.90	16.19	24.00	-5.06				Pass
EHT20	MCS0	2	44	5220	106/53	16.82	16.11	19.49	24.00	-5.06				Pass
EHT20	MCS0	2	44	5220	52T+26T/71	15.90	14.80	18.40	24.00	-5.06				Pass
EHT20	MCS0	2	44	5220	106T+26T/83	17.63	16.93	20.30	24.00	-5.06				Pass
EHT20	MCS0	2	48	5240	Full	19.33	19.26	22.31	24.00	-5.06			-	Pass
EHT20	MCS0	2	48	5240	26/8	7.87	8.55	11.23	24.00	-5.06				Pass
EHT20	MCS0	2	48	5240	52/40	13.25	13.00	16.14	24.00	-5.06				Pass
EHT20	MCS0	2	48	5240	106/54	16.93	16.45	19.71	24.00	-5.06				Pass
EHT20	MCS0	2	48	5240	52T+26T/72	15.54	14.54	18.08	24.00	-5.06				Pass
EHT20	MCS0	2	48	5240	106T+26T/83	17.89	17.43	20.68	24.00	-5.06				Pass
EHT40	MCS0	2	38	5190	Full	18.11	17.50	20.83	24.00	-5.06				Pass
EHT40	MCS0	2	46	5230	Full	19.66	19.54	22.61	24.00	-5.06				Pass
EHT80	MCS0	2	42	5210	Full	16.37	16.35	19.37	24.00	-5.06				Pass
EHT80	MCS0	2	42	5210	Puncture 20/8	15.18	14.51	17.87	24.00	-5.06				Pass
EHT160	MCS0	2	50	5250	Full	13.31	12.44	15.91	24.00	-5.06				Pass
EHT160	MCS0	2	50	5250	Puncture 40/192	11.97	11.45	14.73	24.00	-5.06				Pass
EHT160	MCS0	2	50	5250	Puncture 20/128	12.41	11.57	15.02	24.00	-5.06				Pass

TEST RESULTS DATA
Power Spectral Density

FCC U-NII-1 MIMO																
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	RU Config.	Duty Factor (dB)		Average Power Density with Duty Factor (dBm/MHz)			Average PSD Limit (dBm/MHz)		DG (dBi)			Pass /Fail
						Ant 4	Ant 3	Ant 4	Ant 3	SUM	Ant 4	Ant 3	Ant 4	Ant 3		
EHT20	MCS0	2	36	5180	Full	0.03	0.03	-		10.82	11.00	-2.14		-	Pass	
EHT20	MCS0	2	36	5180	26/0	0.10	0.10			10.62	11.00	-2.14			Pass	
EHT20	MCS0	2	36	5180	52/37	0.11	0.11			10.32	11.00	-2.14			Pass	
EHT20	MCS0	2	36	5180	106/53	0.12	0.12			10.34	11.00	-2.14			Pass	
EHT20	MCS0	2	36	5180	52T+26T/70	0.04	0.04			10.76	11.00	-2.14			Pass	
EHT20	MCS0	2	36	5180	106T+26T/82	0.09	0.08			10.46	11.00	-2.14			Pass	
EHT20	MCS0	2	44	5220	Full	0.03	0.03			10.79	11.00	-2.14			Pass	
EHT20	MCS0	2	44	5220	26/4	0.10	0.10			10.43	11.00	-2.14			Pass	
EHT20	MCS0	2	44	5220	52/38	0.11	0.11			10.60	11.00	-2.14			Pass	
EHT20	MCS0	2	44	5220	106/53	0.12	0.12			10.46	11.00	-2.14			Pass	
EHT20	MCS0	2	44	5220	52T+26T/71	0.04	0.04			10.73	11.00	-2.14			Pass	
EHT20	MCS0	2	44	5220	106T+26T/83	0.09	0.08			10.42	11.00	-2.14			Pass	
EHT20	MCS0	2	48	5240	Full	0.03	0.03			10.81	11.00	-2.14			Pass	
EHT20	MCS0	2	48	5240	26/8	0.10	0.10			8.57	11.00	-2.14			Pass	
EHT20	MCS0	2	48	5240	52/40	0.11	0.11			10.34	11.00	-2.14			Pass	
EHT20	MCS0	2	48	5240	106/54	0.12	0.12			10.74	11.00	-2.14			Pass	
EHT20	MCS0	2	48	5240	52T+26T/72	0.04	0.04			10.47	11.00	-2.14			Pass	
EHT20	MCS0	2	48	5240	106T+26T/83	0.09	0.08			10.78	11.00	-2.14			Pass	
EHT40	MCS0	2	38	5190	Full	0.06	0.06			6.69	11.00	-2.14			Pass	
EHT40	MCS0	2	46	5230	Full	0.06	0.06			8.22	11.00	-2.14			Pass	
EHT80	MCS0	2	42	5210	Full	0.12	0.13		2.18	11.00	-2.14		Pass			
EHT80	MCS0	2	42	5210	Puncture 20/8	0.09	0.09		1.77	11.00	-2.14		Pass			
EHT160	MCS0	2	50	5250	Full	0.23	0.22		-4.24	11.00	-2.14		Pass			
EHT160	MCS0	2	50	5250	Puncture 40/192	0.18	0.18		-4.40	11.00	-2.14		Pass			
EHT160	MCS0	2	50	5250	Puncture 20/128	0.20	0.20		-4.70	11.00	-2.14		Pass			

TEST RESULTS DATA
26dB and 99% OBW

U-NII-2A MIMO																
Mod.	Data Rate	N _{rx}	CH.	Freq. (MHz)	RU Config.	99% Bandwidth (MHz)		26 dB Bandwidth (MHz)		IC 99% Bandwidth Power Limit (dBm)		IC 99% Bandwidth EIRP Limit (dBm)		FCC 26dB Bandwidth Power Limit (dBm)		Note
						Ant 4	Ant 3	Ant 4	Ant 3	Ant 4	Ant 3	Ant 4	Ant 3	Ant 4	Ant 3	
EHT20	MCS0	2	52	5260	Full	19.44	19.17	35.41	24.22	23.83		29.83		23.98	-	
EHT20	MCS0	2	60	5300	Full	19.50	19.16	35.38	28.62	23.82		29.82		23.98		
EHT20	MCS0	2	64	5320	Full	19.22	19.08	31.98	25.68	23.81		29.81		23.98		
EHT40	MCS0	2	54	5270	Full	39.03	38.30	67.41	57.33	23.98		30.00		23.98		
EHT40	MCS0	2	62	5310	Full	38.13	37.97	41.34	41.12	23.98		30.00		23.98		
EHT80	MCS0	2	58	5290	Full	77.13	77.06	82.40	81.44	23.98		30.00		23.98		

TEST RESULTS DATA
Average Power Table

FCC U-NII-2A MIMO														
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	RU Config.	Average Conducted Power (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		EIRP Power Limit (dBm)	Pass/Fail
						Ant 4	Ant 3	SUM	Ant 4	Ant 3	Ant 4	Ant 3		
EHT20	MCS0	2	52	5260	Full	19.73	19.35	22.55	23.98		-2.22		30	Pass
EHT20	MCS0	2	52	5260	26/0	8.65	8.71	11.69	23.98		-2.22		30	Pass
EHT20	MCS0	2	52	5260	52/37	14.19	13.20	16.73	23.98		-2.22		30	Pass
EHT20	MCS0	2	52	5260	106/53	17.27	16.27	19.81	23.98		-2.22		30	Pass
EHT20	MCS0	2	52	5260	52T+26T/70	16.12	15.05	18.63	23.98		-2.22		30	Pass
EHT20	MCS0	2	52	5260	106T+26T/82	18.15	17.36	20.78	23.98		-2.22		30	Pass
EHT20	MCS0	2	60	5300	Full	19.35	18.98	22.18	23.98		-2.22		30	Pass
EHT20	MCS0	2	60	5300	26/4	11.77	11.04	14.43	23.98		-2.22		30	Pass
EHT20	MCS0	2	60	5300	52/38	13.42	12.48	15.99	23.98		-2.22		30	Pass
EHT20	MCS0	2	60	5300	106/53	17.08	16.25	19.70	23.98		-2.22		30	Pass
EHT20	MCS0	2	60	5300	52T+26T/71	15.30	14.47	17.92	23.98		-2.22		30	Pass
EHT20	MCS0	2	60	5300	106T+26T/83	17.64	16.76	20.23	23.98		-2.22		30	Pass
EHT20	MCS0	2	64	5320	Full	18.91	18.24	21.60	23.98		-2.22		30	Pass
EHT20	MCS0	2	64	5320	26/8	8.17	8.38	11.29	23.98		-2.22		30	Pass
EHT20	MCS0	2	64	5320	52/40	12.78	12.15	15.49	23.98		-2.22		30	Pass
EHT20	MCS0	2	64	5320	106/54	16.08	15.45	18.79	23.98		-2.22		30	Pass
EHT20	MCS0	2	64	5320	52T+26T/72	14.50	13.85	17.20	23.98		-2.22		30	Pass
EHT20	MCS0	2	64	5320	106T+26T/83	17.15	16.44	19.82	23.98		-2.22		30	Pass
EHT40	MCS0	2	54	5270	Full	19.98	19.18	22.61	23.98		-2.22		30	Pass
EHT40	MCS0	2	62	5310	Full	17.55	17.00	20.29	23.98		-2.22		30	Pass
EHT80	MCS0	2	58	5290	Full	16.08	15.52	18.82	23.98		-2.22		30	Pass
EHT80	MCS0	2	58	5290	Puncture 20/1	14.88	13.93	17.44	23.98		-2.22		30	Pass

TEST RESULTS DATA
Power Spectral Density

U-NII-2A MIMO																
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	RU Config.	Duty Factor (dB)		Average Power Density with Duty Factor (dBm/MHz)			Average PSD Limit (dBm/MHz)		DG (dBi)			Pass /Fail
						Ant 4	Ant 3	Ant 4	Ant 3	SUM	Ant 4	Ant 3	Ant 4	Ant 3		
EHT20	MCS0	2	52	5260	Full	0.03	0.03			10.89	11.00	0.06			Pass	
EHT20	MCS0	2	52	5260	26/0	0.10	0.10			8.92	11.00	0.06			Pass	
EHT20	MCS0	2	52	5260	52/37	0.11	0.11			10.69	11.00	0.06			Pass	
EHT20	MCS0	2	52	5260	106/53	0.12	0.12			10.56	11.00	0.06			Pass	
EHT20	MCS0	2	52	5260	52T+26T/70	0.04	0.04			10.83	11.00	0.06			Pass	
EHT20	MCS0	2	52	5260	106T+26T/82	0.09	0.08			10.60	11.00	0.06			Pass	
EHT20	MCS0	2	60	5300	Full	0.03	0.03			10.61	11.00	0.06			Pass	
EHT20	MCS0	2	60	5300	26/4	0.10	0.10			10.25	11.00	0.06			Pass	
EHT20	MCS0	2	60	5300	52/38	0.11	0.11			10.38	11.00	0.06			Pass	
EHT20	MCS0	2	60	5300	106/53	0.12	0.12			10.52	11.00	0.06			Pass	
EHT20	MCS0	2	60	5300	52T+26T/71	0.04	0.04			10.33	11.00	0.06			Pass	
EHT20	MCS0	2	60	5300	106T+26T/83	0.09	0.08			10.27	11.00	0.06			Pass	
EHT20	MCS0	2	64	5320	Full	0.03	0.03			10.19	11.00	0.06			Pass	
EHT20	MCS0	2	64	5320	26/8	0.10	0.10			8.69	11.00	0.06			Pass	
EHT20	MCS0	2	64	5320	52/40	0.11	0.11			9.85	11.00	0.06			Pass	
EHT20	MCS0	2	64	5320	106/54	0.12	0.12			9.91	11.00	0.06			Pass	
EHT20	MCS0	2	64	5320	52T+26T/72	0.04	0.04			9.78	11.00	0.06			Pass	
EHT20	MCS0	2	64	5320	106T+26T/83	0.09	0.08			9.89	11.00	0.06			Pass	
EHT40	MCS0	2	54	5270	Full	0.06	0.06			8.18	11.00	0.06			Pass	
EHT40	MCS0	2	62	5310	Full	0.06	0.06			5.97	11.00	0.06			Pass	
EHT80	MCS0	2	58	5290	Full	0.12	0.13		1.39	11.00	0.06			Pass		
EHT80	MCS0	2	58	5290	Puncture 20/1	0.09	0.09		1.27	11.00	0.06			Pass		

TEST RESULTS DATA
26dB and 99% OBW

U-NII-2C MIMO																	
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	RU Config.	99% Bandwidth In U-NII 2C (MHz)		26 dB Bandwidth In U-NII 2C (MHz)		IC 99% Bandwidth Power Limit (dBm)		IC 99% Bandwidth EIRP Limit (dBm)		FCC 26dB Bandwidth Power Limit (dBm)		6 dB Bandwidth for Straddle Channel (MHz)	
						Ant 4	Ant 3	Ant 4	Ant 3	Ant 4	Ant 3	Ant 4	Ant 3	Ant 4	Ant 3	Ant 4	Ant 3
EHT20	MCS0	2	100	5500	Full	19.33	19.16	33.40	29.26	23.82		29.82		23.98		----	----
EHT20	MCS0	2	116	5580	Full	19.41	19.25	34.54	32.34	23.84		29.84		23.98		----	----
EHT20	MCS0	2	140	5700	Full	19.05	18.98	25.14	21.22	23.78		29.78		23.98		----	----
EHT40	MCS0	2	102	5510	Full	37.98	37.90	41.28	41.14	23.98		30.00		23.98		----	----
EHT40	MCS0	2	110	5550	Full	38.99	38.42	71.10	66.82	23.98		30.00		23.98		----	----
EHT40	MCS0	2	134	5670	Full	38.42	38.19	62.11	45.41	23.98		30.00		23.98		----	----
EHT80	MCS0	2	106	5530	Full	77.06	77.10	82.82	82.18	23.98		30.00		23.98		----	----
EHT80	MCS0	2	122	5610	Full	77.63	77.28	143.49	99.65	23.98		30.00		23.98		----	----
EHT160	MCS0	2	114	5570	Full	157.06	156.90	267.50	165.60	23.98		30.00		23.98		----	----

U-NII-2C straddle channel MIMO																	
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	RU Config.	99% Bandwidth In U-NII 2C (MHz)		26 dB Bandwidth In U-NII 2C (MHz)		IC 99% Bandwidth Power Limit (dBm)		IC 99% Bandwidth EIRP Limit (dBm)		FCC 26dB Bandwidth Power Limit (dBm)		6 dB Bandwidth for Straddle Channel (MHz)	
						Ant 4	Ant 3	Ant 4	Ant 3	Ant 4	Ant 3	Ant 4	Ant 3	Ant 4	Ant 3	Ant 4	Ant 3
EHT20	MCS0	2	144	5720	Full	14.72	14.59	24.69	20.56	23.85		29.85		23.98		4.49	4.39
EHT40	MCS0	2	142	5710	Full	34.37	34.06	50.25	41.61	23.98		30.00		23.98		3.855	3.639
EHT80	MCS0	2	138	5690	Full	73.77	73.54	101.05	80.79	23.98		30.00		23.98		3.256	3.816
6dB Bandwidth Limit ≥ 500kHz																Pass	

TEST RESULTS DATA
Average Power Table

FCC U-NII-2C MIMO														
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	RU Config.	Average Conducted Power (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		EIRP Power Limit (dBm)	Pass/Fail
						Ant 4	Ant 3	SUM	Ant 4	Ant 3	Ant 4	Ant 3		
EHT20	MCS0	2	100	5500	Full	19.46	19.24	22.36	23.98		-1.37		30	Pass
EHT20	MCS0	2	100	5500	26/0	9.20	8.43	11.84	23.98		-1.37		30	Pass
EHT20	MCS0	2	100	5500	52/37	13.65	13.17	16.43	23.98		-1.37		30	Pass
EHT20	MCS0	2	100	5500	106/53	16.65	16.23	19.46	23.98		-1.37		30	Pass
EHT20	MCS0	2	100	5500	52T+26T/70	15.41	14.73	18.09	23.98		-1.37		30	Pass
EHT20	MCS0	2	100	5500	106T+26T/82	17.58	17.49	20.55	23.98		-1.37		30	Pass
EHT20	MCS0	2	116	5580	Full	19.68	19.56	22.63	23.98		-1.37		30	Pass
EHT20	MCS0	2	116	5580	26/4	12.17	11.52	14.87	23.98		-1.37		30	Pass
EHT20	MCS0	2	116	5580	52/38	13.52	13.31	16.43	23.98		-1.37		30	Pass
EHT20	MCS0	2	116	5580	106/53	17.22	16.63	19.95	23.98		-1.37		30	Pass
EHT20	MCS0	2	116	5580	52T+26T/71	15.48	15.03	18.27	23.98		-1.37		30	Pass
EHT20	MCS0	2	116	5580	106T+26T/83	18.07	17.43	20.77	23.98		-1.37		30	Pass
EHT20	MCS0	2	140	5700	Full	17.07	16.45	19.78	23.98		-1.37		30	Pass
EHT20	MCS0	2	140	5700	26/8	7.83	6.87	10.39	23.98		-1.37		30	Pass
EHT20	MCS0	2	140	5700	52/40	10.89	10.10	13.52	23.98		-1.37		30	Pass
EHT20	MCS0	2	140	5700	106/54	14.37	13.69	17.05	23.98		-1.37		30	Pass
EHT20	MCS0	2	140	5700	52T+26T/72	13.11	11.99	15.60	23.98		-1.37		30	Pass
EHT20	MCS0	2	140	5700	106T+26T/83	15.06	14.33	17.72	23.98		-1.37		30	Pass
EHT40	MCS0	2	102	5510	Full	16.37	15.89	19.15	23.98		-1.37		30	Pass
EHT40	MCS0	2	110	5550	Full	19.80	19.61	22.72	23.98		-1.37		30	Pass
EHT40	MCS0	2	134	5670	Full	19.33	19.05	22.20	23.98		-1.37		30	Pass
EHT80	MCS0	2	106	5530	Full	15.26	14.40	17.86	23.98		-1.37		30	Pass
EHT80	MCS0	2	106	5530	Puncture 20/8	13.93	13.15	16.57	23.98		-1.37		30	Pass
EHT80	MCS0	2	122	5610	Full	19.57	19.33	22.46	23.98		-1.37		30	Pass
EHT80	MCS0	2	122	5610	Puncture 20/4	18.07	16.95	20.56	23.98		-1.37		30	Pass
EHT80	MCS0	2	122	5610	Puncture 20/2	17.97	16.83	20.45	23.98		-1.37		30	Pass
EHT160	MCS0	2	114	5570	Full	13.12	12.37	15.77	23.98		-1.37		30	Pass
EHT160	MCS0	2	114	5570	Puncture 40/3	11.37	10.72	14.07	23.98		-1.37		30	Pass
EHT160	MCS0	2	114	5570	Puncture 20/1	12.27	11.93	15.11	23.98		-1.37		30	Pass

FCC U-NII-2C straddle channel MIMO														
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	RU Config.	Average Conducted Power (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		EIRP Power Limit (dBm)	Pass/Fail
						Ant 4	Ant 3	SUM	Ant 4	Ant 3	Ant 4	Ant 3		
EHT20	MCS0	2	144	5720	Full	19.70	19.58	22.65	23.98		-1.37		30	Pass
EHT20	MCS0	2	144	5720	26/8	11.02	10.04	13.57	23.98		-1.37		30	Pass
EHT20	MCS0	2	144	5720	52/40	13.91	13.15	16.56	23.98		-1.37		30	Pass
EHT20	MCS0	2	144	5720	106/54	17.03	16.19	19.64	23.98		-1.37		30	Pass
EHT20	MCS0	2	144	5720	52T+26T/72	15.86	14.98	18.45	23.98		-1.37		30	Pass
EHT20	MCS0	2	144	5720	106T+26T/83	17.83	17.20	20.54	23.98		-1.37		30	Pass
EHT80	MCS0	2	138	5690	Full	19.78	19.23	22.52	23.98		-1.37		30	Pass
EHT80	MCS0	2	138	5690	Puncture 20/1	18.64	18.04	21.36	23.98		-1.37		30	Pass

TEST RESULTS DATA
Power Spectral Density

U-NII-2C MIMO															
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	RU Config.	Duty Factor (dB)		Average Power Density with Duty Factor (dBm/MHz)			Average PSD Limit (dBm/MHz)		DG (dBi)		Pass /Fail
						Ant 4	Ant 3	Ant 4	Ant 3	SUM	Ant 4	Ant 3	Ant 4	Ant 3	
EHT20	MCS0	2	100	5500	Full	0.03	0.03	-		10.86	11.00	0.71			Pass
EHT20	MCS0	2	100	5500	26/0	0.10	0.10			9.19	11.00	0.71			Pass
EHT20	MCS0	2	100	5500	52/37	0.11	0.11			10.47	11.00	0.71			Pass
EHT20	MCS0	2	100	5500	106/53	0.12	0.12			10.39	11.00	0.71			Pass
EHT20	MCS0	2	100	5500	52T+26T/70	0.04	0.04			10.42	11.00	0.71			Pass
EHT20	MCS0	2	100	5500	106T+26T/82	0.09	0.08			10.60	11.00	0.71			Pass
EHT20	MCS0	2	116	5580	Full	0.03	0.03			10.84	11.00	0.71			Pass
EHT20	MCS0	2	116	5580	26/4	0.10	0.10			10.81	11.00	0.71			Pass
EHT20	MCS0	2	116	5580	52/38	0.11	0.11			10.35	11.00	0.71			Pass
EHT20	MCS0	2	116	5580	106/53	0.12	0.12			10.56	11.00	0.71			Pass
EHT20	MCS0	2	116	5580	52T+26T/71	0.04	0.04			10.48	11.00	0.71			Pass
EHT20	MCS0	2	116	5580	106T+26T/83	0.09	0.08			10.68	11.00	0.71			Pass
EHT20	MCS0	2	140	5700	Full	0.03	0.03			7.84	11.00	0.71			Pass
EHT20	MCS0	2	140	5700	26/8	0.10	0.10			7.45	11.00	0.71			Pass
EHT20	MCS0	2	140	5700	52/40	0.11	0.11			7.62	11.00	0.71			Pass
EHT20	MCS0	2	140	5700	106/54	0.12	0.12			7.67	11.00	0.71			Pass
EHT20	MCS0	2	140	5700	52T+26T/72	0.04	0.04			7.57	11.00	0.71			Pass
EHT20	MCS0	2	140	5700	106T+26T/83	0.09	0.08			7.62	11.00	0.71			Pass
EHT40	MCS0	2	102	5510	Full	0.06	0.06			4.72	11.00	0.71			Pass
EHT40	MCS0	2	110	5550	Full	0.06	0.06			8.15	11.00	0.71			Pass
EHT40	MCS0	2	134	5670	Full	0.06	0.06			7.18	11.00	0.71			Pass
EHT80	MCS0	2	106	5530	Full	0.12	0.13			0.57	11.00	0.71			Pass
EHT80	MCS0	2	106	5530	Puncture 20/8	0.09	0.09			0.21	11.00	0.71			Pass
EHT80	MCS0	2	122	5610	Full	0.12	0.13			4.99	11.00	0.71			Pass
EHT80	MCS0	2	122	5610	Puncture 20/4	0.09	0.09			4.76	11.00	0.71			Pass
EHT80	MCS0	2	122	5610	Puncture 20/2	0.09	0.09			4.60	11.00	0.71			Pass
EHT160	MCS0	2	114	5570	Full	0.23	0.22			-4.62	11.00	0.71			Pass
EHT160	MCS0	2	114	5570	Puncture 40/3	0.18	0.18			-5.19	11.00	0.71			Pass
EHT160	MCS0	2	114	5570	Puncture 20/1	0.20	0.20		-4.87	11.00	0.71			Pass	

U-NII-2C straddle channel MIMO																
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	RU Config.	Duty Factor (dB)		Average Power Density (dBm/MHz)			Average PSD Limit (dBm/MHz)		DG (dBi)			Pass /Fail
						Ant 4	Ant 3	Ant 4	Ant 3	SUM	Ant 4	Ant 3	Ant 4	Ant 3		
EHT20	MCS0	2	144	5720	Full	0.03	0.03	-		10.69	11.00	0.71				Pass
EHT20	MCS0	2	144	5720	26/8	0.10	0.10			10.52	11.00	0.71				Pass
EHT20	MCS0	2	144	5720	52/40	0.11	0.11			10.53	11.00	0.71				Pass
EHT20	MCS0	2	144	5720	106/54	0.12	0.12			10.42	11.00	0.71				Pass
EHT20	MCS0	2	144	5720	52T+26T/72	0.04	0.04			10.52	11.00	0.71				Pass
EHT20	MCS0	2	144	5720	106T+26T/83	0.09	0.08			10.31	11.00	0.71				Pass
EHT40	MCS0	2	142	5710	Full	0.06	0.06			8.03	11.00	0.71				Pass
EHT80	MCS0	2	138	5690	Full	0.12	0.13			4.86	11.00	0.71				Pass
EHT80	MCS0	2	138	5690	Puncture 20/1	0.09	0.09			4.68	11.00	0.71				Pass

TEST RESULTS DATA
6dB and 26dB EBW and 99% OBW

U-NII-3 MIMO												
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Bandwidth (MHz)		26dB Bandwidth (MHz)		6 dB Bandwidth (MHz)		6 dB Bandwidth Min. Limit (MHz)	Pass/Fail
					Ant 4	Ant 3	Ant 4	Ant 3	Ant 4	Ant 3		
11a	6Mbps	2	149	5745	26.57	18.84	41.08	32.63	15.74	16.34	0.5	Pass
11a	6Mbps	2	157	5785	27.66	19.00	43.43	33.52	16.30	16.33	0.5	Pass
11a	6Mbps	2	165	5825	28.22	18.58	43.03	32.70	15.92	16.31	0.5	Pass

TEST RESULTS DATA
Average Power Table

U-NII-3 MIMO												
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Average Conducted Power (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		Pass/Fail
					Ant 4	Ant 3	SUM	Ant 4	Ant 3	Ant 4	Ant 3	
11a	6Mbps	2	149	5745	20.77	20.68	23.74	30.00		-1.42		Pass
11a	6Mbps	2	157	5785	20.80	20.42	23.62	30.00		-1.42		Pass
11a	6Mbps	2	165	5825	20.77	20.52	23.66	30.00		-1.42		Pass
HT20	MCS0	2	149	5745	20.64	20.52	23.59	30.00		-1.42		Pass
HT20	MCS0	2	157	5785	20.63	20.32	23.49	30.00		-1.42		Pass
HT20	MCS0	2	165	5825	20.82	20.74	23.79	30.00		-1.42		Pass
HT40	MCS0	2	151	5755	19.82	19.52	22.68	30.00		-1.42		Pass
HT40	MCS0	2	159	5795	19.79	19.25	22.54	30.00		-1.42		Pass
VHT20	MCS0	2	149	5745	20.64	20.52	23.59	30.00		-1.42		Pass
VHT20	MCS0	2	157	5785	20.63	20.32	23.49	30.00		-1.42		Pass
VHT20	MCS0	2	165	5825	20.82	20.74	23.79	30.00		-1.42		Pass
VHT40	MCS0	2	151	5755	19.82	19.52	22.68	30.00		-1.42		Pass
VHT40	MCS0	2	159	5795	19.79	19.25	22.54	30.00		-1.42		Pass
VHT80	MCS0	2	155	5775	19.86	19.25	22.58	30.00		-1.42		Pass

TEST RESULTS DATA
Power Spectral Density

U-NII-3 MIMO														
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)		Average Power Density with Duty Factor (dBm/500kHz)			Average PSD Limit (dBm/500kHz)		DG (dBi)		Pass /Fail
					Ant 4	Ant 3	Ant 4	Ant 3	SUM	Ant 4	Ant 3	Ant 4	Ant 3	
11a	6Mbps	2	149	5745	0.02	0.02	6.84	6.35	9.85	30.00		0.40		Pass
11a	6Mbps	2	157	5785	0.02	0.02	7.01	6.17	10.02	30.00		0.40		Pass
11a	6Mbps	2	165	5825	0.02	0.02	6.97	6.67	9.98	30.00		0.40		Pass

Note: PSD Sum = Max PSD(Ant. 1, Ant. 2) + 10 log (n)

TEST RESULTS DATA
Average Power Table

U-NII-3 MIMO													
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	RU Config.	Average Conducted Power (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		Pass/Fail
						Ant 4	Ant 3	SUM	Ant 4	Ant 3	Ant 4	Ant 3	
HE20	MCS0	2	149	5745	Full	20.64	20.52	23.59	30.00		-1.42		Pass
HE20	MCS0	2	157	5785	Full	20.63	20.32	23.49	30.00		-1.42		Pass
HE20	MCS0	2	165	5825	Full	20.82	20.74	23.79	30.00		-1.42		Pass
HE40	MCS0	2	151	5755	Full	19.82	19.52	22.68	30.00		-1.42		Pass
HE40	MCS0	2	159	5795	Full	19.79	19.25	22.54	30.00		-1.42		Pass
HE80	MCS0	2	155	5775	Full	19.86	19.25	22.58	30.00		-1.42		Pass

TEST RESULTS DATA
6dB and 26dB EBW and 99% OBW

U-NII-3 MIMO													
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config	99% Bandwidth (MHz)		26dB Bandwidth (MHz)		6 dB Bandwidth (MHz)		6 dB Bandwidth Min. Limit (MHz)	Pass/Fail
						Ant 4	Ant 3	Ant 4	Ant 3	Ant 4	Ant 3		
EHT20	MCS0	2	149	5745	Full	25.61	19.62	42.15	35.28	18.33	18.73	0.5	Pass
EHT20	MCS0	2	157	5785	Full	27.94	19.67	48.06	37.08	18.64	18.69	0.5	Pass
EHT20	MCS0	2	165	5825	Full	28.61	19.49	47.53	37.63	18.59	18.84	0.5	Pass
EHT40	MCS0	2	151	5755	Full	40.17	38.22	75.58	57.90	37.46	37.40	0.5	Pass
EHT40	MCS0	2	159	5795	Full	42.28	38.29	72.37	58.02	37.42	37.63	0.5	Pass
EHT80	MCS0	2	155	5775	Full	78.06	77.25	144.96	106.50	76.78	77.23	0.5	Pass

TEST RESULTS DATA
Average Power Table

U-NII-3 MIMO													
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	RU Config.	Average Conducted Power (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		Pass/Fail
						Ant 4	Ant 3	SUM	Ant 4	Ant 3	Ant 4	Ant 3	
EHT20	MCS0	2	149	5745	Full	20.74	20.62	23.69	30.00		-1.42		Pass
EHT20	MCS0	2	149	5745	26/0	12.25	12.00	15.14	30.00		-1.42		Pass
EHT20	MCS0	2	149	5745	52/37	15.31	15.12	18.23	30.00		-1.42		Pass
EHT20	MCS0	2	149	5745	106/53	18.37	18.16	21.28	30.00		-1.42		Pass
EHT20	MCS0	2	149	5745	52T+26T/70	17.11	16.79	19.96	30.00		-1.42		Pass
EHT20	MCS0	2	149	5745	106T+26T/82	19.28	19.05	22.18	30.00		-1.42		Pass
EHT20	MCS0	2	157	5785	Full	20.73	20.42	23.59	30.00		-1.42		Pass
EHT20	MCS0	2	157	5785	26/4	12.01	11.57	14.81	30.00		-1.42		Pass
EHT20	MCS0	2	157	5785	52/38	15.10	14.65	17.89	30.00		-1.42		Pass
EHT20	MCS0	2	157	5785	106/53	18.21	18.05	21.14	30.00		-1.42		Pass
EHT20	MCS0	2	157	5785	52T+26T/71	16.86	16.45	19.67	30.00		-1.42		Pass
EHT20	MCS0	2	157	5785	106T+26T/83	19.18	19.06	22.13	30.00		-1.42		Pass
EHT20	MCS0	2	165	5825	Full	20.92	20.84	23.89	30.00		-1.42		Pass
EHT20	MCS0	2	165	5825	26/8	12.19	11.80	15.01	30.00		-1.42		Pass
EHT20	MCS0	2	165	5825	52/40	15.27	15.05	18.17	30.00		-1.42		Pass
EHT20	MCS0	2	165	5825	106/54	18.46	18.32	21.40	30.00		-1.42		Pass
EHT20	MCS0	2	165	5825	52T+26T/72	17.15	16.90	20.04	30.00		-1.42		Pass
EHT20	MCS0	2	165	5825	106T+26T/83	19.57	19.47	22.53	30.00		-1.42		Pass
EHT40	MCS0	2	151	5755	Full	19.92	19.62	22.78	30.00		-1.42		Pass
EHT40	MCS0	2	159	5795	Full	19.89	19.35	22.64	30.00		-1.42		Pass
EHT80	MCS0	2	155	5775	Full	19.96	19.35	22.68	30.00		-1.42		Pass
EHT80	MCS0	2	155	5775	Punctured 20/1	19.01	18.73	21.88	30.00		-1.42		Pass

TEST RESULTS DATA
Power Spectral Density


U-NII-3 MIMO															
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Duty Factor (dB)		Average Power Density with Duty Factor (dBm/500kHz)			Average PSD Limit (dBm/500kHz)		DG (dBi)		Pass /Fail
						Ant 4	Ant 3	Ant 4	Ant 3	SUM	Ant 4	Ant 3	Ant 4	Ant 3	
EHT20	MCS0	2	149	5745	Full	0.03	0.03	6.21	5.71	9.22	30.00		0.40		Pass
EHT20	MCS0	2	149	5745	26/0	0.10	0.10	6.17	5.68	9.18	30.00		0.40		Pass
EHT20	MCS0	2	149	5745	52/37	0.11	0.11	6.15	5.68	9.16	30.00		0.40		Pass
EHT20	MCS0	2	149	5745	106/53	0.12	0.12	5.93	5.79	8.94	30.00		0.40		Pass
EHT20	MCS0	2	149	5745	52T+26T/70	0.04	0.04	6.18	5.73	9.19	30.00		0.40		Pass
EHT20	MCS0	2	149	5745	106T+26T/82	0.09	0.08	6.00	5.68	9.01	30.00		0.40		Pass
EHT20	MCS0	2	157	5785	Full	0.03	0.03	6.24	5.72	9.25	30.00		0.40		Pass
EHT20	MCS0	2	157	5785	26/4	0.10	0.10	5.93	5.55	8.94	30.00		0.40		Pass
EHT20	MCS0	2	157	5785	52/38	0.11	0.11	5.97	5.62	8.98	30.00		0.40		Pass
EHT20	MCS0	2	157	5785	106/53	0.12	0.12	5.88	5.71	8.89	30.00		0.40		Pass
EHT20	MCS0	2	157	5785	52T+26T/71	0.04	0.04	5.91	5.67	8.92	30.00		0.40		Pass
EHT20	MCS0	2	157	5785	106T+26T/83	0.09	0.08	5.98	5.66	8.99	30.00		0.40		Pass
EHT20	MCS0	2	165	5825	Full	0.03	0.03	6.53	6.08	9.54	30.00		0.40		Pass
EHT20	MCS0	2	165	5825	26/8	0.10	0.10	6.40	6.02	9.41	30.00		0.40		Pass
EHT20	MCS0	2	165	5825	52/40	0.11	0.11	6.31	6.01	9.32	30.00		0.40		Pass
EHT20	MCS0	2	165	5825	106/54	0.12	0.12	6.39	6.12	9.40	30.00		0.40		Pass
EHT20	MCS0	2	165	5825	52T+26T/72	0.04	0.04	6.37	5.90	9.38	30.00		0.40		Pass
EHT20	MCS0	2	165	5825	106T+26T/83	0.09	0.08	6.44	6.34	9.45	30.00		0.40		Pass
EHT40	MCS0	2	151	5755	Full	0.06	0.06	2.39	1.77	5.40	30.00		0.40		Pass
EHT40	MCS0	2	159	5795	Full	0.06	0.06	2.68	1.82	5.69	30.00		0.40		Pass
EHT80	MCS0	2	155	5775	Full	0.12	0.13	-0.34	-1.41	2.67	30.00		0.40		Pass
EHT80	MCS0	2	155	5775	Punctured 20/	0.09	0.09	-0.54	-0.82	2.47	30.00		0.40		Pass

Note: PSD Sum = Max PSD(Ant. 1, Ant. 2) + 10 log (n)

**Test Result of 26dB & 99% Occupied Bandwidth**


MIMO <Ant. 4+3>

<802.11a>

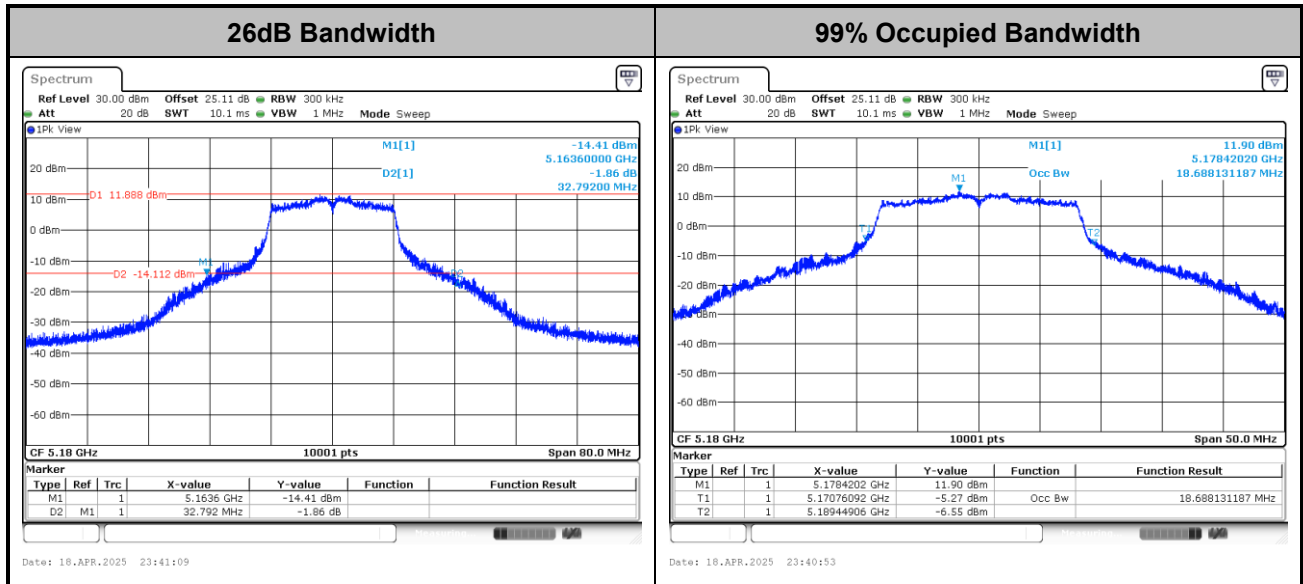

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.


<802.11be EHT20>

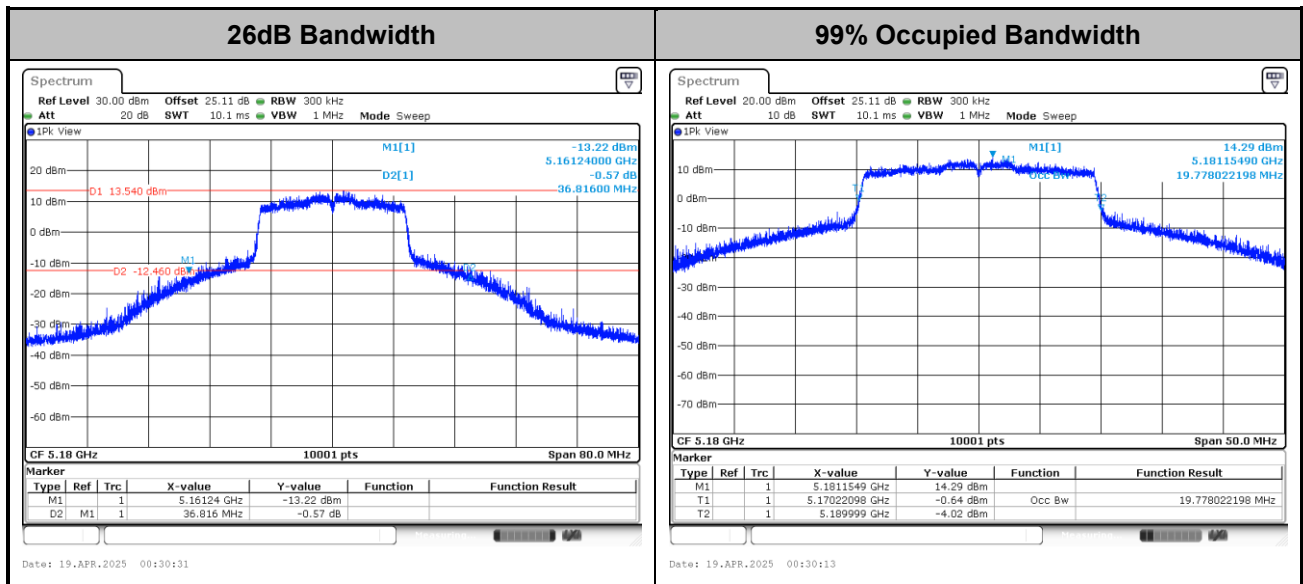

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.




<802.11be EHT40>

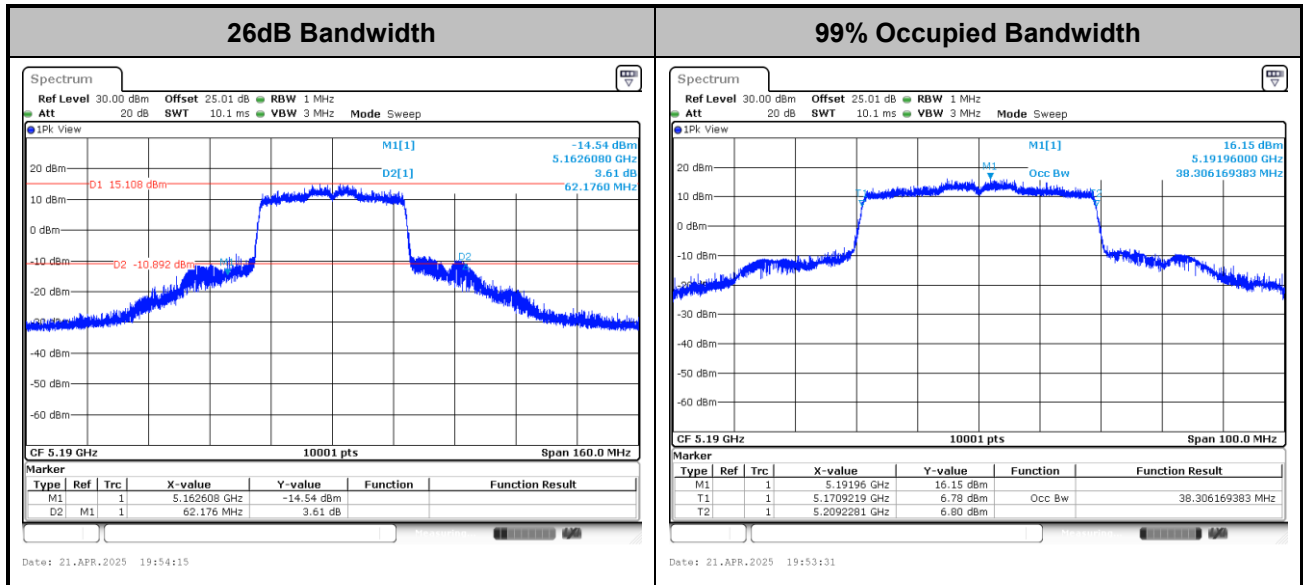

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.


<802.11be EHT80>

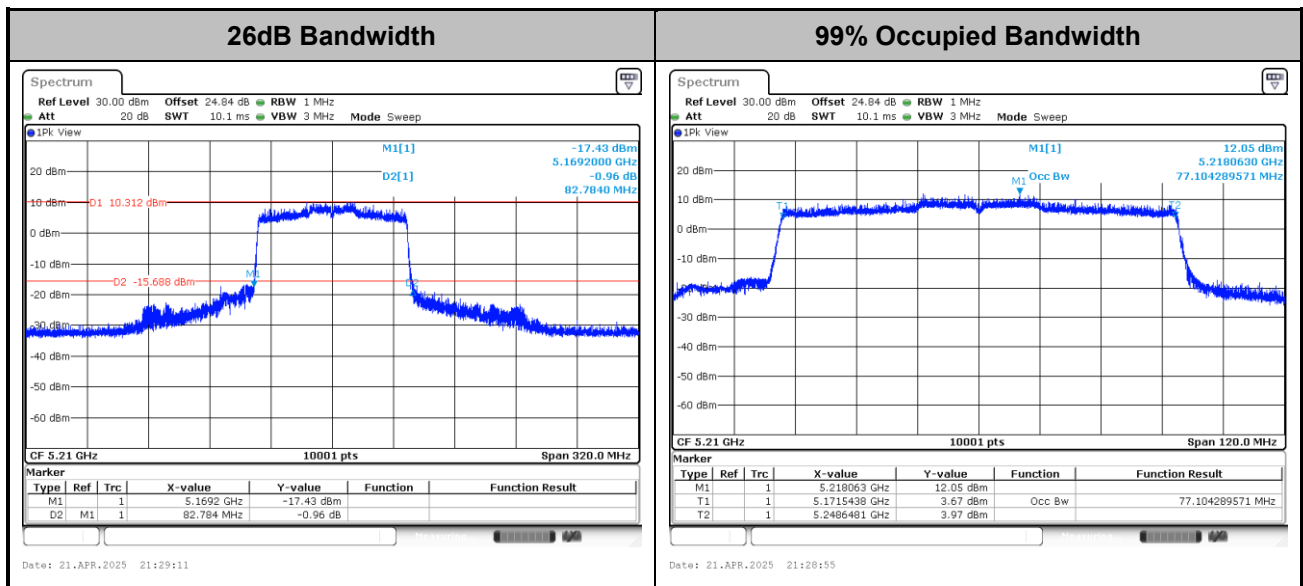

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.




<802.11be EHT160>

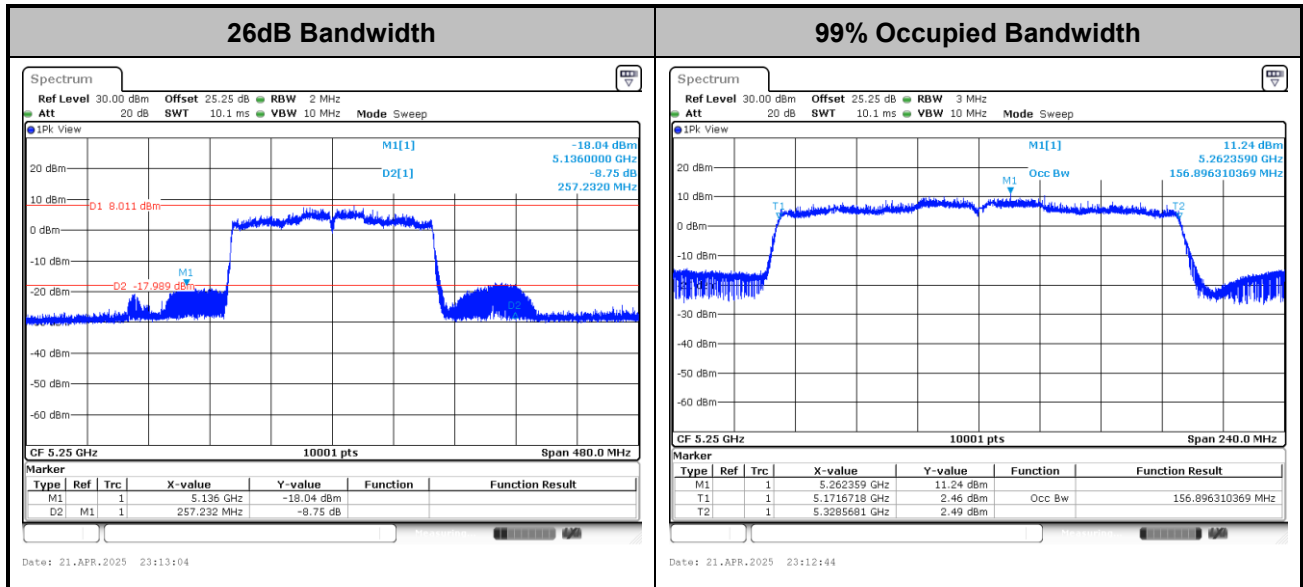


Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

**Test Result of Power Spectral Density**

<802.11a>

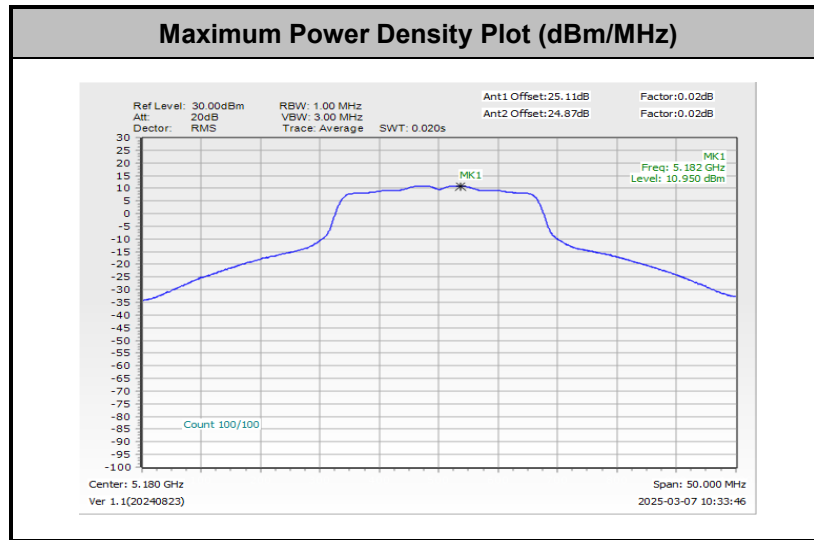


Remark: The test plot is showing a bin by bin combined result mathematically adds two traces.

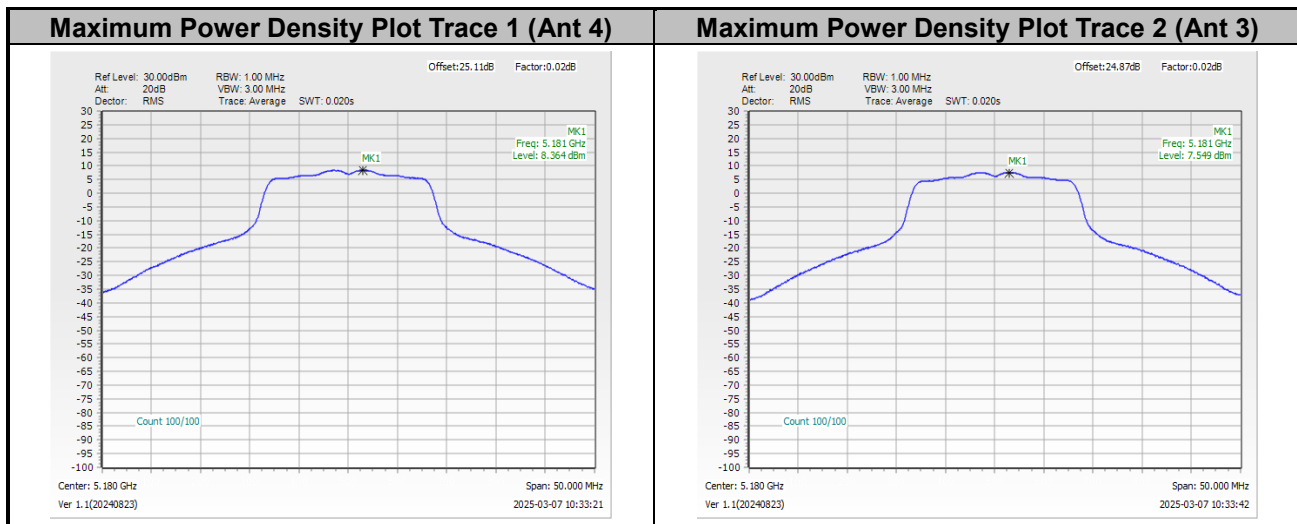




<802.11be EHT20>

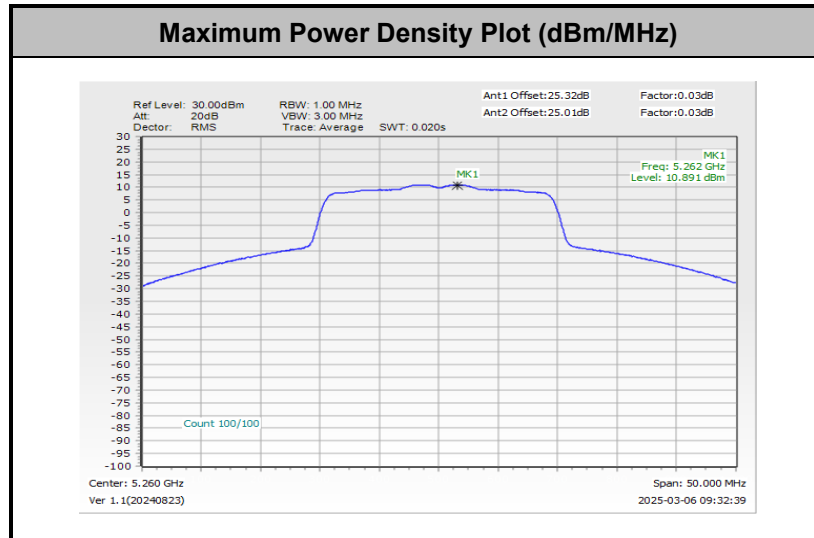


Remark: The test plot is showing a bin by bin combined result mathematically adds two traces.

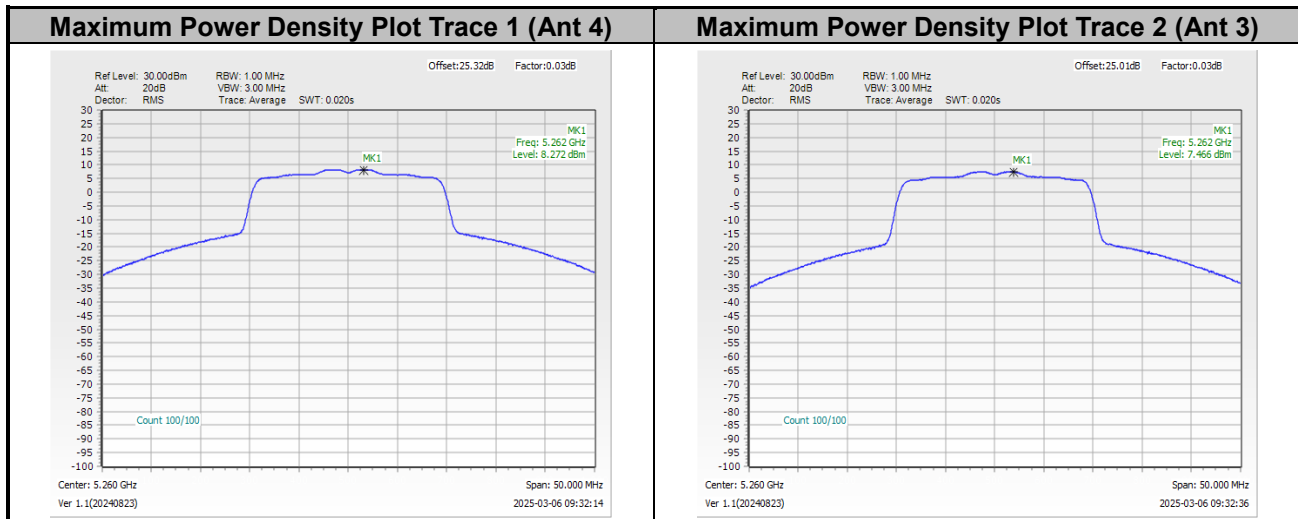




<802.11be EHT40>

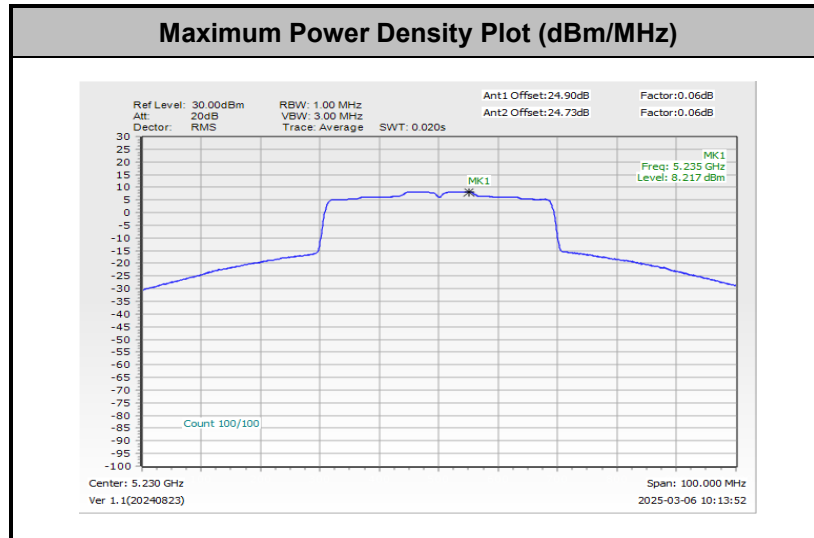


Remark: The test plot is showing a bin by bin combined result mathematically adds two traces.

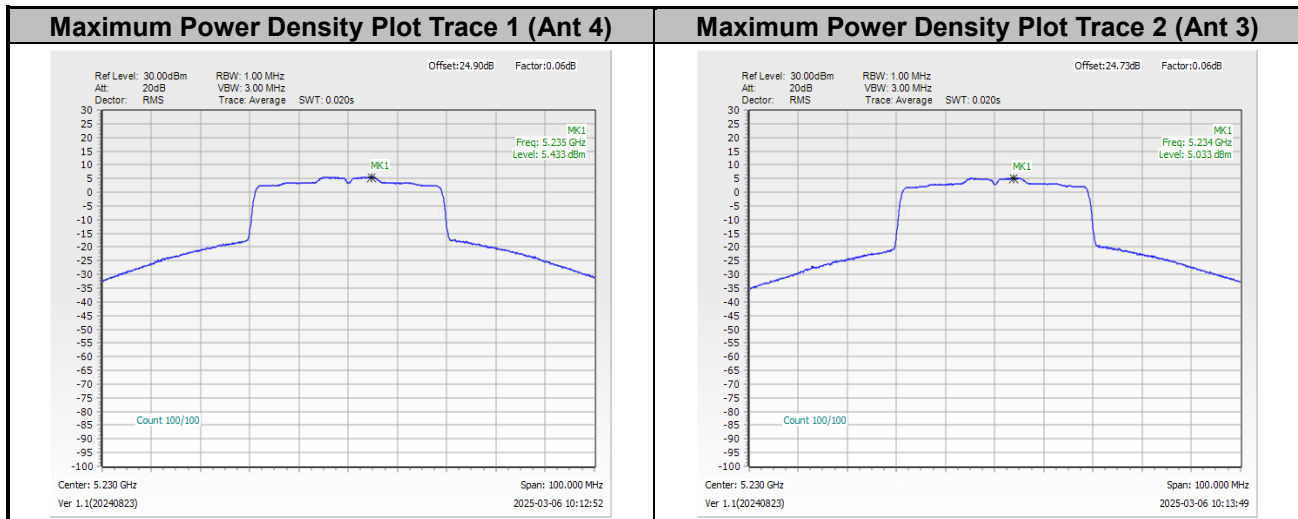




<802.11be EHT80>

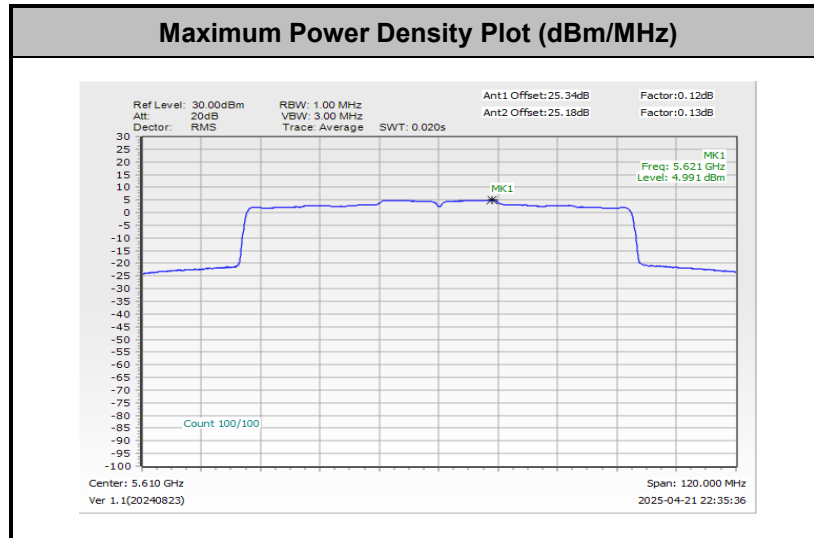


Remark: The test plot is showing a bin by bin combined result mathematically adds two traces.

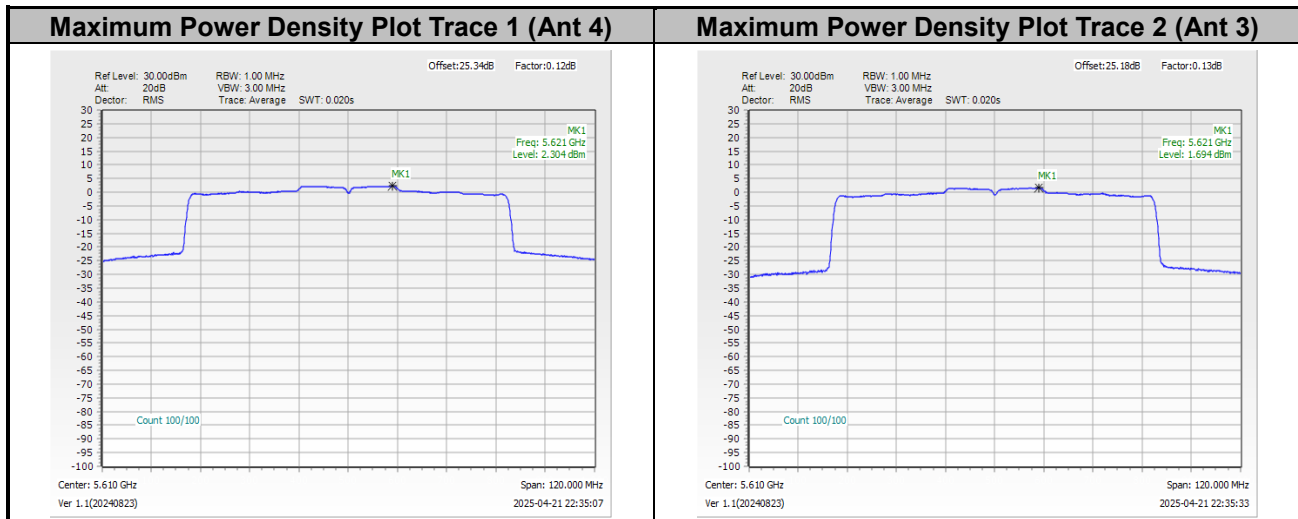




<802.11be EHT160>

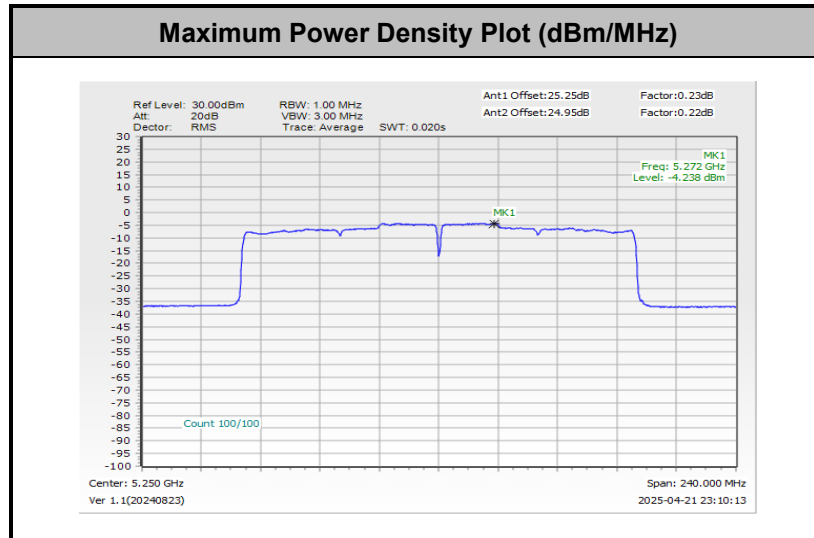




Remark: The test plot is showing a bin by bin combined result mathematically adds two traces.

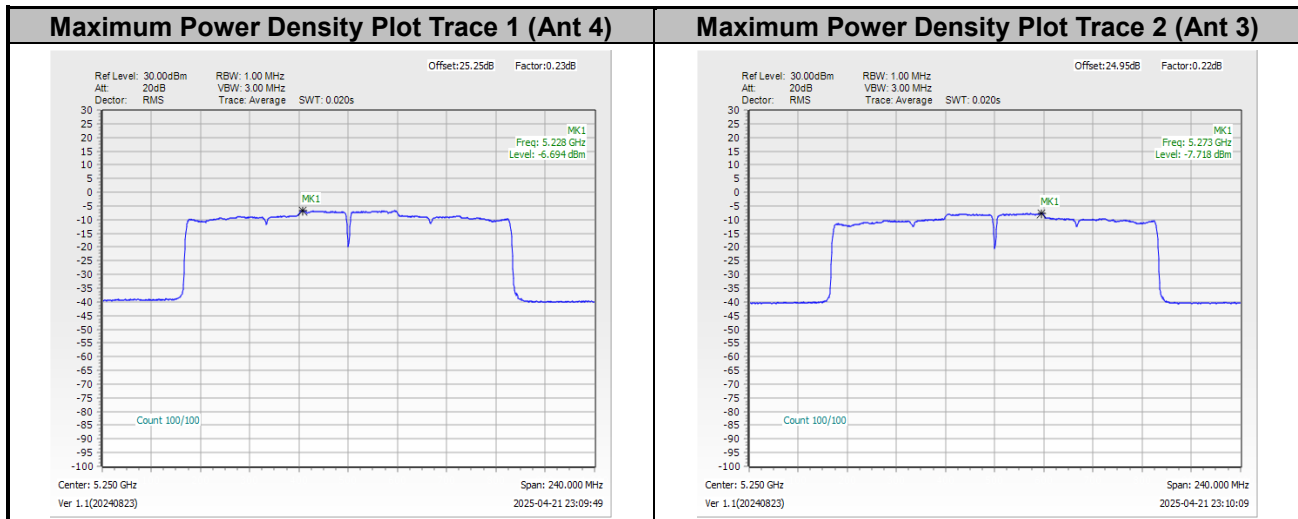

**Test Result of 6dB and 26dB and 99% Occupied Bandwidth**

MIMO <Ant. 4+3>

<802.11a>

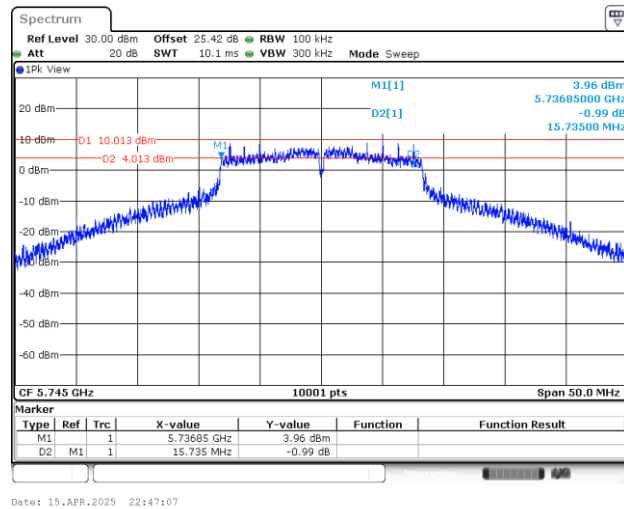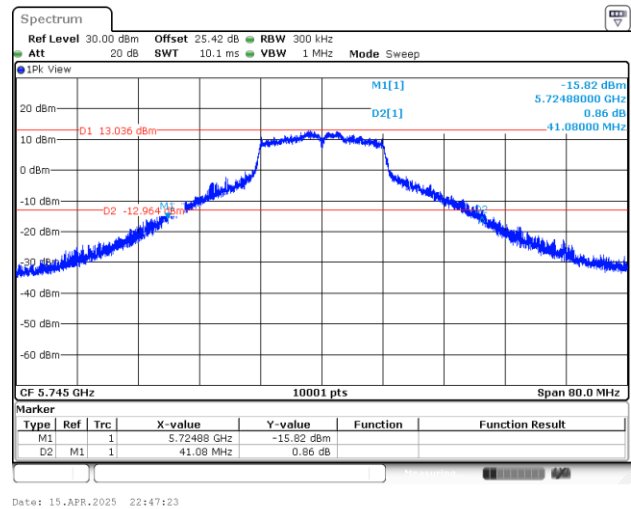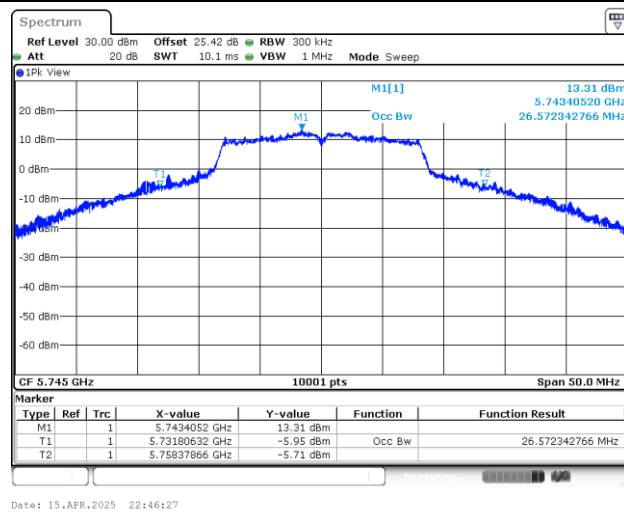
6dB Bandwidth**26dB Bandwidth****99% Occupied Bandwidth**

N/A




<802.11be EHT20>


6dB Bandwidth

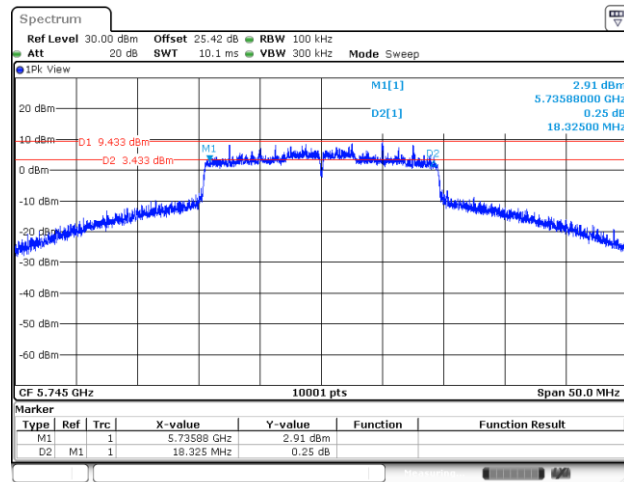

26dB Bandwidth

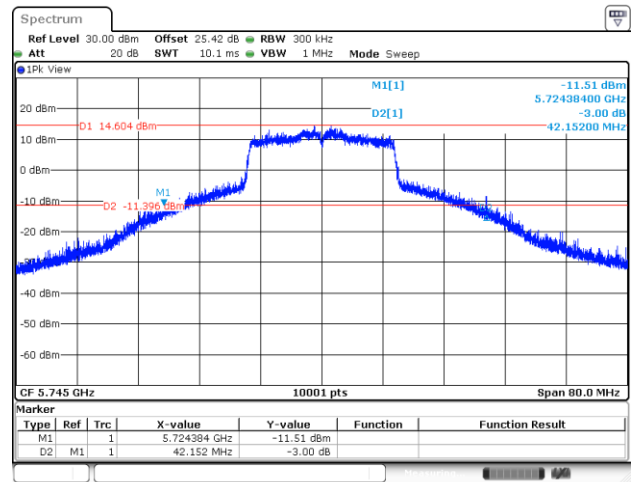


99% Occupied Bandwidth

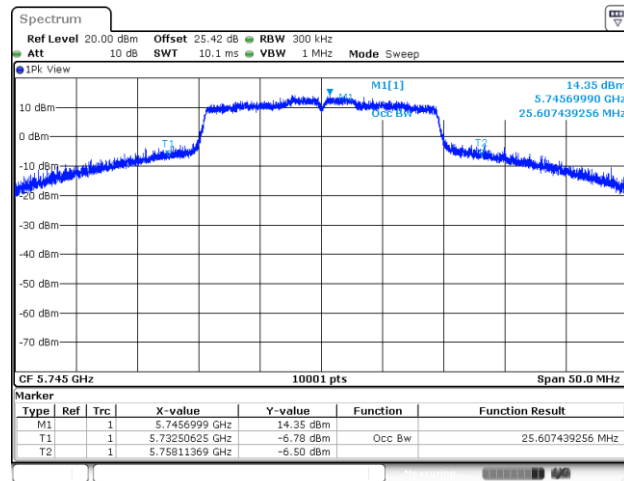

N/A




<802.11be EHT40>

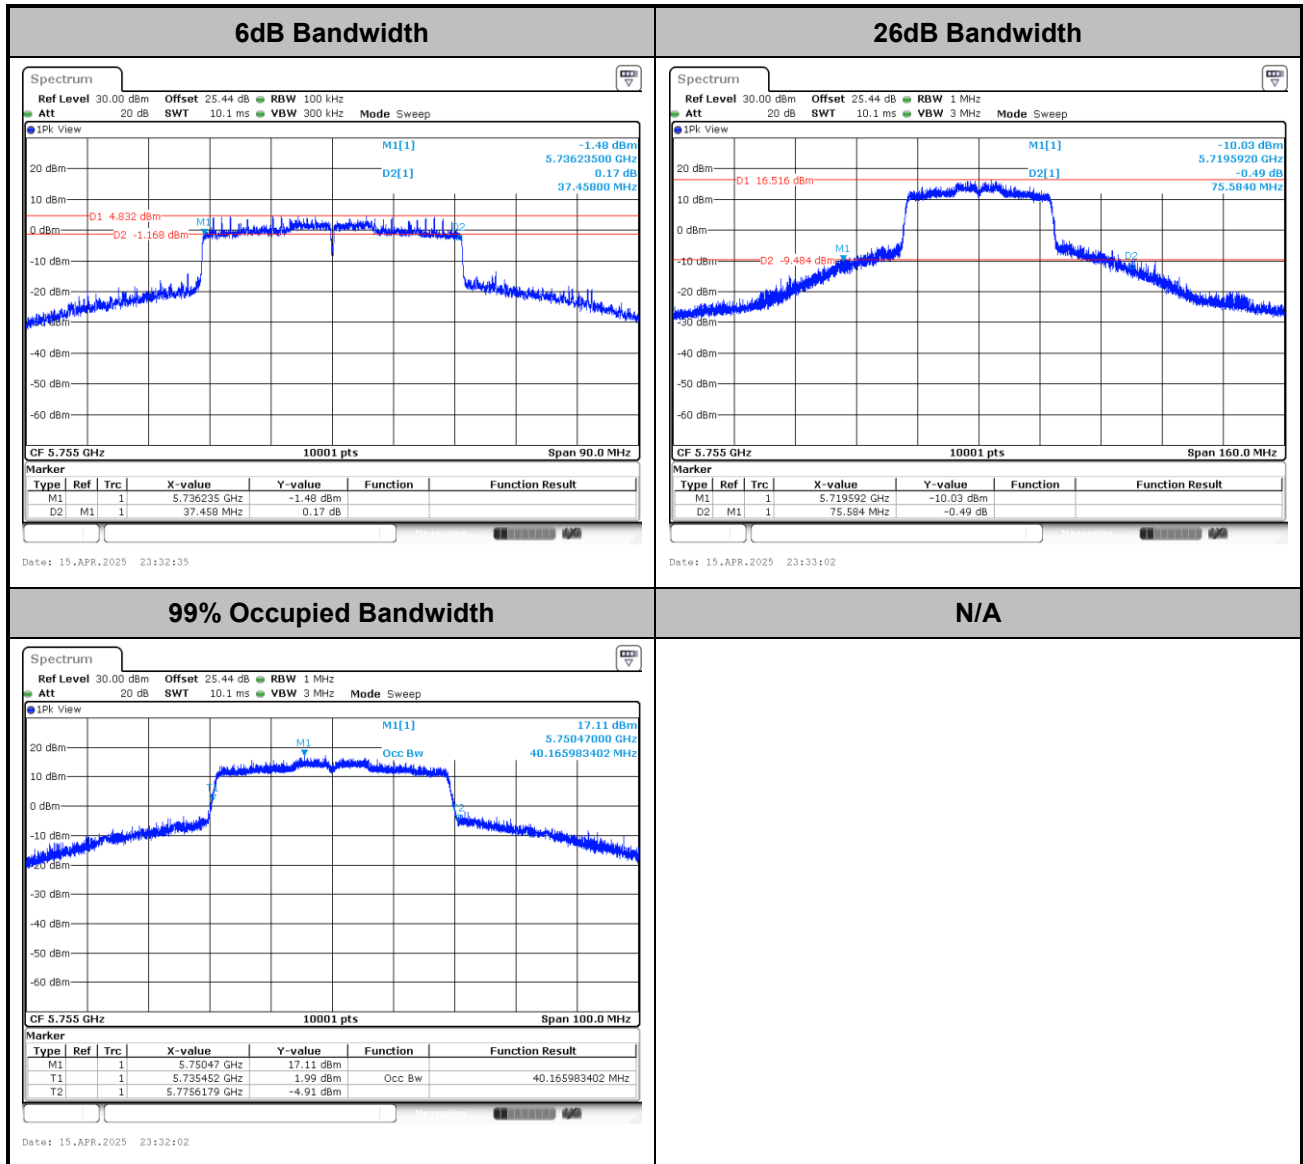




<802.11be EHT80>

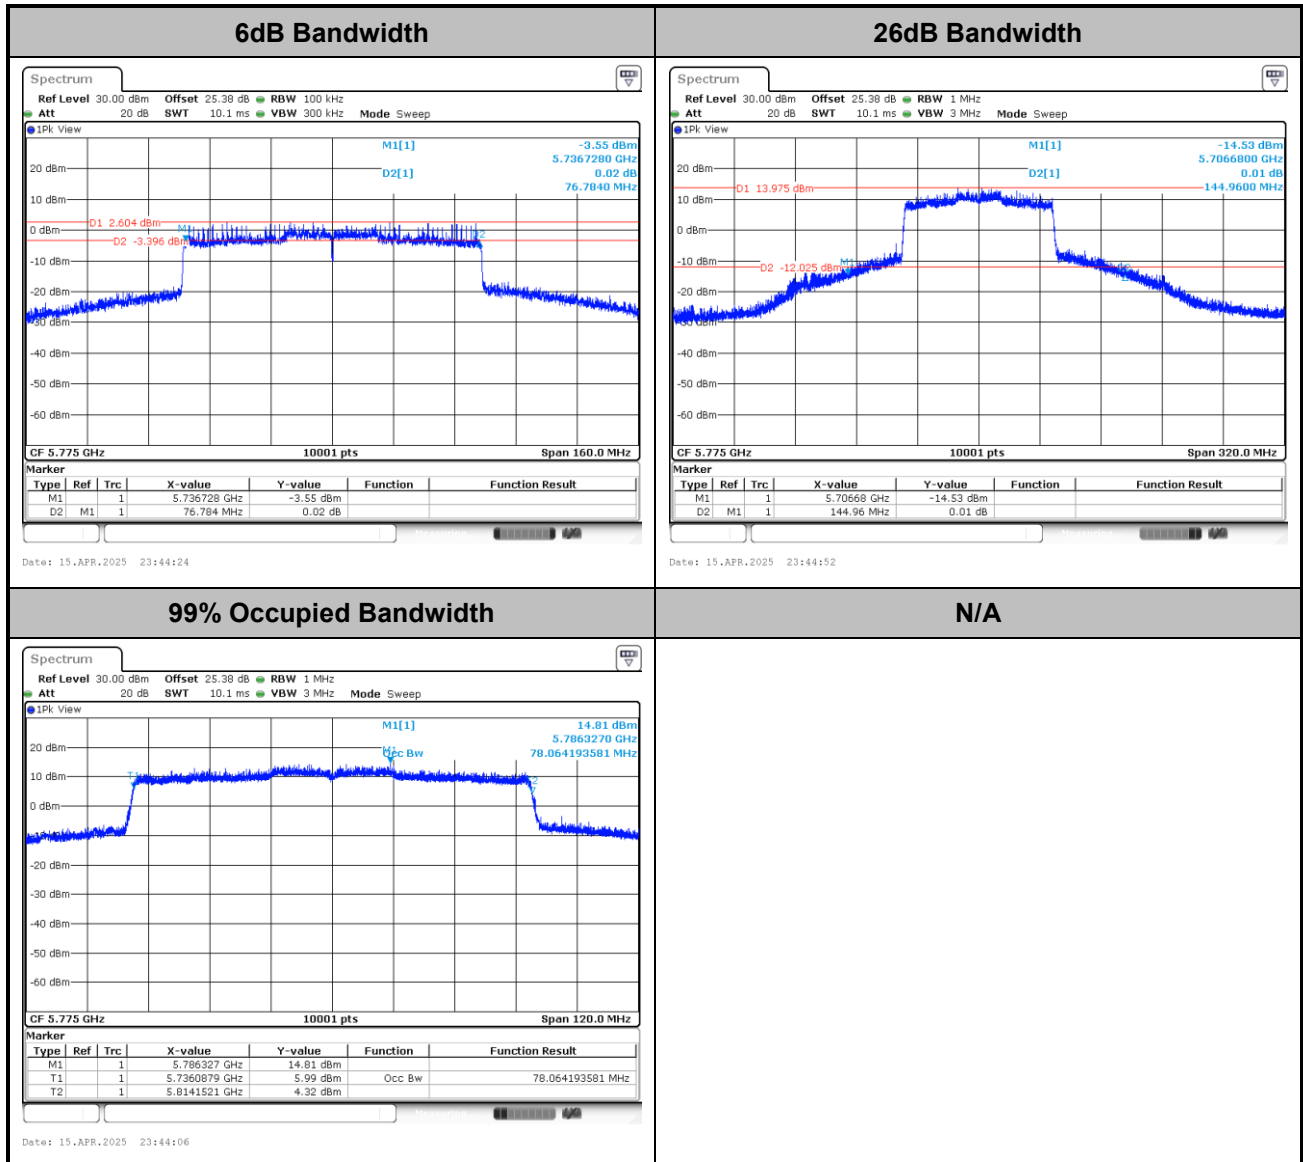




Test Result of Power Spectral Density

<802.11a>

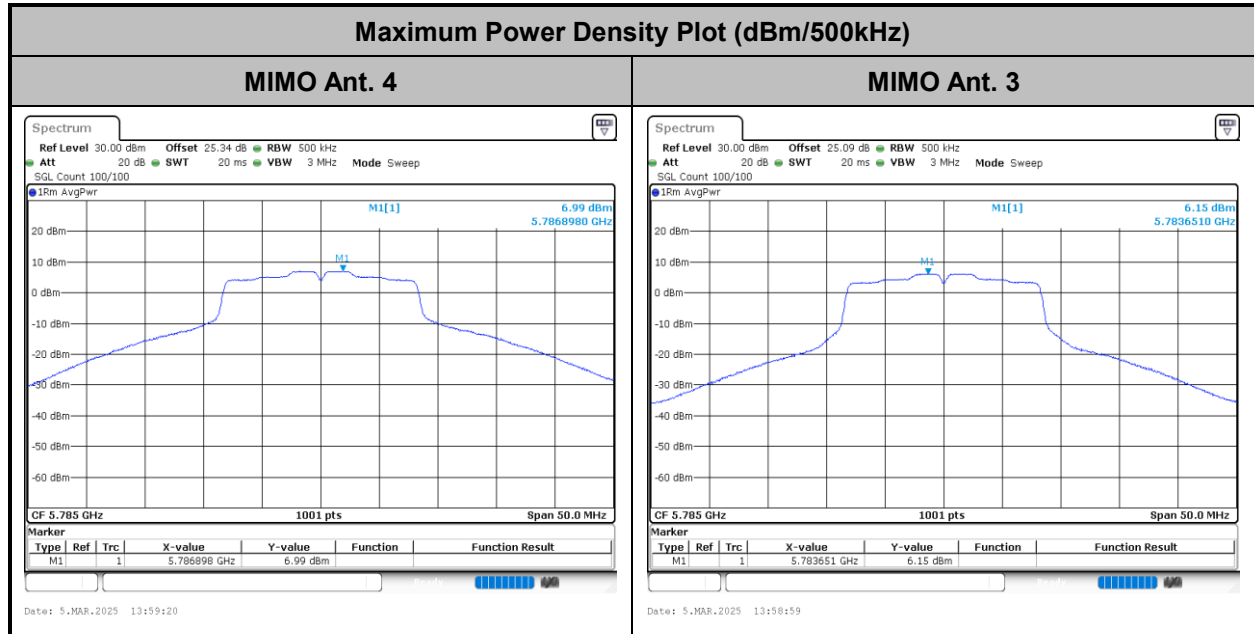


<802.11be EHT20>

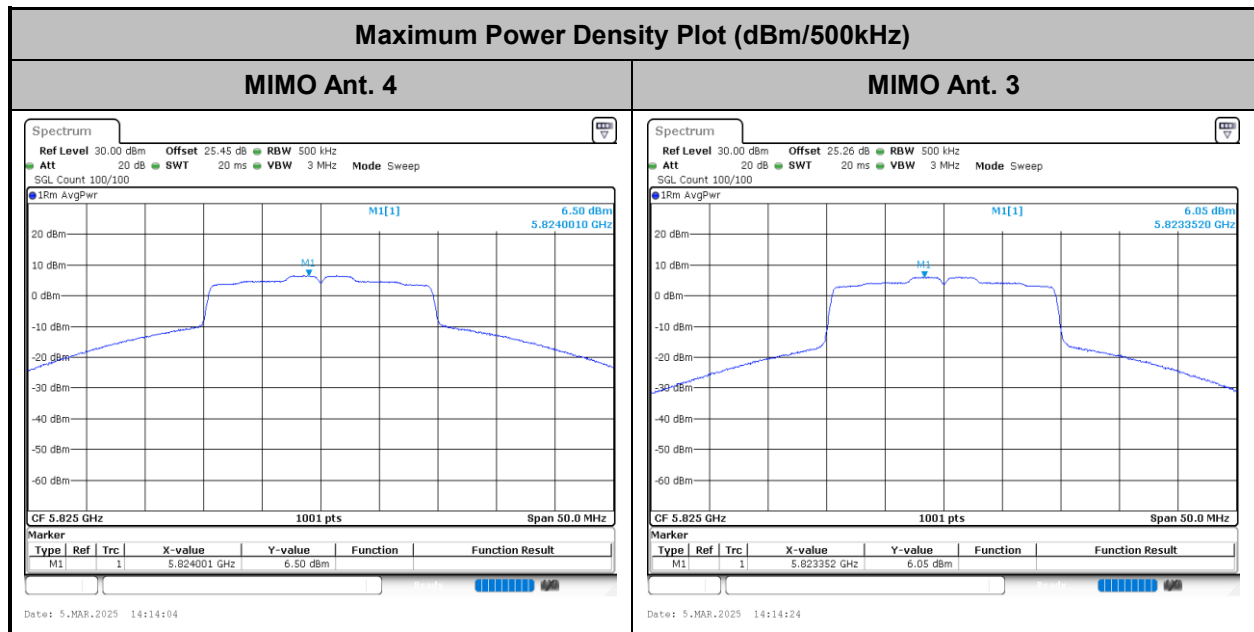




<802.11be EHT40>

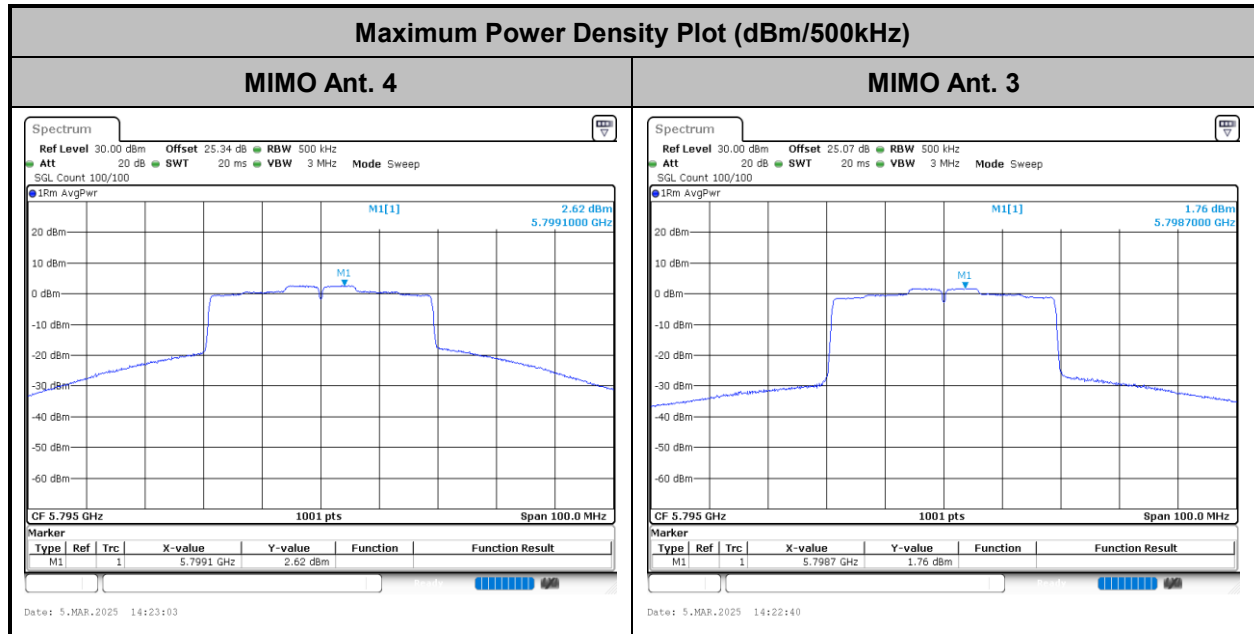

<802.11be EHT80>

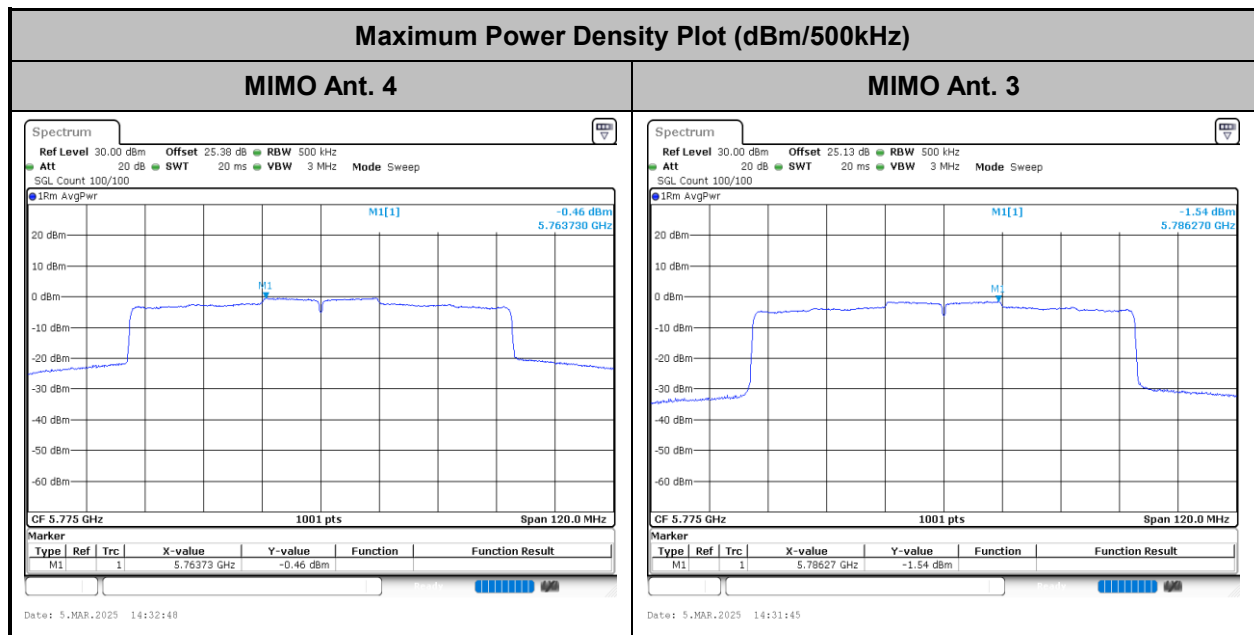



Appendix B. AC Conducted Emission Test Results


Test Engineer :	Louis Chung	Temperature :	23.1~24.8℃
		Relative Humidity :	43.3~46.7%

EUT Information

Report NO :
Test Mode :
Test Voltage :
Phase :

4N0920
Mode 1
120Vac/60Hz
Line

Full Spectrum

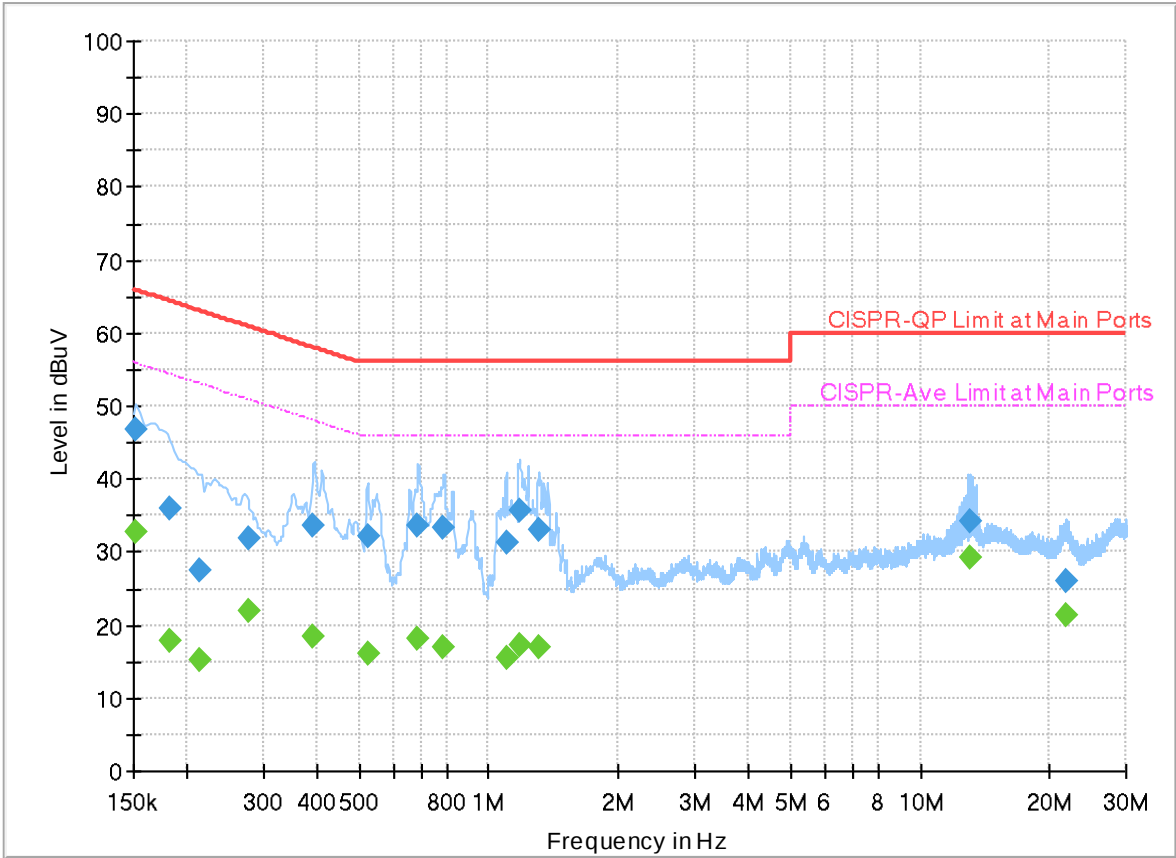

Final_Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	PE	Corr. (dB)
0.152363	---	32.61	55.87	23.26	L1	FLO	20.0
0.152363	46.64	---	65.87	19.23	L1	FLO	20.0
0.181500	---	17.98	54.42	36.44	L1	FLO	20.0
0.181500	36.11	---	64.42	28.31	L1	FLO	20.0
0.213360	---	15.28	53.07	37.79	L1	FLO	20.0
0.213360	27.39	---	63.07	35.68	L1	FLO	20.0
0.276000	---	22.07	50.94	28.87	L1	FLO	20.0
0.276000	31.78	---	60.94	29.16	L1	FLO	20.0
0.388500	---	18.45	48.10	29.65	L1	FLO	20.0
0.388500	33.62	---	58.10	24.48	L1	FLO	20.0
0.524940	---	15.97	46.00	30.03	L1	FLO	20.0
0.524940	32.24	---	56.00	23.76	L1	FLO	20.0
0.682530	---	18.00	46.00	28.00	L1	FLO	20.0
0.682530	33.60	---	56.00	22.40	L1	FLO	20.0
0.780720	---	16.97	46.00	29.03	L1	FLO	20.0
0.780720	33.41	---	56.00	22.59	L1	FLO	20.0
1.101480	---	15.52	46.00	30.48	L1	FLO	20.0
1.101480	31.25	---	56.00	24.75	L1	FLO	20.0
1.175190	---	17.29	46.00	28.71	L1	FLO	20.0


1.175190	35.55	---	56.00	20.45	L1	FLO	20.0
1.309920	---	16.87	46.00	29.13	L1	FLO	20.0
1.309920	33.12	---	56.00	22.88	L1	FLO	20.0
13.046100	---	29.26	50.00	20.74	L1	FLO	20.5
13.046100	34.14	---	60.00	25.86	L1	FLO	20.5
21.717780	---	21.24	50.00	28.76	L1	FLO	20.9
21.717780	25.89	---	60.00	34.11	L1	FLO	20.9

EUT Information

Report NO :
Test Mode :
Test Voltage :
Phase :

4N0920
Mode 1
120Vac/60Hz
Neutral

Full Spectrum

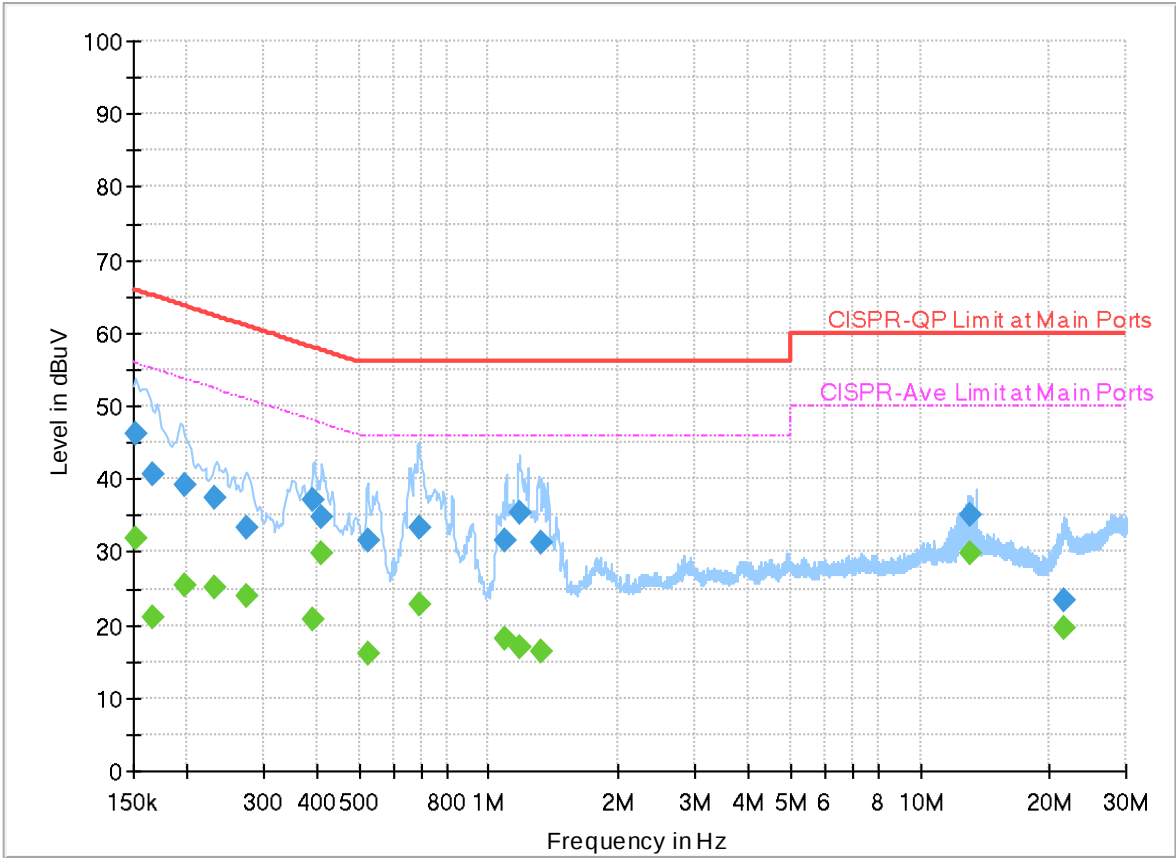

Final_Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	PE	Corr. (dB)
0.151553	---	31.91	55.91	24.00	N	FLO	20.0
0.151553	46.33	---	65.91	19.58	N	FLO	20.0
0.166650	---	21.07	55.13	34.06	N	FLO	20.0
0.166650	40.50	---	65.13	24.63	N	FLO	20.0
0.196710	---	25.34	53.75	28.41	N	FLO	20.0
0.196710	39.22	---	63.75	24.53	N	FLO	20.0
0.230550	---	25.08	52.43	27.35	N	FLO	20.0
0.230550	37.48	---	62.43	24.95	N	FLO	20.0
0.274380	---	23.88	50.98	27.10	N	FLO	20.0
0.274380	33.38	---	60.98	27.60	N	FLO	20.0
0.392460	---	20.74	48.01	27.27	N	FLO	20.0
0.392460	37.00	---	58.01	21.01	N	FLO	20.0
0.408570	---	29.75	47.68	17.93	N	FLO	20.0
0.408570	34.65	---	57.68	23.03	N	FLO	20.0
0.526380	---	16.07	46.00	29.93	N	FLO	20.0
0.526380	31.63	---	56.00	24.37	N	FLO	20.0
0.690000	---	22.93	46.00	23.07	N	FLO	20.0
0.690000	33.38	---	56.00	22.62	N	FLO	20.0
1.093290	---	18.16	46.00	27.84	N	FLO	20.0

1.093290	31.55	---	56.00	24.45	N	FLO	20.0
1.173750	---	17.10	46.00	28.90	N	FLO	20.0
1.173750	35.29	---	56.00	20.71	N	FLO	20.0
1.316400	---	16.33	46.00	29.67	N	FLO	20.0
1.316400	31.43	---	56.00	24.57	N	FLO	20.0
13.041330	---	29.97	50.00	20.03	N	FLO	20.5
13.041330	35.06	---	60.00	24.94	N	FLO	20.5
21.540300	---	19.73	50.00	30.27	N	FLO	20.9
21.540300	23.50	---	60.00	36.50	N	FLO	20.9



Appendix C. Radiated Spurious Emission Test Data

Test Engineer :	Sam Pan, Quentin Liu and Bigshow Wang	Relative Humidity(%):	50~65
		Temperature(°C):	18~23

Note symbol

-L	Low channel location
-R	High channel location

C1-1. Radiated Spurious Emission Test Modes

Mode	Band	Band (GHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 1	U-NII-1	5.15-5.25	4+3	802.11a	36	5180	6Mbps	-	-
Mode 2	U-NII-1	5.15-5.25	4+3	802.11a	44	5220	6Mbps	-	-
Mode 3	U-NII-1	5.15-5.25	4+3	802.11a	48	5240	6Mbps	-	-
Mode 4	U-NII-1	5.15-5.25	4+3	802.11be EHT20	36	5180	MCS0	-	-
Mode 5	U-NII-1	5.15-5.25	4+3	802.11be EHT20	36	5180	MCS0	Partial_26/0RU	-
Mode 6	U-NII-1	5.15-5.25	4+3	802.11be EHT20	36	5180	MCS0	Partial_52/37RU	-
Mode 7	U-NII-1	5.15-5.25	4+3	802.11be EHT20	36	5180	MCS0	Partial_106/53RU	-
Mode 8	U-NII-1	5.15-5.25	4+3	802.11be EHT20	44	5220	MCS0	-	-
Mode 9	U-NII-1	5.15-5.25	4+3	802.11be EHT20	48	5240	MCS0	-	-
Mode 10	U-NII-1	5.15-5.25	4+3	802.11be EHT40	38	5190	MCS0	-	-
Mode 11	U-NII-1	5.15-5.25	4+3	802.11be EHT40	46	5230	MCS0	-	-



Mode	Band	Band (GHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 12	U-NII-1	5.15-5.25	4+3	802.11be EHT80	42	5210	MCS0	-	-
Mode 13	U-NII-1	5.15-5.25	4+3	802.11be EHT160	50	5250	MCS0	-	-
Mode 14	U-NII-2A	5.25-5.35	4+3	802.11a	52	5260	6Mbps	-	-
Mode 15	U-NII-2A	5.25-5.35	4+3	802.11a	60	5300	6Mbps	-	-
Mode 16	U-NII-2A	5.25-5.35	4+3	802.11a	64	5320	6Mbps	-	-
Mode 17	U-NII-2A	5.25-5.35	4+3	802.11be EHT20	52	5260	MCS0	-	-
Mode 18	U-NII-2A	5.25-5.35	4+3	802.11be EHT20	60	5300	MCS0	-	-
Mode 19	U-NII-2A	5.25-5.35	4+3	802.11be EHT20	64	5320	MCS0	-	-
Mode 20	U-NII-2A	5.25-5.35	4+3	802.11be EHT20	64	5320	MCS0	Partial_26/8RU	-
Mode 21	U-NII-2A	5.25-5.35	4+3	802.11be EHT20	64	5320	MCS0	Partial_52/40RU	-
Mode 22	U-NII-2A	5.25-5.35	4+3	802.11be EHT20	64	5320	MCS0	Partial_106/54RU	-



Mode	Band	Band (GHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 23	U-NII-2A	5.25-5.35	4+3	802.11be EHT40	54	5270	MCS0	-	-
Mode 24	U-NII-2A	5.25-5.35	4+3	802.11be EHT40	62	5310	MCS0	-	-
Mode 25	U-NII-2A	5.25-5.35	4+3	802.11be EHT80	58	5290	MCS0	-	-
Mode 26	U-NII-2C	5.47-5.725	4+3	802.11a	100	5500	6Mbps	-	-
Mode 27	U-NII-2C	5.47-5.725	4+3	802.11a	116	5580	6Mbps	-	-
Mode 28	U-NII-2C	5.47-5.725	4+3	802.11a	140	5700	6Mbps	-	-
Mode 29	U-NII-2C	5.47-5.725	4+3	802.11a	144	5720	6Mbps	-	-
Mode 30	U-NII-2C	5.47-5.725	4+3	802.11be EHT20	100	5500	MCS0	-	-
Mode 31	U-NII-2C	5.47-5.725	4+3	802.11be EHT20	100	5500	MCS0	Partial_26/0RU	-
Mode 32	U-NII-2C	5.47-5.725	4+3	802.11be EHT20	100	5500	MCS0	Partial_52/37RU	-
Mode 33	U-NII-2C	5.47-5.725	4+3	802.11be EHT20	100	5500	MCS0	Partial_106/53RU	-



Mode	Band	Band (GHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 34	U-NII-2C	5.47-5.725	4+3	802.11be EHT20	116	5580	MCS0	-	-
Mode 35	U-NII-2C	5.47-5.725	4+3	802.11be EHT20	140	5700	MCS0	-	-
Mode 36	U-NII-2C	5.47-5.725	4+3	802.11be EHT20	140	5700	MCS0	Partial_26/8RU	-
Mode 37	U-NII-2C	5.47-5.725	4+3	802.11be EHT20	140	5700	MCS0	Partial_52/38RU	-
Mode 38	U-NII-2C	5.47-5.725	4+3	802.11be EHT20	140	5700	MCS0	Partial_106/54RU	-
Mode 39	U-NII-2C	5.47-5.725	4+3	802.11be EHT20	144	5720	MCS0	-	-
Mode 40	U-NII-2C	5.47-5.725	4+3	802.11be EHT40	102	5510	MCS0	-	-
Mode 41	U-NII-2C	5.47-5.725	4+3	802.11be EHT40	110	5550	MCS0	-	-
Mode 42	U-NII-2C	5.47-5.725	4+3	802.11be EHT40	134	5670	MCS0	-	-
Mode 43	U-NII-2C	5.47-5.725	4+3	802.11be EHT40	142	5710	MCS0	-	-
Mode 44	U-NII-2C	5.47-5.725	4+3	802.11be EHT80	106	5530	MCS0	-	-
Mode 45	U-NII-2C	5.47-5.725	4+3	802.11be EHT80	122	5610	MCS0	-	-
Mode 46	U-NII-2C	5.47-5.725	4+3	802.11be EHT80	138	5690	MCS0	-	-
Mode 47	U-NII-2C	5.47-5.725	4+3	802.11be EHT160	114	5570	MCS0	-	-
Mode 79	U-NII-1	5.15-5.25	4+3	802.11be EHT20	36	5180	MCS0	-	LF
Mode 80	U-NII-1	5.15-5.25	4+3	802.11be EHT20	36	5180	MCS0	-	SHF

C1-2. Summary of each worse mode

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	RU	Remark
1	802.11a	36	5148.58	48.00	54.00	-6.00	H	Avg.	Pass	-	Band Edge
	802.11a	36	10360.00	45.58	68.20	-22.62	V	Peak	Pass	-	Harmonic
2	802.11a	44	5149.96	37.49	54.00	-16.51	H	Avg.	Pass	-	Band Edge
	802.11a	44	10440.00	45.73	68.20	-22.47	H	Peak	Pass	-	Harmonic
3	802.11a	48	5150.00	37.18	54.00	-16.82	V	Avg.	Pass	-	Band Edge
	802.11a	48	10480.00	47.10	68.20	-21.10	H	Peak	Pass	-	Harmonic
4	802.11be EHT20	36	5148.77	52.31	54.00	-1.69	H	Avg.	Pass	-	Band Edge
	802.11be EHT20	36	10360.00	46.19	68.20	-22.01	V	Peak	Pass	-	Harmonic
5	802.11be EHT20	36	5137.56	49.12	54.00	-4.88	H	Avg.	Pass	Partial_26/0RU	Band Edge
	802.11be EHT20	36	-	-	-	-	-	-	-	Partial_26/0RU	Harmonic
6	802.11be EHT20	36	5140.03	71.84	74.00	-2.16	V	Peak	Pass	Partial_52/37RU	Band Edge
	802.11be EHT20	36	-	-	-	-	-	-	-	Partial_52/37RU	Harmonic



Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	RU	Remark
7	802.11be EHT20	36	5148.77	50.44	54.00	-3.56	H	Avg.	Pass	Partial_106/53RU	Band Edge
	802.11be EHT20	36	-	-	-	-	-	-	-	Partial_106/53RU	Harmonic
8	802.11be EHT20	44	5149.96	41.28	54.00	-12.72	H	Avg.	Pass	-	Band Edge
	802.11be EHT20	44	10440.00	46.01	68.20	-22.19	V	Peak	Pass	-	Harmonic
9	802.11be EHT20	48	5150.00	39.02	54.00	-14.98	H	Avg.	Pass	-	Band Edge
	802.11be EHT20	48	10480.00	46.20	68.20	-22.00	V	Peak	Pass	-	Harmonic
10	802.11be EHT40	38	5149.73	51.67	54.00	-2.33	H	Avg.	Pass	-	Band Edge
	802.11be EHT40	38	10380.00	46.42	68.20	-21.78	V	Peak	Pass	-	Harmonic
11	802.11be EHT40	46	5150.00	45.30	54.00	-8.70	H	Avg.	Pass	-	Band Edge
	802.11be EHT40	46	10460.00	46.74	68.20	-21.46	V	Peak	Pass	-	Harmonic



Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	RU	Remark
12	802.11be EHT80	42	5148.75	51.67	54.00	-2.33	H	Avg.	Pass	-	Band Edge
	802.11be EHT80	42	10420.00	47.10	68.20	-21.10	H	Peak	Pass	-	Harmonic
13	802.11be EHT160	50	5387.50	50.46	54.00	-3.54	H	Avg.	Pass	-	Band Edge
	802.11be EHT160	50	10500.00	47.04	68.20	-21.16	V	Peak	Pass	-	Harmonic
14	802.11a	52	5353.53	37.40	54.00	-16.60	H	Avg.	Pass	-	Band Edge
	802.11a	52	10520.00	46.63	68.20	-21.57	H	Peak	Pass	-	Harmonic
15	802.11a	60	5350.01	42.85	54.00	-11.15	H	Avg.	Pass	-	Band Edge
	802.11a	60	10600.00	47.02	74.00	-26.98	H	Peak	Pass	-	Harmonic
16	802.11a	64	5350.05	49.67	54.00	-4.33	H	Avg.	Pass	-	Band Edge
	802.11a	64	15960.00	45.90	74.00	-28.10	V	Peak	Pass	-	Harmonic
17	802.11be EHT20	52	5350.38	39.96	54.00	-14.04	V	Avg.	Pass	-	Band Edge
	802.11be EHT20	52	10520.00	46.30	68.20	-21.90	V	Peak	Pass	-	Harmonic



Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	RU	Remark
18	802.11be EHT20	60	5350.18	51.39	54.00	-2.61	H	Avg.	Pass	-	Band Edge
	802.11be EHT20	60	15900.00	47.99	74.00	-26.01	V	Peak	Pass	-	Harmonic
19	802.11be EHT20	64	5350.05	51.70	54.00	-2.30	V	Avg.	Pass	-	Band Edge
	802.11be EHT20	64	10640.00	47.15	74.00	-26.85	H	Peak	Pass	-	Harmonic
20	802.11be EHT20	64	5362.35	50.78	54.00	-3.22	H	Avg.	Pass	Partial_26/8RU	Band Edge
	802.11be EHT20	64	-	-	-	-	-	-	-	Partial_26/8RU	Harmonic
21	802.11be EHT20	64	5357.85	50.69	54.00	-3.31	H	Avg.	Pass	Partial_52/40RU	Band Edge
	802.11be EHT20	64	-	-	-	-	-	-	-	Partial_52/40RU	Harmonic
22	802.11be EHT20	64	5350.80	51.89	54.00	-2.11	H	Avg.	Pass	Partial_106/54RU	Band Edge
	802.11be EHT20	64	-	-	-	-	-	-	-	Partial_106/54RU	Harmonic



Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	RU	Remark
23	802.11be EHT40	54	5350.80	50.98	54.00	-3.02	H	Avg.	Pass	-	Band Edge
	802.11be EHT40	54	10540.00	47.44	68.20	-20.76	H	Peak	Pass	-	Harmonic
24	802.11be EHT40	62	5350.18	51.98	54.00	-2.02	H	Avg.	Pass	-	Band Edge
	802.11be EHT40	62	10620.00	47.38	74.00	-26.62	V	Peak	Pass	-	Harmonic
25	802.11be EHT80	58	5350.59	51.10	54.00	-2.90	H	Avg.	Pass	-	Band Edge
	802.11be EHT80	58	10580.00	46.85	68.20	-21.35	H	Peak	Pass	-	Harmonic
26	802.11a	100	5459.76	42.61	54.00	-11.39	H	Avg.	Pass	-	Band Edge
	802.11a	100	16500.00	46.75	68.20	-21.45	H	Peak	Pass	-	Harmonic
27	802.11a	116	5457.76	37.59	54.00	-16.41	H	Avg.	Pass	-	Band Edge
	802.11a	116	16740.00	46.77	68.20	-21.43	H	Peak	Pass	-	Harmonic
28	802.11a	140	5727.28	65.56	68.20	-2.64	H	Peak	Pass	-	Band Edge



Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	RU	Remark
28	802.11a	140	17100.00	47.71	68.20	-20.49	H	Peak	Pass	-	Harmonic
29	802.11a	144	5459.82	35.93	54.00	-18.07	H	Avg.	Pass	-	Band Edge
	802.11a	144	17160.00	46.82	68.20	-21.38	H	Peak	Pass	-	Harmonic
30	802.11be EHT20	100	5469.68	65.53	68.20	-2.67	V	Peak	Pass	-	Band Edge
	802.11be EHT20	100	16500.00	47.69	68.20	-20.51	H	Peak	Pass	-	Harmonic
31	802.11be EHT20	100	5457.36	50.89	54.00	-3.11	H	Avg.	Pass	Partial_26/0RU	Band Edge
	802.11be EHT20	100	-	-	-	-	-	-	-	Partial_26/0RU	Harmonic
32	802.11be EHT20	100	5459.92	44.01	54.00	-9.99	H	Avg.	Pass	Partial_52/37RU	Band Edge
	802.11be EHT20	100	-	-	-	-	-	-	-	Partial_52/37RU	Harmonic
33	802.11be EHT20	100	5470.00	62.53	68.20	-5.67	H	Peak	Pass	Partial_106/53RU	Band Edge
	802.11be EHT20	100	-	-	-	-	-	-	-	Partial_106/53RU	Harmonic



Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	RU	Remark
34	802.11be EHT20	116	5459.92	37.90	54.00	-16.10	H	Avg.	Pass	-	Band Edge
	802.11be EHT20	116	16740.00	46.59	68.20	-21.61	V	Peak	Pass	-	Harmonic
35	802.11be EHT20	140	5725.33	66.26	68.20	-1.94	V	Peak	Pass	-	Band Edge
	802.11be EHT20	140	17100.00	46.71	68.20	-21.49	V	Peak	Pass	-	Harmonic
36	802.11be EHT20	140	5728.85	65.67	68.20	-2.53	H	Peak	Pass	Partial_26/8RU	Band Edge
	802.11be EHT20	140	-	-	-	-	-	-	-	Partial_26/8RU	Harmonic
37	802.11be EHT20	140	5725.03	65.41	68.20	-2.79	H	Peak	Pass	Partial_52/38RU	Band Edge
	802.11be EHT20	140	-	-	-	-	-	-	-	Partial_52/38RU	Harmonic
38	802.11be EHT20	140	5726.00	65.04	68.20	-3.16	H	Peak	Pass	Partial_106/54RU	Band Edge
	802.11be EHT20	140	-	-	-	-	-	-	-	Partial_106/54RU	Harmonic
39	802.11be EHT20	144	5364.82	36.52	54.00	-17.48	H	Avg.	Pass	-	Band Edge



Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	RU	Remark
39	802.11be EHT20	144	17160.00	45.51	68.20	-22.69	V	Peak	Pass	-	Harmonic
40	802.11be EHT40	102	5468.26	64.80	68.20	-3.40	H	Peak	Pass	-	Band Edge
	802.11be EHT40	102	16530.00	46.85	68.20	-21.35	V	Peak	Pass	-	Harmonic
41	802.11be EHT40	110	5458.68	47.62	54.00	-6.38	H	Avg.	Pass	-	Band Edge
	802.11be EHT40	110	16650.00	47.33	68.20	-20.87	V	Peak	Pass	-	Harmonic
42	802.11be EHT40	134	5725.33	64.28	68.20	-3.92	H	Peak	Pass	-	Band Edge
	802.11be EHT40	134	17010.00	46.56	68.20	-21.64	H	Peak	Pass	-	Harmonic
43	802.11be EHT40	142	5459.82	36.10	54.00	-17.90	H	Avg.	Pass	-	Band Edge
	802.11be EHT40	142	17130.00	47.57	68.20	-20.63	V	Peak	Pass	-	Harmonic
44	802.11be EHT80	106	5467.92	66.29	68.20	-1.91	H	Peak	Pass	-	Band Edge
	802.11be EHT80	106	16590.00	46.87	68.20	-21.33	V	Peak	Pass	-	Harmonic







Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	RU	Remark
45	802.11be EHT80	122	5455.00	49.76	54.00	-4.24	H	Avg.	Pass	-	Band Edge
	802.11be EHT80	122	16830.00	47.02	68.20	-21.18	H	Peak	Pass	-	Harmonic
46	802.11be EHT80	138	5454.88	45.05	54.00	-8.95	H	Avg.	Pass	-	Band Edge
	802.11be EHT80	138	17070.00	47.26	68.20	-20.94	H	Peak	Pass	-	Harmonic
47	802.11be EHT160	114	5462.42	65.04	68.20	-3.16	H	Peak	Pass	-	Band Edge
	802.11be EHT160	114	16710.00	47.52	68.20	-20.68	V	Peak	Pass	-	Harmonic
79	LF	36	94.02	33.90	43.50	-9.60	V	Peak	Pass	-	LF
80	SHF	36	39593.75	47.14	74.00	-26.86	H	Peak	Pass	-	SHF





Mode	1																																																																																																			
	Band Edge																																																																																																			
	U-NII-1_5.15-5.25_802.11a_CH36_5180MHz																																																																																																			
ANT	4+3																																																																																																			
Pol.	Horizontal						Fundamental																																																																																													
Peak	Site : 03CH15-HY Condition: PEAK_BE_74 3m 91200-02294_240620 HORIZONTAL : RBW:1000.000kHz VBN:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5146.87</td><td>58.23</td><td>74.00</td><td>-15.77</td><td>53.48</td><td>33.19</td><td>8.41</td><td>36.85</td><td>0.00</td><td>101</td><td>39</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5146.87	58.23	74.00	-15.77	53.48	33.19	8.41	36.85	0.00	101	39	PEAK	Site : 03CH15-HY Condition: PEAK(UNII) 3m 91200-02294_240620 HORIZONTAL : RBW:1000.000kHz VBN:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5180.00</td><td>107.64</td><td>-----</td><td>-----</td><td>102.98</td><td>33.07</td><td>8.44</td><td>36.85</td><td>0.00</td><td>101</td><td>39</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5180.00	107.64	-----	-----	102.98	33.07	8.44	36.85	0.00	101	39	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	5146.87	58.23	74.00	-15.77	53.48	33.19	8.41	36.85	0.00	101	39	PEAK																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	5180.00	107.64	-----	-----	102.98	33.07	8.44	36.85	0.00	101	39	PEAK																																																																																								
Avg	Site : 03CH15-HY Condition: AVG_BE_54 3m 91200-02294_240620 HORIZONTAL : RBW:1000.000kHz VBN:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5148.58</td><td>48.00</td><td>54.00</td><td>-6.00</td><td>43.25</td><td>33.19</td><td>8.41</td><td>36.85</td><td>0.00</td><td>101</td><td>39</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5148.58	48.00	54.00	-6.00	43.25	33.19	8.41	36.85	0.00	101	39	AVERAGE	Site : 03CH15-HY Condition: AVG_54 3m 91200-02294_240620 HORIZONTAL : RBW:1000.000kHz VBN:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5180.00</td><td>101.88</td><td>-----</td><td>-----</td><td>97.22</td><td>33.07</td><td>8.44</td><td>36.85</td><td>0.00</td><td>101</td><td>39</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5180.00	101.88	-----	-----	97.22	33.07	8.44	36.85	0.00	101	39	AVERAGE
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	5148.58	48.00	54.00	-6.00	43.25	33.19	8.41	36.85	0.00	101	39	AVERAGE																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	5180.00	101.88	-----	-----	97.22	33.07	8.44	36.85	0.00	101	39	AVERAGE																																																																																								

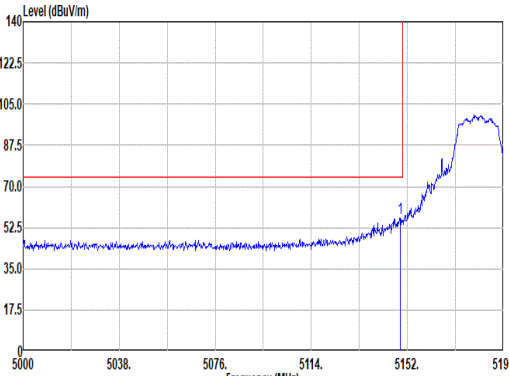
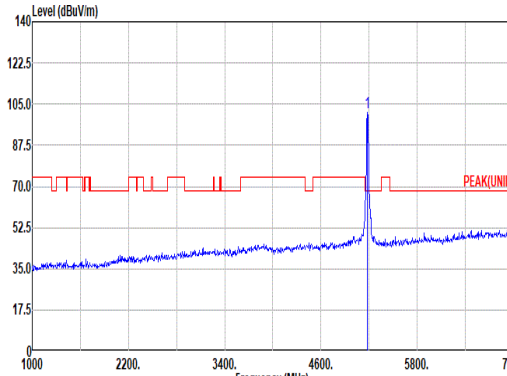
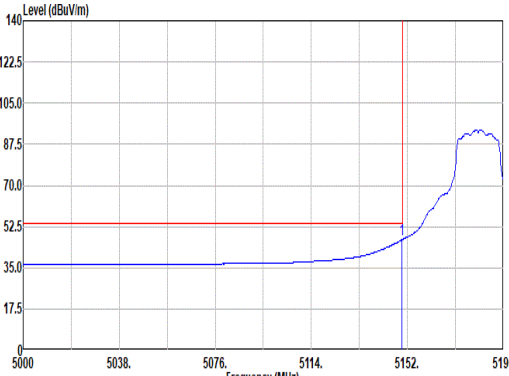
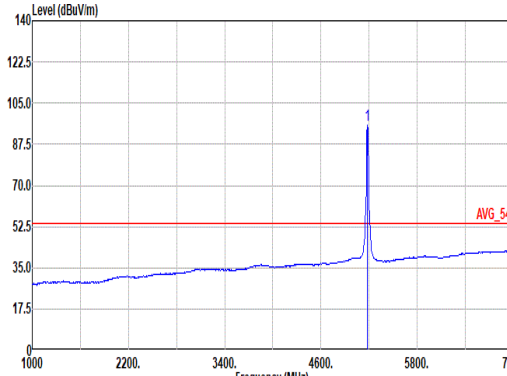


		1																																																																																																		
Mode	Band Edge																																																																																																			
	U-NII-1_5.15-5.25_802.11a_CH36_5180MHz																																																																																																			
ANT	4+3																																																																																																			
Pol.	Vertical						Fundamental																																																																																													
Peak	 Site : 03CH15-HY Condition: PEAK_BE_74 3m 91200-02294_240620 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5149.15</td><td>56.30</td><td>74.00</td><td>-17.70</td><td>51.54</td><td>33.20</td><td>8.41</td><td>36.85</td><td>0.00</td><td>100</td><td>123</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5149.15	56.30	74.00	-17.70	51.54	33.20	8.41	36.85	0.00	100	123	PEAK	 Site : 03CH15-HY Condition: PEAK(UNII) 3m 91200-02294_240620 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5180.00</td><td>101.42</td><td>-----</td><td>-----</td><td>96.74</td><td>33.10</td><td>8.43</td><td>36.85</td><td>0.00</td><td>100</td><td>123</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5180.00	101.42	-----	-----	96.74	33.10	8.43	36.85	0.00	100	123	PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	5149.15	56.30	74.00	-17.70	51.54	33.20	8.41	36.85	0.00	100	123	PEAK																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	5180.00	101.42	-----	-----	96.74	33.10	8.43	36.85	0.00	100	123	PEAK																																																																																								
Avg	 Site : 03CH15-HY Condition: AVG_BE_54 3m 91200-02294_240620 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5149.91</td><td>46.95</td><td>54.00</td><td>-7.05</td><td>42.19</td><td>33.20</td><td>8.41</td><td>36.85</td><td>0.00</td><td>100</td><td>123</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5149.91	46.95	54.00	-7.05	42.19	33.20	8.41	36.85	0.00	100	123	AVERAGE	 Site : 03CH15-HY Condition: AVG_54 3m 91200-02294_240620 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5180.00</td><td>95.45</td><td>-----</td><td>-----</td><td>90.79</td><td>33.07</td><td>8.44</td><td>36.85</td><td>0.00</td><td>100</td><td>123</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5180.00	95.45	-----	-----	90.79	33.07	8.44	36.85	0.00	100	123	AVERAGE
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	5149.91	46.95	54.00	-7.05	42.19	33.20	8.41	36.85	0.00	100	123	AVERAGE																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	5180.00	95.45	-----	-----	90.79	33.07	8.44	36.85	0.00	100	123	AVERAGE																																																																																								



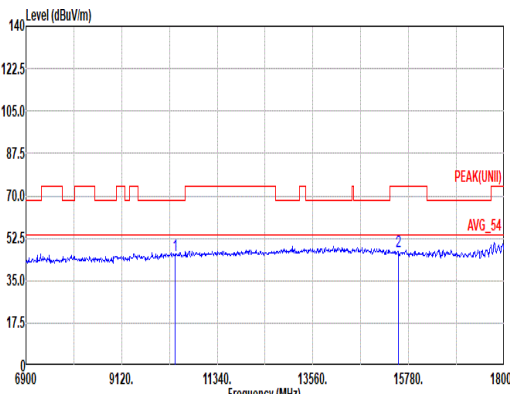
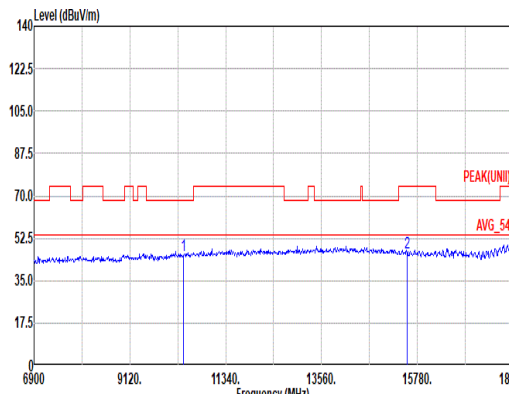


Mode	1																																																																	
	Harmonic																																																																	
	U-NII-1_5.15-5.25_802.11a_CH36_5180MHz																																																																	
ANT	4+3																																																																	
Pol.	Horizontal																																																																	
Peak Avg	 Site : 03CH15-HY Condition: PEAK(UNII) 3m 91200-02294_240620 HORIZONTAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>10360.00</td><td>45.51</td><td>68.20</td><td>-22.69</td><td>52.22</td><td>38.60</td><td>11.94</td><td>58.13</td><td>0.88</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>15540.00</td><td>47.25</td><td>74.00</td><td>-26.75</td><td>51.06</td><td>38.06</td><td>15.02</td><td>57.78</td><td>0.89</td><td>--</td><td>Peak</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	10360.00	45.51	68.20	-22.69	52.22	38.60	11.94	58.13	0.88	--	Peak	2	15540.00	47.25	74.00	-26.75	51.06	38.06	15.02	57.78	0.89	--	Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																									
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																								
1	10360.00	45.51	68.20	-22.69	52.22	38.60	11.94	58.13	0.88	--	Peak																																																							
2	15540.00	47.25	74.00	-26.75	51.06	38.06	15.02	57.78	0.89	--	Peak																																																							
Peak Avg	 Site : 03CH15-HY Condition: PEAK(UNII) 3m 91200-02294_240620 VERTICAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>10360.00</td><td>45.58</td><td>68.20</td><td>-22.62</td><td>52.29</td><td>38.60</td><td>11.94</td><td>58.13</td><td>0.88</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>15540.00</td><td>46.44</td><td>74.00</td><td>-27.56</td><td>50.25</td><td>38.06</td><td>15.02</td><td>57.78</td><td>0.89</td><td>--</td><td>Peak</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	10360.00	45.58	68.20	-22.62	52.29	38.60	11.94	58.13	0.88	--	Peak	2	15540.00	46.44	74.00	-27.56	50.25	38.06	15.02	57.78	0.89	--	Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																									
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																								
1	10360.00	45.58	68.20	-22.62	52.29	38.60	11.94	58.13	0.88	--	Peak																																																							
2	15540.00	46.44	74.00	-27.56	50.25	38.06	15.02	57.78	0.89	--	Peak																																																							

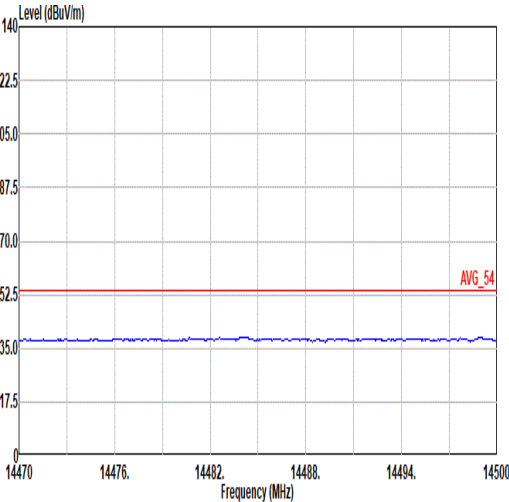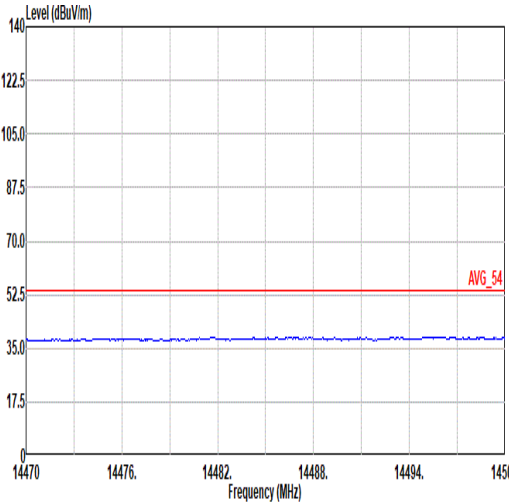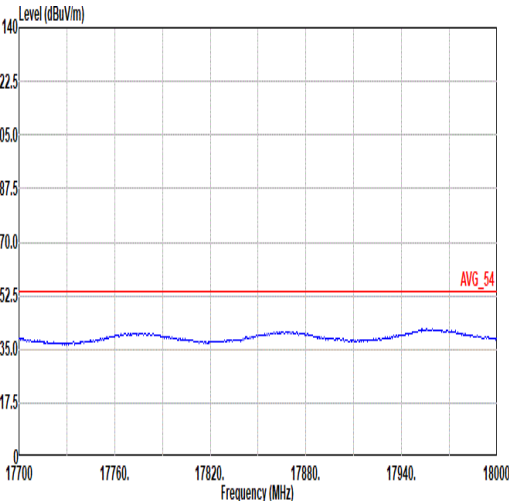
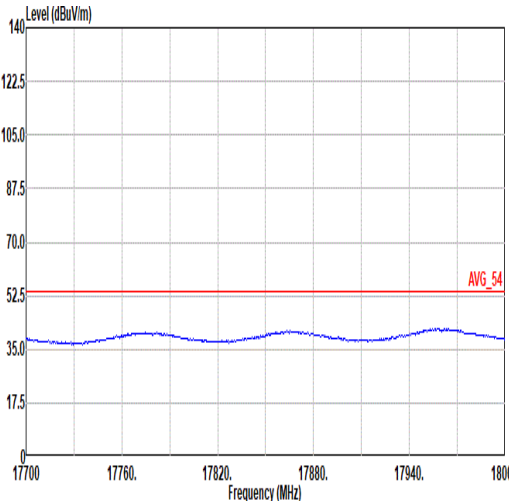


Mode	1	
	Harmonic	
	U-NII-1_5.15-5.25_802.11a_CH36_5180MHz	
ANT	4+3	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	 Site : 03CH15-HY Condition: AVG_54 3m 91280-02294_240620 HORIZONTAL	 Site : 03CH15-HY Condition: AVG_54 3m 91280-02294_240620 VERTICAL
	 Site : 03CH15-HY Condition: AVG_54 3m 91280-02294_240620 HORIZONTAL	 Site : 03CH15-HY Condition: AVG_54 3m 91280-02294_240620 VERTICAL

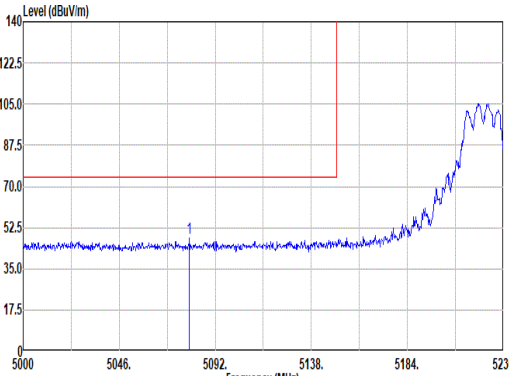
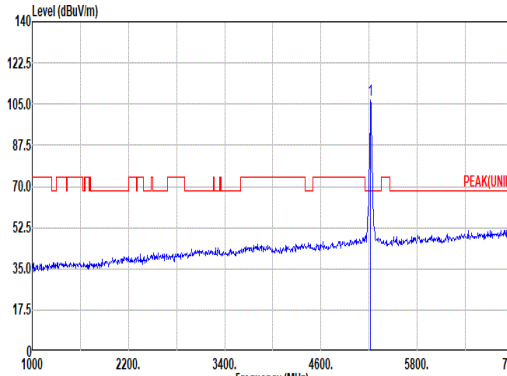
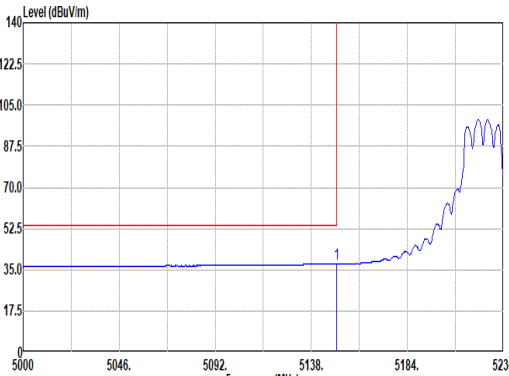
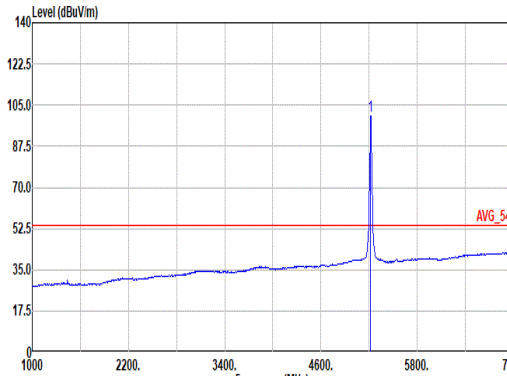


Mode	2																																																																																																		
	Band Edge - L																																																																																																		
	U-NII-1_5.15-5.25_802.11a_CH44_5220MHz																																																																																																		
ANT	4+3																																																																																																		
Pol.	Horizontal						Fundamental																																																																																												
Peak																																																																																																			
	Site : 03CH15-HY Condition: PEAK_BE_74 3m 91200-02294_240620 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5079.58</td><td>48.09</td><td>74.00</td><td>-25.91</td><td>43.57</td><td>33.00</td><td>8.37</td><td>36.85</td><td>0.00</td><td>100</td><td>41</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5079.58	48.09	74.00	-25.91	43.57	33.00	8.37	36.85	0.00	100	41	PEAK	Site : 03CH15-HY Condition: PEAK(UNII) 3m 91200-02294_240620 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5220.00</td><td>106.71</td><td>-----</td><td>-----</td><td>102.09</td><td>33.00</td><td>8.46</td><td>36.84</td><td>0.00</td><td>100</td><td>41</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5220.00	106.71	-----	-----	102.09	33.00	8.46	36.84	0.00	100	41
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	5079.58	48.09	74.00	-25.91	43.57	33.00	8.37	36.85	0.00	100	41	PEAK																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	5220.00	106.71	-----	-----	102.09	33.00	8.46	36.84	0.00	100	41	PEAK																																																																																							
Avg																																																																																																			
	Site : 03CH15-HY Condition: AVG_BE_54 3m 91200-02294_240620 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5149.96</td><td>37.49</td><td>54.00</td><td>-16.51</td><td>32.73</td><td>33.20</td><td>8.41</td><td>36.85</td><td>0.00</td><td>100</td><td>41</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5149.96	37.49	54.00	-16.51	32.73	33.20	8.41	36.85	0.00	100	41	AVERAGE	Site : 03CH15-HY Condition: AVG_54 3m 91200-02294_240620 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5220.00</td><td>100.49</td><td>-----</td><td>-----</td><td>95.87</td><td>33.00</td><td>8.46</td><td>36.84</td><td>0.00</td><td>100</td><td>41</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5220.00	100.49	-----	-----	95.87	33.00	8.46	36.84	0.00	100	41
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	5149.96	37.49	54.00	-16.51	32.73	33.20	8.41	36.85	0.00	100	41	AVERAGE																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	5220.00	100.49	-----	-----	95.87	33.00	8.46	36.84	0.00	100	41	AVERAGE																																																																																							

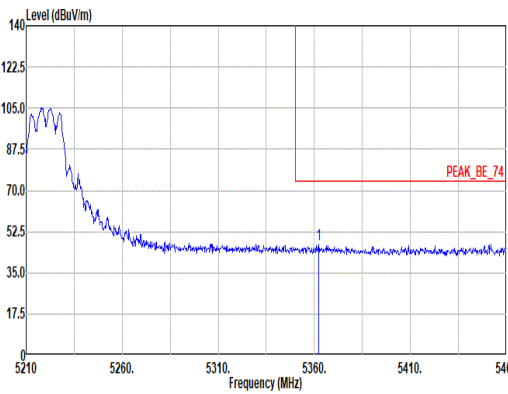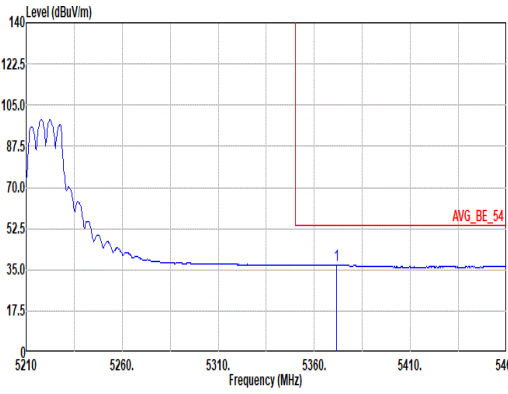

Mode	2																																																						
	Band Edge - R																																																						
	U-NII-1_5.15-5.25_802.11a_CH44_5220MHz																																																						
ANT	4+3																																																						
Pol.	Horizontal						Fundamental																																																
Peak	 Site : 03CH15-HY Condition: PEAK_BE_74 3m 91200-02294_240620 HORIZONTAL : RBW:1000.000kHz VBN:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5362.25</td><td>47.11</td><td>74.00</td><td>-26.89</td><td>42.48</td><td>32.88</td><td>8.58</td><td>36.83</td><td>0.00</td><td>100</td><td>41</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5362.25	47.11	74.00	-26.89	42.48	32.88	8.58	36.83	0.00	100	41	PEAK	Blank				
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																													
1	5362.25	47.11	74.00	-26.89	42.48	32.88	8.58	36.83	0.00	100	41	PEAK																																											
Avg	 Site : 03CH15-HY Condition: AVG_BE_54 3m 91200-02294_240620 HORIZONTAL : RBW:1000.000kHz VBN:0.010kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5371.50</td><td>37.12</td><td>54.00</td><td>-16.88</td><td>32.50</td><td>32.86</td><td>8.59</td><td>36.83</td><td>0.00</td><td>100</td><td>41</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5371.50	37.12	54.00	-16.88	32.50	32.86	8.59	36.83	0.00	100	41	AVERAGE	Blank				
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																													
1	5371.50	37.12	54.00	-16.88	32.50	32.86	8.59	36.83	0.00	100	41	AVERAGE																																											

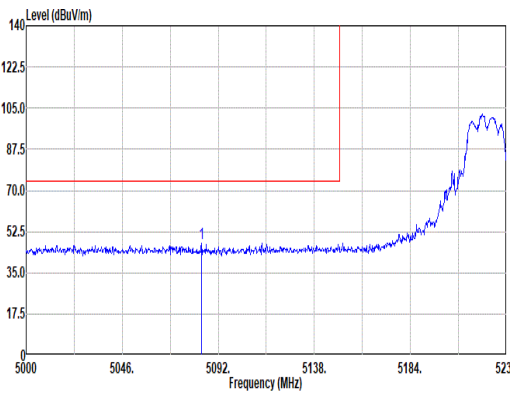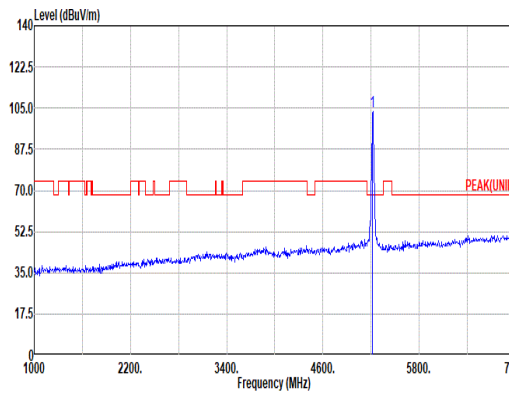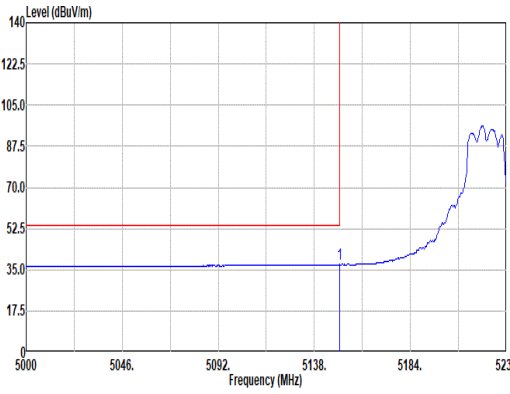
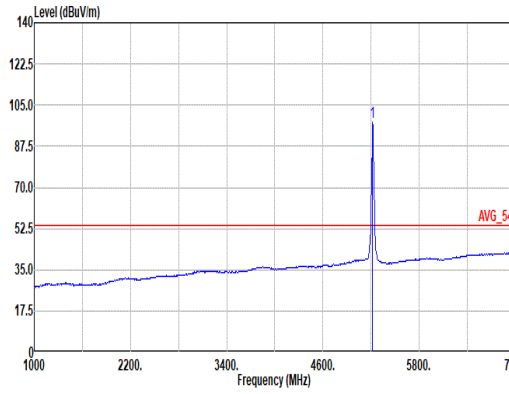


Mode	2																																																																																									
	Band Edge - L																																																																																									
	U-NII-1_5.15-5.25_802.11a_CH44_5220MHz																																																																																									
ANT	4+3																																																																																									
Pol.	Vertical	Fundamental																																																																																								
Peak	 Site : 03CH15-HY Condition: PEAK_BE_74 3m 91200-02294_240620 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5083.95</td><td>47.43</td><td>74.00</td><td>-26.57</td><td>42.91</td><td>33.00</td><td>8.37</td><td>36.85</td><td>0.00</td><td>100</td><td>103</td><td>PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5083.95	47.43	74.00	-26.57	42.91	33.00	8.37	36.85	0.00	100	103	PEAK	 Site : 03CH15-HY Condition: PEAK(UNII) 3m 91200-02294_240620 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5220.00</td><td>103.55</td><td>-----</td><td>-----</td><td>98.92</td><td>33.00</td><td>8.47</td><td>36.84</td><td>0.00</td><td>100</td><td>103</td><td>PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5220.00	103.55	-----	-----	98.92	33.00	8.47	36.84	0.00	100	103	PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																
1	5083.95	47.43	74.00	-26.57	42.91	33.00	8.37	36.85	0.00	100	103	PEAK																																																																														
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																
1	5220.00	103.55	-----	-----	98.92	33.00	8.47	36.84	0.00	100	103	PEAK																																																																														
Avg	 Site : 03CH15-HY Condition: AVG_BE_54 3m 91200-02294_240620 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5149.96</td><td>37.26</td><td>54.00</td><td>-16.74</td><td>32.50</td><td>33.20</td><td>8.41</td><td>36.85</td><td>0.00</td><td>100</td><td>103</td><td>AVERAGE</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5149.96	37.26	54.00	-16.74	32.50	33.20	8.41	36.85	0.00	100	103	AVERAGE	 Site : 03CH15-HY Condition: AVG_54 3m 91200-02294_240620 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5220.00</td><td>97.81</td><td>-----</td><td>-----</td><td>93.19</td><td>33.00</td><td>8.46</td><td>36.84</td><td>0.00</td><td>100</td><td>103</td><td>AVERAGE</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5220.00	97.81	-----	-----	93.19	33.00	8.46	36.84	0.00	100	103	AVERAGE
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																
1	5149.96	37.26	54.00	-16.74	32.50	33.20	8.41	36.85	0.00	100	103	AVERAGE																																																																														
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																
1	5220.00	97.81	-----	-----	93.19	33.00	8.46	36.84	0.00	100	103	AVERAGE																																																																														







Mode	2																																																							
	Band Edge - R																																																							
	U-NII-1_5.15-5.25_802.11a_CH44_5220MHz																																																							
ANT	4+3																																																							
Pol.	Vertical						Fundamental																																																	
Peak	Level (dBuV/m) Frequency (MHz) PEAK_BE_74 Site : 03CH15-HY Condition: PEAK_BE_74 3m 91200-02294_240620 VERTICAL : RBW:1000.000kHz VBN:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5397.75</td><td>46.12</td><td>74.00</td><td>-27.88</td><td>41.54</td><td>32.80</td><td>8.61</td><td>36.83</td><td>0.00</td><td>100</td><td>103</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm	deg	1	5397.75	46.12	74.00	-27.88	41.54	32.80	8.61	36.83	0.00	100	103	PEAK	Blank					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm	deg																																														
1	5397.75	46.12	74.00	-27.88	41.54	32.80	8.61	36.83	0.00	100	103	PEAK																																												
Avg	Level (dBuV/m) Frequency (MHz) AVG_BE_54 Site : 03CH15-HY Condition: AVG_BE_54 3m 91200-02294_240620 VERTICAL : RBW:1000.000kHz VBN:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5351.50</td><td>36.13</td><td>54.00</td><td>-17.87</td><td>31.49</td><td>32.90</td><td>8.57</td><td>36.83</td><td>0.00</td><td>100</td><td>103</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm	deg	1	5351.50	36.13	54.00	-17.87	31.49	32.90	8.57	36.83	0.00	100	103	AVERAGE	Blank					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm	deg																																														
1	5351.50	36.13	54.00	-17.87	31.49	32.90	8.57	36.83	0.00	100	103	AVERAGE																																												



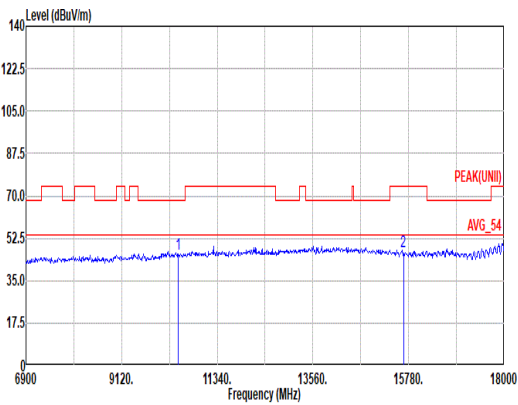
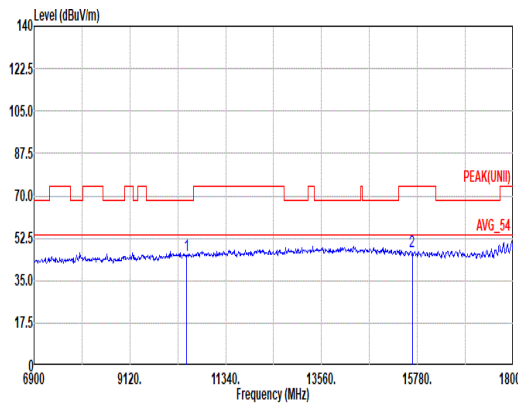


Mode	2																																																																																																															
	Harmonic																																																																																																															
	U-NII-1_5.15-5.25_802.11a_CH44_5220MHz																																																																																																															
ANT	4+3																																																																																																															
Pol.	Horizontal	Vertical																																																																																																														
Peak Avg	 Site : 03CH15-HY Condition: PEAK(UNII) 3m 91200-02294_240620 HORIZONTAL <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>10440.00</td><td>45.73</td><td>68.20</td><td>-22.47</td><td>52.31</td><td>38.60</td><td>11.98</td><td>58.05</td><td>0.89</td><td>--</td><td>PEAK</td></tr><tr><td>2</td><td>15660.00</td><td>46.85</td><td>74.00</td><td>-27.15</td><td>50.61</td><td>38.12</td><td>15.09</td><td>57.89</td><td>0.92</td><td>--</td><td>PEAK</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	10440.00	45.73	68.20	-22.47	52.31	38.60	11.98	58.05	0.89	--	PEAK	2	15660.00	46.85	74.00	-27.15	50.61	38.12	15.09	57.89	0.92	--	PEAK	 Site : 03CH15-HY Condition: PEAK(UNII) 3m 91200-02294_240620 VERTICAL <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>10440.00</td><td>45.52</td><td>68.20</td><td>-22.68</td><td>52.10</td><td>38.60</td><td>11.98</td><td>58.05</td><td>0.89</td><td>--</td><td>PEAK</td></tr><tr><td>2</td><td>15660.00</td><td>46.78</td><td>74.00</td><td>-27.22</td><td>50.54</td><td>38.12</td><td>15.09</td><td>57.89</td><td>0.92</td><td>--</td><td>PEAK</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	10440.00	45.52	68.20	-22.68	52.10	38.60	11.98	58.05	0.89	--	PEAK	2	15660.00	46.78	74.00	-27.22	50.54	38.12	15.09	57.89	0.92	--	PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																						
1	10440.00	45.73	68.20	-22.47	52.31	38.60	11.98	58.05	0.89	--	PEAK																																																																																																					
2	15660.00	46.85	74.00	-27.15	50.61	38.12	15.09	57.89	0.92	--	PEAK																																																																																																					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																						
1	10440.00	45.52	68.20	-22.68	52.10	38.60	11.98	58.05	0.89	--	PEAK																																																																																																					
2	15660.00	46.78	74.00	-27.22	50.54	38.12	15.09	57.89	0.92	--	PEAK																																																																																																					

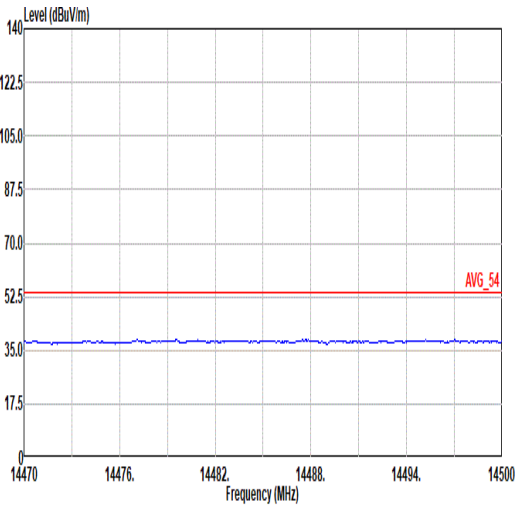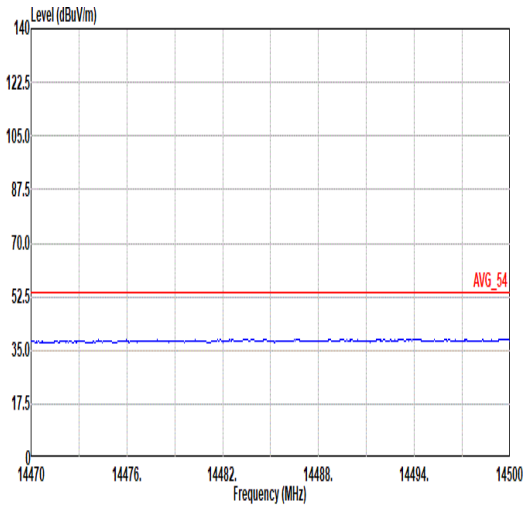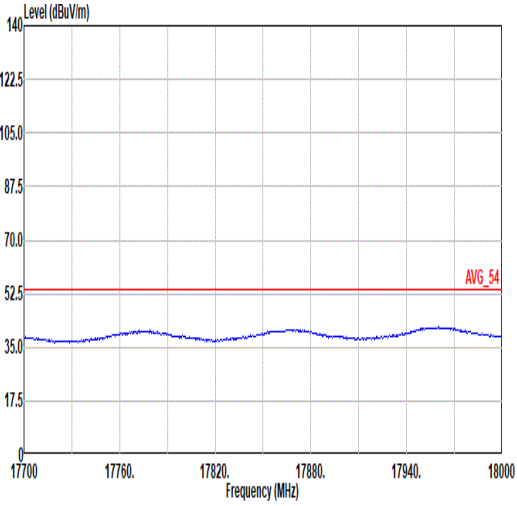
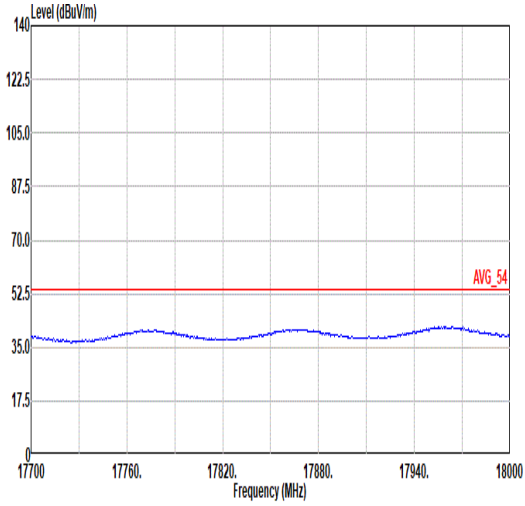


Mode	2	
	Harmonic	
	U-NII-1_5.15-5.25_802.11a_CH44_5220MHz	
ANT	4+3	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	 Site : 03CH15-HY Condition: AVG_54 3m 91280-92294_240620 HORIZONTAL	 Site : 03CH15-HY Condition: AVG_54 3m 91280-92294_240620 VERTICAL
	 Site : 03CH15-HY Condition: AVG_54 3m 91280-92294_240620 HORIZONTAL	 Site : 03CH15-HY Condition: AVG_54 3m 91280-92294_240620 VERTICAL

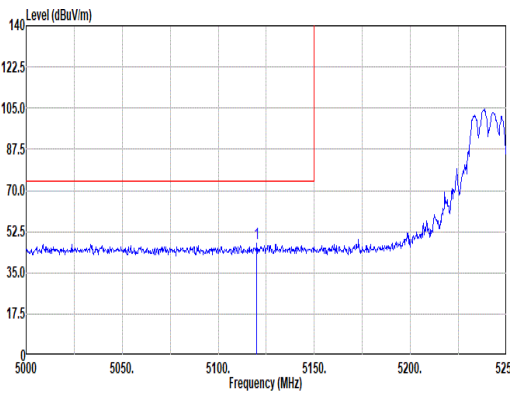
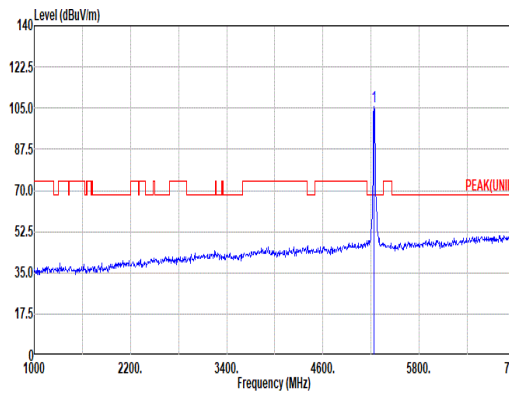
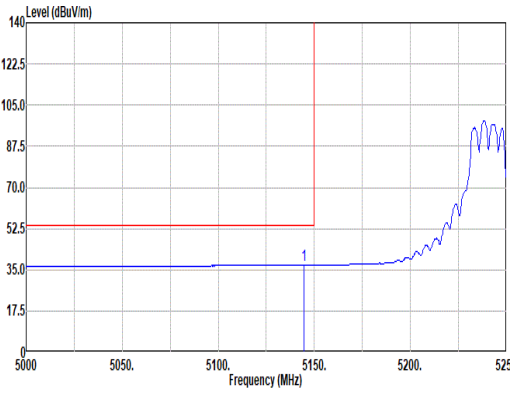
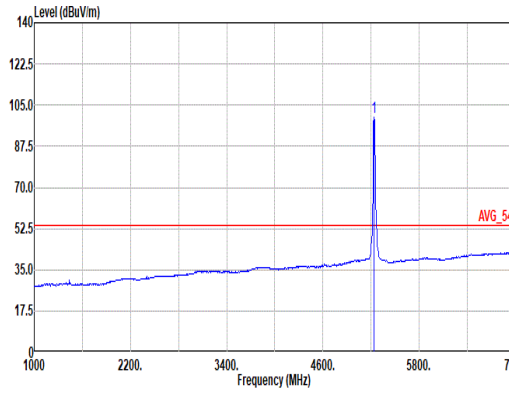


Mode	3																																																																																																		
	Band Edge - L																																																																																																		
	U-NII-1_5.15-5.25_802.11a_CH48_5240MHz																																																																																																		
ANT	4+3																																																																																																		
Pol.	Horizontal						Fundamental																																																																																												
Peak																																																																																																			
	Site : 03CH15-HY Condition: PEAK_BE_74 3m 91200-02294_240620 HORIZONTAL : RBW:1000.000kHz VBN:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5120.00</td><td>47.66</td><td>74.00</td><td>-26.34</td><td>43.04</td><td>33.00</td><td>8.39</td><td>36.85</td><td>0.00</td><td>100</td><td>48</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5120.00	47.66	74.00	-26.34	43.04	33.00	8.39	36.85	0.00	100	48	PEAK	Site : 03CH15-HY Condition: PEAK(UNII) 3m 91200-02294_240620 HORIZONTAL : RBW:1000.000kHz VBN:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5240.00</td><td>105.88</td><td>-----</td><td>-----</td><td>101.24</td><td>33.00</td><td>8.48</td><td>36.84</td><td>0.00</td><td>100</td><td>48</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5240.00	105.88	-----	-----	101.24	33.00	8.48	36.84	0.00	100	48
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	5120.00	47.66	74.00	-26.34	43.04	33.00	8.39	36.85	0.00	100	48	PEAK																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	5240.00	105.88	-----	-----	101.24	33.00	8.48	36.84	0.00	100	48	PEAK																																																																																							
Avg																																																																																																			
	Site : 03CH15-HY Condition: AVG_BE_54 3m 91200-02294_240620 HORIZONTAL : RBW:1000.000kHz VBN:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5144.50</td><td>37.12</td><td>54.00</td><td>-16.88</td><td>32.38</td><td>33.18</td><td>8.41</td><td>36.85</td><td>0.00</td><td>100</td><td>48</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5144.50	37.12	54.00	-16.88	32.38	33.18	8.41	36.85	0.00	100	48	AVERAGE	Site : 03CH15-HY Condition: AVG_54 3m 91200-02294_240620 HORIZONTAL : RBW:1000.000kHz VBN:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5240.00</td><td>99.94</td><td>-----</td><td>-----</td><td>95.30</td><td>33.00</td><td>8.48</td><td>36.84</td><td>0.00</td><td>100</td><td>48</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5240.00	99.94	-----	-----	95.30	33.00	8.48	36.84	0.00	100	48
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	5144.50	37.12	54.00	-16.88	32.38	33.18	8.41	36.85	0.00	100	48	AVERAGE																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	5240.00	99.94	-----	-----	95.30	33.00	8.48	36.84	0.00	100	48	AVERAGE																																																																																							

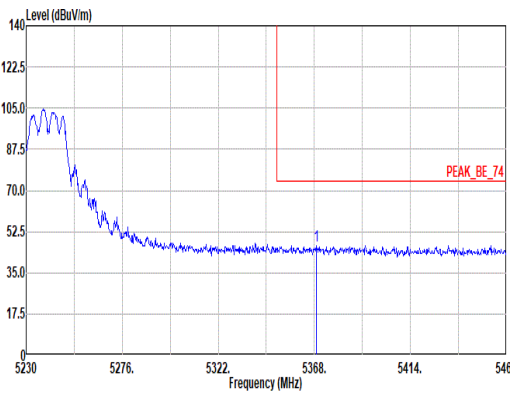
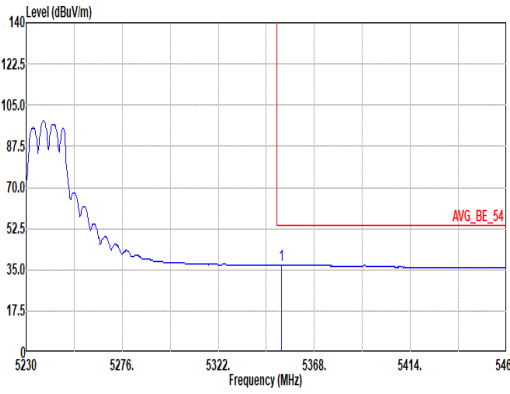


Mode	3																																																						
	Band Edge - R																																																						
	U-NII-1_5.15-5.25_802.11a_CH48_5240MHz																																																						
ANT	4+3																																																						
Pol.	Horizontal						Fundamental																																																
Peak	 Site : 03CH15-HY Condition: PEAK_BE_74 3m 91200-02294_240620 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5368.92</td><td>46.72</td><td>74.00</td><td>-27.28</td><td>42.10</td><td>32.86</td><td>8.59</td><td>36.83</td><td>0.00</td><td>100</td><td>48</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5368.92	46.72	74.00	-27.28	42.10	32.86	8.59	36.83	0.00	100	48	PEAK	Blank				
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	5368.92	46.72	74.00	-27.28	42.10	32.86	8.59	36.83	0.00	100	48	PEAK																																											
Avg	 Site : 03CH15-HY Condition: AVG_BE_54 3m 91200-02294_240620 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5352.36</td><td>37.03</td><td>54.00</td><td>-16.97</td><td>32.39</td><td>32.90</td><td>8.57</td><td>36.83</td><td>0.00</td><td>100</td><td>48</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5352.36	37.03	54.00	-16.97	32.39	32.90	8.57	36.83	0.00	100	48	AVERAGE	Blank				
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	5352.36	37.03	54.00	-16.97	32.39	32.90	8.57	36.83	0.00	100	48	AVERAGE																																											

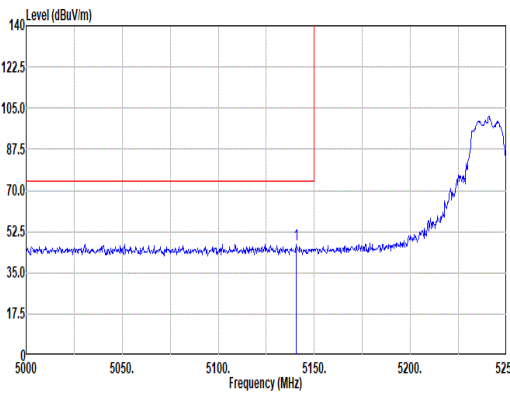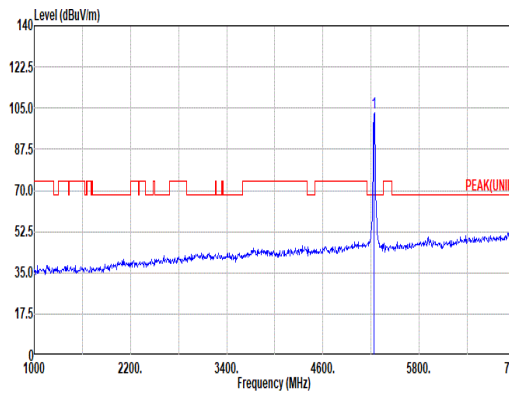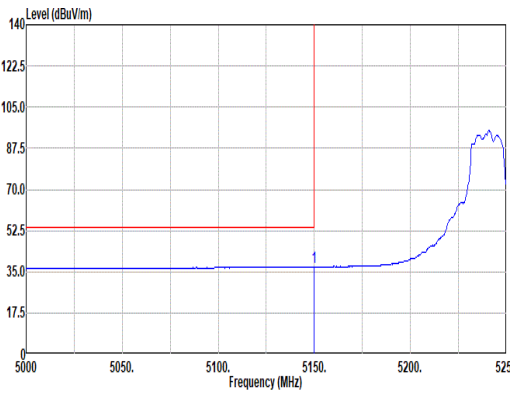
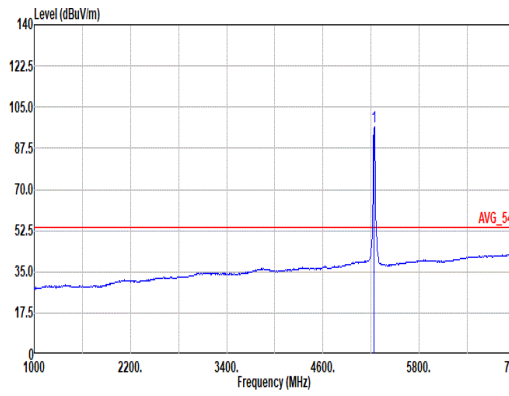


Mode	3																																																																																	
	Band Edge - L																																																																																	
	U-NII-1_5.15-5.25_802.11a_CH48_5240MHz																																																																																	
ANT	4+3																																																																																	
Pol.	Vertical	Fundamental																																																																																
Peak	 Site : 03CH15-HY Condition: PEAK_BE_74 3m 91200-02294_240620 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 5140.50</td><td>47.19</td><td>74.00 -26.81</td><td>42.47</td><td>33.16</td><td>8.41</td><td>36.85</td><td>0.00</td><td>100</td><td>129 PEAK</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor				MHz	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 5140.50	47.19	74.00 -26.81	42.47	33.16	8.41	36.85	0.00	100	129 PEAK	 Site : 03CH15-HY Condition: PEAK(UNII) 3m 91200-02294_240620 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 5240.00</td><td>102.82</td><td>-----</td><td>98.18</td><td>33.00</td><td>8.48</td><td>36.84</td><td>0.00</td><td>100</td><td>129 PEAK</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor				MHz	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 5240.00	102.82	-----	98.18	33.00	8.48	36.84	0.00	100	129 PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																								
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																												
MHz	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																									
1 5140.50	47.19	74.00 -26.81	42.47	33.16	8.41	36.85	0.00	100	129 PEAK																																																																									
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																									
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																												
MHz	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																									
1 5240.00	102.82	-----	98.18	33.00	8.48	36.84	0.00	100	129 PEAK																																																																									
Avg	 Site : 03CH15-HY Condition: AVG_BE_54 3m 91200-02294_240620 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 5150.00</td><td>37.18</td><td>54.00 -16.82</td><td>32.42</td><td>33.20</td><td>8.41</td><td>36.85</td><td>0.00</td><td>100</td><td>129 AVERAGE</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor				MHz	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 5150.00	37.18	54.00 -16.82	32.42	33.20	8.41	36.85	0.00	100	129 AVERAGE	 Site : 03CH15-HY Condition: AVG_54 3m 91200-02294_240620 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 5240.00</td><td>96.54</td><td>-----</td><td>91.90</td><td>33.00</td><td>8.48</td><td>36.84</td><td>0.00</td><td>100</td><td>129 AVERAGE</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor				MHz	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 5240.00	96.54	-----	91.90	33.00	8.48	36.84	0.00	100	129 AVERAGE
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																									
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																												
MHz	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																									
1 5150.00	37.18	54.00 -16.82	32.42	33.20	8.41	36.85	0.00	100	129 AVERAGE																																																																									
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																									
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																												
MHz	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																									
1 5240.00	96.54	-----	91.90	33.00	8.48	36.84	0.00	100	129 AVERAGE																																																																									



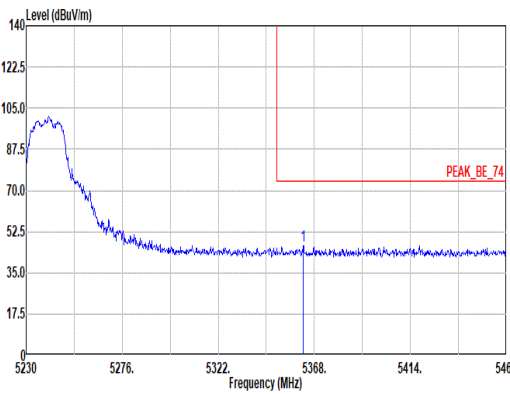
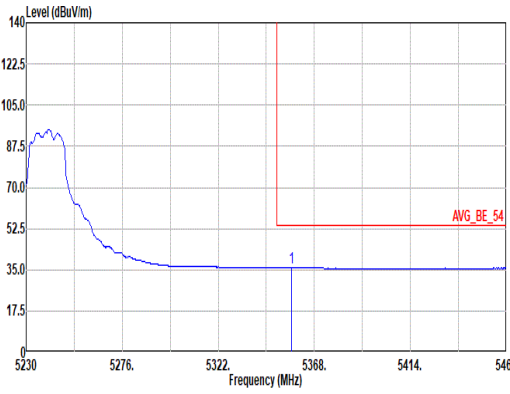


Mode	3																																																							
	Band Edge - R																																																							
	U-NII-1_5.15-5.25_802.11a_CH48_5240MHz																																																							
ANT	4+3																																																							
Pol.	Vertical						Fundamental																																																	
Peak	 Site : 03CH15-HY Condition: PEAK_BE_74 3m 91200-02294_240620 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5362.71</td><td>46.51</td><td>74.00</td><td>-27.49</td><td>41.89</td><td>32.87</td><td>8.58</td><td>36.83</td><td>0.00</td><td>100</td><td>129</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5362.71	46.51	74.00	-27.49	41.89	32.87	8.58	36.83	0.00	100	129	PEAK	Blank					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																														
1	5362.71	46.51	74.00	-27.49	41.89	32.87	8.58	36.83	0.00	100	129	PEAK																																												
Avg	 Site : 03CH15-HY Condition: AVG_BE_54 3m 91200-02294_240620 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5357.19</td><td>35.96</td><td>54.00</td><td>-18.04</td><td>31.32</td><td>32.89</td><td>8.58</td><td>36.83</td><td>0.00</td><td>100</td><td>129</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5357.19	35.96	54.00	-18.04	31.32	32.89	8.58	36.83	0.00	100	129	AVERAGE	Blank					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																														
1	5357.19	35.96	54.00	-18.04	31.32	32.89	8.58	36.83	0.00	100	129	AVERAGE																																												



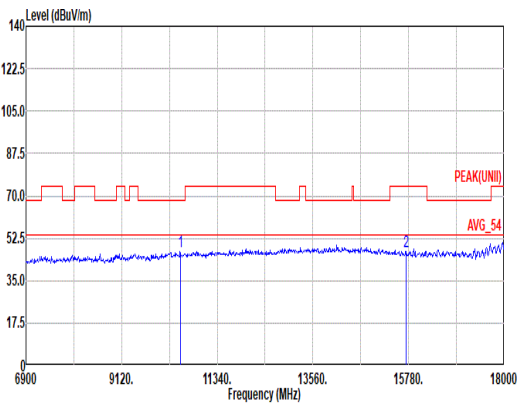
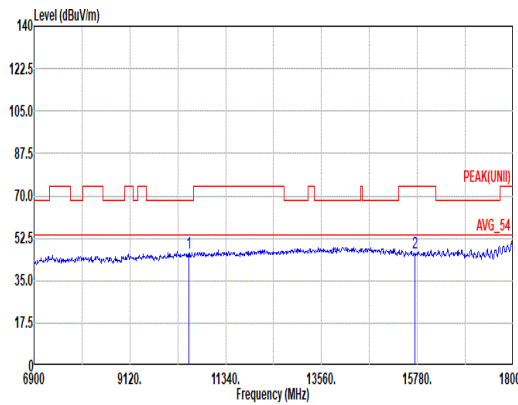


Mode	3																																																																																																															
	Harmonic																																																																																																															
	U-NII-1_5.15-5.25_802.11a_CH48_5240MHz																																																																																																															
ANT	4+3																																																																																																															
Pol.	Horizontal	Vertical																																																																																																														
Peak Avg	 Site : 03CH15-HY Condition: PEAK(UNII) 3m 91200-02294_240620 HORIZONTAL <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>10480.00</td><td>47.10</td><td>68.20</td><td>-21.10</td><td>53.62</td><td>38.60</td><td>12.00</td><td>58.01</td><td>0.89</td><td>--</td><td>PEAK</td></tr><tr><td>2</td><td>15720.00</td><td>46.96</td><td>74.00</td><td>-27.04</td><td>50.72</td><td>38.12</td><td>15.13</td><td>57.94</td><td>0.93</td><td>--</td><td>PEAK</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	10480.00	47.10	68.20	-21.10	53.62	38.60	12.00	58.01	0.89	--	PEAK	2	15720.00	46.96	74.00	-27.04	50.72	38.12	15.13	57.94	0.93	--	PEAK	 Site : 03CH15-HY Condition: PEAK(UNII) 3m 91200-02294_240620 VERTICAL <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>10480.00</td><td>46.23</td><td>68.20</td><td>-21.97</td><td>52.75</td><td>38.60</td><td>12.00</td><td>58.01</td><td>0.89</td><td>--</td><td>PEAK</td></tr><tr><td>2</td><td>15720.00</td><td>46.55</td><td>74.00</td><td>-27.45</td><td>50.31</td><td>38.12</td><td>15.13</td><td>57.94</td><td>0.93</td><td>--</td><td>PEAK</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	10480.00	46.23	68.20	-21.97	52.75	38.60	12.00	58.01	0.89	--	PEAK	2	15720.00	46.55	74.00	-27.45	50.31	38.12	15.13	57.94	0.93	--	PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																						
1	10480.00	47.10	68.20	-21.10	53.62	38.60	12.00	58.01	0.89	--	PEAK																																																																																																					
2	15720.00	46.96	74.00	-27.04	50.72	38.12	15.13	57.94	0.93	--	PEAK																																																																																																					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																						
1	10480.00	46.23	68.20	-21.97	52.75	38.60	12.00	58.01	0.89	--	PEAK																																																																																																					
2	15720.00	46.55	74.00	-27.45	50.31	38.12	15.13	57.94	0.93	--	PEAK																																																																																																					

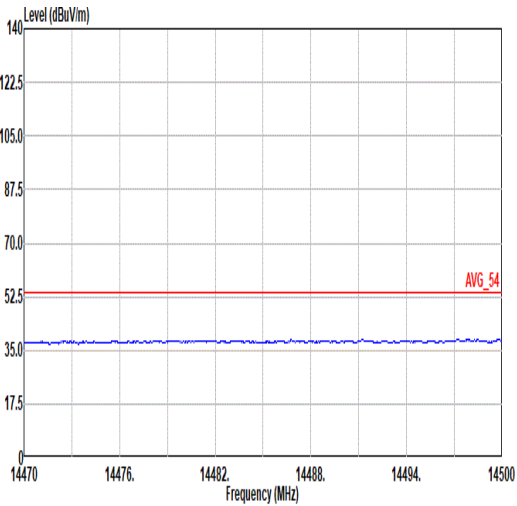
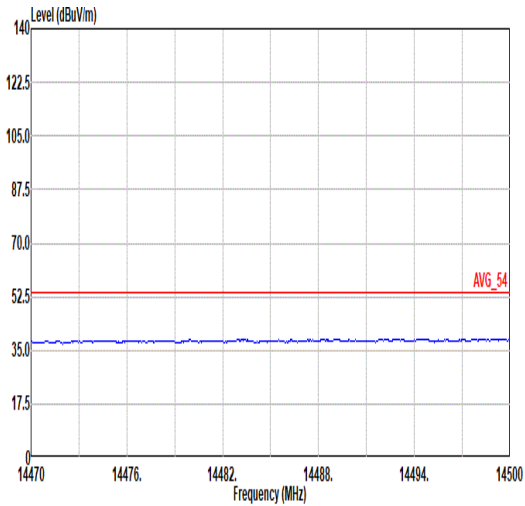
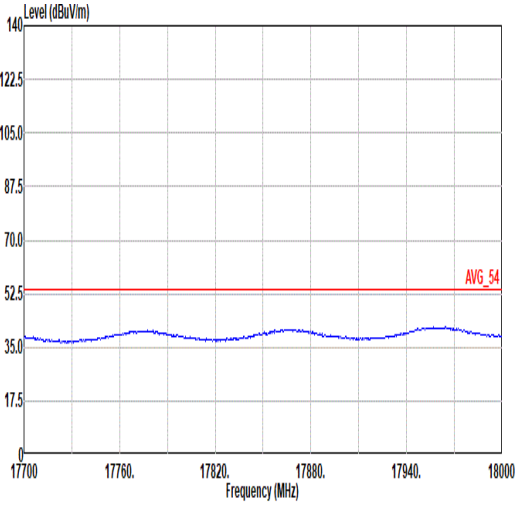
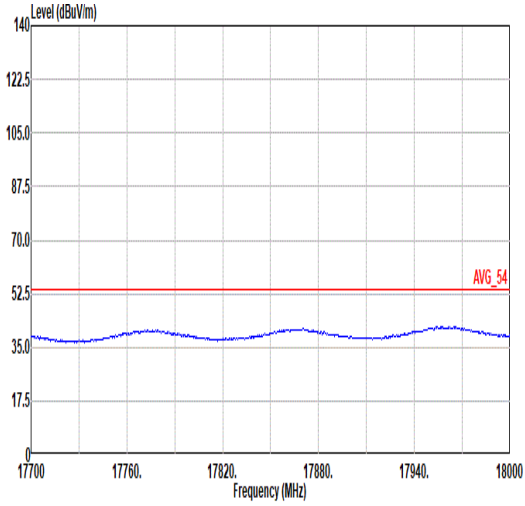


Mode	3	
	Harmonic	
	U-NII-1_5.15-5.25_802.11a_CH48_5240MHz	
ANT	4+3	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	 Site : 03CH15-HY Condition: AVG_54 3m 91280-92294_240620 HORIZONTAL	 Site : 03CH15-HY Condition: AVG_54 3m 91280-92294_240620 VERTICAL
	 Site : 03CH15-HY Condition: AVG_54 3m 91280-92294_240620 HORIZONTAL	 Site : 03CH15-HY Condition: AVG_54 3m 91280-92294_240620 VERTICAL

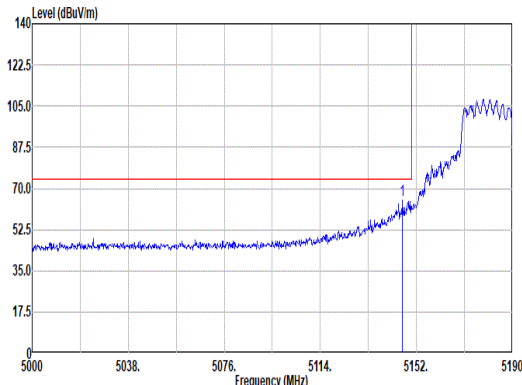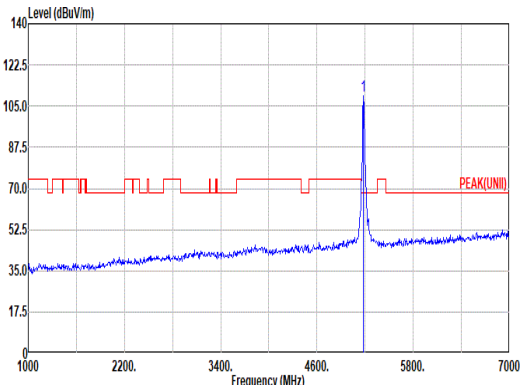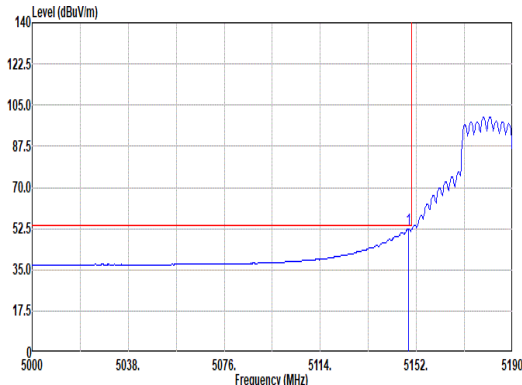
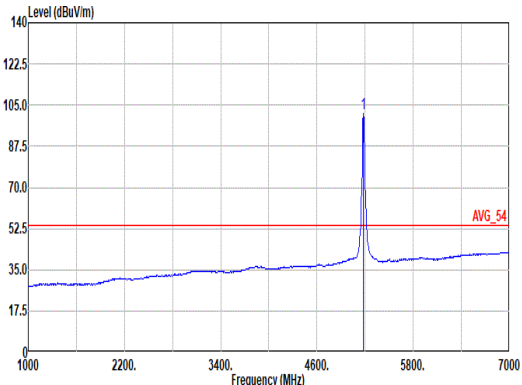


Mode	4																																																																																																		
	Band Edge																																																																																																		
	U-NII-1_5.15-5.25_802.11be EHT20_CH36_5180MHz																																																																																																		
ANT	4+3																																																																																																		
Pol.	Horizontal						Fundamental																																																																																												
Peak																																																																																																			
	Site : 03CH15-HY Condition: PEAK_BE_74 3m 91200-02294_240620 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5146.49</td><td>64.77</td><td>74.00</td><td>-9.23</td><td>60.02</td><td>33.19</td><td>8.41</td><td>36.85</td><td>0.00</td><td>186</td><td>297</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5146.49	64.77	74.00	-9.23	60.02	33.19	8.41	36.85	0.00	186	297	PEAK	Site : 03CH15-HY Condition: PEAK(UNII) 3m 91200-02294_240620 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5180.00</td><td>109.56</td><td>-----</td><td>-----</td><td>104.90</td><td>33.07</td><td>8.44</td><td>36.85</td><td>0.00</td><td>186</td><td>297</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5180.00	109.56	-----	-----	104.90	33.07	8.44	36.85	0.00	186	297
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																									
1	5146.49	64.77	74.00	-9.23	60.02	33.19	8.41	36.85	0.00	186	297	PEAK																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																									
1	5180.00	109.56	-----	-----	104.90	33.07	8.44	36.85	0.00	186	297	PEAK																																																																																							
Avg																																																																																																			
	Site : 03CH15-HY Condition: AVG_BE_54 3m 91200-02294_240620 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5148.77</td><td>52.31</td><td>54.00</td><td>-1.69</td><td>47.55</td><td>33.20</td><td>8.41</td><td>36.85</td><td>0.00</td><td>186</td><td>297</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5148.77	52.31	54.00	-1.69	47.55	33.20	8.41	36.85	0.00	186	297	AVERAGE	Site : 03CH15-HY Condition: AVG_54 3m 91200-02294_240620 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5180.00</td><td>101.28</td><td>-----</td><td>-----</td><td>96.62</td><td>33.07</td><td>8.44</td><td>36.85</td><td>0.00</td><td>186</td><td>297</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5180.00	101.28	-----	-----	96.62	33.07	8.44	36.85	0.00	186	297
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																									
1	5148.77	52.31	54.00	-1.69	47.55	33.20	8.41	36.85	0.00	186	297	AVERAGE																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																									
1	5180.00	101.28	-----	-----	96.62	33.07	8.44	36.85	0.00	186	297	AVERAGE																																																																																							

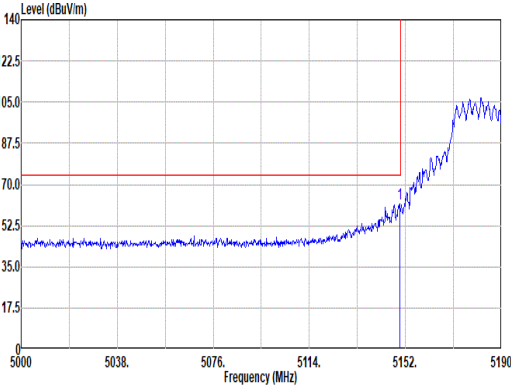
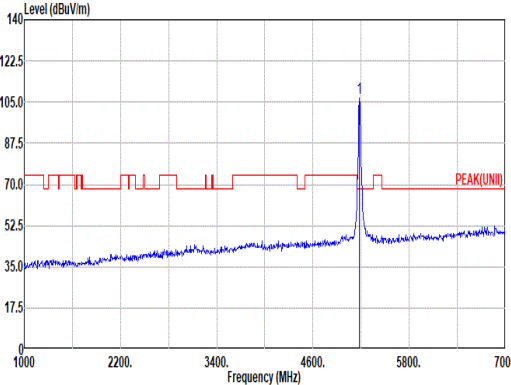
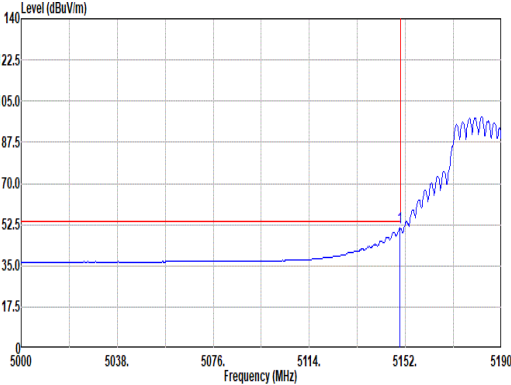
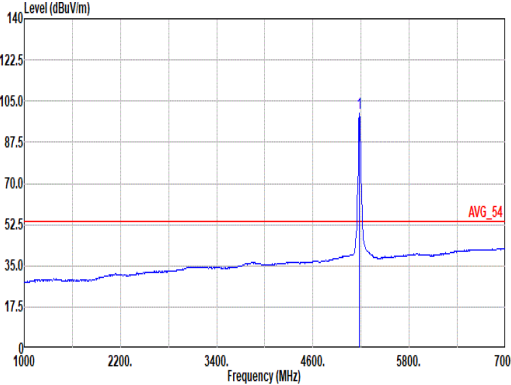


Mode	4																																																																																																															
	Band Edge																																																																																																															
	U-NII-1_5.15-5.25_802.11be EHT20_CH36_5180MHz																																																																																																															
ANT	4+3																																																																																																															
Pol.	Vertical						Fundamental																																																																																																									
Peak	 Level (dBuV/m) Frequency (MHz) Site : 03CH15-HY Condition: PEAK_BE_74 3m 91200-02294_240620 VERTICAL : RBW:1000.000kHz VBN:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5149.72</td><td>62.00</td><td>74.00</td><td>-12.00</td><td>57.24</td><td>33.20</td><td>8.41</td><td>36.85</td><td>0.00</td><td>400</td><td>78</td><td>PEAK</td></tr></tbody></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5149.72	62.00	74.00	-12.00	57.24	33.20	8.41	36.85	0.00	400	78	PEAK	 Level (dBuV/m) Frequency (MHz) Site : 03CH15-HY Condition: PEAK(UNII) 3m 91200-02294_240620 VERTICAL : RBW:1000.000kHz VBN:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5180.00</td><td>106.98</td><td>-----</td><td>-----</td><td>102.32</td><td>33.07</td><td>8.44</td><td>36.85</td><td>0.00</td><td>400</td><td>78</td><td>PEAK</td></tr></tbody></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5180.00	106.98	-----	-----	102.32	33.07	8.44	36.85	0.00	400	78	PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																						
1	5149.72	62.00	74.00	-12.00	57.24	33.20	8.41	36.85	0.00	400	78	PEAK																																																																																																				
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																						
1	5180.00	106.98	-----	-----	102.32	33.07	8.44	36.85	0.00	400	78	PEAK																																																																																																				
Avg	 Level (dBuV/m) Frequency (MHz) Site : 03CH15-HY Condition: AVG_BE_54 3m 91200-02294_240620 VERTICAL : RBW:1000.000kHz VBN:0.010kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5149.91</td><td>51.01</td><td>54.00</td><td>-2.99</td><td>46.25</td><td>33.20</td><td>8.41</td><td>36.85</td><td>0.00</td><td>400</td><td>78</td><td>AVERAGE</td></tr></tbody></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5149.91	51.01	54.00	-2.99	46.25	33.20	8.41	36.85	0.00	400	78	AVERAGE	 Level (dBuV/m) Frequency (MHz) Site : 03CH15-HY Condition: AVG_54 3m 91200-02294_240620 VERTICAL : RBW:1000.000kHz VBN:0.010kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5180.00</td><td>99.66</td><td>-----</td><td>-----</td><td>95.00</td><td>33.07</td><td>8.44</td><td>36.85</td><td>0.00</td><td>400</td><td>78</td><td>AVERAGE</td></tr></tbody></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5180.00	99.66	-----	-----	95.00	33.07	8.44	36.85	0.00	400	78	AVERAGE
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																						
1	5149.91	51.01	54.00	-2.99	46.25	33.20	8.41	36.85	0.00	400	78	AVERAGE																																																																																																				
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																						
1	5180.00	99.66	-----	-----	95.00	33.07	8.44	36.85	0.00	400	78	AVERAGE																																																																																																				

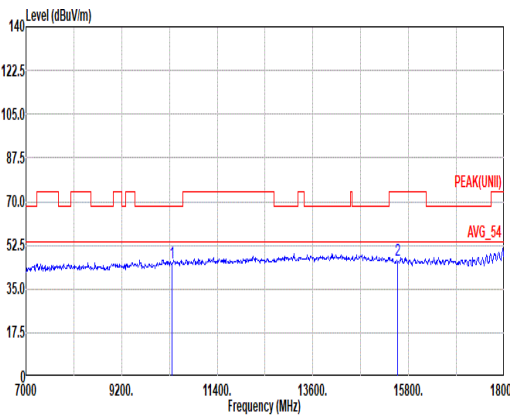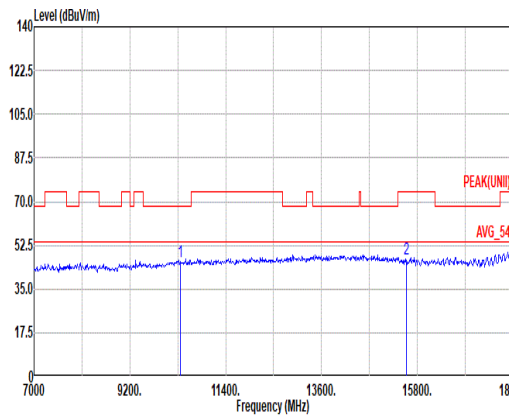

Mode	4																																																																																																																								
	Harmonic																																																																																																																								
	U-NII-1_5.15-5.25_802.11be EHT20_CH36_5180MHz																																																																																																																								
ANT	4+3																																																																																																																								
Pol.	Horizontal						Vertical																																																																																																																		
Peak Avg																																																																																																																									
	Site : 03CH15-HY Condition: PEAK(UNII) 3m 91200-02294_240620 HORIZONTAL Mode : 4 <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>10360.00</td><td>45.38</td><td>68.20</td><td>-22.82</td><td>52.09</td><td>38.60</td><td>11.94</td><td>58.13</td><td>0.88</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>15540.00</td><td>46.69</td><td>74.00</td><td>-27.31</td><td>50.49</td><td>38.06</td><td>15.02</td><td>57.77</td><td>0.89</td><td>--</td><td>Peak</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	10360.00	45.38	68.20	-22.82	52.09	38.60	11.94	58.13	0.88	--	Peak	2	15540.00	46.69	74.00	-27.31	50.49	38.06	15.02	57.77	0.89	--	Peak	Site : 03CH15-HY Condition: PEAK(UNII) 3m 91200-02294_240620 VERTICAL Mode : 4 <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>10360.00</td><td>46.19</td><td>68.20</td><td>-22.01</td><td>52.90</td><td>38.60</td><td>11.94</td><td>58.13</td><td>0.88</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>15540.00</td><td>47.25</td><td>74.00</td><td>-26.75</td><td>51.03</td><td>38.08</td><td>15.01</td><td>57.76</td><td>0.89</td><td>--</td><td>Peak</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	10360.00	46.19	68.20	-22.01	52.90	38.60	11.94	58.13	0.88	--	Peak	2	15540.00	47.25	74.00	-26.75	51.03	38.08	15.01	57.76	0.89	--
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																															
1	10360.00	45.38	68.20	-22.82	52.09	38.60	11.94	58.13	0.88	--	Peak																																																																																																														
2	15540.00	46.69	74.00	-27.31	50.49	38.06	15.02	57.77	0.89	--	Peak																																																																																																														
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																															
1	10360.00	46.19	68.20	-22.01	52.90	38.60	11.94	58.13	0.88	--	Peak																																																																																																														
2	15540.00	47.25	74.00	-26.75	51.03	38.08	15.01	57.76	0.89	--	Peak																																																																																																														

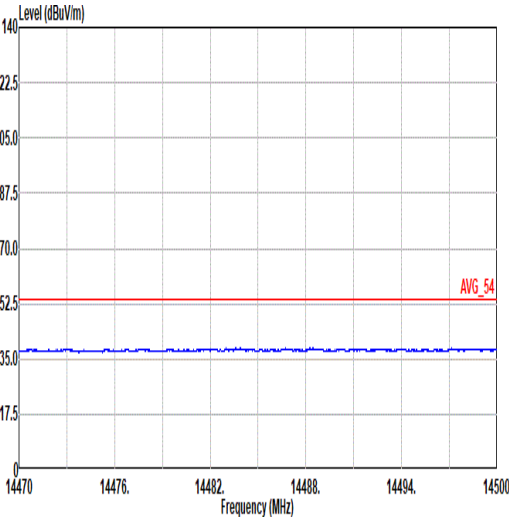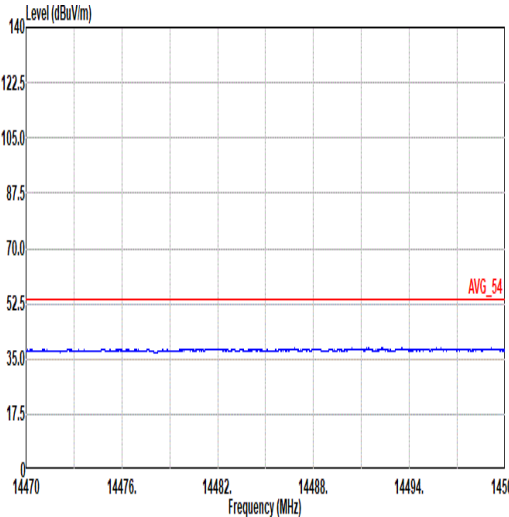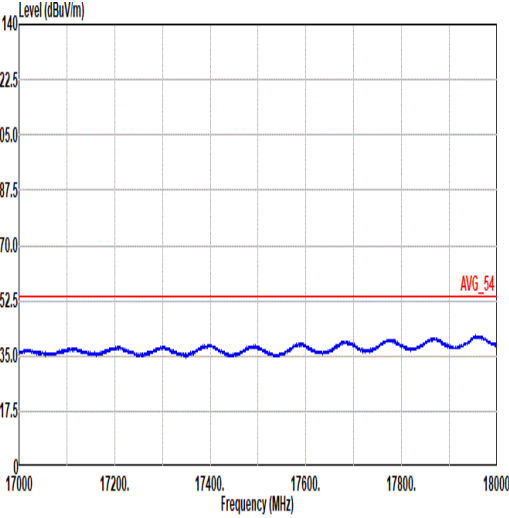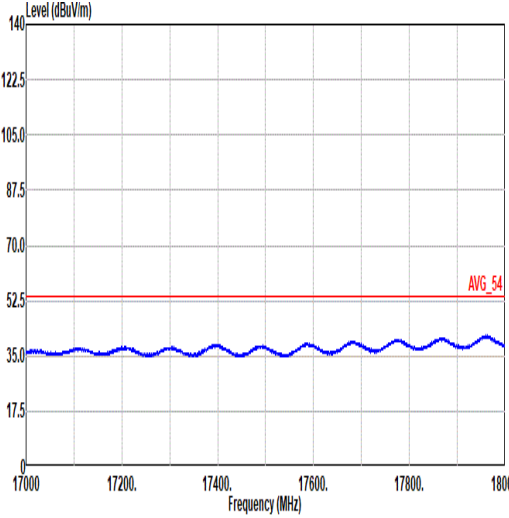

Mode	4	
	Harmonic	
	U-NII-1_5.15-5.25_802.11be EHT20_CH36_5180MHz	
ANT	4+3	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	 Site : 03CH15-HY Condition: AVG_54 3m 91280-02294_240620 HORIZONTAL Mode : 4	 Site : 03CH15-HY Condition: AVG_54 3m 91280-02294_240620 VERTICAL Mode : 4
	 Site : 03CH15-HY Condition: AVG_54 3m 91280-02294_240620 HORIZONTAL Mode : 4	 Site : 03CH15-HY Condition: AVG_54 3m 91280-02294_240620 VERTICAL Mode : 4







Mode	5																																																																																																			
	Band Edge																																																																																																			
	U-NII-1_5.15-5.25_802.11be EHT20_CH36_Partial_26/0RU_5180MHz																																																																																																			
ANT	4+3																																																																																																			
Pol.	Horizontal						Fundamental																																																																																													
Peak	Site : 03CH15-HY Condition: PEAK_BE_74 3m 91200-02294_240620 HORIZONTAL : RBW:1000.000kHz VBN:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5137.94</td><td>60.34</td><td>74.00</td><td>-13.66</td><td>55.63</td><td>33.15</td><td>8.41</td><td>36.85</td><td>0.00</td><td>300</td><td>30</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5137.94	60.34	74.00	-13.66	55.63	33.15	8.41	36.85	0.00	300	30	PEAK	Site : 03CH15-HY Condition: PEAK(UNII) 3m 91200-02294_240620 HORIZONTAL : RBW:1000.000kHz VBN:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5180.00</td><td>110.26</td><td>-----</td><td>-----</td><td>105.56</td><td>33.12</td><td>8.43</td><td>36.85</td><td>0.00</td><td>300</td><td>30</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5180.00	110.26	-----	-----	105.56	33.12	8.43	36.85	0.00	300	30	PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	5137.94	60.34	74.00	-13.66	55.63	33.15	8.41	36.85	0.00	300	30	PEAK																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	5180.00	110.26	-----	-----	105.56	33.12	8.43	36.85	0.00	300	30	PEAK																																																																																								
Avg	Site : 03CH15-HY Condition: AVG_BE_54 3m 91200-02294_240620 HORIZONTAL : RBW:1000.000kHz VBN:0.680kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5137.56</td><td>49.12</td><td>54.00</td><td>-4.88</td><td>44.41</td><td>33.15</td><td>8.41</td><td>36.85</td><td>0.00</td><td>300</td><td>30</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5137.56	49.12	54.00	-4.88	44.41	33.15	8.41	36.85	0.00	300	30	AVERAGE	Site : 03CH15-HY Condition: AVG_54 3m 91200-02294_240620 HORIZONTAL : RBW:1000.000kHz VBN:0.680kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5180.00</td><td>105.35</td><td>-----</td><td>-----</td><td>100.65</td><td>33.12</td><td>8.43</td><td>36.85</td><td>0.00</td><td>300</td><td>30</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5180.00	105.35	-----	-----	100.65	33.12	8.43	36.85	0.00	300	30	AVERAGE
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	5137.56	49.12	54.00	-4.88	44.41	33.15	8.41	36.85	0.00	300	30	AVERAGE																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	5180.00	105.35	-----	-----	100.65	33.12	8.43	36.85	0.00	300	30	AVERAGE																																																																																								







Mode	5																																																																																									
	Band Edge																																																																																									
	U-NII-1_5.15-5.25_802.11be EHT20_CH36_Partial_26/0RU_5180MHz																																																																																									
ANT	4+3																																																																																									
Pol.	Vertical	Fundamental																																																																																								
Peak	Site : 03CH15-HY Condition: PEAK_BE_74 3m 91200-02294_240620 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5144.40</td><td>58.64</td><td>74.00</td><td>-15.36</td><td>53.90</td><td>33.18</td><td>8.41</td><td>36.85</td><td>0.00</td><td>100</td><td>126</td><td>PEAK</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5144.40	58.64	74.00	-15.36	53.90	33.18	8.41	36.85	0.00	100	126	PEAK	Site : 03CH15-HY Condition: PEAK(UNII) 3m 91200-02294_240620 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5180.00</td><td>107.48</td><td>-----</td><td>-----</td><td>102.78</td><td>33.12</td><td>8.43</td><td>36.85</td><td>0.00</td><td>100</td><td>126</td><td>PEAK</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5180.00	107.48	-----	-----	102.78	33.12	8.43	36.85	0.00	100	126	PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																
1	5144.40	58.64	74.00	-15.36	53.90	33.18	8.41	36.85	0.00	100	126	PEAK																																																																														
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																
1	5180.00	107.48	-----	-----	102.78	33.12	8.43	36.85	0.00	100	126	PEAK																																																																														
Avg	Site : 03CH15-HY Condition: AVG_BE_54 3m 91200-02294_240620 VERTICAL : RBW:1000.000kHz VBW:0.600kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5136.99</td><td>48.53</td><td>54.00</td><td>-5.47</td><td>43.82</td><td>33.15</td><td>8.41</td><td>36.85</td><td>0.00</td><td>100</td><td>126</td><td>AVERAGE</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5136.99	48.53	54.00	-5.47	43.82	33.15	8.41	36.85	0.00	100	126	AVERAGE	Site : 03CH15-HY Condition: AVG_54 3m 91200-02294_240620 VERTICAL : RBW:1000.000kHz VBW:0.600kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5180.00</td><td>102.20</td><td>-----</td><td>-----</td><td>97.50</td><td>33.12</td><td>8.43</td><td>36.85</td><td>0.00</td><td>100</td><td>126</td><td>AVERAGE</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5180.00	102.20	-----	-----	97.50	33.12	8.43	36.85	0.00	100	126	AVERAGE
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																
1	5136.99	48.53	54.00	-5.47	43.82	33.15	8.41	36.85	0.00	100	126	AVERAGE																																																																														
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																
1	5180.00	102.20	-----	-----	97.50	33.12	8.43	36.85	0.00	100	126	AVERAGE																																																																														

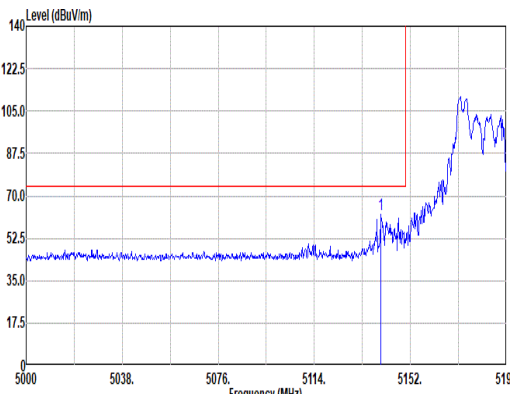
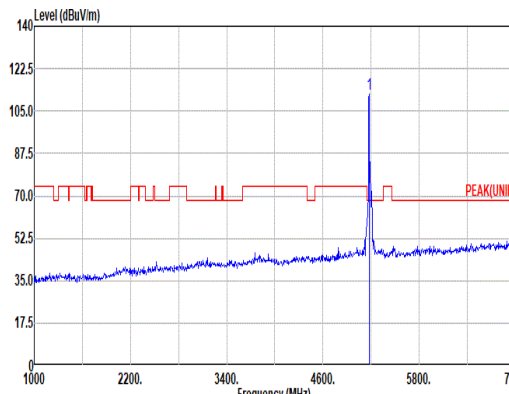
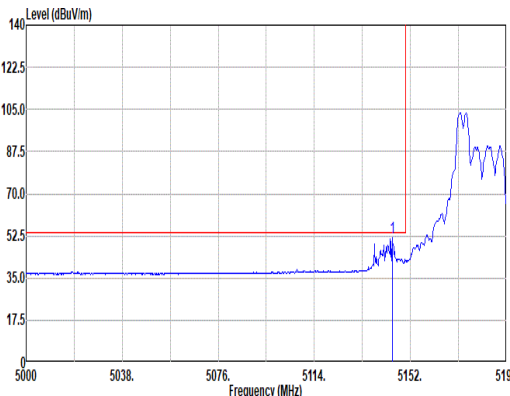
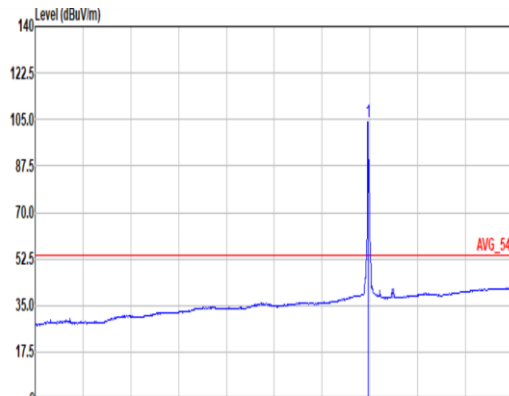


Mode	6																																																																																																		
	Band Edge																																																																																																		
	U-NII-1_5.15-5.25_802.11be EHT20_CH36_Partial_52/37RU_5180MHz																																																																																																		
ANT	4+3																																																																																																		
Pol.	Horizontal						Fundamental																																																																																												
Peak																																																																																																			
	Site : 03CH15-HY Condition: PEAK_BE_74 3m 91200-02294_240620 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5140.41</td><td>62.20</td><td>74.00</td><td>-11.80</td><td>57.48</td><td>33.16</td><td>8.41</td><td>36.85</td><td>0.00</td><td>100</td><td>46</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5140.41	62.20	74.00	-11.80	57.48	33.16	8.41	36.85	0.00	100	46	Peak	Site : 03CH15-HY Condition: PEAK(UNII) 3m 91200-02294_240620 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5180.00</td><td>111.83</td><td>-----</td><td>-----</td><td>107.15</td><td>33.10</td><td>8.43</td><td>36.85</td><td>0.00</td><td>100</td><td>46</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5180.00	111.83	-----	-----	107.15	33.10	8.43	36.85	0.00	100	46
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	5140.41	62.20	74.00	-11.80	57.48	33.16	8.41	36.85	0.00	100	46	Peak																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	5180.00	111.83	-----	-----	107.15	33.10	8.43	36.85	0.00	100	46	Peak																																																																																							
Avg																																																																																																			
	Site : 03CH15-HY Condition: AVG_BE_54 3m 91200-02294_240620 HORIZONTAL : RBW:1000.000kHz VBW:0.600kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5144.78</td><td>51.73</td><td>54.00</td><td>-2.27</td><td>46.99</td><td>33.18</td><td>8.41</td><td>36.85</td><td>0.00</td><td>100</td><td>46</td><td>Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5144.78	51.73	54.00	-2.27	46.99	33.18	8.41	36.85	0.00	100	46	Average	Site : 03CH15-HY Condition: AVG_54 3m 91200-02294_240620 HORIZONTAL : RBW:1000.000kHz VBW:0.600kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5180.00</td><td>104.24</td><td>-----</td><td>-----</td><td>99.54</td><td>33.12</td><td>8.43</td><td>36.85</td><td>0.00</td><td>100</td><td>46</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5180.00	104.24	-----	-----	99.54	33.12	8.43	36.85	0.00	100	46
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	5144.78	51.73	54.00	-2.27	46.99	33.18	8.41	36.85	0.00	100	46	Average																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	5180.00	104.24	-----	-----	99.54	33.12	8.43	36.85	0.00	100	46	Peak																																																																																							

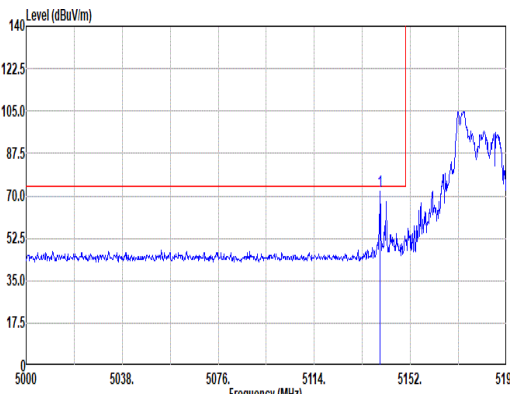
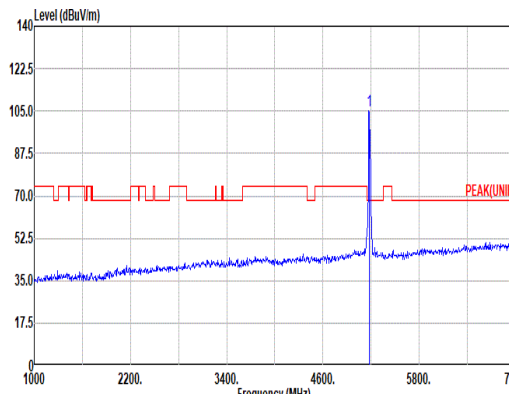
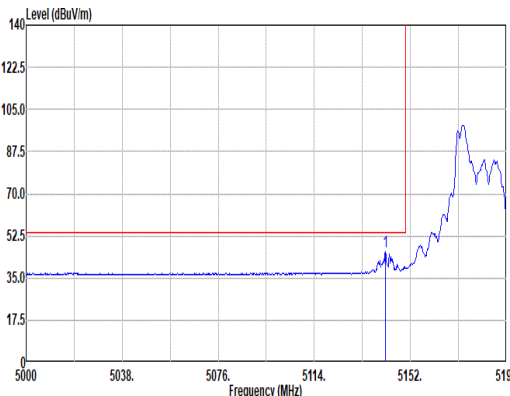
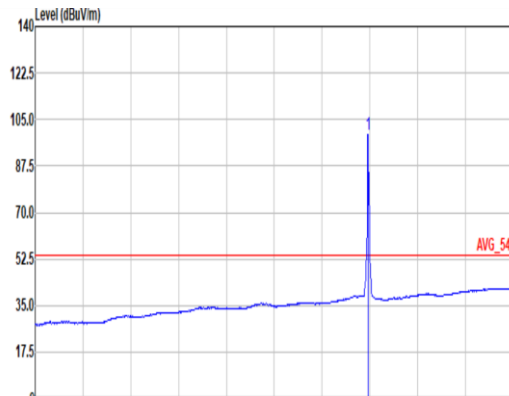


Mode	6																																																																																																		
	Band Edge																																																																																																		
	U-NII-1_5.15-5.25_802.11be EHT20_CH36_Partial_52/37RU_5180MHz																																																																																																		
ANT	4+3																																																																																																		
Pol.	Vertical						Fundamental																																																																																												
Peak																																																																																																			
	Site : 03CH15-HY Condition: PEAK_BE_74 3m 91200-02294_240620 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5140.03</td><td>71.84</td><td>74.00</td><td>-2.16</td><td>67.12</td><td>33.16</td><td>8.41</td><td>36.85</td><td>0.00</td><td>126</td><td>360</td><td>Peak</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5140.03	71.84	74.00	-2.16	67.12	33.16	8.41	36.85	0.00	126	360	Peak	Site : 03CH15-HY Condition: PEAK(UNII) 3m 91200-02294_240620 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5180.00</td><td>105.30</td><td>-----</td><td>-----</td><td>100.60</td><td>33.12</td><td>8.43</td><td>36.85</td><td>0.00</td><td>126</td><td>360</td><td>Peak</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5180.00	105.30	-----	-----	100.60	33.12	8.43	36.85	0.00	126	360
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	5140.03	71.84	74.00	-2.16	67.12	33.16	8.41	36.85	0.00	126	360	Peak																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	5180.00	105.30	-----	-----	100.60	33.12	8.43	36.85	0.00	126	360	Peak																																																																																							
Avg																																																																																																			
	Site : 03CH15-HY Condition: AVG_BE_54 3m 91200-02294_240620 VERTICAL : RBW:1000.000kHz VBW:0.600kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5142.12</td><td>45.75</td><td>54.00</td><td>-8.25</td><td>41.02</td><td>33.17</td><td>8.41</td><td>36.85</td><td>0.00</td><td>126</td><td>360</td><td>Average</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5142.12	45.75	54.00	-8.25	41.02	33.17	8.41	36.85	0.00	126	360	Average	Site : 03CH15-HY Condition: AVG_54 3m 91200-02294_240620 VERTICAL : RBW:1000.000kHz VBW:0.600kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5180.00</td><td>99.41</td><td>-----</td><td>-----</td><td>94.71</td><td>33.12</td><td>8.43</td><td>36.85</td><td>0.00</td><td>126</td><td>360</td><td>Peak</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5180.00	99.41	-----	-----	94.71	33.12	8.43	36.85	0.00	126	360
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	5142.12	45.75	54.00	-8.25	41.02	33.17	8.41	36.85	0.00	126	360	Average																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	5180.00	99.41	-----	-----	94.71	33.12	8.43	36.85	0.00	126	360	Peak																																																																																							

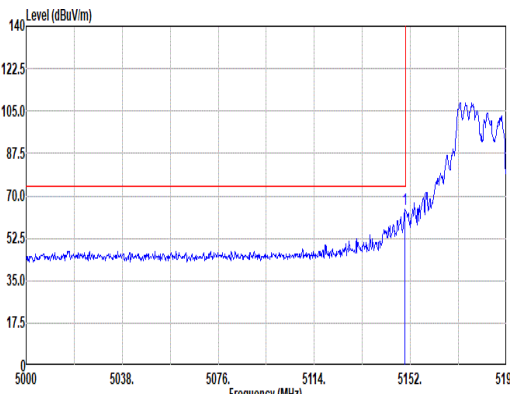
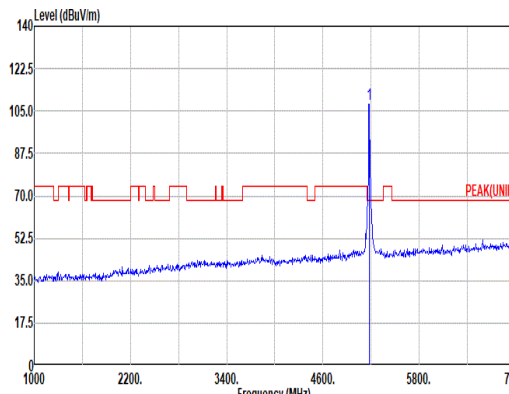
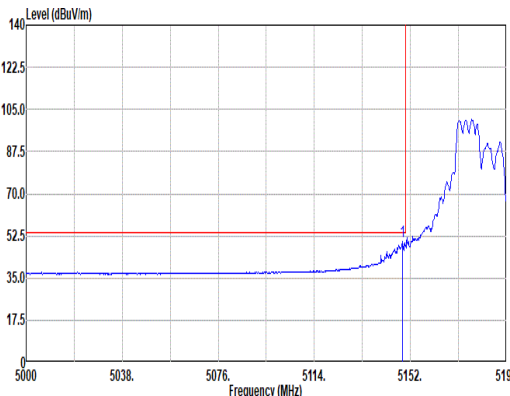
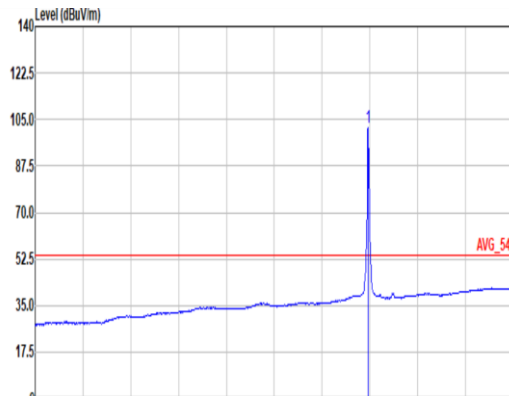


		7																																																																																															
Mode	Band Edge																																																																																																
	U-NII-1_5.15-5.25_802.11be EHT20_CH36_Partial_106/53RU_5180MHz																																																																																																
ANT	4+3																																																																																																
Pol.	Horizontal						Fundamental																																																																																										
Peak																																																																																																	
	Site : 03CH15-HY Condition: PEAK_BE_74 3m 91200-02294_240620 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5149.91</td><td>64.37</td><td>74.00</td><td>-9.63</td><td>59.61</td><td>33.20</td><td>8.41</td><td>36.85</td><td>0.00</td><td>103</td><td>44</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	1	5149.91	64.37	74.00	-9.63	59.61	33.20	8.41	36.85	0.00	103	44	Peak	Site : 03CH15-HY Condition: PEAK(UNII) 3m 91200-02294_240620 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5180.00</td><td>107.88</td><td>-----</td><td>-----</td><td>103.20</td><td>33.10</td><td>8.43</td><td>36.85</td><td>0.00</td><td>103</td><td>44</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	1	5180.00	107.88	-----	-----	103.20	33.10	8.43	36.85	0.00	103	44
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																								
Freq	Level	Line	Level	Factor	Loss	Factor	Factor																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg																																																																																								
1	5149.91	64.37	74.00	-9.63	59.61	33.20	8.41	36.85	0.00	103	44	Peak																																																																																					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																								
Freq	Level	Line	Level	Factor	Loss	Factor	Factor																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg																																																																																								
1	5180.00	107.88	-----	-----	103.20	33.10	8.43	36.85	0.00	103	44	Peak																																																																																					
Avg																																																																																																	
	Site : 03CH15-HY Condition: AVG_BE_54 3m 91200-02294_240620 HORIZONTAL : RBW:1000.000kHz VBW:0.020kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5148.77</td><td>50.44</td><td>54.00</td><td>-3.56</td><td>45.68</td><td>33.20</td><td>8.41</td><td>36.85</td><td>0.00</td><td>103</td><td>44</td><td>Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	1	5148.77	50.44	54.00	-3.56	45.68	33.20	8.41	36.85	0.00	103	44	Average	Site : 03CH15-HY Condition: AVG_54 3m 91200-02294_240620 HORIZONTAL : RBW:1000.000kHz VBW:0.020kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5180.00</td><td>101.72</td><td>-----</td><td>-----</td><td>97.04</td><td>33.10</td><td>8.43</td><td>36.85</td><td>0.00</td><td>103</td><td>44</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	1	5180.00	101.72	-----	-----	97.04	33.10	8.43	36.85	0.00	103	44
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																								
Freq	Level	Line	Level	Factor	Loss	Factor	Factor																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg																																																																																								
1	5148.77	50.44	54.00	-3.56	45.68	33.20	8.41	36.85	0.00	103	44	Average																																																																																					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																								
Freq	Level	Line	Level	Factor	Loss	Factor	Factor																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg																																																																																								
1	5180.00	101.72	-----	-----	97.04	33.10	8.43	36.85	0.00	103	44	Peak																																																																																					

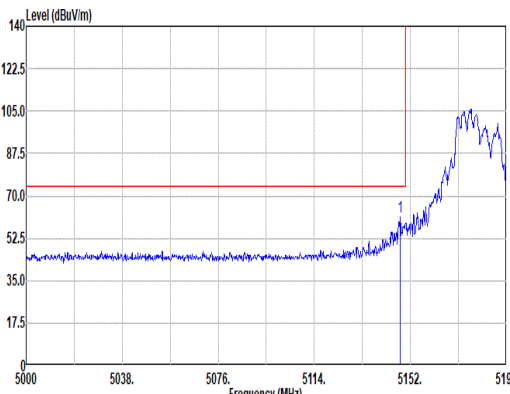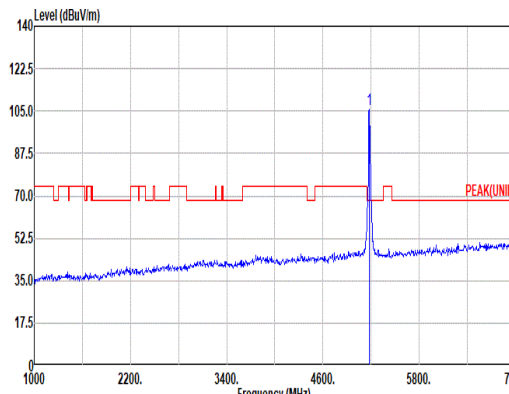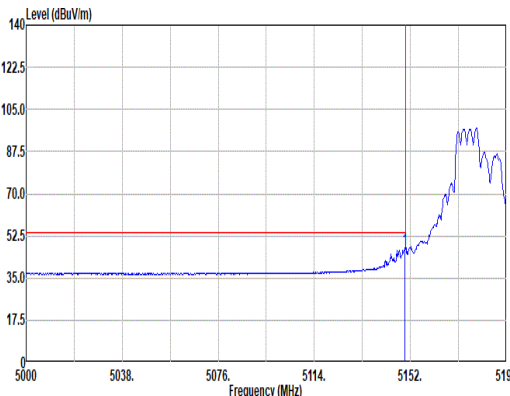
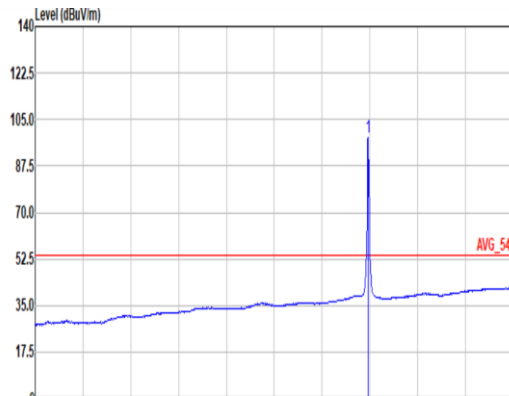


Mode	7																																																																																																			
	Band Edge																																																																																																			
	U-NII-1_5.15-5.25_802.11be EHT20_CH36_Partial_106/53RU_5180MHz																																																																																																			
ANT	4+3																																																																																																			
Pol.	Vertical						Fundamental																																																																																													
Peak	 Site : 03CH15-HY Condition: PEAK_BE_74 3m 91200-02294_240620 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5147.82</td><td>61.48</td><td>74.00</td><td>-12.52</td><td>56.73</td><td>33.19</td><td>8.41</td><td>36.85</td><td>0.00</td><td>100</td><td>272</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5147.82	61.48	74.00	-12.52	56.73	33.19	8.41	36.85	0.00	100	272	Peak	 Site : 03CH15-HY Condition: PEAK(UNII) 3m 91200-02294_240620 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5180.00</td><td>105.68</td><td>-----</td><td>-----</td><td>101.00</td><td>33.10</td><td>8.43</td><td>36.85</td><td>0.00</td><td>100</td><td>272</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5180.00	105.68	-----	-----	101.00	33.10	8.43	36.85	0.00	100	272	Peak
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	5147.82	61.48	74.00	-12.52	56.73	33.19	8.41	36.85	0.00	100	272	Peak																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	5180.00	105.68	-----	-----	101.00	33.10	8.43	36.85	0.00	100	272	Peak																																																																																								
Avg	 Site : 03CH15-HY Condition: AVG_BE_54 3m 91200-02294_240620 VERTICAL : RBW:1000.000kHz VBW:0.020kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5149.91</td><td>46.85</td><td>54.00</td><td>-7.15</td><td>42.09</td><td>33.20</td><td>8.41</td><td>36.85</td><td>0.00</td><td>100</td><td>272</td><td>Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5149.91	46.85	54.00	-7.15	42.09	33.20	8.41	36.85	0.00	100	272	Average	 Site : 03CH15-HY Condition: AVG_54 3m 91200-02294_240620 VERTICAL : RBW:1000.000kHz VBW:0.020kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5180.00</td><td>98.25</td><td>-----</td><td>-----</td><td>93.57</td><td>33.10</td><td>8.43</td><td>36.85</td><td>0.00</td><td>100</td><td>272</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5180.00	98.25	-----	-----	93.57	33.10	8.43	36.85	0.00	100	272	Peak
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	5149.91	46.85	54.00	-7.15	42.09	33.20	8.41	36.85	0.00	100	272	Average																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	5180.00	98.25	-----	-----	93.57	33.10	8.43	36.85	0.00	100	272	Peak																																																																																								

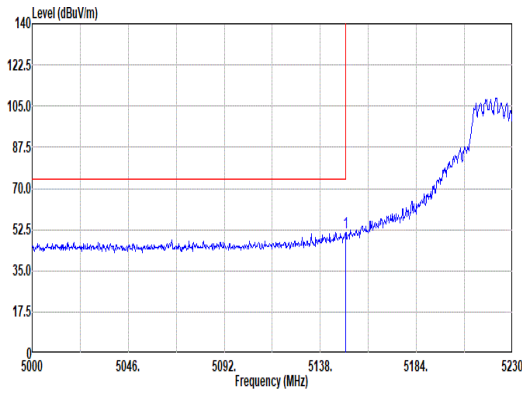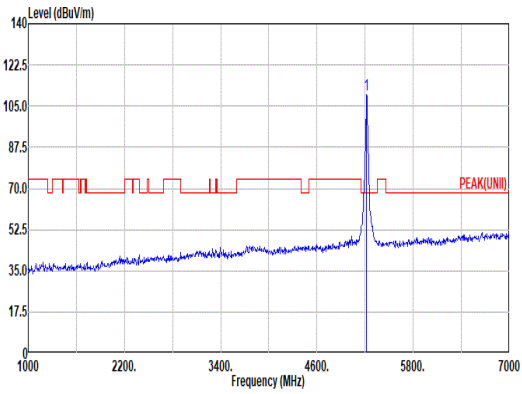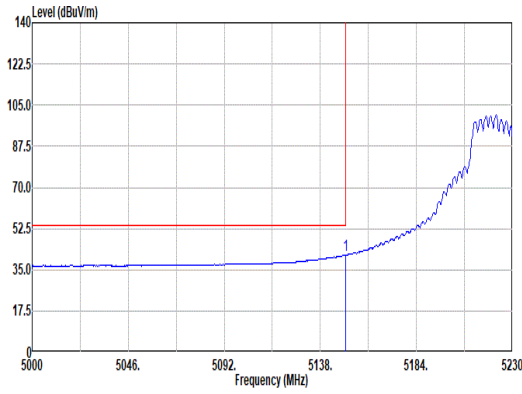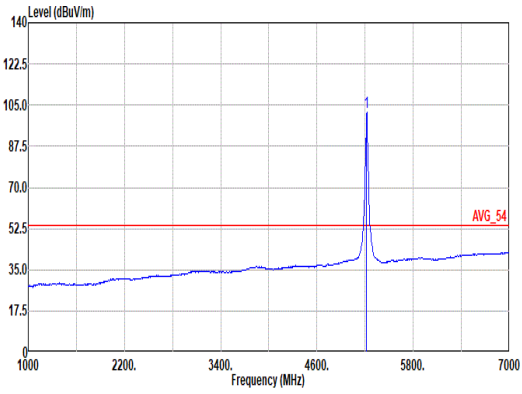

Mode	8																																																																																															
	Band Edge - L																																																																																															
	U-NII-1_5.15-5.25_802.11be EHT20_CH44_5220MHz																																																																																															
ANT	4+3																																																																																															
Pol.	Horizontal						Fundamental																																																																																									
Peak	 Site : 03CH15-HY Condition: PEAK_BE_74 3m 91200-02294_240620 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>5149.96</td><td>51.29</td><td>74.00</td><td>-22.71</td><td></td><td>46.53</td><td>33.20</td><td>8.41</td><td>36.85</td><td>0.00</td><td>200</td><td>297</td><td>PEAK</td></tr></tbody></table>							Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5149.96	51.29	74.00	-22.71		46.53	33.20	8.41	36.85	0.00	200	297	PEAK	 Site : 03CH15-HY Condition: PEAK(UNII) 3m 91200-02294_240620 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>5220.00</td><td>109.95</td><td>-----</td><td>-----</td><td></td><td>105.33</td><td>33.00</td><td>8.46</td><td>36.84</td><td>0.00</td><td>200</td><td>297</td><td>PEAK</td></tr></tbody></table>							Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5220.00	109.95	-----	-----		105.33	33.00	8.46	36.84	0.00	200	297	PEAK
		Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																				
1	5149.96	51.29	74.00	-22.71		46.53	33.20	8.41	36.85	0.00	200	297	PEAK																																																																																			
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																				
1	5220.00	109.95	-----	-----		105.33	33.00	8.46	36.84	0.00	200	297	PEAK																																																																																			
Avg	 Site : 03CH15-HY Condition: AVG_BE_54 3m 91200-02294_240620 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>5149.96</td><td>41.28</td><td>54.00</td><td>-12.72</td><td></td><td>36.52</td><td>33.20</td><td>8.41</td><td>36.85</td><td>0.00</td><td>200</td><td>297</td><td>AVERAGE</td></tr></tbody></table>							Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5149.96	41.28	54.00	-12.72		36.52	33.20	8.41	36.85	0.00	200	297	AVERAGE	 Site : 03CH15-HY Condition: AVG_54 3m 91200-02294_240620 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>5220.00</td><td>102.10</td><td>-----</td><td>-----</td><td></td><td>97.47</td><td>33.00</td><td>8.47</td><td>36.84</td><td>0.00</td><td>200</td><td>297</td><td>AVERAGE</td></tr></tbody></table>							Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5220.00	102.10	-----	-----		97.47	33.00	8.47	36.84	0.00	200	297	AVERAGE
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																				
1	5149.96	41.28	54.00	-12.72		36.52	33.20	8.41	36.85	0.00	200	297	AVERAGE																																																																																			
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																				
1	5220.00	102.10	-----	-----		97.47	33.00	8.47	36.84	0.00	200	297	AVERAGE																																																																																			

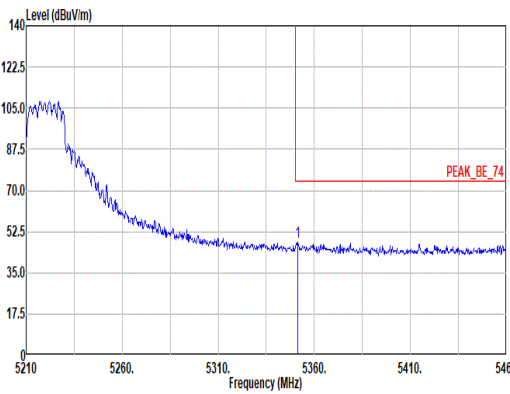
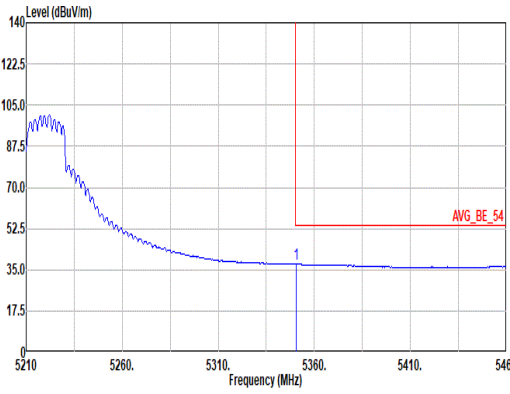


Mode	8																																																							
	Band Edge - R																																																							
	U-NII-1_5.15-5.25_802.11be EHT20_CH44_5220MHz																																																							
ANT	4+3																																																							
Pol.	Horizontal						Fundamental																																																	
Peak	 Site : 03CH15-HY Condition: PEAK_BE_74 3m 91200-02294_240620 HORIZONTAL : RBW:1000.000kHz VBN:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5351.25</td><td>47.93</td><td>74.00</td><td>-26.07</td><td>43.29</td><td>32.90</td><td>8.57</td><td>36.83</td><td>0.00</td><td>200</td><td>297</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5351.25	47.93	74.00	-26.07	43.29	32.90	8.57	36.83	0.00	200	297	PEAK	Blank					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																														
1	5351.25	47.93	74.00	-26.07	43.29	32.90	8.57	36.83	0.00	200	297	PEAK																																												
Avg	 Site : 03CH15-HY Condition: AVG_BE_54 3m 91200-02294_240620 HORIZONTAL : RBW:1000.000kHz VBN:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5350.75</td><td>37.37</td><td>54.00</td><td>-16.63</td><td>32.73</td><td>32.90</td><td>8.57</td><td>36.83</td><td>0.00</td><td>200</td><td>297</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5350.75	37.37	54.00	-16.63	32.73	32.90	8.57	36.83	0.00	200	297	AVERAGE	Blank					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																														
1	5350.75	37.37	54.00	-16.63	32.73	32.90	8.57	36.83	0.00	200	297	AVERAGE																																												





Mode	8																																																																																																			
	Band Edge - L																																																																																																			
	U-NII-1_5.15-5.25_802.11be EHT20_CH44_5220MHz																																																																																																			
ANT	4+3																																																																																																			
Pol.	Vertical						Fundamental																																																																																													
Peak	Site : 03CH15-HY Condition: PEAK_BE_74 3m 91200-02294_240620 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5142.83</td><td>49.19</td><td>74.00</td><td>-24.81</td><td>44.46</td><td>33.17</td><td>8.41</td><td>36.85</td><td>0.00</td><td>200</td><td>75</td><td>PEAK</td></tr></tbody></table> Site : 03CH15-HY Condition: PEAK(UNII) 3m 91200-02294_240620 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5220.00</td><td>105.18</td><td>-----</td><td>-----</td><td>100.56</td><td>33.00</td><td>8.46</td><td>36.84</td><td>0.00</td><td>200</td><td>75</td><td>PEAK</td></tr></tbody></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5142.83	49.19	74.00	-24.81	44.46	33.17	8.41	36.85	0.00	200	75	PEAK		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5220.00	105.18	-----	-----	100.56	33.00	8.46	36.84	0.00	200	75	PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	5142.83	49.19	74.00	-24.81	44.46	33.17	8.41	36.85	0.00	200	75	PEAK																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	5220.00	105.18	-----	-----	100.56	33.00	8.46	36.84	0.00	200	75	PEAK																																																																																								
Avg	Site : 03CH15-HY Condition: AVG_BE_54 3m 91200-02294_240620 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5149.96</td><td>38.99</td><td>54.00</td><td>-15.01</td><td>34.23</td><td>33.20</td><td>8.41</td><td>36.85</td><td>0.00</td><td>200</td><td>75</td><td>AVERAGE</td></tr></tbody></table> Site : 03CH15-HY Condition: AVG_54 3m 91200-02294_240620 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5220.00</td><td>98.63</td><td>-----</td><td>-----</td><td>94.01</td><td>33.00</td><td>8.46</td><td>36.84</td><td>0.00</td><td>200</td><td>75</td><td>AVERAGE</td></tr></tbody></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5149.96	38.99	54.00	-15.01	34.23	33.20	8.41	36.85	0.00	200	75	AVERAGE		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5220.00	98.63	-----	-----	94.01	33.00	8.46	36.84	0.00	200	75	AVERAGE
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	5149.96	38.99	54.00	-15.01	34.23	33.20	8.41	36.85	0.00	200	75	AVERAGE																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	5220.00	98.63	-----	-----	94.01	33.00	8.46	36.84	0.00	200	75	AVERAGE																																																																																								



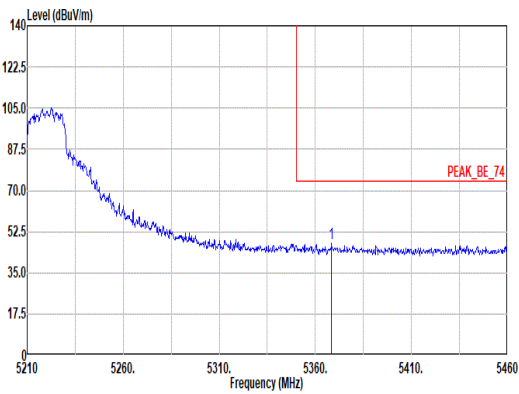
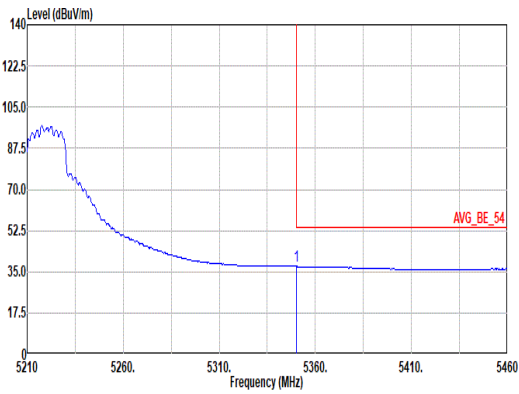


Mode	8																																																					
	Band Edge - R																																																					
	U-NII-1_5.15-5.25_802.11be EHT20_CH44_5220MHz																																																					
ANT	4+3																																																					
Pol.	Vertical						Fundamental																																															
Peak	 Site : 03CH15-HY Condition: PEAK_BE_74 3m 91200-02294_240620 VERTICAL : RBW:1000.000kHz VBN:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5368.50</td><td>47.68</td><td>74.00</td><td>-26.32</td><td>43.07</td><td>32.86</td><td>8.58</td><td>36.83</td><td>0.00</td><td>200</td><td>75 PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5368.50	47.68	74.00	-26.32	43.07	32.86	8.58	36.83	0.00	200	75 PEAK	Blank				
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																												
1	5368.50	47.68	74.00	-26.32	43.07	32.86	8.58	36.83	0.00	200	75 PEAK																																											
Avg	 Site : 03CH15-HY Condition: AVG_BE_54 3m 91200-02294_240620 VERTICAL : RBW:1000.000kHz VBN:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5358.25</td><td>37.25</td><td>54.00</td><td>-16.75</td><td>32.61</td><td>32.90</td><td>8.57</td><td>36.83</td><td>0.00</td><td>200</td><td>75 AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5358.25	37.25	54.00	-16.75	32.61	32.90	8.57	36.83	0.00	200	75 AVERAGE	Blank				
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																												
1	5358.25	37.25	54.00	-16.75	32.61	32.90	8.57	36.83	0.00	200	75 AVERAGE																																											



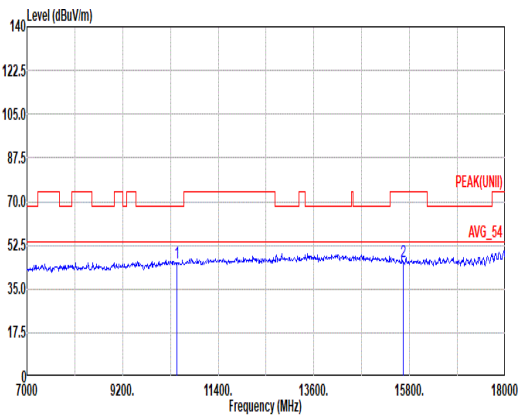
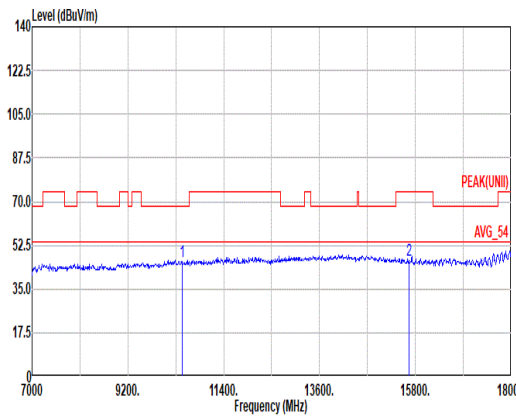


Mode	8																																																																																																															
	Harmonic																																																																																																															
	U-NII-1_5.15-5.25_802.11be EHT20_CH44_5220MHz																																																																																																															
ANT	4+3																																																																																																															
Pol.	Horizontal	Vertical																																																																																																														
Peak Avg	 Site : 03CH15-HY Condition: PEAK(UNII) 3m 91200-02294_240620 HORIZONTAL Mode : 8 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>10440.00</td><td>45.69</td><td>68.20</td><td>-22.51</td><td>52.27</td><td>38.60</td><td>11.98</td><td>58.05</td><td>0.89</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>15660.00</td><td>46.06</td><td>74.00</td><td>-27.94</td><td>49.86</td><td>38.07</td><td>15.08</td><td>57.86</td><td>0.91</td><td>--</td><td>Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	10440.00	45.69	68.20	-22.51	52.27	38.60	11.98	58.05	0.89	--	Peak	2	15660.00	46.06	74.00	-27.94	49.86	38.07	15.08	57.86	0.91	--	Peak	 Site : 03CH15-HY Condition: PEAK(UNII) 3m 91200-02294_240620 VERTICAL Mode : 8 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>10440.00</td><td>46.01</td><td>68.20</td><td>-22.19</td><td>52.57</td><td>38.60</td><td>11.99</td><td>58.04</td><td>0.89</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>15660.00</td><td>46.74</td><td>74.00</td><td>-27.26</td><td>50.53</td><td>38.09</td><td>15.08</td><td>57.87</td><td>0.91</td><td>--</td><td>Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	10440.00	46.01	68.20	-22.19	52.57	38.60	11.99	58.04	0.89	--	Peak	2	15660.00	46.74	74.00	-27.26	50.53	38.09	15.08	57.87	0.91	--	Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																						
1	10440.00	45.69	68.20	-22.51	52.27	38.60	11.98	58.05	0.89	--	Peak																																																																																																					
2	15660.00	46.06	74.00	-27.94	49.86	38.07	15.08	57.86	0.91	--	Peak																																																																																																					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																						
1	10440.00	46.01	68.20	-22.19	52.57	38.60	11.99	58.04	0.89	--	Peak																																																																																																					
2	15660.00	46.74	74.00	-27.26	50.53	38.09	15.08	57.87	0.91	--	Peak																																																																																																					

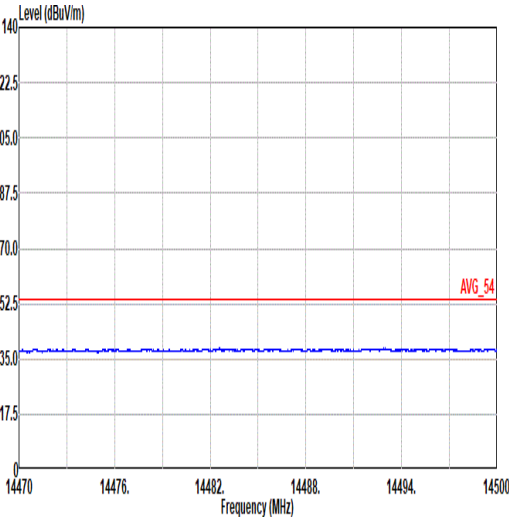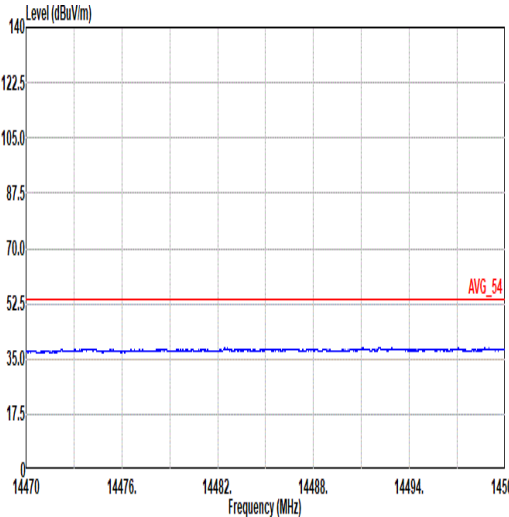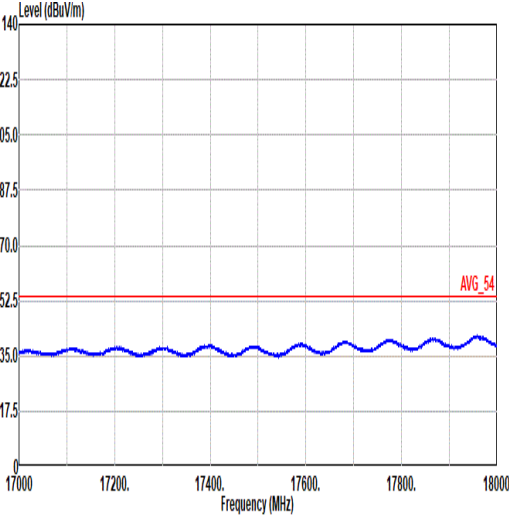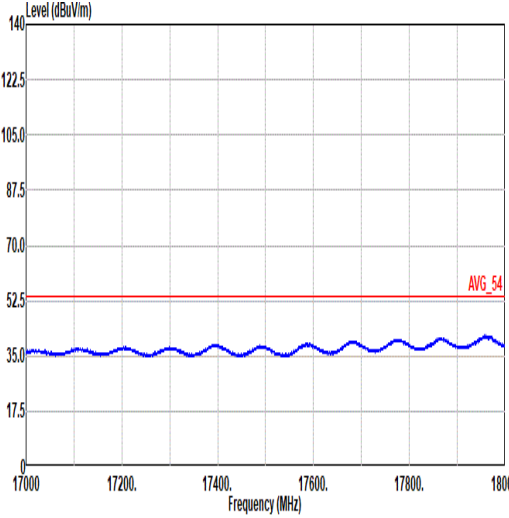

Mode	8	
	Harmonic	
	U-NII-1_5.15-5.25_802.11be EHT20_CH44_5220MHz	
ANT	4+3	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	 Site : 03CH15-HY Condition: AVG_54 3m 91280-02294_240620 HORIZONTAL Mode : 8	 Site : 03CH15-HY Condition: AVG_54 3m 91280-02294_240620 VERTICAL Mode : 8
	 Site : 03CH15-HY Condition: AVG_54 3m 91280-02294_240620 HORIZONTAL Mode : 8	 Site : 03CH15-HY Condition: AVG_54 3m 91280-02294_240620 VERTICAL Mode : 8

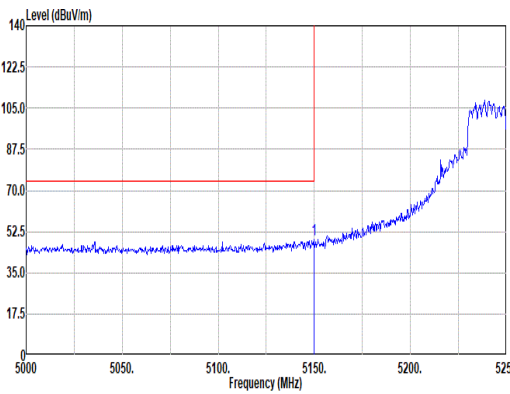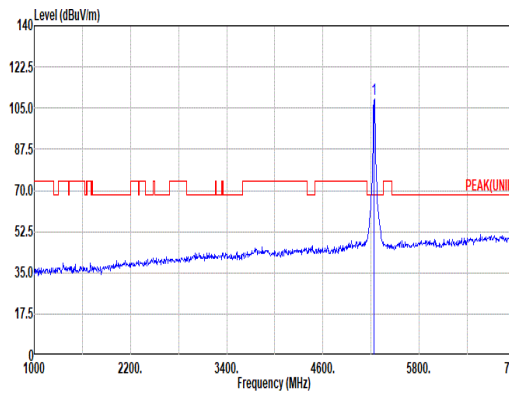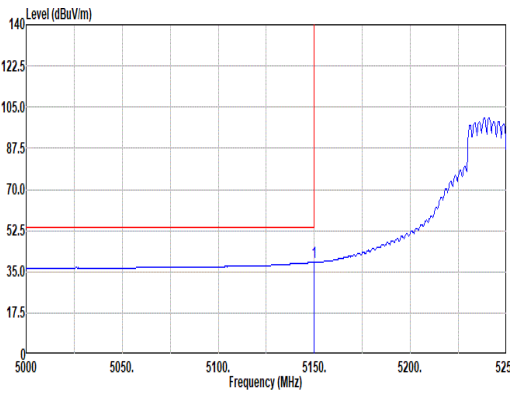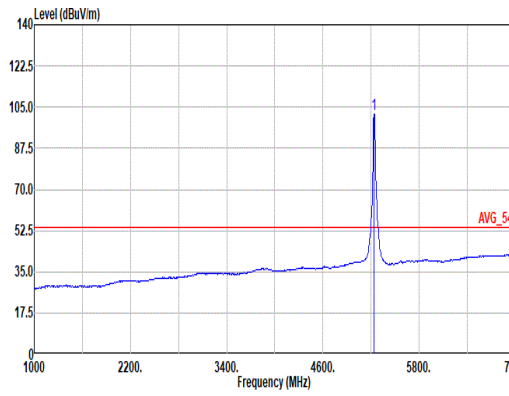

Mode	9																																																																																																	
	Band Edge - L																																																																																																	
	U-NII-1_5.15-5.25_802.11be EHT20_CH48_5240MHz																																																																																																	
ANT	4+3																																																																																																	
Pol.	Horizontal						Fundamental																																																																																											
Peak																																																																																																		
	Site : 03CH15-HY Condition: PEAK_BE_74 3m 91200-02294_240620 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5149.75</td><td>49.22</td><td>74.00</td><td>-24.78</td><td>44.46</td><td>33.20</td><td>8.41</td><td>36.85</td><td>0.00</td><td>200 296 PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5149.75	49.22	74.00	-24.78	44.46	33.20	8.41	36.85	0.00	200 296 PEAK	Site : 03CH15-HY Condition: PEAK(UNII) 3m 91200-02294_240620 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5240.00</td><td>100.63</td><td>-----</td><td>-----</td><td>103.99</td><td>33.00</td><td>8.48</td><td>36.84</td><td>0.00</td><td>200 296 PEAK</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5240.00	100.63	-----	-----	103.99	33.00	8.48	36.84	0.00
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	5149.75	49.22	74.00	-24.78	44.46	33.20	8.41	36.85	0.00	200 296 PEAK																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	5240.00	100.63	-----	-----	103.99	33.00	8.48	36.84	0.00	200 296 PEAK																																																																																								
Avg																																																																																																		
	Site : 03CH15-HY Condition: AVG_BE_54 3m 91200-02294_240620 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5150.00</td><td>39.02</td><td>54.00</td><td>-14.98</td><td>34.26</td><td>33.20</td><td>8.41</td><td>36.85</td><td>0.00</td><td>200 296 AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5150.00	39.02	54.00	-14.98	34.26	33.20	8.41	36.85	0.00	200 296 AVERAGE	Site : 03CH15-HY Condition: AVG_54 3m 91200-02294_240620 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5240.00</td><td>101.92</td><td>-----</td><td>-----</td><td>97.28</td><td>33.00</td><td>8.48</td><td>36.84</td><td>0.00</td><td>200 296 AVERAGE</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5240.00	101.92	-----	-----	97.28	33.00	8.48	36.84	0.00
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	5150.00	39.02	54.00	-14.98	34.26	33.20	8.41	36.85	0.00	200 296 AVERAGE																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	5240.00	101.92	-----	-----	97.28	33.00	8.48	36.84	0.00	200 296 AVERAGE																																																																																								



Mode	9																																																							
	Band Edge - R																																																							
	U-NII-1_5.15-5.25_802.11be EHT20_CH48_5240MHz																																																							
ANT	4+3																																																							
Pol.	Horizontal						Fundamental																																																	
Peak	Site : 03CH15-HY Condition: PEAK_BE_74 3m 91200-02294_240620 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5351.67</td><td>48.20</td><td>74.00</td><td>-25.80</td><td>43.56</td><td>32.90</td><td>8.57</td><td>36.83</td><td>0.00</td><td>200</td><td>296</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5351.67	48.20	74.00	-25.80	43.56	32.90	8.57	36.83	0.00	200	296	PEAK	Blank					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																														
1	5351.67	48.20	74.00	-25.80	43.56	32.90	8.57	36.83	0.00	200	296	PEAK																																												
Avg	Site : 03CH15-HY Condition: AVG_BE_54 3m 91200-02294_240620 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5358.75</td><td>37.94</td><td>54.00</td><td>-16.06</td><td>33.30</td><td>32.90</td><td>8.57</td><td>36.83</td><td>0.00</td><td>200</td><td>296</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5358.75	37.94	54.00	-16.06	33.30	32.90	8.57	36.83	0.00	200	296	AVERAGE	Blank					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																														
1	5358.75	37.94	54.00	-16.06	33.30	32.90	8.57	36.83	0.00	200	296	AVERAGE																																												