



FCC RADIO TEST REPORT

FCC ID : A4RGU0NP
Equipment : Phone
Model Name : GU0NP, GM66V
Applicant : Google LLC
1600 Amphitheatre Parkway,
Mountain View, CA, 94043 USA
Standard : FCC 47 CFR Part 2, 22(H), 24(E), 27(L)

The product was received on Mar. 06, 2025 and testing was performed from Mar. 12, 2025 to Apr. 19, 2025. We, Sporton International Inc. EMC & Wireless Communications Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval from Sporton International Inc. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.

Louis Wu

Approved by: Louis Wu

Sporton International Inc. EMC & Wireless Communications Laboratory

No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C.)



Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
1 General Description	5
1.1 Product Feature of Equipment Under Test	5
1.2 Modification of EUT	5
1.3 Testing Location	6
1.4 Applicable Standards	6
2 Test Configuration of Equipment Under Test	7
2.1 Test Mode.....	7
2.2 Connection Diagram of Test System	8
2.3 Support Unit used in test configuration	8
2.4 Measurement Results Explanation Example	8
2.5 Frequency List of Low/Middle/High Channels	9
3 Conducted Test Result	10
3.1 Measuring Instruments.....	10
3.2 Conducted Output Power and ERP/EIRP	11
3.3 Peak-to-Average Ratio	12
3.4 99% Occupied Bandwidth and 26dB Bandwidth Measurement.....	13
3.5 Conducted Band Edge	14
3.6 Conducted Spurious Emission	15
3.7 Frequency Stability	16
4 Radiated Test Items	17
4.1 Measuring Instruments.....	17
4.2 Test Setup	17
4.3 Test Result of Radiated Test.....	18
4.4 Field Strength of Spurious Radiation Measurement	19
5 List of Measuring Equipment.....	20
6 Measurement Uncertainty	22
Appendix A. Test Results of Conducted Test	
Appendix B. Test Results of Radiated Test	
Appendix C. Test Setup Photographs	



History of this test report

Report No.	Version	Description	Issue Date
FG4N0920A	01	Initial issue of report	May 20, 2025

Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.2	§2.1046	Conducted Output Power	Pass	-
	§22.913 (a)(5)	Effective Radiated Power (GSM850) (WCDMA Band V)		
	§24.232 (c)	Equivalent Isotropic Radiated Power (GSM1900) (WCDMA Band II)		
	§27.50 (d)(4)	Equivalent Isotropic Radiated Power (WCDMA Band IV)		
3.3	§24.232 (d)	Peak-to-Average Ratio	Pass	-
3.4	§2.1049 §22.917 (b) §24.238 (b) §27.53 (g)	Occupied Bandwidth (GSM850) (WCDMA Band V) (GSM1900) (WCDMA Band II) (WCDMA Band IV)	Pass	-
3.5	§2.1051 §22.917 (a) §24.238 (a) §27.53 (g)	Band Edge Measurement (GSM850) (WCDMA Band V) (GSM1900) (WCDMA Band II) (WCDMA Band IV)	Pass	-
3.6	§2.1051 §22.917 (a) §24.238 (a) §27.53 (g)	Conducted Emission (GSM850) (WCDMA Band V) (GSM1900) (WCDMA Band II) (WCDMA Band IV)	Pass	-
3.7	§2.1055 §22.355 §24.235 §27.54	Frequency Stability Temperature & Voltage	Pass	-
4.4	§2.1053 §22.917 (a) §24.238 (a) §27.53 (h)	Field Strength of Spurious Radiation (GSM850) (WCDMA Band V) (GSM1900) (WCDMA Band II) (WCDMA Band IV)	Pass	-

Conformity Assessment Condition:

- The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacture who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
- The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty".

Disclaimer:

- The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.
- The GU0NP and GM66V are 100% identical in Hardware / Software to each other, and only have different model names for marketing segmentation. The test sample are all model GU0NP.

Reviewed by: William Chen
Report Producer: Clío Lo

1 General Description

1.1 Product Feature of Equipment Under Test

Product Feature
General Specs GSM/WCDMA/LTE/5G NR/NTN , Bluetooth, BLE, BLE channel sounding, Thread, Wi-Fi 802.11be, NFC, WPC Rx, UWB and GNSS Rx.
Antenna Type WWAN: <Ant. 0>: ILA Antenna <Ant. 1>: ILA Antenna <Ant. 2>: ILA Antenna

Remark: The above EUT's information was declared by manufacturer. Please refer to Disclaimer in report summary.

Antenna information					
Band	Ant0	Ant1	Ant2	Main Ant. #	Sub Ant. #
GSM 850	-4.44	-7.01	-	0	1
GSM 1900	-	-3.51	0.31	2	1
WCDMA B5	-4.44	-7.01	-	0	1
WCDMA B2	-	-3.51	0.31	2	1
WCDMA B4	-	-5.92	-1.15	2	1

Remark:

1. For Test Items, Main Ant. means Tx0 and Sub Ant. means Tx1.
2. After preliminary scan, the main antenna Ant 0 for Low band and main antenna Ant 2 for Mid/high band are selected as the worst mode to be reported for conducted test.

EUT Information List	
S/N	Performed Test Item
52171FDCG00076	Conducted Measurement ERP/EIRP
52181FDCG0007G	Radiated Spurious Emission

1.2 Modification of EUT

No modifications made to the EUT during the testing.

1.3 Testing Location

Test Site	Sporton International Inc. EMC & Wireless Communications Laboratory
Test Site Location	No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C.) TEL: +886-3-327-3456 FAX: +886-3-328-4978
Test Site No.	Sporton Site No. TH03-HY
Test Engineer	Eric Wu
Temperature (°C)	19.4~21.4
Relative Humidity (%)	38.6~40.6

Test Site	Sporton International Inc. Wensan Laboratory
Test Site Location	No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan (R.O.C.) TEL: +886-3-327-0868 FAX: +886-3-327-0855
Test Site No.	Sporton Site No. 03CH12-HY (TAF Code: 3786)
Test Engineer	Jack Cheng, Tim Lee and Wilson Wu
Temperature (°C)	20~25
Relative Humidity (%)	50~60
Remark	The Radiated Spurious Emission test item subcontracted to Sporton International Inc. Wensan Laboratory.

Note: The test site complies with ANSI C63.4 2014 requirement.

FCC Designation No.: TW1190 and TW3786

1.4 Applicable Standards

According to the specifications declared by the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ ANSI C63.26-2015
- ♦ FCC 47 CFR Part 2, 22(H), 24(E), 27(L)
- ♦ FCC KDB 971168 D01 Power Meas. License Digital Systems v03r01
- ♦ FCC KDB 412172 D01 Determining ERP and EIRP v01r01
- ♦ FCC KDB 414788 D01 Radiated Test Site v01r01

Remark:

1. All the test items were validated and recorded in accordance with the standards without any modification during the testing.
2. The TAF code is not including all the FCC KDB listed without accreditation.

2 Test Configuration of Equipment Under Test

2.1 Test Mode

Antenna port conducted and radiated test items were performed according to KDB 971168 D01 Power Meas. License Digital Systems v03r01 with maximum output power.

For radiated measurement, the measured emission level of the EUT was maximized by rotating the EUT on a turntable, adjusting the orientation of the EUT and EUT antenna in three orthogonal axis (X: flat, Y: portrait, Z: landscape) and accessory (Adapter or Earphone), and adjusting the measurement antenna orientation, following C63.26 exploratory test procedures and worst plane as below.

Plane	Main Antenna	Sub Antenna
GSM850 WCDMA Band V	Y Open With Adapter	X Close With Adapter
GSM1900 WCDMA Band II	Z Close With Adapter	Y Open With Adapter
WCDMA Band IV	Z Open With Adapter	Z Close With Adapter

Radiated emissions were investigated as following frequency range:

1. 30 MHz to 9000 MHz for GSM850 and WCDMA Band V
2. 30 MHz to 18000 MHz for WCDMA Band IV
3. 30 MHz to 19100 MHz for GSM1900 and WCDMA Band II

All modes, data rates and positions were investigated.


Test modes are chosen to be reported as the worst case configuration below:

Test Modes		
Band	Radiated TCs	Conducted TCs
GSM850	■ GPRS Class 8 Link ■ EDGE Class 8 Link	■ GPRS Class 8 Link ■ EDGE Class 8 Link
GSM1900	■ GPRS Class 8 Link ■ EDGE Class 8 Link	■ GPRS Class 8 Link ■ EDGE Class 8 Link
WCDMA Band V	■ RMC 12.2Kbps Link	■ RMC 12.2Kbps Link
WCDMA Band II	■ RMC 12.2Kbps Link	■ RMC 12.2Kbps Link
WCDMA Band IV	■ RMC 12.2Kbps Link	■ RMC 12.2Kbps Link

Remark: All the radiated test cases were performed with USB Cable 1.

2.2 Connection Diagram of Test System

<EUT with Adapter>

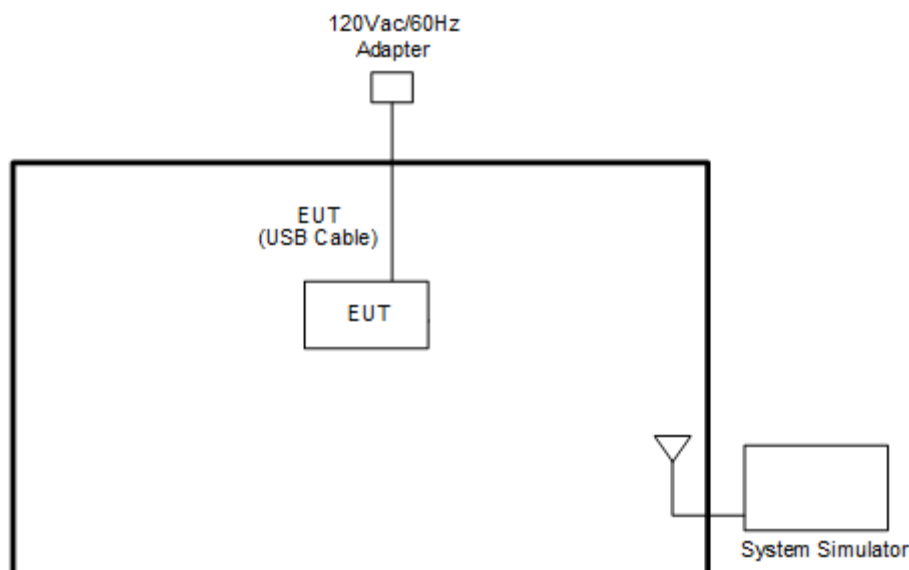

2.3 Support Unit used in test configuration

Item	Equipment	Brand Name	Model No.	FCC ID	Data Cable	Power Cord
1.	System Simulator	Anritsu	MT8821C	N/A	N/A	Unshielded, 1.8 m
2.	System Simulator	R&S	CMU 200	N/A	N/A	Unshielded, 1.8 m
3.	AC Adapter	N/A	GW8L7	N/A	N/A	N/A

2.4 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between RF conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level will be exactly the RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

The following shows an offset computation example with RF cable loss 4.2 dB and a 10 dB attenuator.

Example:

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)} \\ &= 4.2 + 10 = 14.2 \text{ (dB)} \end{aligned}$$



2.5 Frequency List of Low/Middle/High Channels

Frequency List				
Band	Channel/Frequency(MHz)	Lowest	Middle	Highest
GSM850	Channel	128	189	251
	Frequency	824.2	836.4	848.8
WCDMA Band V	Channel	4132	4182	4233
	Frequency	826.4	836.4	846.6
GSM1900	Channel	512	661	810
	Frequency	1850.2	1880.0	1909.8
WCDMA Band II	Channel	9262	9400	9538
	Frequency	1852.4	1880.0	1907.6
WCDMA Band IV	Channel	1312	1413	1513
	Frequency	1712.4	1732.6	1752.6

3 Conducted Test Result

3.1 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.1.1 Test Setup

3.1.2 Conducted Output Power



3.1.3 Peak-to-Average Ratio, Occupied Bandwidth, Conducted Band-Edge and Conducted Spurious Emission



3.1.4 Frequency Stability



3.1.5 Test Result of Conducted Test

Please refer to Appendix A.

3.2 Conducted Output Power and ERP/EIRP

3.2.1 Description of the Conducted Output Power and ERP/EIRP

A system simulator was used to establish communication with the EUT. Its parameters were set to enforce EUT transmitting at the maximum power. The measured power in the radio frequency on the transmitter output terminals shall be reported.

The ERP of mobile transmitters must not exceed 7 Watts for GSM850 and WCDMA Band V

The EIRP of mobile transmitters must not exceed 2 Watts for GSM1900 and WCDMA Band II

The EIRP of mobile transmitters must not exceed 1 Watts for WCDMA Band IV

According to KDB 412172 D01 Power Approach,

$EIRP = P_T + G_T - L_C$, $ERP = EIRP - 2.15$, where

P_T = transmitter output power in dBm

G_T = gain of the transmitting antenna in dBi

L_C = signal attenuation in the connecting cable between the transmitter and antenna in dB

3.2.2 Test Procedures

1. The transmitter output port is connected to the system simulator.
2. Set EUT at maximum power through system simulator.
3. Select the lowest, middle, and the highest channels for each band and different modulation.
4. Measure the maximum burst average power for GSM and maximum average power for other modulation signal.



3.3 Peak-to-Average Ratio

3.3.1 Description of the PAR Measurement

The peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

3.3.2 Test Procedures

The testing follows ANSI C63.26-2015 Section 5.2.6

1. The EUT is connected to spectrum analyzer and system simulator via a power divider.
2. Set EUT to transmit at maximum output power.
3. When the duty cycle is less than 98%, then signal gating will be implemented on the spectrum analyzer by triggering from the system simulator.
4. Set the CCDF (Complementary Cumulative Distribution Function) option of the spectrum analyzer.
5. Record the maximum PAPR level associated with a probability of 0.1%.

3.4 99% Occupied Bandwidth and 26dB Bandwidth Measurement

3.4.1 Description of 99% Occupied Bandwidth and 26dB Bandwidth Measurement

The occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

The 26 dB emission bandwidth is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated 26 dB below the maximum in-band spectral density of the modulated signal. Spectral density (power per unit bandwidth) is to be measured with a detector of resolution bandwidth equal to approximately 1.0% of the emission bandwidth.

3.4.2 Test Procedures

The testing follows ANSI C63.26-2015 Section 5.4.3 (26dB) and Section 5.4.4 (99OB)

1. The EUT is connected to spectrum analyzer and system simulator via a power divider.
2. The spectrum analyzer center frequency is set to the nominal EUT channel center frequency.
The span range for the spectrum analyzer shall be between two and five times the anticipated OBW.
3. The nominal resolution bandwidth (RBW) shall be in the range of 1 to 5 % of the anticipated OBW, and the VBW shall be at least 3 times the RBW.
4. Set the detection mode to peak, and the trace mode to max hold.
5. Determine the reference value: Set the EUT to transmit a modulated signal. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace.
(This is the reference value)
6. Determine the “-26 dB down amplitude” as equal to (Reference Value – X).
7. Place two markers, one at the lowest and the other at the highest frequency of the envelope of the spectral display such that each marker is at or slightly below the “-X dB down amplitude” determined in step 6. If a marker is below this “-X dB down amplitude” value it shall be placed as close as possible to this value. The OBW is the positive frequency difference between the two markers.
8. Use the 99 % power bandwidth function of the spectrum analyzer and report the measured bandwidth.



3.5 Conducted Band Edge

3.5.1 Description of Conducted Band Edge Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.

3.5.2 Test Procedures

The testing follows FCC KDB 971168 D01 v03r01 Section 6.1.

1. The EUT is connected to the spectrum analyzer and system simulator via a power divider.
2. The RF output of EUT is connected to the spectrum analyzer by an RF cable and attenuator. The path loss is compensated to the results for each measurement.
3. The band edges of low and high channels for the highest RF powers are measured.
4. The RF fundamental frequency shall be excluded against the limit line in the operating frequency band.
5. The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)

3.6 Conducted Spurious Emission

3.6.1 Description of Conducted Spurious Emission Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.

It is measured by means of a calibrated spectrum analyzer and scanned from 30 MHz up to a frequency including its 10th harmonic.

3.6.2 Test Procedures

The testing follows FCC KDB 971168 D01 v03r01 Section 6.1.

1. The EUT is connected to the spectrum analyzer and system simulator via a power divider.
2. The RF output of EUT is connected to the spectrum analyzer by an RF cable and attenuator. The path loss is compensated to the results for each measurement.
3. The middle channel for the highest RF power within the transmitting frequency is measured.
4. The conducted spurious emission for the whole frequency range is taken.
5. The RF fundamental frequency shall be excluded against the limit line in the operating frequency band.
6. The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)

3.7 Frequency Stability

3.7.1 Description of Frequency Stability Measurement

22.355

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within $\pm 0.00025\%$ ($\pm 2.5\text{ppm}$) of the center frequency.

24.235 & 27.54

The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

3.7.2 Test Procedures for Temperature Variation

The testing follows FCC KDB 971168 D01 v03r01 Section 9.0.

1. The EUT is set up in the thermal chamber and connected with the system simulator.
2. With power OFF, the temperature is decreased to -30°C and the EUT is stabilized before testing. Power is applied and the maximum change in frequency is recorded within one minute.
3. With power OFF, the temperature is raised in 10°C steps up to 50°C . The EUT is stabilized at each step for at least half an hour. Power is applied and the maximum frequency change is recorded within one minute.

3.7.3 Test Procedures for Voltage Variation

The testing follows FCC KDB 971168 D01 v03r01 Section 9.0.

1. The EUT is placed in a temperature chamber at $20 \pm 5^{\circ}\text{C}$ and connected with the system simulator.
2. The power supply voltage to the EUT is varied from 85% to 115% of the nominal value measured at the input to the EUT.
3. The variation in frequency is measured for the worst case.


4 Radiated Test Items

4.1 Measuring Instruments


Please refer to the measuring equipment list in this test report.

4.2 Test Setup


For radiated test below 30MHz

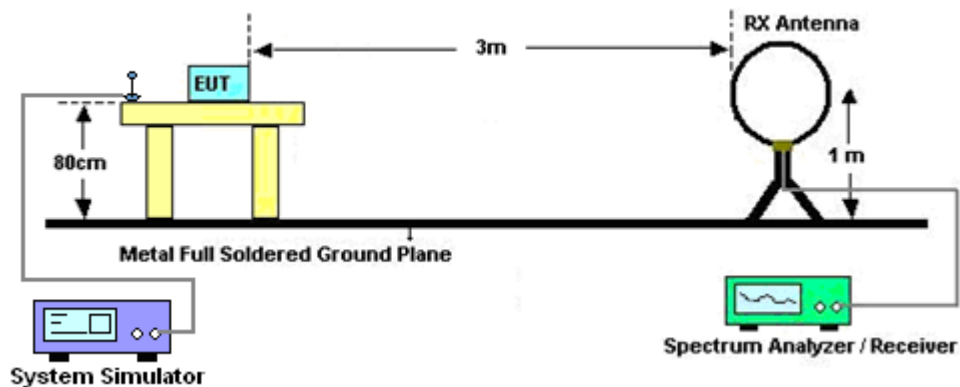


For radiated test from 30MHz to 1GHz

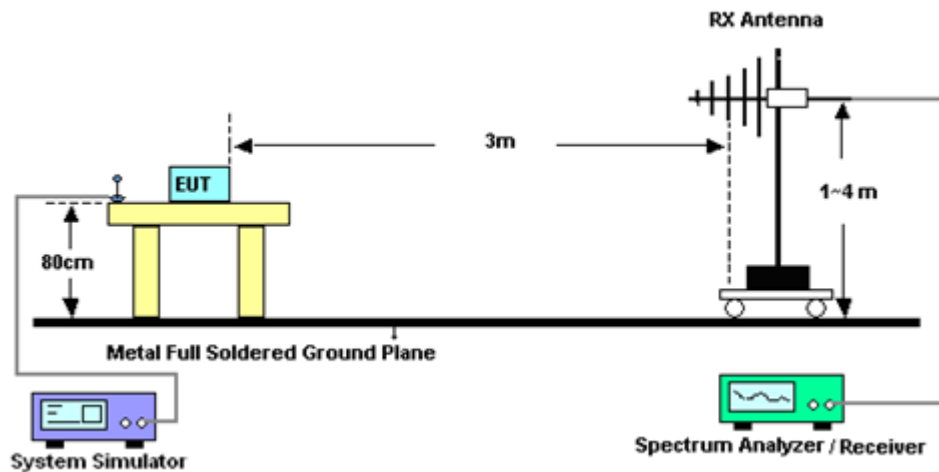

For radiated test from 1GHz to 18GHz

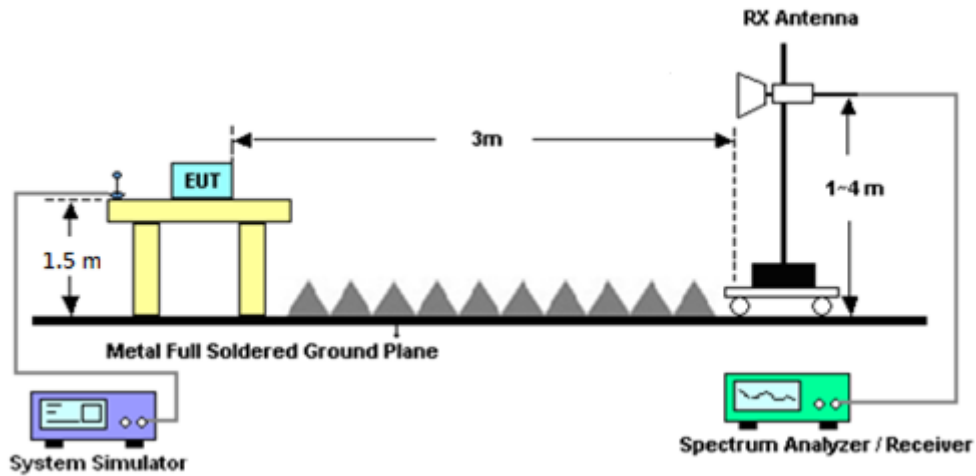

For radiated test above 18GHz

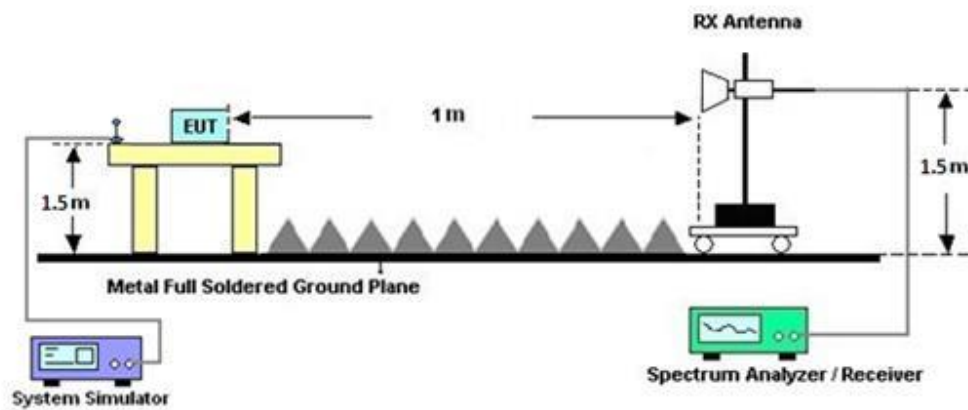

4.3 Test Result of Radiated Test

Please refer to Appendix B.

Note:

The low frequency, which starts from 9 kHz to 30 MHz, is pre-scanned and the result which is 20 dB lower than the limit line is not reported.

There is adequate comparison measurement of both open-field test site and alternative test site - semi-Anechoic chamber according to 414788 D01 Radiated Test Site v01r01, and the result came out very similar.

4.4 Field Strength of Spurious Radiation Measurement

4.4.1 Description of Field Strength of Spurious Radiated Measurement

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB. The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

4.4.2 Test Procedures

The testing follows FCC KDB 971168 D01 v03r01 Section 7 and ANSI C63.26-2015 section 5.5.4 Radiated measurement using the field strength method.

1. The EUT is placed on a rotatable wooden table 0.8 meters for frequency below 1 GHz and 1.5 meter for frequency above 1 GHz above the ground.
2. The EUT is set 3 meters away from the receiving antenna, which is mounted on the antenna tower.
3. The table is rotated 360 degrees to determine the position of the highest spurious emission.
4. The height of the receiving antenna is varied between one meter and four meters to search for the maximum spurious emission for both horizontal and vertical polarizations.
5. Make the measurement with the spectrum analyzer's RBW = 1 MHz, VBW = 3 MHz, taking record of maximum spurious emission.
6. To convert spectrum reading E(dBuV/m) to EIRP(dBm)
$$\text{EIRP(dBm)} = \text{Level (dBuV/m)} + 20\log(d) - 104.77,$$
where d is the distance at which field strength limit is specified in the rules
7. Field Strength Level (dBm) = Spectrum Reading (dBm) + Antenna Factor + Cable Loss + Read Level - Preamp Factor.
8. ERP (dBm) = EIRP (dBm) - 2.15
9. The RF fundamental frequency shall be excluded against the limit line in the operating frequency band.



5 List of Measuring Equipment

Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Loop Antenna	Rohde & Schwarz	HFH2-Z2E	101108	9 kHz~30 MHz	Dec. 18, 2024	Mar. 12 2025~ Apr. 19 2025	Dec. 17, 2025	Radiation (03CH12-HY)
Bilog Antenna	TESEQ	CBL 6111D & 00800N1D01N-06	37059 & 01	30MHz~1GHz	Nov. 27, 2024	Mar. 12 2025~ Apr. 19 2025	Nov. 26, 2025	Radiation (03CH12-HY)
Horn Antenna	SCHWARZBECK	BBHA 9120 D	9120D-02114	1GHz~18GHz	Jul. 11, 2024	Mar. 12 2025~ Apr. 19 2025	Jul. 10, 2025	Radiation (03CH12-HY)
Preamplifier	E-INSTRUMENT TECH LTD.	ERA-100M-18G-56-01-A70	EC1900269	1GHz-18GHz	Dec. 19, 2024	Mar. 12 2025~ Apr. 19 2025	Dec. 18, 2025	Radiation (03CH12-HY)
Spectrum Analyzer	Agilent	N9010A	MY53470118	10Hz~44GHz	Aug.09, 2024	Mar. 12 2025~ Apr. 19 2025	Aug.08, 2025	Radiation (03CH12-HY)
EMI Test Receiver	Agilent	N9038A(MXE)	MY53290053	20Hz~26.5GHz	Sep. 09, 2024	Mar. 12 2025~ Apr. 19 2025	Sep. 08, 2025	Radiation (03CH12-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA 9170	1223	18GHz~40GHz	Jun. 24, 2024	Mar. 12 2025~ Apr. 19 2025	Jun. 23, 2025	Radiation (03CH12-HY)
Preamplifier	EMEC	EM18G40G	060715	18GHz~40GHz	Dec. 02, 2024	Mar. 12 2025~ Apr. 19 2025	Dec. 01, 2025	Radiation (03CH12-HY)
Notch Filter	Wainwright	WHKX12-900-1000-15000-60S	SN11	1GHz High Pass Filter	Mar. 12, 2025	Mar. 12 2025~ Apr. 19 2025	Mar. 11, 2026	Radiation (03CH12-HY)
Notch Filter	Wainwright	WLKS1200-12S	SN2	1.2GHz Low Pass Filter	Mar. 12, 2025	Mar. 12 2025~ Apr. 19 2025	Mar. 11, 2026	Radiation (03CH12-HY)
Notch Filter	Wainwright	WHKX12-2700-3000-18000-60ST	SN2	3GHz High Pass Filter	Mar. 12, 2025	Mar. 12 2025~ Apr. 19 2025	Mar. 11, 2026	Radiation (03CH12-HY)
Notch Filter	Wainwright	WHKX12-2700-3000-18000-60ST	SN2	6.75GHz High Pass Filter	Mar. 12, 2025	Mar. 12 2025~ Apr. 19 2025	Mar. 11, 2026	Radiation (03CH12-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY28655/4 MY24971/4	9kHz~30MHz	Feb. 20, 2025	Mar. 12 2025~ Apr. 19 2025	Feb. 19, 2026	Radiation (03CH12-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	505134/2	30MHz~40GHz	Dec. 19, 2024	Mar. 12 2025~ Apr. 19 2025	Dec. 18, 2025	Radiation (03CH12-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	803955/2	30MHz~40GHz	Nov. 01, 2024	Mar. 12 2025~ Apr. 19 2025	Oct. 31, 2025	Radiation (03CH12-HY)
RF Cable	EMCI	EMC101Y-KM-KM-100	240907	30MHz~40GHz	Nov. 14, 2024	Mar. 12 2025~ Apr. 19 2025	Dec. 13, 2025	Radiation (03CH12-HY)
Hygrometer	TECPEL	DTM-303B	TP210090	N/A	Aug. 29, 2024	Mar. 12 2025~ Apr. 19 2025	Aug. 28, 2025	Radiation (03CH12-HY)
Controller	EMEC	EM1000	N/A	Control Turn table & Ant Mast	N/A	Mar. 12 2025~ Apr. 19 2025	N/A	Radiation (03CH12-HY)
Antenna Mast	EMEC	AM-BS-4500-B	N/A	1m~4m	N/A	Mar. 12 2025~ Apr. 19 2025	N/A	Radiation (03CH12-HY)
Turn Table	EMEC	TT2000	N/A	0~360 Degree	N/A	Mar. 12 2025~ Apr. 19 2025	N/A	Radiation (03CH12-HY)
Software	Audix	E3 6.2009-8-24	RK-000989	N/A	N/A	Mar. 12 2025~ Apr. 19 2025	N/A	Radiation (03CH12-HY)



Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	Rohde & Schwarz	FSP30	101329	9kHz~30GHz	Sep. 25, 2024	Mar. 25, 2025~ Mar. 31, 2025	Sep. 24, 2025	Conducted (TH03-HY)
DC Power Supply	GW Instek	GPE-2323	GEU871221	0V~64V ; 0A~6A	Apr. 09, 2024	Mar. 25, 2025~ Mar. 31, 2025	Apr. 08, 2025	Conducted (TH03-HY)
Base Station (Measure)	Rohde & Schwarz	CMU200	117995	GSM / GPRS / WCDMA / CDMA	Aug. 08, 2024	Mar. 25, 2025~ Mar. 31, 2025	Aug. 07, 2025	Conducted (TH03-HY)
Temperature & Humidity Cabinet Chamber	ESPEC	SH-641	92013720	-40°C~90°C	Sep. 06, 2024	Mar. 25, 2025~ Mar. 31, 2025	Sep. 05, 2025	Conducted (TH03-HY)
Hygrometer	TECEPIL	DTM-303A	TP201996	N/A	Nov. 01, 2024	Mar. 25, 2025~ Mar. 31, 2025	Oct. 31, 2025	Conducted (TH03-HY)

6 Measurement Uncertainty

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	6.3 dB
---	--------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 6 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.7 dB
---	--------

Uncertainty of Radiated Emission Measurement (6 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.0 dB
---	--------

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.1 dB
---	--------



Appendix A. Test Results of Conducted Test

Conducted Output Power(Average power) & ERP / EIRP

<Tx0>

GSM850 Maximum Average Power [dBm] (GT - LC = -4.44 dB)					
Channel	128	189	251	ERP (dBm)	ERP (W)
Frequency	824.2	836.4	848.8		
GSM	32.65	32.76	32.66	26.20	0.4169
GPRS class 8	32.66	32.79	32.70		
GPRS class 10	31.48	31.19	31.25		
GPRS class 11	30.71	30.36	30.27		
GPRS class 12	29.46	29.21	29.00		
EGPRS class 8	26.64	26.69	26.65	20.10	0.1023
EGPRS class 10	25.61	25.75	25.52		
EGPRS class 11	24.54	24.60	24.36		
EGPRS class 12	23.20	23.15	23.11		
Limit	ERP < 7W			Result	Pass

GSM1900 Maximum Average Power [dBm] (GT - LC = 0.31 dB)					
Channel	512	661	810	EIRP (dBm)	EIRP (W)
Frequency	1850.2	1880	1909.8		
GSM	29.46	29.79	29.75	30.12	1.0280
GPRS class 8	29.50	29.81	29.79		
GPRS class 10	27.50	27.68	27.59		
GPRS class 11	27.03	27.20	27.10		
GPRS class 12	26.16	26.43	26.27		
EGPRS class 8	25.32	25.68	25.60	25.99	0.3972
EGPRS class 10	24.31	24.02	24.16		
EGPRS class 11	23.22	23.08	22.74		
EGPRS class 12	22.17	22.14	22.01		
Limit	EIRP < 2W			Result	Pass



WCDMA Band V Maximum Average Power [dBm] (GT - LC = -4.44 dB)					
Channel	4132	4182	4233	ERP (dBm)	ERP (W)
Frequency	826.4	836.4	846.6		
RMC 12.2K	24.56	24.57	24.42		
HSDPA Subtest-1	24.45	24.38	24.52		
HSDPA Subtest-2	24.48	24.52	24.52		
HSDPA Subtest-3	24.25	24.23	24.15		
HSDPA Subtest-4	24.30	24.29	24.09		
HSUPA Subtest-1	23.66	23.48	23.31		
HSUPA Subtest-2	22.23	22.12	21.95		
HSUPA Subtest-3	23.51	23.36	23.24		
HSUPA Subtest-4	22.44	22.33	22.31		
HSUPA Subtest-5	24.50	24.50	24.40		
Limit	ERP < 7W			Result	Pass

WCDMA Band II Maximum Average Power [dBm] (GT - LC = 0.31 dB)					
Channel	9262	9400	9538	EIRP (dBm)	EIRP (W)
Frequency	1852.4	1880	1907.6		
RMC 12.2K	24.08	24.11	23.94		
HSDPA Subtest-1	24.10	24.10	23.67		
HSDPA Subtest-2	24.10	24.05	23.98		
HSDPA Subtest-3	24.10	24.05	23.94		
HSDPA Subtest-4	24.04	24.00	23.89		
HSUPA Subtest-1	23.05	23.07	23.00		
HSUPA Subtest-2	22.50	22.65	22.35		
HSUPA Subtest-3	23.03	22.99	22.88		
HSUPA Subtest-4	22.51	22.21	22.27		
HSUPA Subtest-5	24.00	24.10	23.90		
Limit	EIRP < 2W			Result	Pass

WCDMA Band IV Maximum Average Power [dBm] (GT - LC = -1.15 dB)					
Channel	1312	1413	1513	EIRP (dBm)	EIRP (W)
Frequency	1712.4	1732.6	1752.6		
RMC 12.2K	24.04	23.89	23.90		
HSDPA Subtest-1	23.81	23.85	23.87		
HSDPA Subtest-2	24.00	23.89	23.79		
HSDPA Subtest-3	24.00	23.88	23.77		
HSDPA Subtest-4	24.02	23.72	23.81		
HSUPA Subtest-1	23.03	23.08	23.03		
HSUPA Subtest-2	22.92	22.65	22.72		
HSUPA Subtest-3	23.05	22.99	22.76		
HSUPA Subtest-4	22.96	22.92	22.84		
HSUPA Subtest-5	24.00	23.90	23.90		
Limit	EIRP < 1W			Result	Pass


<Tx1>

GSM850 Maximum Average Power [dBm] (GT - LC = -7.01 dB)					
Channel	128	189	251	ERP (dBm)	ERP (W)
Frequency	824.2	836.4	848.8		
GSM	32.66	32.77	32.60	23.67	0.2328
GPRS class 8	32.71	32.83	32.63		
GPRS class 10	31.62	31.45	31.17		
GPRS class 11	30.81	30.42	30.40		
GPRS class 12	29.68	29.26	29.20		
EGPRS class 8	26.73	26.73	26.72	17.57	0.0571
EGPRS class 10	25.86	25.71	25.63		
EGPRS class 11	24.70	24.79	24.36		
EGPRS class 12	23.23	23.32	22.87		
Limit	ERP < 7W			Result	Pass

GSM1900 Maximum Average Power [dBm] (GT - LC = -3.51 dB)					
Channel	512	661	810	EIRP (dBm)	EIRP (W)
Frequency	1850.2	1880	1909.8		
GSM	29.66	29.57	29.56	26.17	0.4140
GPRS class 8	29.68	29.61	29.61		
GPRS class 10	27.69	27.51	27.38		
GPRS class 11	27.12	27.02	26.86		
GPRS class 12	26.35	25.98	25.85		
EGPRS class 8	25.60	25.48	25.23	22.09	0.1618
EGPRS class 10	24.17	23.99	23.76		
EGPRS class 11	23.26	22.82	22.86		
EGPRS class 12	22.26	22.17	21.81		
Limit	EIRP < 2W			Result	Pass



WCDMA Band V Maximum Average Power [dBm] (GT - LC = -7.01 dB)					
Channel	4132	4182	4233	ERP (dBm)	ERP (W)
Frequency	826.4	836.4	846.6		
RMC 12.2K	24.28	24.22	24.07		
HSDPA Subtest-1	24.11	24.10	24.01		
HSDPA Subtest-2	24.25	24.10	23.93		
HSDPA Subtest-3	22.92	22.74	22.66		
HSDPA Subtest-4	23.38	23.34	23.22		
HSUPA Subtest-1	23.19	23.01	23.07		
HSUPA Subtest-2	21.94	21.72	21.66		
HSUPA Subtest-3	23.02	22.86	22.70		
HSUPA Subtest-4	21.67	21.75	21.69		
HSUPA Subtest-5	24.20	24.10	24.10		
Limit	ERP < 7W			Result	Pass

WCDMA Band II Maximum Average Power [dBm] (GT - LC = -3.51 dB)					
Channel	9262	9400	9538	EIRP (dBm)	EIRP (W)
Frequency	1852.4	1880	1907.6		
RMC 12.2K	24.33	24.12	23.99		
HSDPA Subtest-1	24.25	24.16	24.00		
HSDPA Subtest-2	24.26	24.22	24.02		
HSDPA Subtest-3	24.30	24.20	23.91		
HSDPA Subtest-4	24.24	24.25	24.06		
HSUPA Subtest-1	23.09	23.01	23.05		
HSUPA Subtest-2	22.99	22.93	22.74		
HSUPA Subtest-3	23.29	23.27	23.03		
HSUPA Subtest-4	23.00	22.99	22.84		
HSUPA Subtest-5	24.30	24.20	24.10		
Limit	EIRP < 2W			Result	Pass

WCDMA Band IV Maximum Average Power [dBm] (GT - LC = -5.92 dB)					
Channel	1312	1413	1513	EIRP (dBm)	EIRP (W)
Frequency	1712.4	1732.6	1752.6		
RMC 12.2K	24.19	23.95	23.99		
HSDPA Subtest-1	24.16	24.01	23.95		
HSDPA Subtest-2	24.15	24.09	23.86		
HSDPA Subtest-3	24.13	24.00	23.90		
HSDPA Subtest-4	24.17	23.95	23.93		
HSUPA Subtest-1	23.31	23.18	23.07		
HSUPA Subtest-2	22.99	22.97	22.97		
HSUPA Subtest-3	23.30	23.11	23.04		
HSUPA Subtest-4	22.97	22.95	22.92		
HSUPA Subtest-5	24.10	24.00	23.90		
Limit	EIRP < 1W			Result	Pass







A2. GSM

Peak-to-Average Ratio







Mode	GSM850		Limit: 13dB
Mod.	GPRS class 8	EDGE class 8	Result
Lowest CH	0.64	3.44	PASS
Middle CH	0.64	3.36	
Highest CH	0.68	3.36	

Mode	GSM1900		Limit: 13dB
Mod.	GPRS class 8	EDGE class 8	Result
Lowest CH	0.76	3.72	PASS
Middle CH	0.76	3.32	
Highest CH	0.80	3.32	

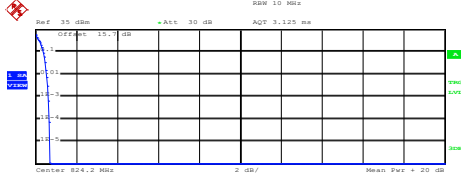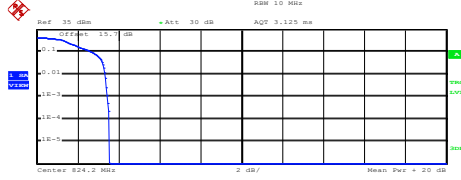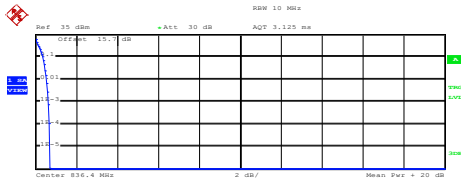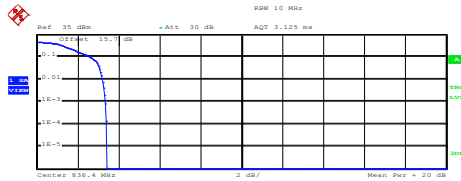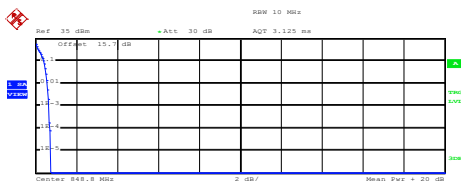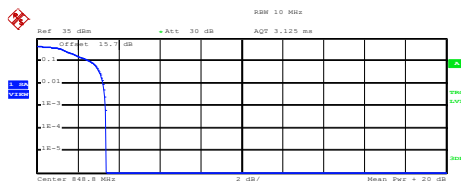

GSM850 (GPRS class 8)		GSM850 (EDGE class 8)	
Lowest Channel		Lowest Channel	
 Center: 824.2 MHz 2 dB/ Mean Pwr + 20 dB Complementary Cumulative Distribution Function (100000 samples) Trace 1 Mean 32.49 dBm Peak 33.20 dBm Crest 0.72 dB 10 % 0.40 dB 1 % 0.56 dB .1 % 0.64 dB .01 % 0.68 dB Date: 31.MAR.2025 10:50:38		 Center: 824.2 MHz 2 dB/ Mean Pwr + 20 dB Complementary Cumulative Distribution Function (100000 samples) Trace 1 Mean 26.56 dBm Peak 30.10 dBm Crest 3.54 dB 10 % 2.72 dB 1 % 3.32 dB .1 % 3.44 dB .01 % 3.56 dB Date: 31.MAR.2025 11:30:32	
Middle Channel		Middle Channel	
 Center: 836.4 MHz 2 dB/ Mean Pwr + 20 dB Complementary Cumulative Distribution Function (100000 samples) Trace 1 Mean 32.52 dBm Peak 33.20 dBm Crest 0.69 dB 10 % 0.36 dB 1 % 0.56 dB .1 % 0.64 dB .01 % 0.68 dB Date: 31.MAR.2025 10:50:59		 Center: 836.4 MHz 2 dB/ Mean Pwr + 20 dB Complementary Cumulative Distribution Function (100000 samples) Trace 1 Mean 26.98 dBm Peak 30.38 dBm Crest 3.40 dB 10 % 2.64 dB 1 % 3.20 dB .1 % 3.36 dB .01 % 3.40 dB Date: 31.MAR.2025 11:30:53	
Highest Channel		Highest Channel	
 Center: 848.8 MHz 2 dB/ Mean Pwr + 20 dB Complementary Cumulative Distribution Function (100000 samples) Trace 1 Mean 32.74 dBm Peak 33.49 dBm Crest 0.75 dB 10 % 0.40 dB 1 % 0.56 dB .1 % 0.68 dB .01 % 0.72 dB Date: 31.MAR.2025 10:51:17		 Center: 848.8 MHz 2 dB/ Mean Pwr + 20 dB Complementary Cumulative Distribution Function (100000 samples) Trace 1 Mean 27.01 dBm Peak 30.38 dBm Crest 3.37 dB 10 % 2.60 dB 1 % 3.24 dB .1 % 3.36 dB .01 % 3.40 dB Date: 31.MAR.2025 11:31:09	

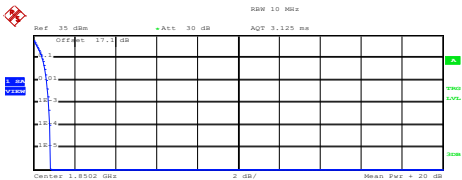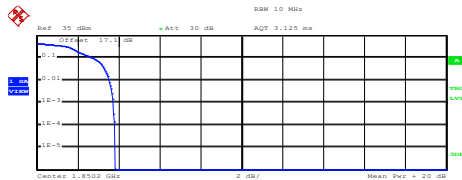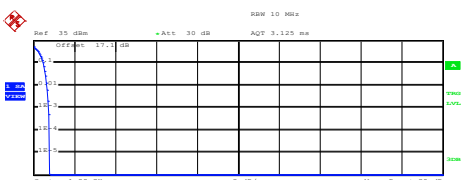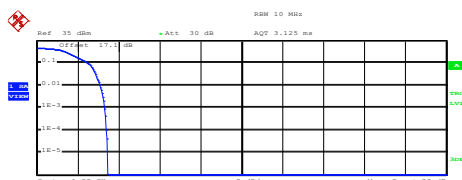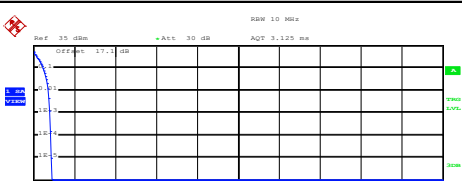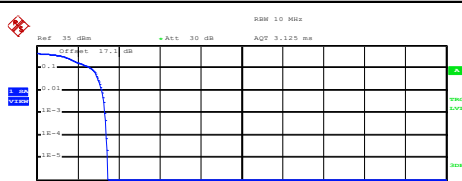

GSM1900 (GPRS class 8)		GSM1900 (EDGE class 8)	
Lowest Channel		Lowest Channel	
 Complementary Cumulative Distribution Function (100000 samples) Trace 1 Mean 29.78 dBm Peak 30.59 dBm Crest 0.81 dB 10 % 0.44 dB 1 % 0.64 dB .1 % 0.76 dB .01 % 0.80 dB Date: 31.MAR.2025 11:50:32		 Complementary Cumulative Distribution Function (100000 samples) Trace 1 Mean 25.64 dBm Peak 29.46 dBm Crest 3.82 dB 10 % 2.76 dB 1 % 3.56 dB .1 % 3.72 dB .01 % 3.80 dB Date: 31.MAR.2025 13:48:01	
Middle Channel		Middle Channel	
 Complementary Cumulative Distribution Function (100000 samples) Trace 1 Mean 30.03 dBm Peak 30.80 dBm Crest 0.77 dB 10 % 0.48 dB 1 % 0.68 dB .1 % 0.76 dB .01 % 0.80 dB Date: 31.MAR.2025 11:50:50		 Complementary Cumulative Distribution Function (100000 samples) Trace 1 Mean 26.29 dBm Peak 29.75 dBm Crest 3.46 dB 10 % 2.48 dB 1 % 3.08 dB .1 % 3.32 dB .01 % 3.40 dB Date: 31.MAR.2025 13:48:20	
Highest Channel		Highest Channel	
 Complementary Cumulative Distribution Function (100000 samples) Trace 1 Mean 29.89 dBm Peak 30.80 dBm Crest 0.91 dB 10 % 0.48 dB 1 % 0.72 dB .1 % 0.80 dB .01 % 0.84 dB Date: 31.MAR.2025 11:51:07		 Complementary Cumulative Distribution Function (100000 samples) Trace 1 Mean 26.08 dBm Peak 29.53 dBm Crest 3.45 dB 10 % 2.64 dB 1 % 3.16 dB .1 % 3.32 dB .01 % 3.40 dB Date: 31.MAR.2025 13:48:39	


**26dB Bandwidth**

Mode	GSM850 : 26dB BW(MHz)	
Mod.	GPRS class 8	EDGE class 8
Lowest CH	0.314	0.313
Middle CH	0.314	0.309
Highest CH	0.316	0.314

Mode	GSM1900 : 26dB BW(MHz)	
Mod.	GPRS class 8	EDGE class 8
Lowest CH	0.322	0.303
Middle CH	0.315	0.316
Highest CH	0.312	0.317

GSM850 (GPRS class 8)


Lowest Channel

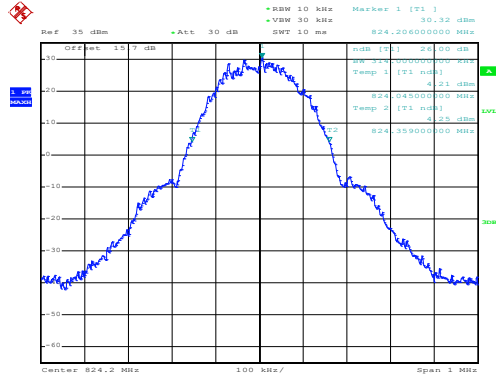

Date: 31.MAR.2025 10:37:52


GSM850 (EDGE class 8)

Lowest Channel

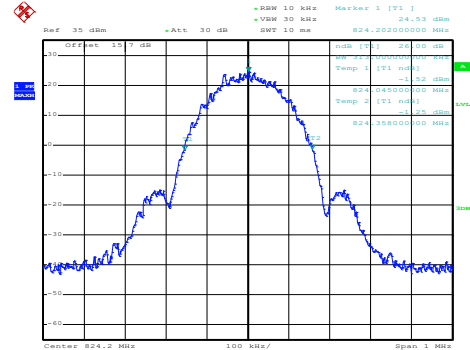


Date: 31.MAR.2025 10:54:53

Middle Channel

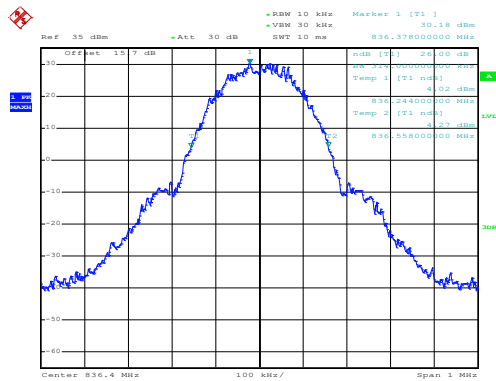


Date: 31.MAR.2025 10:38:33

Middle Channel

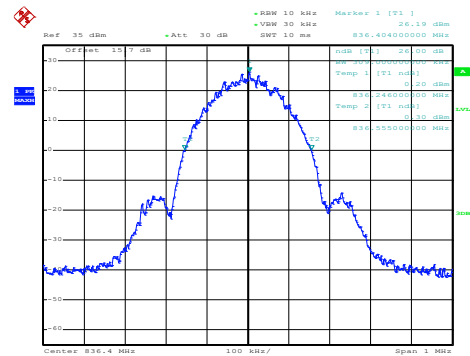


Date: 31.MAR.2025 10:55:28

Highest Channel

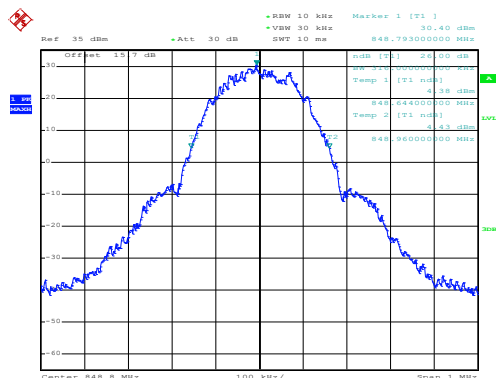


Date: 31.MAR.2025 10:39:08

Highest Channel

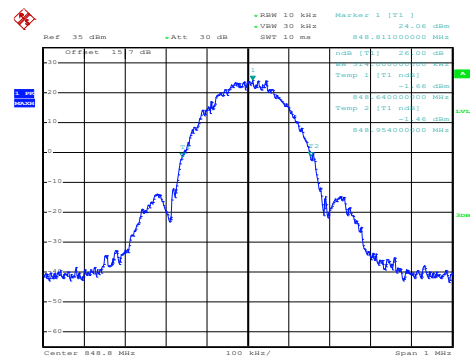

Date: 31.MAR.2025 10:56:05

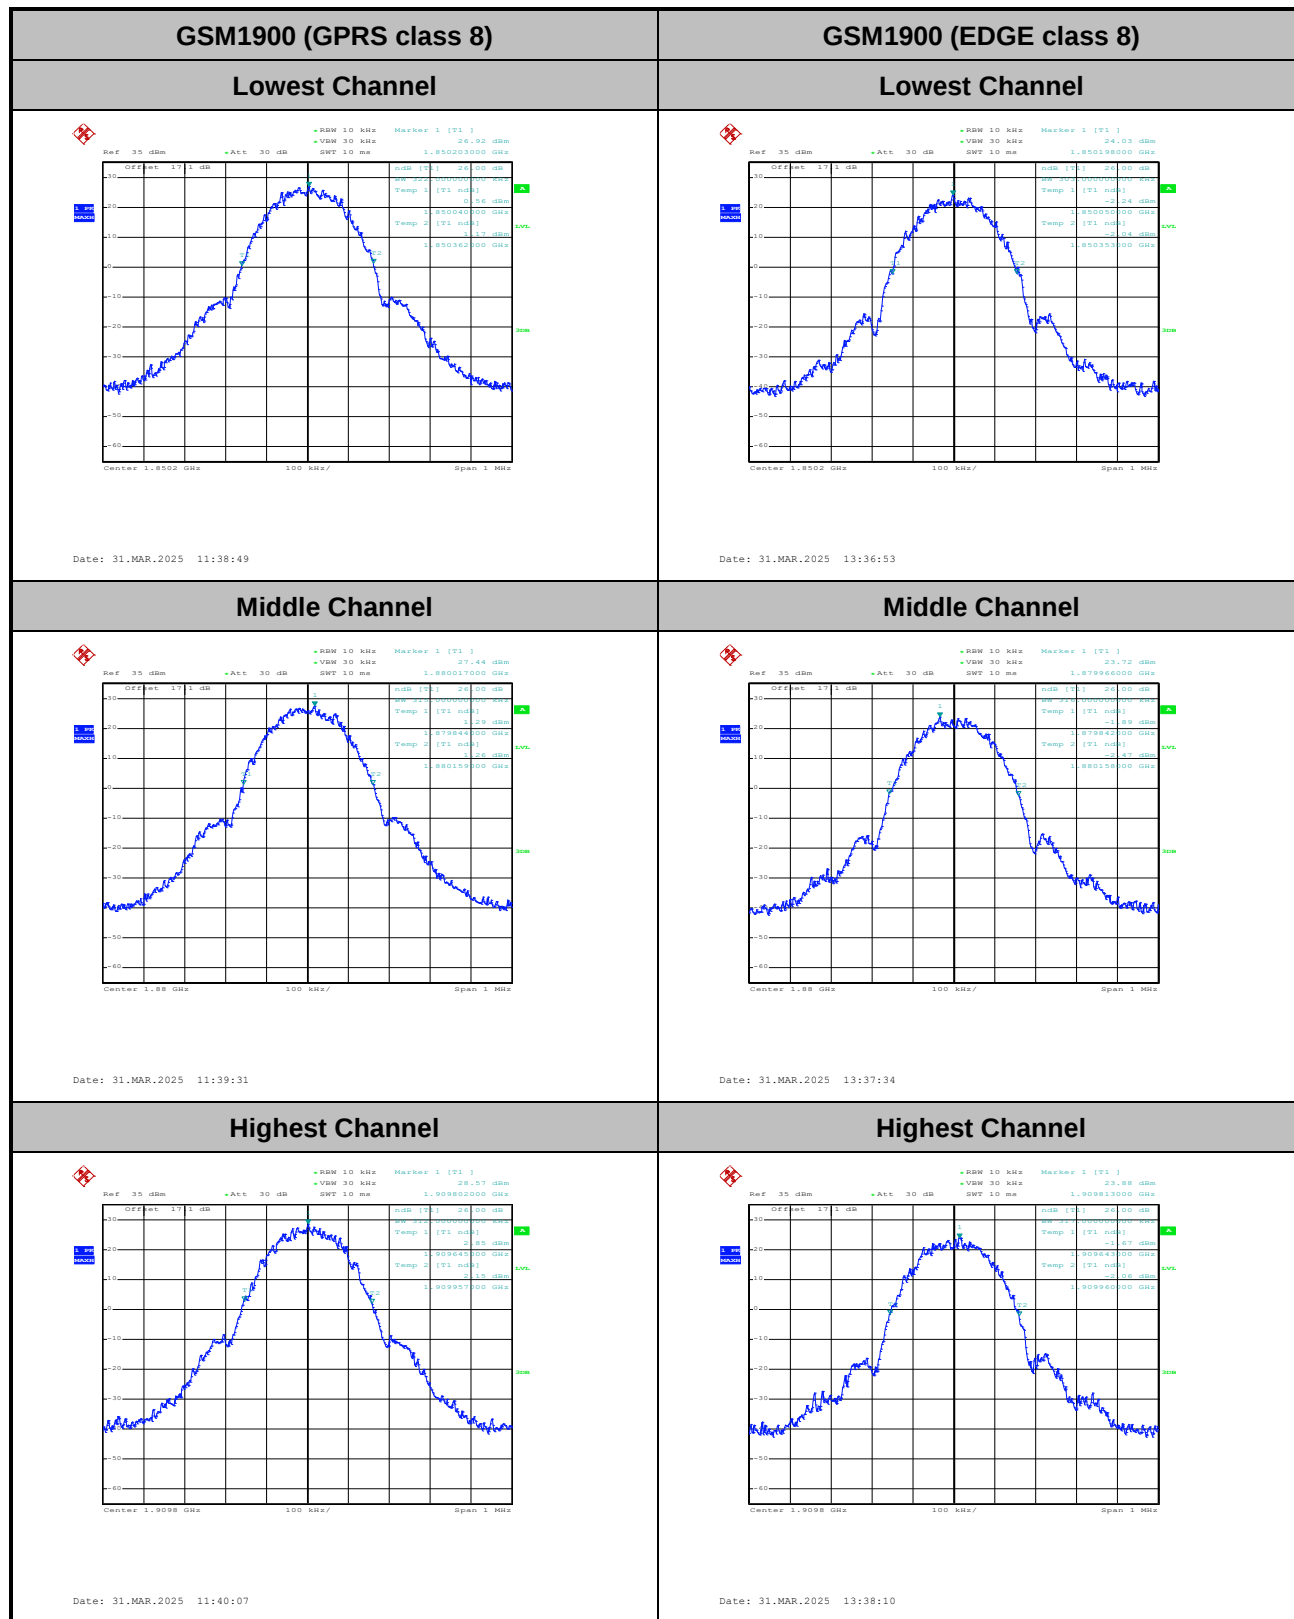

**Occupied Bandwidth**


Mode	GSM850 : 99%OBW(MHz)	
Mod.	GPRS class 8	EDGE class 8
Lowest CH	0.246	0.247
Middle CH	0.244	0.245
Highest CH	0.246	0.247

Mode	GSM1900 : 99%OBW(MHz)	
Mod.	GPRS class 8	EDGE class 8
Lowest CH	0.245	0.249
Middle CH	0.245	0.249
Highest CH	0.248	0.242



GSM850 (GPRS class 8)


Lowest Channel

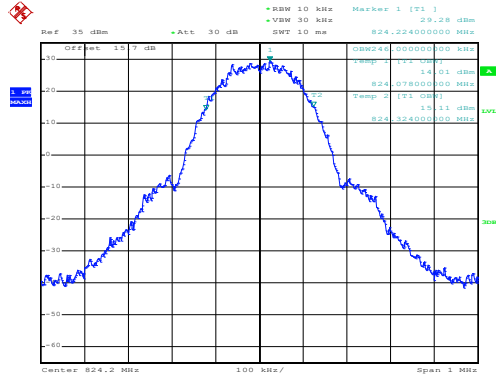

Date: 31.MAR.2025 10:40:44


GSM850 (EDGE class 8)

Lowest Channel

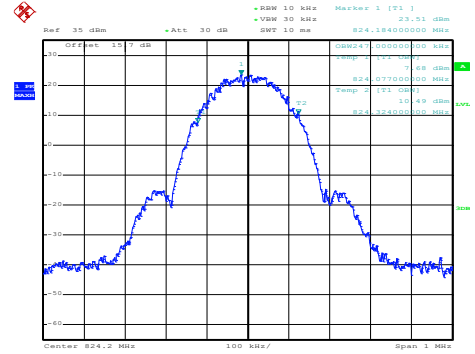


Date: 31.MAR.2025 11:17:15

Middle Channel

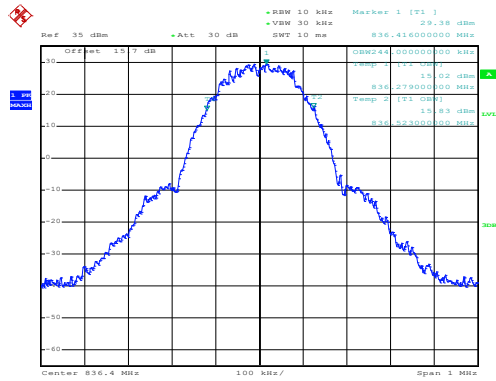


Date: 31.MAR.2025 10:41:58

Middle Channel

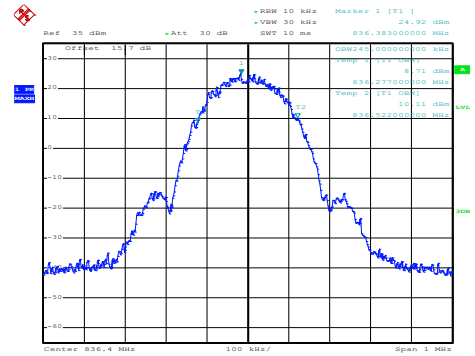


Date: 31.MAR.2025 11:17:55

Highest Channel

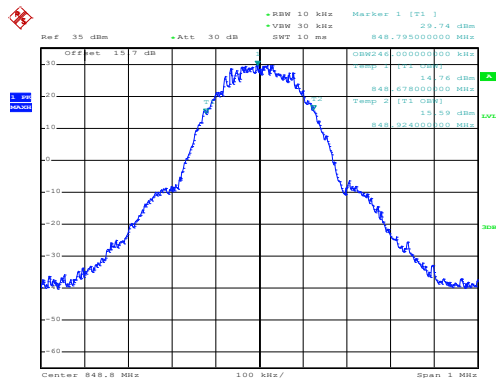

Date: 31.MAR.2025 10:42:34

Highest Channel

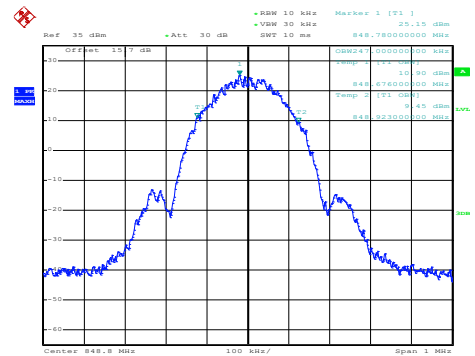


Date: 31.MAR.2025 11:18:41



Conducted Band Edge


GSM850 (GPRS class 8)

Lowest Band Edge

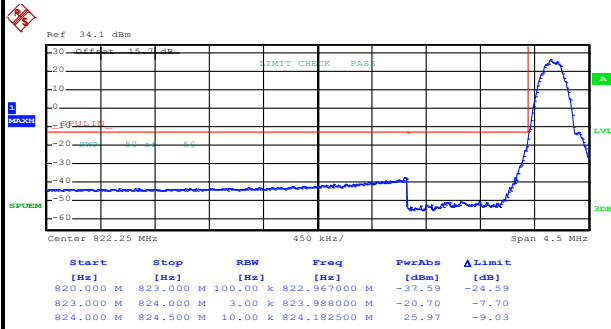

Date: 31.MAR.2025 10:44:44


Highest Band Edge

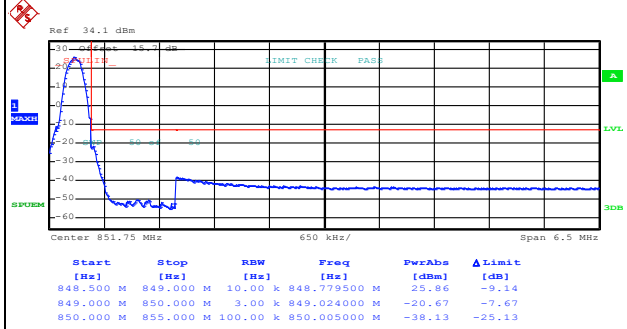

Date: 31.MAR.2025 10:46:21


GSM850 (EDGE class 8)

Lowest Band Edge

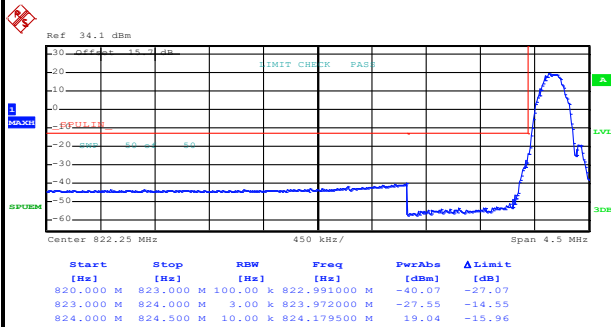

Date: 31.MAR.2025 11:20:35

Highest Band Edge

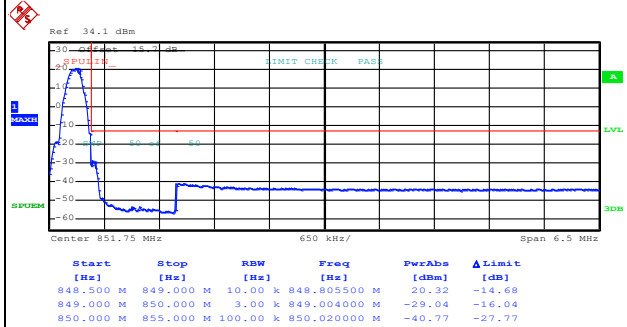


Date: 31.MAR.2025 11:22:39




GSM1900 (GPRS class 8)

Lowest Band Edge

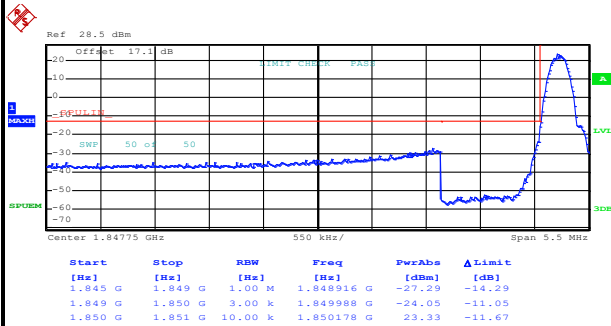

Date: 31.MAR.2025 11:44:33


Highest Band Edge

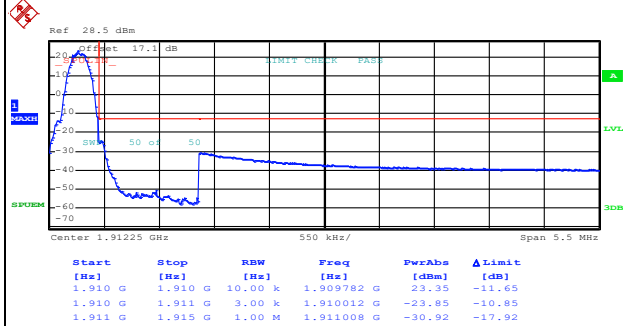

Date: 31.MAR.2025 11:46:10


GSM1900 (EDGE class 8)

Lowest Band Edge

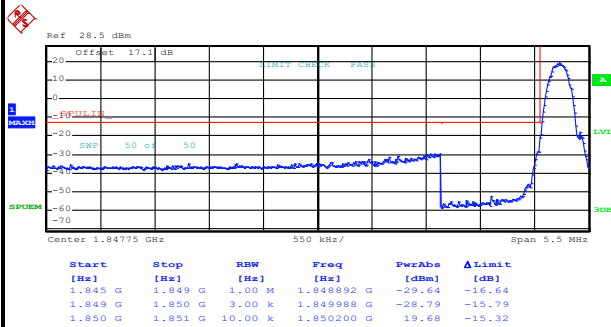

Date: 31.MAR.2025 13:42:41

Highest Band Edge

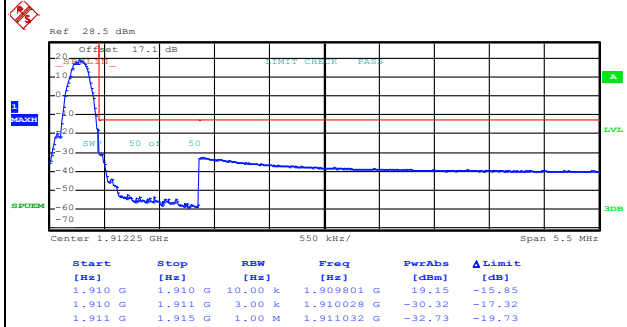







Date: 31.MAR.2025 13:44:18



Conducted Spurious Emission

GSM850 (GPRS class 8)		GSM850 (EDGE class 8)	
Lowest Channel		Lowest Channel	
</			

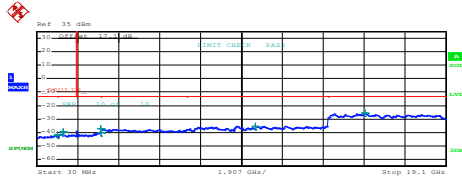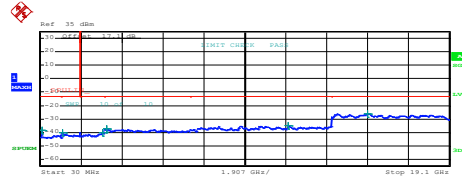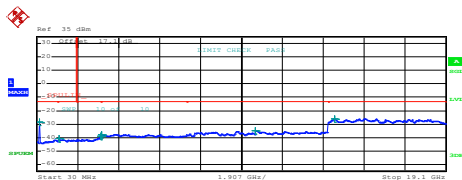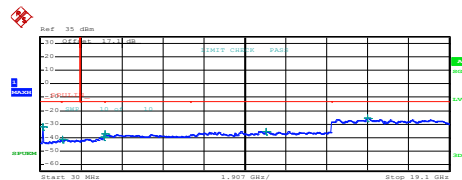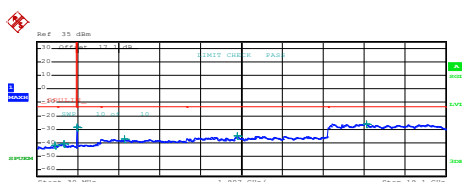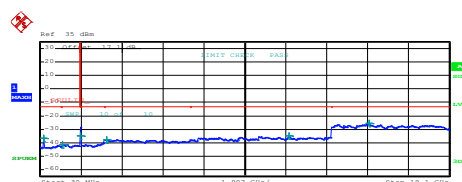

GSM1900 (GPRS class 8)		GSM1900 (EDGE class 8)																																																																																																	
Lowest Channel		Lowest Channel																																																																																																	
 <table><tr><th>Start</th><th>Stop</th><th>RBW</th><th>Freq</th><th>PerAbn</th><th>ΔLimit</th></tr><tr><th>[Hz]</th><th>[Hz]</th><th>[Hz]</th><th>[Hz]</th><th>[dBm]</th><th>[dB]</th></tr><tr><td>30.000 M</td><td>1.000 G</td><td>1.00 M</td><td>998.787500 M</td><td>-43.98</td><td>-26.94</td></tr><tr><td>1.000 G</td><td>1.845 G</td><td>1.00 M</td><td>1.250754 G</td><td>-39.69</td><td>-26.69</td></tr><tr><td>1.845 G</td><td>3.000 G</td><td>1.00 M</td><td>2.987251 G</td><td>-40.08</td><td>-27.08</td></tr><tr><td>3.000 G</td><td>7.000 G</td><td>1.00 M</td><td>3.022000 G</td><td>-37.02</td><td>-24.02</td></tr><tr><td>7.000 G</td><td>13.600 G</td><td>1.00 M</td><td>10.221625 G</td><td>-35.19</td><td>-22.19</td></tr><tr><td>13.600 G</td><td>19.100 G</td><td>1.00 M</td><td>15.329062 G</td><td>-25.79</td><td>-12.79</td></tr></table> Date: 31.MAR.2025 11:47:18		Start	Stop	RBW	Freq	PerAbn	ΔLimit	[Hz]	[Hz]	[Hz]	[Hz]	[dBm]	[dB]	30.000 M	1.000 G	1.00 M	998.787500 M	-43.98	-26.94	1.000 G	1.845 G	1.00 M	1.250754 G	-39.69	-26.69	1.845 G	3.000 G	1.00 M	2.987251 G	-40.08	-27.08	3.000 G	7.000 G	1.00 M	3.022000 G	-37.02	-24.02	7.000 G	13.600 G	1.00 M	10.221625 G	-35.19	-22.19	13.600 G	19.100 G	1.00 M	15.329062 G	-25.79	-12.79	 <table><tr><th>Start</th><th>Stop</th><th>RBW</th><th>Freq</th><th>PerAbn</th><th>ΔLimit</th></tr><tr><th>[Hz]</th><th>[Hz]</th><th>[Hz]</th><th>[Hz]</th><th>[dBm]</th><th>[dB]</th></tr><tr><td>30.000 M</td><td>1.000 G</td><td>1.00 M</td><td>112.207500 M</td><td>-38.40</td><td>-25.40</td></tr><tr><td>1.000 G</td><td>1.845 G</td><td>1.00 M</td><td>1.066755 G</td><td>-40.04</td><td>-27.04</td></tr><tr><td>1.845 G</td><td>3.000 G</td><td>1.00 M</td><td>2.994629 G</td><td>-40.12</td><td>-27.12</td></tr><tr><td>3.000 G</td><td>7.000 G</td><td>1.00 M</td><td>3.104000 G</td><td>-37.45</td><td>-24.45</td></tr><tr><td>7.000 G</td><td>13.600 G</td><td>1.00 M</td><td>11.595250 G</td><td>-35.02</td><td>-22.02</td></tr><tr><td>13.600 G</td><td>19.100 G</td><td>1.00 M</td><td>15.283687 G</td><td>-26.16</td><td>-13.16</td></tr></table> Date: 31.MAR.2025 13:45:36		Start	Stop	RBW	Freq	PerAbn	ΔLimit	[Hz]	[Hz]	[Hz]	[Hz]	[dBm]	[dB]	30.000 M	1.000 G	1.00 M	112.207500 M	-38.40	-25.40	1.000 G	1.845 G	1.00 M	1.066755 G	-40.04	-27.04	1.845 G	3.000 G	1.00 M	2.994629 G	-40.12	-27.12	3.000 G	7.000 G	1.00 M	3.104000 G	-37.45	-24.45	7.000 G	13.600 G	1.00 M	11.595250 G	-35.02	-22.02	13.600 G	19.100 G	1.00 M	15.283687 G	-26.16	-13.16
Start	Stop	RBW	Freq	PerAbn	ΔLimit																																																																																														
[Hz]	[Hz]	[Hz]	[Hz]	[dBm]	[dB]																																																																																														
30.000 M	1.000 G	1.00 M	998.787500 M	-43.98	-26.94																																																																																														
1.000 G	1.845 G	1.00 M	1.250754 G	-39.69	-26.69																																																																																														
1.845 G	3.000 G	1.00 M	2.987251 G	-40.08	-27.08																																																																																														
3.000 G	7.000 G	1.00 M	3.022000 G	-37.02	-24.02																																																																																														
7.000 G	13.600 G	1.00 M	10.221625 G	-35.19	-22.19																																																																																														
13.600 G	19.100 G	1.00 M	15.329062 G	-25.79	-12.79																																																																																														
Start	Stop	RBW	Freq	PerAbn	ΔLimit																																																																																														
[Hz]	[Hz]	[Hz]	[Hz]	[dBm]	[dB]																																																																																														
30.000 M	1.000 G	1.00 M	112.207500 M	-38.40	-25.40																																																																																														
1.000 G	1.845 G	1.00 M	1.066755 G	-40.04	-27.04																																																																																														
1.845 G	3.000 G	1.00 M	2.994629 G	-40.12	-27.12																																																																																														
3.000 G	7.000 G	1.00 M	3.104000 G	-37.45	-24.45																																																																																														
7.000 G	13.600 G	1.00 M	11.595250 G	-35.02	-22.02																																																																																														
13.600 G	19.100 G	1.00 M	15.283687 G	-26.16	-13.16																																																																																														
Middle Channel		Middle Channel																																																																																																	
 <table><tr><th>Start</th><th>Stop</th><th>RBW</th><th>Freq</th><th>PerAbn</th><th>ΔLimit</th></tr><tr><th>[Hz]</th><th>[Hz]</th><th>[Hz]</th><th>[Hz]</th><th>[dBm]</th><th>[dB]</th></tr><tr><td>30.000 M</td><td>1.000 G</td><td>1.00 M</td><td>141.792500 M</td><td>-28.52</td><td>-15.52</td></tr><tr><td>1.000 G</td><td>1.845 G</td><td>1.00 M</td><td>1.060203 G</td><td>-40.85</td><td>-27.85</td></tr><tr><td>1.845 G</td><td>3.000 G</td><td>1.00 M</td><td>2.998372 G</td><td>-39.13</td><td>-26.13</td></tr><tr><td>3.000 G</td><td>7.000 G</td><td>1.00 M</td><td>3.045000 G</td><td>-37.59</td><td>-24.59</td></tr><tr><td>7.000 G</td><td>13.600 G</td><td>1.00 M</td><td>10.215025 G</td><td>-34.98</td><td>-21.98</td></tr><tr><td>13.600 G</td><td>19.100 G</td><td>1.00 M</td><td>13.928625 G</td><td>-26.00</td><td>-13.00</td></tr></table> Date: 31.MAR.2025 11:48:44		Start	Stop	RBW	Freq	PerAbn	ΔLimit	[Hz]	[Hz]	[Hz]	[Hz]	[dBm]	[dB]	30.000 M	1.000 G	1.00 M	141.792500 M	-28.52	-15.52	1.000 G	1.845 G	1.00 M	1.060203 G	-40.85	-27.85	1.845 G	3.000 G	1.00 M	2.998372 G	-39.13	-26.13	3.000 G	7.000 G	1.00 M	3.045000 G	-37.59	-24.59	7.000 G	13.600 G	1.00 M	10.215025 G	-34.98	-21.98	13.600 G	19.100 G	1.00 M	13.928625 G	-26.00	-13.00	 <table><tr><th>Start</th><th>Stop</th><th>RBW</th><th>Freq</th><th>PerAbn</th><th>ΔLimit</th></tr><tr><th>[Hz]</th><th>[Hz]</th><th>[Hz]</th><th>[Hz]</th><th>[dBm]</th><th>[dB]</th></tr><tr><td>30.000 M</td><td>1.000 G</td><td>1.00 M</td><td>141.792500 M</td><td>-32.12</td><td>-19.12</td></tr><tr><td>1.000 G</td><td>1.845 G</td><td>1.00 M</td><td>1.070135 G</td><td>-41.84</td><td>-28.84</td></tr><tr><td>1.845 G</td><td>3.000 G</td><td>1.00 M</td><td>2.987251 G</td><td>-39.33</td><td>-26.33</td></tr><tr><td>3.000 G</td><td>7.000 G</td><td>1.00 M</td><td>3.045000 G</td><td>-37.46</td><td>-24.46</td></tr><tr><td>7.000 G</td><td>13.600 G</td><td>1.00 M</td><td>10.546675 G</td><td>-35.22</td><td>-22.22</td></tr><tr><td>13.600 G</td><td>19.100 G</td><td>1.00 M</td><td>15.298125 G</td><td>-25.49</td><td>-12.49</td></tr></table> Date: 31.MAR.2025 13:46:29		Start	Stop	RBW	Freq	PerAbn	ΔLimit	[Hz]	[Hz]	[Hz]	[Hz]	[dBm]	[dB]	30.000 M	1.000 G	1.00 M	141.792500 M	-32.12	-19.12	1.000 G	1.845 G	1.00 M	1.070135 G	-41.84	-28.84	1.845 G	3.000 G	1.00 M	2.987251 G	-39.33	-26.33	3.000 G	7.000 G	1.00 M	3.045000 G	-37.46	-24.46	7.000 G	13.600 G	1.00 M	10.546675 G	-35.22	-22.22	13.600 G	19.100 G	1.00 M	15.298125 G	-25.49	-12.49
Start	Stop	RBW	Freq	PerAbn	ΔLimit																																																																																														
[Hz]	[Hz]	[Hz]	[Hz]	[dBm]	[dB]																																																																																														
30.000 M	1.000 G	1.00 M	141.792500 M	-28.52	-15.52																																																																																														
1.000 G	1.845 G	1.00 M	1.060203 G	-40.85	-27.85																																																																																														
1.845 G	3.000 G	1.00 M	2.998372 G	-39.13	-26.13																																																																																														
3.000 G	7.000 G	1.00 M	3.045000 G	-37.59	-24.59																																																																																														
7.000 G	13.600 G	1.00 M	10.215025 G	-34.98	-21.98																																																																																														
13.600 G	19.100 G	1.00 M	13.928625 G	-26.00	-13.00																																																																																														
Start	Stop	RBW	Freq	PerAbn	ΔLimit																																																																																														
[Hz]	[Hz]	[Hz]	[Hz]	[dBm]	[dB]																																																																																														
30.000 M	1.000 G	1.00 M	141.792500 M	-32.12	-19.12																																																																																														
1.000 G	1.845 G	1.00 M	1.070135 G	-41.84	-28.84																																																																																														
1.845 G	3.000 G	1.00 M	2.987251 G	-39.33	-26.33																																																																																														
3.000 G	7.000 G	1.00 M	3.045000 G	-37.46	-24.46																																																																																														
7.000 G	13.600 G	1.00 M	10.546675 G	-35.22	-22.22																																																																																														
13.600 G	19.100 G	1.00 M	15.298125 G	-25.49	-12.49																																																																																														
Highest Channel		Highest Channel																																																																																																	
 <table><tr><th>Start</th><th>Stop</th><th>RBW</th><th>Freq</th><th>PerAbn</th><th>ΔLimit</th></tr><tr><th>[Hz]</th><th>[Hz]</th><th>[Hz]</th><th>[Hz]</th><th>[dBm]</th><th>[dB]</th></tr><tr><td>30.000 M</td><td>1.000 G</td><td>1.00 M</td><td>875.840000 M</td><td>-42.16</td><td>-29.16</td></tr><tr><td>1.000 G</td><td>1.845 G</td><td>1.00 M</td><td>1.292159 G</td><td>-40.50</td><td>-27.50</td></tr><tr><td>1.845 G</td><td>3.000 G</td><td>1.00 M</td><td>1.993271 G</td><td>-39.32</td><td>-26.32</td></tr><tr><td>3.000 G</td><td>7.000 G</td><td>1.00 M</td><td>4.103000 G</td><td>-37.22</td><td>-24.22</td></tr><tr><td>7.000 G</td><td>13.600 G</td><td>1.00 M</td><td>9.372700 G</td><td>-35.15</td><td>-22.15</td></tr><tr><td>13.600 G</td><td>19.100 G</td><td>1.00 M</td><td>15.396437 G</td><td>-25.95</td><td>-12.95</td></tr></table> Date: 31.MAR.2025 11:49:51		Start	Stop	RBW	Freq	PerAbn	ΔLimit	[Hz]	[Hz]	[Hz]	[Hz]	[dBm]	[dB]	30.000 M	1.000 G	1.00 M	875.840000 M	-42.16	-29.16	1.000 G	1.845 G	1.00 M	1.292159 G	-40.50	-27.50	1.845 G	3.000 G	1.00 M	1.993271 G	-39.32	-26.32	3.000 G	7.000 G	1.00 M	4.103000 G	-37.22	-24.22	7.000 G	13.600 G	1.00 M	9.372700 G	-35.15	-22.15	13.600 G	19.100 G	1.00 M	15.396437 G	-25.95	-12.95	 <table><tr><th>Start</th><th>Stop</th><th>RBW</th><th>Freq</th><th>PerAbn</th><th>ΔLimit</th></tr><tr><th>[Hz]</th><th>[Hz]</th><th>[Hz]</th><th>[Hz]</th><th>[dBm]</th><th>[dB]</th></tr><tr><td>30.000 M</td><td>1.000 G</td><td>1.00 M</td><td>171.862500 M</td><td>-30.78</td><td>-17.78</td></tr><tr><td>1.000 G</td><td>1.845 G</td><td>1.00 M</td><td>1.077740 G</td><td>-41.05</td><td>-28.05</td></tr><tr><td>1.845 G</td><td>3.000 G</td><td>1.00 M</td><td>1.993271 G</td><td>-39.15</td><td>-26.15</td></tr><tr><td>3.000 G</td><td>7.000 G</td><td>1.00 M</td><td>3.108000 G</td><td>-37.70</td><td>-24.70</td></tr><tr><td>7.000 G</td><td>13.600 G</td><td>1.00 M</td><td>11.641450 G</td><td>-35.17</td><td>-22.17</td></tr><tr><td>13.600 G</td><td>19.100 G</td><td>1.00 M</td><td>15.377188 G</td><td>-25.65</td><td>-12.65</td></tr></table> Date: 31.MAR.2025 13:47:22		Start	Stop	RBW	Freq	PerAbn	ΔLimit	[Hz]	[Hz]	[Hz]	[Hz]	[dBm]	[dB]	30.000 M	1.000 G	1.00 M	171.862500 M	-30.78	-17.78	1.000 G	1.845 G	1.00 M	1.077740 G	-41.05	-28.05	1.845 G	3.000 G	1.00 M	1.993271 G	-39.15	-26.15	3.000 G	7.000 G	1.00 M	3.108000 G	-37.70	-24.70	7.000 G	13.600 G	1.00 M	11.641450 G	-35.17	-22.17	13.600 G	19.100 G	1.00 M	15.377188 G	-25.65	-12.65
Start	Stop	RBW	Freq	PerAbn	ΔLimit																																																																																														
[Hz]	[Hz]	[Hz]	[Hz]	[dBm]	[dB]																																																																																														
30.000 M	1.000 G	1.00 M	875.840000 M	-42.16	-29.16																																																																																														
1.000 G	1.845 G	1.00 M	1.292159 G	-40.50	-27.50																																																																																														
1.845 G	3.000 G	1.00 M	1.993271 G	-39.32	-26.32																																																																																														
3.000 G	7.000 G	1.00 M	4.103000 G	-37.22	-24.22																																																																																														
7.000 G	13.600 G	1.00 M	9.372700 G	-35.15	-22.15																																																																																														
13.600 G	19.100 G	1.00 M	15.396437 G	-25.95	-12.95																																																																																														
Start	Stop	RBW	Freq	PerAbn	ΔLimit																																																																																														
[Hz]	[Hz]	[Hz]	[Hz]	[dBm]	[dB]																																																																																														
30.000 M	1.000 G	1.00 M	171.862500 M	-30.78	-17.78																																																																																														
1.000 G	1.845 G	1.00 M	1.077740 G	-41.05	-28.05																																																																																														
1.845 G	3.000 G	1.00 M	1.993271 G	-39.15	-26.15																																																																																														
3.000 G	7.000 G	1.00 M	3.108000 G	-37.70	-24.70																																																																																														
7.000 G	13.600 G	1.00 M	11.641450 G	-35.17	-22.17																																																																																														
13.600 G	19.100 G	1.00 M	15.377188 G	-25.65	-12.65																																																																																														

Frequency Stability

Test Conditions	Middle Channel	GSM850 (GSM)	GSM850 (EDGE class 8)	Limit 2.5ppm
Temperature (°C)	Voltage (Volt)	Deviation (ppm)		Result
50	Normal Voltage	0.0084	0.0132	PASS
40	Normal Voltage	0.0036	0.0048	
30	Normal Voltage	0.0024	0.0072	
20(Ref.)	Normal Voltage	0.0000	0.0000	
10	Normal Voltage	0.0096	0.0096	
0	Normal Voltage	0.0227	0.0012	
-10	Normal Voltage	0.0347	0.0096	
-20	Normal Voltage	0.0299	0.0024	
-30	Normal Voltage	0.0060	0.0179	
20	Maximum Voltage	0.0203	0.0048	
20	Normal Voltage	0.0239	0.0024	
20	Minimum Voltage	0.0215	0.0108	

Test Conditions	Middle Channel	GSM1900 (GSM)	GSM1900 (EDGE class 8)	Limit Note 2.
Temperature (°C)	Voltage (Volt)	Deviation (ppm)		Result
50	Normal Voltage	0.0106	0.0170	PASS
40	Normal Voltage	0.0032	0.0053	
30	Normal Voltage	0.0011	0.0011	
20(Ref.)	Normal Voltage	0.0000	0.0000	
10	Normal Voltage	0.0021	0.0043	
0	Normal Voltage	0.0133	0.0117	
-10	Normal Voltage	0.0144	0.0144	
-20	Normal Voltage	0.0096	0.0080	
-30	Normal Voltage	0.0059	0.0037	
20	Maximum Voltage	0.0128	0.0069	
20	Normal Voltage	0.0117	0.0059	
20	Minimum Voltage	0.0160	0.0096	

Note:

1. Normal Voltage = 3.89V. ; Minimum Voltage = 3.6 V. ; Maximum Voltage =4.5 V
2. The frequency fundamental emissions stay within the authorized frequency block.









A2. WCDMA

Peak-to-Average Ratio


Mode	WCDMA Band V	WCDMA Band II	WCDMA Band IV	Limit: 13dB
Mod.	RMC 12.2Kbps	RMC 12.2Kbps	RMC 12.2Kbps	Result
Lowest CH	3.48	3.52	3.60	PASS
Middle CH	3.48	3.72	3.60	
Highest CH	3.40	3.36	3.64	

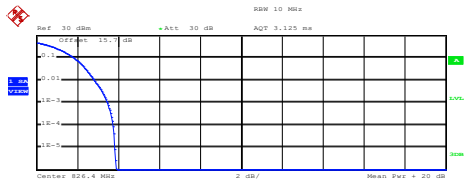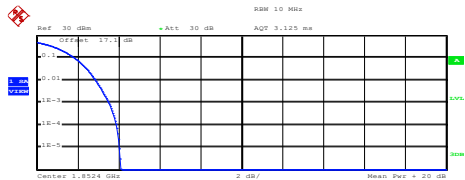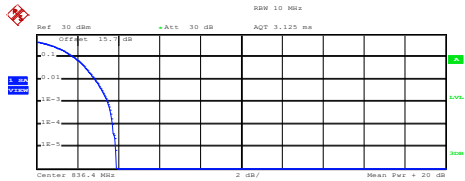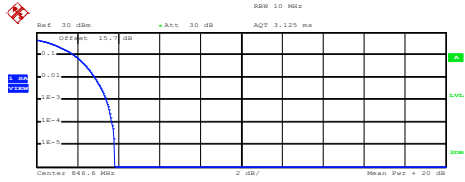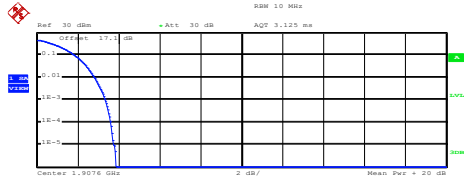

WCDMA Band V (RMC 12.2Kbps)	WCDMA Band II (RMC 12.2Kbps)																												
Lowest Channel	Lowest Channel																												
 Ref: 30 dBm, Att: 30 dB, AGT: 3.125 ms, Center: 828.6 MHz, Span: 2 dB, Mean: 24.59 dBm, Peak: 28.48 dBm, Crest: 3.89 dB Complementary Cumulative Distribution Function (100000 samples) Trace 1 <table><tr><td>Mean</td><td>24.59 dBm</td></tr><tr><td>Peak</td><td>28.48 dBm</td></tr><tr><td>Crest</td><td>3.89 dB</td></tr></table> <table><tr><td>10 %</td><td>1.84 dB</td></tr><tr><td>1 %</td><td>2.84 dB</td></tr><tr><td>.1 %</td><td>3.48 dB</td></tr><tr><td>.01 %</td><td>3.76 dB</td></tr></table> Date: 26.MAR.2025 11:47:30	Mean	24.59 dBm	Peak	28.48 dBm	Crest	3.89 dB	10 %	1.84 dB	1 %	2.84 dB	.1 %	3.48 dB	.01 %	3.76 dB	 Ref: 30 dBm, Att: 30 dB, AGT: 3.125 ms, Center: 1.8524 GHz, Span: 2 dB, Mean: 24.54 dBm, Peak: 28.63 dBm, Crest: 4.10 dB Complementary Cumulative Distribution Function (100000 samples) Trace 1 <table><tr><td>Mean</td><td>24.54 dBm</td></tr><tr><td>Peak</td><td>28.63 dBm</td></tr><tr><td>Crest</td><td>4.10 dB</td></tr></table> <table><tr><td>10 %</td><td>1.84 dB</td></tr><tr><td>1 %</td><td>2.88 dB</td></tr><tr><td>.1 %</td><td>3.52 dB</td></tr><tr><td>.01 %</td><td>3.88 dB</td></tr></table> Date: 25.MAR.2025 17:08:52	Mean	24.54 dBm	Peak	28.63 dBm	Crest	4.10 dB	10 %	1.84 dB	1 %	2.88 dB	.1 %	3.52 dB	.01 %	3.88 dB
Mean	24.59 dBm																												
Peak	28.48 dBm																												
Crest	3.89 dB																												
10 %	1.84 dB																												
1 %	2.84 dB																												
.1 %	3.48 dB																												
.01 %	3.76 dB																												
Mean	24.54 dBm																												
Peak	28.63 dBm																												
Crest	4.10 dB																												
10 %	1.84 dB																												
1 %	2.88 dB																												
.1 %	3.52 dB																												
.01 %	3.88 dB																												
Middle Channel	Middle Channel																												
 Ref: 30 dBm, Att: 30 dB, AGT: 3.125 ms, Center: 838.6 MHz, Span: 2 dB, Mean: 24.45 dBm, Peak: 28.34 dBm, Crest: 3.89 dB Complementary Cumulative Distribution Function (100000 samples) Trace 1 <table><tr><td>Mean</td><td>24.45 dBm</td></tr><tr><td>Peak</td><td>28.34 dBm</td></tr><tr><td>Crest</td><td>3.89 dB</td></tr></table> <table><tr><td>10 %</td><td>1.84 dB</td></tr><tr><td>1 %</td><td>2.88 dB</td></tr><tr><td>.1 %</td><td>3.48 dB</td></tr><tr><td>.01 %</td><td>3.72 dB</td></tr></table> Date: 26.MAR.2025 11:47:49	Mean	24.45 dBm	Peak	28.34 dBm	Crest	3.89 dB	10 %	1.84 dB	1 %	2.88 dB	.1 %	3.48 dB	.01 %	3.72 dB	 Ref: 30 dBm, Att: 30 dB, AGT: 3.125 ms, Center: 1.88 GHz, Span: 2 dB, Mean: 24.50 dBm, Peak: 28.77 dBm, Crest: 4.27 dB Complementary Cumulative Distribution Function (100000 samples) Trace 1 <table><tr><td>Mean</td><td>24.50 dBm</td></tr><tr><td>Peak</td><td>28.77 dBm</td></tr><tr><td>Crest</td><td>4.27 dB</td></tr></table> <table><tr><td>10 %</td><td>1.92 dB</td></tr><tr><td>1 %</td><td>3.00 dB</td></tr><tr><td>.1 %</td><td>3.72 dB</td></tr><tr><td>.01 %</td><td>4.08 dB</td></tr></table> Date: 25.MAR.2025 17:09:15	Mean	24.50 dBm	Peak	28.77 dBm	Crest	4.27 dB	10 %	1.92 dB	1 %	3.00 dB	.1 %	3.72 dB	.01 %	4.08 dB
Mean	24.45 dBm																												
Peak	28.34 dBm																												
Crest	3.89 dB																												
10 %	1.84 dB																												
1 %	2.88 dB																												
.1 %	3.48 dB																												
.01 %	3.72 dB																												
Mean	24.50 dBm																												
Peak	28.77 dBm																												
Crest	4.27 dB																												
10 %	1.92 dB																												
1 %	3.00 dB																												
.1 %	3.72 dB																												
.01 %	4.08 dB																												
Highest Channel	Highest Channel																												
 Ref: 30 dBm, Att: 30 dB, AGT: 3.125 ms, Center: 848.6 MHz, Span: 2 dB, Mean: 24.39 dBm, Peak: 28.20 dBm, Crest: 3.82 dB Complementary Cumulative Distribution Function (100000 samples) Trace 1 <table><tr><td>Mean</td><td>24.39 dBm</td></tr><tr><td>Peak</td><td>28.20 dBm</td></tr><tr><td>Crest</td><td>3.82 dB</td></tr></table> <table><tr><td>10 %</td><td>1.84 dB</td></tr><tr><td>1 %</td><td>2.84 dB</td></tr><tr><td>.1 %</td><td>3.40 dB</td></tr><tr><td>.01 %</td><td>3.68 dB</td></tr></table> Date: 26.MAR.2025 11:48:10	Mean	24.39 dBm	Peak	28.20 dBm	Crest	3.82 dB	10 %	1.84 dB	1 %	2.84 dB	.1 %	3.40 dB	.01 %	3.68 dB	 Ref: 30 dBm, Att: 30 dB, AGT: 3.125 ms, Center: 1.9076 GHz, Span: 2 dB, Mean: 24.27 dBm, Peak: 28.14 dBm, Crest: 3.87 dB Complementary Cumulative Distribution Function (100000 samples) Trace 1 <table><tr><td>Mean</td><td>24.27 dBm</td></tr><tr><td>Peak</td><td>28.14 dBm</td></tr><tr><td>Crest</td><td>3.87 dB</td></tr></table> <table><tr><td>10 %</td><td>1.84 dB</td></tr><tr><td>1 %</td><td>2.80 dB</td></tr><tr><td>.1 %</td><td>3.36 dB</td></tr><tr><td>.01 %</td><td>3.60 dB</td></tr></table> Date: 25.MAR.2025 17:09:40	Mean	24.27 dBm	Peak	28.14 dBm	Crest	3.87 dB	10 %	1.84 dB	1 %	2.80 dB	.1 %	3.36 dB	.01 %	3.60 dB
Mean	24.39 dBm																												
Peak	28.20 dBm																												
Crest	3.82 dB																												
10 %	1.84 dB																												
1 %	2.84 dB																												
.1 %	3.40 dB																												
.01 %	3.68 dB																												
Mean	24.27 dBm																												
Peak	28.14 dBm																												
Crest	3.87 dB																												
10 %	1.84 dB																												
1 %	2.80 dB																												
.1 %	3.36 dB																												
.01 %	3.60 dB																												


WCDMA Band IV (RMC 12.2Kbps)

Lowest Channel

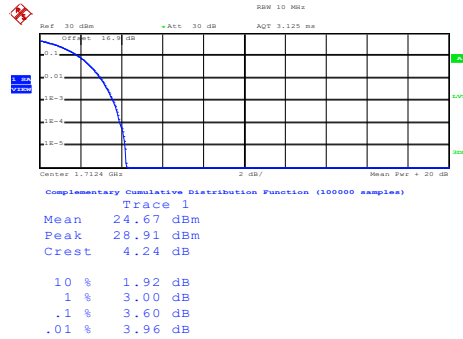


Date: 25.MAR.2025 17:56:16

Middle Channel

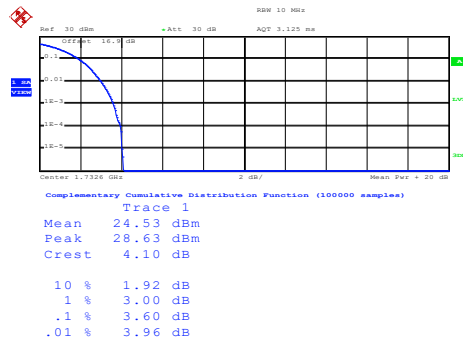

Date: 25.MAR.2025 17:56:40

Highest Channel

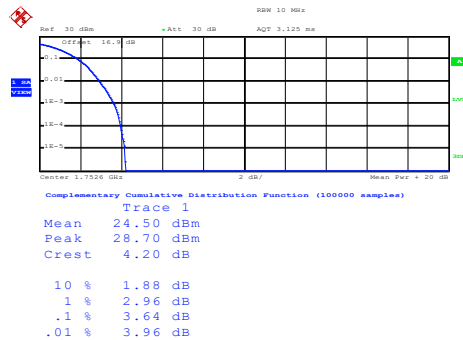

Date: 25.MAR.2025 17:57:06


**26dB Bandwidth**

Mode	WCDMA Band V 26dB BW(MHz)	WCDMA Band II 26dB BW(MHz)	WCDMA Band IV 26dB BW(MHz)
Mod.	RMC 12.2Kbps	RMC 12.2Kbps	RMC 12.2Kbps
Lowest CH	4.72	4.73	4.75
Middle CH	4.73	4.73	4.71
Highest CH	4.72	4.72	4.76



WCDMA Band V (RMC 12.2Kbps)


Lowest Channel

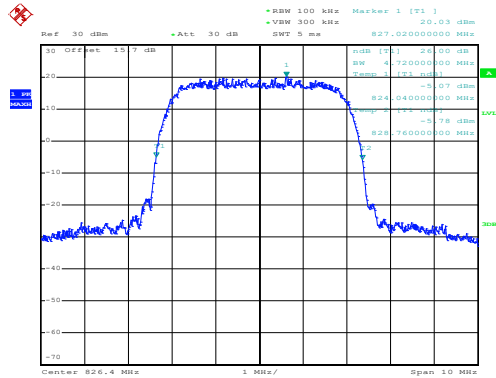

Date: 26.MAR.2025 11:13:42


WCDMA Band II (RMC 12.2Kbps)

Lowest Channel

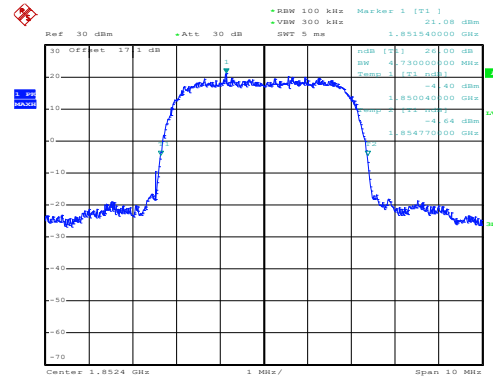


Date: 25.MAR.2025 16:48:45

Middle Channel

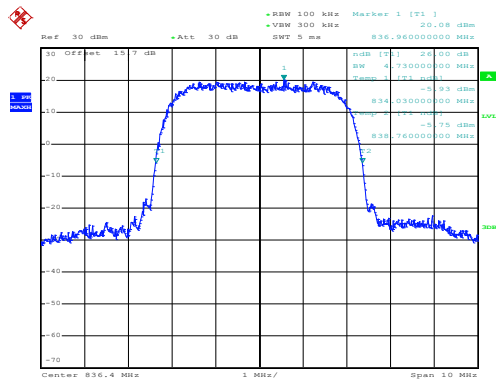


Date: 26.MAR.2025 11:14:27

Middle Channel

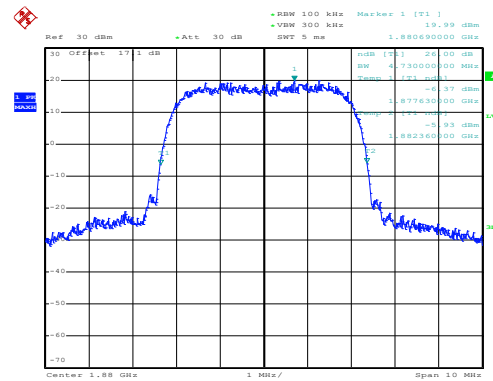


Date: 25.MAR.2025 16:55:19

Highest Channel

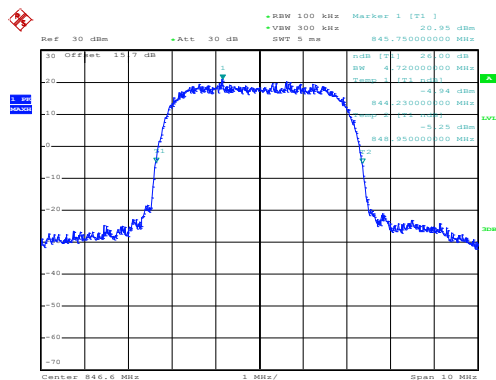

Date: 26.MAR.2025 11:15:23


Highest Channel

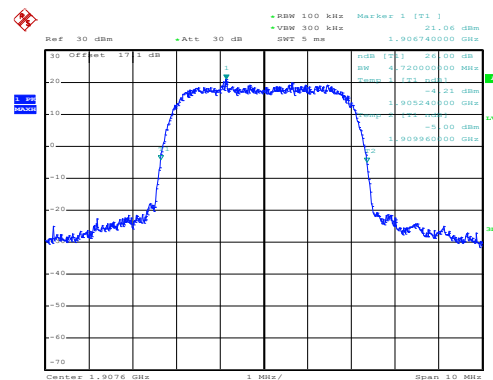

Date: 25.MAR.2025 16:56:04


WCDMA Band IV (RMC 12.2Kbps)

Lowest Channel

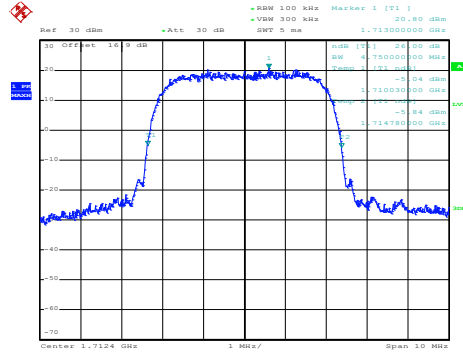


Date: 25.MAR.2025 17:28:45

Middle Channel

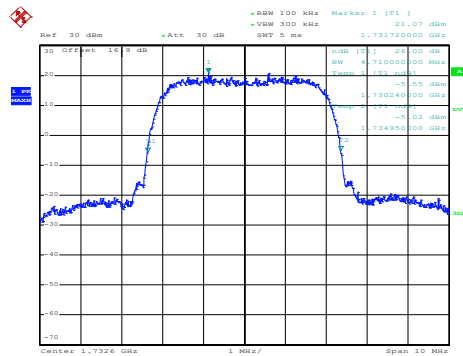

Date: 25.MAR.2025 17:29:30

Highest Channel

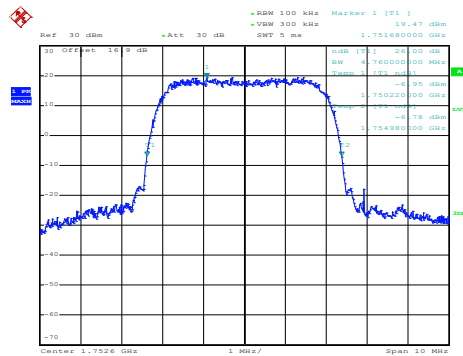

Date: 25.MAR.2025 17:30:14


**Occupied Bandwidth**

Mode	WCDMA Band V 99%OBW(MHz)	WCDMA Band II 99%OBW(MHz)	WCDMA Band IV 99%OBW(MHz)
Mod.	RMC 12.2Kbps	RMC 12.2Kbps	RMC 12.2Kbps
Lowest CH	4.15	4.18	4.17
Middle CH	4.14	4.17	4.16
Highest CH	4.15	4.17	4.17



WCDMA Band V (RMC 12.2Kbps)


Lowest Channel

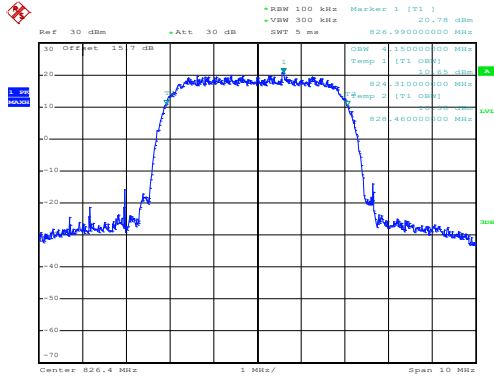

Date: 26.MAR.2025 11:28:28


WCDMA Band II (RMC 12.2Kbps)

Lowest Channel

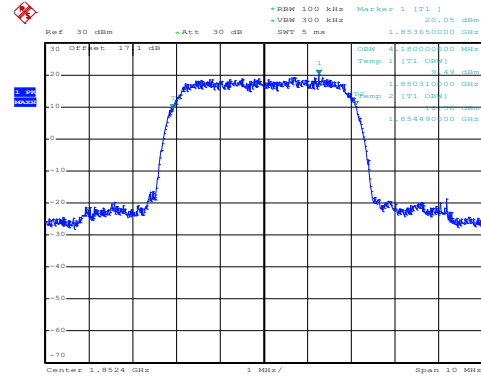


Date: 25.MAR.2025 16:57:22

Middle Channel

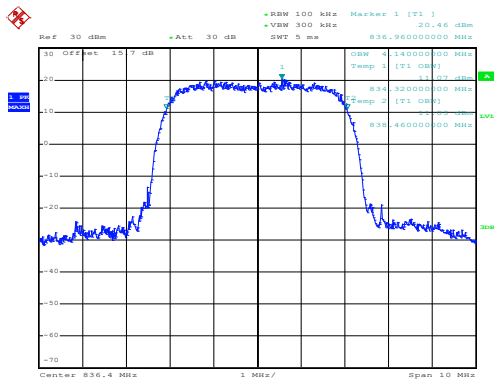


Date: 26.MAR.2025 11:29:09

Middle Channel

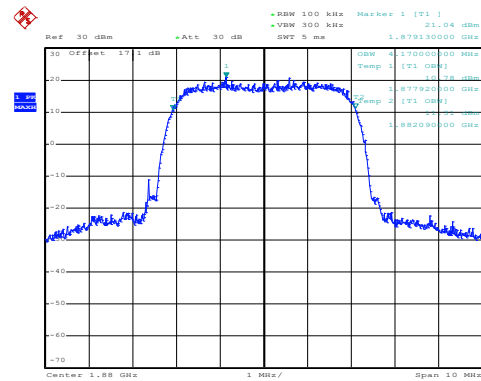


Date: 25.MAR.2025 16:58:03

Highest Channel

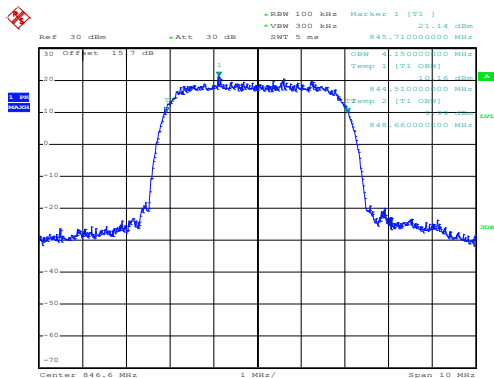

Date: 26.MAR.2025 11:29:51


Highest Channel

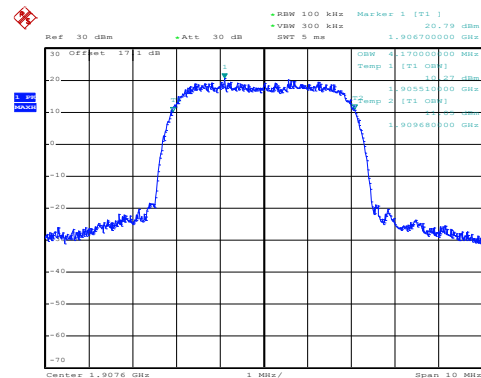

Date: 25.MAR.2025 16:58:45


WCDMA Band IV (RMC 12.2Kbps)

Lowest Channel

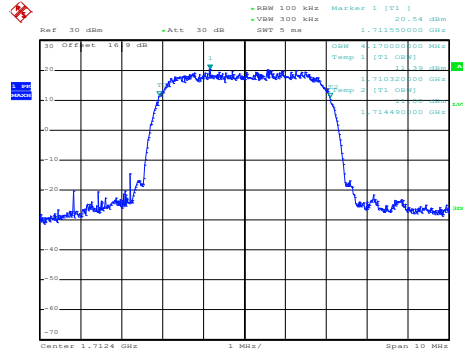


Date: 25.MAR.2025 17:31:31

Middle Channel

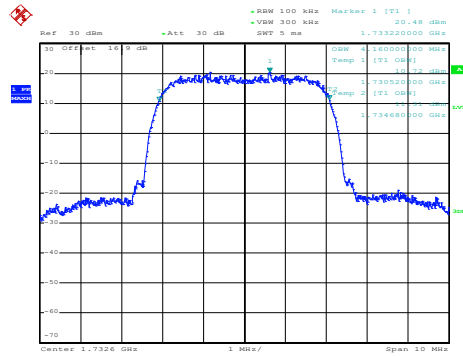

Date: 25.MAR.2025 17:32:48

Highest Channel

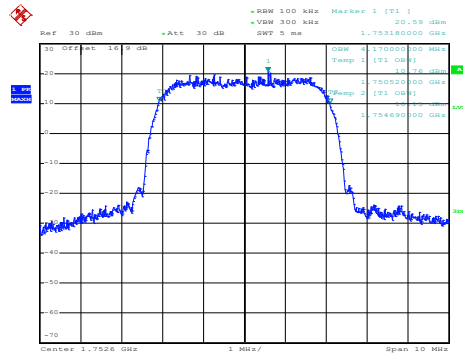


Date: 25.MAR.2025 17:34:15



Conducted Band Edge


WCDMA Band V (RMC 12.2Kbps)

Lowest Band Edge

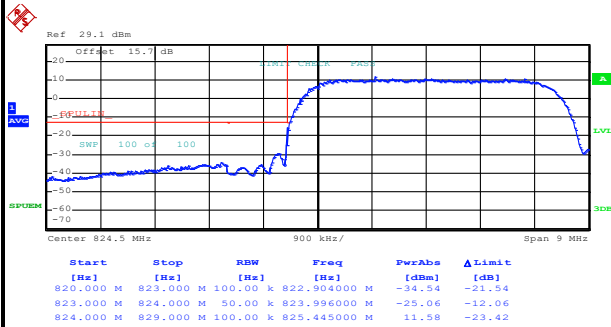

Date: 26.MAR.2025 11:33:42


Highest Band Edge

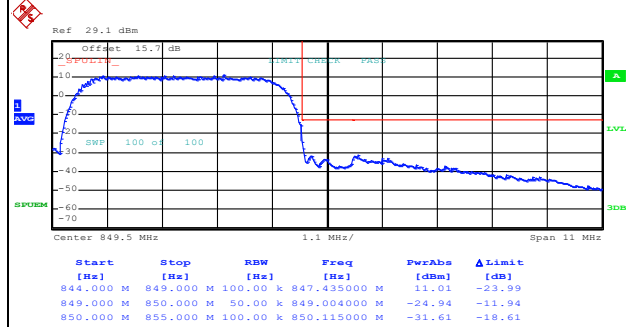

Date: 26.MAR.2025 11:36:49


WCDMA Band II (RMC 12.2Kbps)

Lowest Band Edge

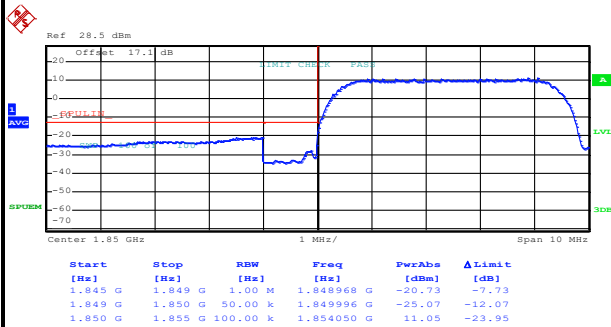

Date: 25.MAR.2025 17:02:01

Highest Band Edge

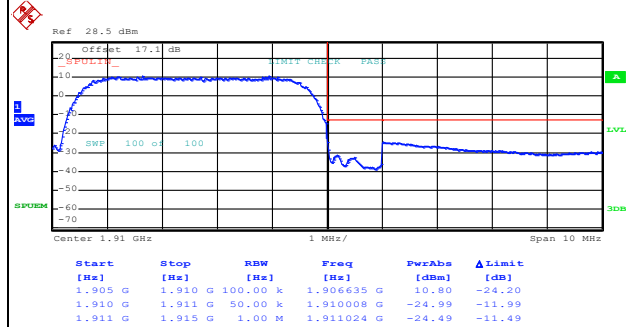


Date: 25.MAR.2025 17:05:00




WCDMA Band IV (RMC 12.2Kbps)

Lowest Band Edge

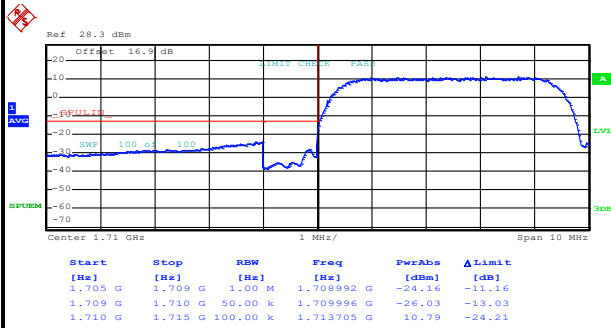

Date: 25.MAR.2025 17:37:20

Highest Band Edge

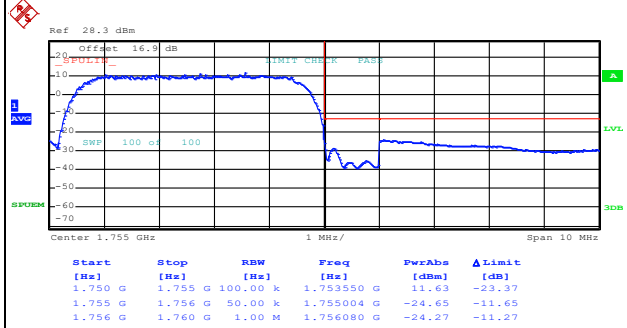


Date: 25.MAR.2025 17:43:24



Conducted Spurious Emission

WCDMA Band V (RMC 12.2Kbps)


Lowest Channel

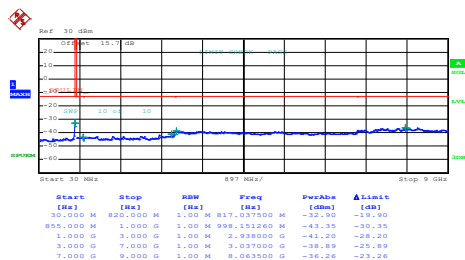

Date: 26.MAR.2025 11:44:28


WCDMA Band II (RMC 12.2Kbps)

Lowest Channel

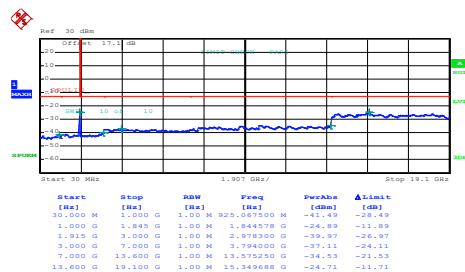


Date: 25.MAR.2025 17:06:17

Middle Channel

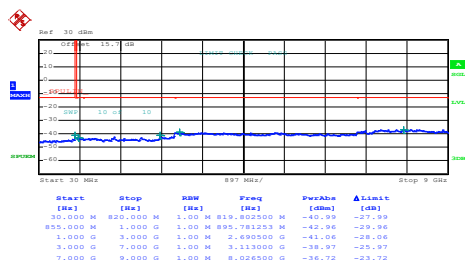


Date: 26.MAR.2025 11:45:42

Middle Channel

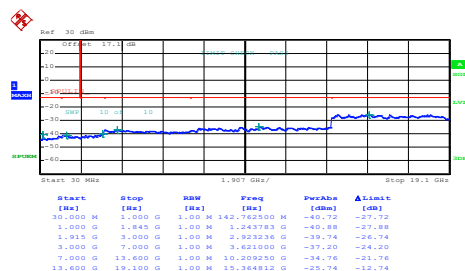


Date: 25.MAR.2025 17:07:22

Highest Channel

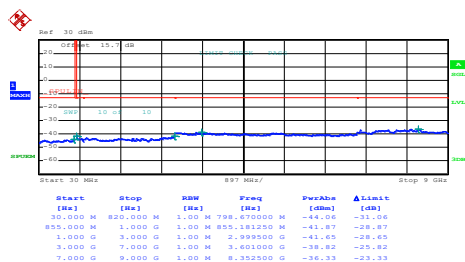

Date: 26.MAR.2025 11:46:40


Highest Channel

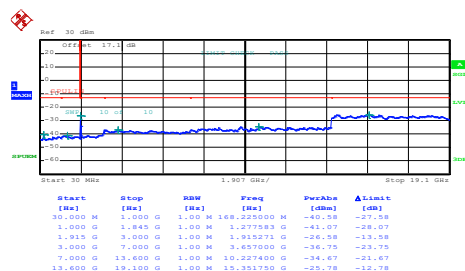

Date: 25.MAR.2025 17:08:23


WCDMA Band IV (RMC 12.2Kbps)

Lowest Channel

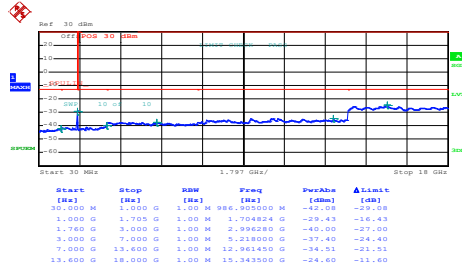


Date: 25.MAR.2025 17:49:59

Middle Channel

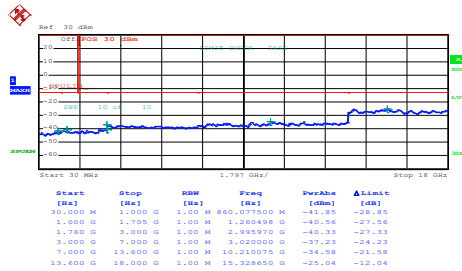

Date: 25.MAR.2025 17:54:13

Highest Channel

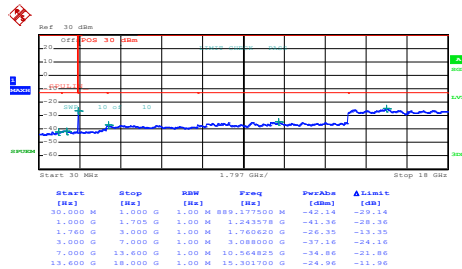

Date: 25.MAR.2025 17:55:14

Frequency Stability

Test Conditions	Middle Channel	WCDMA Band V (RMC 12.2Kbps)	Limit 2.5ppm
Temperature (°C)	Voltage (Volt)	Deviation (ppm)	Result
50	Normal Voltage	0.0143	PASS
40	Normal Voltage	0.0120	
30	Normal Voltage	0.0108	
20(Ref.)	Normal Voltage	0.0000	
10	Normal Voltage	0.0048	
0	Normal Voltage	0.0024	
-10	Normal Voltage	0.0036	
-20	Normal Voltage	0.0024	
-30	Normal Voltage	0.0132	
20	Maximum Voltage	0.0012	
20	Normal Voltage	0.0012	
20	Minimum Voltage	0.0036	

Test Conditions	Middle Channel	WCDMA Band II (RMC 12.2Kbps)	Limit Note 2.
Temperature (°C)	Voltage (Volt)	Deviation (ppm)	Result
50	Normal Voltage	0.0122	PASS
40	Normal Voltage	0.0101	
30	Normal Voltage	0.0021	
20(Ref.)	Normal Voltage	0.0000	
10	Normal Voltage	0.0016	
0	Normal Voltage	0.0027	
-10	Normal Voltage	0.0011	
-20	Normal Voltage	0.0032	
-30	Normal Voltage	0.0138	
20	Maximum Voltage	0.0016	
20	Normal Voltage	0.0037	
20	Minimum Voltage	0.0027	

Note:

1. Normal Voltage = 3.89V. ; Minimum Voltage = 3.6 V. ; Maximum Voltage =4.5 V
2. The frequency fundamental emissions stay within the authorized frequency block .

Test Conditions	Middle Channel	WCDMA Band IV (RMC 12.2Kbps)	Limit Note 2.
Temperature (°C)	Voltage (Volt)	Deviation (ppm)	Result
50	Normal Voltage	0.0040	PASS
40	Normal Voltage	0.0087	
30	Normal Voltage	0.0075	
20(Ref.)	Normal Voltage	0.0000	
10	Normal Voltage	0.0012	
0	Normal Voltage	0.0029	
-10	Normal Voltage	0.0081	
-20	Normal Voltage	0.0035	
-30	Normal Voltage	0.0023	
20	Maximum Voltage	0.0017	
20	Normal Voltage	0.0046	
20	Minimum Voltage	0.0006	

Note:

1. Normal Voltage = 3.89V. ; Minimum Voltage = 3.6 V. ; Maximum Voltage =4.5 V
2. The frequency fundamental emissions stay within the authorized frequency block .



Appendix B. Test Results of Radiated Test

B1. Summary of each worse mode

Mode	Part	Band	Ch	Freq (MHz)	Level (dBm)	Det	Ant Factor (dB)	Amp\Cbl (dB)	Filter (dB)	EIRPCF (dB)	Reading (dBuV)	Limit (dBm)	Margin (dB)	Pol	Ant
1	Part 22H	GSM 850	H	4244	-42.87	RMS	31.38	-25.02	0.44	-95.23	45.56	-13.00	-29.87	V	0
2	Part 22H	GSM 850	H	2546	-41.92	RMS	28.44	-27.23	0.48	-95.23	51.62	-13.00	-28.92	H	1
3	Part 22H	WCDMA B5	H	3386	-55.70	RMS	29.73	-26.15	0.41	-95.23	35.54	-13.00	-42.70	V	0
4	Part 22H	WCDMA B5	M	3345	-55.93	RMS	29.80	-26.22	0.40	-95.23	35.32	-13.00	-42.93	H	1
1	Part 24E	GSM 1900	H	7639	-45.85	RMS	36.48	-22.00	0.37	-95.23	34.53	-13.00	-32.85	H	2
2	Part 24E	GSM 1900	L	7400	-46.08	RMS	36.60	-22.16	0.33	-95.23	34.38	-13.00	-33.08	H	1
3	Part 24E	WCDMA B2	H	7630	-46.48	RMS	36.46	-22.00	0.37	-95.23	33.92	-13.00	-33.48	V	2
4	Part 24E	WCDMA B2	M	7520	-45.97	RMS	36.48	-22.06	0.35	-95.23	34.49	-13.00	-32.97	H	1
1	Part 27L	WCDMA B4	H	7010	-46.91	RMS	36.14	-22.40	0.34	-95.23	34.24	-13.00	-33.91	V	2
2	Part 27L	WCDMA B4	H	7010	-47.73	RMS	36.14	-22.40	0.34	-95.23	33.42	-13.00	-34.73	V	1




Ant. 0

Part 22H Mode 1

GSM 850 Ch128

L

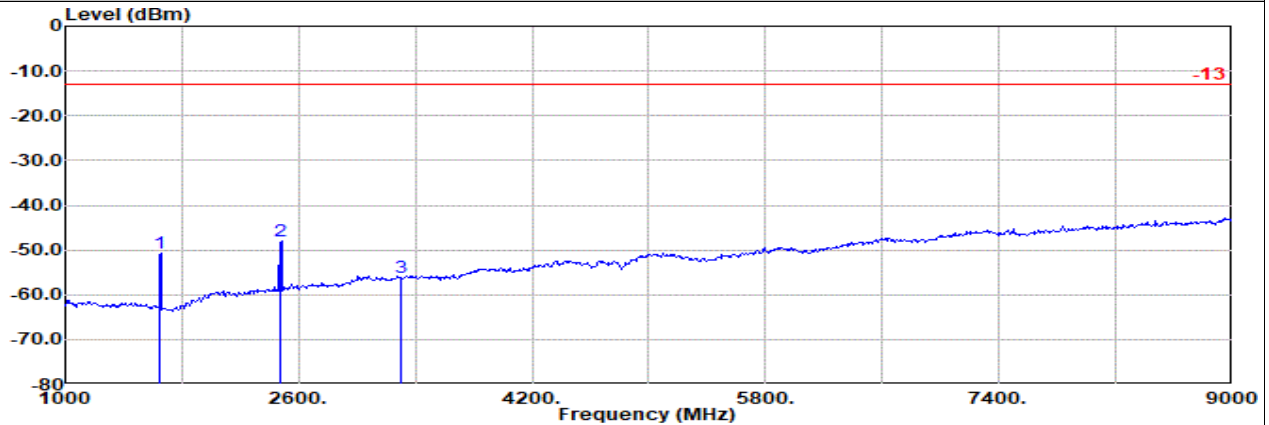


Site : 03CH12-HY

Condition: -13 3m 9120D-02114-240711 Horizontal

: GSM 850 Ch128

	Freq	Level	Detector	Ant Factor	Amp\Cb	Filter	EIRPCF	Readin	Limit	Margin	Pol
	MHz	dBm			dB	dB	dB	dBuV	dBm	dB	
1	1648.00	-50.70	RMS	25.32	-29.25	0.75	-95.23	47.71	-13.00	-37.70	Horizontal
2	2472.00	-48.05	RMS	27.82	-27.31	0.51	-95.23	46.16	-13.00	-35.05	Horizontal
3	3296.00	-56.08	RMS	29.80	-26.30	0.39	-95.23	35.26	-13.00	-43.08	Horizontal

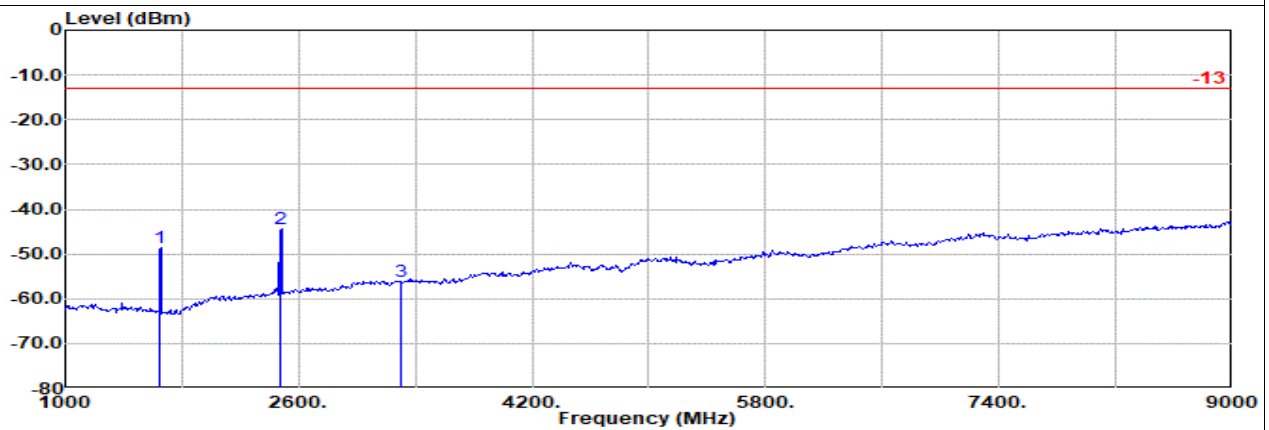

Site : 03CH12-HY

Condition: -13 3m 9120D-02114-240711 Vertical

: GSM 850 Ch128

	Freq	Level	Detector	Ant Factor	Amp\Cb	Filter	EIRPCF	Readin	Limit	Margin	Pol
	MHz	dBm			dB	dB	dB	dBuV	dBm	dB	
1	1648.00	-48.58	RMS	25.32	-29.25	0.75	-95.23	49.83	-13.00	-35.58	Vertical
2	2472.00	-44.38	RMS	27.82	-27.31	0.51	-95.23	49.83	-13.00	-31.38	Vertical
3	3296.00	-56.22	RMS	29.80	-26.30	0.39	-95.23	35.12	-13.00	-43.22	Vertical




Ant. 0

Part 22H Mode 1

GSM 850 Ch189

M

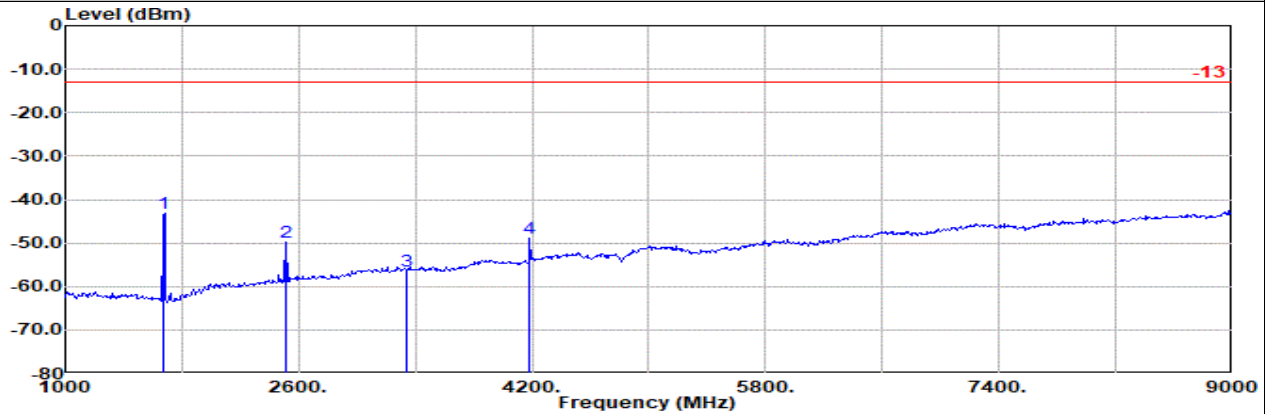


Site : 03CH12-HY

Condition: -13 3m 9120D-02114-240711 Horizontal

: GSM 850 Ch189

	Freq	Level	Detector	Ant Factor	Amp\Cb	Filter 1	EIRPCF	Readin g	Limit	Margin	Pol
	MHz	dBm									
1	1672.00	-43.14	RMS	25.40	-29.15	0.74	-95.23	55.10	-13.00	-30.14	Horizontal
2	2509.00	-49.85	RMS	28.19	-27.27	0.50	-95.23	43.96	-13.00	-36.85	Horizontal
3	3345.00	-56.32	RMS	29.80	-26.22	0.40	-95.23	34.93	-13.00	-43.32	Horizontal
4	4182.00	-48.98	RMS	31.20	-25.09	0.46	-95.23	39.68	-13.00	-35.98	Horizontal

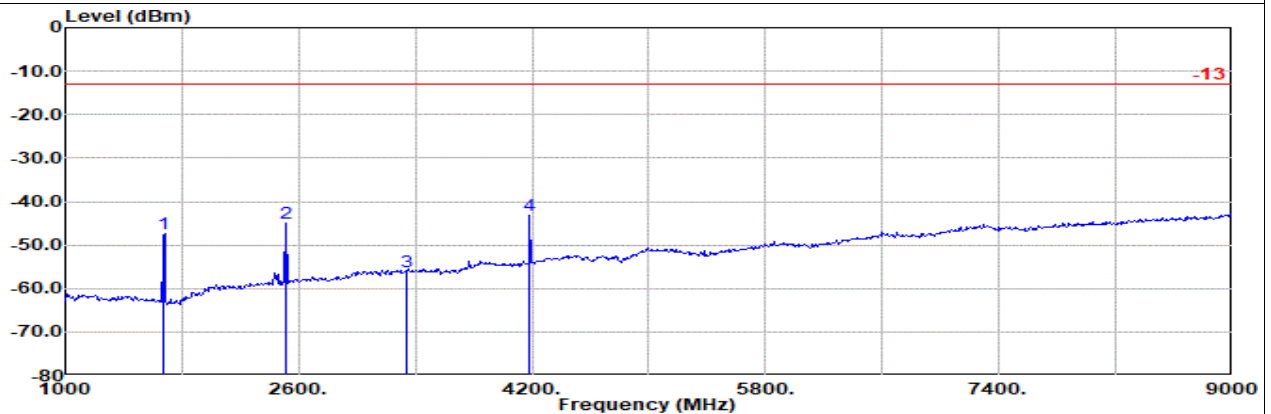

Site : 03CH12-HY

Condition: -13 3m 9120D-02114-240711 Vertical

: GSM 850 Ch189

	Freq	Level	Detector	Ant Factor	Amp\Cb	Filter 1	EIRPCF	Readin g	Limit	Margin	Pol
	MHz	dBm									
1	1672.00	-47.37	RMS	25.40	-29.15	0.74	-95.23	50.87	-13.00	-34.37	Vertical
2	2509.00	-44.94	RMS	28.19	-27.27	0.50	-95.23	48.87	-13.00	-31.94	Vertical
3	3345.00	-56.17	RMS	29.80	-26.22	0.40	-95.23	35.08	-13.00	-43.17	Vertical
4	4182.00	-43.15	RMS	31.20	-25.09	0.46	-95.23	45.51	-13.00	-30.15	Vertical




Ant. 0

Part 22H Mode 1

GSM 850 Ch251

H

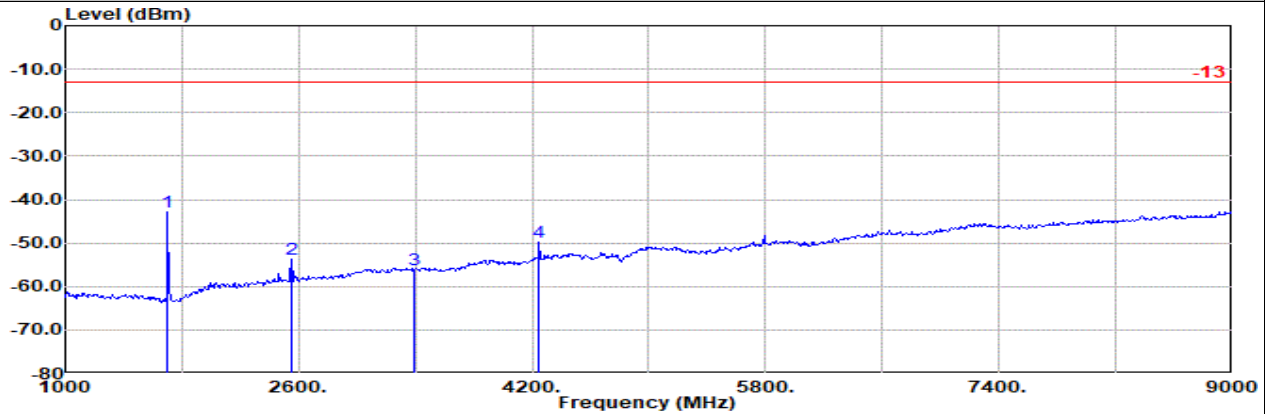


Site : 03CH12-HY

Condition: -13 3m 9120D-02114-240711 Horizontal

: GSM 850 Ch251

	Freq	Level	Detector	Ant Factor	Amp\Cb 1	Filter	EIRPCF	Readin g	Limit	Margin	Pol
	MHz	dBm		dB/m	dB	dB	dB	dBuV	dBm	dB	
1	1697.00	-42.92	RMS	25.23	-29.05	0.72	-95.23	55.41	-13.00	-29.92	Horizontal
2	2546.00	-53.69	RMS	28.44	-27.23	0.48	-95.23	39.85	-13.00	-40.69	Horizontal
3	3395.00	-56.21	RMS	29.71	-26.13	0.41	-95.23	35.03	-13.00	-43.21	Horizontal
4	4244.00	-49.70	RMS	31.38	-25.02	0.44	-95.23	38.73	-13.00	-36.70	Horizontal

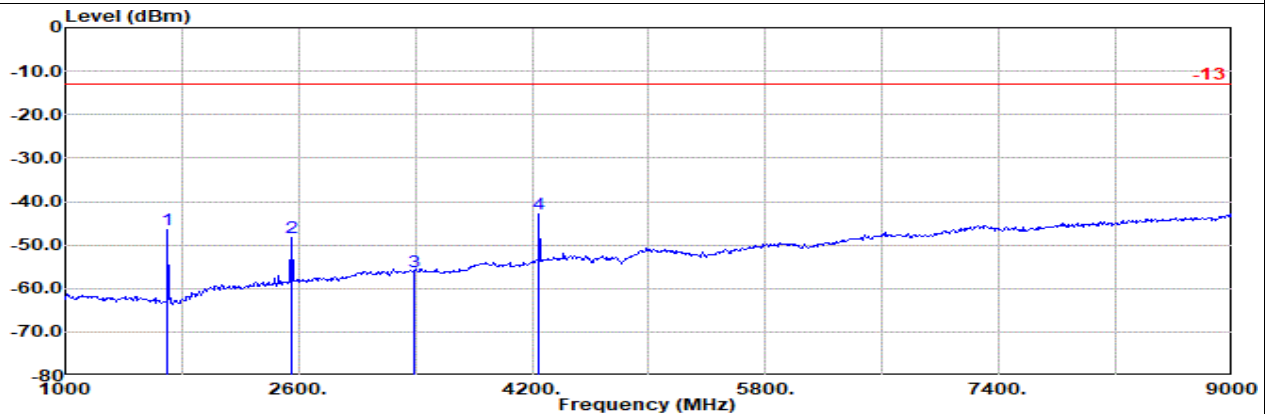

Site : 03CH12-HY

Condition: -13 3m 9120D-02114-240711 Vertical

: GSM 850 Ch251

	Freq	Level	Detector	Ant Factor	Amp\Cb 1	Filter	EIRPCF	Readin g	Limit	Margin	Pol
	MHz	dBm		dB/m	dB	dB	dB	dBuV	dBm	dB	
1	1697.00	-46.63	RMS	25.23	-29.05	0.72	-95.23	51.70	-13.00	-33.63	Vertical
2	2546.00	-48.30	RMS	28.44	-27.23	0.48	-95.23	45.24	-13.00	-35.30	Vertical
3	3395.00	-56.10	RMS	29.71	-26.13	0.41	-95.23	35.14	-13.00	-43.10	Vertical
4	4244.00	-42.87	RMS	31.38	-25.02	0.44	-95.23	45.56	-13.00	-29.87	Vertical




Ant. 0

Part 22H Mode 3

WCDMA B5 Ch4132

L

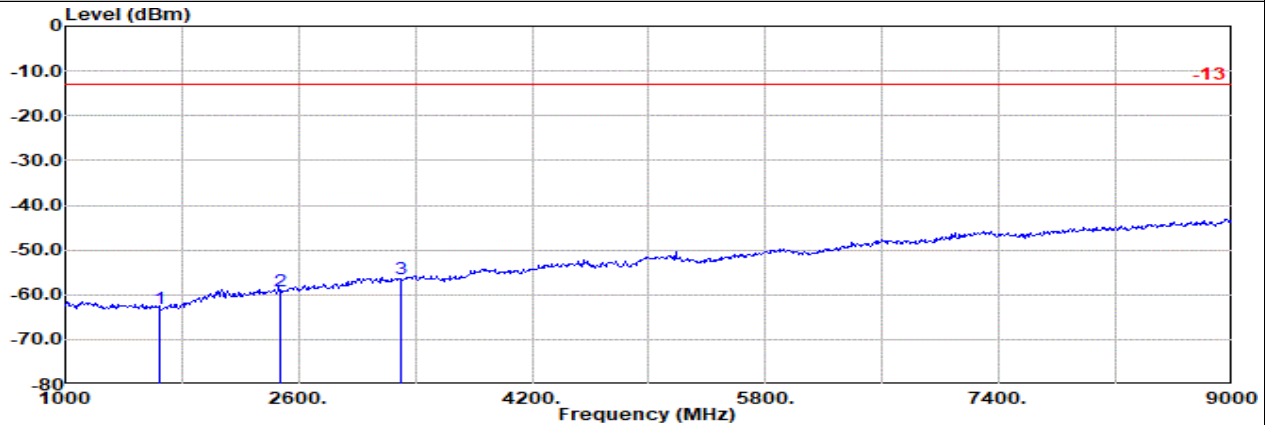


Site : 03CH12-HY

Condition: -13 3m 9120D-02114-240711 Horizontal

: WCDMA Band5 4132

	Freq MHz	Level dBm	Detector	Ant Amp\Cb Filter		EIRPCF	Readin g	Limit	Margin	Pol
				Factor	1					
1	1652.00	-63.16	RMS	25.30	-29.23	0.75	-95.23	35.25	-13.00	-50.16 Horizontal
2	2479.00	-59.13	RMS	27.89	-27.30	0.51	-95.23	35.00	-13.00	-46.13 Horizontal
3	3305.00	-56.50	RMS	29.80	-26.29	0.40	-95.23	34.82	-13.00	-43.50 Horizontal

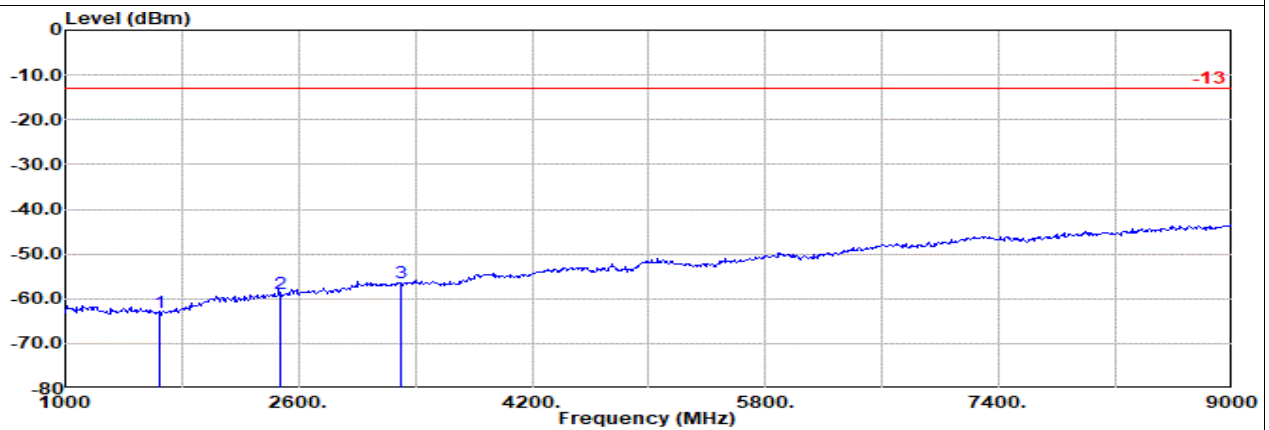

Site : 03CH12-HY

Condition: -13 3m 9120D-02114-240711 Vertical

: WCDMA Band5 4132

	Freq MHz	Level dBm	Detector	Ant Amp\Cb Filter		EIRPCF	Readin g	Limit	Margin	Pol
				Factor	1					
1	1652.00	-63.21	RMS	25.30	-29.23	0.75	-95.23	35.20	-13.00	-50.21 Vertical
2	2479.00	-59.01	RMS	27.89	-27.30	0.51	-95.23	35.12	-13.00	-46.01 Vertical
3	3305.00	-56.52	RMS	29.80	-26.29	0.40	-95.23	34.80	-13.00	-43.52 Vertical




Ant. 0

Part 22H Mode 3

WCDMA B5 Ch4182

M

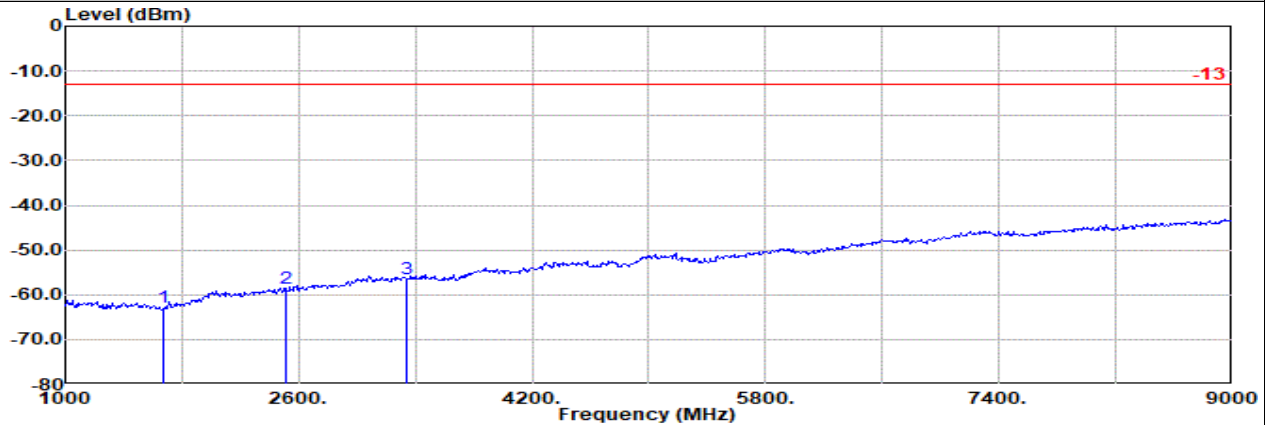


Site : 03CH12-HY

Condition: -13 3m 9120D-02114-240711 Horizontal

: WCDMA Band5 4182

	Freq	Level	Detector	Ant Factor	Amp\Cb	Filter	EIRPCF	Readin	Limit	Margin	Pol
	MHz	dBm			dB	dB	dB	dBuV	dBm	dB	
1	1672.00	-62.65	RMS	25.40	-29.15	0.74	-95.23	35.59	-13.00	-49.65	Horizontal
2	2509.00	-58.63	RMS	28.19	-27.27	0.50	-95.23	35.18	-13.00	-45.63	Horizontal
3	3345.00	-56.34	RMS	29.80	-26.22	0.40	-95.23	34.91	-13.00	-43.34	Horizontal

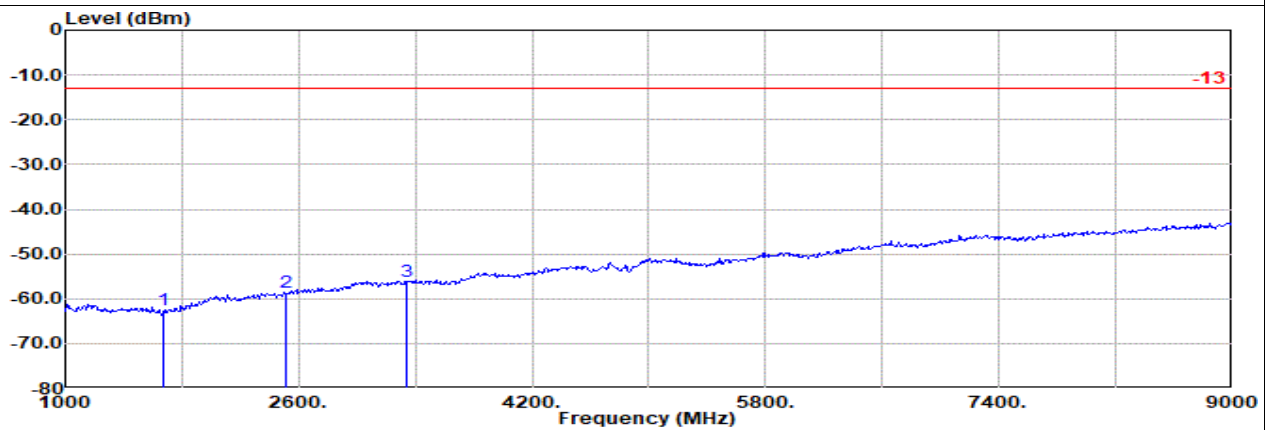

Site : 03CH12-HY

Condition: -13 3m 9120D-02114-240711 Vertical

: WCDMA Band5 4182

	Freq	Level	Detector	Ant Factor	Amp\Cb	Filter	EIRPCF	Readin	Limit	Margin	Pol
	MHz	dBm			dB	dB	dB	dBuV	dBm	dB	
1	1672.00	-62.56	RMS	25.40	-29.15	0.74	-95.23	35.68	-13.00	-49.56	Vertical
2	2509.00	-58.71	RMS	28.19	-27.27	0.50	-95.23	35.10	-13.00	-45.71	Vertical
3	3345.00	-56.08	RMS	29.80	-26.22	0.40	-95.23	35.17	-13.00	-43.08	Vertical




Ant. 0

Part 22H Mode 3

WCDMA B5 Ch4233

H

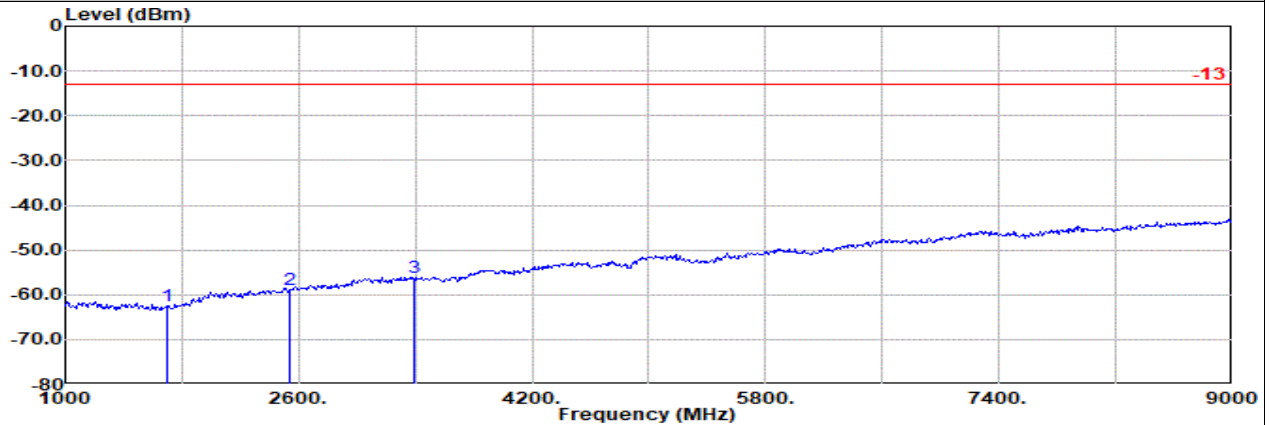


Site : 03CH12-HY

Condition: -13 3m 9120D-02114-240711 Horizontal

: WCDMA Band5 4233

	Freq	Level	Detector	Ant Factor	Amp\Cb	Filter	EIRPCF	Readin	Limit	Margin	Pol
	MHz	dBm			dB		dB	dBuV	dBm	dB	
1	1693.00	-62.49	RMS	25.27	-29.07	0.72	-95.23	35.82	-13.00	-49.49	Horizontal
2	2539.00	-58.81	RMS	28.49	-27.24	0.48	-95.23	34.69	-13.00	-45.81	Horizontal
3	3386.00	-56.15	RMS	29.73	-26.15	0.41	-95.23	35.09	-13.00	-43.15	Horizontal

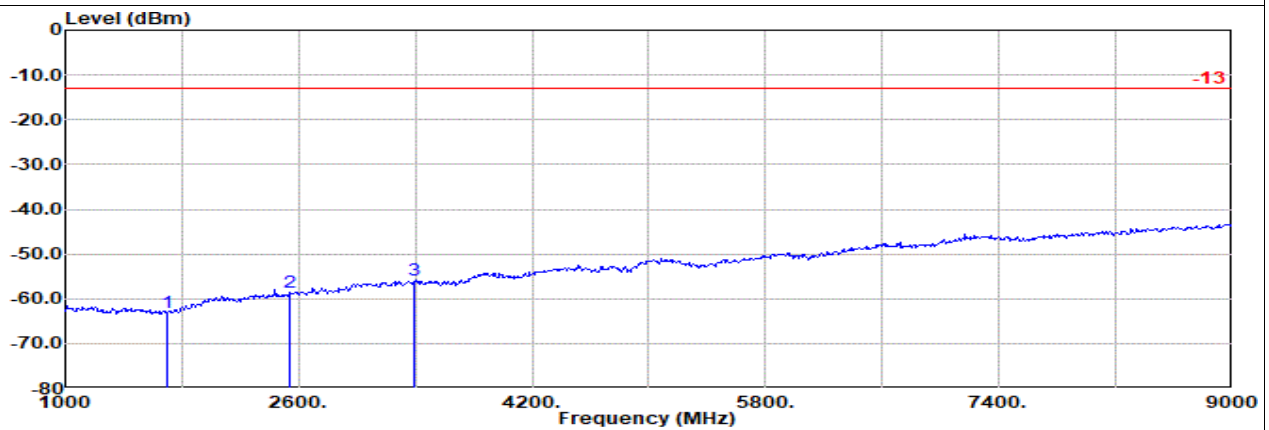

Site : 03CH12-HY

Condition: -13 3m 9120D-02114-240711 Vertical

: WCDMA Band5 4233

	Freq	Level	Detector	Ant Factor	Amp\Cb	Filter	EIRPCF	Readin	Limit	Margin	Pol
	MHz	dBm			dB		dB	dBuV	dBm	dB	
1	1693.00	-63.06	RMS	25.27	-29.07	0.72	-95.23	35.25	-13.00	-50.06	Vertical
2	2539.00	-58.53	RMS	28.49	-27.24	0.48	-95.23	34.97	-13.00	-45.53	Vertical
3	3386.00	-55.70	RMS	29.73	-26.15	0.41	-95.23	35.54	-13.00	-42.70	Vertical




Ant. 1

Part 22H Mode 2

GSM 850 Ch128

L

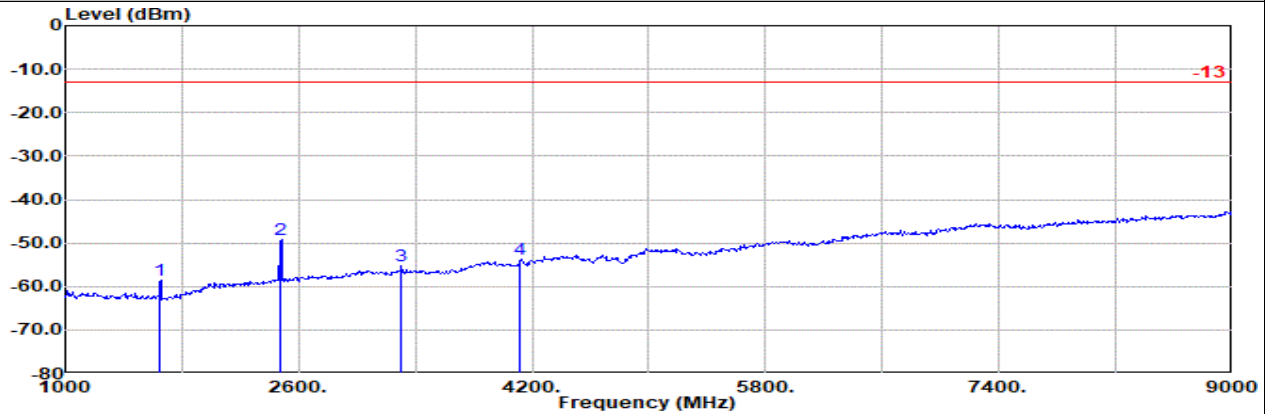


Site : 03CH12-HY

Condition: -13 3m 9120D-02114-240711 Horizontal

: GSM 850 Ch128

	Freq	Level	Detector	Ant Factor	Amp\Cb 1	Filter	EIRPCF	Readin g	Limit	Margin	Pol
	MHz	dBm			dB/m	dB	dB	dB	dBuV	dBm	dB
1	1648.00	-58.48	RMS	25.32	-29.25	0.75	-95.23	39.93	-13.00	-45.48	Horizontal
2	2472.00	-49.34	RMS	27.82	-27.31	0.51	-95.23	44.87	-13.00	-36.34	Horizontal
3	3296.00	-55.29	RMS	29.80	-26.30	0.39	-95.23	36.05	-13.00	-42.29	Horizontal
4	4121.00	-53.85	RMS	31.14	-25.16	0.49	-95.23	34.91	-13.00	-40.85	Horizontal

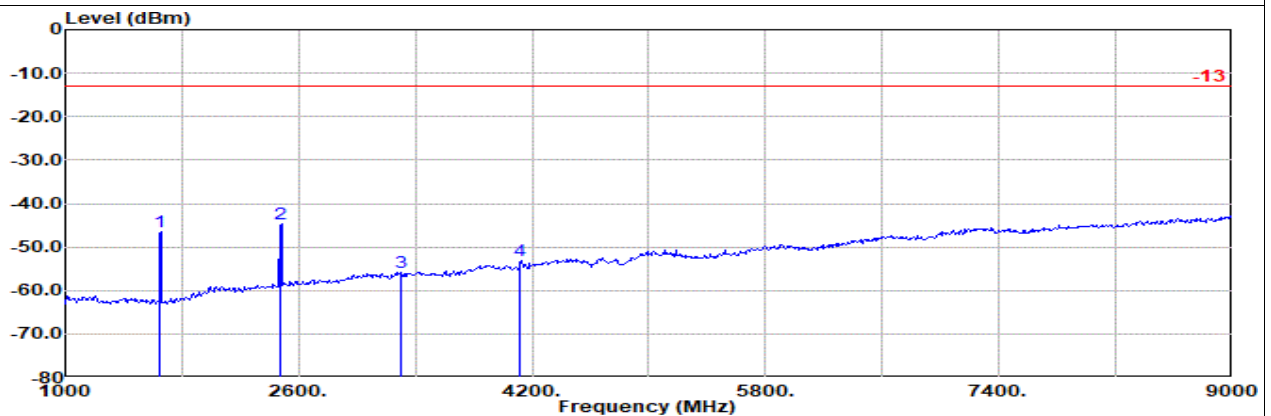

Site : 03CH12-HY

Condition: -13 3m 9120D-02114-240711 Vertical

: GSM 850 Ch128

	Freq	Level	Detector	Ant Factor	Amp\Cb 1	Filter	EIRPCF	Readin g	Limit	Margin	Pol
	MHz	dBm			dB/m	dB	dB	dB	dBuV	dBm	dB
1	1648.00	-46.37	RMS	25.32	-29.25	0.75	-95.23	52.04	-13.00	-33.37	Vertical
2	2472.00	-44.53	RMS	27.82	-27.31	0.51	-95.23	49.68	-13.00	-31.53	Vertical
3	3296.00	-55.78	RMS	29.80	-26.30	0.39	-95.23	35.56	-13.00	-42.78	Vertical
4	4121.00	-53.20	RMS	31.14	-25.16	0.49	-95.23	35.56	-13.00	-40.20	Vertical




Ant. 1

Part 22H Mode 2

GSM 850 Ch189

M

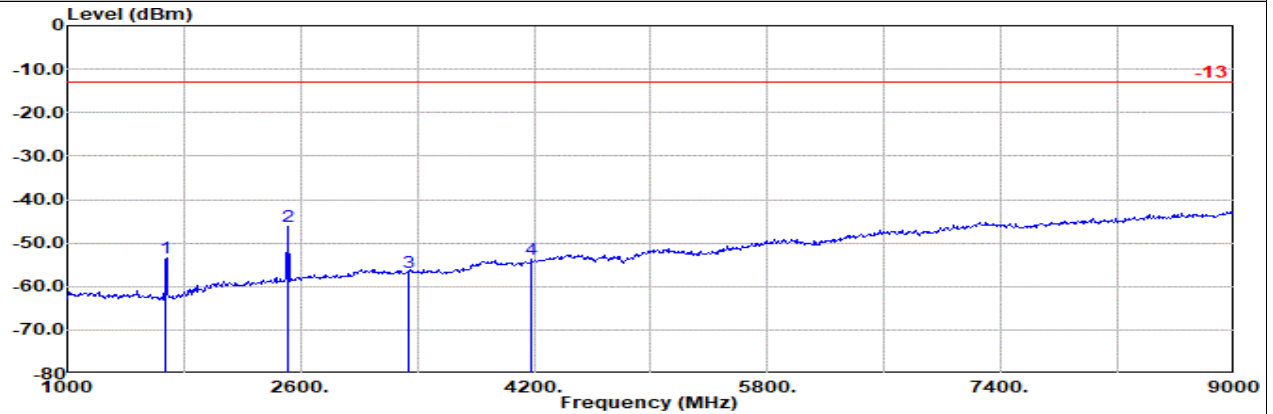


Site : 03CH12-HY

Condition: -13 3m 9120D-02114-240711 Horizontal

: GSM 850 Ch189

	Freq	Level	Detector	Ant Factor	Amp\Cb	Filter 1	EIRPCF	Readin g	Limit	Margin	Pol
	MHz	dBm									
1	1672.00	-53.40	RMS	25.40	-29.15	0.74	-95.23	44.84	-13.00	-40.40	Horizontal
2	2509.00	-46.21	RMS	28.19	-27.27	0.50	-95.23	47.60	-13.00	-33.21	Horizontal
3	3345.00	-56.61	RMS	29.80	-26.22	0.40	-95.23	34.64	-13.00	-43.61	Horizontal
4	4182.00	-53.60	RMS	31.20	-25.09	0.46	-95.23	35.06	-13.00	-40.60	Horizontal

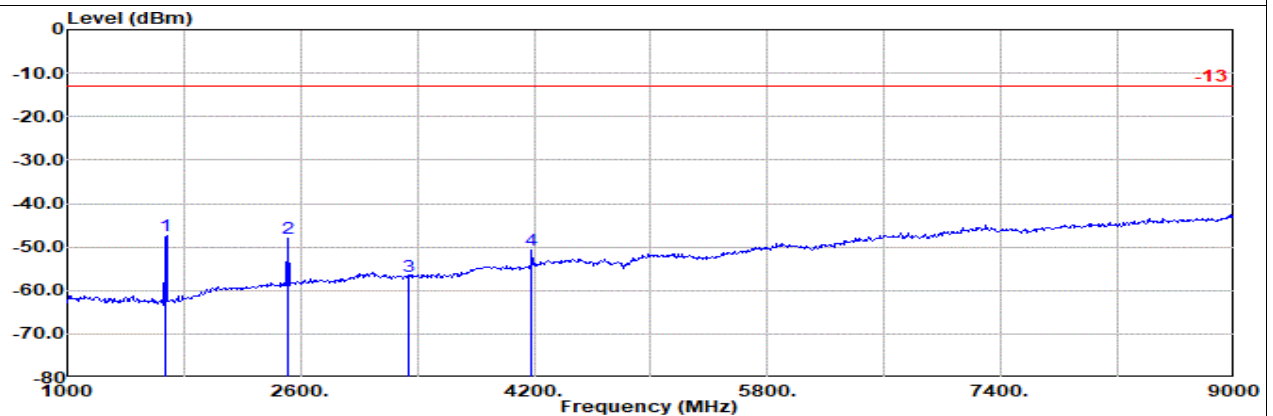

Site : 03CH12-HY

Condition: -13 3m 9120D-02114-240711 Vertical

: GSM 850 Ch189

	Freq	Level	Detector	Ant Factor	Amp\Cb	Filter 1	EIRPCF	Readin g	Limit	Margin	Pol
	MHz	dBm									
1	1672.00	-47.39	RMS	25.40	-29.15	0.74	-95.23	50.85	-13.00	-34.39	Vertical
2	2509.00	-47.91	RMS	28.19	-27.27	0.50	-95.23	45.90	-13.00	-34.91	Vertical
3	3345.00	-56.63	RMS	29.80	-26.22	0.40	-95.23	34.62	-13.00	-43.63	Vertical
4	4182.00	-50.71	RMS	31.20	-25.09	0.46	-95.23	37.95	-13.00	-37.71	Vertical




Ant. 1

Part 22H Mode 2

GSM 850 Ch251

H

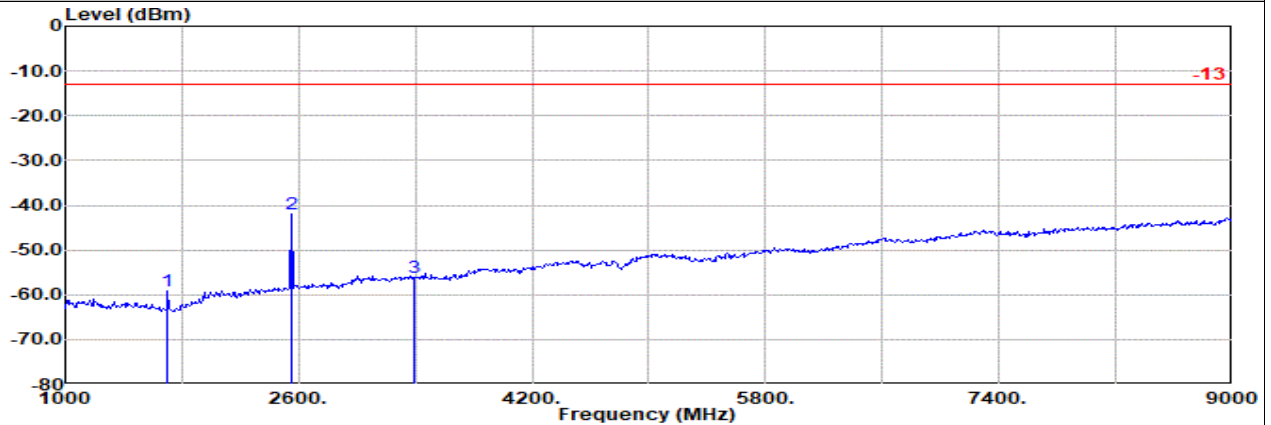


Site : 03CH12-HY

Condition: -13 3m 9120D-02114-240711 Horizontal

: GSM 850 Ch251

	Freq	Level	Detector	Ant Factor	Amp\Cb	Filter	EIRPCF	Readin	Limit	Margin	Pol
	MHz	dBm			dB	dB	dB	dBuV	dBm	dB	
1	1697.00	-59.27	RMS	25.23	-29.05	0.72	-95.23	39.06	-13.00	-46.27	Horizontal
2	2546.00	-41.92	RMS	28.44	-27.23	0.48	-95.23	51.62	-13.00	-28.92	Horizontal
3	3395.00	-56.26	RMS	29.71	-26.13	0.41	-95.23	34.98	-13.00	-43.26	Horizontal

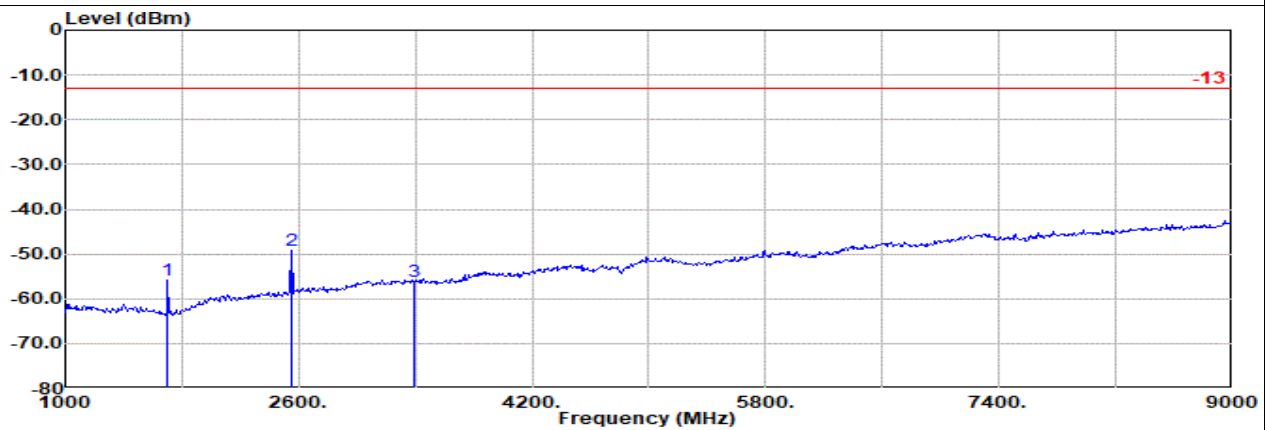

Site : 03CH12-HY

Condition: -13 3m 9120D-02114-240711 Vertical

: GSM 850 Ch251

	Freq	Level	Detector	Ant Factor	Amp\Cb	Filter	EIRPCF	Readin	Limit	Margin	Pol
	MHz	dBm			dB	dB	dB	dBuV	dBm	dB	
1	1697.00	-55.83	RMS	25.23	-29.05	0.72	-95.23	42.50	-13.00	-42.83	Vertical
2	2546.00	-49.13	RMS	28.44	-27.23	0.48	-95.23	44.41	-13.00	-36.13	Vertical
3	3395.00	-56.12	RMS	29.71	-26.13	0.41	-95.23	35.12	-13.00	-43.12	Vertical




Ant. 1

Part 22H Mode 4

WCDMA B5 Ch4132

L

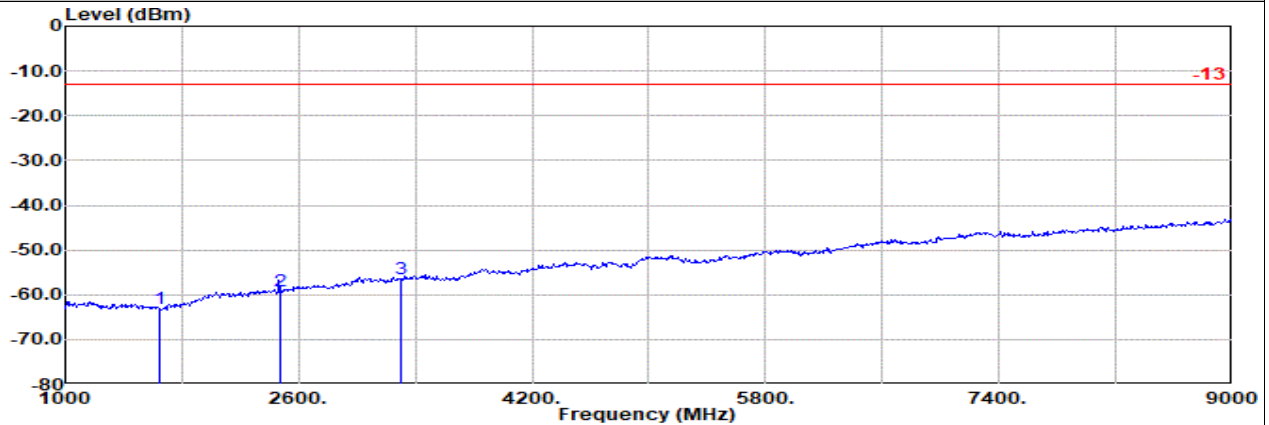


Site : 03CH12-HY

Condition: -13 3m 9120D-02114-240711 Horizontal

: WCDMA Band5 4132

	Freq MHz	Level dBm	Detector	Ant Amp\Cb Filter		EIRPCF	Readin g	Limit	Margin	Pol
				Factor	1					
1	1652.00	-62.98	RMS	25.30	-29.23	0.75	-95.23	35.43	-13.00	-49.98 Horizontal
2	2479.00	-59.31	RMS	27.89	-27.30	0.51	-95.23	34.82	-13.00	-46.31 Horizontal
3	3305.00	-56.59	RMS	29.80	-26.29	0.40	-95.23	34.73	-13.00	-43.59 Horizontal

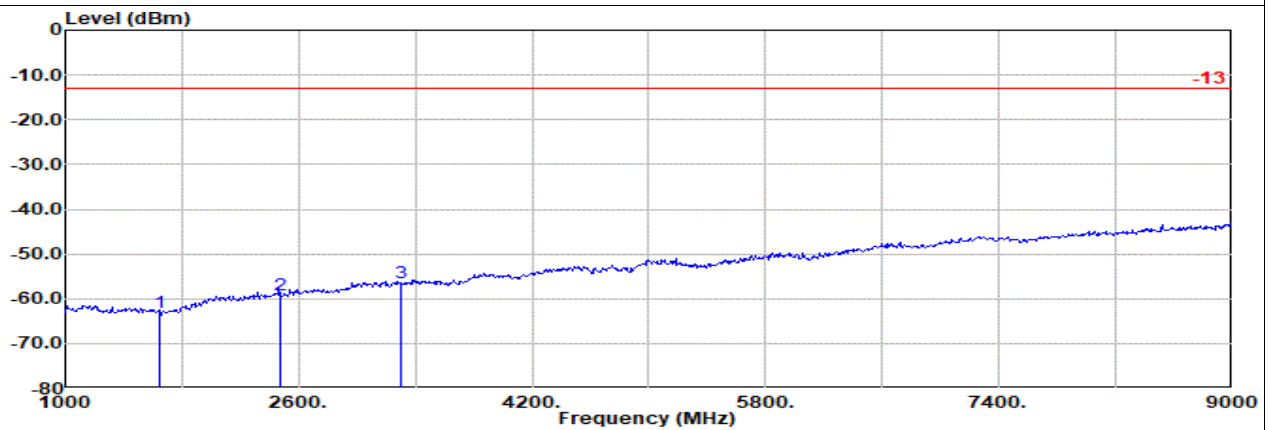

Site : 03CH12-HY

Condition: -13 3m 9120D-02114-240711 Vertical

: WCDMA Band5 4132

	Freq MHz	Level dBm	Detector	Ant Amp\Cb Filter		EIRPCF	Readin g	Limit	Margin	Pol
				Factor	1					
1	1652.00	-63.06	RMS	25.30	-29.23	0.75	-95.23	35.35	-13.00	-50.06 Vertical
2	2479.00	-59.23	RMS	27.89	-27.30	0.51	-95.23	34.90	-13.00	-46.23 Vertical
3	3305.00	-56.53	RMS	29.80	-26.29	0.40	-95.23	34.79	-13.00	-43.53 Vertical




Ant. 1

Part 22H Mode 4

WCDMA B5 Ch4182

M

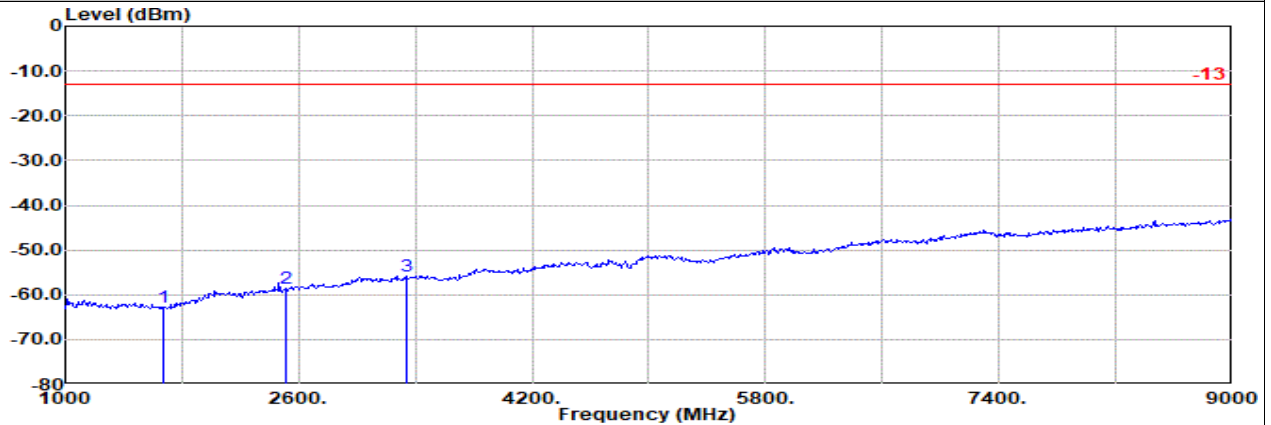


Site : 03CH12-HY

Condition: -13 3m 9120D-02114-240711 Horizontal

: WCDMA Band5 4182

	Freq MHz	Level dBm	Detector	Ant Amp\Cb Filter		EIRPCF	Readin g	Limit	Margin	Pol
				Factor	1					
1	1672.00	-62.70	RMS	25.40	-29.15	0.74	-95.23	35.54	-13.00	-49.70 Horizontal
2	2509.00	-58.48	RMS	28.19	-27.27	0.50	-95.23	35.33	-13.00	-45.48 Horizontal
3	3345.00	-55.93	RMS	29.80	-26.22	0.40	-95.23	35.32	-13.00	-42.93 Horizontal

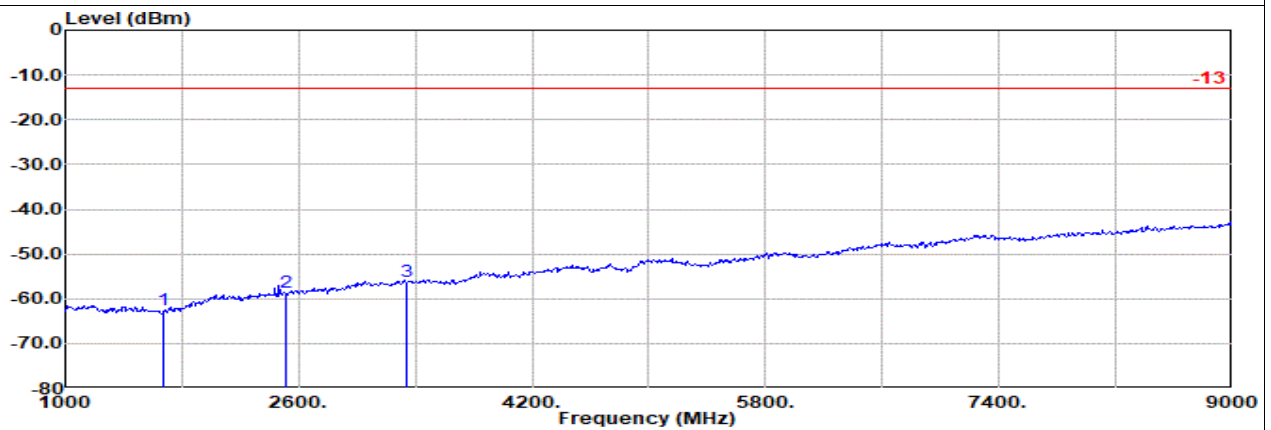

Site : 03CH12-HY

Condition: -13 3m 9120D-02114-240711 Vertical

: WCDMA Band5 4182

	Freq MHz	Level dBm	Detector	Ant Amp\Cb Filter		EIRPCF	Readin g	Limit	Margin	Pol
				Factor	1					
1	1672.00	-62.62	RMS	25.40	-29.15	0.74	-95.23	35.62	-13.00	-49.62 Vertical
2	2509.00	-58.55	RMS	28.19	-27.27	0.50	-95.23	35.26	-13.00	-45.55 Vertical
3	3345.00	-56.19	RMS	29.80	-26.22	0.40	-95.23	35.06	-13.00	-43.19 Vertical




Ant. 1

Part 22H Mode 4

WCDMA B5 Ch4233

H

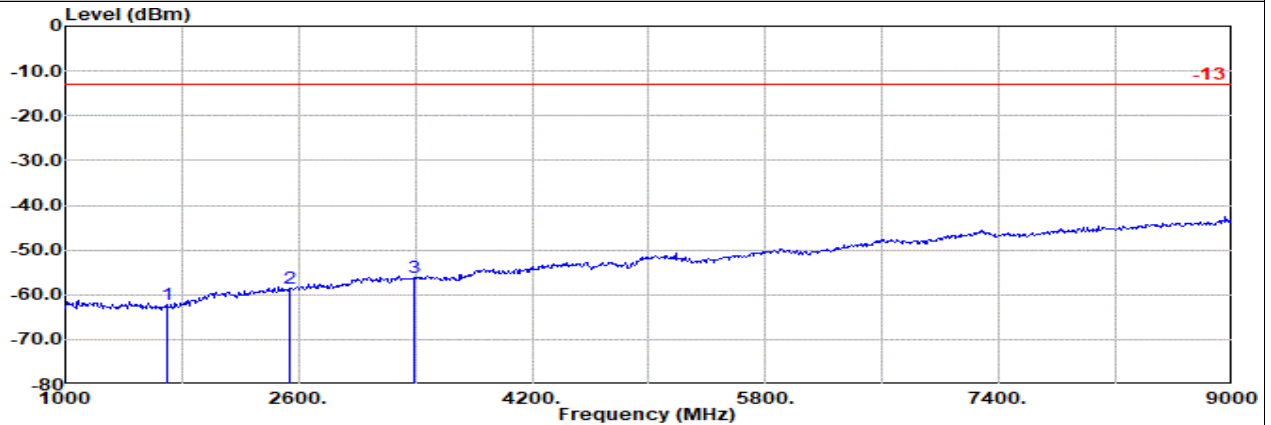


Site : 03CH12-HY

Condition: -13 3m 9120D-02114-240711 Horizontal

: WCDMA Band5 4233

	Freq	Level	Detector	Ant Factor	Amp\Cb	Filter	EIRPCF	Readin	Limit	Margin	Pol
	MHz	dBm			dB	dB	dB	dBuV	dBm	dB	
1	1693.00	-62.34	RMS	25.27	-29.07	0.72	-95.23	35.97	-13.00	-49.34	Horizontal
2	2539.00	-58.44	RMS	28.49	-27.24	0.48	-95.23	35.06	-13.00	-45.44	Horizontal
3	3386.00	-56.04	RMS	29.73	-26.15	0.41	-95.23	35.20	-13.00	-43.04	Horizontal

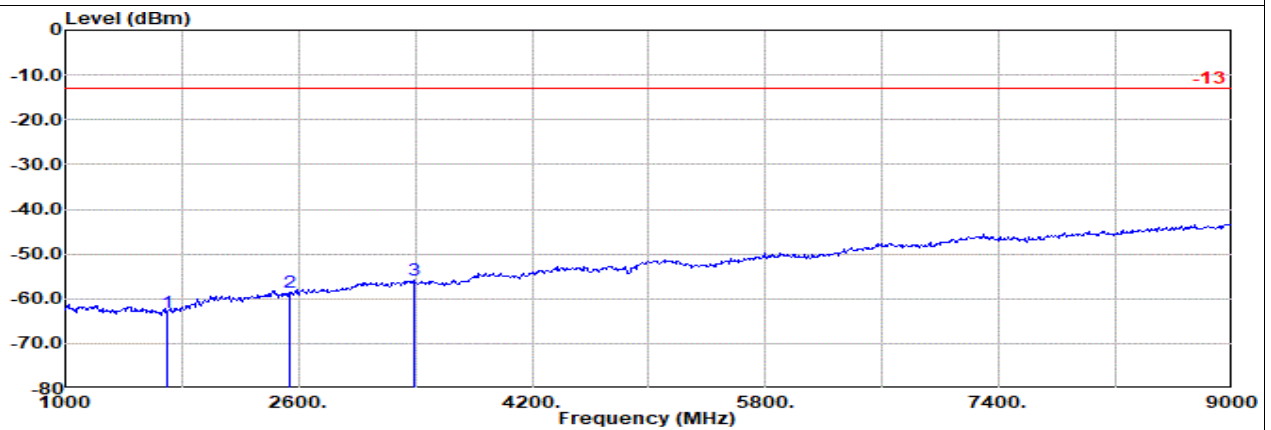

Site : 03CH12-HY

Condition: -13 3m 9120D-02114-240711 Vertical

: WCDMA Band5 4233

	Freq	Level	Detector	Ant Factor	Amp\Cb	Filter	EIRPCF	Readin	Limit	Margin	Pol
	MHz	dBm			dB	dB	dB	dBuV	dBm	dB	
1	1693.00	-63.08	RMS	25.27	-29.07	0.72	-95.23	35.23	-13.00	-50.08	Vertical
2	2539.00	-58.54	RMS	28.49	-27.24	0.48	-95.23	34.96	-13.00	-45.54	Vertical
3	3386.00	-56.00	RMS	29.73	-26.15	0.41	-95.23	35.24	-13.00	-43.00	Vertical




Ant. 2

Part 24E Mode 1

GSM 1900 Ch512

L

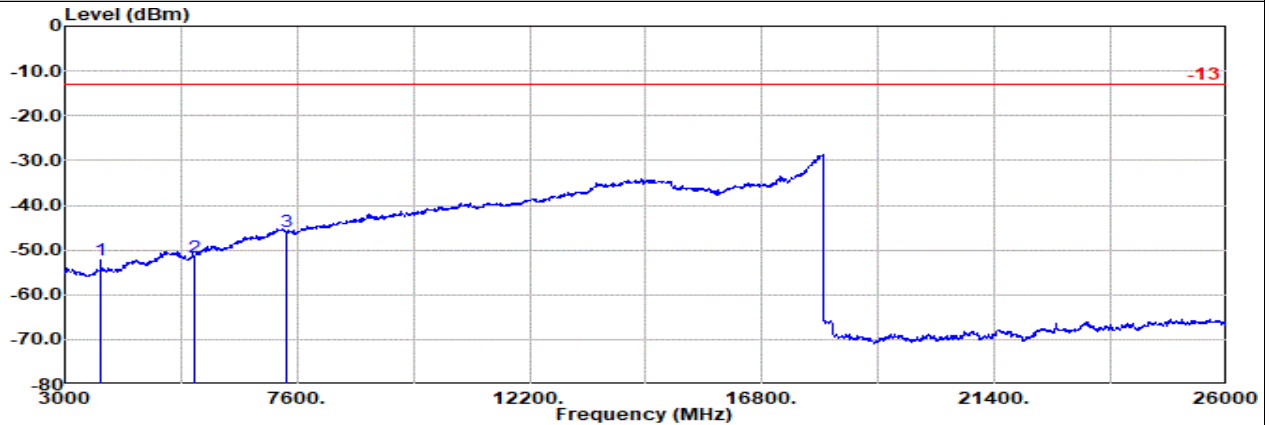


Site : 03CH12-HY

Condition: -13 1m BBHA9170_1223_240622 Horizontal

: GSM 1900 Ch512

	Freq MHz	Level dBm	Detector	Ant Amp\Cb Filter		EIRPCF	Readin g	Limit dBm	Margin dB	Pol
				Factor	1					
1	3700.00	-52.08	RMS	29.90	-25.73	0.76 -95.23	38.22	-13.00	-39.08	Horizontal
2	5550.00	-51.54	RMS	33.10	-23.64	0.40 -95.23	33.83	-13.00	-38.54	Horizontal
3	7400.00	-45.87	RMS	36.60	-22.16	0.33 -95.23	34.59	-13.00	-32.87	Horizontal

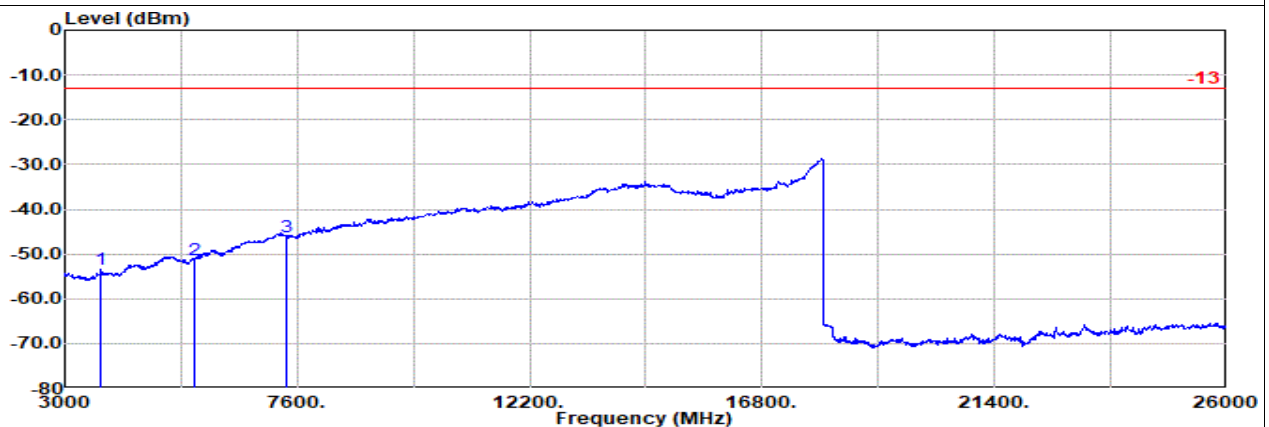

Site : 03CH12-HY

Condition: -13 1m BBHA9170_1223_240622 Vertical

: GSM 1900 Ch512

	Freq MHz	Level dBm	Detector	Ant Amp\Cb Filter		EIRPCF	Readin g	Limit dBm	Margin dB	Pol
				Factor	1					
1	3700.00	-53.52	RMS	29.90	-25.73	0.76 -95.23	36.78	-13.00	-40.52	Vertical
2	5550.00	-51.32	RMS	33.10	-23.64	0.40 -95.23	34.05	-13.00	-38.32	Vertical
3	7400.00	-46.14	RMS	36.60	-22.16	0.33 -95.23	34.32	-13.00	-33.14	Vertical




Ant. 2

Part 24E Mode 1

GSM 1900 Ch661

M

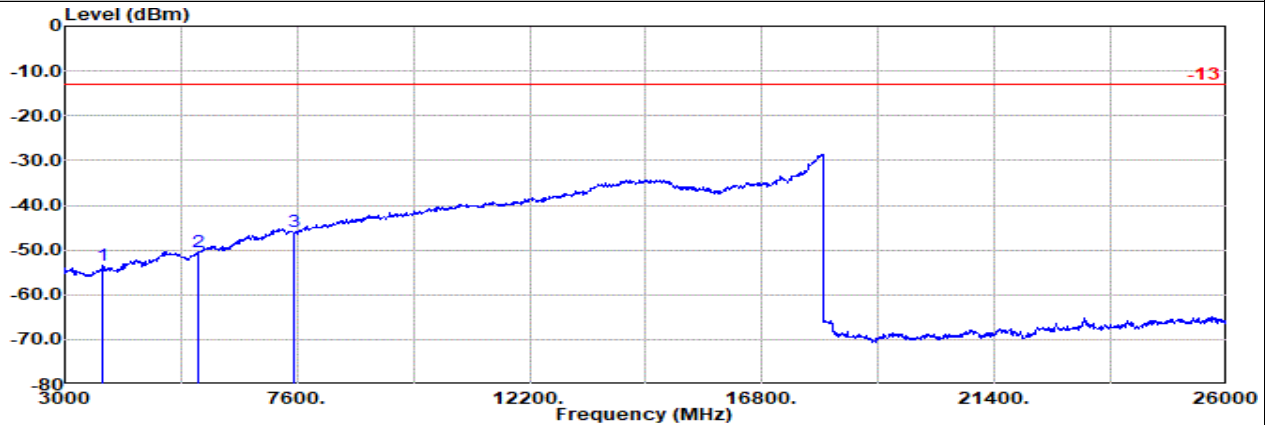


Site : 03CH12-HY

Condition: -13 1m BBHA9170_1223_240622 Horizontal

: GSM 1900 Ch661

	Freq MHz	Level dBm	Detector	Ant Amp\Cb Filter		EIRPCF	Readin g	Limit dBm	Margin	Pol
				Factor	1					
1	3760.00	-53.42	RMS	30.18	-25.66	0.70	-95.23	36.59	-13.00	-40.42 Horizontal
2	5640.00	-50.38	RMS	33.18	-23.57	0.39	-95.23	34.85	-13.00	-37.38 Horizontal
3	7520.00	-46.01	RMS	36.48	-22.06	0.35	-95.23	34.45	-13.00	-33.01 Horizontal

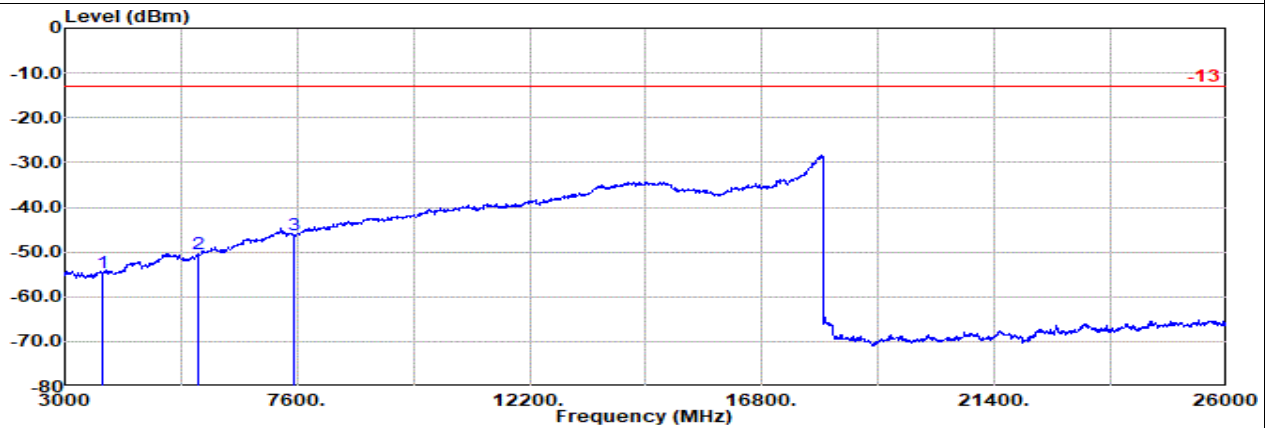

Site : 03CH12-HY

Condition: -13 1m BBHA9170_1223_240622 Vertical

: GSM 1900 Ch661

	Freq MHz	Level dBm	Detector	Ant Amp\Cb Filter		EIRPCF	Readin g	Limit dBm	Margin	Pol
				Factor	1					
1	3760.00	-54.73	RMS	30.18	-25.66	0.70	-95.23	35.28	-13.00	-41.73 Vertical
2	5640.00	-50.43	RMS	33.18	-23.57	0.39	-95.23	34.80	-13.00	-37.43 Vertical
3	7520.00	-46.05	RMS	36.48	-22.06	0.35	-95.23	34.41	-13.00	-33.05 Vertical




Ant. 2

Part 24E Mode 1

GSM 1900 Ch810

H

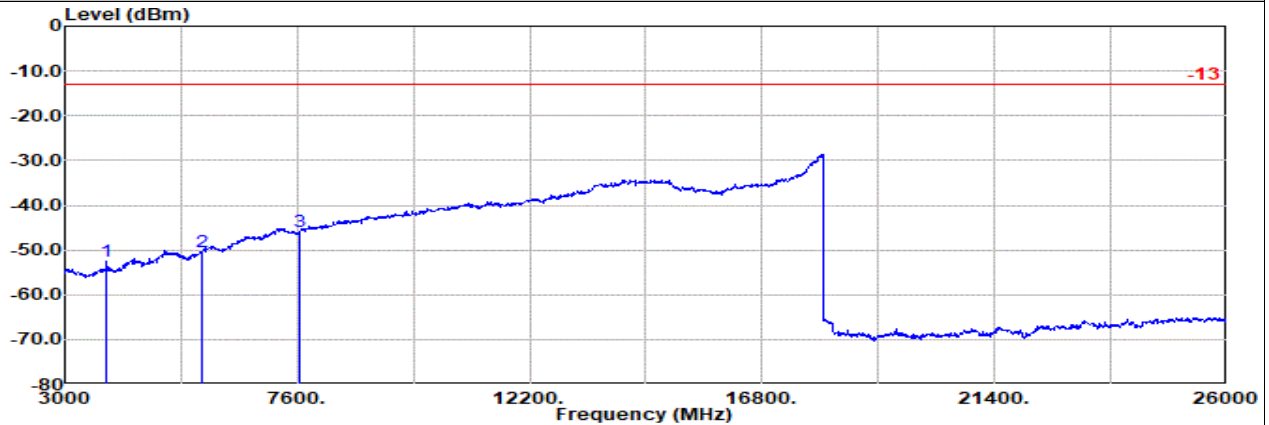


Site : 03CH12-HY

Condition: -13 1m BBHA9170_1223_240622 Horizontal

: GSM 1900 Ch810

	Freq	Level	Detector	Ant Amp\Cb Filter				Readin	Limit	Margin	Pol
				Factor	1	EIRPCF					
	MHz	dBm		dB/m	dB	dB	dB	dBuV	dBm	dB	
1	3819.00	-52.59	RMS	30.65	-25.59	0.65	-95.23	36.93	-13.00	-39.59	Horizontal
2	5729.00	-50.36	RMS	33.72	-23.49	0.38	-95.23	34.26	-13.00	-37.36	Horizontal
3	7639.00	-45.85	RMS	36.48	-22.00	0.37	-95.23	34.53	-13.00	-32.85	Horizontal

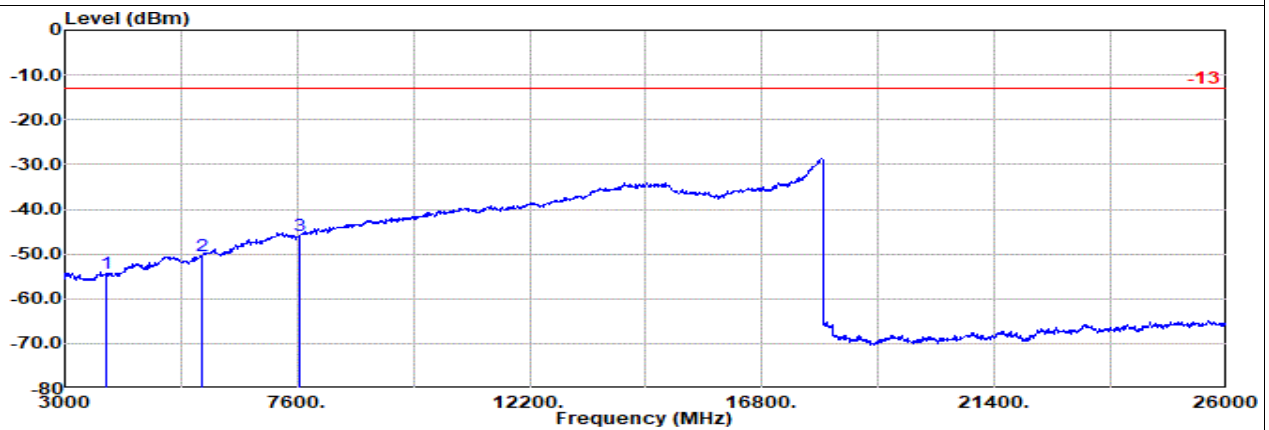

Site : 03CH12-HY

Condition: -13 1m BBHA9170_1223_240622 Vertical

: GSM 1900 Ch810

	Freq	Level	Detector	Ant Amp\Cb Filter				Readin	Limit	Margin	Pol
				Factor	1	EIRPCF					
	MHz	dBm		dB/m	dB	dB	dB	dBuV	dBm	dB	
1	3819.00	-54.44	RMS	30.65	-25.59	0.65	-95.23	35.08	-13.00	-41.44	Vertical
2	5729.00	-50.33	RMS	33.72	-23.49	0.38	-95.23	34.29	-13.00	-37.33	Vertical
3	7639.00	-45.92	RMS	36.48	-22.00	0.37	-95.23	34.46	-13.00	-32.92	Vertical




Ant. 2

Part 24E Mode 3

WCDMA B2 Ch9262

L

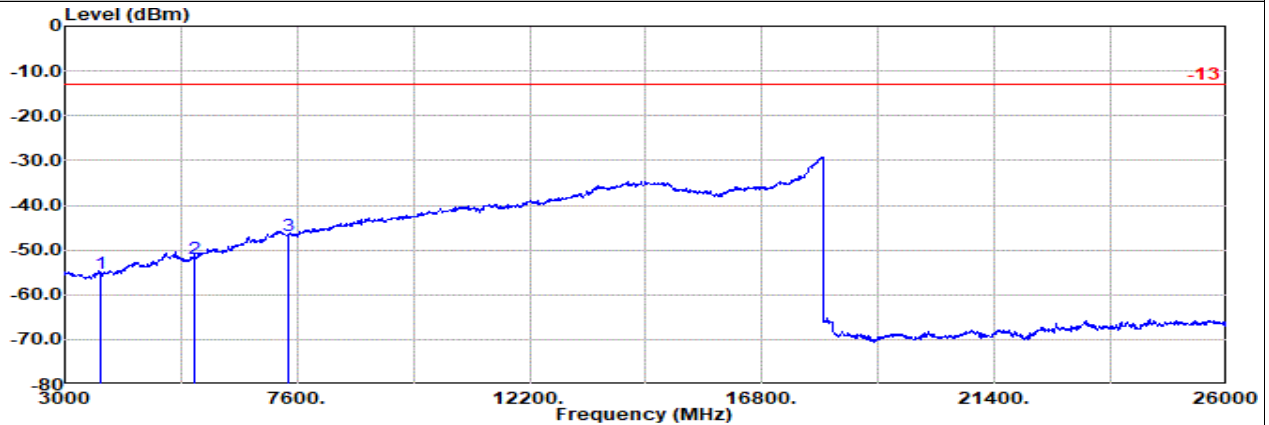


Site : 03CH12-HY

Condition: -13 3m 9120D-02114-240711 Horizontal

: WCDMA Band2 Ch9262

	Freq MHz	Level dBm	Detector	Ant		Filter	EIRPCF		Readin g	Limit	Margin Pol	
				Factor	Amp\Cb dB/m dB		dB	dB				
1	3705.00	-55.14	RMS	29.92	-25.72	0.75	-95.23	35.13	-13.00	-42.14	Horizontal	
2	5557.00	-51.86	RMS	33.10	-23.64	0.40	-95.23	33.51	-13.00	-38.86	Horizontal	
3	7410.00	-46.81	RMS	36.62	-22.15	0.33	-95.23	33.62	-13.00	-33.81	Horizontal	

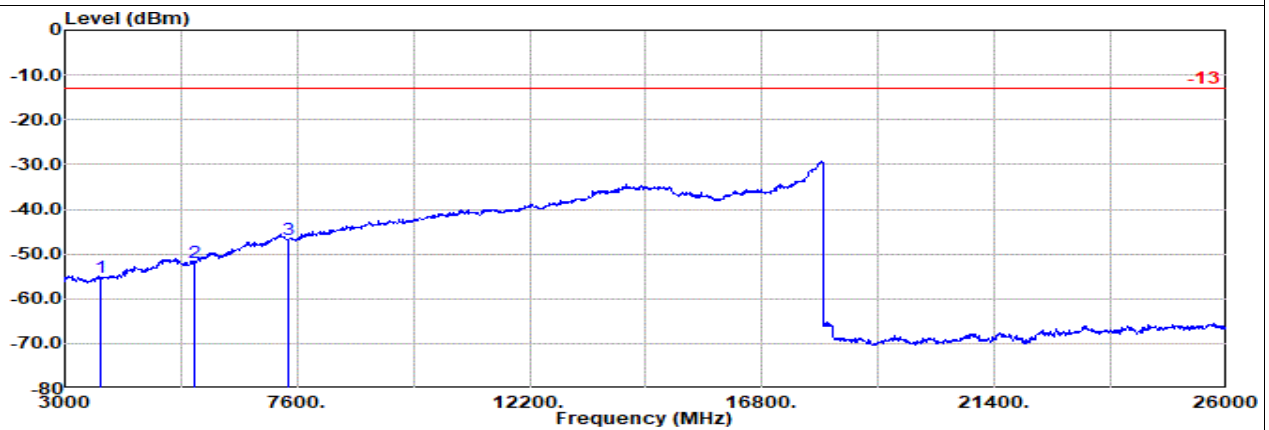

Site : 03CH12-HY

Condition: -13 3m 9120D-02114-240711 Vertical

: WCDMA Band2 Ch9262

	Freq MHz	Level dBm	Detector	Ant		Filter	EIRPCF		Readin g	Limit	Margin Pol	
				Factor	Amp\Cb dB/m dB		dB	dB				
1	3705.00	-55.21	RMS	29.92	-25.72	0.75	-95.23	35.06	-13.00	-42.21	Vertical	
2	5557.00	-51.82	RMS	33.10	-23.64	0.40	-95.23	33.55	-13.00	-38.82	Vertical	
3	7410.00	-46.72	RMS	36.62	-22.15	0.33	-95.23	33.71	-13.00	-33.72	Vertical	




Ant. 2

Part 24E Mode 3

WCDMA B2 Ch9400

M

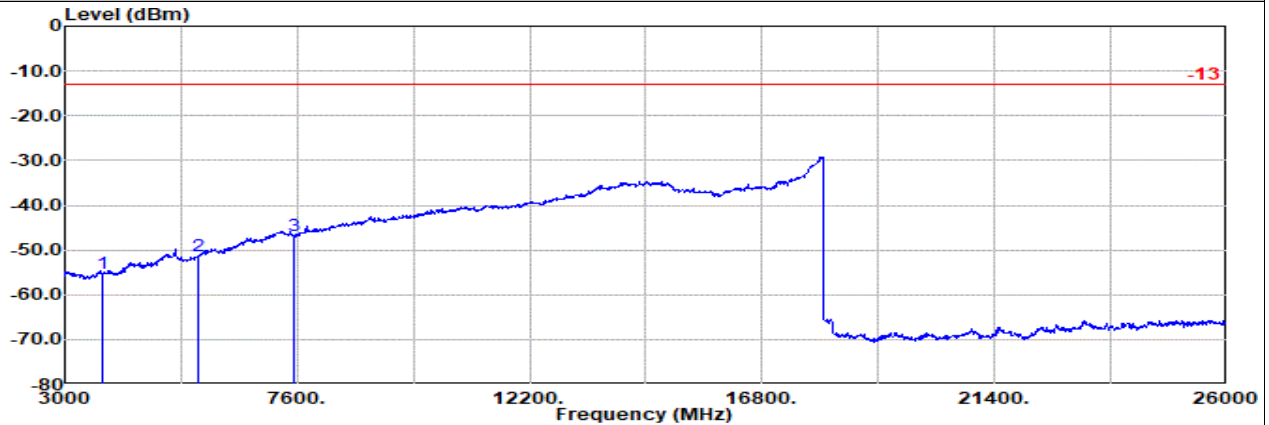


Site : 03CH12-HY

Condition: -13 3m 9120D-02114-240711 Horizontal

: WCDMA Band2 Ch9400

	Freq MHz	Level dBm	Detector	Ant Amp\Cb Filter		EIRPCF	Readin g	Limit	Margin Pol	
				Factor	1					
1	3760.00	-55.16	RMS	30.18	-25.66	0.70	-95.23	34.85	-13.00	-42.16 Horizontal
2	5640.00	-51.34	RMS	33.18	-23.57	0.39	-95.23	33.89	-13.00	-38.34 Horizontal
3	7520.00	-46.76	RMS	36.48	-22.06	0.35	-95.23	33.70	-13.00	-33.76 Horizontal

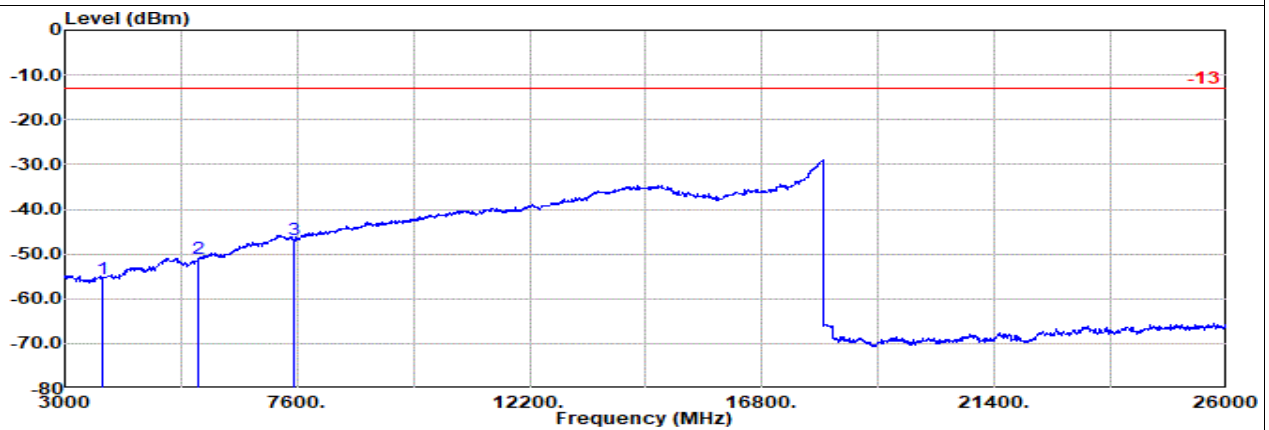

Site : 03CH12-HY

Condition: -13 3m 9120D-02114-240711 Vertical

: WCDMA Band2 Ch9400

	Freq MHz	Level dBm	Detector	Ant Amp\Cb Filter		EIRPCF	Readin g	Limit	Margin Pol	
				Factor	1					
1	3760.00	-55.52	RMS	30.18	-25.66	0.70	-95.23	34.49	-13.00	-42.52 Vertical
2	5640.00	-51.04	RMS	33.18	-23.57	0.39	-95.23	34.19	-13.00	-38.04 Vertical
3	7520.00	-46.66	RMS	36.48	-22.06	0.35	-95.23	33.80	-13.00	-33.66 Vertical




Ant. 2

Part 24E Mode 3

WCDMA B2 Ch9538

H

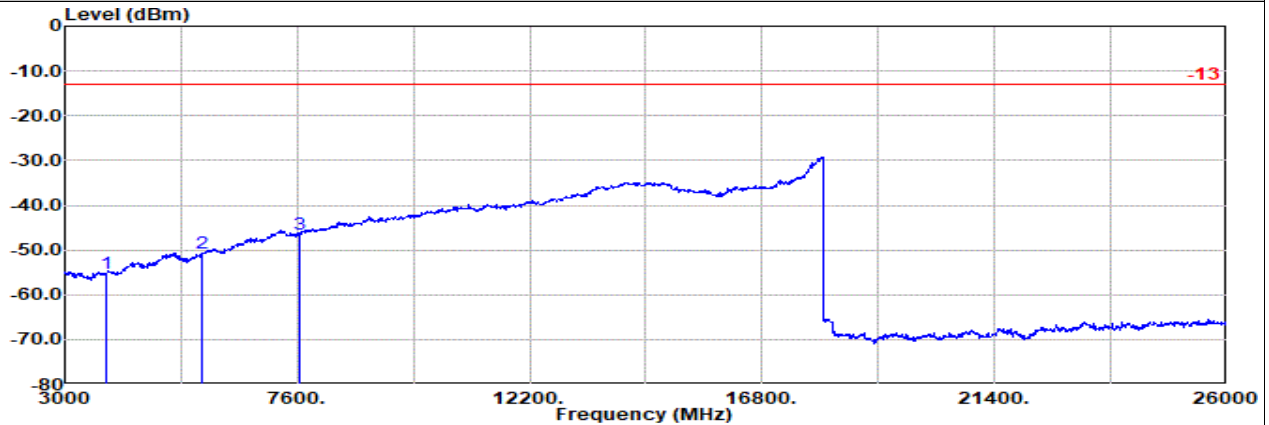


Site : 03CH12-HY

Condition: -13 3m 9120D-02114-240711 Horizontal

: WCDMA Band2 Ch9538

	Freq	Level	Detector	Ant Factor	Amp\Cb	Filter	EIRPCF	Readin	Limit	Margin	Pol
	MHz	dBm			dB		dB	dBuV	dBm	dB	
1	3815.00	-55.17	RMS	30.62	-25.60	0.66	-95.23	34.38	-13.00	-42.17	Horizontal
2	5722.00	-50.72	RMS	33.69	-23.50	0.38	-95.23	33.94	-13.00	-37.72	Horizontal
3	7630.00	-46.58	RMS	36.46	-22.00	0.37	-95.23	33.82	-13.00	-33.58	Horizontal

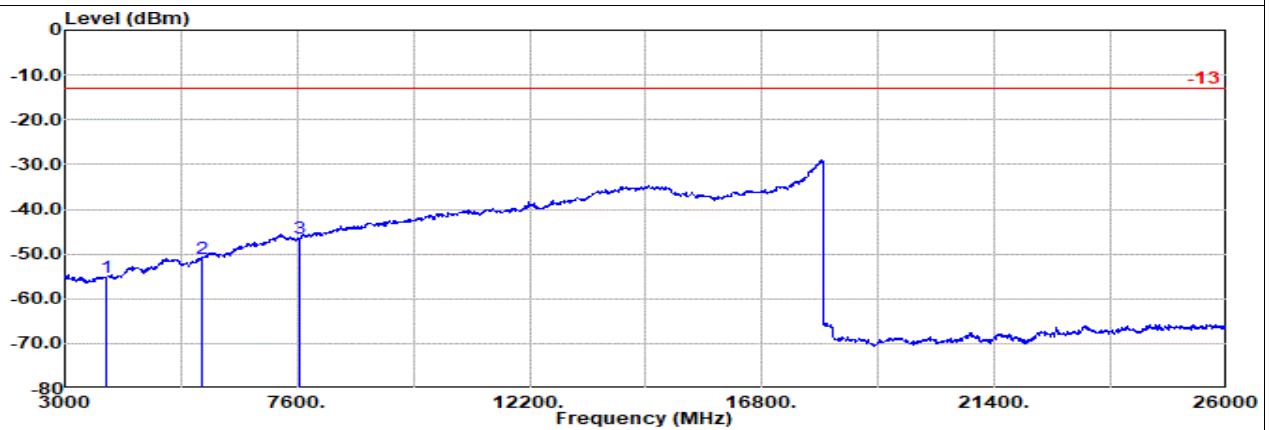

Site : 03CH12-HY

Condition: -13 3m 9120D-02114-240711 Vertical

: WCDMA Band2 Ch9538

	Freq	Level	Detector	Ant Factor	Amp\Cb	Filter	EIRPCF	Readin	Limit	Margin	Pol
	MHz	dBm			dB		dB	dBuV	dBm	dB	
1	3815.00	-55.38	RMS	30.62	-25.60	0.66	-95.23	34.17	-13.00	-42.38	Vertical
2	5722.00	-51.05	RMS	33.69	-23.50	0.38	-95.23	33.61	-13.00	-38.05	Vertical
3	7630.00	-46.48	RMS	36.46	-22.00	0.37	-95.23	33.92	-13.00	-33.48	Vertical




Ant. 1

Part 24E Mode 2

GSM 1900 Ch512

L

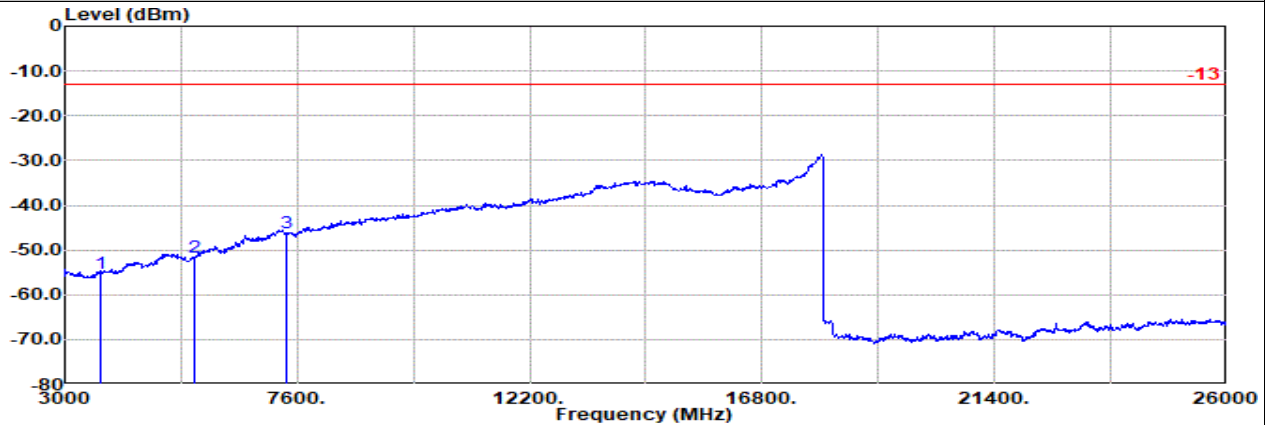


Site : 03CH12-HY

Condition: -13 1m BBHA9170_1223_240622 Horizontal

: GSM 1900 Ch512

	Freq MHz	Level dBm	Detector	Ant Amp\Cb Filter		EIRPCF	Readin g	Limit	Margin Pol	
				Factor	1					
1	3700.00	-55.24	RMS	29.90	-25.73	0.76	-95.23	35.06	-13.00	-42.24 Horizontal
2	5550.00	-51.62	RMS	33.10	-23.64	0.40	-95.23	33.75	-13.00	-38.62 Horizontal
3	7400.00	-46.08	RMS	36.60	-22.16	0.33	-95.23	34.38	-13.00	-33.08 Horizontal

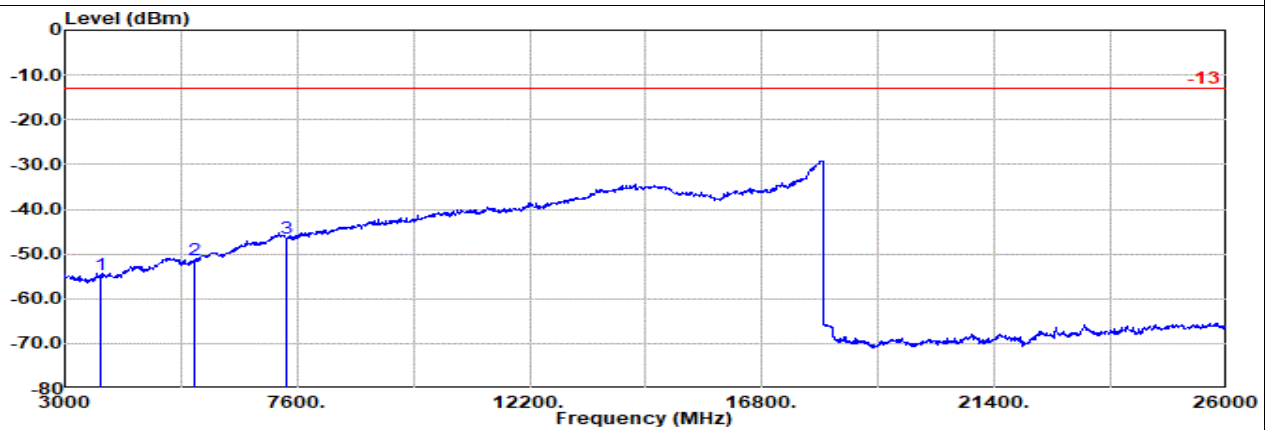

Site : 03CH12-HY

Condition: -13 1m BBHA9170_1223_240622 Vertical

: GSM 1900 Ch512

	Freq MHz	Level dBm	Detector	Ant Amp\Cb Filter		EIRPCF	Readin g	Limit	Margin Pol	
				Factor	1					
1	3700.00	-54.56	RMS	29.90	-25.73	0.76	-95.23	35.74	-13.00	-41.56 Vertical
2	5550.00	-51.42	RMS	33.10	-23.64	0.40	-95.23	33.95	-13.00	-38.42 Vertical
3	7400.00	-46.46	RMS	36.60	-22.16	0.33	-95.23	34.00	-13.00	-33.46 Vertical




Ant. 1

Part 24E Mode 2

GSM 1900 Ch661

M

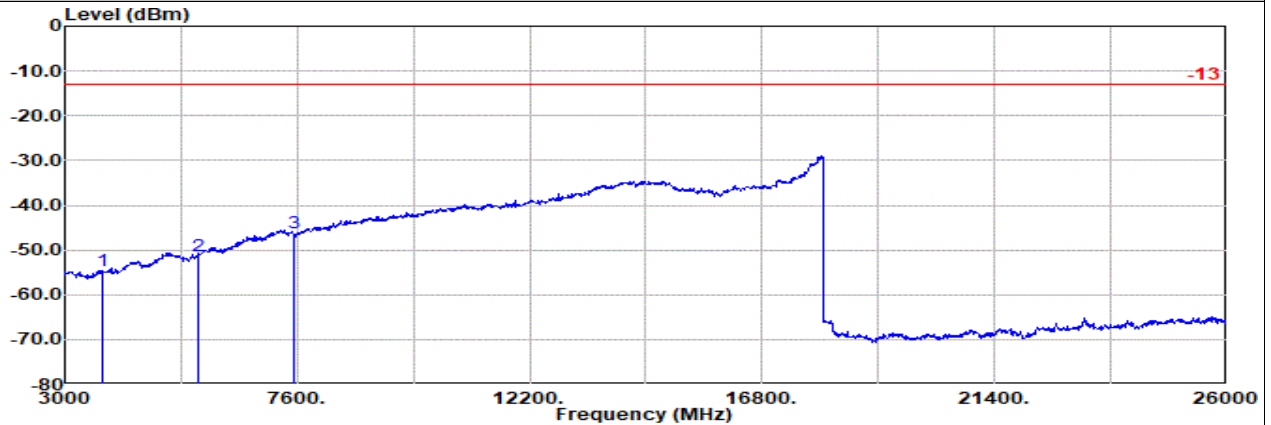


Site : 03CH12-HY

Condition: -13 1m BBHA9170_1223_240622 Horizontal

: GSM 1900 Ch661

	Freq MHz	Level dBm	Detector	Ant Amp\Cb Filter		EIRPCF	Readin g	Limit dBm	Margin	Pol
				Factor	1					
1	3760.00	-54.77	RMS	30.18	-25.66	0.70	-95.23	35.24	-13.00	-41.77 Horizontal
2	5640.00	-51.26	RMS	33.18	-23.57	0.39	-95.23	33.97	-13.00	-38.26 Horizontal
3	7520.00	-46.11	RMS	36.48	-22.06	0.35	-95.23	34.35	-13.00	-33.11 Horizontal

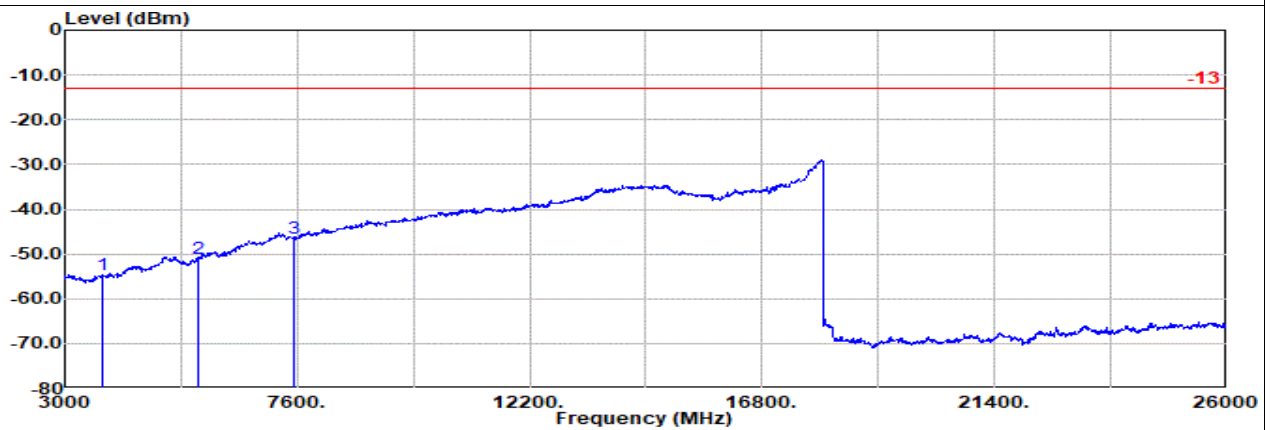

Site : 03CH12-HY

Condition: -13 1m BBHA9170_1223_240622 Vertical

: GSM 1900 Ch661

	Freq MHz	Level dBm	Detector	Ant Amp\Cb Filter		EIRPCF	Readin g	Limit dBm	Margin	Pol
				Factor	1					
1	3760.00	-54.69	RMS	30.18	-25.66	0.70	-95.23	35.32	-13.00	-41.69 Vertical
2	5640.00	-50.91	RMS	33.18	-23.57	0.39	-95.23	34.32	-13.00	-37.91 Vertical
3	7520.00	-46.37	RMS	36.48	-22.06	0.35	-95.23	34.09	-13.00	-33.37 Vertical




Ant. 1

Part 24E Mode 2

GSM 1900 Ch810

H

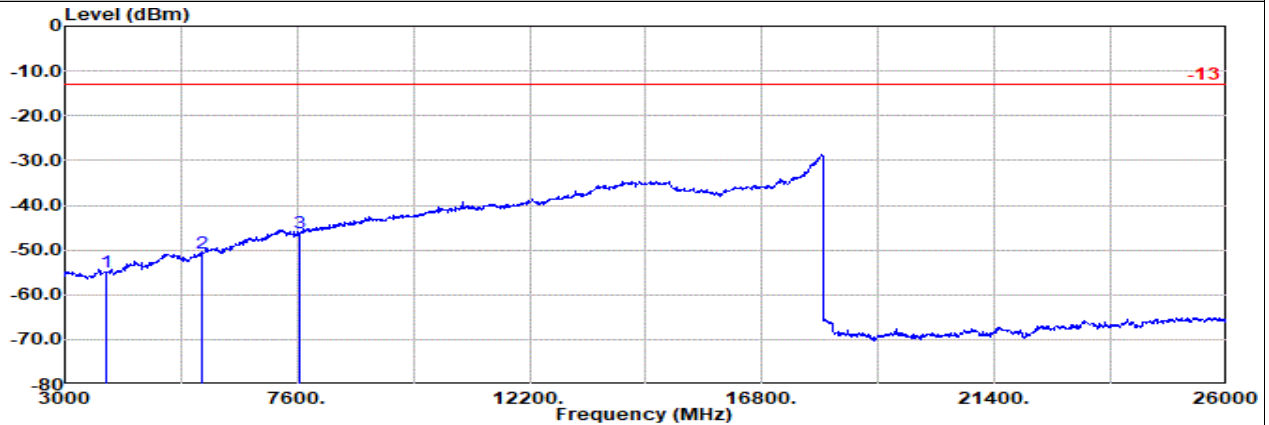


Site : 03CH12-HY

Condition: -13 1m BBHA9170_1223_240622 Horizontal

: GSM 1900 Ch810

	Freq	Level	Detector	Ant Amp\Cb Filter				Readin	Limit	Margin Pol	
				Factor	1	EIRPCF					
	MHz	dBm		dB/m	dB	dB	dB	dBuV	dBm	dB	
1	3819.00	-55.04	RMS	30.65	-25.59	0.65	-95.23	34.48	-13.00	-42.04	Horizontal
2	5729.00	-50.77	RMS	33.72	-23.49	0.38	-95.23	33.85	-13.00	-37.77	Horizontal
3	7639.00	-46.28	RMS	36.48	-22.00	0.37	-95.23	34.10	-13.00	-33.28	Horizontal

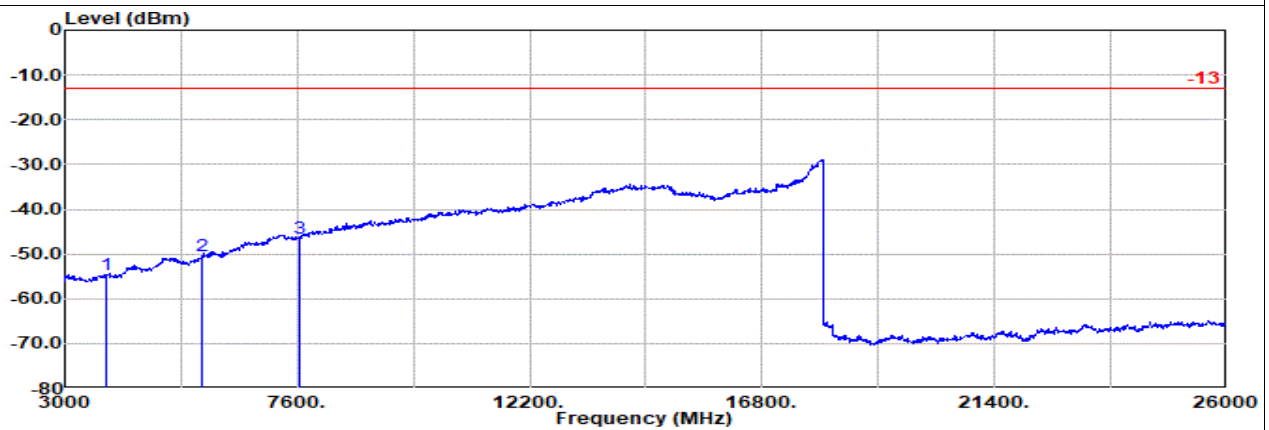

Site : 03CH12-HY

Condition: -13 1m BBHA9170_1223_240622 Vertical

: GSM 1900 Ch810

	Freq	Level	Detector	Ant Amp\Cb Filter				Readin	Limit	Margin Pol	
				Factor	1	EIRPCF					
	MHz	dBm		dB/m	dB	dB	dB	dBuV	dBm	dB	
1	3819.00	-54.52	RMS	30.65	-25.59	0.65	-95.23	35.00	-13.00	-41.52	Vertical
2	5729.00	-50.44	RMS	33.72	-23.49	0.38	-95.23	34.18	-13.00	-37.44	Vertical
3	7639.00	-46.56	RMS	36.48	-22.00	0.37	-95.23	33.82	-13.00	-33.56	Vertical




Ant. 1

Part 24E Mode 4

WCDMA B2 Ch9262

L

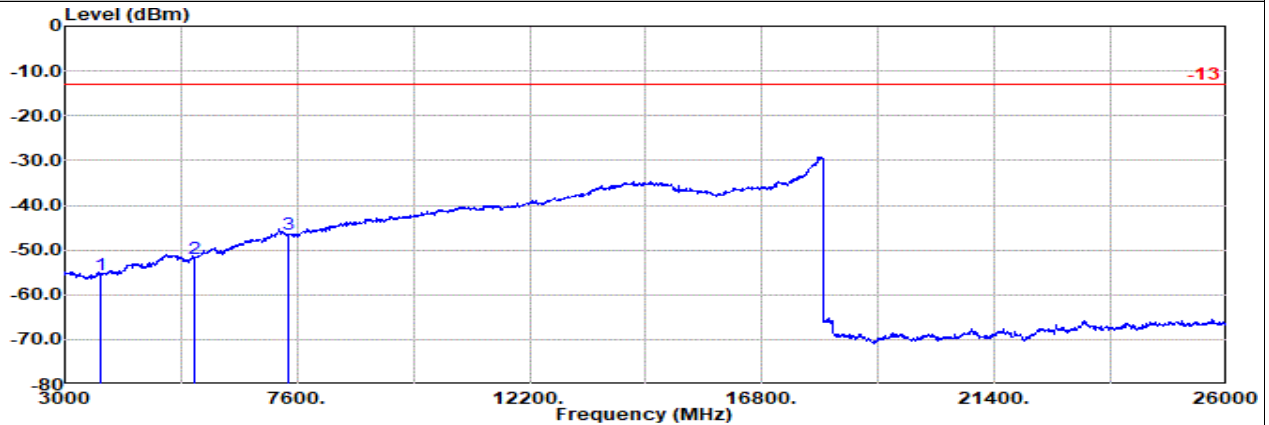


Site : 03CH12-HY

Condition: -13 3m 9120D-02114-240711 Horizontal

: WCDMA Band2 Ch9262

	Freq MHz	Level dBm	Detector	Ant		Filter	EIRPCF		Readin g	Limit	Margin	Pol
				Factor	Amp\Cb dB/m dB		dB	dB				
1	3705.00	-55.62	RMS	29.92	-25.72	0.75	-95.23	34.65	-13.00	-42.62	Horizontal	
2	5557.00	-51.97	RMS	33.10	-23.64	0.40	-95.23	33.40	-13.00	-38.97	Horizontal	
3	7410.00	-46.37	RMS	36.62	-22.15	0.33	-95.23	34.06	-13.00	-33.37	Horizontal	

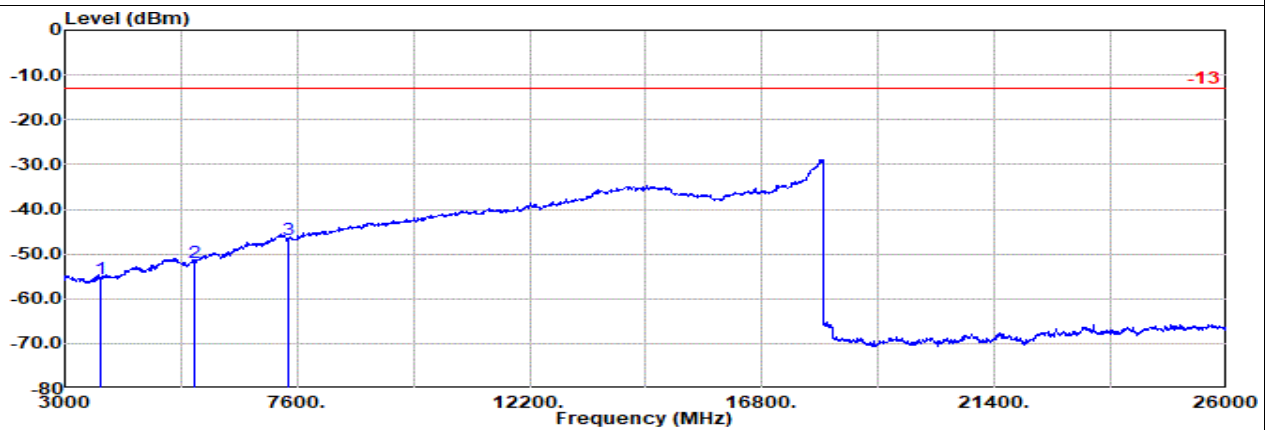

Site : 03CH12-HY

Condition: -13 3m 9120D-02114-240711 Vertical

: WCDMA Band2 Ch9262

	Freq MHz	Level dBm	Detector	Ant		Filter	EIRPCF		Readin g	Limit	Margin	Pol
				Factor	Amp\Cb dB/m dB		dB	dB				
1	3705.00	-55.45	RMS	29.92	-25.72	0.75	-95.23	34.82	-13.00	-42.45	Vertical	
2	5557.00	-52.02	RMS	33.10	-23.64	0.40	-95.23	33.35	-13.00	-39.02	Vertical	
3	7410.00	-46.82	RMS	36.62	-22.15	0.33	-95.23	33.61	-13.00	-33.82	Vertical	




Ant. 1


Part 24E Mode 4

WCDMA B2 Ch9400

M

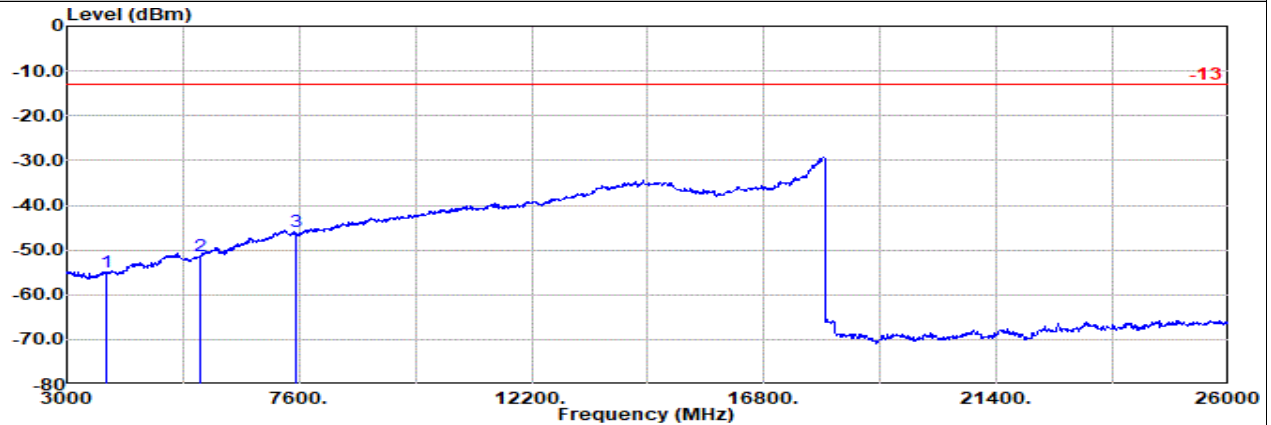

	Freq	Level	Detector	Ant Factor	Amp\Cb	Filter	EIRPCF	Readin	Limit	Margin	Pol
	MHz	dBm			dB	dB	dB	dBuV	dBm	dB	
1	3765.00	-55.04	RMS	30.22	-25.66	0.70	-95.23	34.93	-13.00	-42.04	Horizontal
2	5640.00	-51.40	RMS	33.18	-23.57	0.39	-95.23	33.83	-13.00	-38.40	Horizontal
3	7520.00	-45.97	RMS	36.48	-22.06	0.35	-95.23	34.49	-13.00	-32.97	Horizontal

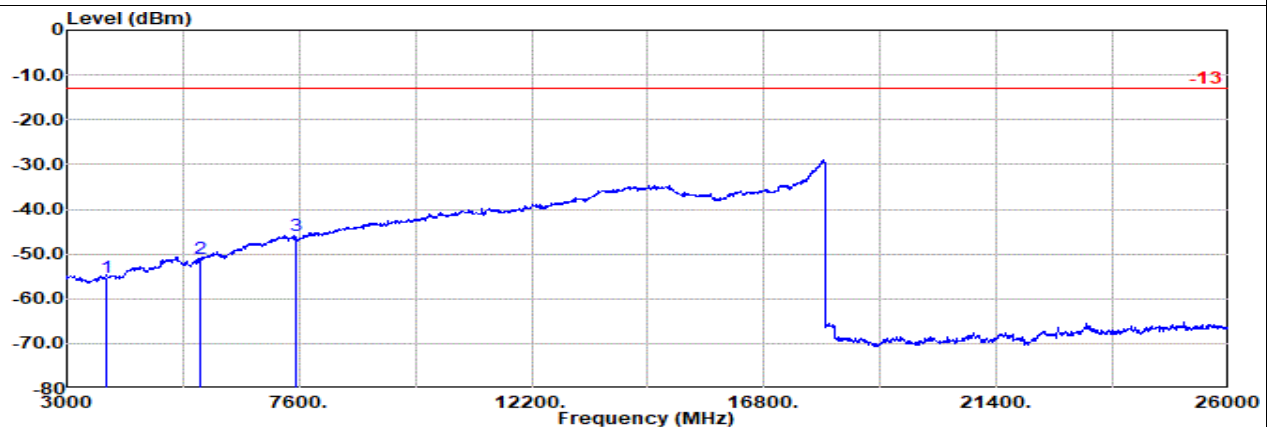

	Freq	Level	Detector	Ant Factor	Amp\Cb	Filter	EIRPCF	Readin	Limit	Margin	Pol
	MHz	dBm			dB	dB	dB	dBuV	dBm	dB	
1	3765.00	-55.30	RMS	30.22	-25.66	0.70	-95.23	34.67	-13.00	-42.30	Vertical
2	5640.00	-51.15	RMS	33.18	-23.57	0.39	-95.23	34.08	-13.00	-38.15	Vertical
3	7520.00	-46.01	RMS	36.48	-22.06	0.35	-95.23	34.45	-13.00	-33.01	Vertical




Ant. 1


Part 24E Mode 4

WCDMA B2 Ch9538

H

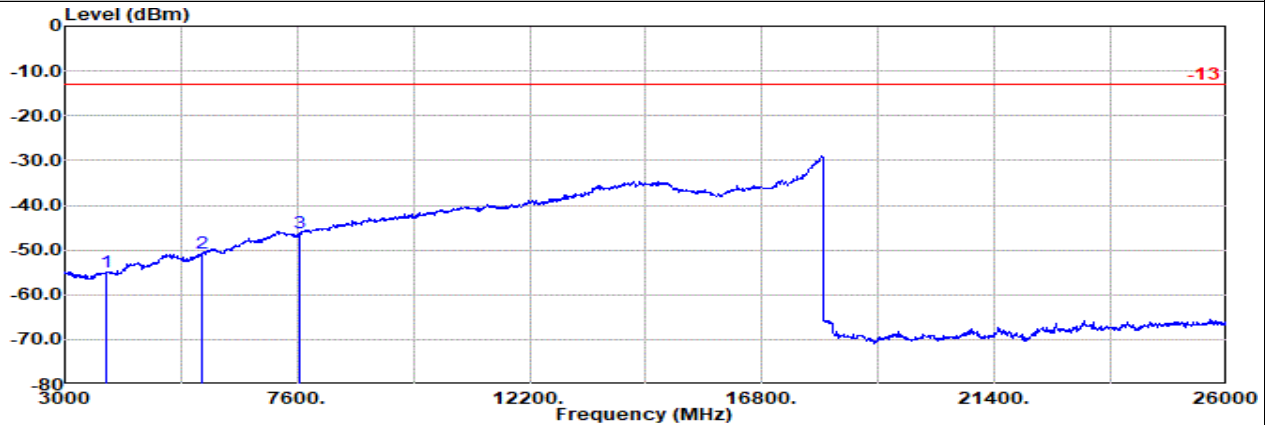

	Freq	Level	Detector	Ant		Filter	EIRPCF		Readin	Limit	Margin	Pol
				Factor	Amp\Cb		1					
	MHz	dBm										
1	3815.00	-54.93	RMS	30.62	-25.60	0.66	-95.23	34.62	-13.00	-41.93	Horizontal	
2	5723.00	-50.83	RMS	33.69	-23.50	0.38	-95.23	33.83	-13.00	-37.83	Horizontal	
3	7630.00	-46.16	RMS	36.46	-22.00	0.37	-95.23	34.24	-13.00	-33.16	Horizontal	

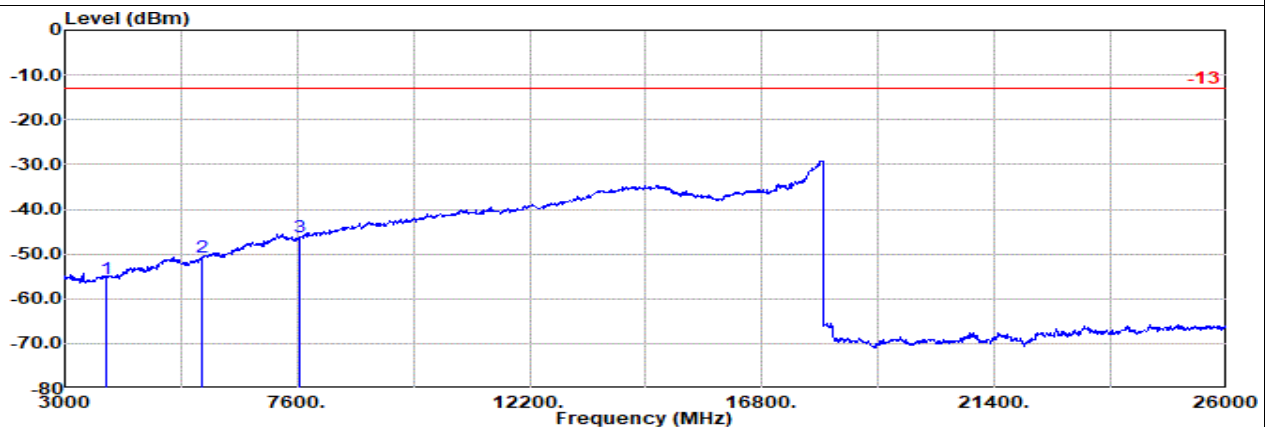

	Freq	Level	Detector	Ant		Filter	EIRPCF		Readin	Limit	Margin	Pol
				Factor	Amp\Cb		1					
	MHz	dBm										
1	3815.00	-55.40	RMS	30.62	-25.60	0.66	-95.23	34.15	-13.00	-42.40	Vertical	
2	5723.00	-50.72	RMS	33.69	-23.50	0.38	-95.23	33.94	-13.00	-37.72	Vertical	
3	7630.00	-46.28	RMS	36.46	-22.00	0.37	-95.23	34.12	-13.00	-33.28	Vertical	




Ant. 2

Part 27L Mode 1

WCDMA B4 Ch1312

L

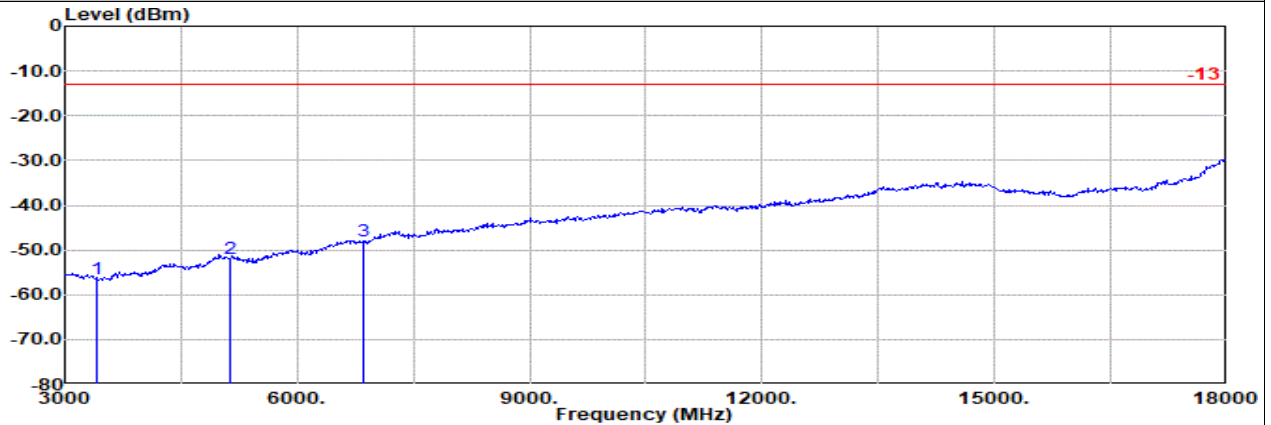


Site : 03CH12-HY

Condition: -13 3m 9120D-02114-240711 Horizontal

: WCDMA Band4 CH1312

	Freq	Level	Detector	Ant		Filter	EIRPCF		Readin	Limit	Margin		Pol
				Factor	Amp\Cb		1						
	MHz	dBm											
1	3424.00	-56.46	RMS	29.65	-26.09	1.04	-95.23		34.17	-13.00	-43.46		Horizontal
2	5137.00	-51.92	RMS	33.35	-23.98	0.47	-95.23		33.47	-13.00	-38.92		Horizontal
3	6849.00	-48.08	RMS	36.10	-22.63	0.34	-95.23		33.34	-13.00	-35.08		Horizontal

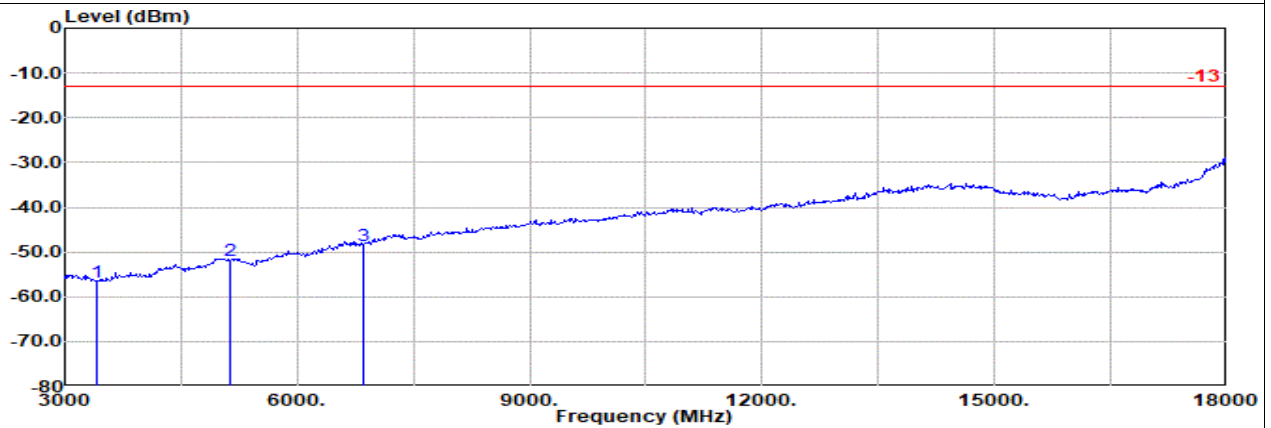

Site : 03CH12-HY

Condition: -13 3m 9120D-02114-240711 Vertical

: WCDMA Band4 CH1312

	Freq	Level	Detector	Ant		Filter	EIRPCF		Readin	Limit	Margin		Pol
				Factor	Amp\Cb		1						
	MHz	dBm											
1	3424.00	-56.64	RMS	29.65	-26.09	1.04	-95.23		33.99	-13.00	-43.64		Vertical
2	5137.00	-52.05	RMS	33.35	-23.98	0.47	-95.23		33.34	-13.00	-39.05		Vertical
3	6849.00	-48.47	RMS	36.10	-22.63	0.34	-95.23		32.95	-13.00	-35.47		Vertical




Ant. 2

Part 27L Mode 1

WCDMA B4 Ch1413

M

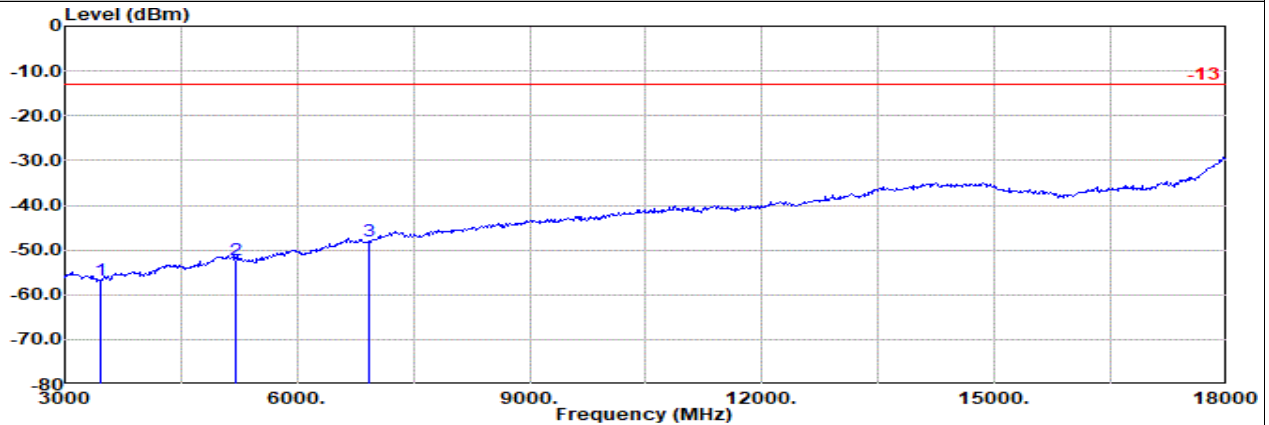


Site : 03CH12-HY

Condition: -13 3m 9120D-02114-240711 Horizontal

: WCDMA Band4 CH1413

	Freq	Level	Detector	Ant		Filter	EIRPCF	Readin	Limit	Margin	Pol
				Factor	Amp\Cb						
	MHz	dBm			dB	dB	dB	dBuV	dBm	dB	
1	3465.00	-56.70	RMS	29.60	-26.03	1.00	-95.23	33.96	-13.00	-43.70	Horizontal
2	5197.00	-52.11	RMS	33.31	-23.92	0.47	-95.23	33.26	-13.00	-39.11	Horizontal
3	6930.00	-48.00	RMS	36.04	-22.51	0.34	-95.23	33.36	-13.00	-35.00	Horizontal

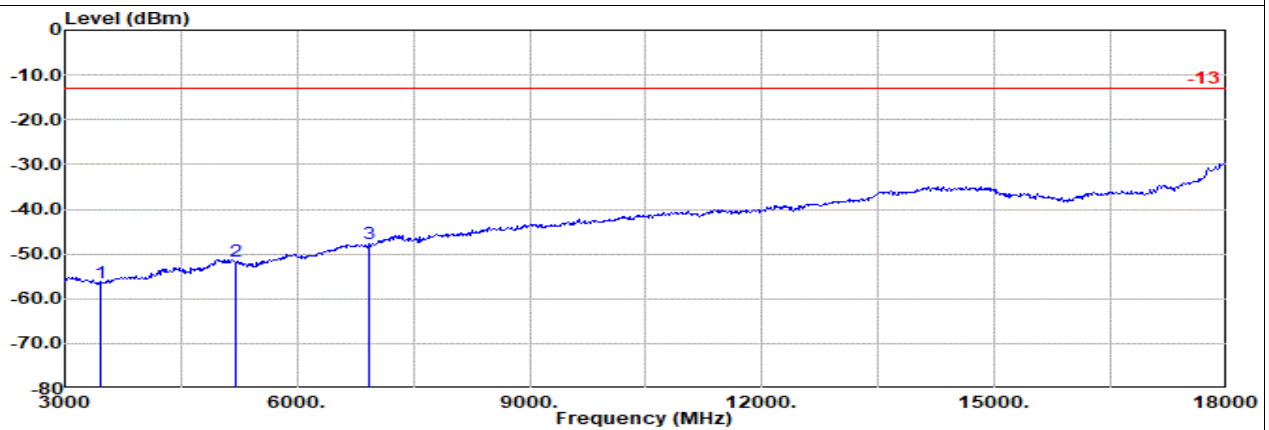

Site : 03CH12-HY

Condition: -13 3m 9120D-02114-240711 Vertical

: WCDMA Band4 CH1413

	Freq	Level	Detector	Ant		Filter	EIRPCF	Readin	Limit	Margin	Pol
				Factor	Amp\Cb						
	MHz	dBm			dB	dB	dB	dBuV	dBm	dB	
1	3465.00	-56.59	RMS	29.60	-26.03	1.00	-95.23	34.07	-13.00	-43.59	Vertical
2	5197.00	-51.75	RMS	33.31	-23.92	0.47	-95.23	33.62	-13.00	-38.75	Vertical
3	6930.00	-47.84	RMS	36.04	-22.51	0.34	-95.23	33.52	-13.00	-34.84	Vertical




Ant. 2

Part 27L Mode 1

WCDMA B4 Ch1513

H

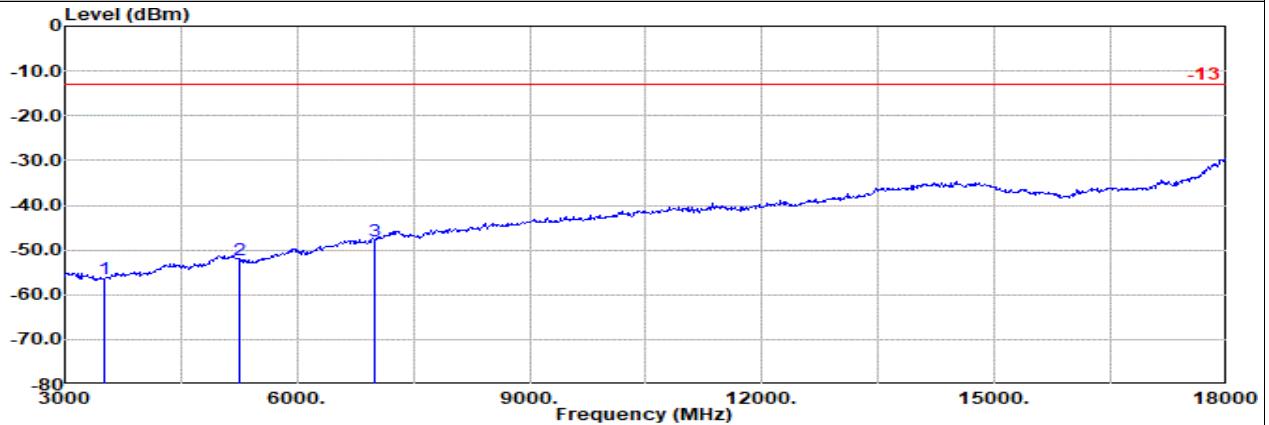


Site : 03CH12-HY

Condition: -13 3m 9120D-02114-240711 Horizontal

: WCDMA Band4 CH1513

	Freq	Level	Detector	Ant Factor	Amp\Cb 1	Filter	EIRPCF	Readin g	Limit	Margin	Pol
	MHz	dBm		dB/m	dB	dB	dB	dBuV	dBm	dB	
1	3505.00	-56.36	RMS	29.60	-25.97	0.96	-95.23	34.28	-13.00	-43.36	Horizontal
2	5257.00	-52.26	RMS	33.17	-23.88	0.46	-95.23	33.22	-13.00	-39.26	Horizontal
3	7010.00	-48.01	RMS	36.14	-22.40	0.34	-95.23	33.14	-13.00	-35.01	Horizontal

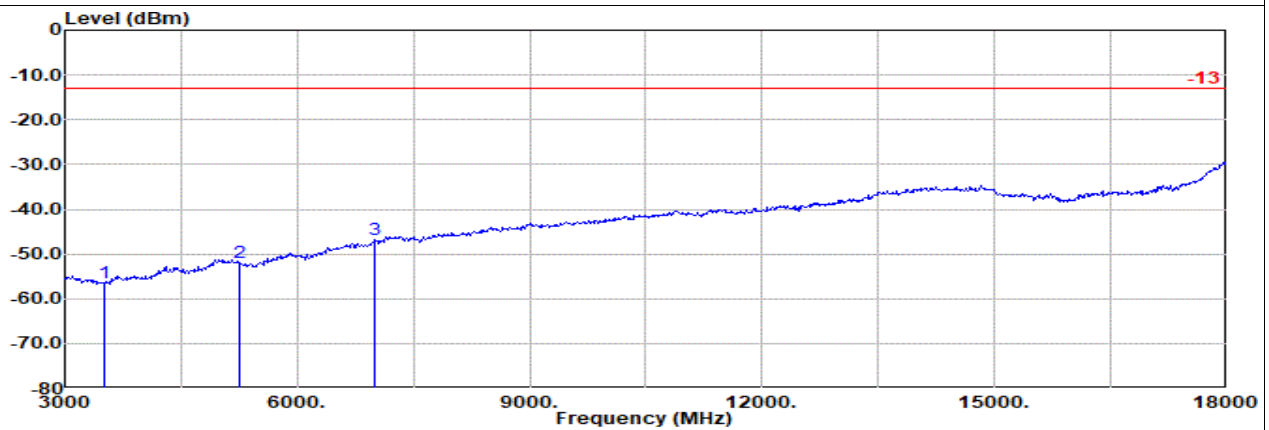

Site : 03CH12-HY

Condition: -13 3m 9120D-02114-240711 Vertical

: WCDMA Band4 CH1513

	Freq	Level	Detector	Ant Factor	Amp\Cb l	Filter	EIRPCF	Readin g	Limit	Margin	Pol
	MHz	dBm		dB/m	dB	dB	dB	dBuV	dBm	dB	
1	3505.00	-56.33	RMS	29.60	-25.97	0.96	-95.23	34.31	-13.00	-43.33	Vertical
2	5257.00	-52.02	RMS	33.17	-23.88	0.46	-95.23	33.46	-13.00	-39.02	Vertical
3	7010.00	-46.91	RMS	36.14	-22.40	0.34	-95.23	34.24	-13.00	-33.91	Vertical




Ant. 1

Part 27L Mode 2

WCDMA B4 Ch1312

L

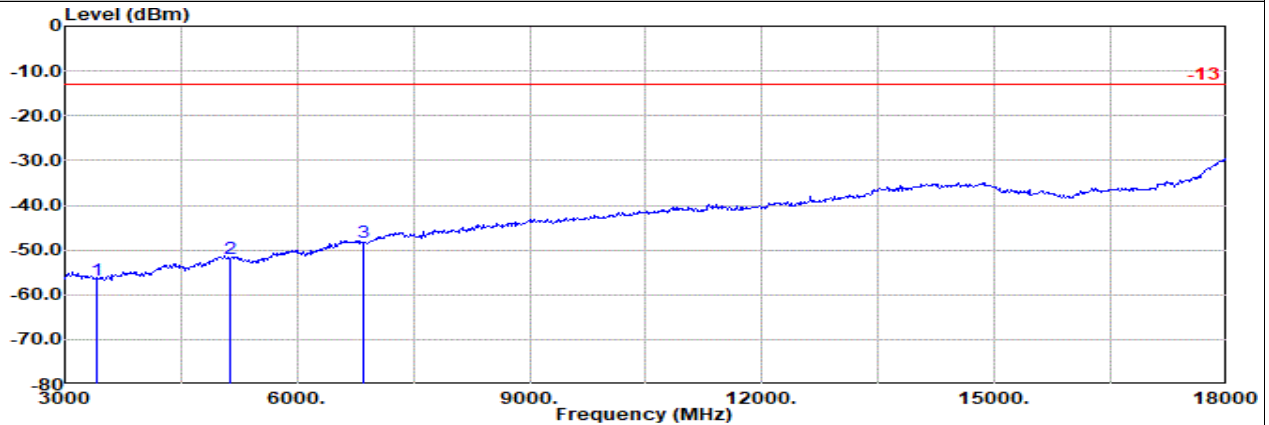


Site : 03CH12-HY

Condition: -13 3m 9120D-02114-240711 Horizontal

: WCDMA Band4 CH1312

	Freq MHz	Level dBm	Detector	Ant		Filter	EIRPCF	Readin g	Limit	Margin	Pol
				Factor	Amp\Cb 1						
1	3424.00	-56.71	RMS	29.65	-26.09	1.04	-95.23	33.92	-13.00	-43.71	Horizontal
2	5137.00	-51.91	RMS	33.35	-23.98	0.47	-95.23	33.48	-13.00	-38.91	Horizontal
3	6849.00	-48.43	RMS	36.10	-22.63	0.34	-95.23	32.99	-13.00	-35.43	Horizontal

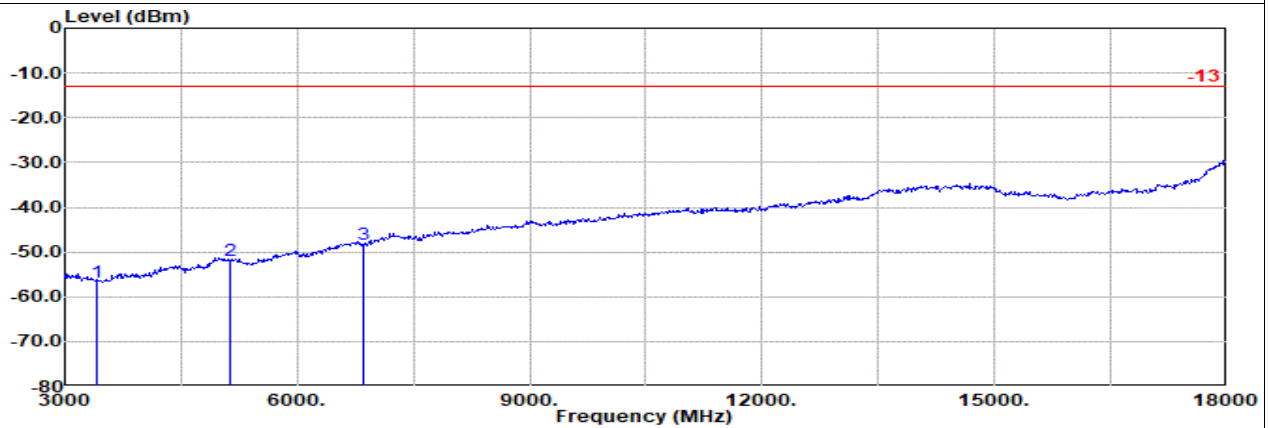

Site : 03CH12-HY

Condition: -13 3m 9120D-02114-240711 Vertical

: WCDMA Band4 CH1312

	Freq MHz	Level dBm	Detector	Ant		Filter	EIRPCF	Readin g	Limit	Margin	Pol
				Factor	Amp\Cb 1						
1	3424.00	-56.85	RMS	29.65	-26.09	1.04	-95.23	33.78	-13.00	-43.85	Vertical
2	5137.00	-51.98	RMS	33.35	-23.98	0.47	-95.23	33.41	-13.00	-38.98	Vertical
3	6849.00	-48.34	RMS	36.10	-22.63	0.34	-95.23	33.08	-13.00	-35.34	Vertical




Ant. 1

Part 27L Mode 2

WCDMA B4 Ch1413

M

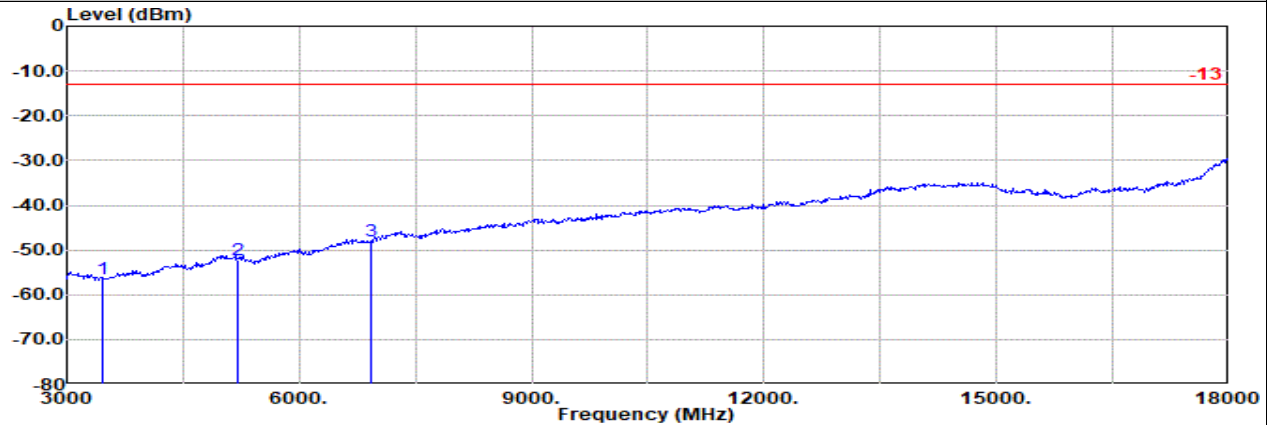


Site : 03CH12-HY

Condition: -13 3m 9120D-02114-240711 Horizontal

: WCDMA Band4 CH1413

	Freq	Level	Detector	Ant		Filter	EIRPCF		Readin	Limit	Margin		Pol
				Factor	Amp\Cb		1						
	MHz	dBm											
1	3465.00	-56.49	RMS	29.60	-26.03	1.00	-95.23	34.17	-13.00	-43.49	Horizontal		
2	5197.00	-52.17	RMS	33.31	-23.92	0.47	-95.23	33.20	-13.00	-39.17	Horizontal		
3	6930.00	-47.85	RMS	36.04	-22.51	0.34	-95.23	33.51	-13.00	-34.85	Horizontal		

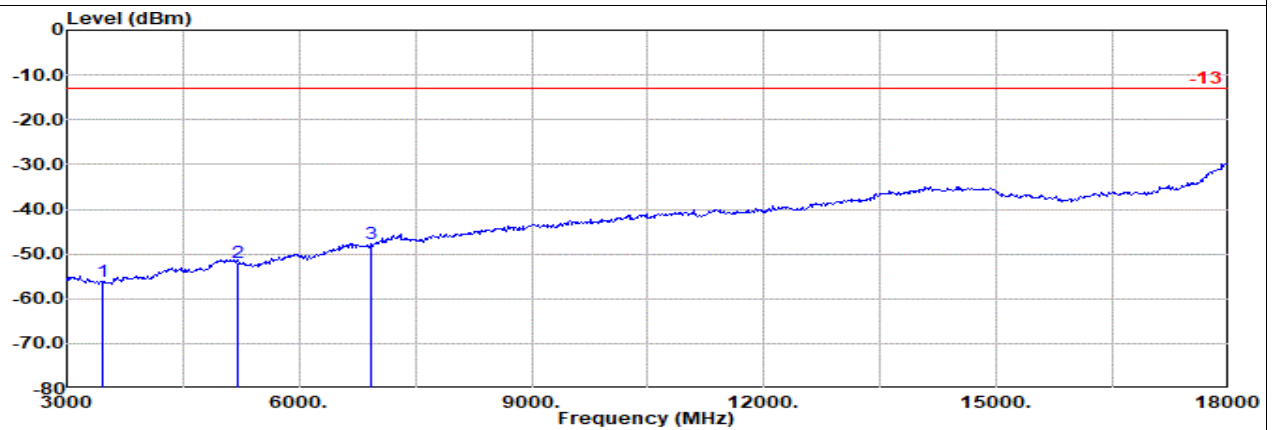

Site : 03CH12-HY

Condition: -13 3m 9120D-02114-240711 Vertical

: WCDMA Band4 CH1413

	Freq	Level	Detector	Ant		Filter	EIRPCF		Readin	Limit	Margin		Pol
				Factor	Amp\Cb		1						
	MHz	dBm											
1	3465.00	-56.08	RMS	29.60	-26.03	1.00	-95.23	34.58	-13.00	-43.08	Vertical		
2	5197.00	-51.78	RMS	33.31	-23.92	0.47	-95.23	33.59	-13.00	-38.78	Vertical		
3	6930.00	-47.82	RMS	36.04	-22.51	0.34	-95.23	33.54	-13.00	-34.82	Vertical		




Ant. 1

Part 27L Mode 2

WCDMA B4 Ch1513

H

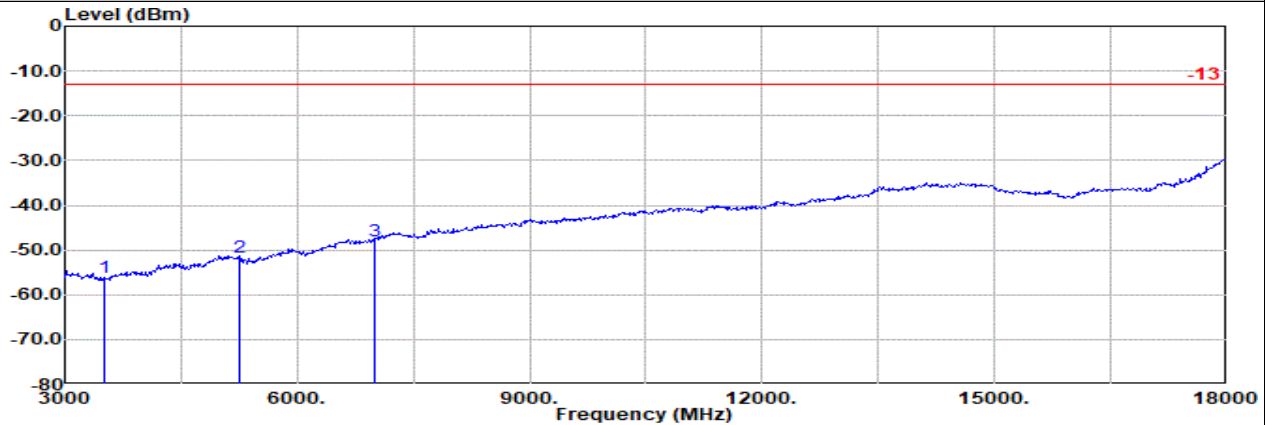


Site : 03CH12-HY

Condition: -13 3m 9120D-02114-240711 Horizontal

: WCDMA Band4 CH1513

	Freq	Level	Detector	Ant		Filter	EIRPCF		Readin	Limit	Margin		Pol
				Factor	Amp\Cb		1						
	MHz	dBm		dB/m	dB	dB	dB	dB	dBuV	dBm	dB		
1	3505.00	-56.21	RMS	29.60	-25.97	0.96	-95.23	34.43	-13.00	-43.21	Horizontal		
2	5257.00	-51.71	RMS	33.17	-23.88	0.46	-95.23	33.77	-13.00	-38.71	Horizontal		
3	7010.00	-47.98	RMS	36.14	-22.40	0.34	-95.23	33.17	-13.00	-34.98	Horizontal		

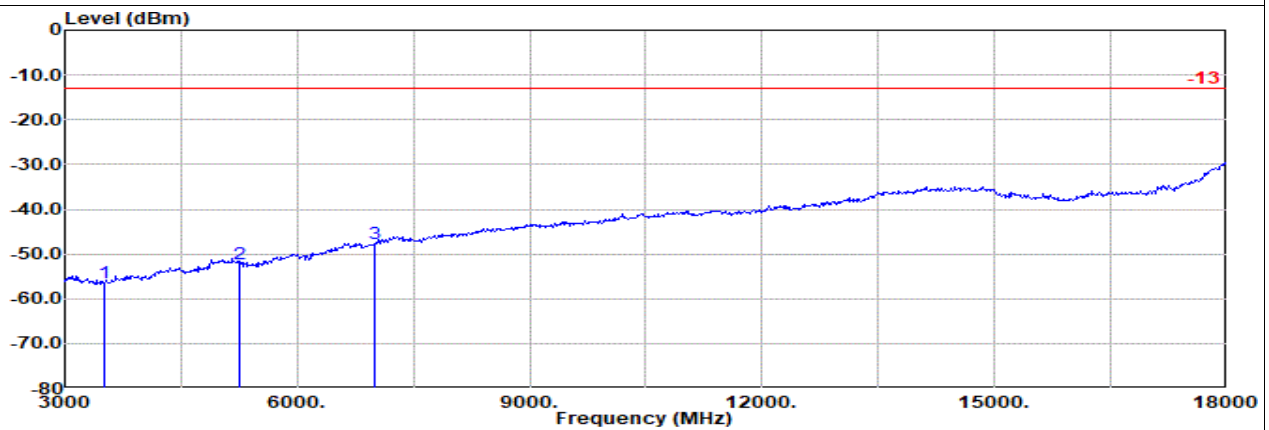

Site : 03CH12-HY

Condition: -13 3m 9120D-02114-240711 Vertical

: WCDMA Band4 CH1513

	Freq	Level	Detector	Ant		Filter	EIRPCF		Readin	Limit	Margin		Pol
				Factor	Amp\Cb		1						
	MHz	dBm		dB/m	dB	dB	dB	dB	dBuV	dBm	dB		
1	3505.00	-56.39	RMS	29.60	-25.97	0.96	-95.23	34.25	-13.00	-43.39	Vertical		
2	5257.00	-52.28	RMS	33.17	-23.88	0.46	-95.23	33.20	-13.00	-39.28	Vertical		
3	7010.00	-47.73	RMS	36.14	-22.40	0.34	-95.23	33.42	-13.00	-34.73	Vertical		




Ant. 1

Part 22H Mode 2

GSM 850 Ch251

H

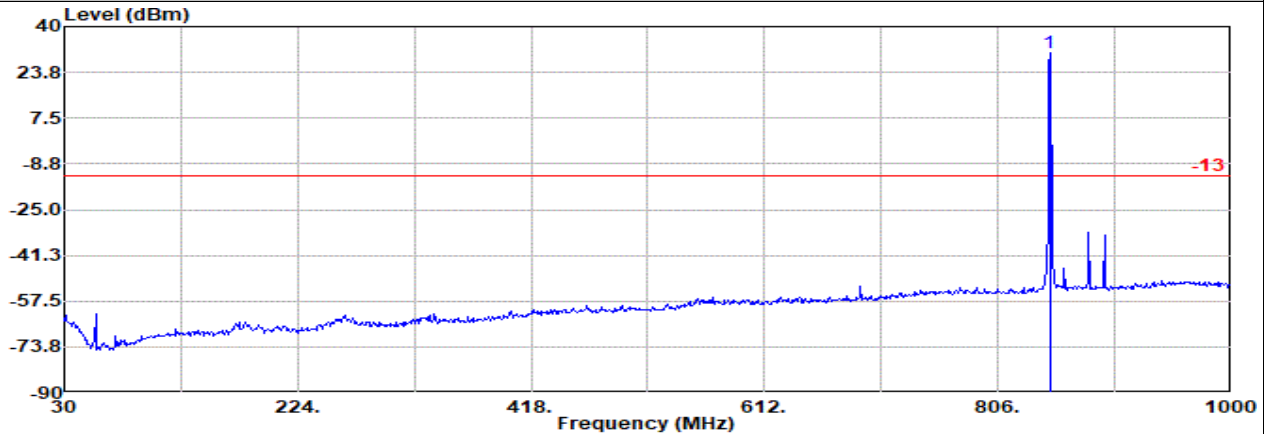


Site : 03CH12-HY

Condition: -13 3m Bilog_37059_20241127 Horizontal

: GSM 850 Ch251

: #1 is fundamental signal which can be ignored.

	Freq	Level	Detector	Ant Amp\Cb Filter			EIRPCF	Readin	Limit	Margin Pol	
				Factor	1						
	MHz	dBm		dB/m	dB	dB	dB	dBuV	dBm	dB	
1	848.80	30.64	RMS	29.33	4.02	0.00	-95.23	92.52	-13.00	43.64	Horizontal

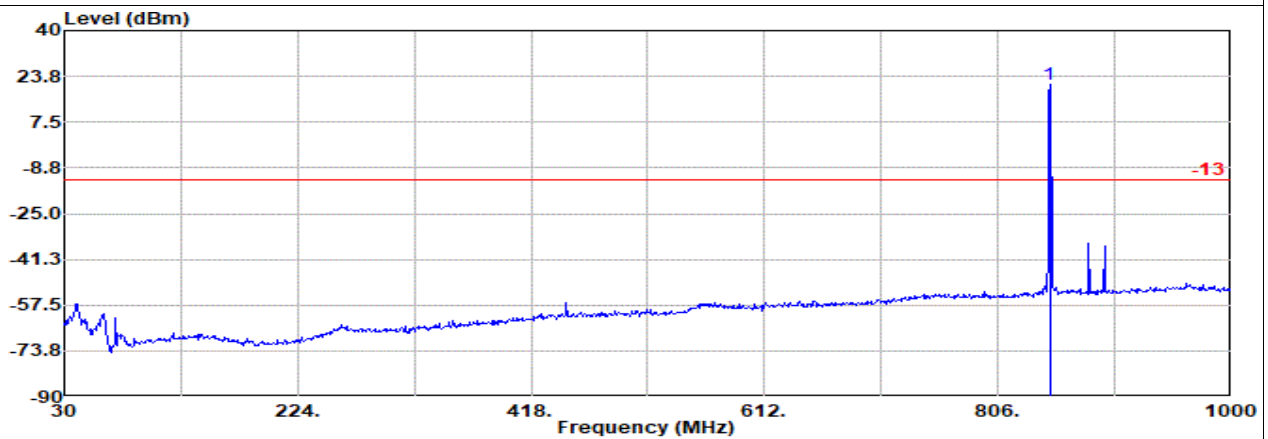

Site : 03CH12-HY

Condition: -13 3m Bilog_37059_20241127 Vertical

: GSM 850 Ch251

: #1 is fundamental signal which can be ignored.

	Freq	Level	Detector	Ant Amp\Cb Filter			EIRPCF	Readin	Limit	Margin Pol	
				Factor	1						
	MHz	dBm		dB/m	dB	dB	dB	dBuV	dBm	dB	
1	848.80	20.88	RMS	29.33	4.02	0.00	-95.23	82.76	-13.00	33.88	Vertical

Remark: #1 is fundamental signal which can be ignored.

—THE END—