



FCC RADIO TEST REPORT

FCC ID : A4RGU0NP
Equipment : Phone
Model Name : GU0NP, GM66V
Applicant : Google LLC
1600 Amphitheatre Parkway,
Mountain View, CA, 94043 USA
Standard : 47 CFR FCC Part 15.519

The product was received on Jan. 14, 2025, and testing was performed from Jan. 27, 2025 to Apr. 29, 2025. We, Sporton International Inc. Wensan Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval from Sporton International Inc. Wensan Laboratory, the test report shall not be reproduced except in full.

Louis Wu

Approved by: Louis Wu

Sporton International Inc. Wensan Laboratory

No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan (R.O.C.)



Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
1 General Description	5
1.1 Product Feature of Equipment Under Test	5
1.2 Modification of EUT	5
1.3 Type of EUT	6
1.4 Testing Applied Standards	6
1.5 Testing Location Information	7
1.6 Measurement Uncertainty	7
2 Test Configuration of EUT	8
2.1 Test Mode.....	8
2.2 The Worst Case Measurement Configuration.....	9
2.3 Test Setup Diagram	10
2.4 Support Unit used in test configuration and system	10
3 Transmitter Test Result	11
3.1 AC Power-line Conducted Emissions	11
3.2 UWB bandwidth.....	12
3.3 Technical requirements for hand held UWB systems	17
3.4 Peak Power Measurement	20
3.5 Radiated Emissions.....	25
4 Test Equipment and Calibration Data	64
Appendix A. Conducted Emissions Test Results	
Appendix B. Setup Photographs	



History of this test report

Report No.	Version	Description	Issue Date
FR4N09200	01	Initial issue of report	May 22, 2025
FR4N09200	02	Revise Antenna information. This report is an updated version, replacing the report issued on May 22, 2025.	Jun. 04, 2025

Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
1.1	15.203	Antenna Requirement	PASS	15.203
3.1	15.207	AC Power-line Conducted Emissions	PASS	15.207
3.2	15.503	UWB Bandwidth	PASS	≥ 500MHz
3.3	15.519(a)(1)	Technical requirements for Hand Held UWB systems	PASS	15.519(a)(1)
3.4	15.519(e)	Peak Power Measurement	PASS	≤ 0 dBm/50MHz
3.5	15.519(c) /15.519(d)	Radiated Emissions	PASS	UWB Emissions: 15.519(c) GPS Emissions: 15.519(d) Digital Emissions: 15.209

Conformity Assessment Condition:

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacture who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2. The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty".

Disclaimer:

1. The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.
2. The GU0NP and GM66V are 100% identical in Hardware / Software to each other, and only have different model names for marketing segmentation. The test sample are all model GU0NP.

Reviewed by: William Chen

Report Producer: Clio Lo

1 General Description

1.1 Product Feature of Equipment Under Test

Product Feature
General Specs GSM/WCDMA/LTE/5G NR/NTN, Bluetooth, BLE, BLE channel sounding, Thread, Wi-Fi 802.11be, NFC, WPC Rx, UWB and GNSS Rx.
Antenna Type UWB: <Ranging Antenna>: ILA Antenna <Patch Antenna>: Patch Antenna

Remark:

1. The above EUT's information was declared by manufacturer. Please refer to Disclaimer in report summary.
2. All measurements were performed radiated therefore additional antenna gain document is not required.

EUT Information List	
S/N	Performed Test Item
4C181FDCG0005C	Radiated Spurious Emission
52181FDCG0008P	Conducted Emission

1.2 Modification of EUT

No modifications are made to the EUT during all test items.

1.3 Type of EUT

Operational Condition	
EUT Power Type	AC mains: AC voltage 120 V
Type of EUT	
☒	Stand-alone
☐	Combined (EUT where the radio part is fully integrated within another device) Combined Equipment - Brand Name / Model No.: ...
☐	Plug-in radio (EUT intended for a variety of host systems) Host System - Brand Name / Model No.: ...
☐	Other:

1.4 Testing Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR FCC Part 15
- ♦ ANSI C63.10-2013
- ♦ FCC KDB 414788 D01 Radiated Test Site v01r01

Remark: The TAF code is not including all the FCC KDB listed without accreditation.

1.5 Testing Location Information

Test Site	Sporton International Inc. Wensan Laboratory	
Test Site Location	No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan (R.O.C.) TEL: +886-3-327-0868 FAX: +886-3-327-0855	
Test Site No.	Sporton Site No.	
	CO07-HY	03CH20-HY

Note: The test site complies with ANSI C63.4 2014 requirement.
FCC designation No.: TW1190 and TW3786

Test Condition	Test Site No.	Test Engineer	Test Environment	Test Date
Conduction	CO07-HY	Louis Chung	22~24.7 °C 42.3~45.6 %	Apr. 29, 2025
Radiated	03CH20-HY	John Chuang, David Dai, Sam Chou	18.5~19.7 °C 65.7~69.6 %	Jan. 27, 2024~ Feb. 24, 2025

1.6 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2))

Test Items	Uncertainty	Remark
AC Conduction (150kHz ~ 30MHz)	3.7 dB	Confidence levels of 95%
Radiated Emission (30MHz ~ 1000MHz)	6.7 dB	Confidence levels of 95%
Radiated Emission (1GHz ~ 6GHz)	5.4 dB	Confidence levels of 95%
Radiated Emission (6GHz ~ 18GHz)	5.6 dB	Confidence levels of 95%
Radiated Emission (18GHz ~ 40GHz)	5.7 dB	Confidence levels of 95%



2 Test Configuration of EUT

2.1 Test Mode


Test Configuration					
Mode	Antenna	Channel	Modulation	Case	Payload Length (bytes)
1	Ranging Antenna	5	BPRF	1	125
2	Ranging Antenna	9	BPRF	1	125
3	Patch Antenna	9	BPRF	1	125
4	Ranging Antenna	5	BPRF	2	125
5	Ranging Antenna	9	BPRF	2	125
6	Patch Antenna	9	BPRF	2	125
7	Ranging Antenna	5	BPRF	3	NA
8	Ranging Antenna	9	BPRF	3	NA
9	Patch Antenna	9	BPRF	3	NA
10	Ranging Antenna	5	HPRF	4	150
11	Ranging Antenna	9	HPRF	4	150
12	Patch Antenna	9	HPRF	4	150
13	Ranging Antenna	5	HPRF	5	150
14	Ranging Antenna	9	HPRF	5	150
15	Patch Antenna	9	HPRF	5	150
16	Ranging Antenna	5	HPRF	6	N/A
17	Ranging Antenna	9	HPRF	6	N/A
18	Patch Antenna	9	HPRF	6	N/A
19	Ranging Antenna	5	HPRF	7	N/A
20	Ranging Antenna	9	HPRF	7	N/A
21	Patch Antenna	9	HPRF	7	N/A

2.2 The Worst Case Measurement Configuration

The Worst Case Mode for Following Conformance Tests	
Tests Item	AC power-line conducted emissions
Condition	AC power-line conducted measurement for line and neutral Test Voltage: 120Vac / 60Hz
Operating Mode	CTX
1	Adapter Mode
Remark: Please refer to 15.207 which states, "Measurements to demonstrate compliance with the conducted limits are not required for devices employ Battery for operation and which do not operate from the AC power lines or contain provisions for operation while connected to the AC power lines".	

The Worst Case Mode for Following Conformance Tests			
Tests Item	Radiated Emissions		
Test Condition	Radiated measurement		
Operating Mode	CTX		
4, 17, 18	Adapter Mode		
Ranging Antenna CH05 Mode 4 configuration was tested and found to be the worst case and measured during the test.			
Ranging Antenna CH09 Mode 17 configuration was tested and found to be the worst case and measured during the test.			
Patch Antenna CH09 Mode 18 configuration was tested and found to be the worst case and measured during the test.			
Operating Mode > 1GHz	CTX		
Orthogonal Planes of EUT	X Plane	Y Plane	Z Plane
			
Ranging Antenna CH05	Close mode		
Ranging Antenna CH09			Open mode
Patch Antenna CH09		Close mode	
Remark: 1. The measured emission level of the EUT was maximized by rotating the EUT on a turntable, adjusting the orientation of the EUT (Open and Close) and EUT antenna in three orthogonal axis (X: flat, Y: portrait, Z: landscape), and adjusting the measurement antenna orientation, following C63.10 exploratory test procedures and find as worst plane, and recorded in this report. 2. For UWB Bandwidth Measurement, all modes are performed and only the maximum bandwidth plot per antenna per channel is shown in the test report. 3. For Peak Power Measurement, all modes are performed and only the worst case plot per antenna per channel is shown in the test report. 4. For Radiated Test Cases, the tests were performed with USB Cable 1.			

2.3 Test Setup Diagram

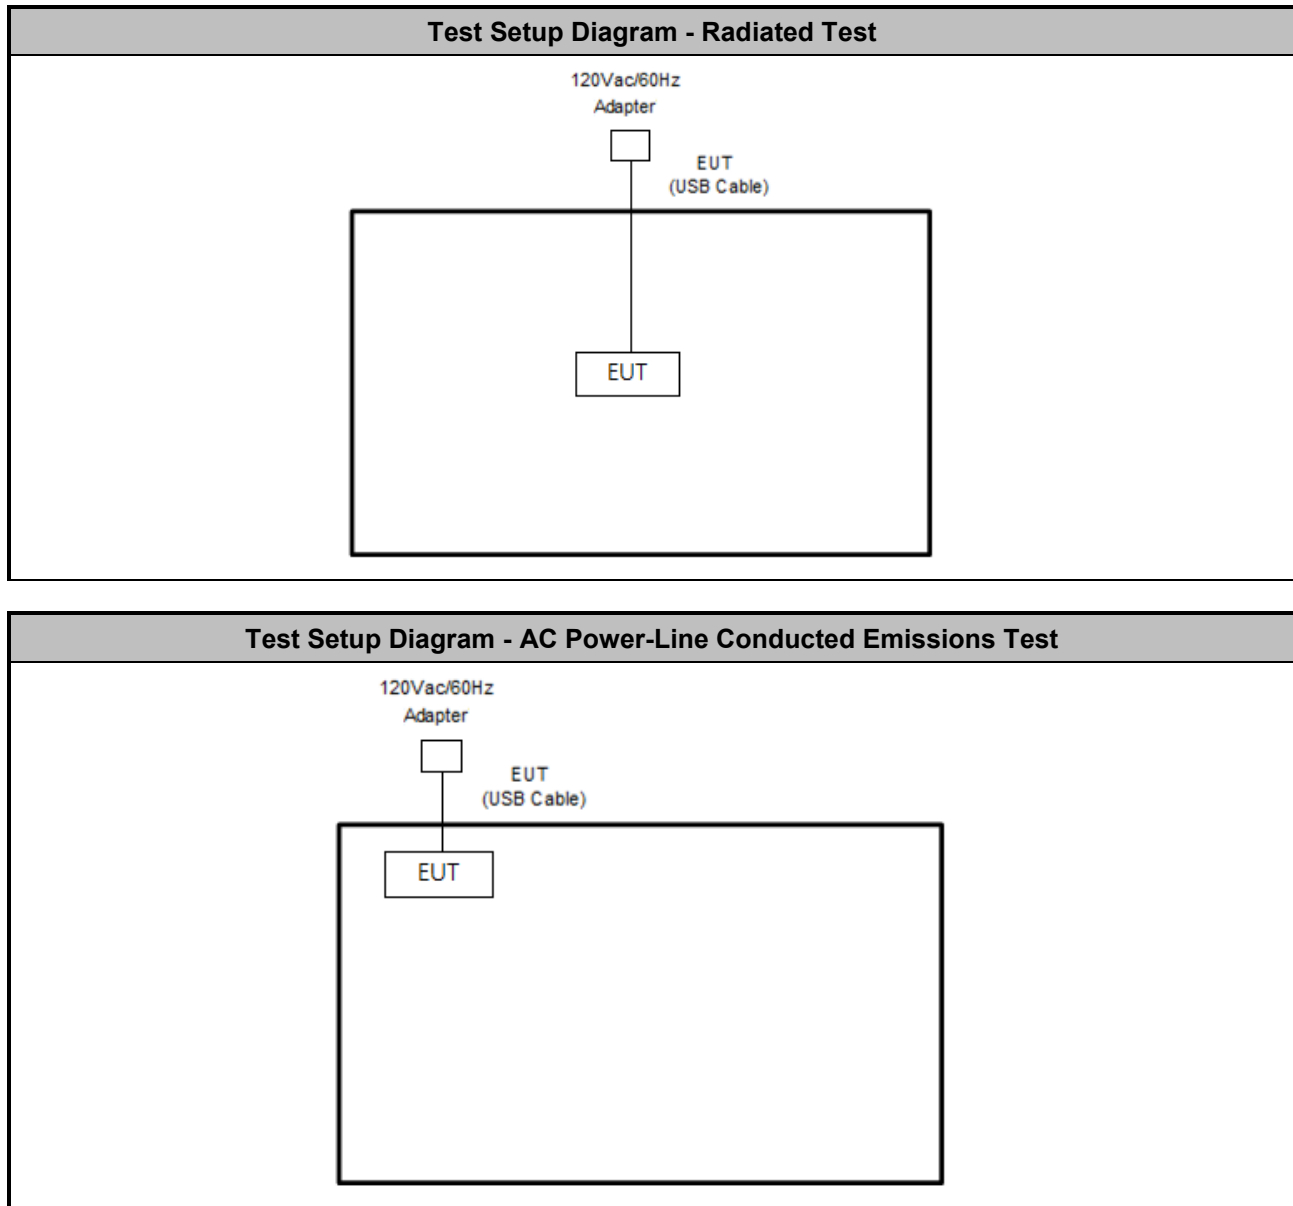

2.4 Support Unit used in test configuration and system

Item	Equipment	Brand Name	Model Name	FCC ID	Data Cable	Power Cord
1.	Adapter	N/A	G9BR1	N/A	N/A	N/A

3 Transmitter Test Result

3.1 AC Power-line Conducted Emissions

3.1.1 AC Power-line Conducted Emissions Limit

AC Power-line Conducted Emissions Limit		
Frequency Emission (MHz)	Quasi-Peak	Average
0.15-0.5	66 - 56 *	56 - 46 *
0.5-5	56	46
5-30	60	50

Note 1: * Decreases with the logarithm of the frequency.


3.1.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.1.3 Test Procedures

Test Method
■ Refer as ANSI C63.10-2013, clause 6.2 for AC power-line conducted emissions.

3.1.4 Test Setup

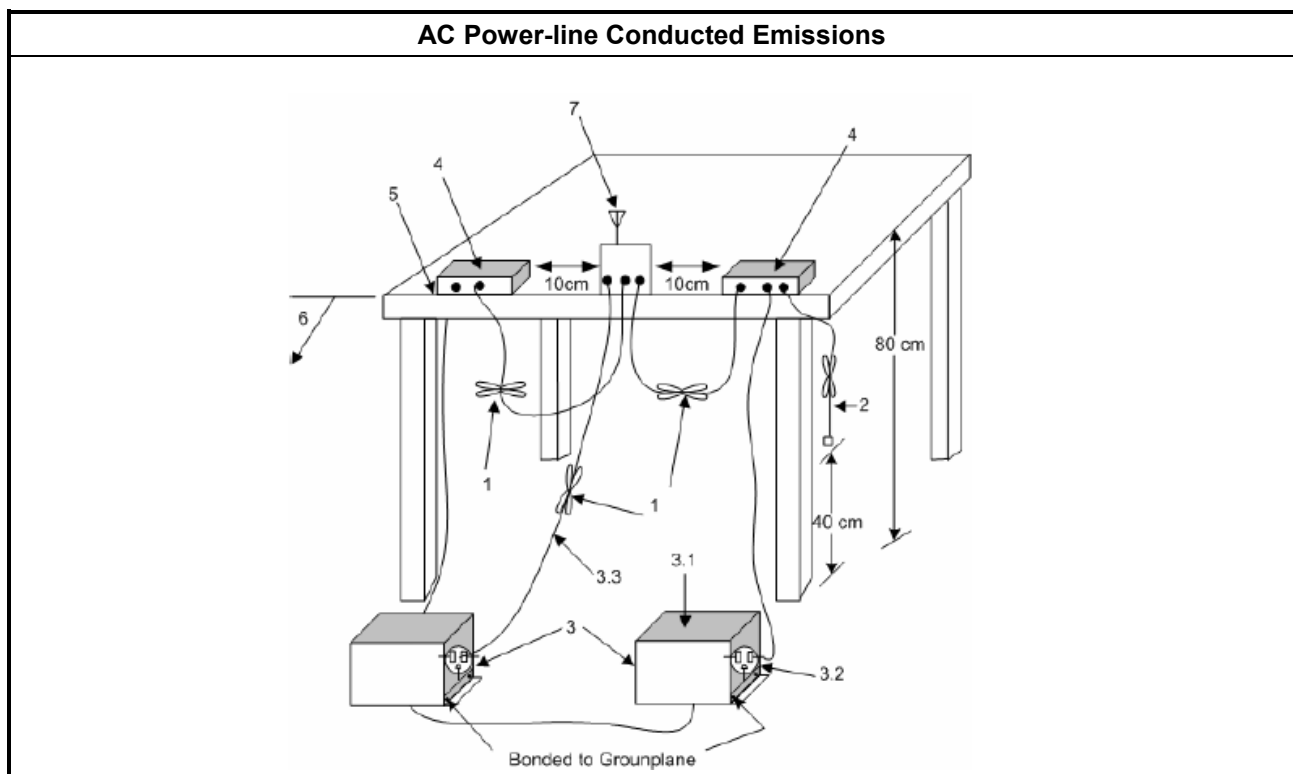

3.1.5 Test Result

Please refer to Appendix A.

3.2 UWB bandwidth

3.2.1 UWB bandwidth Limit

UWB bandwidth Limit
UWB bandwidth ≥ 500 MHz or Fractional bandwidth ≥ 0.2 ; Fractional bandwidth = $2(f_H - f_L) / (f_H + f_L)$


3.2.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.2.3 Test Procedures

Test Method
■ For the UWB bandwidth shall be measured using one of the options below:
■ Refer as ANSI C63.10, clause 6.9.2 and clause 10.1 for UWB bandwidth testing.

3.2.4 Test Setup

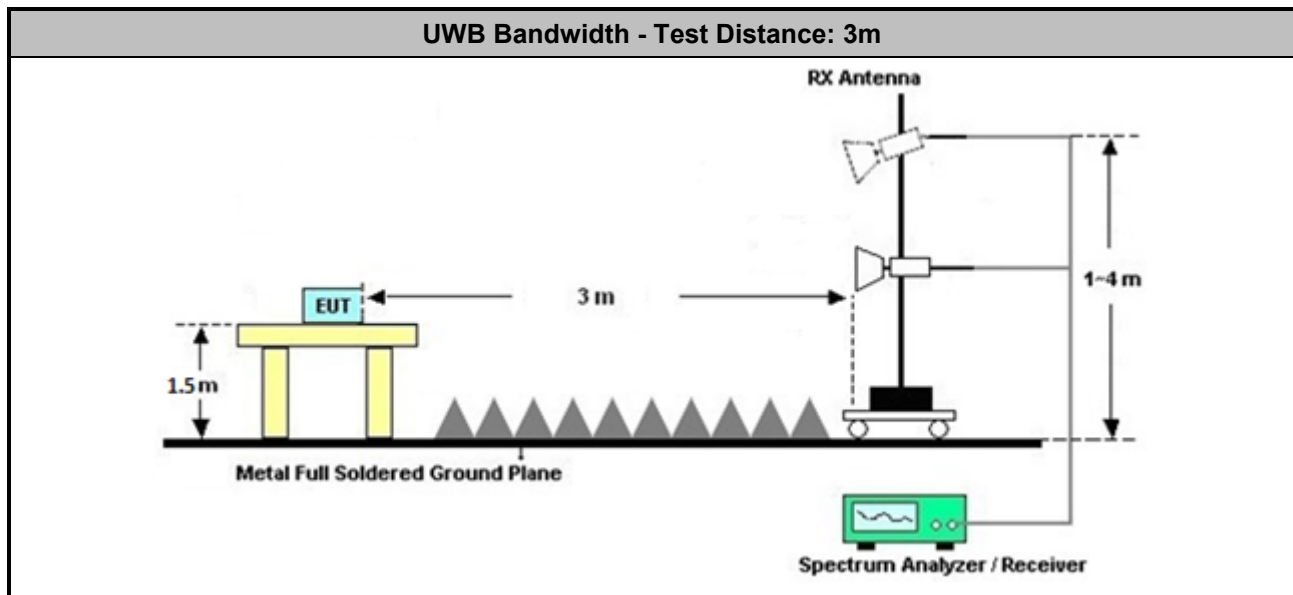


3.2.5 Test Result of UWB Bandwidth

Test mode	F _L (MHz)	F _H (MHz)	UWB Bandwidth (MHz)	Bandwidth limit (MHz)	Result	Pol [H/V]
1	6218	6762	544	≥ 500	Pass	H
2	7715	8259	544	≥ 500	Pass	H
3	7714	8261	547	≥ 500	Pass	H
4	6217	6762	545	≥ 500	Pass	H
5	7715	8260	545	≥ 500	Pass	H
6	7714	8261	547	≥ 500	Pass	H
7	6217	6762	545	≥ 500	Pass	H
8	7715	8261	546	≥ 500	Pass	H
9	7714	8261	547	≥ 500	Pass	H
10	6217	6763	546	≥ 500	Pass	H
11	7714	8260	546	≥ 500	Pass	H
12	7714	8261	547	≥ 500	Pass	H
13	6218	6762	544	≥ 500	Pass	H
14	7717	8259	542	≥ 500	Pass	H
15	7714	8261	547	≥ 500	Pass	H
16	6217	6763	546	≥ 500	Pass	H
17	7714	8260	546	≥ 500	Pass	H
18	7714	8261	547	≥ 500	Pass	H
19	6218	6761	543	≥ 500	Pass	H
20	7751	8258	507	≥ 500	Pass	H
21	7714	8261	547	≥ 500	Pass	H

UWB Bandwidth
Ranging Antenna Channel 5

Mode 1 – Bandwidth 6762MHz – 6218MHz = 544MHz

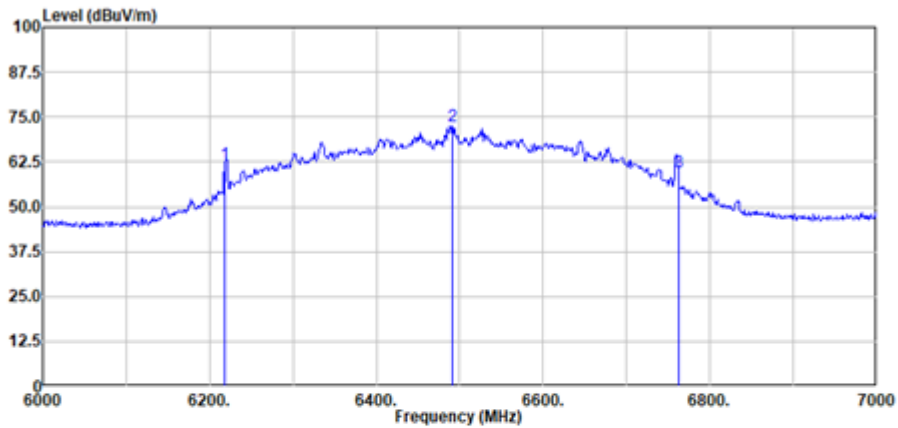


Site : 03CH20-HY
Condition : 3m HF_91200_02360_241101 Horizontal
Project : 4N0920
Detector : Peak
Plane : X Close with Adapter
Mode : 1
Channel : 05
Test Case Number : Case 1-BPRF Set#2
Post Packet Power: 50
Payload Length : 125
TX Power Control : 41

	Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	6218.00	62.01	-----	-----	51.51	34.34	14.10	37.94	0.00	--	--	Peak
2	6491.00	72.52	-----	-----	60.81	35.26	14.41	37.96	0.00	--	--	Peak
3	6762.00	59.72	-----	-----	47.10	35.98	14.73	38.09	0.00	--	--	Peak

UWB Bandwidth
Ranging Antenna Channel 9

Mode 2 – Bandwidth 8259MHz – 7715MHz = 544MHz

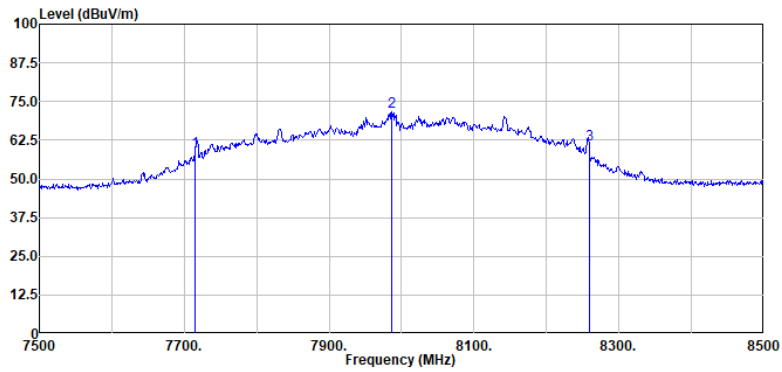


Site : 03CH20-HY
Condition : 3m HF_9120D_02360_241101 Horizontal
RBW:1000.000kHz VBW:3000.000kHz SMT:3.000sec
Project : 4N0920
Detector : Peak
Plane : Z Open with Adapter
Mode : 2
Channel : 09
Test Case Number : Case 1-BPRF Set#2
Post Packet Power: 50
Payload Length : 125
TX Power Control : 29

	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB		dBuV	dB/m	dB	dB	dB	cm	deg	
1	7715.00	59.05	-----	-----		45.50	36.60	15.75	38.80	0.00	--	--	Peak
2	7986.00	71.78	-----	-----		57.55	37.10	16.15	39.02	0.00	--	--	Peak
3	8259.00	61.26	-----	-----		47.09	37.12	16.33	39.28	0.00	--	--	Peak

**UWB Bandwidth
Patch Antenna Channel 9**

Mode 3 – 8261MHz – 7714MHz = 547MHz

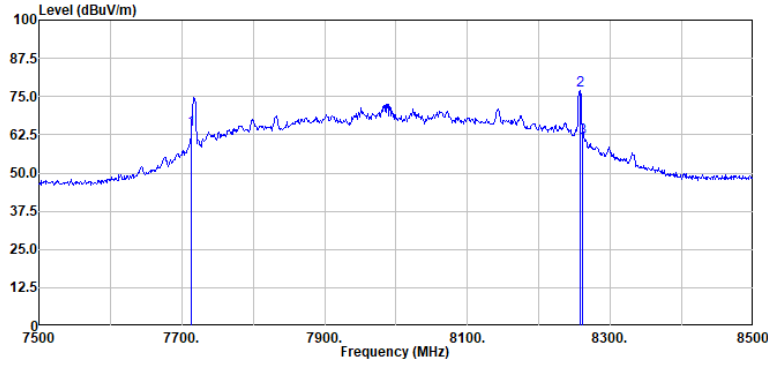

Site : 03CH20-HY
 Condition : 3m HF_9120D_02360_241101 Horizontal
 : RBW:1000.000kHz VBW:3000.000kHz SWT:3.000sec
 Project : 4N0920
 Detector : Peak
 Plane : Y Close with Adapter
 Mode : 3
 Channel : 09
 Test Case Number : Case 1 - BPRF Set #2
 Post Packet Power: 50
 Payload Length : 125
 TX Power Control : 66

	Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	7714.00	64.15	-----	-----	50.60	36.60	15.75	38.80	0.00	--	--	Peak
2	8257.00	77.05	-----	-----	62.89	37.11	16.33	39.28	0.00	--	--	Peak
3	8261.00	61.42	-----	-----	47.25	37.12	16.33	39.28	0.00	--	--	Peak

3.3 Technical requirements for hand held UWB systems

3.3.1 Technical Requirements for transmission Limit

FCC 15.519(a) (1) A UWB device operating under the provisions of this section shall transmit only when it is sending information to an associated receiver. The UWB intentional radiator shall cease transmission within 10 seconds unless it receives an acknowledgement from the associated receiver that its transmission is being received. An acknowledgment of reception must continue to be received by the UWB intentional radiator at least every 10 seconds or the UWB device must cease transmitting.

3.3.2 Measuring Instruments


Refer a test equipment and calibration data table in this test report.

3.3.3 Test Procedure

Follow the test step as below:


1. Turn on both EUT and companion receiver.
2. Set the EUT to TX mode, and EUT starts polling.
3. Set the companion receiver to associate EUT and EUT starts to transmit.
4. Disable the RX function of the companion receiver to disassociate the EUT.
5. Check if EUT stop transmitting once step 4 is made.

3.3.4 Test Setup

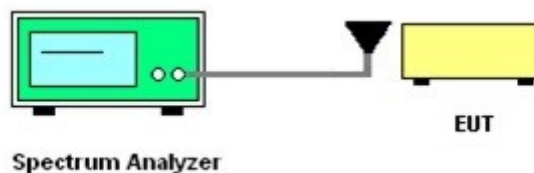



3.3.5 Test Result

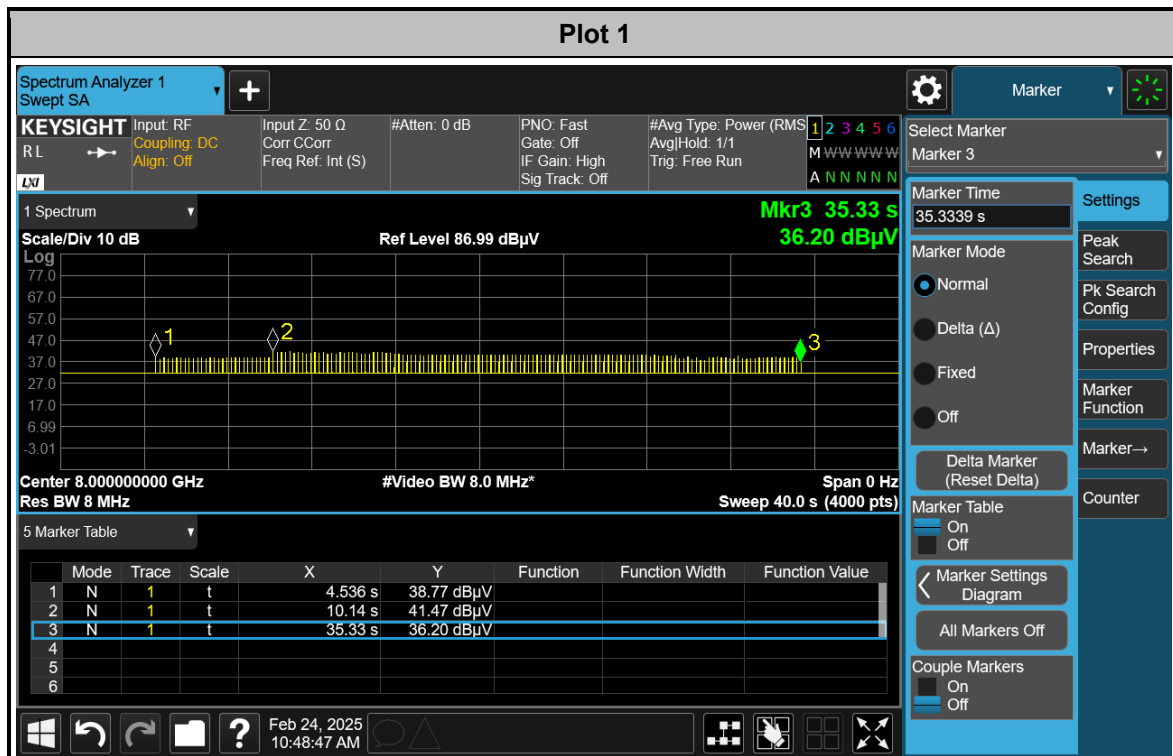


M1 to M2: Set the EUT to TX mode, and EUT starts polling.

M2 to M3: Set the companion receiver to associate EUT and EUT starts to transmit.

M3: Disable the TX function of EUT. EUT stops transmitting and polling.

Plot 2

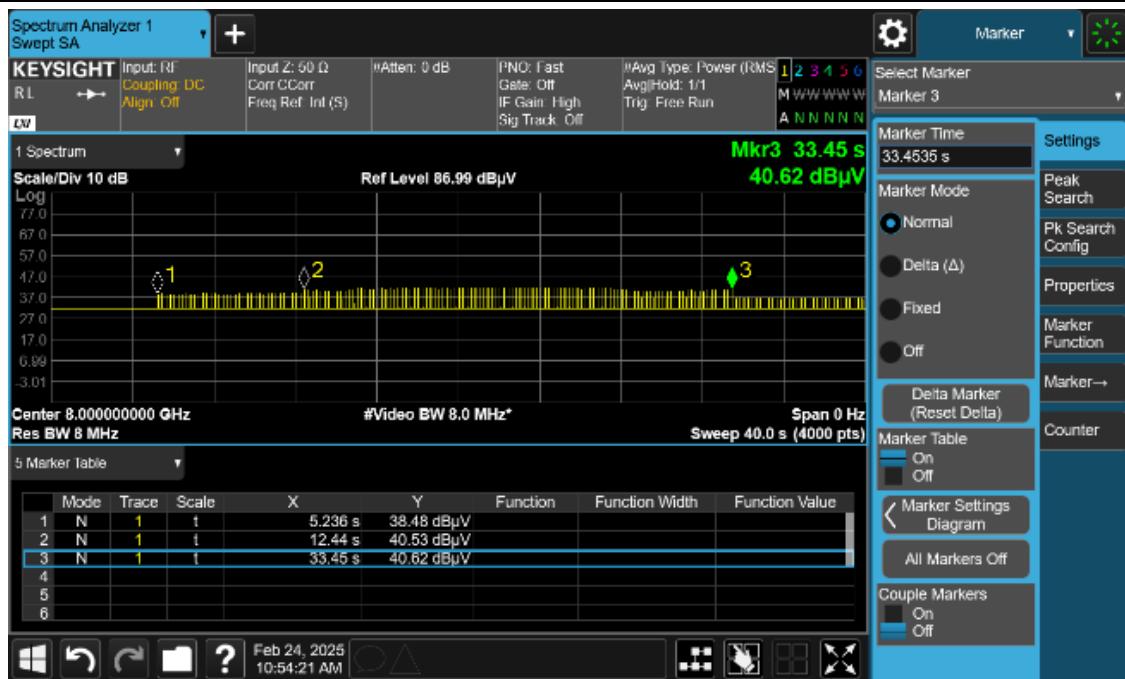

M1 to M2: Set the EUT to TX mode, and EUT starts polling.


M2 to M3: Set the companion receiver to associate EUT and EUT starts to transmit.

M3: RX function of the companion receiver is disabled. EUT disassociates the companion receiver and stops transmitting, but continues polling.

Plot 3



Plot 4

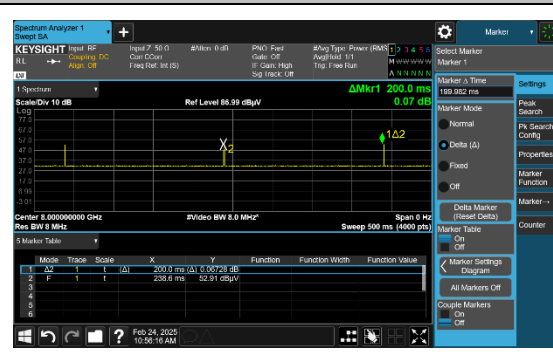

Plot 3 is zoom in plot of M2 to M3 (transmission)

Plot 4 is zoom in plot after M3 (polling only)

3.4 Peak Power Measurement

3.4.1 Peak Power Measurement Limit

Peak Power Measurement Limit
$P_{eirp} = 0 \text{ dBm/50MHz}$


3.4.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.4.3 Test Procedures


Test Method
Peak Power Measurement
- Refer as ANSI C63.10, clause 10.3.1 for radiated measurement procedure testing. - Refer as ANSI C63.10, clause 10.3.2 for measurement distance is 3m. - Refer as ANSI C63.10, clause 10.3.5 for peak detector procedure testing. - Refer as ANSI C63.10, clause 10.3.6 for bandwidth conversion of peak power.
- Frequency of max peak power is pre-located: The span bandwidth is continuously reduced to find the worst frequency. Once the worst frequency is found, the setting of spectrum analyzer is set as below: - Central frequency: Worst frequency point - Span: Zero span - RBW: 50MHz - VBW: 80MHz - Detector: Peak detector - Trace: Max hold

3.4.4 Test Setup

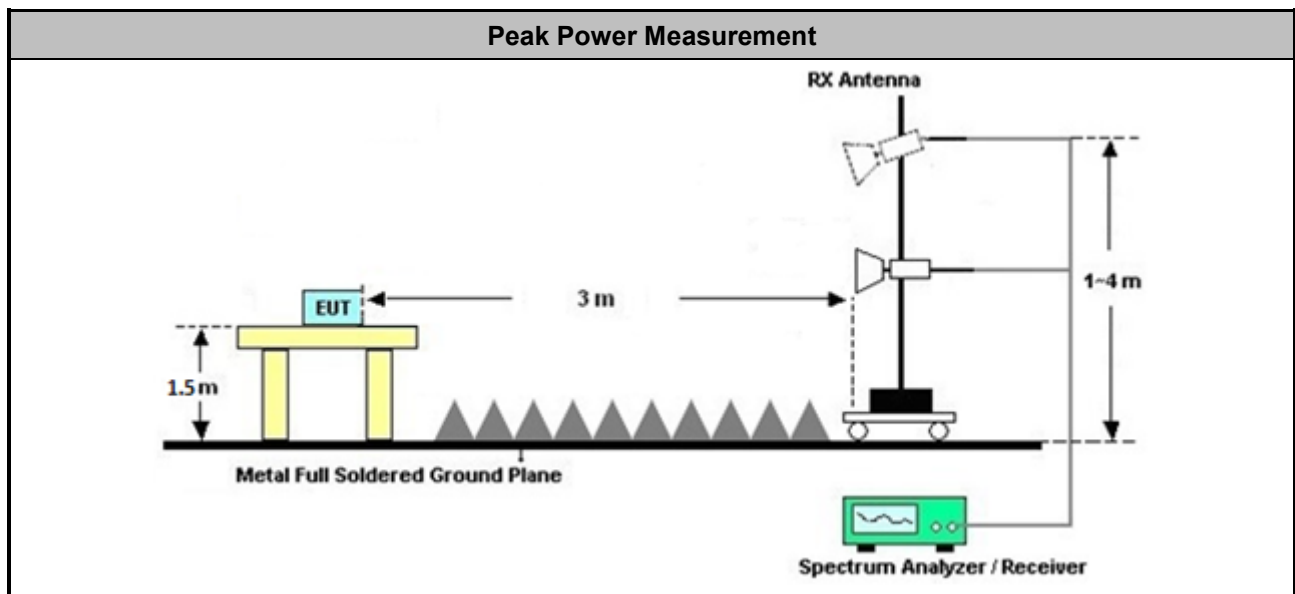

3.4.5 Test Result of Peak Power Measurement

Peak Measurement Result							
Test Mode	Freq. (MHz)	E-Field (dBuV/m)	EIRP _{50MHz} (dBm)	EIRP _{50MHz} Limit (dBm)	Margin (dB)	Result	Pol [H/V]
1	6490	94.65	-0.55	0	-0.55	Pass	H
2	7985	93.34	-1.86	0	-1.86	Pass	H
3	7989	95.02	-0.18	0	-0.18	Pass	H
4	7989	94.31	-0.89	0	-0.89	Pass	H
5	7991	92.65	-2.55	0	-2.55	Pass	H
6	7987	91.15	-4.05	0	-4.05	Pass	H
7	6494	87.15	-8.05	0	-8.05	Pass	H
8	8050	86.87	-8.33	0	-8.33	Pass	H
9	8257	86.78	-8.42	0	-8.42	Pass	H
10	6489	84.67	-10.53	0	-10.53	Pass	H
11	8113	84.16	-11.04	0	-11.04	Pass	H
12	8257	86.57	-8.63	0	-8.63	Pass	H
13	6490	87.97	-7.23	0	-7.23	Pass	H
14	7988	87.74	-7.46	0	-7.46	Pass	H
15	7987	87.52	-7.68	0	-7.68	Pass	H
16	6491	82.51	-12.69	0	-12.69	Pass	H
17	8051	82.67	-12.53	0	-12.53	Pass	H
18	8258	86.11	-9.09	0	-9.09	Pass	H
19	6491	86.73	-8.47	0	-8.47	Pass	H
20	8049	86.50	-8.70	0	-8.70	Pass	H
21	8050	87.02	-8.18	0	-8.18	Pass	H
Note 1: EIRP [dBm] = E-Field [dBuV/m] - 95.23; Note 2: Measurement worst emissions of receive antenna polarization.							

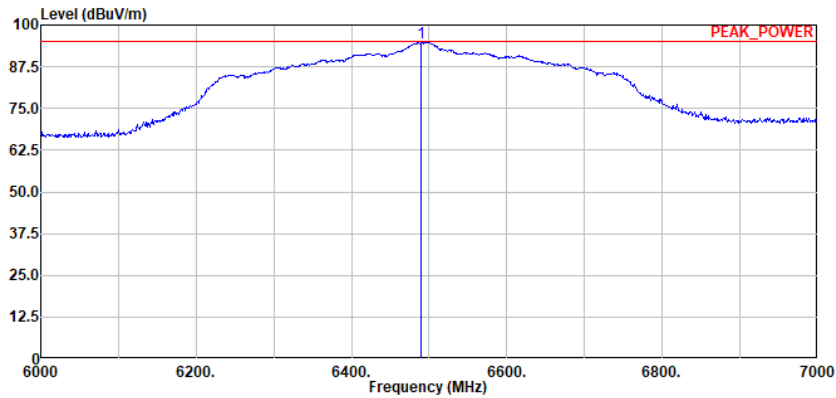
**Peak Power Measurement Plots
Ranging Antenna Channel 5****Mode 1 – Peak Power 94.68 – 95.23 = -0.55 dBm/50MHz**

Site : 03CH20-HY
Condition : PEAK_POWER 3m HF_9120D_02360_241101 Horizontal
RBW:50000.000kHz VBW:80000.000kHz SWT:1.000sec
Project : 4N0920
Detector : Peak
Plane : X Close with Adapter
Mode : 1
Channel : 05
Test Case Number : Case 1-BPRF Set#2
Post Packet Power: 50
Payload Length : 125
TX Power Control : 41

	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	6490.00	94.68	95.23	-0.55		82.97	35.26	14.41	37.96	0.00	--	--	Peak


Peak Power Measurement Plots
Ranging Antenna Channel 9

Mode 2 – Peak Power 93.37 – 95.23 = -1.86 dBm/50MHz

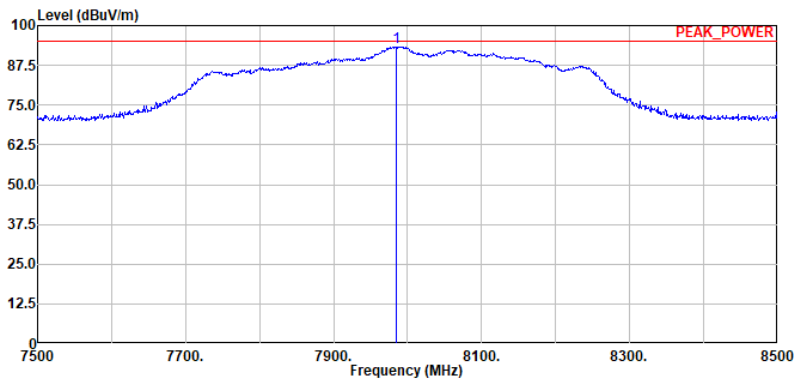

Site : 03CH20-HY
Condition : PEAK_POWER 3m HF_9120D_02360_241101 Horizontal
RBW:50000.000kHz VBW:80000.000kHz SWT:1.000sec
Project : 4N0920
Detector : Peak
Plane : Z Open with Adapter
Mode : 2
Channel : 09
Test Case Number : Case 1-BPRF Set#2
Post Packet Power: 50
Payload Length : 125
TX Power Control : 29

	Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	7985.00	93.37	95.23	-1.86	79.15	37.10	16.14	39.02	0.00	--	--	Peak

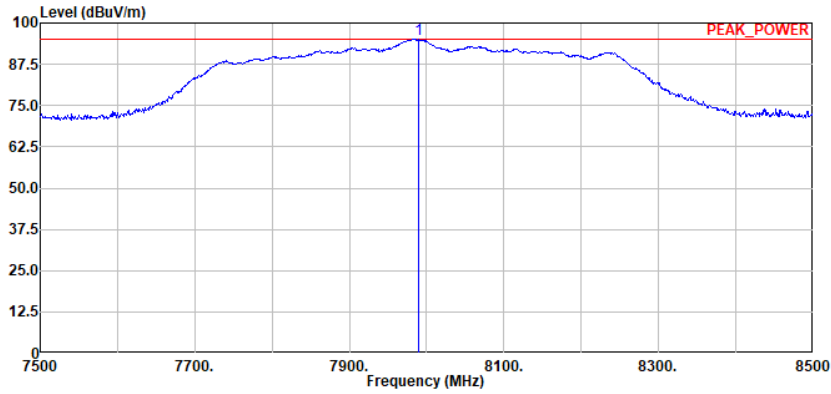**Peak Power Measurement Plots
Patch Antenna Channel 9****Mode 3 – Peak Power 95.05 – 95.23 = -0.18 dBm/50MHz**

Site : 03CH20-HY
Condition : PEAK_POWER 3m HF_91200_02360_241101 Horizontal
Project : 4N0920
Detector : Peak
Plane : Y Close with Adapter
Mode : 3
Channel : 09
Test Case Number : Case 1 - BPRF Set #2
Post Packet Power: 50
Payload Length : 125
TX Power Control : 66

	Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	7989.00	95.05	95.23	-0.18	80.82	37.10	16.15	39.02	0.00	--	--	Peak

3.5 Radiated Emissions

3.5.1 Radiated Emissions Limit

Radiated Emissions below 960MHz and Emissions from Digital Circuitry Limit			
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3

Note 1: Test distance for frequencies at or above 30 MHz, measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).

Note 2: Test distance for frequencies at below 30 MHz, measurements may be performed at a distance closer than the EUT limit distance; however, an attempt should be made to avoid making measurements in the near field. When performing measurements below 30 MHz at a closer distance than the limit distance, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two or more distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade). The test report shall specify the extrapolation method used to determine compliance of the EUT.

Radiated Emissions above 960MHz Limit	
Frequency Range (MHz)	EIRP (dBm), RBW = 1MHz
960-1610	-75.3
1610-1990	-63.3
1990-3100	-61.3
3100-10600	-41.3
Above 10600	-61.3

Note: Distance extrapolation factor = 20 log (test distance [X m]/specific distance [3 m]) (dB)

Radiated Emissions in GPS Bands Limit	
Frequency Range (MHz)	EIRP (dBm), RBW ≥ 1kHz
1164-1240	-85.3
1559-1610	-85.3

Note E (dBuV/m) = EIRP (dBm) + 95.23, example, E(dBuV/m) = -85.3 + 95.23 = 9.93dBuV/m

3.5.2 Measuring Instruments




Refer a test equipment and calibration data table in this test report.

3.5.3 Test Procedures


Test Method for Radiated Emissions above 960MHz	
■ Radiated Emissions above 960MHz	
■	Refer as ANSI C63.10, clause 10.3.1 for radiated measurement procedure testing.
■	Refer as ANSI C63.10, clause 10.3.2 for measurement distance is 3m. In some cases, it may be necessary to measure the radiated UWB emissions at a closer distance to obtain enough signal and margin to overcome the measurement system noise floor. Distance extrapolation factor = 20 log (test distance [X m]/specific distance [3 m]) (dB)
■	Refer as ANSI C63.10, clause 10.3.4 for rms detector procedure testing.
■	Refer as ANSI C63.10, clause 10.3.7 for evaluating AVG-PSD (RBW=1MHz).
■	Refer as ANSI C63.10, clause 10.3.10 for evaluating AVG-PSD in GPS Band (RBW≥1kHz).
■ For radiated measurement.	
■	Refer as ANSI C63.10, clause 10.3.8 following eirp can be used radiated test configuration.
■	Refer as ANSI C63.10, clause 10.3.9 following eirp can be directly determined using the field strength.

Test Method for Radiated Emissions below 960MHz and Emissions from Digital Circuitry	
■ Measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements) for above 30MHz-960MHz; 40dB/decade for frequency below 30MHz.	
■ For the transmitter unwanted emissions shall be measured using following options below:	
■	Refer as ANSI C63.10, clause 4.1.4 Detector functions and selection of bandwidth
□	Refer as ANSI C63.10, clause 4.1.4.2.4 average value of pulsed emissions. Adjusted by a “duty cycle correction factor”, derived from 20log (dwell time/100 ms). Average emission = peak emission + 20 log (duty cycle).
■	Refer as ANSI C63.10, clause 4.1.4.2.2 measurement procedure peak limit.
■ For radiated measurement.	
■	Refer as ANSI C63.10, clause 6.4 for radiated emissions below 30 MHz and test distance is 3m.
■	Refer as ANSI C63.10, clause 6.5 for radiated emissions 30 MHz to 1 GHz and test distance is 3m.
■	Refer as ANSI C63.10, clause 6.6 for radiated emissions above 1 GHz and test distance is 3m.
■	If the noise floor can't meet the limit, the test distance will be shorten and described in the report.
■ Any unwanted emissions level shall not exceed the fundamental emission level.	


3.5.4 Test Setup

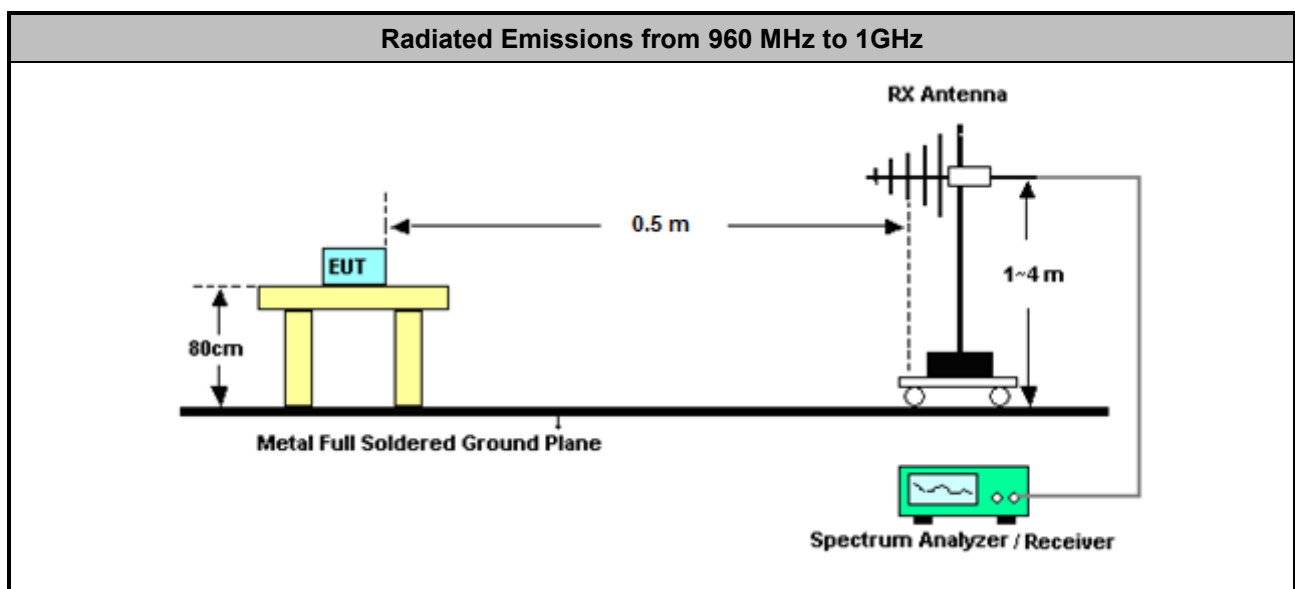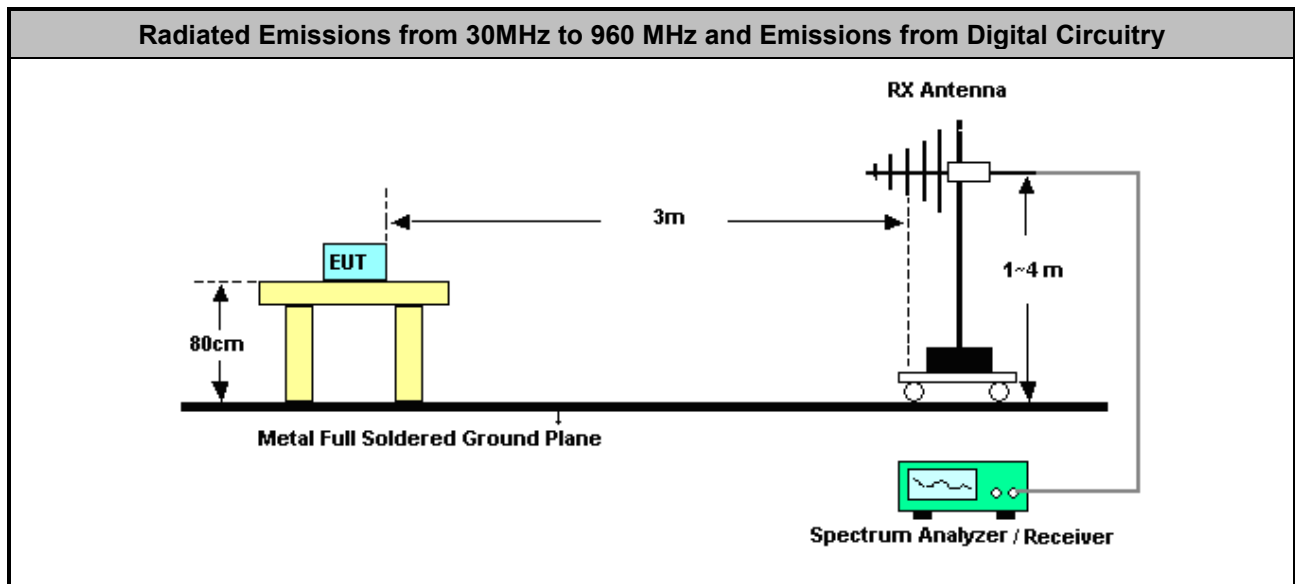
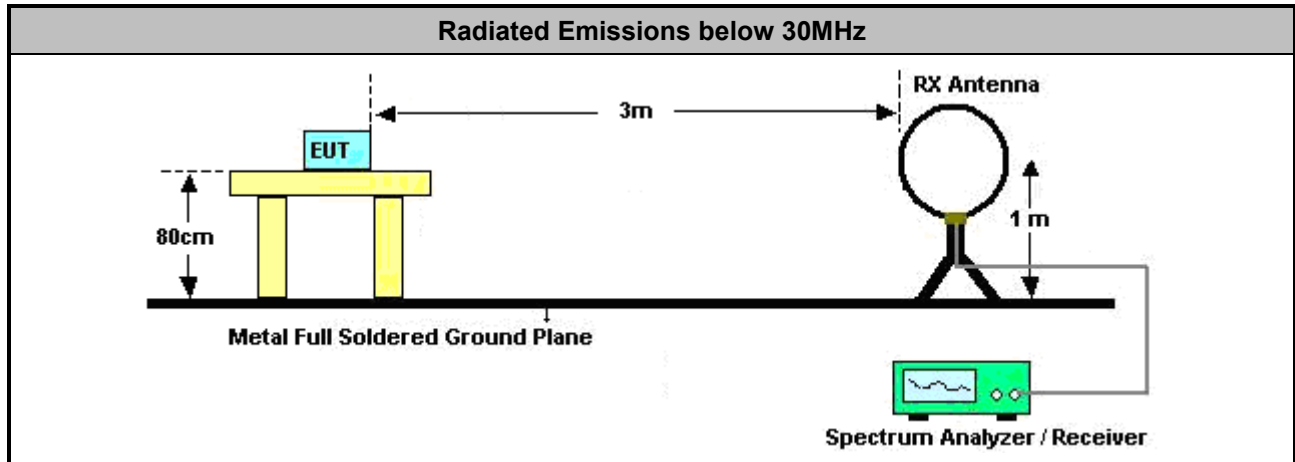


Radiated Emissions from 1GHz to 1.61 GHz

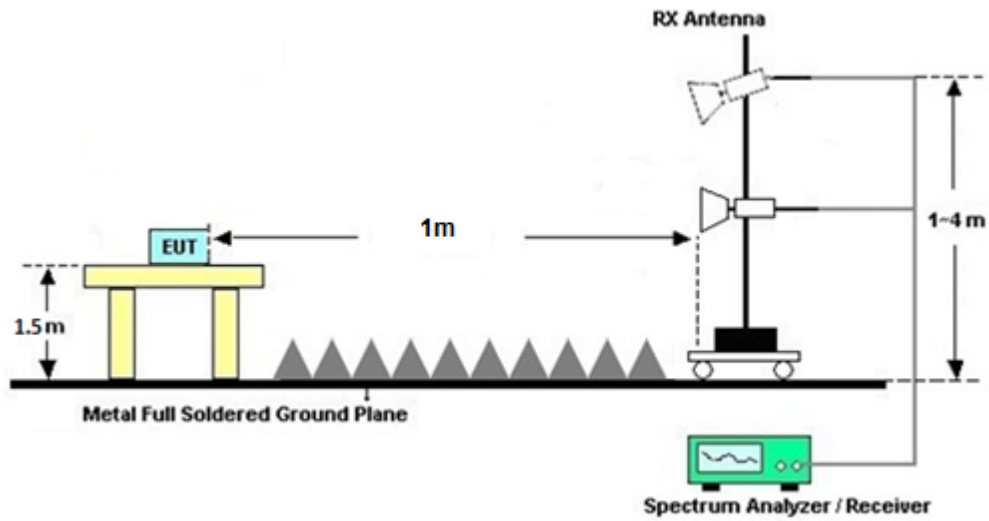

Radiated Emissions from 1.61 GHz to 10.60 GHz

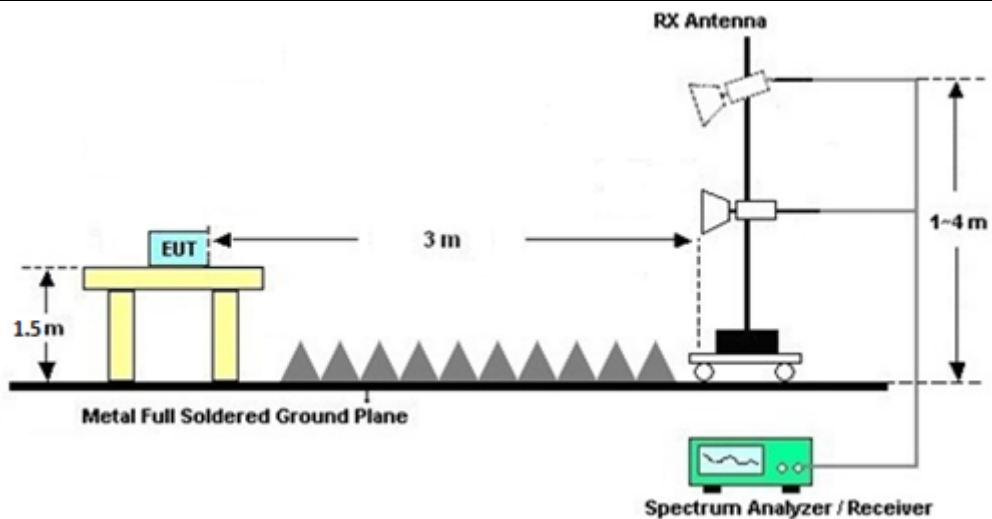

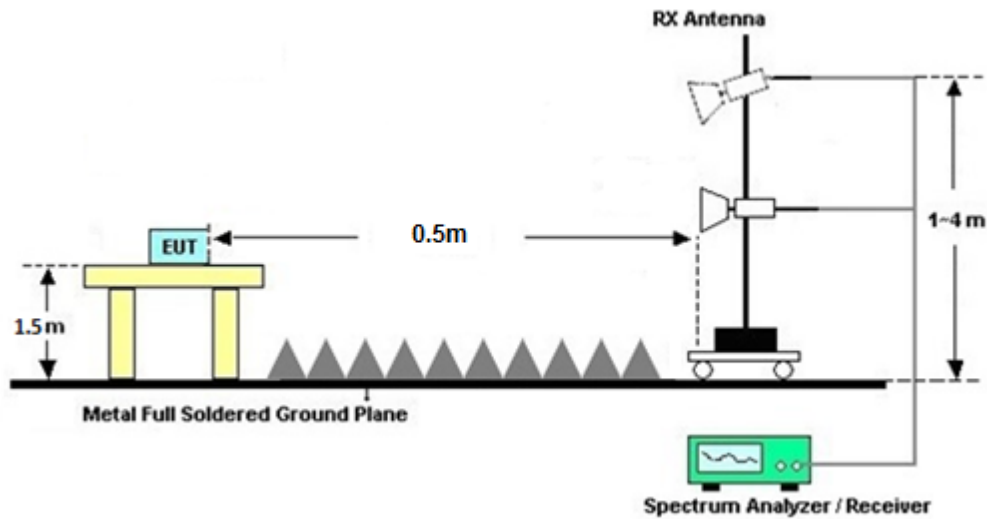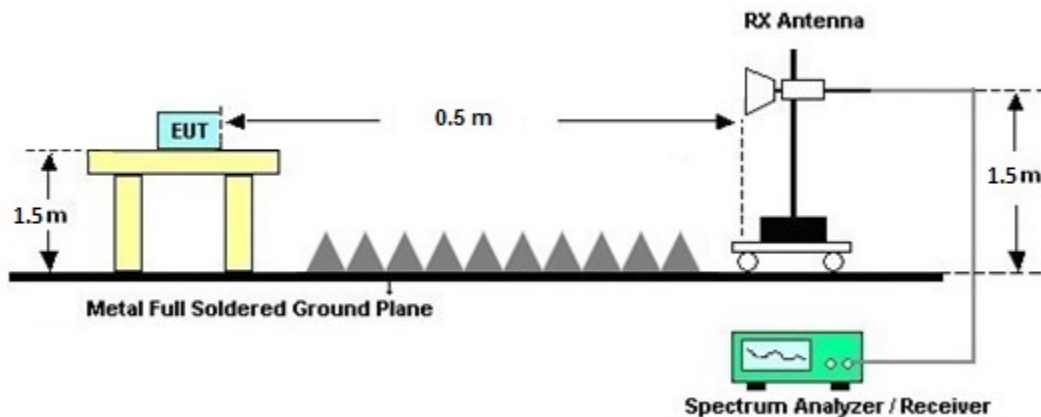Radiated Emissions from 10.60 GHz to 18GHz

Radiated Emissions above 18GHz


Note 1: Magnetic field tests shall be performed in the frequency range of 9 kHz to 30 MHz using a calibrated loop antenna. Electric field tests shall be performed in the frequency range of 30 MHz to 1000 MHz using a calibrated bi-log antenna and the frequency range of 1 GHz to 40 GHz using a calibrated horn antenna.

Note 2: If test distance other than 3m is used, the used test distance will be recorded in test result.

3.5.5 Radiated Emissions (Below 30MHz)

All amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.


There is adequate comparison measurement of both open-field test site and alternative test site - semi-Anechoic chamber according to 414788 D01 Radiated Test Site v01r01, and the result came out very similar.

3.5.6 Average Power Spectral Density

Test mode	Frequency (MHz)	Emission Level (dBuV/m)	Emission Limit (dBm/MHz)	Emission Limit (dBuV/m)	Margin (dB)	Result	Pol [H/V]
1	6525	53.54	-41.3	53.93	-0.39	Pass	H
2	8064	53.57	-41.3	53.93	-0.36	Pass	H
3	8054	53.77	-41.3	53.93	-0.16	Pass	H
4	6530	53.79	-41.3	53.93	-0.14	Pass	H
5	8059	53.66	-41.3	53.93	-0.27	Pass	H
6	8064	53.26	-41.3	53.93	-0.67	Pass	H
7	6525	53.56	-41.3	53.93	-0.37	Pass	H
8	8058	53.27	-41.3	53.93	-0.66	Pass	H
9	7980	53.55	-41.3	53.93	-0.38	Pass	H
10	6496	53.35	-41.3	53.93	-0.58	Pass	H
11	8064	53.61	-41.3	53.93	-0.32	Pass	H
12	7977	53.71	-41.3	53.93	-0.22	Pass	H
13	6499	53.67	-41.3	53.93	-0.26	Pass	H
14	8064	53.66	-41.3	53.93	-0.27	Pass	H
15	8055	53.38	-41.3	53.93	-0.55	Pass	H
16	8064	53.67	-41.3	53.93	-0.24	Pass	H
17	8064	53.67	-41.3	53.93	-0.26	Pass	H
18	7975	53.81	-41.3	53.93	-0.12	Pass	H
19	6532	53.50	-41.3	53.93	-0.43	Pass	H
20	8072	53.52	-41.3	53.93	-0.41	Pass	H
21	7968	53.65	-41.3	53.93	-0.28	Pass	H

Average Power Spectral Density Plots
Ranging Antenna Channel 5

Mode 4 – Emission Level 53.79 dBuV/m

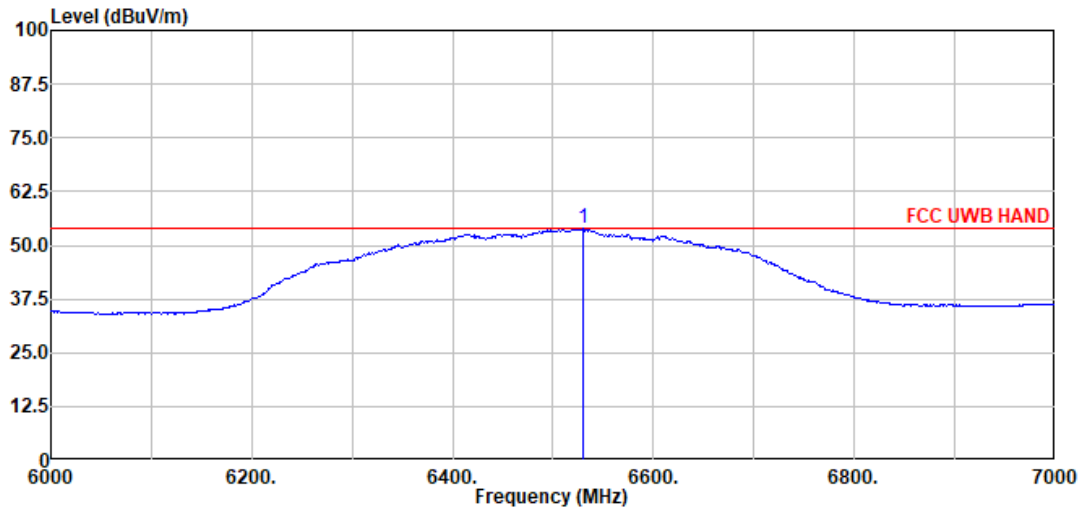


Site : 03CH20-HY
Condition : FCC UWB HAND 3m HF_9120D_02360_241101 Horizontal
RBW:1000.000kHz VBW:3000.000kHz SWT:1.000sec
Project : 4N0920
Detector : Average
Plane : X Close with Adapter
Mode : 4
Channel : 05
Test Case Number : Case 2-BPRF Set#3
Post Packet Power: 50
Payload Length : 125
TX Power Control : 44

	Freq	Level	Limit		Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	6530.00	53.79	53.93	-0.14	41.88	35.42	14.46	37.97	0.00	--	--	Average

Average Power Spectral Density Plots
Ranging Antenna Channel 9

Mode 17 Emission Level 53.67 dBuV/m

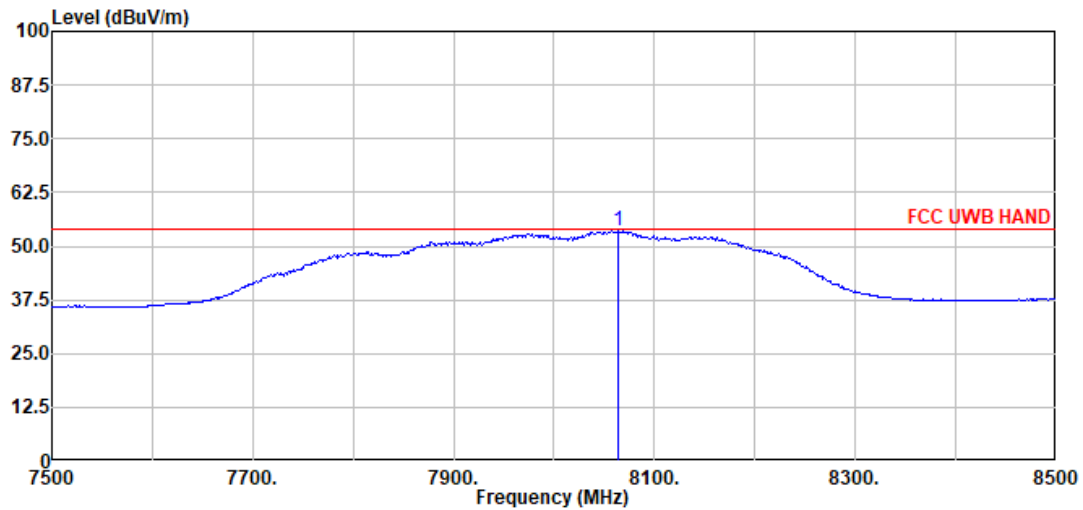


Site : 03CH20-HY
Condition : FCC UWB HAND 3m HF_9120D_02360_241101 Horizontal
RBW:1000.000kHz VBW:3000.000kHz SWT:1.000sec
Project : 4N0920
Detector : Average
Plane : Z Open with Adapter
Mode : 17
Channel : 09
Test Case Number : Case 6 - HPRF Set #21
Post Packet Power: 50
Payload Length : N/A(Default 20)
TX Power Control : 44

	Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	8064.00	53.67	53.93	-0.26	39.48	37.07	16.21	39.09	0.00	--	--	Average

Average Power Spectral Density Plots
Patch Antenna Channel 9

Mode 18 – Emission Level 53.81 dBuV/m

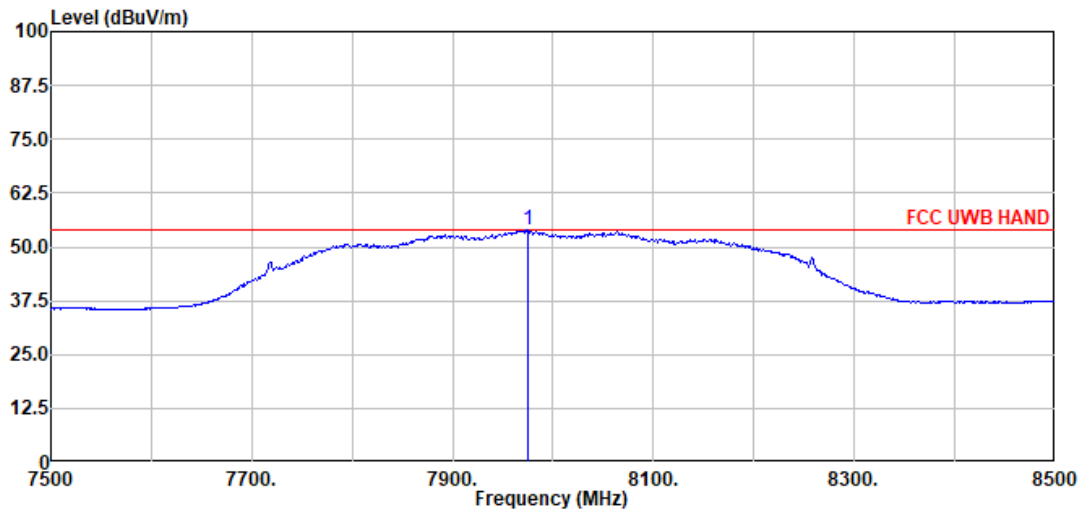

Site : 03CH20-HY
Condition : FCC UWB HAND 3m HF_9120D_02360_241101 Horizontal
: RBW:1000.000kHz VBW:3000.000kHz SWT:1.000sec
Project : 4N0920
Detector : Average
Plane : Y Close with Adapter
Mode : 18
Channel : 09
Test Case Number : Case 6 - HPRF Set #21
Post Packet Power: 50
Payload Length : N/A(Default 20)
TX Power Control : 81


1	Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	7975.00	53.81	53.93	-0.12	39.59	37.10	16.13	39.01	0.00	--	--	Average



3.5.7 Radiated Emissions (30MHz – 1GHz)

CH5 Radiated Emissions (30MHz – 1GHz)

Test Mode	Mode 4	Polarization	H
Operating Function	Adapter Mode	Test Distance	3m

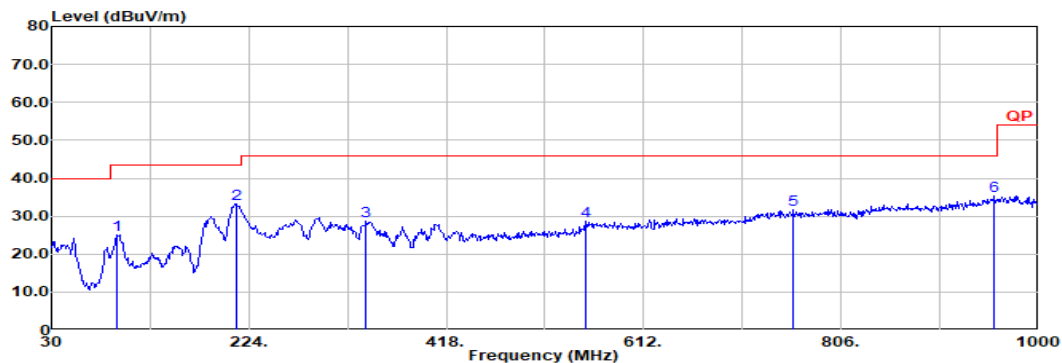

Site : 03CH20-HY
Condition : QP 3m Bilog_55606 & 08_241127 HORIZONTAL
Project : 4N0920
Detector : Average
Plane : X Close with Adapter
Mode : 4
Channel : 05
Test Case Number : Case 2 - BPRF Set #3
Post Packet Power: 50
Payload Length : 125
TX Power Control : 44

	Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	94.02	25.14	43.50	-18.36	43.85	15.08	1.73	35.69	0.17	--	--	Peak
2	212.36	33.16	43.50	-10.34	50.57	15.28	2.59	35.48	0.20	--	--	Peak
3	339.43	28.57	46.00	-17.43	40.15	20.13	3.27	35.15	0.17	--	--	Peak
4	554.77	28.55	46.00	-17.45	33.15	25.70	4.18	34.60	0.12	--	--	Peak
5	759.44	31.75	46.00	-14.25	32.41	28.18	4.87	33.85	0.14	--	--	Peak
6	956.35	35.25	46.00	-10.75	31.89	30.95	5.45	33.13	0.09	--	--	Peak


Note 1: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 2: Peak emission setting: RBW=120kHz; VBW = 300kHz.



CH5 Radiated Emissions (30MHz – 1GHz)

Test Mode	Mode 4	Polarization	V
Operating Function	Adapter Mode	Test Distance	3m

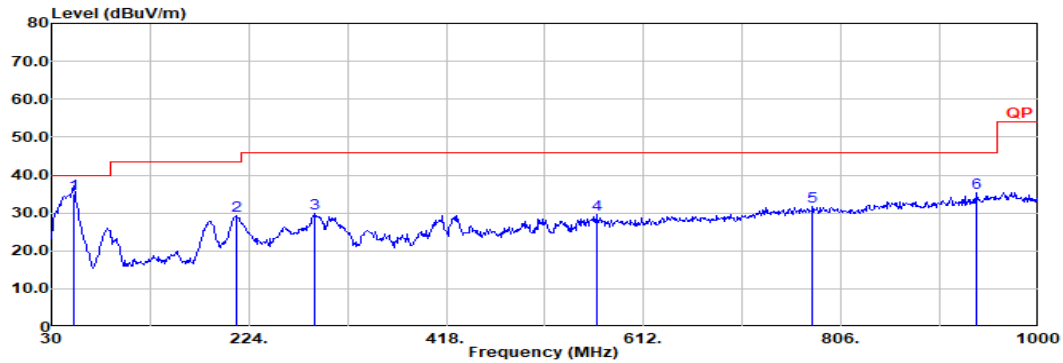

Site : 03CH20-HY
Condition : QP 3m Bilog_55606 & 08_241127 VERTICAL
Project : 4N0920
Detector : Average
Plane : X Close with Adapter
Mode : 4
Channel : 05
Test Case Number : Case 2 - BPRF Set #3
Post Packet Power : 50
Payload Length : 125
TX Power Control : 44


	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m		dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	51.34	35.03	40.00	-4.97		55.25	14.02	1.26	35.74	0.24	100	180	QP
2	211.39	29.31	43.50	-14.19		46.69	15.31	2.59	35.48	0.20	--	--	Peak
3	288.99	29.92	46.00	-16.08		42.79	19.24	3.01	35.31	0.19	--	--	Peak
4	565.44	29.57	46.00	-16.43		33.50	26.32	4.21	34.57	0.11	--	--	Peak
5	777.87	31.66	46.00	-14.34		32.13	28.24	4.92	33.78	0.15	--	--	Peak
6	938.89	35.21	46.00	-10.79		32.78	30.12	5.40	33.20	0.11	--	--	Peak

Note 1: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 2: Peak emission setting: RBW=120kHz; VBW = 300kHz.

**CH9 Radiated Emissions (30MHz – 1GHz)**

Test Mode	Mode 17	Polarization	H
Operating Function	Adapter Mode	Test Distance	3m

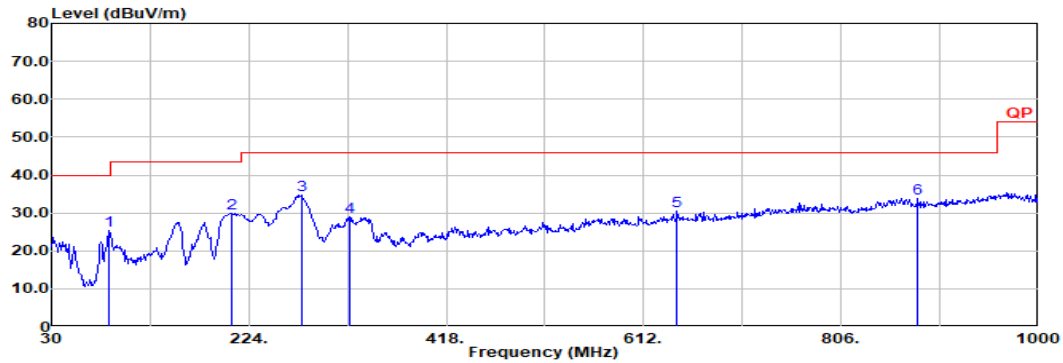

Site : 03CH20-HY
Condition : QP 3m Bilog_55606 & 08_241127 HORIZONTAL
Project : 4N0920
Detector : Average
Plane : Z Open with Adapter
Mode : 17
Channel : 09
Test Case Number : Case 6 - HPRF Set #21
Post Packet Power: 50
Payload Length : N/A(Default 20)
TX Power Control : 44


	Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	86.26	25.36	40.00	-14.64	44.96	14.24	1.66	35.70	0.20	--	--	Peak
2	207.51	29.90	43.50	-13.60	47.25	15.38	2.56	35.49	0.20	--	--	Peak
3	275.41	34.79	46.00	-11.21	48.16	18.84	2.94	35.34	0.19	--	--	Peak
4	322.94	29.12	46.00	-16.88	41.41	19.55	3.18	35.20	0.18	--	--	Peak
5	644.98	30.52	46.00	-15.48	33.65	26.53	4.49	34.29	0.14	--	--	Peak
6	881.66	33.81	46.00	-12.19	32.78	29.04	5.24	33.39	0.14	--	--	Peak

Note 1: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 2: Peak emission setting: RBW=120kHz; VBW = 300kHz.

**CH9 Radiated Emissions (30MHz – 1GHz)**

Test Mode	Mode 17	Polarization	V
Operating Function	Adapter Mode	Test Distance	3m

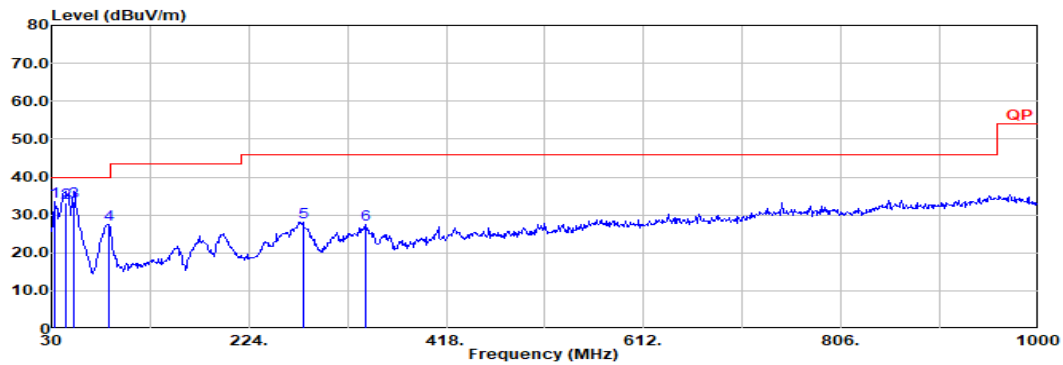

Site : 03CH20-HY
Condition : QP 3m Bilog_55606 & 08_241127 VERTICAL
Project : 4N0920
Detector : Average
Plane : Z Open with Adapter
Mode : 17
Channel : 09
Test Case Number : Case 6 - HPRF Set #21
Post Packet Power: 50
Payload Length : N/A(Default 20)
TX Power Control : 44


	Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	33.88	33.38	40.00	-6.62	45.16	22.74	1.02	35.75	0.21	--	--	Peak
2	43.58	33.25	40.00	-6.75	50.12	17.48	1.17	35.75	0.23	100	42	QP
3	52.31	33.64	40.00	-6.36	54.33	13.54	1.27	35.74	0.24	100	154	QP
4	86.26	27.54	40.00	-12.46	47.14	14.24	1.66	35.70	0.20	--	--	Peak
5	277.35	28.22	46.00	-17.78	41.54	18.87	2.95	35.33	0.19	--	--	Peak
6	339.43	27.35	46.00	-18.65	38.93	20.13	3.27	35.15	0.17	--	--	Peak

Note 1: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 2: Peak emission setting: RBW=120kHz; VBW = 300kHz.

**CH9 Radiated Emissions (30MHz – 1GHz)**

Test Mode	Mode 18	Polarization	H
Operating Function	Adapter Mode	Test Distance	3m

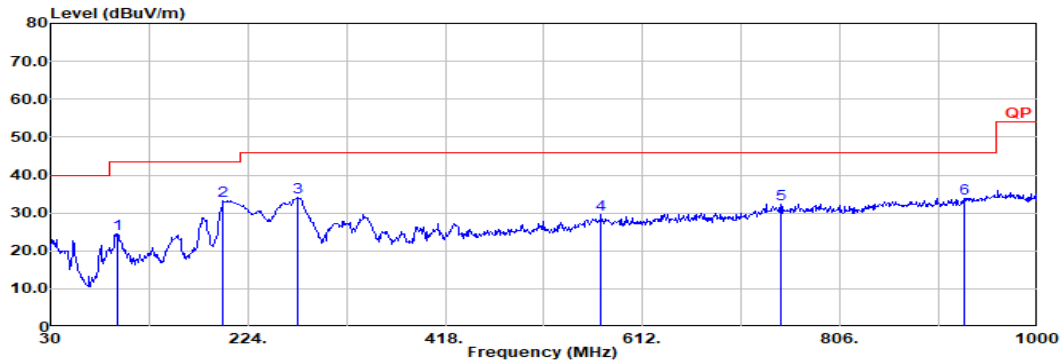

Site : 03CH20-HY
Condition : QP 3m Bilog_55606 & 08_241127 HORIZONTAL
Project : 4N0920
Detector : Average
Plane : Y Close with Adapter
Mode : 18
Channel : 09
Test Case Number : Case 6 - HPRF Set #21
Post Packet Power: 50
Payload Length : N/A(Default 20)
TX Power Control : 81


	Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	Loss	Factor	Factor	cm	deg	
1	95.96	24.51	43.50	-18.99	42.84	15.44	1.75	35.69	0.17	--	--	Peak
2	199.75	33.19	43.50	-10.31	50.91	15.07	2.52	35.51	0.20	--	--	Peak
3	272.50	34.01	46.00	-11.99	47.33	18.91	2.93	35.35	0.19	--	--	Peak
4	571.26	29.46	46.00	-16.54	33.43	26.24	4.23	34.55	0.11	--	--	Peak
5	747.80	32.43	46.00	-13.57	33.19	28.16	4.84	33.90	0.14	--	--	Peak
6	927.25	33.85	46.00	-12.15	31.93	29.66	5.37	33.24	0.13	--	--	Peak

Note 1: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 2: Peak emission setting: RBW=120kHz; VBW = 300kHz.

**CH9 Radiated Emissions (30MHz – 1GHz)**

Test Mode	Mode 18	Polarization	V
Operating Function	Adapter Mode	Test Distance	3m

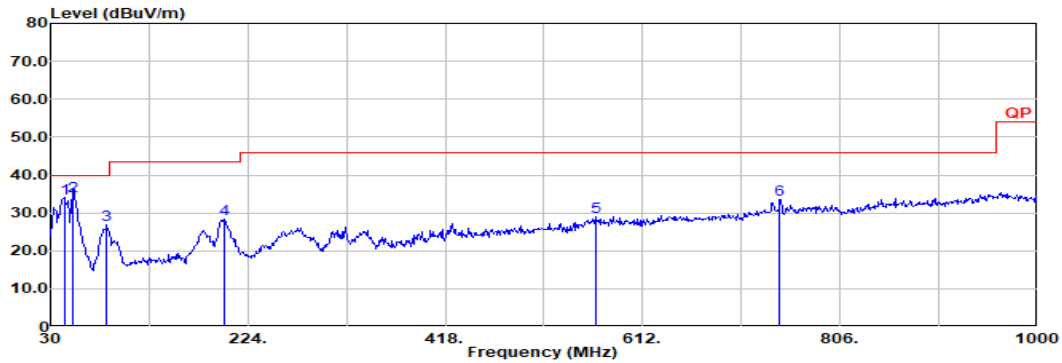

Site : 03CH20-HY
Condition : QP 3m Bilog_55606 & 08_241127 VERTICAL
Project : 4N0920
Detector : Average
Plane : Y Close with Adapter
Mode : 18
Channel : 09
Test Case Number : Case 6 - HPRF Set #21
Post Packet Power: 50
Payload Length : N/A(Default 20)
TX Power Control : 81


	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m		dB	dBuV	dB/m	Loss	Factor	Factor	cm	deg	
1	43.58	33.84	40.00	-6.16		50.71	17.48	1.17	35.75	0.23	--	--	Peak
2	52.31	34.29	40.00	-5.71		54.98	13.54	1.27	35.74	0.24	100	192	QP
3	85.29	26.79	40.00	-13.21		46.55	14.08	1.65	35.70	0.21	--	--	Peak
4	200.72	28.26	43.50	-15.24		45.96	15.09	2.52	35.51	0.20	--	--	Peak
5	565.44	29.02	46.00	-16.98		32.95	26.32	4.21	34.57	0.11	--	--	Peak
6	746.83	33.53	46.00	-12.47		34.30	28.15	4.84	33.90	0.14	--	--	Peak

Note 1: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 2: Peak emission setting: RBW=120kHz; VBW = 300kHz.

3.5.8 Radiated Emissions (960MHz – 18GHz)

CH5 Radiated Emissions (960MHz – 18GHz)											
Test Mode	Mode 4				Polarization				H		
Operating Function	Adapter Mode										
Test Distance	The test distance between the receiving antenna and the EUT is as following: 3m for 1.61 GHz ~ 10.60 GHz frequency range, 1 m for 1GHz ~ 1.61 GHz, and 0.5 m for other frequency ranges.										

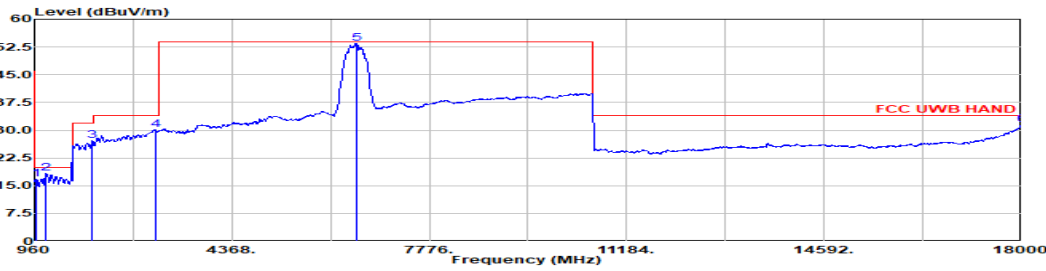

Site : 03CH20-HY
Condition : FCC UWB HAND 3m HF_9120D_02360_241101 Horizontal
Project : 4N0920
Detector : Average
Plane : X Close with Adapter
Mode : 4
Channel : 05
Test Case Number : Case 2 - BPRF Set #3
Post Packet Power: 50
Payload Length : 125
TX Power Control : 44

Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	Loss	Factor	Factor	dB	cm	deg
1	978.04	16.76	19.93	-3.17	28.92	30.94	5.50	33.04	-15.56	--	Peak
2	1159.82	18.29	19.93	-1.64	31.49	26.00	5.99	35.65	-9.54	--	Average
3	1955.42	27.12	31.93	-4.81	29.31	26.15	7.78	36.12	0.00	--	Average
4	3044.30	30.05	33.93	-3.88	26.59	29.70	9.88	36.12	0.00	--	Average
5	6527.30	53.50	53.93	-0.43	41.60	35.41	14.46	37.97	0.00	--	Average
6	18000.00	31.38	33.93	-2.55	24.67	43.20	24.54	45.47	-15.56	--	Average

Note 1: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 2: Average emission setting outside GPS Bands: RBW=1MHz; VBW=3MHz.

Note 3: Average emission setting in GPS bands: RBW=1kHz; VBW=3kHz.

Note 4: #5 is fundamental signal.


Note 5:

- Distance extrapolation factor = 20 log (test distance [X m]/specific distance [3 m]) (dB)
Example: Distance extrapolation factor = 20log (0.5m/3m) = -15.56 (dB)
- Corrected Reading: Antenna Factor (dB/m) + Cable Loss (dB) + Read Level (dBuV) - Preamp Factor (dB) + Aux Factor (dB) = Level (dBuV/m)
(Note: For test item below 1GHz, Aux = Filter loss)
(Note: For test item above 1GHz, Aux = Distance extrapolation factor)
Example:
Corrected Reading: 30.94 (dB/m) + 5.50 (dB) + 28.92 (dBuV) – 33.04 (dB) + (-15.56) (dB) = 16.76 (dBuV/m)



CH5 Radiated Emissions (960MHz – 18GHz)

Test Mode	Mode 4	Polarization	V
Operating Function	Adapter Mode		
Test Distance	The test distance between the receiving antenna and the EUT is as following: 3m for 1.61 GHz ~ 10.60 GHz frequency range, 1 m for 1GHz ~ 1.61 GHz, and 0.5 m for other frequency ranges.		

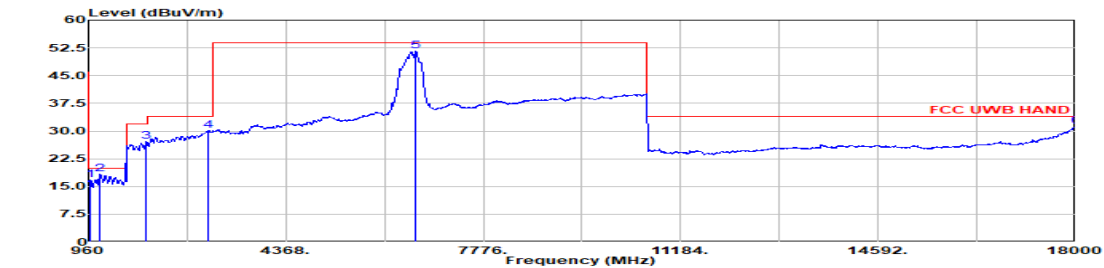

Site : 03CH20-HY
Condition : FCC UWB HAND 3m HF_9120D_02360_241101 Vertical
Project : 4N0920
Detector : Average
Plane : X Close with Adapter
Mode : 4
Channel : 05
Test Case Number : Case 2 - BPRF Set #3
Post Packet Power : 50
Payload Length : 125
TX Power Control : 44

	Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	Loss	Factor	Factor	cm	deg	
1	979.28	16.74	19.93	-3.19	28.98	30.84	5.51	33.03	-15.56	--	--	Peak
2	1162.87	18.27	19.93	-1.66	31.46	26.00	6.00	35.65	-9.54	--	--	Average
3	1955.04	27.19	31.93	-4.74	29.38	26.15	7.78	36.12	0.00	--	--	Average
4	3034.51	30.07	33.93	-3.86	26.61	29.70	9.86	36.10	0.00	--	--	Average
5	6610.00	51.69	53.93	-2.24	39.33	35.82	14.55	38.01	0.00	--	--	Average
6	17992.60	31.21	33.93	-2.72	24.54	43.16	24.53	45.46	-15.56	--	--	Average

Note 1: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 2: Average emission setting outside GPS Bands: RBW=1MHz; VBW=3MHz.

Note 3: Average emission setting in GPS bands: RBW=1kHz; VBW=3kHz.


Note 4: #5 is fundamental signal.

Note 5:

- Distance extrapolation factor = $20 \log (\text{test distance [X m]}/\text{specific distance [3 m]})$ (dB)
Example: Distance extrapolation factor = $20 \log (0.5\text{m}/3\text{m}) = -15.56$ (dB)
- Corrected Reading: Antenna Factor (dB/m) + Cable Loss (dB) + Read Level (dBuV) - Preamp Factor (dB) + Aux Factor (dB) = Level (dBuV/m)
(Note: For test item below 1GHz, Aux = Filter loss)
(Note: For test item above 1GHz, Aux = Distance extrapolation factor)



CH9 Radiated Emissions (960MHz – 18GHz)			
Test Mode	Mode 17	Polarization	H
Operating Function	Adapter Mode		
Test Distance	The test distance between the receiving antenna and the EUT is as following: 3m for 1.61 GHz ~ 10.60 GHz frequency range, 1 m for 1GHz ~ 1.61 GHz, and 0.5 m for other frequency ranges.		

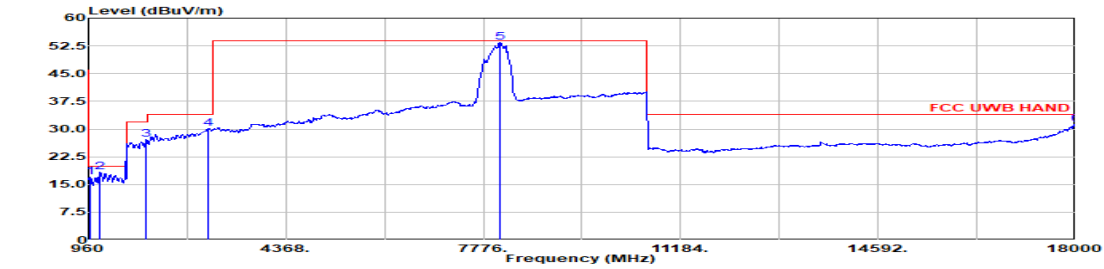

Site : 03CH20-HY
 Condition : FCC UWB HAND 3m HF_9120D_02360_241101 Horizontal
 Project : 4N0920
 Detector : Average
 Plane : Z Open with Adapter
 Mode : 17
 Channel : 09
 Test Case Number : Case 6 - HPRF Set #21
 Post Packet Power : 50
 Payload Length : N/A(Default 20)
 TX Power Control : 44

	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m		dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	977.44	16.92	19.93	-3.01	29.04	30.98	5.50	33.04	-15.56	--	--	--	Peak
2	1159.21	18.28	19.93	-1.65	31.49	25.99	5.99	35.65	-9.54	--	--	--	Average
3	1954.28	27.14	31.93	-4.79	29.32	26.16	7.78	36.12	0.00	--	--	--	Average
4	3027.85	30.04	33.93	-3.89	26.58	29.70	9.85	36.09	0.00	--	--	--	Average
5	8065.00	53.48	53.93	-0.45	39.29	37.07	16.21	39.09	0.00	--	--	--	Average
6	17992.00	31.22	33.93	-2.71	24.55	43.16	24.53	45.46	-15.56	--	--	--	Average

Note 1: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 2: Average emission setting outside GPS Bands: RBW=1MHz; VBW=3MHz.

Note 3: Average emission setting in GPS bands: RBW=1kHz; VBW=3kHz.

Note 4: #5 is fundamental signal.


Note 5:

- Distance extrapolation factor = $20 \log (\text{test distance [X m]}/\text{specific distance [3 m]})$ (dB)
Example: Distance extrapolation factor = $20 \log (0.5\text{m}/3\text{m}) = -15.56$ (dB)
- Corrected Reading: Antenna Factor (dB/m) + Cable Loss (dB) + Read Level (dBuV) - Preamp Factor (dB) + Aux Factor (dB) = Level (dBuV/m)
(Note: For test item below 1GHz, Aux = Filter loss)
(Note: For test item above 1GHz, Aux = Distance extrapolation factor)



CH9 Radiated Emissions (960MHz – 18GHz)

Test Mode	Mode 17	Polarization	V
Operating Function	Adapter Mode		
Test Distance	The test distance between the receiving antenna and the EUT is as following: 3m for 1.61 GHz ~ 10.60 GHz frequency range, 1 m for 1GHz ~ 1.61 GHz, and 0.5 m for other frequency ranges.		

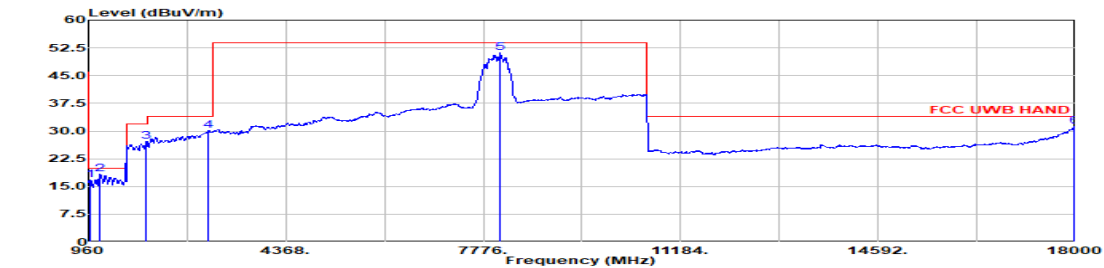

Site : 03CH20-HY
 Condition : FCC UWB HAND 3m HF_9120D_02360_241101 Vertical
 Project : 4N0920
 Detector : Average
 Plane : Z Open with Adapter
 Mode : 17
 Channel : 09
 Test Case Number : Case 6 - HPRF Set #21
 Post Packet Power : 50
 Payload Length : N/A(Default 20)
 TX Power Control : 44

	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m		dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	976.40	16.86	19.93	-3.07	28.91	31.05	5.50	33.04	-15.56	--	--	--	Peak
2	1161.65	18.30	19.93	-1.63	31.49	26.00	6.00	35.65	-9.54	--	--	--	Average
3	1954.28	27.12	31.93	-4.81	29.30	26.16	7.78	36.12	0.00	--	--	--	Average
4	3027.85	30.04	33.93	-3.89	26.58	29.70	9.85	36.09	0.00	--	--	--	Average
5	8065.00	51.20	53.93	-2.73	37.01	37.07	16.21	39.09	0.00	--	--	--	Average
6	17985.20	31.28	33.93	-2.65	24.65	43.11	24.53	45.45	-15.56	--	--	--	Average

Note 1: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 2: Average emission setting outside GPS Bands: RBW=1MHz; VBW=3MHz.

Note 3: Average emission setting in GPS bands: RBW=1kHz; VBW=3kHz.

Note 4: #5 is fundamental signal.


Note 5:

- Distance extrapolation factor = $20 \log (\text{test distance [X m]}/\text{specific distance [3 m]})$ (dB)
Example: Distance extrapolation factor = $20 \log (0.5\text{m}/3\text{m}) = -15.56$ (dB)
- Corrected Reading: Antenna Factor (dB/m) + Cable Loss (dB) + Read Level (dBuV) - Preamp Factor (dB) + Aux Factor (dB) = Level (dBuV/m)
(Note: For test item below 1GHz, Aux = Filter loss)
(Note: For test item above 1GHz, Aux = Distance extrapolation factor)



CH9 Radiated Emissions (960MHz – 18GHz)

Test Mode	Mode 18	Polarization	H
Operating Function	Adapter Mode		
Test Distance	The test distance between the receiving antenna and the EUT is as following: 3m for 1.61 GHz ~ 10.60 GHz frequency range, 1 m for 1GHz ~ 1.61 GHz, and 0.5 m for other frequency ranges.		

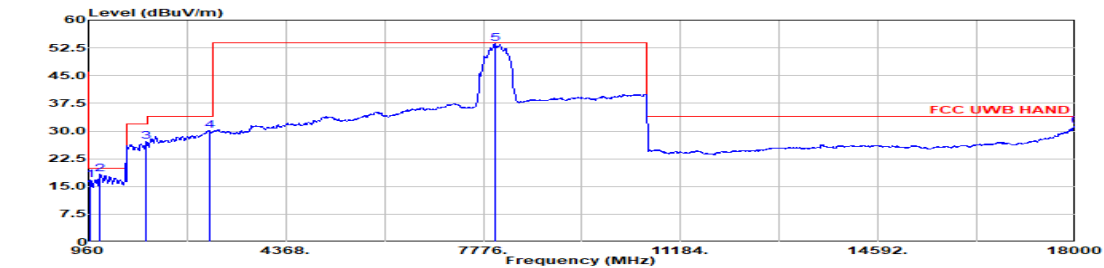

Site : 03CH20-HY
Condition : FCC UWB HAND 3m HF_9120D_02360_241101 Horizontal
Project : 4N0920
Detector : Average
Plane : Y Close with Adapter
Mode : 18
Channel : 09
Test Case Number : Case 6 - HPRF Set #21
Post Packet Power : 50
Payload Length : N/A(Default 20)
TX Power Control : 81

	Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	976.72	16.82	19.93	-3.11	28.89	31.03	5.50	33.04	-15.56	--	--	Peak
2	1158.60	18.27	19.93	-1.66	31.48	25.99	5.99	35.65	-9.54	--	--	Average
3	1954.66	27.19	31.93	-4.74	29.38	26.15	7.78	36.12	0.00	--	--	Average
4	3042.28	30.06	33.93	-3.87	26.61	29.70	9.87	36.12	0.00	--	--	Average
5	7975.00	53.71	53.93	-0.22	39.49	37.10	16.13	39.01	0.00	--	--	Average
6	18000.00	31.25	33.93	-2.68	24.54	43.20	24.54	45.47	-15.56	--	--	Average

Note 1: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 2: Average emission setting outside GPS Bands: RBW=1MHz; VBW=3MHz.


Note 3: Average emission setting in GPS bands: RBW=1kHz; VBW=3kHz.

Note 4: #5 is fundamental signal.

Note 5:

- Distance extrapolation factor = $20 \log (\text{test distance [X m]}/\text{specific distance [3 m]})$ (dB)
Example: Distance extrapolation factor = $20 \log (0.5\text{m}/3\text{m}) = -15.56$ (dB)
- Corrected Reading: Antenna Factor (dB/m) + Cable Loss (dB) + Read Level (dBuV) - Preamp Factor (dB) + Aux Factor (dB) = Level (dBuV/m)
(Note: For test item below 1GHz, Aux = Filter loss)
(Note: For test item above 1GHz, Aux = Distance extrapolation factor)

CH9 Radiated Emissions (960MHz – 18GHz)			
Test Mode	Mode 18	Polarization	V
Operating Function	Adapter Mode		
Test Distance	The test distance between the receiving antenna and the EUT is as following: 3m for 1.61 GHz ~ 10.60 GHz frequency range, 1 m for 1GHz ~ 1.61 GHz, and 0.5 m for other frequency ranges.		

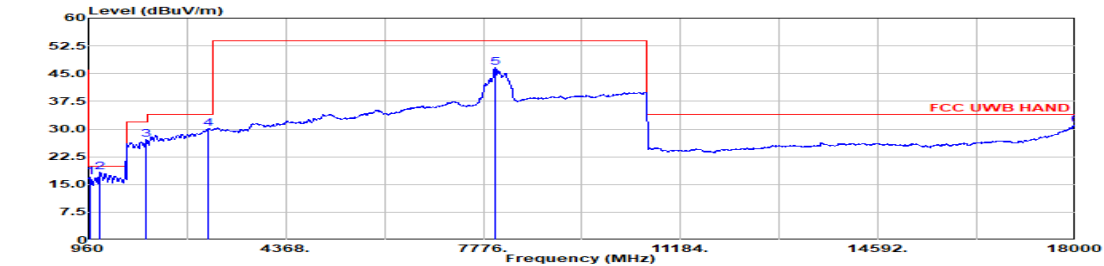

Site : 03CH20-HY
 Condition : FCC UWB HAND 3m HF_9120D_02360_241101 Vertical
 Project : 4N0920
 Detector : Average
 Plane : Y Close with Adapter
 Mode : 18
 Channel : 09
 Test Case Number : Case 6 - HPRF Set #21
 Post Packet Power : 50
 Payload Length : N/A(Default 20)
 TX Power Control : 81

	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m		dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	978.64	16.87	19.93	-3.06		29.07	30.89	5.50	33.03	-15.56	--	--	Peak
2	1160.43	18.28	19.93	-1.65		31.48	26.00	5.99	35.65	-9.54	--	--	Average
3	1952.38	27.10	31.93	-4.83		29.27	26.18	7.77	36.12	0.00	--	--	Average
4	3026.74	30.03	33.93	-3.90		26.57	29.70	9.85	36.09	0.00	--	--	Average
5	7975.00	46.68	53.93	-7.25		32.46	37.10	16.13	39.01	0.00	--	--	Average
6	17992.00	31.12	33.93	-2.81		24.45	43.16	24.53	45.46	-15.56	--	--	Average

Note 1: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 2: Average emission setting outside GPS Bands: RBW=1MHz; VBW=3MHz.

Note 3: Average emission setting in GPS bands: RBW=1kHz; VBW=3kHz.

Note 4: #5 is fundamental signal.

Note 5:


- Distance extrapolation factor = $20 \log (\text{test distance [X m]}/\text{specific distance [3 m]})$ (dB)
Example: Distance extrapolation factor = $20 \log (0.5\text{m}/3\text{m}) = -15.56$ (dB)
- Corrected Reading: Antenna Factor (dB/m) + Cable Loss (dB) + Read Level (dBuV) - Preamp Factor (dB) + Aux Factor (dB) = Level (dBuV/m)
(Note: For test item below 1GHz, Aux = Filter loss)
(Note: For test item above 1GHz, Aux = Distance extrapolation factor)



3.5.9 Radiated Emissions (1164MHz – 1240MHz)

CH5 Radiated Emissions (1164MHz – 1240MHz)

Test Mode	Mode 4	Polarization	H
Operating Function	Adapter Mode	Test Distance	3m

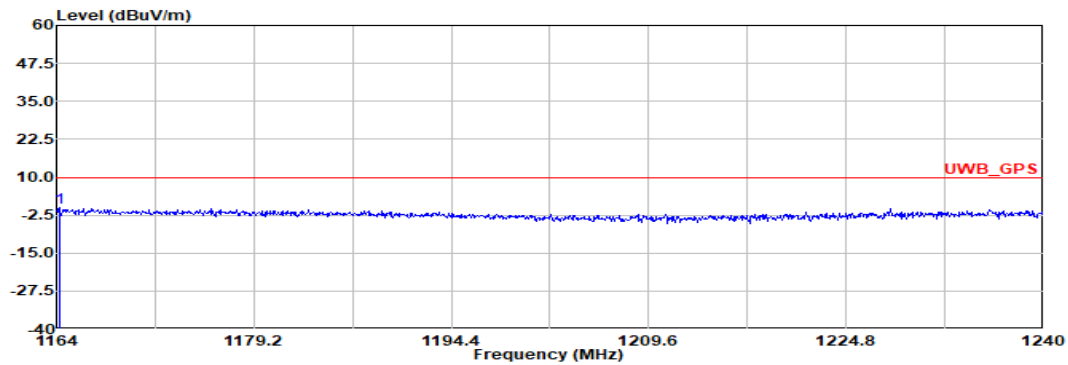

Site : 03CH20-HY
Condition : UWB_GPS 3m HF_9120D_02360_241101 Horizontal
RBW:1.000kHz VBW:3.000kHz SWT:40.000sec
Project : 4N0920
Detector : Peak
Plane : X Close with Adapter
Mode : 4
Channel : 05
Test Case Number : Case 2 - BPRF Set #3
Post Packet Power: 50
Payload Length : 125
TX Power Control : 44

	Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	1164.23	-0.17	9.93	-10.10	3.48	26.00	6.00	35.65	0.00	--	--	Peak


Note 1: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 2: Average emission setting: RBW=1kHz; VBW=3kHz.

Note 3: $E \text{ (dBuV/m)} = \text{EIRP Limit (dBm)} + 95.23$. $E \text{ (dBuV/m)} = -85.3 + 95.23 = 9.93 \text{ dBuV/m}$.

CH5 Radiated Emissions (1164MHz – 1240MHz)

Test Mode	Mode 4	Polarization	V
Operating Function	Adapter Mode	Test Distance	3m

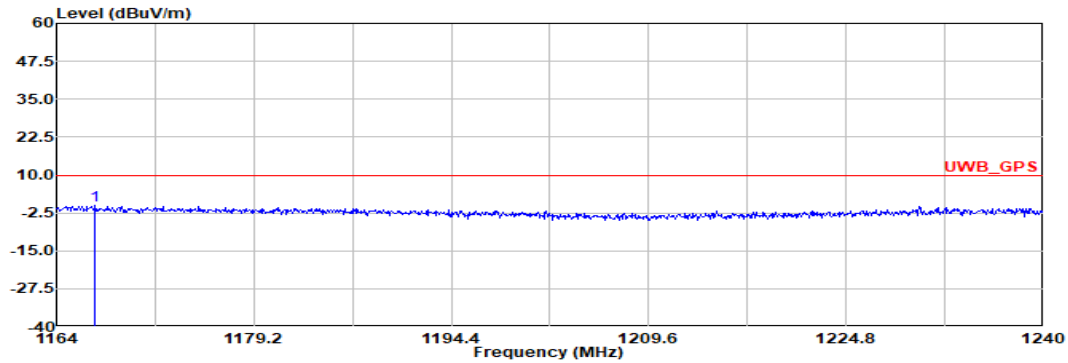

Site : 03CH20-HY
 Condition : UWB_GPS 3m HF_9120D_02360_241101 Vertical
 Project : 4N0920
 Detector : Peak
 Plane : X Close with Adapter
 Mode : 4
 Channel : 05
 Test Case Number : Case 2 - BPRF Set #3
 Post Packet Power : 50
 Payload Length : 125
 TX Power Control : 44

	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m		dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	1166.96	-0.18	9.93		-10.11	3.46	26.00	6.01	35.65	0.00	--	--	Peak

Note 1: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 2: Average emission setting: RBW=1kHz; VBW=3kHz.

Note 3: $E \text{ (dBuV/m)} = \text{EIRP Limit (dBm)} + 95.23$. $E \text{ (dBuV/m)} = -85.3 + 95.23 = 9.93 \text{ dBuV/m}$.



CH9 Radiated Emissions (1164MHz – 1240MHz)

Test Mode	Mode 17	Polarization	H
Operating Function	Adapter Mode	Test Distance	3m

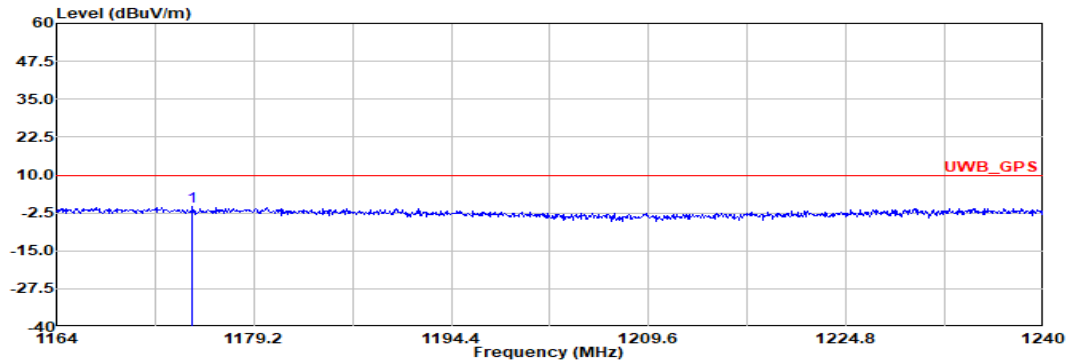

Site : 03CH20-HY
Condition : UWB_GPS 3m HF_9120D_02360_241101 Horizontal
Project : 4N0920
Detector : Average
Plane : Z Open with Adapter
Mode : 17
Channel : 09
Test Case Number : Case 6 - HPRF Set #21
Post Packet Power : 50
Payload Length : N/A(Default 20)
TX Power Control : 44

	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m		dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	1174.49	-0.50	9.93		-10.43	3.04	26.09	6.03	35.66	0.00	--	--	Peak


Note 1: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 2: Average emission setting: RBW=1kHz; VBW=3kHz.

Note 3: $E \text{ (dBuV/m)} = \text{EIRP Limit (dBm)} + 95.23$. $E \text{ (dBuV/m)} = -85.3 + 95.23 = 9.93 \text{ dBuV/m}$.

CH9 Radiated Emissions (1164MHz – 1240MHz)

Test Mode	Mode 17	Polarization	V
Operating Function	Adapter Mode	Test Distance	3m

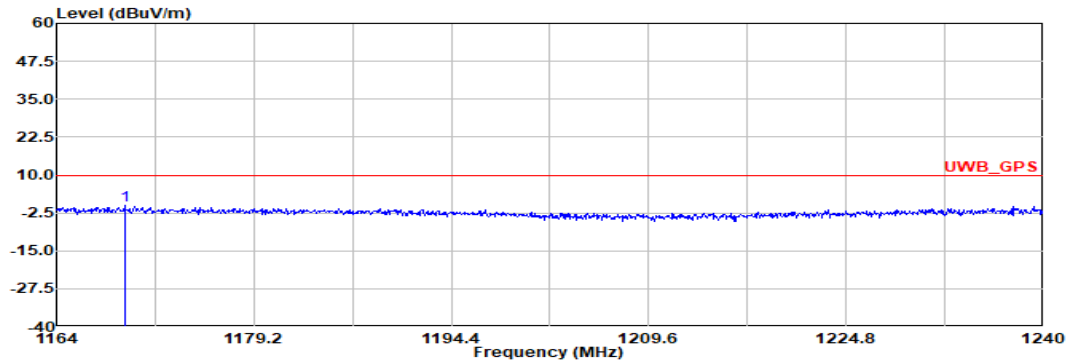

Site : 03CH20-HY
 Condition : UWB_GPS 3m HF_9120D_02360_241101 Vertical
 Project : 4N0920
 Detector : Average
 Plane : Z Open with Adapter
 Mode : 17
 Channel : 09
 Test Case Number : Case 6 - HPRF Set #21
 Post Packet Power : 50
 Payload Length : N/A(Default 20)
 TX Power Control : 44

	Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	1169.24	0.19	9.93	-9.74	3.82	26.00	6.02	35.65	0.00	--	--	Peak


Note 1: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 2: Average emission setting: RBW=1kHz; VBW=3kHz.

Note 3: $E \text{ (dBuV/m)} = \text{EIRP Limit (dBm)} + 95.23$. $E \text{ (dBuV/m)} = -85.3 + 95.23 = 9.93 \text{ dBuV/m}$.

**CH9 Radiated Emissions (1164MHz – 1240MHz)**

Test Mode	Mode 18	Polarization	H
Operating Function	Adapter Mode	Test Distance	3m

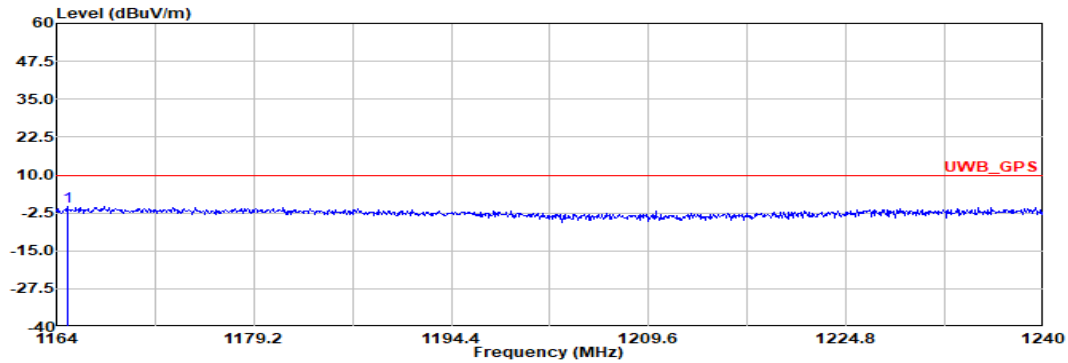


Site : 03CH20-HY
Condition : UWB_GPS 3m HF_9120D_02360_241101 Horizontal
Project : 4N0920
Detector : Average
Plane : Z Open with Adapter
Mode : 18
Channel : 09
Test Case Number : Case 6 - HPRF Set #21
Post Packet Power : 50
Payload Length : N/A(Default 20)
TX Power Control : 81

	Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	1164.84	-0.28	9.93	-10.21	3.36	26.00	6.01	35.65	0.00	--	--	Peak

Note 1: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 2: Average emission setting: RBW=1kHz; VBW=3kHz.

Note 3: $E \text{ (dBuV/m)} = \text{EIRP Limit (dBm)} + 95.23$. $E \text{ (dBuV/m)} = -85.3 + 95.23 = 9.93 \text{ dBuV/m}$.

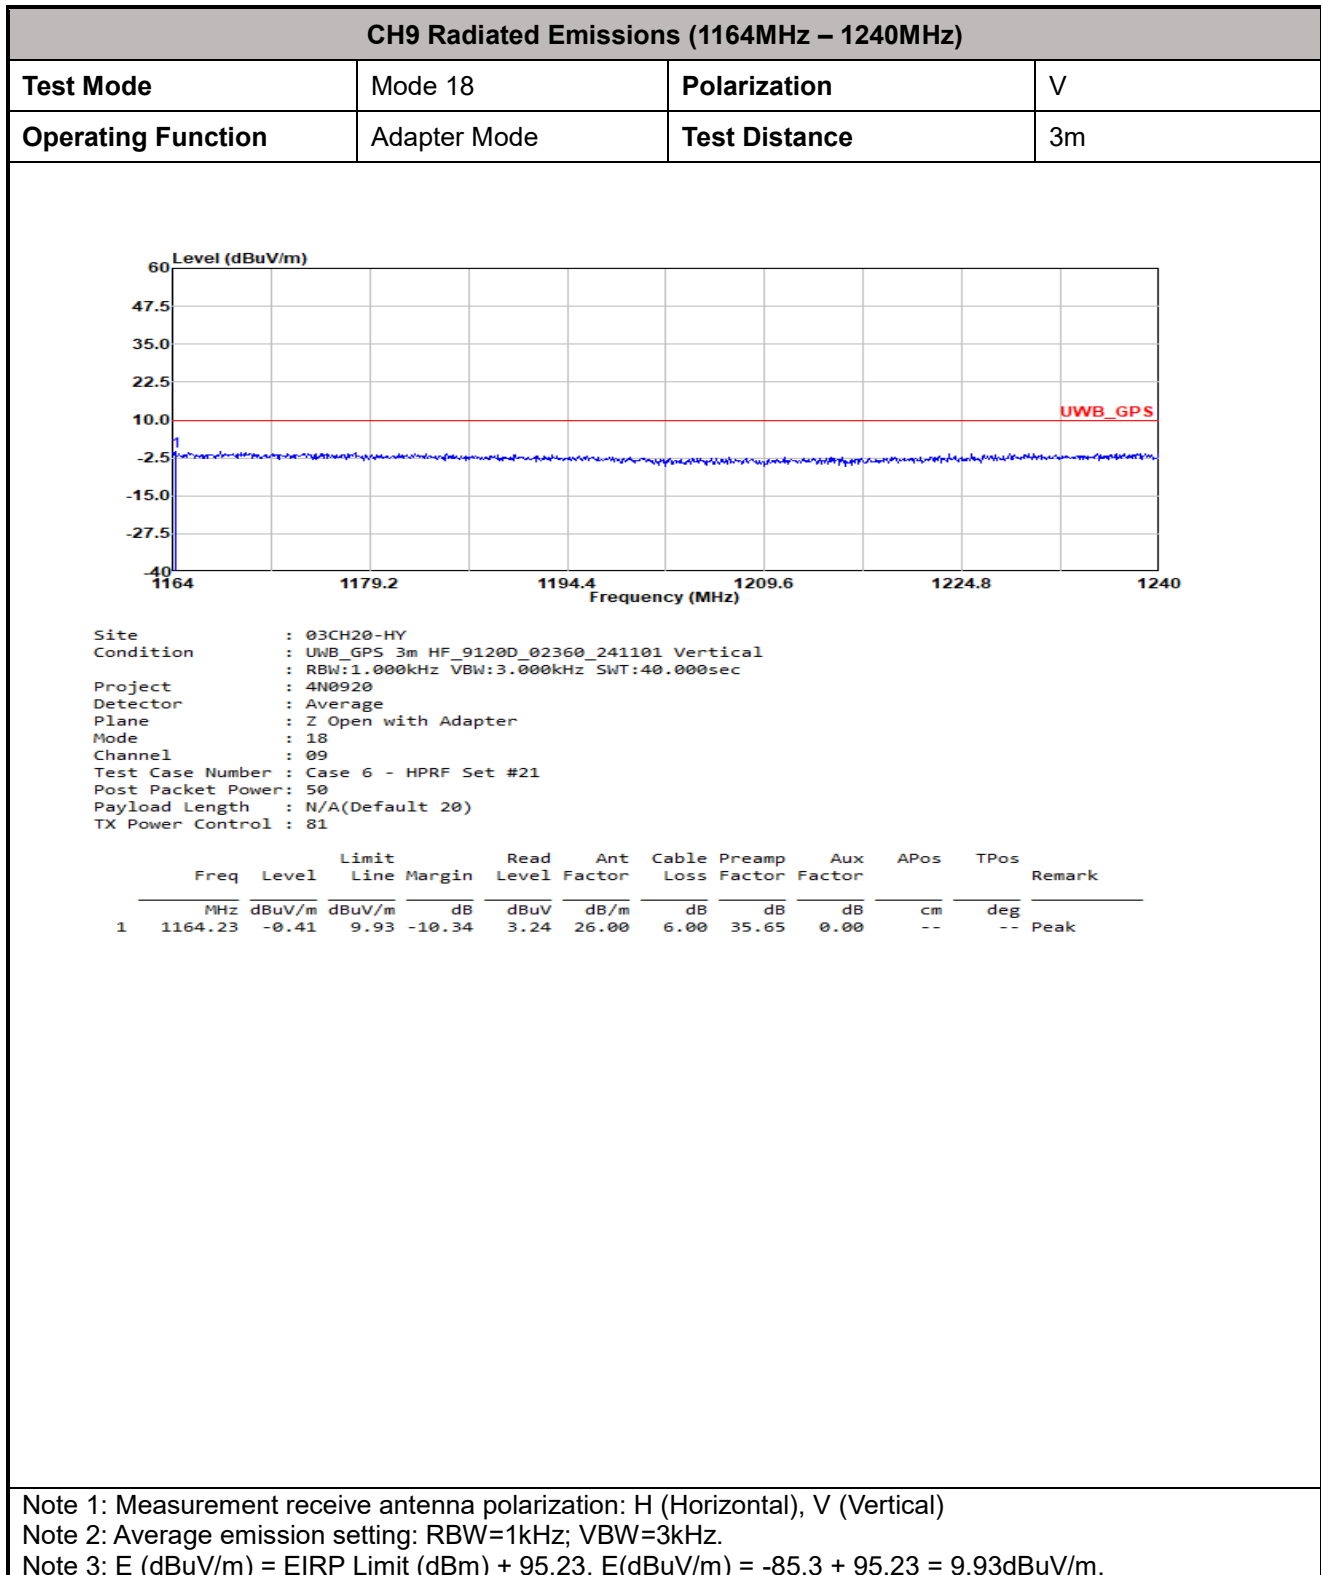




3.5.10 Radiated Emissions (1559MHz – 1610MHz)

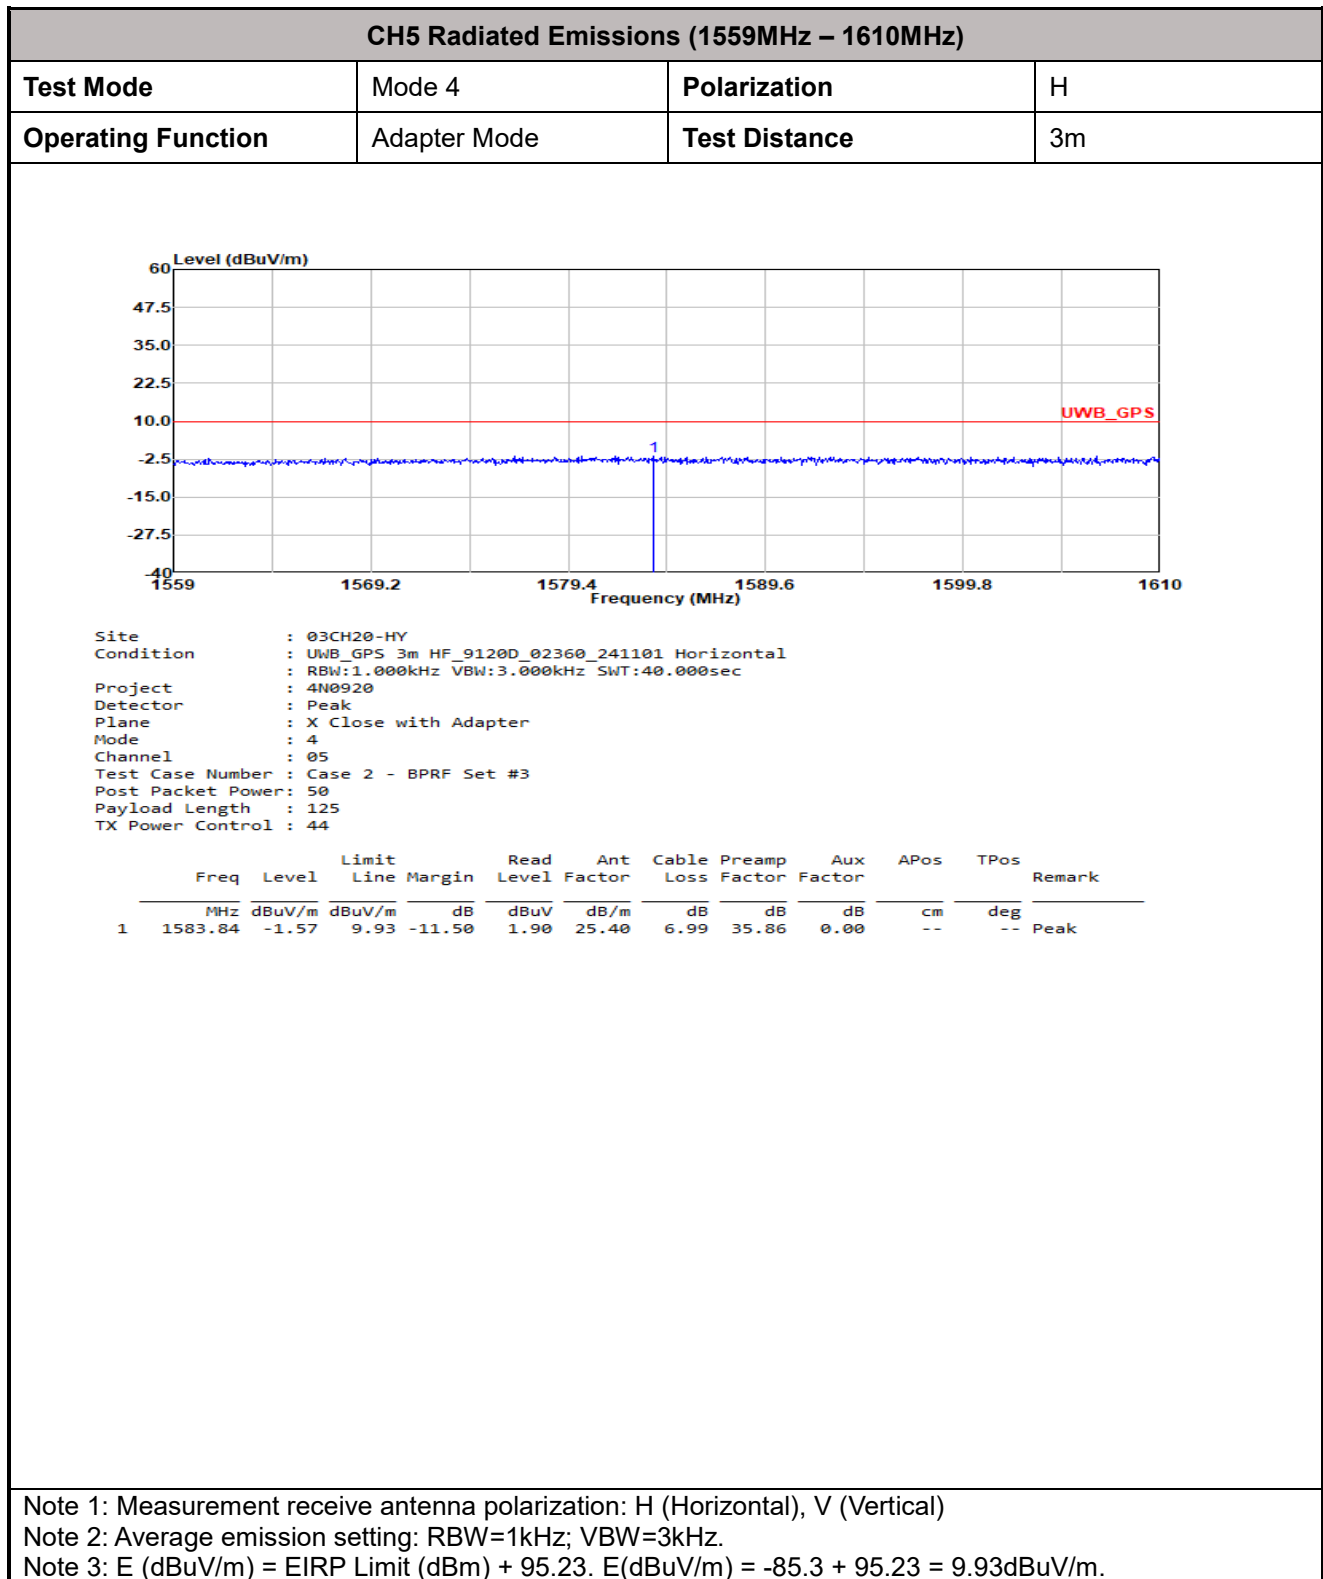

**CH5 Radiated Emissions (1559MHz – 1610MHz)**

Test Mode	Mode 4	Polarization	V
Operating Function	Adapter Mode	Test Distance	3m

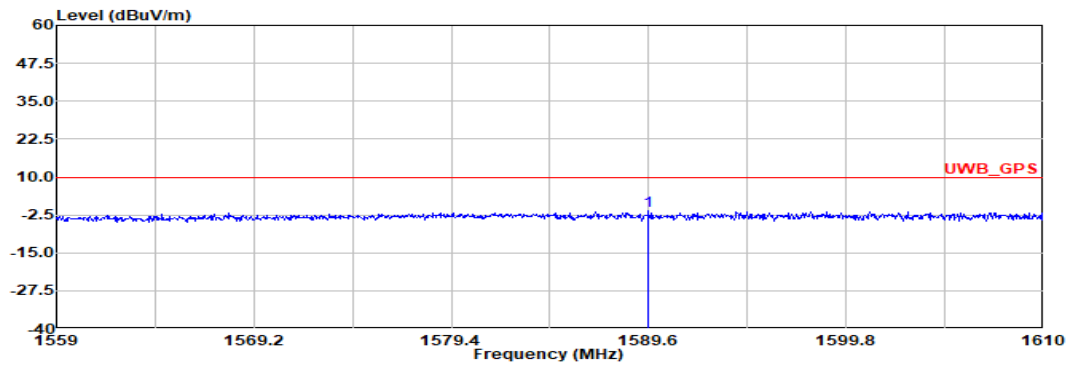

Site : 03CH20-HY
Condition : UWB_GPS 3m HF_9120D_02360_241101 Vertical
Project : 4N0920
Detector : Peak
Plane : X Close with Adapter
Mode : 4
Channel : 05
Test Case Number : Case 2 - BPRF Set #3
Post Packet Power: 50
Payload Length : 125
TX Power Control : 44

	Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	1589.60	-1.27	9.93	-11.20	2.18	25.40	7.01	35.86	0.00	--	--	Peak


Note 1: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 2: Average emission setting: RBW=1kHz; VBW=3kHz.

Note 3: $E \text{ (dBuV/m)} = \text{EIRP Limit (dBm)} + 95.23$. $E \text{ (dBuV/m)} = -85.3 + 95.23 = 9.93 \text{ dBuV/m}$.

CH9 Radiated Emissions (1559MHz – 1610MHz)

Test Mode	Mode 17	Polarization	H
Operating Function	Adapter Mode	Test Distance	3m

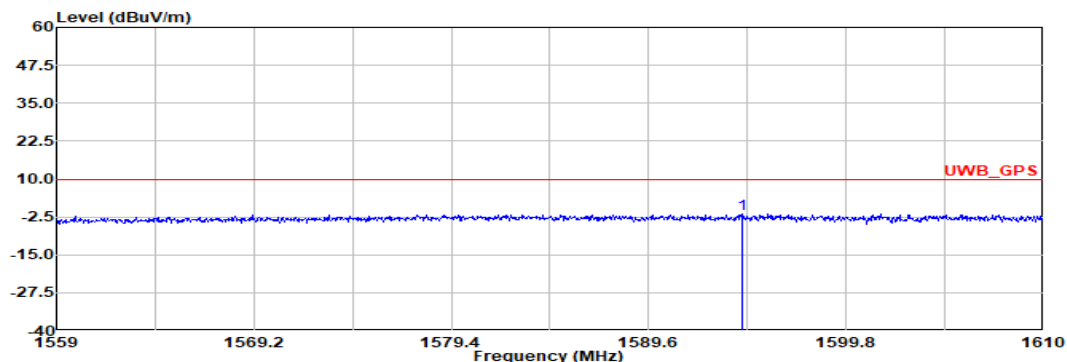

Site : 03CH20-HY
 Condition : UWB_GPS 3m HF_9120D_02360_241101 Horizontal
 Project : 4N0920
 Detector : Average
 Plane : Z Open with Adapter
 Mode : 17
 Channel : 09
 Test Case Number : Case 6 - HPRF Set #21
 Post Packet Power : 50
 Payload Length : N/A(Default 20)
 TX Power Control : 44

	Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	1594.39	-1.44	9.93	-11.37	2.10	25.31	7.02	35.87	0.00	--	--	Peak

Note 1: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 2: Average emission setting: RBW=1kHz; VBW=3kHz.

Note 3: $E \text{ (dBuV/m)} = \text{EIRP Limit (dBm)} + 95.23$. $E \text{ (dBuV/m)} = -85.3 + 95.23 = 9.93 \text{ dBuV/m}$.



CH9 Radiated Emissions (1559MHz – 1610MHz)

Test Mode	Mode 17	Polarization	V
Operating Function	Adapter Mode	Test Distance	3m

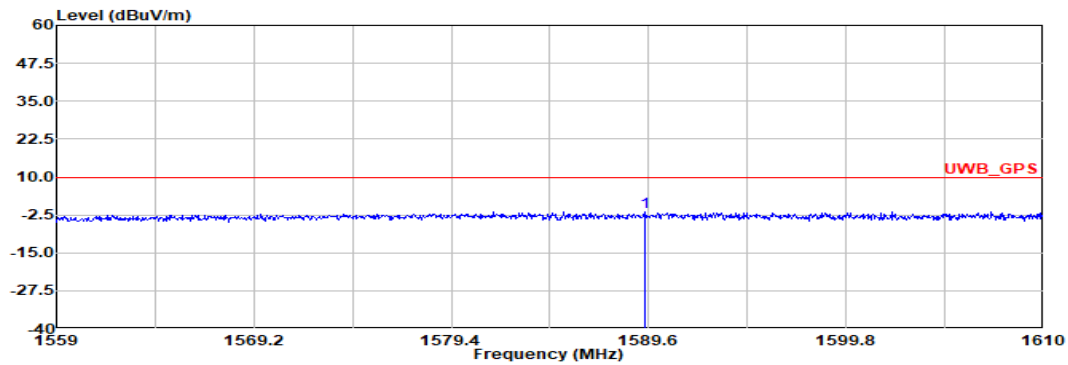

Site : 03CH20-HY
Condition : UWB_GPS 3m HF_9120D_02360_241101 Vertical
Project : 4N0920
Detector : Average
Plane : Z Open with Adapter
Mode : 17
Channel : 09
Test Case Number : Case 6 - HPRF Set #21
Post Packet Power : 50
Payload Length : N/A(Default 20)
TX Power Control : 44

	Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	1589.40	-1.41	9.93	-11.34	2.04	25.40	7.01	35.86	0.00	--	--	Peak

Note 1: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 2: Average emission setting: RBW=1kHz; VBW=3kHz.

Note 3: $E \text{ (dBuV/m)} = \text{EIRP Limit (dBm)} + 95.23$. $E \text{ (dBuV/m)} = -85.3 + 95.23 = 9.93 \text{ dBuV/m}$.



CH9 Radiated Emissions (1559MHz – 1610MHz)

Test Mode	Mode 18	Polarization	H
Operating Function	Adapter Mode	Test Distance	3m

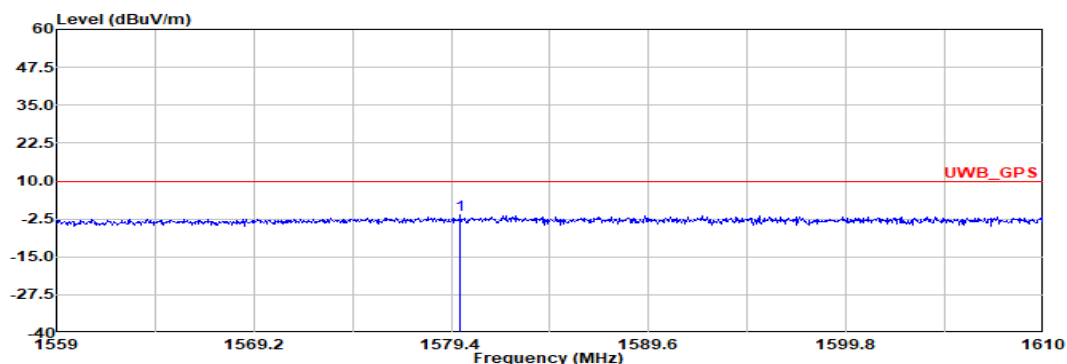

Site : 03CH20-HY
Condition : UWB_GPS 3m HF_9120D_02360_241101 Horizontal
Project : 4N0920
Detector : Average
Plane : Z Open with Adapter
Mode : 18
Channel : 09
Test Case Number : Case 6 - HPRF Set #21
Post Packet Power : 50
Payload Length : N/A(Default 20)
TX Power Control : 81

	Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	1579.86	-1.32	9.93	-11.25	2.16	25.40	6.98	35.86	0.00	--	--	Peak

Note 1: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 2: Average emission setting: RBW=1kHz; VBW=3kHz.

Note 3: $E \text{ (dBuV/m)} = \text{EIRP Limit (dBm)} + 95.23$. $E \text{ (dBuV/m)} = -85.3 + 95.23 = 9.93 \text{ dBuV/m}$.



CH9 Radiated Emissions (1559MHz – 1610MHz)

Test Mode	Mode 18	Polarization	V
Operating Function	Adapter Mode	Test Distance	3m

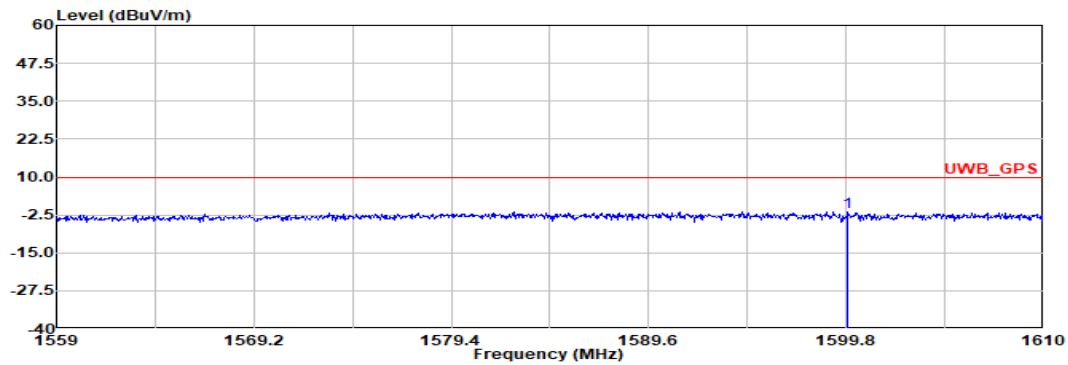

Site : 03CH20-HY
Condition : UWB_GPS 3m HF_9120D_02360_241101 Vertical
Project : 4N0920
Detector : Average
Plane : Z Open with Adapter
Mode : 18
Channel : 09
Test Case Number : Case 6 - HPRF Set #21
Post Packet Power : 50
Payload Length : N/A(Default 20)
TX Power Control : 81

	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m		dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	1599.90	-1.34	9.93		-11.27	2.30	25.20	7.03	35.87	0.00	--	--	Peak


Note 1: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 2: Average emission setting: RBW=1kHz; VBW=3kHz.

Note 3: $E \text{ (dBuV/m)} = \text{EIRP Limit (dBm)} + 95.23$. $E \text{ (dBuV/m)} = -85.3 + 95.23 = 9.93 \text{ dBuV/m}$.




3.5.11 Radiated Emissions (18GHz – 40GHz)

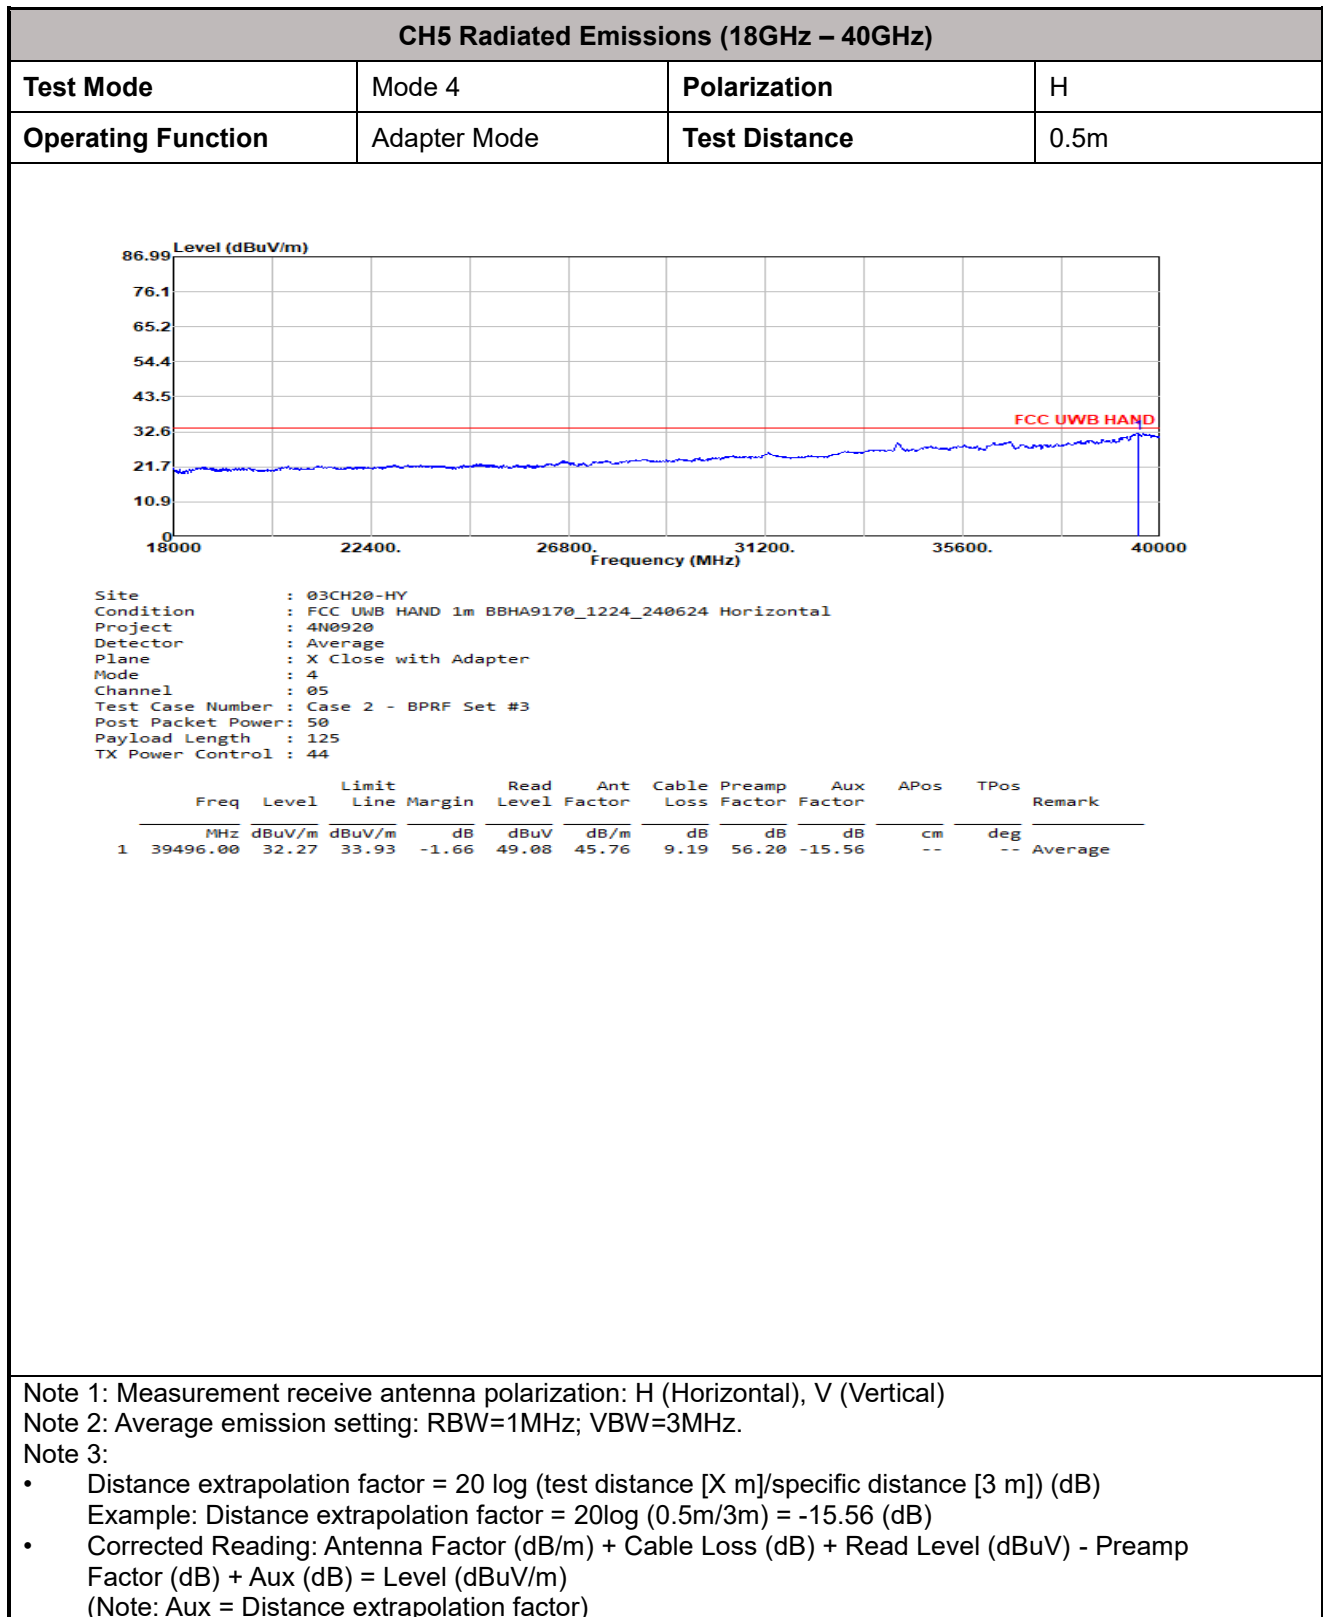



CH5 Radiated Emissions (18GHz – 40GHz)

Test Mode	Mode 4	Polarization	V
Operating Function	Adapter Mode	Test Distance	0.5m

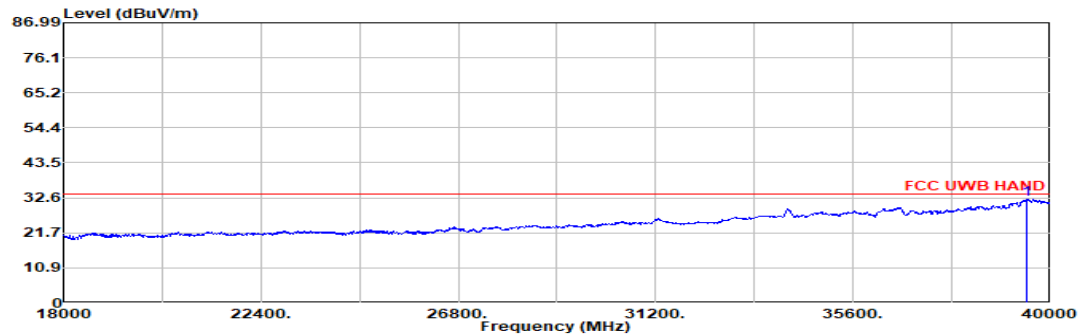

Site : 03CH20-HY
Condition : FCC UWB HAND 1m BBHA9170_1224_240624 Vertical
Project : 4N0920
Detector : Average
Plane : X Close with Adapter
Mode : 4
Channel : 05
Test Case Number : Case 2 - BPRF Set #3
Post Packet Power: 50
Payload Length : 125
TX Power Control : 44

	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m		dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	39468.00	32.27	33.93	-1.66		49.44	45.48	9.13	56.22	-15.56	--	--	Average

Note 1: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 2: Average emission setting: RBW=1MHz; VBW=3MHz.


Note 3:

- Distance extrapolation factor = $20 \log (\text{test distance [X m]}/\text{specific distance [3 m]})$ (dB)
Example: Distance extrapolation factor = $20 \log (0.5\text{m}/3\text{m}) = -15.56$ (dB)
- Corrected Reading: Antenna Factor (dB/m) + Cable Loss (dB) + Read Level (dBuV) - Preamp Factor (dB) + Aux (dB) = Level (dBuV/m)
(Note: Aux = Distance extrapolation factor)



CH9 Radiated Emissions (18GHz – 40GHz)

Test Mode	Mode 17	Polarization	H
Operating Function	Adapter Mode	Test Distance	0.5m

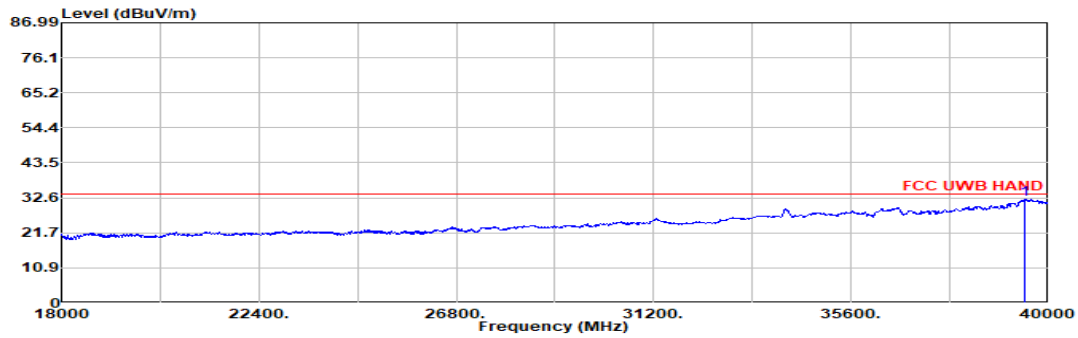

Site : 03CH20-HY
Condition : FCC UWB HAND 1m BBHA9170_1224_240624 Horizontal
Project : 4N0920
Detector : Average
Plane : Z Open with Adapter
Mode : 17
Channel : 09
Test Case Number : Case 6 - HPRF Set #21
Post Packet Power: 50
Payload Length : N/A(Default 20)
TX Power Control : 44

Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark
MHz	dBuV/m	dBuV/m		dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1 39468.00	32.30	33.93		-1.63	49.47	45.48	9.13	56.22	-15.56	--	--	Average

Note 1: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 2: Average emission setting: RBW=1MHz; VBW=3MHz.


Note 3:

- Distance extrapolation factor = $20 \log (\text{test distance [X m]}/\text{specific distance [3 m]})$ (dB)
Example: Distance extrapolation factor = $20 \log (0.5\text{m}/3\text{m}) = -15.56$ (dB)
- Corrected Reading: Antenna Factor (dB/m) + Cable Loss (dB) + Read Level (dBuV) - Preamp Factor (dB) + Aux (dB) = Level (dBuV/m)
(Note: Aux = Distance extrapolation factor)



CH9 Radiated Emissions (18GHz – 40GHz)

Test Mode	Mode 17	Polarization	V
Operating Function	Adapter Mode	Test Distance	0.5m

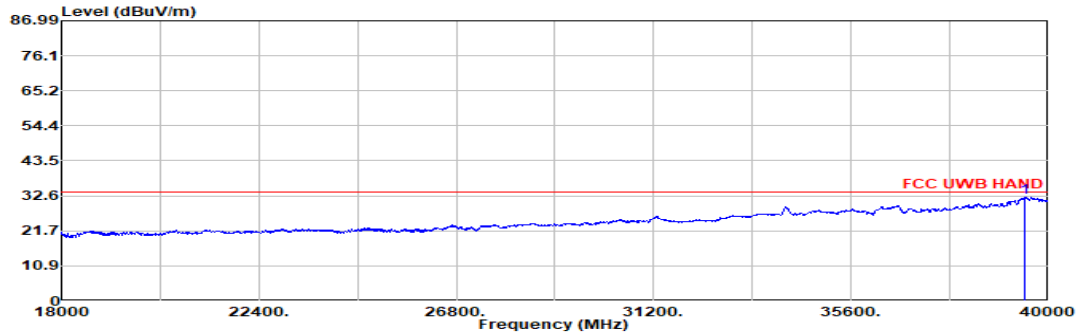

Site : 03CH20-HY
Condition : FCC UWB HAND 1m BBHA9170_1224_240624 Vertical
Project : 4N0920
Detector : Average
Plane : Z Open with Adapter
Mode : 17
Channel : 09
Test Case Number : Case 6 - HPRF Set #21
Post Packet Power: 50
Payload Length : N/A(Default 20)
TX Power Control : 44

Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark
MHz	dBuV/m	dBuV/m		dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1 39468.00	32.27	33.93		-1.66	49.44	45.48	9.13	56.22	-15.56	--	--	Average

Note 1: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 2: Average emission setting: RBW=1MHz; VBW=3MHz.


Note 3:

- Distance extrapolation factor = $20 \log (\text{test distance [X m]}/\text{specific distance [3 m]})$ (dB)
Example: Distance extrapolation factor = $20 \log (0.5\text{m}/3\text{m}) = -15.56$ (dB)
- Corrected Reading: Antenna Factor (dB/m) + Cable Loss (dB) + Read Level (dBuV) - Preamp Factor (dB) + Aux (dB) = Level (dBuV/m)
(Note: Aux = Distance extrapolation factor)



CH9 Radiated Emissions (18GHz – 40GHz)

Test Mode	Mode 18	Polarization	H
Operating Function	Adapter Mode	Test Distance	0.5m

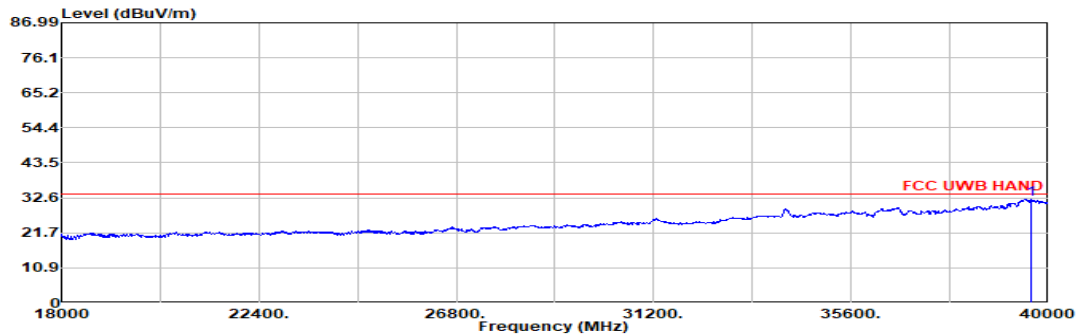

Site : 03CH20-HY
Condition : FCC UWB HAND 1m BBHA9170_1224_240624 Horizontal
Project : 4N0920
Detector : Average
Plane : Y Close with Adapter
Mode : 18
Channel : 09
Test Case Number : Case 6 - HPRF Set #21
Post Packet Power: 50
Payload Length : N/A(Default 20)
TX Power Control : 81

	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m		dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	39608.00	32.27	33.93	-1.66		49.33	45.50	9.03	56.03	-15.56	--	--	Average

Note 1: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 2: Average emission setting: RBW=1MHz; VBW=3MHz.


Note 3:

- Distance extrapolation factor = $20 \log (\text{test distance [X m]}/\text{specific distance [3 m]})$ (dB)
Example: Distance extrapolation factor = $20 \log (0.5\text{m}/3\text{m}) = -15.56$ (dB)
- Corrected Reading: Antenna Factor (dB/m) + Cable Loss (dB) + Read Level (dBuV) - Preamp Factor (dB) + Aux (dB) = Level (dBuV/m)
(Note: Aux = Distance extrapolation factor)



CH9 Radiated Emissions (18GHz – 40GHz)

Test Mode	Mode 18	Polarization	V
Operating Function	Adapter Mode	Test Distance	0.5m

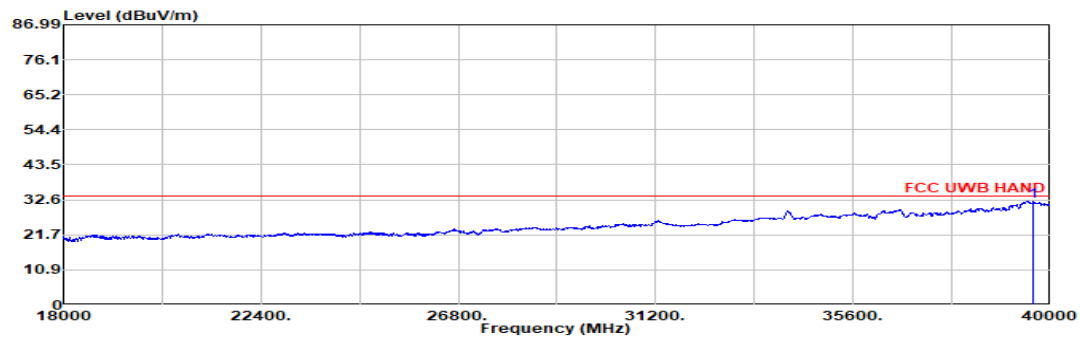

Site : 03CH20-HY
Condition : FCC UWB HAND 1m BBHA9170_1224_240624 Vertical
Project : 4N0920
Detector : Average
Plane : Y Close with Adapter
Mode : 18
Channel : 09
Test Case Number : Case 6 - HPRF Set #21
Post Packet Power: 50
Payload Length : N/A(Default 20)
TX Power Control : 81

	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m		dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	39608.00	32.30	33.93	-1.63		49.36	45.50	9.03	56.03	-15.56	--	--	Average

Note 1: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 2: Average emission setting: RBW=1MHz; VBW=3MHz.

Note 3:

- Distance extrapolation factor = $20 \log (\text{test distance [X m]}/\text{specific distance [3 m]})$ (dB)
Example: Distance extrapolation factor = $20 \log (0.5\text{m}/3\text{m}) = -15.56$ (dB)
- Corrected Reading: Antenna Factor (dB/m) + Cable Loss (dB) + Read Level (dBuV) - Preamp Factor (dB) + Aux (dB) = Level (dBuV/m)
(Note: Aux = Distance extrapolation factor)



4 Test Equipment and Calibration Data

Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
EMI Test Receiver	Keysight	N9038A(MXE)	MY54130085	N/A	Oct. 16, 2024	Jan. 27, 2025~ Feb. 24, 2025	Oct. 15, 2025	Radiation (03CH20-HY)
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100488	9 kHz~30 MHz	Aug. 29, 2024	Jan. 27, 2025~ Feb. 24, 2025	Aug. 28, 2025	Radiation (03CH20-HY)
Preamplifier	EMEC	EM18G40G	060801	18GHz~40GHz	May 27, 2024	Jan. 27, 2025~ Feb. 24, 2025	May 26, 2025	Radiation (03CH20-HY)
Controller	ChainTek	3000-1	N/A	Control Turn table & Ant Mast	N/A	Jan. 27, 2025~ Feb. 24, 2025	N/A	Radiation (03CH20-HY)
Antenna Mast	ChainTek	MBS-520-1	N/A	1m~4m	N/A	Jan. 27, 2025~ Feb. 24, 2025	N/A	Radiation (03CH20-HY)
Turn Table	ChainTek	T-200-S-1	N/A	0~360 Degree	N/A	Jan. 27, 2025~ Feb. 24, 2025	N/A	Radiation (03CH20-HY)
Signal Analyzer	Keysight	N9010B	MY60240520	N/A	Dec. 09, 2024	Jan. 27, 2025~ Feb. 24, 2025	Dec. 08, 2025	Radiation (03CH20-HY)
Bilog Antenna	TESEQ	CBL 6111D&00802N1 D01N-06	55606 & 08	30MHz~1GHz	Nov. 27, 2024	Jan. 27, 2025~ Feb. 24, 2025	Nov. 26, 2025	Radiation (03CH20-HY)
Horn Antenna	SCHWARZBE CK	BBHA 9120 D	02360	1GHz-18GHz	Nov. 01, 2024	Jan. 27, 2025~ Feb. 24, 2025	Oct. 31, 2025	Radiation (03CH20-HY)
SHF-EHF Horn Antenna	SCHWARZBE CK	BBHA 9170	1224	18GHz-40GHz	Jun. 24, 2024	Jan. 27, 2025~ Feb. 24, 2025	Jun. 23, 2025	Radiation (03CH20-HY)
Preamplifier	COM-POWER	PAM-103	18020201	1MHz-1000MHz	Dec. 31, 2024	Jan. 27, 2025~ Feb. 24, 2025	Dec. 30, 2025	Radiation (03CH20-HY)
Amplifier	EMCI	EMC118A45SE	980792	N/A	Nov. 12, 2024	Jan. 27, 2025~ Feb. 24, 2025	Nov. 11, 2025	Radiation (03CH20-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	519229/2,8040 15/2,804027/2	N/A	Jan. 16, 2025	Jan. 27, 2025~ Feb. 24, 2025	Jan. 15, 2026	Radiation (03CH20-HY)
Hygrometer	TECPEL	DTM-303A	TP211382	N/A	Mar. 27, 2024	Jan. 27, 2025~ Feb. 24, 2025	Mar. 26, 2025	Radiation (03CH20-HY)
Software	Audix	N/A	RK-002156	N/A	N/A	Jan. 27, 2025~ Feb. 24, 2025	N/A	Radiation (03CH20-HY)
AC Power Source	ACPOWER	AFC-11003G	F317040033	N/A	N/A	Apr. 29, 2025	N/A	Conduction (CO07-HY)
Software	Rohde & Schwarz	EMC32 V10.30	N/A	N/A	N/A	Apr. 29, 2025	N/A	Conduction (CO07-HY)
Pulse Limiter	SCHWARZBE CK	VTSD 9561-F N	9561-F N00373	9kHz-200MHz	Oct. 23, 2024	Apr. 29, 2025	Oct. 22, 2025	Conduction (CO07-HY)
RF Cable	HUBER + SUHNER	RG 214/U	1358175	9kHz~30MHz	Mar. 03, 2025	Apr. 29, 2025	Mar. 02, 2026	Conduction (CO07-HY)
Two-Line V-Network	TESEQ	NNB 51	45051	N/A	Mar. 24, 2025	Apr. 29, 2025	Mar. 23, 2026	Conduction (CO07-HY)
EMI Test Receiver	Rohde & Schwarz	ESR3	102317	9kHz~3.6GHz	Sep. 23, 2024	Apr. 29, 2025	Sep. 22, 2025	Conduction (CO07-HY)




Appendix A. AC Conducted Emission Test Results

EUT Information

Report NO :
Test Mode :
Test Voltage :
Phase :

4N0920
Mode 1
120Vac/60Hz
Line

Full Spectrum

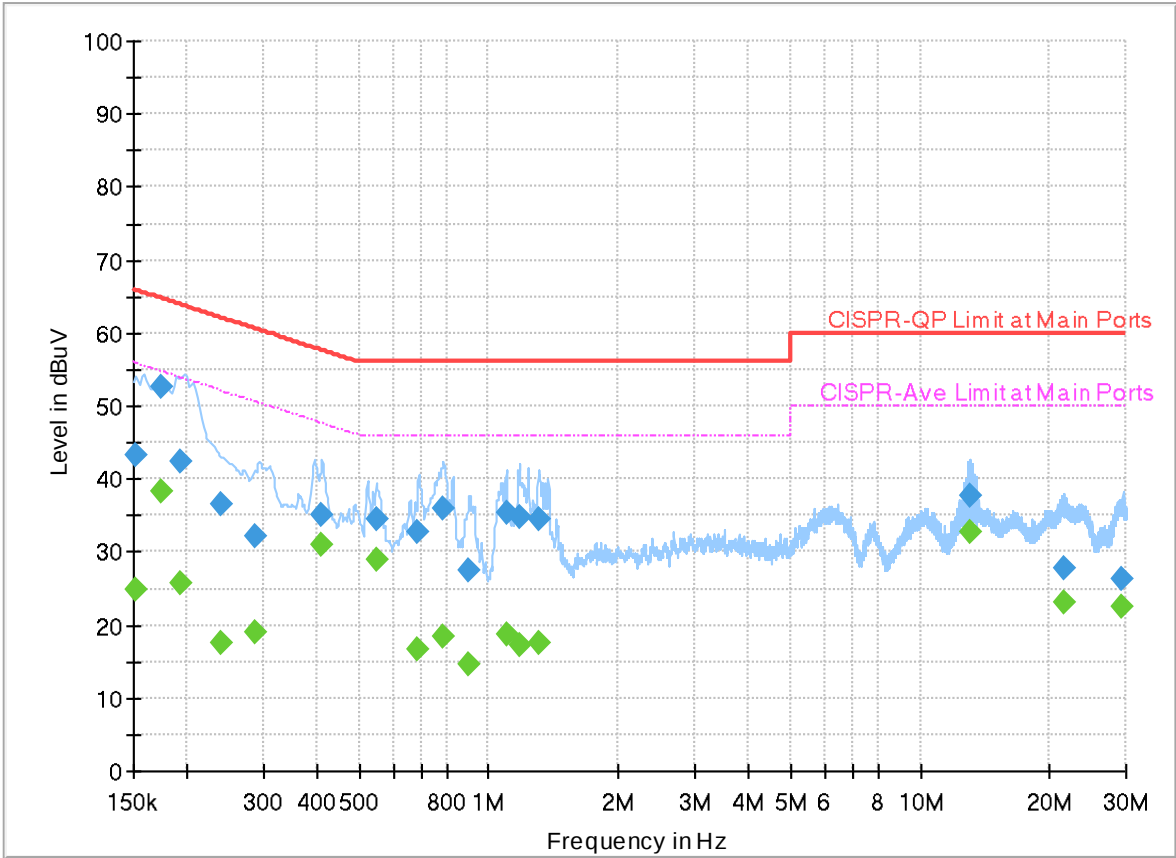

Final_Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	PE	Corr. (dB)
0.152250	---	24.98	55.88	30.90	L1	FLO	20.2
0.152250	43.22	---	65.88	22.66	L1	FLO	20.2
0.174750	---	38.45	54.73	16.28	L1	FLO	20.1
0.174750	52.50	---	64.73	12.23	L1	FLO	20.1
0.192750	---	25.82	53.92	28.10	L1	FLO	20.1
0.192750	42.28	---	63.92	21.64	L1	FLO	20.1
0.240000	---	17.46	52.10	34.64	L1	FLO	20.1
0.240000	36.53	---	62.10	25.57	L1	FLO	20.1
0.288420	---	19.00	50.57	31.57	L1	FLO	20.1
0.288420	32.04	---	60.57	28.53	L1	FLO	20.1
0.408030	---	31.14	47.69	16.55	L1	FLO	20.1
0.408030	34.99	---	57.69	22.70	L1	FLO	20.1
0.546810	---	29.00	46.00	17.00	L1	FLO	20.1
0.546810	34.38	---	56.00	21.62	L1	FLO	20.1
0.683250	---	16.80	46.00	29.20	L1	FLO	20.1
0.683250	32.80	---	56.00	23.20	L1	FLO	20.1
0.786210	---	18.29	46.00	27.71	L1	FLO	20.1
0.786210	35.87	---	56.00	20.13	L1	FLO	20.1
0.899700	---	14.75	46.00	31.25	L1	FLO	20.1


0.899700	27.55	---	56.00	28.45	L1	FLO	20.1
1.096260	---	18.62	46.00	27.38	L1	FLO	20.1
1.096260	35.24	---	56.00	20.76	L1	FLO	20.1
1.182210	---	17.28	46.00	28.72	L1	FLO	20.1
1.182210	34.75	---	56.00	21.25	L1	FLO	20.1
1.304250	---	17.66	46.00	28.34	L1	FLO	20.1
1.304250	34.37	---	56.00	21.63	L1	FLO	20.1
13.051590	---	32.67	50.00	17.33	L1	FLO	20.2
13.051590	37.67	---	60.00	22.33	L1	FLO	20.2
21.525000	---	23.21	50.00	26.79	L1	FLO	20.1
21.525000	27.66	---	60.00	32.34	L1	FLO	20.1
29.487750	---	22.56	50.00	27.44	L1	FLO	20.1
29.487750	26.28	---	60.00	33.72	L1	FLO	20.1

EUT Information

Report NO :
Test Mode :
Test Voltage :
Phase :

4N0920
Mode 1
120Vac/60Hz
Neutral

Full Spectrum

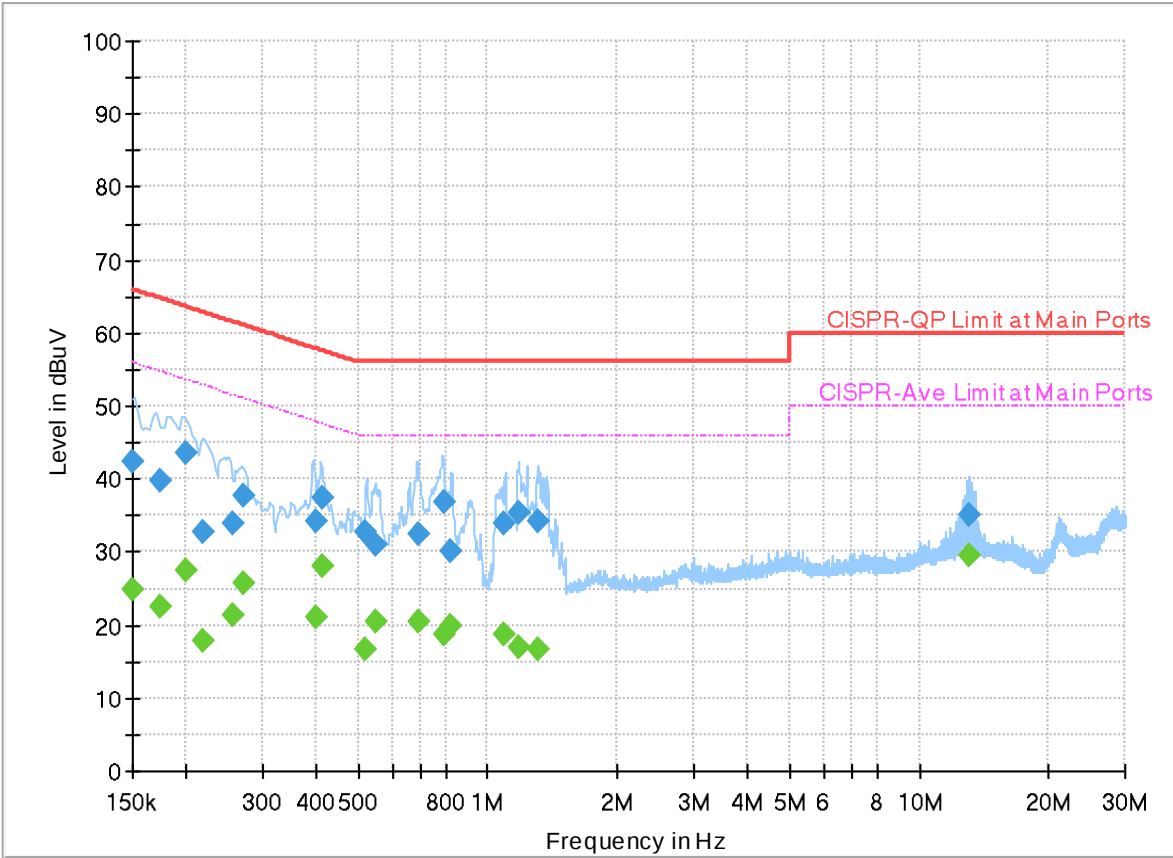

Final_Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	PE	Corr. (dB)
0.150000	---	24.78	56.00	31.22	N	FLO	20.1
0.150000	42.39	---	66.00	23.61	N	FLO	20.1
0.174750	---	22.39	54.73	32.34	N	FLO	20.1
0.174750	39.84	---	64.73	24.89	N	FLO	20.1
0.198330	---	27.60	53.68	26.08	N	FLO	20.1
0.198330	43.43	---	63.68	20.25	N	FLO	20.1
0.217500	---	17.79	52.91	35.12	N	FLO	20.1
0.217500	32.71	---	62.91	30.20	N	FLO	20.1
0.255750	---	21.48	51.57	30.09	N	FLO	20.1
0.255750	33.97	---	61.57	27.60	N	FLO	20.1
0.270960	---	25.78	51.09	25.31	N	FLO	20.1
0.270960	37.58	---	61.09	23.51	N	FLO	20.1
0.397500	---	20.91	47.91	27.00	N	FLO	20.1
0.397500	34.32	---	57.91	23.59	N	FLO	20.1
0.411450	---	28.13	47.62	19.49	N	FLO	20.1
0.411450	37.29	---	57.62	20.33	N	FLO	20.1
0.522150	---	16.75	46.00	29.25	N	FLO	20.1
0.522150	32.89	---	56.00	23.11	N	FLO	20.1
0.552750	---	20.43	46.00	25.57	N	FLO	20.1

0.552750	31.13	---	56.00	24.87	N	FLO	20.1
0.690450	---	20.56	46.00	25.44	N	FLO	20.1
0.690450	32.31	---	56.00	23.69	N	FLO	20.1
0.789000	---	18.80	46.00	27.20	N	FLO	20.1
0.789000	36.92	---	56.00	19.08	N	FLO	20.1
0.818250	---	19.82	46.00	26.18	N	FLO	20.1
0.818250	30.00	---	56.00	26.00	N	FLO	20.1
1.094820	---	18.84	46.00	27.16	N	FLO	20.1
1.094820	33.79	---	56.00	22.21	N	FLO	20.1
1.178880	---	16.83	46.00	29.17	N	FLO	20.1
1.178880	35.45	---	56.00	20.55	N	FLO	20.1
1.307760	---	16.78	46.00	29.22	N	FLO	20.1
1.307760	34.09	---	56.00	21.91	N	FLO	20.1
13.048440	---	29.49	50.00	20.51	N	FLO	20.3
13.048440	34.95	---	60.00	25.05	N	FLO	20.3

————THE END————