



FCC RADIO TEST REPORT

FCC ID : A4RGUL82
Equipment : Phone
Model Name : GUL82
Applicant : Google LLC
1600 Amphitheatre Parkway,
Mountain View, CA, 94043 USA
Standard : FCC Part 15 Subpart C §15.247

The product was received on Dec. 12, 2024 and testing was performed from Dec. 17, 2024 to Mar. 21, 2025. We, Sporton International Inc. Wensan Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval from Sporton International Inc. Wensan Laboratory, the test report shall not be reproduced except in full.

Approved by: Louis Wu

Sportun International Inc. Wensan Laboratory

No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan (R.O.C.)



Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
1 General Description.....	5
1.1 Product Feature of Equipment Under Test.....	5
1.2 Modification of EUT	5
1.3 Testing Location	6
1.4 Applicable Standards.....	6
2 Test Configuration of Equipment Under Test.....	7
2.1 Carrier Frequency Channel	7
2.2 Test Mode.....	8
2.3 Connection Diagram of Test System	9
2.4 Support Unit used in test configuration and system	10
2.5 EUT Operation Test Setup	10
2.6 Measurement Results Explanation Example.....	10
3 Test Result.....	11
3.1 6dB and 99% Bandwidth Measurement	11
3.2 Output Power Measurement.....	12
3.3 Power Spectral Density Measurement	13
3.4 Conducted Band Edges and Spurious Emission Measurement	14
3.5 Radiated Band Edges and Spurious Emission Measurement	15
3.6 AC Conducted Emission Measurement.....	19
3.7 Antenna Requirements.....	21
4 List of Measuring Equipment	22
5 Measurement Uncertainty	24
Appendix A. Conducted Test Results	
Appendix B. AC Conducted Emission Test Result	
Appendix C. Radiated Spurious Emission Test Data	
Appendix D. Duty Cycle Plots	
Appendix E. Setup Photographs	



History of this test report



Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.1	15.247(a)(2)	6dB Bandwidth	Pass	-
3.1	2.1049	99% Occupied Bandwidth	Pass	-
3.2	15.247(b)(3) 15.247(b)(4)	Output Power	Pass	-
3.3	15.247(e)	Power Spectral Density	Pass	-
3.4	15.247(d)	Conducted Band Edges and Spurious Emission	Pass	-
3.5	15.247(d)	Radiated Band Edges and Spurious Emission	Pass	-
3.6	15.207	AC Conducted Emission	Pass	-
3.7	15.203	Antenna Requirement	Pass	-

Conformity Assessment Condition:

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacturer who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2. The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty".

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.

Reviewed by: William Chen**Report Producer: Michelle Chen**



1 General Description

1.1 Product Feature of Equipment Under Test

Product Feature	
General Specs GSM/WCDMA/LTE/5G NR/NTN, Bluetooth, BLE, BLE channel sounding, Thread, Wi-Fi 802.11be, NFC, WPC Rx, UWB and GNSS Rx.	
Antenna Type Thread: IFA Antenna	

EUT Information List	
S/N	Performed Test Item
4B151FDCQ0000L	RF Conducted Measurement
4B191FDCQ000A9 51061FDCQ000C0	Radiated Spurious Emission
51061FDCQ000B2	Conducted Emission

Antenna information		
2400 MHz ~ 2483.5 MHz	Peak Gain (dBi)	-0.10

Remark: The EUT's information above is declared by manufacturer. Please refer to Disclaimer in report summary.

1.2 Modification of EUT

No modifications made to the EUT during the testing.



1.3 Testing Location

Test Site	Sportun International Inc. Wensan Laboratory
Test Site Location	No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan (R.O.C.) TEL: +886-3-327-0868 FAX: +886-3-327-0855
Test Site No.	Sportun Site No. TH05-HY, CO07-HY, 03CH16-HY

Note: The test site complies with ANSI C63.4 2014 requirement.

FCC designation No.: TW3786

1.4 Applicable Standards

According to the specifications declared by the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart C §15.247
- ♦ FCC KDB Publication No. 558074 D01 15.247 Meas Guidance v05r02
- ♦ FCC KDB 414788 D01 Radiated Test Site v01r01
- ♦ ANSI C63.10-2013

Remark:

1. All the test items were validated and recorded in accordance with the standards without any modification during the testing.
2. The TAF code is not including all the FCC KDB listed without accreditation.



2 Test Configuration of Equipment Under Test

2.1 Carrier Frequency Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	11	2405	19	2445
	12	2410	20	2450
	13	2415	21	2455
	14	2420	22	2460
	15	2425	23	2465
	16	2430	24	2470
	17	2435	25	2475
	18	2440	26	2480



2.2 Test Mode


- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, the measured emission level of the EUT was maximized by rotating the EUT on a turntable, adjusting the orientation of the EUT and EUT antenna in three orthogonal axis (X: flat, Y: portrait, Z: landscape) and accessory (Adapter or Earphone), and adjusting the measurement antenna orientation, following C63.10 exploratory test procedures and find Z plane with Adapter as worst plane.
- b. AC power line Conducted Emission was tested under maximum output power.

The following summary table is showing all test modes to demonstrate in compliance with the standard.


Summary table of Test Cases	
Test Item	Data Rate / Modulation
Conducted Test Cases	Thread / GFSK
	Mode 1: Thread Tx CH11_2405 MHz
	Mode 2: Thread Tx CH18_2440 MHz
	Mode 3: Thread Tx CH25_2475 MHz
AC Conducted Emission	Mode 4: Thread Tx CH26_2480 MHz
Remark:	
1. For Radiated Test Cases, the tests were performed with USB Cable 2. 2. During the preliminary test, both charging modes (Adapter mode and WPC Rx mode) were verified. It is determined that the adaptor mode is the worst case for official test. 3. For radiation spurious emission, the modulation and the data rate picked for testing are determined by the Max. RF conducted power.	

2.3 Connection Diagram of Test System

<AC Conducted Emission Mode>

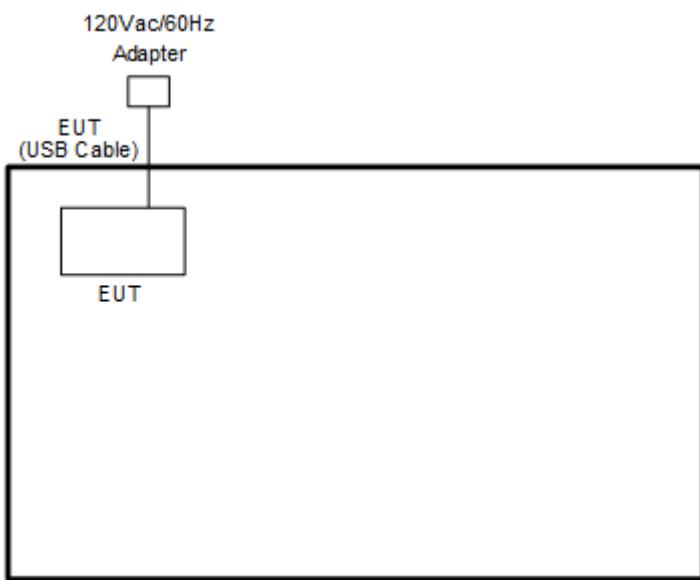

<Radiated Emission Mode>

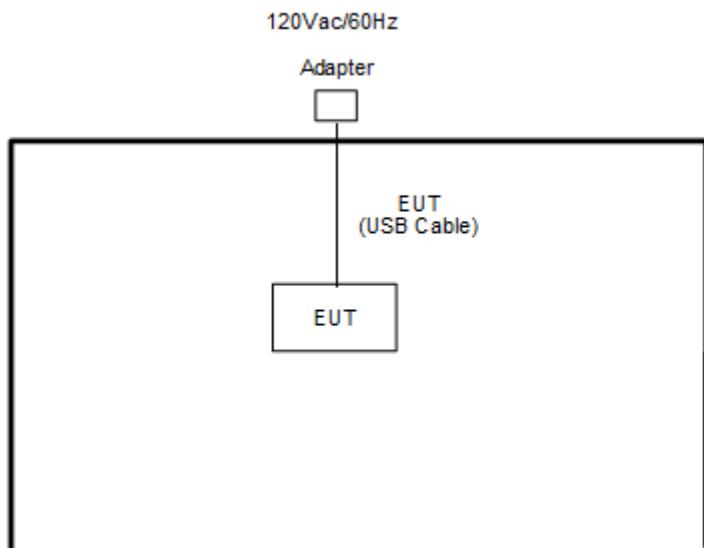



2.4 Support Unit used in test configuration and system

Item	Equipment	Brand Name	Model Name	FCC ID	Data Cable	Power Cord
1.	Adapter	N/A	G9BR1	N/A	N/A	N/A

2.5 EUT Operation Test Setup

The RF test items, utility “BT_DUT_Control_GUI_03-11-24.exe” was installed in Notebook which was programmed in order to make the EUT get into the engineering modes to provide channel selection, power level, data rate and the application type and for continuous transmitting signals.

2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 4.2 dB and 10 dB attenuator.

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)} \\ &= 4.2 + 10 = 14.2 \text{ (dB)} \end{aligned}$$

3 Test Result

3.1 6dB and 99% Bandwidth Measurement

3.1.1 Limit of 6dB and 99% Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.


3.1.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.1.3 Test Procedures

1. The testing follows the ANSI C63.10 Section 6.9.3 (OBW) and 11.8.1 (6dB BW).
2. The RF output of EUT is connected to the spectrum analyzer by RF cable and attenuator. The path loss is compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6dB bandwidth must be greater than 500 kHz.
5. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set 1-5% of the emission bandwidth and set the Video bandwidth (VBW) $\geq 3 * \text{RBW}$.
6. Measure and record the results in the test report.

3.1.4 Test Setup

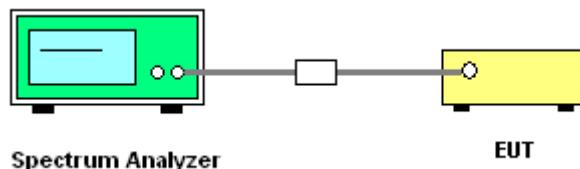

3.1.5 Test Result of 6dB Bandwidth

Please refer to Appendix A.

3.1.6 Test Result of 99% Occupied Bandwidth

Please refer to Appendix A.

3.2 Output Power Measurement

3.2.1 Limit of Output Power

For systems using digital modulation in the 2400-2483.5 MHz, the limit for output power is 30 dBm. If transmitting antenna of directional gain greater than 6 dBi is used, the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.


3.2.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.2.3 Test Procedures

1. For Peak Power, the testing follows ANSI C63.10 Section 11.9.1.3 PKPM1.
2. For Average Power, the testing follows ANSI C63.10 Section 11.9.2.3.2 Method AVGPM-G
3. The RF output of EUT is connected to the power meter by RF cable and attenuator.
4. The path loss is compensated to the results for each measurement.
5. Set the maximum power setting and enable the EUT to transmit continuously.
6. Measure the conducted output power and record the results in the test report.

3.2.4 Test Setup

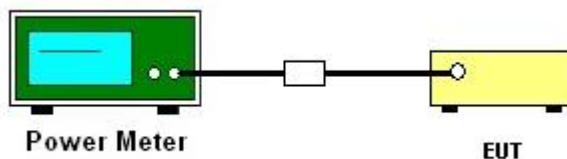

3.2.5 Test Result of Peak Output Power

Please refer to Appendix A.

3.2.6 Test Result of Average Output Power (Reporting Only)

Please refer to Appendix A.

3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8 dBm in any 3 kHz band at any time interval of continuous transmission.


3.3.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.3.3 Test Procedures

1. The testing follows the ANSI C63.10 Section 11.10.2 Method PKPSD.
2. The RF output of EUT is connected to the spectrum analyzer by RF cable and attenuator. The path loss is compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth (VBW) = 10 kHz. In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6 dB BW)
5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
6. Measure and record the results in the test report.
7. The Measured power density (dBm)/ 100 kHz is a reference level and is used as 20 dBc down limit line for Conducted Band Edges and Conducted Spurious Emission.

3.3.4 Test Setup

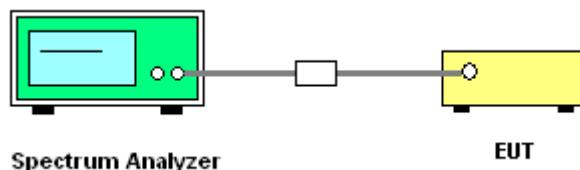

3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.

3.4 Conducted Band Edges and Spurious Emission Measurement

3.4.1 Limit of Conducted Band Edges and Spurious Emission

All harmonics/spurious must be at least 20 dB down from the highest emission level within the authorized band.


3.4.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.4.3 Test Procedure

1. The testing follows the ANSI C63.10 Section 11.11.3 Emission level measurement.
2. The RF output of EUT is connected to the spectrum analyzer by RF cable and attenuator. The path loss is compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Set RBW = 100 kHz, VBW = 300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

3.4.4 Test Setup

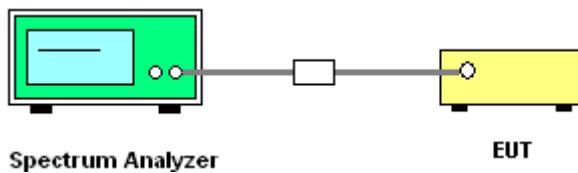

3.4.5 Test Result of Conducted Band Edges Plots

Please refer to Appendix A.

3.4.6 Test Result of Conducted Spurious Emission Plots

Please refer to Appendix A.



3.5 Radiated Band Edges and Spurious Emission Measurement

3.5.1 Limit of Radiated Band Edges and Spurious Emission

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.5.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.



3.5.3 Test Procedures


1. The testing follows the ANSI C63.10 Section 11.12.1 Radiated emission measurements.
2. The EUT is arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT is placed on a turntable with 0.8 meter for frequency below 1 GHz and 1.5 meter for frequency above 1 GHz respectively above ground.
4. The EUT is set 3 meters away from the receiving antenna, which is mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. Radiated testing below 1 GHz is performed by adjusting the antenna tower from 1 m to 4 m and by rotating the turn table from 0 degree to 360 degrees to find the peak maximum hold reading. When there is no suspected emission found and the emission level is with at least 6 dB margin against QP limit line, the position is marked as “-”.
7. Radiated testing above 1 GHz is performed by adjusting the antenna tower from 1 m to 4 m and by rotating the turn table from 0 degree to 360 degrees to find the peak maximum hold reading for scanning all frequencies. When there is no suspected emission found and the harmonic emission level is with at least 6 dB margin against average limit line, the position is marked as “-”.
8. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW = 100 kHz for $f < 1$ GHz; VBW \geq RBW; Sweep = auto; Detector function = peak; Trace = max hold;
 - (3) Set RBW = 1 MHz, VBW = 3 MHz for $f \geq 1$ GHz for peak measurement.

For average measurement:


 - VBW = 10 Hz, when duty cycle is no less than 98 percent.
 - VBW $\geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

3.5.4 Test Setup


For radiated test below 30MHz

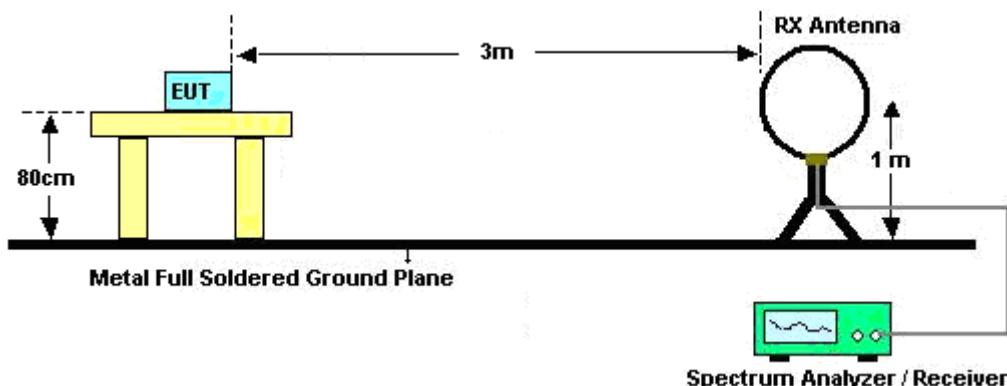


For radiated test from 30MHz to 1GHz

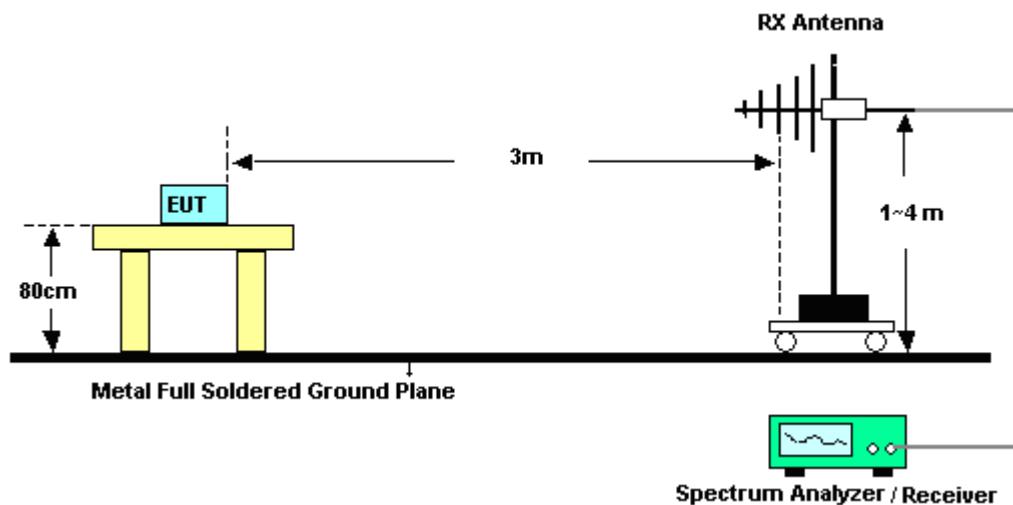

For radiated test from 1GHz to 18GHz

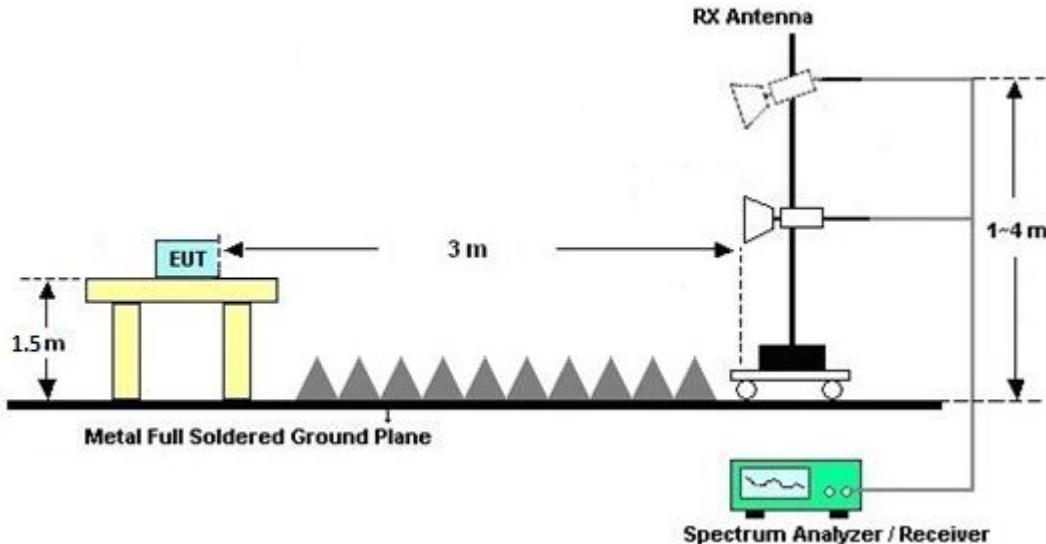

For radiated test above 18GHz

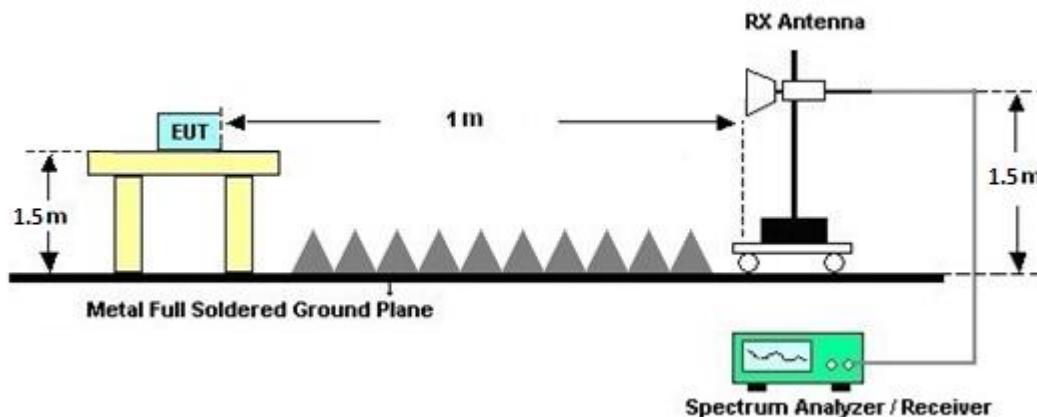

3.5.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which starts from 9 kHz to 30 MHz, is pre-scanned and the result which is 20 dB lower than the limit line is not reported.

There is adequate comparison measurement of both open-field test site and alternative test site - semi-Anechoic chamber according to 414788 D01 Radiated Test Site v01r01, and the result comes out very similar.

3.5.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix C.

3.5.7 Duty Cycle

Please refer to Appendix D.

3.5.8 Test Result of Radiated Spurious Emission (30 MHz ~ 10th Harmonic)

Please refer to Appendix C.



3.6 AC Conducted Emission Measurement

3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.6.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.6.3 Test Procedures

1. The EUT is placed 0.4 meter away from the conducting wall of the shielding room, and is kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN shall be used.
6. Both Line and Neutral shall be tested in order to find out the maximum conducted emission.
7. The frequency range from 150 kHz to 30 MHz is scanned.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9 kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.

3.6.4 Test Setup

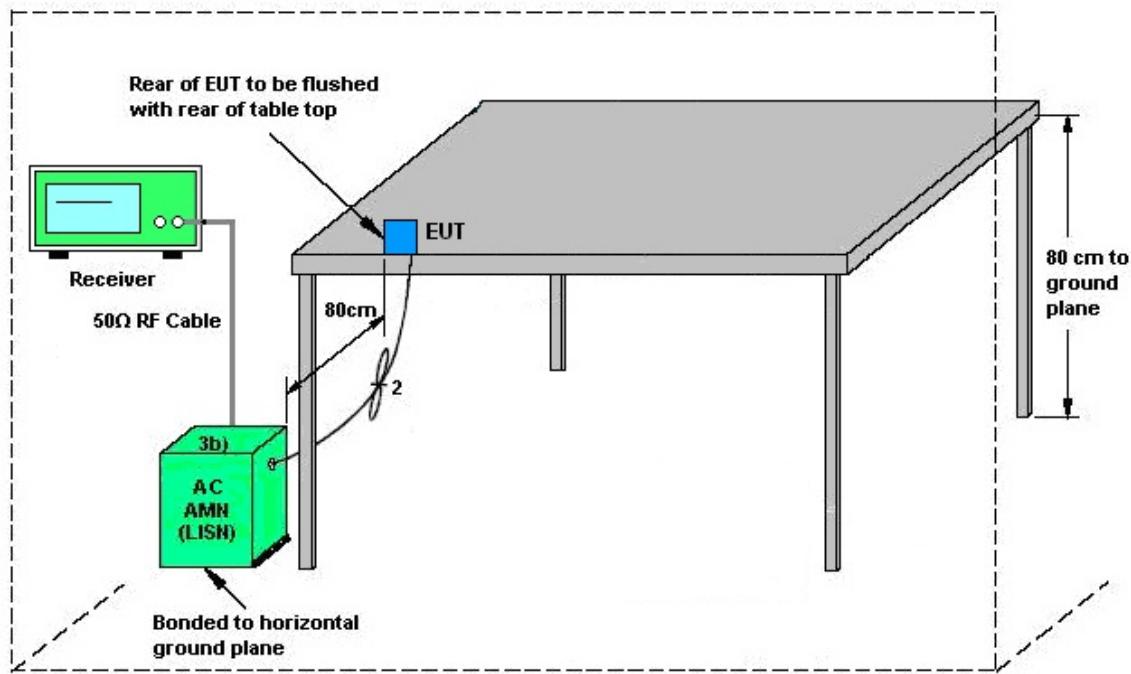

AMN = Artificial mains network (LISN)

AE = Associated equipment

EUT = Equipment under test

ISN = Impedance stabilization network

3.6.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



3.7 Antenna Requirements

3.7.1 Standard Applicable

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §§ 15.211, 15.213, 15.217, 15.219, 15.221, or § 15.236. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with § 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

3.7.2 Antenna Anti-Replacement Construction

- b) Unique (non-standard) antenna connector.

Use of a standard connector is also allowed if the connector is within the transmitter enclosure and can only be accessed by disassembly of the transmitter, where such disassembly is not normally required. The user manual must not show that user has access to the connector.



4 List of Measuring Equipment

Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100488	9kHz~30MHz	Aug. 29, 2024	Dec. 20, 2024~Mar. 10, 2025	Aug. 28, 2025	Radiation (03CH16-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA9170	1224	18GHz-40GHz	Oct. 25, 2024	Dec. 20, 2024~Mar. 10, 2025	Oct. 24, 2025	Radiation (03CH16-HY)
EMI Test Receiver	Keysight	N9038A(MXE)	MY57290111	3Hz~26.5GHz	Nov. 22, 2024	Dec. 20, 2024~Mar. 10, 2025	Nov. 21, 2025	Radiation (03CH16-HY)
Bilog Antenna	TESEQ	CBL 6111D & 00802N1D01N-06	47020 & 06	30MHz to 1GHz	Oct. 05, 2024	Dec. 20, 2024~Mar. 10, 2025	Oct. 04, 2025	Radiation (03CH16-HY)
Horn Antenna	SCHWARZBECK	BBHA 9120 D	9120D-1522	1G~18GHz	Mar. 28, 2024	Dec. 20, 2024~Mar. 10, 2025	Mar. 27, 2025	Radiation (03CH16-HY)
Horn Antenna	SCHWARZBECK	BBHA 9120 D	9120D-1328	1G~18GHz	Dec. 06, 2024	Mar. 24, 2025	Dec. 05, 2025	Radiation (03CH16-HY)
Amplifier	SONOMA	310N	371607	9kHz~1GHz	Jul. 02, 2024	Dec. 20, 2024~Mar. 10, 2025	Jul. 01, 2025	Radiation (03CH16-HY)
Preamplifier	Keysight	83017A	MY53270264	1GHz~26.5GHz	Dec. 05, 2024	Dec. 20, 2024~Mar. 10, 2025	Dec. 04, 2025	Radiation (03CH16-HY)
Preamplifier	EMEC	EM1G18G	060812	1GHz~18GHz	Dec. 25, 2023	Dec. 20, 2024~Dec. 23, 2024	Dec. 24, 2024	Radiation (03CH16-HY)
Preamplifier	EMEC	EM1G18G	060812	1GHz~18GHz	Dec. 24, 2024	Dec. 24, 2024~Mar. 10, 2025	Dec. 23, 2025	Radiation (03CH16-HY)
Preamplifier	EMEC	EM18G40G	060801	18GHz~40GHz	May 27, 2024	Dec. 20, 2024~Mar. 10, 2025	May 26, 2025	Radiation (03CH16-HY)
Filter	Wainwright	WLK4-1000-15 30-8000-40SS	SN17	1.53GHz Low Pass Filter	Jan. 15, 2024	Dec. 20, 2024~Jan. 13, 2025	Jan. 14, 2025	Radiation (03CH16-HY)
Filter	Wainwright	WLK4-1000-15 30-8000-40SS	SN17	1.53GHz Low Pass Filter	Jan. 14, 2025	Jan. 14, 2025~Mar. 10, 2025	Jan. 13, 2026	Radiation (03CH16-HY)
Filter	Wainwright	WHKX12-2700-3000-18000-60ST	SN3	3GHz High Pass Filter	Jun. 28, 2024	Dec. 20, 2024~Mar. 10, 2025	Jun. 27, 2025	Radiation (03CH16-HY)
Notch Filter	ST1	STI15_9935_5 150-5850	NA	N/A	Apr. 05, 2024	Dec. 20, 2024~Mar. 10, 2025	Apr. 04, 2025	Radiation (03CH16-HY)
Notch Filter	Wainwright	WRCQV14-54 25-5825-6525-6925-60SS	SN1	N/A	Jan. 05, 2024	Dec. 20, 2024~Jan. 02, 2025	Jan. 04, 2025	Radiation (03CH16-HY)
Notch Filter	Wainwright	WRCQV14-54 25-5825-6525-6925-60SS	SN1	N/A	Jan. 03, 2025	Jan. 03, 2025~Mar. 10, 2025	Jan. 02, 2026	Radiation (03CH16-HY)
Filter	Wainwright	WHKX6-7268-9200-26500-40CD	SN2	9GHz High Pass Filter	May 22, 2024	Dec. 20, 2024~Mar. 10, 2025	May 21, 2025	Radiation (03CH16-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	801606/2	9KHz ~ 40GHz	Apr. 22, 2024	Dec. 20, 2024~Mar. 10, 2025	Apr. 21, 2025	Radiation (03CH16-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102/SUCOFLEX 104	EC-A5-300-5 757,805935/4 ,802434/4	30MHz~18GHz	Aug. 07, 2024	Dec. 20, 2024~Mar. 10, 2025	Aug. 06, 2025	Radiation (03CH16-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	804011/2,804012/2	18-40GHz	Jan. 02, 2024	Dec. 20, 2024~Dec. 30, 2024	Jan. 01, 2025	Radiation (03CH16-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	804011/2,804012/2	18-40GHz	Dec. 31, 2024	Dec. 31, 2024~Mar. 10, 2025	Dec. 30, 2025	Radiation (03CH16-HY)
Software	Audix	E3 230621 V9	RK-002393	N/A	N/A	Dec. 20, 2024~Mar. 10, 2025	N/A	Radiation (03CH16-HY)
Controller	ChainTek	3000-1	N/A	Control Turn table & Ant Mast	N/A	Dec. 20, 2024~Mar. 10, 2025	N/A	Radiation (03CH16-HY)
Antenna Mast	ChainTek	MBS-520-1	N/A	1m~4m	N/A	Dec. 20, 2024~Mar. 10, 2025	N/A	Radiation (03CH16-HY)
Turn Table	ChainTek	T-200-S-1	N/A	0~360 Degree	N/A	Dec. 20, 2024~Mar. 10, 2025	N/A	Radiation (03CH16-HY)

**FCC RADIO TEST REPORT**

Report No. : FR4N0918N

Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Hygrometer	TECPEL	DTM-303A	TP201996	N/A	Nov. 01, 2024	Dec. 17, 2024~Dec. 28, 2024	Oct. 31, 2025	Conducted (TH05-HY)
Power Sensor	DARE	RPR3006W	17I00015SNO35 (NO:109)	10MHz~6GHz	Jan. 15, 2024	Dec. 17, 2024~Dec. 28, 2024	Jan. 14, 2025	Conducted (TH05-HY)
Signal Analyzer	Rohde & Schwarz	FSV40	101566	10Hz~40GHz	Aug. 23, 2024	Dec. 17, 2024~Dec. 28, 2024	Aug. 22, 2025	Conducted (TH05-HY)
Switch Control Mainframe	Burgeon	ETF-058	EC1300484 (BOX3)	N/A	May 20, 2024	Dec. 17, 2024~Dec. 28, 2024	May 19, 2025	Conducted (TH05-HY)
Software	Sporton	BTWIFI_Final_version_241211	N/A	Conducted Other Test Item	N/A	Dec. 17, 2024~Dec. 28, 2024	N/A	Conducted (TH05-HY)
AC Power Source	ACPOWER	AFC-11003G	F317040033	N/A	N/A	Mar. 19, 2025~Mar. 21, 2025	N/A	Conduction (CO07-HY)
Software	Rohde & Schwarz	EMC32 V10.30	N/A	N/A	N/A	Mar. 19, 2025~Mar. 21, 2025	N/A	Conduction (CO07-HY)
Pulse Limiter	SCHWARZBECK	VTSD 9561-F N	9561-F N00373	9kHz-200MHz	Oct. 23, 2024	Mar. 19, 2025~Mar. 21, 2025	Oct. 22, 2025	Conduction (CO07-HY)
RF Cable	HUBER + SUHNER	RG 214/U	1358175	9kHz~30MHz	Mar. 03, 2025	Mar. 19, 2025~Mar. 21, 2025	Mar. 02, 2026	Conduction (CO07-HY)
Lisn	Rohde & Schwarz	ENV216	100080	9kHz~30MHz	Dec. 12, 2024	Mar. 19, 2025~Mar. 21, 2025	Dec. 11, 2025	Conduction (CO07-HY)
EMI Test Receiver	Rohde & Schwarz	ESR3	102317	9kHz~3.6GHz	Sep. 23, 2024	Mar. 19, 2025~Mar. 21, 2025	Sep. 22, 2025	Conduction (CO07-HY)



5 Measurement Uncertainty

Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_{C(y)}$)	3.7 dB
---	--------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_{C(y)}$)	6.5 dB
---	--------

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 6000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_{C(y)}$)	4.9 dB
---	--------

Uncertainty of Radiated Emission Measurement (6000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_{C(y)}$)	5.1 dB
---	--------

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_{C(y)}$)	5.3 dB
---	--------

Appendix A. Test Result of Conducted Test Items

Test Engineer:	Mina Liu				Temperature:	21~25		°C
Test Date:	2024/12/17-2024/12/28				Relative Humidity:	51~54		%





<u>TEST RESULTS DATA</u> <u>6dB and 99% Occupied Bandwidth</u>								
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	99% Occupied BW (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail
Thread	250k	1	11	2405	2.204	1.548	0.50	Pass
Thread	250k	1	18	2440	2.211	1.548	0.50	Pass
Thread	250k	1	25	2475	2.209	1.553	0.50	Pass
Thread	250k	1	26	2480	2.214	1.551	0.50	Pass





<u>TEST RESULTS DATA</u> <u>Peak Power Table</u>										
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Peak Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
Thread	250k	1	11	2405	21.32	30.00	-0.10	21.22	36.00	Pass
Thread	250k	1	18	2440	21.26	30.00	-0.10	21.16	36.00	Pass
Thread	250k	1	25	2475	21.55	30.00	-0.10	21.45	36.00	Pass
Thread	250k	1	26	2480	21.52	30.00	-0.10	21.42	36.00	Pass

<u>TEST RESULTS DATA</u> <u>Average Power Table</u> <u>(Reporting Only)</u>						
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Average Conducted Power (dBm)	
Thread	250k	1	11	2405	20.62	
Thread	250k	1	18	2440	20.56	
Thread	250k	1	25	2475	20.96	
Thread	250k	1	26	2480	20.94	

<u>TEST RESULTS DATA</u> <u>Peak Power Density</u>									
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Peak PSD (dBm /100kHz)	Peak PSD (dBm /3kHz)	DG (dBi)	Peak PSD Limit (dBm /3kHz)	Pass/Fail
Thread	250k	1	11	2405	16.92	5.89	-0.10	8.00	Pass
Thread	250k	1	18	2440	16.62	5.50	-0.10	8.00	Pass
Thread	250k	1	25	2475	17.11	5.98	-0.10	8.00	Pass
Thread	250k	1	26	2480	16.87	5.91	-0.10	8.00	Pass

Note: PSD (dBm/ 100kHz) is a reference level used for Conducted Band Edges and Conducted Spurious Emission 20dBc limit.

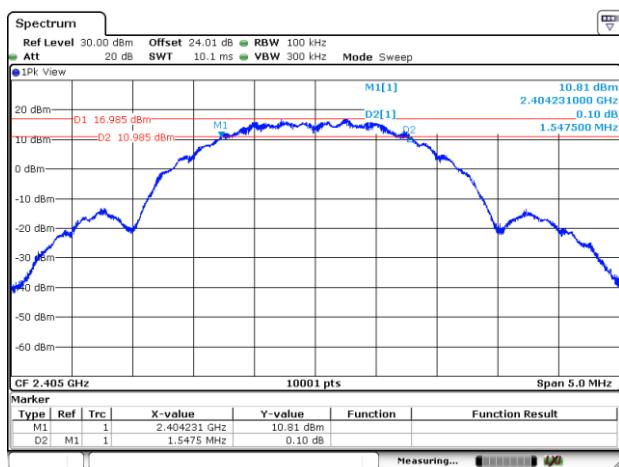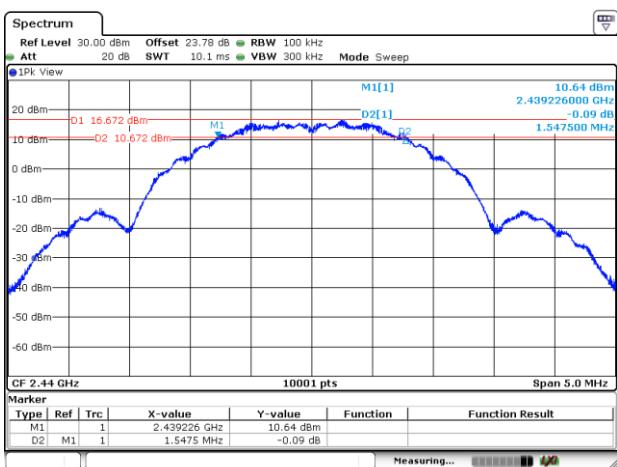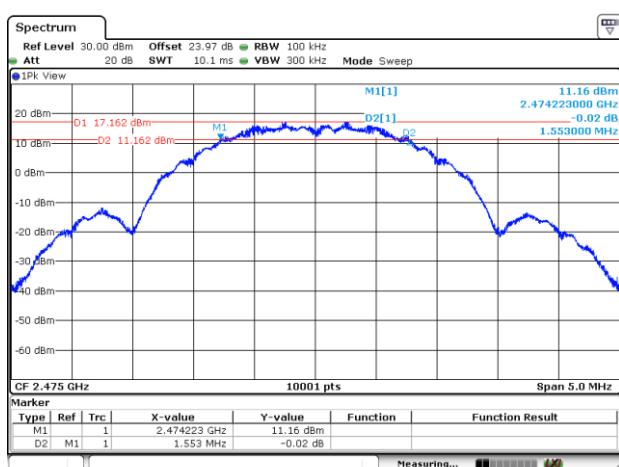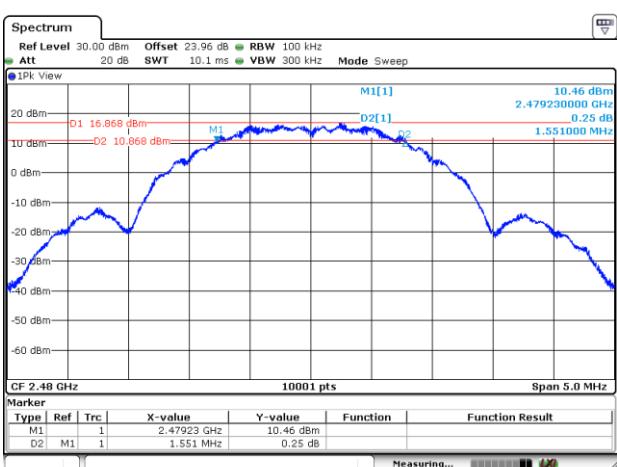
**6dB Bandwidth****6 dB Bandwidth Plot on Channel 11****6 dB Bandwidth Plot on Channel 18****6 dB Bandwidth Plot on Channel 25****6 dB Bandwidth Plot on Channel 26**

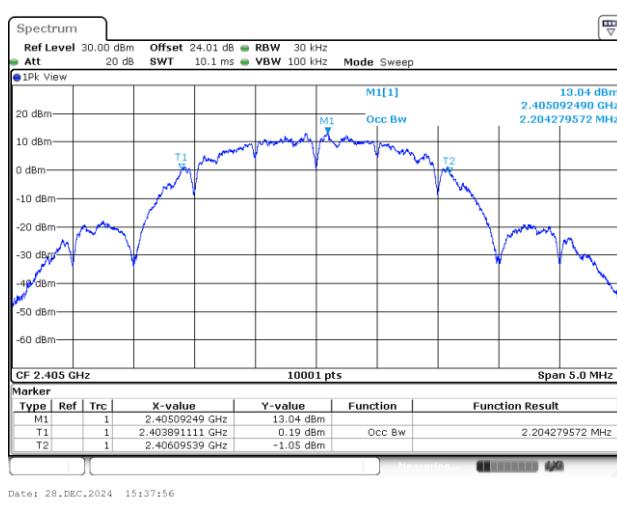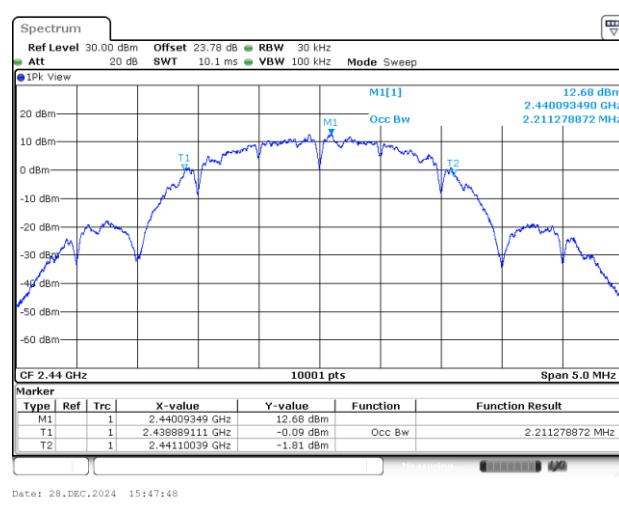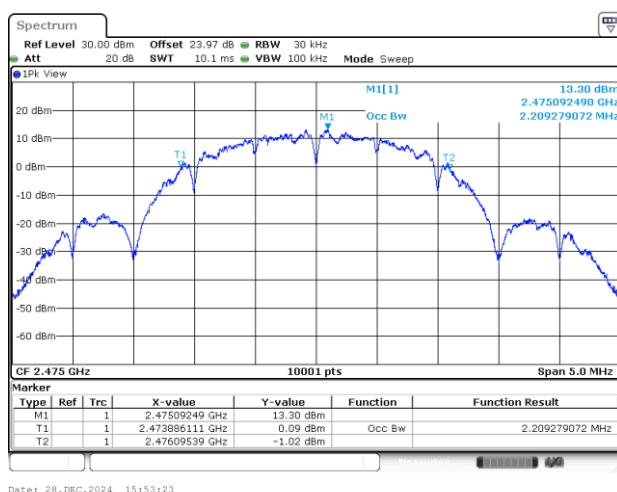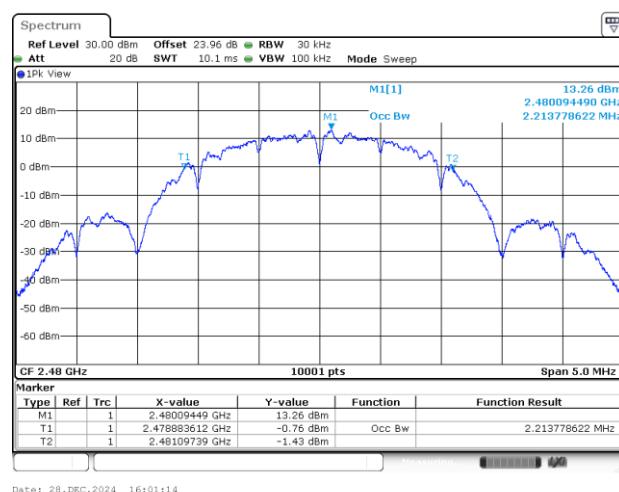99% Occupied Bandwidth
99% Occupied Bandwidth Plot on Channel 11

99% Occupied Bandwidth Plot on Channel 18

99% Occupied Bandwidth Plot on Channel 25

99% Occupied Bandwidth Plot on Channel 26

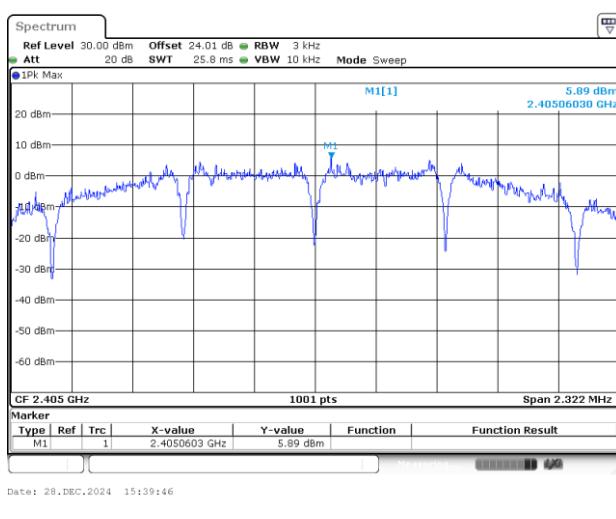
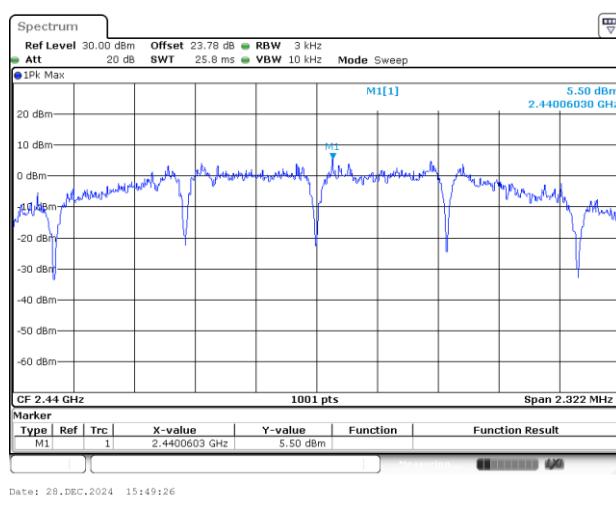


Power Spectral Density (dBm/3kHz)


Power Density (dBm/3kHz) Plot Channel 11




Power Density (dBm/3kHz) Plot Channel 18








Power Density (dBm/3kHz) Plot Channel 25

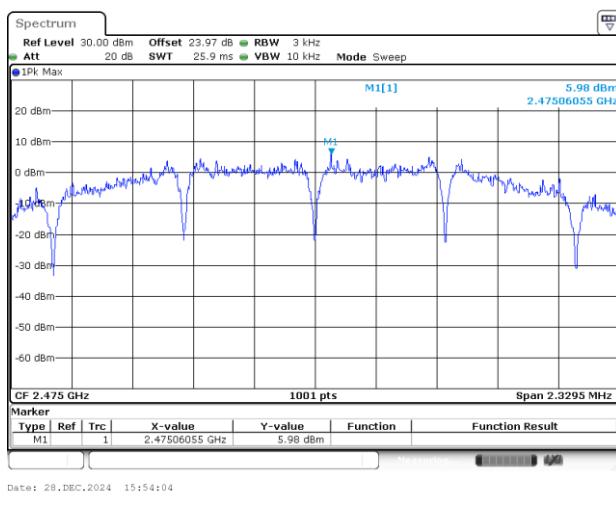



Power Density (dBm/3kHz) Plot Channel 26

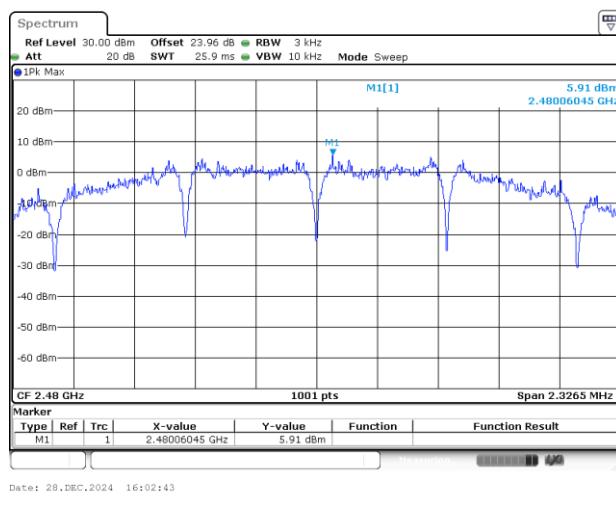

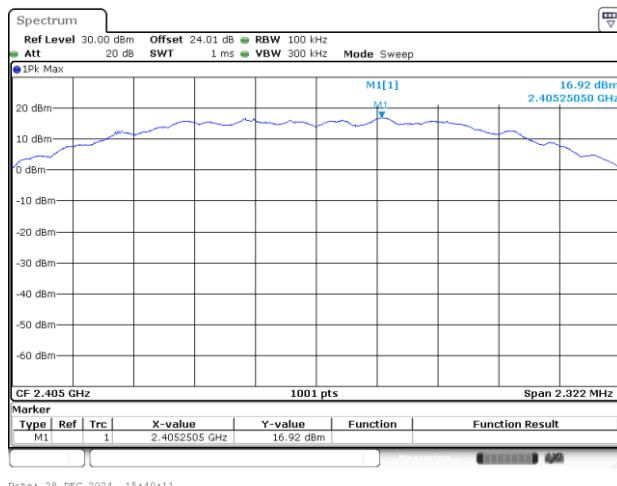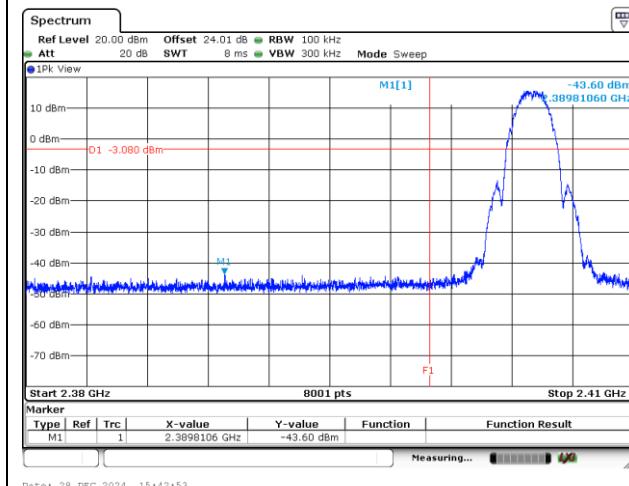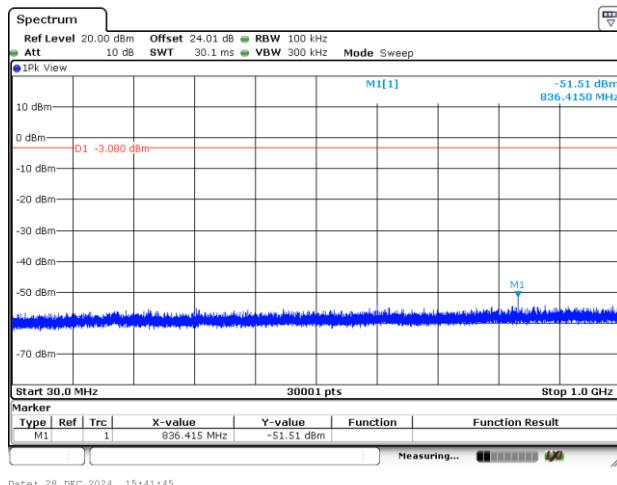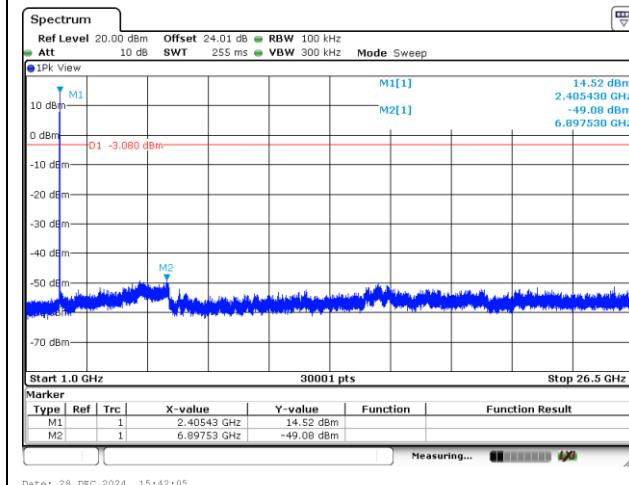**Band Edge and Conducted Spurious Emission****Channel 11****100kHz PSD reference Level Plot****Low Channel Plot****Spurious Emission 30MHz~1GHz Plot****Spurious Emission 1GHz~26.5GHz Plot**

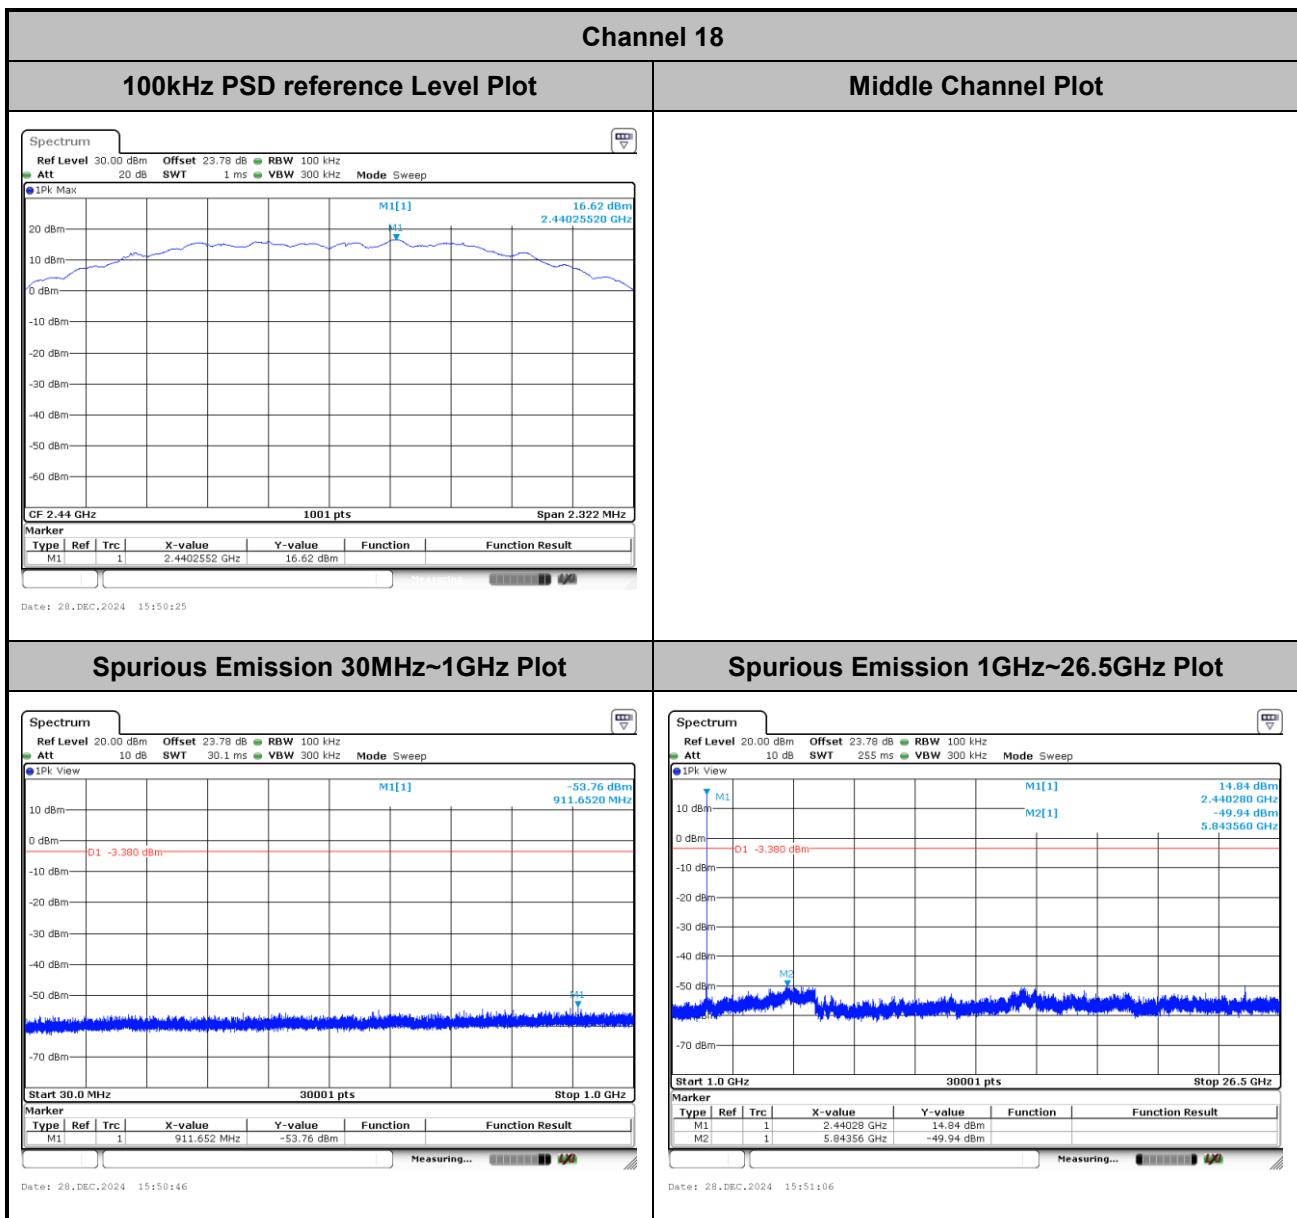

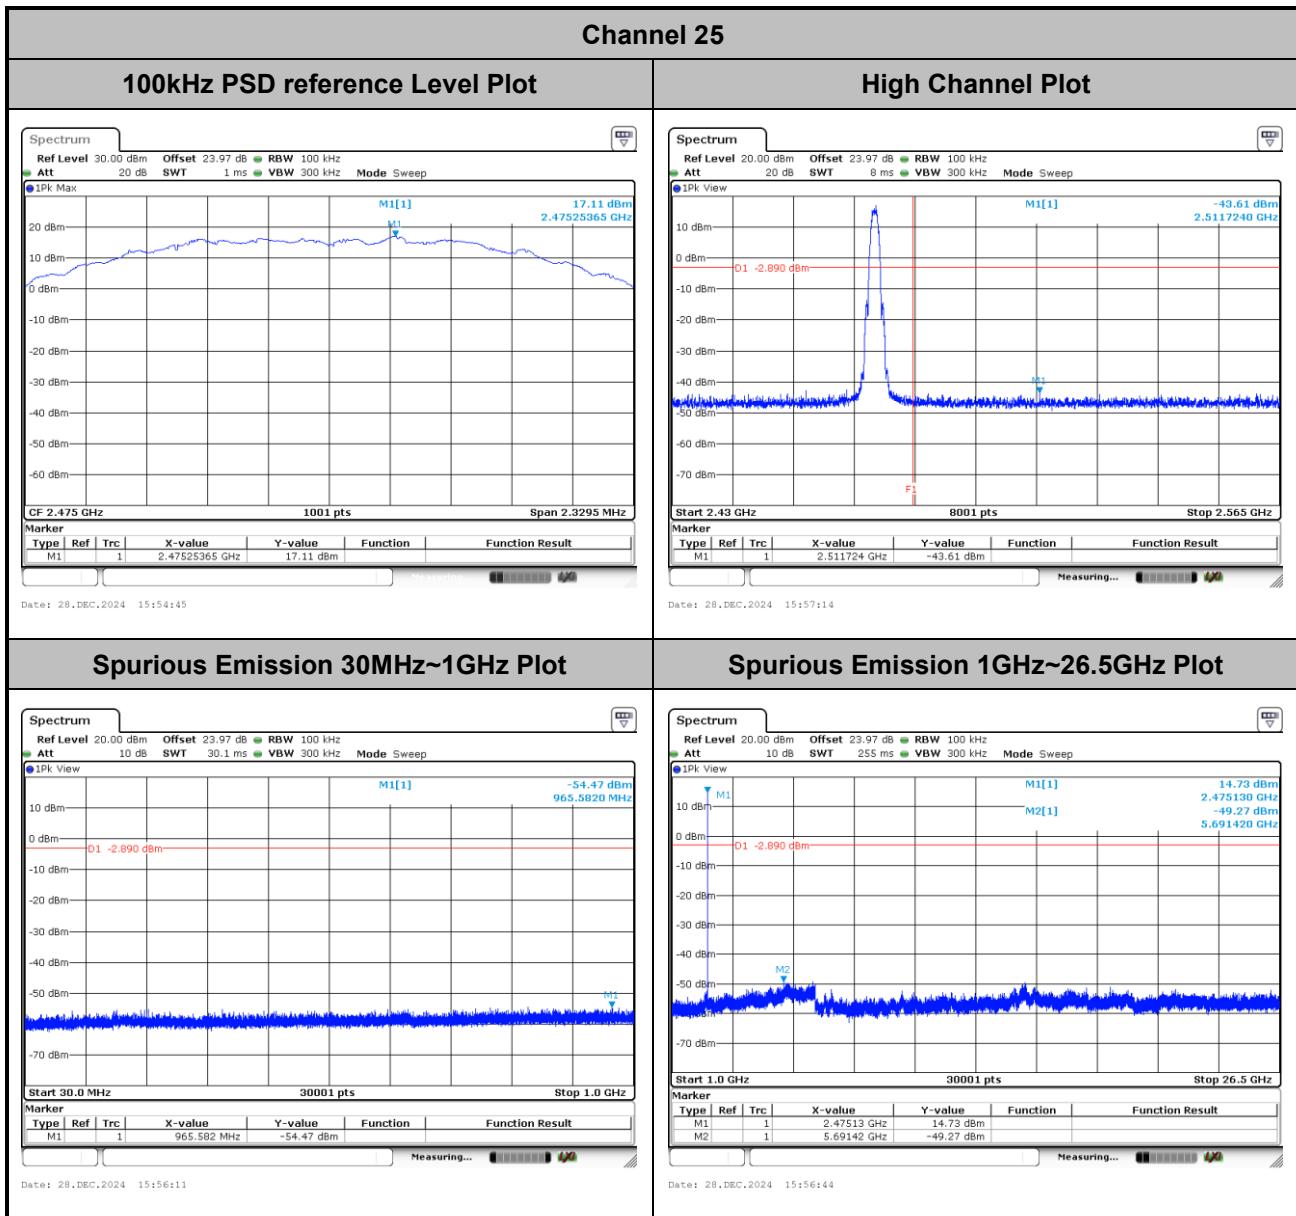

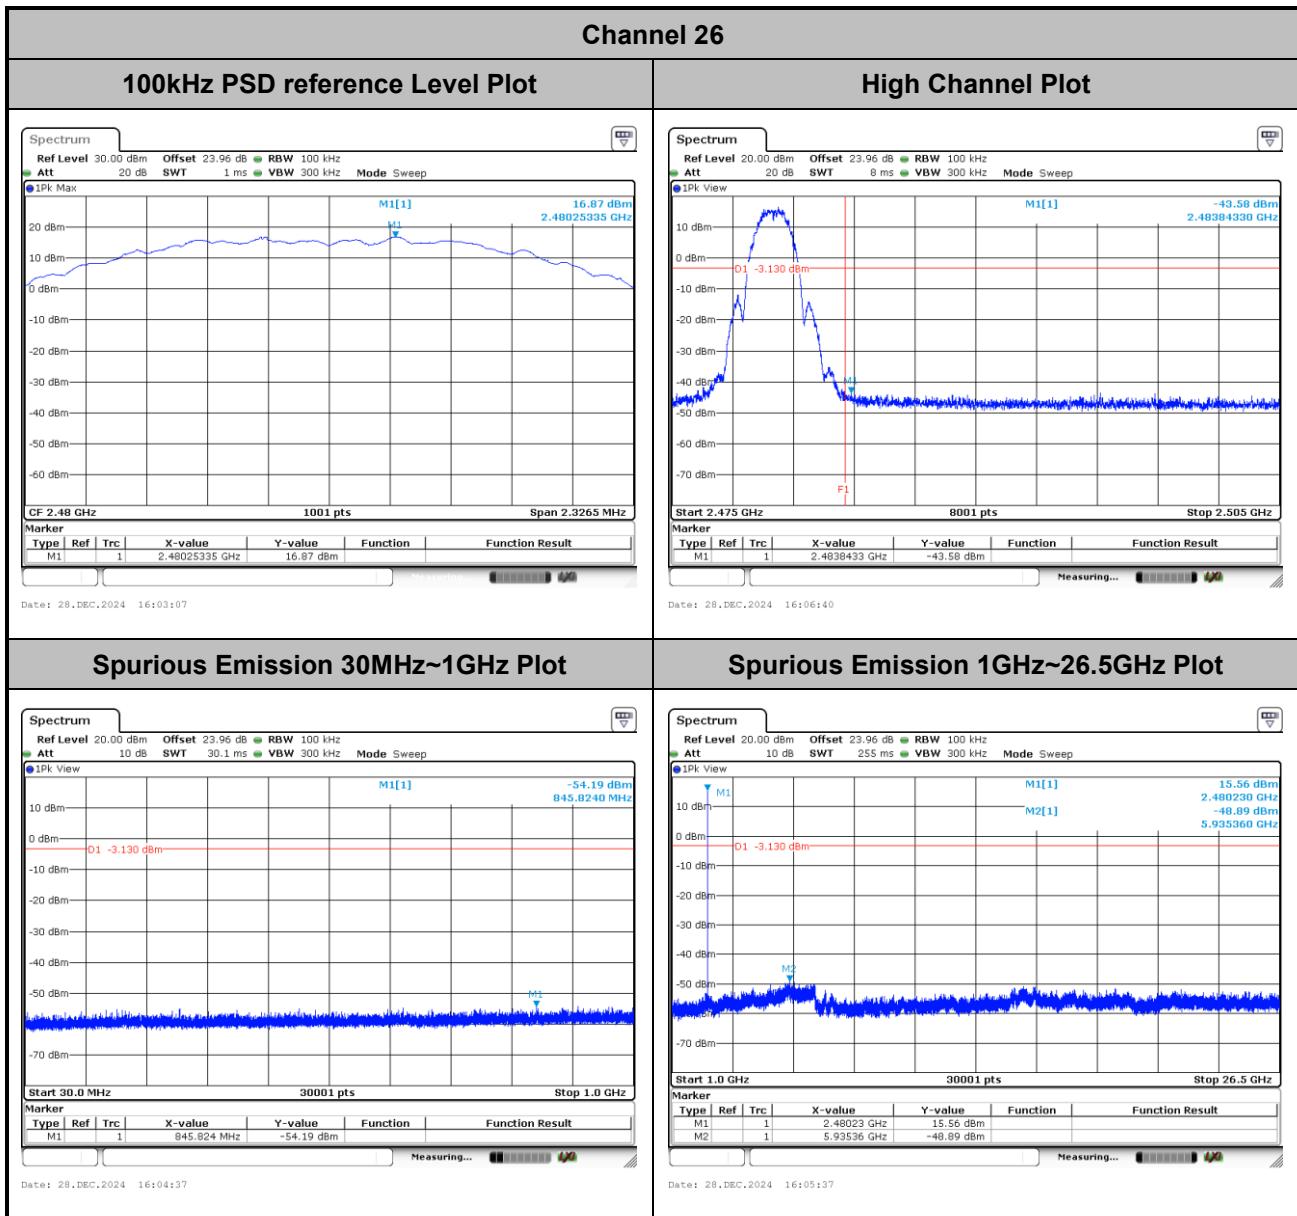




Appendix B. AC Conducted Emission Test Results

Test Engineer :	Louis Chung	Temperature :	16.1~22.7°C
		Relative Humidity :	45.9~48.9%

EUT Information

Report NO : 4N0918
 Test Mode : Mode 1
 Test Voltage : 120Vac/60Hz
 Phase : Line

Full Spectrum

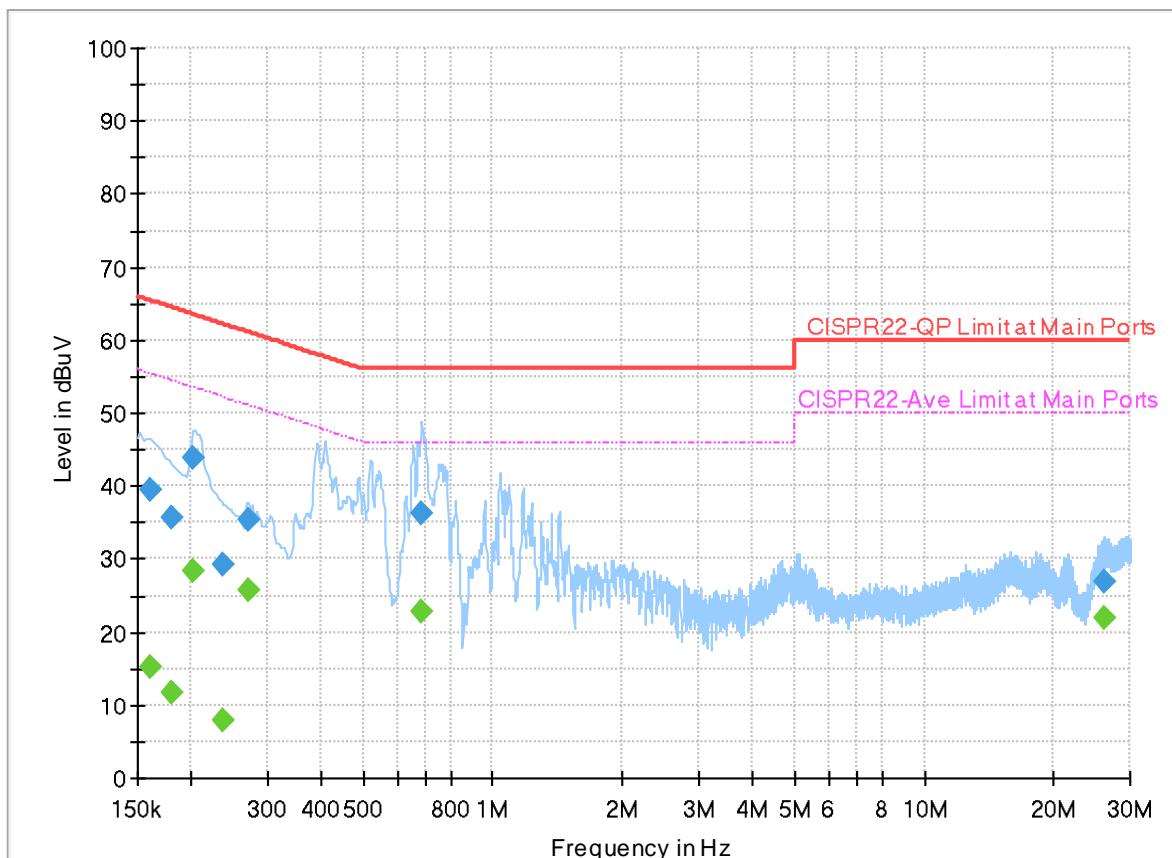
**Final Result**

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.161250	---	15.19	55.40	40.21	L1	OFF	19.8
0.161250	39.39	---	65.40	26.01	L1	OFF	19.8
0.179250	---	11.61	54.52	42.91	L1	OFF	19.8
0.179250	35.81	---	64.52	28.71	L1	OFF	19.8
0.201750	---	28.45	53.54	25.09	L1	OFF	19.8
0.201750	43.94	---	63.54	19.60	L1	OFF	19.8
0.237750	---	7.98	52.17	44.19	L1	OFF	19.8
0.237750	29.18	---	62.17	32.99	L1	OFF	19.8
0.271500	---	25.68	51.07	25.39	L1	OFF	19.8
0.271500	35.41	---	61.07	25.66	L1	OFF	19.8
0.683250	---	22.88	46.00	23.12	L1	OFF	19.8
0.683250	36.23	---	56.00	19.77	L1	OFF	19.8
26.133000	---	22.06	50.00	27.94	L1	OFF	20.7
26.133000	26.83	---	60.00	33.17	L1	OFF	20.7

EUT Information

Report NO : 4N0918
 Test Mode : Mode 1
 Test Voltage : 120Vac/60Hz
 Phase : Neutral

Full Spectrum

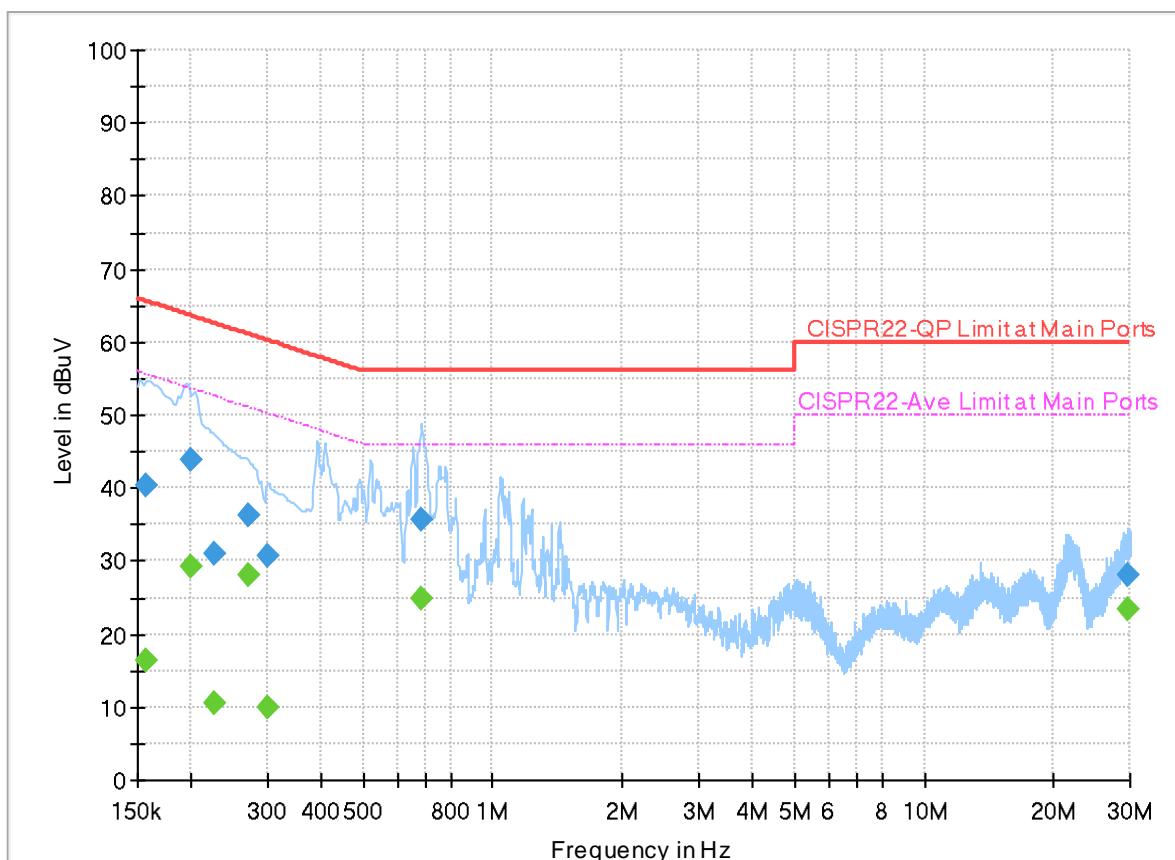**Final Result**

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.156750	---	16.27	55.63	39.36	N	OFF	19.8
0.156750	40.25	---	65.63	25.38	N	OFF	19.8
0.199500	---	29.26	53.63	24.37	N	OFF	19.8
0.199500	43.81	---	63.63	19.82	N	OFF	19.8
0.226500	---	10.64	52.58	41.94	N	OFF	19.8
0.226500	31.07	---	62.58	31.51	N	OFF	19.8
0.271500	---	28.07	51.07	23.00	N	OFF	19.8
0.271500	36.20	---	61.07	24.87	N	OFF	19.8
0.302190	---	9.83	50.18	40.35	N	OFF	19.8
0.302190	30.79	---	60.18	29.39	N	OFF	19.8
0.685995	---	24.99	46.00	21.01	N	OFF	19.8
0.685995	35.63	---	56.00	20.37	N	OFF	19.8
29.663250	---	23.31	50.00	26.69	N	OFF	21.0
29.663250	28.15	---	60.00	31.85	N	OFF	21.0



Appendix C. Radiated Spurious Emission Test Data

Test Engineer :	Jerry Lan, Gary Guo and Steven Wu	Temperature :	20~26°C
		Relative Humidity :	40~65%

Note symbol

-L	Low channel location
-R	High channel location



C1. Radiated Spurious Emission Test Modes




Mode	Band (MHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 1	2400-2483.5	3	Thread_250k	11	2405	250kbps	-	-
Mode 2	2400-2483.5	3	Thread_250k	18	2440	250kbps	-	-
Mode 3	2400-2483.5	3	Thread_250k	25	2475	250kbps	-	-
Mode 4	2400-2483.5	3	Thread_250k	26	2480	250kbps	-	-
Mode 5	2400-2483.5	3	Thread_250k	26	2480	250kbps	-	LF
Mode 6	2400-2483.5	3	Thread_250k	26	2480	250kbps	-	SHF



C2. Summary of each worse mode

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	RU	Remark
1	Thread_250k	11	2389.33	45.06	54.00	-8.94	V	Avg.	Pass	-	Band Edge
	Thread_250k	11	7215.00	45.23	74.00	-28.77	V	Peak	Pass	-	Harmonic
2	Thread_250k	18	2486.98	45.47	54.00	-8.53	V	Avg.	Pass	-	Band Edge
	Thread_250k	18	7215.00	45.23	74.00	-28.77	V	Peak	Pass	-	Harmonic
3	Thread_250k	25	2483.70	46.06	54.00	-7.94	V	Avg.	Pass	-	Band Edge
	Thread_250k	25	7425.00	43.87	74.00	-30.13	H	Peak	Pass	-	Harmonic
4	Thread_250k	26	2483.52	52.05	54.00	-1.95	V	Avg.	Pass	-	Band Edge
	Thread_250k	26	7440.00	43.89	74.00	-30.11	H	Peak	Pass	-	Harmonic
5	LF	26	42.61	34.25	40.00	-5.75	V	QP	Pass	-	LF
6	SHF	26	24968.00	38.82	74.00	-35.18	H	Peak	Pass	-	SHF

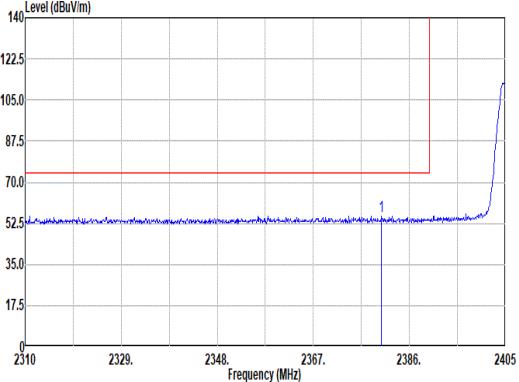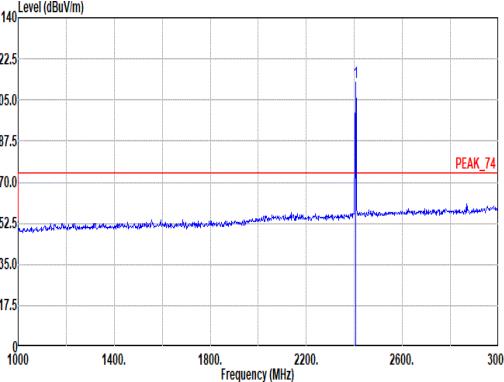
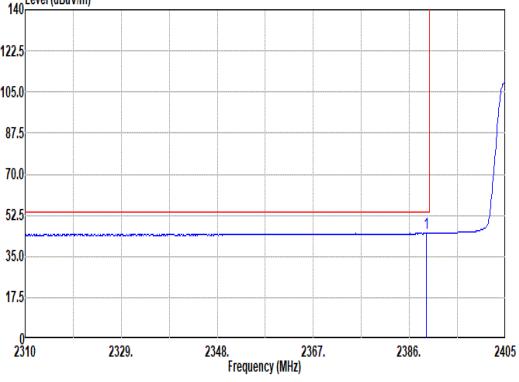


Mode	1																																																																																	
	Band Edge																																																																																	
	2400-2483.5_Thread_250k_CH11_2405MHz																																																																																	
ANT	3																																																																																	
Pol.	Horizontal	Fundamental																																																																																
Peak	 <p>Site : 03CH16-HY Condition: PEAK_BE_74 3m 91200-1522_240328 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWF:Auto</p> <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr></thead><tbody><tr><td>1</td><td>MHz</td><td>dBuV/m</td><td>dBuV/m</td><td>dB</td><td>dBuV</td><td>dB/m</td><td>dB</td><td>dB</td><td>cm deg</td></tr><tr><td>1</td><td>2388.49</td><td>55.65</td><td>74.00</td><td>-18.35</td><td>41.17</td><td>27.20</td><td>7.70</td><td>30.34</td><td>9.92 100 45 PEAK</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor			1	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm deg	1	2388.49	55.65	74.00	-18.35	41.17	27.20	7.70	30.34	9.92 100 45 PEAK	 <p>Site : 03CH16-HY Condition: PEAK_74_3m 91200-1522_240328 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWF:Auto</p> <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr></thead><tbody><tr><td>1</td><td>MHz</td><td>dBuV/m</td><td>dBuV/m</td><td>dB</td><td>dBuV</td><td>dB/m</td><td>dB</td><td>dB</td><td>cm deg</td></tr><tr><td>1</td><td>2405.00</td><td>112.48</td><td>-----</td><td>-----</td><td>97.75</td><td>27.40</td><td>7.74</td><td>30.33</td><td>9.92 100 45 PEAK</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor			1	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm deg	1	2405.00	112.48	-----	-----	97.75	27.40	7.74	30.33	9.92 100 45 PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																									
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																											
1	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm deg																																																																									
1	2388.49	55.65	74.00	-18.35	41.17	27.20	7.70	30.34	9.92 100 45 PEAK																																																																									
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																									
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																											
1	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm deg																																																																									
1	2405.00	112.48	-----	-----	97.75	27.40	7.74	30.33	9.92 100 45 PEAK																																																																									
 <p>Site : 03CH16-HY Condition: AVG_BE_54 3m 91200-1522_240328 HORIZONTAL : RBW:1000.000kHz VBW:0.240kHz SWF:Auto</p> <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr></thead><tbody><tr><td>1</td><td>MHz</td><td>dBuV/m</td><td>dBuV/m</td><td>dB</td><td>dBuV</td><td>dB/m</td><td>dB</td><td>dB</td><td>cm deg</td></tr><tr><td>1</td><td>2389.33</td><td>44.98</td><td>54.00</td><td>-9.02</td><td>38.39</td><td>27.29</td><td>7.71</td><td>30.33</td><td>9.92 100 45 AVERAGE</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor			1	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm deg	1	2389.33	44.98	54.00	-9.02	38.39	27.29	7.71	30.33	9.92 100 45 AVERAGE	 <p>Site : 03CH16-HY Condition: AVG_54_3m 91200-1522_240328 HORIZONTAL : RBW:1000.000kHz VBW:0.240kHz SWF:Auto</p> <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr></thead><tbody><tr><td>1</td><td>MHz</td><td>dBuV/m</td><td>dBuV/m</td><td>dB</td><td>dBuV</td><td>dB/m</td><td>dB</td><td>dB</td><td>cm deg</td></tr><tr><td>1</td><td>2405.00</td><td>110.44</td><td>-----</td><td>-----</td><td>95.71</td><td>27.40</td><td>7.74</td><td>30.33</td><td>9.92 100 45 AVERAGE</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor			1	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm deg	1	2405.00	110.44	-----	-----	95.71	27.40	7.74	30.33	9.92 100 45 AVERAGE	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																									
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																											
1	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm deg																																																																									
1	2389.33	44.98	54.00	-9.02	38.39	27.29	7.71	30.33	9.92 100 45 AVERAGE																																																																									
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																									
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																											
1	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm deg																																																																									
1	2405.00	110.44	-----	-----	95.71	27.40	7.74	30.33	9.92 100 45 AVERAGE																																																																									







Mode	Band Edge																																																																																	
ANT	3																																																																																	
Pol.	Vertical	Fundamental																																																																																
Peak	<p>Site : 03CH16-HY Condition: PEAK_BE_74 3m 91200-1522_240328 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2387.90</td> <td>55.77</td> <td>74.00</td> <td>-18.23</td> <td>41.19</td> <td>27.28</td> <td>7.71</td> <td>30.33</td> <td>9.92 242 68 PEAK</td> </tr> <tr> <td></td> <td>MHz</td> <td>dBuV/m</td> <td>dBuV/m</td> <td>dB</td> <td>dBuV</td> <td>dB/m</td> <td>dB</td> <td>dB</td> <td>cm deg</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor			1	2387.90	55.77	74.00	-18.23	41.19	27.28	7.71	30.33	9.92 242 68 PEAK		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm deg	<p>Site : 03CH16-HY Condition: PEAK_74 3m 91200-1522_240328 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2405.00</td> <td>114.71</td> <td>-----</td> <td>-----</td> <td>99.98</td> <td>27.40</td> <td>7.74</td> <td>30.33</td> <td>9.92 242 68 PEAK</td> </tr> <tr> <td></td> <td>MHz</td> <td>dBuV/m</td> <td>dBuV/m</td> <td>dB</td> <td>dBuV</td> <td>dB/m</td> <td>dB</td> <td>dB</td> <td>cm deg</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor			1	2405.00	114.71	-----	-----	99.98	27.40	7.74	30.33	9.92 242 68 PEAK		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm deg
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																									
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																											
1	2387.90	55.77	74.00	-18.23	41.19	27.28	7.71	30.33	9.92 242 68 PEAK																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm deg																																																																									
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																									
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																											
1	2405.00	114.71	-----	-----	99.98	27.40	7.74	30.33	9.92 242 68 PEAK																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm deg																																																																									
Avg	<p>Site : 03CH16-HY Condition: AVG_BE_54 3m 91200-1522_240328 VERTICAL : RBW:1000.000kHz VBW:0.240kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2389.33</td> <td>45.06</td> <td>54.00</td> <td>-8.94</td> <td>30.47</td> <td>27.29</td> <td>7.71</td> <td>30.33</td> <td>9.92 242 68 AVERAGE</td> </tr> <tr> <td></td> <td>MHz</td> <td>dBuV/m</td> <td>dBuV/m</td> <td>dB</td> <td>dBuV</td> <td>dB/m</td> <td>dB</td> <td>dB</td> <td>cm deg</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor			1	2389.33	45.06	54.00	-8.94	30.47	27.29	7.71	30.33	9.92 242 68 AVERAGE		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm deg	<p>Site : 03CH16-HY Condition: AVG_54 3m 91200-1522_240328 VERTICAL : RBW:1000.000kHz VBW:0.240kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2405.00</td> <td>112.77</td> <td>-----</td> <td>-----</td> <td>98.04</td> <td>27.40</td> <td>7.74</td> <td>30.33</td> <td>9.92 242 68 AVERAGE</td> </tr> <tr> <td></td> <td>MHz</td> <td>dBuV/m</td> <td>dBuV/m</td> <td>dB</td> <td>dBuV</td> <td>dB/m</td> <td>dB</td> <td>dB</td> <td>cm deg</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor			1	2405.00	112.77	-----	-----	98.04	27.40	7.74	30.33	9.92 242 68 AVERAGE		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm deg
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																									
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																											
1	2389.33	45.06	54.00	-8.94	30.47	27.29	7.71	30.33	9.92 242 68 AVERAGE																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm deg																																																																									
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																									
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																											
1	2405.00	112.77	-----	-----	98.04	27.40	7.74	30.33	9.92 242 68 AVERAGE																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm deg																																																																									



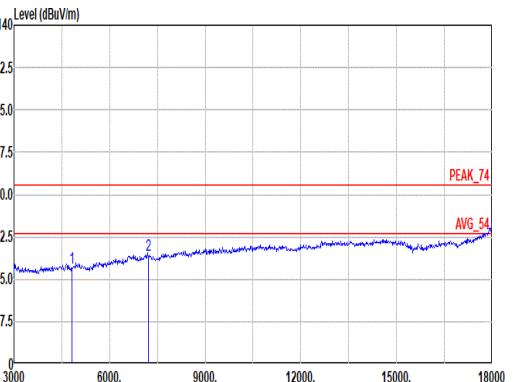
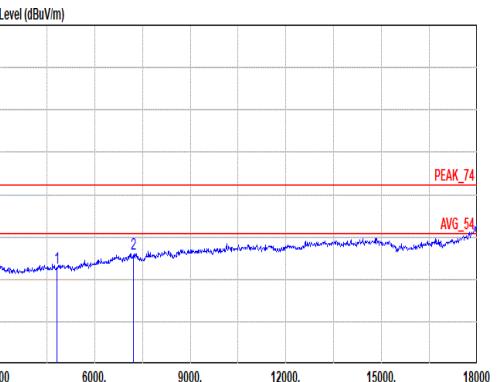


Mode	Harmonic																																																																																															
	2400-2483.5_Thread_250k_CH11_2405MHz																																																																																															
ANT	3																																																																																															
Pol.	Horizontal						Vertical																																																																																									
Peak	 <p>Level (dBuV/m)</p> <p>Frequency (MHz)</p> <p>PEAK_74</p> <p>Avg_54</p> <p>1</p> <p>2</p>						 <p>Level (dBuV/m)</p> <p>Frequency (MHz)</p> <p>PEAK_74</p> <p>Avg_54</p> <p>1</p> <p>2</p>																																																																																									
Avg	<p>Site : 03CH16-HY</p> <p>Condition: PEAK_74 3m 91200-1522_240328 HORIZONTAL</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>Remark</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4810.00</td> <td>39.66</td> <td>74.00</td> <td>-34.34</td> <td>62.20</td> <td>32.34</td> <td>11.04</td> <td>66.40</td> <td>0.48</td> <td>-- -- PEAK</td> </tr> <tr> <td>2</td> <td>7215.00</td> <td>44.66</td> <td>74.00</td> <td>-29.34</td> <td>59.98</td> <td>36.86</td> <td>13.22</td> <td>65.75</td> <td>0.35</td> <td>-- -- PEAK</td> </tr> </tbody> </table> <p>Site : 03CH16-HY</p> <p>Condition: PEAK_74 3m 91200-1522_240328 VERTICAL</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>Remark</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4810.00</td> <td>39.55</td> <td>74.00</td> <td>-34.45</td> <td>62.09</td> <td>32.34</td> <td>11.04</td> <td>66.40</td> <td>0.48</td> <td>-- -- PEAK</td> </tr> <tr> <td>2</td> <td>7215.00</td> <td>45.23</td> <td>74.00</td> <td>-28.77</td> <td>60.55</td> <td>36.86</td> <td>13.22</td> <td>65.75</td> <td>0.35</td> <td>-- -- PEAK</td> </tr> </tbody> </table>												Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor	Remark		1	4810.00	39.66	74.00	-34.34	62.20	32.34	11.04	66.40	0.48	-- -- PEAK	2	7215.00	44.66	74.00	-29.34	59.98	36.86	13.22	65.75	0.35	-- -- PEAK	Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor	Remark		1	4810.00	39.55	74.00	-34.45	62.09	32.34	11.04	66.40	0.48	-- -- PEAK	2	7215.00	45.23	74.00	-28.77	60.55	36.86	13.22	65.75	0.35	-- -- PEAK
Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																							
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																								
1	4810.00	39.66	74.00	-34.34	62.20	32.34	11.04	66.40	0.48	-- -- PEAK																																																																																						
2	7215.00	44.66	74.00	-29.34	59.98	36.86	13.22	65.75	0.35	-- -- PEAK																																																																																						
Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																							
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																								
1	4810.00	39.55	74.00	-34.45	62.09	32.34	11.04	66.40	0.48	-- -- PEAK																																																																																						
2	7215.00	45.23	74.00	-28.77	60.55	36.86	13.22	65.75	0.35	-- -- PEAK																																																																																						
1	1																																																																																															
2	2																																																																																															

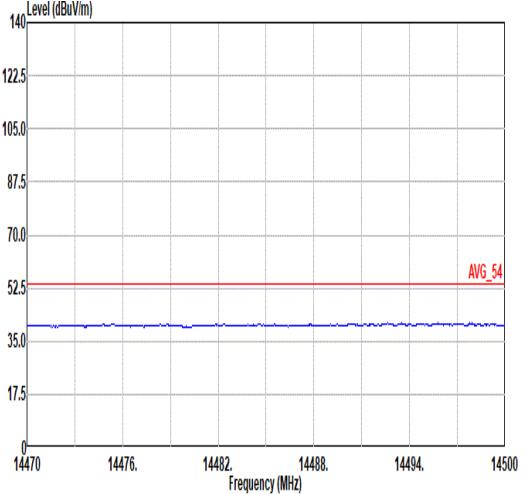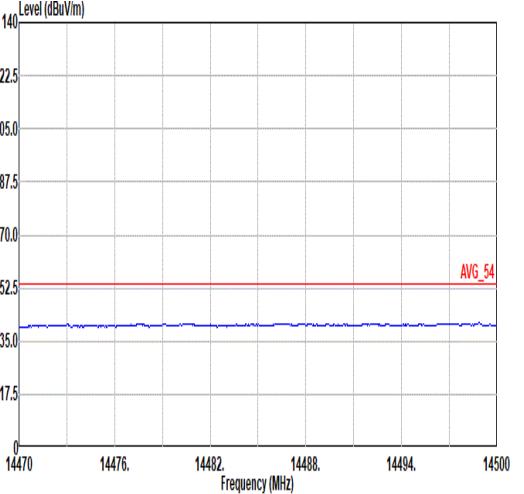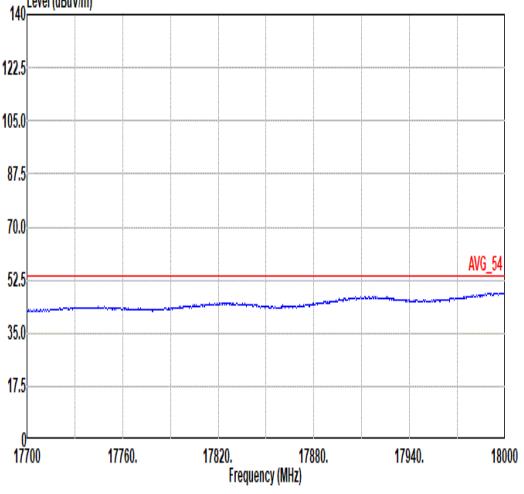
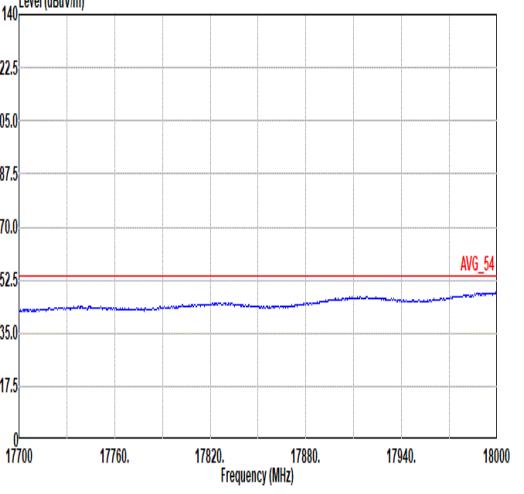


		1
Mode		Harmonic
		2400-2483.5_Thread_250k_CH11_2405MHz
ANT		3
Pol.	Horizontal	Vertical
14.47G		
~14.5G		
Avg	<p>Site : 03CH16-HY Condition: AVG_54 3m 91200-1522_240328 HORIZONTAL</p>	<p>Site : 03CH16-HY Condition: AVG_54 3m 91200-1522_240328 VERTICAL</p>
17.7G		
~18G		
Avg	<p>Site : 03CH16-HY Condition: AVG_54 3m 91200-1522_240328 HORIZONTAL</p>	<p>Site : 03CH16-HY Condition: AVG_54 3m 91200-1522_240328 VERTICAL</p>

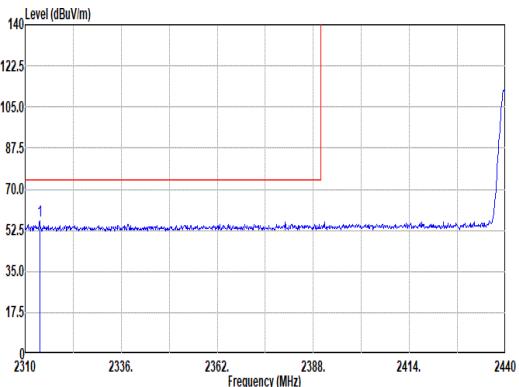
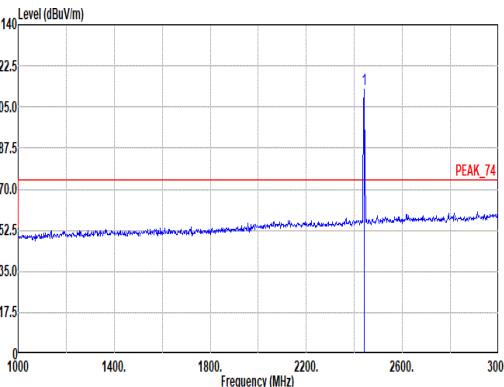
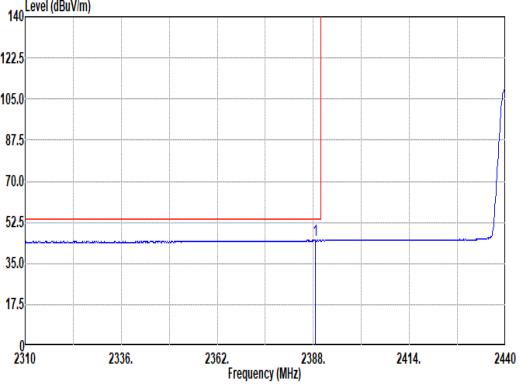
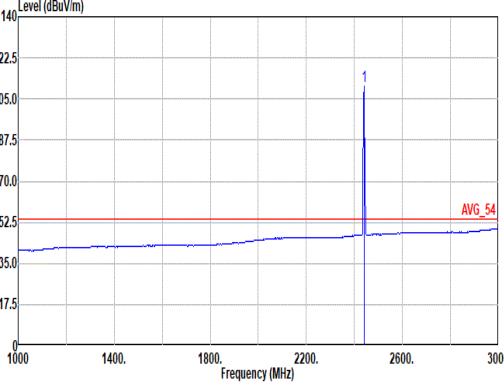


Mode	2																																																																																																					
	Band Edge - L																																																																																																					
	2400-2483.5_Thread_250k_CH18_2440MHz																																																																																																					
ANT	3																																																																																																					
Pol.	Horizontal	Fundamental																																																																																																				
Peak	 <p>Site : 03CH16-HY Condition: PEAK_BE_74 3m 91200-1522_240328 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWF:Auto</p> <table border="1"> <thead> <tr> <th>Freq</th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th> </tr> <tr> <th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td><td>2313.90</td><td>56.42</td><td>74.00</td><td>-17.58</td><td>42.18</td><td>27.10</td><td>7.58</td><td>30.36</td><td>9.92</td> </tr> <tr> <td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>100</td> </tr> <tr> <td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>46 PEAK</td> </tr> </tbody> </table>	Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2313.90	56.42	74.00	-17.58	42.18	27.10	7.58	30.36	9.92										100										46 PEAK	 <p>Site : 03CH16-HY Condition: PEAK_74_3m 91200-1522_240328 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWF:Auto</p> <table border="1"> <thead> <tr> <th>Freq</th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th> </tr> <tr> <th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td><td>2440.00</td><td>112.42</td><td>-----</td><td>-----</td><td>97.42</td><td>27.60</td><td>7.79</td><td>30.31</td><td>9.92</td> </tr> <tr> <td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>100</td> </tr> <tr> <td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>46 PEAK</td> </tr> </tbody> </table>	Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2440.00	112.42	-----	-----	97.42	27.60	7.79	30.31	9.92										100										46 PEAK
Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																													
1	2313.90	56.42	74.00	-17.58	42.18	27.10	7.58	30.36	9.92																																																																																													
									100																																																																																													
									46 PEAK																																																																																													
Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																													
1	2440.00	112.42	-----	-----	97.42	27.60	7.79	30.31	9.92																																																																																													
									100																																																																																													
									46 PEAK																																																																																													
 <p>Site : 03CH16-HY Condition: AVG_BE_54 3m 91200-1522_240328 HORIZONTAL : RBW:1000.000kHz VBW:0.240kHz SWF:Auto</p> <table border="1"> <thead> <tr> <th>Freq</th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th> </tr> <tr> <th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td><td>2388.65</td><td>44.74</td><td>54.00</td><td>-9.26</td><td>38.15</td><td>27.29</td><td>7.71</td><td>30.33</td><td>9.92</td> </tr> <tr> <td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>100</td> </tr> <tr> <td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>46 AVERAGE</td> </tr> </tbody> </table>	Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2388.65	44.74	54.00	-9.26	38.15	27.29	7.71	30.33	9.92										100										46 AVERAGE	 <p>Site : 03CH16-HY Condition: AVG_54_3m 91200-1522_240328 HORIZONTAL : RBW:1000.000kHz VBW:0.240kHz SWF:Auto</p> <table border="1"> <thead> <tr> <th>Freq</th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th> </tr> <tr> <th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td><td>2440.00</td><td>110.47</td><td>-----</td><td>-----</td><td>95.47</td><td>27.60</td><td>7.79</td><td>30.31</td><td>9.92</td> </tr> <tr> <td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>100</td> </tr> <tr> <td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>46 AVERAGE</td> </tr> </tbody> </table>	Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2440.00	110.47	-----	-----	95.47	27.60	7.79	30.31	9.92										100										46 AVERAGE	
Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																													
1	2388.65	44.74	54.00	-9.26	38.15	27.29	7.71	30.33	9.92																																																																																													
									100																																																																																													
									46 AVERAGE																																																																																													
Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																													
1	2440.00	110.47	-----	-----	95.47	27.60	7.79	30.31	9.92																																																																																													
									100																																																																																													
									46 AVERAGE																																																																																													

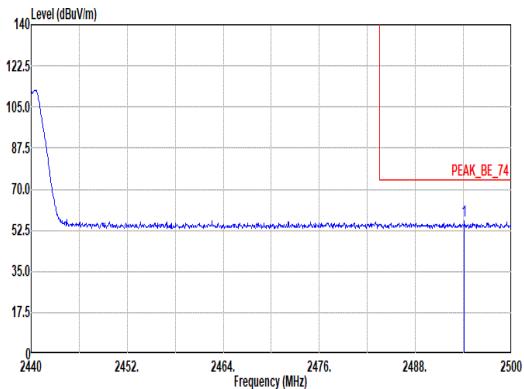
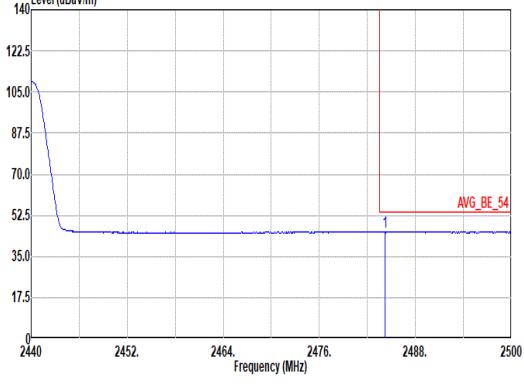


		2																																								
Mode		Band Edge - R																																								
		2400-2483.5_Thread_250k_CH18_2440MHz																																								
ANT		3																																								
Pol.	Horizontal	Fundamental																																								
Peak	 <p>Site : 03CH16-HY Condition: PEAK_BE_74 3m 91280-1522_240328 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SIT:Auto</p> <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2494.12</td><td>56.47</td><td>74.00</td><td>-17.53</td><td>41.26</td><td>27.70</td><td>7.88</td><td>30.29</td><td>9.92 100 46 PEAK</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2494.12	56.47	74.00	-17.53	41.26	27.70	7.88	30.29	9.92 100 46 PEAK	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																	
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																	
1	2494.12	56.47	74.00	-17.53	41.26	27.70	7.88	30.29	9.92 100 46 PEAK																																	
Avg	 <p>Site : 03CH16-HY Condition: AVG_BE_54 3m 91280-1522_240328 HORIZONTAL : RBW:1000.000kHz VBW:0.240kHz SIT:Auto</p> <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2484.16</td><td>45.41</td><td>54.00</td><td>-8.59</td><td>30.23</td><td>27.70</td><td>7.86</td><td>30.30</td><td>9.92 100 46 AVERAGE</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2484.16	45.41	54.00	-8.59	30.23	27.70	7.86	30.30	9.92 100 46 AVERAGE	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																	
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																	
1	2484.16	45.41	54.00	-8.59	30.23	27.70	7.86	30.30	9.92 100 46 AVERAGE																																	

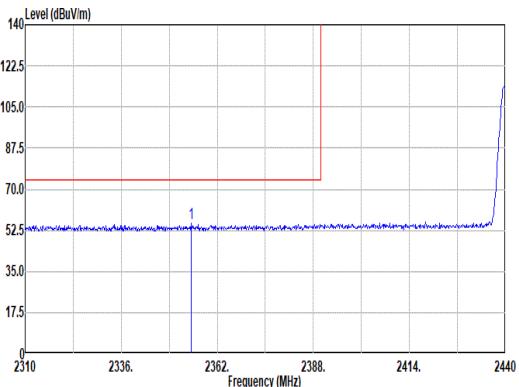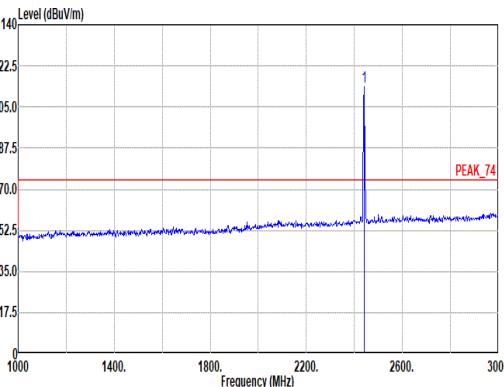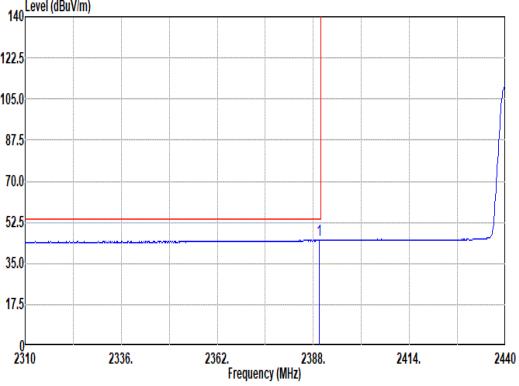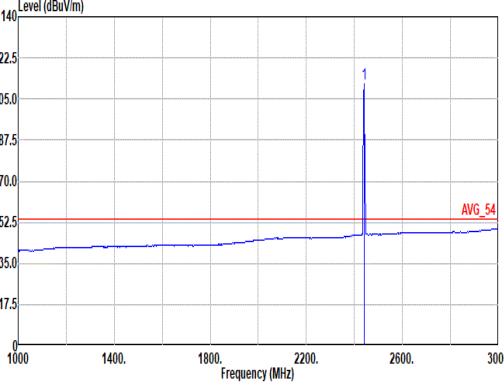

Mode	2																																																																	
	Band Edge - L																																																																	
	2400-2483.5_Thread_250k_CH18_2440MHz																																																																	
ANT	3																																																																	
Pol.	Vertical	Fundamental																																																																
Peak	 <p>Site : 03CH16-HY Condition: PEAK_BE_74 3m 91200-1522_240328 VERTICAL : RBW:1000.000kHz VBN:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Freq</th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th> </tr> <tr> <th>MHz</th><th>dBm</th><th>dBm</th><th>dB</th><th>dBm</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td><td>2354.85</td><td>55.28</td><td>74.00</td><td>-18.72</td><td>40.91</td><td>27.15</td><td>7.65</td><td>30.35</td><td>9.92</td><td>200</td><td>72 PEAK</td> </tr> </tbody> </table>	Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	MHz	dBm	dBm	dB	dBm	dB	dB	dB	cm	deg	1	2354.85	55.28	74.00	-18.72	40.91	27.15	7.65	30.35	9.92	200	72 PEAK	 <p>Site : 03CH16-HY Condition: PEAK_74_3m 91200-1522_240328 VERTICAL : RBW:1000.000kHz VBN:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Freq</th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th> </tr> <tr> <th>MHz</th><th>dBm</th><th>dBm</th><th>dB</th><th>dBm</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td><td>2440.00</td><td>113.65</td><td>-----</td><td>-----</td><td>98.65</td><td>27.60</td><td>7.79</td><td>30.31</td><td>9.92</td><td>200</td><td>72 PEAK</td> </tr> </tbody> </table>	Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	MHz	dBm	dBm	dB	dBm	dB	dB	dB	cm	deg	1	2440.00	113.65	-----	-----	98.65	27.60	7.79	30.31	9.92	200	72 PEAK
Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																									
MHz	dBm	dBm	dB	dBm	dB	dB	dB	cm	deg																																																									
1	2354.85	55.28	74.00	-18.72	40.91	27.15	7.65	30.35	9.92	200	72 PEAK																																																							
Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																									
MHz	dBm	dBm	dB	dBm	dB	dB	dB	cm	deg																																																									
1	2440.00	113.65	-----	-----	98.65	27.60	7.79	30.31	9.92	200	72 PEAK																																																							
 <p>Site : 03CH16-HY Condition: AVG_BE_54 3m 91200-1522_240328 VERTICAL : RBW:1000.000kHz VBN:0.240kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Freq</th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th> </tr> <tr> <th>MHz</th><th>dBm</th><th>dBm</th><th>dB</th><th>dBm</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td><td>2389.69</td><td>44.82</td><td>54.00</td><td>-9.18</td><td>38.22</td><td>27.30</td><td>7.71</td><td>30.33</td><td>9.92</td><td>200</td><td>72 AVERAGE</td> </tr> </tbody> </table>	Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	MHz	dBm	dBm	dB	dBm	dB	dB	dB	cm	deg	1	2389.69	44.82	54.00	-9.18	38.22	27.30	7.71	30.33	9.92	200	72 AVERAGE	 <p>Site : 03CH16-HY Condition: AVG_54_3m 91200-1522_240328 VERTICAL : RBW:1000.000kHz VBN:0.240kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Freq</th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th> </tr> <tr> <th>MHz</th><th>dBm</th><th>dBm</th><th>dB</th><th>dBm</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td><td>2440.00</td><td>111.71</td><td>-----</td><td>-----</td><td>96.71</td><td>27.60</td><td>7.79</td><td>30.31</td><td>9.92</td><td>200</td><td>72 AVERAGE</td> </tr> </tbody> </table>	Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	MHz	dBm	dBm	dB	dBm	dB	dB	dB	cm	deg	1	2440.00	111.71	-----	-----	96.71	27.60	7.79	30.31	9.92	200	72 AVERAGE	
Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																									
MHz	dBm	dBm	dB	dBm	dB	dB	dB	cm	deg																																																									
1	2389.69	44.82	54.00	-9.18	38.22	27.30	7.71	30.33	9.92	200	72 AVERAGE																																																							
Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																									
MHz	dBm	dBm	dB	dBm	dB	dB	dB	cm	deg																																																									
1	2440.00	111.71	-----	-----	96.71	27.60	7.79	30.31	9.92	200	72 AVERAGE																																																							
TEL : 886-3-327-0868	Page Number																																																																	
	: C10 of C23																																																																	
FAX : 886-3-327-0855																																																																		



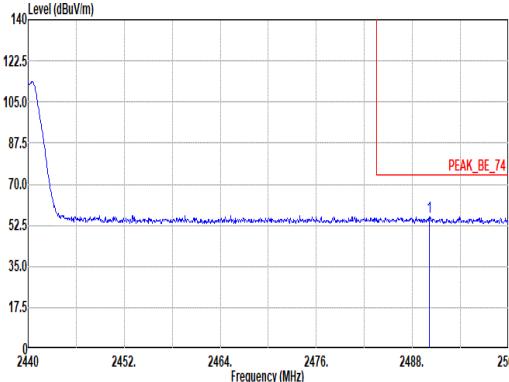
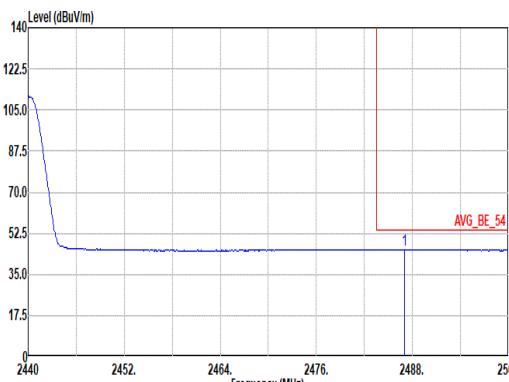


		2																																																		
Mode		Band Edge - R																																																		
		2400-2483.5_Thread_250k_CH18_2440MHz																																																		
ANT		3																																																		
Pol.	Vertical	Fundamental																																																		
Peak	 <p>Site : 03CH16-HY Condition: PEAK_BE_74 3m 91280-1522_240328 VERTICAL : RBW:1000.000kHz VBN:3000.000kHz SHT:Auto</p> <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2490.18</td><td>56.16</td><td>74.00</td><td>-17.84</td><td>40.96</td><td>27.70</td><td>7.87</td><td>30.29</td><td>9.92</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>200</td><td>72 PEAK</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2490.18	56.16	74.00	-17.84	40.96	27.70	7.87	30.29	9.92									200	72 PEAK	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																											
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																											
1	2490.18	56.16	74.00	-17.84	40.96	27.70	7.87	30.29	9.92																																											
								200	72 PEAK																																											
Avg	 <p>Site : 03CH16-HY Condition: AVG_BE_54 3m 91280-1522_240328 VERTICAL : RBW:1000.000kHz VBN:0.240kHz SHT:Auto</p> <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2486.98</td><td>45.47</td><td>54.00</td><td>-8.53</td><td>30.28</td><td>27.70</td><td>7.86</td><td>30.29</td><td>9.92</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>200</td><td>72 AVERAGE</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2486.98	45.47	54.00	-8.53	30.28	27.70	7.86	30.29	9.92									200	72 AVERAGE	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																											
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																											
1	2486.98	45.47	54.00	-8.53	30.28	27.70	7.86	30.29	9.92																																											
								200	72 AVERAGE																																											









Mode	2																																																																																	
	Harmonic																																																																																	
	2400-2483.5_Thread_250k_CH18_2440MHz																																																																																	
ANT	3																																																																																	
Pol.	Horizontal	Vertical																																																																																
Peak																																																																																		
Avg	<p>Site : 03CH16-HY Condition: PEAK_74 3m 91280-1522_240328 HORIZONTAL</p> <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr></thead><tbody><tr><td>1</td><td>4810.00</td><td>39.66</td><td>74.00</td><td>-34.34</td><td>62.20</td><td>32.34</td><td>11.04</td><td>66.40</td><td>0.48</td></tr><tr><td>2</td><td>7215.00</td><td>44.66</td><td>74.00</td><td>-29.34</td><td>59.98</td><td>36.86</td><td>13.22</td><td>65.75</td><td>0.35</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor			1	4810.00	39.66	74.00	-34.34	62.20	32.34	11.04	66.40	0.48	2	7215.00	44.66	74.00	-29.34	59.98	36.86	13.22	65.75	0.35	<p>Site : 03CH16-HY Condition: PEAK_74 3m 91280-1522_240328 VERTICAL</p> <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr></thead><tbody><tr><td>1</td><td>4810.00</td><td>39.55</td><td>74.00</td><td>-34.45</td><td>62.09</td><td>32.34</td><td>11.04</td><td>66.40</td><td>0.48</td></tr><tr><td>2</td><td>7215.00</td><td>45.23</td><td>74.00</td><td>-28.77</td><td>60.55</td><td>36.86</td><td>13.22</td><td>65.75</td><td>0.35</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor			1	4810.00	39.55	74.00	-34.45	62.09	32.34	11.04	66.40	0.48	2	7215.00	45.23	74.00	-28.77	60.55	36.86	13.22	65.75	0.35
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																									
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																											
1	4810.00	39.66	74.00	-34.34	62.20	32.34	11.04	66.40	0.48																																																																									
2	7215.00	44.66	74.00	-29.34	59.98	36.86	13.22	65.75	0.35																																																																									
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																									
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																											
1	4810.00	39.55	74.00	-34.45	62.09	32.34	11.04	66.40	0.48																																																																									
2	7215.00	45.23	74.00	-28.77	60.55	36.86	13.22	65.75	0.35																																																																									

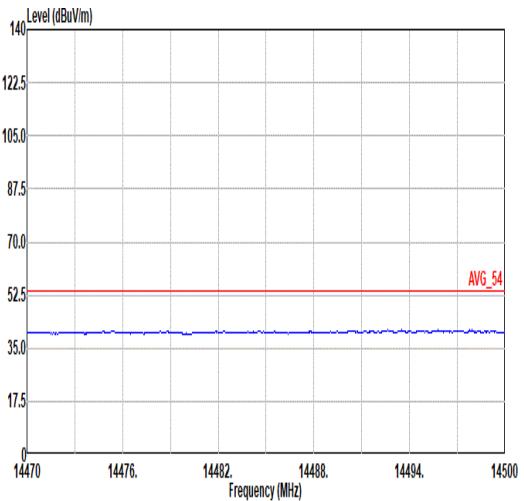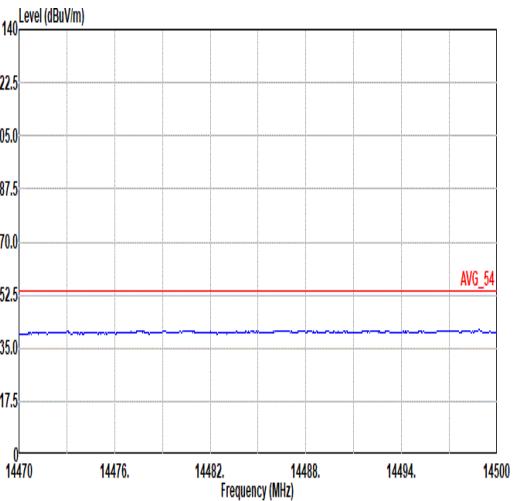
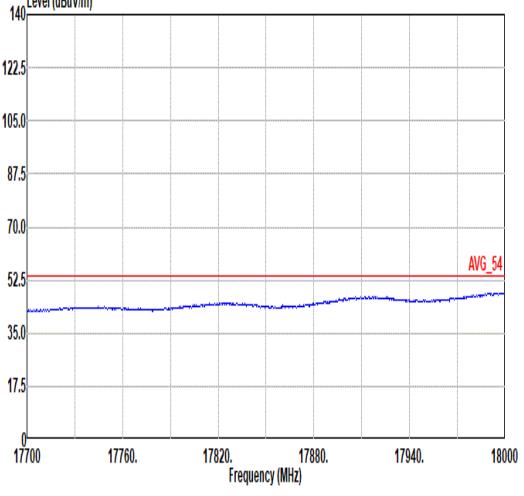
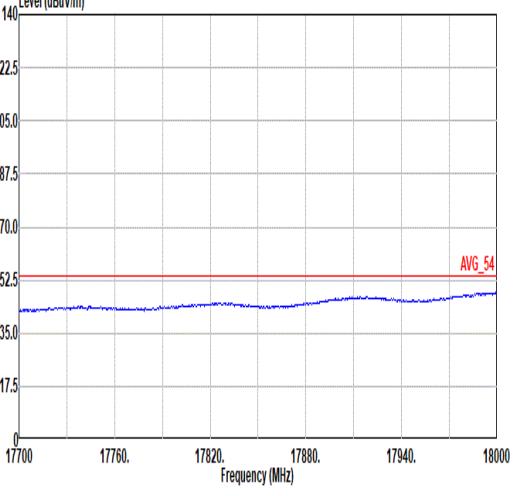


		2
Mode		Harmonic
2400-2483.5_Thread_250k_CH18_2440MHz		
ANT		3
Pol.	Horizontal	Vertical
14.47G		
~14.5G		
Avg	<p>Site : 03CH16-HY Condition: AVG_54 3m 91200-1522_248328 HORIZONTAL</p>	<p>Site : 03CH16-HY Condition: AVG_54 3m 91200-1522_248328 VERTICAL</p>
17.7G		
~18G		
Avg	<p>Site : 03CH16-HY Condition: AVG_54 3m 91200-1522_248328 HORIZONTAL</p>	<p>Site : 03CH16-HY Condition: AVG_54 3m 91200-1522_248328 VERTICAL</p>

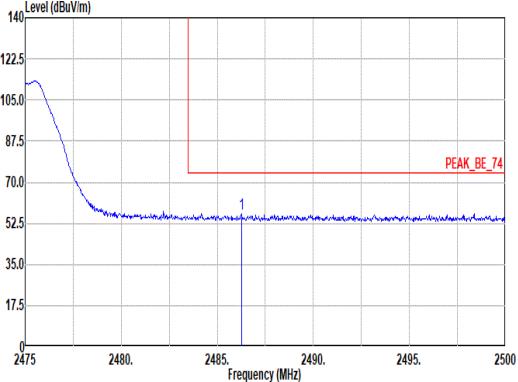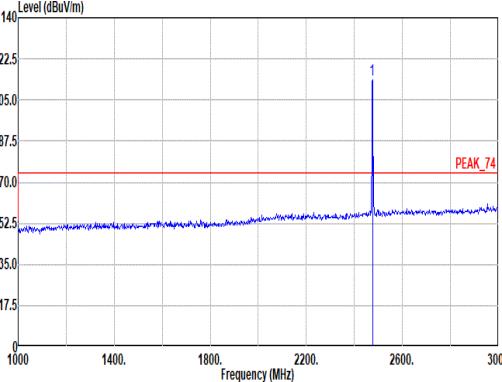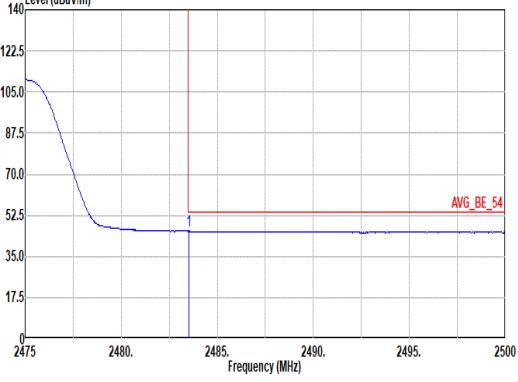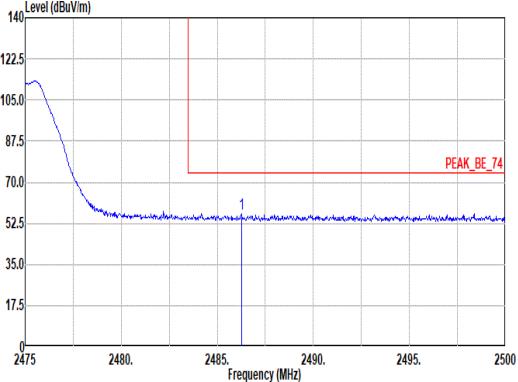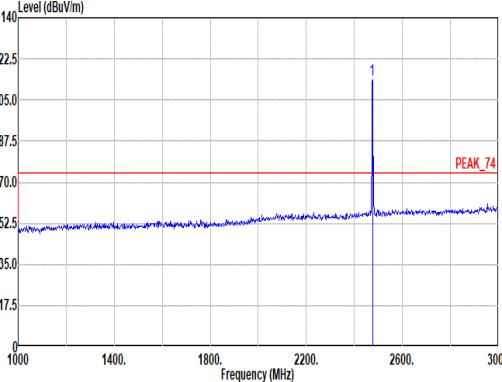
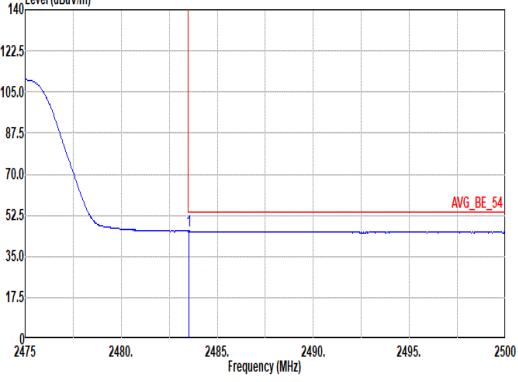


Mode	3																																																																																																					
	Band Edge																																																																																																					
	2400-2483.5_Thread_250k_CH25_2475MHz																																																																																																					
ANT	3																																																																																																					
Pol.	Horizontal	Fundamental																																																																																																				
Peak	 <p>Site : 03CH16-HY Condition: PEAK_BE_74 3m 91200-1522_240328 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Freq</th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th> </tr> <tr> <th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td><td>2486.25</td><td>56.45</td><td>74.00</td><td>-17.55</td><td>41.27</td><td>27.70</td><td>7.86</td><td>30.30</td><td>9.92</td> </tr> <tr> <td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>342</td> </tr> <tr> <td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>338 PEAK</td> </tr> </tbody> </table>	Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2486.25	56.45	74.00	-17.55	41.27	27.70	7.86	30.30	9.92										342										338 PEAK	 <p>Site : 03CH16-HY Condition: PEAK_74 3m 91200-1522_240328 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Freq</th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th> </tr> <tr> <th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td><td>2475.00</td><td>113.34</td><td>-----</td><td>-----</td><td>98.21</td><td>27.66</td><td>7.85</td><td>30.30</td><td>9.92</td> </tr> <tr> <td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>342</td> </tr> <tr> <td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>338 PEAK</td> </tr> </tbody> </table>	Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2475.00	113.34	-----	-----	98.21	27.66	7.85	30.30	9.92										342										338 PEAK
Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																													
1	2486.25	56.45	74.00	-17.55	41.27	27.70	7.86	30.30	9.92																																																																																													
									342																																																																																													
									338 PEAK																																																																																													
Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																													
1	2475.00	113.34	-----	-----	98.21	27.66	7.85	30.30	9.92																																																																																													
									342																																																																																													
									338 PEAK																																																																																													
 <p>Site : 03CH16-HY Condition: AVG_BE_54 3m 91200-1522_240328 HORIZONTAL : RBW:1000.000kHz VBW:0.240kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Freq</th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th> </tr> <tr> <th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td><td>2483.53</td><td>45.74</td><td>54.00</td><td>-8.26</td><td>38.56</td><td>27.70</td><td>7.86</td><td>30.30</td><td>9.92</td> </tr> <tr> <td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>342</td> </tr> <tr> <td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>338 AVERAGE</td> </tr> </tbody> </table>	Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.53	45.74	54.00	-8.26	38.56	27.70	7.86	30.30	9.92										342										338 AVERAGE	 <p>Site : 03CH16-HY Condition: AVG_54 3m 91200-1522_240328 HORIZONTAL : RBW:1000.000kHz VBW:0.240kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Freq</th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th> </tr> <tr> <th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td><td>2475.00</td><td>111.33</td><td>-----</td><td>-----</td><td>96.20</td><td>27.66</td><td>7.85</td><td>30.30</td><td>9.92</td> </tr> <tr> <td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>342</td> </tr> <tr> <td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>338 AVERAGE</td> </tr> </tbody> </table>	Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2475.00	111.33	-----	-----	96.20	27.66	7.85	30.30	9.92										342										338 AVERAGE	
Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																													
1	2483.53	45.74	54.00	-8.26	38.56	27.70	7.86	30.30	9.92																																																																																													
									342																																																																																													
									338 AVERAGE																																																																																													
Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																													
1	2475.00	111.33	-----	-----	96.20	27.66	7.85	30.30	9.92																																																																																													
									342																																																																																													
									338 AVERAGE																																																																																													
Mode	3																																																																																																					
	Band Edge																																																																																																					
2400-2483.5_Thread_250k_CH25_2475MHz																																																																																																						
ANT	3																																																																																																					
Pol.	Horizontal	Fundamental																																																																																																				
Peak	 <p>Site : 03CH16-HY Condition: PEAK_BE_74 3m 91200-1522_240328 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Freq</th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th> </tr> <tr> <th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td><td>2486.25</td><td>56.45</td><td>74.00</td><td>-17.55</td><td>41.27</td><td>27.70</td><td>7.86</td><td>30.30</td><td>9.92</td> </tr> <tr> <td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>342</td> </tr> <tr> <td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>338 PEAK</td> </tr> </tbody> </table>	Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2486.25	56.45	74.00	-17.55	41.27	27.70	7.86	30.30	9.92										342										338 PEAK	 <p>Site : 03CH16-HY Condition: PEAK_74 3m 91200-1522_240328 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Freq</th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th> </tr> <tr> <th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td><td>2475.00</td><td>113.34</td><td>-----</td><td>-----</td><td>98.21</td><td>27.66</td><td>7.85</td><td>30.30</td><td>9.92</td> </tr> <tr> <td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>342</td> </tr> <tr> <td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>338 PEAK</td> </tr> </tbody> </table>	Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2475.00	113.34	-----	-----	98.21	27.66	7.85	30.30	9.92										342										338 PEAK
Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																													
1	2486.25	56.45	74.00	-17.55	41.27	27.70	7.86	30.30	9.92																																																																																													
									342																																																																																													
									338 PEAK																																																																																													
Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																													
1	2475.00	113.34	-----	-----	98.21	27.66	7.85	30.30	9.92																																																																																													
									342																																																																																													
									338 PEAK																																																																																													
 <p>Site : 03CH16-HY Condition: AVG_BE_54 3m 91200-1522_240328 HORIZONTAL : RBW:1000.000kHz VBW:0.240kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Freq</th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th> </tr> <tr> <th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td><td>2483.53</td><td>45.74</td><td>54.00</td><td>-8.26</td><td>38.56</td><td>27.70</td><td>7.86</td><td>30.30</td><td>9.92</td> </tr> <tr> <td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>342</td> </tr> <tr> <td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>338 AVERAGE</td> </tr> </tbody> </table>	Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.53	45.74	54.00	-8.26	38.56	27.70	7.86	30.30	9.92										342										338 AVERAGE	 <p>Site : 03CH16-HY Condition: AVG_54 3m 91200-1522_240328 HORIZONTAL : RBW:1000.000kHz VBW:0.240kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Freq</th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th> </tr> <tr> <th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td><td>2475.00</td><td>111.33</td><td>-----</td><td>-----</td><td>96.20</td><td>27.66</td><td>7.85</td><td>30.30</td><td>9.92</td> </tr> <tr> <td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>342</td> </tr> <tr> <td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>338 AVERAGE</td> </tr> </tbody> </table>	Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2475.00	111.33	-----	-----	96.20	27.66	7.85	30.30	9.92										342										338 AVERAGE	
Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																													
1	2483.53	45.74	54.00	-8.26	38.56	27.70	7.86	30.30	9.92																																																																																													
									342																																																																																													
									338 AVERAGE																																																																																													
Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																													
1	2475.00	111.33	-----	-----	96.20	27.66	7.85	30.30	9.92																																																																																													
									342																																																																																													
									338 AVERAGE																																																																																													

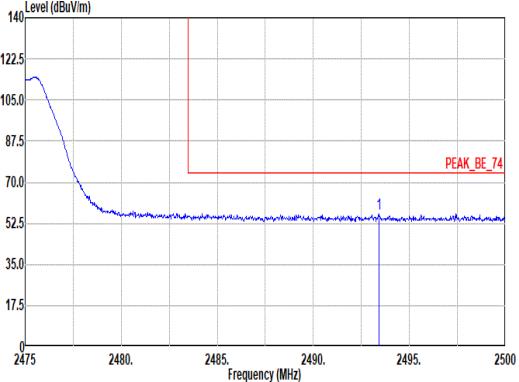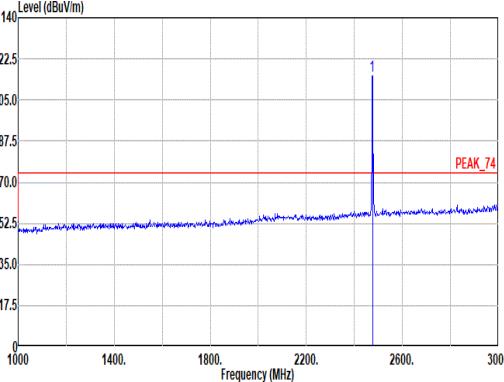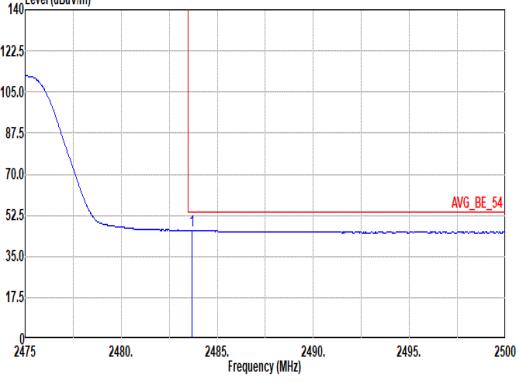

Mode	3																																																																																																					
	Band Edge																																																																																																					
	2400-2483.5_Thread_250k_CH25_2475MHz																																																																																																					
ANT	3																																																																																																					
Pol.	Vertical	Fundamental																																																																																																				
Peak	 <p>Site : 03CH16-HY Condition: PEAK_BE_74 3m 91200-1522_240328 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Freq</th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th> </tr> <tr> <th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td><td>2493.43</td><td>56.64</td><td>74.00</td><td>-17.36</td><td>41.44</td><td>27.70</td><td>7.87</td><td>30.29</td><td>9.92</td> </tr> <tr> <td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>284</td> </tr> <tr> <td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>70 PEAK</td> </tr> </tbody> </table>	Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2493.43	56.64	74.00	-17.36	41.44	27.70	7.87	30.29	9.92										284										70 PEAK	 <p>Site : 03CH16-HY Condition: PEAK_74 3m 91200-1522_240328 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Freq</th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th> </tr> <tr> <th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td><td>2475.00</td><td>114.99</td><td>-----</td><td>-----</td><td>99.86</td><td>27.66</td><td>7.85</td><td>30.30</td><td>9.92</td> </tr> <tr> <td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>284</td> </tr> <tr> <td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>70 PEAK</td> </tr> </tbody> </table>	Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2475.00	114.99	-----	-----	99.86	27.66	7.85	30.30	9.92										284										70 PEAK
Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																													
1	2493.43	56.64	74.00	-17.36	41.44	27.70	7.87	30.29	9.92																																																																																													
									284																																																																																													
									70 PEAK																																																																																													
Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																													
1	2475.00	114.99	-----	-----	99.86	27.66	7.85	30.30	9.92																																																																																													
									284																																																																																													
									70 PEAK																																																																																													
 <p>Site : 03CH16-HY Condition: AVG_BE_54 3m 91200-1522_240328 VERTICAL : RBW:1000.000kHz VBW:0.240kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Freq</th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th> </tr> <tr> <th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td><td>2483.70</td><td>46.06</td><td>54.00</td><td>-7.94</td><td>38.88</td><td>27.70</td><td>7.86</td><td>30.30</td><td>9.92</td> </tr> <tr> <td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>284</td> </tr> <tr> <td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>70 AVERAGE</td> </tr> </tbody> </table>	Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.70	46.06	54.00	-7.94	38.88	27.70	7.86	30.30	9.92										284										70 AVERAGE	 <p>Site : 03CH16-HY Condition: AVG_54 3m 91200-1522_240328 VERTICAL : RBW:1000.000kHz VBW:0.240kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Freq</th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th> </tr> <tr> <th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td><td>2475.00</td><td>113.01</td><td>-----</td><td>-----</td><td>97.88</td><td>27.66</td><td>7.85</td><td>30.30</td><td>9.92</td> </tr> <tr> <td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>284</td> </tr> <tr> <td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>70 AVERAGE</td> </tr> </tbody> </table>	Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2475.00	113.01	-----	-----	97.88	27.66	7.85	30.30	9.92										284										70 AVERAGE	
Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																													
1	2483.70	46.06	54.00	-7.94	38.88	27.70	7.86	30.30	9.92																																																																																													
									284																																																																																													
									70 AVERAGE																																																																																													
Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																													
1	2475.00	113.01	-----	-----	97.88	27.66	7.85	30.30	9.92																																																																																													
									284																																																																																													
									70 AVERAGE																																																																																													
TEL : 886-3-327-0868	Page Number																																																																																																					
	: C15 of C23																																																																																																					
FAX : 886-3-327-0855																																																																																																						


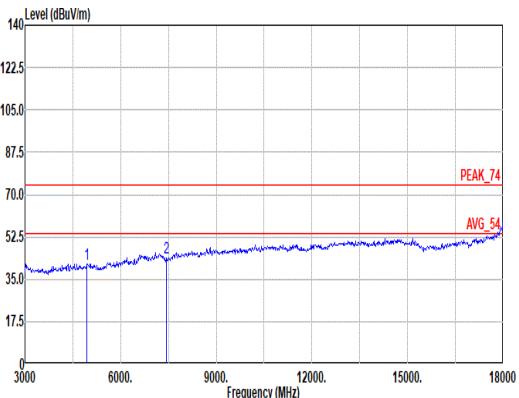
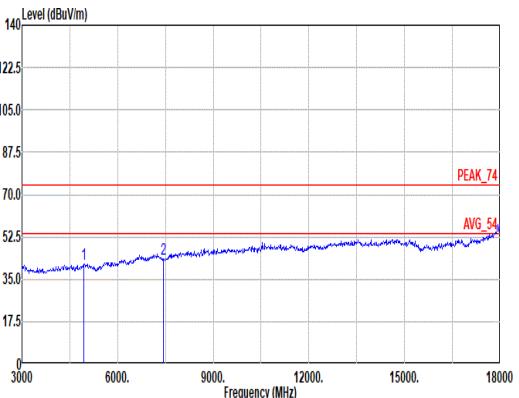


Mode	3																																																																																
	Harmonic																																																																																
	2400-2483.5_Thread_250k_CH25_2475MHz																																																																																
ANT	3																																																																																
Pol.	Horizontal	Vertical																																																																															
Peak																																																																																	
	<p>Site : 03CH16-HY Condition: PEAK_74 3m 91280-1522_240328 HORIZONTAL</p> <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr></thead><tbody><tr><td>1</td><td>4950.00</td><td>41.28</td><td>74.00</td><td>-32.72</td><td>62.97</td><td>33.00</td><td>11.06</td><td>66.28</td><td>0.53</td></tr><tr><td>2</td><td>7425.00</td><td>43.87</td><td>74.00</td><td>-30.13</td><td>59.41</td><td>36.35</td><td>13.37</td><td>65.76</td><td>0.50</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor			1	4950.00	41.28	74.00	-32.72	62.97	33.00	11.06	66.28	0.53	2	7425.00	43.87	74.00	-30.13	59.41	36.35	13.37	65.76	0.50	<p>Site : 03CH16-HY Condition: PEAK_74 3m 91280-1522_240328 VERTICAL</p> <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr></thead><tbody><tr><td>1</td><td>4950.00</td><td>41.15</td><td>74.00</td><td>-32.85</td><td>62.84</td><td>33.00</td><td>11.06</td><td>66.28</td><td>0.53</td></tr><tr><td>2</td><td>7425.00</td><td>43.45</td><td>74.00</td><td>-30.55</td><td>58.99</td><td>36.35</td><td>13.37</td><td>65.76</td><td>0.50</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor			1	4950.00	41.15	74.00	-32.85	62.84	33.00	11.06	66.28	0.53	2	7425.00	43.45	74.00	-30.55	58.99	36.35	13.37	65.76
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																								
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																										
1	4950.00	41.28	74.00	-32.72	62.97	33.00	11.06	66.28	0.53																																																																								
2	7425.00	43.87	74.00	-30.13	59.41	36.35	13.37	65.76	0.50																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																								
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																										
1	4950.00	41.15	74.00	-32.85	62.84	33.00	11.06	66.28	0.53																																																																								
2	7425.00	43.45	74.00	-30.55	58.99	36.35	13.37	65.76	0.50																																																																								







		3
Mode		Harmonic
		2400-2483.5_Thread_250k_CH25_2475MHz
ANT		3
Pol.	Horizontal	Vertical
14.47G		
~14.5G		
Avg	<p>Site : 03CH16-HY Condition: AVG_54 3m 91200-1522_248328 HORIZONTAL</p>	<p>Site : 03CH16-HY Condition: AVG_54 3m 91200-1522_248328 VERTICAL</p>
17.7G		
~18G		
Avg	<p>Site : 03CH16-HY Condition: AVG_54 3m 91200-1522_248328 HORIZONTAL</p>	<p>Site : 03CH16-HY Condition: AVG_54 3m 91200-1522_248328 VERTICAL</p>

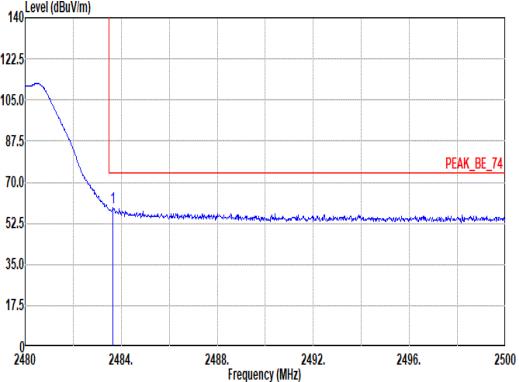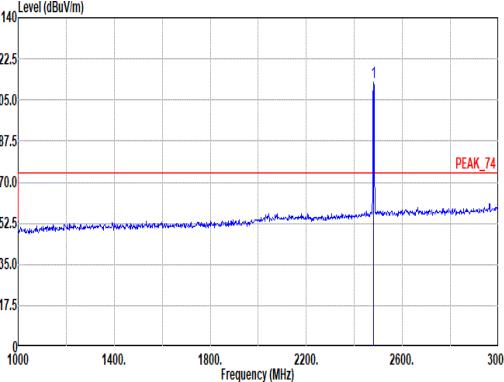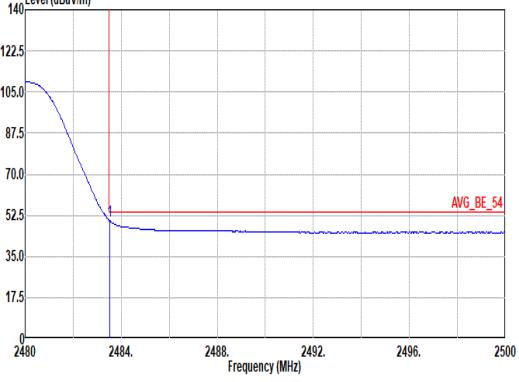

Mode	4																																																																																																					
	Band Edge																																																																																																					
	2400-2483.5_Thread_250k_CH26_2480MHz																																																																																																					
ANT	3																																																																																																					
Pol.	Horizontal	Fundamental																																																																																																				
Peak	 <p>Site : 03CH16-HY Condition: PEAK_BE_74 3m 91200-1522_240328 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2483.66</td><td>59.04</td><td>74.00</td><td>-14.96</td><td>43.86</td><td>27.70</td><td>7.86</td><td>30.30</td><td>9.92</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>343 339 PEAK</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.66	59.04	74.00	-14.96	43.86	27.70	7.86	30.30	9.92										343 339 PEAK	 <p>Site : 03CH16-HY Condition: PEAK_74 3m 91200-1522_240328 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2480.00</td><td>112.48</td><td>-----</td><td>-----</td><td>97.31</td><td>27.70</td><td>7.85</td><td>30.30</td><td>9.92</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>343 339 PEAK</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	112.48	-----	-----	97.31	27.70	7.85	30.30	9.92										343 339 PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																													
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																													
1	2483.66	59.04	74.00	-14.96	43.86	27.70	7.86	30.30	9.92																																																																																													
									343 339 PEAK																																																																																													
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																													
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																													
1	2480.00	112.48	-----	-----	97.31	27.70	7.85	30.30	9.92																																																																																													
									343 339 PEAK																																																																																													
 <p>Site : 03CH16-HY Condition: AVG_BE_54 3m 91200-1522_240328 HORIZONTAL : RBW:1000.000kHz VBW:0.240kHz SWT:Auto</p> <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2483.52</td><td>50.25</td><td>54.00</td><td>-3.75</td><td>35.07</td><td>27.70</td><td>7.86</td><td>30.30</td><td>9.92</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>343 339 AVERAGE</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.52	50.25	54.00	-3.75	35.07	27.70	7.86	30.30	9.92										343 339 AVERAGE	 <p>Site : 03CH16-HY Condition: AVG_54 3m 91200-1522_240328 HORIZONTAL : RBW:1000.000kHz VBW:0.240kHz SWT:Auto</p> <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2480.00</td><td>110.42</td><td>-----</td><td>-----</td><td>95.25</td><td>27.70</td><td>7.85</td><td>30.30</td><td>9.92</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>343 339 AVERAGE</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	110.42	-----	-----	95.25	27.70	7.85	30.30	9.92										343 339 AVERAGE	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																													
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																													
1	2483.52	50.25	54.00	-3.75	35.07	27.70	7.86	30.30	9.92																																																																																													
									343 339 AVERAGE																																																																																													
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																													
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																													
1	2480.00	110.42	-----	-----	95.25	27.70	7.85	30.30	9.92																																																																																													
									343 339 AVERAGE																																																																																													

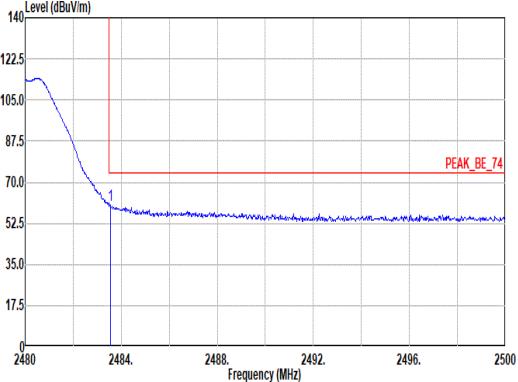
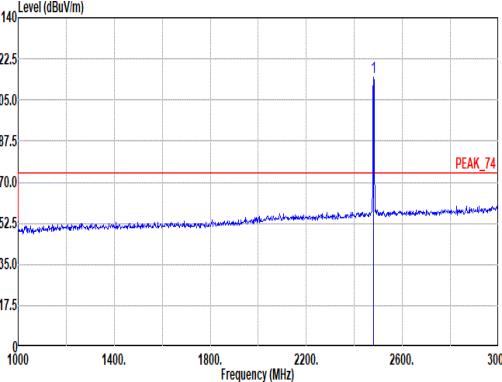
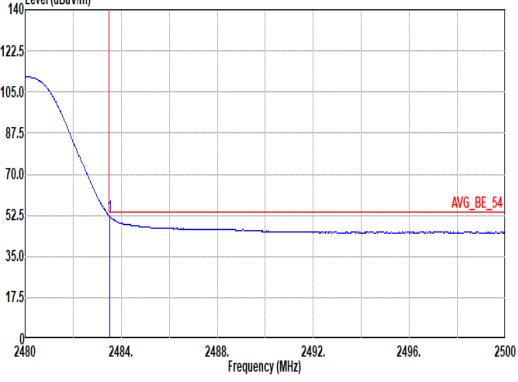
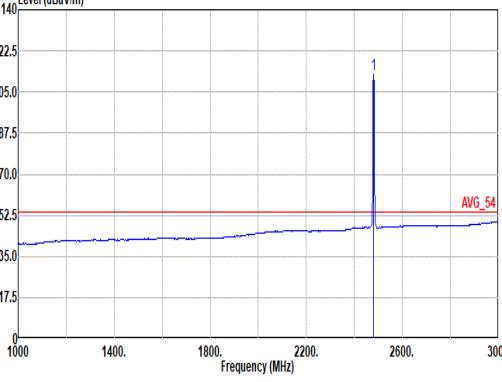


Mode	4																																																													
	Band Edge																																																													
	2400-2483.5_Thread_250k_CH26_2480MHz																																																													
ANT	3																																																													
Pol.	Vertical	Fundamental																																																												
Peak	 <p>Site : 03CH16-HY Condition: PEAK_BE_74 3m 91200-1522_240328 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Freq</th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th> </tr> <tr> <th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td><td>2483.54</td><td>60.41</td><td>74.00</td><td>-13.59</td><td>45.23</td><td>27.70</td><td>7.86</td><td>30.30</td><td>9.92 209 70 PEAK</td> </tr> </tbody> </table>	Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.54	60.41	74.00	-13.59	45.23	27.70	7.86	30.30	9.92 209 70 PEAK	 <p>Site : 03CH16-HY Condition: PEAK_74 3m 91200-1522_240328 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Freq</th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th> </tr> <tr> <th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td><td>2480.00</td><td>114.61</td><td>-----</td><td>-----</td><td>99.44</td><td>27.70</td><td>7.85</td><td>30.30</td><td>9.92 209 70 PEAK</td> </tr> </tbody> </table>	Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	114.61	-----	-----	99.44	27.70	7.85	30.30	9.92 209 70 PEAK
Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																					
1	2483.54	60.41	74.00	-13.59	45.23	27.70	7.86	30.30	9.92 209 70 PEAK																																																					
Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																					
1	2480.00	114.61	-----	-----	99.44	27.70	7.85	30.30	9.92 209 70 PEAK																																																					
 <p>Site : 03CH16-HY Condition: AVG_BE_54 3m 91200-1522_240328 VERTICAL : RBW:1000.000kHz VBW:0.240kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Freq</th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th> </tr> <tr> <th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td><td>2483.52</td><td>52.05</td><td>54.00</td><td>-1.95</td><td>36.87</td><td>27.70</td><td>7.86</td><td>30.30</td><td>9.92 209 70 AVERAGE</td> </tr> </tbody> </table>	Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.52	52.05	54.00	-1.95	36.87	27.70	7.86	30.30	9.92 209 70 AVERAGE	 <p>Site : 03CH16-HY Condition: AVG_54 3m 91200-1522_240328 VERTICAL : RBW:1000.000kHz VBW:0.240kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Freq</th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th> </tr> <tr> <th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td><td>2480.00</td><td>112.57</td><td>-----</td><td>-----</td><td>97.40</td><td>27.70</td><td>7.85</td><td>30.30</td><td>9.92 209 70 AVERAGE</td> </tr> </tbody> </table>	Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	112.57	-----	-----	97.40	27.70	7.85	30.30	9.92 209 70 AVERAGE	
Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																					
1	2483.52	52.05	54.00	-1.95	36.87	27.70	7.86	30.30	9.92 209 70 AVERAGE																																																					
Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																					
1	2480.00	112.57	-----	-----	97.40	27.70	7.85	30.30	9.92 209 70 AVERAGE																																																					




Mode	4																																																																																										
	Harmonic																																																																																										
	2400-2483.5_Thread_250k_CH26_2480MHz																																																																																										
ANT	3																																																																																										
Pol.	Horizontal	Vertical																																																																																									
Peak																																																																																											
	<p>Site : 03CH16-HY Condition: PEAK_74 3m 91280-1522_240328 HORIZONTAL</p> <table><thead><tr><th>Freq</th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>4960.00</td><td>41.02</td><td>74.00</td><td>-32.98</td><td>62.68</td><td>33.02</td><td>11.06</td><td>66.27</td><td>0.53</td><td>--</td><td>-- PEAK</td></tr><tr><td>2</td><td>7440.00</td><td>43.89</td><td>74.00</td><td>-30.11</td><td>59.45</td><td>36.32</td><td>13.38</td><td>65.77</td><td>0.51</td><td>--</td><td>-- PEAK</td></tr></tbody></table>	Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4960.00	41.02	74.00	-32.98	62.68	33.02	11.06	66.27	0.53	--	-- PEAK	2	7440.00	43.89	74.00	-30.11	59.45	36.32	13.38	65.77	0.51	--	-- PEAK	<p>Site : 03CH16-HY Condition: PEAK_74 3m 91280-1522_240328 VERTICAL</p> <table><thead><tr><th>Freq</th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>4960.00</td><td>41.99</td><td>74.00</td><td>-32.81</td><td>63.65</td><td>33.02</td><td>11.06</td><td>66.27</td><td>0.53</td><td>--</td><td>-- PEAK</td></tr><tr><td>2</td><td>7440.00</td><td>43.57</td><td>74.00</td><td>-30.43</td><td>59.13</td><td>36.32</td><td>13.38</td><td>65.77</td><td>0.51</td><td>--</td><td>-- PEAK</td></tr></tbody></table>	Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4960.00	41.99	74.00	-32.81	63.65	33.02	11.06	66.27	0.53	--	-- PEAK	2	7440.00	43.57	74.00	-30.43	59.13	36.32	13.38	65.77	0.51	--
Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																	
1	4960.00	41.02	74.00	-32.98	62.68	33.02	11.06	66.27	0.53	--	-- PEAK																																																																																
2	7440.00	43.89	74.00	-30.11	59.45	36.32	13.38	65.77	0.51	--	-- PEAK																																																																																
Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																	
1	4960.00	41.99	74.00	-32.81	63.65	33.02	11.06	66.27	0.53	--	-- PEAK																																																																																
2	7440.00	43.57	74.00	-30.43	59.13	36.32	13.38	65.77	0.51	--	-- PEAK																																																																																

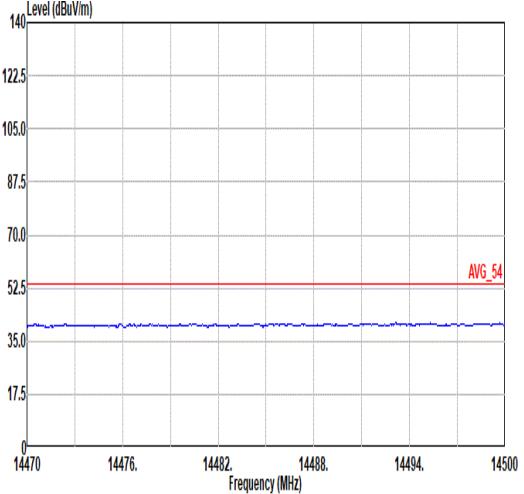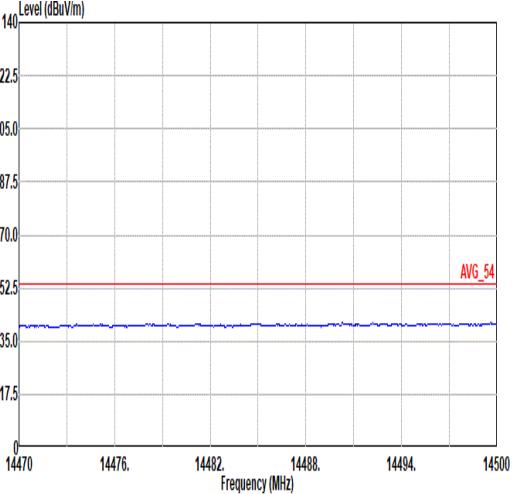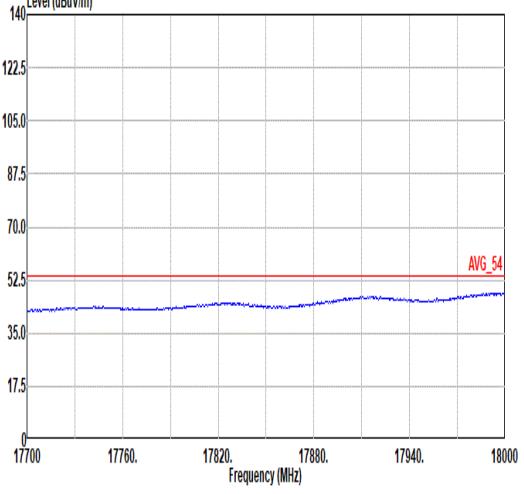
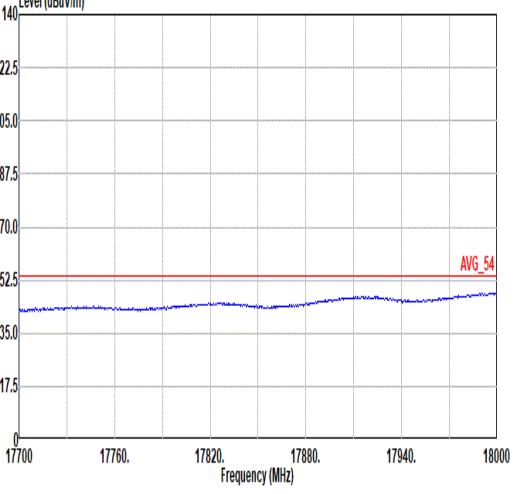


		4
Mode		Harmonic
		2400-2483.5_Thread_250k_CH26_2480MHz
ANT		3
Pol.	Horizontal	Vertical
14.47G		
~14.5G		
Avg	<p>Site : 03CH16-HY Condition: AVG_54 3m 91200-1522_248328 HORIZONTAL</p>	<p>Site : 03CH16-HY Condition: AVG_54 3m 91200-1522_248328 VERTICAL</p>
17.7G		
~18G		
Avg	<p>Site : 03CH16-HY Condition: AVG_54 3m 91200-1522_248328 HORIZONTAL</p>	<p>Site : 03CH16-HY Condition: AVG_54 3m 91200-1522_248328 VERTICAL</p>

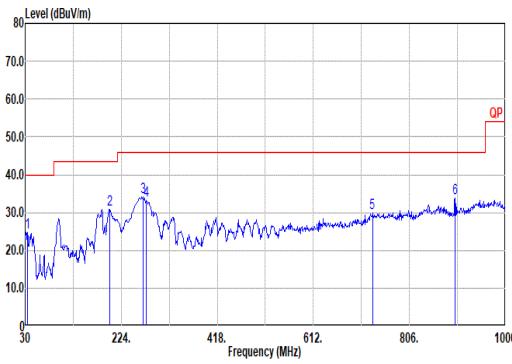

Mode	5																																																																																																																																																																	
	LF																																																																																																																																																																	
	2400-2483.5_Thread_250k_CH26_2480MHz																																																																																																																																																																	
ANT	3																																																																																																																																																																	
Pol.	Horizontal 																																																																																																																																																																	
QP/ Peak	Site : 03CH16-HY Condition: QP 3m CRI6111D&00002NID01N-06_47020 & 06_241005 HORIZONTAL <table border="1"> <thead> <tr> <th>Freq</th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th> </tr> <tr> <th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th> </tr> </thead> <tbody> <tr><td>1</td><td>34.85</td><td>24.77</td><td>40.00</td><td>-15.23</td><td>34.01</td><td>22.35</td><td>0.93</td><td>32.57</td><td>0.05</td></tr> <tr><td>2</td><td>200.72</td><td>30.83</td><td>43.50</td><td>-12.67</td><td>46.01</td><td>15.15</td><td>2.20</td><td>32.00</td><td>0.07</td></tr> <tr><td>3</td><td>268.62</td><td>34.17</td><td>46.00</td><td>-11.83</td><td>44.57</td><td>19.31</td><td>2.54</td><td>32.32</td><td>0.07</td></tr> <tr><td>4</td><td>274.44</td><td>33.30</td><td>46.00</td><td>-12.70</td><td>44.11</td><td>18.85</td><td>2.56</td><td>32.29</td><td>0.07</td></tr> <tr><td>5</td><td>731.31</td><td>29.76</td><td>46.00</td><td>-16.24</td><td>29.56</td><td>27.97</td><td>4.20</td><td>32.11</td><td>0.14</td></tr> <tr><td>6</td><td>898.15</td><td>33.91</td><td>46.00</td><td>-12.09</td><td>32.16</td><td>29.19</td><td>4.67</td><td>32.27</td><td>0.16</td></tr> </tbody> </table> Site : 03CH16-HY Condition: QP 3m CRI6111D&00002NID01N-06_47020 & 06_241005 VERTICAL <table border="1"> <thead> <tr> <th>Freq</th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th> </tr> <tr> <th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th> </tr> </thead> <tbody> <tr><td>1</td><td>42.61</td><td>34.25</td><td>40.00</td><td>-5.75</td><td>47.55</td><td>18.15</td><td>1.01</td><td>32.51</td><td>0.05</td></tr> <tr><td>2</td><td>182.29</td><td>32.43</td><td>43.50</td><td>-11.07</td><td>47.25</td><td>15.24</td><td>2.10</td><td>32.24</td><td>0.08</td></tr> <tr><td>3</td><td>271.53</td><td>28.79</td><td>46.00</td><td>-17.21</td><td>39.57</td><td>18.91</td><td>2.55</td><td>32.31</td><td>0.07</td></tr> <tr><td>4</td><td>426.73</td><td>29.69</td><td>46.00</td><td>-16.31</td><td>36.01</td><td>22.70</td><td>3.24</td><td>32.38</td><td>0.12</td></tr> <tr><td>5</td><td>757.50</td><td>32.78</td><td>46.00</td><td>-13.22</td><td>32.07</td><td>28.37</td><td>4.28</td><td>32.09</td><td>0.15</td></tr> <tr><td>6</td><td>897.18</td><td>34.85</td><td>46.00</td><td>-11.15</td><td>33.12</td><td>29.17</td><td>4.66</td><td>32.26</td><td>0.16</td></tr> </tbody> </table>		Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg		1	34.85	24.77	40.00	-15.23	34.01	22.35	0.93	32.57	0.05	2	200.72	30.83	43.50	-12.67	46.01	15.15	2.20	32.00	0.07	3	268.62	34.17	46.00	-11.83	44.57	19.31	2.54	32.32	0.07	4	274.44	33.30	46.00	-12.70	44.11	18.85	2.56	32.29	0.07	5	731.31	29.76	46.00	-16.24	29.56	27.97	4.20	32.11	0.14	6	898.15	33.91	46.00	-12.09	32.16	29.19	4.67	32.27	0.16	Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg		1	42.61	34.25	40.00	-5.75	47.55	18.15	1.01	32.51	0.05	2	182.29	32.43	43.50	-11.07	47.25	15.24	2.10	32.24	0.08	3	271.53	28.79	46.00	-17.21	39.57	18.91	2.55	32.31	0.07	4	426.73	29.69	46.00	-16.31	36.01	22.70	3.24	32.38	0.12	5	757.50	32.78	46.00	-13.22	32.07	28.37	4.28	32.09	0.15	6	897.18	34.85	46.00	-11.15	33.12	29.17	4.66	32.26	0.16
Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																									
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg																																																																																																																																																										
1	34.85	24.77	40.00	-15.23	34.01	22.35	0.93	32.57	0.05																																																																																																																																																									
2	200.72	30.83	43.50	-12.67	46.01	15.15	2.20	32.00	0.07																																																																																																																																																									
3	268.62	34.17	46.00	-11.83	44.57	19.31	2.54	32.32	0.07																																																																																																																																																									
4	274.44	33.30	46.00	-12.70	44.11	18.85	2.56	32.29	0.07																																																																																																																																																									
5	731.31	29.76	46.00	-16.24	29.56	27.97	4.20	32.11	0.14																																																																																																																																																									
6	898.15	33.91	46.00	-12.09	32.16	29.19	4.67	32.27	0.16																																																																																																																																																									
Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																									
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg																																																																																																																																																										
1	42.61	34.25	40.00	-5.75	47.55	18.15	1.01	32.51	0.05																																																																																																																																																									
2	182.29	32.43	43.50	-11.07	47.25	15.24	2.10	32.24	0.08																																																																																																																																																									
3	271.53	28.79	46.00	-17.21	39.57	18.91	2.55	32.31	0.07																																																																																																																																																									
4	426.73	29.69	46.00	-16.31	36.01	22.70	3.24	32.38	0.12																																																																																																																																																									
5	757.50	32.78	46.00	-13.22	32.07	28.37	4.28	32.09	0.15																																																																																																																																																									
6	897.18	34.85	46.00	-11.15	33.12	29.17	4.66	32.26	0.16																																																																																																																																																									

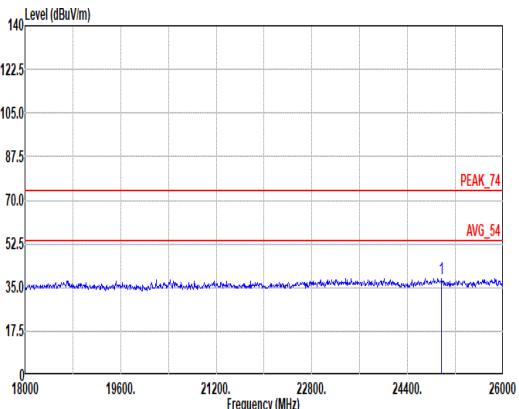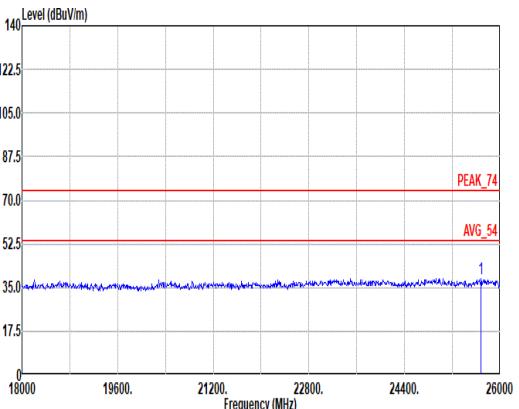


Mode	6																																																																																																				
	SHF																																																																																																				
	2400-2483.5_Thread_250k_CH26_2480MHz																																																																																																				
ANT	3																																																																																																				
Pol.	Horizontal																																																																																																				
Peak																																																																																																					
	<p>Site : Condition: PEAK_74 1m SHF_1230_241025 HORIZONTAL</p> <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Factor</th><th></th></tr></thead><tbody><tr><td>MHz</td><td>dBuV/m</td><td>dBuV/m</td><td>dB</td><td>dBuV</td><td>dB</td><td>dB</td><td>dB</td><td>cm</td><td>deg</td></tr><tr><td>1</td><td>24968.00</td><td>38.82</td><td>74.00</td><td>-35.18</td><td>55.90</td><td>39.36</td><td>6.32</td><td>53.22</td><td>-9.54</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>--</td><td>--</td><td>PEAK</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB	cm	deg	1	24968.00	38.82	74.00	-35.18	55.90	39.36	6.32	53.22	-9.54								--	--	PEAK	<p>Site : Condition: PEAK_74 1m SHF_1230_241025 VERTICAL</p> <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Factor</th><th></th></tr></thead><tbody><tr><td>MHz</td><td>dBuV/m</td><td>dBuV/m</td><td>dB</td><td>dBuV</td><td>dB</td><td>dB</td><td>dB</td><td>cm</td><td>deg</td></tr><tr><td>1</td><td>25680.00</td><td>38.68</td><td>74.00</td><td>-35.32</td><td>56.14</td><td>38.96</td><td>6.22</td><td>53.10</td><td>-9.54</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>--</td><td>--</td><td>PEAK</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB	cm	deg	1	25680.00	38.68	74.00	-35.32	56.14	38.96	6.22	53.10	-9.54								--	--
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																												
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor	Factor																																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB	cm	deg																																																																																												
1	24968.00	38.82	74.00	-35.18	55.90	39.36	6.32	53.22	-9.54																																																																																												
							--	--	PEAK																																																																																												
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																												
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor	Factor																																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB	cm	deg																																																																																												
1	25680.00	38.68	74.00	-35.32	56.14	38.96	6.22	53.10	-9.54																																																																																												
							--	--	PEAK																																																																																												



Appendix D. Duty Cycle Plots

Band	Duty Cycle(%)	T(us)	1/T(kHz)	VBW Setting
Thread - 250kbps	89.87	4260	0.23	240Hz

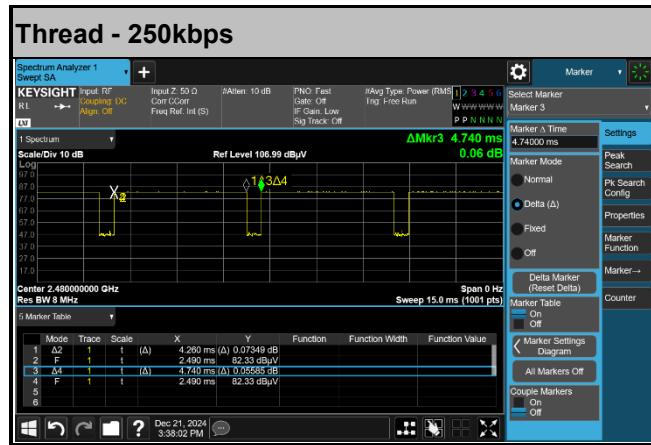

—————THE END—————