


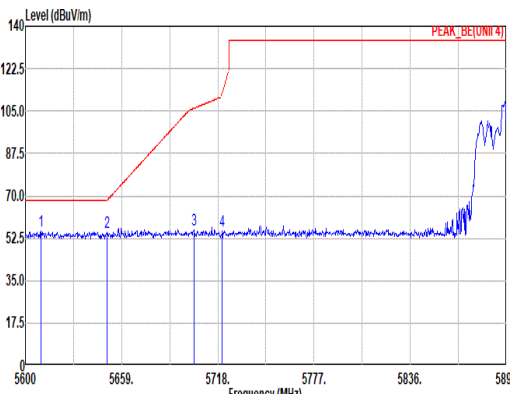
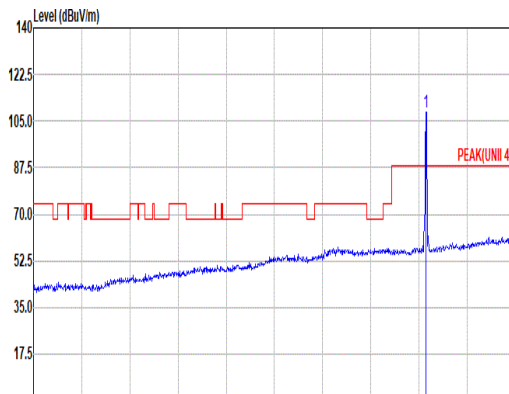




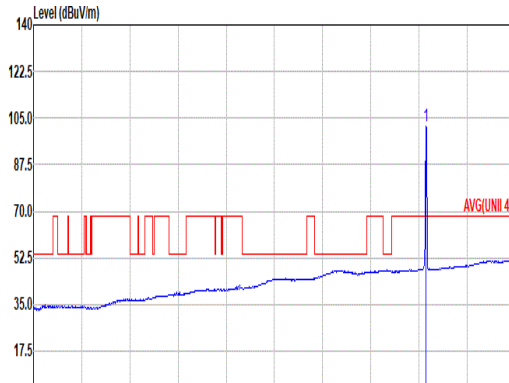


		75																																																																																																																																						
Mode	Band Edge - L																																																																																																																																							
	U-NII-4_5.85-5.895_802.11ax HE20_CH177_Partial 26/8_5885MHz																																																																																																																																							
ANT	4+3																																																																																																																																							
Pol.	Horizontal						Fundamental																																																																																																																																	
Peak																																																																																																																																								
	Site : 03CH12-HY Condition: PEAK_BE(UNII 4) 3m 91200-02114-240711 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5609.74</td><td>55.68</td><td>68.20</td><td>-12.52</td><td></td><td>44.60</td><td>33.12</td><td>11.24</td><td>33.28</td><td>0.00</td><td>153</td><td>25</td><td>PEAK</td></tr><tr><td>2</td><td>5650.15</td><td>54.83</td><td>68.31</td><td>-13.48</td><td></td><td>43.73</td><td>33.20</td><td>11.22</td><td>33.32</td><td>0.00</td><td>153</td><td>25</td><td>PEAK</td></tr><tr><td>3</td><td>5703.55</td><td>55.76</td><td>106.19</td><td>-50.43</td><td></td><td>44.32</td><td>33.61</td><td>11.20</td><td>33.37</td><td>0.00</td><td>153</td><td>25</td><td>PEAK</td></tr><tr><td>4</td><td>5720.66</td><td>55.42</td><td>112.29</td><td>-56.87</td><td></td><td>43.94</td><td>33.68</td><td>11.19</td><td>33.39</td><td>0.00</td><td>153</td><td>25</td><td>PEAK</td></tr></tbody></table>							Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB		dBuV	dB/m	dB	dB	dB	dB	cm	deg	1	5609.74	55.68	68.20	-12.52		44.60	33.12	11.24	33.28	0.00	153	25	PEAK	2	5650.15	54.83	68.31	-13.48		43.73	33.20	11.22	33.32	0.00	153	25	PEAK	3	5703.55	55.76	106.19	-50.43		44.32	33.61	11.20	33.37	0.00	153	25	PEAK	4	5720.66	55.42	112.29	-56.87		43.94	33.68	11.19	33.39	0.00	153	25	PEAK	Site : 03CH12-HY Condition: PEAK(UNII 4) 3m 91200-02114-240711 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5885.00</td><td>108.45</td><td>-----</td><td>-----</td><td></td><td>96.27</td><td>34.28</td><td>11.47</td><td>33.57</td><td>0.00</td><td>153</td><td>25</td><td>PEAK</td></tr></tbody></table>						Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB		dBuV	dB/m	dB	dB	dB	dB	cm	deg	1	5885.00	108.45	-----	-----		96.27	34.28	11.47	33.57	0.00	153	25
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																											
	MHz	dBuV/m	dBuV/m	dB		dBuV	dB/m	dB	dB	dB	dB	cm	deg																																																																																																																											
1	5609.74	55.68	68.20	-12.52		44.60	33.12	11.24	33.28	0.00	153	25	PEAK																																																																																																																											
2	5650.15	54.83	68.31	-13.48		43.73	33.20	11.22	33.32	0.00	153	25	PEAK																																																																																																																											
3	5703.55	55.76	106.19	-50.43		44.32	33.61	11.20	33.37	0.00	153	25	PEAK																																																																																																																											
4	5720.66	55.42	112.29	-56.87		43.94	33.68	11.19	33.39	0.00	153	25	PEAK																																																																																																																											
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																											
	MHz	dBuV/m	dBuV/m	dB		dBuV	dB/m	dB	dB	dB	dB	cm	deg																																																																																																																											
1	5885.00	108.45	-----	-----		96.27	34.28	11.47	33.57	0.00	153	25	PEAK																																																																																																																											
Avg.	Blank																																																																																																																																							
							Site : 03CH12-HY Condition: AVG(UNII 4) 3m 91200-02114-240711 HORIZONTAL : RBW:1000.000kHz VBW:1.000kHz SWT:Auto <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5885.00</td><td>101.87</td><td>-----</td><td>-----</td><td></td><td>89.72</td><td>34.26</td><td>11.45</td><td>33.56</td><td>0.00</td><td>153</td><td>25</td><td>AVERAGE</td></tr></tbody></table>						Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB		dBuV	dB/m	dB	dB	dB	dB	cm	deg	1	5885.00	101.87	-----	-----		89.72	34.26	11.45	33.56	0.00	153	25	AVERAGE																																																																																			
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																											
	MHz	dBuV/m	dBuV/m	dB		dBuV	dB/m	dB	dB	dB	dB	cm	deg																																																																																																																											
1	5885.00	101.87	-----	-----		89.72	34.26	11.45	33.56	0.00	153	25	AVERAGE																																																																																																																											


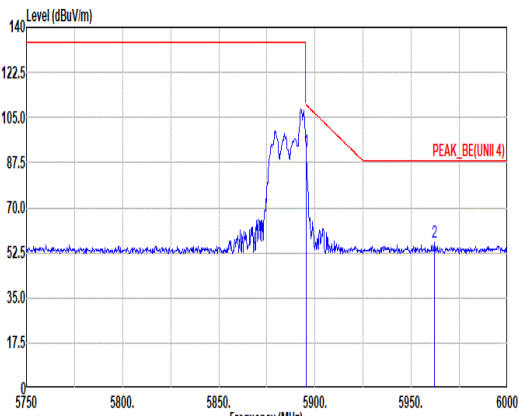


Mode	75																																																																			
	Band Edge - R																																																																			
	U-NII-4_5.85-5.895_802.11ax HE20_CH177_Partial 26/8_5885MHz																																																																			
ANT	4+3																																																																			
Pol.	Horizontal						Fundamental																																																													
Peak	 Site : 03CH12-HY Condition: PEAK_BE(UNII 4) 3m 91200-02114-240711 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5895.25</td><td>92.18</td><td>110.02</td><td>-17.84</td><td>80.00</td><td>34.28</td><td>11.47</td><td>33.57</td><td>0.00</td><td>153</td><td>25</td><td>PEAK</td></tr><tr><td>2</td><td>5962.00</td><td>56.74</td><td>88.20</td><td>-31.46</td><td>44.40</td><td>34.28</td><td>11.69</td><td>33.63</td><td>0.00</td><td>153</td><td>25</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm	deg	1	5895.25	92.18	110.02	-17.84	80.00	34.28	11.47	33.57	0.00	153	25	PEAK	2	5962.00	56.74	88.20	-31.46	44.40	34.28	11.69	33.63	0.00	153	25	PEAK	Blank				
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																												
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm	deg																																																										
1	5895.25	92.18	110.02	-17.84	80.00	34.28	11.47	33.57	0.00	153	25	PEAK																																																								
2	5962.00	56.74	88.20	-31.46	44.40	34.28	11.69	33.63	0.00	153	25	PEAK																																																								
Avg.	 Site : 03CH12-HY Condition: AVG_BE(UNII 4) 3m 91200-02114-240711 HORIZONTAL : RBW:1000.000kHz VBW:1.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5895.25</td><td>87.93</td><td>90.02</td><td>-2.09</td><td>75.75</td><td>34.28</td><td>11.47</td><td>33.57</td><td>0.00</td><td>153</td><td>25</td><td>AVERAGE</td></tr><tr><td>2</td><td>5927.75</td><td>46.41</td><td>68.20</td><td>-21.79</td><td>34.13</td><td>34.30</td><td>11.58</td><td>33.60</td><td>0.00</td><td>153</td><td>25</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm	deg	1	5895.25	87.93	90.02	-2.09	75.75	34.28	11.47	33.57	0.00	153	25	AVERAGE	2	5927.75	46.41	68.20	-21.79	34.13	34.30	11.58	33.60	0.00	153	25	AVERAGE	Blank				
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																												
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm	deg																																																										
1	5895.25	87.93	90.02	-2.09	75.75	34.28	11.47	33.57	0.00	153	25	AVERAGE																																																								
2	5927.75	46.41	68.20	-21.79	34.13	34.30	11.58	33.60	0.00	153	25	AVERAGE																																																								



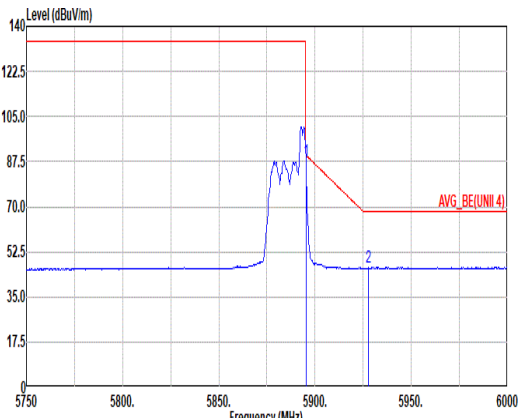


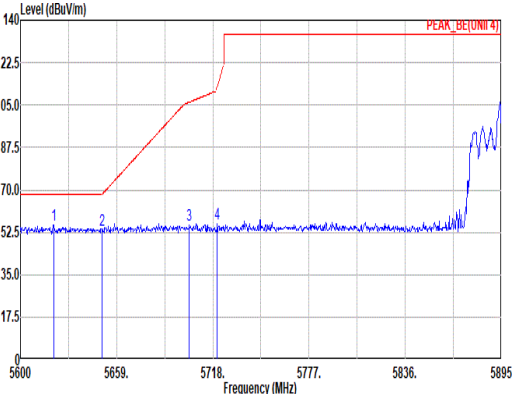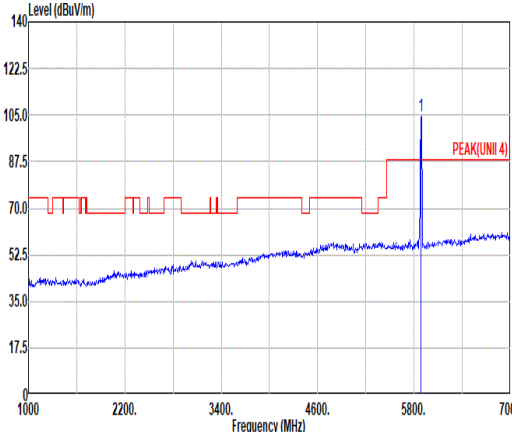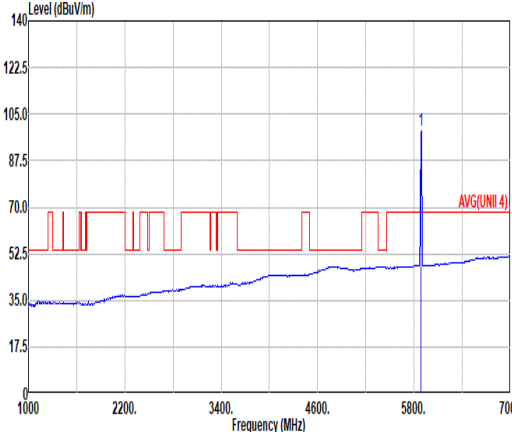Mode	75																																																																																																																																									
	Band Edge - L																																																																																																																																									
	U-NII-4_5.85-5.895_802.11ax HE20_CH177_Partial 26/8_5885MHz																																																																																																																																									
ANT	4+3																																																																																																																																									
Pol.	Vertical						Fundamental																																																																																																																																			
Peak																																																																																																																																										
	Site : 03CH12-HY Condition: PEAK_BE(UNII 4) 3m 91200-02114-240711 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5620.36</td><td>55.59</td><td>68.20</td><td>-12.61</td><td>44.51</td><td>33.14</td><td>11.23</td><td>33.29</td><td>0.00</td><td>200</td><td>206</td><td>PEAK</td></tr><tr><td>2</td><td>5650.15</td><td>53.39</td><td>68.31</td><td>-14.92</td><td>42.29</td><td>33.20</td><td>11.22</td><td>33.32</td><td>0.00</td><td>200</td><td>206</td><td>PEAK</td></tr><tr><td>3</td><td>5703.55</td><td>55.51</td><td>106.19</td><td>-50.68</td><td>44.07</td><td>33.61</td><td>11.20</td><td>33.37</td><td>0.00</td><td>200</td><td>206</td><td>PEAK</td></tr><tr><td>4</td><td>5720.66</td><td>56.24</td><td>112.29</td><td>-56.05</td><td>44.76</td><td>33.68</td><td>11.19</td><td>33.39</td><td>0.00</td><td>200</td><td>206</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5620.36	55.59	68.20	-12.61	44.51	33.14	11.23	33.29	0.00	200	206	PEAK	2	5650.15	53.39	68.31	-14.92	42.29	33.20	11.22	33.32	0.00	200	206	PEAK	3	5703.55	55.51	106.19	-50.68	44.07	33.61	11.20	33.37	0.00	200	206	PEAK	4	5720.66	56.24	112.29	-56.05	44.76	33.68	11.19	33.39	0.00	200	206	PEAK	Site : 03CH12-HY Condition: PEAK(UNII 4) 3m 91200-02114-240711 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5885.00</td><td>104.86</td><td>-----</td><td>-----</td><td>92.68</td><td>34.28</td><td>11.47</td><td>33.57</td><td>0.00</td><td>200</td><td>206</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5885.00	104.86	-----	-----	92.68	34.28	11.47	33.57	0.00	200	206
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																
1	5620.36	55.59	68.20	-12.61	44.51	33.14	11.23	33.29	0.00	200	206	PEAK																																																																																																																														
2	5650.15	53.39	68.31	-14.92	42.29	33.20	11.22	33.32	0.00	200	206	PEAK																																																																																																																														
3	5703.55	55.51	106.19	-50.68	44.07	33.61	11.20	33.37	0.00	200	206	PEAK																																																																																																																														
4	5720.66	56.24	112.29	-56.05	44.76	33.68	11.19	33.39	0.00	200	206	PEAK																																																																																																																														
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																
1	5885.00	104.86	-----	-----	92.68	34.28	11.47	33.57	0.00	200	206	PEAK																																																																																																																														
Avg.	Blank																																																																																																																																									
							Site : 03CH12-HY Condition: AVG(UNII 4) 3m 91200-02114-240711 VERTICAL : RBW:1000.000kHz VBW:1.000kHz SWT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5885.00</td><td>99.00</td><td>-----</td><td>-----</td><td>86.82</td><td>34.28</td><td>11.47</td><td>33.57</td><td>0.00</td><td>200</td><td>206</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5885.00	99.00	-----	-----	86.82	34.28	11.47	33.57	0.00	200	206	AVERAGE																																																																																		
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																
1	5885.00	99.00	-----	-----	86.82	34.28	11.47	33.57	0.00	200	206	AVERAGE																																																																																																																														

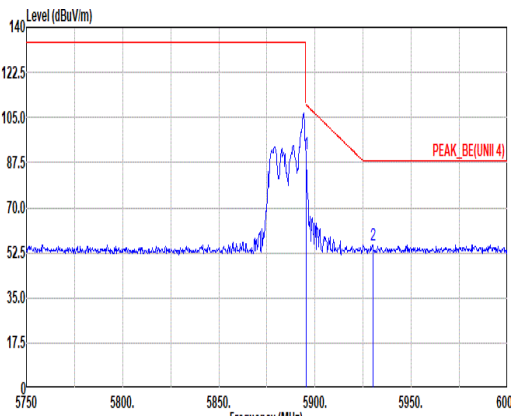
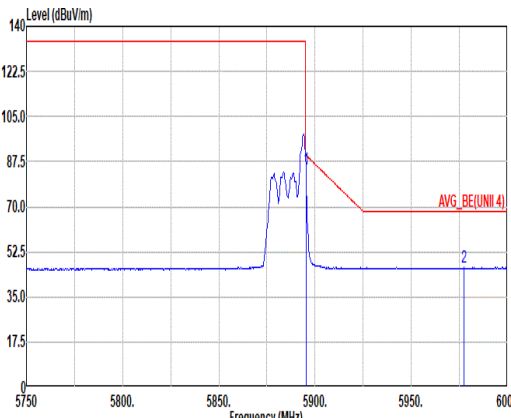


Mode	75																																																													
	Band Edge - R																																																													
	U-NII-4_5.85-5.895_802.11ax HE20_CH177_Partial 26/8_5885MHz																																																													
ANT	4+3																																																													
Pol.	Vertical						Fundamental																																																							
Peak							Blank																																																							
	Site : 03CH12-HY Condition: PEAK_BE(UNII 4) 3m 91200-02114-240711 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5895.25</td><td>90.97</td><td>110.02</td><td>-19.05</td><td>78.79</td><td>34.28</td><td>11.47</td><td>33.57</td><td>0.00</td><td>200</td><td>206</td><td>PEAK</td></tr><tr><td>2</td><td>5930.00</td><td>55.67</td><td>88.20</td><td>-32.53</td><td>43.39</td><td>34.30</td><td>11.58</td><td>33.60</td><td>0.00</td><td>200</td><td>206</td><td>PEAK</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5895.25	90.97	110.02	-19.05	78.79	34.28	11.47	33.57	0.00	200	206	PEAK	2	5930.00	55.67	88.20	-32.53	43.39	34.30
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																				
1	5895.25	90.97	110.02	-19.05	78.79	34.28	11.47	33.57	0.00	200	206	PEAK																																																		
2	5930.00	55.67	88.20	-32.53	43.39	34.30	11.58	33.60	0.00	200	206	PEAK																																																		
Avg.							Blank																																																							
Site : 03CH12-HY Condition: AVG_BE(UNII 4) 3m 91200-02114-240711 VERTICAL : RBW:1000.000kHz VBW:1.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5895.25</td><td>84.32</td><td>90.02</td><td>-5.70</td><td>72.14</td><td>34.28</td><td>11.47</td><td>33.57</td><td>0.00</td><td>200</td><td>206</td><td>AVERAGE</td></tr><tr><td>2</td><td>5977.50</td><td>46.37</td><td>68.20</td><td>-21.83</td><td>34.04</td><td>34.24</td><td>11.74</td><td>33.65</td><td>0.00</td><td>200</td><td>206</td><td>AVERAGE</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5895.25	84.32	90.02	-5.70	72.14	34.28	11.47	33.57	0.00	200	206	AVERAGE	2	5977.50	46.37	68.20	-21.83	34.04	34.24	11.74
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																				
1	5895.25	84.32	90.02	-5.70	72.14	34.28	11.47	33.57	0.00	200	206	AVERAGE																																																		
2	5977.50	46.37	68.20	-21.83	34.04	34.24	11.74	33.65	0.00	200	206	AVERAGE																																																		

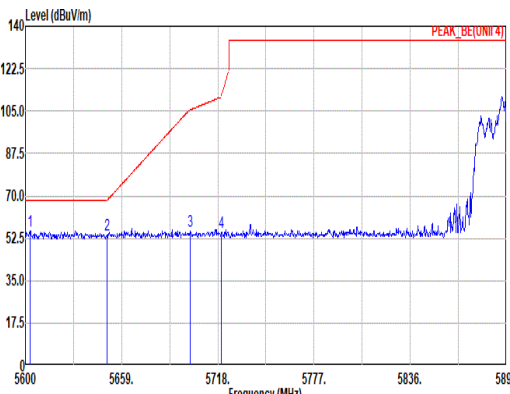
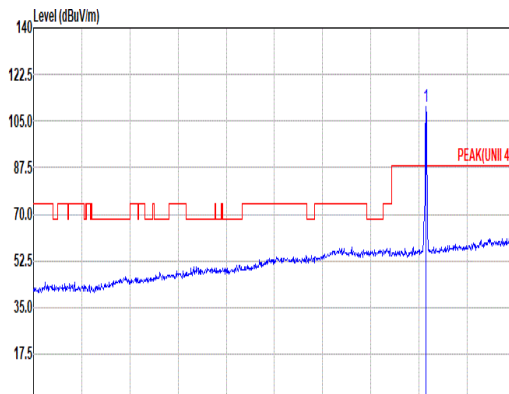
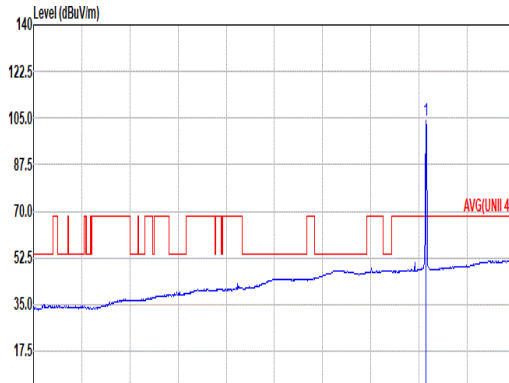


		76																																																																																																																																																							
Mode	Band Edge - L																																																																																																																																																								
	U-NII-4_5.85-5.895_802.11ax HE20_CH177_Partial 52/40_5885MHz																																																																																																																																																								
ANT	4+3																																																																																																																																																								
Pol.	Horizontal																																																																																																																																																								
Peak	 Level (dBuV/m) Frequency (MHz) Site : 03CH12-HY Condition: PEAK_BE(UNII 4) 3m 91200-02114-240711 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5602.95</td><td>55.73</td><td>68.20</td><td>-12.47</td><td>44.65</td><td>33.11</td><td>11.24</td><td>33.27</td><td>0.00</td><td>149</td><td>24</td><td>PEAK</td></tr><tr><td>2</td><td>5650.15</td><td>54.13</td><td>68.31</td><td>-14.18</td><td>43.03</td><td>33.20</td><td>11.22</td><td>33.32</td><td>0.00</td><td>149</td><td>24</td><td>PEAK</td></tr><tr><td>3</td><td>5700.89</td><td>55.71</td><td>105.45</td><td>-49.74</td><td>44.28</td><td>33.60</td><td>11.20</td><td>33.37</td><td>0.00</td><td>149</td><td>24</td><td>PEAK</td></tr><tr><td>4</td><td>5720.07</td><td>54.68</td><td>110.95</td><td>-56.27</td><td>43.20</td><td>33.68</td><td>11.19</td><td>33.39</td><td>0.00</td><td>149</td><td>24</td><td>PEAK</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5602.95	55.73	68.20	-12.47	44.65	33.11	11.24	33.27	0.00	149	24	PEAK	2	5650.15	54.13	68.31	-14.18	43.03	33.20	11.22	33.32	0.00	149	24	PEAK	3	5700.89	55.71	105.45	-49.74	44.28	33.60	11.20	33.37	0.00	149	24	PEAK	4	5720.07	54.68	110.95	-56.27	43.20	33.68	11.19	33.39	0.00	149	24	PEAK	 Level (dBuV/m) Frequency (MHz) Site : 03CH12-HY Condition: PEAK(UNII 4) 3m 91200-02114-240711 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5885.00</td><td>110.46</td><td>-----</td><td>-----</td><td>98.31</td><td>34.26</td><td>11.45</td><td>33.56</td><td>0.00</td><td>149</td><td>24</td><td>PEAK</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5885.00	110.46	-----	-----	98.31	34.26	11.45	33.56	0.00	149	24	PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																															
1	5602.95	55.73	68.20	-12.47	44.65	33.11	11.24	33.27	0.00	149	24	PEAK																																																																																																																																													
2	5650.15	54.13	68.31	-14.18	43.03	33.20	11.22	33.32	0.00	149	24	PEAK																																																																																																																																													
3	5700.89	55.71	105.45	-49.74	44.28	33.60	11.20	33.37	0.00	149	24	PEAK																																																																																																																																													
4	5720.07	54.68	110.95	-56.27	43.20	33.68	11.19	33.39	0.00	149	24	PEAK																																																																																																																																													
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																															
1	5885.00	110.46	-----	-----	98.31	34.26	11.45	33.56	0.00	149	24	PEAK																																																																																																																																													
Avg.	Blank											 Level (dBuV/m) Frequency (MHz) Site : 03CH12-HY Condition: AVG(UNII 4) 3m 91200-02114-240711 HORIZONTAL : RBW:1000.000kHz VBW:1.000kHz SWT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5885.00</td><td>104.25</td><td>-----</td><td>-----</td><td>92.10</td><td>34.26</td><td>11.45</td><td>33.56</td><td>0.00</td><td>149</td><td>24</td><td>AVERAGE</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5885.00	104.25	-----	-----	92.10	34.26	11.45	33.56	0.00	149	24	AVERAGE																																																																																					
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																															
1	5885.00	104.25	-----	-----	92.10	34.26	11.45	33.56	0.00	149	24	AVERAGE																																																																																																																																													

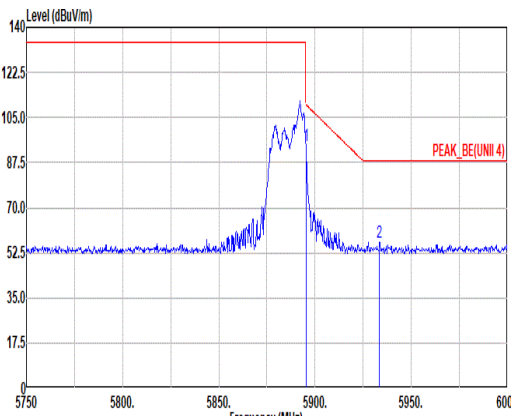
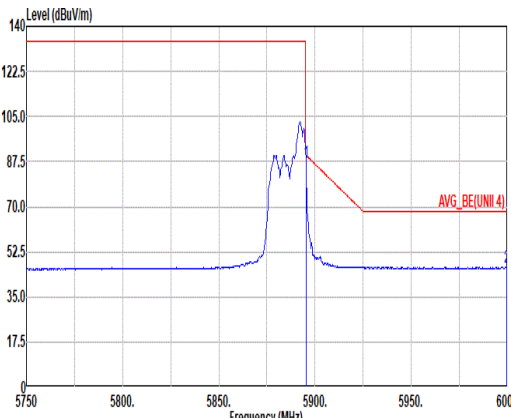


Mode	76																																																					
	Band Edge - R																																																					
	U-NII-4_5.85-5.895_802.11ax HE20_CH177_Partial 52/40_5885MHz																																																					
ANT	4+3																																																					
Pol.	Horizontal	Fundamental																																																				
Peak	 Site : 03CH12-HY Condition: PEAK_BE(UNII 4) 3m 91200-02114-240711 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>5895.25</td><td>94.18</td><td>110.02</td><td>-15.84</td><td>82.00</td><td>34.28</td><td>11.47</td><td>33.57</td><td>0.00</td><td>149</td><td>24</td><td>PEAK</td></tr><tr><td>2</td><td>5933.50</td><td>56.30</td><td>88.20</td><td>-31.90</td><td>44.01</td><td>34.30</td><td>11.59</td><td>33.60</td><td>0.00</td><td>149</td><td>24</td><td>PEAK</td></tr></table>		Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5895.25	94.18	110.02	-15.84	82.00	34.28	11.47	33.57	0.00	149	24	PEAK	2	5933.50	56.30	88.20	-31.90	44.01	34.30	11.59	33.60	0.00	149	24	PEAK	Blank
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																											
1	5895.25	94.18	110.02	-15.84	82.00	34.28	11.47	33.57	0.00	149	24	PEAK																																										
2	5933.50	56.30	88.20	-31.90	44.01	34.30	11.59	33.60	0.00	149	24	PEAK																																										
Avg.	 Site : 03CH12-HY Condition: AVG_BE(UNII 4) 3m 91200-02114-240711 HORIZONTAL : RBW:1000.000kHz VBW:1.000kHz SMT:Auto <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>5895.25</td><td>87.30</td><td>90.02</td><td>-2.72</td><td>75.12</td><td>34.28</td><td>11.47</td><td>33.57</td><td>0.00</td><td>149</td><td>24</td><td>AVERAGE</td></tr><tr><td>2</td><td>5999.50</td><td>46.52</td><td>68.20</td><td>-21.68</td><td>34.18</td><td>34.20</td><td>11.81</td><td>33.67</td><td>0.00</td><td>149</td><td>24</td><td>AVERAGE</td></tr></table>		Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5895.25	87.30	90.02	-2.72	75.12	34.28	11.47	33.57	0.00	149	24	AVERAGE	2	5999.50	46.52	68.20	-21.68	34.18	34.20	11.81	33.67	0.00	149	24	AVERAGE	Blank
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																											
1	5895.25	87.30	90.02	-2.72	75.12	34.28	11.47	33.57	0.00	149	24	AVERAGE																																										
2	5999.50	46.52	68.20	-21.68	34.18	34.20	11.81	33.67	0.00	149	24	AVERAGE																																										

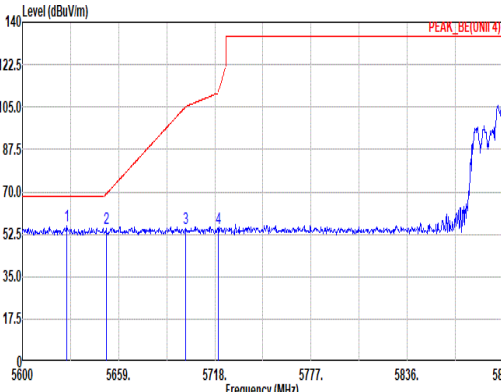
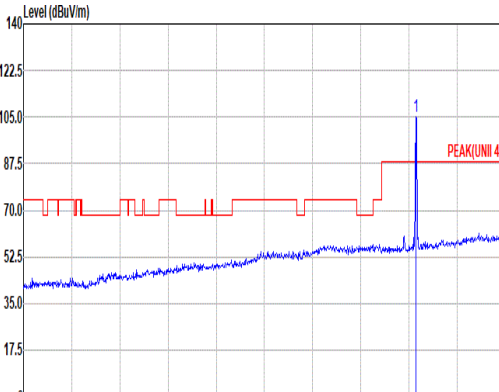
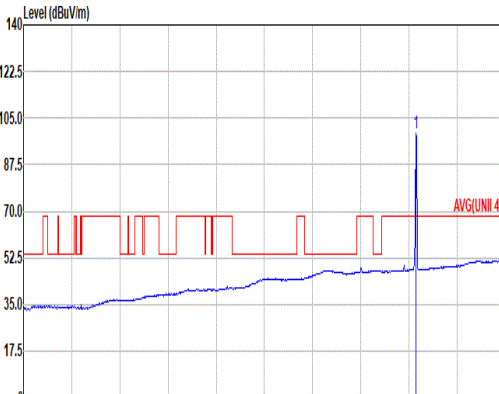


		76																																																																																																																																														
Mode	Band Edge - L																																																																																																																																															
	U-NII-4_5.85-5.895_802.11ax HE20_CH177_Partial 52/40_5885MHz																																																																																																																																															
ANT	4+3																																																																																																																																															
Pol.	Vertical						Fundamental																																																																																																																																									
Peak	 Level (dBuV/m) Frequency (MHz) PEAK_BE(UNII 4) Site : 03CH12-HY Condition: PEAK_BE(UNII 4) 3m 91200-02114-240711 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="3">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>5627.14</td><td>56.24</td><td>68.20</td><td>-11.96</td><td>45.16</td><td>33.15</td><td>11.23</td><td>33.30</td><td>0.00</td><td>200</td><td>200 PEAK</td></tr><tr><td>2</td><td>5651.33</td><td>54.74</td><td>69.19</td><td>-14.45</td><td>43.63</td><td>33.21</td><td>11.22</td><td>33.32</td><td>0.00</td><td>200</td><td>200 PEAK</td></tr><tr><td>3</td><td>5700.01</td><td>55.21</td><td>105.20</td><td>-49.99</td><td>43.78</td><td>33.60</td><td>11.20</td><td>33.37</td><td>0.00</td><td>200</td><td>200 PEAK</td></tr><tr><td>4</td><td>5720.07</td><td>54.68</td><td>110.95</td><td>-56.27</td><td>43.20</td><td>33.68</td><td>11.19</td><td>33.39</td><td>0.00</td><td>200</td><td>200 PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	5627.14	56.24	68.20	-11.96	45.16	33.15	11.23	33.30	0.00	200	200 PEAK	2	5651.33	54.74	69.19	-14.45	43.63	33.21	11.22	33.32	0.00	200	200 PEAK	3	5700.01	55.21	105.20	-49.99	43.78	33.60	11.20	33.37	0.00	200	200 PEAK	4	5720.07	54.68	110.95	-56.27	43.20	33.68	11.19	33.39	0.00	200	200 PEAK	 Level (dBuV/m) Frequency (MHz) PEAK(UNII 4) Site : 03CH12-HY Condition: PEAK(UNII 4) 3m 91200-02114-240711 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="3">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>5885.00</td><td>105.34</td><td>-----</td><td>-----</td><td>93.19</td><td>34.26</td><td>11.45</td><td>33.56</td><td>0.00</td><td>200</td><td>200 PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	5885.00	105.34	-----	-----	93.19	34.26	11.45	33.56	0.00	200	200 PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																						
1	5627.14	56.24	68.20	-11.96	45.16	33.15	11.23	33.30	0.00	200	200 PEAK																																																																																																																																					
2	5651.33	54.74	69.19	-14.45	43.63	33.21	11.22	33.32	0.00	200	200 PEAK																																																																																																																																					
3	5700.01	55.21	105.20	-49.99	43.78	33.60	11.20	33.37	0.00	200	200 PEAK																																																																																																																																					
4	5720.07	54.68	110.95	-56.27	43.20	33.68	11.19	33.39	0.00	200	200 PEAK																																																																																																																																					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																						
1	5885.00	105.34	-----	-----	93.19	34.26	11.45	33.56	0.00	200	200 PEAK																																																																																																																																					
Avg.	Blank						 Level (dBuV/m) Frequency (MHz) AVG(UNII 4) Site : 03CH12-HY Condition: AVG(UNII 4) 3m 91200-02114-240711 VERTICAL : RBW:1000.000kHz VBW:1.000kHz SWT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="3">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>5885.00</td><td>99.00</td><td>-----</td><td>-----</td><td>86.93</td><td>34.26</td><td>11.45</td><td>33.56</td><td>0.00</td><td>200</td><td>200 AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	5885.00	99.00	-----	-----	86.93	34.26	11.45	33.56	0.00	200	200 AVERAGE																																																																																				
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																						
1	5885.00	99.00	-----	-----	86.93	34.26	11.45	33.56	0.00	200	200 AVERAGE																																																																																																																																					

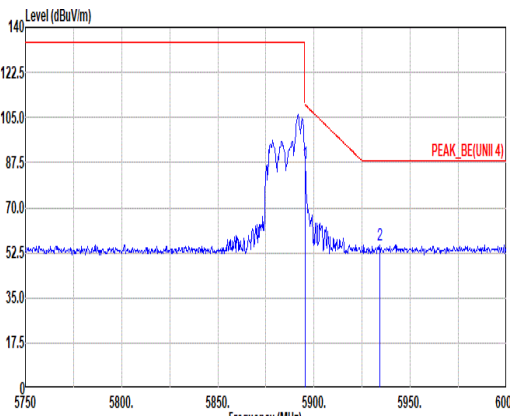
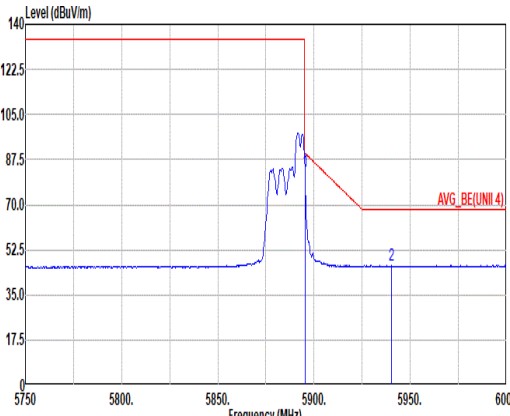


Mode	76																																																													
	Band Edge - R																																																													
	U-NII-4_5.85-5.895_802.11ax HE20_CH177_Partial 52/40_5885MHz																																																													
ANT	4+3																																																													
Pol.	Vertical						Fundamental																																																							
Peak							Blank																																																							
	Site : 03CH12-HY Condition: PEAK_BE(UNII 4) 3m 91200-02114-240711 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5895.50</td><td>87.33</td><td>109.83</td><td>-22.50</td><td>75.15</td><td>34.28</td><td>11.47</td><td>33.57</td><td>0.00</td><td>200</td><td>200</td><td>PEAK</td></tr><tr><td>2</td><td>5934.00</td><td>55.64</td><td>88.20</td><td>-32.56</td><td>43.34</td><td>34.30</td><td>11.60</td><td>33.60</td><td>0.00</td><td>200</td><td>200</td><td>PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm	deg	1	5895.50	87.33	109.83	-22.50	75.15	34.28	11.47	33.57	0.00	200	200	PEAK	2	5934.00	55.64	88.20	-32.56	43.34
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																						
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm	deg																																																				
1	5895.50	87.33	109.83	-22.50	75.15	34.28	11.47	33.57	0.00	200	200	PEAK																																																		
2	5934.00	55.64	88.20	-32.56	43.34	34.30	11.60	33.60	0.00	200	200	PEAK																																																		
Avg.							Blank																																																							
	Site : 03CH12-HY Condition: AVG_BE(UNII 4) 3m 91200-02114-240711 VERTICAL : RBW:1000.000kHz VBW:1.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5895.25</td><td>82.99</td><td>90.02</td><td>-7.03</td><td>70.81</td><td>34.28</td><td>11.47</td><td>33.57</td><td>0.00</td><td>200</td><td>200</td><td>AVERAGE</td></tr><tr><td>2</td><td>5940.25</td><td>46.44</td><td>68.20</td><td>-21.76</td><td>34.13</td><td>34.30</td><td>11.62</td><td>33.61</td><td>0.00</td><td>200</td><td>200</td><td>AVERAGE</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm	deg	1	5895.25	82.99	90.02	-7.03	70.81	34.28	11.47	33.57	0.00	200	200	AVERAGE	2	5940.25	46.44	68.20	-21.76	34.13
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																						
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm	deg																																																				
1	5895.25	82.99	90.02	-7.03	70.81	34.28	11.47	33.57	0.00	200	200	AVERAGE																																																		
2	5940.25	46.44	68.20	-21.76	34.13	34.30	11.62	33.61	0.00	200	200	AVERAGE																																																		

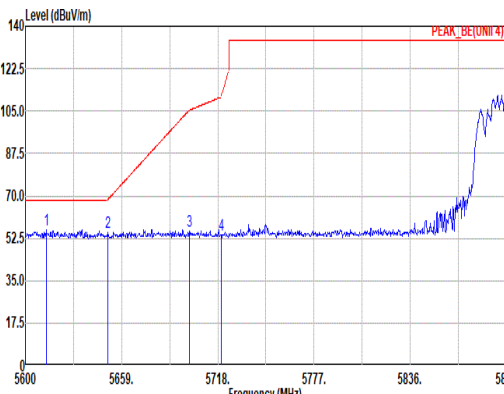
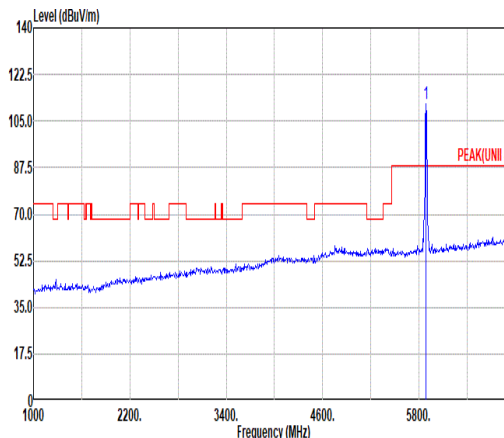
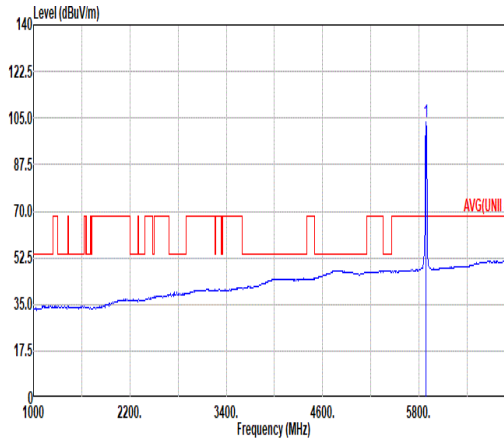


Mode	77																																																																																																																																									
	Band Edge - L																																																																																																																																									
	U-NII-4_5.85-5.895_802.11ax HE20_CH177_Partial 106/54_5885MHz																																																																																																																																									
ANT	4+3																																																																																																																																									
Pol.	Horizontal						Fundamental																																																																																																																																			
Peak																																																																																																																																										
	Site : 03CH12-HY Condition: PEAK_BE(UNII 4) 3m 91200-02114-240711 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5612.69</td><td>55.93</td><td>68.20</td><td>-12.27</td><td>44.85</td><td>33.13</td><td>11.23</td><td>33.28</td><td>0.00</td><td>155</td><td>25</td><td>PEAK</td></tr><tr><td>2</td><td>5650.74</td><td>55.19</td><td>68.75</td><td>-13.56</td><td>44.08</td><td>33.21</td><td>11.22</td><td>33.32</td><td>0.00</td><td>155</td><td>25</td><td>PEAK</td></tr><tr><td>3</td><td>5700.60</td><td>55.36</td><td>105.37</td><td>-50.01</td><td>43.93</td><td>33.60</td><td>11.20</td><td>33.37</td><td>0.00</td><td>155</td><td>25</td><td>PEAK</td></tr><tr><td>4</td><td>5720.07</td><td>54.10</td><td>110.95</td><td>-56.85</td><td>42.62</td><td>33.68</td><td>11.19</td><td>33.39</td><td>0.00</td><td>155</td><td>25</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5612.69	55.93	68.20	-12.27	44.85	33.13	11.23	33.28	0.00	155	25	PEAK	2	5650.74	55.19	68.75	-13.56	44.08	33.21	11.22	33.32	0.00	155	25	PEAK	3	5700.60	55.36	105.37	-50.01	43.93	33.60	11.20	33.37	0.00	155	25	PEAK	4	5720.07	54.10	110.95	-56.85	42.62	33.68	11.19	33.39	0.00	155	25	PEAK	Site : 03CH12-HY Condition: PEAK(UNII 4) 3m 91200-02114-240711 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5885.00</td><td>111.27</td><td>-----</td><td>-----</td><td>99.12</td><td>34.26</td><td>11.45</td><td>33.56</td><td>0.00</td><td>155</td><td>25</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5885.00	111.27	-----	-----	99.12	34.26	11.45	33.56	0.00	155	25
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																
1	5612.69	55.93	68.20	-12.27	44.85	33.13	11.23	33.28	0.00	155	25	PEAK																																																																																																																														
2	5650.74	55.19	68.75	-13.56	44.08	33.21	11.22	33.32	0.00	155	25	PEAK																																																																																																																														
3	5700.60	55.36	105.37	-50.01	43.93	33.60	11.20	33.37	0.00	155	25	PEAK																																																																																																																														
4	5720.07	54.10	110.95	-56.85	42.62	33.68	11.19	33.39	0.00	155	25	PEAK																																																																																																																														
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																
1	5885.00	111.27	-----	-----	99.12	34.26	11.45	33.56	0.00	155	25	PEAK																																																																																																																														
Avg.	Blank																																																																																																																																									
							Site : 03CH12-HY Condition: AVG(UNII 4) 3m 91200-02114-240711 HORIZONTAL : RBW:1000.000kHz VBW:1.000kHz SWT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5885.00</td><td>103.66</td><td>-----</td><td>-----</td><td>91.51</td><td>34.26</td><td>11.45</td><td>33.56</td><td>0.00</td><td>155</td><td>25</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5885.00	103.66	-----	-----	91.51	34.26	11.45	33.56	0.00	155	25	AVERAGE																																																																																		
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																
1	5885.00	103.66	-----	-----	91.51	34.26	11.45	33.56	0.00	155	25	AVERAGE																																																																																																																														

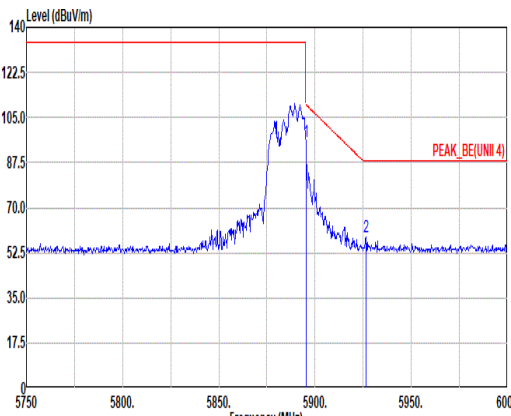
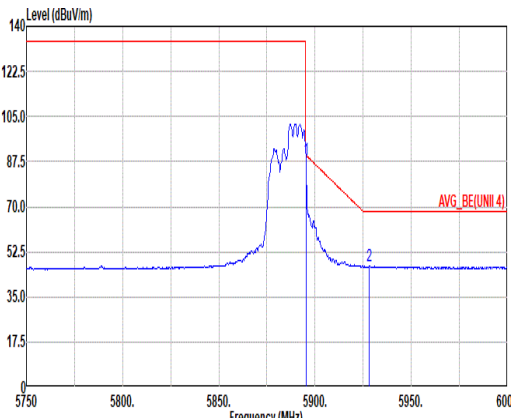


Mode	77																																																							
	Band Edge - R																																																							
	U-NII-4_5.85-5.895_802.11ax HE20_CH177_Partial 106/54_5885MHz																																																							
ANT	4+3																																																							
Pol.	Horizontal	Fundamental																																																						
Peak	 Site : 03CH12-HY Condition: PEAK_BE(UNII 4) 3m 91200-02114-240711 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>5895.25</td><td>95.70</td><td>110.02</td><td>-14.32</td><td>83.52</td><td>34.28</td><td>11.47</td><td>33.57</td><td>0.00</td><td>155</td><td>25</td><td>PEAK</td></tr><tr><td>2</td><td>5926.50</td><td>58.90</td><td>88.20</td><td>-29.30</td><td>46.63</td><td>34.30</td><td>11.57</td><td>33.60</td><td>0.00</td><td>155</td><td>25</td><td>PEAK</td></tr></table>		Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5895.25	95.70	110.02	-14.32	83.52	34.28	11.47	33.57	0.00	155	25	PEAK	2	5926.50	58.90	88.20	-29.30	46.63	34.30	11.57	33.60	0.00	155	25	PEAK	Blank
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																											
	MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																												
1	5895.25	95.70	110.02	-14.32	83.52	34.28	11.47	33.57	0.00	155	25	PEAK																																												
2	5926.50	58.90	88.20	-29.30	46.63	34.30	11.57	33.60	0.00	155	25	PEAK																																												
Avg.	 Site : 03CH12-HY Condition: AVG_BE(UNII 4) 3m 91200-02114-240711 HORIZONTAL : RBW:1000.000kHz VBW:1.000kHz SMT:Auto <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>5895.25</td><td>88.39</td><td>90.02</td><td>-1.63</td><td>76.21</td><td>34.28</td><td>11.47</td><td>33.57</td><td>0.00</td><td>155</td><td>25</td><td>AVERAGE</td></tr><tr><td>2</td><td>5928.00</td><td>46.97</td><td>68.20</td><td>-21.23</td><td>34.69</td><td>34.30</td><td>11.58</td><td>33.60</td><td>0.00</td><td>155</td><td>25</td><td>AVERAGE</td></tr></table>		Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5895.25	88.39	90.02	-1.63	76.21	34.28	11.47	33.57	0.00	155	25	AVERAGE	2	5928.00	46.97	68.20	-21.23	34.69	34.30	11.58	33.60	0.00	155	25	AVERAGE	Blank
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																											
	MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																												
1	5895.25	88.39	90.02	-1.63	76.21	34.28	11.47	33.57	0.00	155	25	AVERAGE																																												
2	5928.00	46.97	68.20	-21.23	34.69	34.30	11.58	33.60	0.00	155	25	AVERAGE																																												

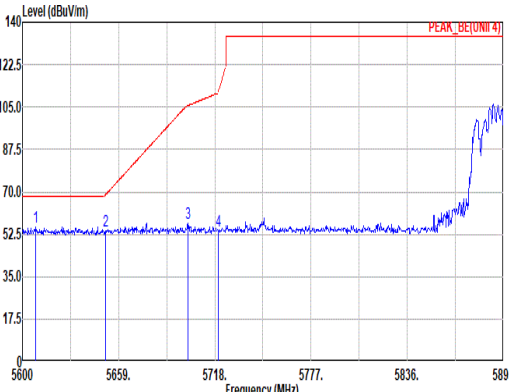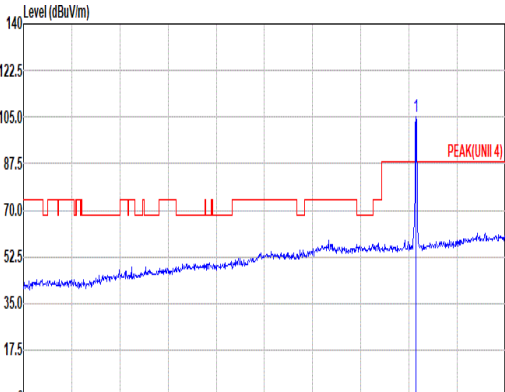
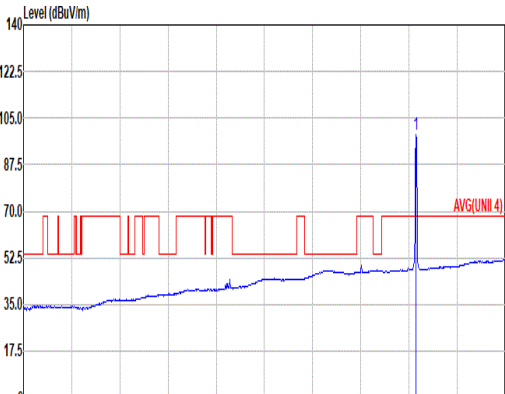


		77																																																																																																																																														
Mode	Band Edge - L																																																																																																																																															
	U-NII-4_5.85-5.895_802.11ax HE20_CH177_Partial 106/54_5885MHz																																																																																																																																															
ANT	4+3																																																																																																																																															
Pol.	Vertical						Fundamental																																																																																																																																									
Peak	 Level (dBuV/m) Frequency (MHz) PEAK_BE(UNII 4) Site : 03CH12-HY Condition: PEAK_BE(UNII 4) 3m 91200-02114-240711 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="3">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>5608.26</td><td>55.53</td><td>68.20</td><td>-12.67</td><td>44.45</td><td>33.12</td><td>11.24</td><td>33.28</td><td>0.00</td><td>200</td><td>206 PEAK</td></tr><tr><td>2</td><td>5651.04</td><td>53.77</td><td>68.97</td><td>-15.20</td><td>42.66</td><td>33.21</td><td>11.22</td><td>33.32</td><td>0.00</td><td>200</td><td>206 PEAK</td></tr><tr><td>3</td><td>5701.48</td><td>56.92</td><td>105.62</td><td>-48.70</td><td>45.48</td><td>33.61</td><td>11.20</td><td>33.37</td><td>0.00</td><td>200</td><td>206 PEAK</td></tr><tr><td>4</td><td>5720.07</td><td>53.99</td><td>110.95</td><td>-56.96</td><td>42.51</td><td>33.68</td><td>11.19</td><td>33.39</td><td>0.00</td><td>200</td><td>206 PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	5608.26	55.53	68.20	-12.67	44.45	33.12	11.24	33.28	0.00	200	206 PEAK	2	5651.04	53.77	68.97	-15.20	42.66	33.21	11.22	33.32	0.00	200	206 PEAK	3	5701.48	56.92	105.62	-48.70	45.48	33.61	11.20	33.37	0.00	200	206 PEAK	4	5720.07	53.99	110.95	-56.96	42.51	33.68	11.19	33.39	0.00	200	206 PEAK	 Level (dBuV/m) Frequency (MHz) PEAK(UNII 4) Site : 03CH12-HY Condition: PEAK(UNII 4) 3m 91200-02114-240711 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="3">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>5885.00</td><td>105.22</td><td>-----</td><td>-----</td><td>93.07</td><td>34.26</td><td>11.45</td><td>33.56</td><td>0.00</td><td>200</td><td>206 PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	5885.00	105.22	-----	-----	93.07	34.26	11.45	33.56	0.00	200	206 PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																						
1	5608.26	55.53	68.20	-12.67	44.45	33.12	11.24	33.28	0.00	200	206 PEAK																																																																																																																																					
2	5651.04	53.77	68.97	-15.20	42.66	33.21	11.22	33.32	0.00	200	206 PEAK																																																																																																																																					
3	5701.48	56.92	105.62	-48.70	45.48	33.61	11.20	33.37	0.00	200	206 PEAK																																																																																																																																					
4	5720.07	53.99	110.95	-56.96	42.51	33.68	11.19	33.39	0.00	200	206 PEAK																																																																																																																																					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																						
1	5885.00	105.22	-----	-----	93.07	34.26	11.45	33.56	0.00	200	206 PEAK																																																																																																																																					
Avg.	Blank						 Level (dBuV/m) Frequency (MHz) AVG(UNII 4) Site : 03CH12-HY Condition: AVG(UNII 4) 3m 91200-02114-240711 VERTICAL : RBW:1000.000kHz VBW:1.000kHz SWT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="3">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>5885.00</td><td>98.68</td><td>-----</td><td>-----</td><td>86.53</td><td>34.26</td><td>11.45</td><td>33.56</td><td>0.00</td><td>200</td><td>206 AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	5885.00	98.68	-----	-----	86.53	34.26	11.45	33.56	0.00	200	206 AVERAGE																																																																																				
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																						
1	5885.00	98.68	-----	-----	86.53	34.26	11.45	33.56	0.00	200	206 AVERAGE																																																																																																																																					

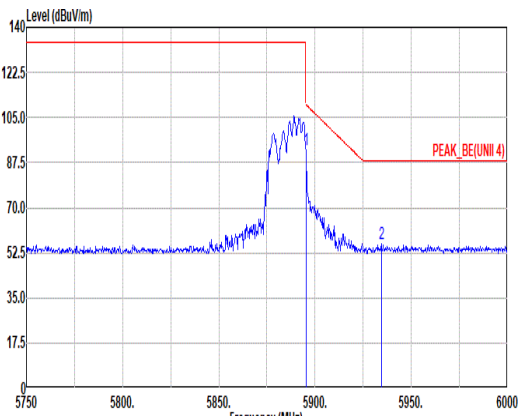
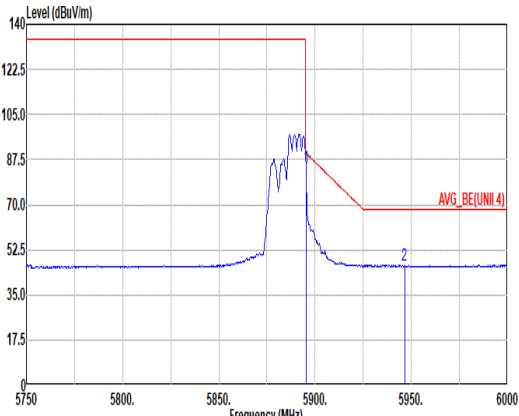


Mode	77																																																										
	Band Edge - R																																																										
	U-NII-4_5.85-5.895_802.11ax HE20_CH177_Partial 106/54_5885MHz																																																										
ANT	4+3																																																										
Pol.	Vertical	Fundamental																																																									
Peak	 Site : 03CH12-HY Condition: PEAK_BE(UNII 4) 3m 91200-02114-240711 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5895.25</td><td>92.50</td><td>110.02</td><td>-17.52</td><td>80.32</td><td>34.28</td><td>11.47</td><td>33.57</td><td>0.00</td><td>200</td><td>206</td><td>PEAK</td></tr><tr><td>2</td><td>5934.50</td><td>56.05</td><td>88.20</td><td>-32.15</td><td>43.75</td><td>34.30</td><td>11.60</td><td>33.60</td><td>0.00</td><td>200</td><td>206</td><td>PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm	deg	1	5895.25	92.50	110.02	-17.52	80.32	34.28	11.47	33.57	0.00	200	206	PEAK	2	5934.50	56.05	88.20	-32.15	43.75	34.30	11.60	33.60	0.00	200	206	PEAK	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																			
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm	deg																																																	
1	5895.25	92.50	110.02	-17.52	80.32	34.28	11.47	33.57	0.00	200	206	PEAK																																															
2	5934.50	56.05	88.20	-32.15	43.75	34.30	11.60	33.60	0.00	200	206	PEAK																																															
Avg.	 Site : 03CH12-HY Condition: AVG_BE(UNII 4) 3m 91200-02114-240711 VERTICAL : RBW:1000.000kHz VBW:1.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5895.25</td><td>84.42</td><td>90.02</td><td>-5.60</td><td>72.24</td><td>34.28</td><td>11.47</td><td>33.57</td><td>0.00</td><td>200</td><td>206</td><td>AVERAGE</td></tr><tr><td>2</td><td>5946.50</td><td>46.48</td><td>68.20</td><td>-21.72</td><td>34.16</td><td>34.30</td><td>11.64</td><td>33.62</td><td>0.00</td><td>200</td><td>206</td><td>AVERAGE</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm	deg	1	5895.25	84.42	90.02	-5.60	72.24	34.28	11.47	33.57	0.00	200	206	AVERAGE	2	5946.50	46.48	68.20	-21.72	34.16	34.30	11.64	33.62	0.00	200	206	AVERAGE	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																			
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm	deg																																																	
1	5895.25	84.42	90.02	-5.60	72.24	34.28	11.47	33.57	0.00	200	206	AVERAGE																																															
2	5946.50	46.48	68.20	-21.72	34.16	34.30	11.64	33.62	0.00	200	206	AVERAGE																																															

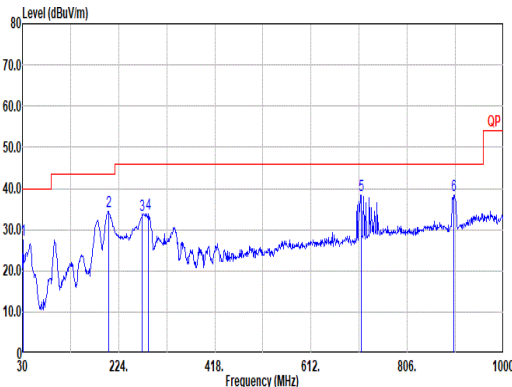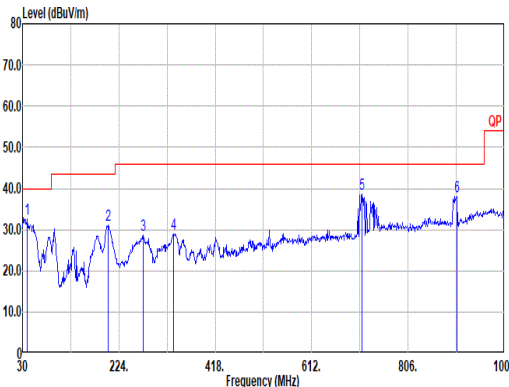

Mode	78																																																																																																								
	LF																																																																																																								
	U-NII-4_5.85-5.895_802.11ax HE20_CH177_Partial 106/54_5885MHz																																																																																																								
ANT	4+3																																																																																																								
Pol.	Horizontal								Vertical																																																																																																
QPI Peak																																																																																																									
	Site : 03CH12-HY																																																																																																								
	Condition: QP 3m Bilog_37059_20231103 HORIZONTAL																																																																																																								
<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr><tr><td>1</td><td>30.97</td><td>27.62</td><td>40.00</td><td>-12.38</td><td>31.84</td><td>24.41</td><td>1.09</td><td>29.77</td><td>0.05 -- -- Peak</td></tr><tr><td>2</td><td>203.63</td><td>34.42</td><td>43.50</td><td>-9.08</td><td>46.60</td><td>15.00</td><td>2.42</td><td>29.78</td><td>0.10 -- -- Peak</td></tr><tr><td>3</td><td>271.53</td><td>33.66</td><td>46.00</td><td>-12.34</td><td>41.49</td><td>18.90</td><td>2.73</td><td>29.62</td><td>0.16 -- -- Peak</td></tr><tr><td>4</td><td>284.14</td><td>33.77</td><td>46.00</td><td>-12.23</td><td>41.40</td><td>18.96</td><td>2.81</td><td>29.59</td><td>0.19 -- -- Peak</td></tr><tr><td>5</td><td>712.88</td><td>38.46</td><td>46.00</td><td>-7.54</td><td>35.77</td><td>27.01</td><td>4.36</td><td>28.99</td><td>0.31 -- -- Peak</td></tr><tr><td>6</td><td>900.09</td><td>38.45</td><td>46.00</td><td>-7.55</td><td>32.69</td><td>29.20</td><td>4.73</td><td>28.51</td><td>0.34 -- -- Peak</td></tr></table>																	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1	30.97	27.62	40.00	-12.38	31.84	24.41	1.09	29.77	0.05 -- -- Peak	2	203.63	34.42	43.50	-9.08	46.60	15.00	2.42	29.78	0.10 -- -- Peak	3	271.53	33.66	46.00	-12.34	41.49	18.90	2.73	29.62	0.16 -- -- Peak	4	284.14	33.77	46.00	-12.23	41.40	18.96	2.81	29.59	0.19 -- -- Peak	5	712.88	38.46	46.00	-7.54	35.77	27.01	4.36	28.99	0.31 -- -- Peak	6	900.09	38.45	46.00	-7.55	32.69	29.20	4.73	28.51	0.34 -- -- Peak
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																																																
1	30.97	27.62	40.00	-12.38	31.84	24.41	1.09	29.77	0.05 -- -- Peak																																																																																																
2	203.63	34.42	43.50	-9.08	46.60	15.00	2.42	29.78	0.10 -- -- Peak																																																																																																
3	271.53	33.66	46.00	-12.34	41.49	18.90	2.73	29.62	0.16 -- -- Peak																																																																																																
4	284.14	33.77	46.00	-12.23	41.40	18.96	2.81	29.59	0.19 -- -- Peak																																																																																																
5	712.88	38.46	46.00	-7.54	35.77	27.01	4.36	28.99	0.31 -- -- Peak																																																																																																
6	900.09	38.45	46.00	-7.55	32.69	29.20	4.73	28.51	0.34 -- -- Peak																																																																																																
Site : 03CH12-HY																																																																																																									
Condition: QP 3m Bilog_37059_20231103 VERTICAL																																																																																																									
<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr><tr><td>1</td><td>39.70</td><td>32.62</td><td>40.00</td><td>-7.38</td><td>41.09</td><td>20.07</td><td>1.09</td><td>29.66</td><td>0.03 -- -- Peak</td></tr><tr><td>2</td><td>201.69</td><td>31.16</td><td>43.50</td><td>-12.34</td><td>43.37</td><td>15.06</td><td>2.42</td><td>29.79</td><td>0.10 -- -- Peak</td></tr><tr><td>3</td><td>272.50</td><td>28.61</td><td>46.00</td><td>-17.39</td><td>36.49</td><td>18.85</td><td>2.73</td><td>29.62</td><td>0.16 -- -- Peak</td></tr><tr><td>4</td><td>334.58</td><td>28.99</td><td>46.00</td><td>-17.01</td><td>35.23</td><td>20.08</td><td>3.04</td><td>29.53</td><td>0.17 -- -- Peak</td></tr><tr><td>5</td><td>713.85</td><td>38.79</td><td>46.00</td><td>-7.21</td><td>36.04</td><td>27.06</td><td>4.37</td><td>28.99</td><td>0.31 -- -- Peak</td></tr><tr><td>6</td><td>903.97</td><td>38.10</td><td>46.00</td><td>-7.90</td><td>32.31</td><td>29.18</td><td>4.75</td><td>28.49</td><td>0.35 -- -- Peak</td></tr></table>																	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1	39.70	32.62	40.00	-7.38	41.09	20.07	1.09	29.66	0.03 -- -- Peak	2	201.69	31.16	43.50	-12.34	43.37	15.06	2.42	29.79	0.10 -- -- Peak	3	272.50	28.61	46.00	-17.39	36.49	18.85	2.73	29.62	0.16 -- -- Peak	4	334.58	28.99	46.00	-17.01	35.23	20.08	3.04	29.53	0.17 -- -- Peak	5	713.85	38.79	46.00	-7.21	36.04	27.06	4.37	28.99	0.31 -- -- Peak	6	903.97	38.10	46.00	-7.90	32.31	29.18	4.75	28.49	0.35 -- -- Peak
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																																																
1	39.70	32.62	40.00	-7.38	41.09	20.07	1.09	29.66	0.03 -- -- Peak																																																																																																
2	201.69	31.16	43.50	-12.34	43.37	15.06	2.42	29.79	0.10 -- -- Peak																																																																																																
3	272.50	28.61	46.00	-17.39	36.49	18.85	2.73	29.62	0.16 -- -- Peak																																																																																																
4	334.58	28.99	46.00	-17.01	35.23	20.08	3.04	29.53	0.17 -- -- Peak																																																																																																
5	713.85	38.79	46.00	-7.21	36.04	27.06	4.37	28.99	0.31 -- -- Peak																																																																																																
6	903.97	38.10	46.00	-7.90	32.31	29.18	4.75	28.49	0.35 -- -- Peak																																																																																																

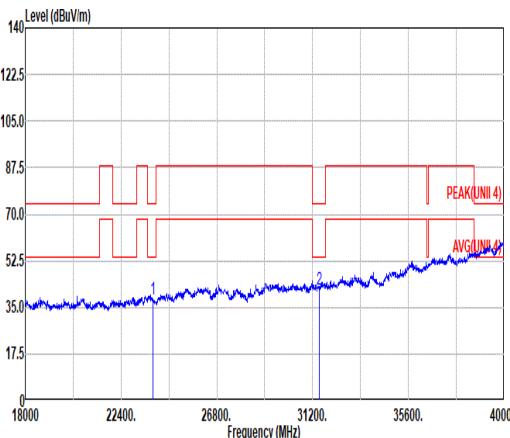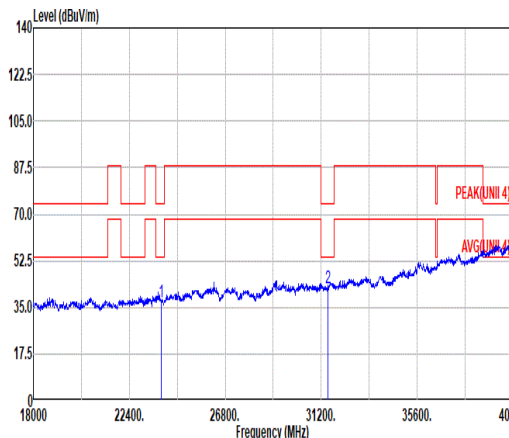

Mode	79																																																														
	SHF																																																														
	U-NII-4_5.85-5.895_802.11ax HE20_CH177_Partial 106/54_5885MHz																																																														
ANT	4+3																																																														
Pol.	Horizontal						Vertical																																																								
Peak																																																															
	Site : 03CH12-HY Condition: PEAK(UNII 4) 1m SHF_00993_231124 HORIZONTAL																																																														
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 23874.00</td><td>38.28</td><td>74.00</td><td>-35.72</td><td>37.49</td><td>38.40</td><td>24.93</td><td>53.00</td><td>-9.54</td><td>150</td><td>216 Peak</td></tr><tr><td>2 31497.00</td><td>41.51</td><td>74.00</td><td>-32.49</td><td>34.64</td><td>40.51</td><td>30.80</td><td>54.90</td><td>-9.54</td><td>150</td><td>259 Peak</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 23874.00	38.28	74.00	-35.72	37.49	38.40	24.93	53.00	-9.54	150	216 Peak	2 31497.00	41.51	74.00	-32.49	34.64	40.51	30.80	54.90	-9.54	150
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																					
1 23874.00	38.28	74.00	-35.72	37.49	38.40	24.93	53.00	-9.54	150	216 Peak																																																					
2 31497.00	41.51	74.00	-32.49	34.64	40.51	30.80	54.90	-9.54	150	259 Peak																																																					
Site : 03CH12-HY Condition: PEAK(UNII 4) 1m SHF_00993_231124 VERTICAL																																																															
<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 23874.00</td><td>37.15</td><td>74.00</td><td>-36.85</td><td>36.36</td><td>38.40</td><td>24.93</td><td>53.00</td><td>-9.54</td><td>150</td><td>166 Peak</td></tr><tr><td>2 31497.00</td><td>42.41</td><td>74.00</td><td>-31.59</td><td>35.54</td><td>40.51</td><td>30.80</td><td>54.90</td><td>-9.54</td><td>150</td><td>26 Peak</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 23874.00	37.15	74.00	-36.85	36.36	38.40	24.93	53.00	-9.54	150	166 Peak	2 31497.00	42.41	74.00	-31.59	35.54	40.51	30.80	54.90	-9.54	150	26 Peak
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																					
1 23874.00	37.15	74.00	-36.85	36.36	38.40	24.93	53.00	-9.54	150	166 Peak																																																					
2 31497.00	42.41	74.00	-31.59	35.54	40.51	30.80	54.90	-9.54	150	26 Peak																																																					




Appendix D. Duty Cycle Plots

<For Radiated Spurious Emission test>


Antenna	Band	Duty Cycle(%)	T(us)	1/T(kHz)	VBW Setting
4+3	802.11a	93.44	1425	0.70	1kHz
4+3	5GHz 802.11ax HE20 Full RU	91.19	1035	0.97	1kHz
4+3	5GHz 802.11ax HE20 26 RU	97.88	1617	0.62	1kHz
4+3	5GHz 802.11ax HE20 52 RU	97.98	1458	0.69	1kHz
4+3	5GHz 802.11ax HE20 106 RU	97.60	1302	0.77	1kHz
4+3	5GHz 802.11ax HE40 Full RU	90.99	1010	0.99	1kHz
4+3	5GHz 802.11ax HE80 Full RU	86.39	730	1.37	3kHz

MIMO <Ant. 4+3>

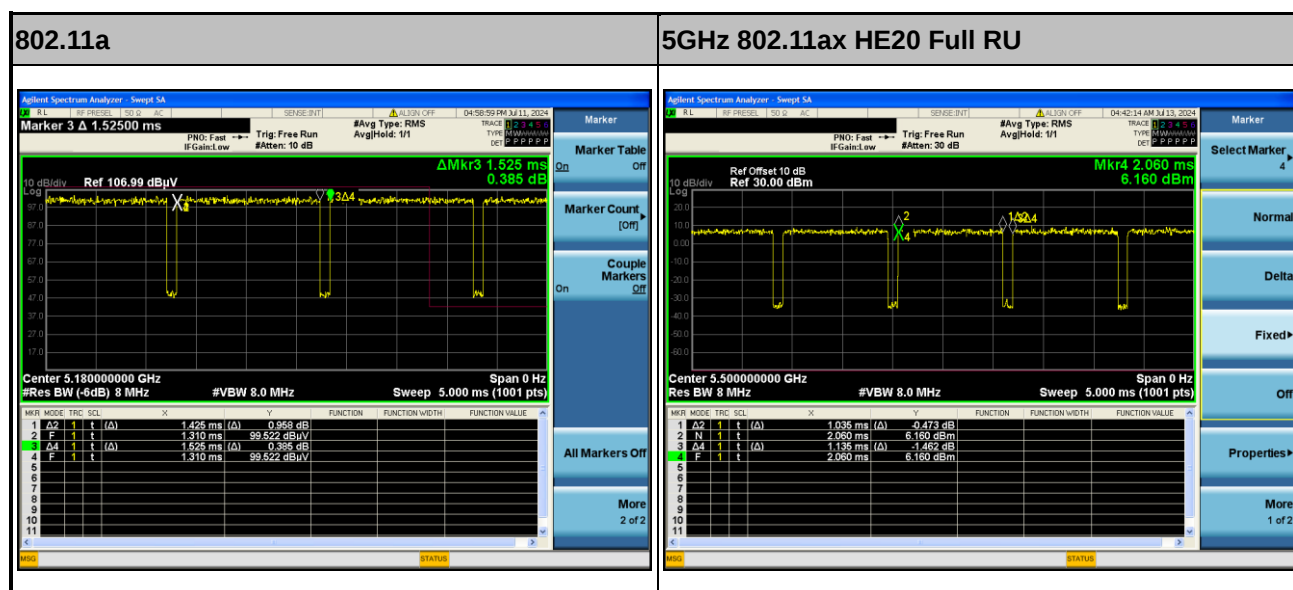





5GHz 802.11ax HE20 26 RU

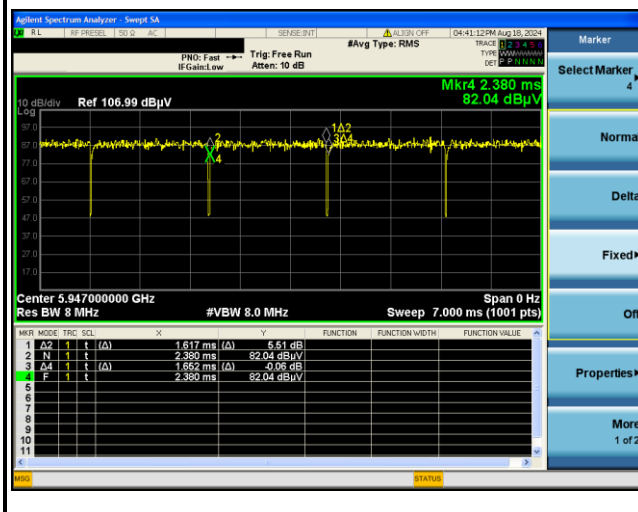


5GHz 802.11ax HE20 52 RU

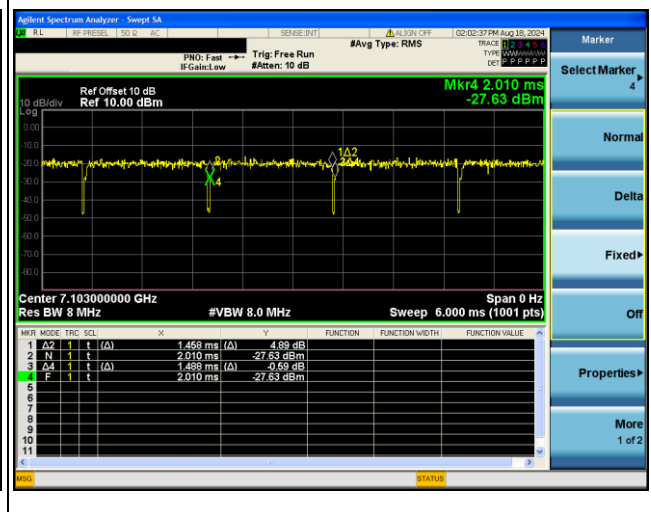


5GHz 802.11ax HE20 106 RU

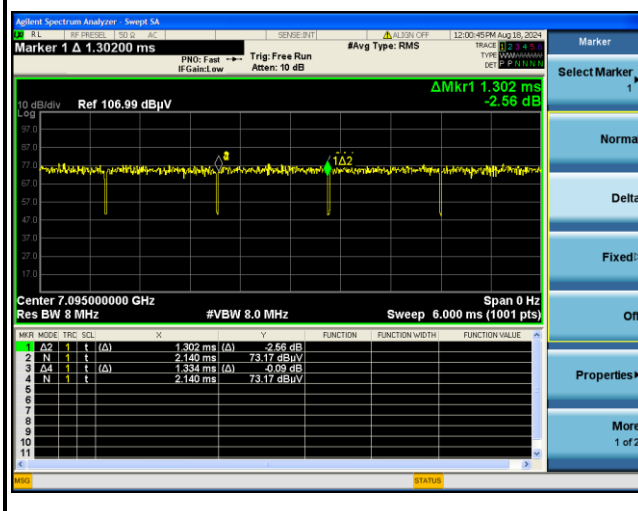

5GHz 802.11ax HE40 Full RU

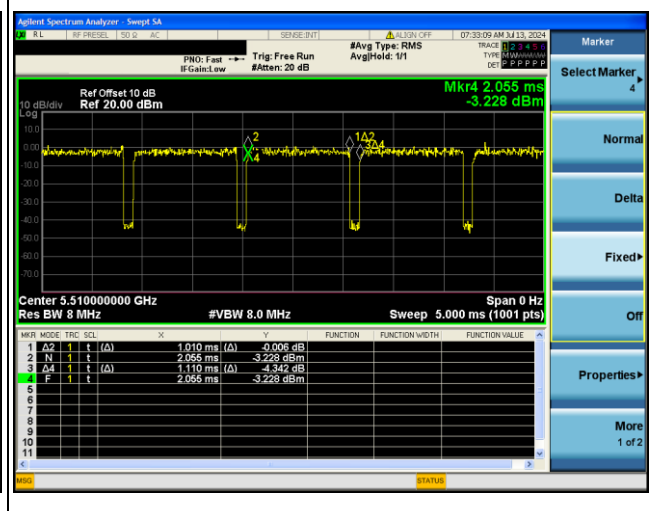

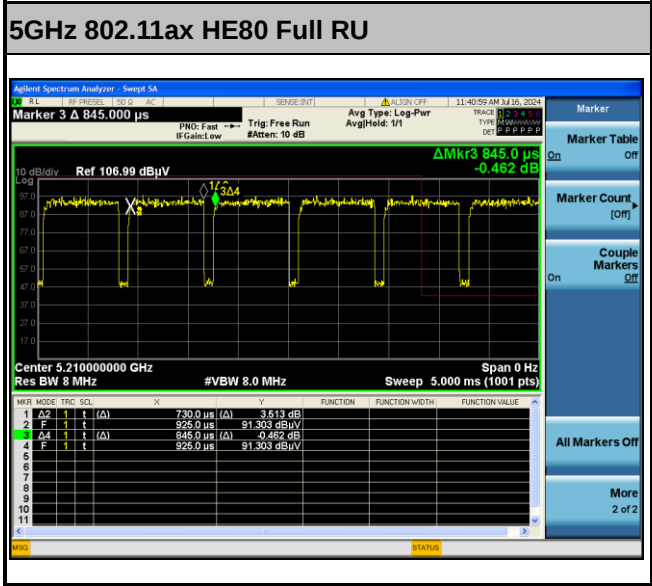


<For Conducted test>

Antenna	Band	Duty Cycle(%)	T(us)	Duty Factor(dB)
4+3	802.11a for Ant.4	93.72	1432	0.28
4+3	802.11a for Ant.3	93.46	1430	0.29
4+3	5GHz 802.11n HT20 Full RU for Ant. 4	93.06	1340	0.31
4+3	5GHz 802.11n HT20 Full RU for Ant. 3	93.06	1340	0.31
4+3	5GHz 802.11n HT40 Full RU for Ant. 4	92.70	1270	1370
4+3	5GHz 802.11n HT40 Full RU for Ant. 3	92.70	1270	1370
4+3	5GHz 802.11ac VHT20 for Ant. 4	93.08	1345	0.31
4+3	5GHz 802.11ac VHT20 for Ant. 3	92.82	1344	0.32
4+3	5GHz 802.11ac VHT40 for Ant. 4	88.40	1280	0.54
4+3	5GHz 802.11ac VHT40 for Ant. 3	88.40	1280	0.54
4+3	5GHz 802.11ac VHT80 for Ant. 4	89.90	890	0.46
4+3	5GHz 802.11ac VHT80 for Ant. 3	89.90	890	0.46
4+3	5GHz 802.11ax HE20 Full RU for Ant. 4	91.27	1045	0.40
4+3	5GHz 802.11ax HE20 Full RU for Ant. 3	91.27	1045	0.40
4+3	5GHz 802.11ax HE20 26 RU for Ant. 4	89.47	850	0.48
4+3	5GHz 802.11ax HE20 26 RU for Ant. 3	89.47	850	0.48
4+3	5GHz 802.11ax HE20 52 RU for Ant. 4	88.64	780	0.52
4+3	5GHz 802.11ax HE20 52 RU for Ant. 3	88.57	775	0.53
4+3	5GHz 802.11ax HE20 106 RU for Ant. 4	87.42	695	0.58
4+3	5GHz 802.11ax HE20 106 RU for Ant. 3	87.34	690	0.59
4+3	5GHz 802.11ax HE40 for Ant. 4	91.15	1030	0.40
4+3	5GHz 802.11ax HE40 for Ant. 3	91.11	1025	0.40
4+3	5GHz 802.11ax HE80 for Ant. 4	88.24	750	0.54
4+3	5GHz 802.11ax HE80 for Ant. 3	88.24	750	0.54



MIMO <Ant. 4+3>

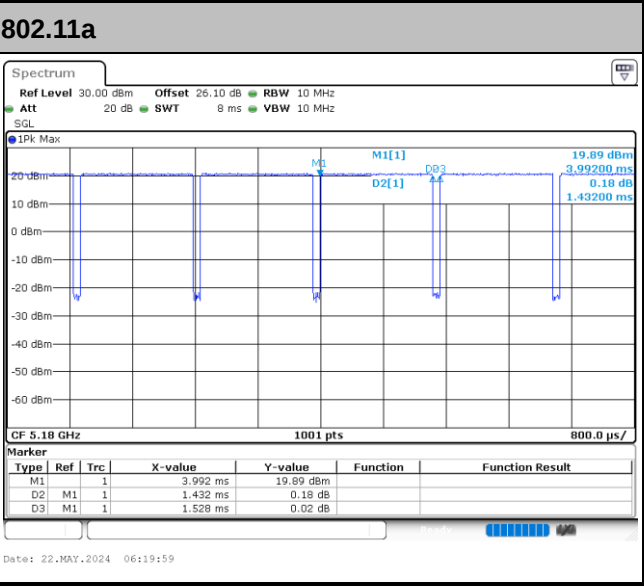

————THE END————