

Custom Band: Pulse Waveform (200Hz, 80%), BACK

Exposure Conditions

|                                  |                    |                        |            |
|----------------------------------|--------------------|------------------------|------------|
| Band                             | Custom Band        | TSL Permittivity       | 38.1       |
| Frequency [MHz]   Channel Number | 2010.000   2010000 | TSL Conductivity [S/m] | 1.39       |
| Group   UID                      | CW   10662-AAB     | Phantom Section   TSL  | Flat   HSL |
| Conversion Factor                | 8.19               | Test Distance [mm]     | 10.00      |

Hardware Setup


|                          |                              |          |                                  |
|--------------------------|------------------------------|----------|----------------------------------|
| Probe   Calibration Date | EX3DV4 - SN3989   2024-01-09 | Phantom  | Twin-SAM V8.0 (30deg probe tilt) |
| DAE   Calibration Date   | DAE4 Sn1674   2023-05-11     | TSL Type | HBBL-600-10000                   |
| Software Version         | 16.2.4.2524                  |          |                                  |

Scan Setup

|                                          | Area Scan     | Zoom Scan                  |
|------------------------------------------|---------------|----------------------------|
| Grid Extents [mm]                        | 120.0 x 200.0 | 30.0 x 30.0 x 30.0         |
| Grid Steps [mm]                          | 10.0 x 10.0   | 5.0 x 5.0 x 1.5            |
| Sensor Surface [mm]                      | 3.0           | 1.4                        |
| Graded Grid                              | N/A           | Yes                        |
| M2/M1 [%]                                |               | 85.0                       |
| Dist 3dB Peak [mm]                       |               | 8.6                        |
| Peak SAR [W/kg]   SAR Peak Location [mm] | N/A           | 1.21   [6.0, 84.5, -207.0] |

Measurement Results

|                  | Area Scan | Zoom Scan |
|------------------|-----------|-----------|
| psSAR1g [W/Kg]   | 0.663     | 0.678     |
| psSAR10g [W/Kg]  | 0.341     | 0.340     |
| Power Drift [dB] | N/A       | -0.02     |

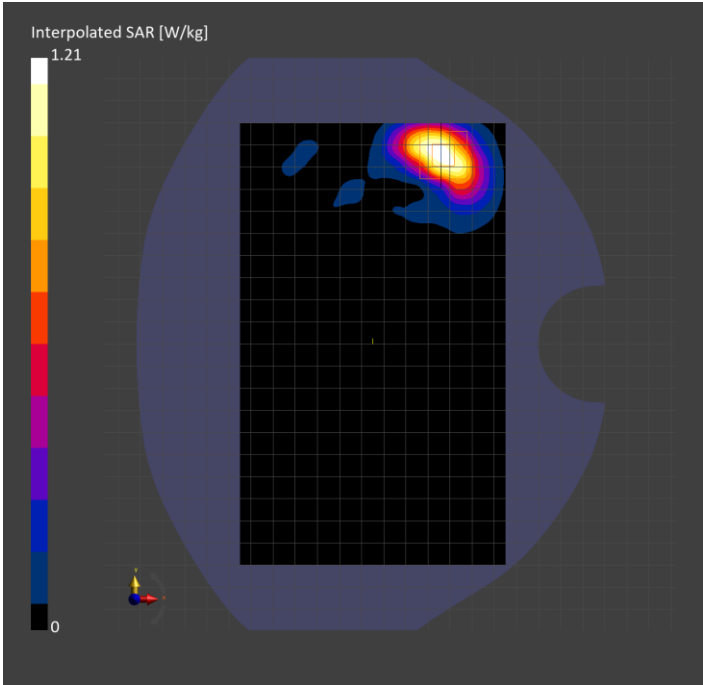

Custom Band: Pulse Waveform (200Hz, 80%), EDGE LEFT

Exposure Conditions

|                                  |                    |                        |            |
|----------------------------------|--------------------|------------------------|------------|
| Band                             | Custom Band        | TSL Permittivity       | 38.1       |
| Frequency [MHz]   Channel Number | 2010.000   2010000 | TSL Conductivity [S/m] | 1.39       |
| Group   UID                      | CW   10662-AAB     | Phantom Section   TSL  | Flat   HSL |
| Conversion Factor                | 8.19               | Test Distance [mm]     | 0.00       |

Hardware Setup


|                          |                              |          |                                  |
|--------------------------|------------------------------|----------|----------------------------------|
| Probe   Calibration Date | EX3DV4 - SN3989   2024-01-09 | Phantom  | Twin-SAM V8.0 (30deg probe tilt) |
| DAE   Calibration Date   | DAE4 Sn1674   2023-05-11     | TSL Type | HBBL-600-10000                   |
| Software Version         | 16.2.4.2524                  |          |                                  |

Scan Setup

|                                          | Area Scan    | Zoom Scan                    |
|------------------------------------------|--------------|------------------------------|
| Grid Extents [mm]                        | 48.0 x 200.0 | 30.0 x 30.0 x 30.0           |
| Grid Steps [mm]                          | 8.0 x 10.0   | 4.8 x 4.8 x 1.5              |
| Sensor Surface [mm]                      | 3.0          | 1.4                          |
| Graded Grid                              | N/A          | Yes                          |
| M2/M1 [%]                                |              | 71.0                         |
| Dist 3dB Peak [mm]                       |              | 5.8                          |
| Peak SAR [W/kg]   SAR Peak Location [mm] | N/A          | 10.9   [-31.6, 59.4, -207.0] |

Measurement Results

|                  | Area Scan | Zoom Scan |
|------------------|-----------|-----------|
| psSAR1g [W/Kg]   | 3.96      | 3.81      |
| psSAR10g [W/Kg]  | 1.66      | 1.51      |
| Power Drift [dB] | N/A       | -0.01     |

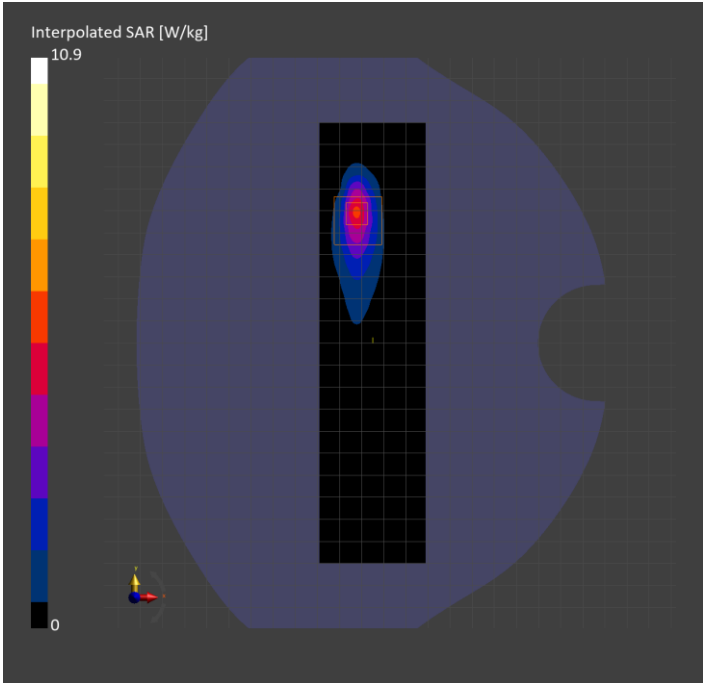

PCS 1900: GPRS-FDD (TDMA, GMSK, TN 0-1-2-3), BACK

Exposure Conditions

|                                  |                 |                        |            |
|----------------------------------|-----------------|------------------------|------------|
| Band                             | PCS 1900        | TSL Permittivity       | 39.3       |
| Frequency [MHz]   Channel Number | 1880.000   661  | TSL Conductivity [S/m] | 1.40       |
| Group   UID                      | GSM   10028-DAC | Phantom Section   TSL  | Flat   HSL |
| Conversion Factor                | 7.06            | Test Distance [mm]     | 10.00      |

Hardware Setup


|                          |                              |          |                                  |
|--------------------------|------------------------------|----------|----------------------------------|
| Probe   Calibration Date | EX3DV4 - SN3686   2024-01-12 | Phantom  | Twin-SAM V8.0 (30deg probe tilt) |
| DAE   Calibration Date   | DAE4 Sn1258   2024-03-12     | TSL Type | HBBL-600-10000                   |
| Software Version         | 16.2.4.2524                  |          |                                  |

Scan Setup

|                                          | Area Scan     | Zoom Scan                     |
|------------------------------------------|---------------|-------------------------------|
| Grid Extents [mm]                        | 120.0 x 210.0 | 30.0 x 30.0 x 30.0            |
| Grid Steps [mm]                          | 15.0 x 15.0   | 6.0 x 6.0 x 1.5               |
| Sensor Surface [mm]                      | 3.0           | 1.4                           |
| Graded Grid                              | N/A           | Yes                           |
| M2/M1 [%]                                |               | 83.6                          |
| Dist 3dB Peak [mm]                       |               | 9.6                           |
| Peak SAR [W/kg]   SAR Peak Location [mm] | N/A           | 1.30   [-11.9, -84.9, -207.0] |

Measurement Results

|                  | Area Scan | Zoom Scan |
|------------------|-----------|-----------|
| psSAR1g [W/Kg]   | 0.636     | 0.733     |
| psSAR10g [W/Kg]  | 0.348     | 0.388     |
| Power Drift [dB] | N/A       | 0.07      |

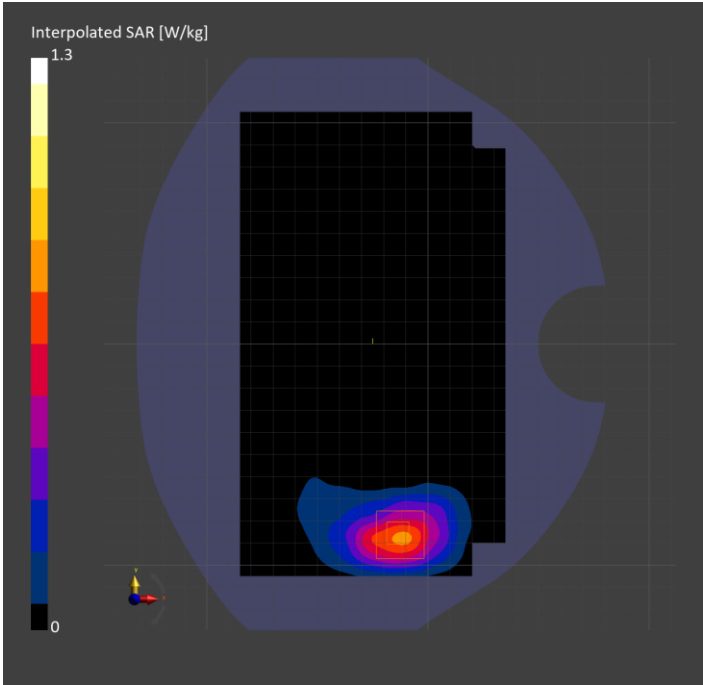

Band n7: 5G NR (DFT-s-OFDM, 1 RB, 50 MHz, QPSK, 15 kHz) RBPosition:Low

AntennaCfg:SISO, EDGE BOTTOM

Exposure Conditions

|                                  |                           |                        |            |
|----------------------------------|---------------------------|------------------------|------------|
| Band                             | Band n7                   | TSL Permittivity       | 38.7       |
| Frequency [MHz]   Channel Number | 2535.000   507000         | TSL Conductivity [S/m] | 1.81       |
| Group   UID                      | 5G NR FR1 FDD   10935-AAD | Phantom Section   TSL  | Flat   HSL |
| Conversion Factor                | 7.64                      | Test Distance [mm]     | 0.00       |

Hardware Setup


|                          |                              |          |                                  |
|--------------------------|------------------------------|----------|----------------------------------|
| Probe   Calibration Date | EX3DV4 - SN3885   2023-10-12 | Phantom  | Twin-SAM V8.0 (30deg probe tilt) |
| DAE   Calibration Date   | DAE4 Sn1787   2023-05-03     | TSL Type | HBBL-600-10000                   |
| Software Version         | 16.2.4.2524                  |          |                                  |

Scan Setup

|                                          | Area Scan    | Zoom Scan                     |
|------------------------------------------|--------------|-------------------------------|
| Grid Extents [mm]                        | 48.0 x 120.0 | 30.0 x 30.0 x 30.0            |
| Grid Steps [mm]                          | 8.0 x 10.0   | 3.8 x 3.8 x 1.4               |
| Sensor Surface [mm]                      | 3.0          | 1.4                           |
| Graded Grid                              | N/A          | Yes                           |
| M2/M1 [%]                                |              | 64.8                          |
| Dist 3dB Peak [mm]                       |              | 5.4                           |
| Peak SAR [W/kg]   SAR Peak Location [mm] | N/A          | 16.4   [-30.3, -11.1, -207.0] |

Measurement Results

|                  | Area Scan | Zoom Scan |
|------------------|-----------|-----------|
| psSAR1g [W/Kg]   | 4.26      | 4.58      |
| psSAR10g [W/Kg]  | 1.79      | 1.72      |
| Power Drift [dB] | N/A       | 0.05      |

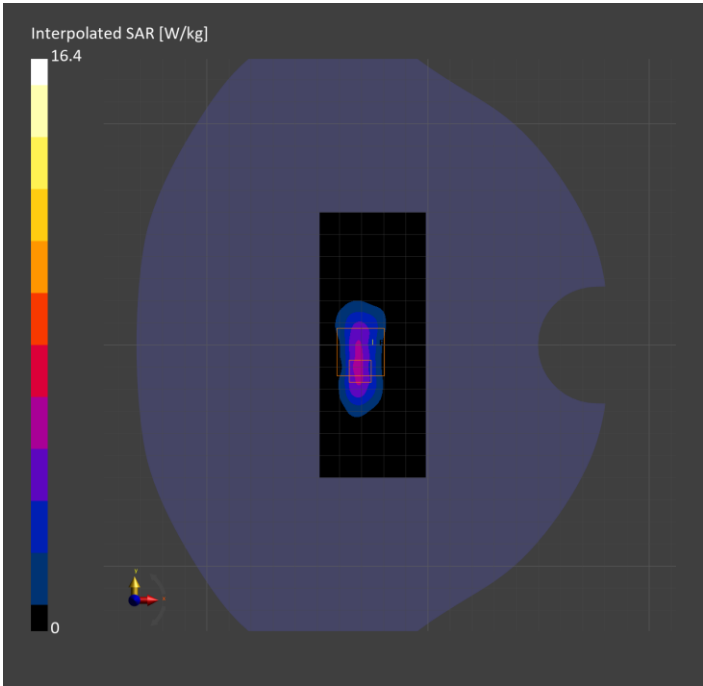

Band n48: 5G NR (DFT-s-OFDM, 50% RB, 40 MHz, QPSK, 30 kHz) RBPosition:Mid

AntennaCfg:SISO, CHEEK

Exposure Conditions

|                                  |                           |                        |                 |
|----------------------------------|---------------------------|------------------------|-----------------|
| Band                             | Band n48                  | TSL Permittivity       | 40.3            |
| Frequency [MHz]   Channel Number | 3643.315   642888         | TSL Conductivity [S/m] | 2.85            |
| Group   UID                      | 5G NR FR1 TDD   10913-AAD | Phantom Section   TSL  | RightHead   HSL |
| Conversion Factor                | 6.89                      | Test Distance [mm]     | 0.00            |

Hardware Setup


|                          |                              |          |                                  |
|--------------------------|------------------------------|----------|----------------------------------|
| Probe   Calibration Date | EX3DV4 - SN7657   2023-05-30 | Phantom  | Twin-SAM V8.0 (30deg probe tilt) |
| DAE   Calibration Date   | DAE4 Sn1545   2024-02-09     | TSL Type | HBBL-600-10000                   |
| Software Version         | 16.2.4.2524                  |          |                                  |

Scan Setup

|                                          | Area Scan     | Zoom Scan                    |
|------------------------------------------|---------------|------------------------------|
| Grid Extents [mm]                        | 120.0 x 200.0 | 28.0 x 28.0 x 28.0           |
| Grid Steps [mm]                          | 10.0 x 10.0   | 2.8 x 2.8 x 1.2              |
| Sensor Surface [mm]                      | 3.0           | 1.4                          |
| Graded Grid                              | N/A           | Yes                          |
| M2/M1 [%]                                |               | 78.4                         |
| Dist 3dB Peak [mm]                       |               | 4.5                          |
| Peak SAR [W/kg]   SAR Peak Location [mm] | N/A           | 1.77   [7.1, -322.5, -173.5] |

Measurement Results

|                  | Area Scan | Zoom Scan |
|------------------|-----------|-----------|
| psSAR1g [W/Kg]   | 0.548     | 0.548     |
| psSAR10g [W/Kg]  | 0.215     | 0.169     |
| Power Drift [dB] | N/A       | -0.02     |

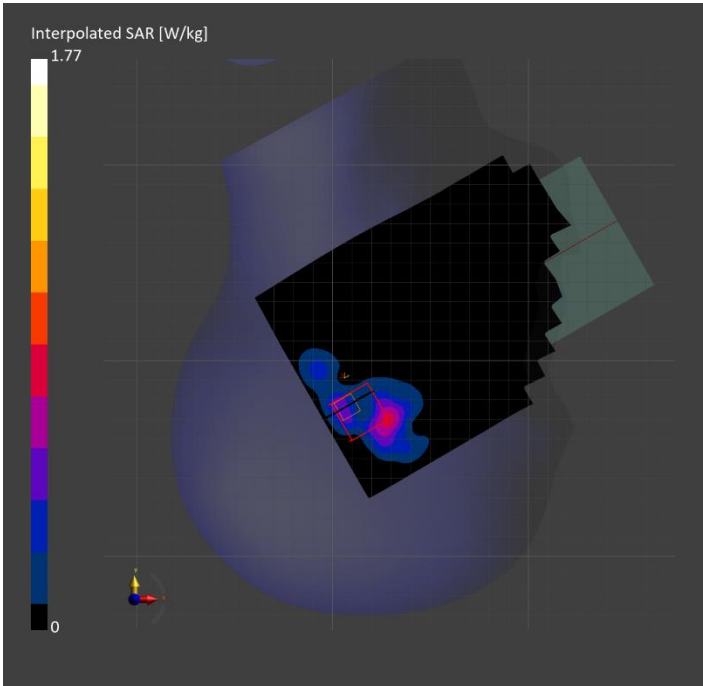

WLAN 2.4GHz: IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 6 Mbps, 99pc duty cycle, Short preamble), CHEEK

Exposure Conditions

|                                  |                  |                        |                |
|----------------------------------|------------------|------------------------|----------------|
| Band                             | WLAN 2.4GHz      | TSL Permittivity       | 39.8           |
| Frequency [MHz]   Channel Number | 2437.000   6     | TSL Conductivity [S/m] | 1.71           |
| Group   UID                      | WLAN   10419-AAA | Phantom Section   TSL  | LeftHead   HSL |
| Conversion Factor                | 7.1              | Test Distance [mm]     | 0.00           |

Hardware Setup


|                          |                              |          |                                  |
|--------------------------|------------------------------|----------|----------------------------------|
| Probe   Calibration Date | EX3DV4 - SN3990   2024-02-28 | Phantom  | Twin-SAM V5.0 (30deg probe tilt) |
| DAE   Calibration Date   | DAE4 Sn1239   2024-03-06     | TSL Type | HBBL-600-10000                   |
| Software Version         | 16.2.4.2524                  |          |                                  |

Scan Setup

|                                          | Area Scan     | Zoom Scan                    |
|------------------------------------------|---------------|------------------------------|
| Grid Extents [mm]                        | 120.0 x 200.0 | 30.0 x 30.0 x 30.0           |
| Grid Steps [mm]                          | 10.0 x 10.0   | 5.0 x 5.0 x 1.5              |
| Sensor Surface [mm]                      | 3.0           | 1.4                          |
| Graded Grid                              | N/A           | Yes                          |
| M2/M1 [%]                                |               | 79.3                         |
| Dist 3dB Peak [mm]                       |               | 5.9                          |
| Peak SAR [W/kg]   SAR Peak Location [mm] | N/A           | 1.14   [37.4, 340.1, -173.6] |

Measurement Results

|                  | Area Scan | Zoom Scan |
|------------------|-----------|-----------|
| psSAR1g [W/Kg]   | 0.513     | 0.525     |
| psSAR10g [W/Kg]  | 0.242     | 0.239     |
| Power Drift [dB] | N/A       | 0.03      |

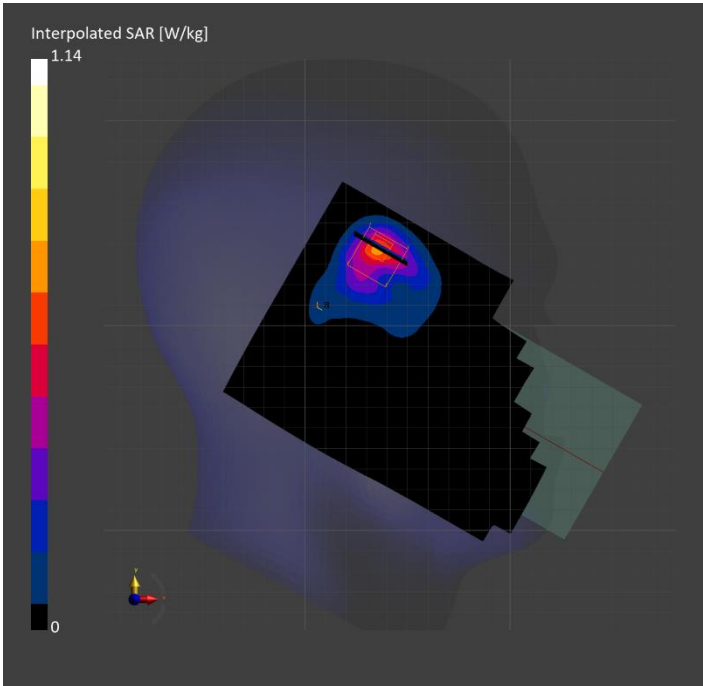

Custom Band: IEEE 802.11n (HT Greenfield, 13.5 Mbps, BPSK), BACK

Exposure Conditions

|                                  |                    |                        |            |
|----------------------------------|--------------------|------------------------|------------|
| Band                             | Custom Band        | TSL Permittivity       | 38.1       |
| Frequency [MHz]   Channel Number | 5835.000   5835000 | TSL Conductivity [S/m] | 5.49       |
| Group   UID                      | CW   10114-CAE     | Phantom Section   TSL  | Flat   HSL |
| Conversion Factor                | 5.16               | Test Distance [mm]     | 10.00      |

Hardware Setup


|                          |                              |          |                                  |
|--------------------------|------------------------------|----------|----------------------------------|
| Probe   Calibration Date | EX3DV4 - SN7657   2023-05-30 | Phantom  | Twin-SAM V8.0 (30deg probe tilt) |
| DAE   Calibration Date   | DAE4 Sn1545   2024-02-09     | TSL Type | HBBL-600-10000                   |
| Software Version         | 16.2.4.2524                  |          |                                  |

Scan Setup

|                                          | Area Scan     | Zoom Scan                  |
|------------------------------------------|---------------|----------------------------|
| Grid Extents [mm]                        | 120.0 x 200.0 | 22.0 x 22.0 x 22.0         |
| Grid Steps [mm]                          | 10.0 x 10.0   | 4.0 x 4.0 x 1.4            |
| Sensor Surface [mm]                      | 3.0           | 1.4                        |
| Graded Grid                              | N/A           | Yes                        |
| M2/M1 [%]                                |               | 57.7                       |
| Dist 3dB Peak [mm]                       |               | 9.7                        |
| Peak SAR [W/kg]   SAR Peak Location [mm] | N/A           | 1.84   [3.5, 59.5, -207.0] |

Measurement Results

|                  | Area Scan | Zoom Scan |
|------------------|-----------|-----------|
| psSAR1g [W/Kg]   | 0.430     | 0.450     |
| psSAR10g [W/Kg]  | 0.160     | 0.164     |
| Power Drift [dB] | N/A       | -0.03     |

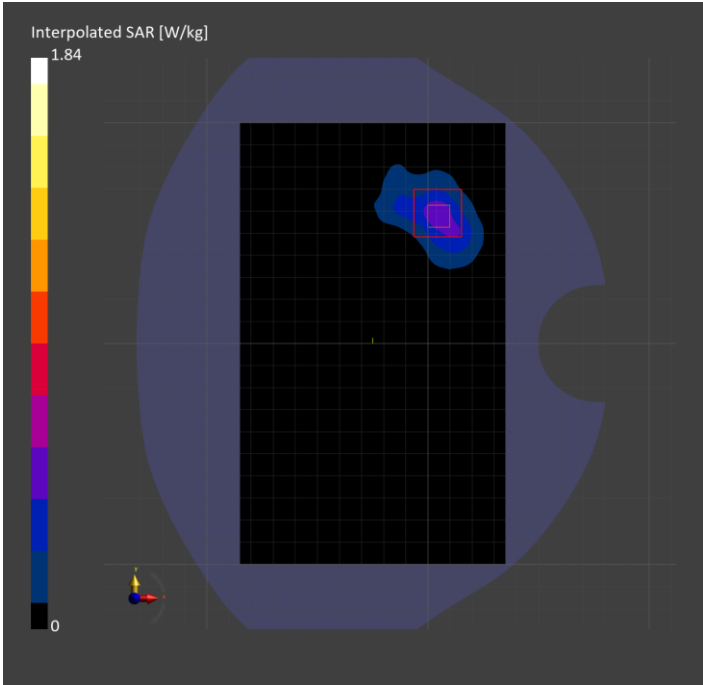

WLAN 5GHz: IEEE 802.11ac WiFi (80MHz, MCS0, 99pc duty cycle), EDGE LEFT

Exposure Conditions

|                                  |                  |                        |            |
|----------------------------------|------------------|------------------------|------------|
| Band                             | WLAN 5GHz        | TSL Permittivity       | 37.0       |
| Frequency [MHz]   Channel Number | 5610.000   122   | TSL Conductivity [S/m] | 4.85       |
| Group   UID                      | WLAN   10544-AAD | Phantom Section   TSL  | Flat   HSL |
| Conversion Factor                | 4.7              | Test Distance [mm]     | 0.00       |

Hardware Setup


|                          |                              |          |                                  |
|--------------------------|------------------------------|----------|----------------------------------|
| Probe   Calibration Date | EX3DV4 - SN3990   2024-02-28 | Phantom  | Twin-SAM V5.0 (30deg probe tilt) |
| DAE   Calibration Date   | DAE4 Sn1239   2024-03-06     | TSL Type | HBBL-600-10000                   |
| Software Version         | 16.2.4.2524                  |          |                                  |

Scan Setup

|                                          | Area Scan    | Zoom Scan                    |
|------------------------------------------|--------------|------------------------------|
| Grid Extents [mm]                        | 48.0 x 200.0 | 22.0 x 22.0 x 22.0           |
| Grid Steps [mm]                          | 8.0 x 10.0   | 4.0 x 4.0 x 1.4              |
| Sensor Surface [mm]                      | 3.0          | 1.4                          |
| Graded Grid                              | N/A          | Yes                          |
| M2/M1 [%]                                |              | 58.0                         |
| Dist 3dB Peak [mm]                       |              | 5.1                          |
| Peak SAR [W/kg]   SAR Peak Location [mm] | N/A          | 27.7   [-27.0, 57.7, -207.0] |

Measurement Results

|                  | Area Scan | Zoom Scan |
|------------------|-----------|-----------|
| psSAR1g [W/Kg]   | 4.10      | 5.53      |
| psSAR10g [W/Kg]  | 1.24      | 1.44      |
| Power Drift [dB] | N/A       | -0.13     |

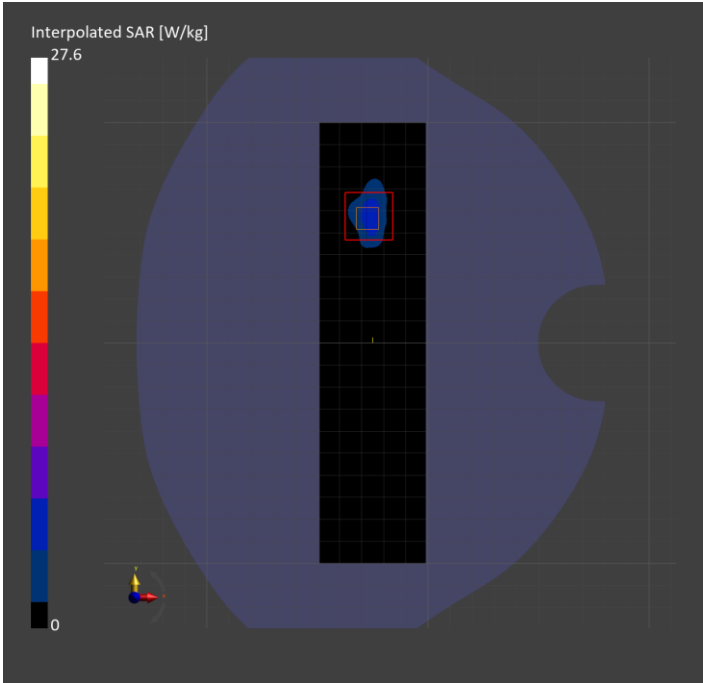

ISM 2.4 GHz Band: IEEE 802.15.1 Bluetooth (GFSK, DH5), EDGE LEFT

Exposure Conditions

|                                  |                       |                        |            |
|----------------------------------|-----------------------|------------------------|------------|
| Band                             | ISM 2.4 GHz Band      | TSL Permittivity       | 39.8       |
| Frequency [MHz]   Channel Number | 2441.000   39         | TSL Conductivity [S/m] | 1.71       |
| Group   UID                      | Bluetooth   10032-CAA | Phantom Section   TSL  | Flat   HSL |
| Conversion Factor                | 7.1                   | Test Distance [mm]     | 10.00      |

Hardware Setup


|                          |                              |          |                                  |
|--------------------------|------------------------------|----------|----------------------------------|
| Probe   Calibration Date | EX3DV4 - SN3990   2024-02-28 | Phantom  | Twin-SAM V5.0 (30deg probe tilt) |
| DAE   Calibration Date   | DAE4 Sn1239   2024-03-06     | TSL Type | HBBL-600-10000                   |
| Software Version         | 16.2.4.2524                  |          |                                  |

Scan Setup

|                                          | Area Scan    | Zoom Scan                     |
|------------------------------------------|--------------|-------------------------------|
| Grid Extents [mm]                        | 48.0 x 200.0 | 30.0 x 30.0 x 30.0            |
| Grid Steps [mm]                          | 8.0 x 10.0   | 5.0 x 5.0 x 1.5               |
| Sensor Surface [mm]                      | 3.0          | 1.4                           |
| Graded Grid                              | N/A          | Yes                           |
| M2/M1 [%]                                |              | 81.1                          |
| Dist 3dB Peak [mm]                       |              | 8.0                           |
| Peak SAR [W/kg]   SAR Peak Location [mm] | N/A          | 0.420   [-30.7, 49.5, -207.0] |

Measurement Results

|                  | Area Scan | Zoom Scan |
|------------------|-----------|-----------|
| psSAR1g [W/Kg]   | 0.206     | 0.210     |
| psSAR10g [W/Kg]  | 0.097     | 0.096     |
| Power Drift [dB] | N/A       | 0.10      |

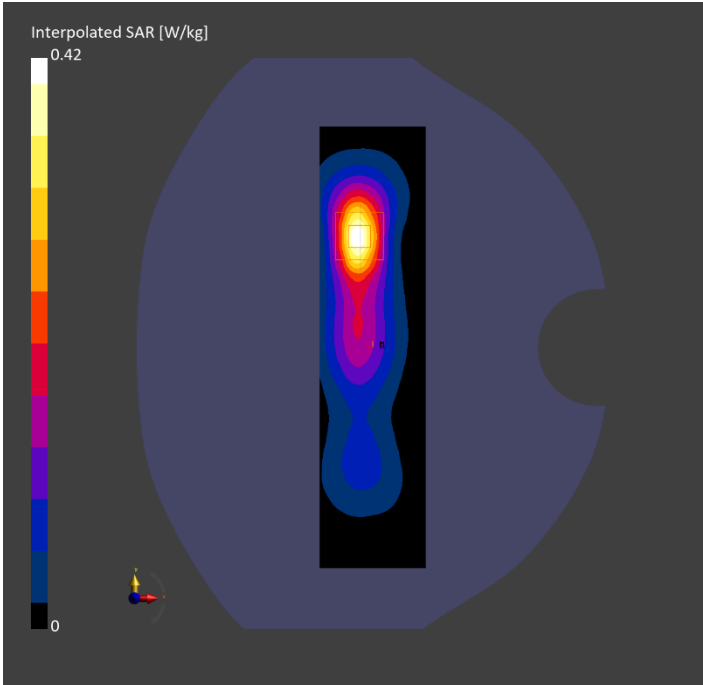

Custom Band: NFC, BACK

Exposure Conditions

|                                  |                |                        |            |
|----------------------------------|----------------|------------------------|------------|
| Band                             | NFC            | TSL Permittivity       | 56.1       |
| Frequency [MHz]   Channel Number | 13.600   13600 | TSL Conductivity [S/m] | 0.764      |
| Group   UID                      | CW   0--       | Phantom Section   TSL  | Flat   HSL |
| Conversion Factor                | 18.85          | Test Distance [mm]     | 0.00       |

Hardware Setup


|                          |                              |          |                             |
|--------------------------|------------------------------|----------|-----------------------------|
| Probe   Calibration Date | EX3DV4 - SN3989   2024-01-09 | Phantom  | ELI V8.0 (20deg probe tilt) |
| DAE   Calibration Date   | DAE4 Sn1674   2023-05-11     | TSL Type | HBBL4-250V3                 |
| Software Version         | 16.2.4.2524                  |          |                             |

Scan Setup

|                                          | Area Scan     | Zoom Scan                    |
|------------------------------------------|---------------|------------------------------|
| Grid Extents [mm]                        | 120.0 x 210.0 | 30.0 x 30.0 x 30.0           |
| Grid Steps [mm]                          | 15.0 x 15.0   | 5.5 x 5.5 x 1.5              |
| Sensor Surface [mm]                      | 3.0           | 1.4                          |
| Graded Grid                              | N/A           | Yes                          |
| M2/M1 [%]                                |               | 62.9                         |
| Dist 3dB Peak [mm]                       |               | 7.0                          |
| Peak SAR [W/kg]   SAR Peak Location [mm] | N/A           | 0.960   [11.0, -5.6, -177.0] |

Measurement Results

|                  | Area Scan | Zoom Scan |
|------------------|-----------|-----------|
| psSAR1g [W/Kg]   | 0.281     | 0.307     |
| psSAR10g [W/Kg]  | 0.193     | 0.133     |
| Power Drift [dB] | N/A       | -0.03     |

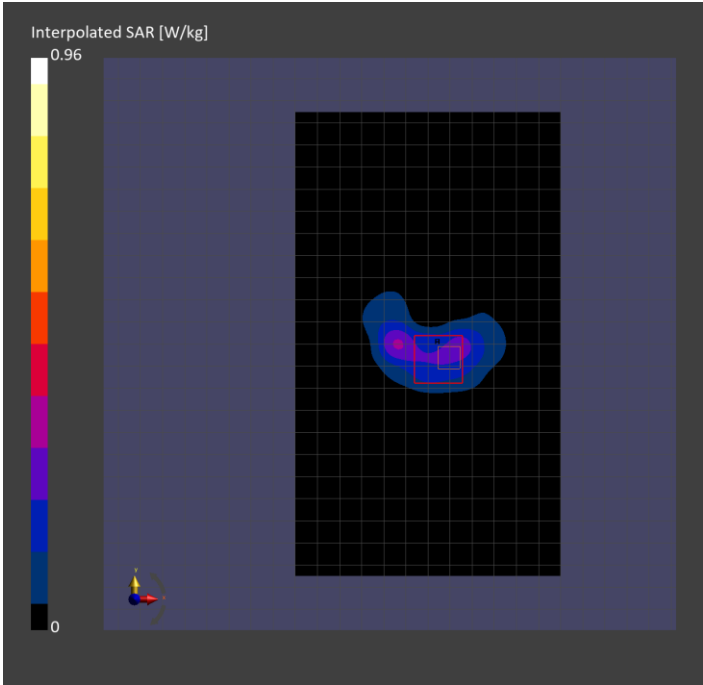

U-NII-6: IEEE 802.11ax (160MHz, MCS0, 99pc duty cycle), CHEEK

Exposure Conditions

|                                  |                  |                        |                 |
|----------------------------------|------------------|------------------------|-----------------|
| Band                             | U-NII-6          | TSL Permittivity       | 35.1            |
| Frequency [MHz]   Channel Number | 6505.000   111   | TSL Conductivity [S/m] | 5.78            |
| Group   UID                      | WLAN   10755-AAC | Phantom Section   TSL  | RightHead   HSL |
| Conversion Factor                | 5.59             | Test Distance [mm]     | 0.00            |

Hardware Setup


|                          |                              |          |                                  |
|--------------------------|------------------------------|----------|----------------------------------|
| Probe   Calibration Date | EX3DV4 - SN7657   2023-05-30 | Phantom  | Twin-SAM V8.0 (30deg probe tilt) |
| DAE   Calibration Date   | DAE4 Sn1545   2024-02-09     | TSL Type | HBBL-600-10000                   |
| Software Version         | 16.2.4.2524                  |          |                                  |

Scan Setup

|                                          | Area Scan     | Zoom Scan                     |
|------------------------------------------|---------------|-------------------------------|
| Grid Extents [mm]                        | 119.0 x 204.0 | 22.0 x 22.0 x 22.0            |
| Grid Steps [mm]                          | 8.5 x 8.5     | 3.4 x 3.4 x 1.4               |
| Sensor Surface [mm]                      | 3.0           | 1.4                           |
| Graded Grid                              | N/A           | Yes                           |
| M2/M1 [%]                                |               | 55.0                          |
| Dist 3dB Peak [mm]                       |               | 6.2                           |
| Peak SAR [W/kg]   SAR Peak Location [mm] | N/A           | 1.97   [48.2, -329.3, -174.2] |

Measurement Results

|                            | Area Scan | Zoom Scan | APD   |
|----------------------------|-----------|-----------|-------|
| psSAR1g [W/Kg]             | 0.340     | 0.425     | N/A   |
| psSAR8g [W/Kg]             | 0.115     | 0.138     | N/A   |
| psSAR10g [W/Kg]            | 0.10      | 0.118     | N/A   |
| psAPD (4.0cm², sq.) [W/m²] | N/A       | N/A       | 2.76  |
| Power Drift [dB]           | N/A       | -0.11     | -0.11 |

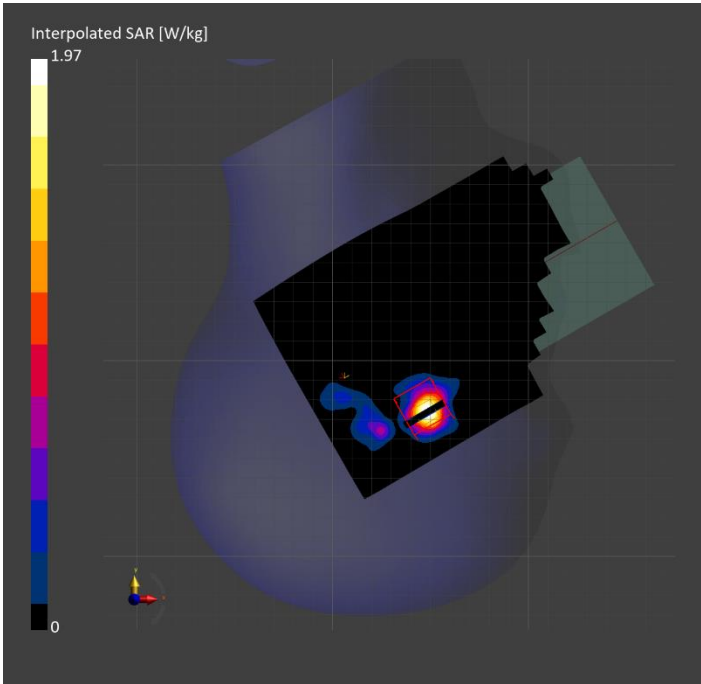

U-NII-7: IEEE 802.11ax (160MHz, MCS0, 99pc duty cycle), FRONT

Exposure Conditions

|                                  |                  |                        |            |
|----------------------------------|------------------|------------------------|------------|
| Band                             | U-NII-7          | TSL Permittivity       | 35.0       |
| Frequency [MHz]   Channel Number | 6665.000   143   | TSL Conductivity [S/m] | 6.14       |
| Group   UID                      | WLAN   10755-AAC | Phantom Section   TSL  | Flat   HSL |
| Conversion Factor                | 5.59             | Test Distance [mm]     | 0.00       |

Hardware Setup

|                          |                              |          |                                  |
|--------------------------|------------------------------|----------|----------------------------------|
| Probe   Calibration Date | EX3DV4 - SN7657   2023-05-30 | Phantom  | Twin-SAM V8.0 (30deg probe tilt) |
| DAE   Calibration Date   | DAE4 Sn1545   2024-02-09     | TSL Type | HBBL-600-10000                   |
| Software Version         | 16.2.4.2524                  |          |                                  |

Scan Setup

|                                          | Area Scan     | Zoom Scan                    |
|------------------------------------------|---------------|------------------------------|
| Grid Extents [mm]                        | 119.0 x 204.0 | 22.0 x 22.0 x 22.0           |
| Grid Steps [mm]                          | 8.5 x 8.5     | 2.9 x 2.9 x 1.2              |
| Sensor Surface [mm]                      | 3.0           | 1.4                          |
| Graded Grid                              | N/A           | Yes                          |
| M2/M1 [%]                                |               | 48.4                         |
| Dist 3dB Peak [mm]                       |               | 4.5                          |
| Peak SAR [W/kg]   SAR Peak Location [mm] | N/A           | 3.15   [-62.8, 50.8, -207.0] |

Measurement Results

|                            | Area Scan | Zoom Scan | APD   |
|----------------------------|-----------|-----------|-------|
| psSAR1g [W/Kg]             | 0.509     | 0.549     | N/A   |
| psSAR8g [W/Kg]             | 0.174     | 0.168     | N/A   |
| psSAR10g [W/Kg]            | 0.150     | 0.141     | N/A   |
| psAPD (4.0cm², sq.) [W/m²] | N/A       | N/A       | 3.35  |
| Power Drift [dB]           | N/A       | -0.05     | -0.05 |

