



FCC 47 CFR PART 15 SUBPART E

CERTIFICATION TEST REPORT

FOR

MEDIA STREAMING DEVICE with BLE, 2.4GHz and 5GHz WLAN Radios

MODEL NUMBER: RUX-J42

FCC ID: A4RRUX-J42

REPORT NUMBER: 15U20918-E2

ISSUE DATE: AUGUST 3, 2015

Prepared for

Google

**1600 Amphitheatre Parkway
Mountain View, CA 94043**

Prepared by

UL VERIFICATION SERVICES INC.

**47173 BENICIA STREET
FREMONT, CA 94538, U.S.A.**

TEL: (510) 771-1000

FAX: (510) 661-0888



NVLAP LAB CODE 200065-0

Revision History

Rev.	Issue Date	Revisions	Revised By
--	8/3/15	Initial Issue	F. de Anda

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS	7
2. TEST METHODOLOGY	8
3. FACILITIES AND ACCREDITATION	8
4. CALIBRATION AND UNCERTAINTY	8
4.1. MEASURING INSTRUMENT CALIBRATION	8
4.2. SAMPLE CALCULATION	8
4.3. MEASUREMENT UNCERTAINTY.....	9
5. EQUIPMENT UNDER TEST	10
5.1. DESCRIPTION OF EUT	10
5.2. MAXIMUM OUTPUT POWER	10
5.3. DESCRIPTION OF AVAILABLE ANTENNAS	11
5.4. SOFTWARE AND FIRMWARE.....	11
5.5. WORST-CASE CONFIGURATION AND MODE.....	11
5.6. DESCRIPTION OF TEST SETUP.....	12
6. TEST AND MEASUREMENT EQUIPMENT	15
7. ON TIME, DUTY CYCLE AND MEASUREMENT METHODS	16
7.1. ON TIME AND DUTY CYCLE.....	16
7.2. MEASUREMENT METHODS	19
8. ANTENNA PORT TEST RESULTS	20
8.1. 802.11a MODE IN THE 5.2 GHz BAND.....	20
8.1.1. 26 dB BANDWIDTH.....	20
8.1.2. 99% BANDWIDTH.....	22
8.1.3. OUTPUT POWER AND PSD.....	24
8.2. 802.11n HT20 MODE IN THE 5.2 GHz BAND	29
8.2.1. 26 dB BANDWIDTH.....	29
8.2.2. 99% BANDWIDTH.....	31
8.2.3. OUTPUT POWER AND PSD.....	33
8.3. 802.11n HT40 MODE IN THE 5.2 GHz BAND	38
8.3.1. 26 dB BANDWIDTH.....	38
8.3.2. 99% BANDWIDTH.....	40
8.3.3. OUTPUT POWER AND PSD.....	42
8.4. 802.11ac VHT80 MODE IN THE 5.2 GHz BAND	46
8.4.1. 26 dB BANDWIDTH.....	46
8.4.2. 99% BANDWIDTH.....	47
8.4.3. OUTPUT POWER AND PSD.....	48
8.5. 802.11a MODE IN THE 5.3 GHz BAND.....	51

8.5.1.	26 dB BANDWIDTH.....	51
8.5.2.	99% BANDWIDTH.....	54
8.5.3.	OUTPUT POWER AND PSD.....	57
8.6.	<i>802.11n HT20 MODE IN THE 5.3 GHz BAND</i>	62
8.6.1.	26 dB BANDWIDTH.....	62
8.6.2.	99% BANDWIDTH.....	65
8.6.3.	OUTPUT POWER AND PSD.....	68
8.7.	<i>802.11n HT40 MODE IN THE 5.3 GHz BAND</i>	73
8.7.1.	26 dB BANDWIDTH.....	73
8.7.2.	99% BANDWIDTH.....	75
8.7.3.	OUTPUT POWER AND PSD.....	77
8.8.	<i>802.11ac VHT80 MODE IN THE 5.3 GHz BAND</i>	81
8.8.1.	26 dB BANDWIDTH.....	81
8.8.2.	99% BANDWIDTH.....	83
8.8.3.	OUTPUT POWER AND PSD.....	85
8.9.	<i>802.11a MODE IN THE 5.6 GHz BAND</i>	88
8.9.1.	26 dB BANDWIDTH.....	88
8.9.2.	99% BANDWIDTH.....	91
8.9.3.	OUTPUT POWER AND PSD.....	94
8.9.4.	STRADDLE CHANNEL 144 RESULTS.....	99
8.9.5.	6 dB BANDWIDTH.....	103
8.10.	<i>802.11n HT20 MODE IN THE 5.6 GHz BAND</i>	104
8.10.1.	26 dB BANDWIDTH.....	104
8.10.2.	99% BANDWIDTH.....	107
8.10.3.	OUTPUT POWER AND PSD.....	110
8.10.4.	STRADDLE CHANNEL 144 RESULTS.....	115
8.10.5.	6 dB BANDWIDTH.....	119
8.11.	<i>802.11n HT40 MODE IN THE 5.6 GHz BAND</i>	120
8.11.1.	26 dB BANDWIDTH.....	120
8.11.2.	99% BANDWIDTH.....	123
8.11.3.	OUTPUT POWER AND PSD.....	126
8.11.4.	STRADDLE CH 142 RESULTS.....	131
8.11.5.	6 dB BANDWIDTH.....	135
8.12.	<i>802.11ac HT80 MODE IN THE 5.6 GHz BAND</i>	136
8.12.1.	26 dB BANDWIDTH.....	136
8.12.2.	99% BANDWIDTH.....	139
8.12.3.	OUTPUT POWER AND PSD.....	142
8.12.4.	STRADDLE CHANNEL 138 RESULTS.....	146
8.12.5.	6 dB BANDWIDTH.....	150
8.13.	<i>802.11a MODE IN THE 5.8 GHz BAND</i>	151
8.13.1.	6 dB BANDWIDTH.....	151
8.13.2.	26 dB BANDWIDTH.....	154
8.13.3.	99% BANDWIDTH.....	157
8.13.4.	OUTPUT POWER.....	160
8.13.5.	PSD.....	162
8.14.	<i>802.11n HT20 MODE IN THE 5.8 GHz BAND</i>	165
8.14.1.	6 dB BANDWIDTH.....	165
8.14.2.	26 dB BANDWIDTH.....	168

8.14.3.	99% BANDWIDTH	171
8.14.4.	OUTPUT POWER.....	174
8.14.5.	PSD	176
8.15.	<i>802.11n HT40 MODE IN THE 5.8 GHz BAND.....</i>	<i>179</i>
8.15.1.	6 dB BANDWIDTH	179
8.15.2.	26 dB BANDWIDTH	181
8.15.3.	99% BANDWIDTH	183
8.15.4.	OUTPUT POWER.....	185
8.15.5.	PSD	187
8.16.	<i>802.11ac VHT80 MODE IN THE 5.8 GHz BAND.....</i>	<i>190</i>
8.16.1.	6 dB BANDWIDTH	190
8.16.2.	26 dB BANDWIDTH	192
8.16.3.	99% BANDWIDTH	194
8.16.4.	OUTPUT POWER.....	196
8.16.5.	PSD	198
9.	RADIATED TEST RESULTS.....	201
9.1.	<i>LIMITS AND PROCEDURE.....</i>	<i>201</i>
9.2.	<i>802.11a MODE IN THE 5.2 GHz BAND.....</i>	<i>202</i>
9.3.	<i>802.11n HT20 MODE IN THE 5.2 GHz BAND</i>	<i>210</i>
9.4.	<i>802.11n HT40 MODE IN THE 5.2 GHz BAND</i>	<i>218</i>
9.5.	<i>802.11ac VHT80 MODE IN THE 5.2 GHz BAND</i>	<i>224</i>
9.6.	<i>802.11a MODE IN THE 5.3 GHz BAND.....</i>	<i>228</i>
9.7.	<i>802.11n HT20 MODE IN THE 5.3 GHz BAND</i>	<i>236</i>
9.8.	<i>802.11n HT40 MODE IN THE 5.3 GHz BAND</i>	<i>244</i>
9.9.	<i>802.11ac VHT80 1Tx SISO MODE IN THE 5.3 GHz BAND.....</i>	<i>250</i>
9.10.	<i>802.11a MODE IN THE 5.6 GHz BAND</i>	<i>254</i>
9.11.	<i>802.11n HT20 MODE IN THE 5.6 GHz BAND.....</i>	<i>266</i>
9.12.	<i>802.11n HT40 MODE IN THE 5.6 GHz BAND.....</i>	<i>278</i>
9.13.	<i>802.11ac VHT80 MODE IN THE 5.6 GHz BAND.....</i>	<i>290</i>
9.14.	<i>802.11a MODE IN THE 5.8 GHz BAND</i>	<i>298</i>
9.15.	<i>802.11n HT20 MODE IN THE 5.8 GHz BAND.....</i>	<i>308</i>
9.16.	<i>802.11n HT40 MODE IN THE 5.8 GHz BAND.....</i>	<i>318</i>
9.17.	<i>802.11ac VHT80 MODE IN THE 5.8 GHz BAND.....</i>	<i>326</i>
9.18.	<i>WORST-CASE BELOW 1 GHz.....</i>	<i>332</i>
9.19.	<i>WORST-CASE ABOVE 18 GHz.....</i>	<i>334</i>
10.	AC POWER LINE CONDUCTED EMISSIONS	336
11.	DYNAMIC FREQUENCY SELECTION	339
11.1.	<i>OVERVIEW.....</i>	<i>339</i>
11.1.1.	<i>LIMITS</i>	<i>339</i>

11.1.2.	TEST AND MEASUREMENT SYSTEM	343
11.1.3.	SETUP OF EUT	346
11.1.4.	DESCRIPTION OF EUT	347
11.2.	<i>RESULTS FOR 20 MHz BANDWIDTH</i>	349
11.2.1.	TEST CHANNEL	349
11.2.2.	RADAR WAVEFORM AND TRAFFIC	349
11.2.3.	OVERLAPPING CHANNEL TESTS	352
11.2.4.	MOVE AND CLOSING TIME.....	352
11.3.	<i>RESULTS FOR 40 MHz BANDWIDTH</i>	356
11.3.1.	TEST CHANNEL	356
11.3.2.	RADAR WAVEFORM AND TRAFFIC	356
11.3.3.	OVERLAPPING CHANNEL TESTS	359
11.3.4.	MOVE AND CLOSING TIME.....	359
11.3.5.	10-MINUTE BEACON MONITORING PERIOD	363
12.	SETUP PHOTOS	364

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: GOOGLE
1600 AMPHITHEATRE PARKWAY
Mountain View, CA 94043

EUT DESCRIPTION: Media Streaming Device with BLE, 2.4GHz and 5GHz Wlan Radios

MODEL: RUX-J42

SERIAL NUMBER: DVT 1(RADIATED); 5512103ZZBJB (CONDUCTED)

DATE TESTED: June 09 – July 20, 2015

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 Part 15 Subpart E	Pass

UL Verification Services Inc. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Verification Services Inc. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Verification Services Inc. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Verification Services Inc. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of any government.

Approved & Released For
UL Verification Services Inc. By:



FRANCISCO DE ANDA
PROJECT LEAD
UL Verification Services Inc.

Tested By:



CLIFFORD SUSA
EMC ENGINEER
UL Verification Services Inc.

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with FCC CFR 47 Part 2, FCC CFR 47 Part 15, FCC 06-96, FCC KDB 789033, and ANSI C63.10-2009.

3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 47173 and 47266 Benicia Street, Fremont, California, USA. Line conducted emissions are measured only at the 47173 address. The following table identifies which facilities were utilized for radiated emission measurements documented in this report. Specific facilities are also identified in the test results sections.

47173 Benicia Street	47266 Benicia Street
☒ Chamber A	☐ Chamber D
☒ Chamber B	☐ Chamber E
☒ Chamber C	☐ Chamber F
	☐ Chamber G
	☐ Chamber H

The above test sites and facilities are covered under FCC Test Firm Registration # 208313. Chambers A through H are covered under Industry Canada company address code 2324B with site numbers 2324B - 1 through 2324B-8, respectively.

UL Verification Services Inc. is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://ts.nist.gov/standards/scopes/2000650.htm>.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

$$\begin{aligned}\text{Field Strength (dBuV/m)} &= \text{Measured Voltage (dBuV)} + \text{Antenna Factor (dB/m)} + \text{Cable} \\ &\text{Loss (dB)} - \text{Preamplifier Gain (dB)} \\ 36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} &= 28.9 \text{ dBuV/m}\end{aligned}$$

4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Conducted Disturbance, 0.15 to 30 MHz	± 3.52 dB
Radiated Disturbance, 30 to 1000 MHz	± 4.94 dB
Radiated Disturbance, 1 to 6 GHz	± 3.86 dB
Radiated Disturbance, 6 to 18 GHz	± 4.23 dB
Radiated Disturbance, 18 to 26 GHz	± 5.30 dB
Radiated Disturbance, 26 to 40 GHz	± 5.23 dB

Uncertainty figures are valid to a confidence level of 95%.

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

The EUT is a Media Streaming Device with BLE, 2.4GHz and 5GHz WLAN Radios.

5.2. MAXIMUM OUTPUT POWER

The transmitter has a maximum conducted output power as follows:

Frequency Range (MHz)	Mode	Output Power (dBm)	Output Power (mW)
5.2GHz Band			
5180 - 5240	802.11a	14.68	29.38
5180 - 5240	802.11n HT20	14.76	29.92
5190 - 5230	802.11n HT40	13.16	20.70
5210	802.11ac VHT80	6.88	4.88
5.3GHz Band			
5260 - 5320	802.11a	14.85	30.55
5260 - 5320	802.11n HT20	14.96	31.33
5270 - 5310	802.11n HT40	12.62	18.28
5290	802.11ac VHT80	7.64	5.81
5.6GHz Band			
5500 - 5700	802.11a	15.48	35.32
5720		13.59	22.86
5500 - 5700	802.11n HT20	15.55	35.89
5720		13.51	22.44
5510 - 5670	802.11n HT40	14.19	26.24
5710		12.62	18.28
5530 - 5690	802.11ac VHT80	9.08	8.09
5690		7.97	6.27
5.8GHz Band			
5745 - 5825	802.11a	14.07	25.53
5745 - 5825	802.11n HT20	14.12	25.82
5755 - 5795	802.11n HT40	11.98	15.78
5755	802.11ac VHT80	4.24	2.65

5.3. DESCRIPTION OF AVAILABLE ANTENNAS

The radio utilizes an PCB antenna, with a maximum gain of 1.7 dBi.

5.4. SOFTWARE AND FIRMWARE

The firmware installed in the EUT during testing was 15.2.7.09.

The test utility software used during testing was Labtool ver 2.0.0.71

5.5. WORST-CASE CONFIGURATION AND MODE

Radiated emission and power line conducted emission were performed with the EUT set to transmit at the channel with highest output power as worst-case scenario.

The fundamental of the EUT was investigated in three orthogonal orientations X (Flat)/Y (Landscape)/Z (Portrait), it was determined that Y orientation was worst-case orientation. Therefore, all final radiated testing was performed with the EUT in Y orientation.

Worst-case data rates as provided by the client were:

802.11a mode: 6 Mbps
802.11n HT20 mode: MCS0
802.11n HT40 mode: MCS0
802.11ac VHT80 mode: MCS0

Radiated emissions for EUT with antenna was performed and passed; therefore, antenna port spurious was not performed.

5.6. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

Support Equipment List				
Description	Manufacturer	Model	Serial Number	FCC ID
AC Adapter	Lenovo	ADLX65NCC2A	11545N0263Z1Z5994AH GRO	N/A
AC Adapter	Google	S005BBU0500100	Proto 1	N/A
Laptop	Lenovo	E440	PF-074E9W 15/01	N/A


I/O CABLES

I/O Cable List						
Cable No	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	DC	1	Barrel	unshielded	0.8	
2	USB	1	USB	unshielded	1.5	Power cable
3	USB	1	USB	unshielded	2.5	
4	USB	1	Micro USB	unshielded	0.2	Y-cable


TEST SETUP

The EUT is connected to a host laptop via USB, test software exercised the radio.

SETUP DIAGRAM FOR RADIATED and AC LC TESTS

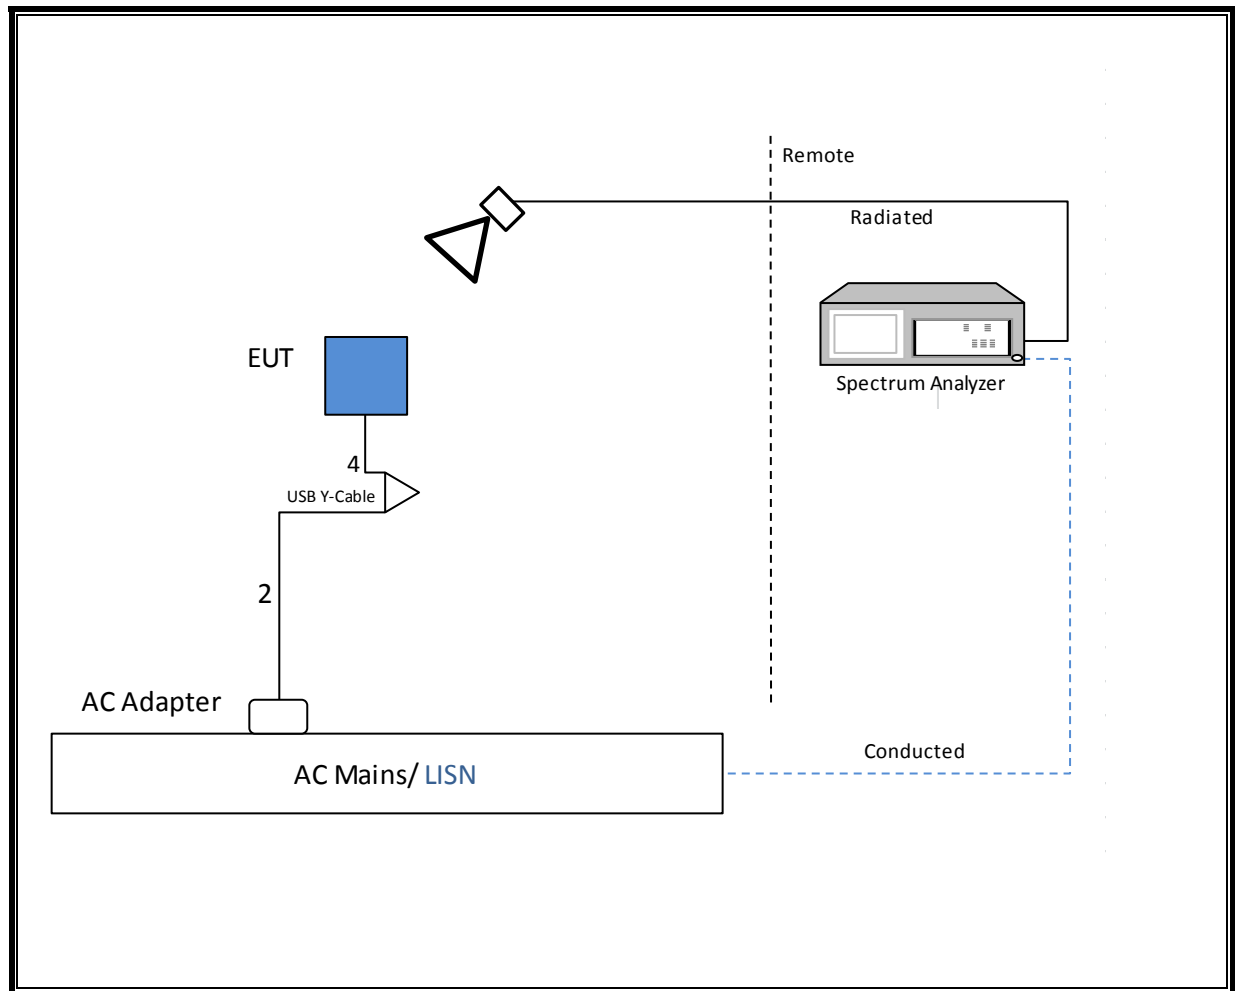

SETUP DIAGRAM FOR CONDUCTED TESTS

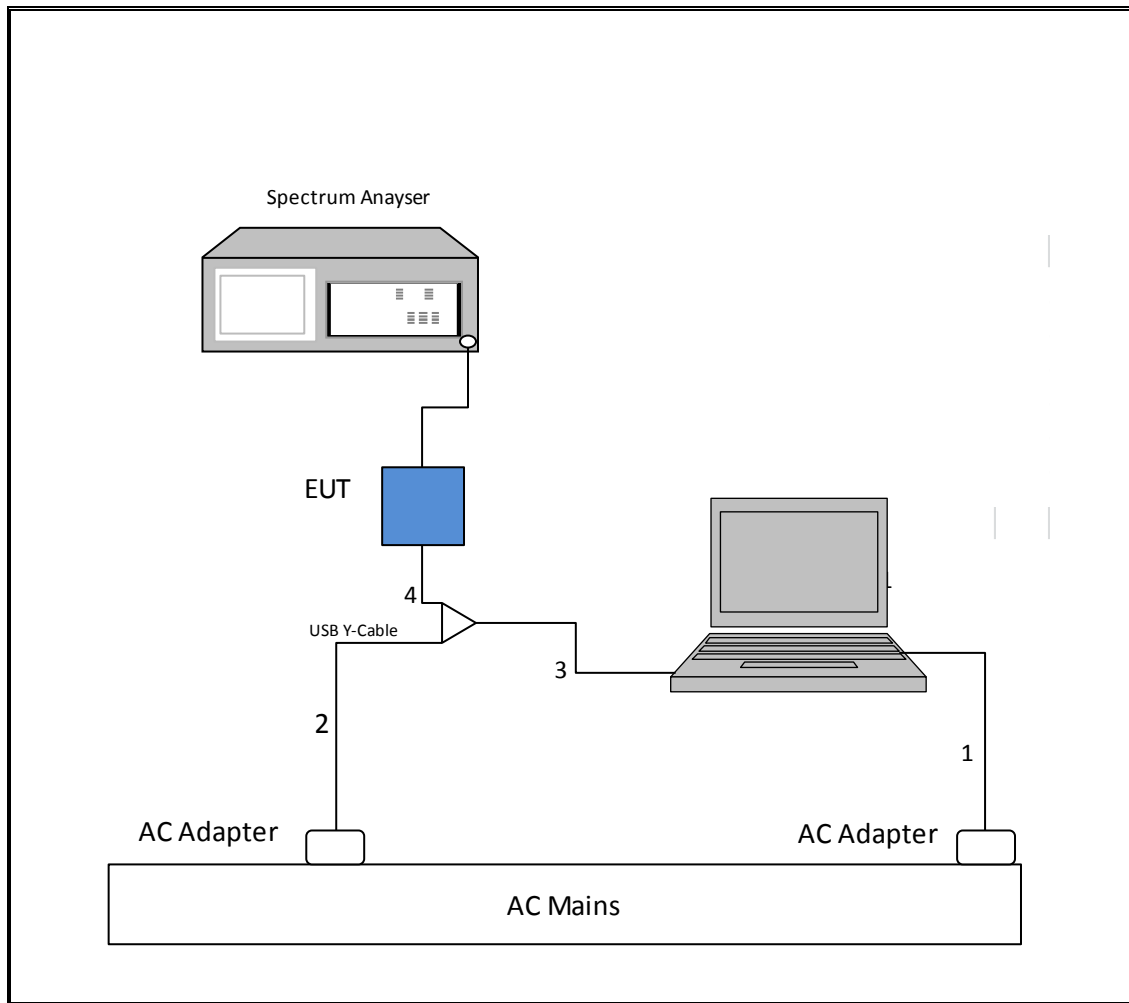

6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

Test Equipment List					
Description	Manufacturer	Model	Asset	Cal Date	Cal Due
Antenna, Horn 1-18GHz	ETS Lindgren	3117	3117	5/15/1900	1/15/2015
Antenna, Broadband Hybrid, 30MHz to 2000MHz	Sunol Sciences	JB1	130	9/10/2014	9/10/2015
Amplifier, 1 - 18GHz	Miteq	AFS42-00101800-25-S-42	492	8/9/2014	8/9/2015
Amplifier, 10KHz to 1GHz, 32dB	Sonoma	310N	300	11/1/2014	11/1/2015
Spectrum Analyzer, PXA, 3Hz to 44GHz	Agilent	N9030A	907	5/15/2015	5/15/2016
Spectrum Analyzer, PXA, 3Hz to 44GHz	Agilent	N9030A	T917	6/2/2015	6/2/2016
Antenna, Horn 18 to 26.5GHz	ARA	MWH-1826	T89	12/17/2014	12/17/2015
Spectrum Analyzer, 40 GHz	Agilent	8564E	T106	8/6/2014	8/6/2015
Amplifier, 1 to 26.5GHz, 23.5dB Gain minimum	Agilent	8449B	T404	4/13/2015	4/13/2016
AC Line Conducted					
EMI Test Receiver 9KHz-7GHz	Rohde & Schwarz	ECSI7	T1124	9/3/2014	9/3/2015
LISN for Conducted Emissions CISPR-16	FCC	50/250-25-2	T24	1/16/2015	1/16/2016
Power Cable, Line Conducted Emissions ANSI 63.4	UL	PG1	T861	7/28/2014	7/28/2015
UL SOFTWARE					
Radiated Software	UL	UL EMC	Rev. 9.5		
Conducted Software	UL	UL EMC	Ver. 3.0		
AC Line Conducted Software	UL	UL EMC	Rev. 9.5		

7. ON TIME, DUTY CYCLE AND MEASUREMENT METHODS

7.1. ON TIME AND DUTY CYCLE

LIMITS

None; for reporting purposes only.



PROCEDURE



KDB 789033 Zero-Span Spectrum Analyzer Method.

RESULTS

Mode	ON Time B (msec)	Period (msec)	Duty Cycle x (linear)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)	1/B Minimum VBW (kHz)
802.11a	3.144	3.164	0.994	99.37%	0.00	0.010
802.11n HT20	9.912	9.936	0.998	99.76%	0.00	0.010
802.11n HT40	4.779	4.816	0.992	99.23%	0.00	0.010
802.11ac VHT80	2.222	2.260	0.983	98.32%	0.00	0.010

DUTY CYCLE PLOTS

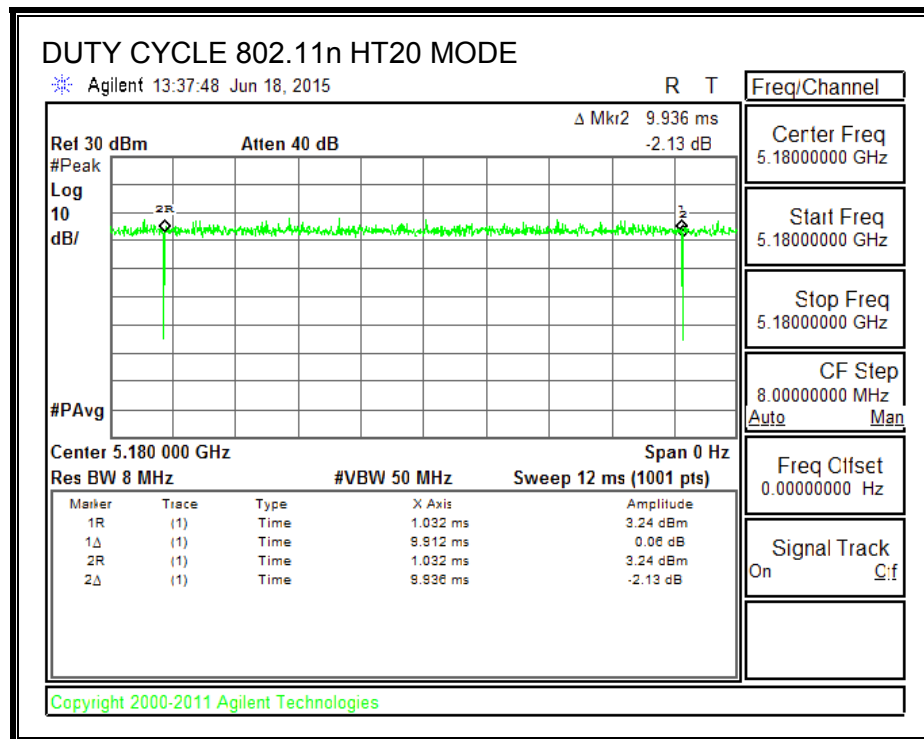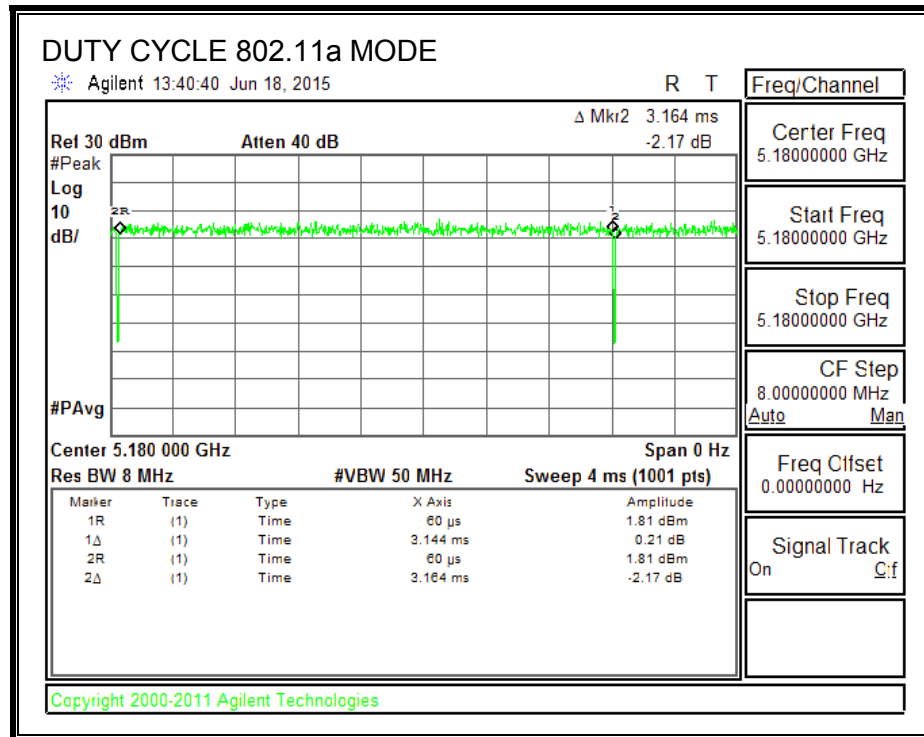

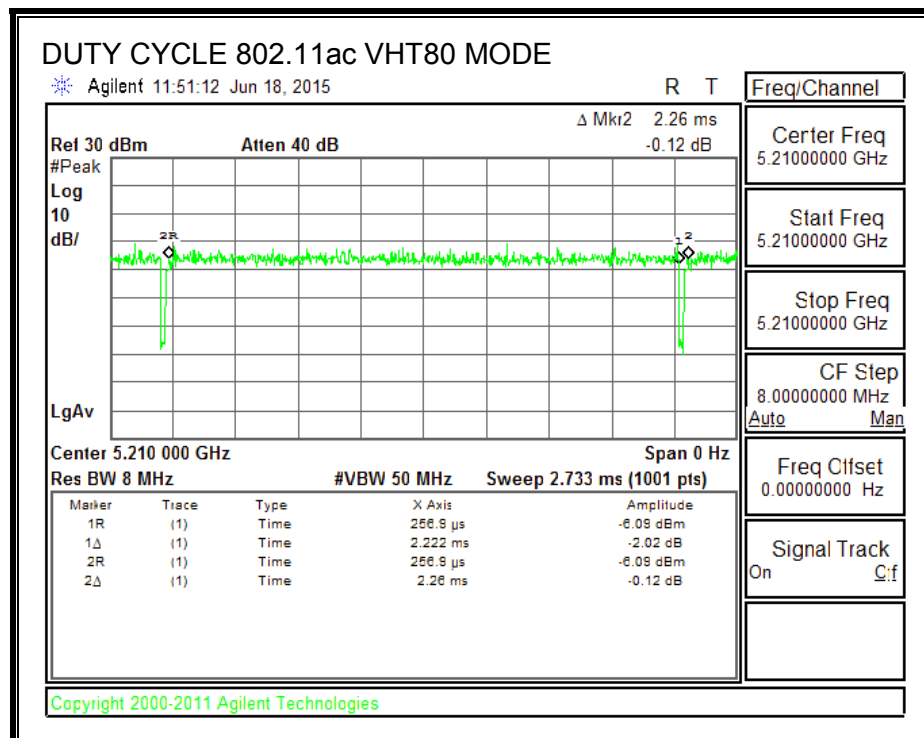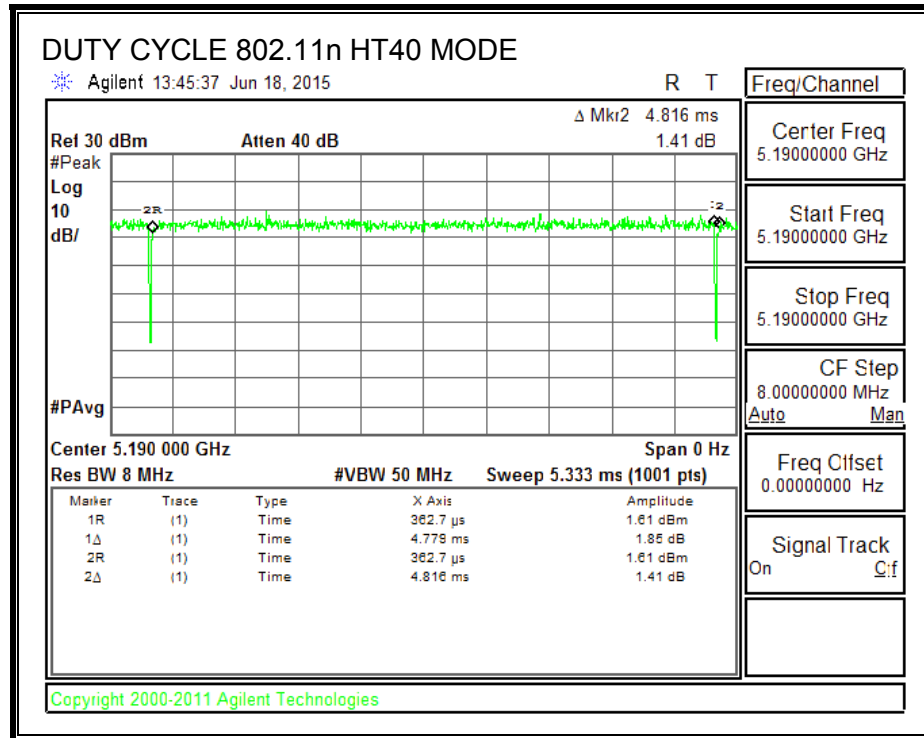

7.2. MEASUREMENT METHODS

26 dB Emission BW: KDB 789033 D02 v01, Section C.

99% Occupied BW: KDB 789033 D02 v01, Section D.

Conducted Output Power: KDB 789033 D02 v01, Section E.3.a (Method PM).

Power Spectral Density: KDB 789033 D02 v01, Section F.

Unwanted emissions in restricted bands: KDB 789033 D02 v01, Sections G.3, G.4, G.5, and G.6.

Unwanted emissions in non-restricted bands: KDB 789033 D02 v01, Sections G.3, G.4, and G.5.

8. ANTENNA PORT TEST RESULTS

8.1. 802.11a MODE IN THE 5.2 GHZ BAND

8.1.1. 26 dB BANDWIDTH


LIMITS


None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
Low	5180	19.71
Mid	5200	19.18
High	5240	19.41

26 dB BANDWIDTH

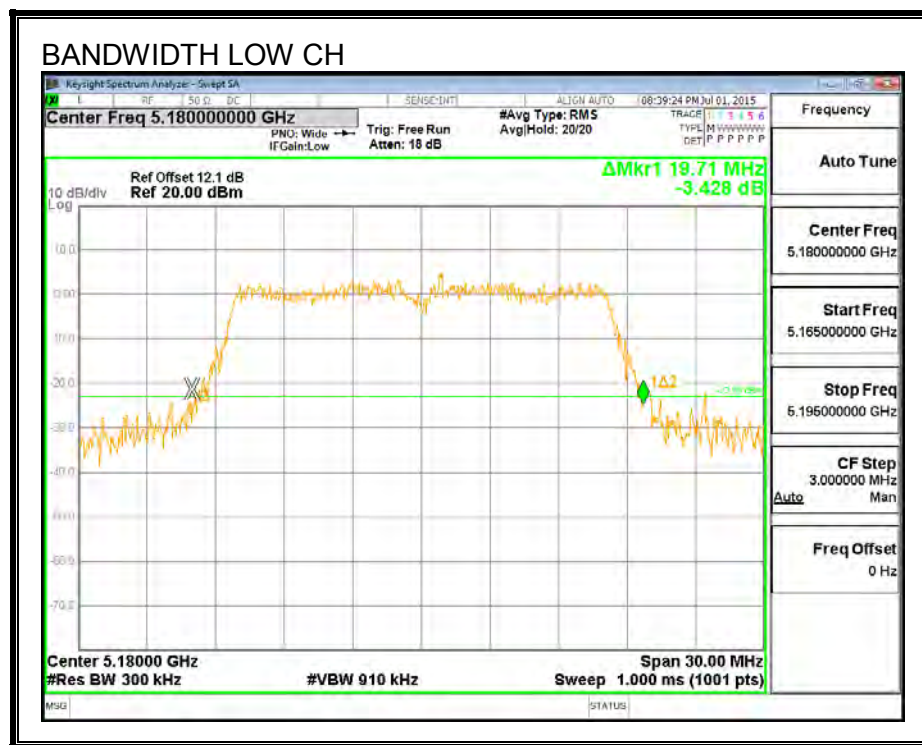

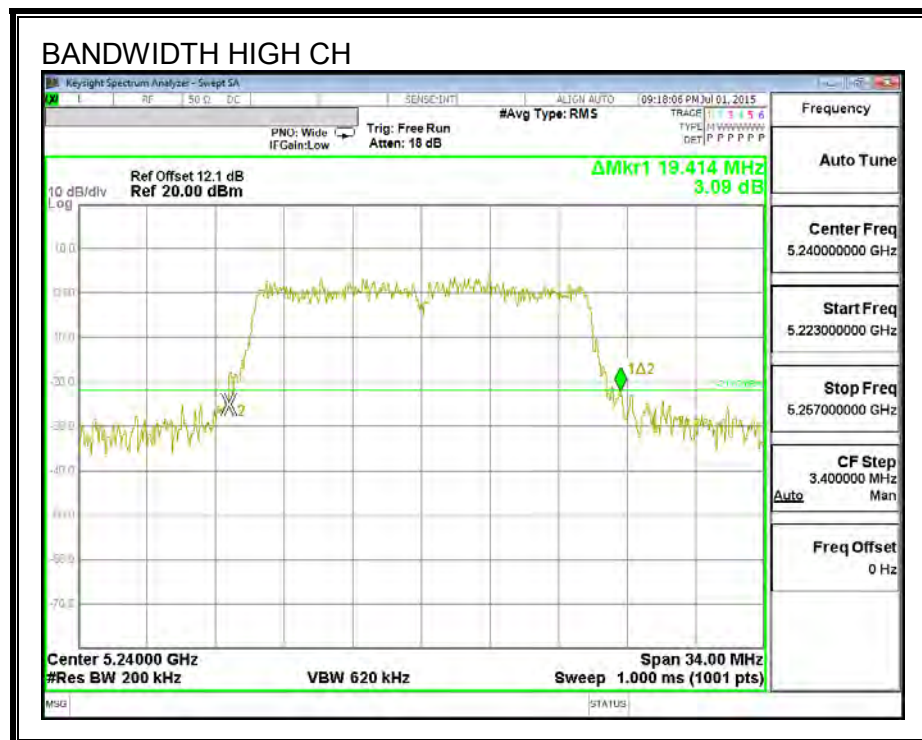

8.1.2. 99% BANDWIDTH


LIMITS



None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	99% BW (MHz)
Low	5180	16.657
Mid	5200	16.744
High	5240	16.676

99% BANDWIDTH, Chain 1

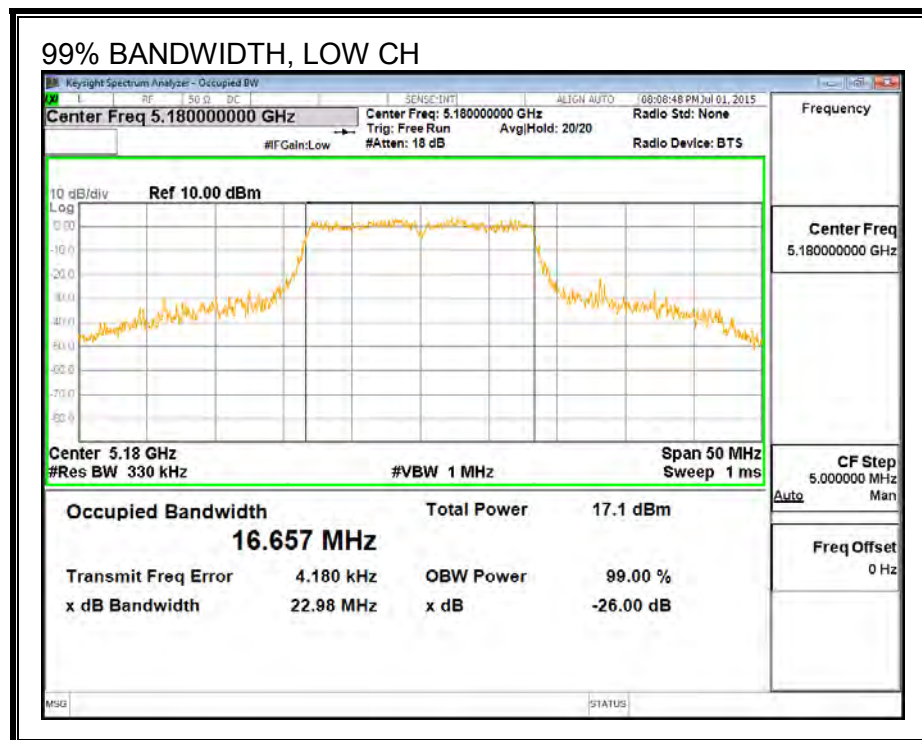

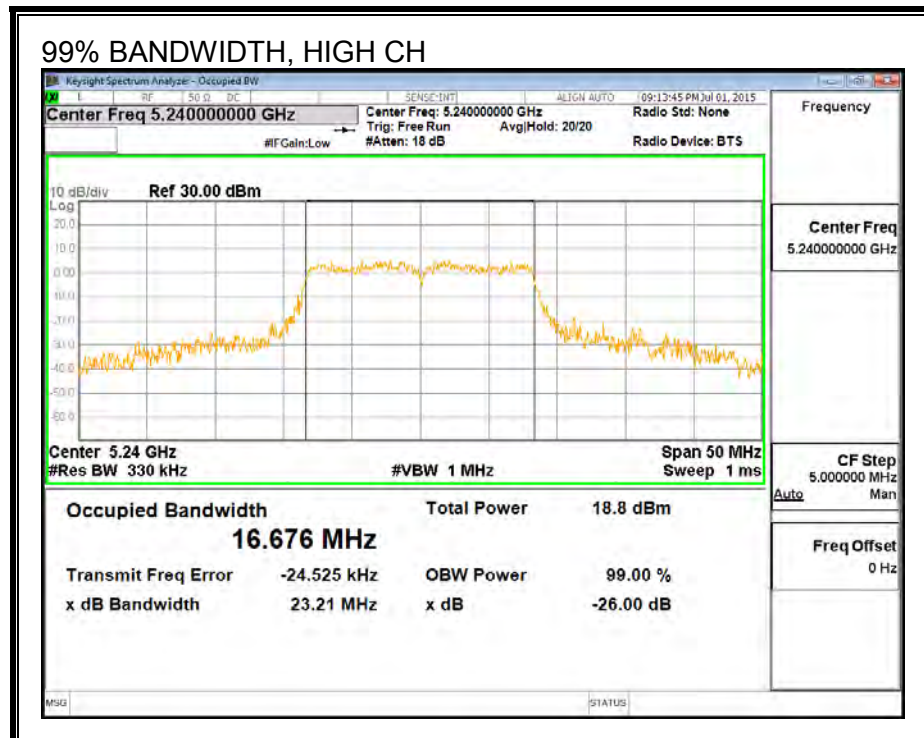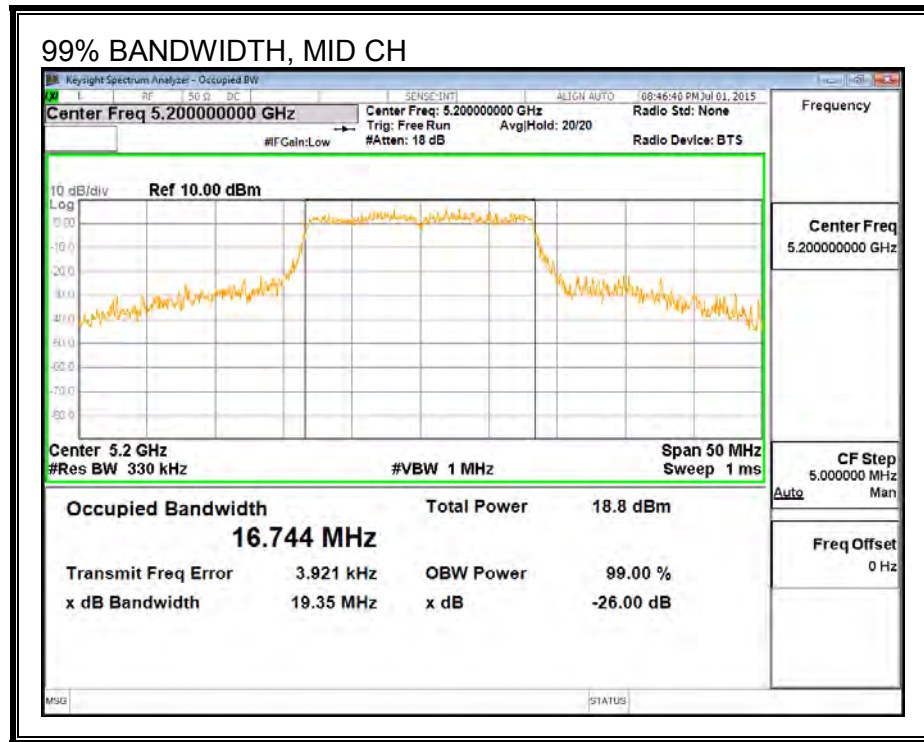

8.1.3. .OUTPUT POWER AND PSD

LIMITS

FCC §15.407 (a) (1)

(i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

DIRECTIONAL ANTENNA GAIN

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

RESULTS

Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm)
Low	5180	1.70	1.70	24.00	11.00
Mid	5200	1.70	1.70	24.00	11.00
High	5240	1.70	1.70	24.00	11.00

Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd Power & PSD
--------------------	------	--

Output Power Results

Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5180	12.93	12.93	24.00	-11.07
Mid	5200	14.68	14.68	24.00	-9.32
High	5240	14.59	14.59	24.00	-9.41

PSD Results

Channel	Frequency (MHz)	Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
Low	5180	1.88	1.88	11.00	-9.12
Mid	5200	3.62	3.62	11.00	-7.38
High	5240	3.58	3.58	11.00	-7.42

OUTPUT POWER AND PSD

OUTPUT POWER, LOW CH




PSD, LOW CH




OUTPUT POWER, MIC CH



PSD, MID CH

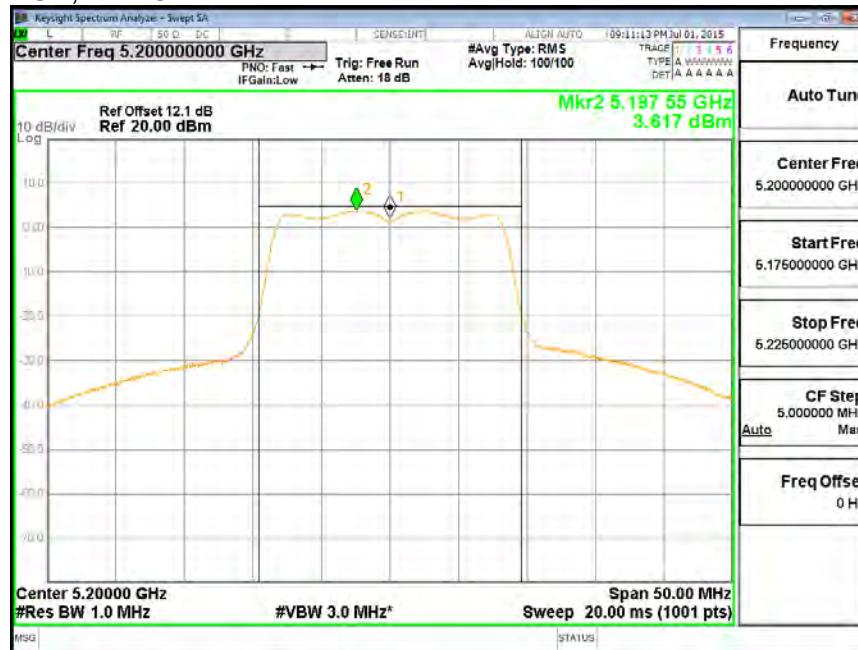

OUTPUT POWER, HIGH CH

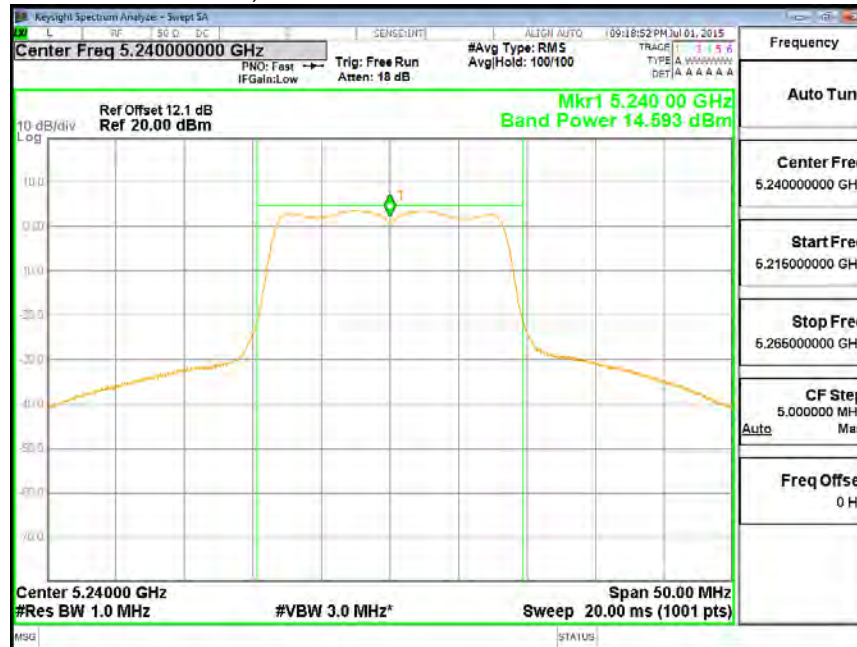

PSD, HIGH CH



8.2. 802.11n HT20 MODE IN THE 5.2 GHz BAND

8.2.1. 26 dB BANDWIDTH


LIMITS



None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
Low	5180	19.98
Mid	5200	20.26
High	5240	19.98

26 dB BANDWIDTH

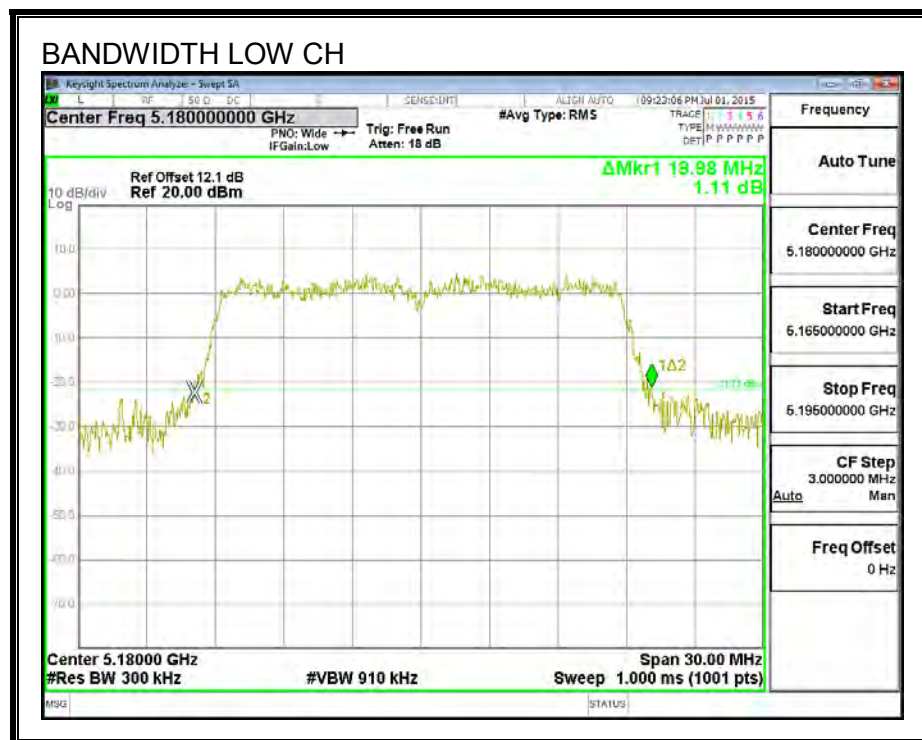

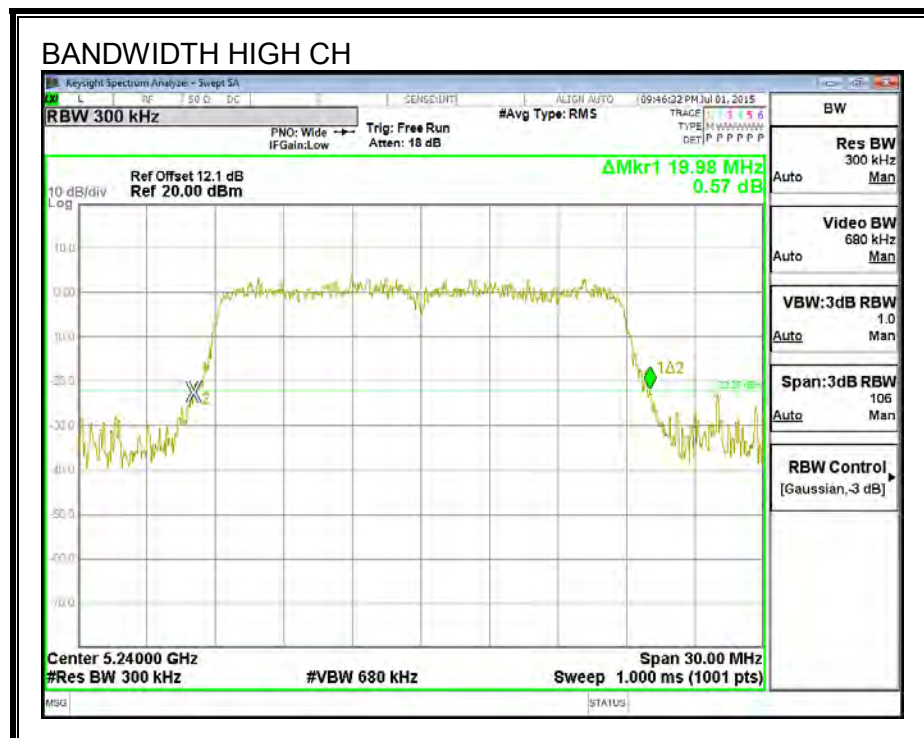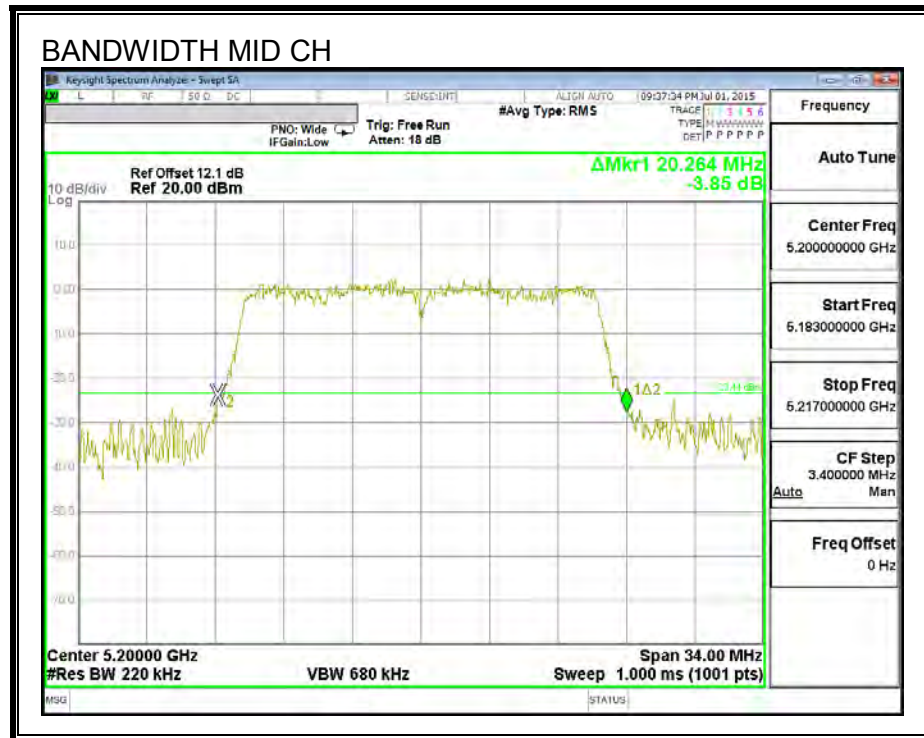

8.2.2. 99% BANDWIDTH


LIMITS



None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	99% BW (MHz)
Low	5180	17.694
Mid	5200	17.760
High	5240	17.743

99% BANDWIDTH, Chain 1

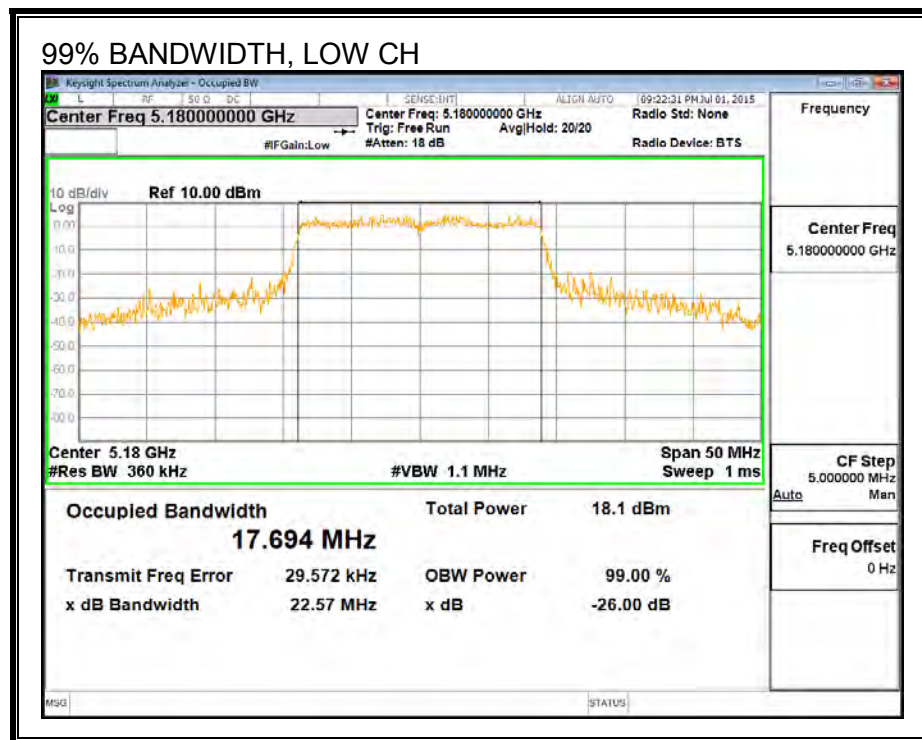

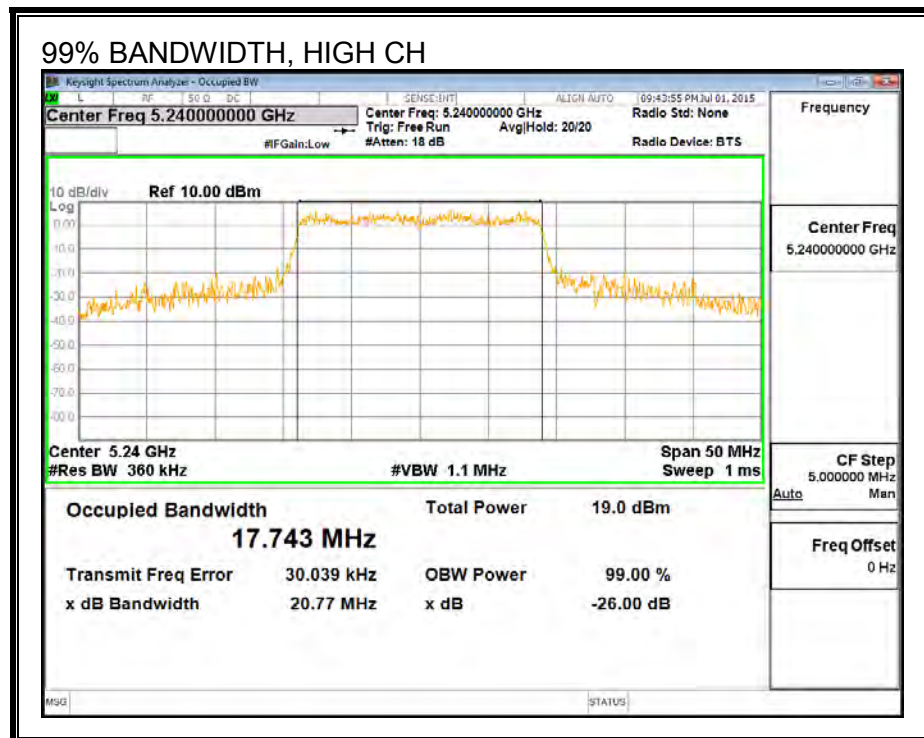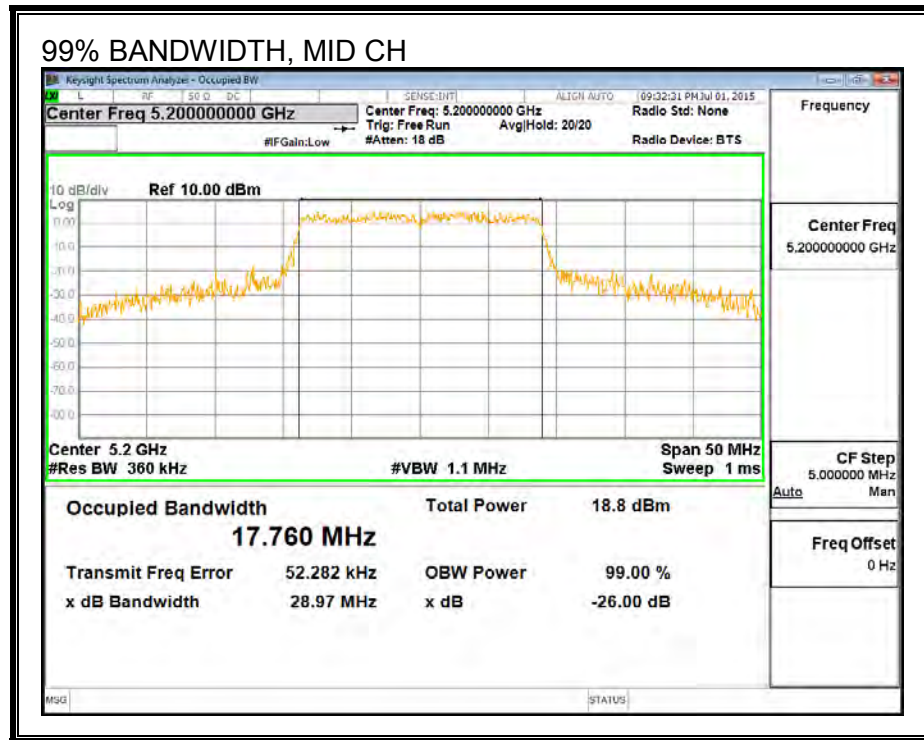

8.2.3. OUTPUT POWER AND PSD

LIMITS

FCC §15.407 (a) (1)

(i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

DIRECTIONAL ANTENNA GAIN

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

RESULTS

Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm)
Low	5180	1.70	1.70	24.00	11.00
Mid	5200	1.70	1.70	24.00	11.00
High	5240	1.70	1.70	24.00	11.00

Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd Power & PSD
--------------------	------	--

Output Power Results


Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5180	13.84	13.84	24.00	-10.16
Mid	5200	14.76	14.76	24.00	-9.24
High	5240	14.67	14.67	24.00	-9.33

PSD Results

Channel	Frequency (MHz)	Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
Low	5180	2.50	2.50	11.00	-8.50
Mid	5200	3.43	3.43	11.00	-7.57
High	5240	3.39	3.39	11.00	-7.61

OUTPUT POWER AND PSD


OUTPUT POWER, LOW CH

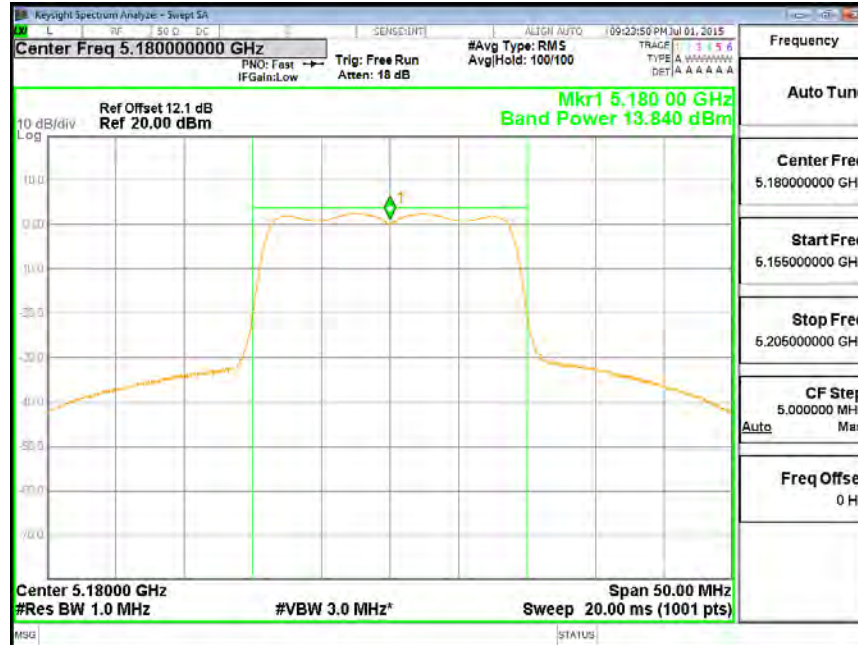

PSD, LOW CH




OUTPUT POWER, MID CH

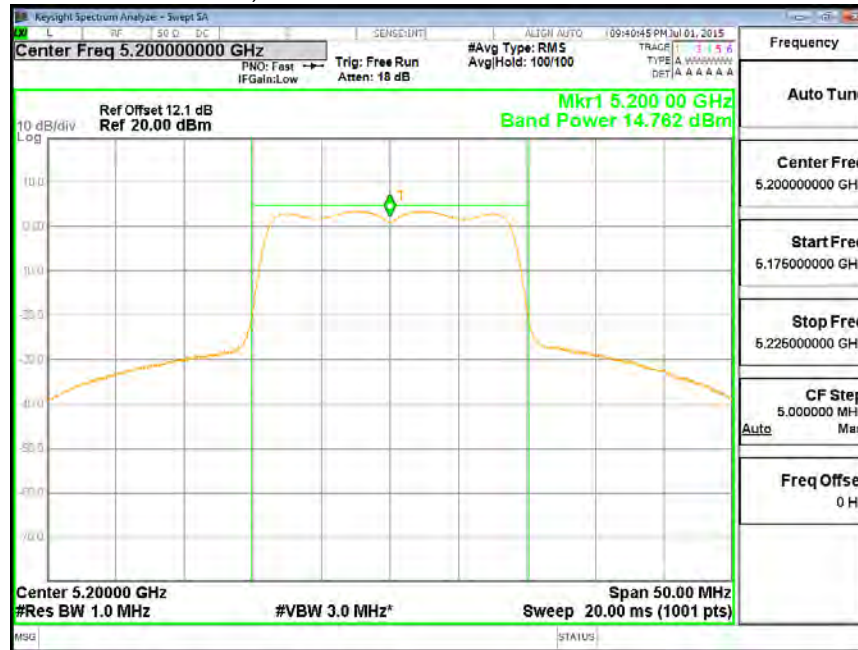

PSD, MID CH



OUTPUT POWER, HIGH CH

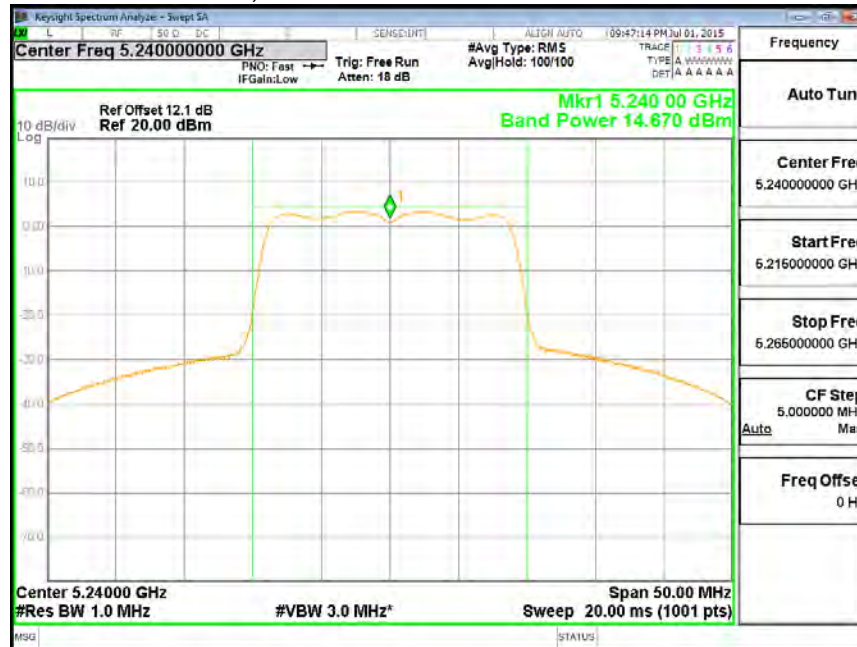

PSD, HIGH CH



8.3. 802.11n HT40 MODE IN THE 5.2 GHz BAND

8.3.1. 26 dB BANDWIDTH



LIMITS

None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
Low	5190	40.63
High	5230	40.44

26 dB BANDWIDTH

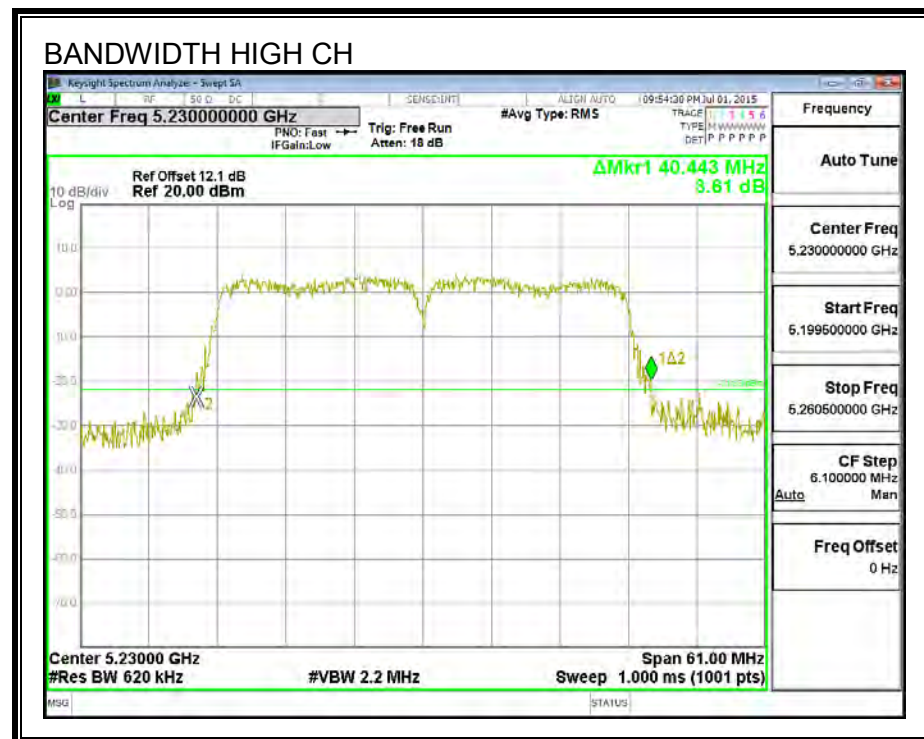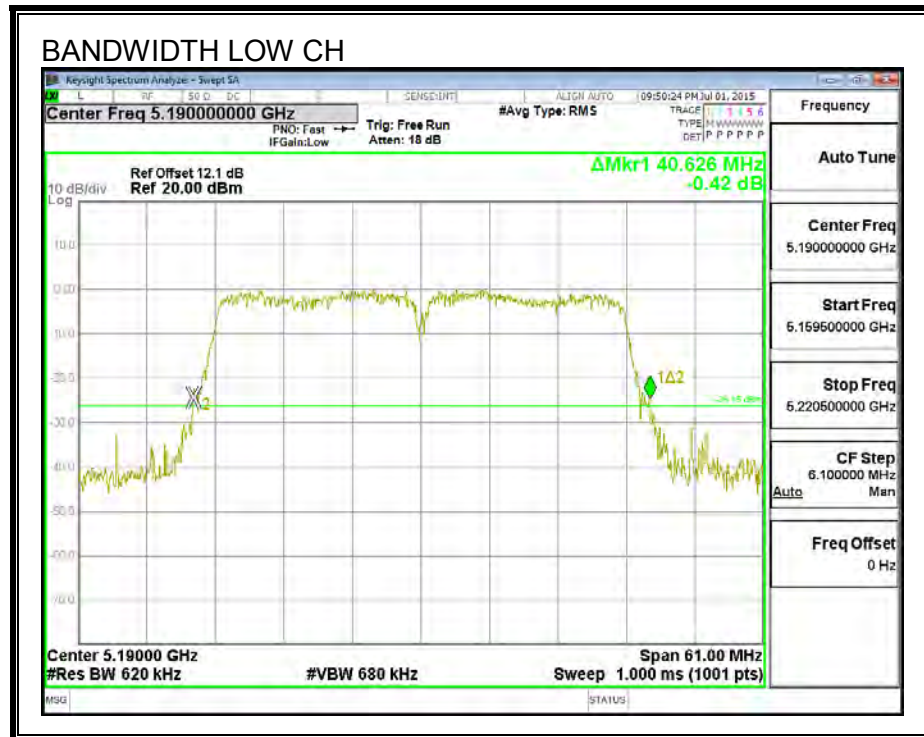

8.3.2. 99% BANDWIDTH



LIMITS

None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	5190	36.229
High	5230	36.296

99% BANDWIDTH

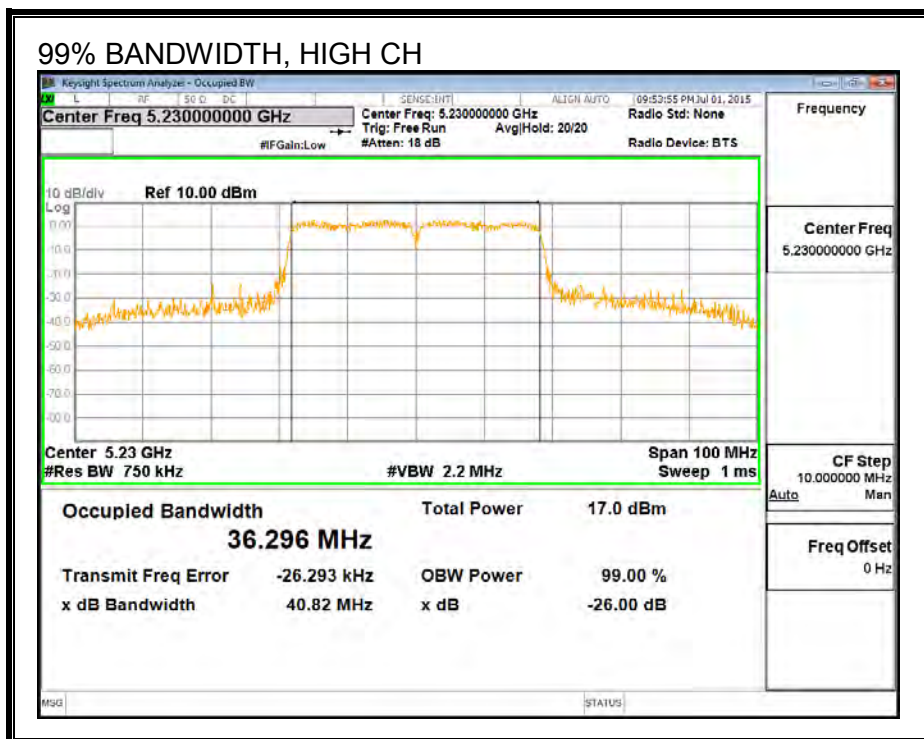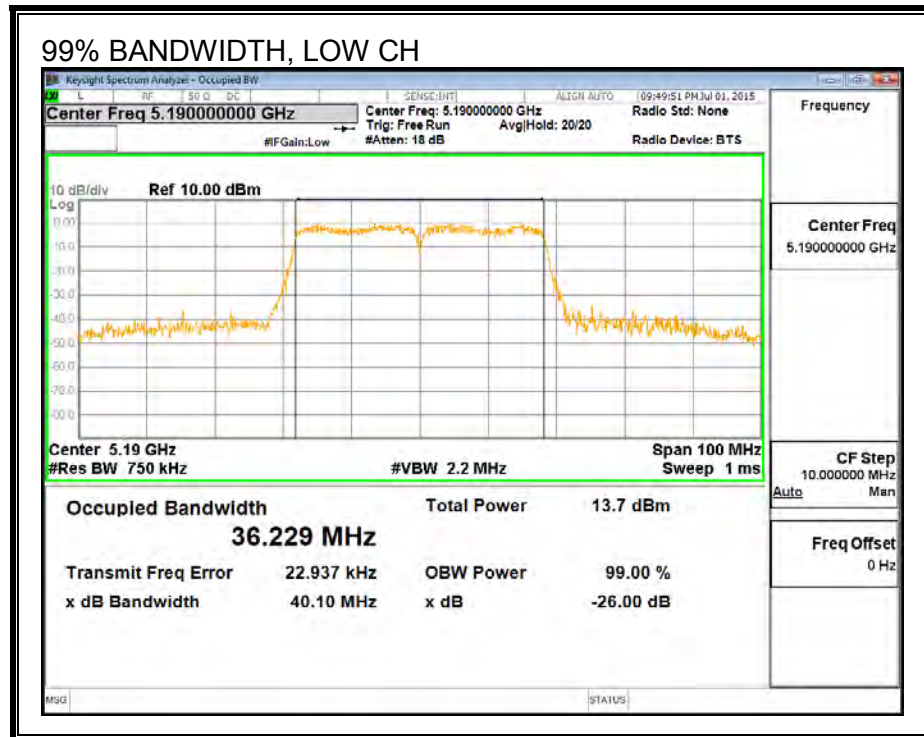

8.3.3. OUTPUT POWER AND PSD

LIMITS

FCC §15.407 (a) (1)

(i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

DIRECTIONAL ANTENNA GAIN

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

RESULTS

Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm)
Low	5190	1.70	1.70	24.00	11.00
High	5230	1.70	1.70	24.00	11.00

Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd Power & PSD
---------------------------	------	---

Output Power Results


Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5190	9.85	9.85	24.00	-14.15
High	5230	13.16	13.16	24.00	-10.84

PSD Results

Channel	Frequency (MHz)	Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
Low	5190	-4.51	-4.51	11.00	-15.51
High	5230	-1.09	-1.09	11.00	-12.09

OUTPUT POWER AND PSD


OUTPUT POWER, LOW CH

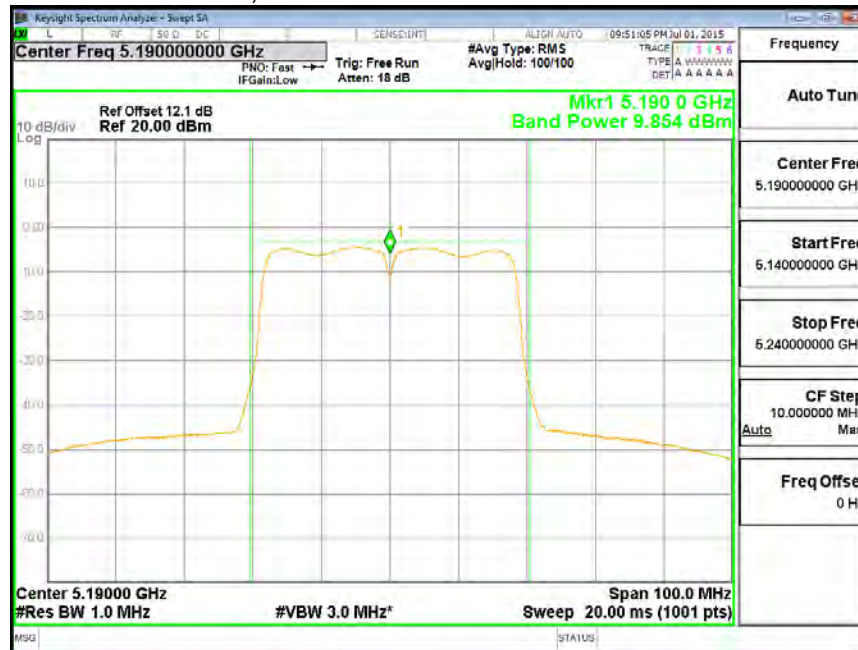

PSD, LOW CH



OUTPUT POWER, HIGH CH

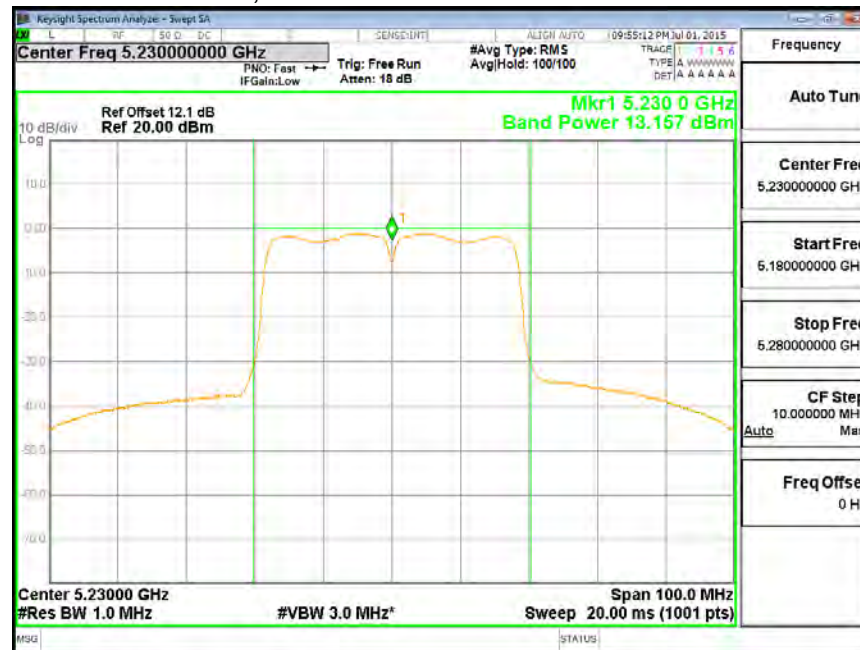

PSD, HIGH CH



8.4. 802.11ac VHT80 MODE IN THE 5.2 GHz BAND

8.4.1. 26 dB BANDWIDTH


LIMITS

None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
Mid	5210	81.55

26 dB BANDWIDTH

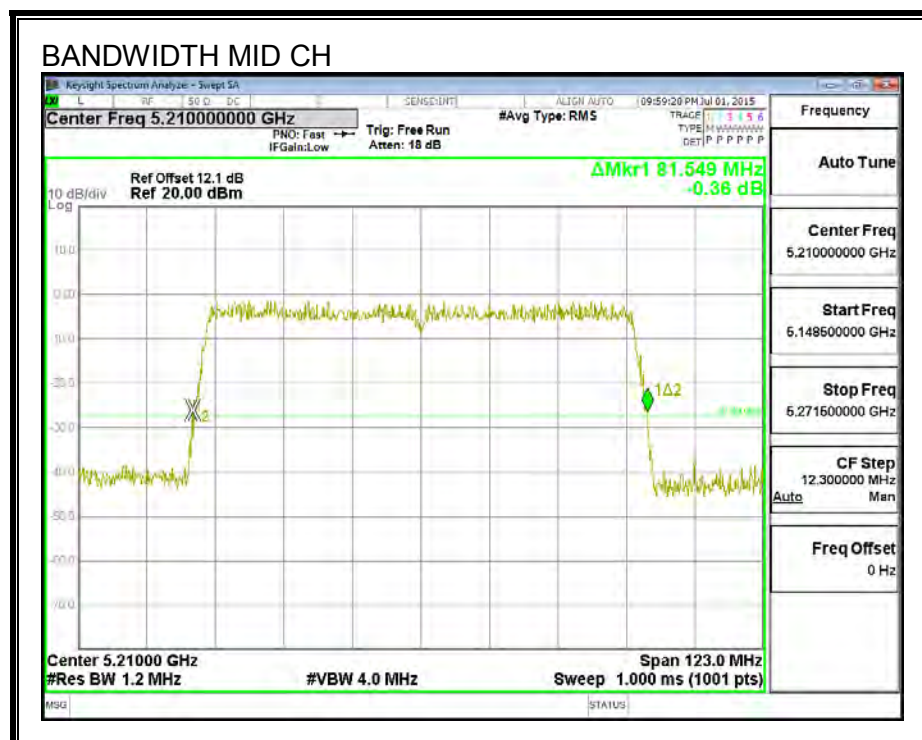

8.4.2. 99% BANDWIDTH


LIMITS

None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Mid	5210	76.522

99% BANDWIDTH

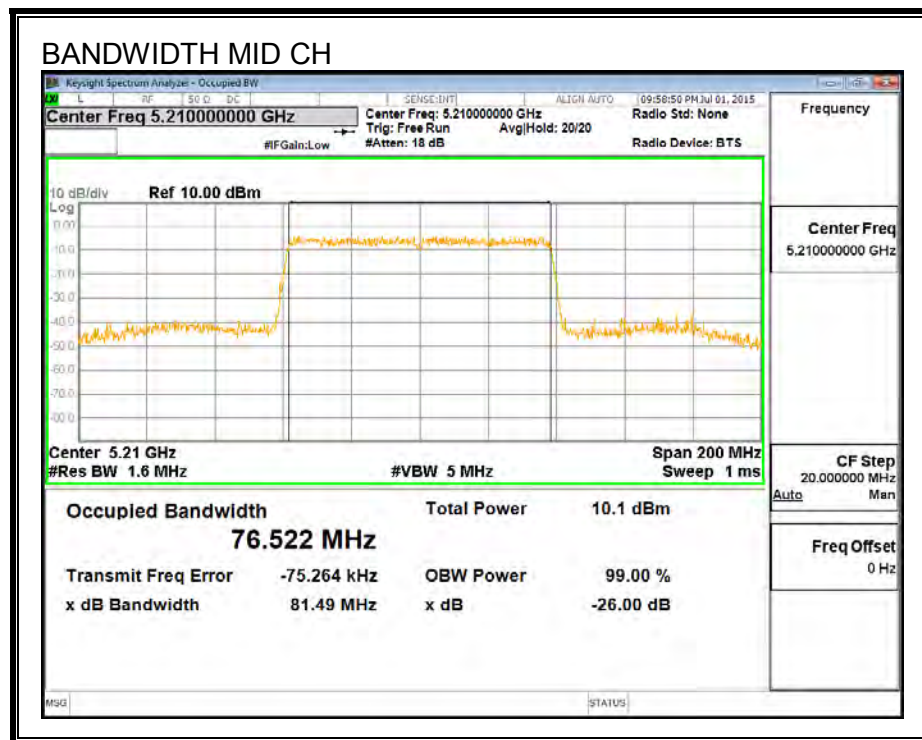

8.4.3. OUTPUT POWER AND PSD

LIMITS

FCC §15.407 (a) (1)

(i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple colocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

DIRECTIONAL ANTENNA GAIN

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

RESULTS

Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm)
Mid	5210	1.70	1.70	24.00	11.00

Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd Power & PSD
--------------------	------	--


Output Power Results

Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Mid	5210	6.88	6.88	24.00	-17.12

PSD Results

Channel	Frequency (MHz)	Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
Mid	5210	-11.11	-11.11	11.00	-22.11

OUTPUT POWER AND PSD

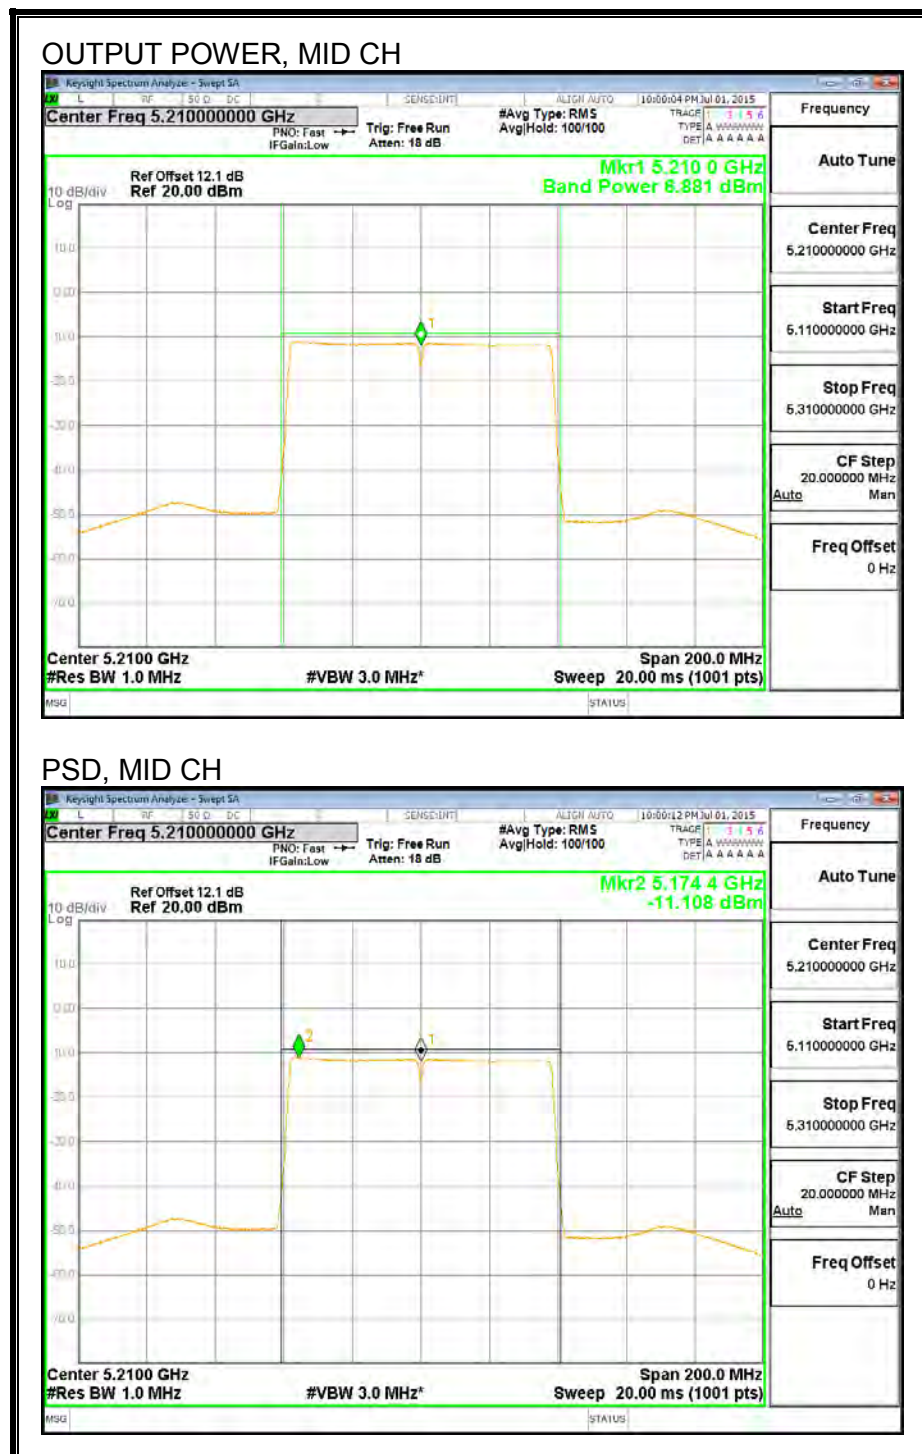

8.5. 802.11a MODE IN THE 5.3 GHz BAND

8.5.1. 26 dB BANDWIDTH



LIMITS


None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
Low	5260	19.50
Mid	5300	19.35
High	5320	19.20

26 dB BANDWIDTH

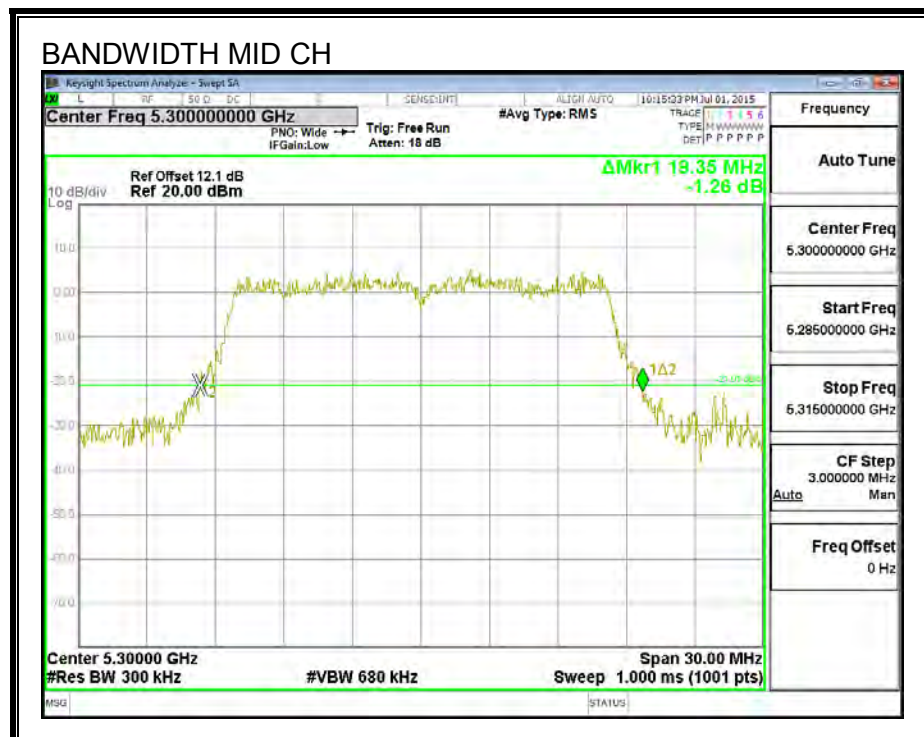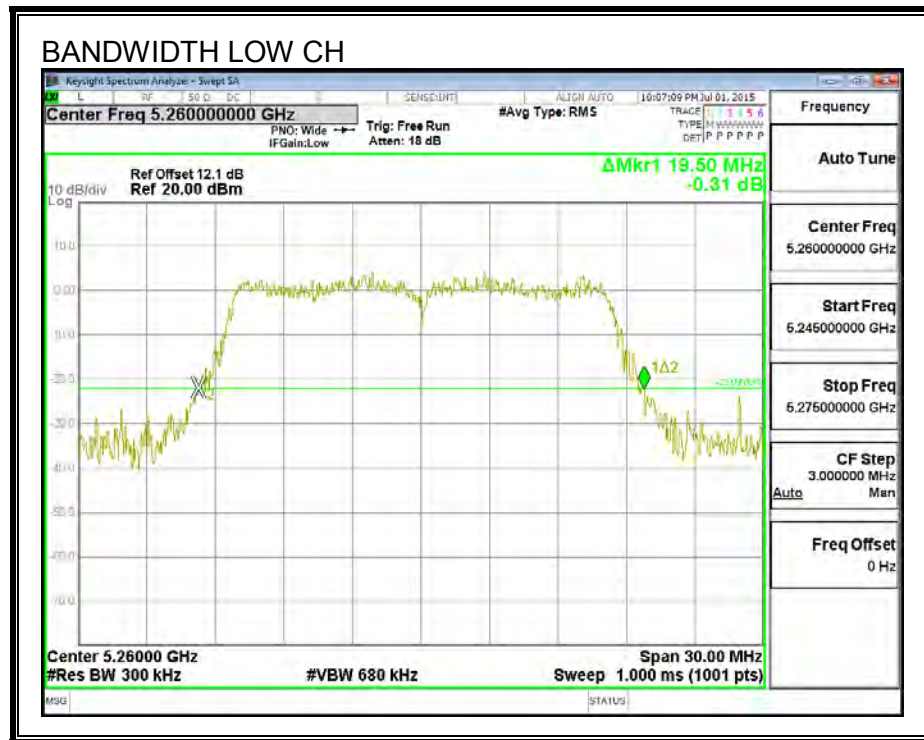

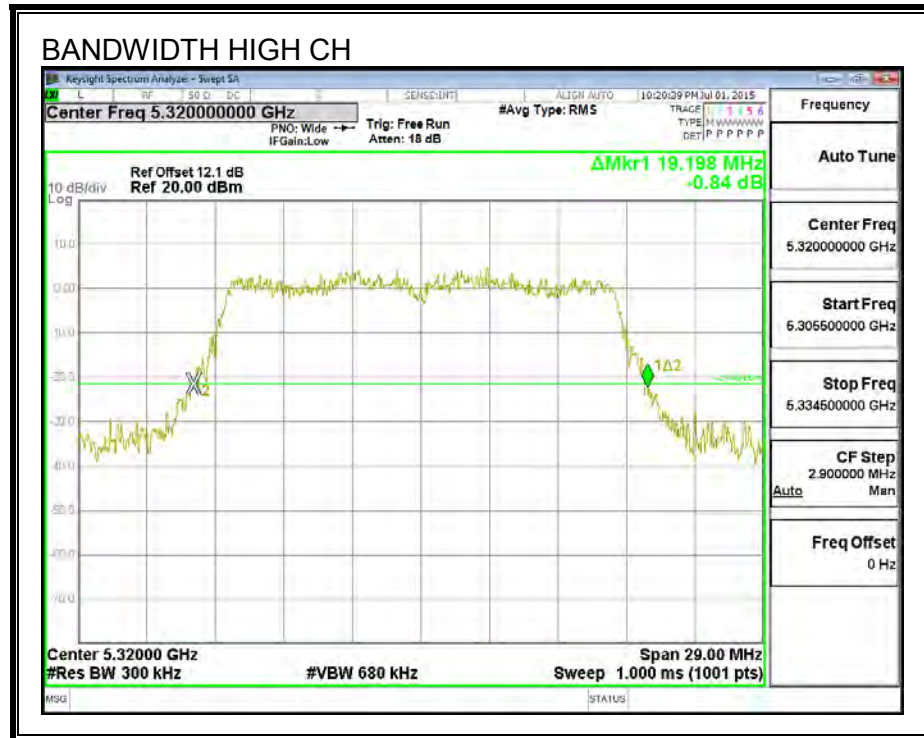

8.5.2. 99% BANDWIDTH



LIMITS


None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	5260	16.675
Mid	5300	16.673
High	5320	16.652

99% BANDWIDTH

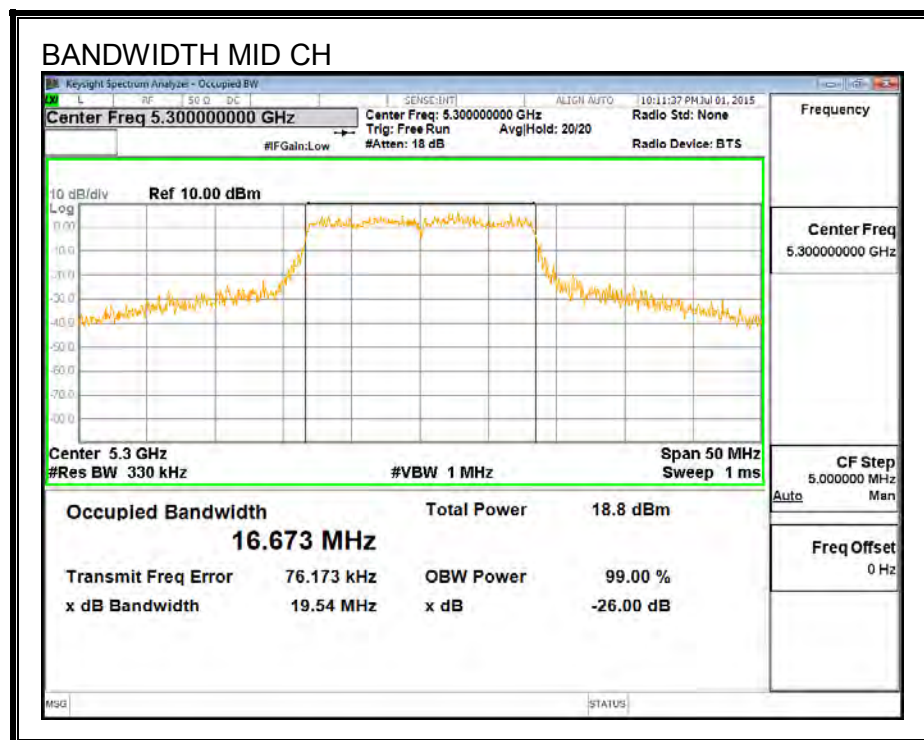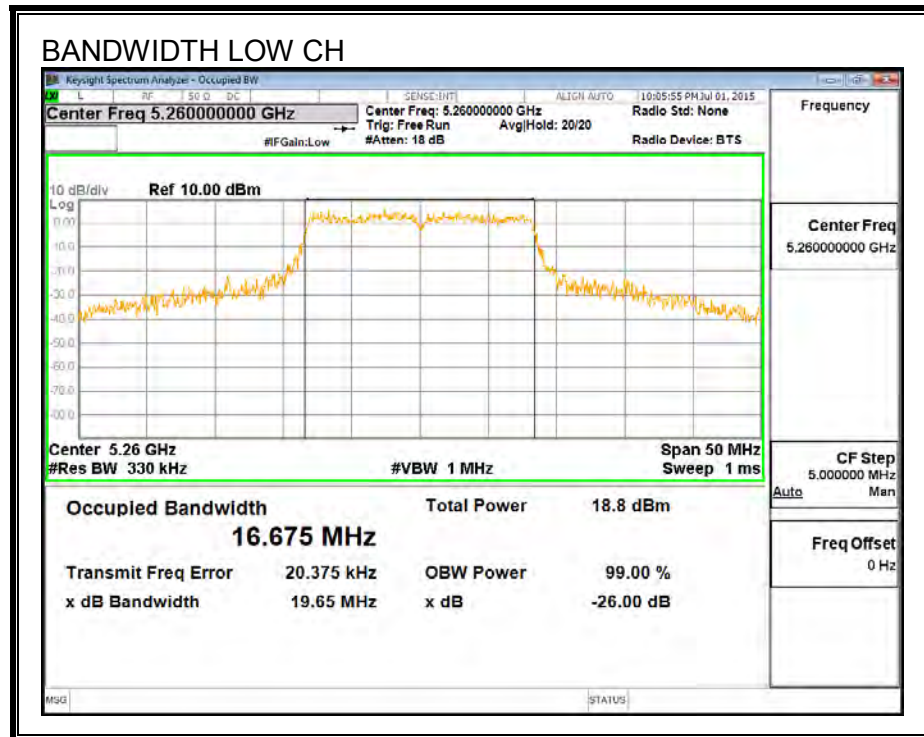

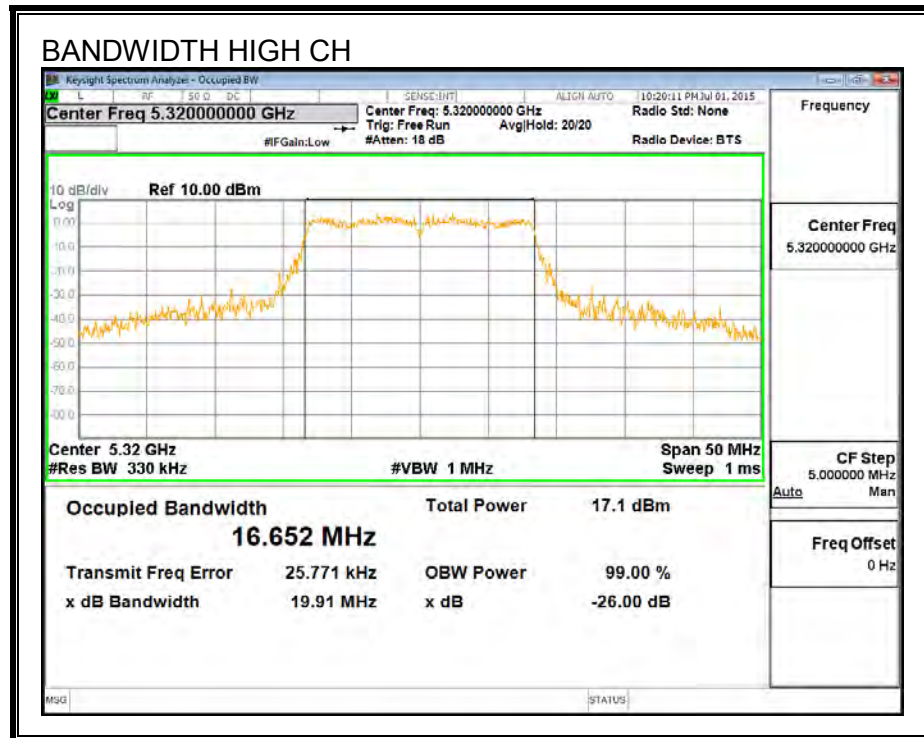

8.5.3. OUTPUT POWER AND PSD

LIMITS

FCC §15.407 (a) (2)

For the band 5.25–5.35 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26-dB emission bandwidth in MHz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1-MHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

IC RSS-247 (6.2.2) (1)

The maximum conducted output power shall not exceed 250 mW or $11 + 10 \log 10B$, dBm, whichever is less. The power spectral density shall not exceed 11 dBm in any 1.0 MHz band.

The maximum e.i.r.p. shall not exceed 1.0 W or $17 + 10 \log 10B$, dBm, whichever is less. B is the 99% emission bandwidth in megahertz. Note that devices with a maximum e.i.r.p. greater than 500 mW shall implement TPC in order to have the capability to operate at least 6 dB below the maximum permitted e.i.r.p. of 1 W.

DIRECTIONAL ANTENNA GAIN

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

RESULTS

Bandwidth, Antenna Gain, and Limits

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain (dBi)	Power Limit (dBm)	PSD Limit (dBm)
Low	5260	19.50	1.70	23.90	11.00
Mid	5300	19.35	1.70	23.87	11.00
High	5320	19.20	1.70	23.83	11.00

Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd Power & PSD
--------------------	------	--

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5260	14.61	14.61	23.90	-9.30
Mid	5300	14.85	14.85	23.87	-9.02
High	5320	13.10	13.10	23.83	-10.73

PSD Results


Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
Low	5260	3.56	3.56	11.00	-7.44
Mid	5300	3.81	3.81	11.00	-7.19
High	5320	2.09	2.09	11.00	-8.91

OUTPUT POWER AND PSD


OUTPUT POWER, LOW CH



PSD, LOW CH

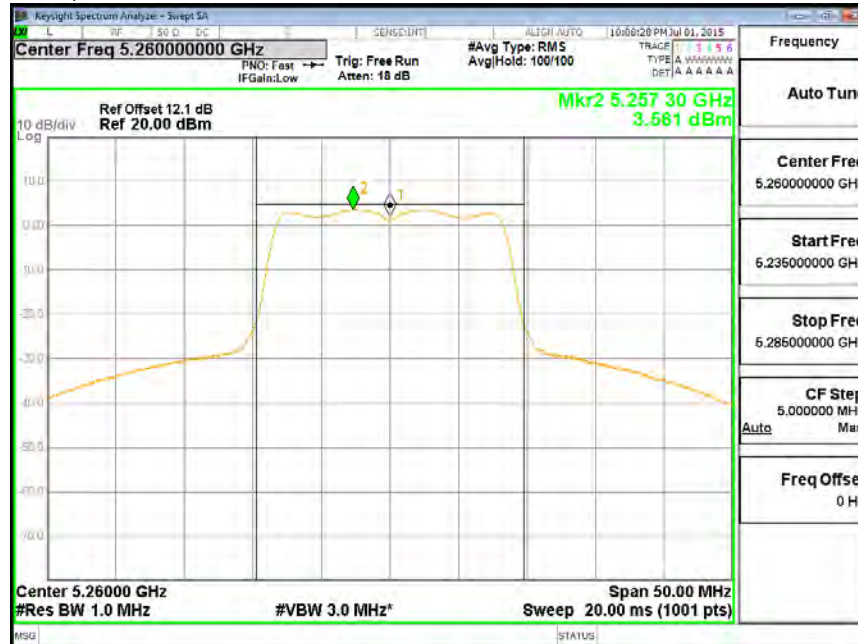


OUTPUT POWER, LOW CH

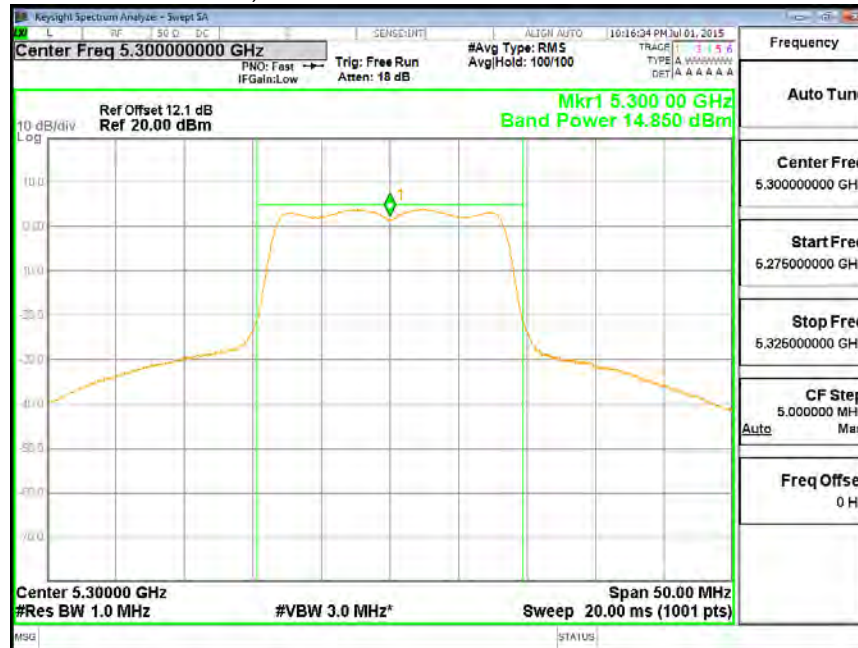


PSD, MID CH



OUTPUT POWER, LOW CH

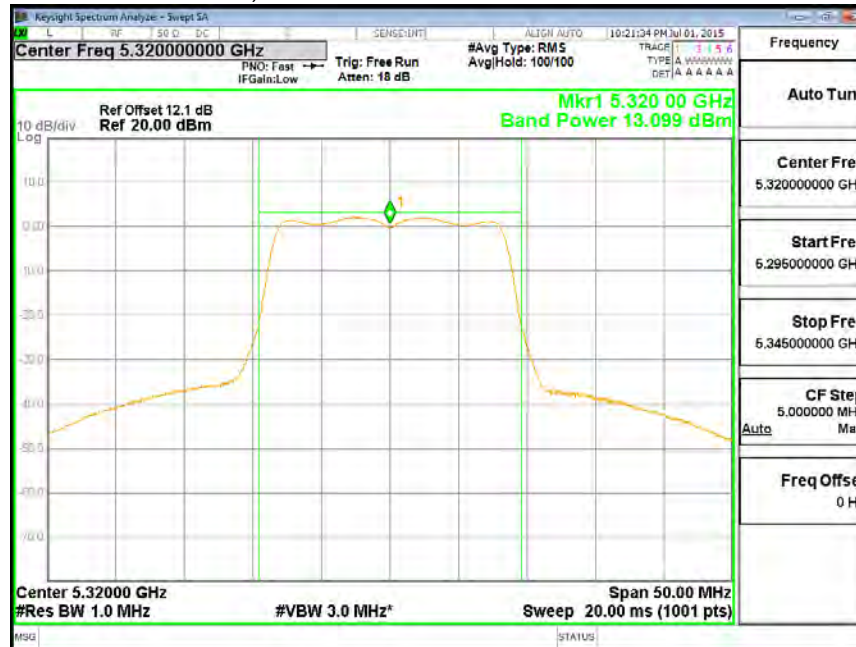

PSD, HIGH CH

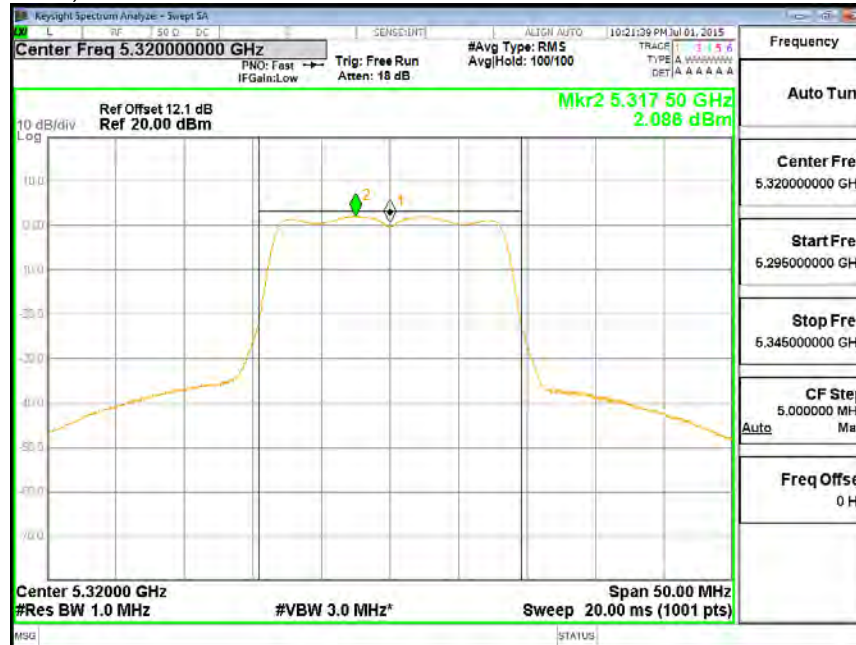

8.6. 802.11n HT20 MODE IN THE 5.3 GHz BAND

8.6.1. 26 dB BANDWIDTH



LIMITS


None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
Low	5260	20.65
Mid	5300	20.03
High	5320	19.95

26 dB BANDWIDTH

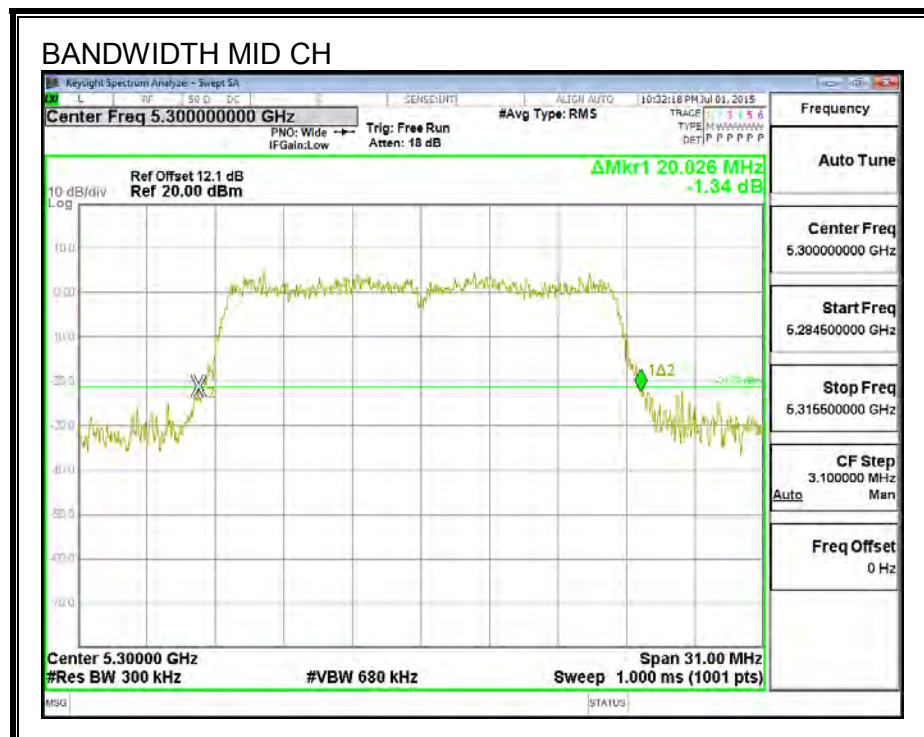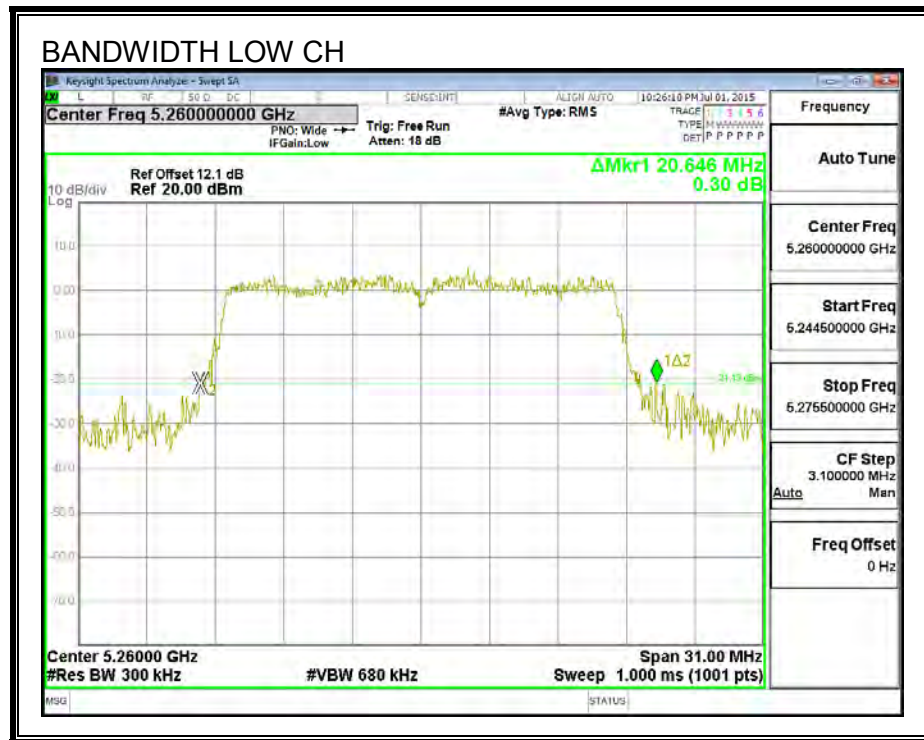

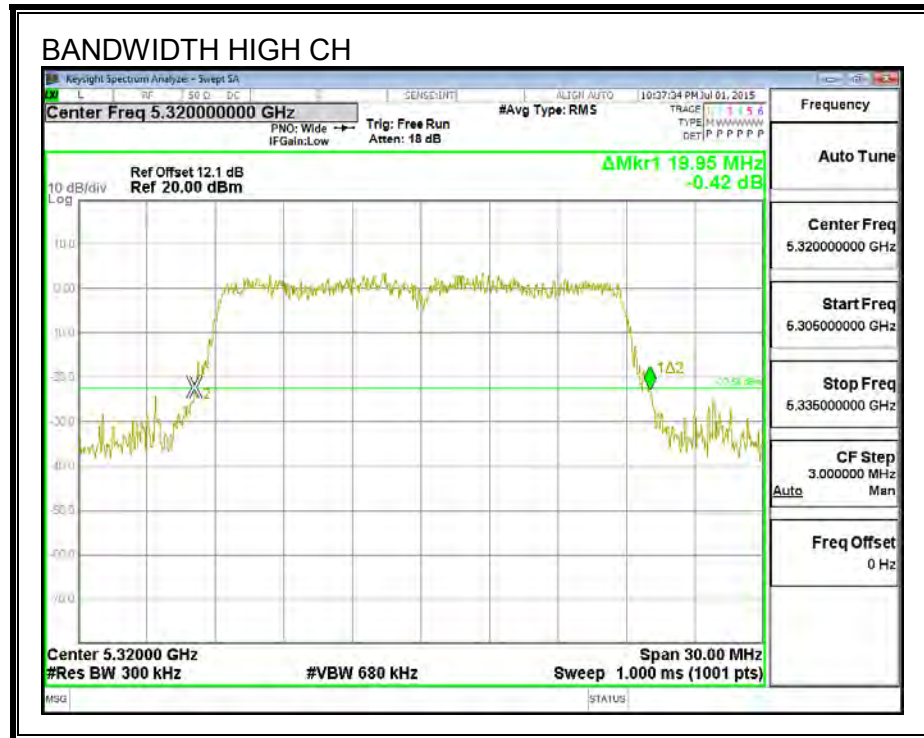

8.6.2. 99% BANDWIDTH



LIMITS


None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	5260	17.741
Mid	5300	17.716
High	5320	17.669

99% BANDWIDTH

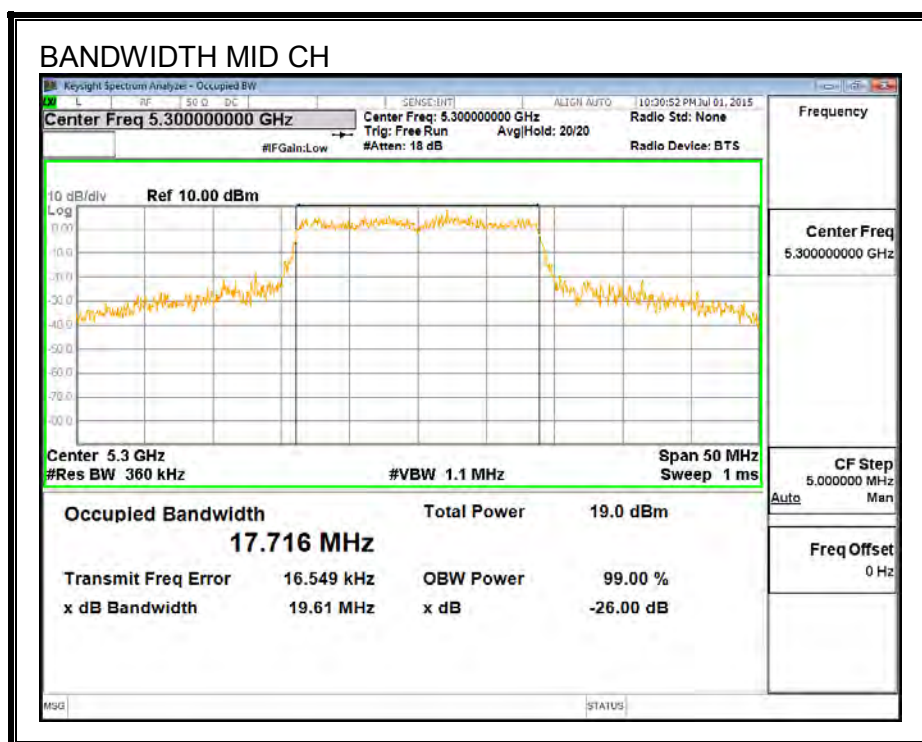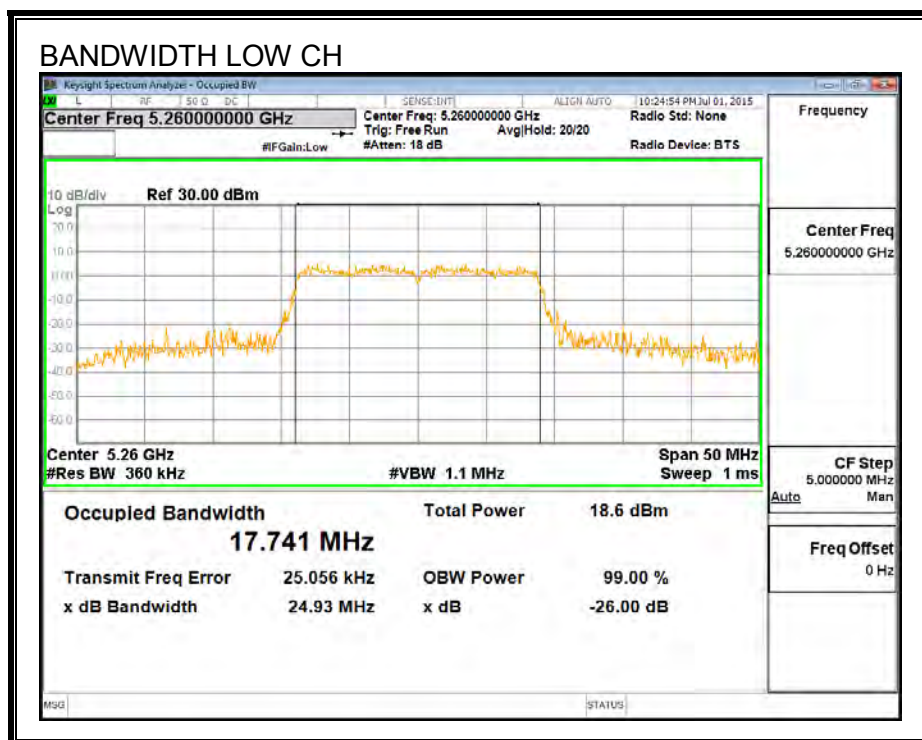

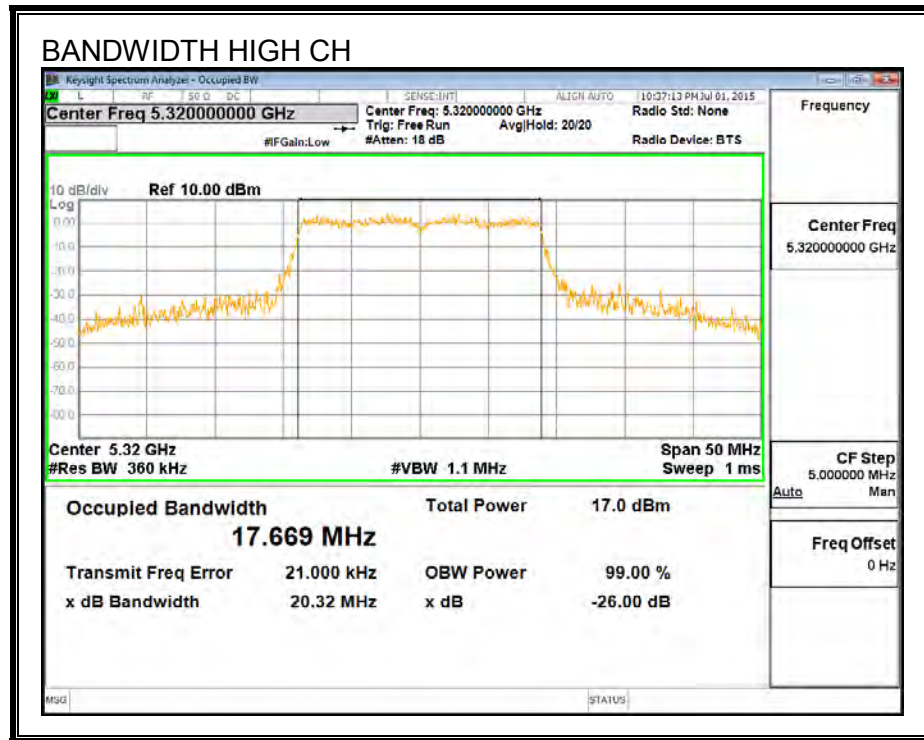

8.6.3. OUTPUT POWER AND PSD

LIMITS

FCC §15.407 (a) (2)

For the band 5.25–5.35 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26–dB emission bandwidth in MHz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1–MHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

DIRECTIONAL ANTENNA GAIN

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

RESULTS

Bandwidth, Antenna Gain, and Limits

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain (dBi)	Power Limit (dBm)	PSD Limit (dBm)
Low	5260	20.65	1.70	24.00	11.00
Mid	5300	20.03	1.70	24.00	11.00
High	5320	19.95	1.70	24.00	11.00

Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd Power & PSD
--------------------	------	--

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5260	14.69	14.69	24.00	-9.31
Mid	5300	14.96	14.96	24.00	-9.04
High	5320	12.96	12.96	24.00	-11.04

PSD Results

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
Low	5260	3.37	3.37	11.00	-7.63
Mid	5300	3.62	3.62	11.00	-7.38
High	5320	1.64	1.64	11.00	-9.36

OUTPUT POWER AND PSD

OUTPUT POWER, LOW CH




PSD, LOW CH



OUTPUT POWER, LOW CH



PSD, MID CH

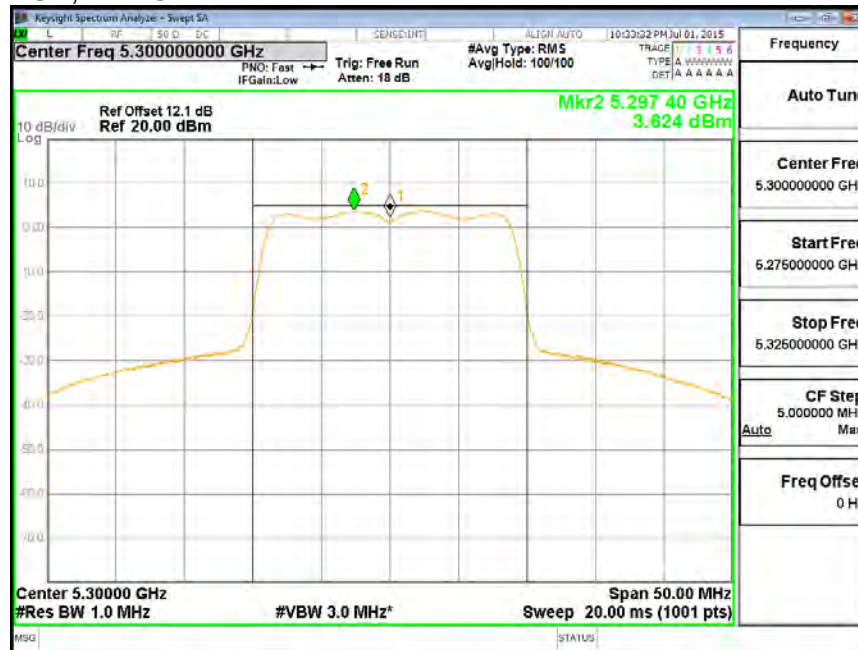

OUTPUT POWER, LOW CH



PSD, HIGH CH



8.7. 802.11n HT40 MODE IN THE 5.3 GHz BAND

8.7.1. 26 dB BANDWIDTH



LIMITS

None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
Low	5270	40.63
High	5310	40.20

26 dB BANDWIDTH

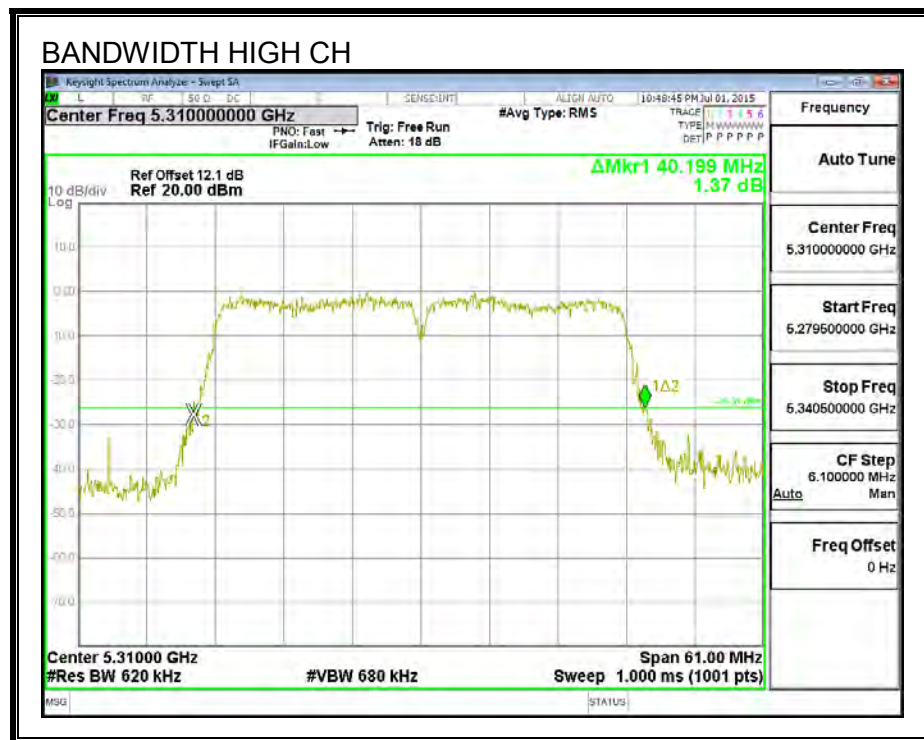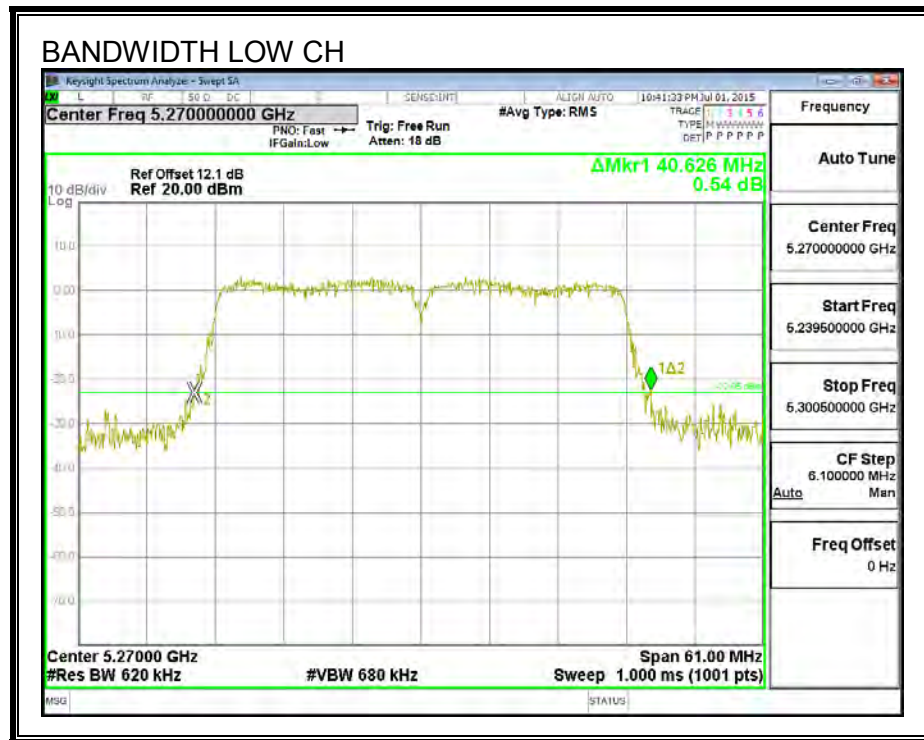

8.7.2. 99% BANDWIDTH



LIMITS

None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	5270	36.204
High	5310	36.206

99% BANDWIDTH

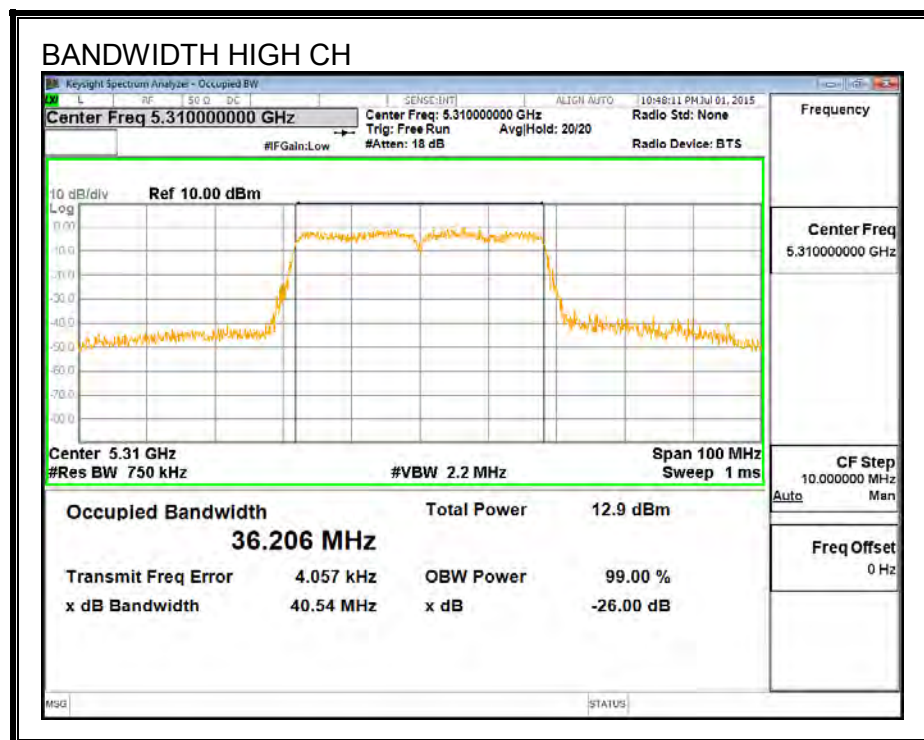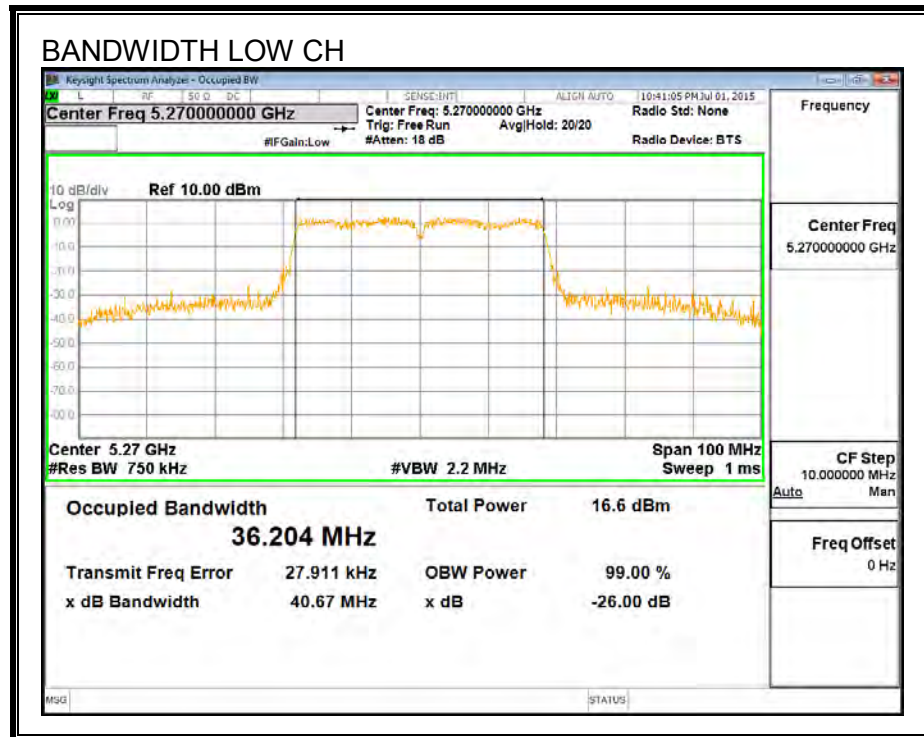

8.7.3. OUTPUT POWER AND PSD

LIMITS

FCC §15.407 (a) (2)

For the band 5.25–5.35 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26–dB emission bandwidth in MHz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1–MHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

DIRECTIONAL ANTENNA GAIN

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

RESULTS

Bandwidth, Antenna Gain, and Limits

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain (dBi)	Power Limit (dBm)	PSD Limit (dBm)
Low	5270	40.63	1.70	24.00	11.00
High	5310	40.20	1.70	24.00	11.00

Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd Power & PSD
--------------------	------	--

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5270	12.62	12.62	24.00	-11.38
High	5310	9.09	9.09	24.00	-14.91

PSD Results

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
Low	5270	-1.74	-1.74	11.00	-12.74
High	5310	-5.22	-5.22	11.00	-16.22

OUTPUT POWER AND PSD


OUTPUT POWER, HIGH CH



PSD, LOW CH



OUTPUT POWER, HIGH CH

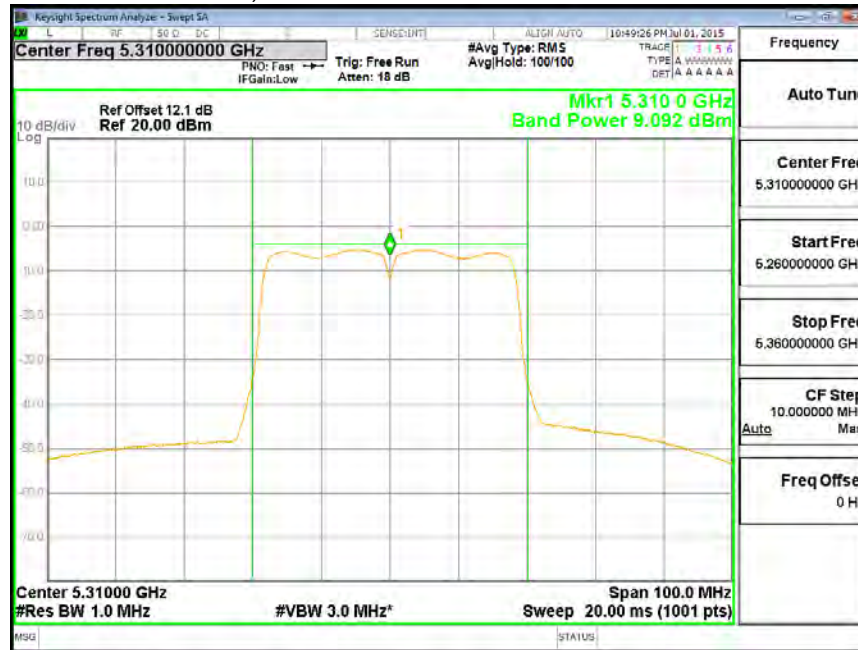

PSD, HIGH CH



8.8. 802.11ac VHT80 MODE IN THE 5.3 GHz BAND


8.8.1. 26 dB BANDWIDTH

LIMITS

None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
Mid	5290	81.25

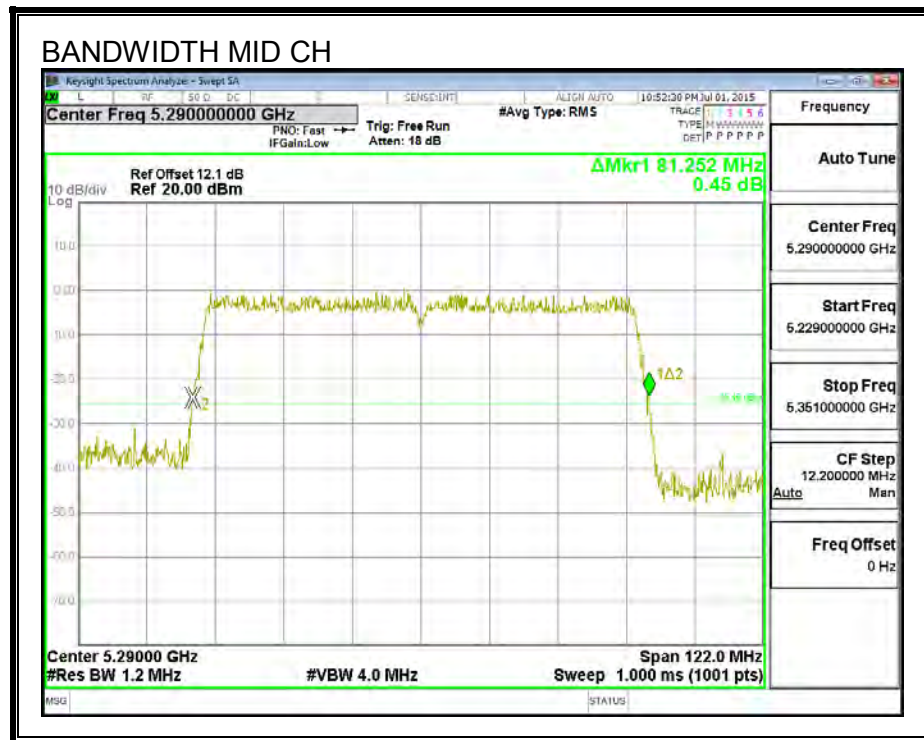

8.8.2. 99% BANDWIDTH


LIMITS

None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Mid	5290	76.454

99% BANDWIDTH

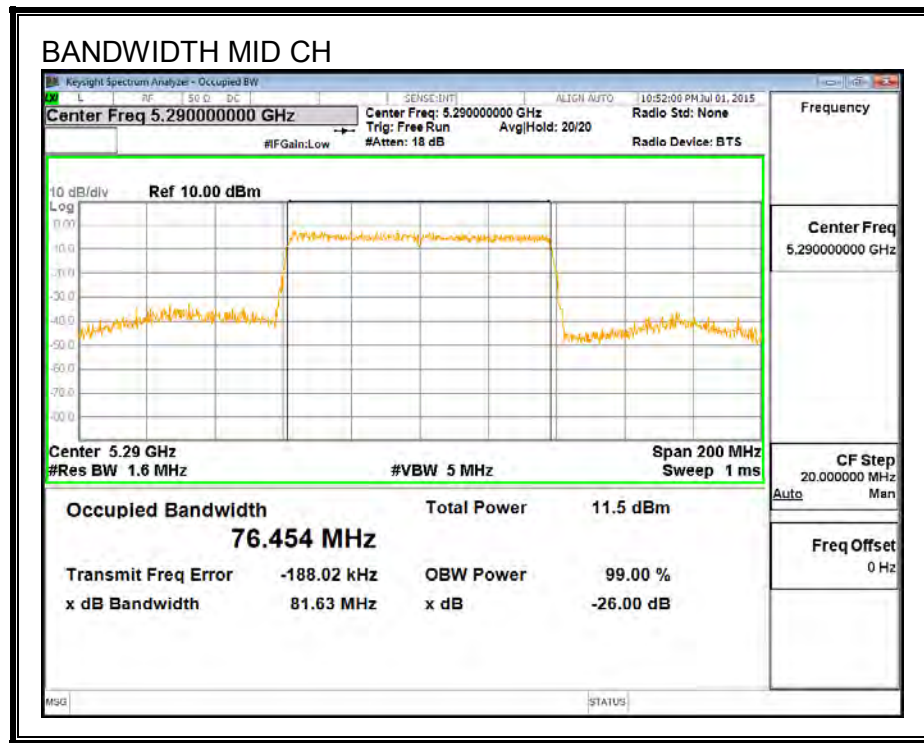

8.8.3. OUTPUT POWER AND PSD

LIMITS

FCC §15.407 (a) (2)

For the band 5.25–5.35 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26–dB emission bandwidth in MHz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1–MHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

DIRECTIONAL ANTENNA GAIN

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

RESULTS

Bandwidth, Antenna Gain, and Limits

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain (dBi)	Power Limit (dBm)	PSD Limit (dBm)
Mid	5290	81.25	1.70	24.00	11.00

Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd Power & PSD
--------------------	------	--


Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Mid	5290	7.64	7.64	24.00	-16.36

PPSD Results

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
Mid	5290	-10.18	-10.18	11.00	-21.18

OUTPUT POWER AND PSD, Chain 0

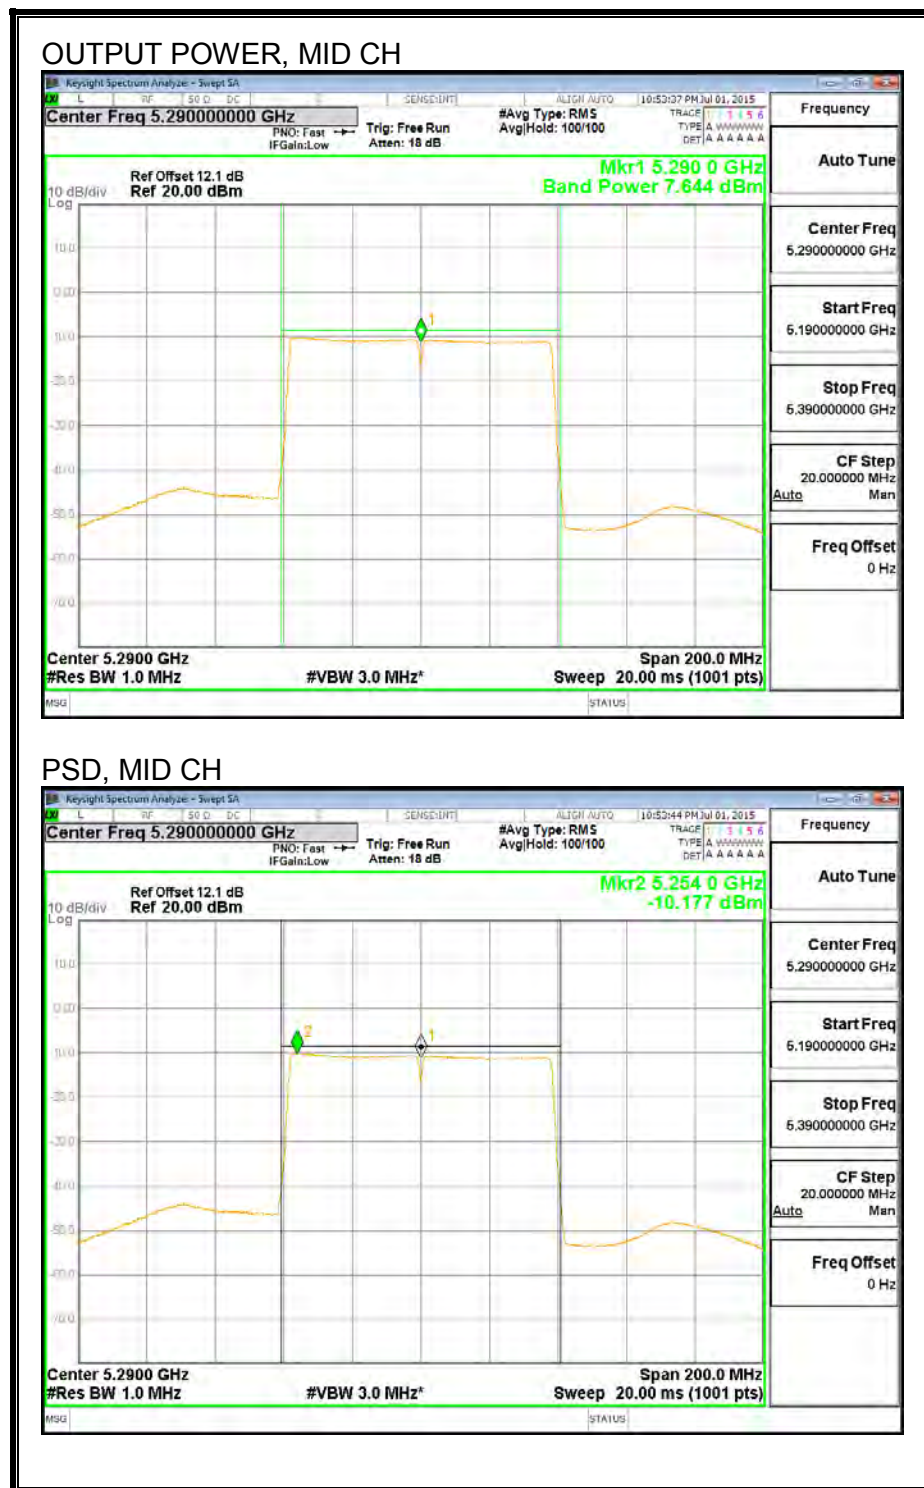

8.9. 802.11a MODE IN THE 5.6 GHz BAND

8.9.1. 26 dB BANDWIDTH



LIMITS



None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
Low	5500	19.17
Mid	5580	19.74
High	5700	19.31
144	5720	19.68

26 dB BANDWIDTH

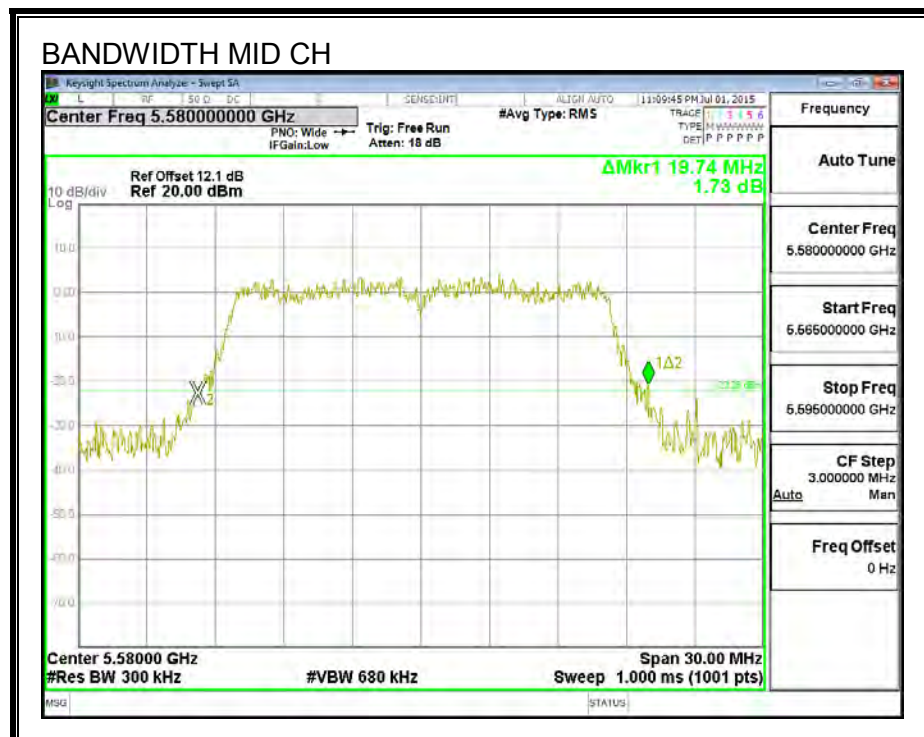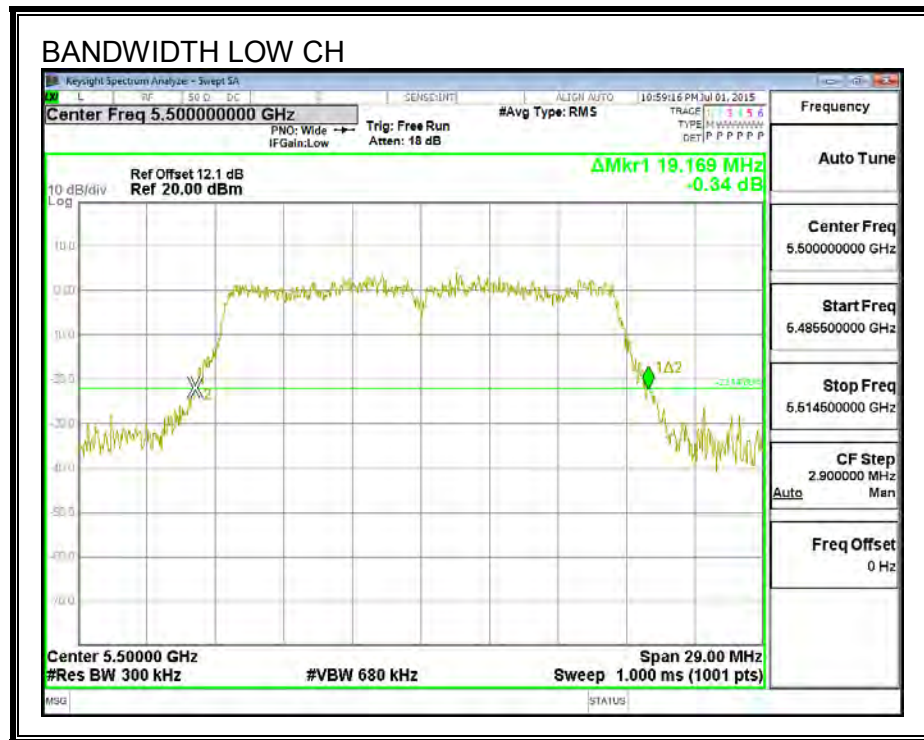

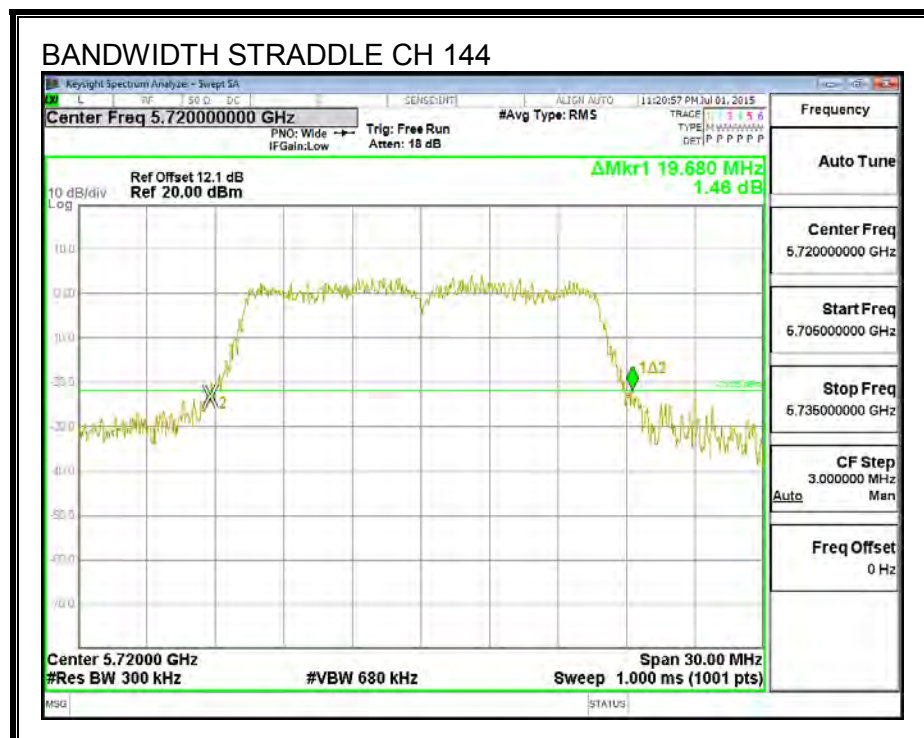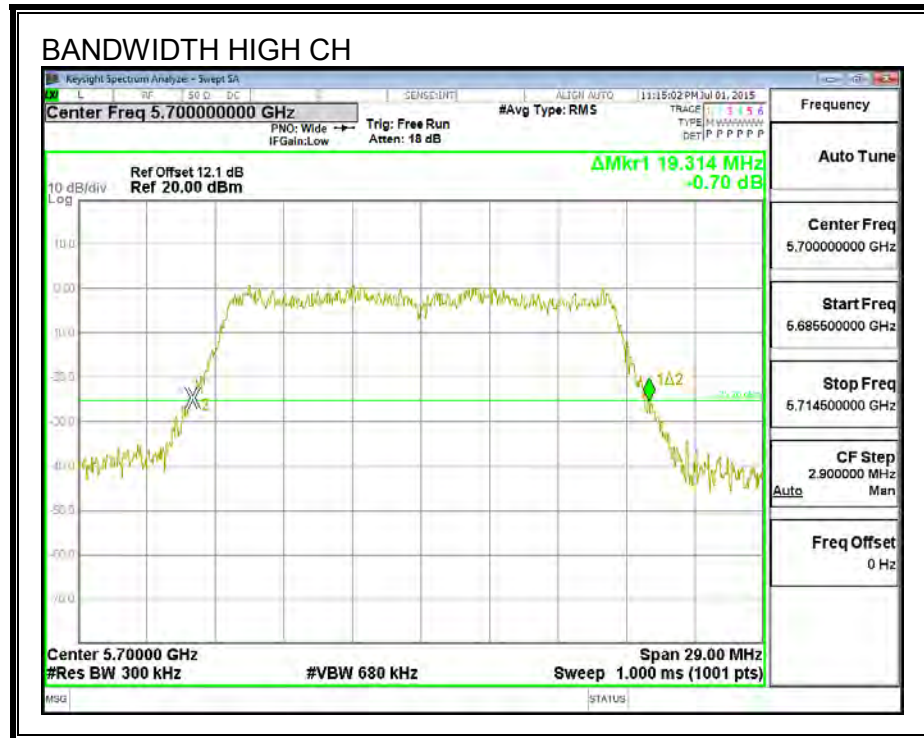

8.9.2. 99% BANDWIDTH



LIMITS



None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	5500	16.672
Mid	5580	16.919
High	5700	16.656
144	5720	16.914

99% BANDWIDTH

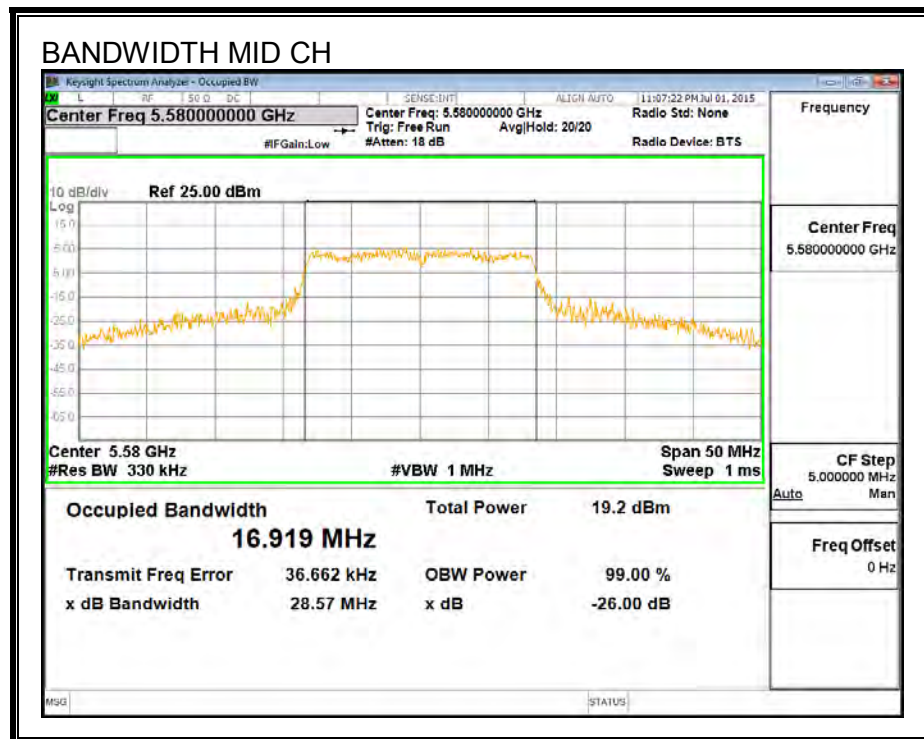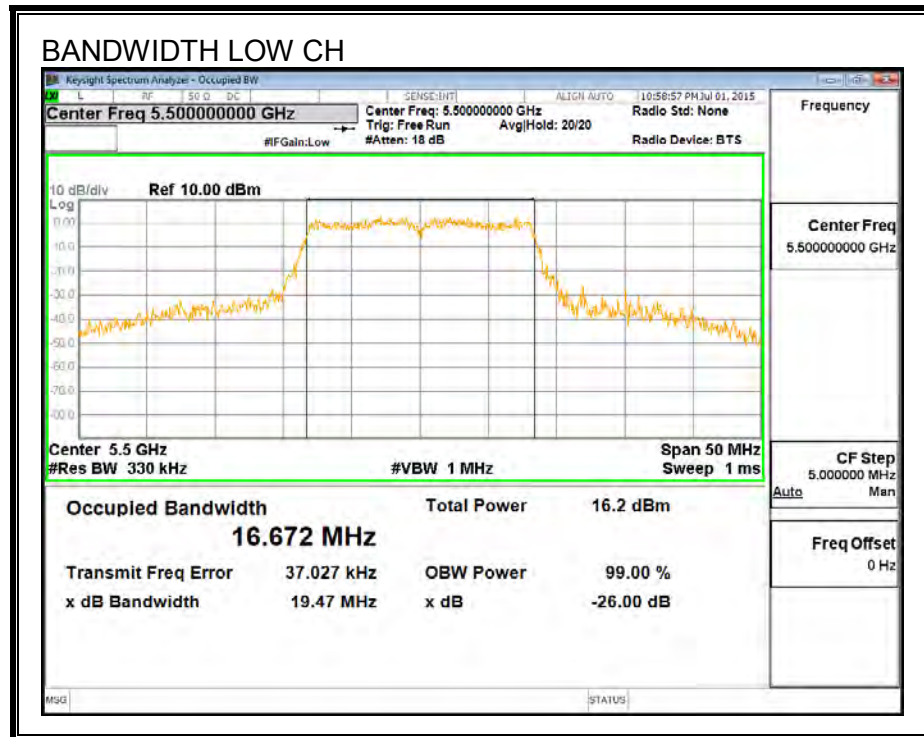

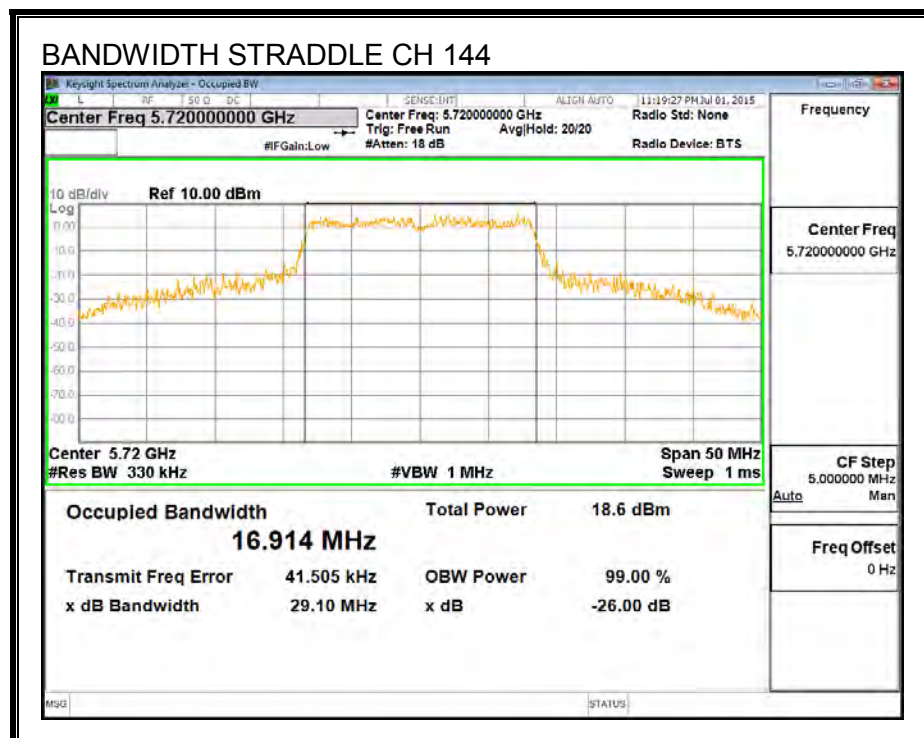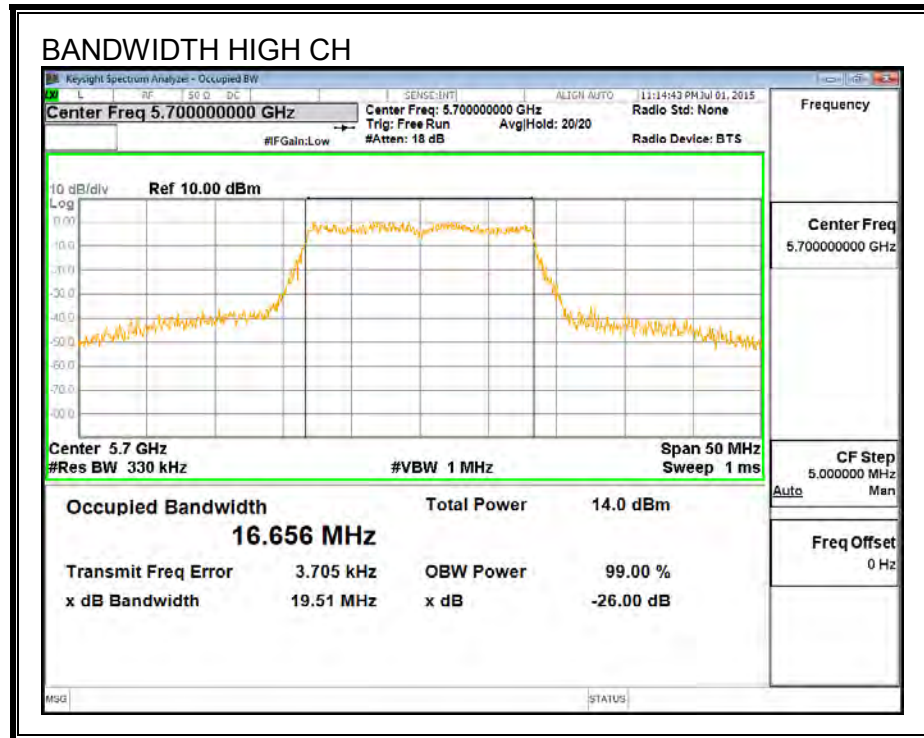

8.9.3. OUTPUT POWER AND PSD

LIMITS

FCC §15.407 (a) (2)

For the band 5.47–5.725 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26-dB emission bandwidth in MHz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1-MHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

DIRECTIONAL ANTENNA GAIN

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

RESULTS

Bandwidth, Antenna Gain, and Limits

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain (dBi)	Power Limit (dBm)	PSD Limit (dBm)
Low	5500	19.17	1.70	23.83	11.00
Mid	5580	19.74	1.70	23.95	11.00
High	5700	19.31	1.70	23.86	11.00

Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd Power & PSD
---------------------------	------	---

Output Power Results


Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5500	14.48	14.48	23.83	-9.34
Mid	5580	15.48	15.48	23.95	-8.48
High	5700	10.08	10.08	23.86	-13.78

PSD Results


Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
Low	5500	1.40	1.40	11.00	-9.60
Mid	5580	4.51	4.51	11.00	-6.49
High	5700	-0.92	-0.92	11.00	-11.92

OUTPUT POWER AND PSD


OUTPUT POWER, LOW CH

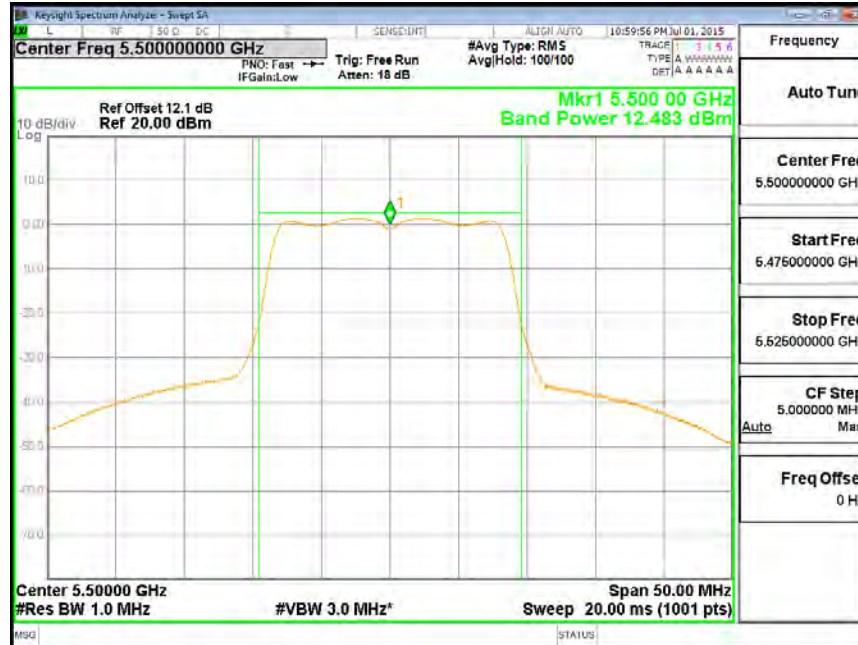


PSD, LOW CH

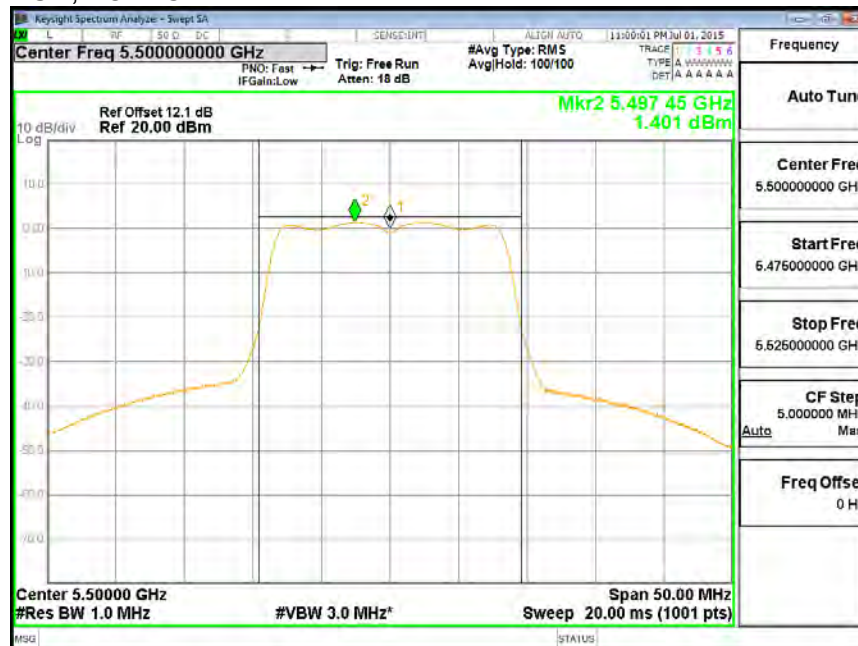


OUTPUT POWER, LOW CH

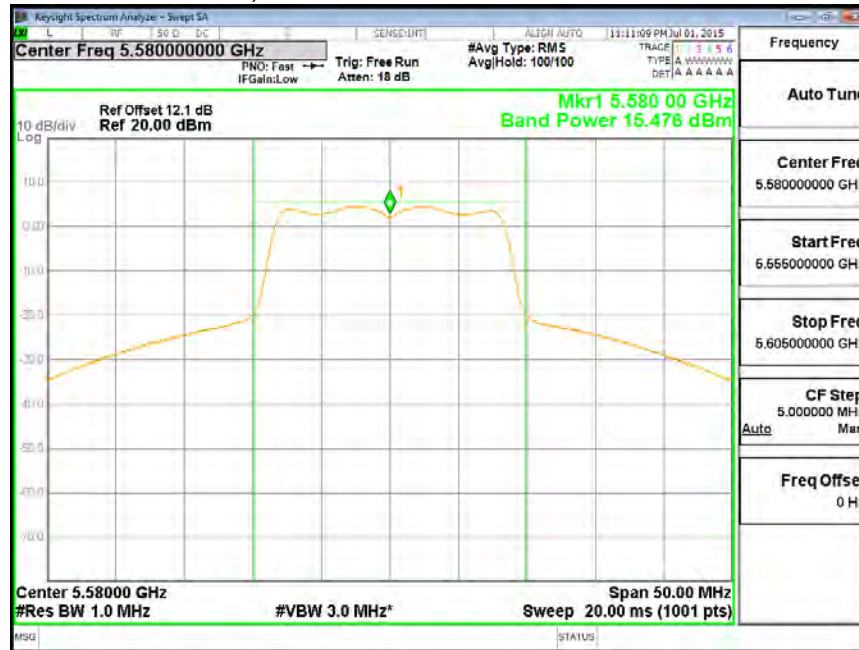

PSD, MID CH

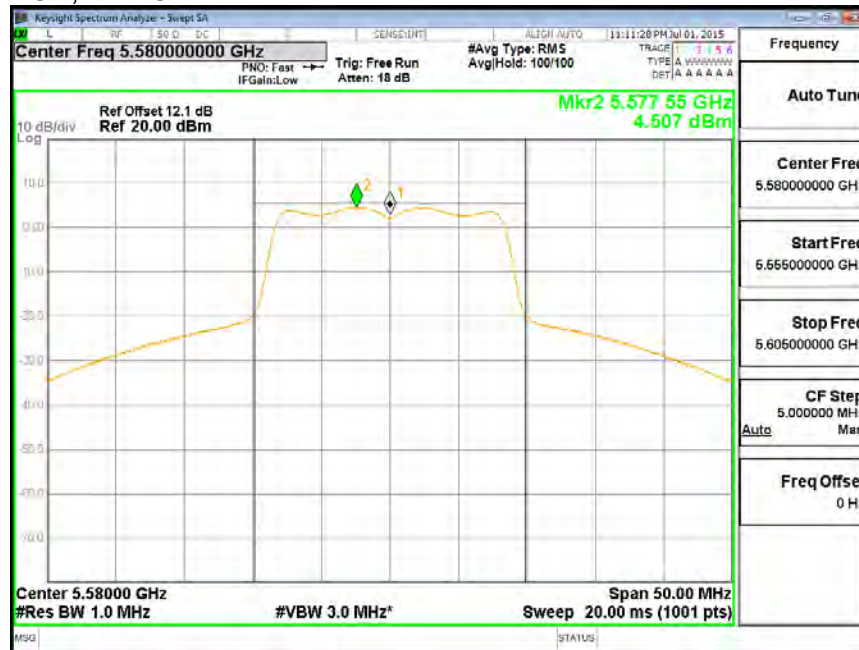

OUTPUT POWER, LOW CH

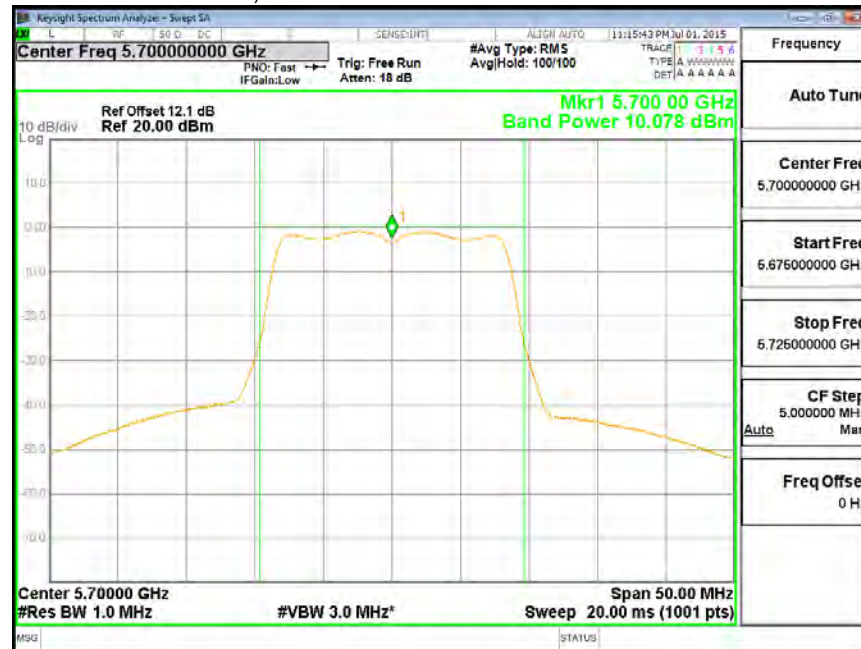

PSD, HIGH CH



8.9.4. STRADDLE CHANNEL 144 RESULTS

UNII-2C BAND

Bandwidth, Antenna Gain, and Limits

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm)
144	5720	19.68	1.70	1.70	23.94	11.00

Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd Power & PSD
--------------------	------	--


Output Power Results

Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
144	5720	13.59	13.59	23.94	-10.35

PSD Results

Channel	Frequency (MHz)	Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
144	5720	3.50	3.50	11.00	-7.50

OUTPUT POWER, CH 144 UNII 2C

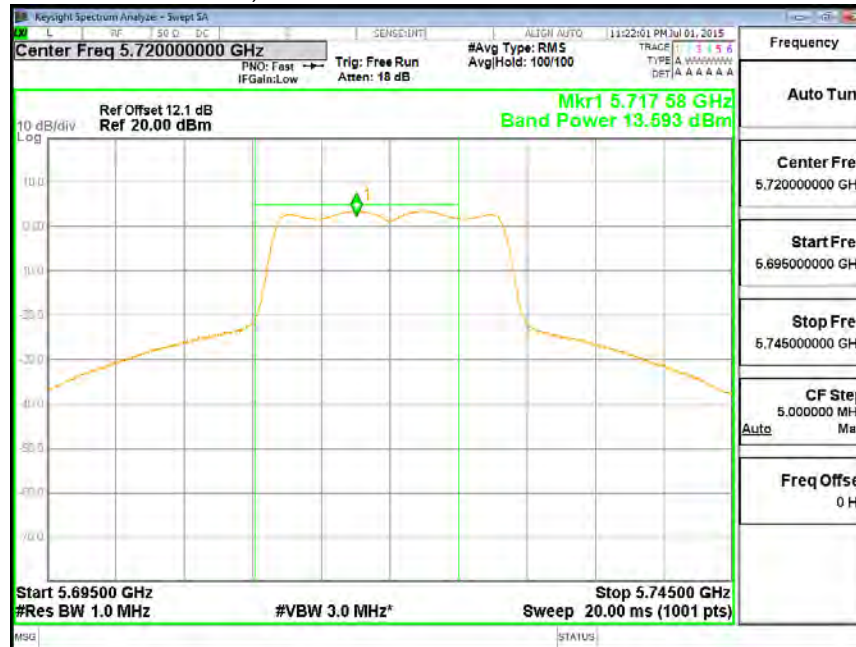

PSD, CH 144 UNII 2C



UNII-3 BAND

Antenna Gain and Limit

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain (dBi)	Power Limit (dBm)	PSD Limit (dBm)
144	5720	19.68	1.70	30.00	30.00

Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd Power & PSD
--------------------	------	--


Output Power Results

Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
144	5720	7.26	7.26	30.00	-22.74


PSD Results

Channel	Frequency (MHz)	Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
144	5720	0.06	0.06	30.00	-29.94

OUTPUT POWER, CH 144 UNII 3

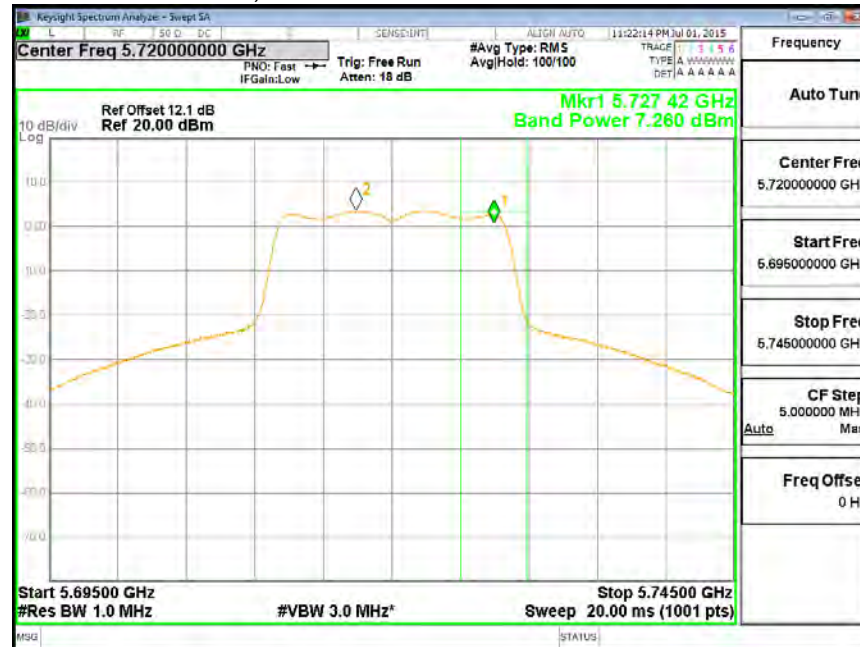

PSD, CH 144 UNII 3

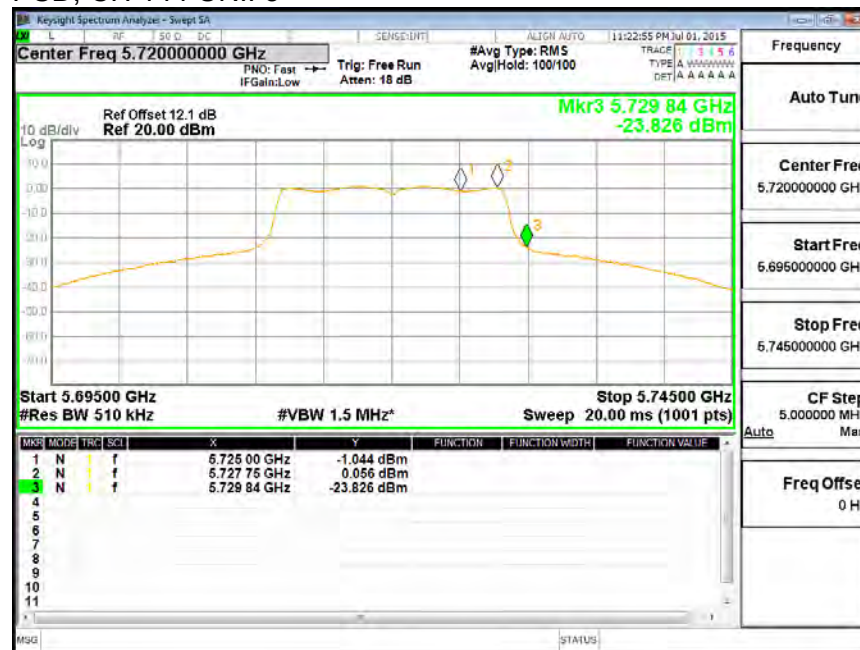


8.9.5. 6 dB BANDWIDTH

LIMITS

FCC §15.407 (e)

The minimum 6 dB bandwidth shall be at least 500 kHz.

RESULTS

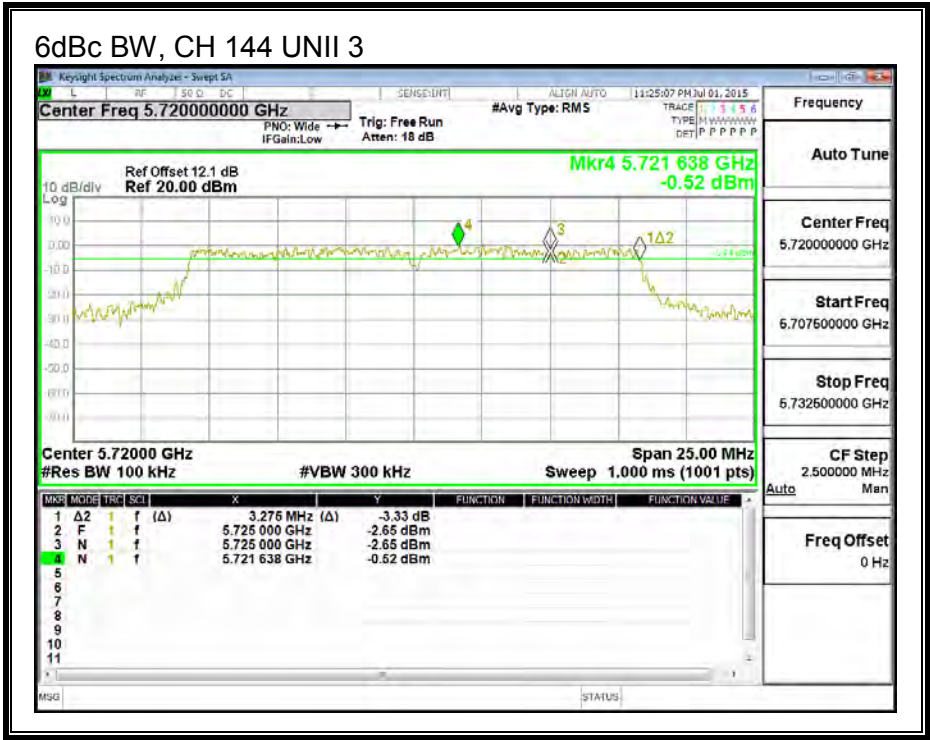

8.10. 802.11n HT20 MODE IN THE 5.6 GHz BAND

8.10.1. 26 dB BANDWIDTH



LIMITS



None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
Low	5500	20.21
Mid	5580	20.34
High	5700	19.86
144	5720	19.98

26 dB BANDWIDTH

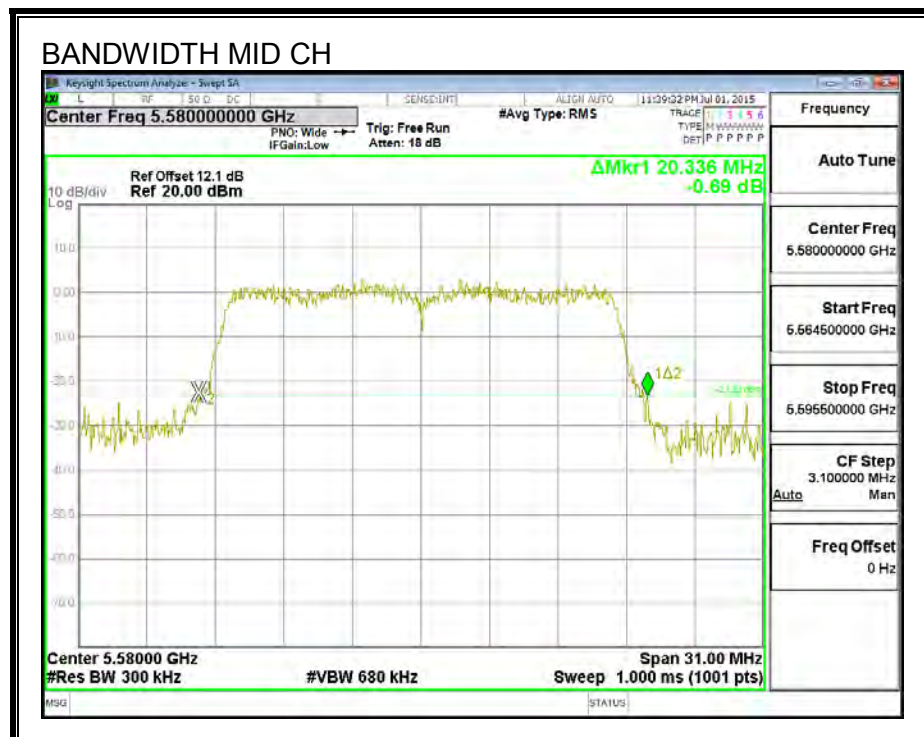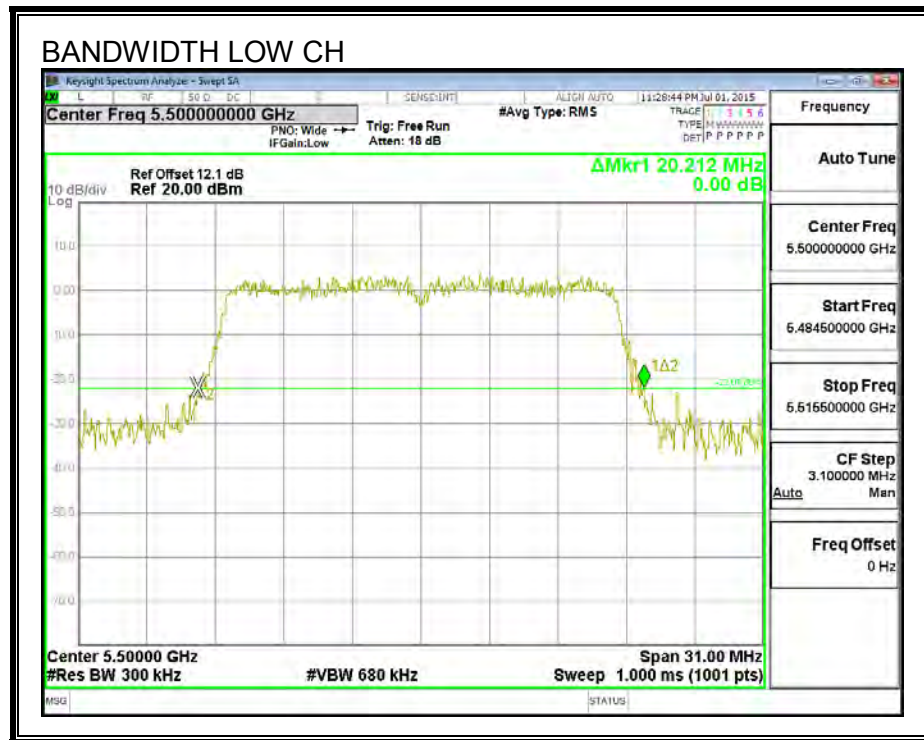

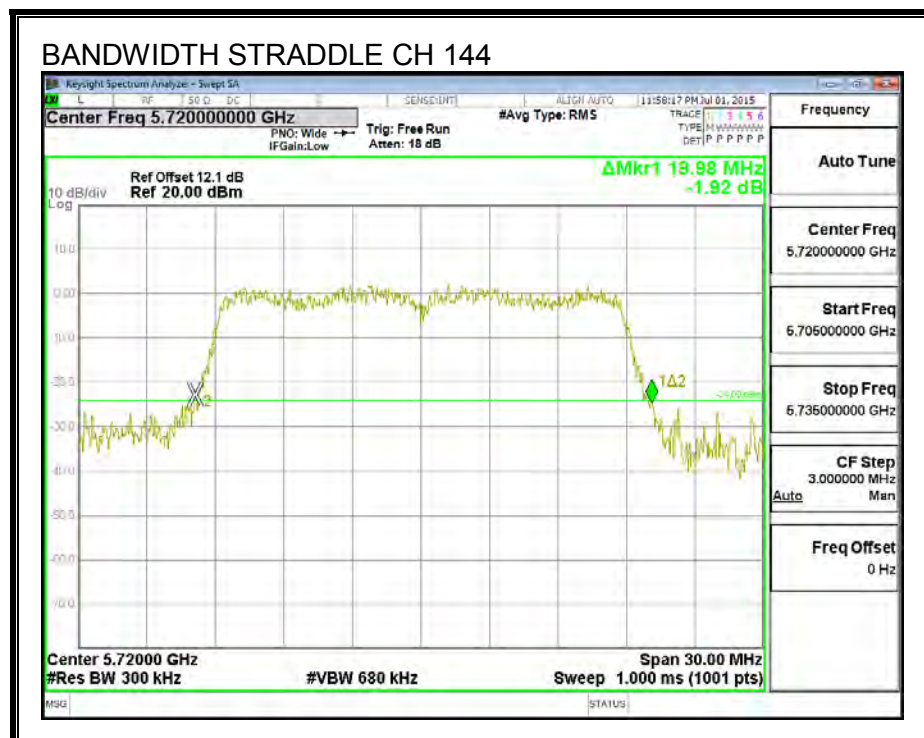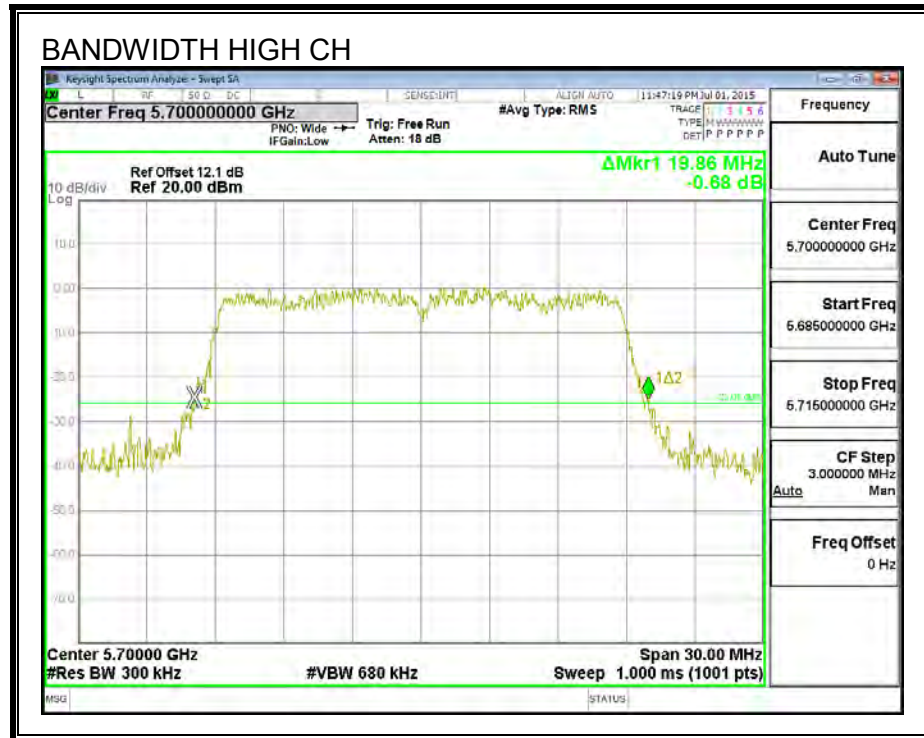

8.10.2. 99% BANDWIDTH



LIMITS



None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	5500	17.738
Mid	5580	17.908
High	5700	17.702
144	5720	17.885

99% BANDWIDTH

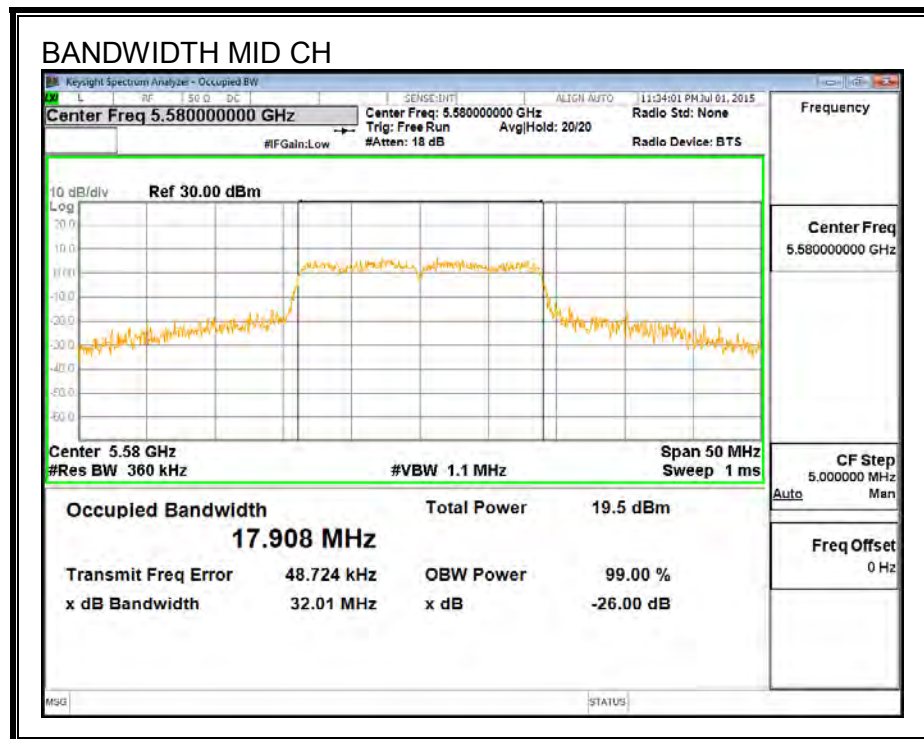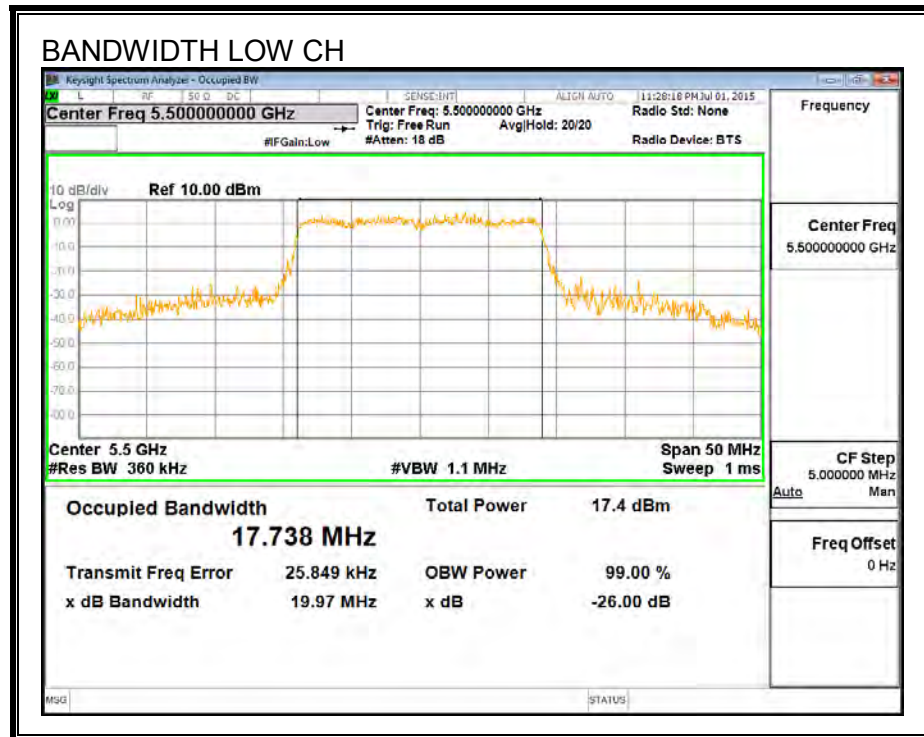

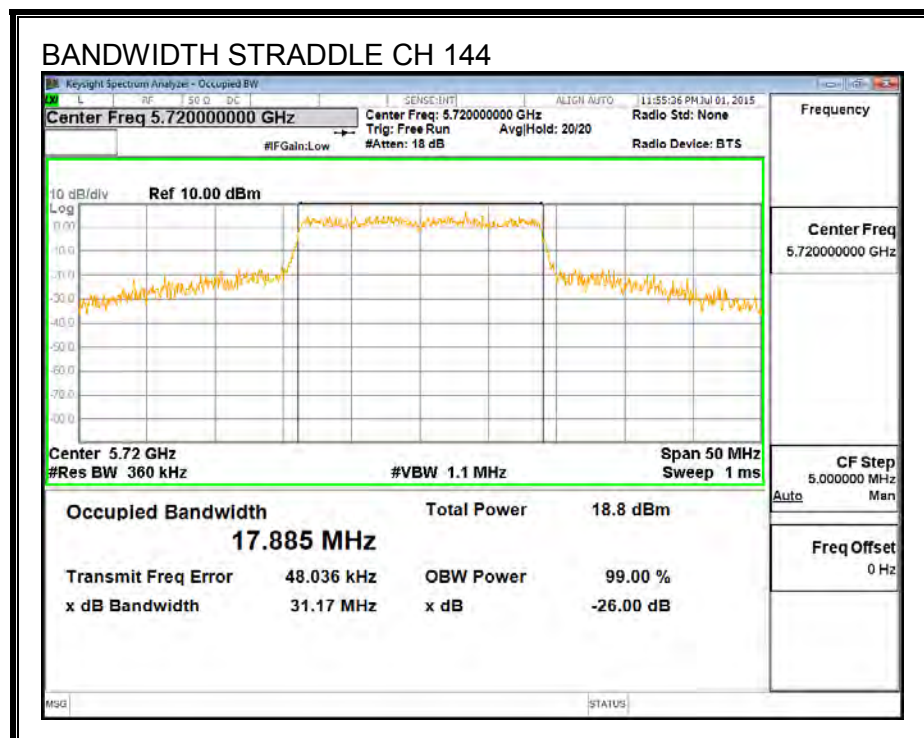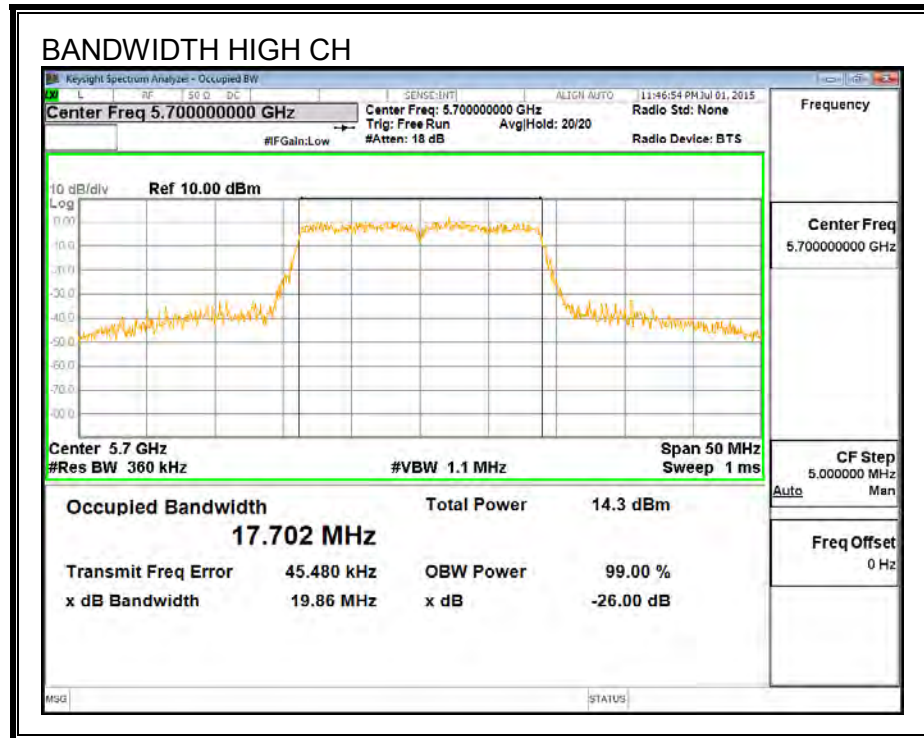

8.10.3. OUTPUT POWER AND PSD

LIMITS

FCC §15.407 (a) (2)

For the band 5.47–5.725 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26-dB emission bandwidth in MHz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1-MHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

DIRECTIONAL ANTENNA GAIN

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

RESULTS

Bandwidth, Antenna Gain, and Limits

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain (dBi)	Power Limit (dBm)	PSD Limit (dBm)
Low	5500	20.21	1.70	24.00	11.00
Mid	5580	20.34	1.70	24.00	11.00
High	5700	19.86	1.70	23.98	11.00

Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd Power & PSD
--------------------	------	--

Output Power Results


Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5500	13.45	13.45	24.00	-10.55
Mid	5580	15.55	15.55	24.00	-8.45
High	5700	10.30	10.30	23.98	-13.68

PSD Results


Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
Low	5500	2.10	2.10	11.00	-8.90
Mid	5580	4.23	4.23	11.00	-6.77
High	5700	-0.98	-0.98	11.00	-11.98

OUTPUT POWER AND PSD


OUTPUT POWER, LOW CH

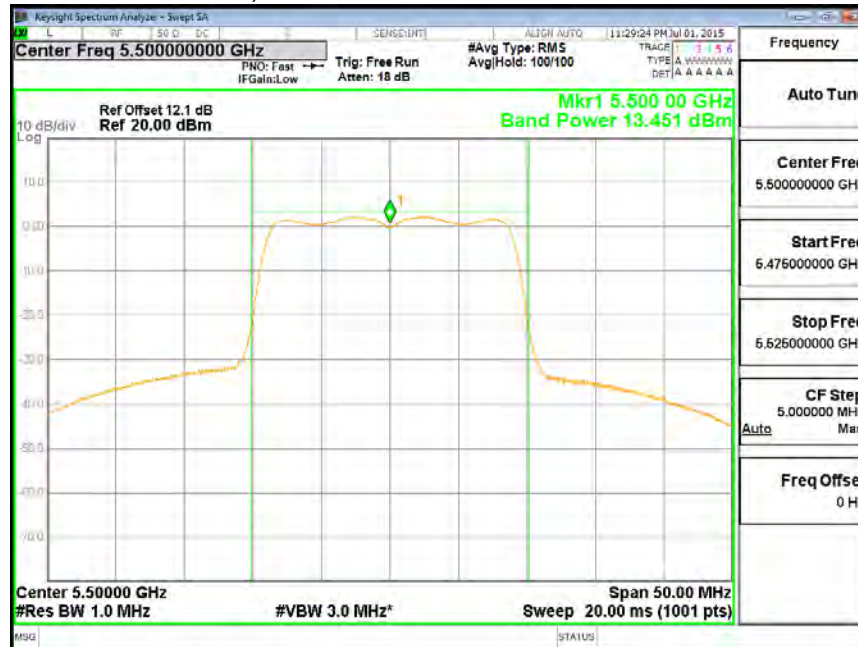


PSD, LOW CH

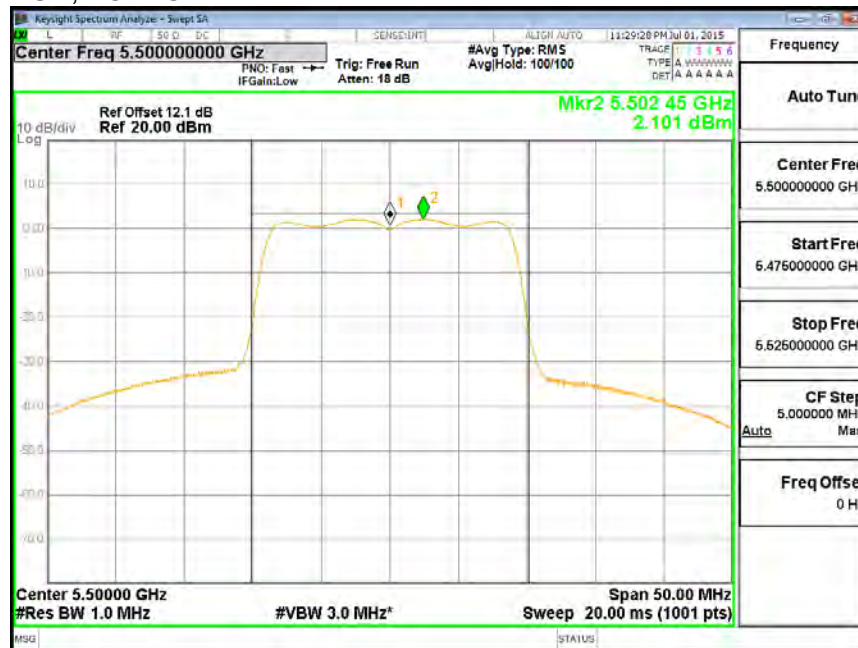


OUTPUT POWER, MID CH

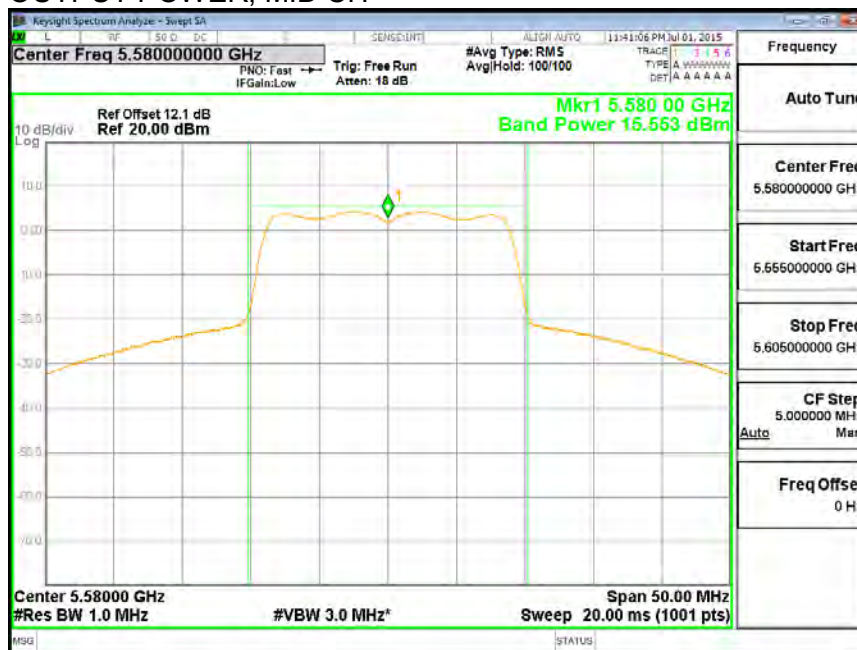

PSD, MID CH

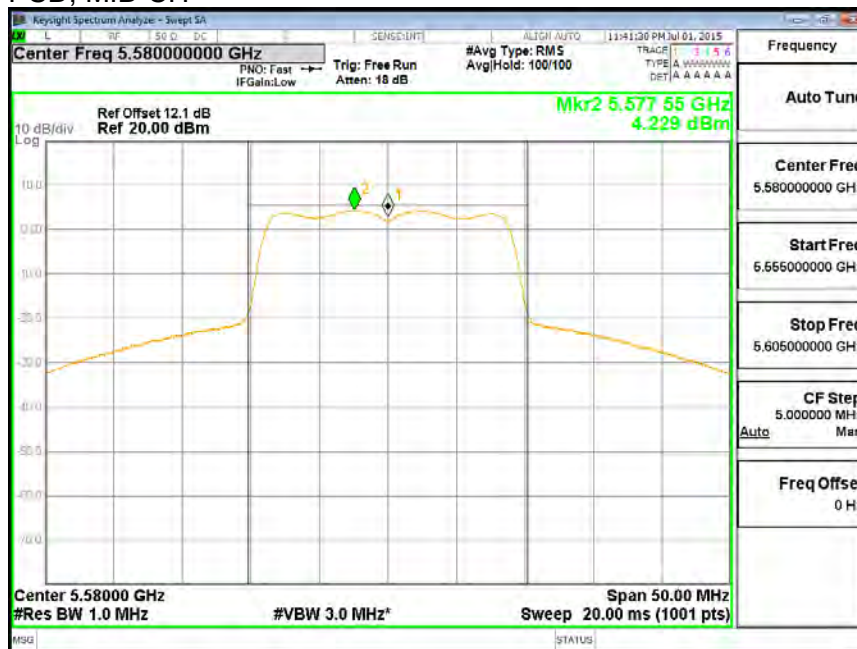

OUTPUT POWER, HIGH CH

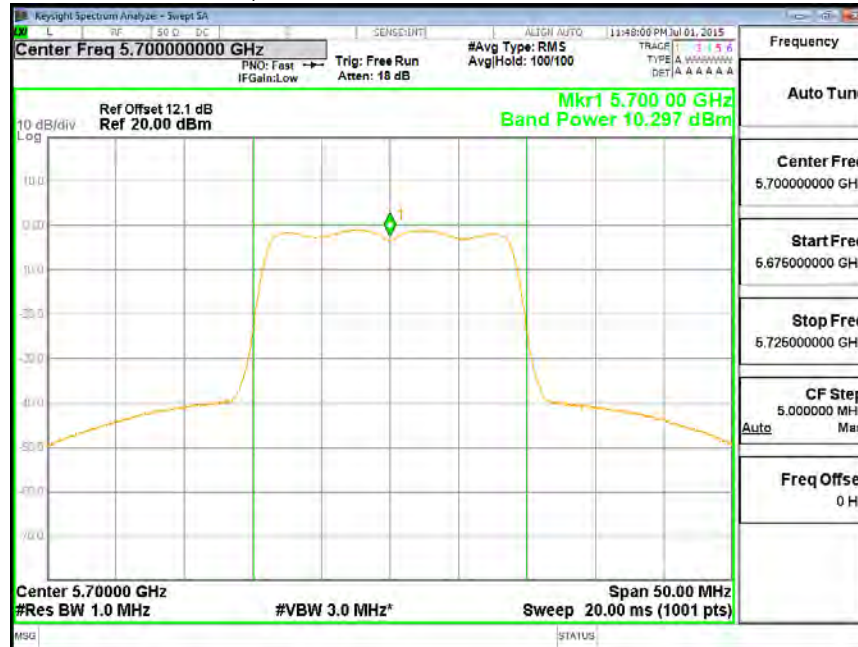

PSD, HIGH CH



8.10.4. STRADDLE CHANNEL 144 RESULTS

UNII-2C BAND

Bandwidth, Antenna Gain, and Limits

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm)
144	5720	19.98	1.70	1.70	24.00	11.00

Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd Power & PSD
--------------------	------	--


Output Power Results

Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
144	5720	13.51	13.51	24.00	-10.49


PSD Results

Channel	Frequency (MHz)	Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
144	5720	3.15	3.15	11.00	-7.85

OUTPUT POWER, CH 144 UNII 2C

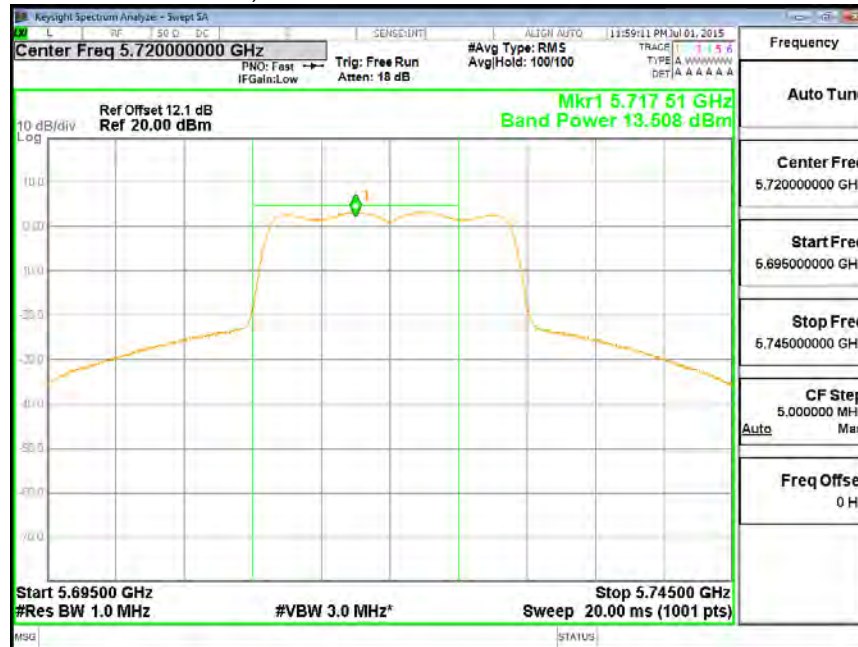

PSD, CH 144 UNII 2C

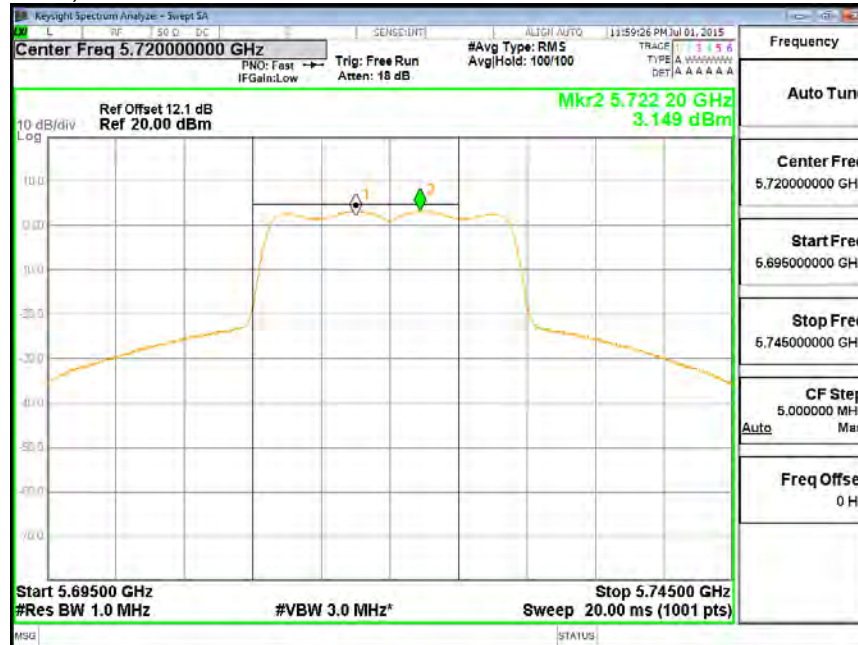

UNII-3 BAND

Antenna Gain and Limit

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain (dBi)	Power Limit (dBm)	PSD Limit (dBm)
144	5720	19.98	1.70	30.00	30.00

Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd Power & PSD
--------------------	------	--


Output Power Results

Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
144	5720	7.74	7.74	30.00	-22.26


PSD Results

Channel	Frequency (MHz)	Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
144	5720	-0.06	-0.06	30.00	-30.06

OUTPUT POWER, CH 144 UNII 3

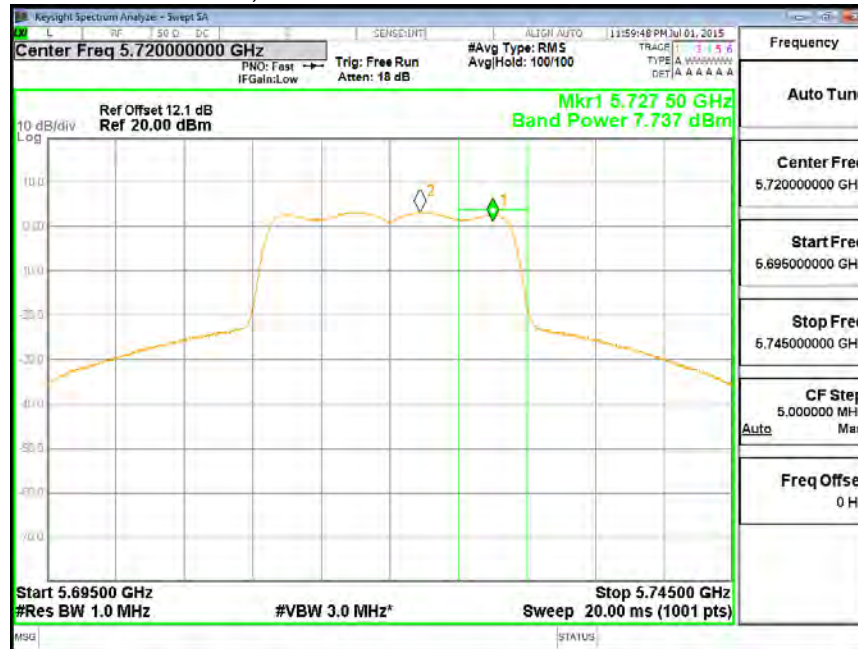

PSD, CH 144 UNII 3

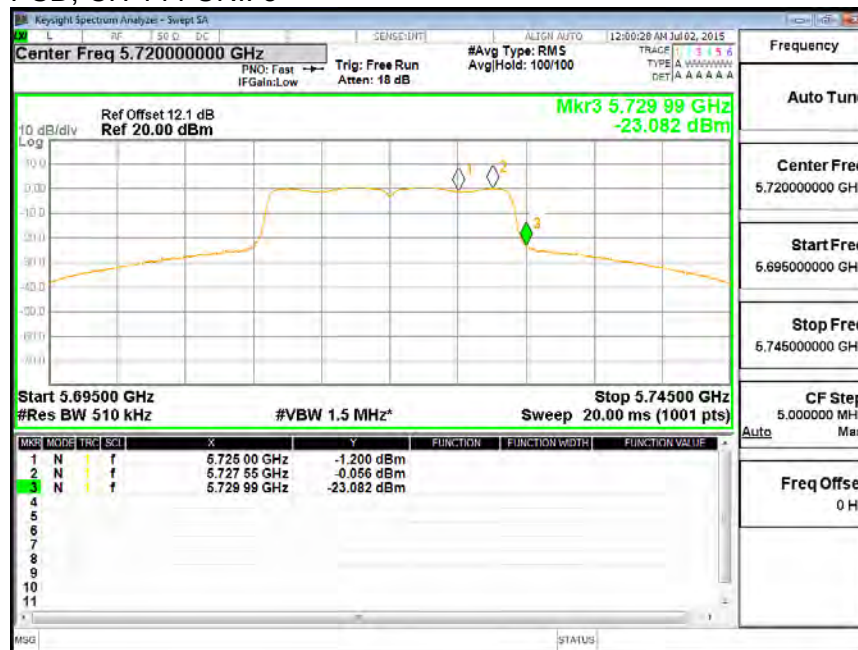


8.10.5. 6 dB BANDWIDTH

LIMITS

FCC §15.407 (e)

The minimum 6 dB bandwidth shall be at least 500 kHz.

RESULTS

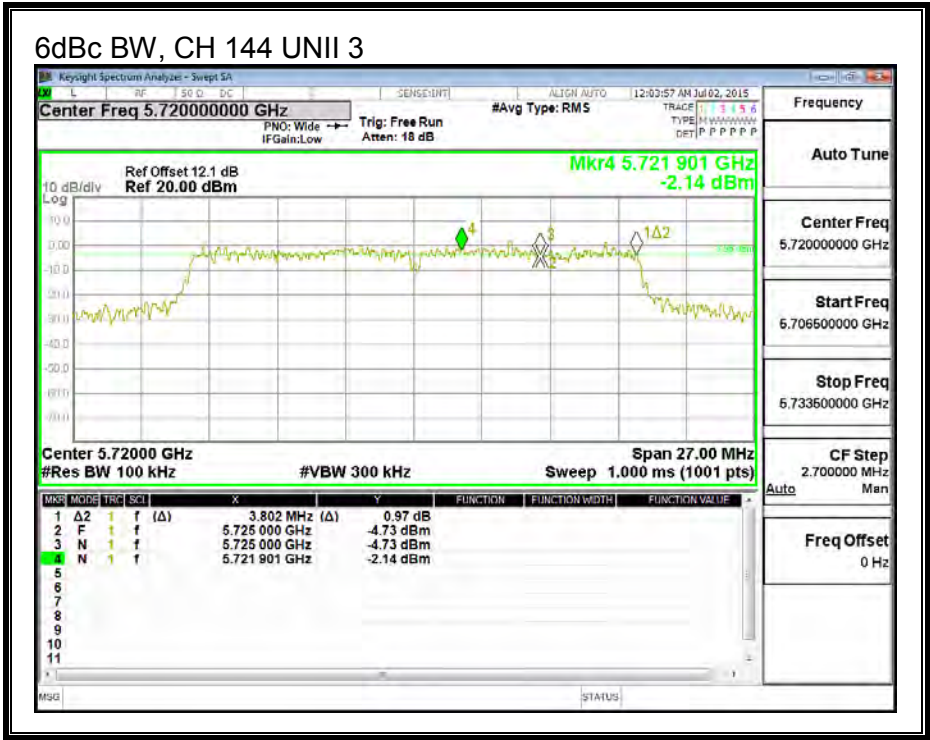

8.11. 802.11n HT40 MODE IN THE 5.6 GHz BAND

8.11.1. 26 dB BANDWIDTH



LIMITS



None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
Low	5510	40.63
Mid	5550	40.20
High	5670	41.04
142	5710	40.20

26 dB BANDWIDTH

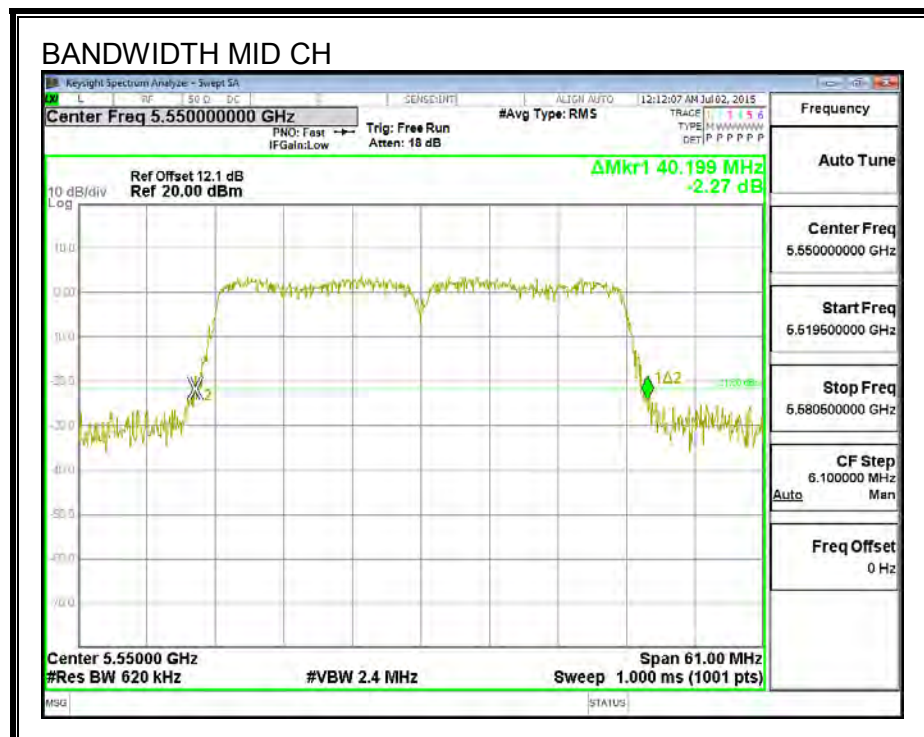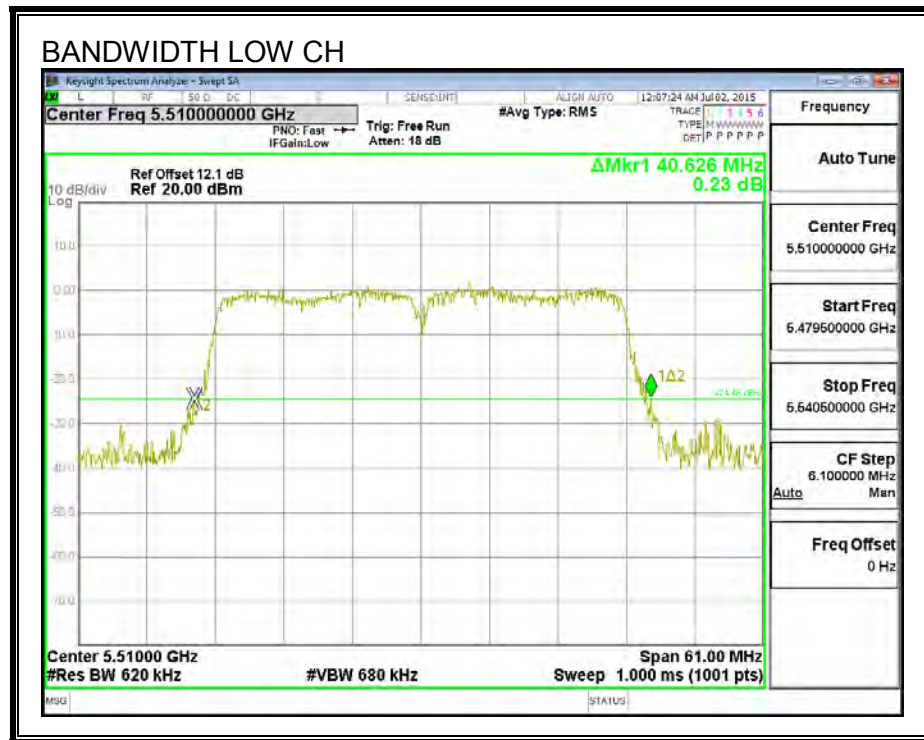

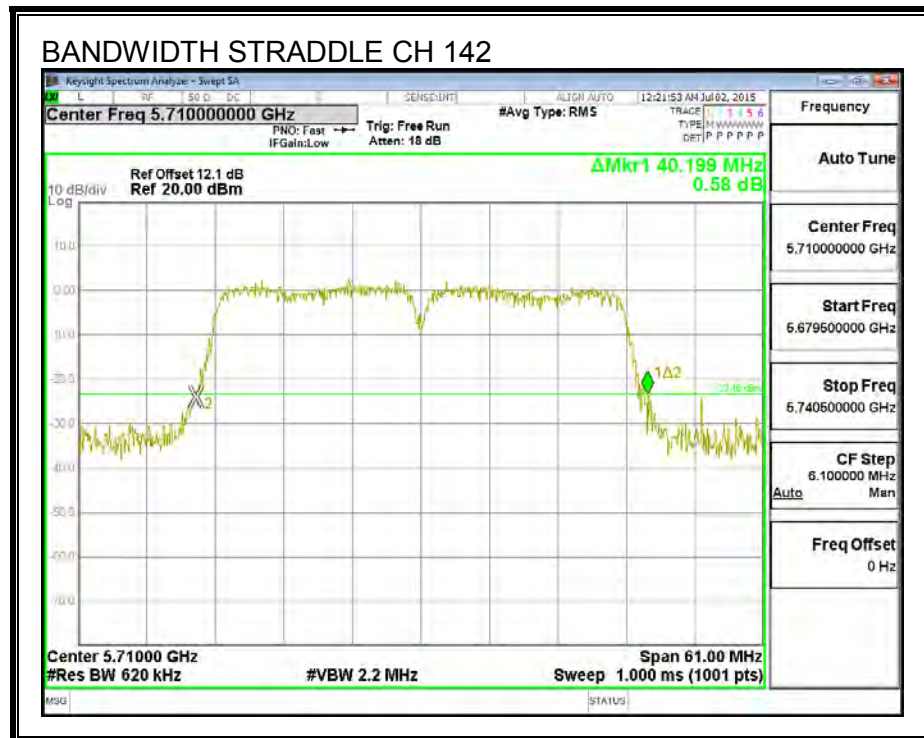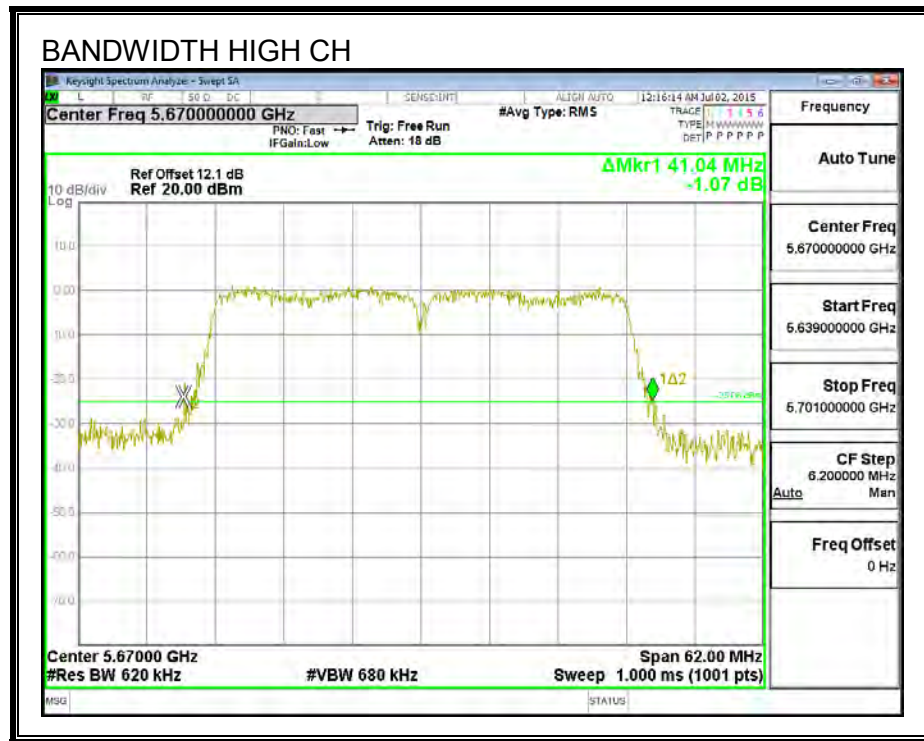

8.11.2. 99% BANDWIDTH



LIMITS



None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	5510	36.237
Mid	5550	36.249
High	5670	36.293
142	5710	36.312

99% BANDWIDTH

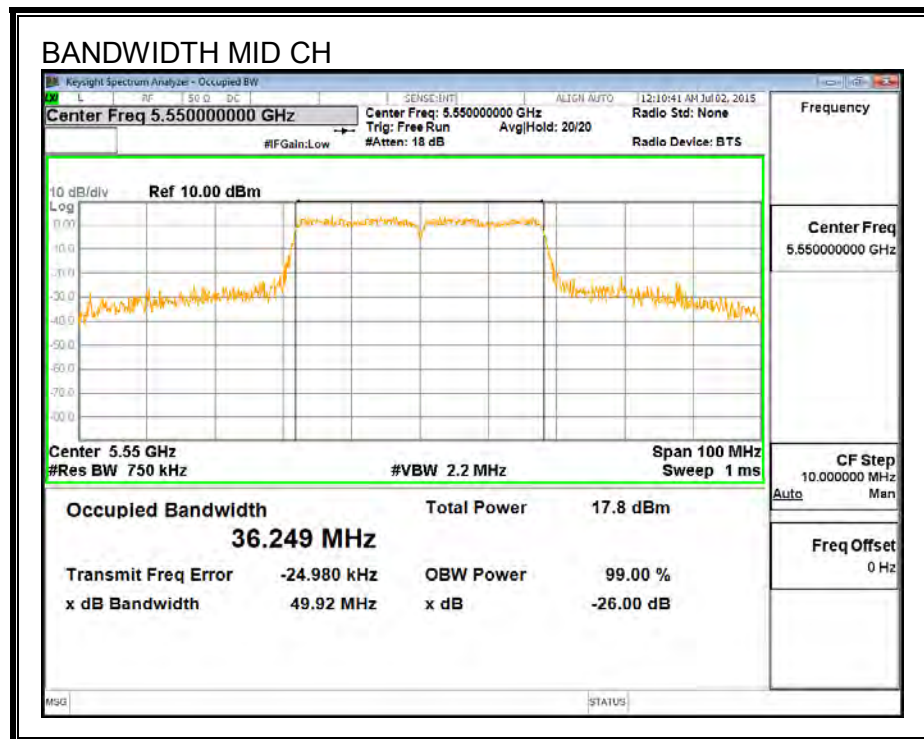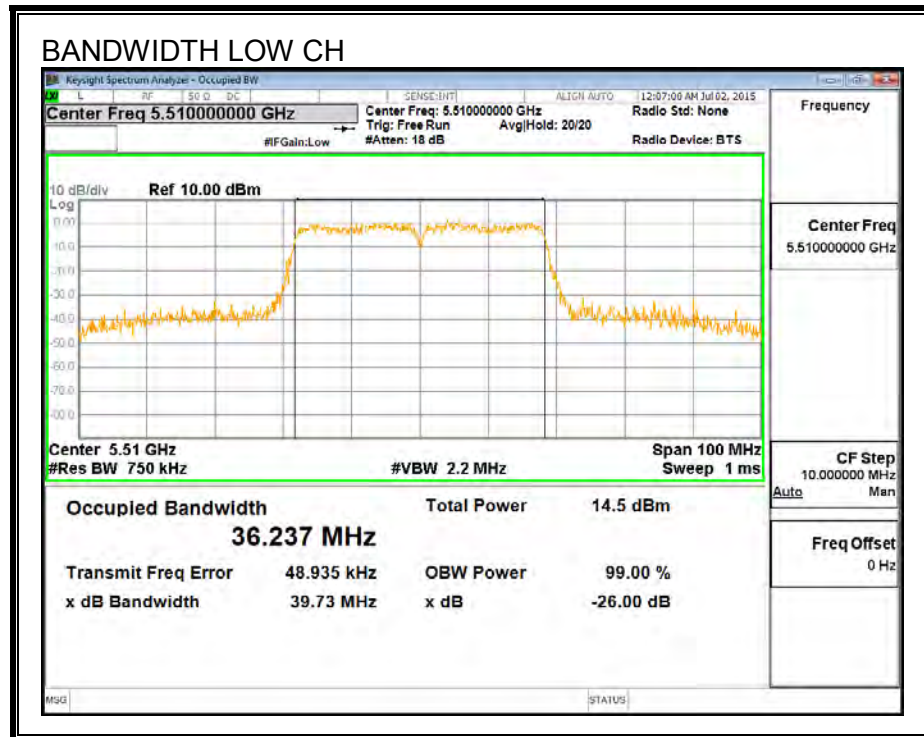

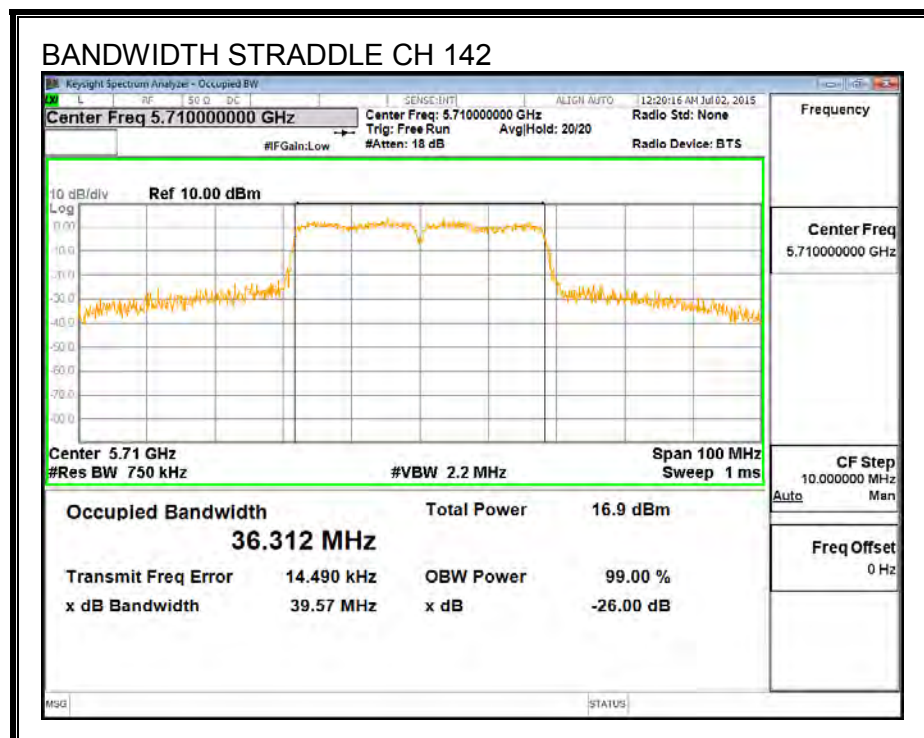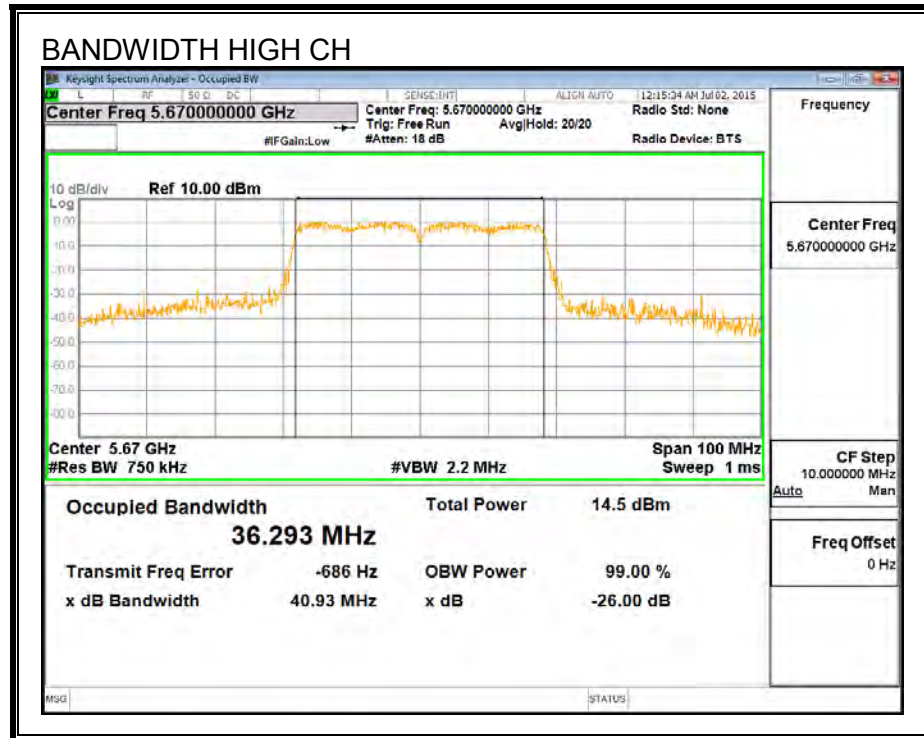

8.11.3. OUTPUT POWER AND PSD

LIMITS

FCC §15.407 (a) (2)

For the band 5.47–5.725 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26-dB emission bandwidth in MHz. In addition, the peak power spectral density shall not exceed 11 dBm in any 1-MHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

DIRECTIONAL ANTENNA GAIN

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

RESULTS

Bandwidth, Antenna Gain, and Limits

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain (dBi)	Power Limit (dBm)	PSD Limit (dBm)
Low	5510	40.63	1.70	24.00	11.00
Mid	5550	40.20	1.70	24.00	11.00
High	5670	41.04	1.70	24.00	11.00

Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd Power & PSD
--------------------	------	--

Output Power Results


Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5510	10.80	10.80	24.00	-13.20
Mid	5550	14.19	14.19	24.00	-9.81
High	5670	10.93	10.93	24.00	-13.08

PSD Results


Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
Low	5510	-3.49	-3.49	11.00	-14.49
Mid	5550	-0.08	-0.08	11.00	-11.08
High	5670	-3.38	-3.38	11.00	-14.38

OUTPUT POWER AND PSD, Chain 0


OUTPUT POWER, LOW CH

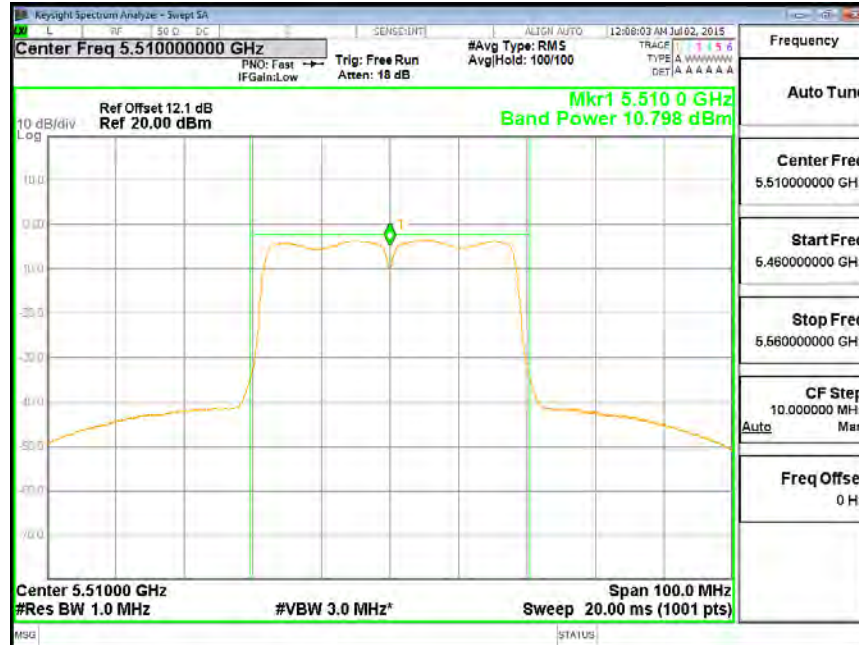


PSD, LOW CH

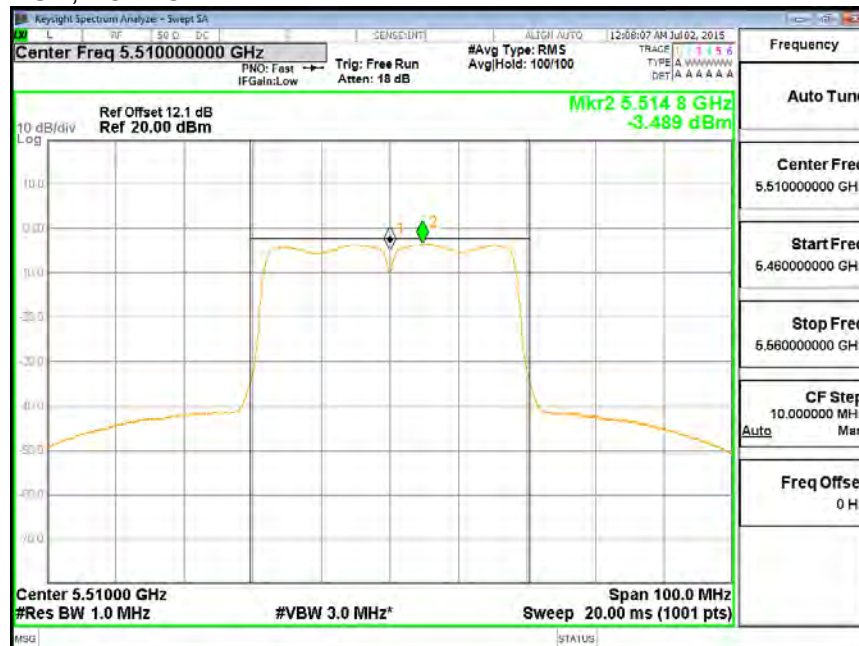


OUTPUT POWER, MID CH

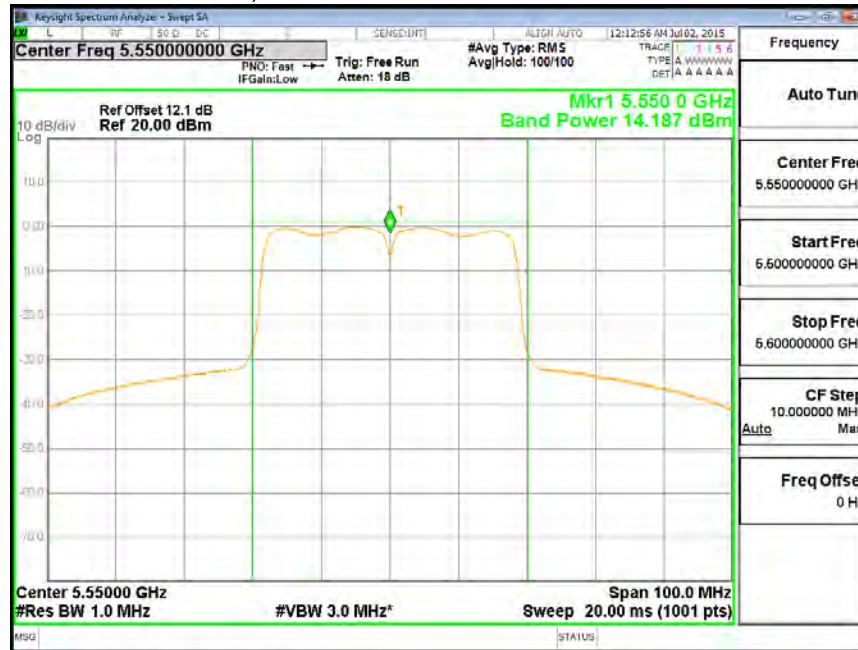


PSD, MID CH

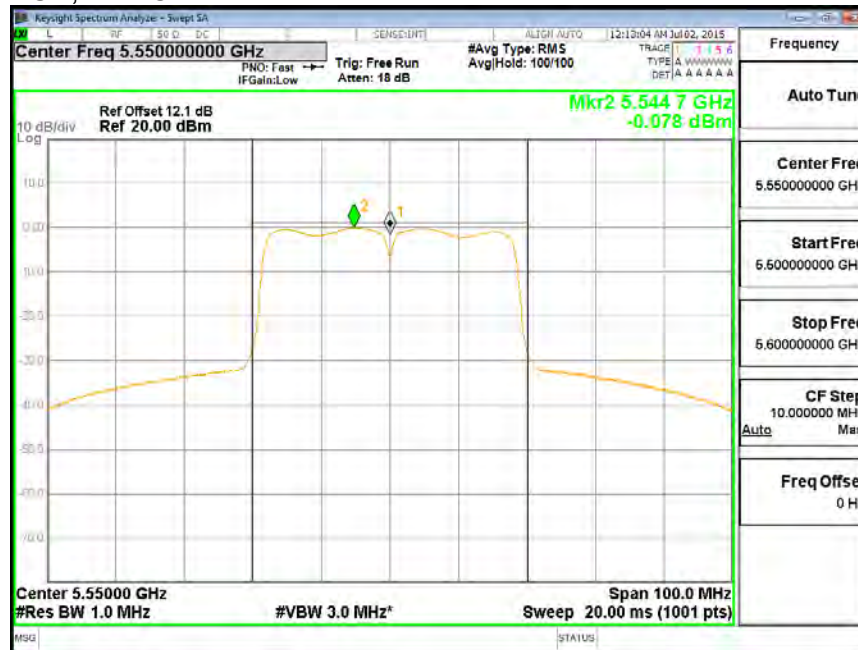

OUTPUT POWER, HIGH CH

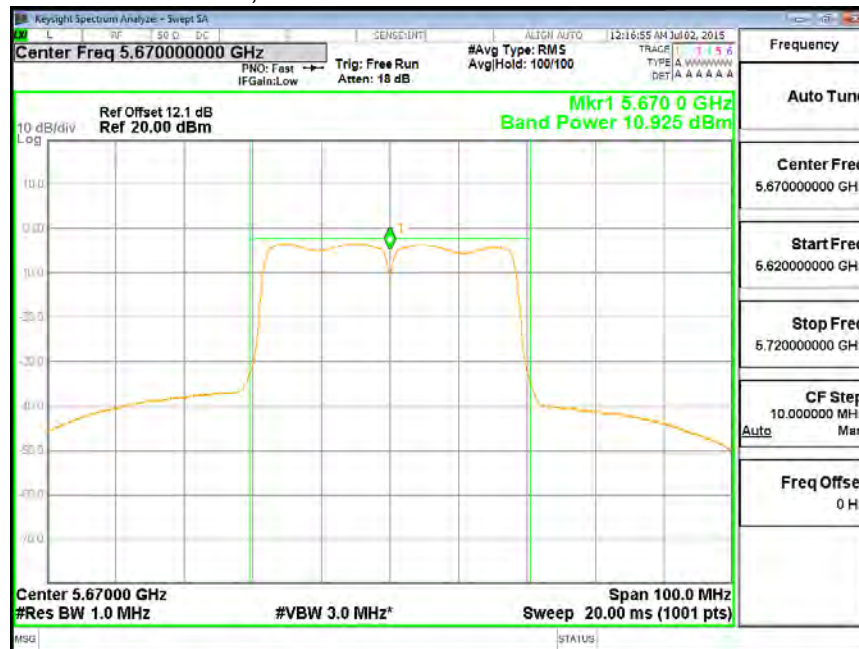

PSD, HIGH CH

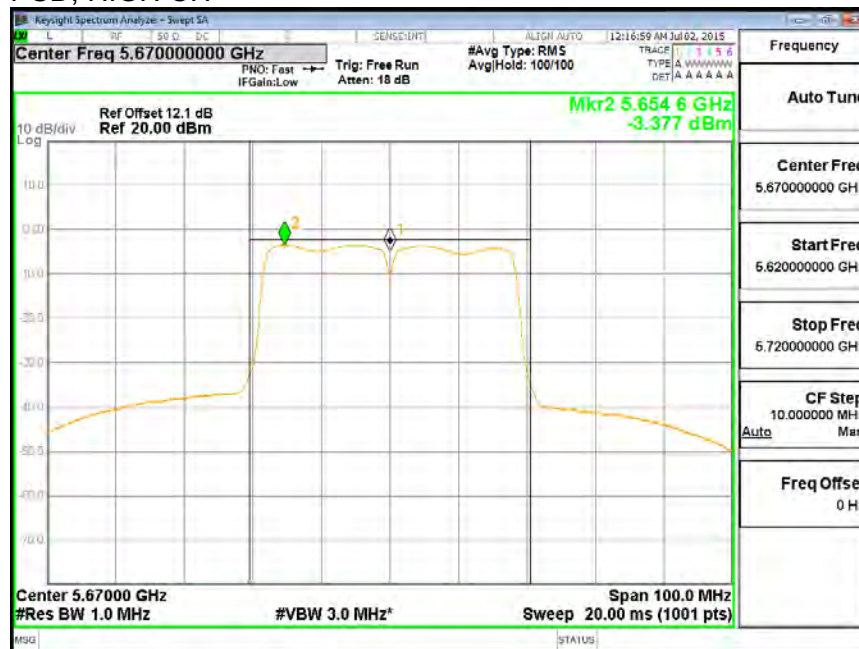

8.11.4. STRADDLE CH 142 RESULTS

UNII-2C BAND

Bandwidth, Antenna Gain, and Limits

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm)
142	5710	40.20	1.70	1.70	24.00	11.00

Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd Power & PSD
--------------------	------	--

Output Power Results

Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
142	5710	12.62	12.62	24.00	-11.38

PSD Results

Channel	Frequency (MHz)	Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
142	5710	-1.19	-1.19	11.00	-12.19

OUTPUT POWER, CH 142 UNII 2C



PSD, CH 142 UNII 2C



UNII-3 BAND

Antenna Gain and Limit

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain (dBi)	Power Limit (dBm)	PSD Limit (dBm)
142	5710	40.20	1.70	30.00	30.00

Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd Power & PSD
--------------------	------	--


Output Power Results

Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
142	5710	1.91	1.91	30.00	-28.09


PSD Results

Channel	Frequency (MHz)	Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
142	5710	-5.28	-5.28	30.00	-35.28

OUTPUT POWER, CH 142 UNII 3

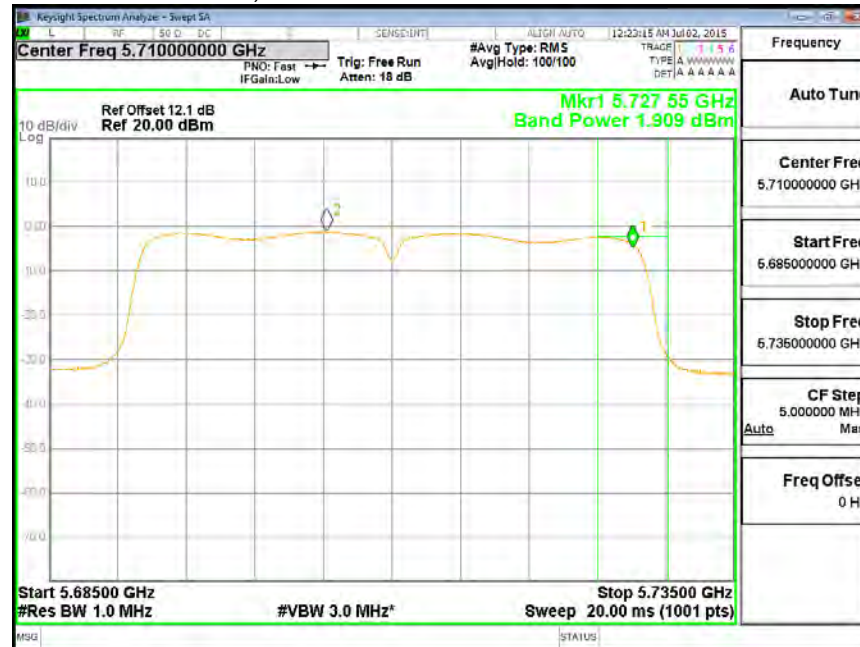

PSD, CH 142 UNII 3

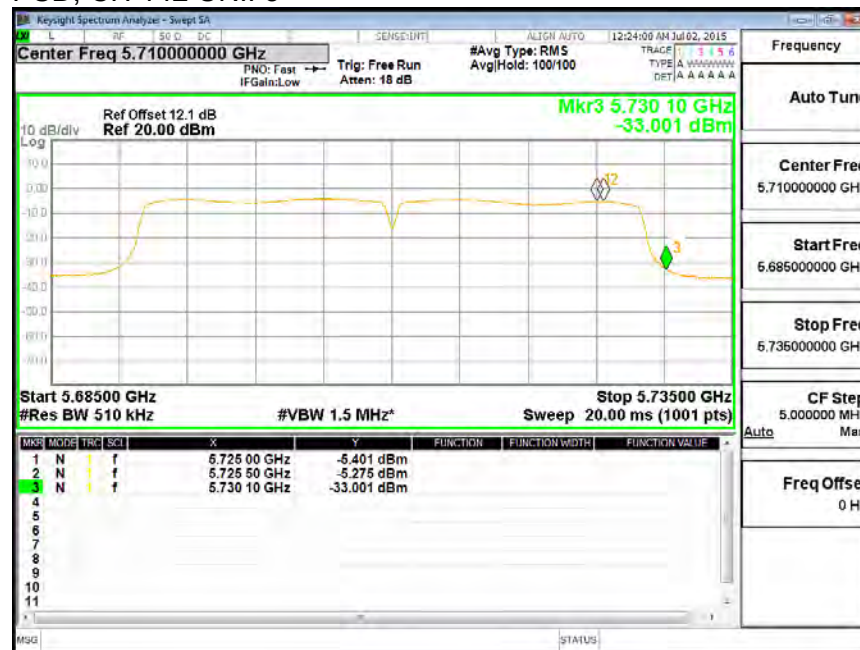


8.11.5. 6 dB BANDWIDTH

LIMITS

FCC §15.407 (e)

The minimum 6 dB bandwidth shall be at least 500 kHz.

RESULTS

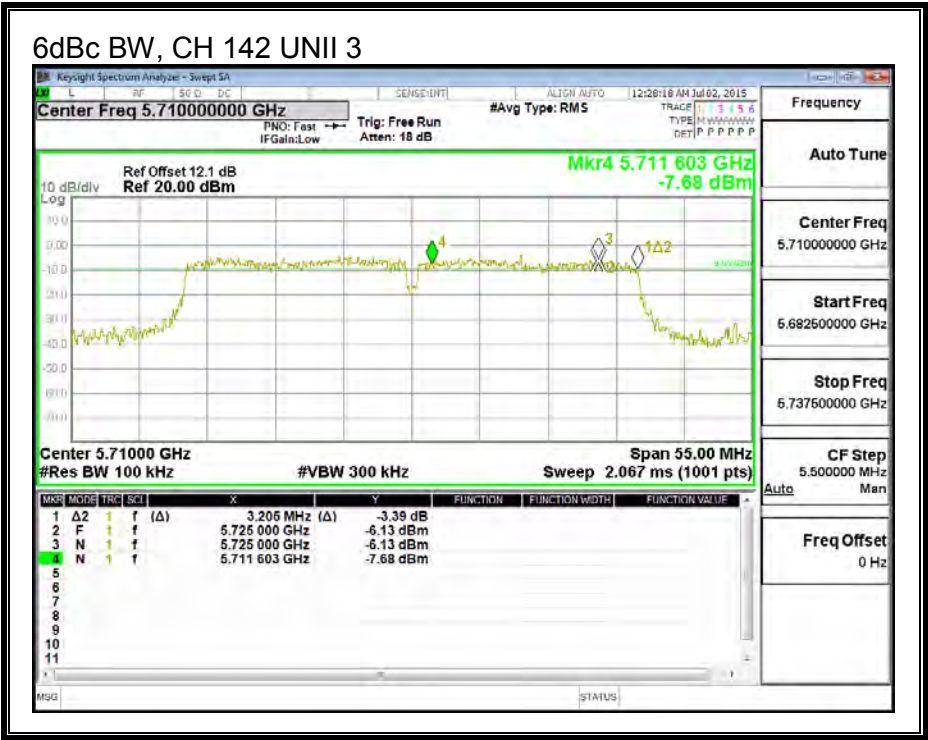

8.12. 802.11ac HT80 MODE IN THE 5.6 GHz BAND

8.12.1. 26 dB BANDWIDTH



LIMITS


None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
Low	5530	81.25
Mid	5610	81.13
138	5690	81.37

26 dB BANDWIDTH

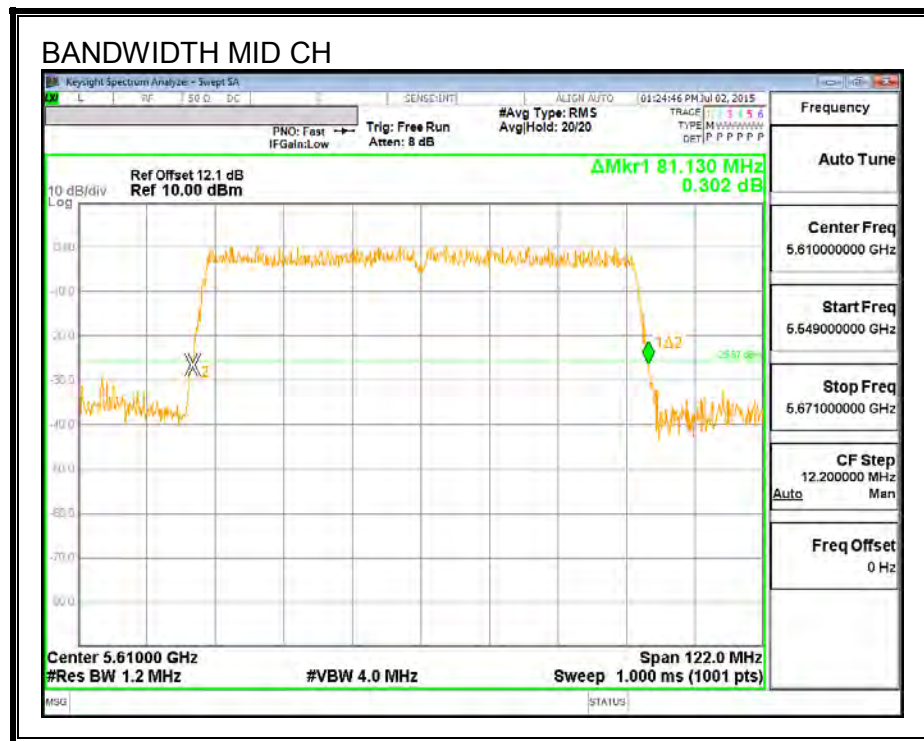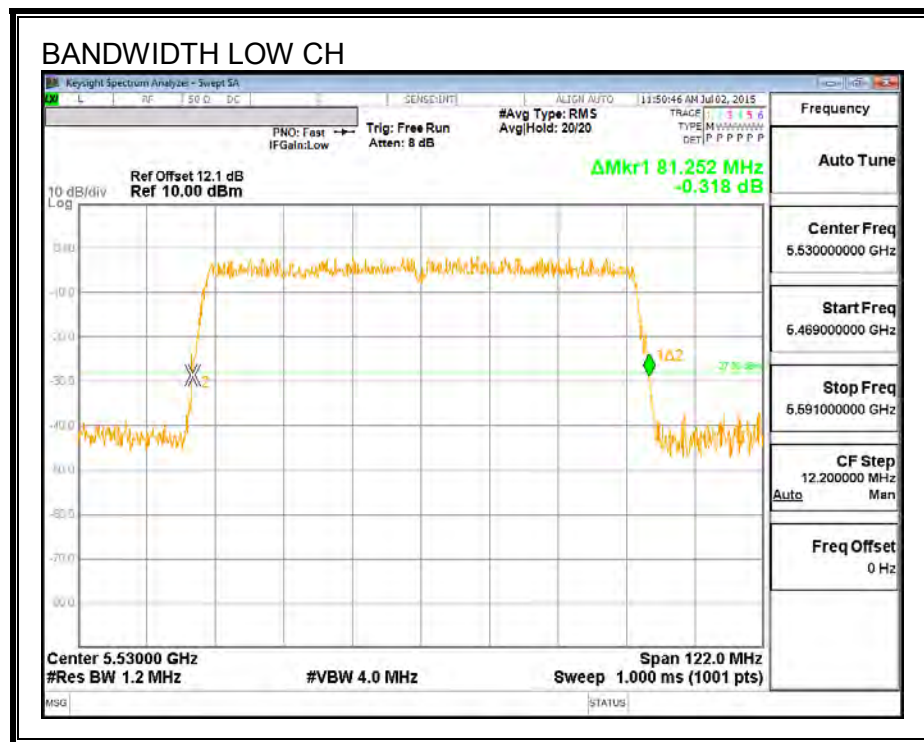

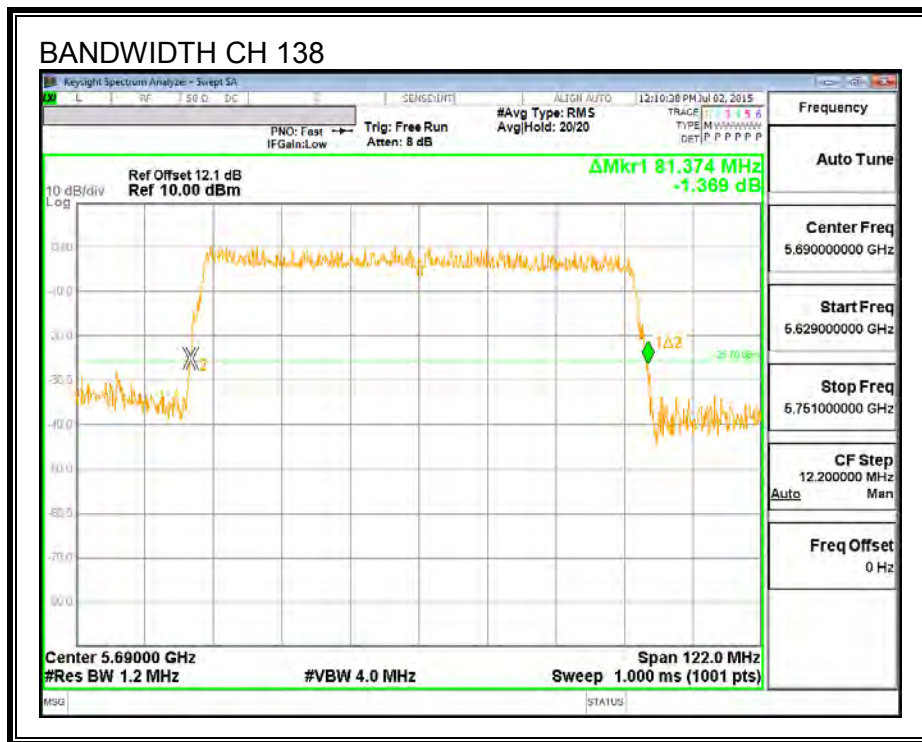

8.12.2. 99% BANDWIDTH



LIMITS


None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	5530	76.535
Mid	5610	76.637
138	5690	76.514

99% BANDWIDTH

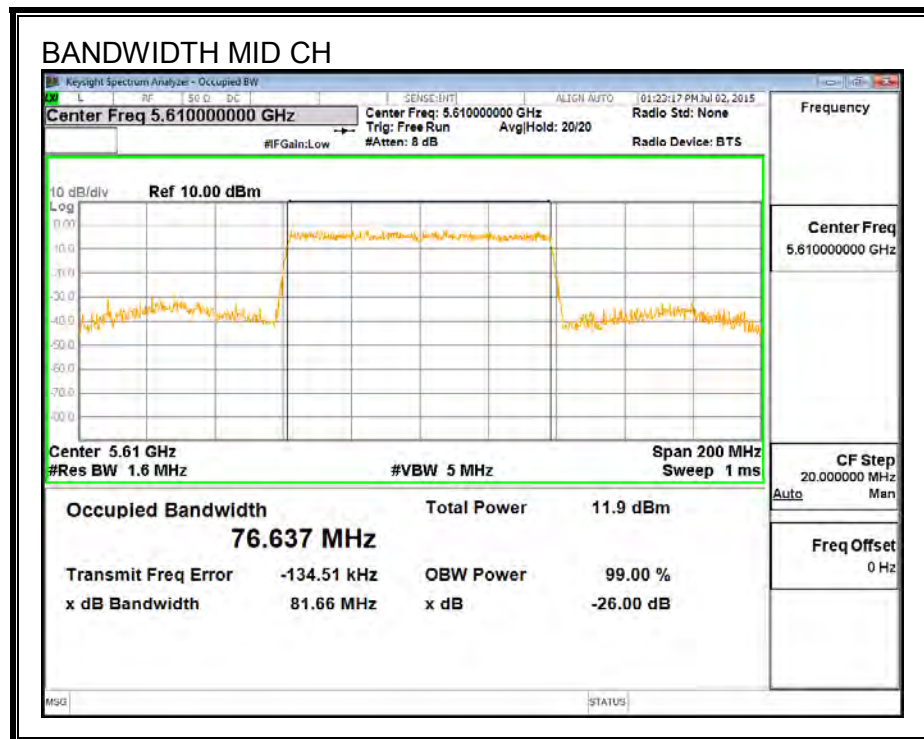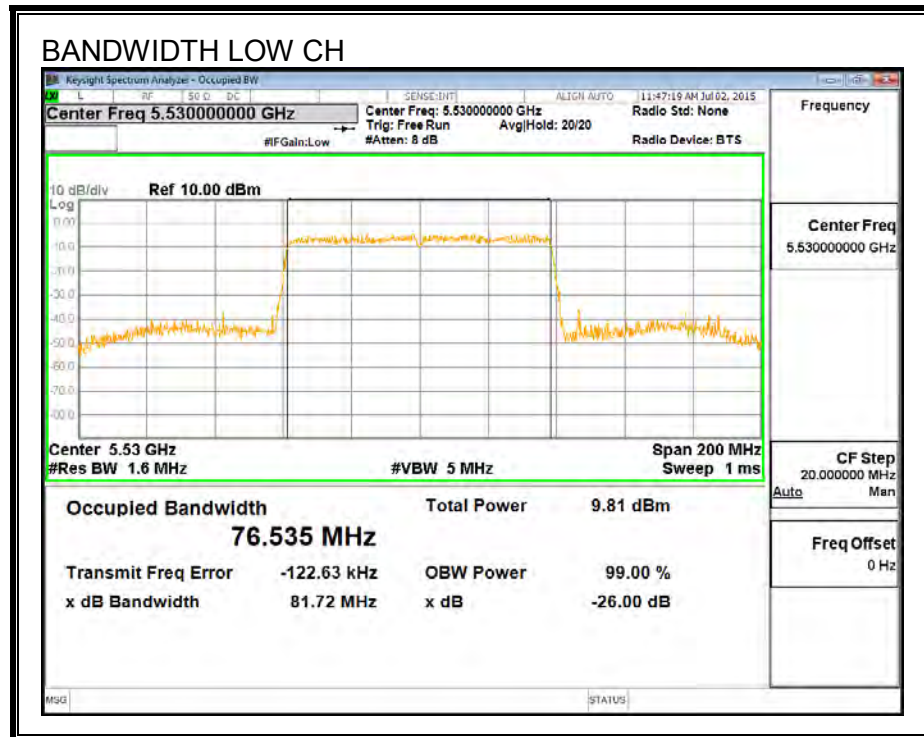

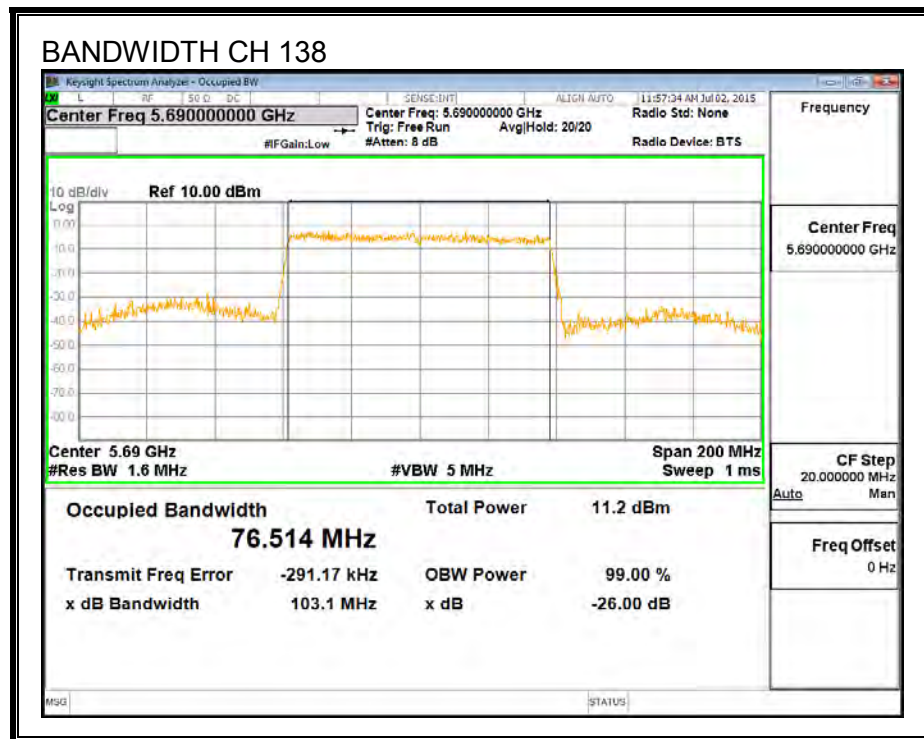

8.12.3. OUTPUT POWER AND PSD

LIMITS

FCC §15.407 (a) (2)

For the band 5.47–5.725 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26–dB emission bandwidth in MHz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1–MHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

DIRECTIONAL ANTENNA GAIN

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

RESULTS

Bandwidth, Antenna Gain, and Limits

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain (dBi)	Power Limit (dBm)	PSD Limit (dBm)
Low	5530	81.25	1.70	24.00	11.00
Mid	5610	81.13	1.70	24.00	11.00

Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd Power & PSD
---------------------------	------	---


Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5530	6.62	6.62	24.00	-17.38
Mid	5610	9.08	9.08	24.00	-14.92

PSD Results

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
Low	5530	-11.36	-11.36	11.00	-22.36
Mid	5610	-8.86	-8.86	11.00	-19.86

OUTPUT POWER AND PSD, Chain 0

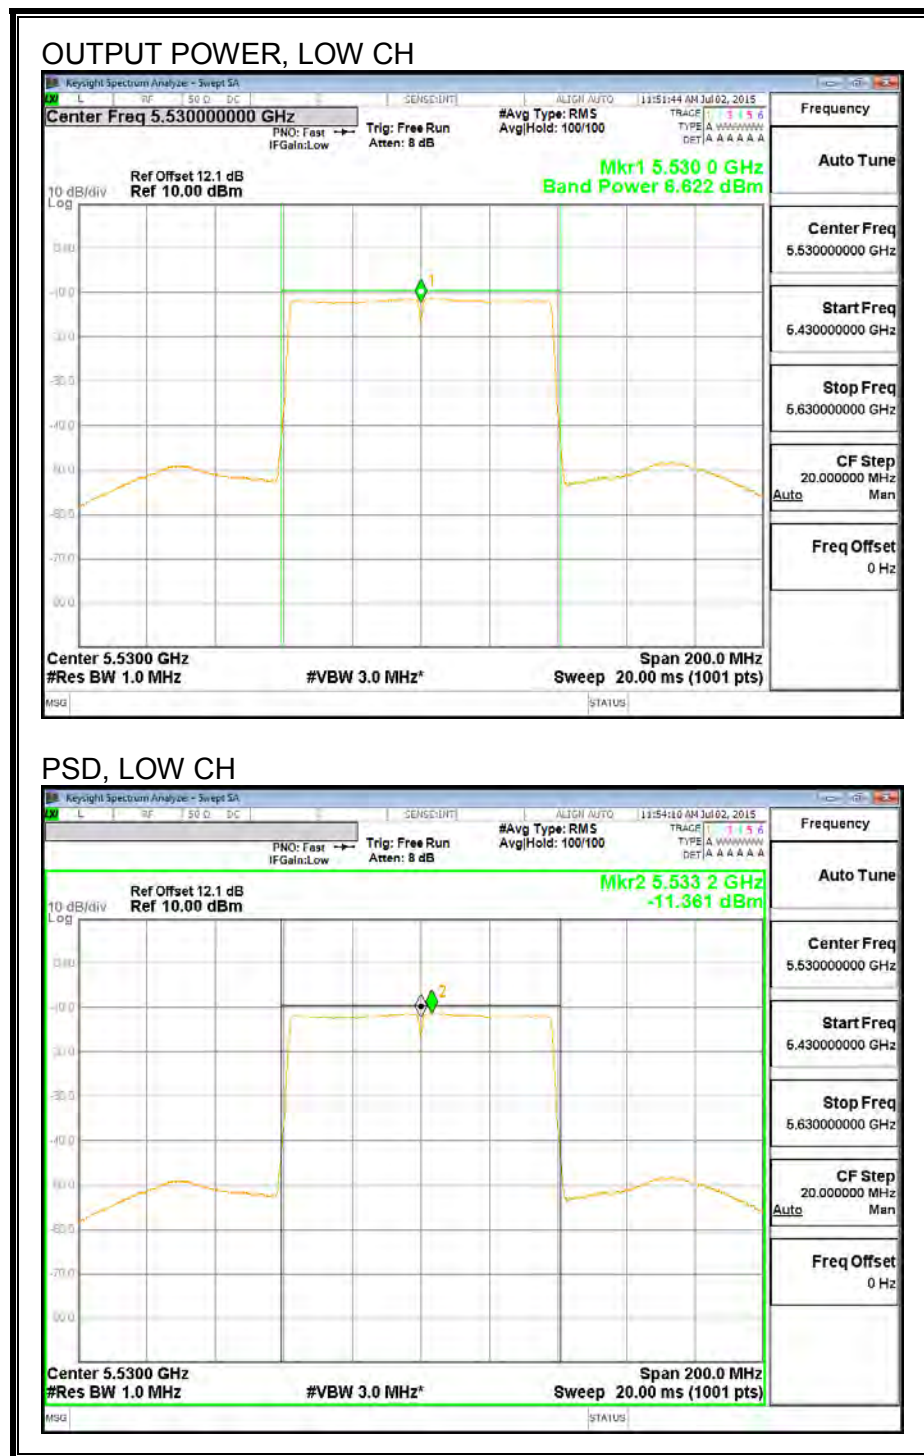

OUTPUT POWER, MID CH



PSD, MID CH



8.12.4. STRADDLE CHANNEL 138 RESULTS

UNII-2C BAND

Bandwidth, Antenna Gain, and Limits

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm)
138	5690	81.37	1.70	1.70	24.00	11.00

Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd Power & PSD
--------------------	------	--


Output Power Results

Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
138	5690	7.97	7.97	24.00	-16.03

PSD Results

Channel	Frequency (MHz)	Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
138	5690	-9.23	-9.23	11.00	-20.23

OUTPUT POWER, CH 138 UNII 2C

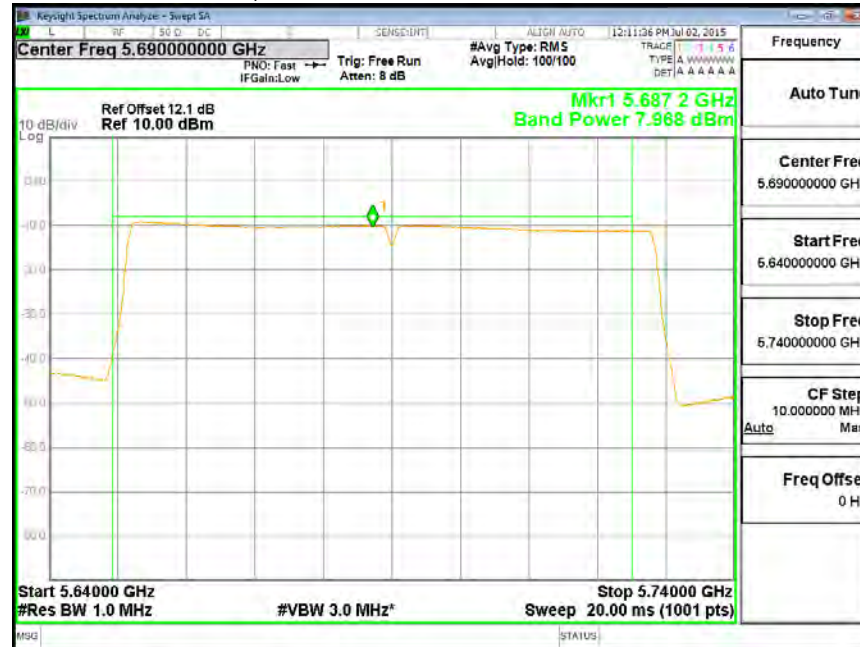

PSD, CH 138 UNII 2C



UNII-3 BAND

Antenna Gain and Limit

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain (dBi)	Power Limit (dBm)	PSD Limit (dBm)
138	5690	81.37	1.70	30.00	30.00

Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd Power & PSD
--------------------	------	--


Output Power Results

Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
138	5690	-6.31	-6.31	30.00	-36.31


PSD Results

Channel	Frequency (MHz)	Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
138	5690	-14.06	-14.06	30.00	-44.06

OUTPUT POWER, CH 138 UNII 3

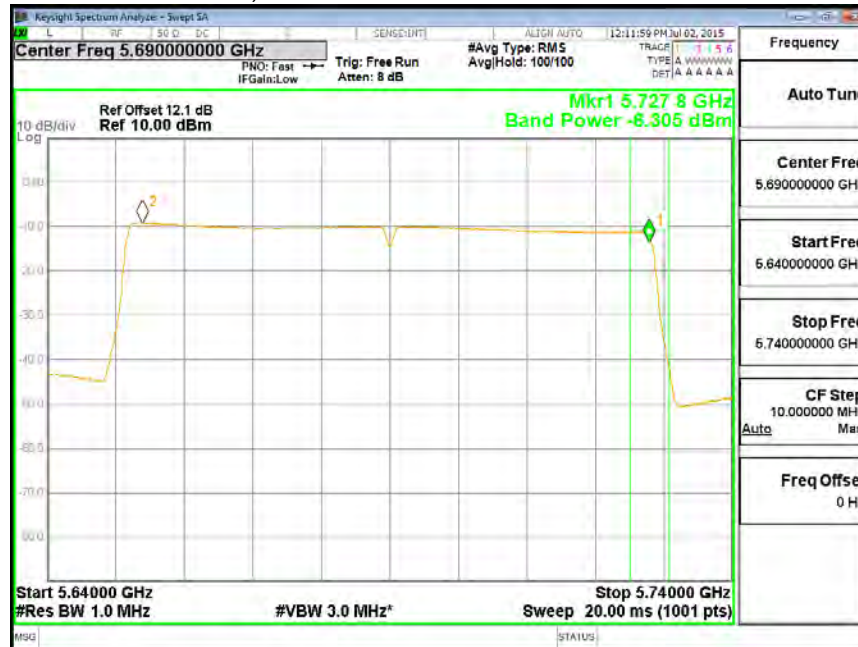

PSD, CH 138 UNII 3

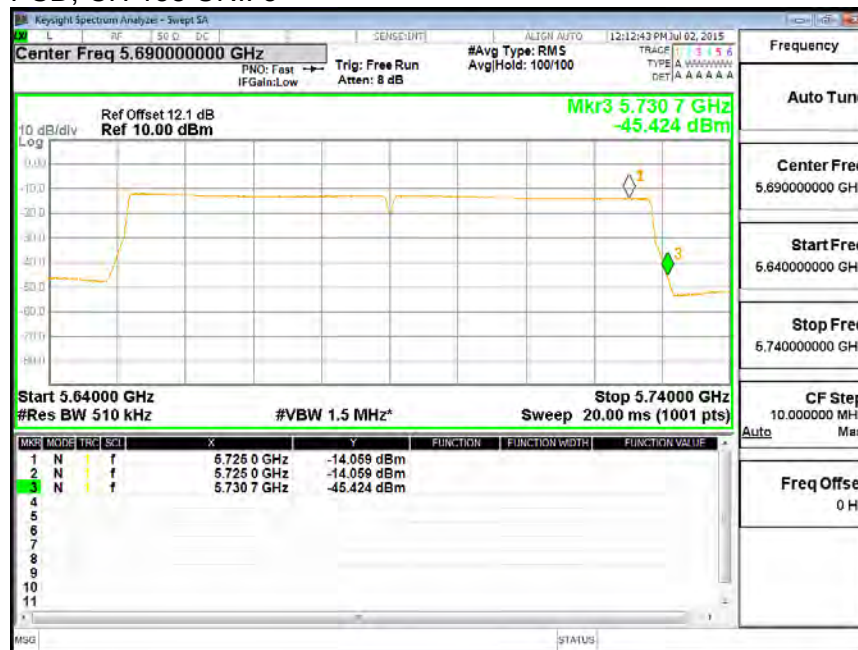


8.12.5. 6 dB BANDWIDTH

LIMITS

FCC §15.407 (e)

The minimum 6 dB bandwidth shall be at least 500 kHz.

RESULTS

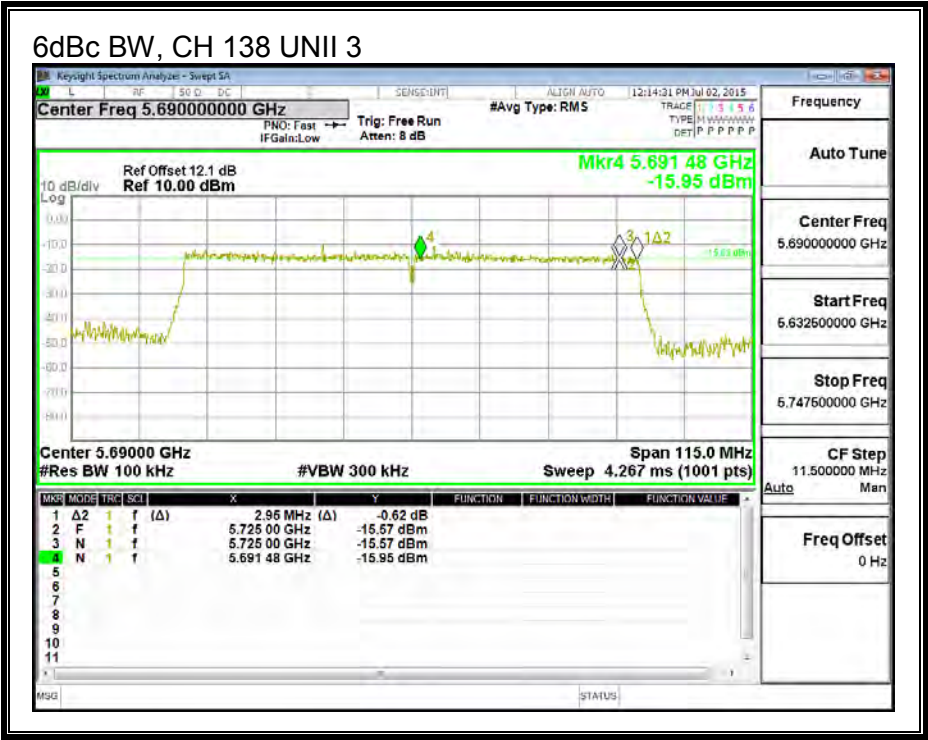

8.13. 802.11a MODE IN THE 5.8 GHz BAND

8.13.1. 6 dB BANDWIDTH

LIMITS



FCC §15.407 (e)


The minimum 6 dB bandwidth shall be at least 500 kHz.

RESULTS

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)
Low	5745	17.658	0.5
Mid	5785	16.400	0.5
High	5825	16.525	0.5

6 dB BANDWIDTH

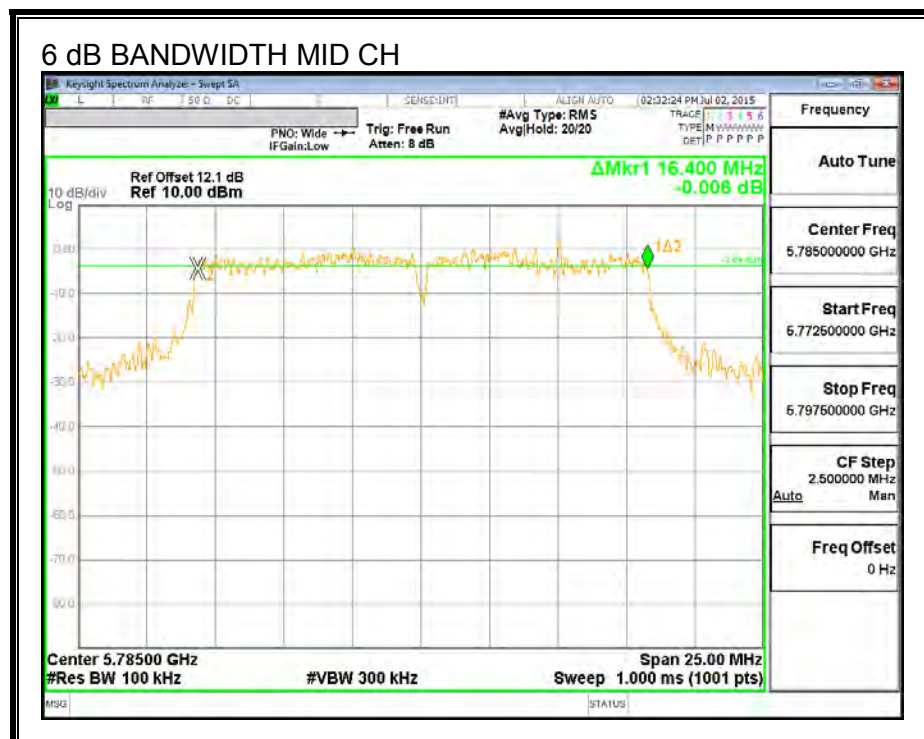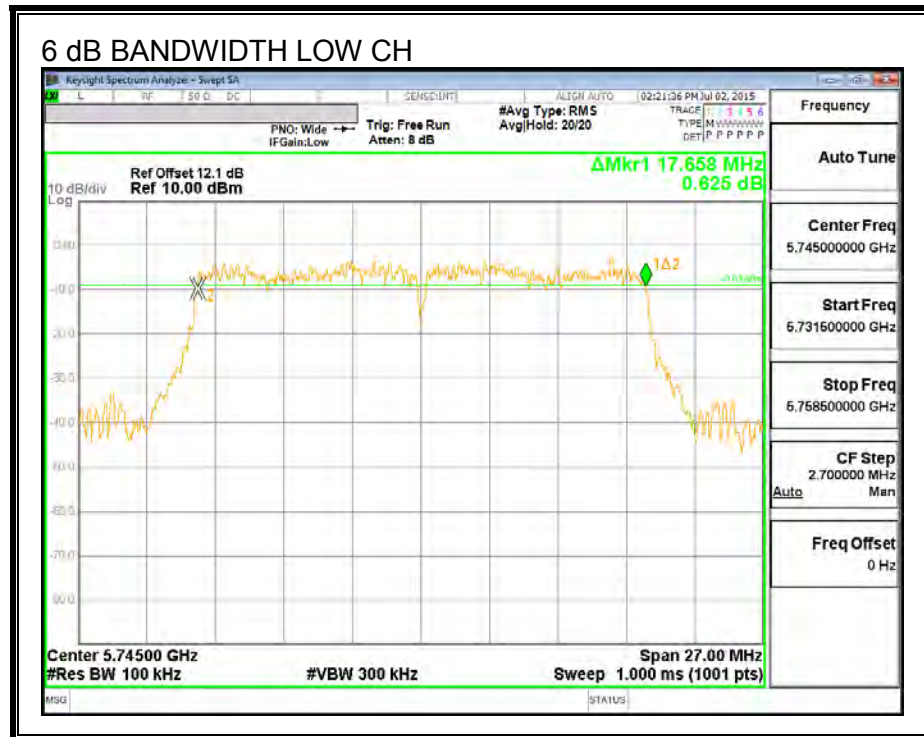

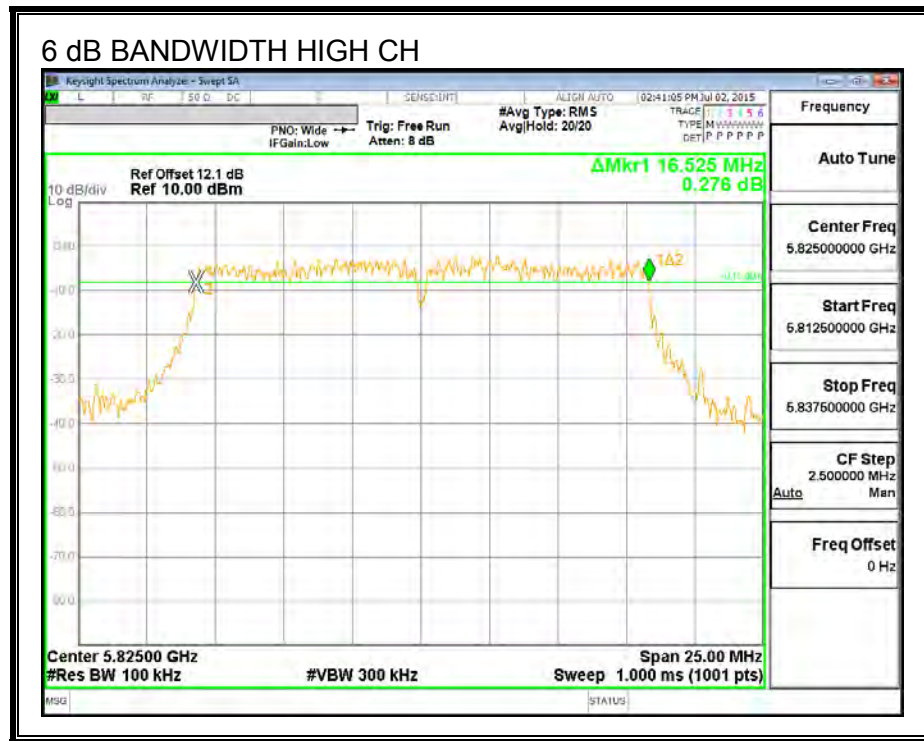

8.13.2. 26 dB BANDWIDTH



LIMITS


None, for reporting purposes only

RESULTS

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
Low	5745	19.7700
Mid	5785	19.1980
High	5825	19.3500

26 dB BANDWIDTH

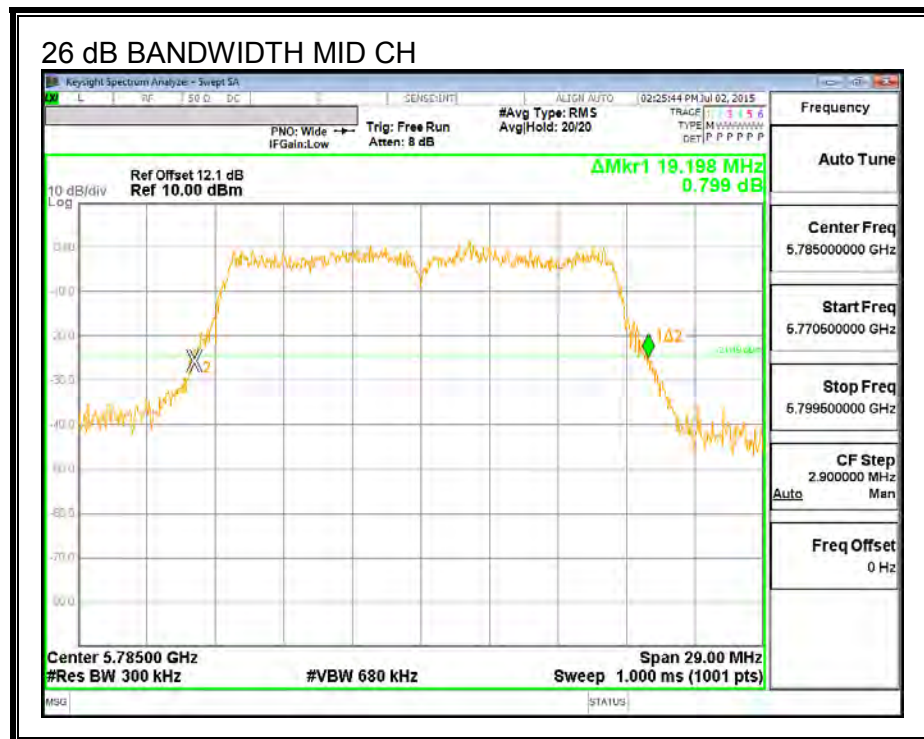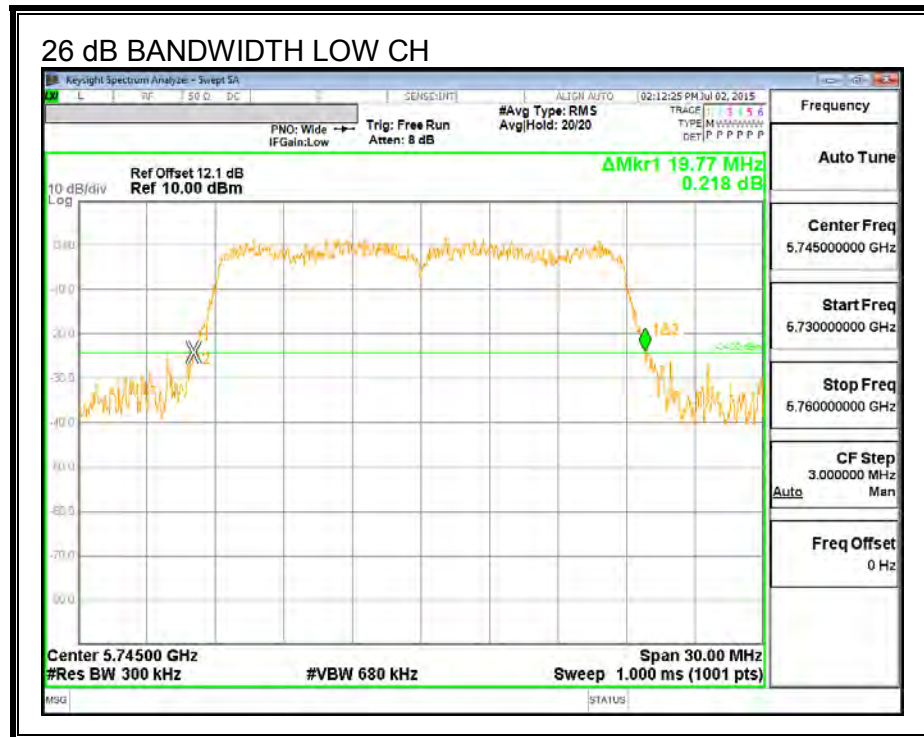

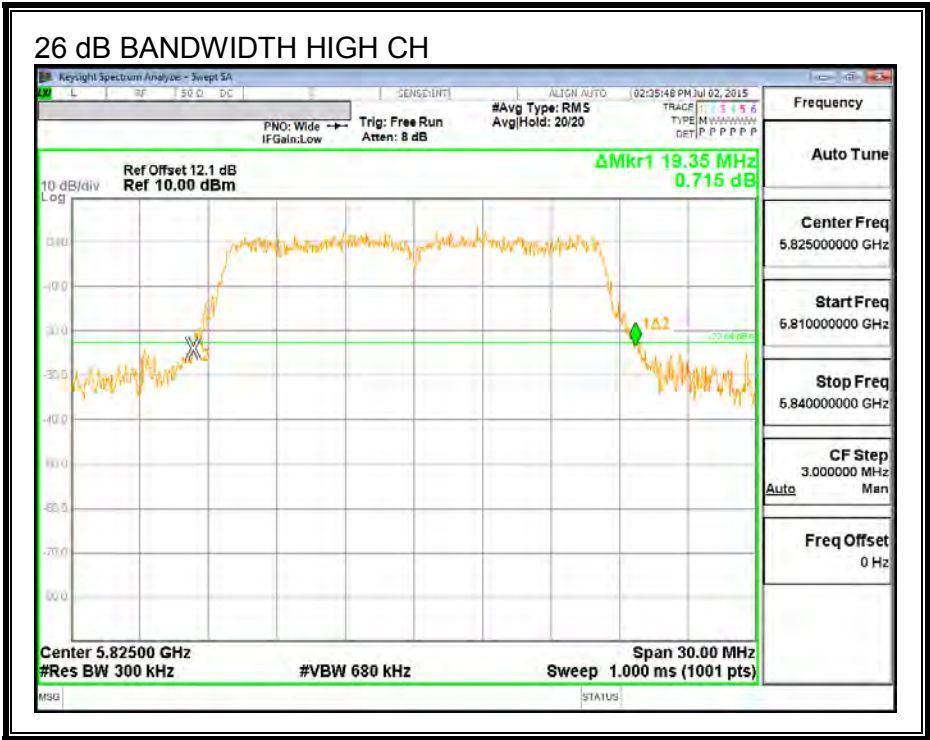

8.13.3. 99% BANDWIDTH



LIMITS


None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	5745	17.687
Mid	5785	16.817
High	5825	16.604

99% BANDWIDTH

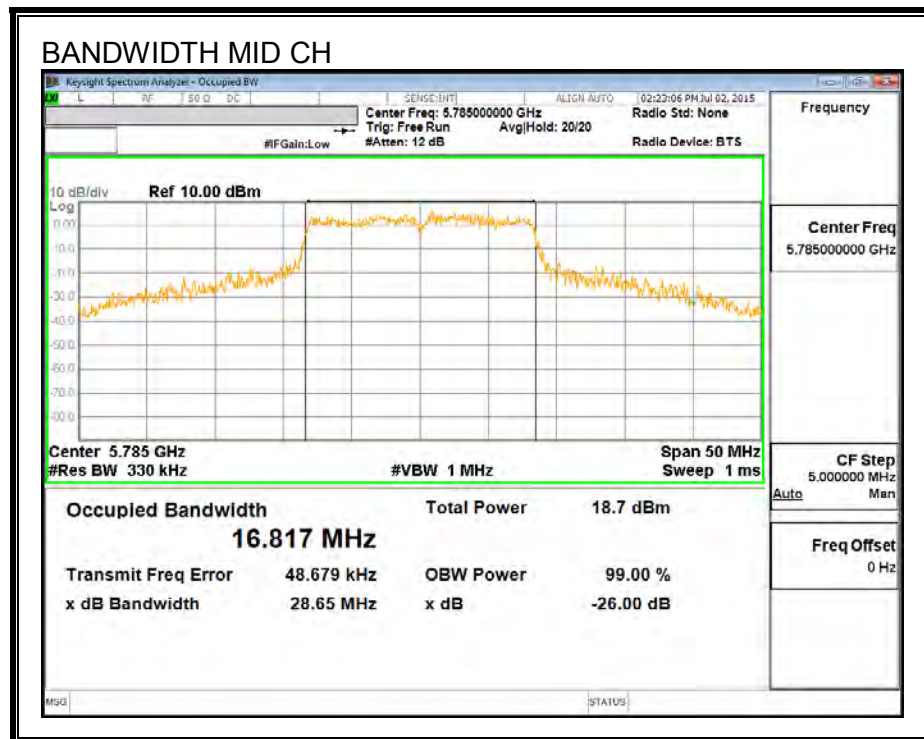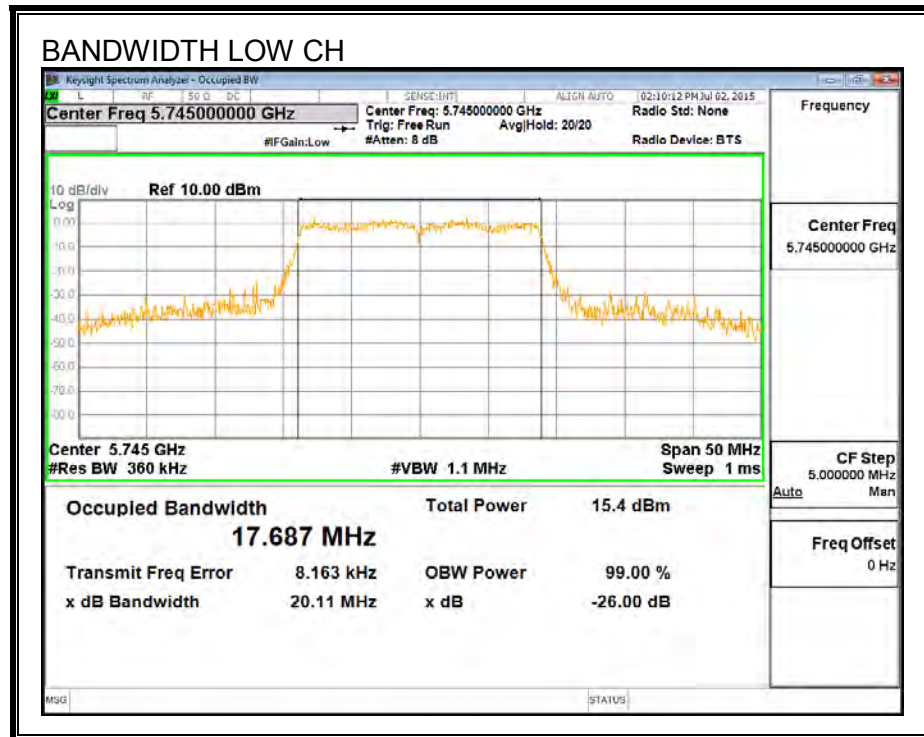

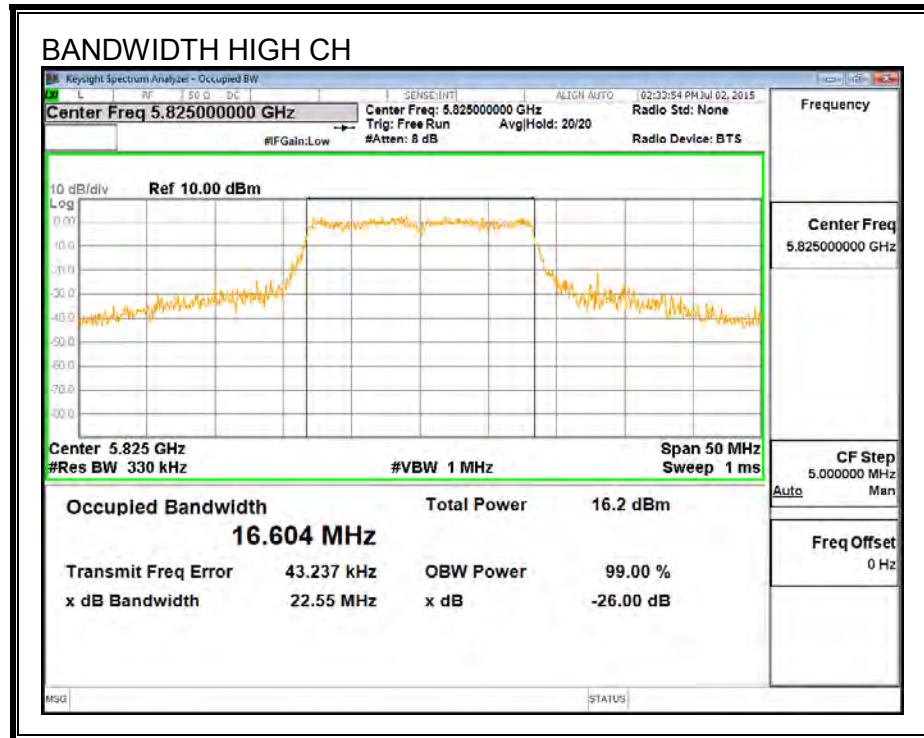

8.13.4. OUTPUT POWER

LIMITS

FCC §15.407 (a) (3)

For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

DIRECTIONAL ANTENNA GAIN

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

RESULTS

Antenna Gain and Limit

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Power Limit (dBm)
Low	5745	1.70	30.00
Mid	5785	1.70	30.00
High	5825	1.70	30.00

Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd Power
---------------------------	------	---

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5745	11.09	11.09	30.00	-18.91
Mid	5785	14.07	14.07	30.00	-15.93
High	5825	11.72	11.72	30.00	-18.28

8.13.5. PSD

LIMITS

FCC §15.407 (a) (3)

For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

DIRECTIONAL ANTENNA GAIN

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

RESULTS

Antenna Gain and Limits



Channel	Frequency (MHz)	Directional Gain (dBi)	PSD Limit (dBm)
Low	5745	1.70	30.00
Mid	5785	1.70	30.00
High	5825	1.70	30.00


Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
--------------------	------	--

PSD Results

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
Low	5745	-3.05	-3.05	30.00	-33.05
Mid	5785	0.13	0.13	30.00	-29.87
High	5825	-2.15	-2.15	30.00	-32.15

PSD, Chain 0

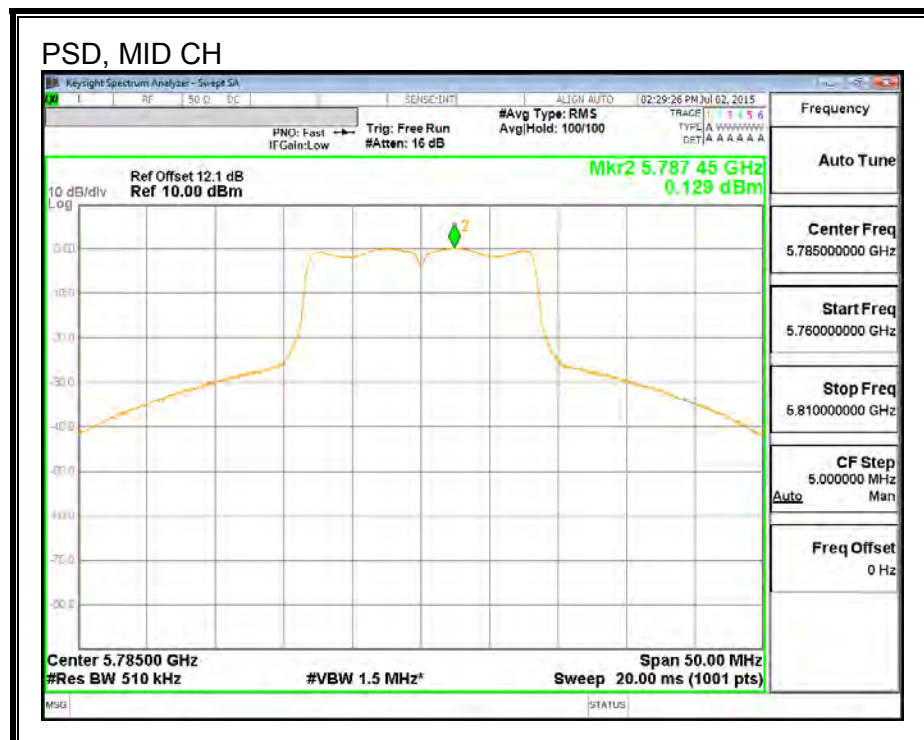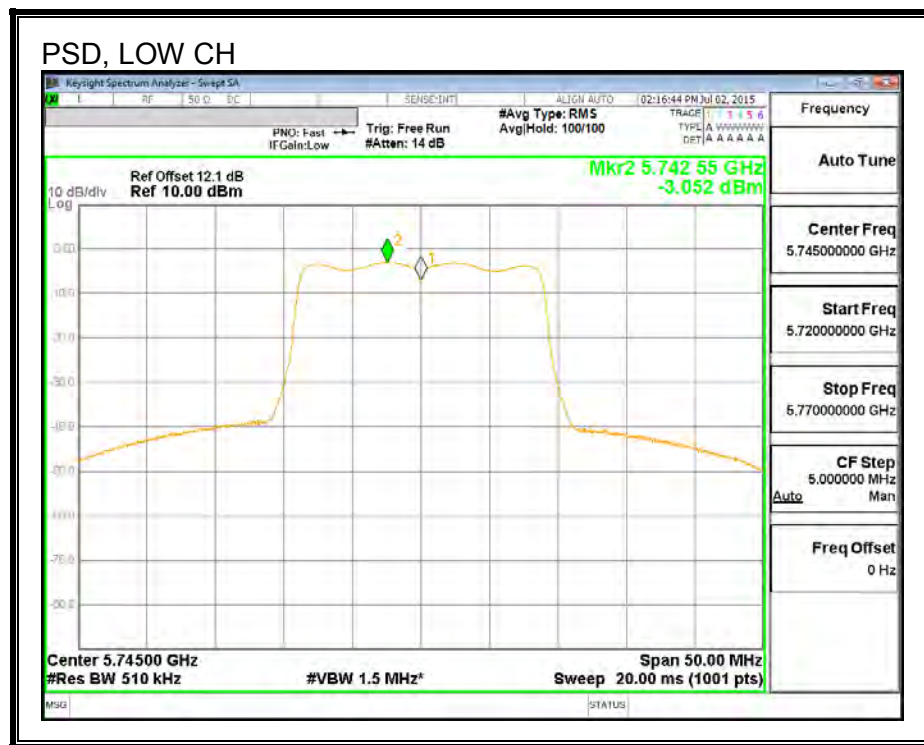

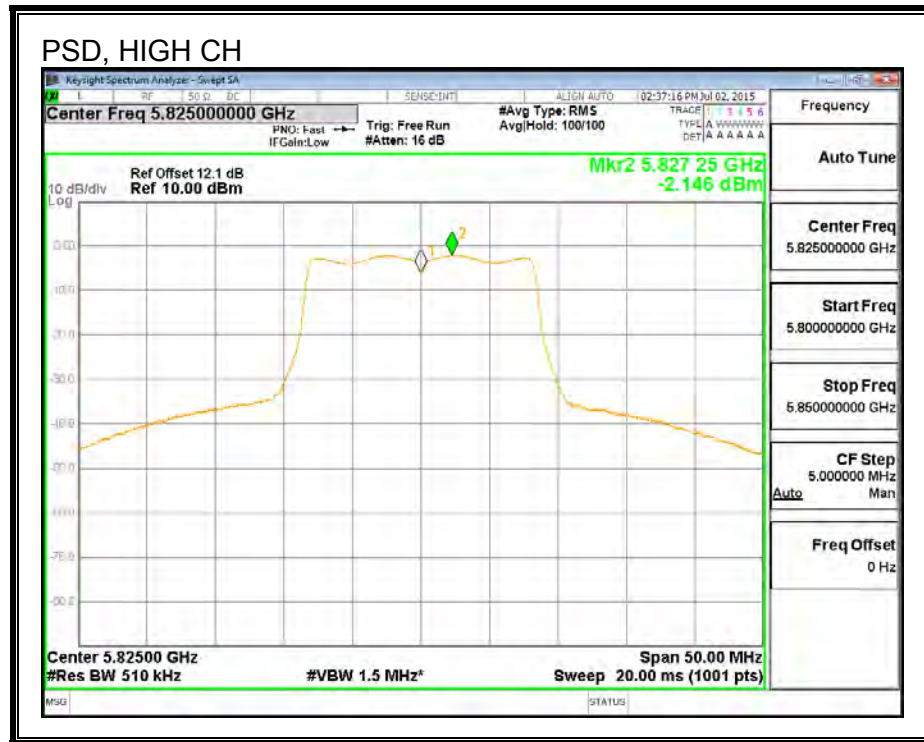

8.14. 802.11n HT20 MODE IN THE 5.8 GHz BAND

8.14.1. 6 dB BANDWIDTH

LIMITS



FCC §15.407 (e)


The minimum 6 dB bandwidth shall be at least 500 kHz.

RESULTS

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)
Low	5745	17.766	0.5
Mid	5785	17.712	0.5
High	5825	17.793	0.5

6 dB BANDWIDTH

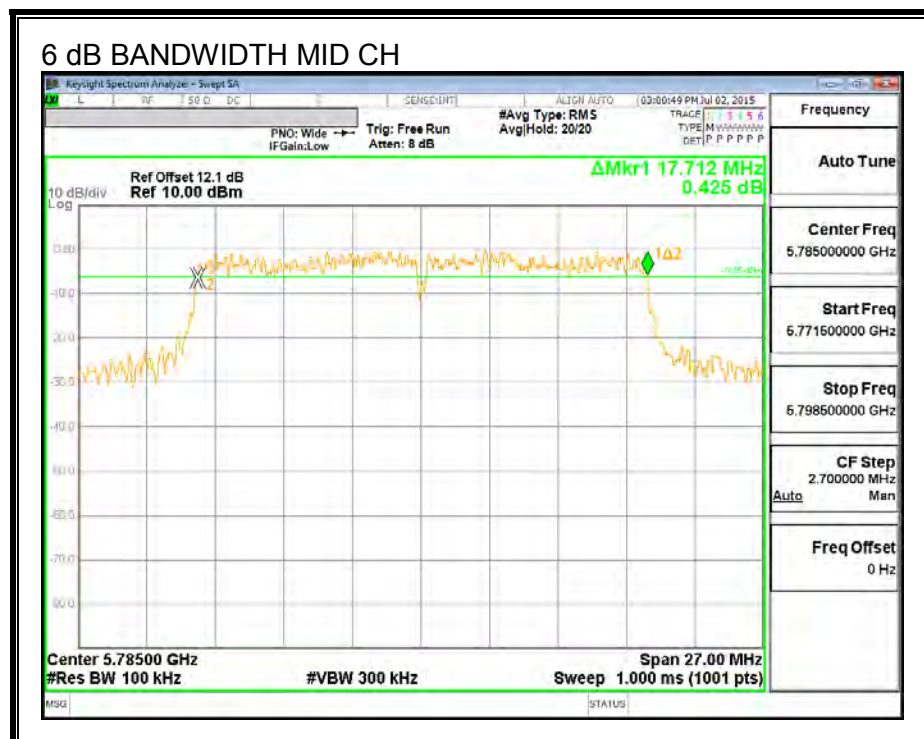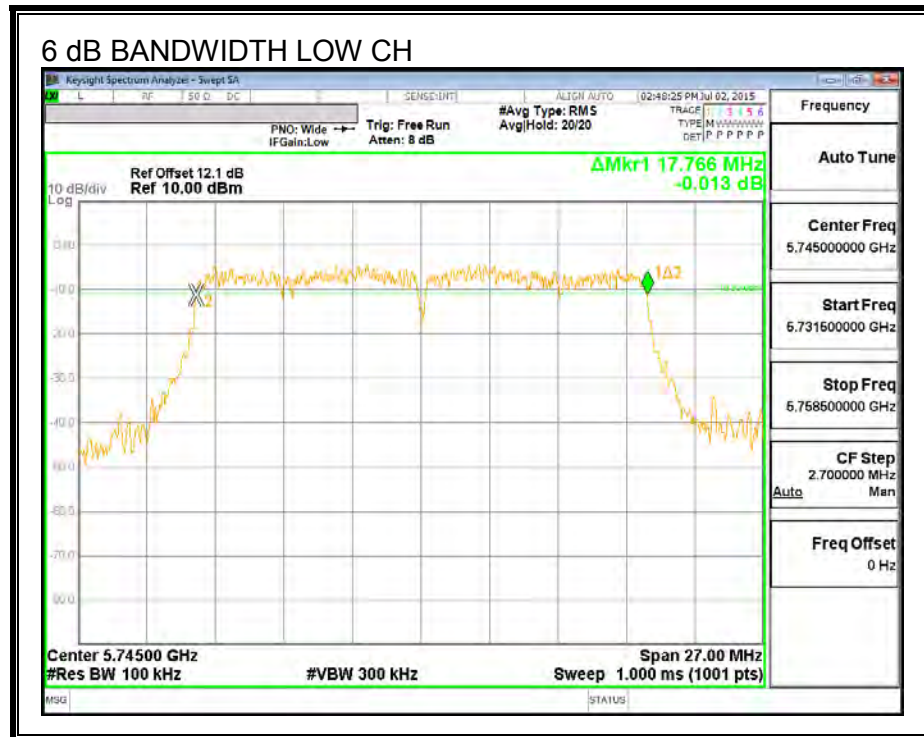

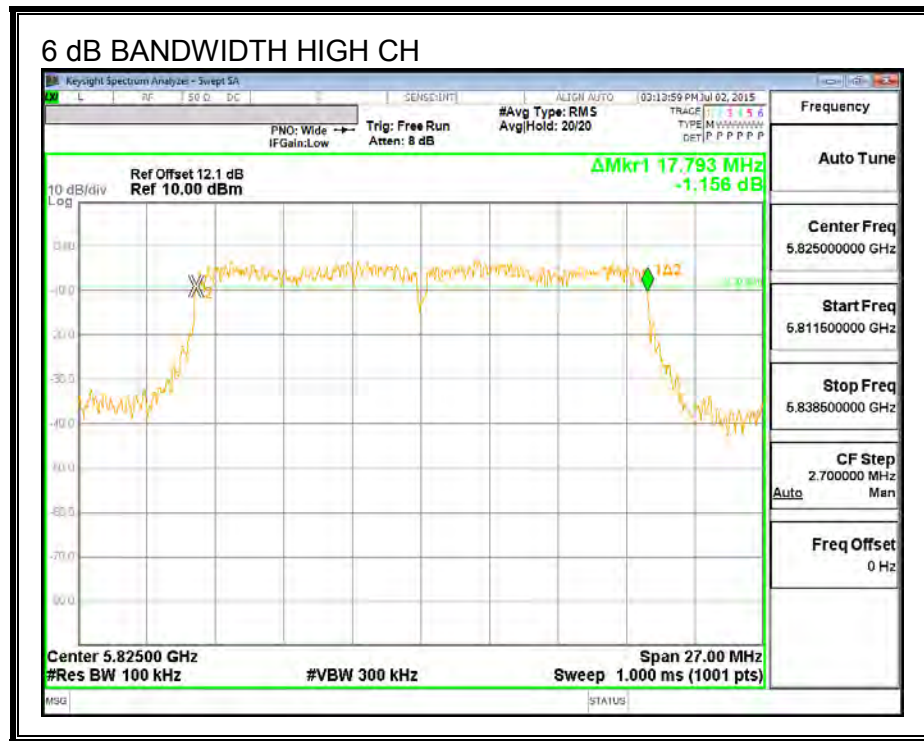

8.14.2. 26 dB BANDWIDTH



LIMITS


None, for reporting purposes only

RESULTS

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
Low	5745	19.4680
Mid	5785	19.7470
High	5825	20.0260

26 dB BANDWIDTH

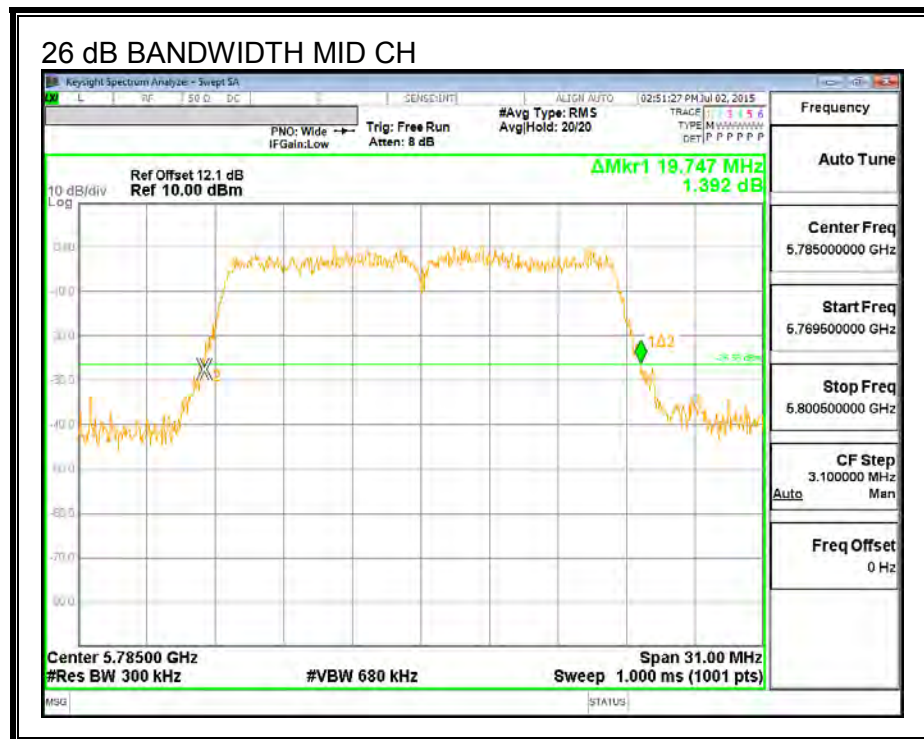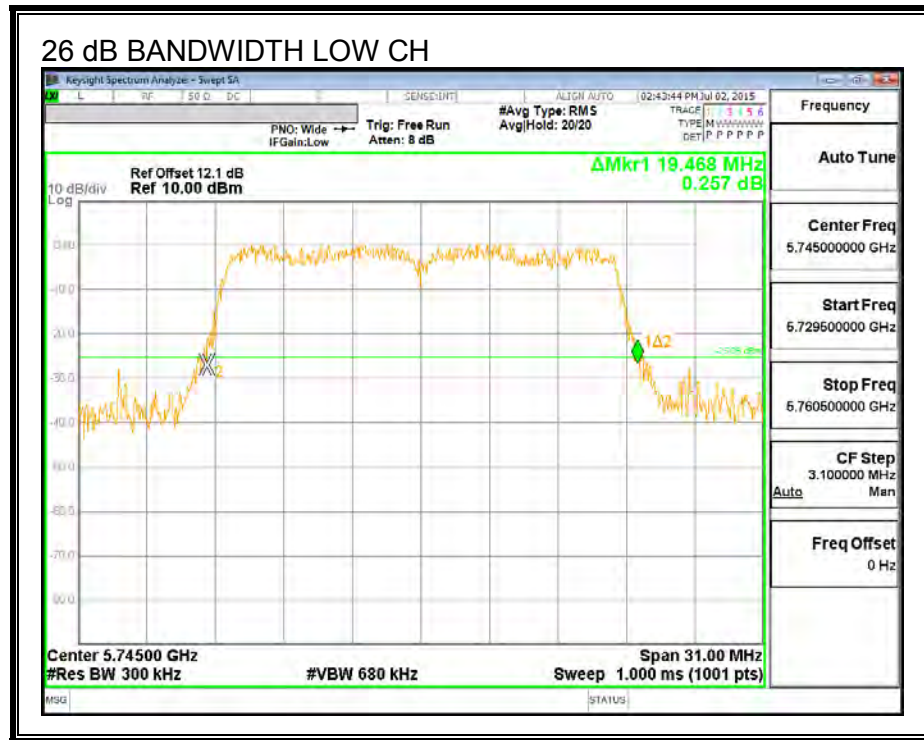

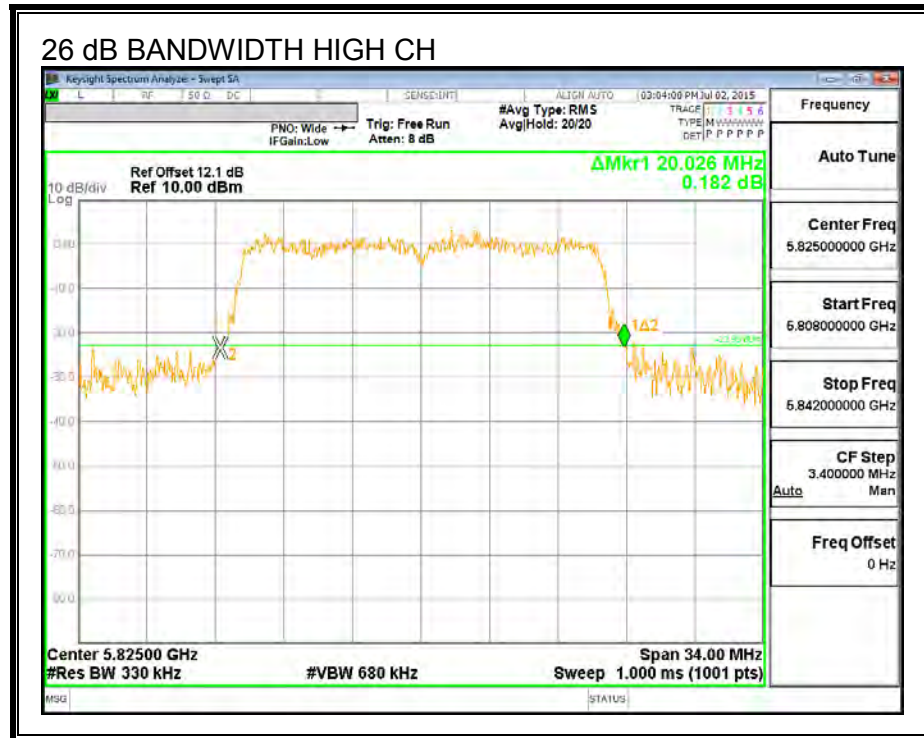

8.14.3. 99% BANDWIDTH



LIMITS


None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	5745	17.685
Mid	5785	17.895
High	5825	17.706

99% BANDWIDTH

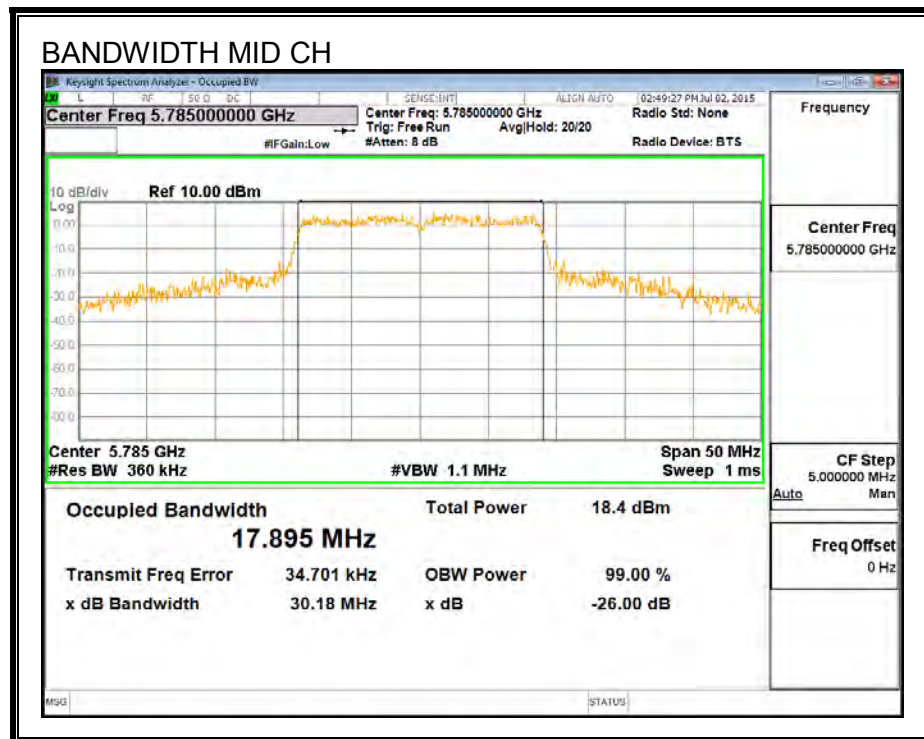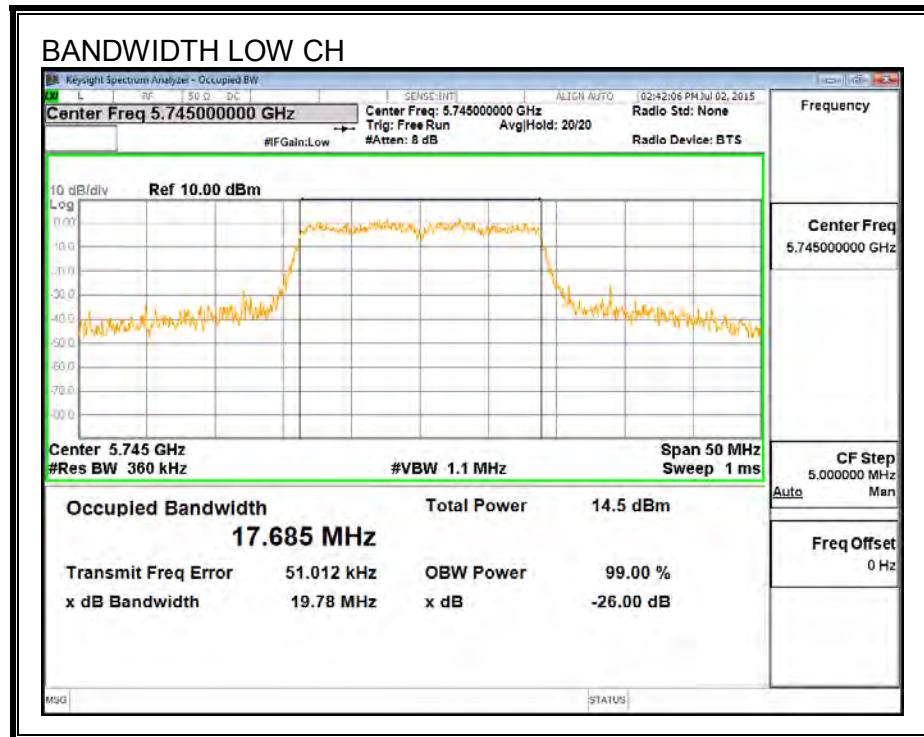

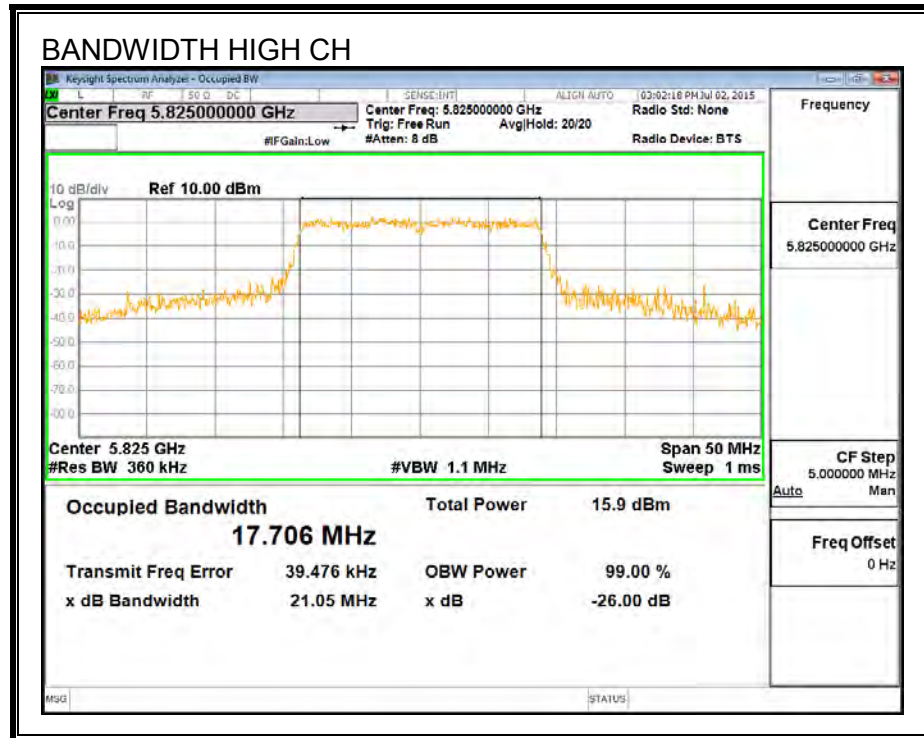

8.14.4. OUTPUT POWER

LIMITS

FCC §15.407 (a) (3)

For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

DIRECTIONAL ANTENNA GAIN

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

RESULTS

Antenna Gain and Limit

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Power Limit (dBm)
Low	5745	1.70	30.00
Mid	5785	1.70	30.00
High	5825	1.70	30.00

Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd Power
---------------------------	------	---

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5745	10.28	10.28	30.00	-19.72
Mid	5785	14.12	14.12	30.00	-15.88
High	5825	11.81	11.81	30.00	-18.19

8.14.5. PSD

LIMITS

FCC §15.407 (a) (3)

For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

DIRECTIONAL ANTENNA GAIN

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

RESULTS

Antenna Gain and Limits



Channel	Frequency (MHz)	Directional Gain (dBi)	PSD Limit (dBm)
Low	5745	1.70	30.00
Mid	5785	1.70	30.00
High	5825	1.70	30.00


Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
--------------------	------	--

PSD Results

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
Low	5745	-3.93	-3.93	30.00	-33.93
Mid	5785	-0.14	-0.14	30.00	-30.14
High	5825	-2.54	-2.54	30.00	-32.54

PSD, Chain 0

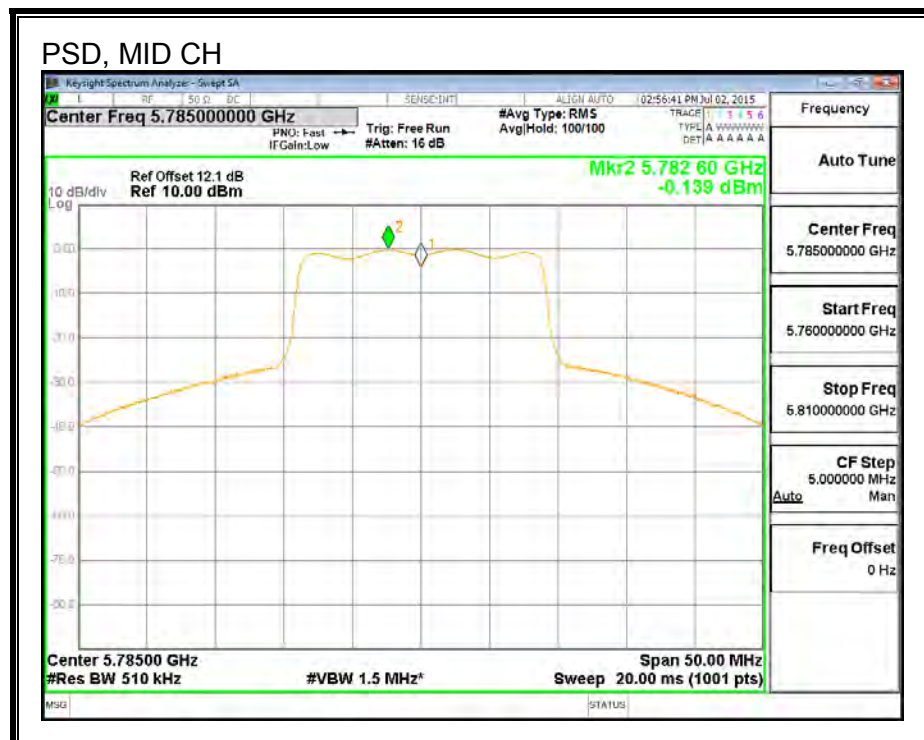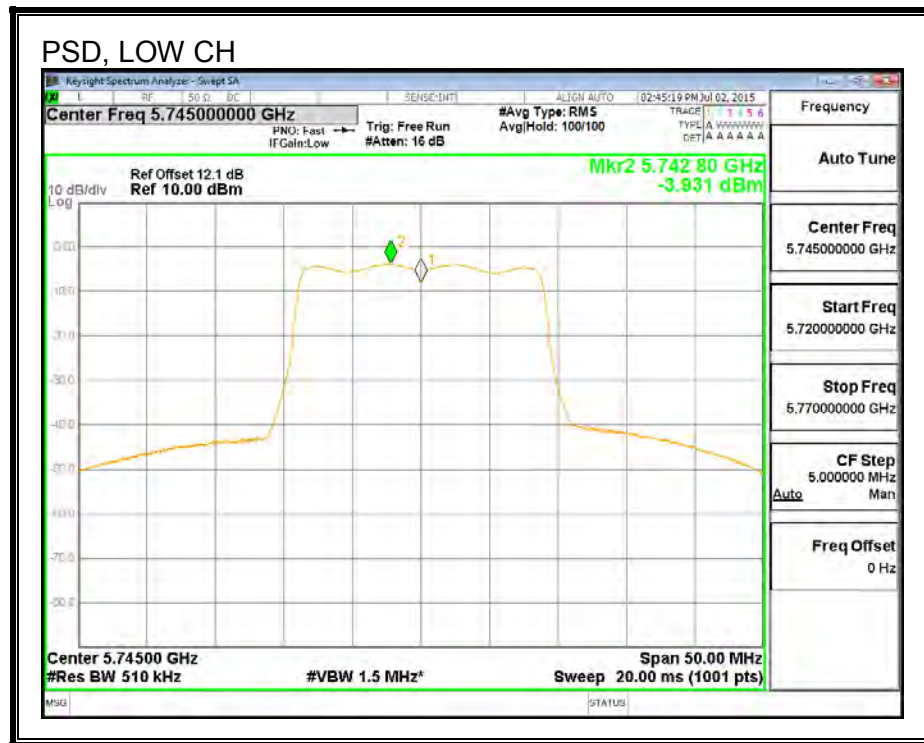

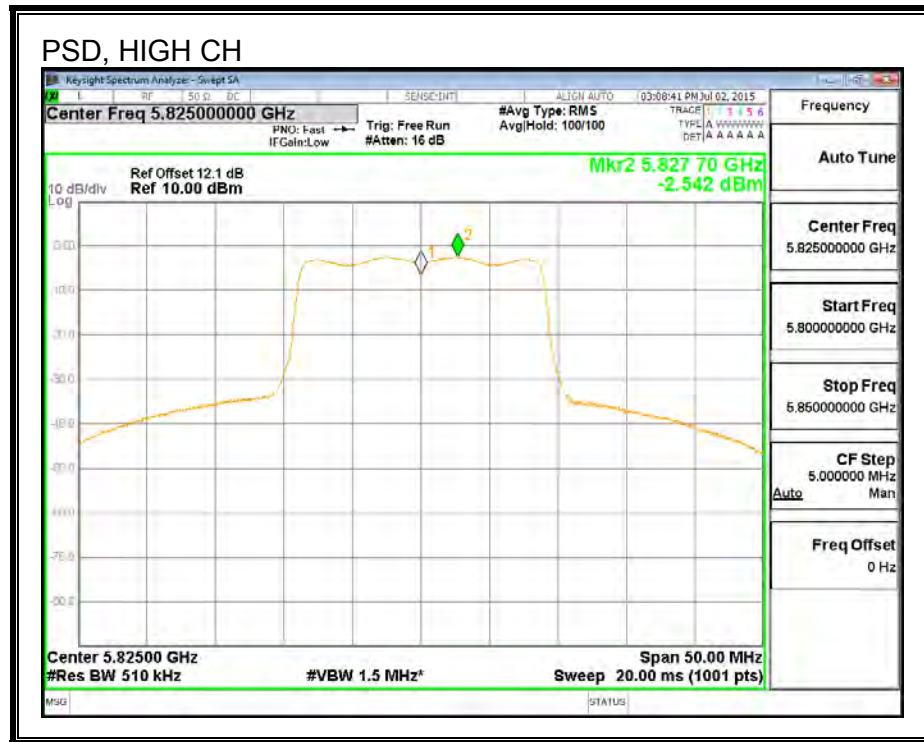

8.15. 802.11n HT40 MODE IN THE 5.8 GHz BAND

8.15.1. 6 dB BANDWIDTH

LIMITS



FCC §15.407 (e)

The minimum 6 dB bandwidth shall be at least 500 kHz.

RESULTS

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)
Low	5755	36.41	0.5
High	5795	36.30	0.5

6 dB BANDWIDTH

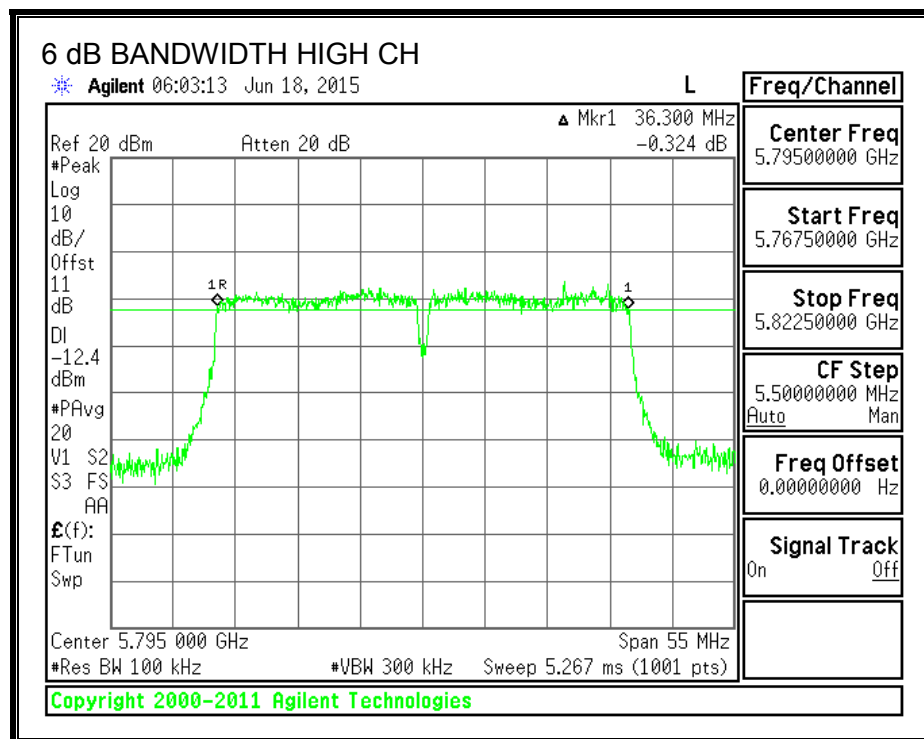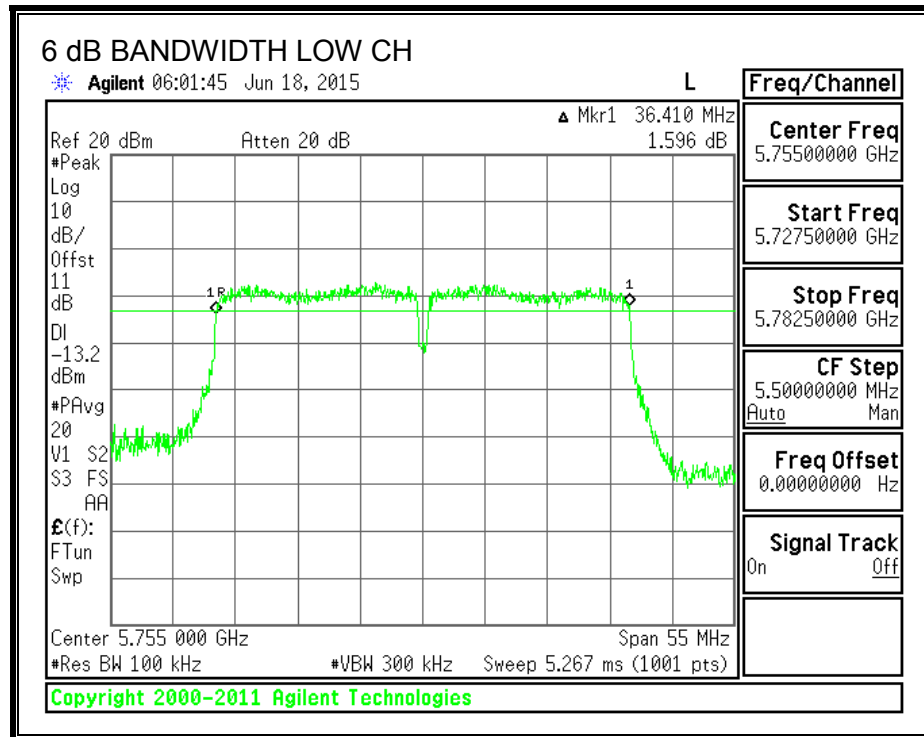

8.15.2. 26 dB BANDWIDTH



LIMITS

None, for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
Low	5755	40.26
High	5795	40.26

26 dB BANDWIDTH

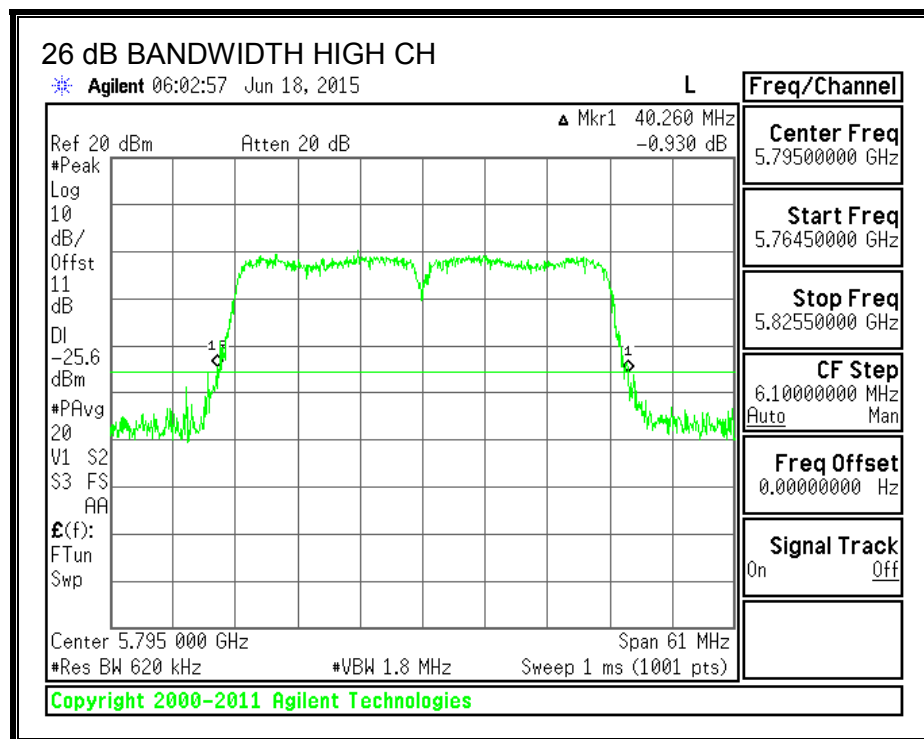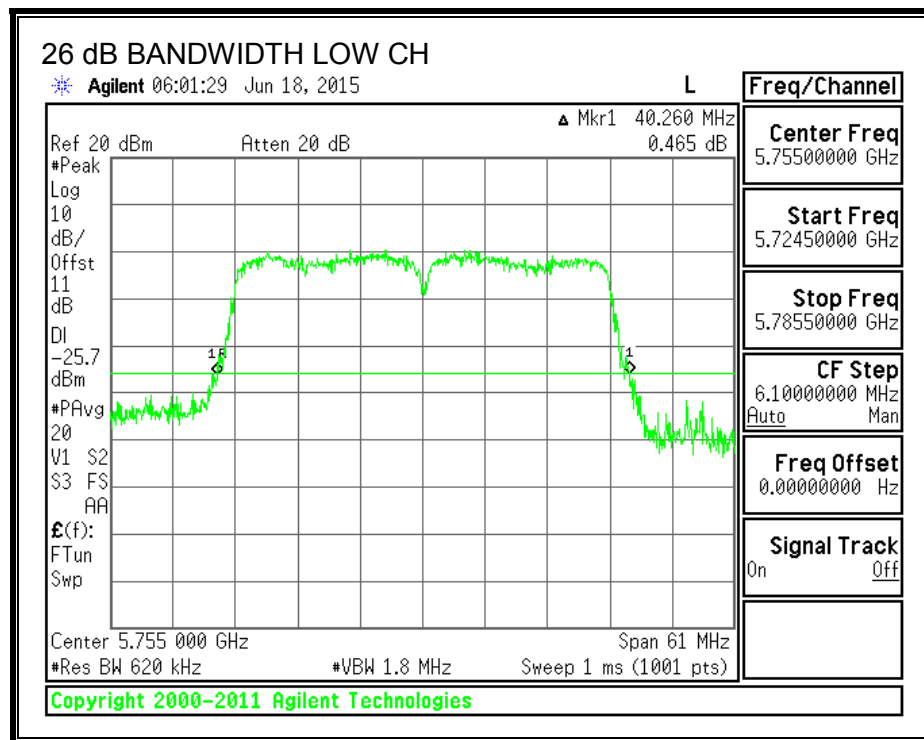

8.15.3. 99% BANDWIDTH



LIMITS

None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	5755	36.199
High	5795	36.267

99% BANDWIDTH

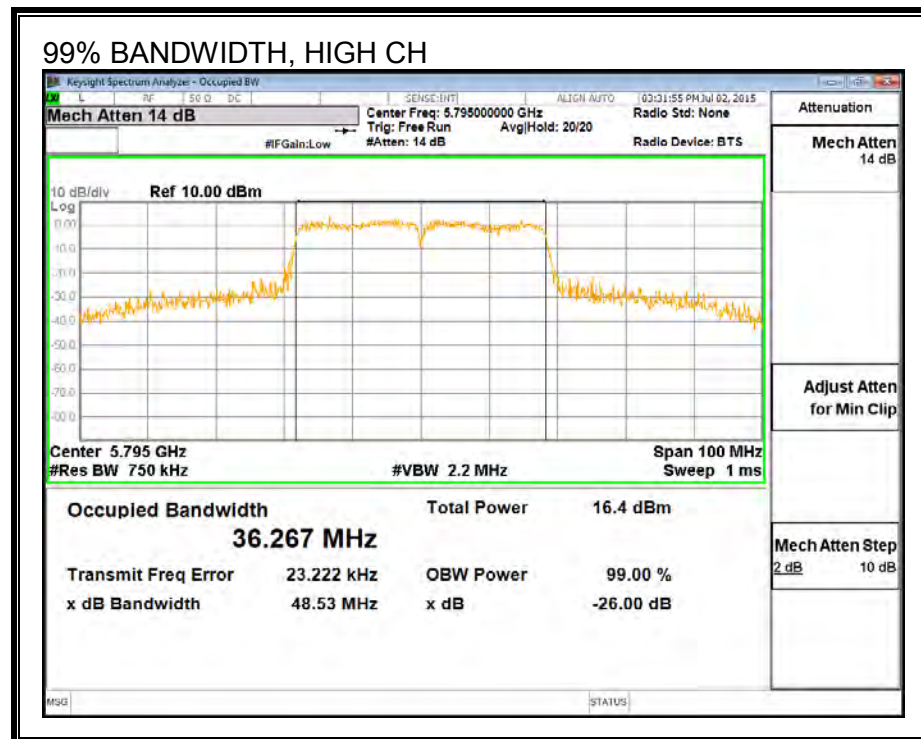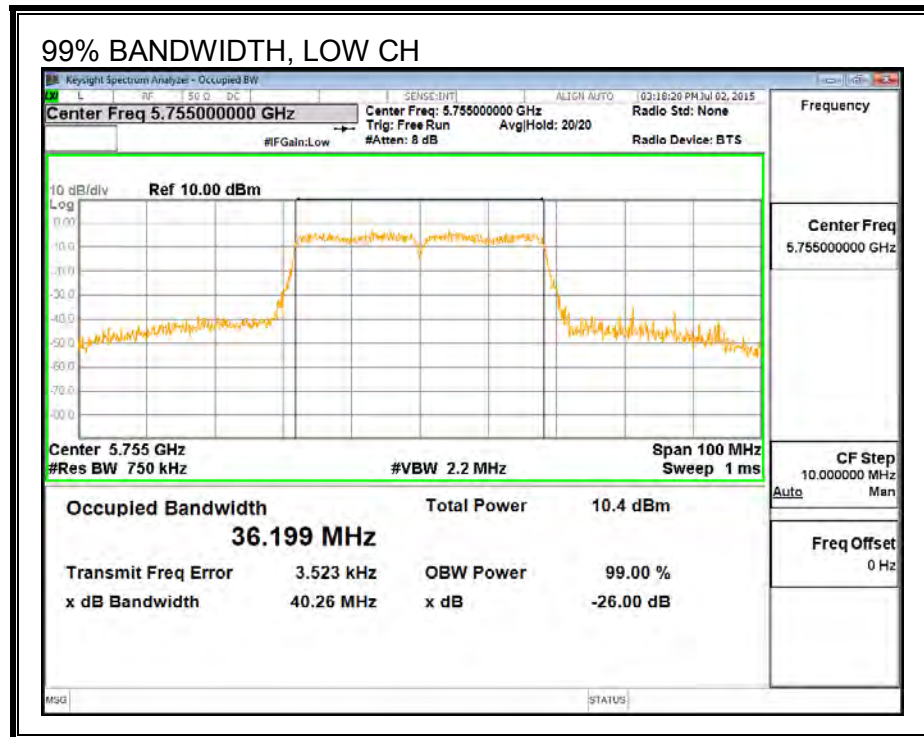

8.15.4. OUTPUT POWER

LIMITS

FCC §15.407 (a) (3)

For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

DIRECTIONAL ANTENNA GAIN

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

RESULTS

Antenna Gain and Limit

Channel	Frequency (MHz)	Directional Gain (dBi)	Power Limit (dBm)
Low	5755	1.70	30.00
High	5795	1.70	30.00

Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd Power
---------------------------	------	---

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5755	6.49	6.49	30.00	-23.51
High	5795	11.98	11.98	30.00	-18.02

8.15.5. PSD

LIMITS

FCC §15.407 (a) (3)

For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

DIRECTIONAL ANTENNA GAIN

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

RESULTS

Antenna Gain and Limits



Channel	Frequency (MHz)	Directional Gain (dBi)	PSD Limit (dBm)
Low	5755	1.70	30.00
High	5795	1.70	30.00

Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
---------------------------	------	---

PSD Results

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
Low	5755	-11.19	-11.19	30.00	-41.19
High	5795	-4.79	-4.79	30.00	-34.79

PSD, Chain 0

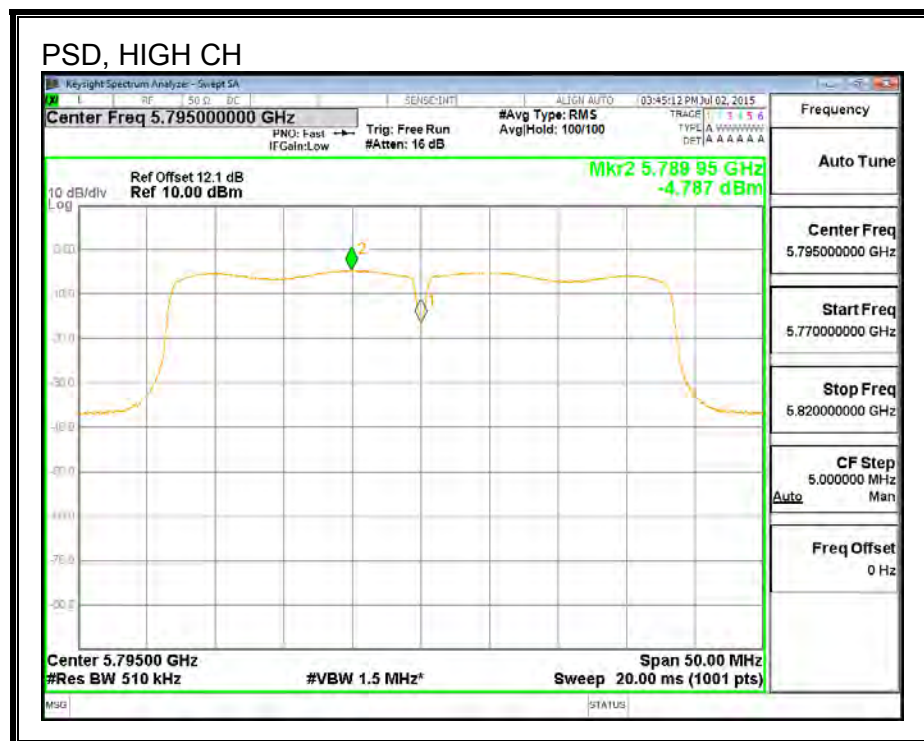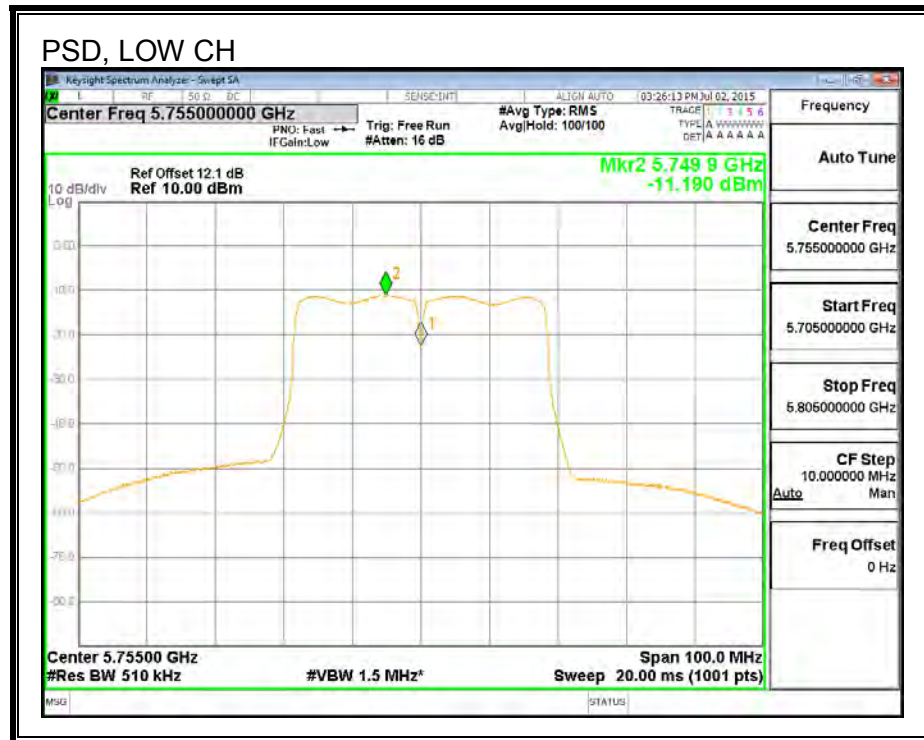

8.16. 802.11ac VHT80 MODE IN THE 5.8 GHz BAND

8.16.1. 6 dB BANDWIDTH

LIMITS


FCC §15.407 (e)

The minimum 6 dB bandwidth shall be at least 500 kHz.

RESULTS

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)
Mid	5775	76.36	0.5

6 dB BANDWIDTH

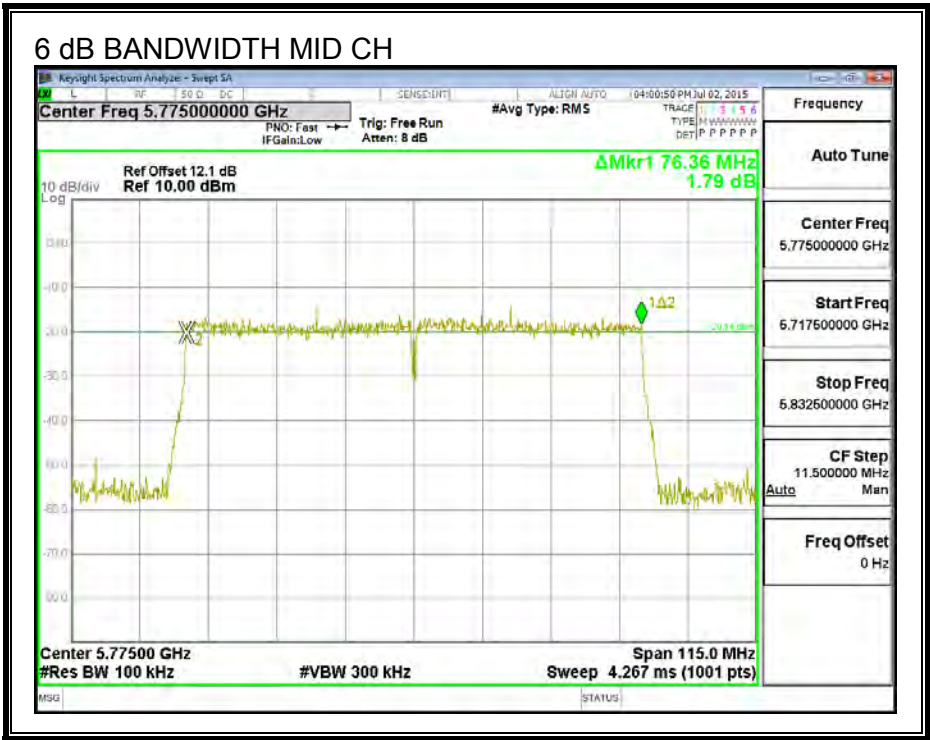


8.16.2. 26 dB BANDWIDTH

LIMITS

None, for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
Mid	5775	81.50

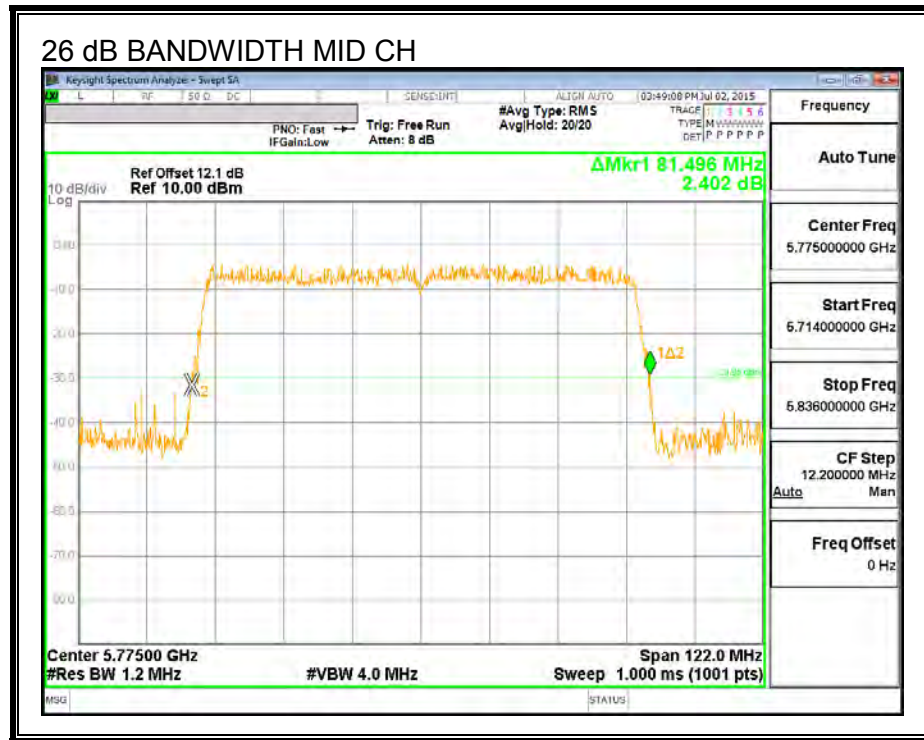

8.16.3. 99% BANDWIDTH


LIMITS

None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Mid	5775	76.365

99% BANDWIDTH

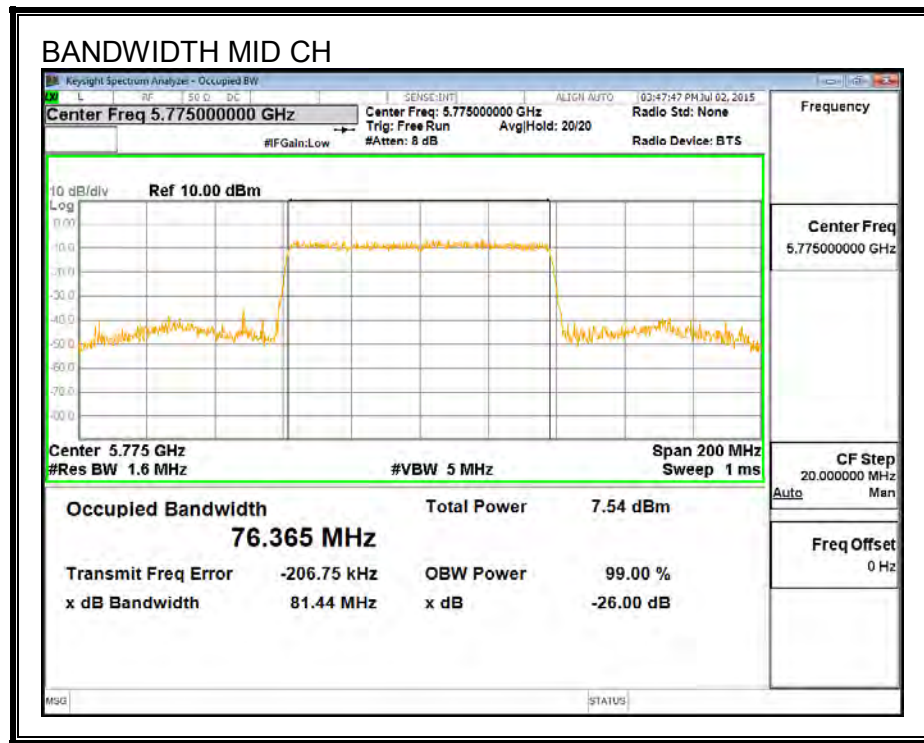

8.16.4. OUTPUT POWER

LIMITS

FCC §15.407 (a) (3)

For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

DIRECTIONAL ANTENNA GAIN

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

RESULTS

Antenna Gain and Limit

Channel	Frequency (MHz)	Directional Gain (dBi)	Power Limit (dBm)
Mid	5775	1.70	30.00

Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd Power
--------------------	------	--

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Mid	5775	4.24	4.24	30.00	-25.76

8.16.5. PSD

LIMITS

FCC §15.407 (a) (3)

For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

DIRECTIONAL ANTENNA GAIN

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

RESULTS

Antenna Gain and Limits

Channel	Frequency (MHz)	Directional Gain (dBi)	PSD Limit (dBm)
Mid	5775	1.70	30.00

Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
--------------------	------	--

PSD Results

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
Mid	5775	-16.661	-16.66	30.00	-46.66

PSD, Chain 0

