

FCC 47 CFR MPE REPORT

CE LINK LIMITED

3-in-1 Wireless Charger

Model Number: MPP25-1TCNA-F

Addition Model: 39-5017

FCC ID: A4X-MPP25-1TCNA-F

Applicant:	CE LINK LIMITED
Address:	22 Dongkang Road, Dalingshan Town,
	Dongguan City, Guangdong
Prepared By:	EST Technology Co., Ltd.
	Chilingxiang, Qishantou, Santun, Houjie, Dongguan, Guangdong, China
	Tel: 86-769-83081888-808

Report Number:	ESTE-R2503246
Date of Test:	Feb. 19, 2025 ~ Mar. 22, 2025
Date of Report:	Mar. 25, 2025

Applicant/ Manufacturer: Address:	CE LINK LIMITED 22 Dongkang Road, Dalingshan Town, Dongguan City, Guangdong		
Factory 1: Address:	SuiChuan CE LINK LIMITED SuiChuan county industrial park east zone, Ji 'an city, Jiangxi province, China.		
Factory 2: Address:	CE LINK VIET NAM COMPANY LIMITED. Part of lots CNSG-04, CNSG-06 Van Trung Industrial Zone, Van Trung Ward, Viet Yen Town, 26000 BAC GIANG PROVINCE, VIETNAM		
E.U.T:	3-in-1 Wireless Charger		
Model Number:	MPP25-1TCNA-F		
Addition Model:	39-5017 Note: The product only differs in model number.		
Power Supply:	Input: DC 5V/3A, 9V/3A, 12V/3A, 15V/2.4A; 36W Output 1: 15W(Max)(QI2) Output 2: 5W(Max)(AirPods) Output 3: 5W(Max)(Built-in C962 module USB-C output)		
Trade Name:	CE-LINK,  Clas Ohlson	Serial No.:	-----
Date of Receipt:	Feb. 19, 2025	Date of Test:	Feb. 19, 2025 ~ Mar. 22, 2025
Test Specification:	FCC CFR 47 Part 1.1307(b)&1.1310 KDB 680106 D01 RF Exposure Wireless Charging Apps v04r01		
Test Result:	The device described above is tested by EST Technology Co., Ltd. The measurement results were contained in this test report and EST Technology Co., Ltd. was assumed full responsibility for the accuracy and completeness of these measurements. Also, this report shows that the EUT to be technically compliance with the FCC CFR 47 Part 1.1307(b)&1.1310 requirements. This report applies to above tested sample only and shall not be reproduced in part without written approval of EST Technology Co., Ltd.		
Date: Mar. 25, 2025			
Prepared by: <u>Zephyr Zhu</u>	Reviewed by: 	Approved by:  Iceman Hu Manager	
Zephyr Zhu / Assistant	Seven Wang / Engineer		
Other Aspects: None.			
Abbreviations: OK/P=passed fail/F=failed n.a/N=not applicable E.U.T=equipment under tested			
This test report is based on a single evaluation of one sample of above mentioned products. It is not permitted to be duplicated in extracts without written approval of EST Technology Co., Ltd.			

1. Summary of test

1.1. Summary of test result

No.	Description of Test Item	FCC Standard Section	Results
1	Maximum Permissible Exposure	Part 1.1307(b)&1.1310	PASS

1.2. Test Mode

Test Item	Test Mode
Maximum Permissible Exposure	Output 1: 15W & Output 2: 5W
	Output 1: 15W
	Output 2: 5W
	Standby
Note: All modes have been tested. The report only reflects the worst case of Output 1: 15W & Output 2: 5W full load test data.	

1.3. Test Equipment List

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
Electric and Magnetic Field Probe-Analyzer	Narda S.T.S./PMM	EHP-200A	EST-E106	June 13,24	1 Year
Test Software	Narda	EHP200-TS	Rel 1.92	N/A	N/A

Note: Test uncertainty: ± 1.62 dB (H-field); ± 1.64 dB (E-field) at a level of confidence of 95%.

1.4. Assistant equipment used for test

Item	Equipment	Brand	Model Name/Type No.	FCC ID	Series No.
A	Adapter	-	HKC10020050-0G1	-	-
B	Wireless load	-	YBZ MPP	-	-
C	Wireless load	-	YBZ BPP	-	-

Item	Shielded Type	Ferrite Core	Length	Model Name/Type No.	Note
1	NO	NO	0.3m	-	Type-C Line 1
2	NO	NO	0.3m	-	Type-C Line 2

2. Maximum Permissible Exposure


2.1. Limit

Limits for Maximum Permissible Exposure (MPE)

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm ²)	Averaging time (minutes)
(A) Limits for Occupational/Controlled Exposure				
0.3-3.0	614	1.63	*100	6
3.0-30	1842/f	4.89/f	*900/f ²	6
30-300	61.4	0.163	1.0	6
300-1,500			f/300	6
1,500-100,000			5	6
(B) Limits for General Population/Uncontrolled Exposure				
0.3-1.34	614	1.63	*100	30
1.34-30	824/f	2.19/f	*180/f ²	30
30-300	27.5	0.073	0.2	30
300-1,500			f/1500	30
1,500-100,000			1.0	30

Note: f = frequency in MHz * = Plane-wave equivalent power density.

2.2. Test Setup

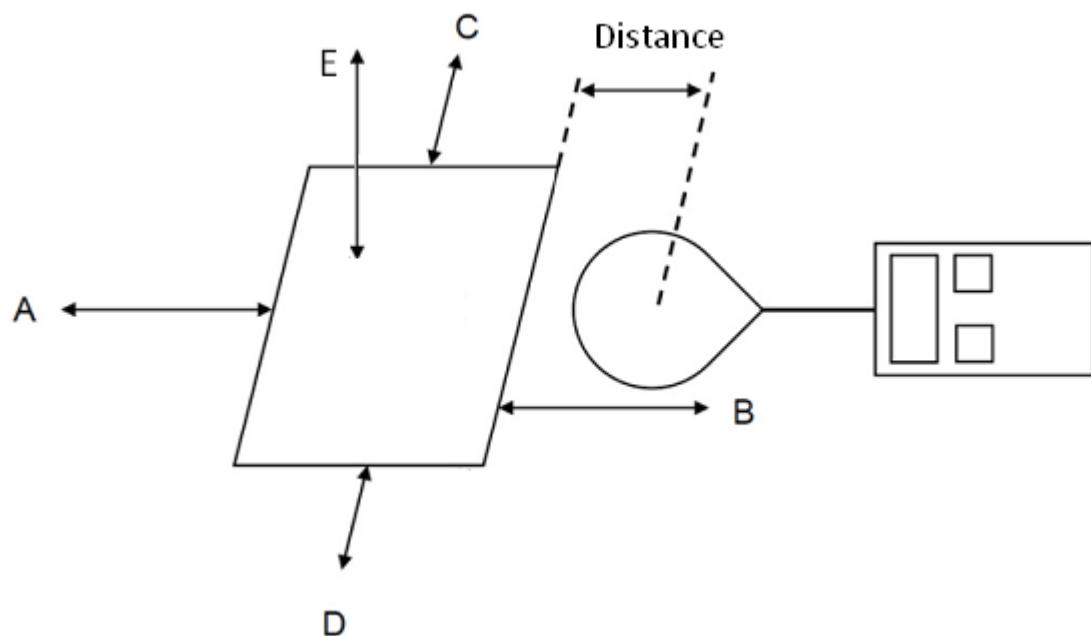

2.3. Test Procedure

- a. The test was performed on 360 degree turn table in anechoic chamber.
- b. The probe was placed at 20 cm surrounding, for test setup.
- c. The highest emission level was recorded and compared with limit as soon as measurement of each point; A, B, C, D, E were completed.

2.4. Equipment Approval Considerations

Inductive wireless power transfer applications with supporting field strength results and meeting all of the following requirements are not required to submit a KDB inquiry for devices approved using SDoC or a PAG for equipment approved using certification to address RF exposure compliance.


	Power transfer frequency is less than 4 MHz
1	YES; the device operated in the frequency range from 110.5-205KHz; 360KHz.
2	Output power from each primary coil is less than or equal to 15 watts YES; the maximum output power of the primary coil is 15W.
3	The system may consist of more than one source primary coils, charging one or more clients. If more than one primary coil is present, the coil pairs may be powered on at the same time. YES; The EUT has three source primary coils
4	Client device is placed directly in contact with the transmitter. YES; Client device is placed directly in contact with the transmitter.
5	Mobile exposure conditions only (portable exposure conditions are not covered by this exclusion). YES; Mobile exposure conditions only.
6	The aggregate H-field strengths anywhere at or beyond 20 cm surrounding the device, and 20 cm away from the surface from all coils that by design can simultaneously transmit, and while those coils are simultaneously energized, are demonstrated to be less than 50% of the applicable MPE limit. YES; The EUT field strength levels are 50% x MPE limits.

2.5. Test Result for Test setup :

E-field strength		
Frequency range	110.5 to 205 kHz	360 kHz
Position A(V/m)	1.103	2.119
Position B(V/m)	1.028	2.132
Position C(V/m)	1.165	2.146
Position D(V/m)	1.038	2.141
Position E(V/m)	1.206	2.338
Limits (V/m)	614	
50% Limits(V/m)	307	
H-field strength		
Frequency range	110.5 to 205 kHz	360 kHz
Position A(A/m)	0.044	0.079
Position B(A/m)	0.046	0.074
Position C(A/m)	0.043	0.072
Position D(A/m)	0.045	0.065
Position E(A/m)	0.065	0.095
Limits (A/m)	1.630	
50% Limits (A/m)	0.815	

3. Test photo

Position E

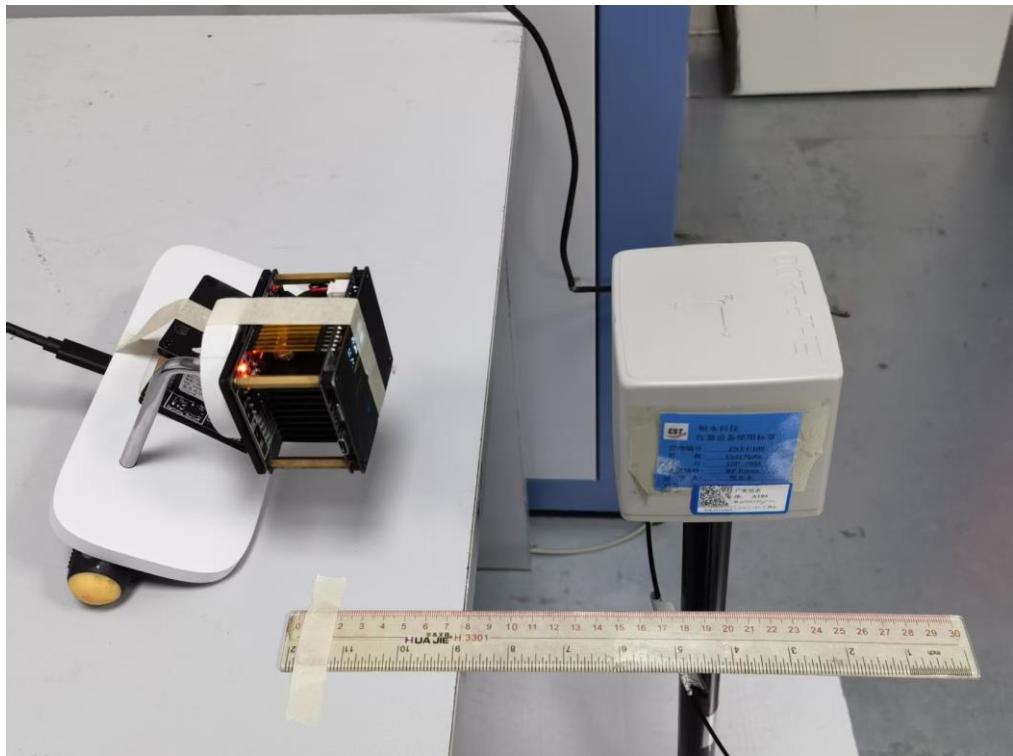

End of Test Report