

TEST REPORT

Reference No...... : WTX25X03045434W002
FCC ID..... : A4X-WL-UTC-HUB01
Applicant..... : CE LINK LIMITED
Address..... : 22 Dongkang Road, Dalingshan Town, Dongguan City, Guangdong
Province, China.
Manufacturer..... : Dongguan CE LINK LIMITED
Address..... : 22 Dongkang Road, Dalingshan Town, Dongguan City, Guangdong
Province, China.
Product Name..... : Type-C 5-in-1 Hub with Qi 2 Wireless Charging
Model No...... : WL-UTC-HUB01
Standards..... : KDB 680106 D01 V04
Date of Receipt sample..... : 2025-03-03
Date of Test..... : 2025-03-03 to 2025-03-26
Date of Issue..... : 2025-03-26
Test Report Form No...... : WTX_KDB 680106_D01_V04W
Test Result..... : **Pass**

Remarks:

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

Prepared By:


Waltek Testing Group (Shenzhen) Co., Ltd.

Address: 1/F., Room 101, Building 1, Hongwei Industrial Park, Liuxian 2nd Road,

Block 70 Bao'an District, Shenzhen, Guangdong, China

Tel.: +86-755-33663308 Fax.: +86-755-33663309 Email: sem@waltek.com.cn

Tested by:



Gala Wang/Project Engineer

Approved by:



Jason Su/Manager

TABLE OF CONTENTS

1. GENERAL INFORMATION..... 4

1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT) 4

1.2 AUXILIARY EQUIPMENT LIST AND DETAILS 5

1.3 TEST EQUIPMENT LIST AND DETAILS 6

2. RF EXPOSURE TEST REPORT 7

2.1 STANDARD APPLICABLE 7

2.2 TEST CONDITIONS 7

2.3 TEST PROCEDURE 8

2.4 TEST RESULT 9

2.5 MEASUREMENT UNCERTAINTY 12

APPENDIX PHOTOGRAPHS..... 13

Report version

Version No.	Date of issue	Description
Rev.00	2025-03-26	Original
/	/	/

1. GENERAL INFORMATION

1.1 Product Description for Equipment Under Test (EUT)

Client Information

Factory#1:	ANFU CE LINK LIMITED
Address of factory	Anfu County Industrial Zone, Ji'an city, Jiangxi Province, P.R. China.
Factory#2:	CE LINK VIET NAM COMPANY LIMITED.
Address of factory	Part of lots CNSG-04, CNSG-06 Van Trung Industrial Zone, Van Trung Ward, Viet Yen Town, Bac Giang Province, Vietnam

General Description of EUT	
Product Name:	Type-C 5-in-1 Hub with Qi 2 Wireless Charging
Trade Name:	CE-LINK
Model No.:	WL-UTC-HUB01
Adding Model(s):	/
<i>Note: The test data is gathered from a production sample, provided by the manufacturer.</i>	

Technical Characteristics of EUT	
Frequency Range:	111~205kHz / 360kHz
Modulation Type:	ASK
Antenna Type:	Coil Antenna
Antenna Gain	0dBi
Rated Input:	USB Type-C Male (From host): 5V USB-C PD Port (From PD Charging): 20V
Rated Output:	Each USB-A 5G Port: 5V USB-C 5G Port: 5V USB Type-C Male (to host): 20V
Rated Current:	USB Type-C Male (From host): 3A max USB-C PD Port (From PD Charging): 5A max Each USB-A 5G Port : 0.9A max USB-C 5G Port: 1.5A max USB Type-C Male (to host): 4.5A max
Rated Power:	Qi 2 Wireless Charging: 5W, 7.5W, 10W, 15W
<i>Note The Antenna Gain is provided by the customer and can affect the validity of results.</i>	

1.2 Auxiliary Equipment List and Details

Auxiliary Equipment List and Details

Description	Manufacturer	Model	Serial Number
Adapter	Apple	A2452	/
Mobile hard drive	Samsung	MU-PC1T0H	/
USB flash disk	Samsung	/	/
Displayer	Samsung	S32BG854NC	/
iPhone	Apple	MGC33CH/A	/
WiFi Router	TP-LINK	TL-WR842N	/

Special Cable List and Details

Cable Description	Length (M)	Shielded/Unshielded	With Core/Without Core
Type-C Cable	1.0	Unshielded	Without Ferrite
HDMI Cable	0.6	Unshielded	Without Ferrite

1.3 Test Equipment List and Details

Description	Manufacturer	Model	Serial No.	Cal Date	Due Date
ELECTRIC AND MAGNETIC FIELD ANALYZER	Narda	EHP-200AC	180ZX10226	2025-02-23	2026-02-22
Note: The deviation response is 0.8dB.					

2. RF Exposure Test Report

2.1 Standard Applicable

According to §1.1310 system operating under the provisions of this section shall be operating in a manner that the public is not exposed to radio frequency energy level in excess limit for maximum permissible exposure.

TABLE 1—LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)



Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm ²)	Averaging time (minutes)
(A) Limits for Occupational/Controlled Exposure				
0.3-3.0	614	1.63	*100	6
3.0-30	1842/f	4.89/f	*900/f ²	6
30-300	61.4	0.163	1.0	6
300-1,500			f/300	6
1,500-100,000			5	6
(B) Limits for General Population/Uncontrolled Exposure				
0.3-1.34	614	1.63	*100	30
1.34-30	824/f	2.19/f	*180/f ²	30
30-300	27.5	0.073	0.2	30
300-1,500			f/1500	30
1,500-100,000			1.0	30

f = frequency in MHz * = Plane-wave equivalent power density

2.2 Test Conditions

Test Mode	Description	Remark	Power Supply Mode
TM1	Wireless Charging	AC120V/60Hz for adapter; Input: DC 12V0.42A;	Wireless charging: output 5W USB-A Ports and USB-C 5G Port and USB Type-C normal working
TM2	Wireless Charging	AC120V/60Hz for adapter; Input: DC 14V1.07A;	Wireless charging: output 15W USB-A Ports and USB-C 5G Port and USB Type-C normal working
<i>Note: The EUT was tested with empty load, half load, and full load, Pre-scan 5W, 7.5W, 10W, 15W mode, and found the 5W and 15W (full load) mode which it is worse case, so only show the test data for worse case.</i>			
Measurement Distance:	15 cm and 20 cm		

2.3 Test Procedure

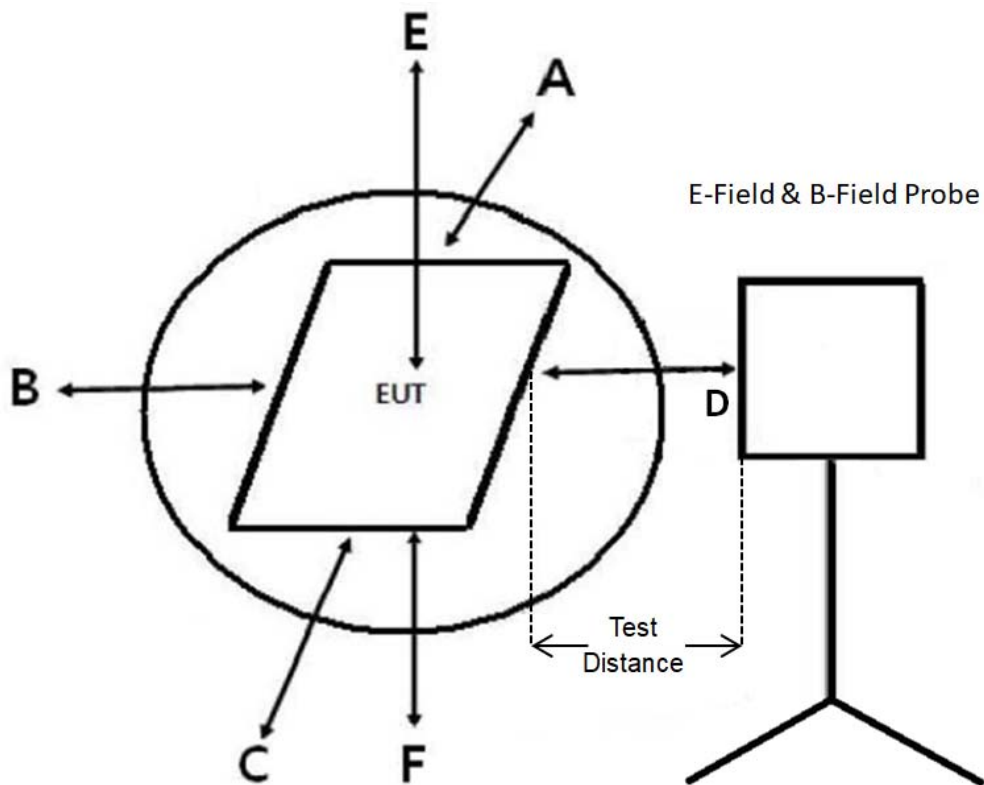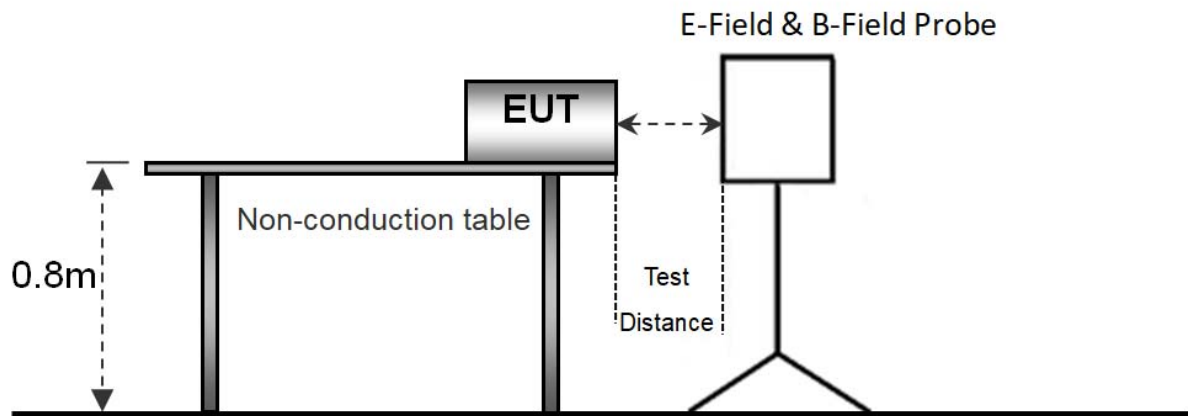

- The measurement probe was placed at test distance (15 cm for A,B,C,D,F and 20 cm for E) which is between the edge of the charger and the geometric center of probe.
- The highest emission level was recorded at the measurement points (A, B, C, D, E, F).
- The EUT was measured according to the distance of KDB 680106 D01 v04.

2.4 Test Result

The EUT complies with item 5.2 of KDB 680106 D01V04

- (1) The power transfer frequency is below 1 MHz.
Yes, the device operate in the frequency range from 111~205kHz / 360kHz.
- (2) The output power from each transmitting element (e.g., coil) is less than or equal to 15 watts.
Yes, the maximum output power of the primary coil is equal to 15W.
- (3) A client device providing the maximum permitted load is placed in physical contact with the transmitter (i.e., the surfaces of the transmitter and client device enclosures need to be in physical contact)
Yes, Client device is placed directly in contact with the transmitter.
- (4) Only § 2.1091-Mobile exposure conditions apply (i.e., this provision does not cover § 2.1093-Portable exposure conditions).
Yes, It is mobile exposure conditions only.
- (5) The E-field and H-field strengths, at and beyond 20 cm surrounding the device surface, are demonstrated to be less than 50% of the applicable MPE limit, per KDB 447498, Table 1. These measurements shall be taken along the principal axes of the device, with one axis oriented along the direction of the estimated maximum field strength, and for three points per axis or until a 1/d (inverse distance from the emitter structure) field strength decay is observed. Symmetry considerations may be used for test reduction purposes. The device shall be operated in documented worst-case compliance scenarios (i.e., the ones that lead to the maximum field components), and while all the radiating structures (e.g., coils or antennas) that by design can simultaneously transmit are energized at their nominal maximum power.
Yes, The EUT field strength levels are less than 50% of the MPE limit, refer to test TM1,TM2 list.
- (6) For systems with more than one radiating structure, the conditions specified in (5) must be met when the system is fully loaded (i.e., clients absorbing maximum power available), and with all the radiating structures operating at maximum power at the same time, as per design conditions. If the design allows one or more radiating structures to be powered at a higher level while other radiating structures are not powered, then those cases must be tested as well. For instance, a device may use three RF coils powered at 5 W, or one coil powered at 15 W: in this case, both scenarios shall be tested.
Yes, The EUT field strength levels are less than 50% of the MPE limit, refer to test list; and the coils can't transmitted simultaneous.

Test Mode: TM1 (15CM Worst mode)

Electric Field Emissions			
Test Position	Measure Value (V/m)	Limit(V/m)	50% Limit (V/m)
Point E	4.62	614	307
Point F	3.33	614	307
Point A	2.21	614	307
Point B	4.69	614	307
Point C	2.33	614	307
Point D	3.12	614	307
Magnetic Field Emissions			
Test Position	Measure Value (A/m)	Limit(A/m)	50% Limit (A/m)
Point E	0.25	1.63	0.815
Point F	0.36	1.63	0.815
Point A	0.28	1.63	0.815
Point B	0.24	1.63	0.815
Point C	0.23	1.63	0.815
Point D	0.25	1.63	0.815

Test Mode: TM1 (20CM Worst mode)

Electric Field Emissions			
Test Position	Measure Value (V/m)	Limit(V/m)	50% Limit (V/m)
Point E	4.10	614	307
Point F	2.98	614	307
Point A	1.95	614	307
Point B	4.21	614	307
Point C	1.87	614	307
Point D	2.66	614	307
Magnetic Field Emissions			
Test Position	Measure Value (A/m)	Limit(A/m)	50% Limit (A/m)
Point E	0.24	1.63	0.815
Point F	0.31	1.63	0.815
Point A	0.21	1.63	0.815
Point B	0.19	1.63	0.815
Point C	0.17	1.63	0.815
Point D	0.18	1.63	0.815

Test Mode: TM2 (15CM Worst mode)

Electric Field Emissions			
Test Position	Measure Value (V/m)	Limit(V/m)	50% Limit (V/m)
Point E	4.60	614	307

Point F	3.71	614	307
Point A	2.21	614	307
Point B	5.36	614	307
Point C	4.33	614	307
Point D	2.21	614	307
Magnetic Field Emissions			
Test Position	Measure Value (A/m)	Limit(A/m)	50% Limit (A/m)
Point E	0.14	1.63	0.815
Point F	0.23	1.63	0.815
Point A	0.25	1.63	0.815
Point B	0.11	1.63	0.815
Point C	0.39	1.63	0.815
Point D	0.41	1.63	0.815

Test Mode: TM2 (20CM Worst mode)

Electric Field Emissions			
Test Position	Measure Value (V/m)	Limit(V/m)	50% Limit (V/m)
Point E	3.92	614	307
Point F	2.88	614	307
Point A	1.21	614	307
Point B	4.36	614	307
Point C	3.68	614	307
Point D	1.54	614	307
Magnetic Field Emissions			
Test Position	Measure Value (A/m)	Limit(A/m)	50% Limit (A/m)
Point E	0.12	1.63	0.815
Point F	0.21	1.63	0.815
Point A	0.22	1.63	0.815
Point B	0.08	1.63	0.815
Point C	0.34	1.63	0.815
Point D	0.32	1.63	0.815

2.5 Measurement Uncertainty

Measurement uncertainty		
Parameter	Conditions	Uncertainty
Electric Field Emissions	Radiated	1.56 (V/m)
Magnetic Field Emissions	Radiated	0.08(A/m)

APPENDIX PHOTOGRAPHS

Please refer to “ANNEX”

***** END OF REPORT *****