


## Appendix A: Test Results of FCC Part 15C

|                                                                                        |           |
|----------------------------------------------------------------------------------------|-----------|
| <b>APPENDIX A: TEST RESULTS OF FCC PART 15C .....</b>                                  | <b>1</b>  |
| <b>APPENDIX A.1: TEST RESULTS OF 20DB BANDWIDTH .....</b>                              | <b>2</b>  |
| <i>Wireless Charger (10W) .....</i>                                                    | <i>2</i>  |
| <i>Standby mode .....</i>                                                              | <i>3</i>  |
| <b>APPENDIX A.2: TEST RESULTS OF FIELD STRENGTH OF FUNDAMENTAL AND HARMONICS .....</b> | <b>4</b>  |
| <i>Wireless Charger (5W) .....</i>                                                     | <i>4</i>  |
| <i>Wireless Charger (10W) .....</i>                                                    | <i>7</i>  |
| <i>Standby mode .....</i>                                                              | <i>18</i> |
| <b>APPENDIX A.3: TEST RESULTS OF CONDUCTED EMISSION ON AC MAINS .....</b>              | <b>29</b> |

## Appendix A.1: Test Results of 20dB Bandwidth

Wireless Charger (10W)


| Frequency              | 20 dB Bandwidth (Hz) |
|------------------------|----------------------|
| Wireless Charger (10W) | 206.28               |

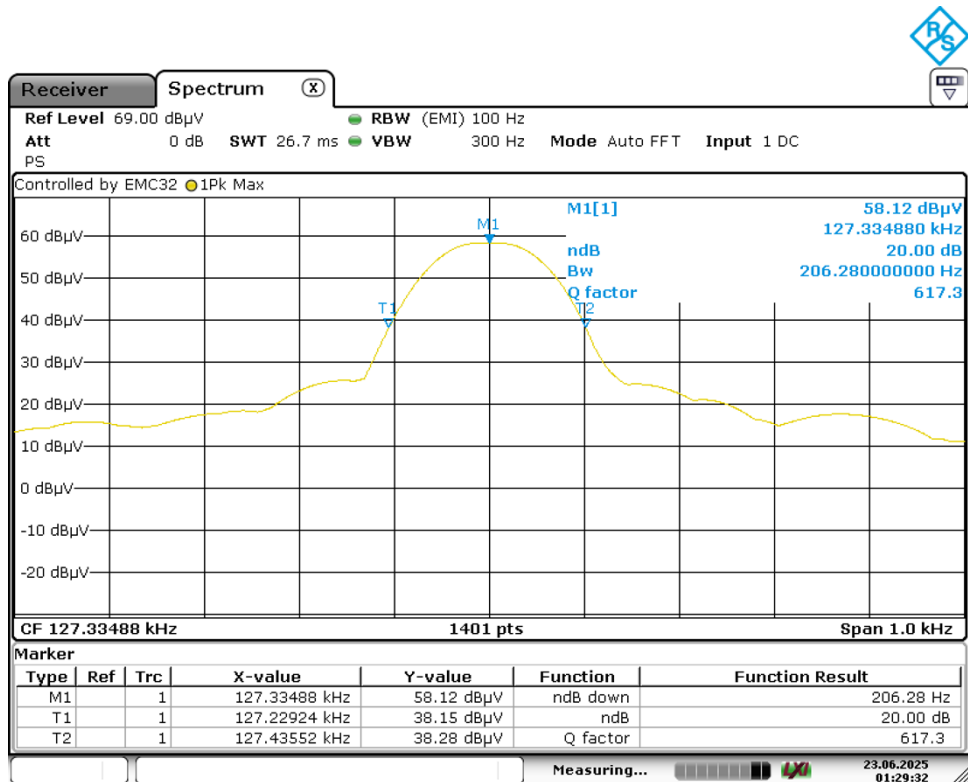

Date: 23.JUN.2025 01:29:32

Standby mode

| Frequency | 20 dB Bandwidth (Hz) |
|-----------|----------------------|
| Standby   | 299.6                |

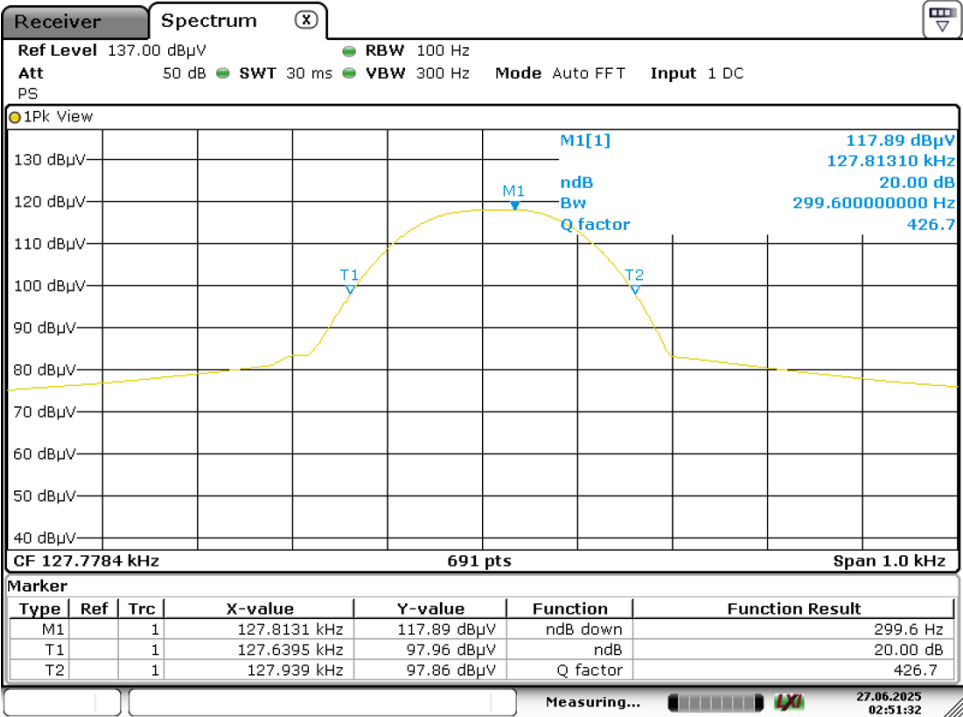


## Appendix A.2: Test Results of Field Strength of Fundamental and Harmonics

Note: The highest waveform in the figure is Fundamental.

Wireless Charger (5W)

### EUT Information

|                     |                          |
|---------------------|--------------------------|
| EUT Name:           | Wireless Charger         |
| Model:              | BE-WLESS10WW             |
| Test Mode:          | Charging                 |
| Order No/Sample No: | 168555685/A004024284-001 |
| Test Voltage:       | AC 120V/60Hz             |
| Remark:             | Temp 22 Humi:52%         |
| Test Standard:      | FCC Part 15C             |
| Tested By:          | Kei Zhang                |
| Reviewed By:        | Terry Yin                |

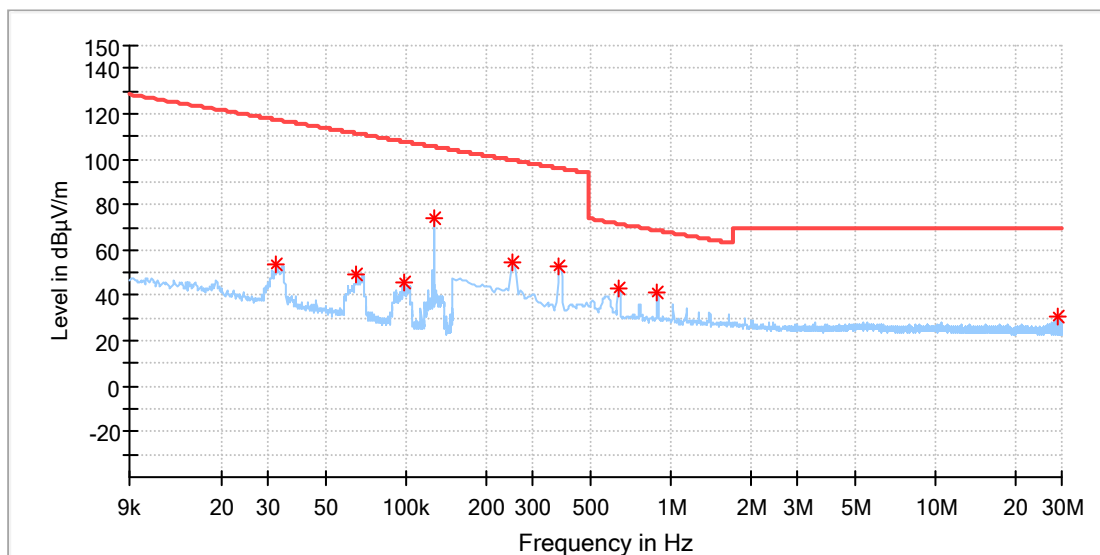

### Critical Freqs


| Frequency (MHz) | MaxPeak (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| 0.032265        | 53.36            | 117.42         | 64.05       | 100.0       | X   | 293.0         | 19.9         |
| 0.064695        | 49.21            | 111.38         | 62.16       | 100.0       | X   | 347.0         | 19.9         |
| 0.097629        | 45.53            | 107.81         | 62.27       | 100.0       | X   | 51.0          | 19.9         |
| 0.127641        | 73.96            | 105.48         | 31.52       | 100.0       | X   | 104.0         | 19.9         |
| 0.250963        | 54.46            | 99.61          | 45.15       | 100.0       | X   | 41.0          | 19.9         |
| 0.378265        | 53.20            | 96.05          | 42.85       | 100.0       | X   | 206.0         | 19.9         |
| 0.637258        | 43.39            | 71.52          | 28.13       | 100.0       | X   | 177.0         | 19.9         |
| 0.891860        | 41.19            | 68.61          | 27.42       | 100.0       | X   | 131.0         | 19.9         |
| 28.849897       | 30.33            | 69.50          | 39.17       | 100.0       | X   | 246.0         | 20.5         |

### Final Result

| Frequency (MHz) | QuasiPeak (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|--------------------|----------------|-------------|-------------|-----|---------------|--------------|
| ---             | ---                | ---            | ---         | ---         |     | ---           | ---          |

## EUT Information

EUT Name: Wireless Charger  
Model: BE-WLESS10WW  
Test Mode: Charging  
Order No/Sample No: 168555685/A004024284-001  
Test Voltage: AC 120V/60Hz  
Remark: Temp 22 Humi:52%  
Test Standard: FCC Part 15C  
Tested By: Kei Zhang  
Reviewed By: Terry Yin

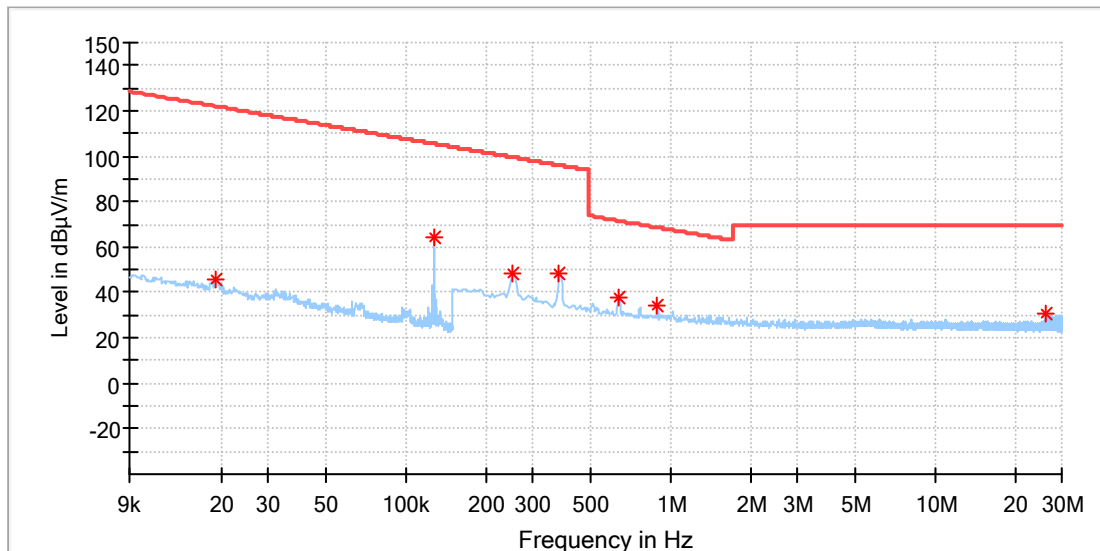

## Critical Freqs


| Frequency (MHz) | MaxPeak (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| 0.019071        | 45.81            | 121.98         | 76.17       | 100.0       | Y   | 184.0         | 19.9         |
| 0.127641        | 64.36            | 105.48         | 41.11       | 100.0       | Y   | 8.0           | 19.9         |
| 0.250963        | 48.57            | 99.61          | 51.04       | 100.0       | Y   | 158.0         | 19.9         |
| 0.378265        | 48.45            | 96.05          | 47.60       | 100.0       | Y   | 306.0         | 19.9         |
| 0.637258        | 37.60            | 71.52          | 33.92       | 100.0       | Y   | 81.0          | 19.9         |
| 0.891860        | 34.03            | 68.61          | 34.58       | 100.0       | Y   | 212.0         | 19.9         |
| 26.044875       | 30.41            | 69.50          | 39.09       | 100.0       | Y   | 237.0         | 20.5         |

## Final Result

| Frequency (MHz) | QuasiPeak (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|--------------------|----------------|-------------|-------------|-----|---------------|--------------|
| ---             | ---                | ---            | ---         | ---         | --- | ---           | ---          |

## EUT Information

|                     |                          |
|---------------------|--------------------------|
| EUT Name:           | Wireless Charger         |
| Model:              | BE-WLESS10WW             |
| Test Mode:          | Charging                 |
| Order No/Sample No: | 168555685/A004024284-001 |
| Test Voltage:       | AC 120V/60Hz             |
| Remark:             | Temp 22 Humi:52%         |
| Test Standard:      | FCC Part 15C             |
| Tested By:          | Kei Zhang                |
| Reviewed By:        | Terry Yin                |

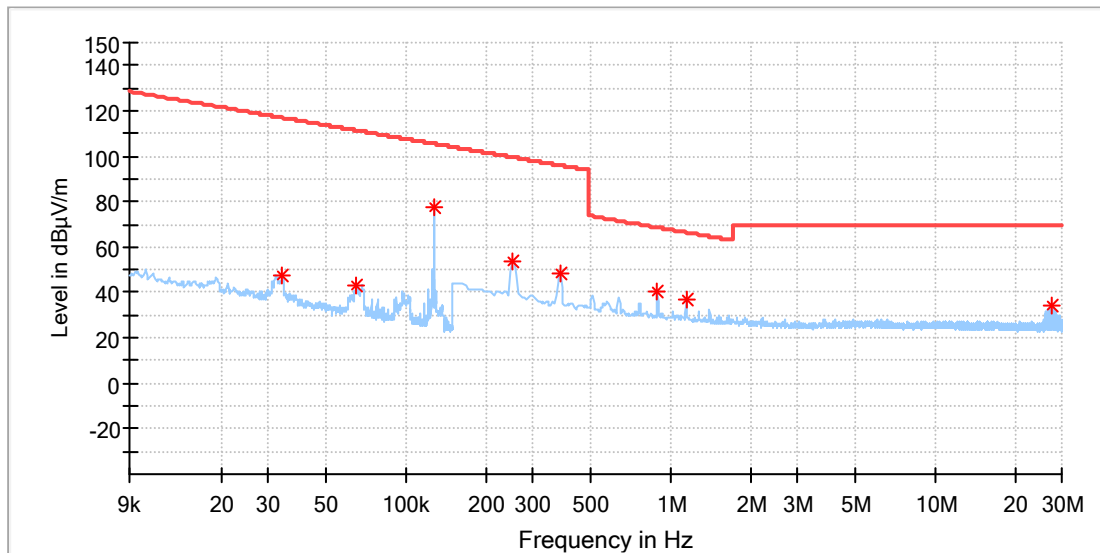

## Critical Freqs

| Frequency (MHz) | MaxPeak (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| 0.033977        | 47.40            | 116.97         | 69.57       | 100.0       | Z   | 142.0         | 19.9         |
| 0.064796        | 43.19            | 111.36         | 68.17       | 100.0       | Z   | 21.0          | 19.9         |
| 0.127440        | 77.32            | 105.49         | 28.17       | 100.0       | Z   | 76.0          | 19.9         |
| 0.250963        | 54.12            | 99.61          | 45.49       | 100.0       | Z   | 83.0          | 19.9         |
| 0.382655        | 47.99            | 95.95          | 47.96       | 100.0       | Z   | 90.0          | 19.9         |
| 0.891860        | 40.37            | 68.61          | 28.24       | 100.0       | Z   | 79.0          | 19.9         |
| 1.146463        | 36.57            | 66.44          | 29.87       | 100.0       | Z   | 76.0          | 19.9         |
| 27.655897       | 34.56            | 69.50          | 34.94       | 100.0       | Z   | 309.0         | 20.5         |


## Final Result

| Frequency (MHz) | QuasiPeak (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|--------------------|----------------|-------------|-------------|-----|---------------|--------------|
| ---             | ---                | ---            | ---         | ---         |     | ---           | ---          |

Wireless Charger (10W)

## EUT Information

|                     |                          |
|---------------------|--------------------------|
| EUT Name:           | Wireless Charger         |
| Model:              | BE-WLESS10WW             |
| Test Mode:          | Charging                 |
| Order No/Sample No: | 168555685/A004024284-001 |
| Test Voltage:       | AC 120V/60Hz             |
| Remark:             | Temp 22 Humi:52%         |
| Test Standard:      | FCC Part 15C             |
| Tested By:          | Kei Zhang                |
| Reviewed By:        | Terry Yin                |

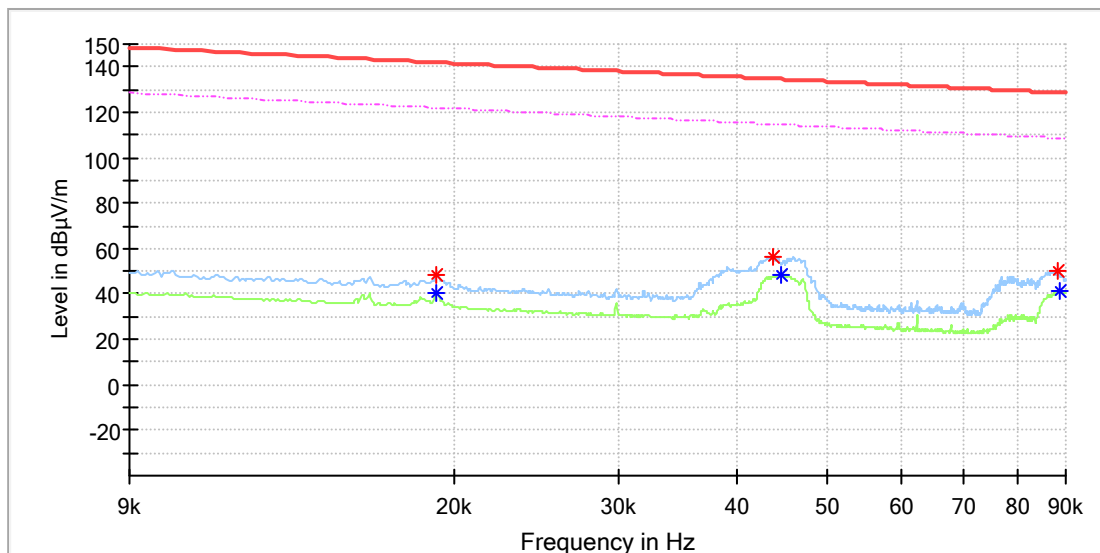


## Critical Freqs

| Frequency (MHz) | MaxPeak (dBμV/m) | Average (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| 0.019183        | 48.31            | ---              | 141.93         | 93.62       | 100.0       | X   | 52.0          | 20.0         |
| 0.019183        | ---              | 40.14            | 121.93         | 81.79       | 100.0       | X   | 52.0          | 20.0         |
| 0.043830        | 56.23            | ---              | 134.76         | 78.53       | 100.0       | X   | 46.0          | 20.0         |
| 0.044582        | ---              | 48.62            | 114.61         | 65.99       | 100.0       | X   | 155.0         | 20.0         |
| 0.088149        | 49.98            | ---              | 128.69         | 78.71       | 100.0       | X   | 69.0          | 20.0         |
| 0.088554        | ---              | 40.98            | 108.65         | 67.67       | 100.0       | X   | 57.0          | 20.0         |

## EUT Information

|                     |                          |
|---------------------|--------------------------|
| EUT Name:           | Wireless Charger         |
| Model:              | BE-WLESS10WW             |
| Test Mode:          | Charging                 |
| Order No/Sample No: | 168555685/A004024284-001 |
| Test Voltage:       | AC 120V/60Hz             |
| Remark:             | Temp 22 Humi:52%         |
| Test Standard:      | FCC Part 15C             |
| Tested By:          | Kei Zhang                |
| Reviewed By:        | Terry Yin                |

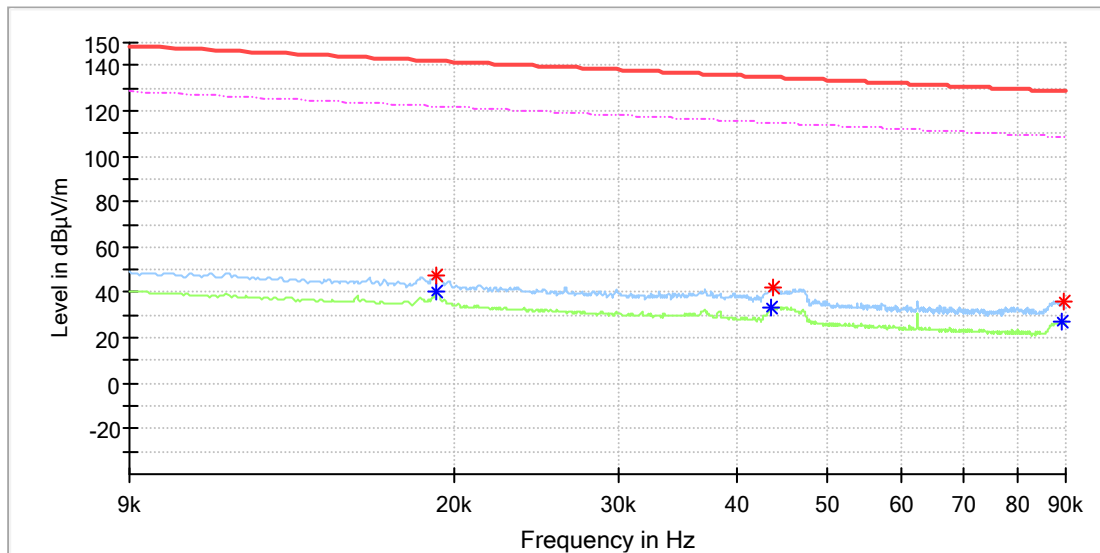


## Critical Freqs

| Frequency (MHz) | MaxPeak (dBμV/m) | Average (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| 0.019183        | 47.54            | ---              | 141.93         | 94.39       | 100.0       | Y   | 124.0         | 20.0         |
| 0.019183        | ---              | 40.02            | 121.93         | 81.91       | 100.0       | Y   | 124.0         | 20.0         |
| 0.043599        | ---              | 33.29            | 114.80         | 81.52       | 100.0       | Y   | 300.0         | 20.0         |
| 0.043714        | 42.36            | ---              | 134.78         | 92.42       | 100.0       | Y   | 214.0         | 20.0         |
| 0.088959        | ---              | 26.87            | 108.61         | 81.74       | 100.0       | Y   | 354.0         | 20.0         |
| 0.089479        | 35.58            | ---              | 128.56         | 92.98       | 100.0       | Y   | 337.0         | 20.0         |



## EUT Information

|                     |                          |
|---------------------|--------------------------|
| EUT Name:           | Wireless Charger         |
| Model:              | BE-WLESS10WW             |
| Test Mode:          | Charging                 |
| Order No/Sample No: | 168555685/A004024284-001 |
| Test Voltage:       | AC 120V/60Hz             |
| Remark:             | Temp 22 Humi:52%         |
| Test Standard:      | FCC Part 15C             |
| Tested By:          | Kei Zhang                |
| Reviewed By:        | Terry Yin                |

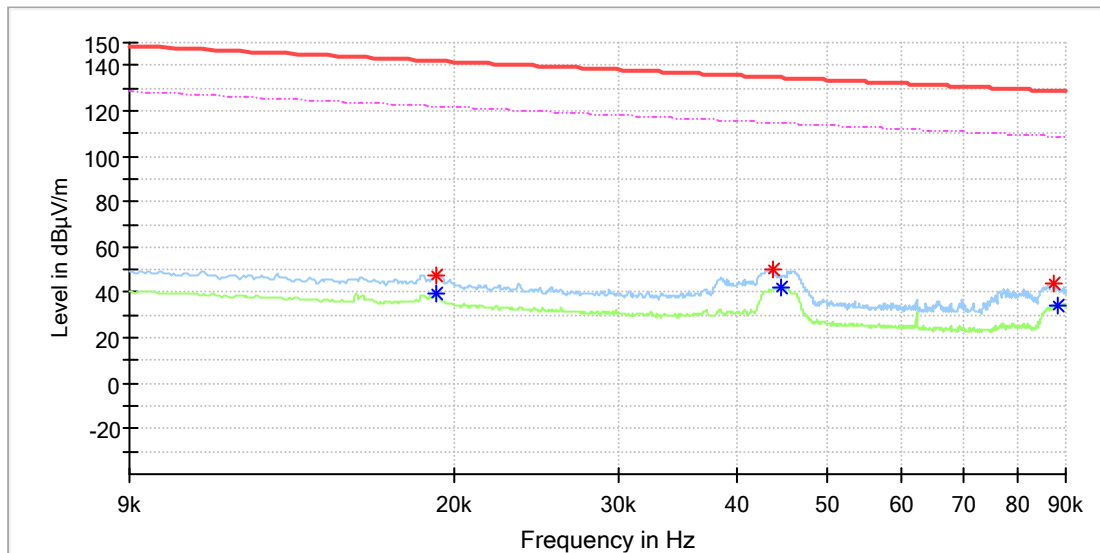


## Critical Freqs

| Frequency (MHz) | MaxPeak (dBμV/m) | Average (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| 0.019183        | 47.92            | ---              | 141.93         | 94.01       | 100.0       | Z   | 278.0         | 20.0         |
| 0.019183        | ---              | 39.73            | 121.93         | 82.20       | 100.0       | Z   | 278.0         | 20.0         |
| 0.043830        | 49.70            | ---              | 134.76         | 85.06       | 100.0       | Z   | 207.0         | 20.0         |
| 0.044756        | ---              | 42.42            | 114.58         | 72.16       | 100.0       | Z   | 195.0         | 20.0         |
| 0.087165        | 44.23            | ---              | 128.79         | 84.56       | 100.0       | Z   | 157.0         | 20.0         |
| 0.088438        | ---              | 34.63            | 108.66         | 74.03       | 100.0       | Z   | 359.0         | 20.0         |

## EUT Information

|                     |                          |
|---------------------|--------------------------|
| EUT Name:           | Wireless Charger         |
| Model:              | BE-WLESS10WW             |
| Test Mode:          | Charging                 |
| Order No/Sample No: | 168555685/A004024284-001 |
| Test Voltage:       | AC 120V/60Hz             |
| Remark:             | Temp 22 Humi:52%         |
| Test Standard:      | FCC Part 15C             |
| Tested By:          | Kei Zhang                |
| Reviewed By:        | Terry Yin                |

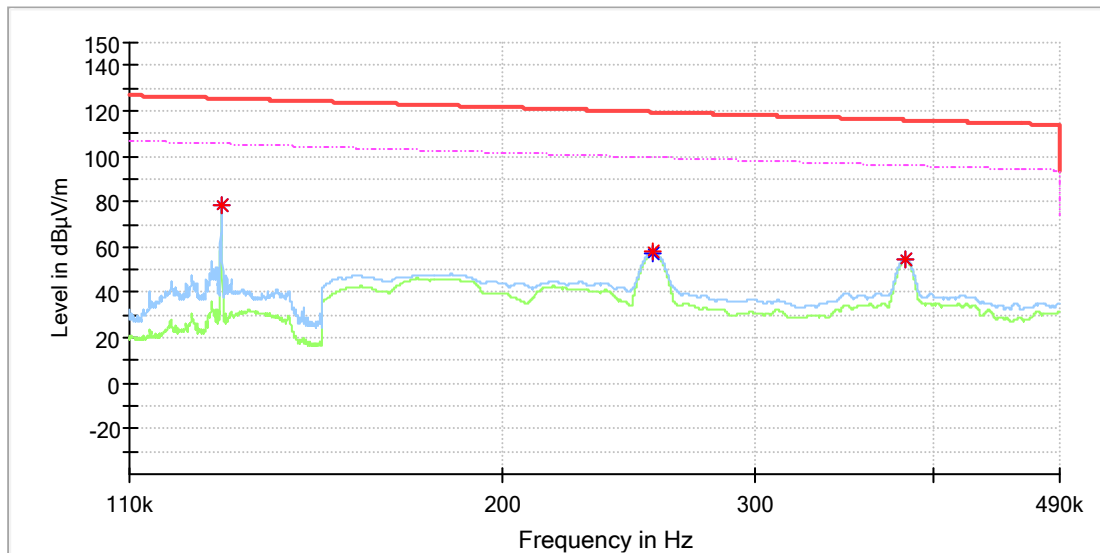


## Critical Freqs

| Frequency (MHz) | MaxPeak (dBμV/m) | Average (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| 0.127514        | ---              | 78.20            | 105.49         | 27.28       | 100.0       | X   | 90.0          | 20.0         |
| 0.127514        | 78.37            | ---              | 125.49         | 47.12       | 100.0       | X   | 90.0          | 20.0         |
| 0.255050        | ---              | 57.21            | 99.47          | 42.26       | 100.0       | X   | 64.0          | 20.0         |
| 0.255100        | 57.70            | ---              | 119.47         | 61.77       | 100.0       | X   | 64.0          | 20.0         |
| 0.382400        | ---              | 54.60            | 95.95          | 41.35       | 100.0       | X   | 204.0         | 20.0         |
| 0.382500        | 54.98            | ---              | 115.95         | 60.97       | 100.0       | X   | 204.0         | 20.0         |

## EUT Information

|                     |                          |
|---------------------|--------------------------|
| EUT Name:           | Wireless Charger         |
| Model:              | BE-WLESS10WW             |
| Test Mode:          | Charging                 |
| Order No/Sample No: | 168555685/A004024284-001 |
| Test Voltage:       | AC 120V/60Hz             |
| Remark:             | Temp 22 Humi:52%         |
| Test Standard:      | FCC Part 15C             |
| Tested By:          | Kei Zhang                |
| Reviewed By:        | Terry Yin                |

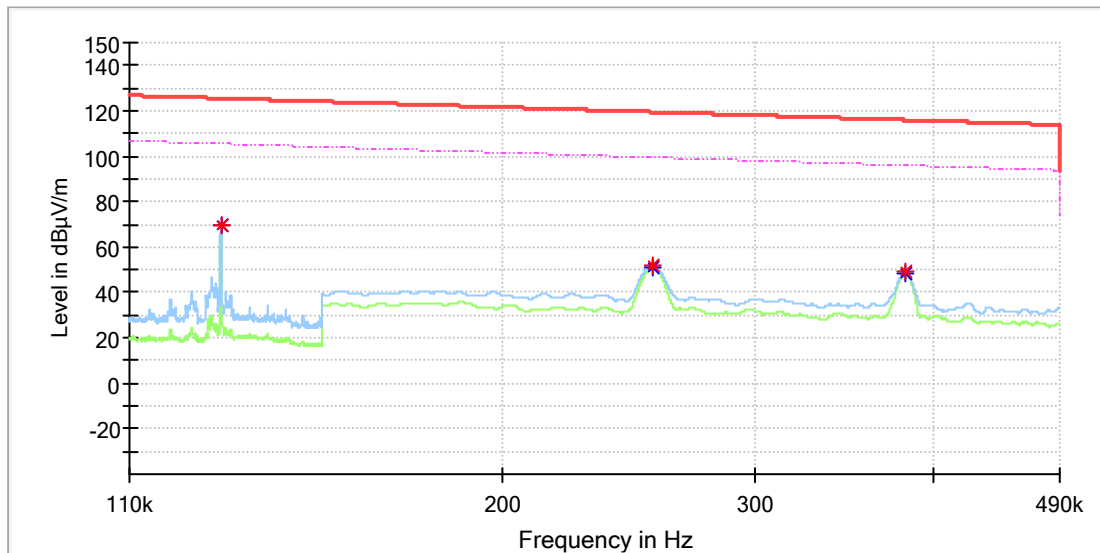


## Critical Freqs

| Frequency (MHz) | MaxPeak (dBμV/m) | Average (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| 0.127457        | 69.83            | ---              | 125.49         | 55.66       | 100.0       | Y   | 359.0         | 20.0         |
| 0.127457        | ---              | 69.64            | 105.49         | 35.85       | 100.0       | Y   | 359.0         | 20.0         |
| 0.254850        | 51.55            | ---              | 119.48         | 67.92       | 100.0       | Y   | 127.0         | 20.0         |
| 0.254950        | ---              | 50.65            | 99.47          | 48.82       | 100.0       | Y   | 127.0         | 20.0         |
| 0.382250        | 49.28            | ---              | 115.96         | 66.68       | 100.0       | Y   | 105.0         | 20.0         |
| 0.382300        | ---              | 48.68            | 95.96          | 47.28       | 100.0       | Y   | 105.0         | 20.0         |

## EUT Information

|                     |                          |
|---------------------|--------------------------|
| EUT Name:           | Wireless Charger         |
| Model:              | BE-WLESS10WW             |
| Test Mode:          | Charging                 |
| Order No/Sample No: | 168555685/A004024284-001 |
| Test Voltage:       | AC 120V/60Hz             |
| Remark:             | Temp 22 Humi:52%         |
| Test Standard:      | FCC Part 15C             |
| Tested By:          | Kei Zhang                |
| Reviewed By:        | Terry Yin                |

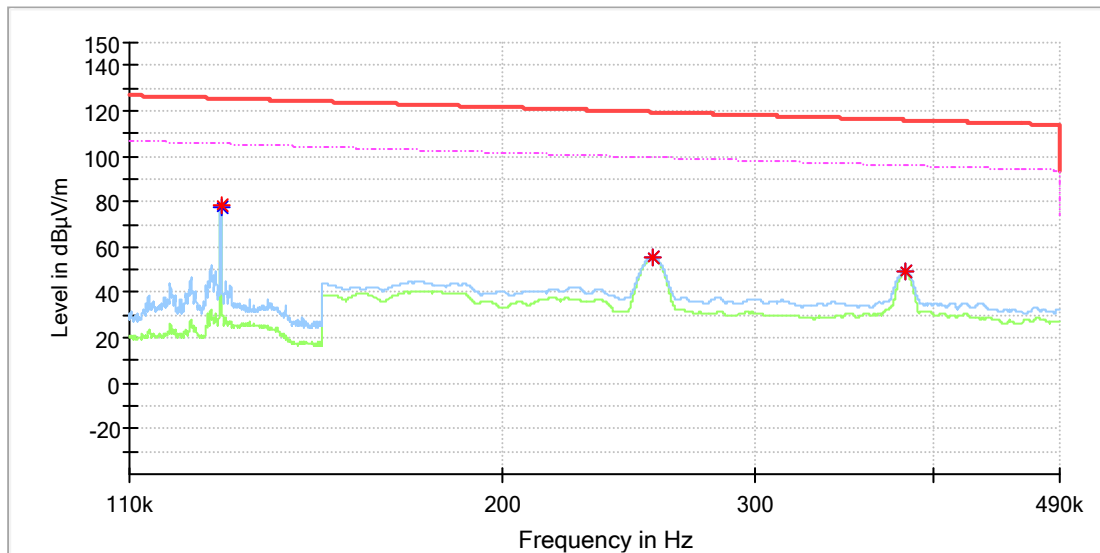


## Critical Freqs

| Frequency (MHz) | MaxPeak (dBμV/m) | Average (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| 0.127400        | 78.14            | ---              | 125.49         | 47.35       | 100.0       | Z   | 73.0          | 20.0         |
| 0.127400        | ---              | 77.98            | 105.49         | 27.52       | 100.0       | Z   | 73.0          | 20.0         |
| 0.254700        | ---              | 55.32            | 99.48          | 44.16       | 100.0       | Z   | 65.0          | 20.0         |
| 0.254750        | 55.67            | ---              | 119.48         | 63.81       | 100.0       | Z   | 65.0          | 20.0         |
| 0.382000        | 49.52            | ---              | 115.96         | 66.44       | 100.0       | Z   | 212.0         | 20.0         |
| 0.382000        | ---              | 49.04            | 95.96          | 46.92       | 100.0       | Z   | 212.0         | 20.0         |

## EUT Information

EUT Name: Wireless Charger  
Model: BE-WLESS10WW  
Test Mode: Charging  
Order No/Sample No: 168555685/A004024284-001  
Test Voltage: AC 120V/60Hz  
Remark: Temp 22 Humi:52%  
Test Standard: FCC Part 15C  
Tested By: Kei Zhang  
Reviewed By: Terry Yin

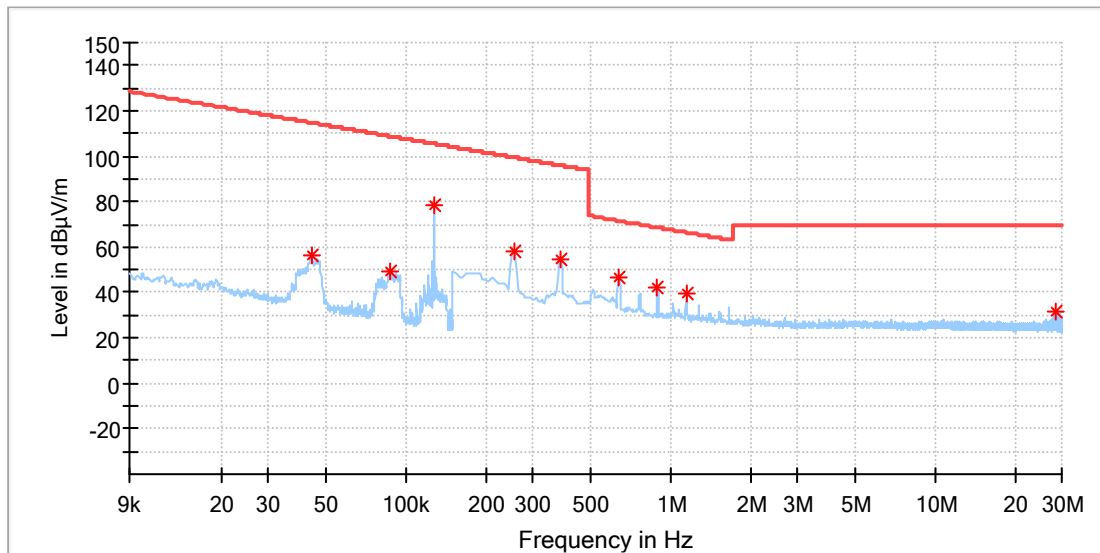

## Critical Freqs


| Frequency (MHz) | MaxPeak (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| 0.043646        | 56.11            | 114.79         | 58.69       | 100.0       | X   | 200.0         | 19.9         |
| 0.087658        | 49.56            | 108.74         | 59.18       | 100.0       | X   | 200.0         | 19.9         |
| 0.127742        | 78.16            | 105.47         | 27.31       | 100.0       | X   | 91.0          | 19.9         |
| 0.255353        | 57.78            | 99.46          | 41.68       | 100.0       | X   | 84.0          | 19.9         |
| 0.382655        | 54.91            | 95.95          | 41.03       | 100.0       | X   | 206.0         | 19.9         |
| 0.637258        | 46.40            | 71.52          | 25.12       | 100.0       | X   | 199.0         | 19.9         |
| 0.891860        | 42.46            | 68.61          | 26.15       | 100.0       | X   | 138.0         | 19.9         |
| 1.146463        | 39.15            | 66.44          | 27.29       | 100.0       | X   | 70.0          | 19.9         |
| 28.467993       | 31.97            | 69.50          | 37.53       | 100.0       | X   | 264.0         | 20.5         |

## Final Result

| Frequency (MHz) | QuasiPeak (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|--------------------|----------------|-------------|-------------|-----|---------------|--------------|
| ---             | ---                | ---            | ---         | ---         | --- | ---           | ---          |

## EUT Information

|                     |                          |
|---------------------|--------------------------|
| EUT Name:           | Wireless Charger         |
| Model:              | BE-WLESS10WW             |
| Test Mode:          | Charging                 |
| Order No/Sample No: | 168555685/A004024284-001 |
| Test Voltage:       | AC 120V/60Hz             |
| Remark:             | Temp 22 Humi:52%         |
| Test Standard:      | FCC Part 15C             |
| Tested By:          | Kei Zhang                |
| Reviewed By:        | Terry Yin                |

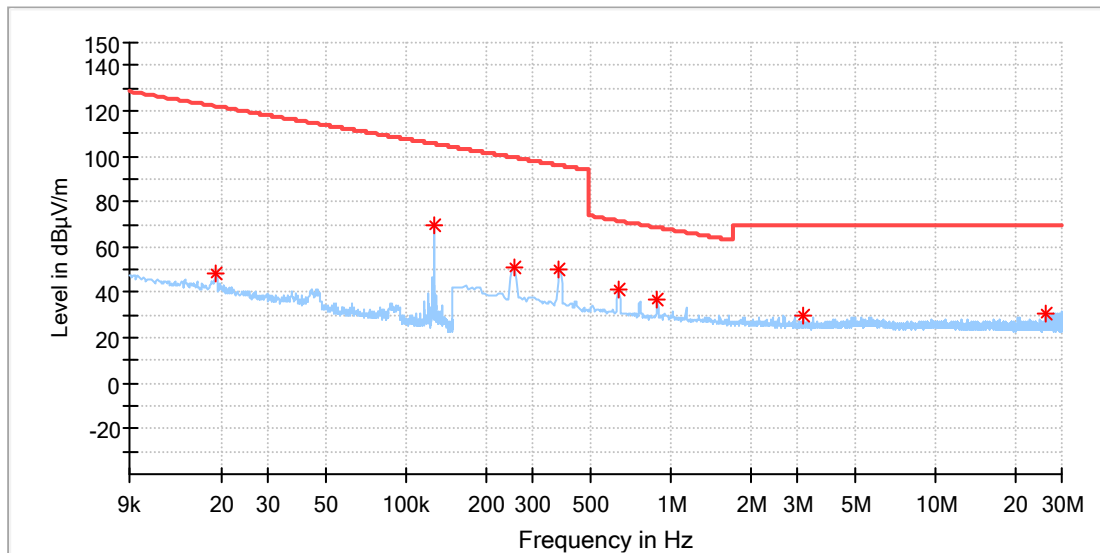

## Critical Freqs


| Frequency (MHz) | MaxPeak (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| 0.019071        | 48.39            | 121.98         | 73.59       | 100.0       | Y   | 331.0         | 19.9         |
| 0.127440        | 69.62            | 105.49         | 35.87       | 100.0       | Y   | 0.0           | 19.9         |
| 0.255353        | 51.23            | 99.46          | 48.22       | 100.0       | Y   | 337.0         | 19.9         |
| 0.378265        | 49.87            | 96.05          | 46.18       | 100.0       | Y   | 110.0         | 19.9         |
| 0.632868        | 40.88            | 71.58          | 30.70       | 100.0       | Y   | 114.0         | 19.9         |
| 0.891860        | 37.15            | 68.61          | 31.46       | 100.0       | Y   | 56.0          | 19.9         |
| 3.183287        | 29.74            | 69.50          | 39.76       | 100.0       | Y   | 160.0         | 20.0         |
| 26.005368       | 30.76            | 69.50          | 38.74       | 100.0       | Y   | 272.0         | 20.5         |

## Final Result

| Frequency (MHz) | QuasiPeak (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|--------------------|----------------|-------------|-------------|-----|---------------|--------------|
| ---             | ---                | ---            | ---         | ---         |     | ---           | ---          |

## EUT Information

|                     |                          |
|---------------------|--------------------------|
| EUT Name:           | Wireless Charger         |
| Model:              | BE-WLESS10WW             |
| Test Mode:          | Charging                 |
| Order No/Sample No: | 168555685/A004024284-001 |
| Test Voltage:       | AC 120V/60Hz             |
| Remark:             | Temp 22 Humi:52%         |
| Test Standard:      | FCC Part 15C             |
| Tested By:          | Kei Zhang                |
| Reviewed By:        | Terry Yin                |

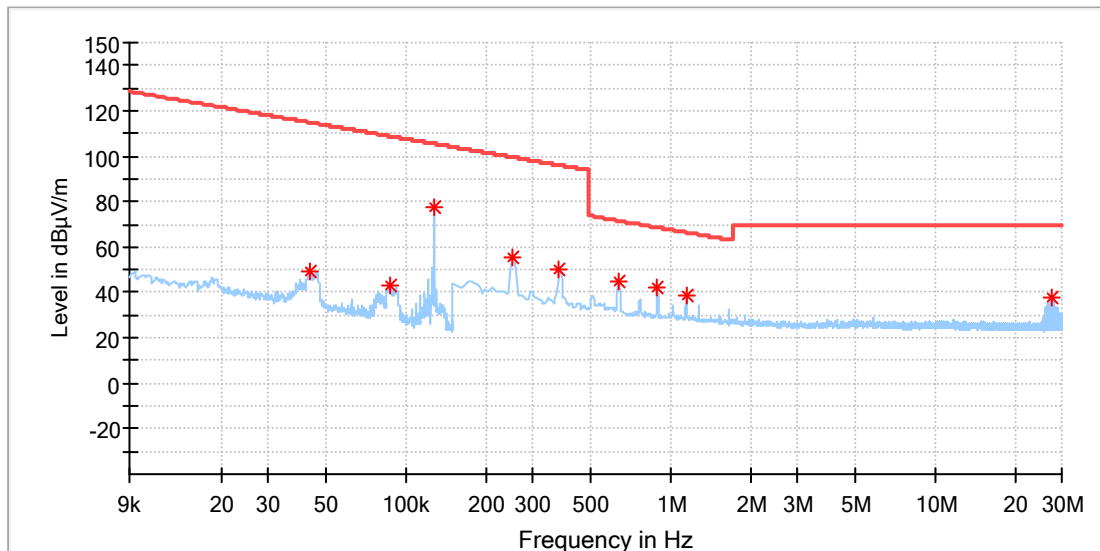

## Critical Freqs


| Frequency (MHz) | MaxPeak (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| 0.043444        | 48.96            | 114.83         | 65.88       | 100.0       | Z   | 262.0         | 19.9         |
| 0.086248        | 43.05            | 108.88         | 65.83       | 100.0       | Z   | 284.0         | 19.9         |
| 0.127541        | 77.86            | 105.49         | 27.62       | 100.0       | Z   | 103.0         | 19.9         |
| 0.250963        | 55.65            | 99.61          | 43.96       | 100.0       | Z   | 72.0          | 19.9         |
| 0.378265        | 49.78            | 96.05          | 46.27       | 100.0       | Z   | 191.0         | 19.9         |
| 0.637258        | 44.41            | 71.52          | 27.12       | 100.0       | Z   | 209.0         | 19.9         |
| 0.891860        | 42.52            | 68.61          | 26.10       | 100.0       | Z   | 134.0         | 19.9         |
| 1.146463        | 38.27            | 66.44          | 28.16       | 100.0       | Z   | 83.0          | 19.9         |
| 27.278382       | 37.58            | 69.50          | 31.92       | 100.0       | Z   | 288.0         | 20.5         |

## Final Result

| Frequency (MHz) | QuasiPeak (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|--------------------|----------------|-------------|-------------|-----|---------------|--------------|
| ---             | ---                | ---            | ---         | ---         | --- | ---           | ---          |

## EUT Information

|                     |                          |
|---------------------|--------------------------|
| EUT Name:           | Wireless Charger         |
| Model:              | BE-WLESS10WW             |
| Test Mode:          | Charging                 |
| Order No/Sample No: | 168555685/A004024284-001 |
| Test Voltage:       | AC 120V/60Hz             |
| Remark:             | Temp 22 Humi:52%         |
| Test Standard:      | FCC Part 15C             |
| Tested By:          | Kei Zhang                |
| Reviewed By:        | Terry Yin                |

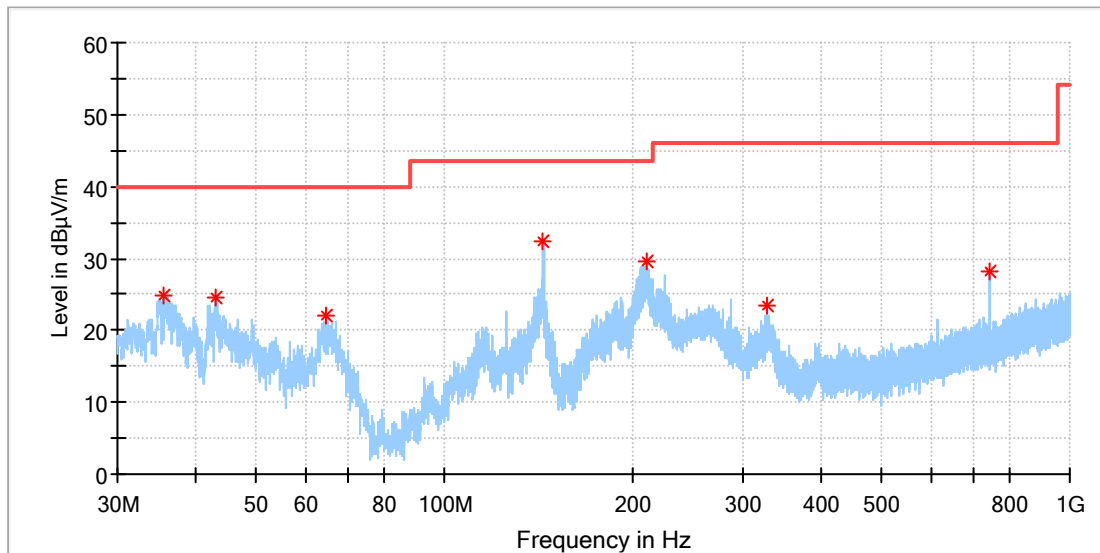

## Critical Freqs

| Frequency (MHz) | MaxPeak (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| 35.558846       | 24.91            | 40.00          | 15.09       | 100.0       | H   | 0.0           | -21.8        |
| 43.206923       | 24.42            | 40.00          | 15.58       | 100.0       | H   | 159.0         | -19.4        |
| 64.882692       | 21.91            | 40.00          | 18.09       | 100.0       | H   | 182.0         | -20.2        |
| 144.012308      | 32.44            | 43.50          | 11.06       | 100.0       | H   | 0.0           | -22.4        |
| 209.972308      | 29.70            | 43.50          | 13.80       | 100.0       | H   | 0.0           | -18.9        |
| 328.386923      | 23.37            | 46.00          | 22.63       | 100.0       | H   | 127.0         | -15.4        |
| 742.465000      | 28.13            | 46.00          | 17.87       | 100.0       | H   | 111.0         | -7.2         |


## Final Result

| Frequency (MHz) | QuasiPeak (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|--------------------|----------------|-------------|-------------|-----|---------------|--------------|
| ---             | ---                | ---            | ---         | ---         | --- | ---           | ---          |



## EUT Information

|                     |                          |
|---------------------|--------------------------|
| EUT Name:           | Wireless Charger         |
| Model:              | BE-WLESS10WW             |
| Test Mode:          | Charging                 |
| Order No/Sample No: | 168555685/A004024284-001 |
| Test Voltage:       | AC 120V/60Hz             |
| Remark:             | Temp 22 Humi:52%         |
| Test Standard:      | FCC Part 15C             |
| Tested By:          | Kei Zhang                |
| Reviewed By:        | Terry Yin                |

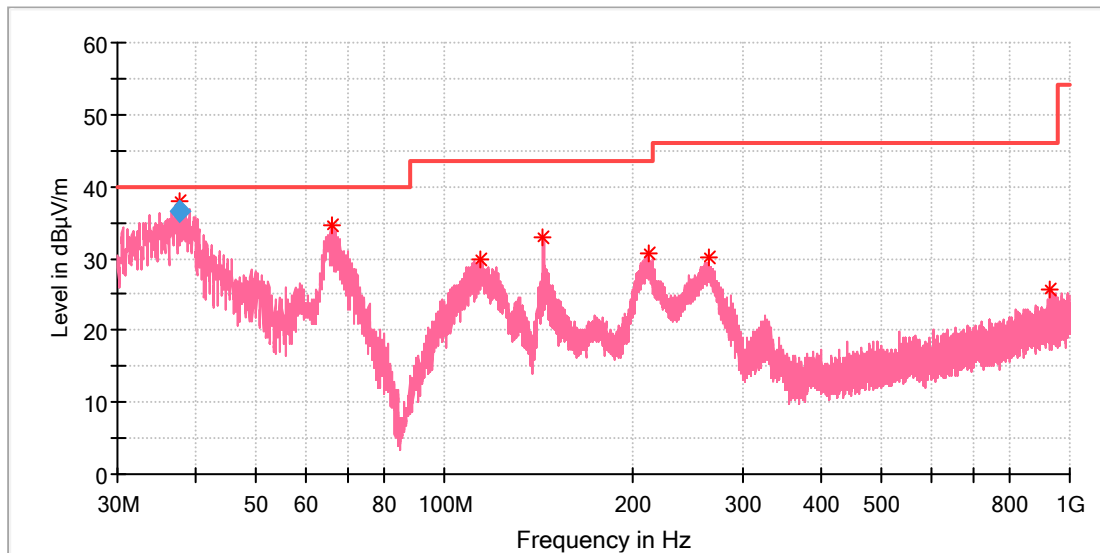

## Critical Freqs

| Frequency (MHz) | MaxPeak (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| 37.805346       | 38.04            | 40.00          | 1.96        | 100.0       | V   | 0.0           | -20.9        |
| 65.852692       | 34.57            | 40.00          | 5.43        | 100.0       | V   | 84.0          | -20.5        |
| 113.942308      | 29.73            | 43.50          | 13.77       | 100.0       | V   | 306.0         | -19.7        |
| 144.012308      | 32.91            | 43.50          | 10.59       | 100.0       | V   | 58.0          | -22.4        |
| 211.427308      | 30.77            | 43.50          | 12.73       | 100.0       | V   | 123.0         | -18.8        |
| 264.255000      | 30.03            | 46.00          | 15.97       | 100.0       | V   | 306.0         | -17.0        |
| 928.070769      | 25.80            | 46.00          | 20.20       | 100.0       | V   | 179.0         | -4.5         |


## Final Result

| Frequency (MHz) | QuasiPeak (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|--------------------|----------------|-------------|-------------|-----|---------------|--------------|
| 37.805346       | 36.44              | 40.00          | 3.56        | 100.0       | V   | 0.0           | -20.9        |

Standby mode

## EUT Information

|                     |                          |
|---------------------|--------------------------|
| EUT Name:           | Wireless Charger         |
| Model:              | BE-WLESS10WW             |
| Test Mode:          | Standby                  |
| Order No/Sample No: | 168555685/A004024284-001 |
| Test Voltage:       | AC 120V/60Hz             |
| Remark:             | Temp 22 Humi:52%         |
| Test Standard:      | FCC Part 15C             |
| Tested By:          | Kei Zhang                |
| Reviewed By:        | Terry Yin                |

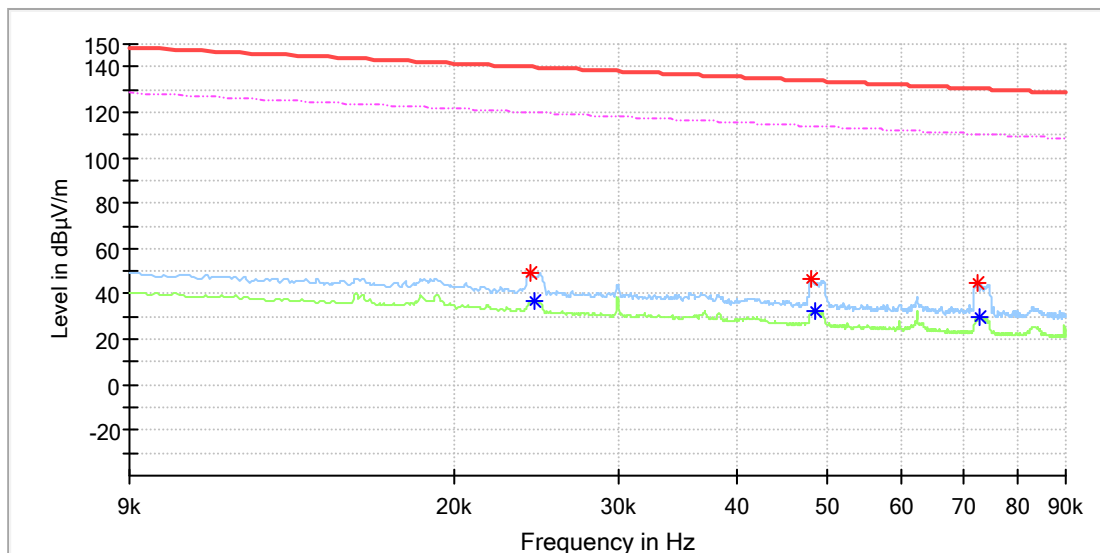


## Critical Freqs

| Frequency (MHz) | MaxPeak (dBµV/m) | Average (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| 0.024159        | 49.13            | ---              | 139.93         | 90.80       | 100.0       | X   | 0.0           | 20.0         |
| 0.024332        | ---              | 37.11            | 119.87         | 82.76       | 100.0       | X   | 110.0         | 20.0         |
| 0.048227        | 46.60            | ---              | 133.93         | 87.32       | 100.0       | X   | 0.0           | 20.0         |
| 0.048690        | ---              | 32.87            | 113.84         | 80.97       | 100.0       | X   | 0.0           | 20.0         |
| 0.072296        | 44.47            | ---              | 130.41         | 85.95       | 100.0       | X   | 0.0           | 20.0         |
| 0.072701        | ---              | 30.08            | 110.36         | 80.28       | 100.0       | X   | 49.0          | 20.0         |

## EUT Information

EUT Name: Wireless Charger  
Model: BE-WLESS10WW  
Test Mode: Standby  
Order No/Sample No: 168555685/A004024284-001  
Test Voltage: AC 120V/60Hz  
Remark: Temp 22 Humi:52%  
Test Standard: FCC Part 15C  
Tested By: Kei Zhang  
Reviewed By: Terry Yin

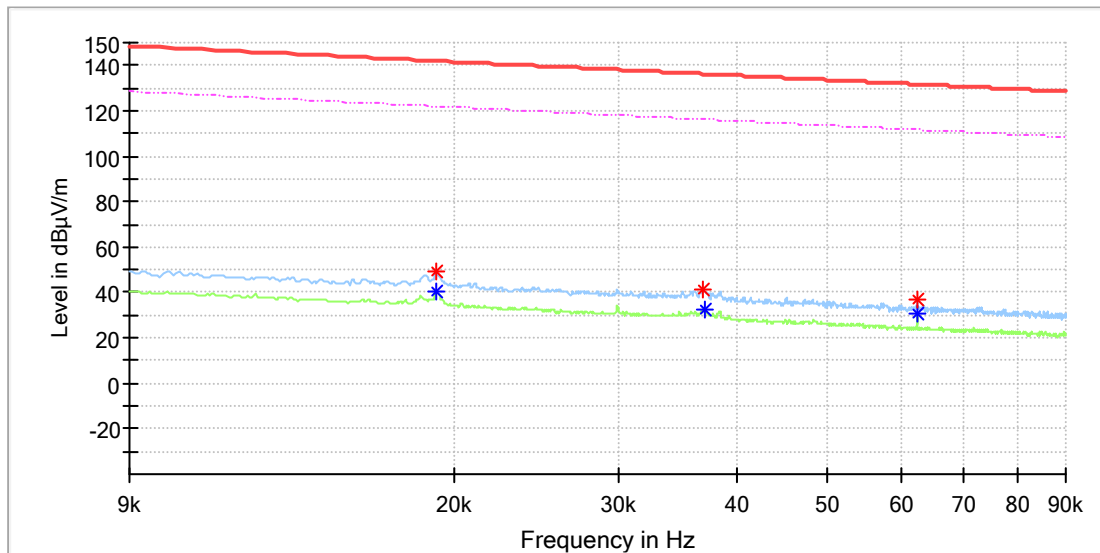


## Critical Freqs

| Frequency (MHz) | MaxPeak (dBμV/m) | Average (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| 0.019125        | 48.83            | ---              | 141.96         | 93.12       | 100.0       | Y   | 30.0          | 20.0         |
| 0.019183        | ---              | 40.32            | 121.93         | 81.61       | 100.0       | Y   | 8.0           | 20.0         |
| 0.036887        | 41.09            | ---              | 136.25         | 95.16       | 100.0       | Y   | 201.0         | 20.0         |
| 0.037119        | ---              | 32.56            | 116.20         | 83.64       | 100.0       | Y   | 53.0          | 20.0         |
| 0.062460        | 36.47            | ---              | 131.68         | 95.21       | 100.0       | Y   | 300.0         | 20.0         |
| 0.062460        | ---              | 30.97            | 111.68         | 80.72       | 100.0       | Y   | 300.0         | 20.0         |

## EUT Information

|                     |                          |
|---------------------|--------------------------|
| EUT Name:           | Wireless Charger         |
| Model:              | BE-WLESS10WW             |
| Test Mode:          | Standby                  |
| Order No/Sample No: | 168555685/A004024284-001 |
| Test Voltage:       | AC 120V/60Hz             |
| Remark:             | Temp 22 Humi:52%         |
| Test Standard:      | FCC Part 15C             |
| Tested By:          | Kei Zhang                |
| Reviewed By:        | Terry Yin                |

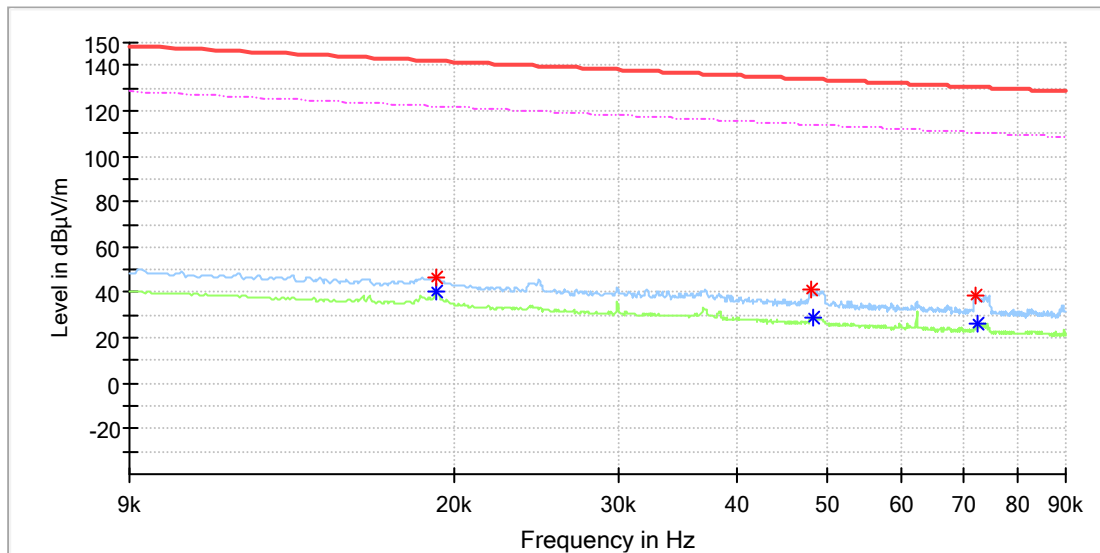


## Critical Freqs

| Frequency (MHz) | MaxPeak (dBμV/m) | Average (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| 0.019125        | 46.94            | ---              | 141.96         | 95.02       | 100.0       | Z   | 154.0         | 20.0         |
| 0.019183        | ---              | 40.07            | 121.93         | 81.86       | 100.0       | Z   | 223.0         | 20.0         |
| 0.048111        | 41.08            | ---              | 133.95         | 92.87       | 100.0       | Z   | 242.0         | 20.0         |
| 0.048401        | ---              | 29.11            | 113.90         | 84.78       | 100.0       | Z   | 0.0           | 20.0         |
| 0.072238        | 38.71            | ---              | 130.42         | 91.71       | 100.0       | Z   | 172.0         | 20.0         |
| 0.072354        | ---              | 26.44            | 110.41         | 83.97       | 100.0       | Z   | 172.0         | 20.0         |

## EUT Information

|                     |                          |
|---------------------|--------------------------|
| EUT Name:           | Wireless Charger         |
| Model:              | BE-WLESS10WW             |
| Test Mode:          | Standby                  |
| Order No/Sample No: | 168555685/A004024284-001 |
| Test Voltage:       | AC 120V/60Hz             |
| Remark:             | Temp 22 Humi:52%         |
| Test Standard:      | FCC Part 15C             |
| Tested By:          | Kei Zhang                |
| Reviewed By:        | Terry Yin                |

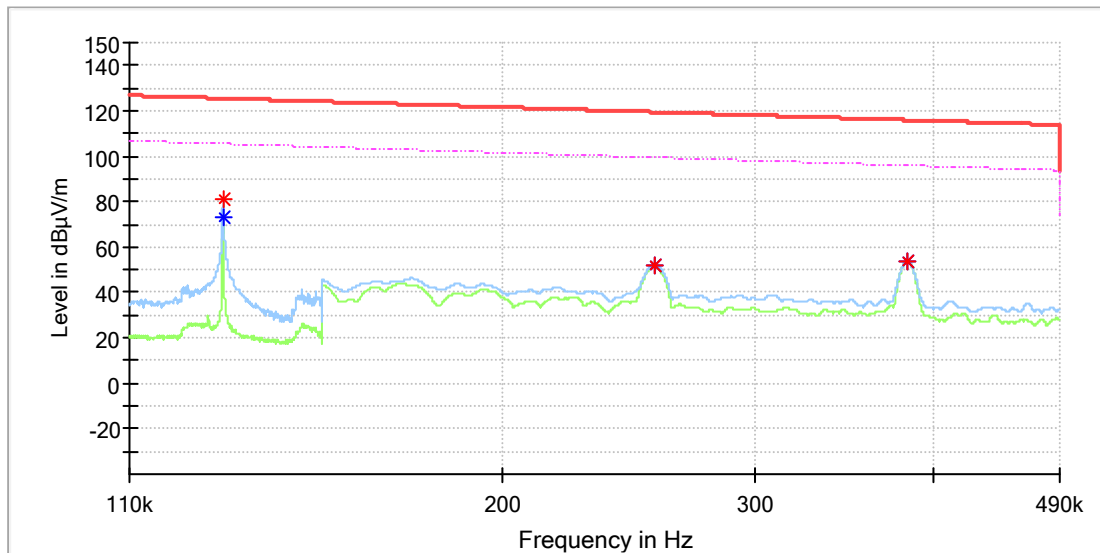


## Critical Freqs

| Frequency (MHz) | MaxPeak (dBμV/m) | Average (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| 0.127886        | ---              | 72.71            | 105.46         | 32.75       | 100.0       | X   | 29.0          | 20.0         |
| 0.127886        | 81.02            | ---              | 125.46         | 44.44       | 100.0       | X   | 29.0          | 20.0         |
| 0.255650        | ---              | 51.60            | 99.45          | 47.84       | 100.0       | X   | 293.0         | 20.0         |
| 0.255700        | 52.34            | ---              | 119.45         | 67.11       | 100.0       | X   | 293.0         | 20.0         |
| 0.383650        | 54.10            | ---              | 115.92         | 61.82       | 100.0       | X   | 64.0          | 20.0         |
| 0.383650        | ---              | 53.73            | 95.92          | 42.19       | 100.0       | X   | 64.0          | 20.0         |

## EUT Information

|                     |                          |
|---------------------|--------------------------|
| EUT Name:           | Wireless Charger         |
| Model:              | BE-WLESS10WW             |
| Test Mode:          | Standby                  |
| Order No/Sample No: | 168555685/A004024284-001 |
| Test Voltage:       | AC 120V/60Hz             |
| Remark:             | Temp 22 Humi:52%         |
| Test Standard:      | FCC Part 15C             |
| Tested By:          | Kei Zhang                |
| Reviewed By:        | Terry Yin                |

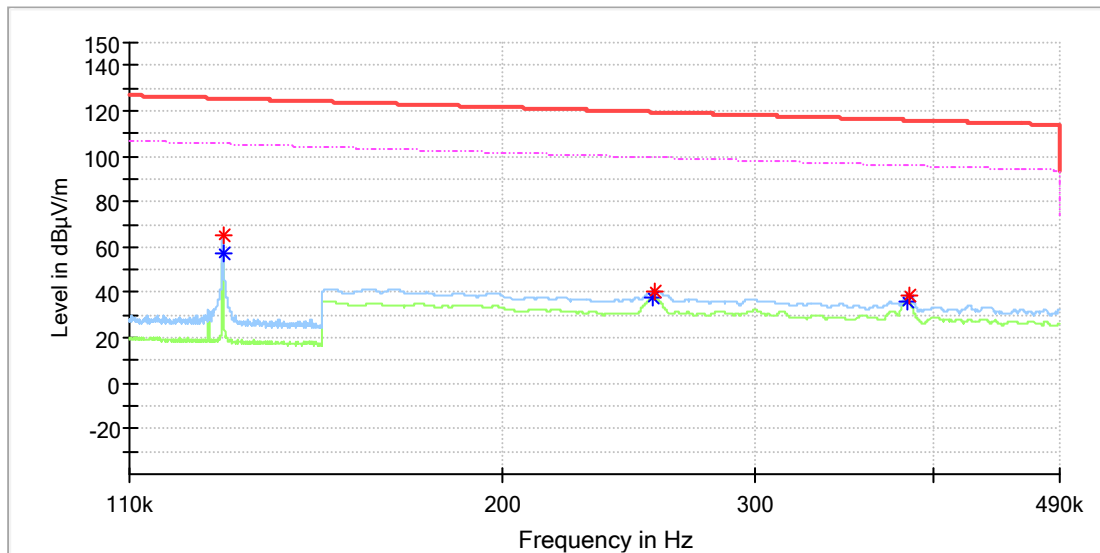


## Critical Freqs

| Frequency (MHz) | MaxPeak (dBμV/m) | Average (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| 0.127829        | 65.09            | ---              | 125.47         | 60.38       | 100.0       | Y   | 137.0         | 20.0         |
| 0.127829        | ---              | 56.86            | 105.47         | 48.60       | 100.0       | Y   | 137.0         | 20.0         |
| 0.255050        | ---              | 37.70            | 99.47          | 61.77       | 100.0       | Y   | 96.0          | 20.0         |
| 0.255950        | 40.81            | ---              | 119.44         | 78.62       | 100.0       | Y   | 96.0          | 20.0         |
| 0.383300        | ---              | 36.24            | 95.93          | 59.69       | 100.0       | Y   | 329.0         | 20.0         |
| 0.384300        | 38.94            | ---              | 115.91         | 76.97       | 100.0       | Y   | 329.0         | 20.0         |

## EUT Information

|                     |                          |
|---------------------|--------------------------|
| EUT Name:           | Wireless Charger         |
| Model:              | BE-WLESS10WW             |
| Test Mode:          | Standby                  |
| Order No/Sample No: | 168555685/A004024284-001 |
| Test Voltage:       | AC 120V/60Hz             |
| Remark:             | Temp 22 Humi:52%         |
| Test Standard:      | FCC Part 15C             |
| Tested By:          | Kei Zhang                |
| Reviewed By:        | Terry Yin                |

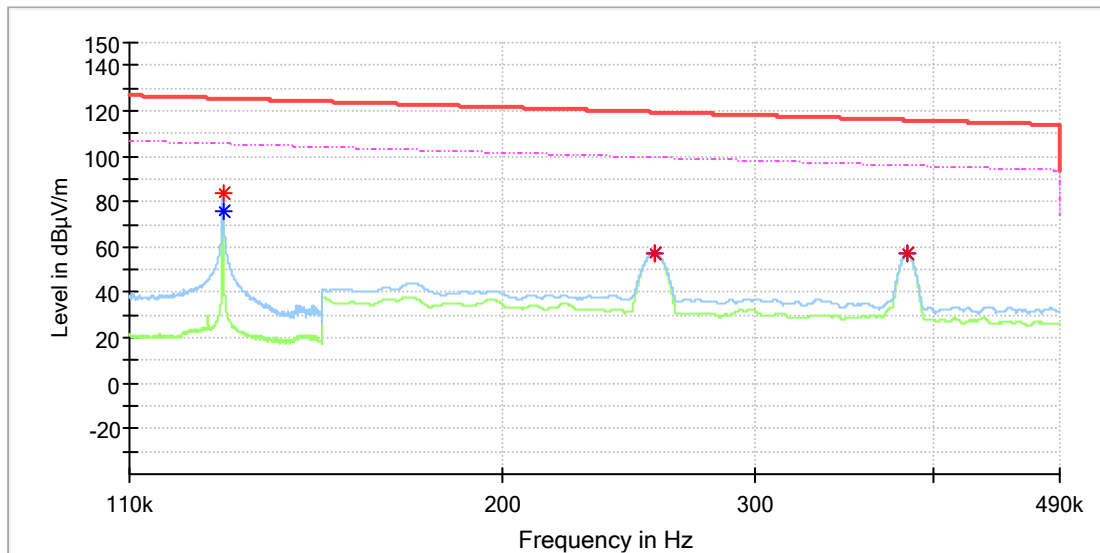


## Critical Freqs

| Frequency (MHz) | MaxPeak (dBμV/m) | Average (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| 0.127829        | ---              | 75.71            | 105.47         | 29.76       | 100.0       | Z   | 29.0          | 20.0         |
| 0.127829        | 84.04            | ---              | 125.47         | 41.42       | 100.0       | Z   | 29.0          | 20.0         |
| 0.255450        | 57.52            | ---              | 119.46         | 61.93       | 100.0       | Z   | 189.0         | 20.0         |
| 0.255550        | ---              | 57.15            | 99.45          | 42.30       | 100.0       | Z   | 189.0         | 20.0         |
| 0.383550        | 56.96            | ---              | 115.93         | 58.96       | 100.0       | Z   | 109.0         | 20.0         |
| 0.383550        | ---              | 56.81            | 95.93          | 39.12       | 100.0       | Z   | 109.0         | 20.0         |

## EUT Information

|                     |                          |
|---------------------|--------------------------|
| EUT Name:           | Wireless Charger         |
| Model:              | BE-WLESS10WW             |
| Test Mode:          | Charging                 |
| Order No/Sample No: | 168555685/A004024284-001 |
| Test Voltage:       | AC 120V/60Hz             |
| Remark:             | Temp 22 Humi:52%         |
| Test Standard:      | FCC Part 15C             |
| Tested By:          | Kei Zhang                |
| Reviewed By:        | Terry Yin                |

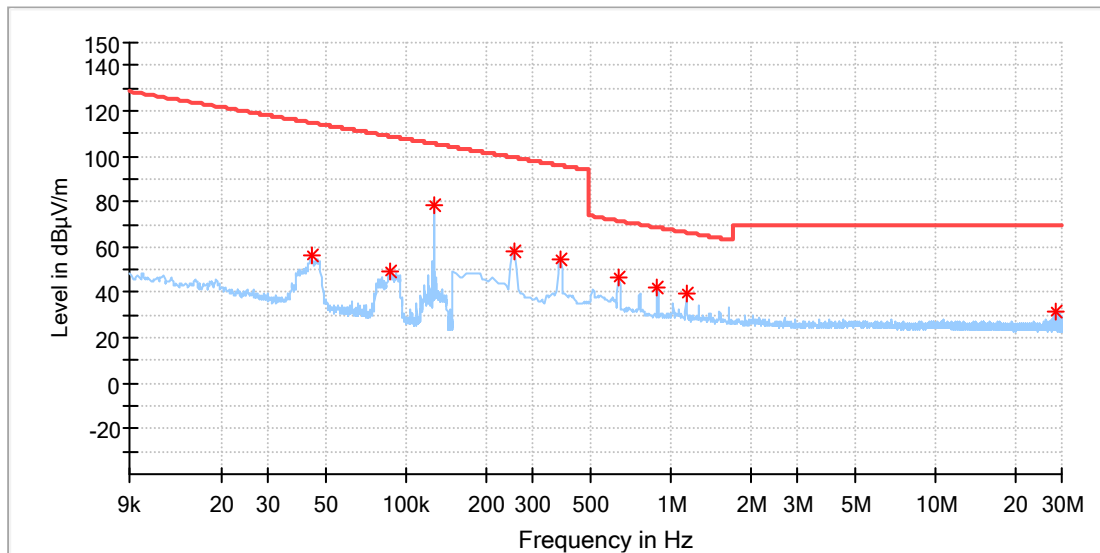

## Critical Freqs

| Frequency (MHz) | MaxPeak (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| 0.043646        | 56.11            | 114.79         | 58.69       | 100.0       | X   | 200.0         | 19.9         |
| 0.087658        | 49.56            | 108.74         | 59.18       | 100.0       | X   | 200.0         | 19.9         |
| 0.127742        | 78.16            | 105.47         | 27.31       | 100.0       | X   | 91.0          | 19.9         |
| 0.255353        | 57.78            | 99.46          | 41.68       | 100.0       | X   | 84.0          | 19.9         |
| 0.382655        | 54.91            | 95.95          | 41.03       | 100.0       | X   | 206.0         | 19.9         |
| 0.637258        | 46.40            | 71.52          | 25.12       | 100.0       | X   | 199.0         | 19.9         |
| 0.891860        | 42.46            | 68.61          | 26.15       | 100.0       | X   | 138.0         | 19.9         |
| 1.146463        | 39.15            | 66.44          | 27.29       | 100.0       | X   | 70.0          | 19.9         |
| 28.467993       | 31.97            | 69.50          | 37.53       | 100.0       | X   | 264.0         | 20.5         |


## Final Result

| Frequency (MHz) | QuasiPeak (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|--------------------|----------------|-------------|-------------|-----|---------------|--------------|
| ---             | ---                | ---            | ---         | ---         | --- | ---           | ---          |



## EUT Information

|                     |                          |
|---------------------|--------------------------|
| EUT Name:           | Wireless Charger         |
| Model:              | BE-WLESS10WW             |
| Test Mode:          | Charging                 |
| Order No/Sample No: | 168555685/A004024284-001 |
| Test Voltage:       | AC 120V/60Hz             |
| Remark:             | Temp 22 Humi:52%         |
| Test Standard:      | FCC Part 15C             |
| Tested By:          | Kei Zhang                |
| Reviewed By:        | Terry Yin                |

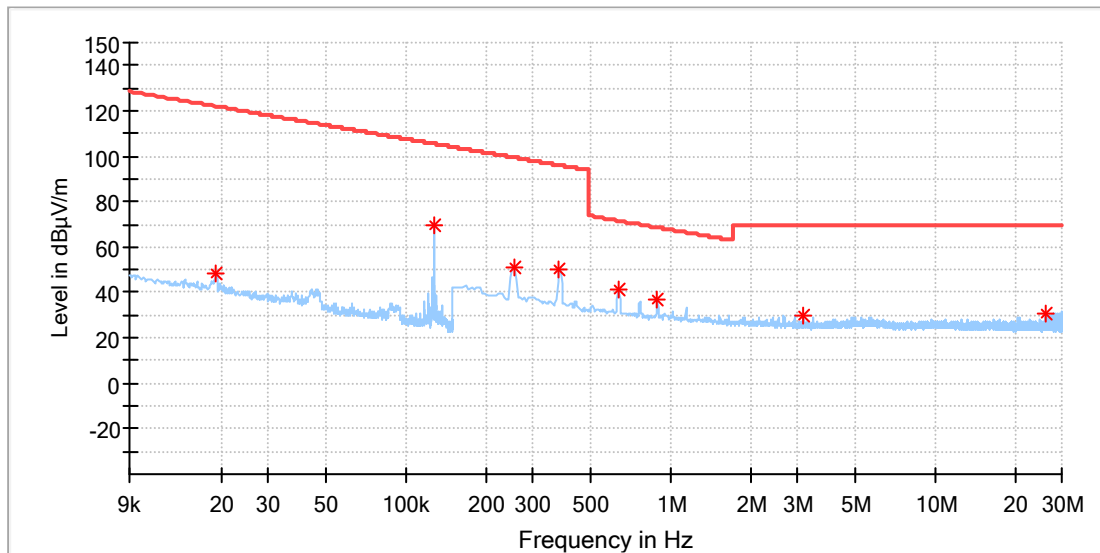

## Critical Freqs


| Frequency (MHz) | MaxPeak (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| 0.019071        | 48.39            | 121.98         | 73.59       | 100.0       | Y   | 331.0         | 19.9         |
| 0.127440        | 69.62            | 105.49         | 35.87       | 100.0       | Y   | 0.0           | 19.9         |
| 0.255353        | 51.23            | 99.46          | 48.22       | 100.0       | Y   | 337.0         | 19.9         |
| 0.378265        | 49.87            | 96.05          | 46.18       | 100.0       | Y   | 110.0         | 19.9         |
| 0.632868        | 40.88            | 71.58          | 30.70       | 100.0       | Y   | 114.0         | 19.9         |
| 0.891860        | 37.15            | 68.61          | 31.46       | 100.0       | Y   | 56.0          | 19.9         |
| 3.183287        | 29.74            | 69.50          | 39.76       | 100.0       | Y   | 160.0         | 20.0         |
| 26.005368       | 30.76            | 69.50          | 38.74       | 100.0       | Y   | 272.0         | 20.5         |

## Final Result

| Frequency (MHz) | QuasiPeak (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|--------------------|----------------|-------------|-------------|-----|---------------|--------------|
| ---             | ---                | ---            | ---         | ---         |     | ---           | ---          |

## EUT Information

|                     |                          |
|---------------------|--------------------------|
| EUT Name:           | Wireless Charger         |
| Model:              | BE-WLESS10WW             |
| Test Mode:          | Charging                 |
| Order No/Sample No: | 168555685/A004024284-001 |
| Test Voltage:       | AC 120V/60Hz             |
| Remark:             | Temp 22 Humi:52%         |
| Test Standard:      | FCC Part 15C             |
| Tested By:          | Kei Zhang                |
| Reviewed By:        | Terry Yin                |

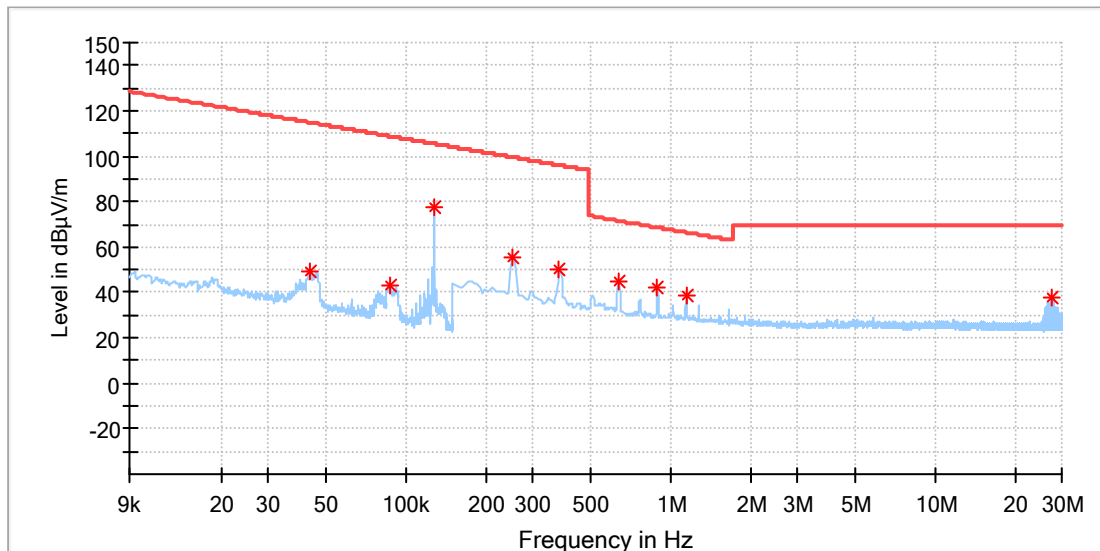

## Critical Freqs


| Frequency (MHz) | MaxPeak (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| 0.043444        | 48.96            | 114.83         | 65.88       | 100.0       | Z   | 262.0         | 19.9         |
| 0.086248        | 43.05            | 108.88         | 65.83       | 100.0       | Z   | 284.0         | 19.9         |
| 0.127541        | 77.86            | 105.49         | 27.62       | 100.0       | Z   | 103.0         | 19.9         |
| 0.250963        | 55.65            | 99.61          | 43.96       | 100.0       | Z   | 72.0          | 19.9         |
| 0.378265        | 49.78            | 96.05          | 46.27       | 100.0       | Z   | 191.0         | 19.9         |
| 0.637258        | 44.41            | 71.52          | 27.12       | 100.0       | Z   | 209.0         | 19.9         |
| 0.891860        | 42.52            | 68.61          | 26.10       | 100.0       | Z   | 134.0         | 19.9         |
| 1.146463        | 38.27            | 66.44          | 28.16       | 100.0       | Z   | 83.0          | 19.9         |
| 27.278382       | 37.58            | 69.50          | 31.92       | 100.0       | Z   | 288.0         | 20.5         |

## Final Result

| Frequency (MHz) | QuasiPeak (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|--------------------|----------------|-------------|-------------|-----|---------------|--------------|
| ---             | ---                | ---            | ---         | ---         | --- | ---           | ---          |

## EUT Information

|                     |                          |
|---------------------|--------------------------|
| EUT Name:           | Wireless Charger         |
| Model:              | BE-WLESS10WW             |
| Test Mode:          | Charging                 |
| Order No/Sample No: | 168555685/A004024284-001 |
| Test Voltage:       | AC 120V/60Hz             |
| Remark:             | Temp 22 Humi:52%         |
| Test Standard:      | FCC Part 15C             |
| Tested By:          | Kei Zhang                |
| Reviewed By:        | Terry Yin                |

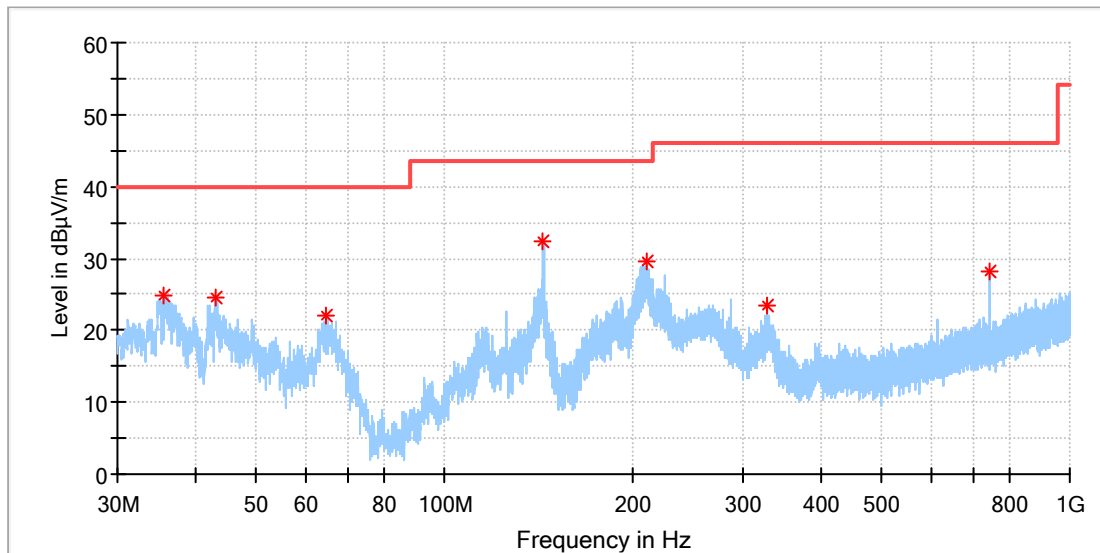

## Critical Freqs


| Frequency (MHz) | MaxPeak (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| 35.558846       | 24.91            | 40.00          | 15.09       | 100.0       | H   | 0.0           | -21.8        |
| 43.206923       | 24.42            | 40.00          | 15.58       | 100.0       | H   | 159.0         | -19.4        |
| 64.882692       | 21.91            | 40.00          | 18.09       | 100.0       | H   | 182.0         | -20.2        |
| 144.012308      | 32.44            | 43.50          | 11.06       | 100.0       | H   | 0.0           | -22.4        |
| 209.972308      | 29.70            | 43.50          | 13.80       | 100.0       | H   | 0.0           | -18.9        |
| 328.386923      | 23.37            | 46.00          | 22.63       | 100.0       | H   | 127.0         | -15.4        |
| 742.465000      | 28.13            | 46.00          | 17.87       | 100.0       | H   | 111.0         | -7.2         |

## Final Result

| Frequency (MHz) | QuasiPeak (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|--------------------|----------------|-------------|-------------|-----|---------------|--------------|
| ---             | ---                | ---            | ---         | ---         | --- | ---           | ---          |

## EUT Information

|                     |                          |
|---------------------|--------------------------|
| EUT Name:           | Wireless Charger         |
| Model:              | BE-WLESS10WW             |
| Test Mode:          | Charging                 |
| Order No/Sample No: | 168555685/A004024284-001 |
| Test Voltage:       | AC 120V/60Hz             |
| Remark:             | Temp 22 Humi:52%         |
| Test Standard:      | FCC Part 15C             |
| Tested By:          | Kei Zhang                |
| Reviewed By:        | Terry Yin                |

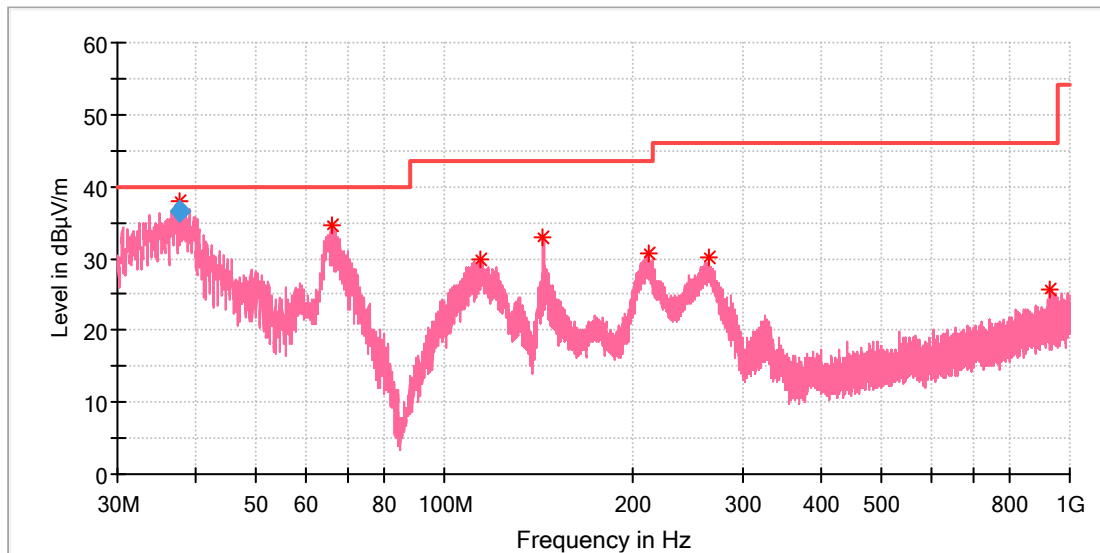

## Critical Freqs

| Frequency (MHz) | MaxPeak (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| 37.805346       | 38.04            | 40.00          | 1.96        | 100.0       | V   | 0.0           | -20.9        |
| 65.852692       | 34.57            | 40.00          | 5.43        | 100.0       | V   | 84.0          | -20.5        |
| 113.942308      | 29.73            | 43.50          | 13.77       | 100.0       | V   | 306.0         | -19.7        |
| 144.012308      | 32.91            | 43.50          | 10.59       | 100.0       | V   | 58.0          | -22.4        |
| 211.427308      | 30.77            | 43.50          | 12.73       | 100.0       | V   | 123.0         | -18.8        |
| 264.255000      | 30.03            | 46.00          | 15.97       | 100.0       | V   | 306.0         | -17.0        |
| 928.070769      | 25.80            | 46.00          | 20.20       | 100.0       | V   | 179.0         | -4.5         |


## Final Result

| Frequency (MHz) | QuasiPeak (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|--------------------|----------------|-------------|-------------|-----|---------------|--------------|
| 37.805346       | 36.44              | 40.00          | 3.56        | 100.0       | V   | 0.0           | -20.9        |

### Appendix A.3: Test Results of Conducted Emission on AC Mains

## EUT Information

|                     |                                         |
|---------------------|-----------------------------------------|
| EUT Name:           | Wireless Charger                        |
| Order Number:       | 168555685 P01909945                     |
| Model:              | BE-WLESS10WW                            |
| Test Mode:          | Charging by adapter + Wireless Charging |
| Test Voltage:       | AC 120V/60Hz                            |
| Test Standard:      | FCC Part 15                             |
| Test By:/Review By: | Simon Feng/Murphy Chen                  |
| Tem./Hum./Pressure: | 24.9°C/50.4%/101kPa                     |
| Remark:             | SR2                                     |

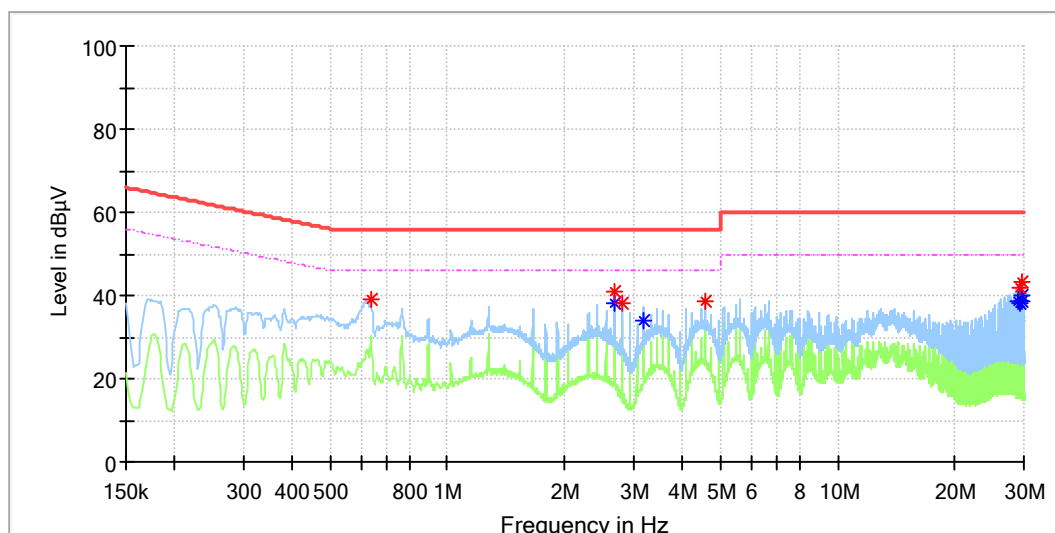

## Critical Freqs


| Frequency (MHz) | MaxPeak (dBμV) | Average (dBμV) | Limit (dBμV) | Margin (dB) | Line | Corr. (dB) |
|-----------------|----------------|----------------|--------------|-------------|------|------------|
| 0.634           | 39.18          | ---            | 56.00        | 16.82       | L1   | 10.2       |
| 2.677           | 41.14          | ---            | 56.00        | 14.86       | L1   | 10.3       |
| 2.679           | ---            | 38.31          | 46.00        | 7.69        | L1   | 10.3       |
| 2.807           | 37.96          | ---            | 56.00        | 18.04       | L1   | 10.3       |
| 3.188           | ---            | 34.06          | 46.00        | 11.94       | L1   | 10.3       |
| 4.591           | 38.56          | ---            | 56.00        | 17.44       | L1   | 10.4       |
| 29.085          | ---            | 38.52          | 50.00        | 11.48       | L1   | 11.4       |
| 29.212          | 42.00          | ---            | 60.00        | 18.00       | L1   | 11.4       |
| 29.212          | ---            | 38.30          | 50.00        | 11.70       | L1   | 11.4       |
| 29.595          | ---            | 40.03          | 50.00        | 9.97        | L1   | 11.4       |
| 29.597          | 43.48          | ---            | 60.00        | 16.52       | L1   | 11.4       |
| 29.723          | ---            | 38.53          | 50.00        | 11.47       | L1   | 11.4       |

## Final Result

[illegible]

## EUT Information

|                     |                                         |
|---------------------|-----------------------------------------|
| EUT Name:           | Wireless Charger                        |
| Order Number:       | 168555685 P01909945                     |
| Model:              | BE-WLESS10WW                            |
| Test Mode:          | Charging by adapter + Wireless Charging |
| Test Voltage:       | AC 120V/60Hz                            |
| Test Standard:      | FCC Part 15                             |
| Test By:/Review By: | Simon Feng/Murphy Chen                  |
| Tem./Hum./Pressure: | 24.9°C/50.4%/101kPa                     |
| Remark:             | SR2                                     |

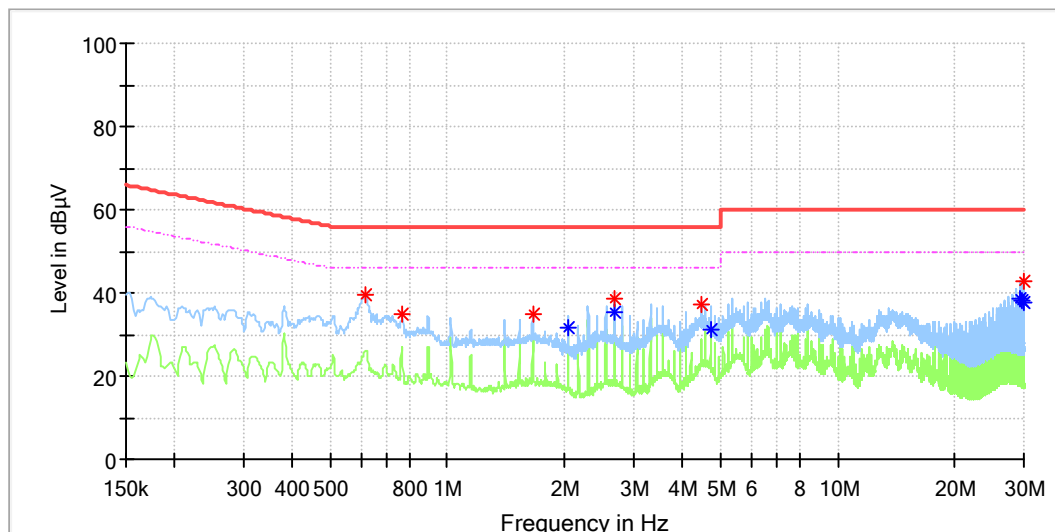

## Critical\_Freqs

| Frequency<br>(MHz) | MaxPeak<br>(dBμV) | Average<br>(dBμV) | Limit<br>(dBμV) | Margin<br>(dB) | Line | Corr.<br>(dB) |
|--------------------|-------------------|-------------------|-----------------|----------------|------|---------------|
| 0.619              | 39.56             | ---               | 56.00           | 16.44          | N    | 10.3          |
| 0.765              | 34.94             | ---               | 56.00           | 21.06          | N    | 10.3          |
| 1.656              | 34.89             | ---               | 56.00           | 21.11          | N    | 10.3          |
| 2.039              | ---               | 31.47             | 46.00           | 14.53          | N    | 10.3          |
| 2.676              | ---               | 35.58             | 46.00           | 10.42          | N    | 10.3          |
| 2.677              | 38.50             | ---               | 56.00           | 17.50          | N    | 10.3          |
| 4.462              | 37.30             | ---               | 56.00           | 18.70          | N    | 10.4          |
| 4.715              | ---               | 31.32             | 46.00           | 14.68          | N    | 10.4          |
| 29.315             | ---               | 38.58             | 50.00           | 11.42          | N    | 11.4          |
| 29.824             | ---               | 38.04             | 50.00           | 11.96          | N    | 11.4          |
| 29.950             | 42.88             | ---               | 60.00           | 17.12          | N    | 11.4          |
| 29.952             | ---               | 37.89             | 50.00           | 12.11          | N    | 11.4          |

## Final Result

| Frequency<br>(MHz) | QuasiPeak<br>(dBμV) | CAverage<br>(dBμV) | Limit<br>(dBμV) | Margin<br>(dB) | Meas. Time<br>(ms) | Bandwidth<br>(kHz) | Line | Corr.<br>(dB) |
|--------------------|---------------------|--------------------|-----------------|----------------|--------------------|--------------------|------|---------------|
| 100.0              | 100.0               | 100.0              | 100.0           | 0.0            | 100.0              | 100.0              |      |               |