


FCC Radio Test Report

FCC ID: A4Z-B0028

Report No. : eLAB-FCC-2-2407X001
Equipment : Body Camera
Model Name : DrivePro Body 40, DrivePro Body 4XXXXXX, TS1TDPB40A, TS512GDPB40A, TS256GDPB40A, TS128GDPB40A, TS64GDPB40A, TSXXXXDPB4XXXXXX (The "X" in the Model Number could be defined as A-Z, 0-9, -, _, or blank for marketing differentiation)
Brand Name : Transcend
Applicant : TRANSCEND INFORMATION INC.
Address : No.70, XingZhong Rd., NeiHu Dist., TAIPEI, 114, Taiwan
Radio Function : WLAN 2.4 GHz
FCC Rule Part(s) : FCC CFR Title 47, Part 15, Subpart C (15.247)
Measurement : ANSI C63.10-2013
Procedure(s)
Date of Receipt : 2024/7/4
Date of Test : 2024/7/4~2024/8/2
Issued Date : 2024/9/4

The above equipment has been tested and found in compliance with the requirement of the above standards by eTest certification Laboratory Inc. hereinafter referred to as "eLAB".

Prepared by

:

Ray Chen, Engineer



Approved by

:

Sam Chuang, Director



eTest certification Laboratory Inc.

64 Lane 169, Sec. 2, Datong Rd., Xizhi Dist., New Taipei City 221 Taiwan

Tel: +886-2-8692-6160 Fax: +886-2-2641-8698

Declaration

eLAB represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with standards traceable to international standard(s) and/or national standard(s).

eLAB's reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **eLAB** shall have no liability for any declarations, inferences or generalizations drawn by the client or others from **eLAB** issued reports.

This report is the confidential property of the client. As a mutual protection to the clients, the public and ourselves, the test report shall not be reproduced, except in full, without our written approval.

eLAB's laboratory quality assurance procedures are in compliance with the **ISO/IEC 17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

eLAB is not responsible for the sampling stage, so the results only apply to the sample as received.

The information, data and test plan are provided by manufacturer which may affect the validity of results, so it is manufacturer's responsibility to ensure that the apparatus meets the essential requirements of applied standards and in all the possible configurations as representative of its intended use.

Limitation

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

Please note that the measurement uncertainty is provided for informational purpose only and are not use in determining the Pass/Fail results.

CONTENTS

REVISION HISTORY	5
1 SUMMARY OF TEST RESULTS	6
1.1 TEST FACILITY	7
1.2 MEASUREMENT UNCERTAINTY	7
1.3 DUTY CYCLE	8
2 GENERAL INFORMATION	9
2.1 DESCRIPTION OF EUT	9
2.2 TEST MODES	11
2.3 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	12
2.4 SUPPORT UNITS	13
3 AC POWER LINE CONDUCTED EMISSIONS TEST	14
3.1 LIMIT	14
3.2 TEST PROCEDURE	14
3.3 TEST SETUP	15
3.4 TEST RESULT	15
4 RADIATED EMISSIONS TEST	16
4.1 LIMIT	16
4.2 TEST PROCEDURE	17
4.3 TEST SETUP	17
4.4 EUT OPERATING CONDITIONS	19
4.5 TEST RESULT – BELOW 30 MHZ	19
4.6 TEST RESULT – 30 MHZ TO 1 GHZ	19
4.7 TEST RESULT – ABOVE 1 GHZ	19
5 BANDWIDTH TEST	20
5.1 LIMIT	20
5.2 TEST PROCEDURE	20
5.3 TEST SETUP	20
5.4 EUT OPERATING CONDITIONS	20
5.5 TEST RESULT	20
6 OUTPUT POWER TEST	21
6.1 LIMIT	21
6.2 TEST PROCEDURE	21
6.3 TEST SETUP	21
6.4 EUT OPERATING CONDITIONS	21
6.5 TEST RESULT	21
7 POWER SPECTRAL DENSITY	22
7.1 LIMIT	22
7.2 TEST PROCEDURE	22
7.3 TEST SETUP	22
7.4 EUT OPERATING CONDITIONS	22
7.5 TEST RESULT	22
8 ANTENNA CONDUCTED SPURIOUS EMISSIONS TEST	23
8.1 LIMIT	23
8.2 TEST PROCEDURE	23
8.3 TEST SETUP	23
8.4 EUT OPERATING CONDITIONS	23
8.5 TEST RESULT	23

9	LIST OF MEASURING EQUIPMENTS	24
10	EUT TEST PHOTO	26
11	EUT PHOTOS	26
APPENDIX A	AC POWER LINE CONDUCTED EMISSIONS	27
APPENDIX B	RADIATED EMISSIONS - 30 MHZ TO 1 GHZ	29
APPENDIX C	RADIATED EMISSIONS - ABOVE 1 GHZ	31
APPENDIX D	BANDWIDTH	55
APPENDIX E	OUTPUT POWER	58
APPENDIX F	POWER SPECTRAL DENSITY	59
APPENDIX G	ANTENNA CONDUCTED SPURIOUS EMISSIONS	62

REVISION HISTORY

Report No.	Version	Description	Issued Date	Note
eLAB-FCC-2-2407X001	R00	Original Report.	2024/9/4	Valid

1 SUMMARY OF TEST RESULTS

Test procedures according to the technical standards.

Standard(s) Section	Description	Result	Remark
15.207	AC Power Line Conducted Emissions	Pass	-----
15.205 15.209 15.247(d)	Radiated Emissions	Pass	-----
15.247(a)	Bandwidth	Pass	-----
15.247(b)	Output Power	Pass	-----
15.247(e)	Power Spectral Density	Pass	-----
15.247(d)	Antenna conducted Spurious Emission	Pass	-----
15.203	Antenna Requirement	Pass	-----

NOTE:

- (1) "N/A" denotes test is not applicable in this Test Report.
- (2) The report format version is FR15CWL2.4_V1.0

1.1 TEST FACILITY

The test locations stated below are under the TAF Accreditation number is 4045. The satellite facilities under the test firm used to collect the test data in this report are:

1-2F, No.91, Ln. 298, Wengong 1st Rd., Guishan Dist., Taoyuan City, Taiwan

C01 CB03 CB02

1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k = 2$, providing a level of confidence of approximately 95 %. The measurement instrumentation uncertainty considerations contained in CISPR 16-4-2. The eLab measurement uncertainty is less than the CISPR 16-4-2 U_{cisp} requirement.

A. AC power line conducted emissions test:

Test Site	Method	Measurement Frequency Range	U (dB)
C01	CISPR	150 kHz ~ 30MHz	3.3

B. Radiated emissions test:

Test Site	Method	Measurement Frequency Range	Ant. H / V	U (dB)
CB03	CISPR	0.009 kHz ~ 30 MHz	-	2.84
		30 MHz ~ 1000 MHz	H	3.12
			V	3.92
		1 GHz ~ 6 GHz	H	4.71
			V	4.90
		6 GHz ~ 18 GHz	H	4.72
			V	4.63
		18 GHz ~ 40GHz	-	4.06

Test Site	Method	Measurement Frequency Range	Ant. H / V	U (dB)
CB02	CISPR	1 GHz ~ 6 GHz	H	4.9
			V	4.8
		6GHz ~ 18GHz	H	4.8
			V	4.9
		18GHz ~40GHz	-	4.6

C. Conducted test:

Test Item	U, (dB)
Occupied Bandwidth	7.2%
Output power	0.3669
Power Spectral Density	0.6590
Conducted Spurious emissions	0.5416
Conducted Band edges	0.5335

NOTE:



Unless specifically mentioned, the uncertainty of measurement has not been taken into account to declare the compliance or non-compliance to the specification.

1.3 DUTY CYCLE

If duty cycle is $\geq 98\%$, duty factor is not required.

If duty cycle is $< 98\%$, duty factor shall be considered.

Remark	Delta 1			Delta 2	On Time/Period	10 log(1/Duty Cycle)
Mode	ON (ms)	Numbers (ON)	On Time (B) (ms)	Period (ON+OFF) (ms)	Duty Cycle (%)	Duty Factor (dB)
IEEE 802.11b	8.416	1	8.416	8.521	98.77%	0.05
IEEE 802.11g	1.396	1	1.396	1.500	93.07%	0.31
IEEE 802.11n (HT20)	1.307	1	1.307	1.409	92.76%	0.33

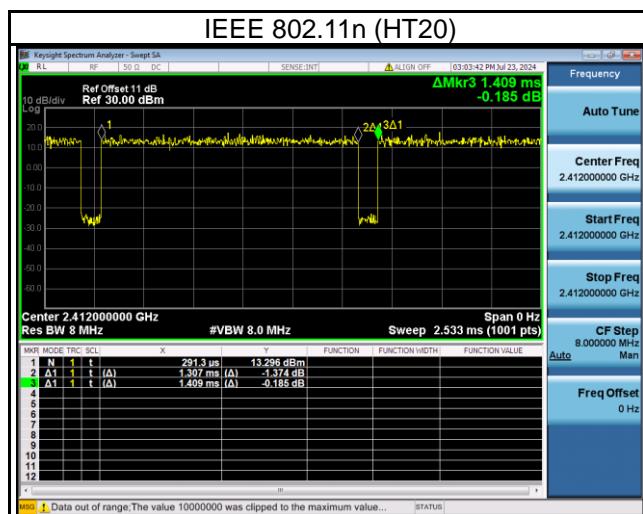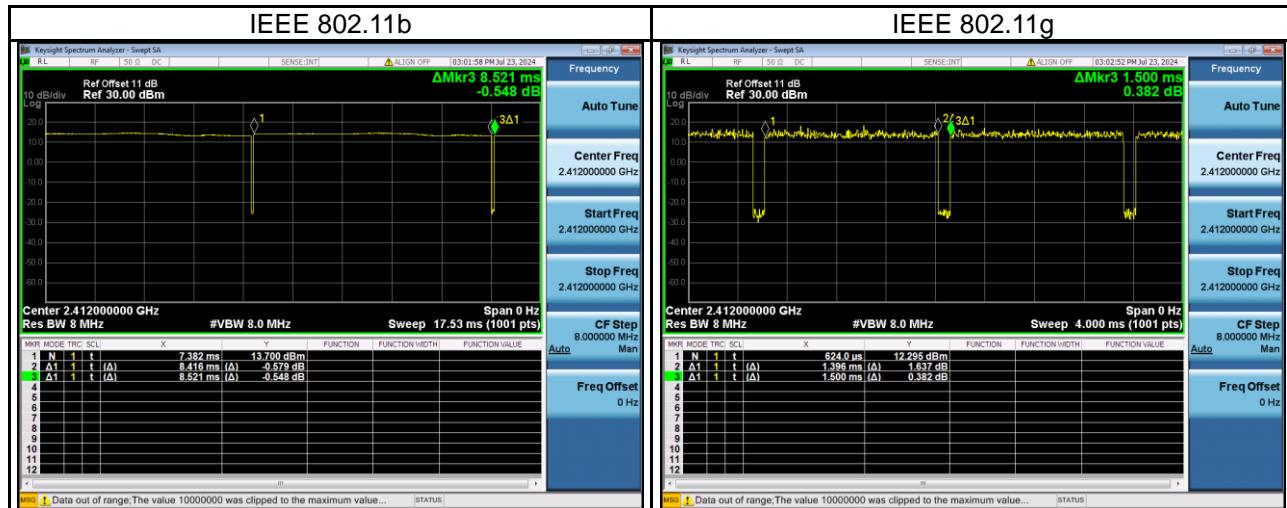

2 GENERAL INFORMATION

2.1 DESCRIPTION OF EUT

Equipment	Body Camera
Model Name	DrivePro Body 40, DrivePro Body 4XXXXXX, TS1TDPB40A, TS512GDPB40A, TS256GDPB40A, TS128GDPB40A, TS64GDPB40A, TSXXXXDPB4XXXXXX (The "X" in the Model Number could be defined as A-Z, 0-9, -, _, or blank for marketing differentiation)
Brand Name	Transcend
Model Difference	Different models distribute to different areas.
SD capacity	64GB/128GB/256GB/512GB/1T
Test Software Version	Tera Term Pro version 2.3
Operation Band	2400 MHz ~ 2483.5 MHz
Operation Frequency	2412 MHz ~ 2462 MHz
Modulation Technology	IEEE 802.11b: DQPSK, DBPSK, CCK IEEE 802.11g/n: OFDM /64-QAM, 16-QAM, QPSK, BPSK
Transfer Rate	IEEE 802.11b: 11/5.5/2/1 Mbps IEEE 802.11g: 54/48/36/24/18/12/9/6 Mbps IEEE 802.11n: up to 600 Mbps
Output Power (Max).	IEEE 802.11b: 15.43 dBm (0.0349 W) IEEE 802.11g: 18.78 dBm (0.0755 W) IEEE 802.11n (HT20): 18.24 dBm (0.0667 W)

NOTE:

(1) The above EUT information is declared by manufacturer and for more detailed features description, please refers to the manufacturer's specifications or user's manual.

(2) Channel List:

CH01 - CH11 for IEEE 802.11b, IEEE 802.11g, IEEE 802.11n (HT20)					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
01	2412	05	2432	09	2452
02	2417	06	2437	10	2457
03	2422	07	2442	11	2462
04	2427	08	2447	-	-

(3) Table for Filed Antenna:

Brand Name	Model Name	Type	Frequency (MHz)	Gain (dBi)
PSA	RFECA3216060A1T	MULTILAYER CERAMIC ANTENNA	2400 ~ 2483.5	2

Note:

- (a) The EUT incorporates a CDD function. Physically, the EUT provides one completed transmitters and receivers (1T1R)
- (b) Directional Gain=2 dBi. (The value is declared by manufacturer.) >6dBi.
- (c) For Power Spectral Density
The reduced power spectral density limits (dBm/3kHz) =8 - 0 = 8(dBm/3kHz)
- (d) For Output Power
For $N_{ANT}=1 < 5$, Direction Gain= $G_{ANT} + 0 = 2 + 0 = 2$
The Direction Gain is less than 6dBi, so output power limits will not be reduced.

(4) The above Antenna information is derived from the antenna data sheet provided by manufacturer and for more detailed features description, please refer to the manufacturer's specifications, the laboratory shall not be held responsible.

(5)

Operating Mode	TX Mode	1TX
IEEE 802.11b		V (Ant. 1)
IEEE 802.11g		V (Ant. 1)
IEEE 802.11n (HT20)		V (Ant. 1)

2.2 TEST MODES

Test Items	Test mode	Channel	Note
AC power line conducted emissions	Normal	-	-
Transmitter Radiated Emissions (below 1GHz)	TX Mode_IEEE 802.11g	01	-
Transmitter Radiated Emissions (above 1GHz)	TX Mode_IEEE 802.11b	01/11	Bandedge
	TX Mode_IEEE 802.11g		
	TX Mode_IEEE 802.11n (HT20)		
Transmitter Radiated Emissions (above 1GHz)	TX Mode_IEEE 802.11b	01/06/11	Harmonic
	TX Mode_IEEE 802.11g		
	TX Mode_IEEE 802.11n (HT20)		
Bandwidth & Output Power & Power Spectral Density & Antenna conducted Spurious Emission	TX Mode_IEEE 802.11b	01/06/11	-
	TX Mode_IEEE 802.11g		
	TX Mode_IEEE 802.11n (HT20)		


NOTE:

(1) For radiated emission band edge test, both Vertical and Horizontal are evaluated, but only the worst case (Horizontal) is recorded.


2.3 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

Equipment letters and Cable numbers refer to item numbers described in the tables of clause 2.4.

AC power line conducted emissions

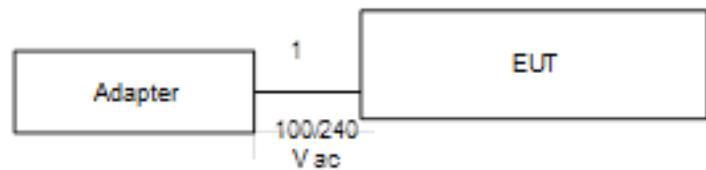

Radiated Emissions

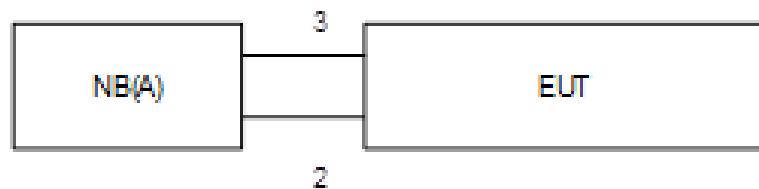

2.4 SUPPORT UNITS

Item	Equipment	Brand	Model No.	Remarks
A	Notebook PC	dynabook	A40-J	Furnished by test lab.
B	Adapter	CWT	2AEA010BC3D	Supplied by test requester.

Item	Cable Type	Ferrite Core	Length	Shielded	Remarks
1	USB2.0 A to C cable	NO	1m	YES	Supplied by test requester.
2	USB2.0 C to C cable	NO	1m	YES	Supplied by test requester.
3	USB cable	NO	1m	YES	Supplied by test requester.

3 AC POWER LINE CONDUCTED EMISSIONS TEST

3.1 LIMIT

Frequency (MHz)	Limit (dB μ V)	
	Quasi-peak	Average
0.15 - 0.5	66 - 56 *	56 - 46 *
0.50 - 5.0	56	46
5.0 - 30.0	60	50

NOTE:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.
- (3) The test result calculated as following:

Measurement Value = Reading Level + Correct Factor

Correct Factor = Insertion Loss + Cable Loss + Attenuator Factor (if use)

Margin Level = Measurement Value – Limit Value

Calculation example:

Reading Level (dB μ V)		Correct Factor (dB)		Measurement Value (dB μ V)
38.22	+	3.45	=	41.67

Measurement Value (dB μ V)		Limit Value (dB μ V)		Margin Level (dB)
41.67	-	60	=	-18.33

The following table is the setting of the receiver.

Receiver Parameter	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 KHz


3.2 TEST PROCEDURE

- a. The EUT was placed 0.8 m above the horizontal ground plane with the EUT being connected to the power mains through a line impedance stabilization network (LISN).
All other support equipment were powered from an additional LISN(s).
The LISN provides 50 Ohm/50uH of impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle to keep the cable above 40 cm.
- c. Excess I/O cables that are not connected to a peripheral shall be bundled in the center.
The end of the cable will be terminated, using the correct terminating impedance.
The overall length shall not exceed 1 m.
- d. The LISN is spaced at least 80 cm from the nearest part of the EUT chassis.
- e. For the actual test configuration, please refer to the related Item - EUT TEST PHOTO.

NOTE:

- (1) In the results, each reading is marked as Peak, QP or AVG per the detector used.
BW=9 kHz (6 dB Bandwidth)
- (2) All readings are Peak unless otherwise stated QP or AVG in column of Note. Both the QP and the AVG readings must be less than the limit for compliance.

3.3 TEST SETUP

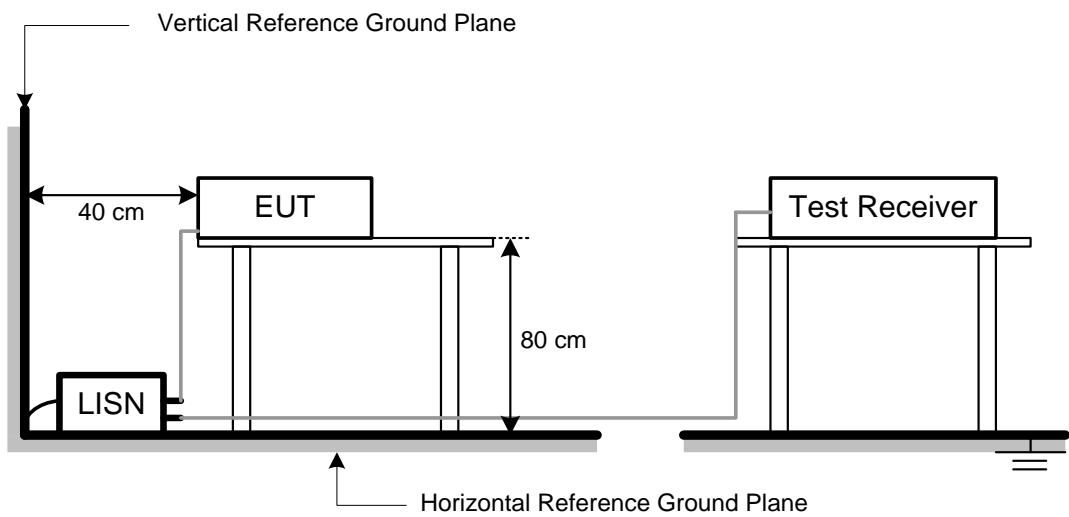

3.4 TEST RESULT

Please refer to the **APPENDIX A**.

4 RADIATED EMISSIONS TEST

4.1 LIMIT

In case the emission fall within the restricted band specified on 15.205, then the 15.209 limit in the table below has to be followed.

LIMITS OF RADIATED EMISSIONS MEASUREMENT (9 kHz to 1000 MHz)

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
960~1000	500	3

LIMITS OF RADIATED EMISSIONS MEASUREMENT (Above 1000 MHz)

Frequency (MHz)	Radiated Emissions (dB μ V/m)		Measurement Distance (meters)
	Peak	Average	
Above 1000	74	54	3

NOTE:

- (1) The limit for radiated test was performed according to FCC CFR Title 47, Part 15, Subpart C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dB μ V/m)=20log Emission level (uV/m).
- (4) The test result calculated as following:

Measurement Value = Reading Level + Correct Factor

Correct Factor = Antenna Factor + Cable Loss - Amplifier Gain(if use)

Margin Level = Measurement Value - Limit Value

Calculation example:

Reading Level (dB μ V)		Correct Factor (dB/m)		Measurement Value (dB μ V/m)
19.11	+	2.11	=	21.22

Measurement Value (dB μ V/m)		Limit Value (dB μ V/m)		Margin Level (dB)
21.22	-	40	=	-18.78


Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RBW / VBW (Emission in restricted band)	1MHz / 3MHz for Peak, 1MHz / 1/T for Average



Spectrum Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9KHz~90KHz for PK/AVG detector
Start ~ Stop Frequency	90KHz~110KHz for QP detector
Start ~ Stop Frequency	110KHz~490KHz for PK/AVG detector
Start ~ Stop Frequency	490KHz~30MHz for QP detector
Start ~ Stop Frequency	30MHz~1000MHz for QP detector

4.2 TEST PROCEDURE

- a. The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(below 1GHz)
- b. The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 1.5 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(above 1GHz)
- c. The height of the equipment or of the substitution antenna shall be 0.8 m or 1.5 m, the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights find the maximum reading (used Bore sight function).
- e. The receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1GHz.
- f. The initial step in collecting radiated emission data is a receiver peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- g. All readings are Peak unless otherwise stated QP in column of Note. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform. (below 1GHz)
- h. All readings are Peak Mode value unless otherwise stated AVG in column of Note. If the Peak Mode Measured value compliance with the Peak Limits and lower than AVG Limits, the EUT shall be deemed to meet both Peak & AVG Limits and then only Peak Mode was measured, but AVG Mode didn't perform. (above 1GHz)
- i. For the actual test configuration, please refer to the related Item – EUT TEST PHOTO.

4.3 TEST SETUP

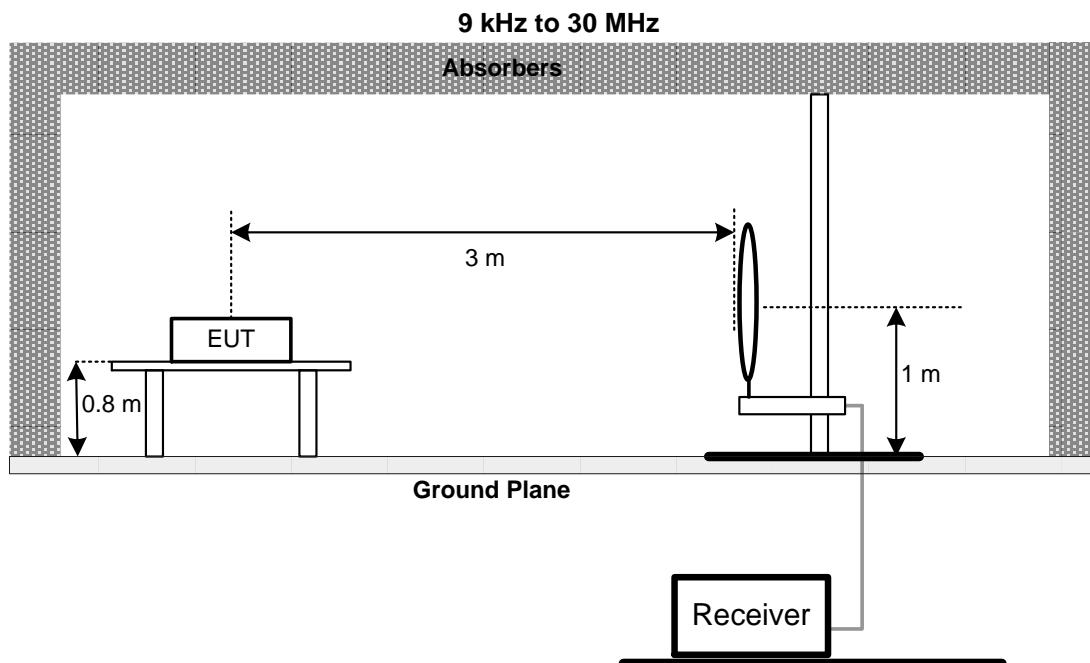

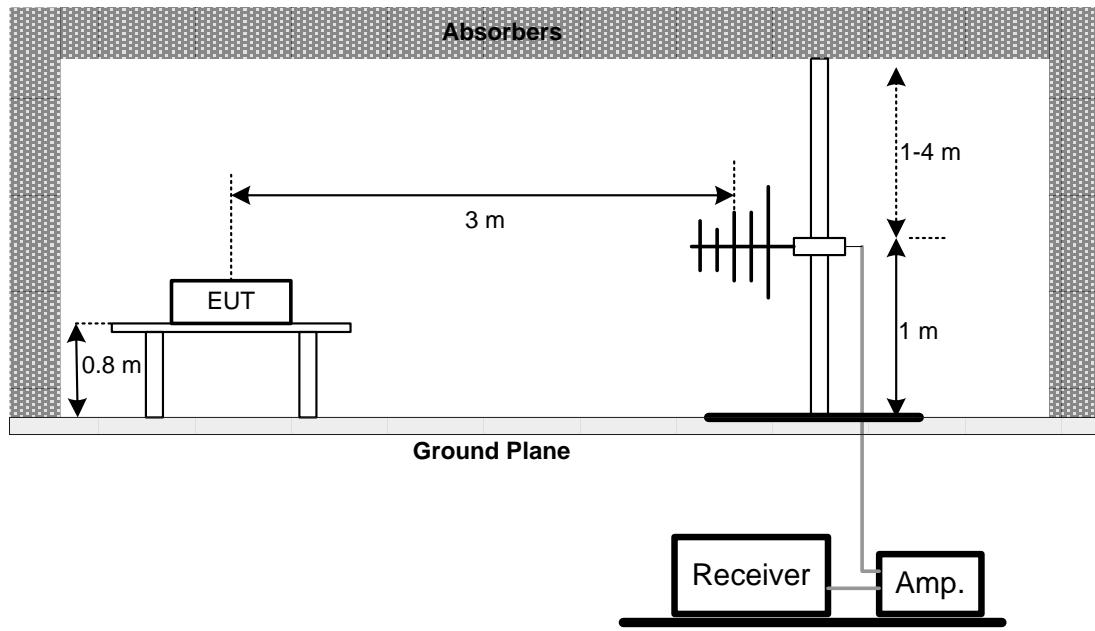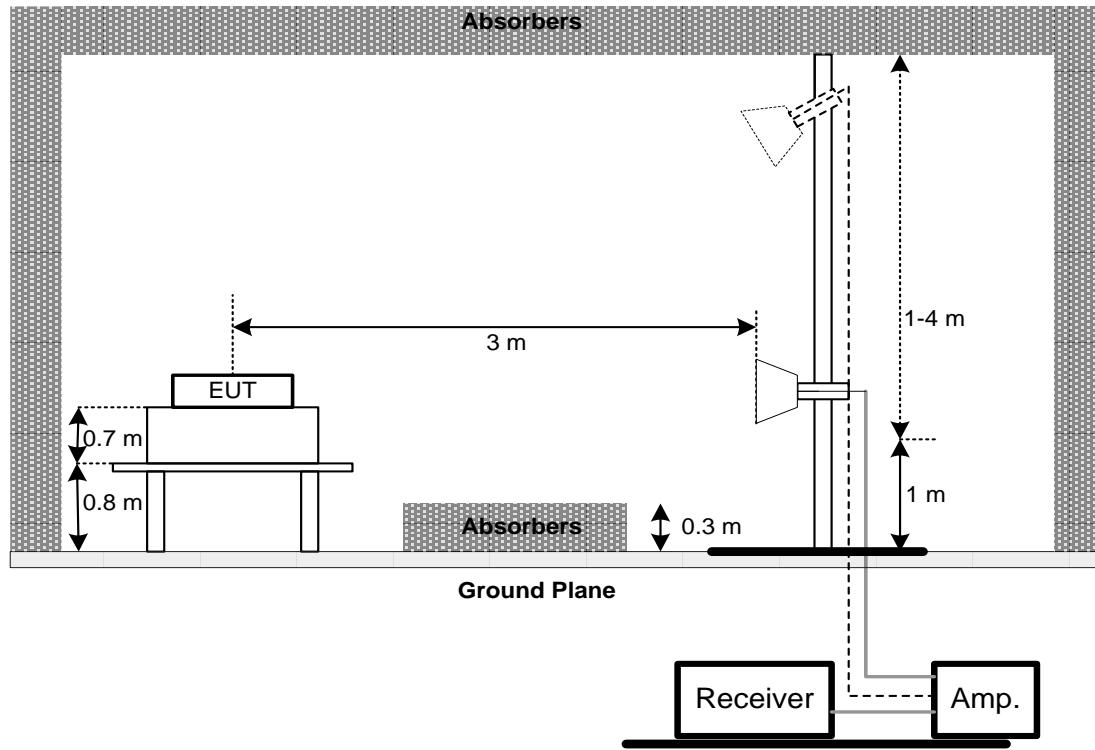30 MHz to 1 GHz**Above 1 GHz**

4.4 EUT OPERATING CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

4.5 TEST RESULT – BELOW 30 MHZ

There were no emissions found below 30 MHz within 20 dB of the limit.

4.6 TEST RESULT – 30 MHZ TO 1 GHZ

Please refer to the APPENDIX B.

4.7 TEST RESULT – ABOVE 1 GHZ

Please refer to the APPENDIX C.

NOTE:

- (1) No limit: This is fundamental signal, the judgment is not applicable.
For fundamental signal judgment was referred to Peak output test.

5 BANDWIDTH TEST


5.1 LIMIT

FCC Part15, Subpart C (15.247)		
Section	Test Item	Limit
15.247(a)	6 dB Bandwidth	500 kHz

5.2 TEST PROCEDURE

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- b. Spectrum Setting: RBW= 100KHz, VBW=300KHz, Sweep time = 2.5 ms.

5.3 TEST SETUP

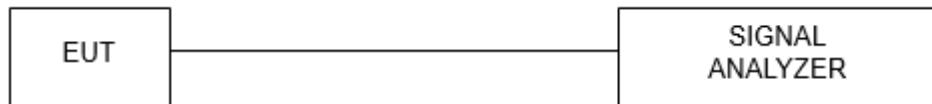

5.4 EUT OPERATING CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

5.5 TEST RESULT

Please refer to the APPENDIX D.

6 OUTPUT POWER TEST


6.1 LIMIT

FCC Part15, Subpart C (15.247)		
Section	Test Item	Limit
15.247(b)	Maximum Output Power	1 Watt or 30dBm

6.2 TEST PROCEDURE

- a. The EUT was directly connected to the power meter and antenna output port as show in the block diagram below.
- b. The maximum peak conducted output power was performed in accordance with FCC KDB 558074 D01 15.247 Meas Guidance.
- c. Subclause 11.9.1.1 of ANSI C63.10 is applied. The maximum peak conducted output power may be measured using a broadband peak RF power meter.
The power meter shall have a video bandwidth that is greater than or equal to the DTS bandwidth and shall use a fast-responding diode detector.

6.3 TEST SETUP



6.4 EUT OPERATING CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

6.5 TEST RESULT

Please refer to the APPENDIX E.

7 POWER SPECTRAL DENSITY


7.1 LIMIT

FCC Part15, Subpart C (15.247)		
Section	Test Item	Limit
15.247(e)	Power Spectral Density	8 dBm (in any 3 kHz)

7.2 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- Spectrum Setting: RBW = 3 kHz, VBW = 10 kHz, Sweep time = Auto.

7.3 TEST SETUP

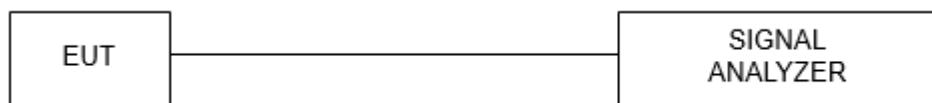

7.4 EUT OPERATING CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

7.5 TEST RESULT

Please refer to the APPENDIX F.

8 ANTENNA CONDUCTED SPURIOUS EMISSIONS TEST


8.1 LIMIT

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits.

8.2 TEST PROCEDURE

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- b. Spectrum Setting: RBW = 100 kHz, VBW=300 kHz, Sweep time = Auto.
- c. Offset = antenna gain + cable loss.

8.3 TEST SETUP

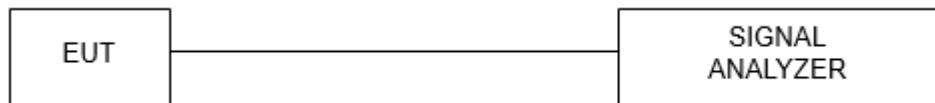

8.4 EUT OPERATING CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

8.5 TEST RESULT

Please refer to the APPENDIX G.

9 LIST OF MEASURING EQUIPMENTS

AC Power Line Conducted Emissions						
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated Date	Calibrated Until
1	TWO-LINE V-NETWORK	R&S	ENV216	101339	2024/3/28	2025/3/27
2	Test Cable	EMCI	EMCRG142S-SM-SM-5000	230609	2024/7/18	2025/7/17
3	EMI Test Receiver	R&S	ESR3	103133	2024/6/28	2025/6/27
4	Measurement Software	Farad	EZ_EMC (Ver.E-LAB-5A2.2 2021)	N/A	N/A	N/A

Radiated Emissions						
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated Date	Calibrated Until
1	Log-Bicon Antenna	Schwarzbeck	VULB 9168	01578	2024/7/17	2025/7/16
2	Attenuator	INMET	EMCI-N-6-05	AT-N0576	2024/7/17	2025/7/16
3	Pre-Amplifier	EMCI	EMC001330	980908	2024/7/11	2025/7/10
4	Test Cable	EMCI	EMC104-SM-SM-6000	230539	2024/7/13	2025/7/12
5	Test Cable	EMCI	EMC104-SM-SM-2500	230542	2024/7/13	2025/7/12
6	Test Cable	EMCI	EMC104-SM-SN-1000	230543	2024/7/13	2025/7/12
7	MXE EMI Receiver	Keysight	N9038A	MY55420127	2024/6/19	2025/6/18
8	Horn Antenna	RFSPIN	DRH18-E	KV2D02A18ES	2024/6/7	2025/6/6
9	Pre-Amplifier	EMCI	EMC118A45SE	980962	2024/7/19	2025/7/18
10	Test Cable	EMCI	EMC104-SM-SM-6000	230540	2024/7/19	2025/7/18
11	Test Cable	EMCI	EMC104-SM-SM-2500	230541	2024/7/19	2025/7/18
12	Test Cable	EMCI	EMC104-SM-SM-1000	230546	2024/7/19	2025/7/18
13	EXA Signal Analyzer	Keysight	N9010A	MY52220990	2023/8/11	2024/8/10
14	Horn Antenna	Schwarzbeck	BBHA 9170	01228	2024/6/12	2025/6/11
15	Pre-Amplifier	EMCI	EMC184045SE	980918	2024/7/17	2025/7/16
16	Test Cable	EMCI	EMC104-35M-35M-1000	230547	2024/7/19	2025/7/18
17	Test Cable	EMCI	EMC104-35M-35M-4700	230548	2024/7/19	2025/7/18
18	EXA Signal Analyzer	Keysight	N9010A	MY52220990	2023/8/11	2024/8/10
19	Measurement Software	Farad	EZ_EMC (Ver. NB-03A1-01)	N/A	N/A	N/A

Bandwidth						
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated Date	Calibrated Until
1	EXA Signal Analyzer	Keysight	N9010A	MY52220990	2023/8/11	2024/8/10

Output Power						
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated Date	Calibrated Until
1	EXA Signal Analyzer	Keysight	N9010A	MY52220990	2023/8/11	2024/8/10

Power Spectral Density						
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated Date	Calibrated Until
1	EXA Signal Analyzer	Keysight	N9010A	MY52220990	2023/8/11	2024/8/10

Antenna conducted Spurious Emission						
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated Date	Calibrated Until
1	EXA Signal Analyzer	Keysight	N9010A	MY52220990	2023/8/11	2024/8/10

Remark: "N/A" denotes no model name, no serial no. or no calibration specified.
All calibration period of equipment list is one year.

10 EUT TEST PHOTO


Please refer to APPENDIX- EP-Test Setup-2407X001-1/ EP-Support Units-2407X001-3

11 EUT PHOTOS

Please refer to APPENDIX- EP-External-2407X001-1/ EP-Internal-2407X001-2

APPENDIX A AC POWER LINE CONDUCTED EMISSIONS


Test Mode	Normal	Tested Date	2024/8/2
Test Frequency	-	Phase	Line

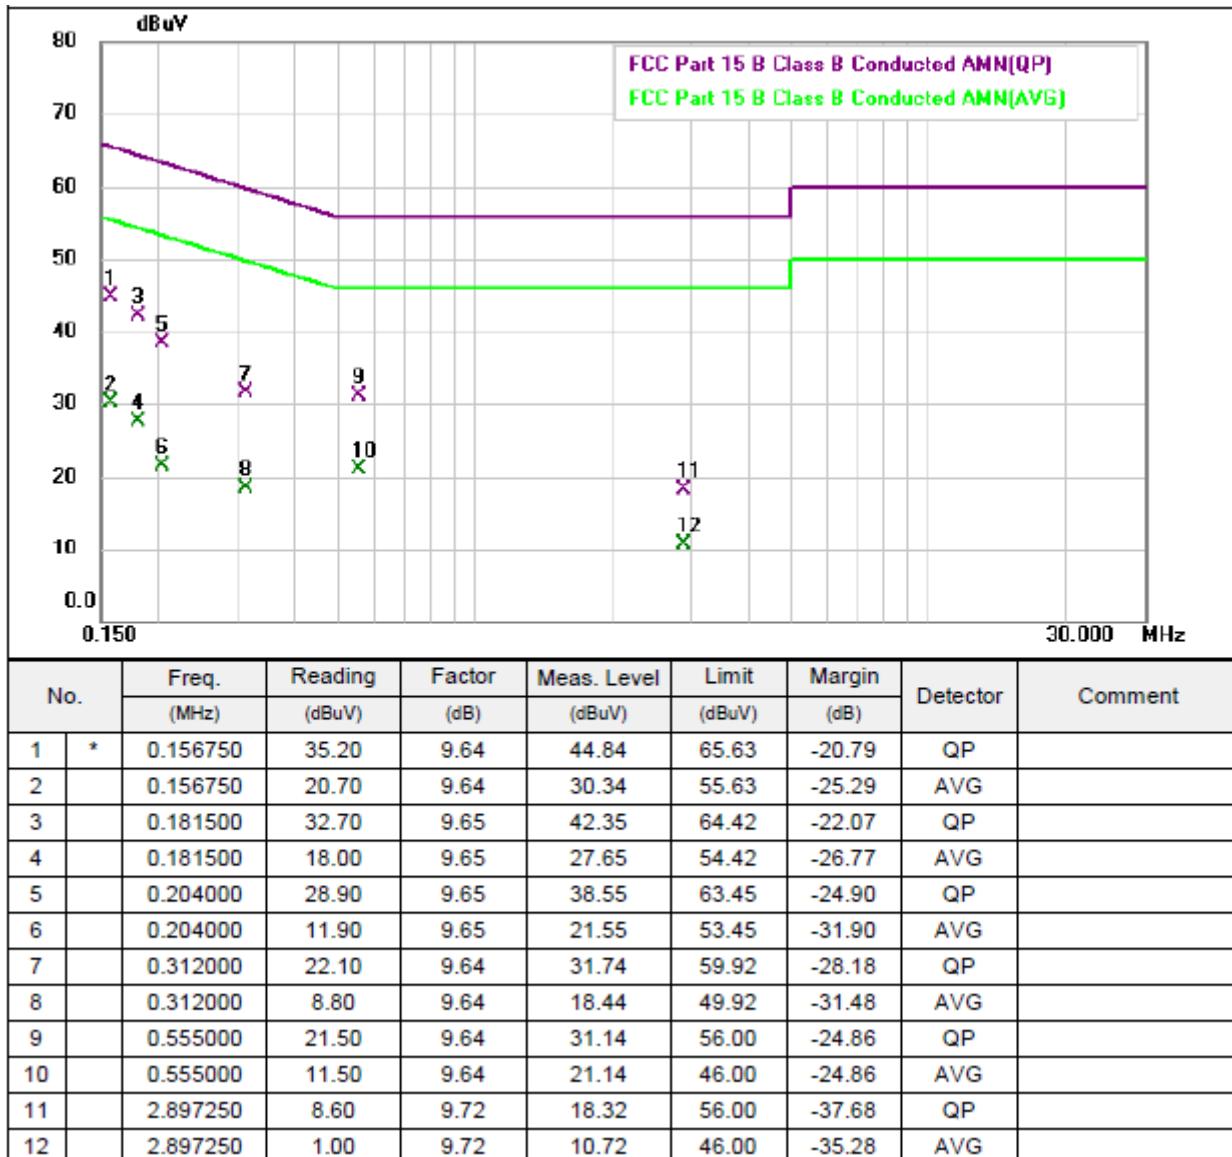

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.
- (3) *: Maximum data x: Over limit !: Over margin

Test Mode	Normal	Tested Date	2024/8/2
Test Frequency	-	Phase	Neutral

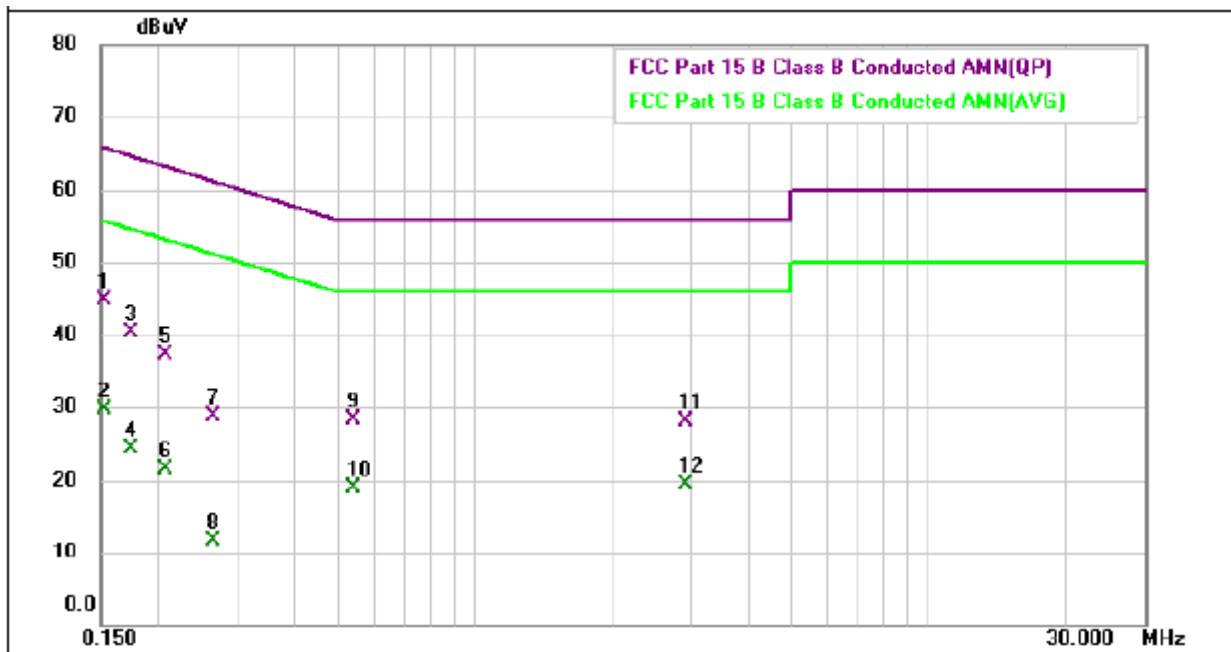

No.	Freq. (MHz)	Reading	Factor	Meas. Level	Limit	Margin	Detector	Comment
		(dBuV)	(dB)	(dBuV)	(dBuV)	(dB)		
1	0.152250	35.20	9.64	44.84	65.88	-21.04	QP	
2	0.152250	20.20	9.64	29.84	55.88	-26.04	AVG	
3	0.174750	30.70	9.64	40.34	64.73	-24.39	QP	
4	0.174750	14.60	9.64	24.24	54.73	-30.49	AVG	
5	0.208500	27.60	9.64	37.24	63.26	-26.02	QP	
6	0.208500	12.00	9.64	21.64	53.26	-31.62	AVG	
7	0.264284	19.30	9.64	28.94	61.30	-32.36	QP	
8	0.264284	2.00	9.64	11.64	51.30	-39.66	AVG	
9	0.539250	18.70	9.64	28.34	56.00	-27.66	QP	
10	0.539250	9.40	9.64	19.04	46.00	-26.96	AVG	
11	2.924250	18.40	9.72	28.12	56.00	-27.88	QP	
12	2.924250	9.60	9.72	19.32	46.00	-26.68	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.
- (3) *: Maximum data x: Over limit !: Over margin

APPENDIX B RADIATED EMISSIONS - 30 MHZ TO 1 GHZ

Test Mode	IEEE 802.11g	Test Date	2024/7/23
Test Frequency	CH06:2437 MHz	Polarization	Vertical
Temp	24°C	Hum.	63%




No.	Freq.	Reading	Factor	Meas. Level	Limit	Margin	Detector	Height	Degree	Comment
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)				
1	58.1300	35.20	-13.07	22.13	40.00	-17.87	peak			
2	157.0700	31.70	-12.51	19.19	43.50	-24.31	peak			
3	260.8600	42.73	-13.45	29.28	46.00	-16.72	peak			
4	466.5000	37.81	-7.83	29.98	46.00	-16.02	peak			
5	598.4200	36.03	-5.34	30.69	46.00	-15.31	peak			
6	* 791.4500	35.45	-2.45	33.00	46.00	-13.00	peak			

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.
- (3) *: Maximum data x: Over limit !: Over margin

Test Mode	IEEE 802.11g	Test Date	2024/7/23
Test Frequency	CH06:2437 MHz	Polarization	Horizontal
Temp	24°C	Hum.	63%

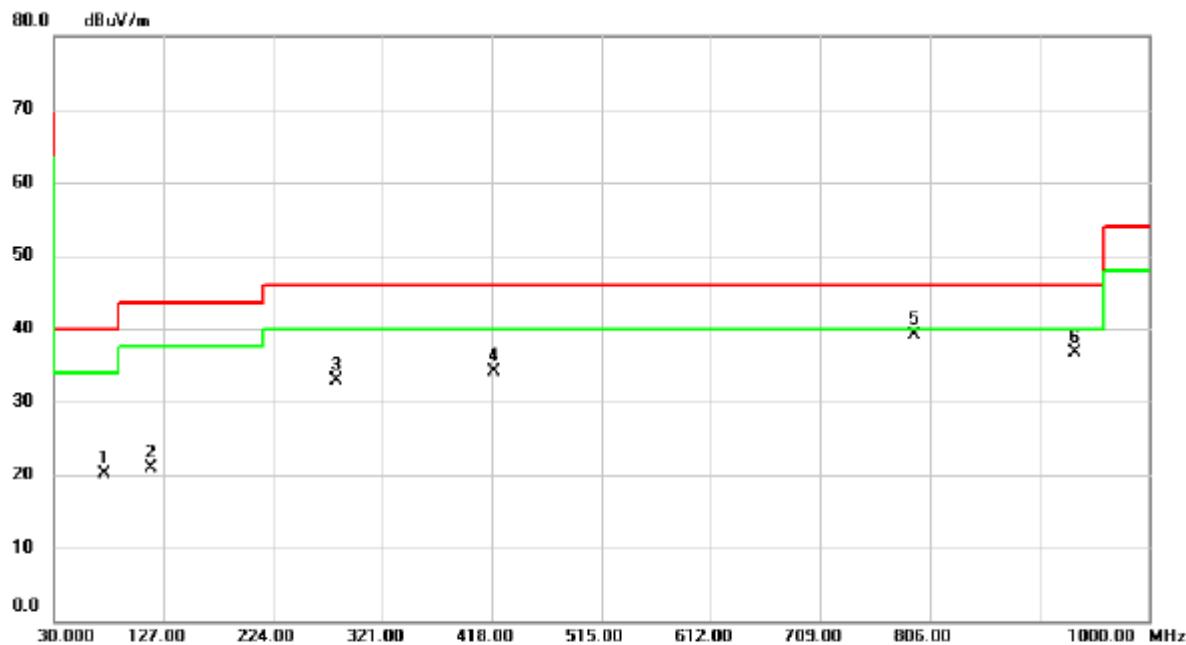


No.	Freq.	Reading	Factor	Meas. Level	Limit	Margin	Detector	Height (cm)	Degree (deg.)	Comment
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)				
1	74.6200	36.55	-16.42	20.13	40.00	-19.87	peak			
2	116.3300	36.05	-15.17	20.88	43.50	-22.62	peak			
3	280.2600	45.56	-12.56	33.00	46.00	-13.00	peak			
4	419.9400	43.06	-8.89	34.17	46.00	-11.83	peak			
5	792.4200	41.56	-2.44	39.12	46.00	-6.88	peak			
6	935.0100	37.33	-0.64	36.69	46.00	-9.31	peak			

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.
- (3) *: Maximum data x: Over limit !: Over margin

APPENDIX C RADIATED EMISSIONS - ABOVE 1 GHZ

Test Mode	IEEE 802.11b	Test Date	2024/7/26
Test Frequency	CH01:2412 MHz	Polarization	Horizontal
Temp	22°C	Hum.	62%

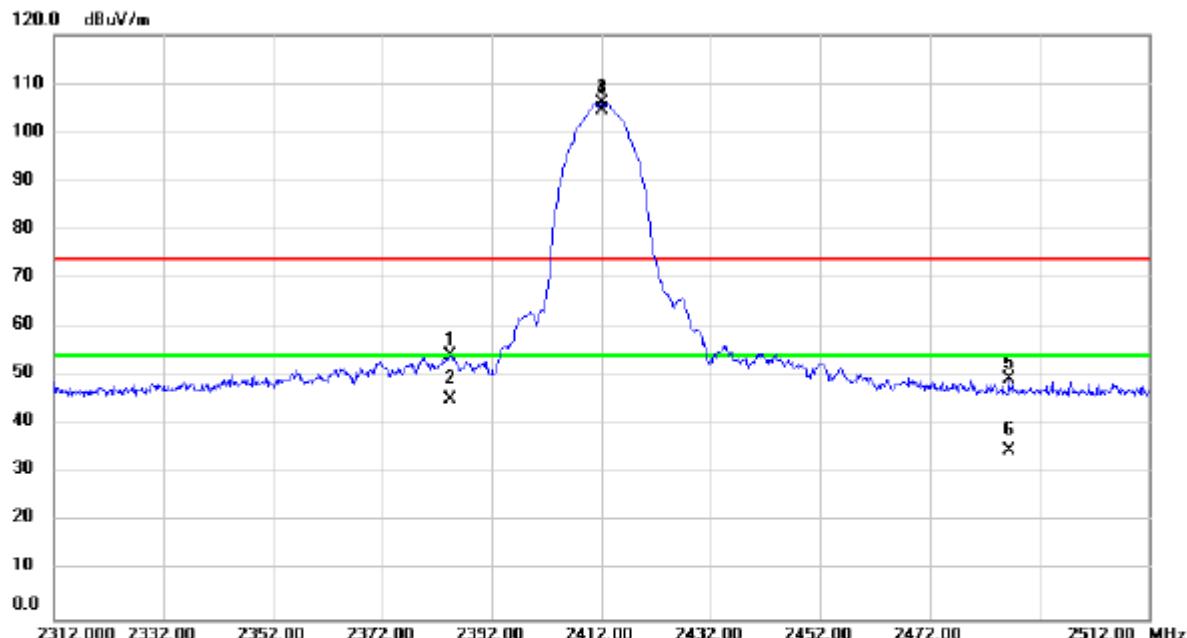


No.	Freq.	Reading	Factor	Meas. Level	Limit	Margin	Detector	Height (cm)	Degree (deg.)	Comment
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)				
1	2384.400	50.56	3.57	54.13	74.00	-19.87	peak			
2	2384.400	41.44	3.57	45.01	54.00	-8.99	AVG			
3	X 2412.000	102.42	3.61	106.03	74.00	32.03	peak			
4	* 2412.000	100.96	3.61	104.57	54.00	50.57	AVG			
5	2486.400	45.65	3.72	49.37	74.00	-24.63	peak			
6	2486.400	31.05	3.72	34.77	54.00	-19.23	AVG			

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.
- (3) *: Maximum data x: Over limit !: Over margin
- (4) X and * represent fundamental frequency and with no limit.

Test Mode	IEEE 802.11b	Test Date	2024/7/26
Test Frequency	CH011:2462 MHz	Polarization	Horizontal
Temp	22°C	Hum.	62%

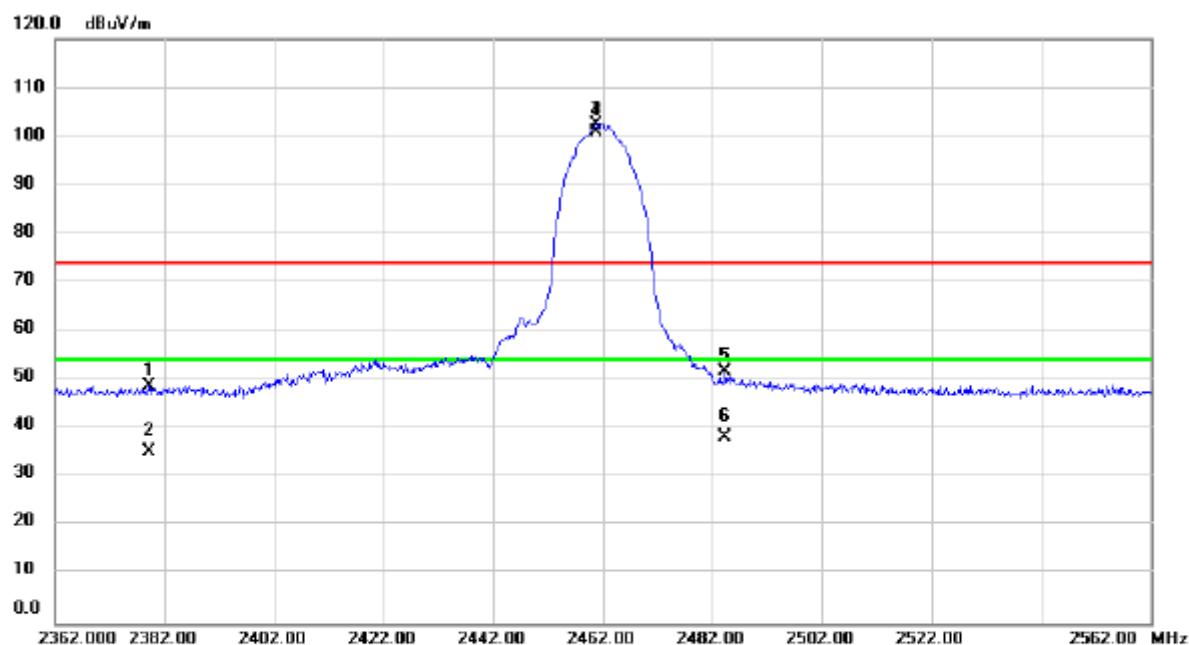


No.	Freq.	Reading	Factor	Meas. Level	Limit	Margin	Detector	Height (cm)	Degree (deg.)	Comment
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)				
1	2379.200	45.31	3.56	48.87	74.00	-25.13	peak			
2	2379.200	31.57	3.56	35.13	54.00	-18.87	AVG			
3	X 2460.800	98.78	3.68	102.46	74.00	28.46	peak			
4	* 2460.800	97.19	3.68	100.87	54.00	46.87	AVG			
5	2484.200	47.99	3.71	51.70	74.00	-22.30	peak			
6	2484.200	34.44	3.71	38.15	54.00	-15.85	AVG			

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.
- (3) *: Maximum data X: Over limit !: Over margin
- (4) X and * represent fundamental frequency and with no limit.

Test Mode	IEEE 802.11g	Test Date	2024/7/26
Test Frequency	CH01: 2412 MHz	Polarization	Horizontal
Temp	22°C	Hum.	62%

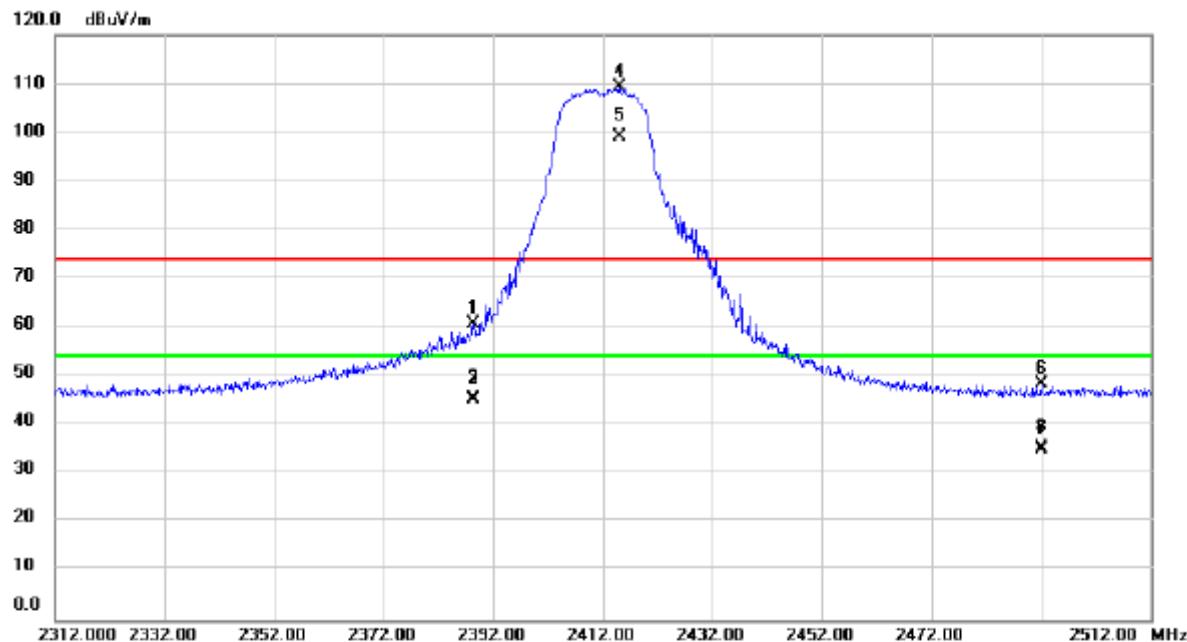


No.	Freq.	Reading	Factor	Meas. Level	Limit	Margin	Detector	Height	Degree	Comment
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)		(cm)	(deg.)	
1	2388.400	57.24	3.58	60.82	74.00	-13.18	peak			
2	2388.400	41.47	3.58	45.05	54.00	-8.95	AVG			
3	2388.400	41.78	3.58	45.36	54.00	-8.64	AVG			DCF:0.31
4	X 2415.000	105.59	3.62	109.21	74.00	35.21	peak			
5	* 2415.000	95.60	3.62	99.22	54.00	45.22	AVG			
6	2492.000	44.70	3.71	48.41	74.00	-25.59	peak			
7	2492.000	31.34	3.71	35.05	54.00	-18.95	AVG			
8	2492.000	31.65	3.71	35.36	54.00	-18.64	AVG			DCF:0.31

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.
- (3) *: Maximum data x: Over limit !: Over margin
- (4) X and * represent fundamental frequency and with no limit.

Test Mode	IEEE 802.11g	Test Date	2024/7/26
Test Frequency	CH11: 2462 MHz	Polarization	Horizontal
Temp	22°C	Hum.	62%

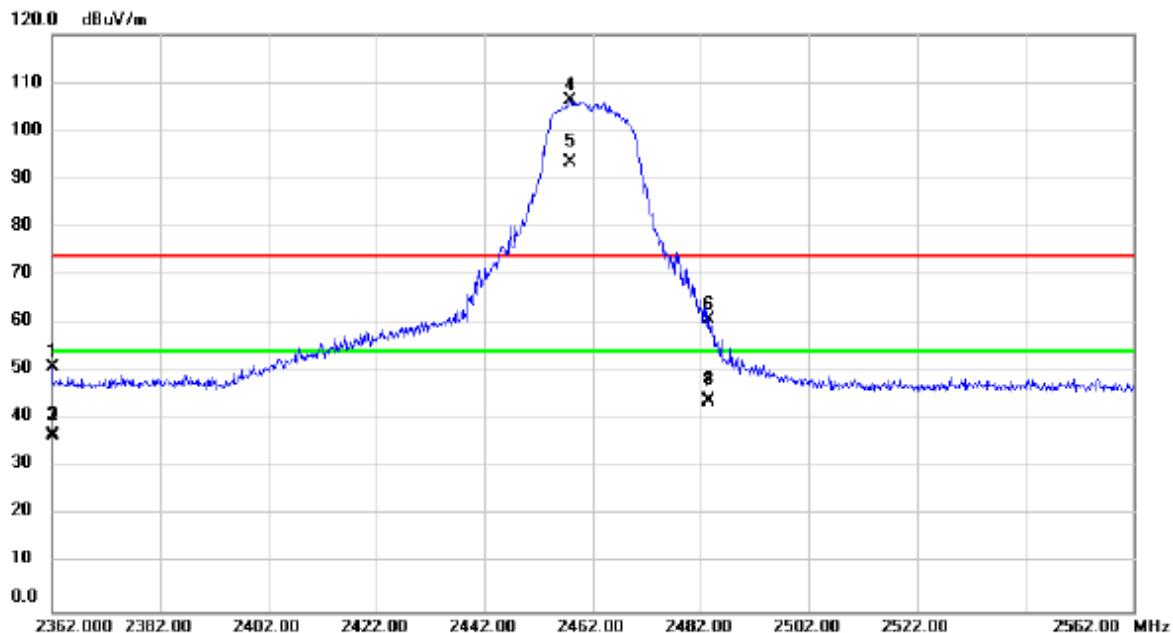


No.	Freq.	Reading	Factor	Meas. Level	Limit	Margin	Detector	Height (cm)	Degree (deg.)	Comment
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)				
1	2362.000	47.23	3.54	50.77	74.00	-23.23	peak			
2	2362.000	32.83	3.54	36.37	54.00	-17.63	AVG			
3	2362.000	33.14	3.54	36.68	54.00	-17.32	AVG			DCF:0.31
4	X 2457.800	102.54	3.68	106.22	74.00	32.22	peak			
5	* 2457.800	89.91	3.68	93.59	54.00	39.59	AVG			
6	2483.600	57.13	3.71	60.84	74.00	-13.16	peak			
7	2483.600	40.03	3.71	43.74	54.00	-10.26	AVG			
8	2483.600	40.34	3.71	44.05	54.00	-9.95	AVG			DCF:0.31

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.
- (3) *: Maximum data x: Over limit !: Over margin
- (4) X and * represent fundamental frequency and with no limit.

Test Mode	IEEE 802.11n (HT20)	Test Date	2024/7/26
Test Frequency	CH01: 2412 MHz	Polarization	Horizontal
Temp	22°C	Hum.	62%

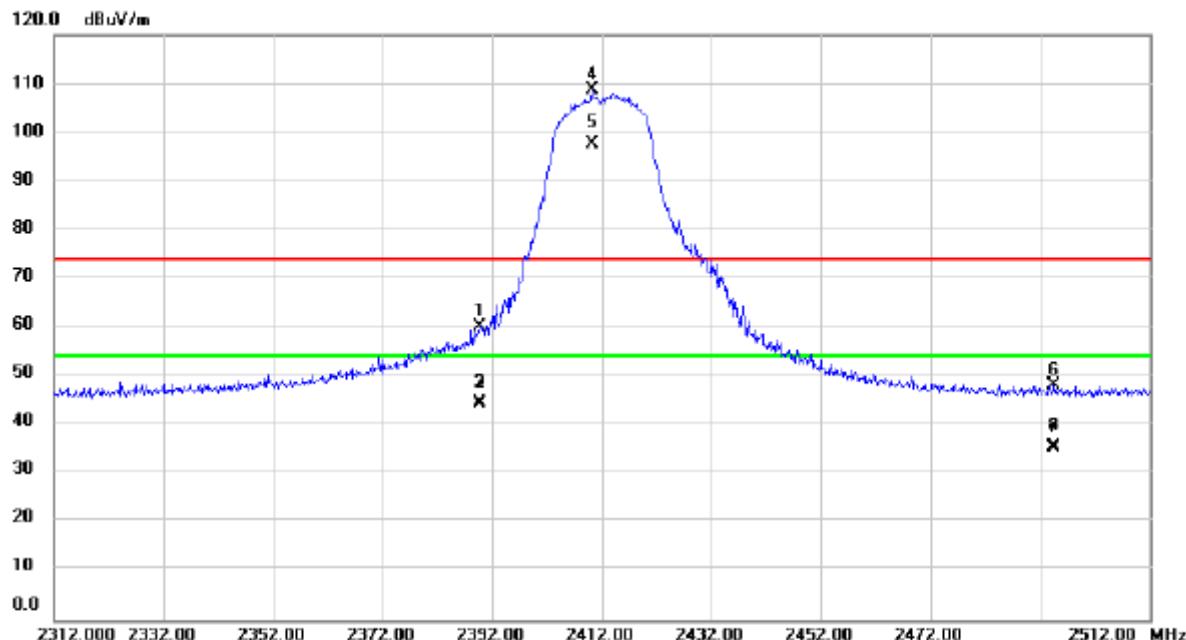


No.	Freq.	Reading	Factor	Meas. Level	Limit	Margin	Detector	Height (cm)	Degree (deg.)	Comment
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)				
1	2389.800	56.64	3.58	60.22	74.00	-13.78	peak			
2	2389.800	40.70	3.58	44.28	54.00	-9.72	AVG			
3	2389.800	41.03	3.58	44.61	54.00	-9.39	AVG			DCF:0.33
4	X 2410.200	105.08	3.61	108.69	74.00	34.69	peak			
5	* 2410.200	94.19	3.61	97.80	54.00	43.80	AVG			
6	2494.600	44.39	3.72	48.11	74.00	-25.89	peak			
7	2494.600	31.52	3.72	35.24	54.00	-18.76	AVG			
8	2494.600	31.85	3.72	35.57	54.00	-18.43	AVG			DCF:0.33

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.
- (3) *: Maximum data x: Over limit !: Over margin
- (4) X and * represent fundamental frequency and with no limit.

Test Mode	IEEE 802.11n (HT20)	Test Date	2024/7/26
Test Frequency	CH11: 2462 MHz	Polarization	Horizontal
Temp	22°C	Hum.	62%

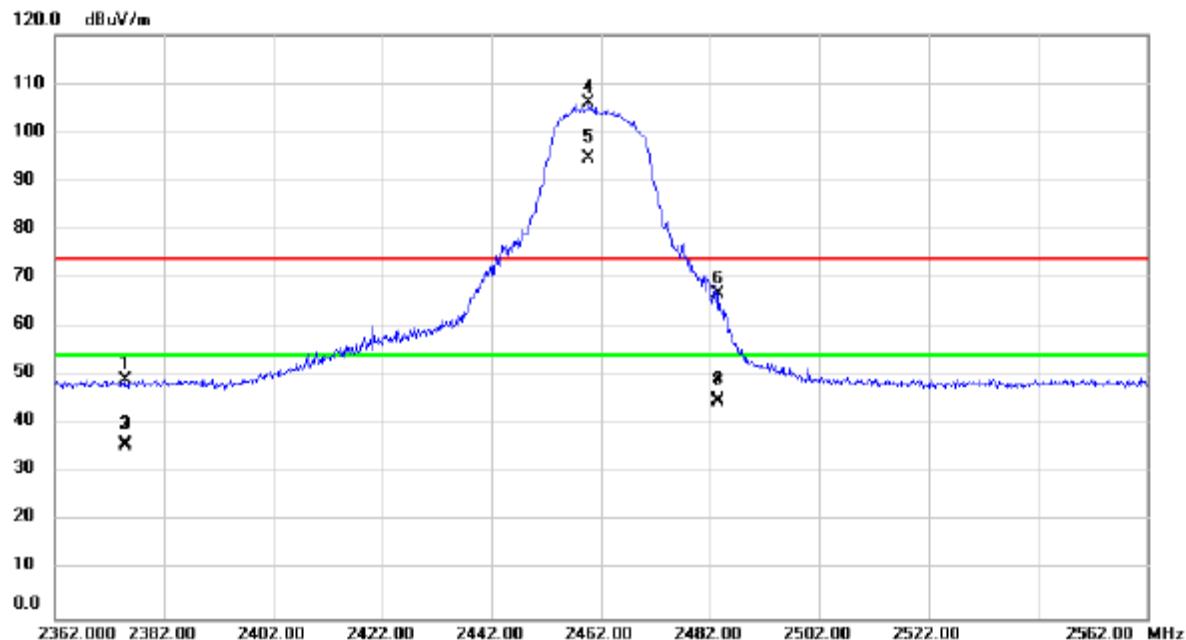


No.	Freq.	Reading	Factor	Meas. Level	Limit	Margin	Detector	Height	Degree	Comment
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)		(cm)	(deg.)	
1	2374.800	45.61	3.56	49.17	74.00	-24.83	peak			
2	2374.800	31.86	3.56	35.42	54.00	-18.58	AVG			
3	2374.800	32.19	3.56	35.75	54.00	-18.25	AVG			DCF:0.33
4	X 2459.800	102.49	3.68	106.17	74.00	32.17	peak			
5	* 2459.800	91.12	3.68	94.80	54.00	40.80	AVG			
6	2483.600	62.91	3.71	66.62	74.00	-7.38	peak			
7	2483.600	40.87	3.71	44.58	54.00	-9.42	AVG			
8	2483.600	41.20	3.71	44.91	54.00	-9.09	AVG			DCF:0.33

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.
- (3) *: Maximum data x: Over limit !: Over margin
- (4) X and * represent fundamental frequency and with no limit.

Test Mode	IEEE 802.11b	Test Date	2024/7/26
Test Frequency	CH01: 2412 MHz	Polarization	Vertical
Temp	22°C	Hum.	62%

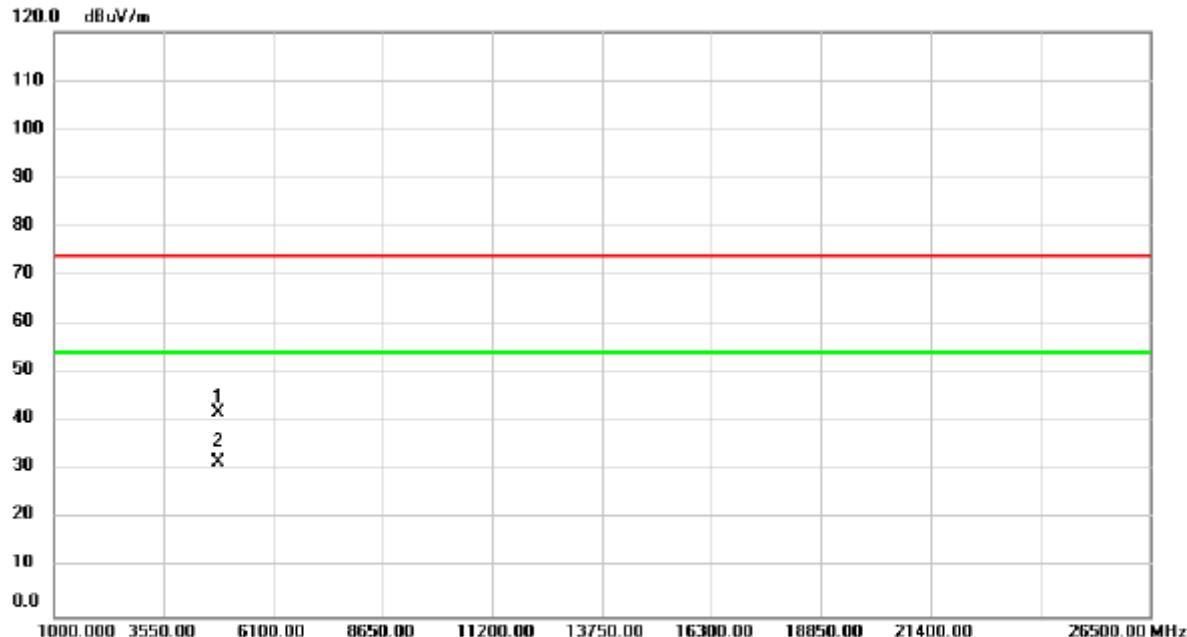


No.	Freq.	Reading	Factor	Meas. Level	Limit	Margin	Detector	Height	Degree	Comment
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)				
1	4824.000	42.11	-0.17	41.94	74.00	-32.06	peak			
2 *	4824.000	31.69	-0.17	31.52	54.00	-22.48	AVG			

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.
- (3) *: Maximum data x: Over limit !: Over margin

Test Mode	IEEE 802.11b	Test Date	2024/7/26
Test Frequency	CH01: 2412 MHz	Polarization	Horizontal
Temp	22°C	Hum.	62%

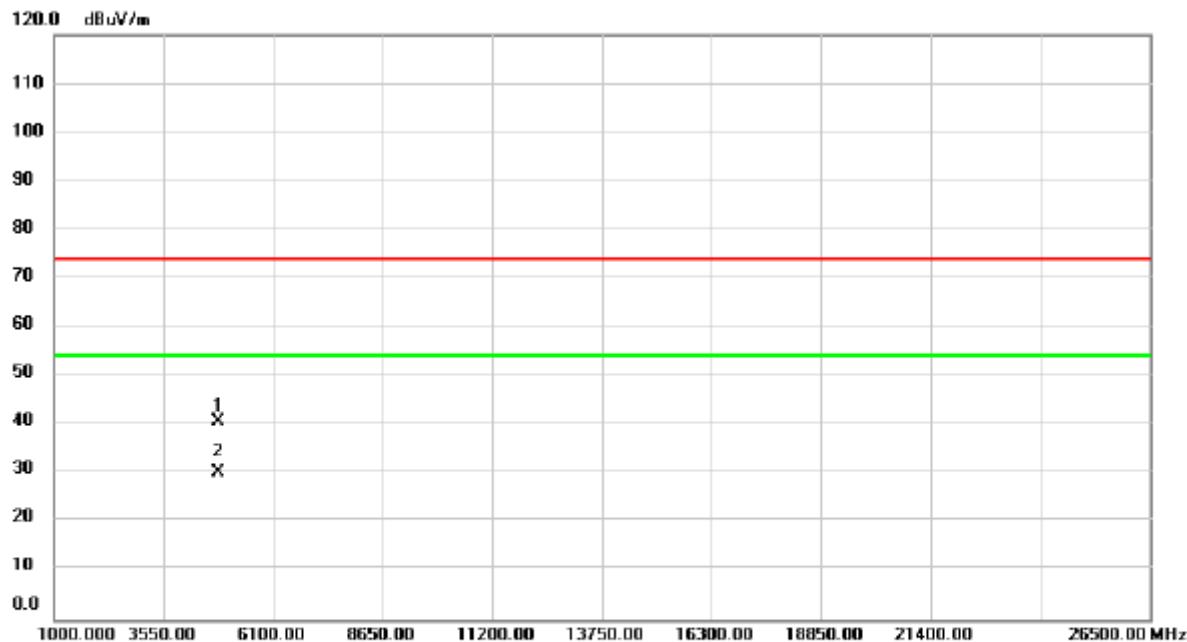


No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Meas. Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height	Degree	Comment
								(cm)	(deg.)	
1	4824.000	40.91	-0.17	40.74	74.00	-33.26	peak			
2	*	4824.000	30.34	-0.17	30.17	54.00	-23.83	AVG		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.
- (3) *: Maximum data x: Over limit !: Over margin

Test Mode	IEEE 802.11b	Test Date	2024/7/26
Test Frequency	CH06: 2437 MHz	Polarization	Vertical
Temp	22°C	Hum.	62%

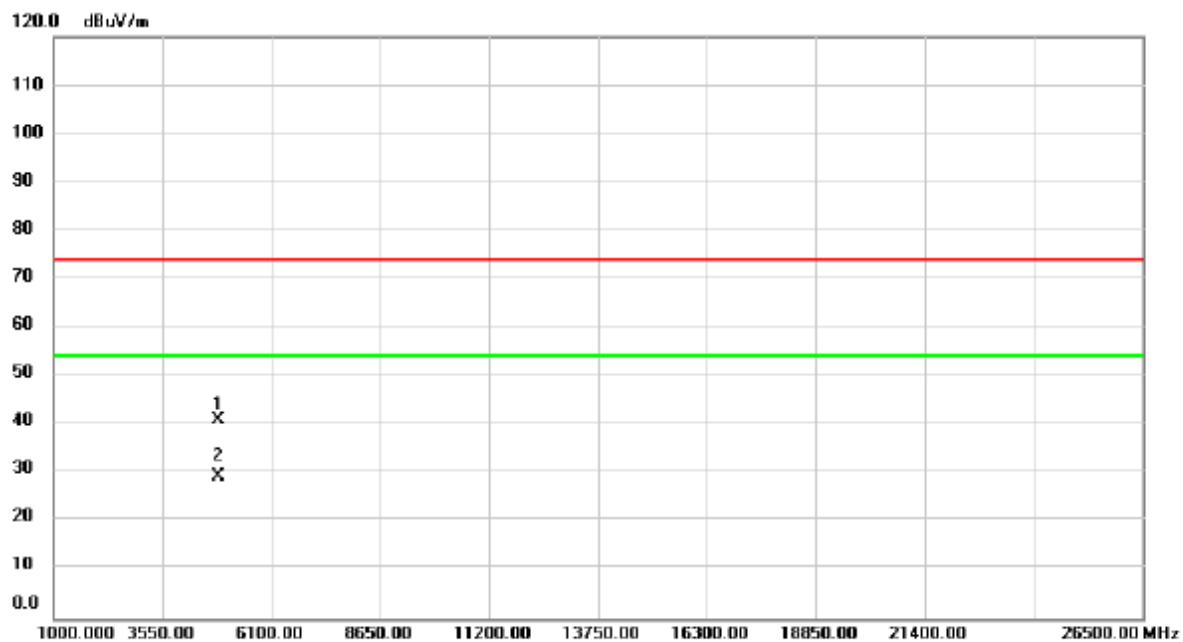


No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Meas. Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height	Degree	Comment
								(cm)	(deg.)	
1	4874.000	40.97	-0.08	40.89	74.00	-33.11	peak			
2	*	4874.000	29.39	-0.08	29.31	54.00	-24.69	AVG		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.
- (3) *: Maximum data x: Over limit !: Over margin

Test Mode	IEEE 802.11b	Test Date	2024/7/26
Test Frequency	CH06: 2437 MHz	Polarization	Horizontal
Temp	22°C	Hum.	62%

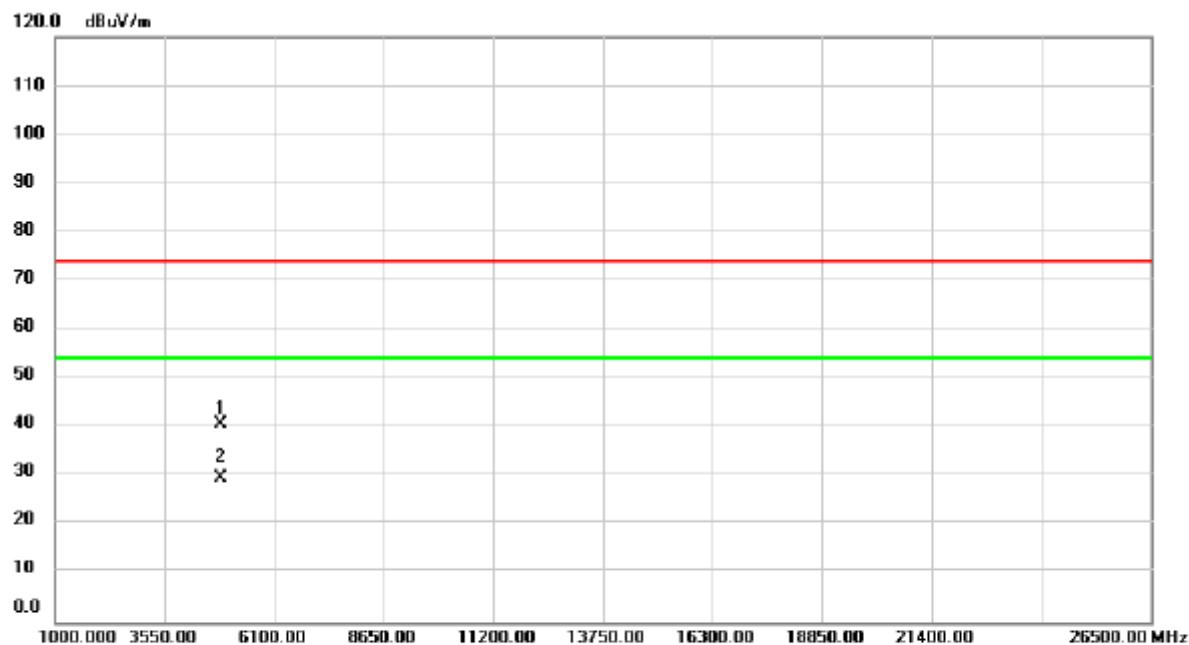


No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Meas. Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height	Degree	Comment
								(cm)	(deg.)	
1	4874.000	40.78	-0.08	40.70	74.00	-33.30	peak			
2	* 4874.000	29.75	-0.08	29.67	54.00	-24.33	Avg			

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.
- (3) *: Maximum data x: Over limit !: Over margin

Test Mode	IEEE 802.11b	Test Date	2024/7/26
Test Frequency	CH11: 2462 MHz	Polarization	Vertical
Temp	22°C	Hum.	62%

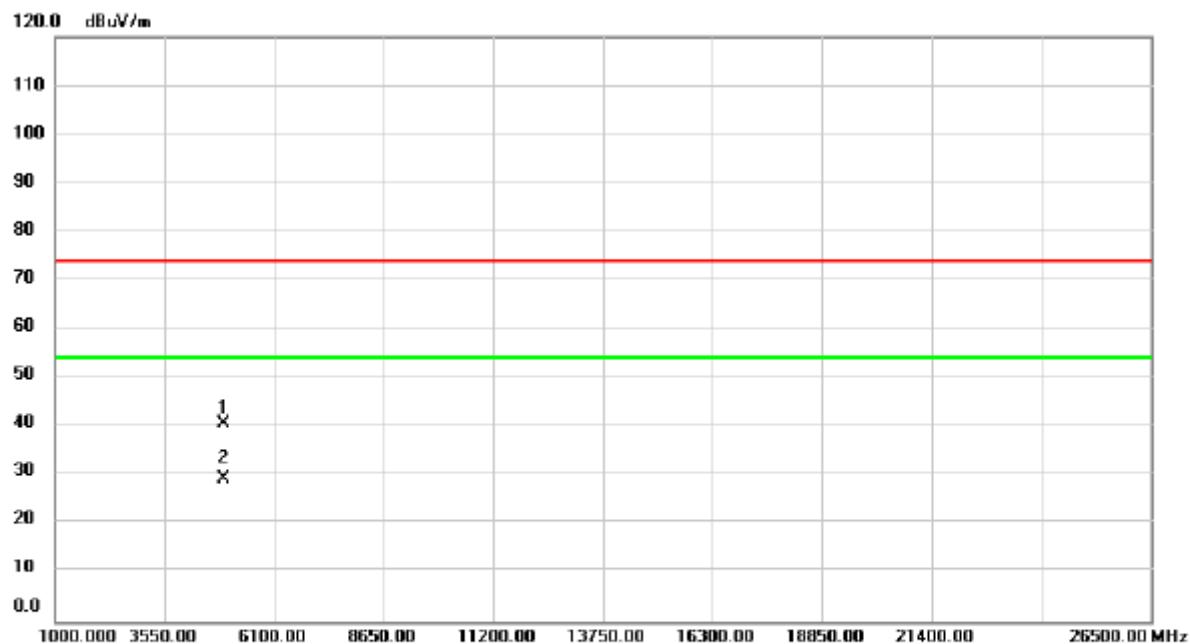


No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Meas. Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height	Degree	Comment
								(cm)	(deg.)	
1	4924.000	40.61	0.01	40.62	74.00	-33.38	peak			
2	*	4924.000	29.10	0.01	29.11	54.00	-24.89	AVG		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.
- (3) *: Maximum data x: Over limit !: Over margin

Test Mode	IEEE 802.11b	Test Date	2024/7/26
Test Frequency	CH11: 2462 MHz	Polarization	Horizontal
Temp	22°C	Hum.	62%

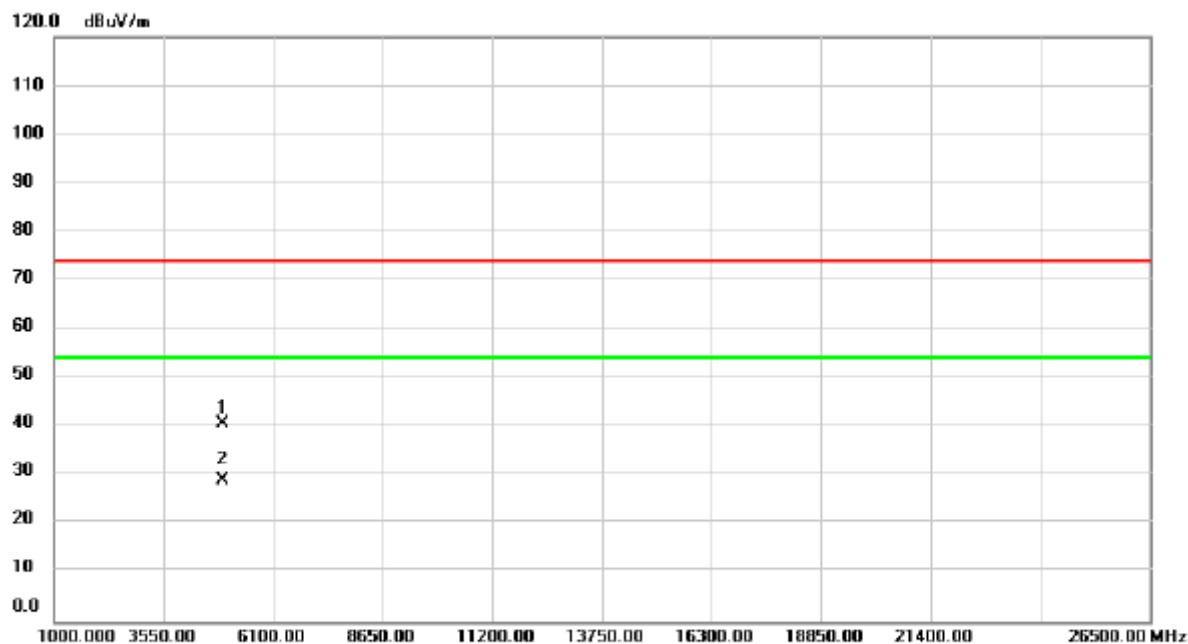


No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Meas. Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height	Degree	Comment
								(cm)	(deg.)	
1	4924.000	40.51	0.01	40.52	74.00	-33.48	peak			
2	*	4924.000	28.87	0.01	28.88	54.00	-25.12	AVG		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.
- (3) *: Maximum data x: Over limit !: Over margin

Test Mode	IEEE 802.11g	Test Date	2024/7/26
Test Frequency	CH01: 2412 MHz	Polarization	Vertical
Temp	22°C	Hum.	62%

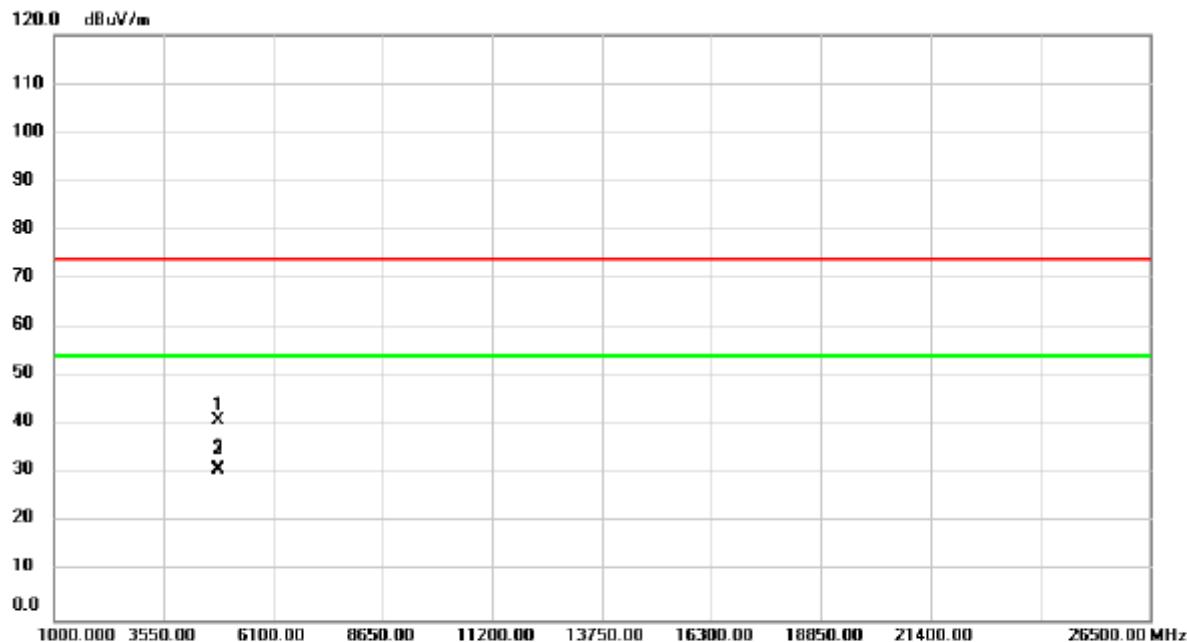


No.	Freq.	Reading	Factor	Meas. Level	Limit	Margin	Detector	Height (cm)	Degree (deg.)	Comment
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)				
1	4824.000	41.09	-0.17	40.92	74.00	-33.08	peak			
2	4824.000	30.89	-0.17	30.72	54.00	-23.28	AVG			
3	*	31.20	-0.17	31.03	54.00	-22.97	AVG			DCF:0.31

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.
- (3) *: Maximum data x: Over limit !: Over margin

Test Mode	IEEE 802.11g	Test Date	2024/7/26
Test Frequency	CH01: 2412 MHz	Polarization	Horizontal
Temp	22°C	Hum.	62%

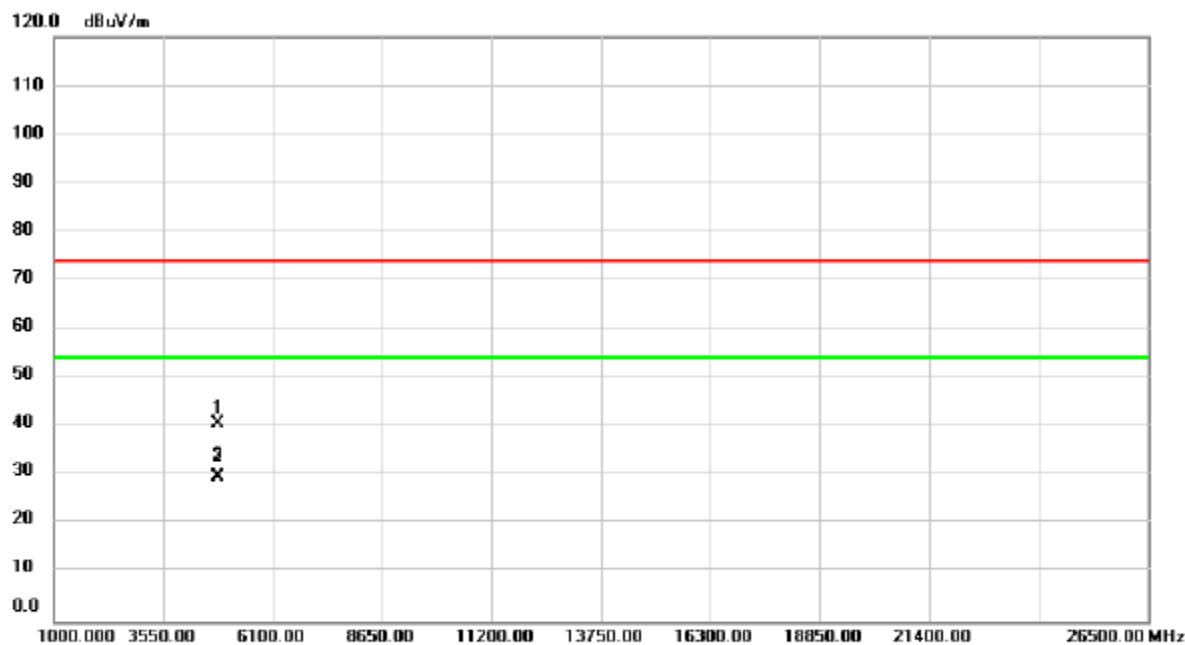


No.	Freq.	Reading	Factor	Meas. Level	Limit	Margin	Detector	Height (cm)	Degree (deg.)	Comment
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)				
1	4824.000	40.83	-0.17	40.66	74.00	-33.34	peak			
2	4824.000	29.66	-0.17	29.49	54.00	-24.51	AVG			
3	* 4824.000	29.97	-0.17	29.80	54.00	-24.20	AVG			DCF:0.31

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.
- (3) *: Maximum data x: Over limit !: Over margin

Test Mode	IEEE 802.11g	Test Date	2024/7/26
Test Frequency	CH06: 2437 MHz	Polarization	Vertical
Temp	22°C	Hum.	62%

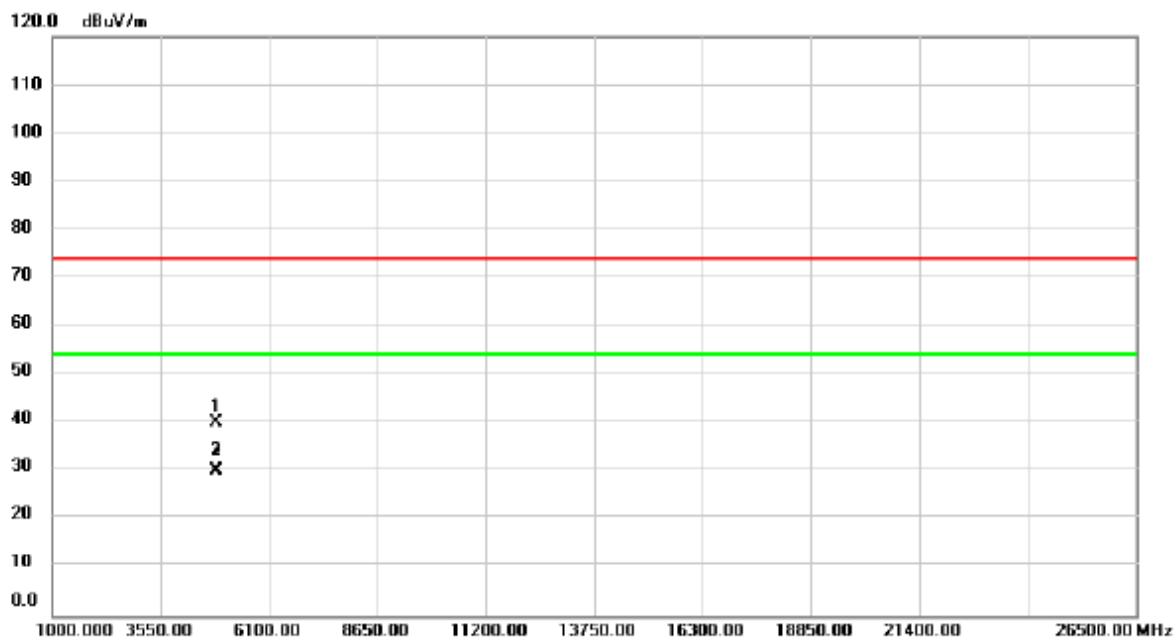


No.	Freq. (MHz)	Reading	Factor	Meas. Level	Limit	Margin	Detector	Height (cm)	Degree (deg.)	Comment
		(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)				
1	4874.000	40.26	-0.08	40.18	74.00	-33.82	peak			
2	4874.000	30.04	-0.08	29.96	54.00	-24.04	AVG			
3	*	4874.000	30.35	-0.08	30.27	54.00	-23.73	AVG		DCF:0.31

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.
- (3) *: Maximum data x: Over limit !: Over margin

Test Mode	IEEE 802.11g	Test Date	2024/7/26
Test Frequency	CH06: 2437 MHz	Polarization	Horizontal
Temp	22°C	Hum.	62%

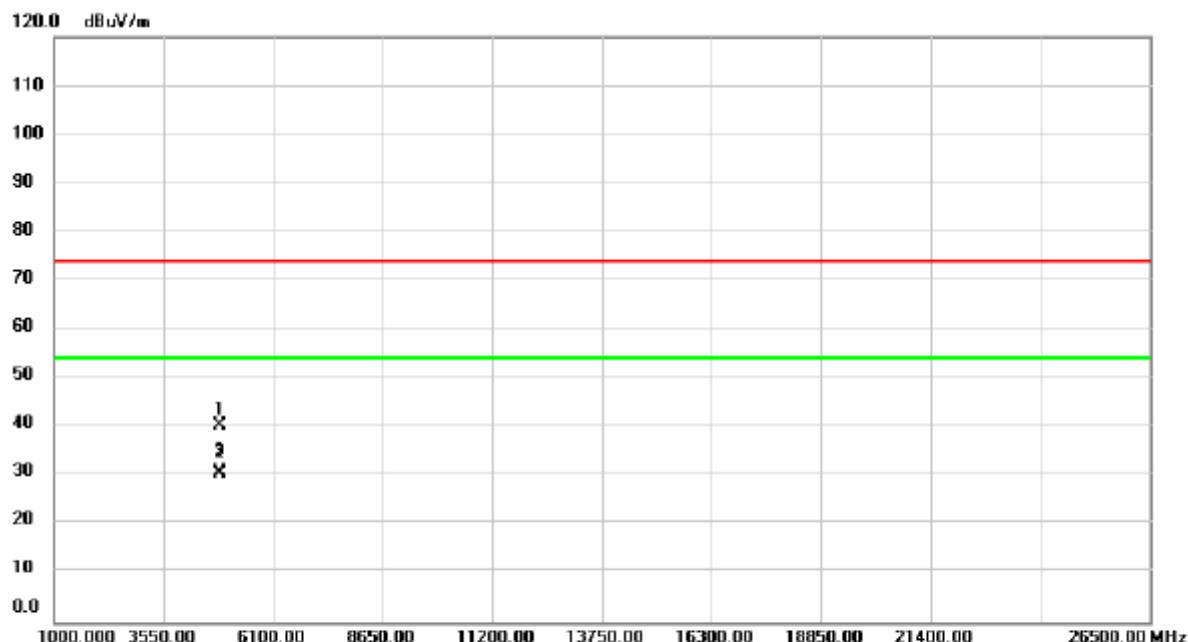


No.	Freq.	Reading	Factor	Meas. Level	Limit	Margin	Detector	Height (cm)	Degree (deg.)	Comment
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)				
1	4874.000	40.45	-0.08	40.37	74.00	-33.63	peak			
2	4874.000	30.56	-0.08	30.48	54.00	-23.52	AVG			
3	* 4874.000	30.87	-0.08	30.79	54.00	-23.21	AVG			DCF:0.31

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.
- (3) *: Maximum data x: Over limit !: Over margin

Test Mode	IEEE 802.11g	Test Date	2024/7/26
Test Frequency	CH11: 2462 MHz	Polarization	Vertical
Temp	22°C	Hum.	62%

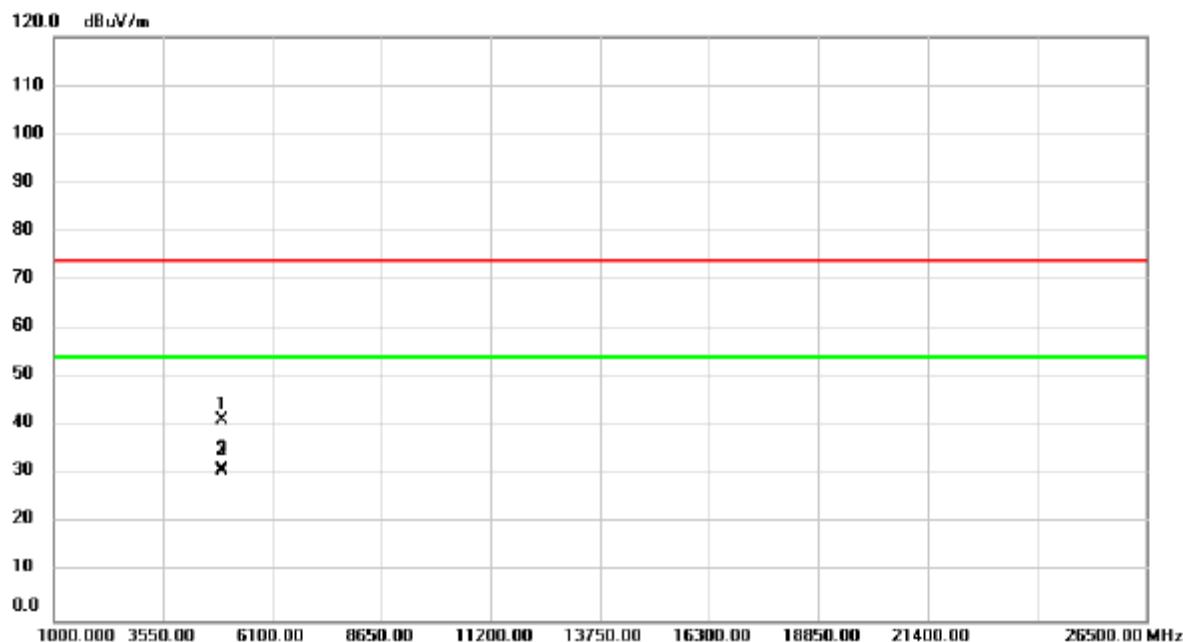


No.	Freq.	Reading	Factor	Meas. Level	Limit	Margin	Detector	Height (cm)	Degree (deg.)	Comment
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)				
1	4924.000	41.26	0.01	41.27	74.00	-32.73	peak			
2	4924.000	30.81	0.01	30.82	54.00	-23.18	AVG			
3	* 4924.000	31.12	0.01	31.13	54.00	-22.87	AVG			DCF:0.31

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.
- (3) *: Maximum data x: Over limit !: Over margin

Test Mode	IEEE 802.11g	Test Date	2024/7/26
Test Frequency	CH11: 2462 MHz	Polarization	Horizontal
Temp	22°C	Hum.	62%

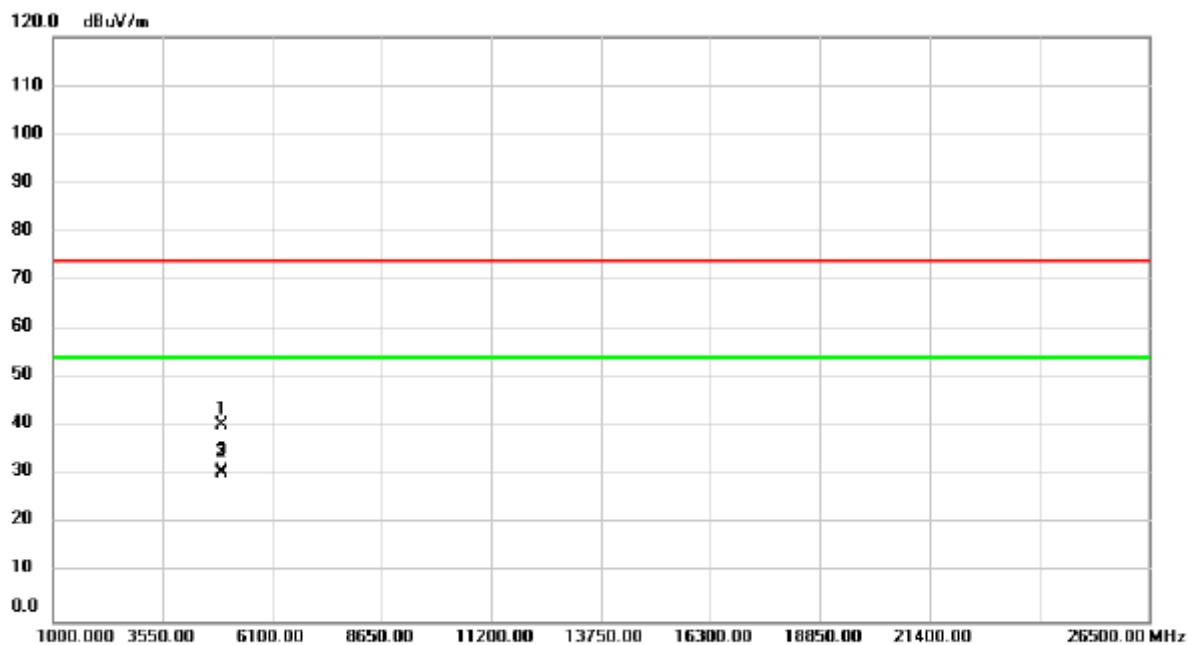


No.	Freq.	Reading	Factor	Meas. Level	Limit	Margin	Detector	Height (cm)	Degree (deg.)	Comment
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)				
1	4924.000	40.46	0.01	40.47	74.00	-33.53	peak			
2	4924.000	30.38	0.01	30.39	54.00	-23.61	AVG			
3	* 4924.000	30.69	0.01	30.70	54.00	-23.30	AVG			DCF:0.31

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.
- (3) *: Maximum data x: Over limit !: Over margin

Test Mode	IEEE 802.11n (HT20)	Test Date	2024/7/26
Test Frequency	CH01: 2412 MHz	Polarization	Vertical
Temp	22°C	Hum.	62%

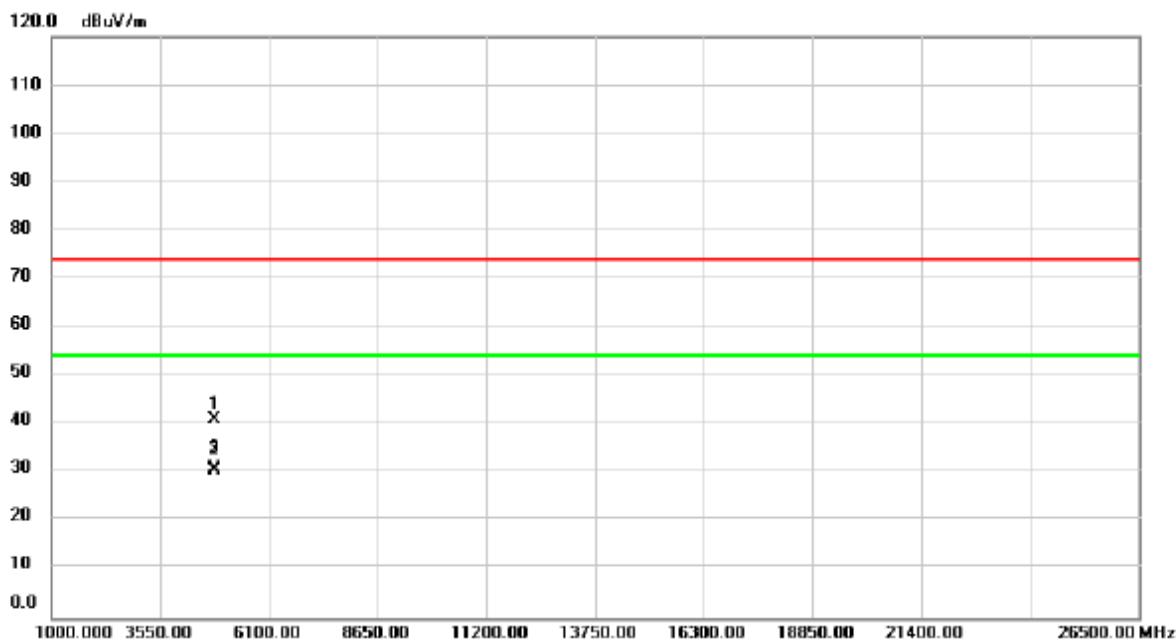


No.	Freq.	Reading	Factor	Meas. Level	Limit	Margin	Detector	Height (cm)	Degree (deg.)	Comment
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)				
1	4824.000	41.14	-0.17	40.97	74.00	-33.03	peak			
2	4824.000	30.68	-0.17	30.51	54.00	-23.49	AVG			
3	*	31.01	-0.17	30.84	54.00	-23.16	AVG			DCF:0.33

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.
- (3) *: Maximum data x: Over limit !: Over margin

Test Mode	IEEE 802.11n (HT20)	Test Date	2024/7/26
Test Frequency	CH01: 2412 MHz	Polarization	Horizontal
Temp	22°C	Hum.	62%

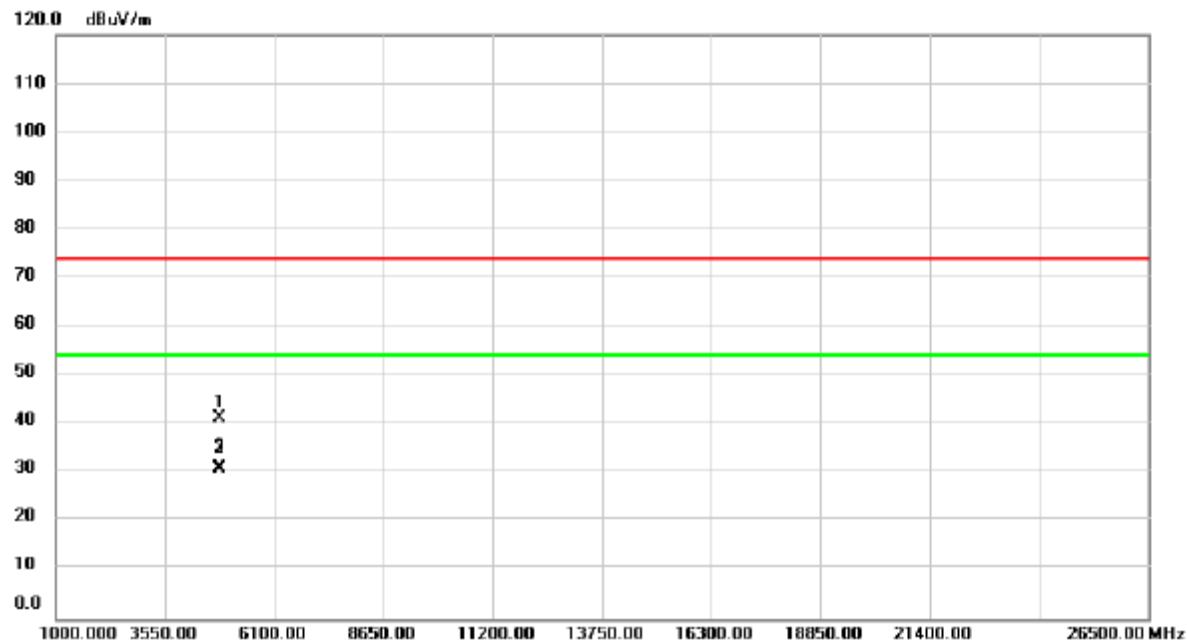


No.	Freq.	Reading	Factor	Meas. Level	Limit	Margin	Detector	Height (cm)	Degree (deg.)	Comment
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)				
1	4824.000	41.37	-0.17	41.20	74.00	-32.80	peak			
2	4824.000	30.78	-0.17	30.61	54.00	-23.39	AVG			
3	* 4824.000	31.11	-0.17	30.94	54.00	-23.06	AVG			DCF:0.33

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.
- (3) *: Maximum data x: Over limit !: Over margin

Test Mode	IEEE 802.11n (HT20)	Test Date	2024/7/26
Test Frequency	CH06: 2437 MHz	Polarization	Vertical
Temp	22°C	Hum.	62%

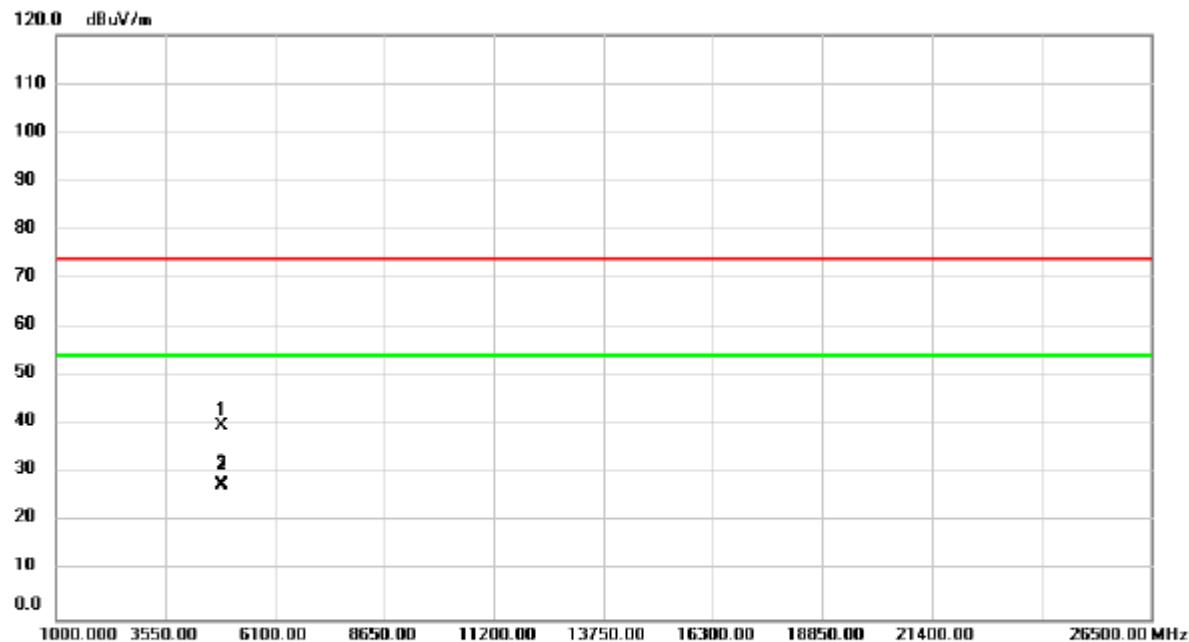


No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Meas. Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height	Degree	Comment
								(cm)	(deg.)	
1	4874.000	39.87	-0.08	39.79	74.00	-34.21	peak			
2	4874.000	27.57	-0.08	27.49	54.00	-26.51	AVG			
3	*	4874.000	27.90	-0.08	27.82	54.00	-26.18	AVG		DCF:0.33

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.
- (3) *: Maximum data x: Over limit !: Over margin

Test Mode	IEEE 802.11n (HT20)	Test Date	2024/7/26
Test Frequency	CH06: 2437 MHz	Polarization	Horizontal
Temp	22°C	Hum.	62%

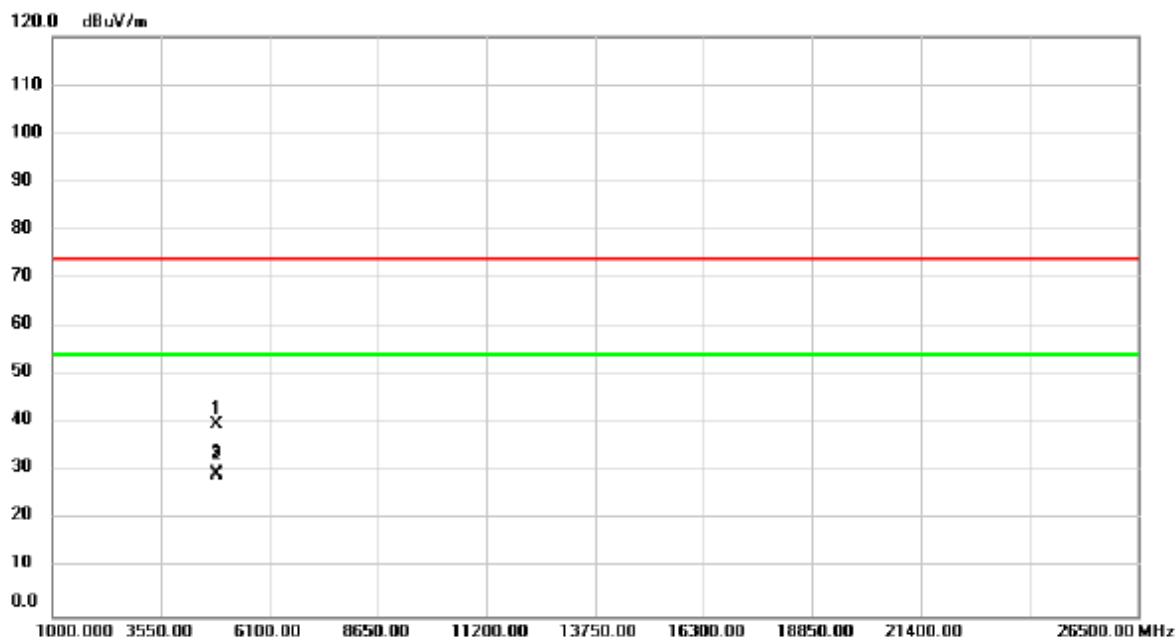


No.	Freq.	Reading	Factor	Meas. Level	Limit	Margin	Detector	Height (cm)	Degree (deg.)	Comment
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)				
1	4874.000	39.85	-0.08	39.77	74.00	-34.23	peak			
2	4874.000	29.24	-0.08	29.16	54.00	-24.84	AVG			
3	*	4874.000	29.57	-0.08	29.49	54.00	-24.51	AVG		DCF:0.33

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.
- (3) *: Maximum data x: Over limit !: Over margin

Test Mode	IEEE 802.11n (HT20)	Test Date	2024/7/26
Test Frequency	CH11: 2462 MHz	Polarization	Vertical
Temp	22°C	Hum.	62%

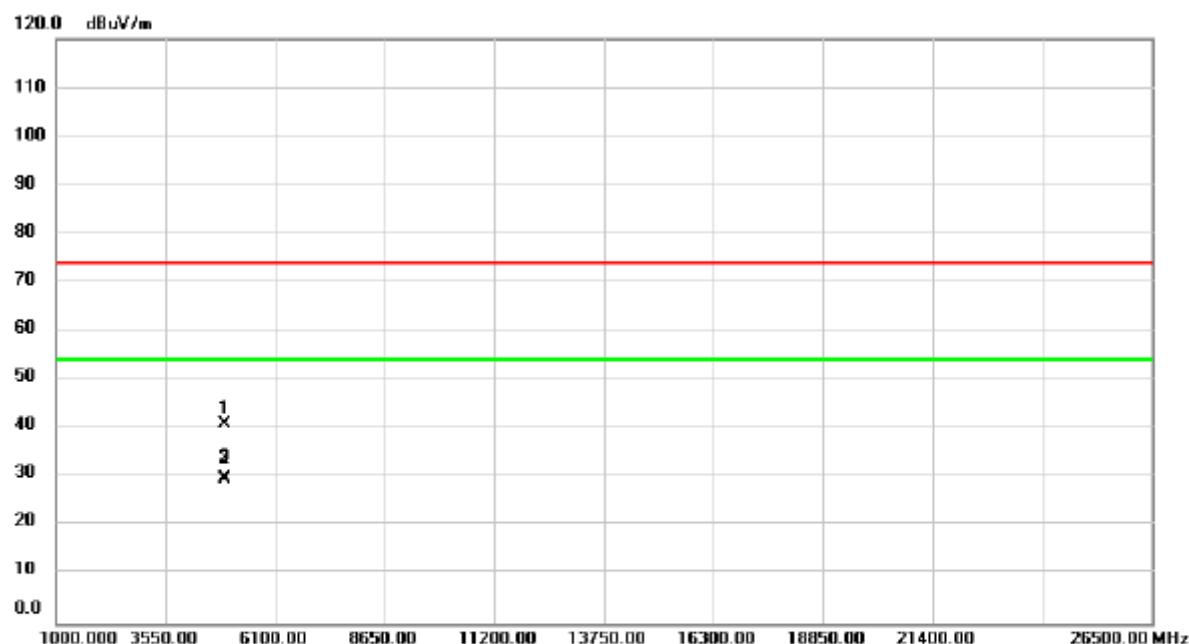


No.	Freq.	Reading	Factor	Meas. Level	Limit	Margin	Detector	Height (cm)	Degree (deg.)	Comment
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)				
1	4924.000	41.02	0.01	41.03	74.00	-32.97	peak			
2	4924.000	29.54	0.01	29.55	54.00	-24.45	AVG			
3	* 4924.000	29.87	0.01	29.88	54.00	-24.12	AVG			DCF:0.33

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.
- (3) *: Maximum data x: Over limit !: Over margin

Test Mode	IEEE 802.11n (HT20)	Test Date	2024/7/26
Test Frequency	CH11: 2462 MHz	Polarization	Horizontal
Temp	22°C	Hum.	62%

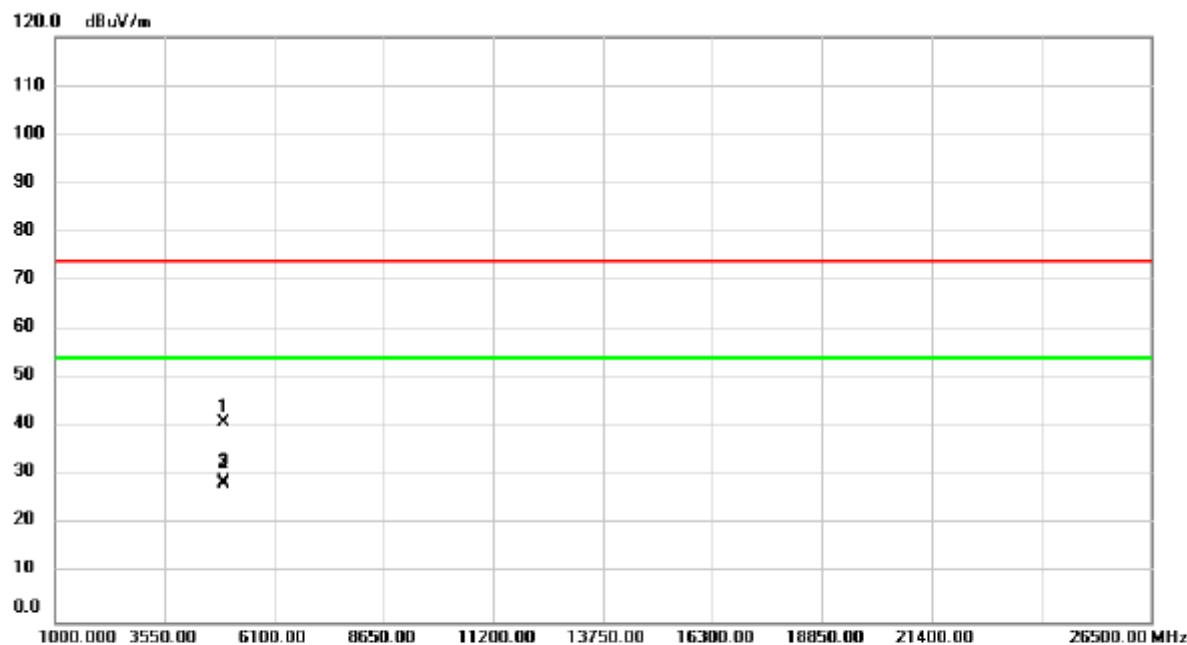

No.	Freq.	Reading	Factor	Meas. Level	Limit	Margin	Detector	Height (cm)	Degree (deg.)	Comment
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)				
1	4924.000	40.99	0.01	41.00	74.00	-33.00	peak			
2	4924.000	28.44	0.01	28.45	54.00	-25.55	AVG			
3	4924.000	28.77	0.01	28.78	54.00	-25.22	AVG			DCF:0.33


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.
- (3) *: Maximum data x: Over limit !: Over margin

APPENDIX D BANDWIDTH


Test Mode	IEEE 802.11b
-----------	--------------

Test Frequency (MHz)	6 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	Minimum 6 dB Bandwidth Limit (kHz)	Result
2412	9.04	14.16	≥ 500	Pass
2437	8.56	14.82	≥ 500	Pass
2462	8.10	14.16	≥ 500	Pass

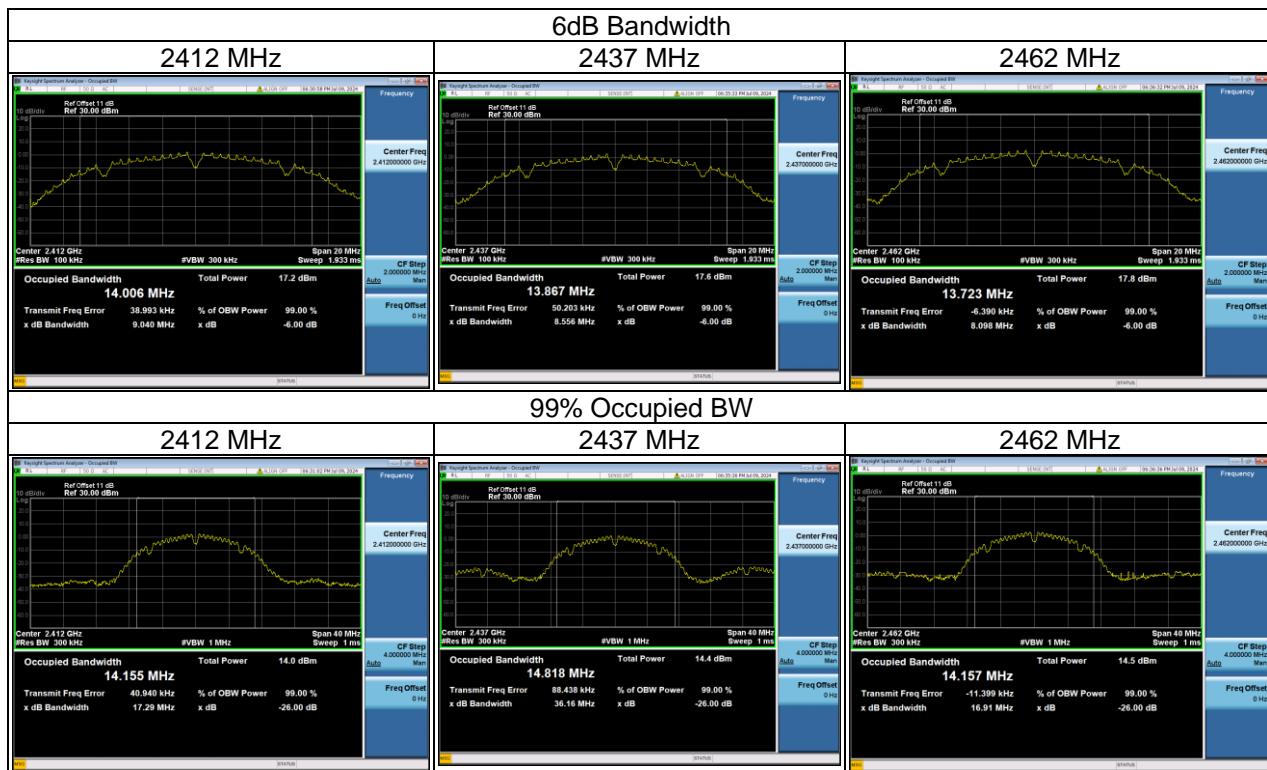


Test Mode	IEEE 802.11g
-----------	--------------

Test Frequency (MHz)	6 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	Minimum 6 dB Bandwidth Limit (kHz)	Result
2412	15.06	16.59	≥ 500	Pass
2437	15.12	16.69	≥ 500	Pass
2462	15.10	16.66	≥ 500	Pass

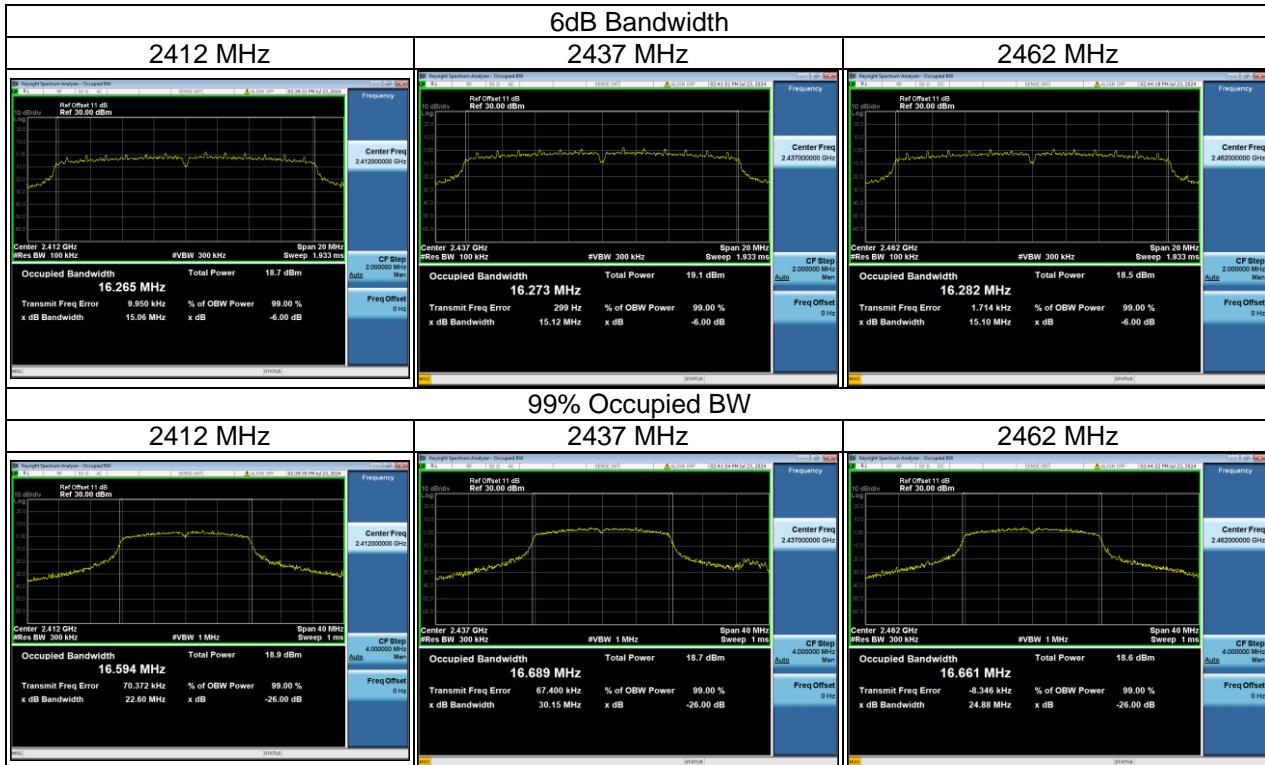

Test Mode	IEEE 802.11n (HT20)
-----------	---------------------

Test Frequency (MHz)	6 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	Minimum 6 dB Bandwidth Limit (kHz)	Result
2412	15.36	17.74	≥ 500	Pass
2437	15.13	17.74	≥ 500	Pass
2462	15.13	17.72	≥ 500	Pass

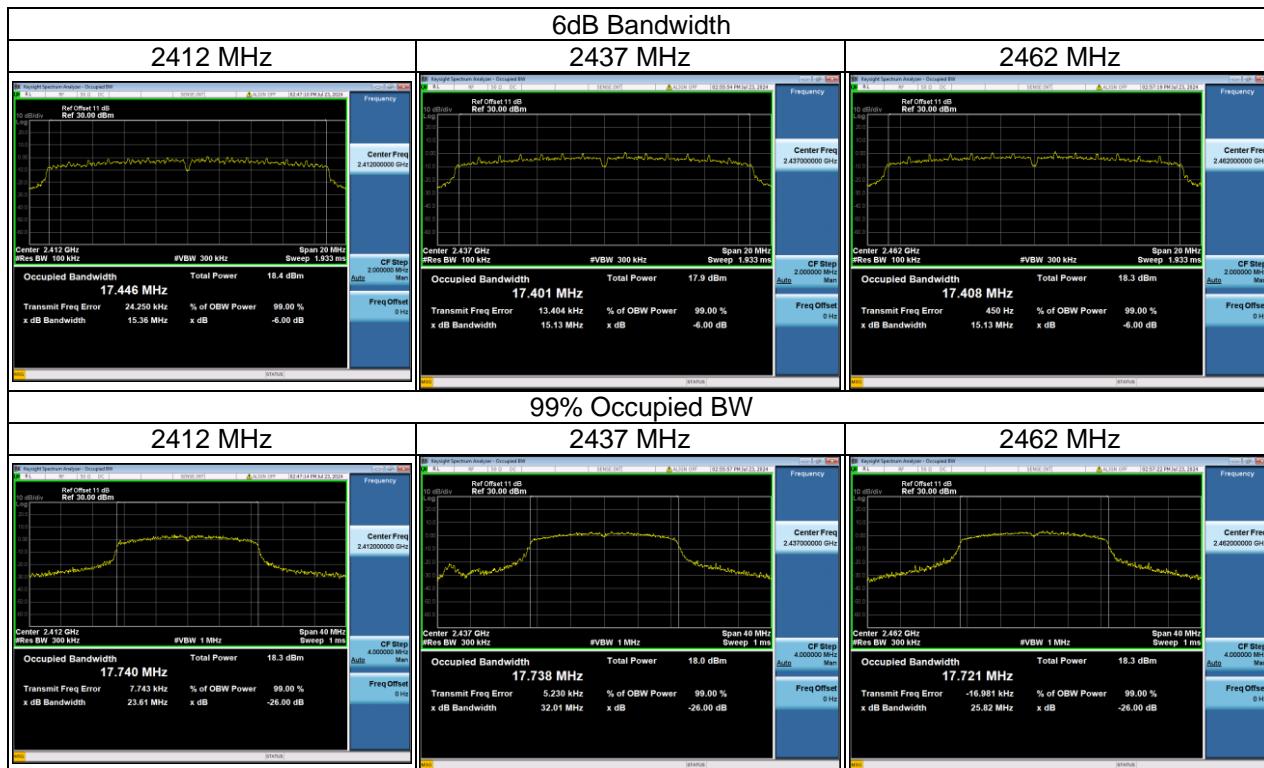

APPENDIX E OUTPUT POWER

Test Mode	IEEE 802.11b	Tested Date	2024/7/23
-----------	--------------	-------------	-----------

Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Limit (dBm)	Limit (W)	Result
2412	14.33	0.0271	30.00	1.0000	Complies
2437	14.61	0.0289	30.00	1.0000	Complies
2462	15.43	0.0349	30.00	1.0000	Complies

Test Mode	IEEE 802.11g	Tested Date	2024/7/23
-----------	--------------	-------------	-----------

Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Limit (dBm)	Limit (W)	Result
2412	18.69	0.0740	30.00	1.0000	Complies
2437	18.78	0.0755	30.00	1.0000	Complies
2462	18.41	0.0693	30.00	1.0000	Complies

Test Mode	IEEE 802.11n (HT20)	Tested Date	2024/7/23
-----------	---------------------	-------------	-----------

Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Limit (dBm)	Limit (W)	Result
2412	18.24	0.0667	30.00	1.0000	Complies
2437	17.77	0.0598	30.00	1.0000	Complies
2462	18.16	0.0655	30.00	1.0000	Complies

APPENDIX F POWER SPECTRAL DENSITY


Test Mode	IEEE 802.11b
-----------	--------------

Test Frequency (MHz)	Power Spectral Density (dBm/3kHz)	Maximum Limit (dBm/3kHz)	Result
2412	-13.12	8	Pass
2437	-12.97	8	Pass
2462	-12.05	8	Pass

2412 MHz



2437 MHz

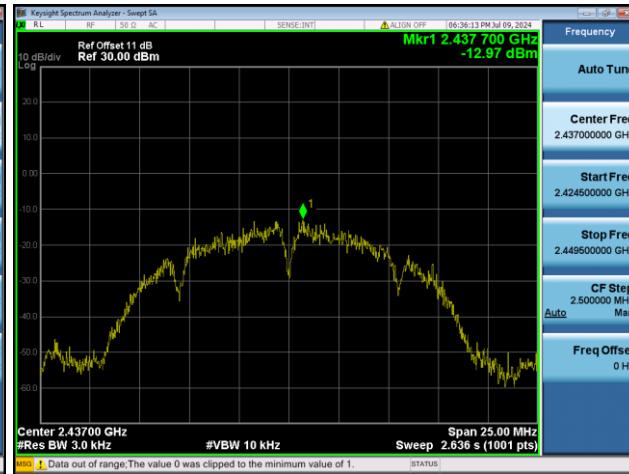


2462 MHz




Test Mode	IEEE 802.11g
-----------	--------------

Test Frequency (MHz)	Power Spectral Density (dBm/3kHz)	Maximum Limit (dBm/3kHz)	Result
2412	-13.16	8	Pass
2437	-13.98	8	Pass
2462	-13.93	8	Pass


2412 MHz

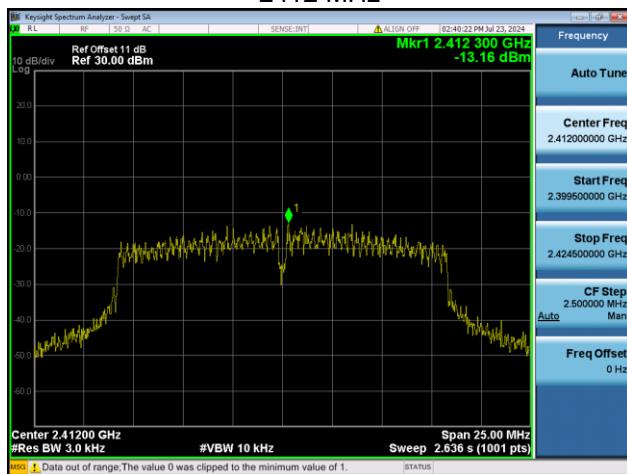

2437 MHz

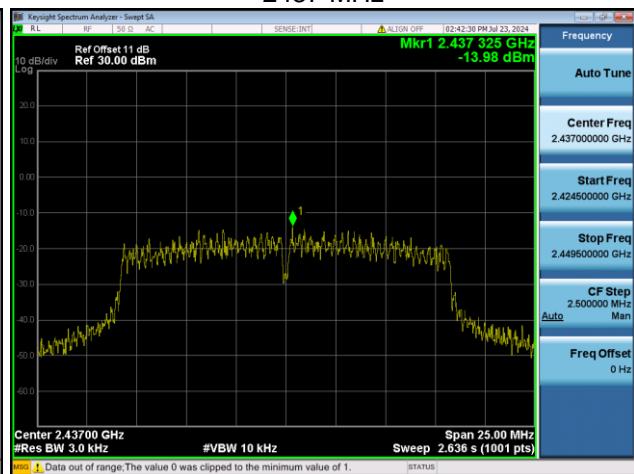


2462 MHz

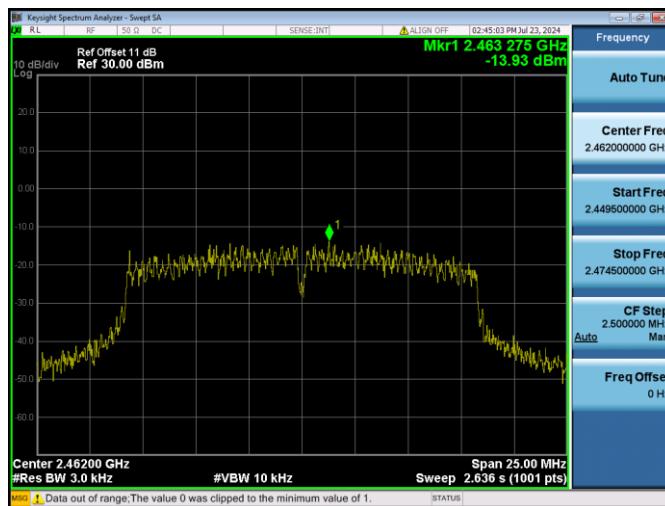


Test Mode	IEEE 802.11n (HT20)
-----------	---------------------

Test Frequency (MHz)	Power Spectral Density (dBm/3kHz)	Maximum Limit (dBm/3kHz)	Result
2412	-15.01	8	Pass
2437	-14.49	8	Pass
2462	-13.54	8	Pass


2412 MHz

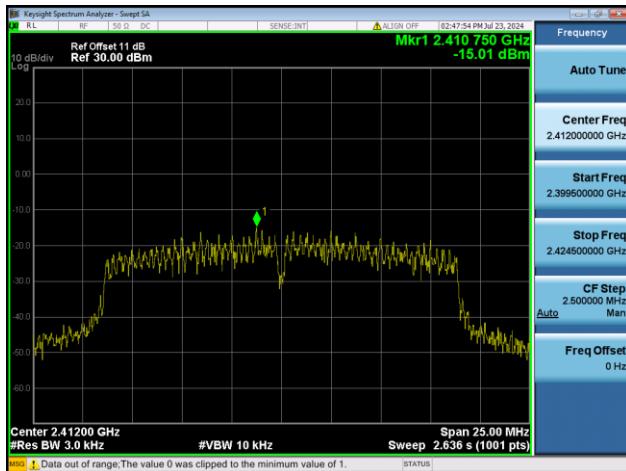

2437 MHz

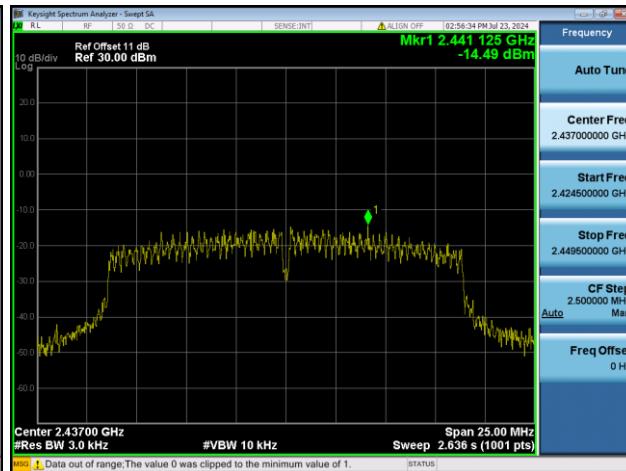


2462 MHz




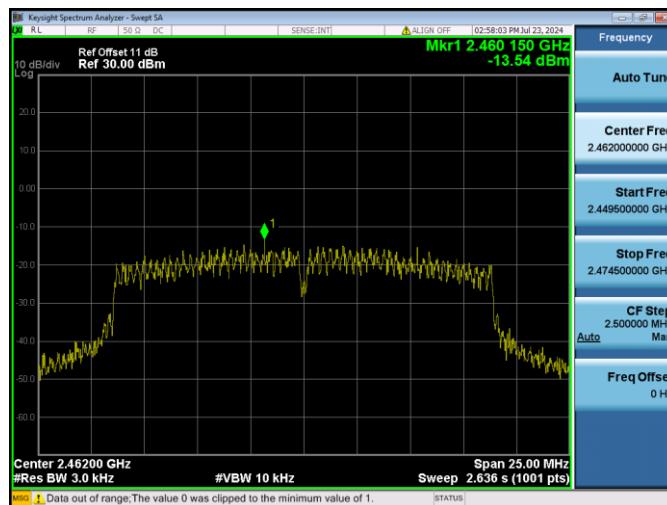


APPENDIX G ANTENNA CONDUCTED SPURIOUS EMISSIONS

Test Mode IEEE 802.11b

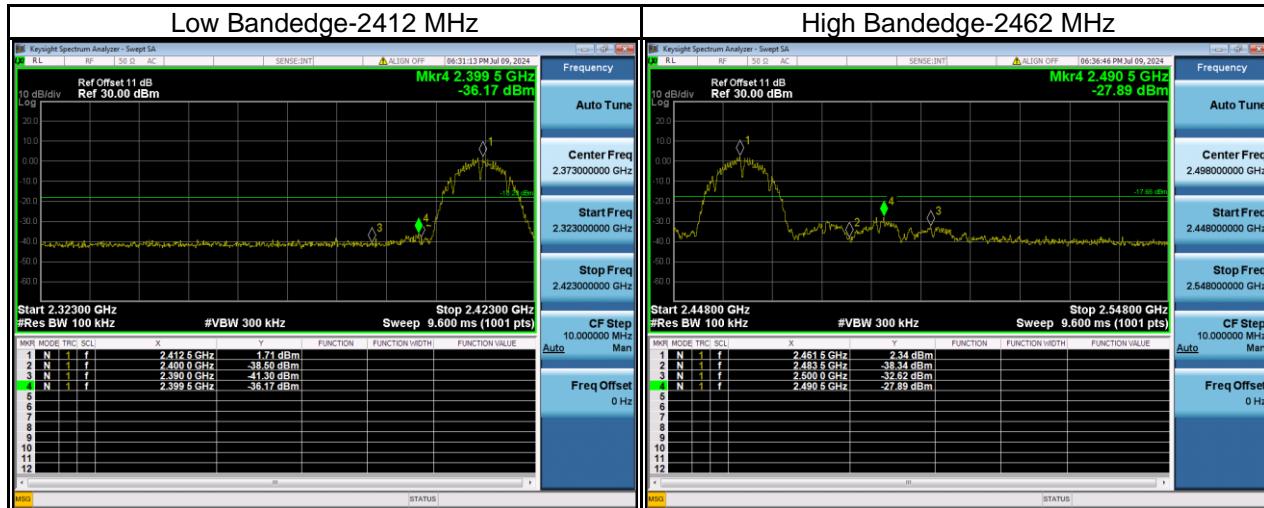


Test Mode | IEEE 802.11g

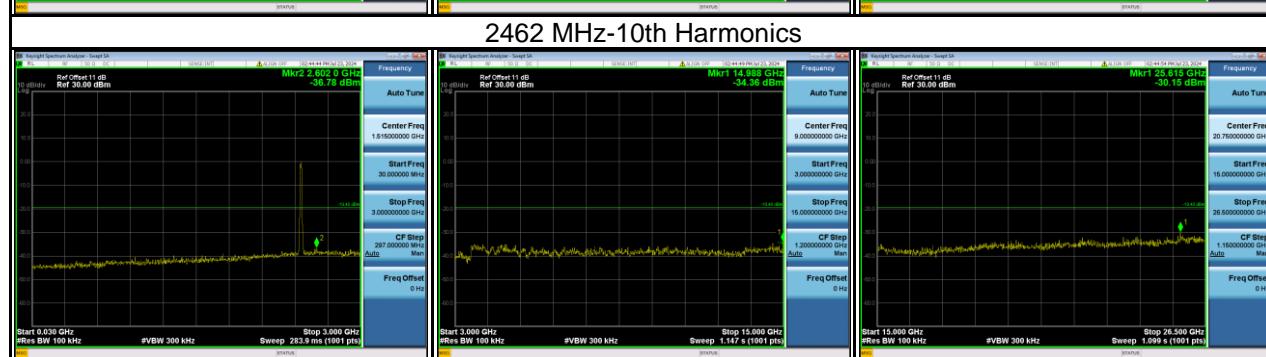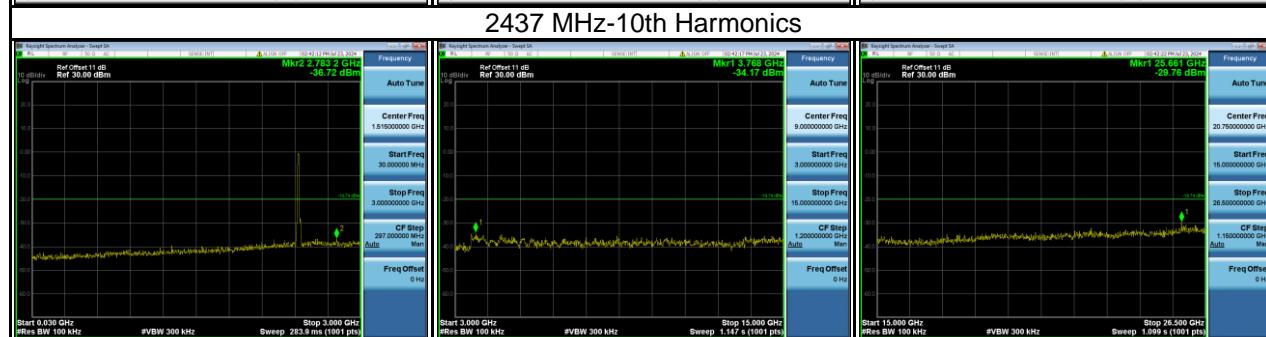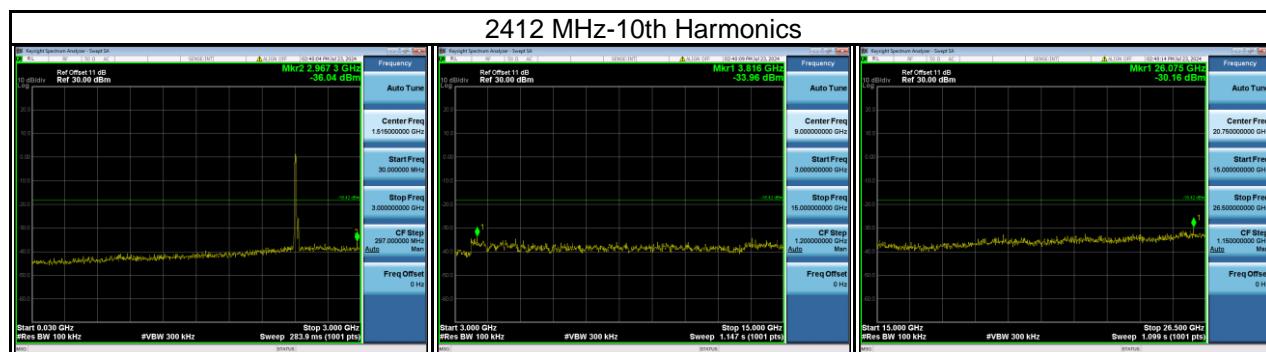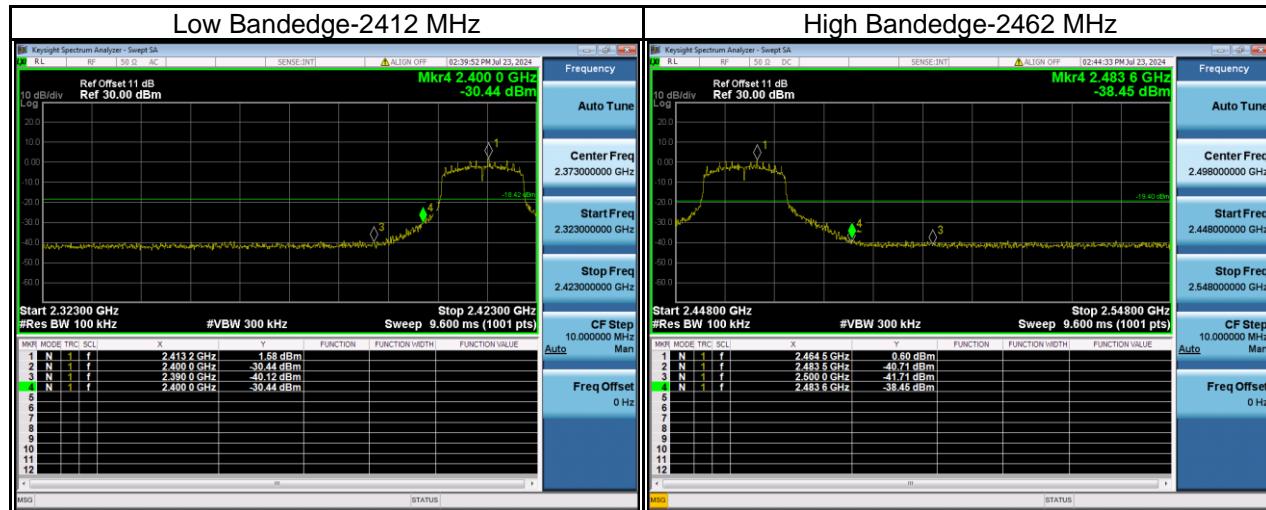


Test Mode IEEE 802.11n (HT20) ANT1


Low Bandedge-2412 MHz

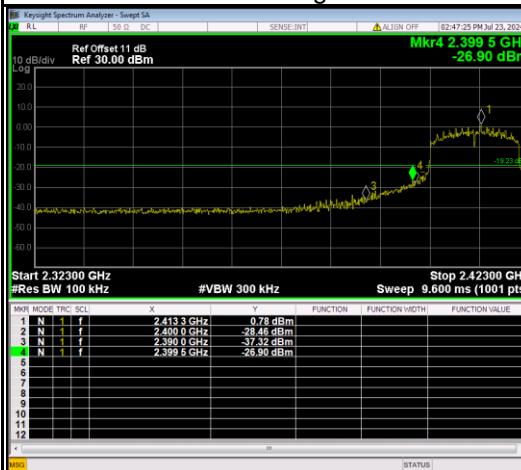


High Bandedge-2462 MHz

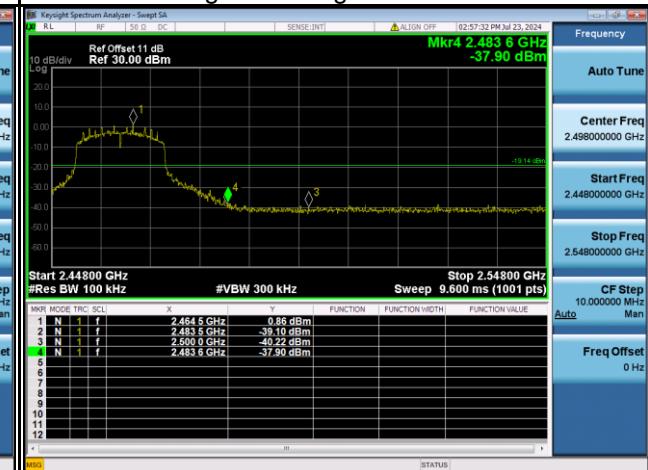



2412 MHz-10th Harmonics

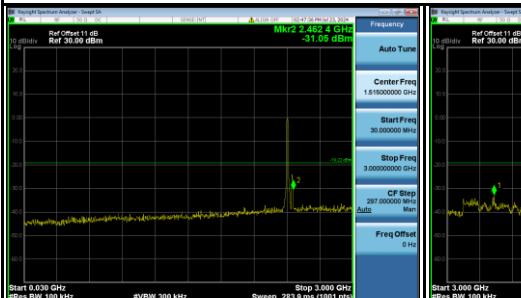

2437 MHz-10th Harmonics

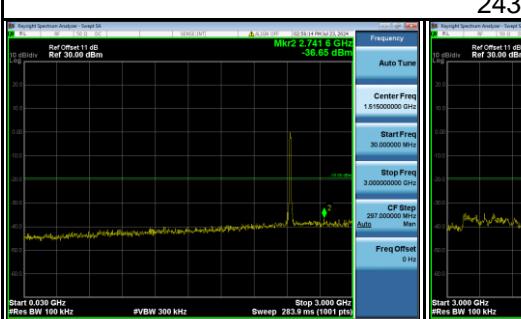

2462 MHz-10th Harmonics

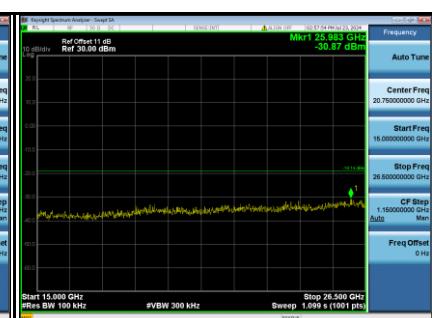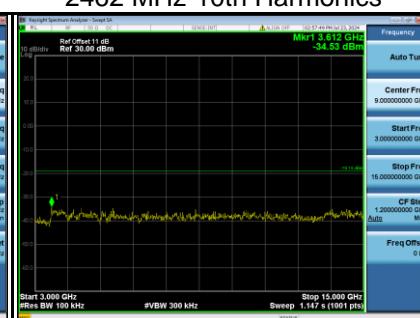

End of Test Report