

RF TEST REPORT

Test item : Wi-Fi USB Dongle
Model No. : PTA127/55
Order No. : 1112-01648
Date of receipt : 2011-12-01
Test duration : 2011-12-16 ~ 2011-12-29
Date of issue : 2012-01-05
Use of report : FCC Original Grant

Applicant : PHILIPS Electronics Singapore Pte Ltd
620A, Lorong 1 Toa Payoh , Singapore 319726.

Test laboratory : Digital EMC Co., Ltd.
683-3, Yubang-Dong, Cheoin-Gu, Yongin-Si, Kyunggi-Do, 449-080, Korea

Test specification : FCC Part 15.247 Subpart C
ANSI C63.4-2003

Test environment : See appended test report

Test result : ☒ Pass ☐ Fail

The test results presented in this test report are limited only to the sample supplied by applicant and the use of this test report is inhibited other than its purpose. This test report shall not be reproduced except in full, without the written approval of Digital EMC Co., Ltd.

Tested by:

Witnessed by:

Reviewed by:



Engineer
J.J. Lee

N/A


Technical Director
Harvey Sung

CONTENTS

1. Equipment information.....	3
1.1 Equipment description	3
1.2 Ancillary equipment.....	3
2. Information about test items.....	4
2.1 Test mode	4
2.2 Auxiliary equipment.....	4
2.3 Frequency / Channel information & Antenna configuration.....	5
2.4 Tested environment	5
2.5 EMI Suppression Device(s)/Modifications	5
3. Test Report.....	6
3.1 Summary of tests.....	6
3.2 Transmitter requirements	7
3.2.1 6 dB Bandwidth	7
3.2.2 Peak Output Power	16
3.2.3 Out of Band Emissions / Band Edge	18
3.2.4 Out of band Emission – Radiated.....	31
3.2.5 Transmitter Power Spectral Density	38
3.2.6 AC Conducted Emissions.....	51
3.2.7 Antenna Requirements.....	60
APPENDIX	61

1. Equipment information

1.1 Equipment description

FCC Equipment Class	Digital Transmission System (DTS)
Equipment type	Wi-Fi USB Dongle
Equipment model name	PTA127/55
Equipment add model name	N/A
Equipment serial no.	Identical prototype
Frequency band	2.4GHz Band 802.11b/g/n(20MHz): 2412 ~ 2462 MHz 802.11n(40MHz): 2422~2452 MHz
Channel number	2.4GHz Band 802.11b/g/n(20MHz): 11 802.11n(40MHz): 7
Modulation type	802.11b: DSSS/CCK 802.11g/n: OFDM
Data rate	802.11b: 1, 2, 5.5, 11 Mbps 802.11g: 6, 9, 12, 18, 24, 36, 48, 54 Mbps 802.11n(20MHz): MCS 0 ~ MCS 15 (Max 130 Mbps) 802.11n(40MHz): MCS 0 ~ MCS 15 (Max 270 Mbps)
Antenna type	PIFA Antenna(2TX 2RX) 2.4GHz Band Max. peak gain - Chain 0 : 1.23 dBi, Chain 1 : 0.61 dBi
Power Supply	DC 5.0 V

1.2 Ancillary equipment

Equipment	Model No.	Serial No.	Manufacturer	Note
-	-	-	-	-
-	-	-	-	-

2. Information about test items

2.1 Test mode

Band	Mode	Single Transmitting		Multiple Transmitting (2 TX / 2 RX)
		Chain 0	Chain 1	
2.4GHz	802.11b	1Mbps	1Mbps	N/A
	802.11g	6Mbps	6Mbps	N/A
	802.11n(20MHz)	N/A	N/A	6.5Mbps
	802.11n(40MHz)	N/A	N/A	6.5Mbps

For all test items, the low, middle and high channels of the modes were tested respectively by choosing the highest RF out power chain, and transmission rate from preliminary testing.

2.2 Auxiliary equipment

Equipment	Model No.	Serial No.	Manufacturer	Note
Notebook	X51RL	85N0AS318314227	ASUSTeK Computer Inc.	-
Mouse	M-B0001	LZ019HR017B	Logitech Inc.	-

2.3 Frequency / Channel information & Antenna configuration

▪ Frequency / Channel information

Band	Mode	Channel No.	Freq. [MHz]	Channel No.	Freq. [MHz]	Channel No.	Freq. [MHz]
2.4GHz	802.11b/g/n(20MHz)	1	2412	5	2432	9	2452
		2	2417	6	2437	10	2457
		3	2422	7	2442	11	2462
		4	2427	8	2447	-	-
	802.11n(40MHz)	3	2422	6	2437	9	2452
		4	2427	7	2442	-	-
		5	2432	8	2447	-	-

▪ Supported Antenna Configuration

Band	Mode	Single Transmitting		Multiple Transmitting (2 TX / 2 RX)
		Chain 0	Chain 1	
2.4GHz	802.11b	Yes	Yes	No
	802.11g	Yes	Yes	No
	802.11n(20MHz)	No	No	Yes
	802.11n(40MHz)	No	No	Yes

2.4 Tested environment

Temperature	:	20 ~ 23 °C
Relative humidity content	:	36 ~ 45 % R.H.
Details of power supply	:	DC 5.0 V

2.5 EMI Suppression Device(s)/Modifications

EMI suppression device(s) added and/or modifications made during testing
→ None

3. Test Report

3.1 Summary of tests

FCC Part Section(s)	Parameter	Limit	Test Condition	Status Note 1
I. Test Items (TX)				
15.247(a)	6 dB Bandwidth	> 500 kHz	Conducted	C
15.247(b)	Transmitter Output Power	< 1Watt		C
15.247(c)	Out of Band Emissions / Band Edge	20dBc in any 100kHz BW		C
15.247(d)	Transmitter Power Spectral Density	< 8dBm / 3kHz		C
15.205 15.209	General Field Strength Limits (Restricted Bands and Radiated Emission Limits)	<FCC 15.209 Limits	Radiated	C Note.2
15.207	AC Conducted Emissions	<FCC 15.207 Limits	AC Line Conducted	C
15.203	Antenna Requirements	FCC 15.203	-	C
Note 1: C=Comply NC=Not Comply NT=Not Tested NA=Not Applicable Note 2: This test item was performed in each axis and the worst case data were reported.				

The sample was tested according to the following specification:
ANSI C-63.4-2003

3.2 Transmitter requirements

3.2.1 6 dB Bandwidth

- Procedure:

The bandwidth at 6 dB below the highest in-band spectral density was measured with a spectrum analyzer connected to the antenna terminal at the highest, middle and the lowest available channels.

After the trace being stable, Use the marker-to-peak function to set the marker to the peak of the emission. Use the marker-delta function to measure 6dB down one side of the emission. Reset the marker-delta function, and move the marker to the other side of the emission, until it is (as close as possible to) even with the reference marker level.

The marker-delta reading at this point is the 6 dB bandwidth of the emission.

- Measurement Data: **Comply**

Mode	Channel	Frequency [MHz]	Test Result [MHz]	
			Chain 0	Chain 1
802.11b	1	2412	11.150	12.060
	6	2437	12.030	12.060
	11	2462	10.180	11.140
802.11g	1	2412	16.340	16.380
	6	2437	16.360	16.360
	11	2462	16.380	16.370
802.11n (20MHz)	1	2412	17.090	16.930
	6	2437	17.090	17.040
	11	2462	17.060	16.980
802.11n (40MHz)	3	2422	35.380	35.190
	6	2437	35.400	35.660
	9	2452	35.380	35.220


Note 1: The worst case plots in both chains are attached on next page.

- Minimum Standard:

The minimum 6 dB bandwidth shall be at least 500 kHz
--


6 dB Bandwidth

Test Mode: 802.11b & Ch.1 & Chain 1

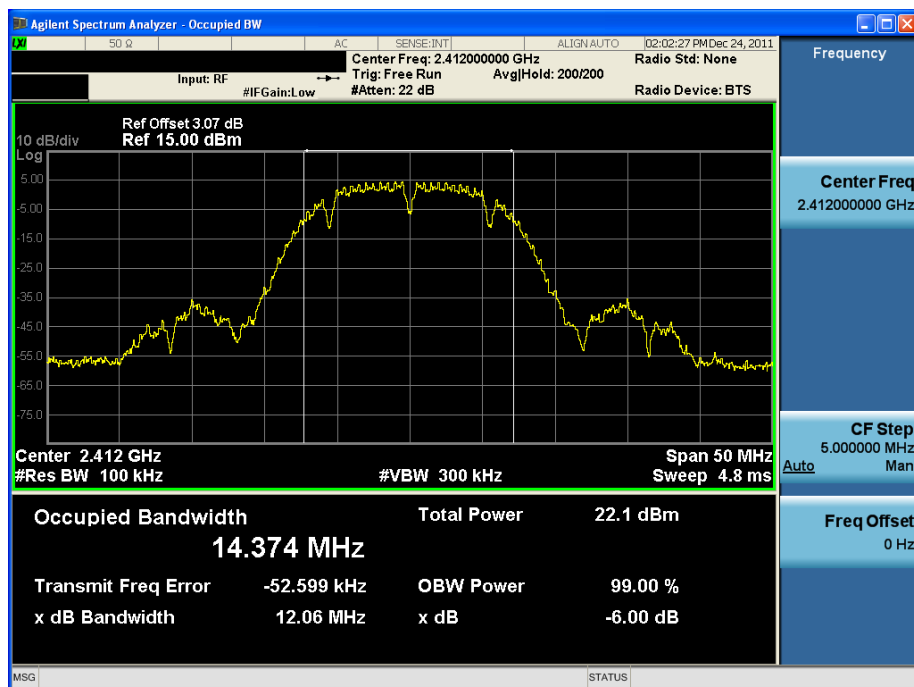


6 dB Bandwidth

Test Mode: 802.11b & Ch.6 & Chain 1

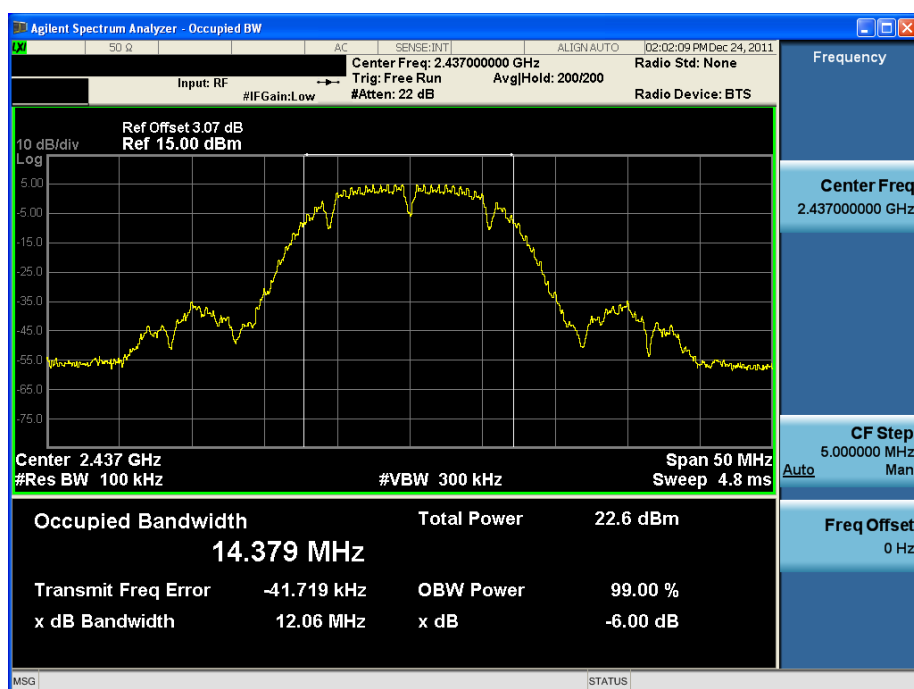


6 dB Bandwidth

Test Mode: 802.11b & Ch.11 & Chain 1

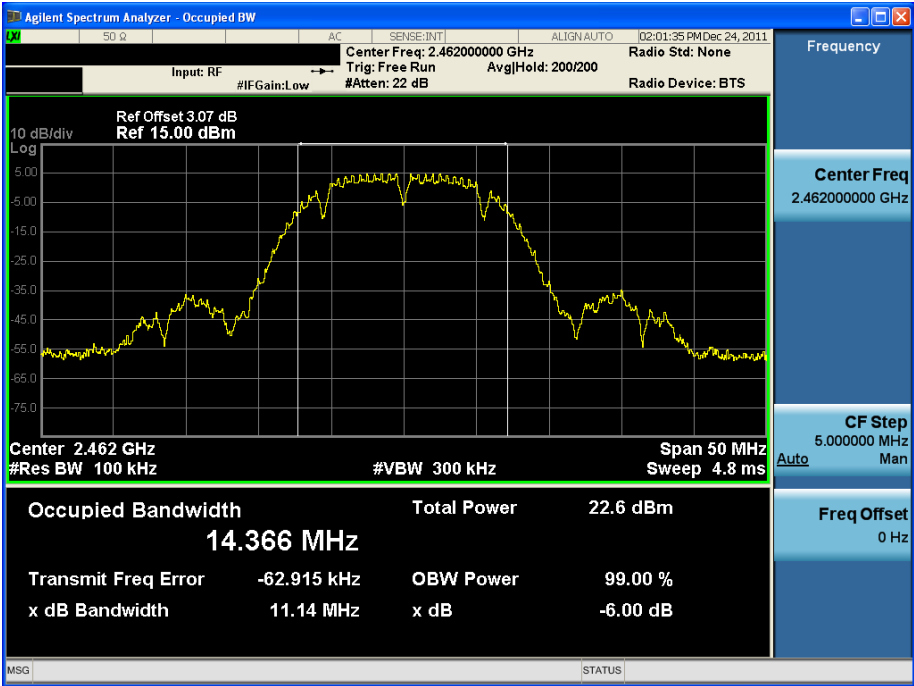


6 dB Bandwidth

Test Mode: 802.11g & Ch.1 & Chain 1

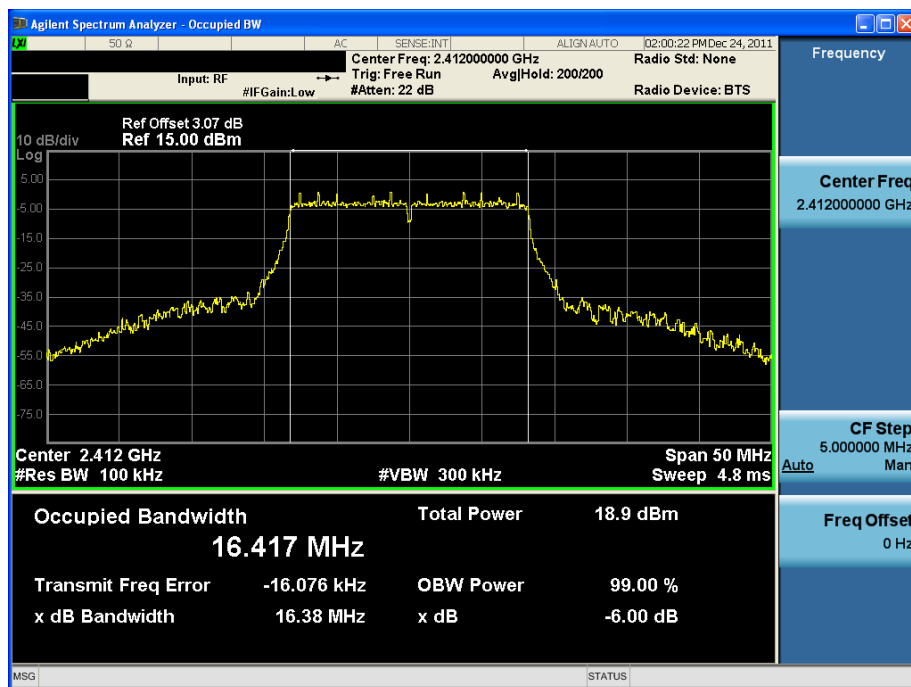


6 dB Bandwidth

Test Mode: 802.11g & Ch.6 & Chain 1

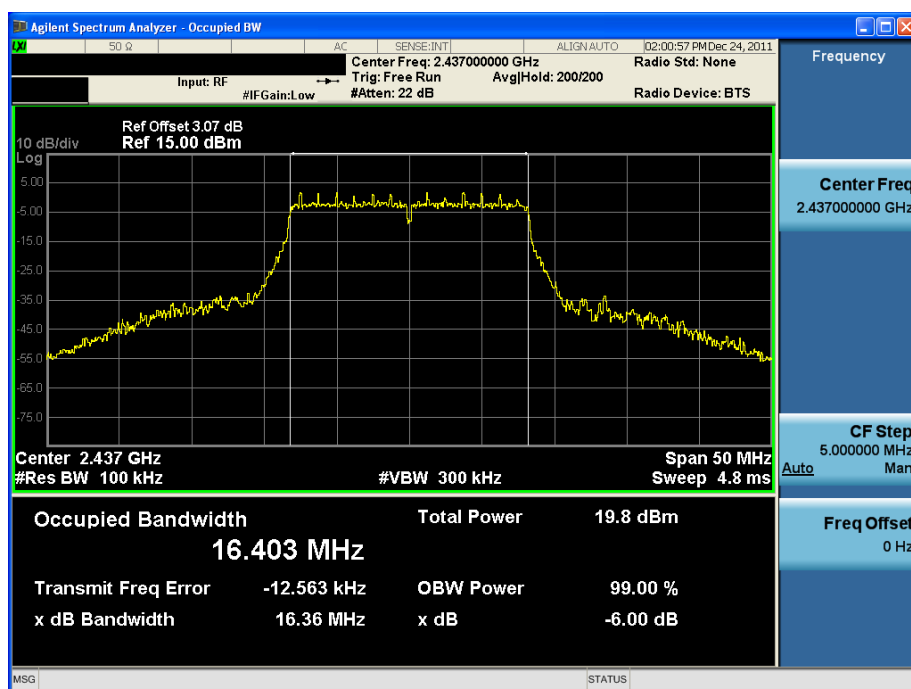


6 dB Bandwidth

Test Mode: 802.11g & Ch.11 & Chain 0

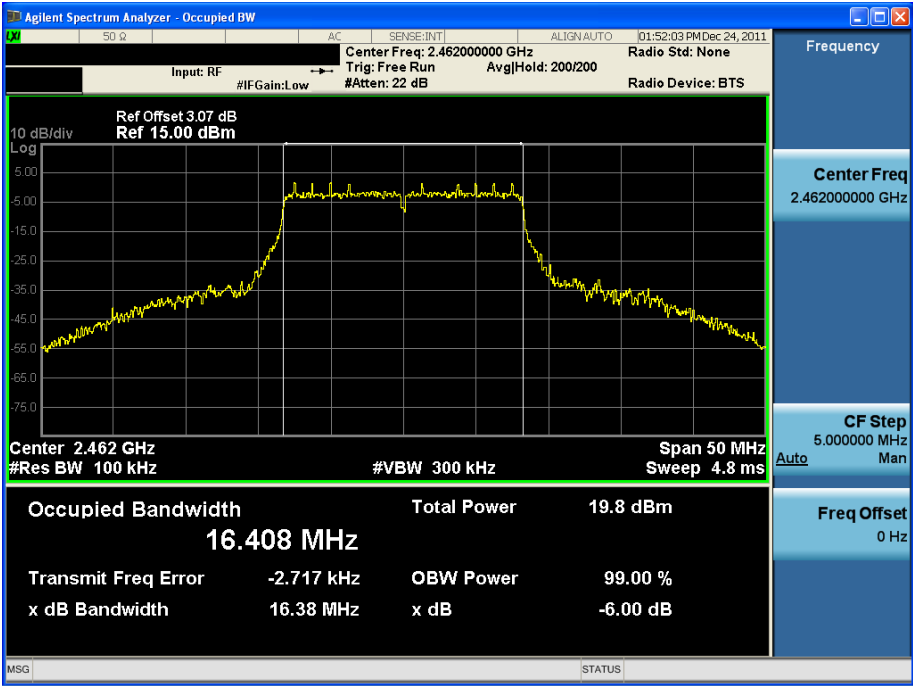


6 dB Bandwidth

Test Mode: 802.11n HT20 & Ch.1 & Chain 0

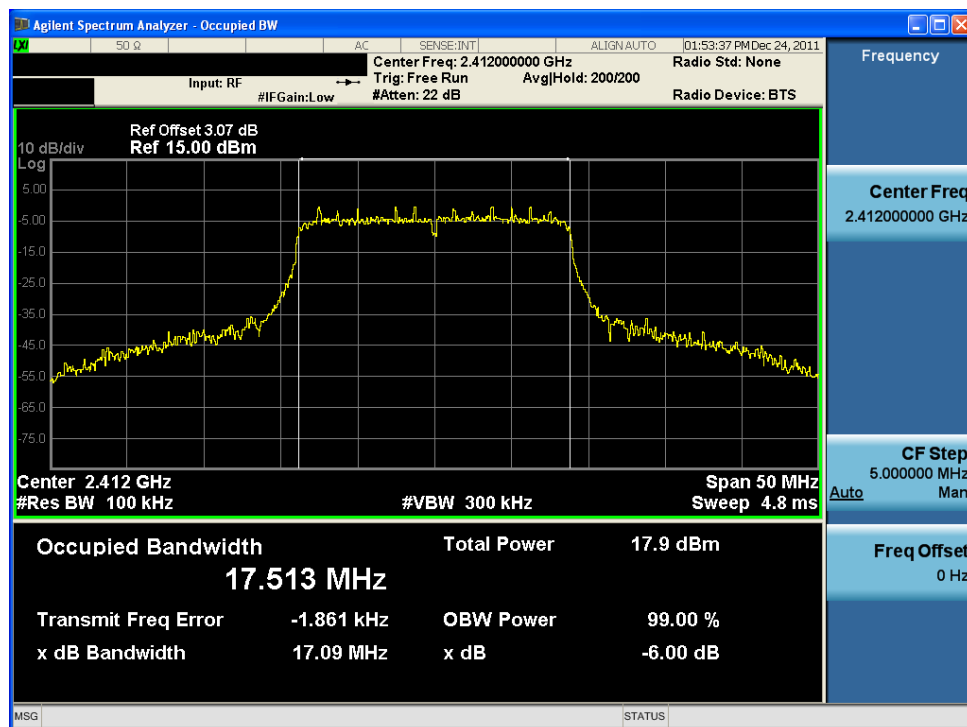


6 dB Bandwidth

Test Mode: 802.11n HT20 & Ch.6 & Chain 0

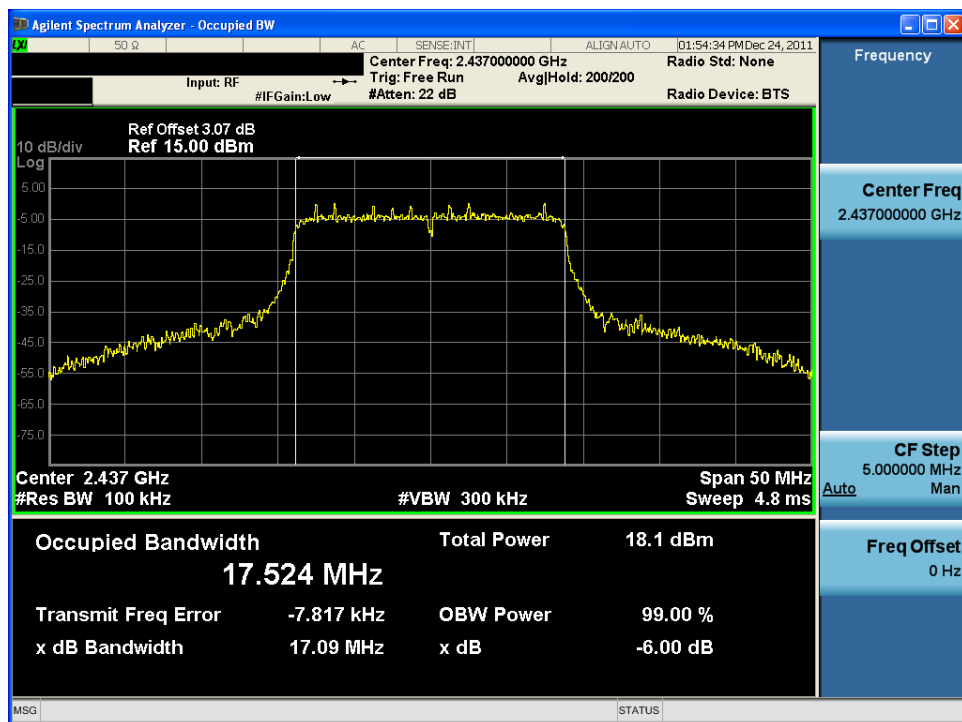


6 dB Bandwidth

Test Mode: 802.11n HT20 & Ch.11 & Chain 0

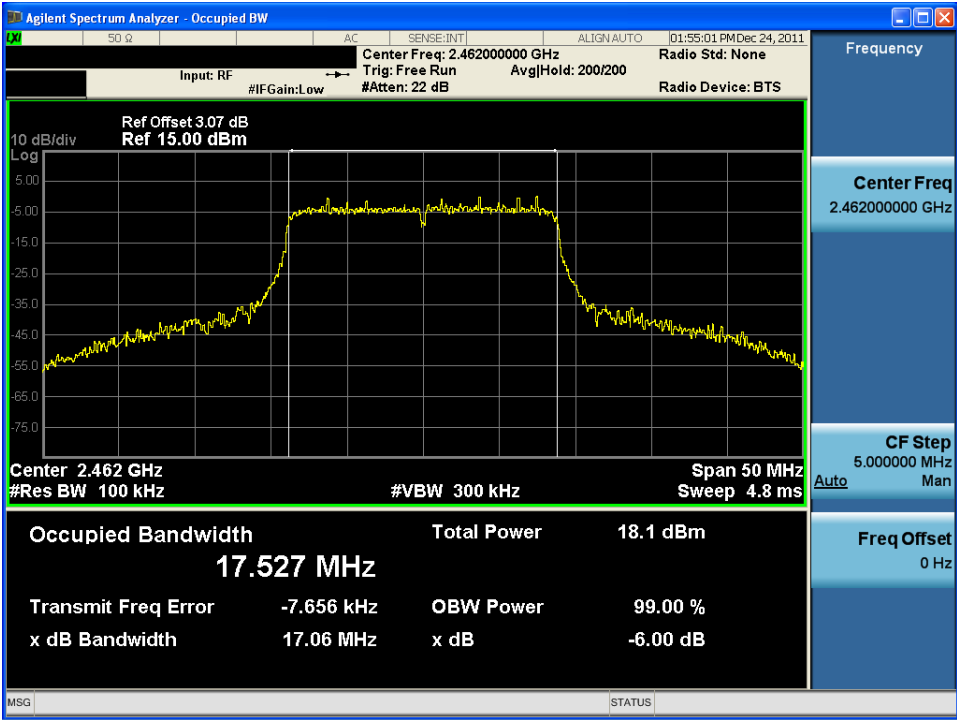


6 dB Bandwidth

Test Mode: 802.11n HT40 & Ch.3 & Chain 0

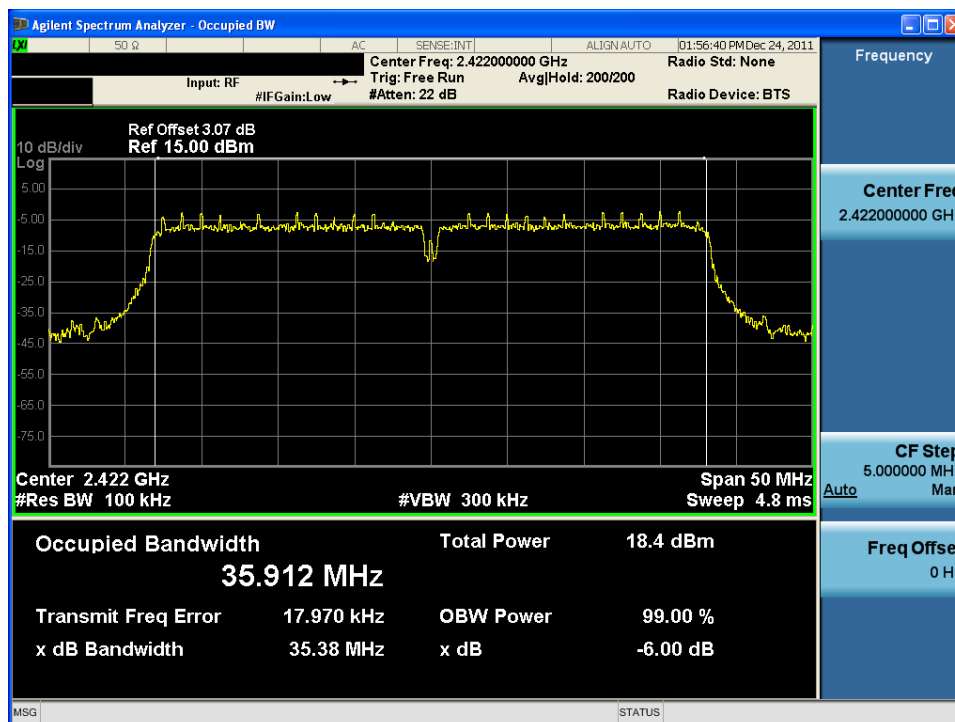


6 dB Bandwidth

Test Mode: 802.11n HT40 & Ch.6 & Chain 1

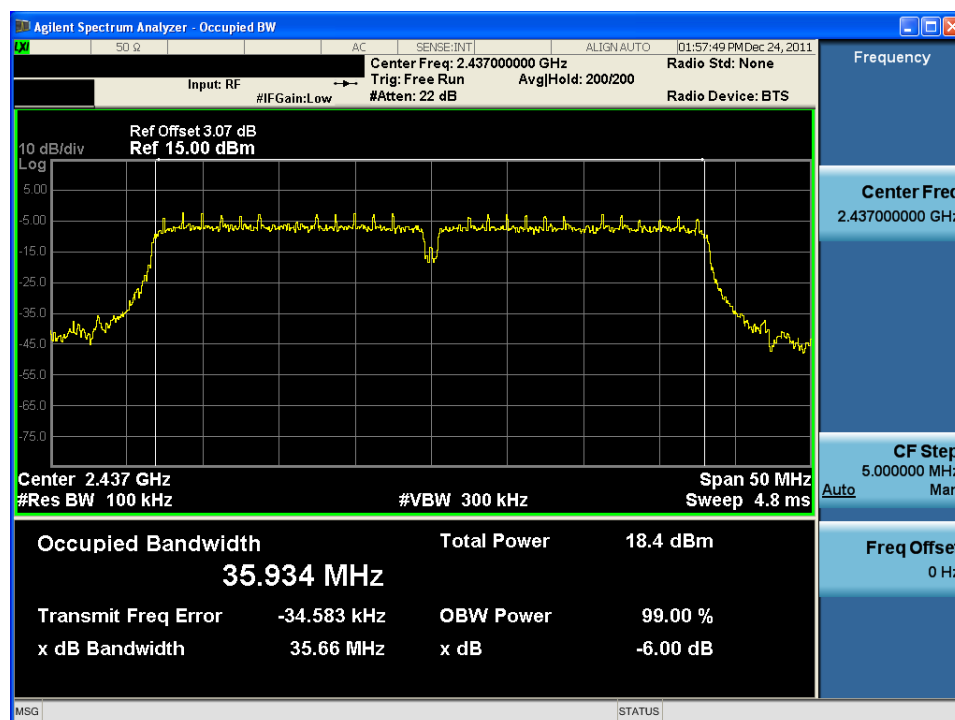

6 dB Bandwidth

Test Mode: 802.11n HT40 & Ch.9 & Chain 0

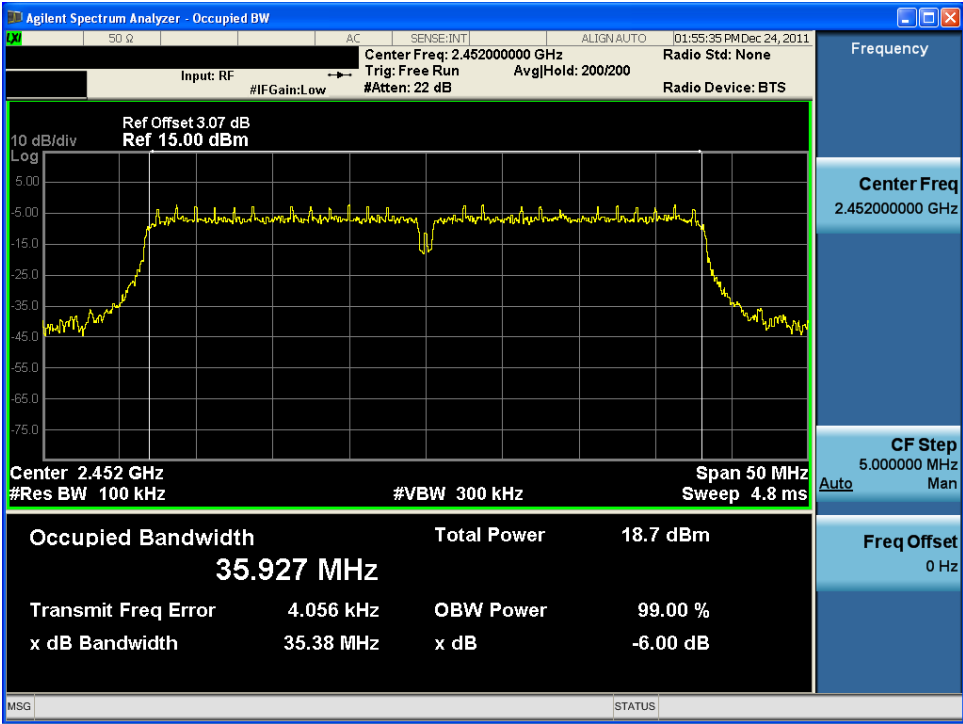

3.2.2 Peak Output Power

- Test Procedure:

The peak output power was measured RF power sensor. Measurement is made while the EUT is operating in transmission mode at the appropriate frequencies.(Power Output Option 1)

- Measurement Data: **Comply**

▪ Single transmitting data

Mode	Channel	Frequency [MHz]	Test Result			
			Chain 0		Chain 1	
			[dBm]	[W]	[dBm]	[W]
802.11b	1	2412	16.47	0.044	15.94	0.039
	6	2437	16.31	0.043	16.65	0.046
	11	2462	16.30	0.043	16.97	0.050
802.11g	1	2412	22.34	0.171	22.32	0.171
	6	2437	22.60	0.182	23.32	0.215
	11	2462	22.89	0.194	23.50	0.224

▪ Multiple transmitting data




Mode	Channel	Frequency [MHz]	Test Result			
			Chain 0 [dBm]	Chain 1 [dBm]	Aggregate Power ^{Note1}	
					[dBm]	[W]
802.11n HT20	1	2412	21.40	21.25	24.34	0.271
	6	2437	21.69	21.76	24.74	0.298
	11	2462	21.85	22.65	25.28	0.337
802.11n HT40	3	2422	21.32	22.25	24.82	0.303
	6	2437	21.30	22.05	24.70	0.295
	9	2452	21.47	22.06	24.79	0.301

Note1: Aggregate power = $10 \log(10^{\frac{\text{chain0}}{10}} + 10^{\frac{\text{chain1}}{10}})$





Minimum Standard:

< 1W

Duty Factors for W-LAN**Antenna port 0**

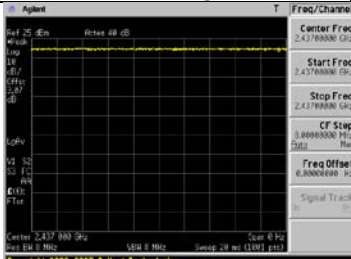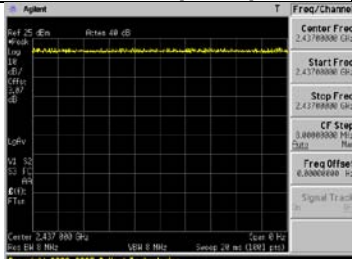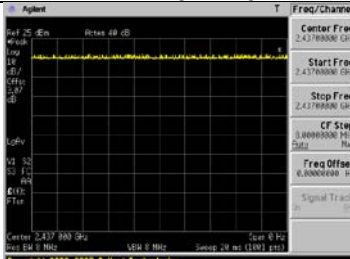802.11b	802.11g	802.11n(HT20)	802.11n(HT40)
			
Duty = 100% Duty Cycle Correction Factor = $10\log(1/\text{Duty}) = 0$	Duty = 100% Duty Cycle Correction Factor = $10\log(1/\text{Duty}) = 0$	Duty = 100% Duty Cycle Correction Factor = $10\log(1/\text{Duty}) = 0$	Duty = 100% Duty Cycle Correction Factor = $10\log(1/\text{Duty}) = 0$

Antenna port 1

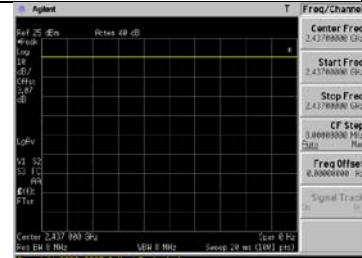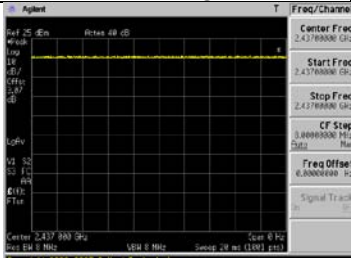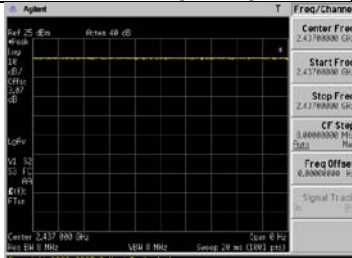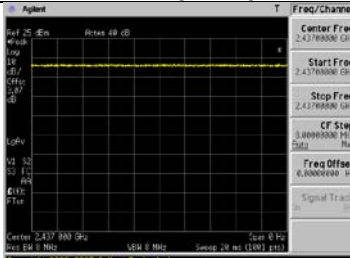802.11b	802.11g	802.11n(HT20)	802.11n(HT40)
			
Duty = 100% Duty Cycle Correction Factor = $10\log(1/\text{Duty}) = 0$	Duty = 100% Duty Cycle Correction Factor = $10\log(1/\text{Duty}) = 0$	Duty = 100% Duty Cycle Correction Factor = $10\log(1/\text{Duty}) = 0$	Duty = 100% Duty Cycle Correction Factor = $10\log(1/\text{Duty}) = 0$

3.2.3 Out of Band Emissions / Band Edge

- Procedure:

Set RBW = 100 kHz, Video bandwidth (VBW) > RBW, scan up through 10th harmonic for 2.4G Band or 40GHz for 5GHz Band. All harmonics/spurs must be at least 20 dB down from the highest emission level within the authorized band as measured with a 100 kHz RBW.

Note: If the device complies with the use of power option 2 the attenuation under this paragraph shall be 30 dB instead of 20 dB.


- Measurement Data: Comply

Note 1: The worst case plots in both chains are attached on next page.

Minimum Standard:	Power Output Option 1 > 20 dBc, Power Output Option 2, 3 > 30 dBc,
--------------------------	---


Low Band-edge at 20 dB blow

Test Mode: 802.11b & Ch.1 & Chain 0

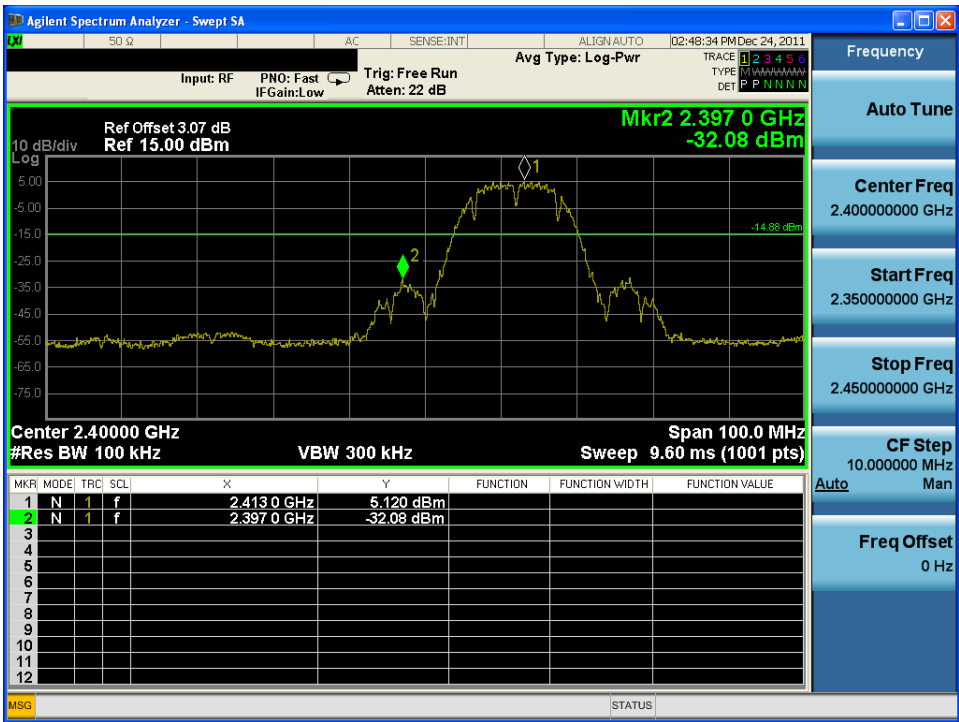


Conducted Spurious Emissions

Test Mode: 802.11b & Ch.1 & Chain 0

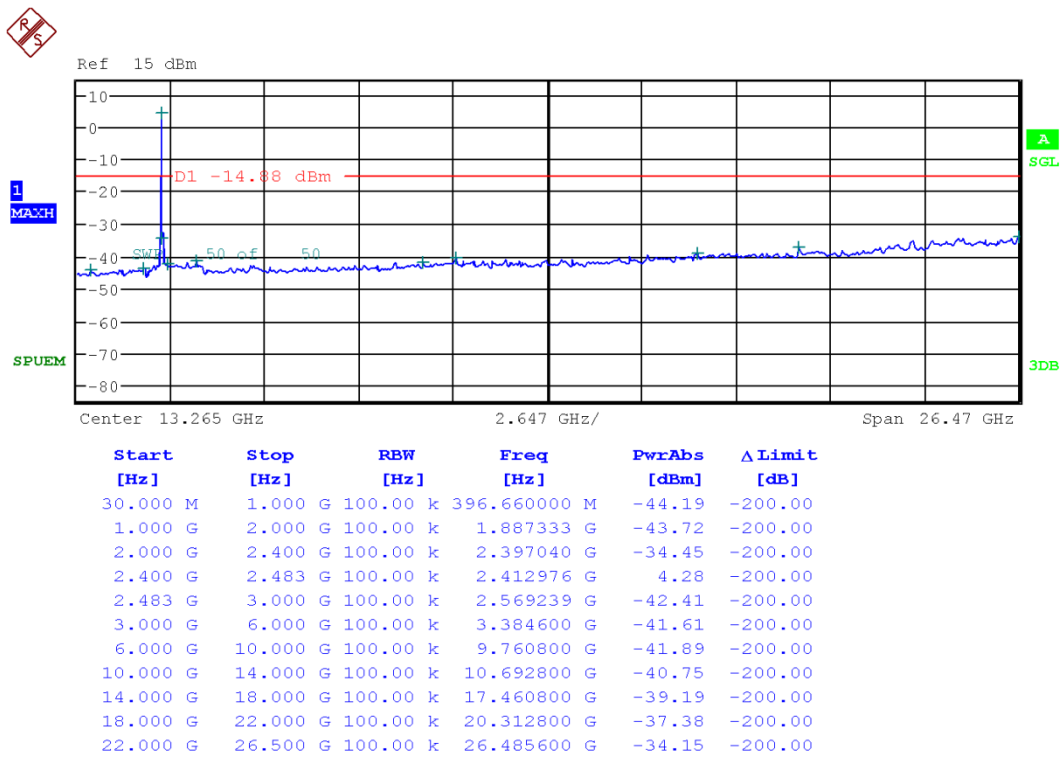


Reference for limit

Test Mode: 802.11b & Ch.6 & Chain 1

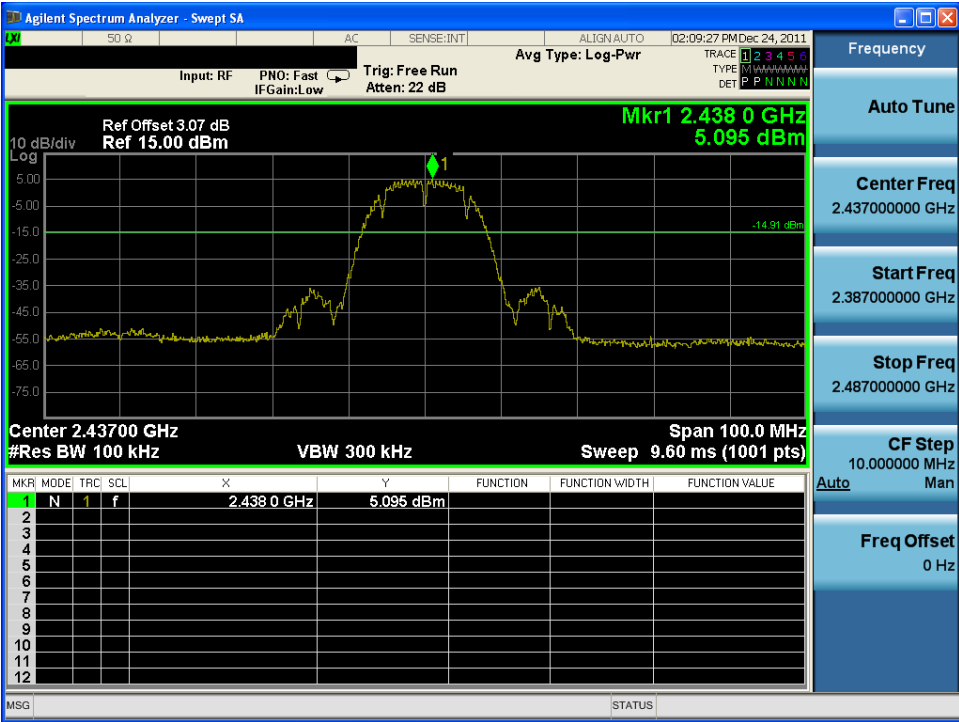

Conducted Spurious Emissions

Test Mode: 802.11b & Ch.6 & Chain 1

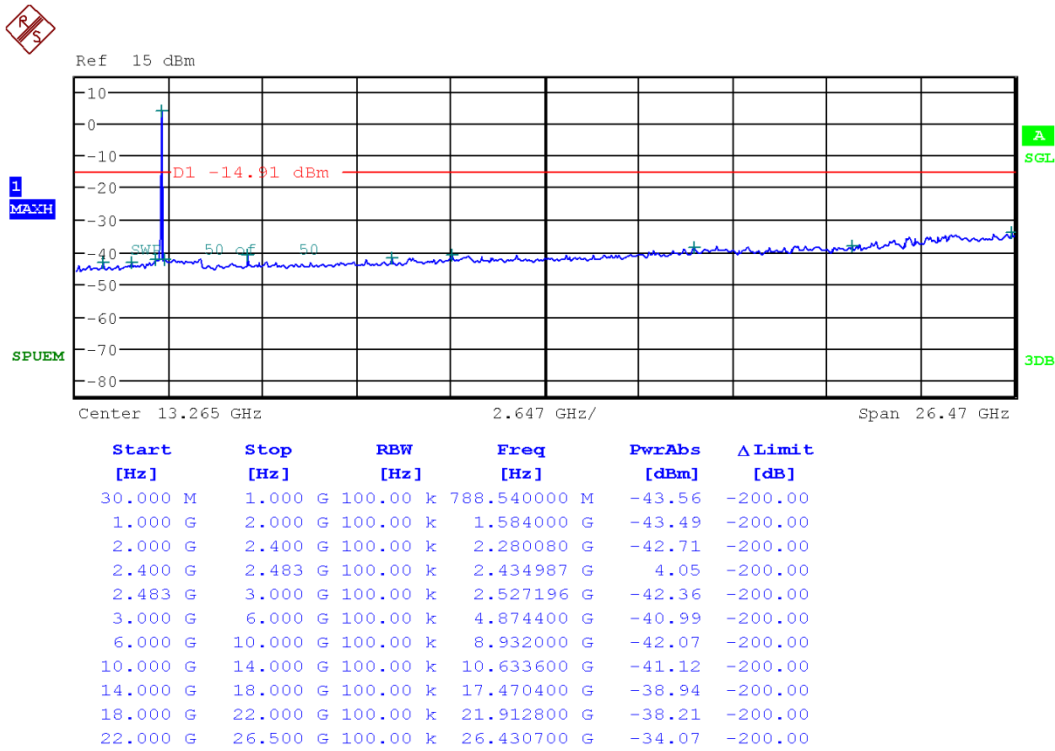


High Band-edge at 20 dB blow

Test Mode: 802.11b & Ch.11 & Chain 1




Conducted Spurious Emissions

Test Mode: 802.11b & Ch.11 & Chain 1

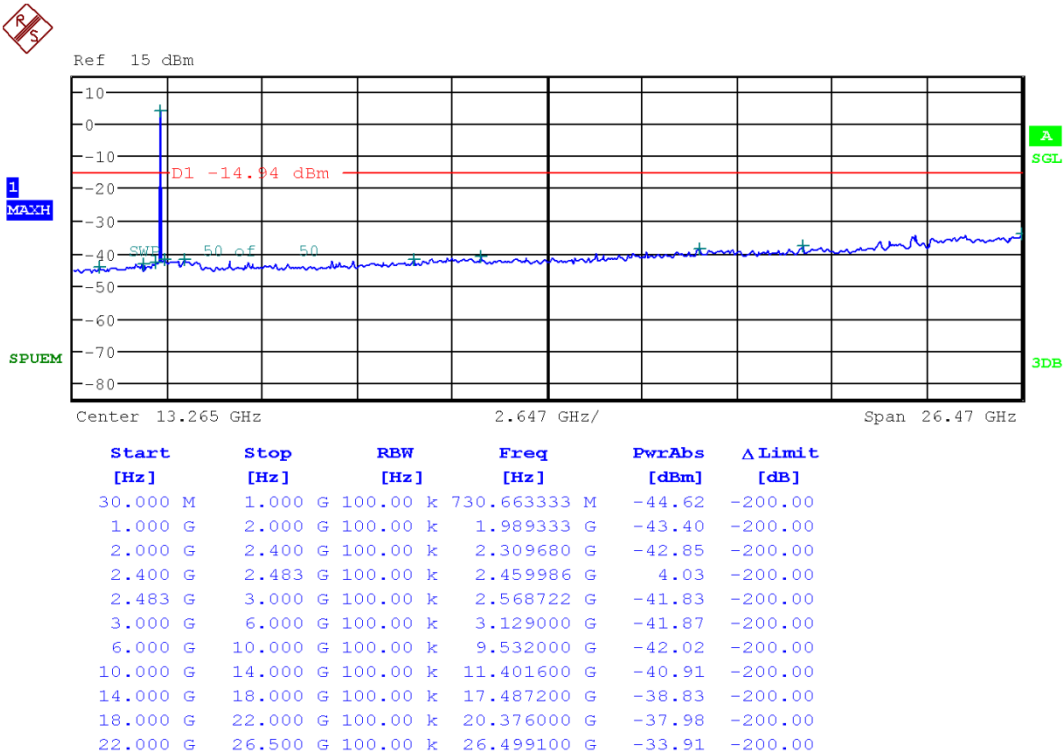


Low Band-edge at 20 dB blow

Test Mode: 802.11g & Ch.1 & Chain 0

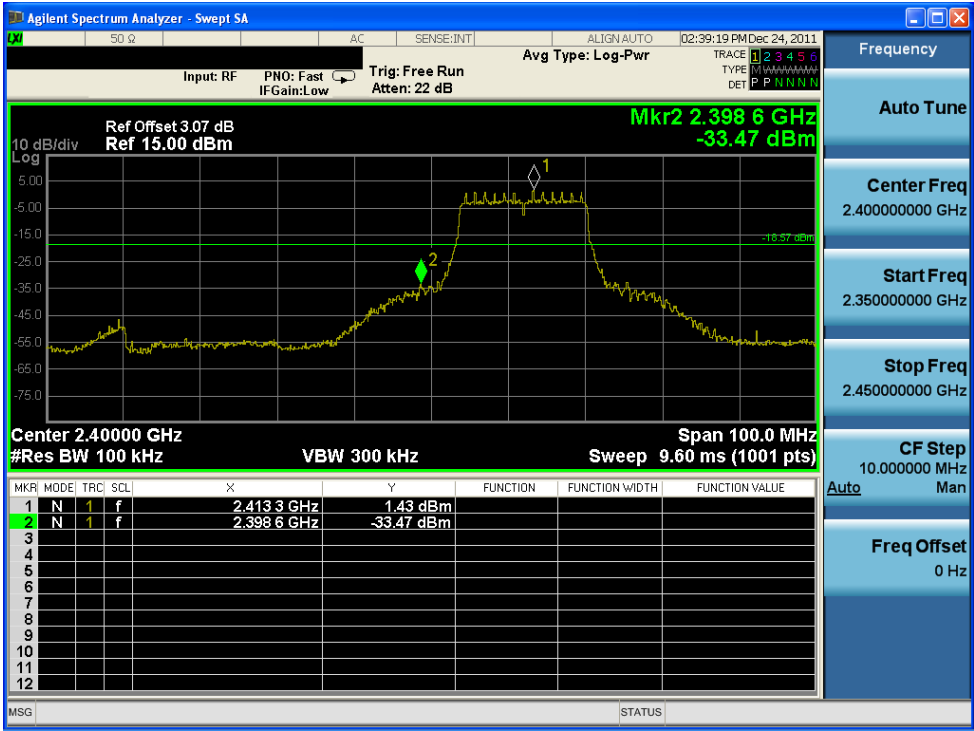


Conducted Spurious Emissions

Test Mode: 802.11g & Ch.1 & Chain 0

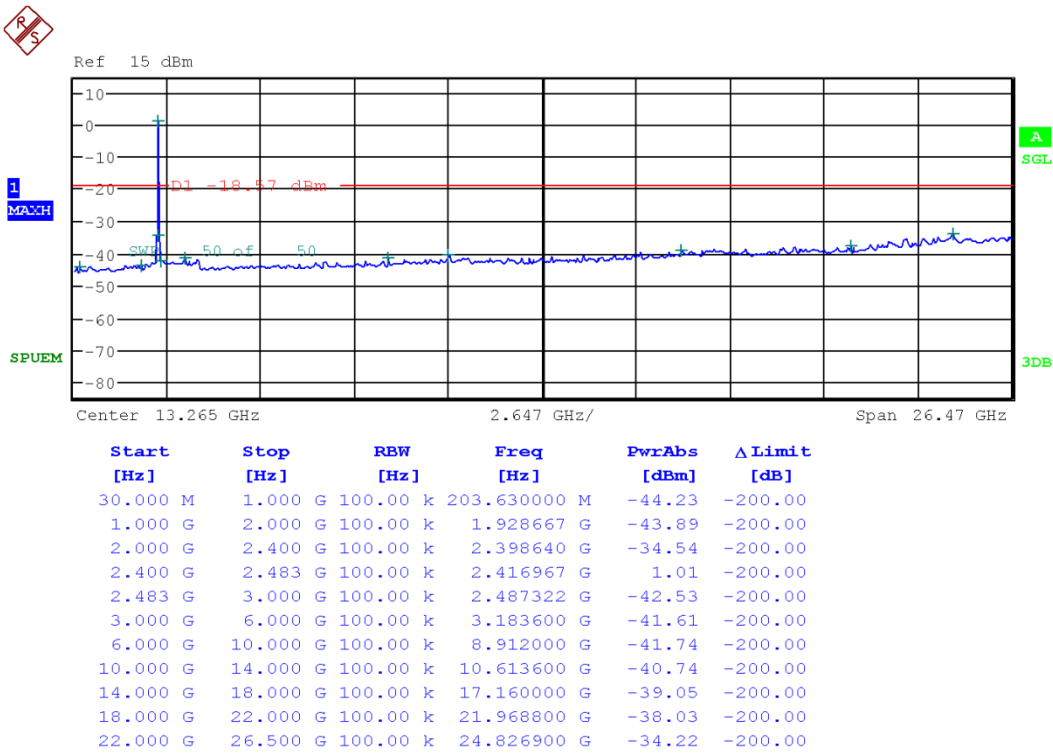


Reference for limit

Test Mode: 802.11g & Ch.6 & Chain 1

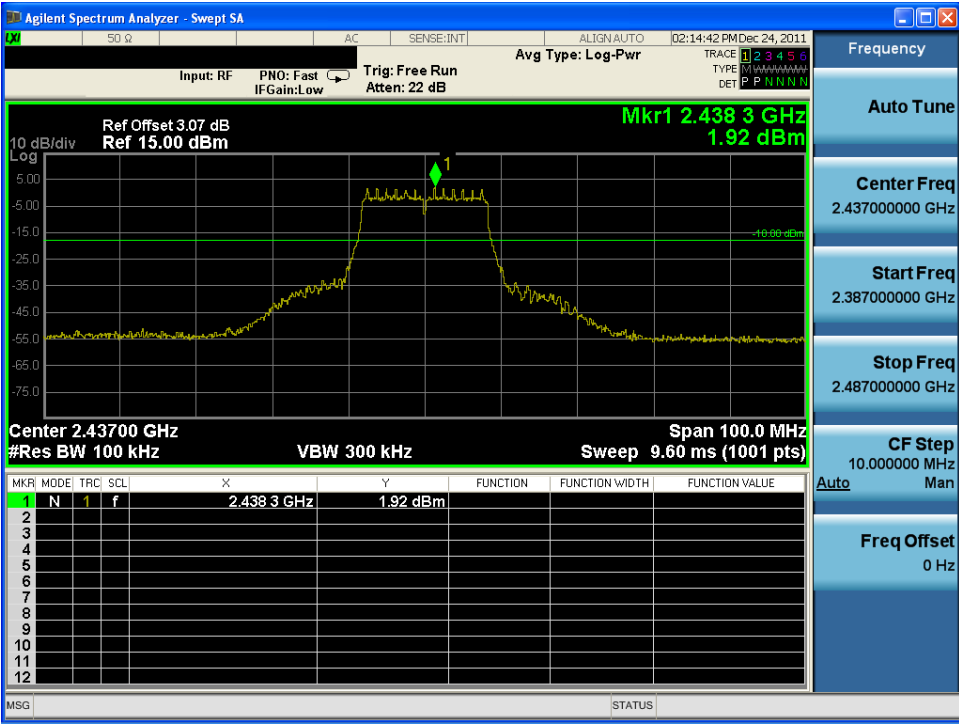


Conducted Spurious Emissions

Test Mode: 802.11g & Ch.6 & Chain 1

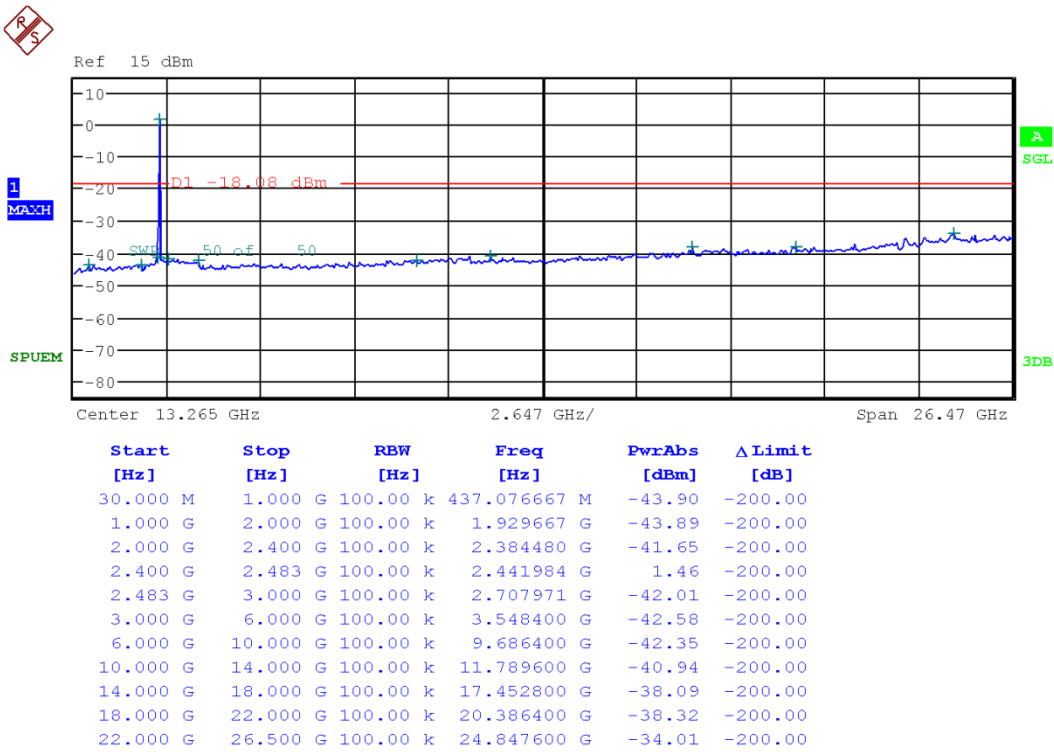


High Band-edge at 20 dB blow

Test Mode: 802.11g & Ch.11 & Chain 1

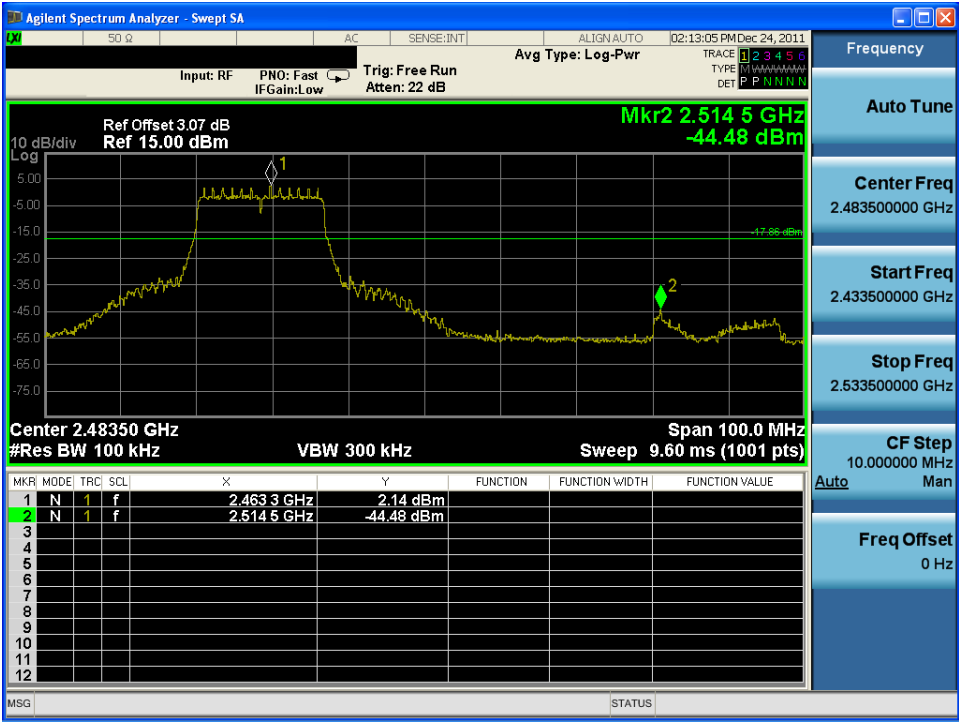


Conducted Spurious Emissions

Test Mode: 802.11g & Ch.11 & Chain 1

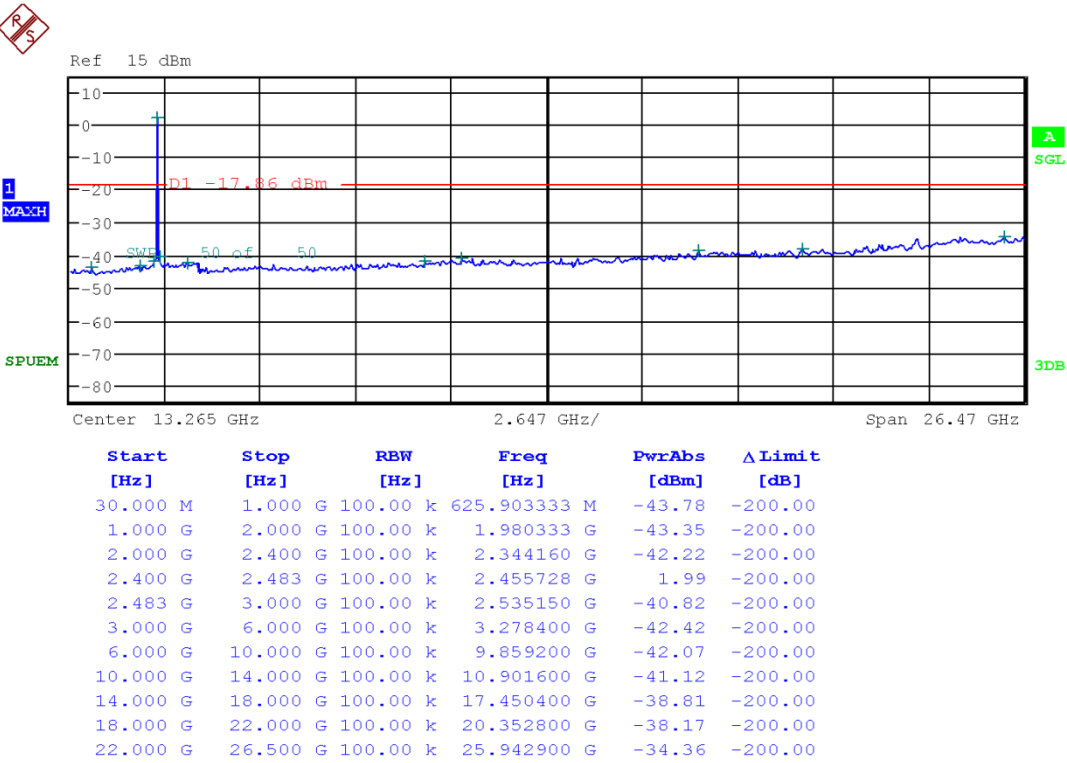


Low Band-edge at 20 dB blow

Test Mode: 802.11n HT20 & Ch.1 & Chain 0

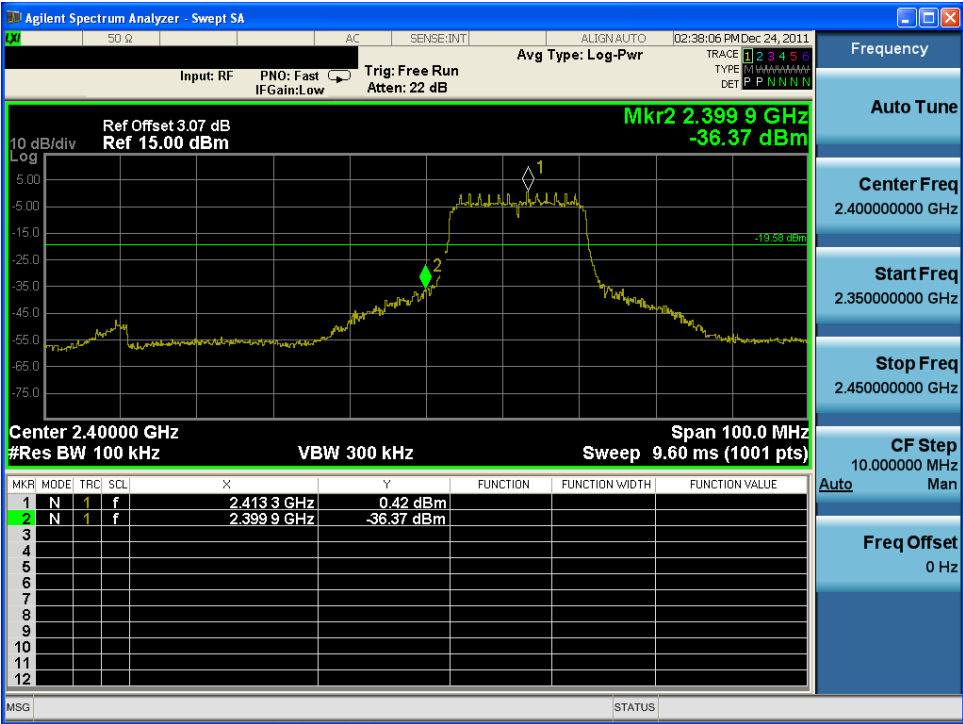


Conducted Spurious Emissions

Test Mode: 802.11n HT20 & Ch.1 & Chain 0

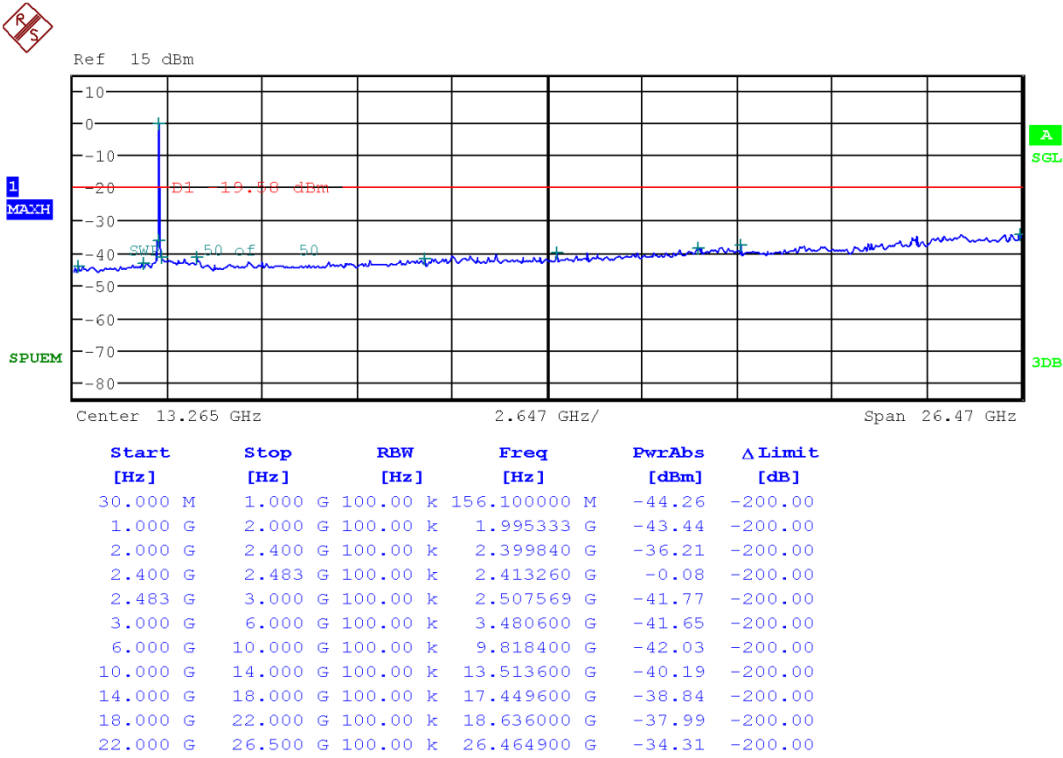


Reference for limit

Test Mode: 802.11n HT20 & Ch.6 & Chain 1

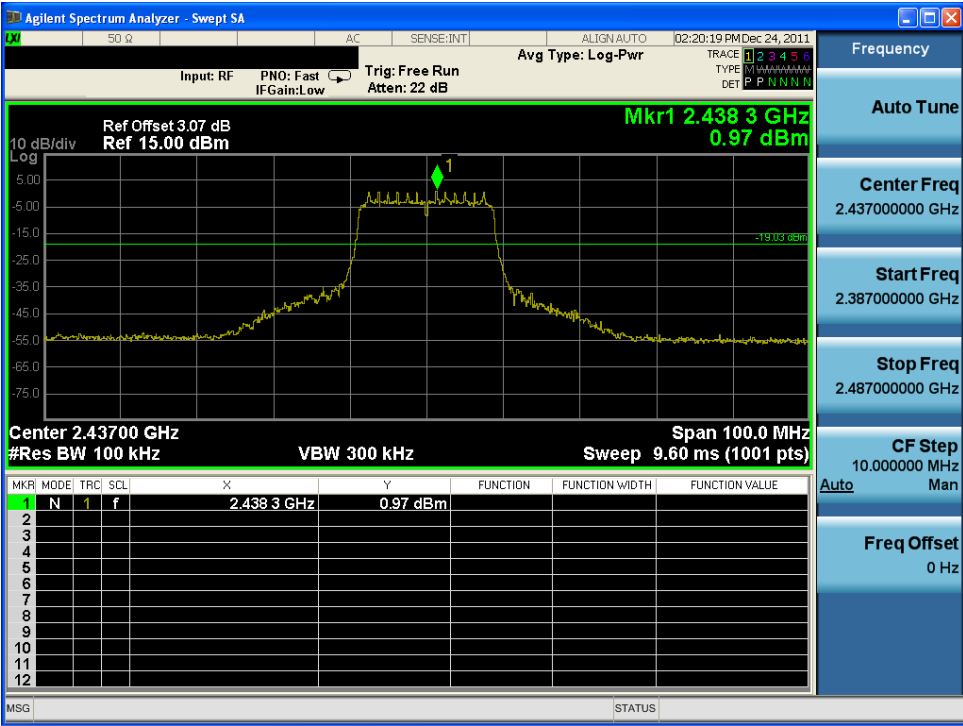


Conducted Spurious missions

Test Mode: 802.11n HT20 & Ch.6 & Chain 1

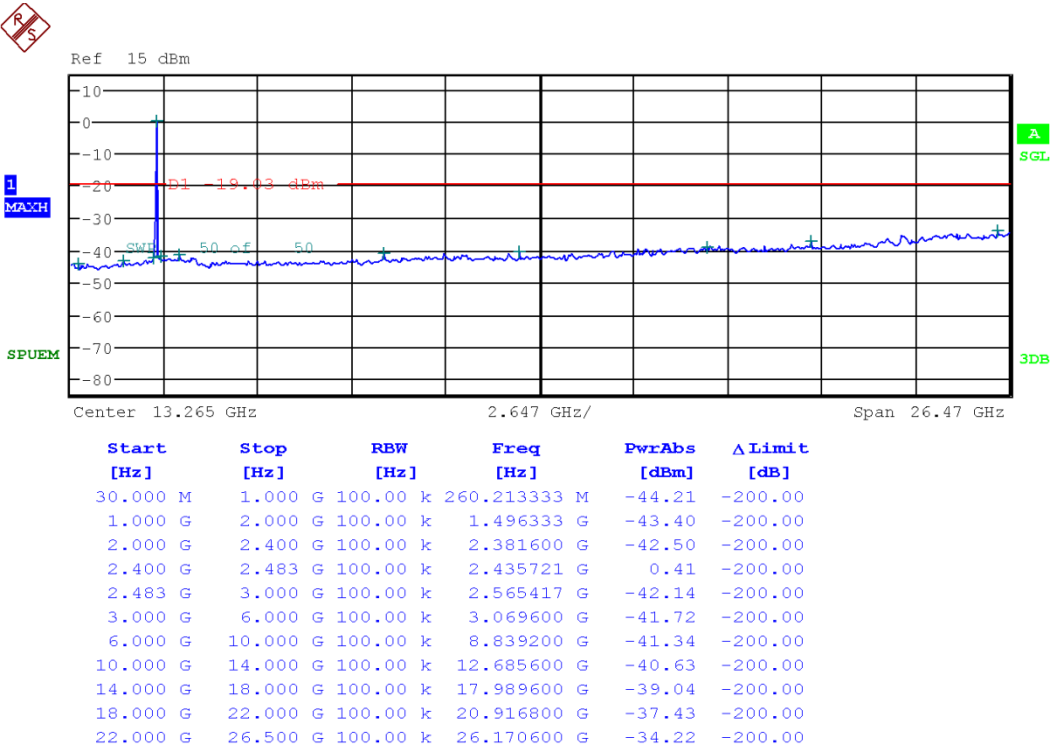


High Band-edge at 20 dB blow

Test Mode: 802.11n HT20 & Ch.11 & Chain 1

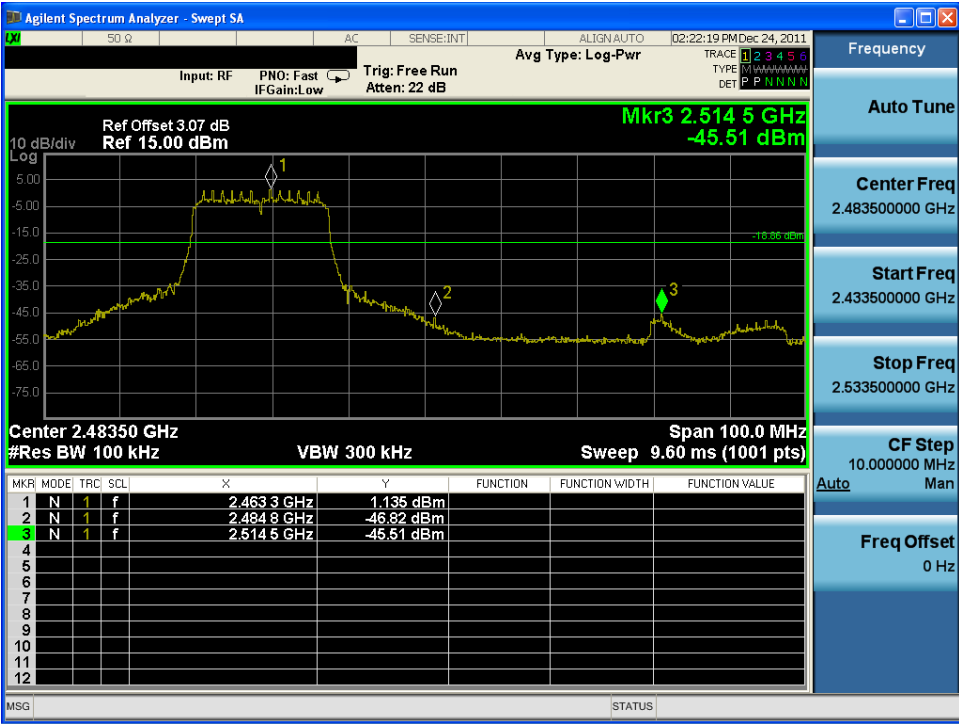

Conducted Spurious Emissions

Test Mode: 802.11n HT20 & Ch.11 & Chain 1

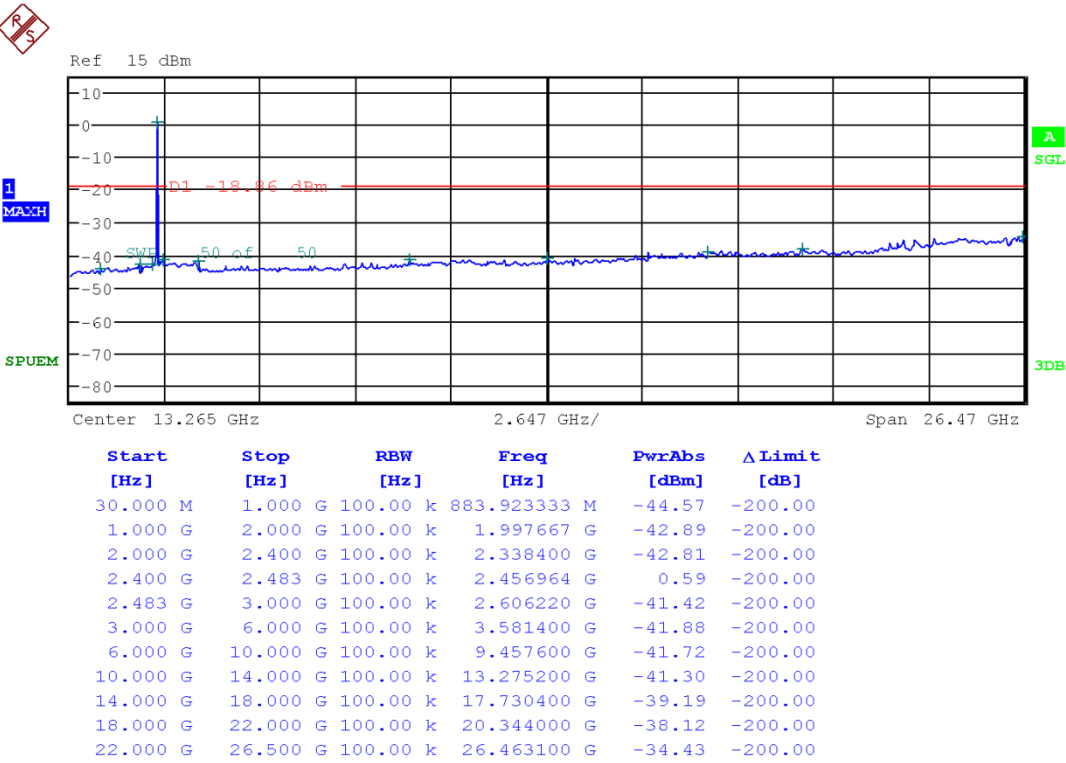


Low Band-edge at 20 dB blow

Test Mode: 802.11n HT40 & Ch.3 & Chain 1




Conducted Spurious Emissions

Test Mode: 802.11n HT40 & Ch.3 & Chain 1

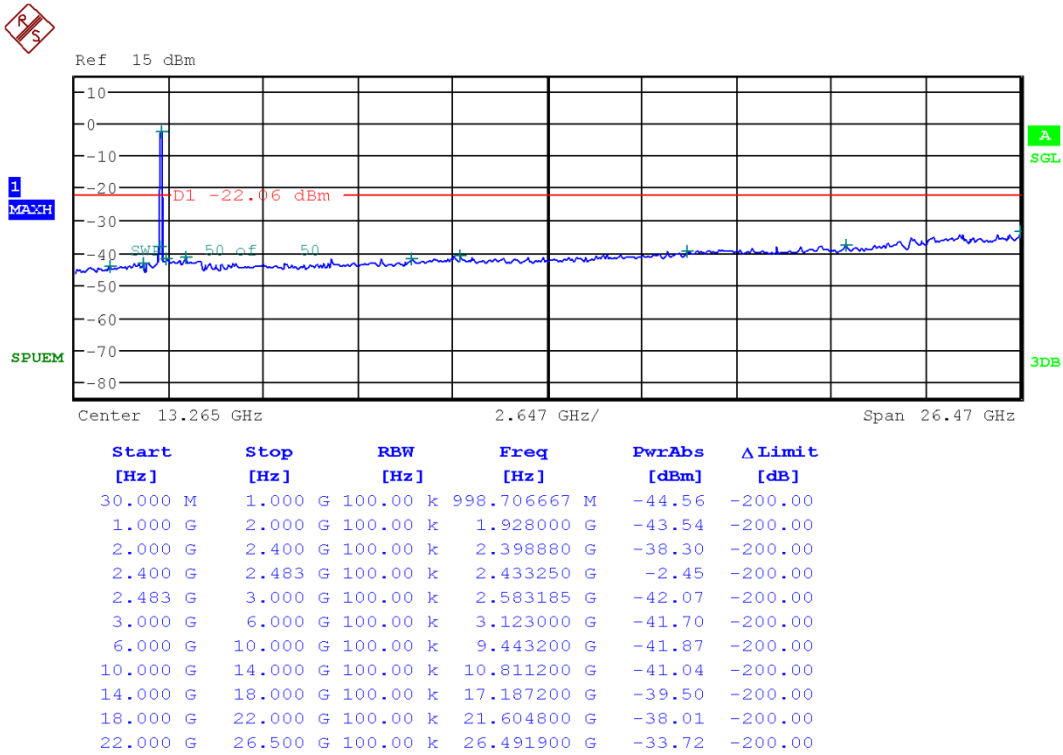


Reference for limit

Test Mode: 802.11n HT40 & Ch.6 & Chain 1

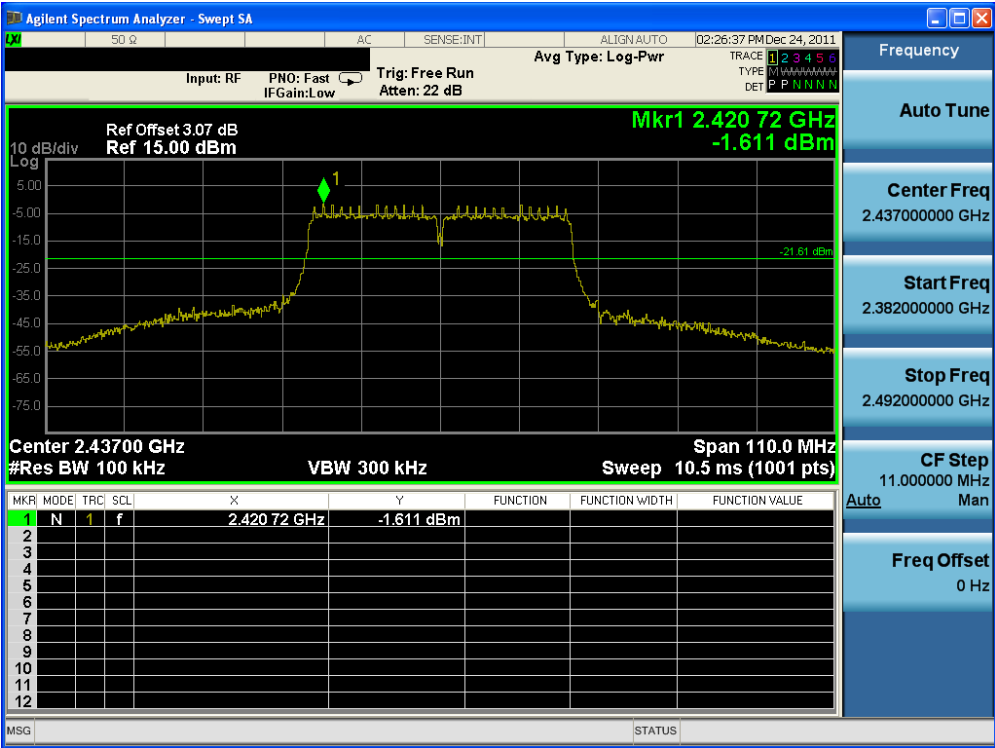

Conducted Spurious Emissions

Test Mode: 802.11n HT40 & Ch.6 & Chain 1

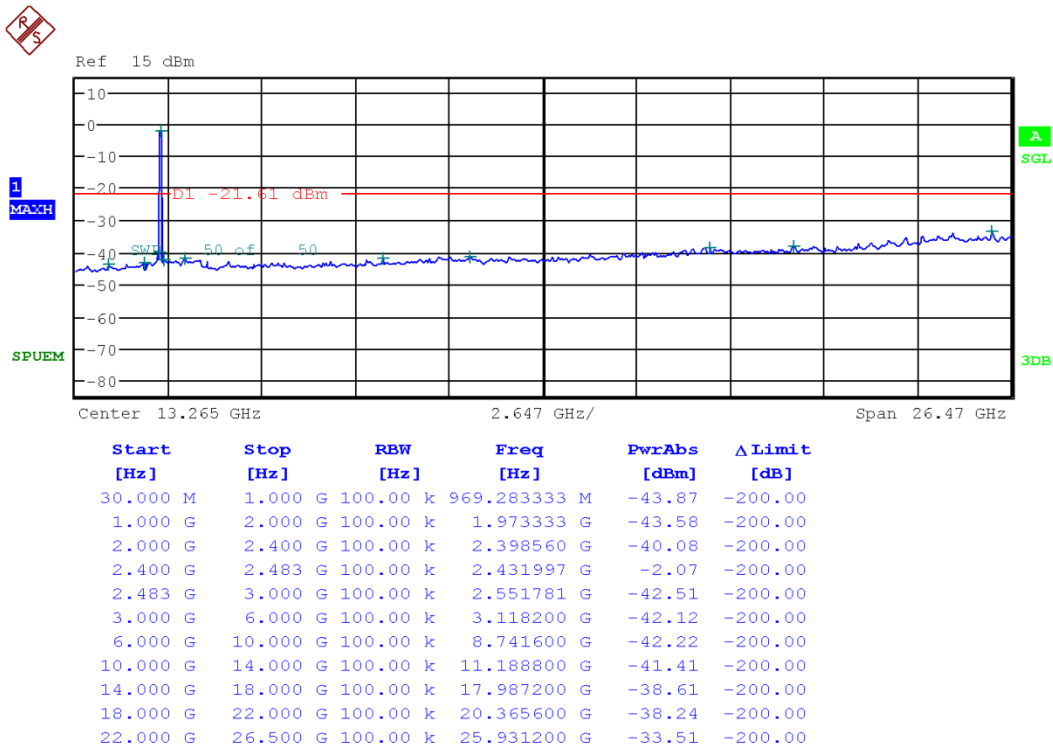


High Band-edge at 20 dB blow

Test Mode: 802.11n HT40 & Ch.9 & Chain 1



Conducted Spurious Emissions

Test Mode: 802.11n HT40 & Ch.9 & Chain 1

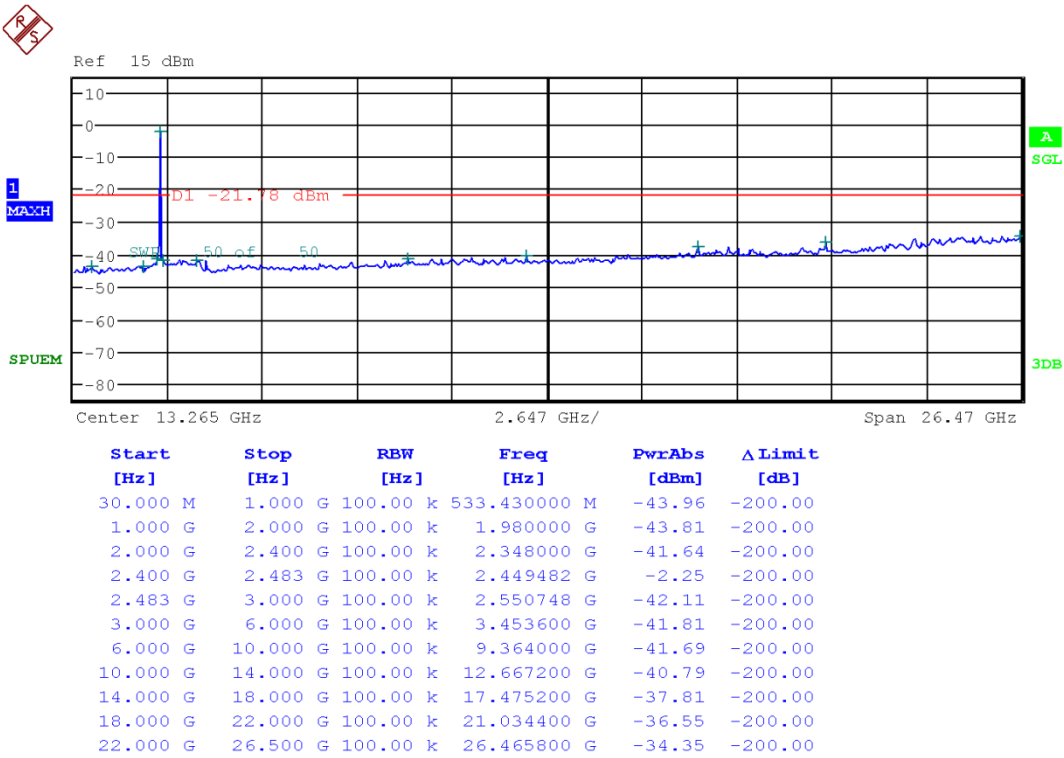

3.2.4 Out of band Emission – Radiated

- Procedure:

The EUT was placed on a 0.8m high wooden table inside a shielded enclosure. An antenna was placed near the EUT and measurements of frequencies and amplitudes of field strengths were recorded for reference during final measurements. For final radiated testing, measurements were performed in OATS. Measurements were performed with the EUT oriented in 3 orthogonal axis and rotated 360 degrees to determine worst-case orientation for maximum emissions.

The spectrum analyzer is set to:

Frequency Range = 30 MHz ~ 10th harmonic for 2.4G or 40 GHz for 5 G band

RBW and VBW = 1. Frequency range: 30MHz ~ 1GHz

RBW = 120KHz / VBW ≥ RBW

2. Frequency range: 1GHz ~ 10th harmonics or 40 GHz

Peak mode: RBW = 1MHz / VBW ≥ RBW

Average mode: RBW = 1MHz / VBW = 10Hz

Detector function = Peak

Sweep = auto

Trace = max hold

- Measurement Data: **Comply**

Note 1: This test item was performed in each axis and the worst case data were reported

- Minimum Standard:

▪ FCC Part 15.209(a) and (b)

Frequency (MHz)	Limit (uV/m) @ 3m
30 ~ 88	100 **
88 ~ 216	150 **
216 ~ 960	200 **
Above 960	500

** Except as provided in 15.209(g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88MHz, 174-216MHz or 470-806MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g. 15.231 and 15.241.

▪ FCC Part 15.205 (a): Only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	MHz	GHz	GHz
0.009 ~ 0.110	8.41425 ~ 8.41475	108 ~ 121.94	1300 ~ 1427	3600 ~ 4400	14.47 ~ 14.5
0.495 ~ 0.505	12.29 ~ 12.293	123 ~ 138	1435 ~ 1626.5	4.5 ~ 5.15	15.35 ~ 16.2
2.1735 ~ 2.1905	12.51975 ~	149.9 ~ 150.05	1645.5 ~ 1646.5	5.35 ~ 5.46	17.7 ~ 21.4
4.125 ~ 4.128	12.52025	156.52475 ~	1660 ~ 1710	7.25 ~ 7.75	22.01 ~ 23.12
4.17725 ~ 4.17775	12.57675 ~	156.52525	1718.8 ~ 1722.2	8.025 ~ 8.5	23.6 ~ 24.0
4.20725 ~ 4.20775	12.57725	156.7 ~ 156.9	2200 ~ 2300	9.0 ~ 9.2	31.2 ~ 31.8
6.215 ~ 6.218	13.36 ~ 13.41	162.0125 ~ 167.17	2310 ~ 2390	9.3 ~ 9.5	36.43 ~ 36.5
6.26775 ~ 6.26825	16.42 ~ 16.423	167.72 ~ 173.2	2483.5 ~ 2500	10.6 ~ 12.7	Above 38.6
6.31175 ~ 6.31225	16.69475 ~	240 ~ 285	2655 ~ 2900	13.25 ~ 13.4	
8.291 ~ 8.294	16.69525	322 ~ 335.4	3260 ~ 3267		
8.362 ~ 8.366	16.80425 ~	399.90 ~ 410	3332 ~ 3339		
8.37625 ~ 8.38675	16.80475	608 ~ 614	3345.8 ~ 3358		
	25.5 ~ 25.67	960 ~ 1240			
	37.5 ~ 38.25				
	73 ~ 74.6				
	74.8 ~ 75.2				

▪ **FCC Part 15.205(b):** The field strength of emissions appearing within these frequency bands shall not exceed the limits shown in §15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in §15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in §15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in §15.35 apply to these measurements.

30MHz ~ 25GHz Radiated Spurious Emissions & 802.11b & Chain 0**▪ Ch.1**

Frequency (MHz)	ANT Pol	The worst case EUT Position	Detector Mode	Reading (dBuV)	T.F (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
839.995	H	X axis	QP	39.20	1.40	40.60	46.00	5.40
2371.080	V	X axis	PK	56.11	-2.67	53.44	74.00	20.56
2373.960	V	X axis	AV	45.73	-2.67	43.06	54.00	10.94
4823.670	H	Y axis	PK	42.32	6.65	48.97	74.00	25.03
4824.020	H	Y axis	AV	31.41	6.65	38.06	54.00	15.94

▪ Ch.6

Frequency (MHz)	ANT Pol	The worst case EUT Position	Detector Mode	Reading (dBuV)	T.F (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
839.987	H	X axis	QP	39.40	1.40	40.80	46.00	5.20
4873.790	H	Y axis	PK	42.67	6.78	49.45	74.00	24.55
4874.020	H	Y axis	AV	31.78	6.78	38.56	54.00	15.44

▪ Ch.11

Frequency (MHz)	ANT Pol	The worst case EUT Position	Detector Mode	Reading (dBuV)	T.F (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
840.037	H	X axis	QP	39.60	1.40	41.00	46.00	5.00
2491.600	V	X axis	PK	54.08	-2.33	51.75	74.00	22.25
2493.350	V	X axis	AV	40.82	-2.33	38.49	54.00	15.51
4924.890	H	Y axis	PK	42.40	7.09	49.49	74.00	24.51
4924.010	H	Y axis	AV	31.66	7.09	38.75	54.00	15.25

Note.

1. This test item was performed in each axis and the worst case data were reported.
2. No other spurious and harmonic emissions were reported greater than listed emissions above table.
3. Sample Calculation.

Margin = Limit – Result / Result = Reading + T.F / T.F = AF + CL – AG

Where, T.F = Total Factor, AF = Antenna Factor, CL = Cable Loss, AG = Amplifier Gain.

30MHz ~ 25GHz Radiated Spurious Emissions & 802.11b & Chain 1**▪ Ch.1**

Frequency (MHz)	ANT Pol	The worst case EUT Position	Detector Mode	Reading (dBuV)	T.F (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
839.997	H	X axis	QP	38.80	1.40	40.20	46.00	5.80
2370.840	V	Z axis	PK	54.06	-2.67	51.39	74.00	22.61
2348.950	V	Z axis	AV	45.07	-2.67	42.40	54.00	11.60
4824.940	V	Z axis	PK	41.97	6.65	48.62	74.00	25.38
4824.940	V	Z axis	AV	31.49	6.65	38.14	54.00	15.86

▪ Ch.6

Frequency (MHz)	ANT Pol	The worst case EUT Position	Detector Mode	Reading (dBuV)	T.F (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
839.995	H	X axis	QP	39.10	1.40	40.50	46.00	5.50
4874.260	V	Z axis	PK	41.95	6.78	48.73	74.00	25.27
4874.010	V	Z axis	AV	31.77	6.78	38.55	54.00	15.45

▪ Ch.11

Frequency (MHz)	ANT Pol	The worst case EUT Position	Detector Mode	Reading (dBuV)	T.F (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
839.998	H	X axis	QP	39.30	1.40	40.70	46.00	5.30
2499.130	V	Z axis	PK	52.98	-2.33	50.65	74.00	23.35
2499.030	V	Z axis	AV	41.20	-2.33	38.87	54.00	15.13
4924.600	V	Z axis	PK	42.52	7.09	49.61	74.00	24.39
4924.030	V	Z axis	AV	31.74	7.09	38.83	54.00	15.17

Note.

1. This test item was performed in each axis and the worst case data were reported.
2. No other spurious and harmonic emissions were reported greater than listed emissions above table.
3. Sample Calculation.

$$\text{Margin} = \text{Limit} - \text{Result} \quad / \quad \text{Result} = \text{Reading} + \text{T.F} / \quad \text{T.F} = \text{AF} + \text{CL} - \text{AG}$$

Where, T.F = Total Factor, AF = Antenna Factor, CL = Cable Loss, AG = Amplifier Gain

30MHz ~ 25GHz Radiated Spurious Emissions & 802.11g & Chain 0**▪ Ch.1**

Frequency (MHz)	ANT Pol	The worst case EUT Position	Detector Mode	Reading (dBuV)	T.F (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
839.994	H	X axis	QP	39.00	1.40	40.40	46.00	5.60
2389.520	H	X axis	PK	68.35	-2.67	65.68	74.00	8.32
2390.000	H	X axis	AV	50.04	-2.67	47.37	54.00	6.63
4823.970	H	Y axis	PK	42.04	6.65	48.69	74.00	25.31
4824.050	H	Y axis	AV	31.45	6.65	38.10	54.00	15.90

▪ Ch.6

Frequency (MHz)	ANT Pol	The worst case EUT Position	Detector Mode	Reading (dBuV)	T.F (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
840.024	H	X axis	QP	38.60	1.40	40.00	46.00	6.00
4873.030	H	Y axis	PK	41.94	6.78	48.72	74.00	25.28
4874.030	H	Y axis	AV	31.60	6.78	38.38	54.00	15.62

▪ Ch.11

Frequency (MHz)	ANT Pol	The worst case EUT Position	Detector Mode	Reading (dBuV)	T.F (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
839.992	H	X axis	QP	38.90	1.40	40.30	46.00	5.70
2481.410	V	Z axis	PK	70.38	-2.33	68.05	74.00	5.95
2483.500	V	Z axis	AV	50.89	-2.33	48.56	54.00	5.44
4873.620	H	Y axis	PK	42.18	7.09	49.27	74.00	24.73
4874.020	H	Y axis	AV	30.94	7.09	38.03	54.00	15.97

Note.

1. This test item was performed in each axis and the worst case data were reported.
2. No other spurious and harmonic emissions were reported greater than listed emissions above table.
3. Sample Calculation.

$$\text{Margin} = \text{Limit} - \text{Result} \quad / \quad \text{Result} = \text{Reading} + \text{T.F} / \quad \text{T.F} = \text{AF} + \text{CL} - \text{AG}$$

Where, T.F = Total Factor, AF = Antenna Factor, CL = Cable Loss, AG = Amplifier Gain.

30MHz ~ 25GHz Radiated Spurious Emissions & 802.11g & Chain 1**▪ Ch.1**

Frequency (MHz)	ANT Pol	The worst case EUT Position	Detector Mode	Reading (dBuV)	T.F (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
839.998	H	X axis	QP	38.70	1.40	40.10	46.00	5.90
2389.120	V	Y axis	PK	61.99	-2.67	59.32	74.00	14.68
2359.600	V	Y axis	AV	47.63	-2.67	44.96	54.00	9.04
4819.200	H	X axis	PK	42.21	6.65	48.86	74.00	25.14
4824.310	H	X axis	AV	31.64	6.65	38.29	54.00	15.71

▪ Ch.6

Frequency (MHz)	ANT Pol	The worst case EUT Position	Detector Mode	Reading (dBuV)	T.F (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
839.989	H	X axis	QP	39.30	1.40	40.70	46.00	5.30
4874.990	H	X axis	PK	42.08	6.78	48.86	74.00	25.14
4874.030	H	X axis	AV	31.31	6.78	38.09	54.00	15.91

▪ Ch.11

Frequency (MHz)	ANT Pol	The worst case EUT Position	Detector Mode	Reading (dBuV)	T.F (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
839.990	H	X axis	QP	38.50	1.40	39.90	46.00	6.10
2484.260	V	Z axis	PK	67.67	-2.33	65.34	74.00	8.66
2483.500	V	Z axis	AV	49.15	-2.33	46.82	54.00	7.18
4924.970	H	X axis	PK	42.01	7.09	49.10	74.00	24.90
4924.010	H	X axis	AV	31.23	7.09	38.32	54.00	15.68

Note.

1. This test item was performed in each axis and the worst case data were reported.
2. No other spurious and harmonic emissions were reported greater than listed emissions above table.
3. Sample Calculation.

$$\text{Margin} = \text{Limit} - \text{Result} \quad / \quad \text{Result} = \text{Reading} + \text{T.F} / \quad \text{T.F} = \text{AF} + \text{CL} - \text{AG}$$

Where, T.F = Total Factor, AF = Antenna Factor, CL = Cable Loss, AG = Amplifier Gain.

30MHz ~ 25GHz Radiated Spurious Emissions & 802.11n HT20 & 2TX (Chain 0, 1)**▪ Ch.1**

Frequency (MHz)	ANT Pol	The worst case EUT Position	Detector Mode	Reading (dBuV)	T.F (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
839.997	H	X axis	QP	39.50	1.40	40.90	46.00	5.10
2389.980	V	Z axis	PK	73.10	-2.67	70.43	74.00	3.57
2370.240	V	Z axis	AV	50.11	-2.67	47.44	54.00	6.56
4831.290	V	X axis	PK	41.75	6.65	48.40	74.00	25.60
4779.320	V	X axis	AV	31.38	6.65	38.03	54.00	15.97

▪ Ch.6

Frequency (MHz)	ANT Pol	The worst case EUT Position	Detector Mode	Reading (dBuV)	T.F (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
840.027	H	X axis	QP	39.00	1.40	40.40	46.00	5.60
4871.090	V	X axis	PK	40.67	6.78	47.45	74.00	26.55
4874.990	V	X axis	AV	30.11	6.78	36.89	54.00	17.11

▪ Ch.11

Frequency (MHz)	ANT Pol	The worst case EUT Position	Detector Mode	Reading (dBuV)	T.F (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
840.032	H	X axis	QP	39.80	1.40	41.20	46.00	4.80
2483.920	V	Z axis	PK	70.12	-2.33	67.79	74.00	6.21
2483.540	V	Z axis	AV	46.04	-2.33	43.71	54.00	10.29
4875.530	H	X axis	PK	39.81	7.09	46.90	74.00	27.10
4873.830	H	X axis	AV	30.07	7.09	37.16	54.00	16.84

Note.

1. This test item was performed in each axis and the worst case data were reported.
2. No other spurious and harmonic emissions were reported greater than listed emissions above table.
3. Sample Calculation.

$$\text{Margin} = \text{Limit} - \text{Result} \quad / \quad \text{Result} = \text{Reading} + \text{T.F} / \quad \text{T.F} = \text{AF} + \text{CL} - \text{AG}$$

Where, T.F = Total Factor, AF = Antenna Factor, CL = Cable Loss, AG = Amplifier Gain.

30MHz ~ 25GHz Radiated Spurious Emissions & 802.11n HT40 & 2 TX (Chain 0, 1)**▪ Ch.3**

Frequency (MHz)	ANT Pol	The worst case EUT Position	Detector Mode	Reading (dBuV)	T.F (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
840.034	H	X axis	QP	40.10	1.40	41.50	46.00	4.50
2387.360	V	Z axis	PK	71.92	-2.67	69.25	74.00	4.75
2388.960	V	Z axis	AV	48.72	-2.67	46.05	54.00	7.95
4847.610	V	X axis	PK	40.62	6.65	47.27	74.00	26.73
4844.430	V	X axis	AV	30.49	6.65	37.14	54.00	16.86

▪ Ch.6

Frequency (MHz)	ANT Pol	The worst case EUT Position	Detector Mode	Reading (dBuV)	T.F (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
839.992	H	X axis	QP	39.90	1.40	41.30	46.00	4.70
4876.600	V	X axis	PK	39.96	6.78	46.74	74.00	27.26
4873.510	V	X axis	AV	30.04	6.78	36.82	54.00	17.18

▪ Ch.9

Frequency (MHz)	ANT Pol	The worst case EUT Position	Detector Mode	Reading (dBuV)	T.F (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
839.996	H	X axis	QP	39.30	1.40	40.70	46.00	5.30
2484.210	V	Z axis	PK	68.64	-2.33	66.31	74.00	7.69
2483.530	V	Z axis	AV	46.00	-2.33	43.67	54.00	10.33
4907.640	V	X axis	PK	40.13	7.09	47.22	74.00	26.78
4904.370	V	X axis	AV	30.22	7.09	37.31	54.00	16.69

Note.

1. This test item was performed in each axis and the worst case data were reported.
2. No other spurious and harmonic emissions were reported greater than listed emissions above table.
3. Sample Calculation.

$$\text{Margin} = \text{Limit} - \text{Result} \quad / \quad \text{Result} = \text{Reading} + \text{T.F} / \quad \text{T.F} = \text{AF} + \text{CL} - \text{AG}$$

Where, T.F = Total Factor, AF = Antenna Factor, CL = Cable Loss, AG = Amplifier Gain.

3.2.5 Transmitter Power Spectral Density

- Procedure:

The transmitter output is connected to a spectrum analyzer. Locate and zoom in on emission peak within the pass band. The maximum level in a 3 kHz bandwidth is measured with the spectrum analyzer using RBW = 3 kHz and VBW > RBW, sweep time= (Span/3 kHz). The peak level measured must be no greater than + 8 dBm.

The spectrum analyzer is set to:

Center frequency = the highest, middle and the lowest Frequencies

Span = 900 kHz

RBW = 3 kHz

VBW = ≥ RBW

Trace = max hold

Detector function = peak

Sweep = 300 S

- Measurement Data: **Comply**

▪ Single transmitting data

Mode	Channel	Frequency [MHz]	Test Result [dBm]	
			Chain 0	Chain 1
802.11b	1	2412	0.67	-0.06
	6	2437	3.17	-0.47
	11	2462	1.90	2.11
802.11g	1	2412	-13.64	-14.25
	6	2437	-13.33	-13.48
	11	2462	-13.28	-13.35

▪ Multiple transmitting data

Mode	Channel	Frequency [MHz]	Chain 0 [dBm]	Chain 1 [dBm]	Aggregate PPSD ^{Note1} [dBm]
802.11n HT20	1	2412	-15.01	-15.18	-12.08
	6	2437	-14.54	-14.56	-11.54
	11	2462	-14.44	-14.48	-11.45
802.11n HT40	3	2422	-18.25	-17.18	-14.67
	6	2437	-18.17	-16.99	-14.53
	9	2452	-18.09	-16.90	-14.44

Note 1: Aggregate PPSD = $10 \log \left(10^{\left(\frac{\text{chain0}}{10}\right)} + 10^{\left(\frac{\text{chain1}}{10}\right)} \right)$


Note 2: The worst case plots in both chains are attached on next page.

- Minimum Standard:

The transmitter power density average over 1-second interval shall not be greater than 8 dBm in any 3kHz BW.


Transmitter Power Spectral Density

Test Mode: 802.11b & Ch.1 & Chain 0

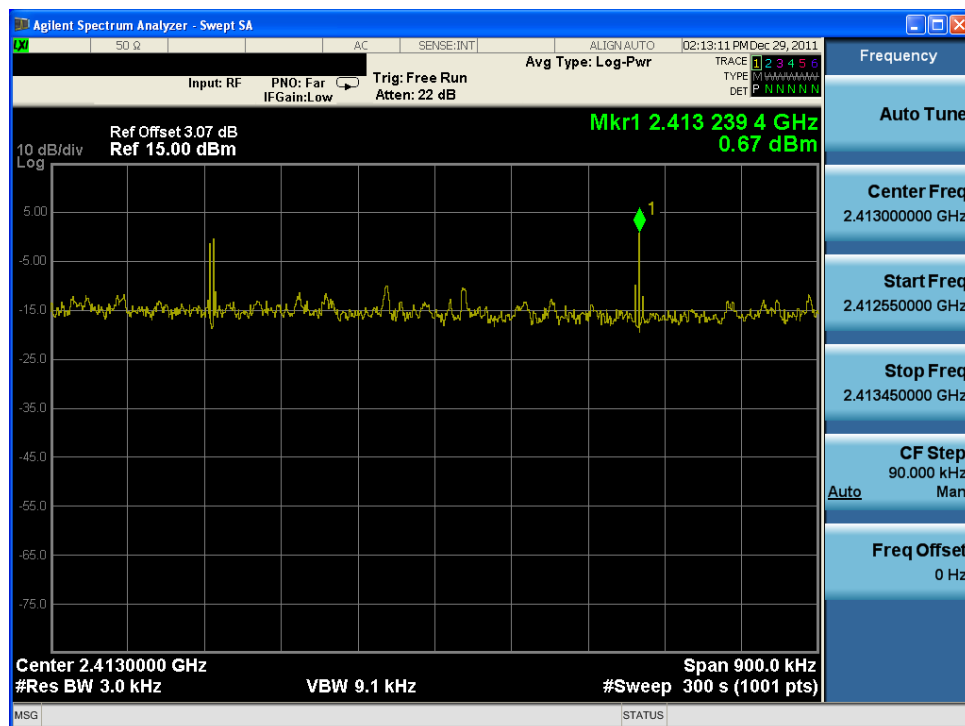


Transmitter Power Spectral Density

Test Mode: 802.11b & Ch.6 & Chain 0

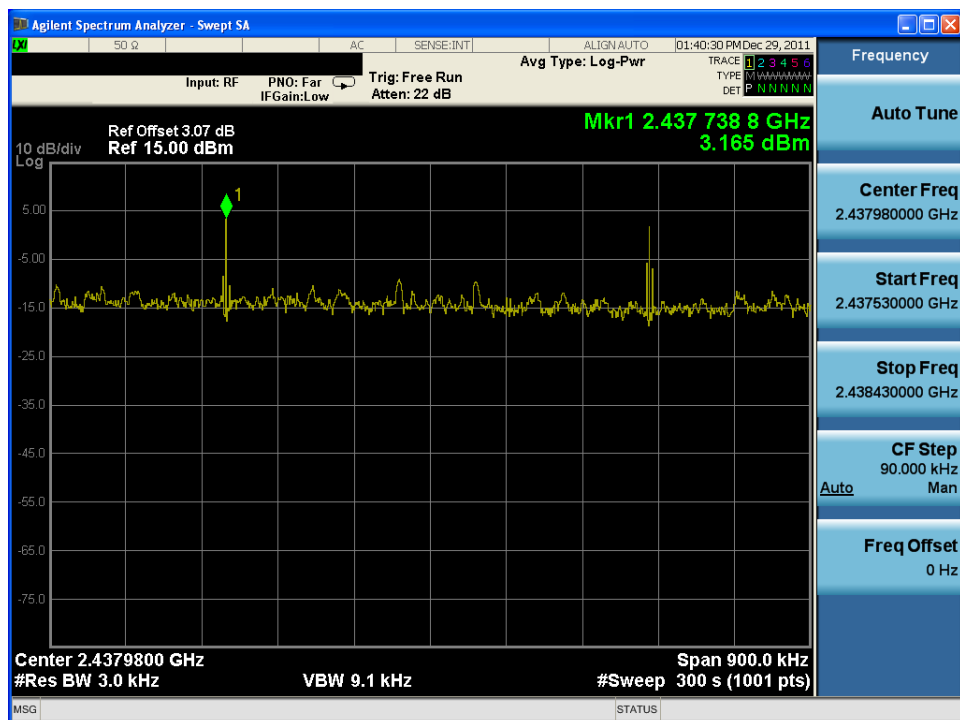


Transmitter Power Spectral Density

Test Mode: 802.11b & Ch.11 & Chain 1

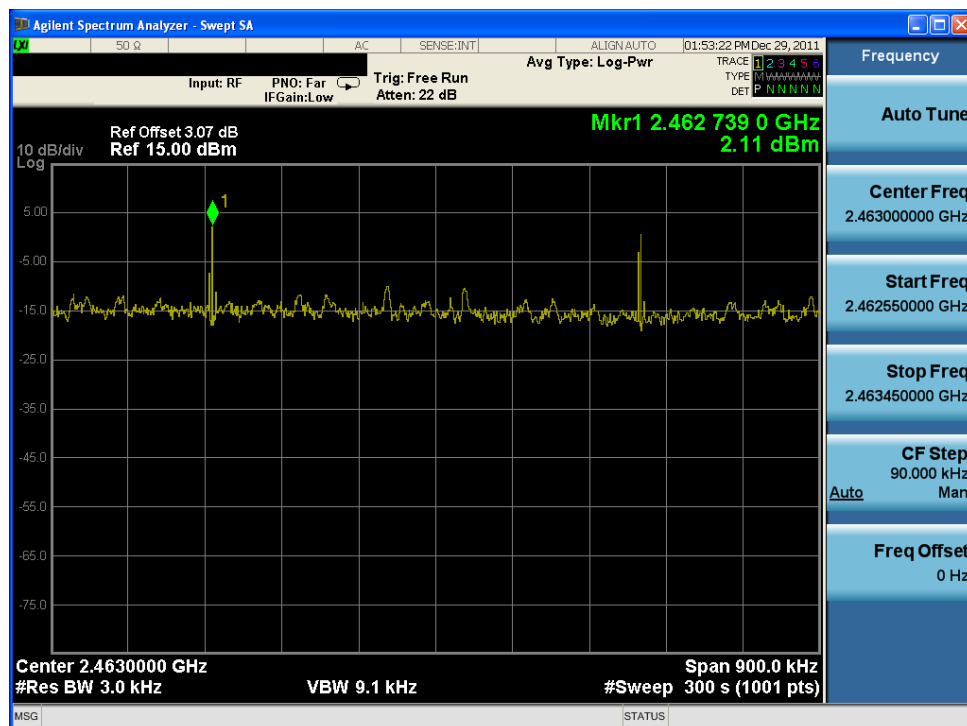


Transmitter Power Spectral Density

Test Mode: 802.11g & Ch.1 & Chain 0

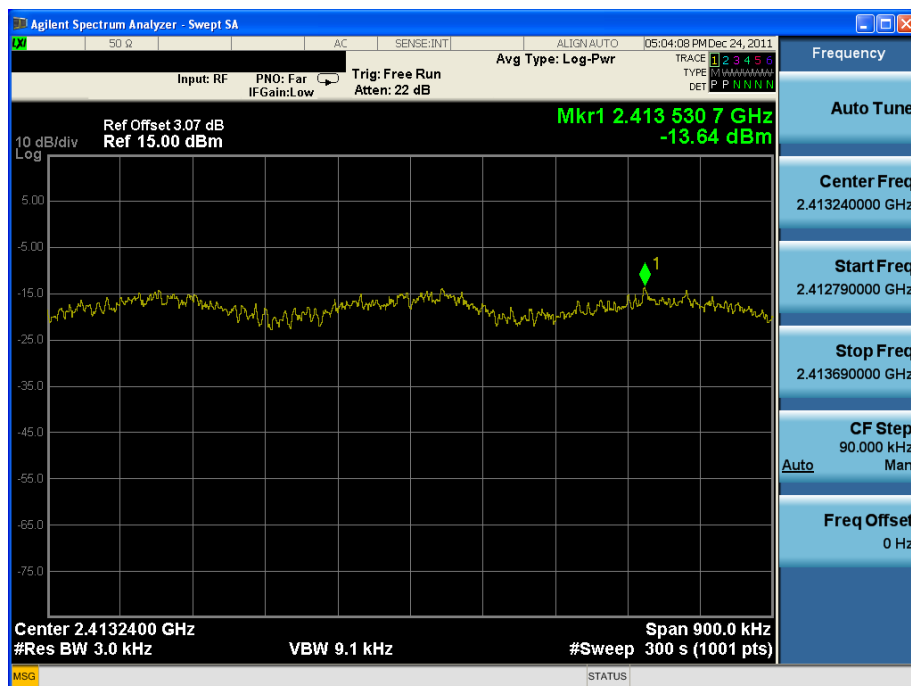


Transmitter Power Spectral Density

Test Mode: 802.11g & Ch.6 & Chain 0

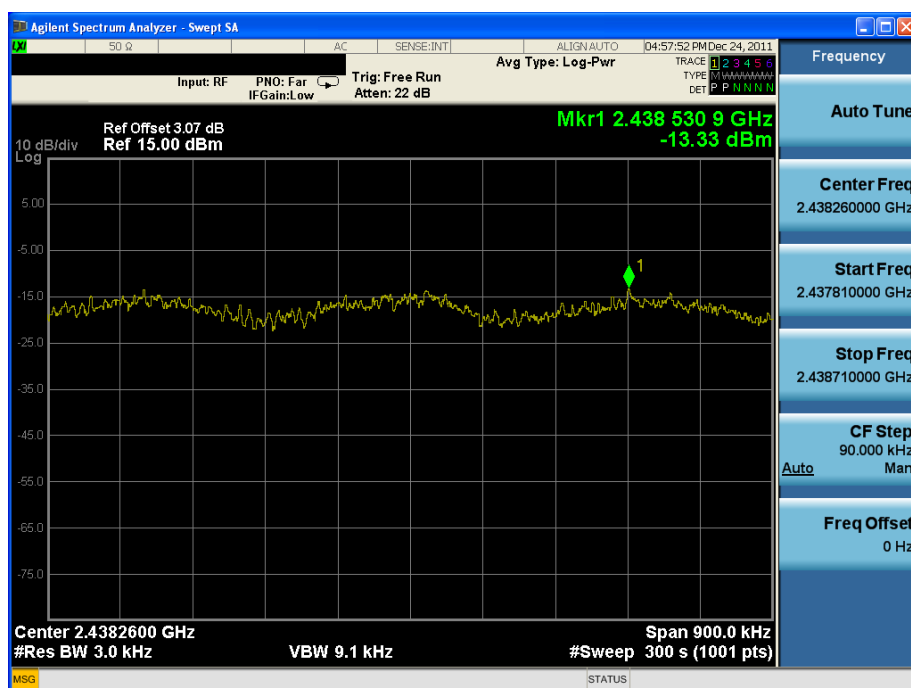


Transmitter Power Spectral Density

Test Mode: 802.11g & Ch.11 & Chain 0

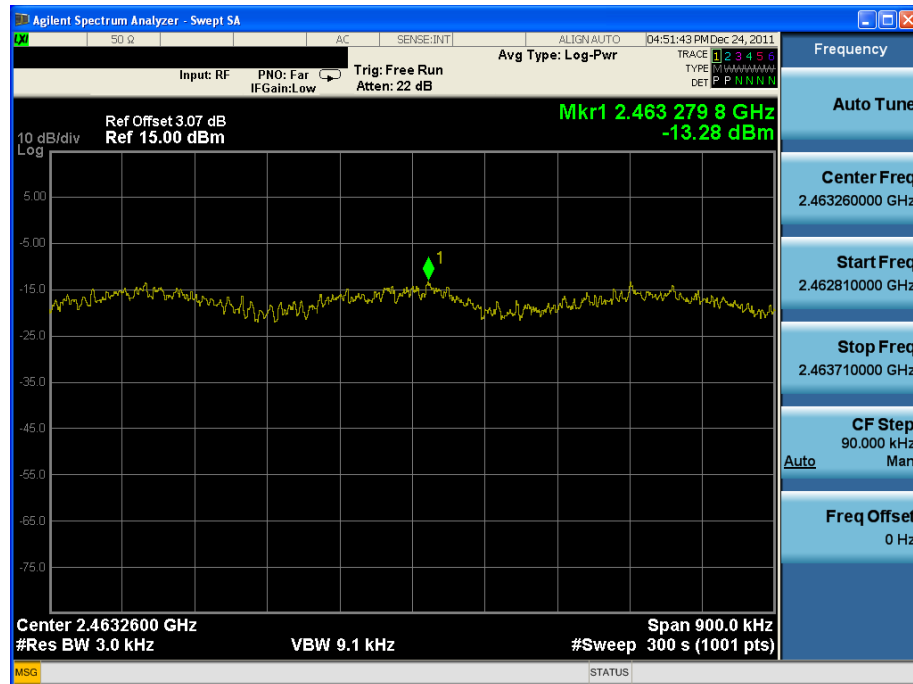


Transmitter Power Spectral Density

Test Mode: 802.11n HT20 & Ch.1 & Chain 0

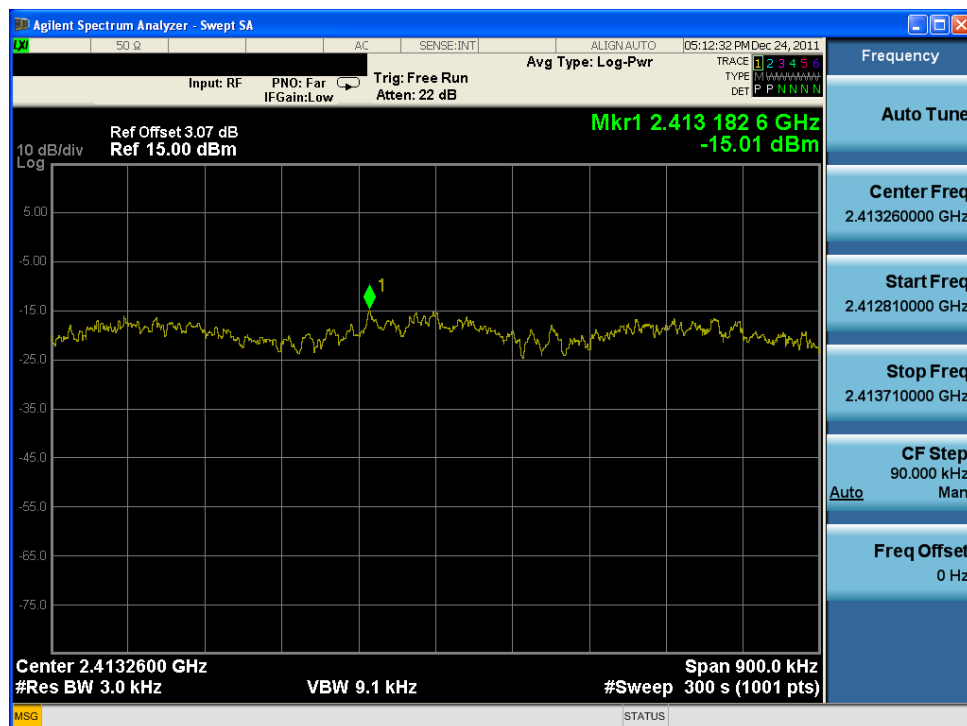


Transmitter Power Spectral Density

Test Mode: 802.11n HT20 & Ch.6 & Chain 0

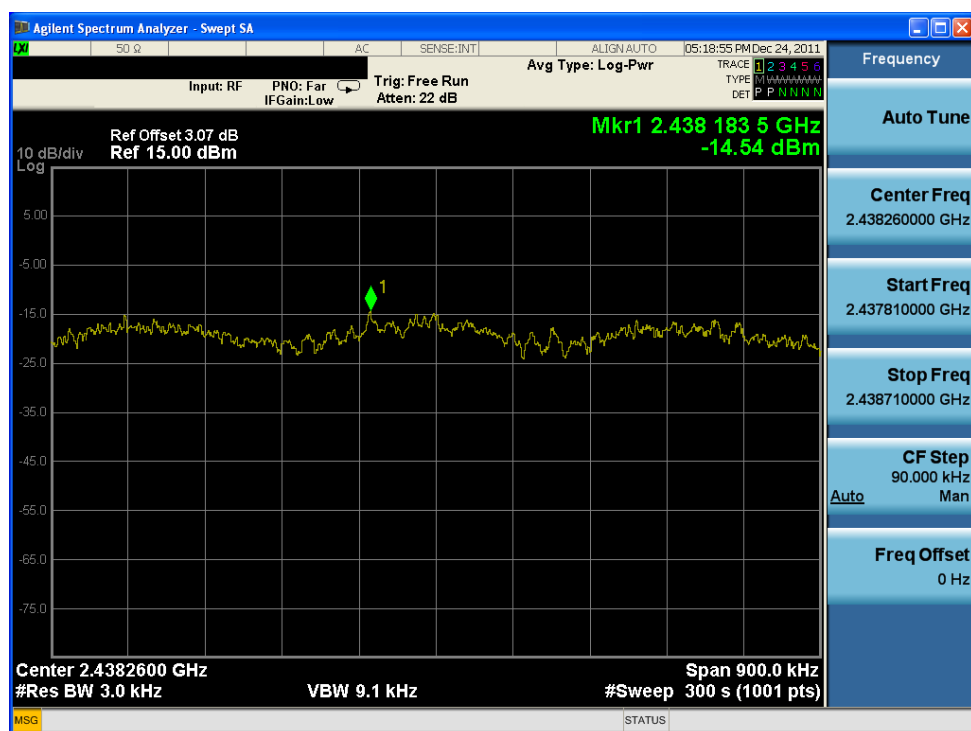


Transmitter Power Spectral Density

Test Mode: 802.11n HT20 & Ch.11 & Chain 0

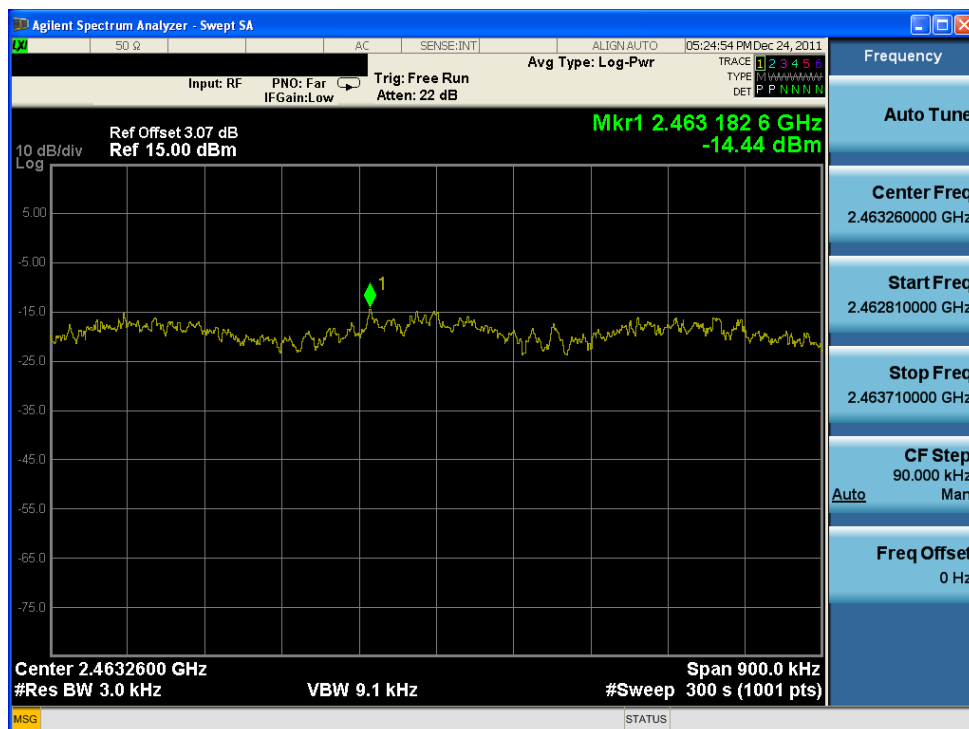


Transmitter Power Spectral Density

Test Mode: 802.11n HT20 & Ch.1 & Chain 1

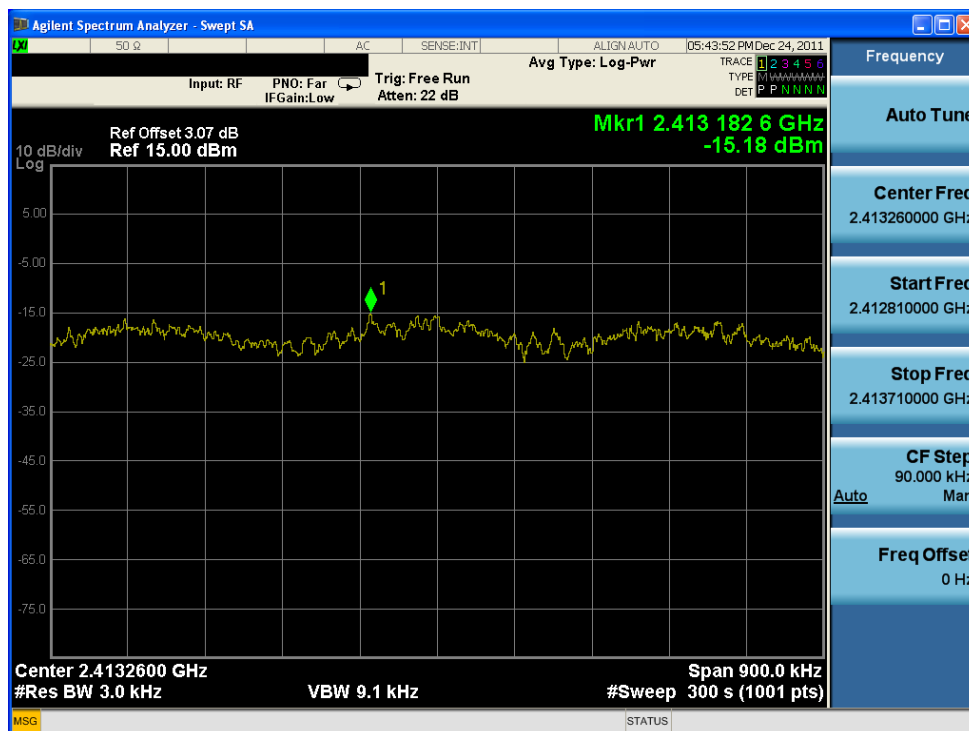


Transmitter Power Spectral Density

Test Mode: 802.11n HT20 & Ch.6 & Chain 1

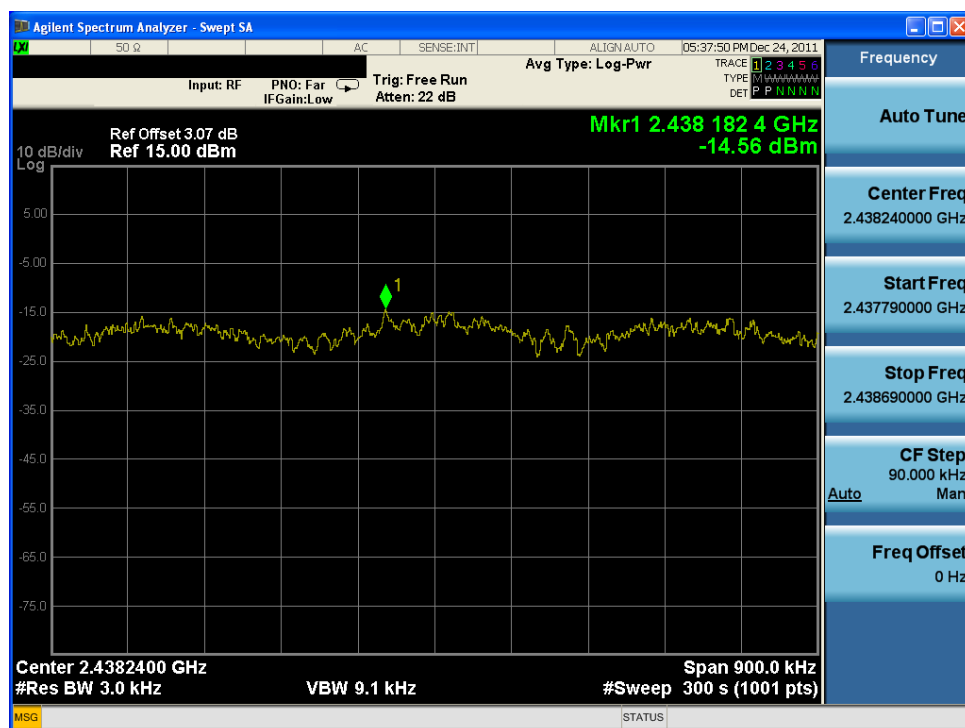


Transmitter Power Spectral Density

Test Mode: 802.11n HT20 & Ch.11 & Chain 1

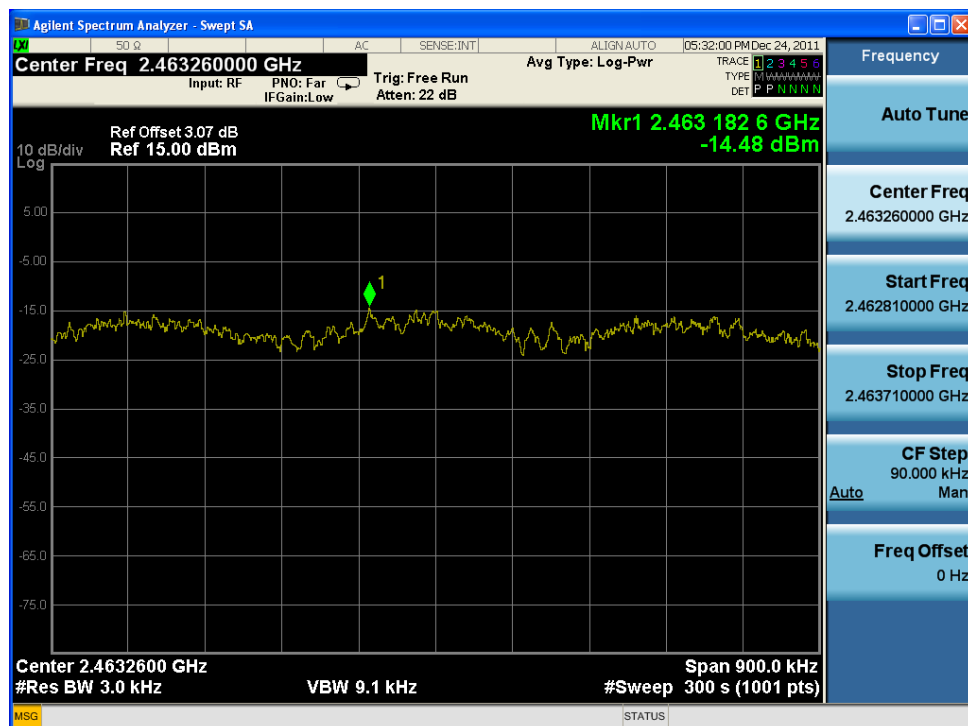


Transmitter Power Spectral Density

Test Mode: 802.11n HT40 & Ch.3 & Chain 0

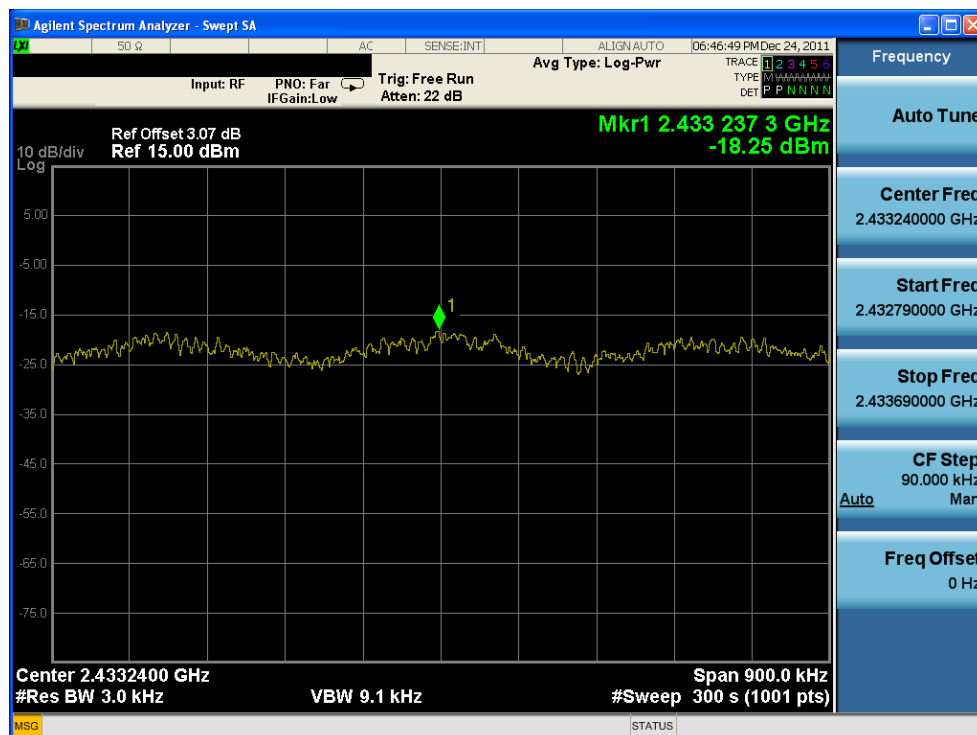


Transmitter Power Spectral Density

Test Mode: 802.11n HT40 & Ch.6 & Chain 0

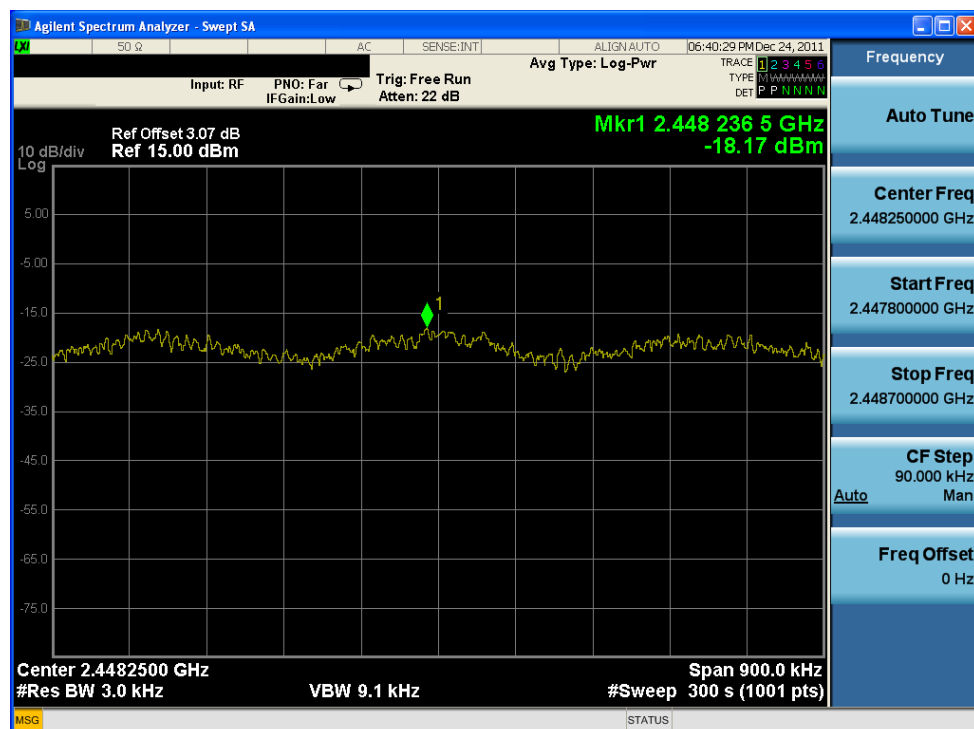


Transmitter Power Spectral Density

Test Mode: 802.11n HT40 & Ch.9 & Chain 0

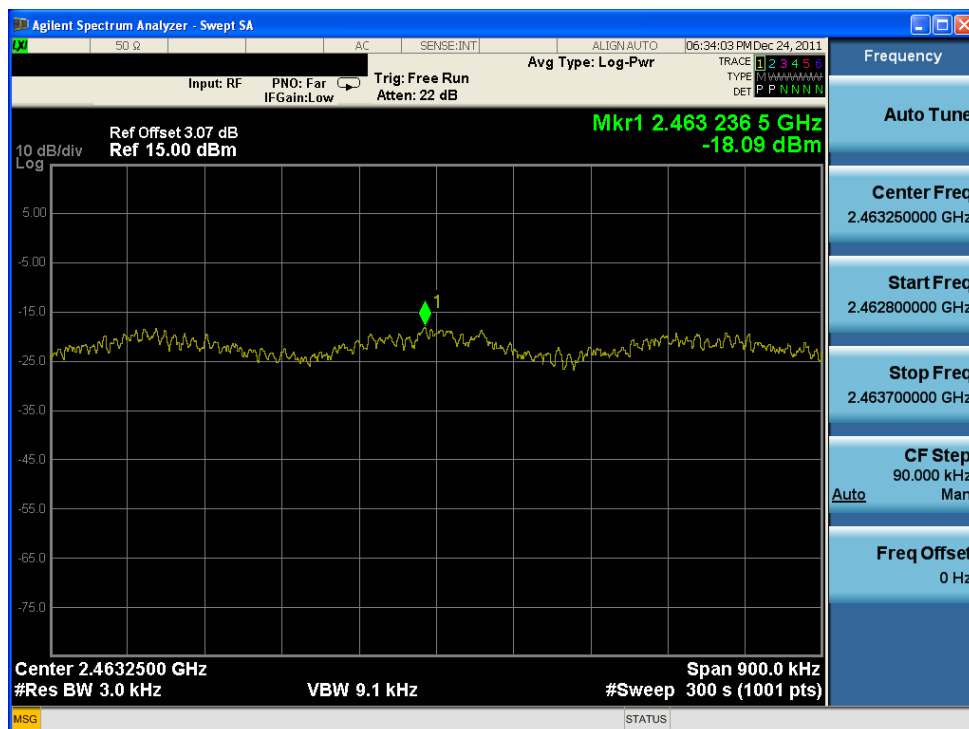


Transmitter Power Spectral Density

Test Mode: 802.11n HT40 & Ch.3 & Chain 1

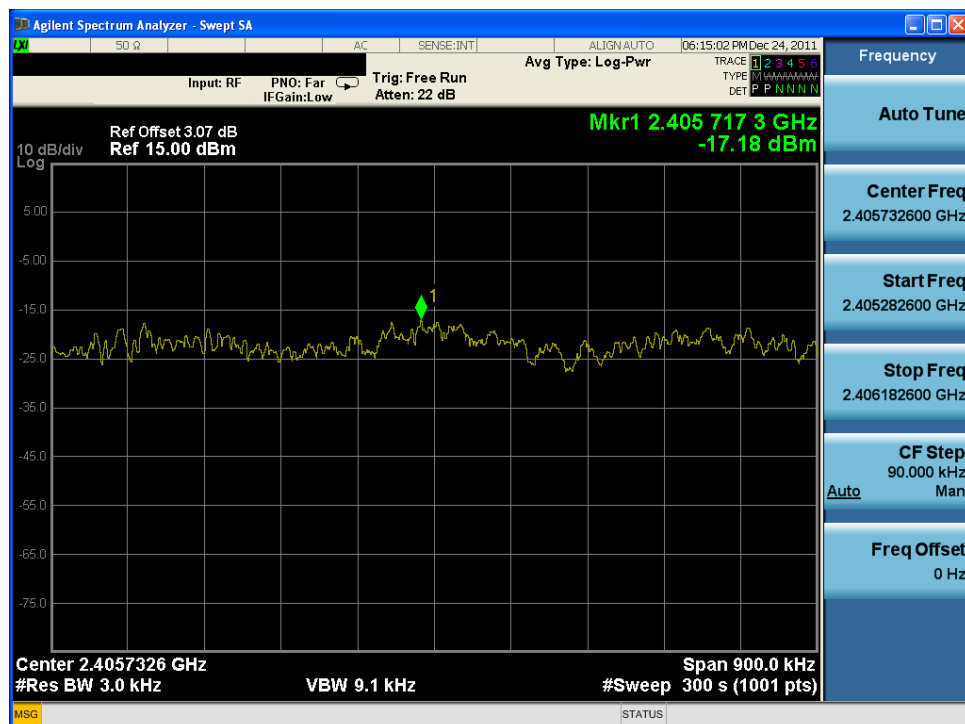


Transmitter Power Spectral Density

Test Mode: 802.11n HT40 & Ch.6 & Chain 1

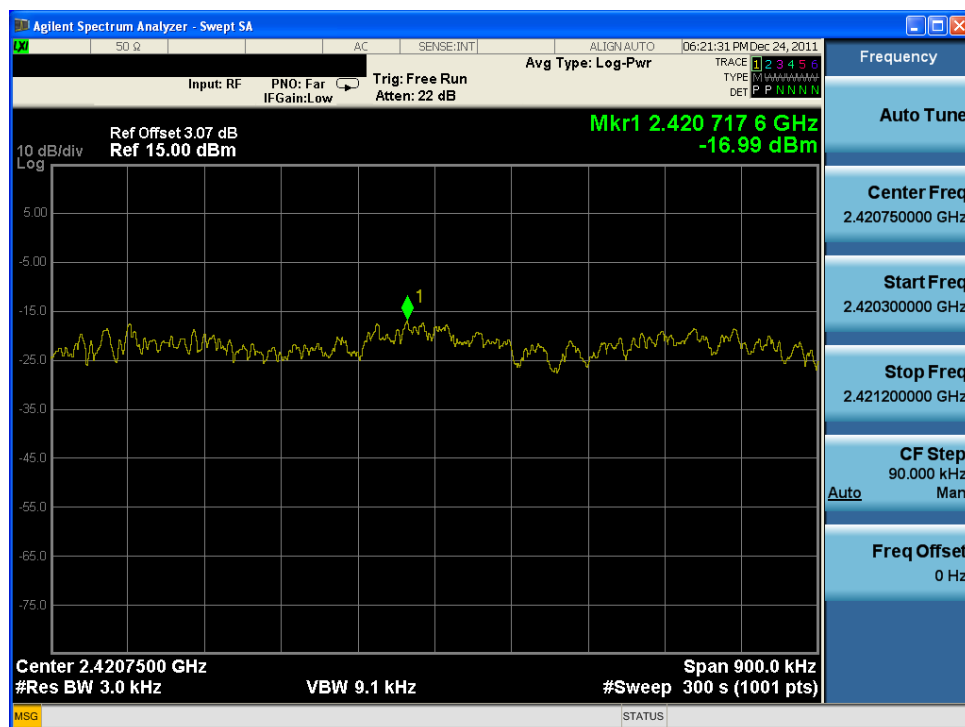

Transmitter Power Spectral Density

Test Mode: 802.11n HT40 & Ch.9 & Chain 1

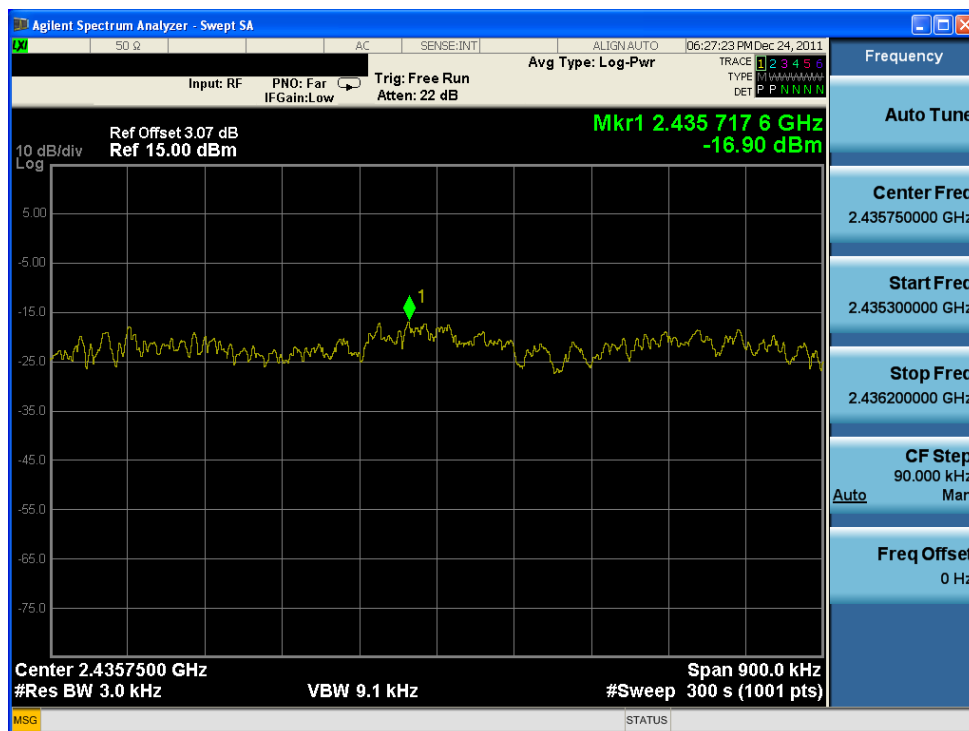

3.2.6 AC Conducted Emissions

- Procedure:

The conducted emissions are measured in the shielded room with a spectrum analyzer in peak hold. Emissions closest to the limit are measured in the quasi-peak mode (QP) and average mode (AV) with the tuned receiver using a bandwidth of 9 kHz. The emissions are maximized further by cable manipulation and Exerciser operation. The highest emissions relative to the limit are listed.

- Measurement Data: Comply

Note 1: See next pages for actual measured spectrum plots and data.



- Minimum Standard: FCC Part 15.207(a)/EN 55022

Frequency Range (MHz)	Conducted Limit (dBuV)	
	Quasi-Peak	Average
0.15 ~ 0.5	66 to 56 *	56 to 46 *
0.5 ~ 5	56	46
5 ~ 30	60	50

* Decreases with the logarithm of the frequency

AC Line Conducted Emissions (Graph)

Test Mode: 802.11b

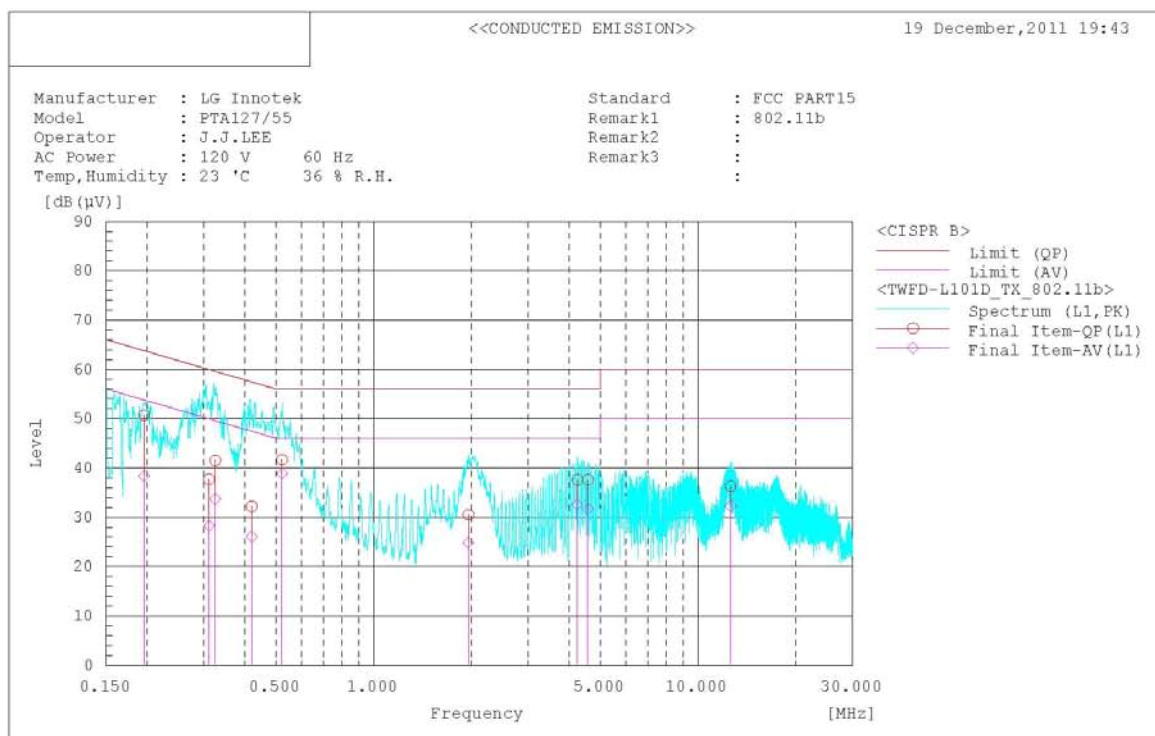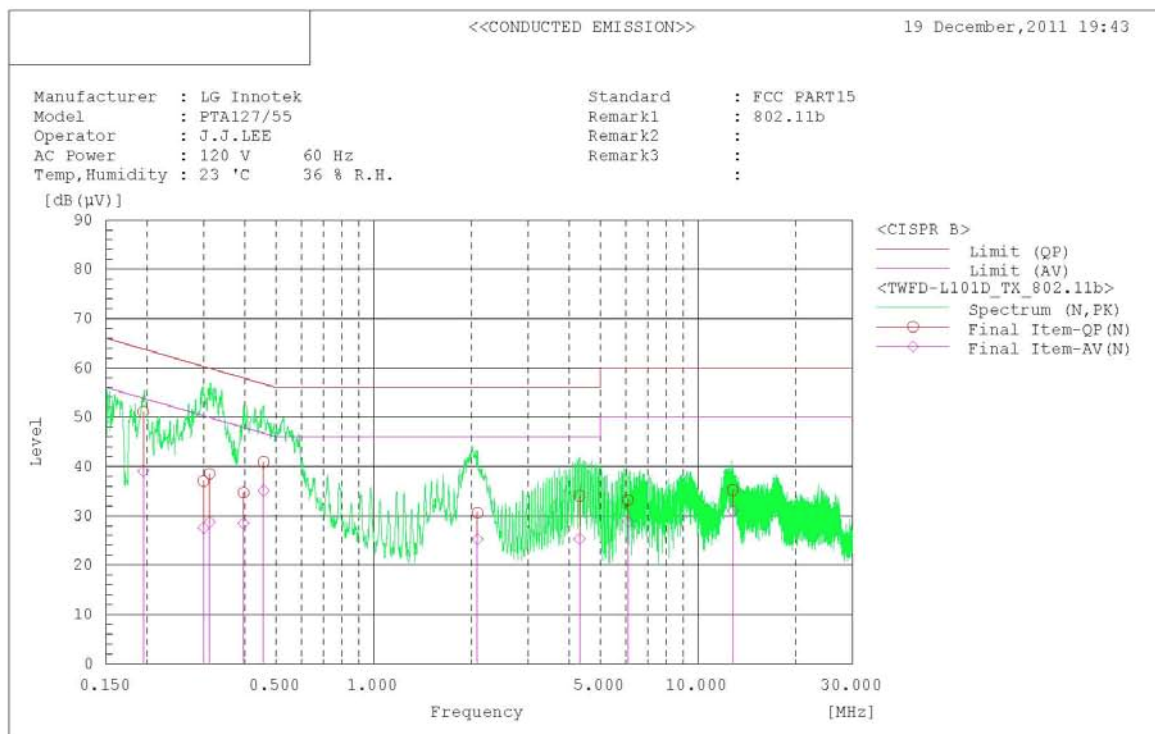



AC Line Conducted Emissions (Data List)

Test Mode: 802.11b

<<CONDUCTED EMISSION>>											
19 December, 2011 19:43											
Standard : FCC PART15											
Manufacturer : LG Innotek											
Model : FTAL27/55											
Operator : J.J.LEE											
AC Power : 120 V 60 Hz											
Temp./Humidity : 23 °C 36 % R.H.											
Remark1 : 802.11b											
Remark2 :											
Remark3 :											
Final Result											
--- N Phase ---											
No.	Frequency	Reading QP	Reading AV	c.f	Result QP	Result AV	Limit QP	Limit AV	Margin QP	Margin AV	Remark
	[MHz]	[dB (μV)]	[dB (μV)]		[dB (μV)]	[dB (μV)]	[dB (μV)]	[dB (μV)]	[dB]	[dB]	
1	0.195	51.0	39.0	0.1	51.1	39.1	63.8	53.8	12.7	14.7	
2	0.299	36.9	27.4	0.1	37.0	27.5	60.3	50.3	23.3	22.8	
3	0.312	38.4	28.6	0.1	38.5	28.7	59.9	49.9	21.4	21.2	
4	0.397	34.6	28.4	0.1	34.7	28.5	57.9	47.9	23.2	19.4	
5	0.458	40.8	35.0	0.1	40.9	35.1	56.7	46.7	15.8	11.6	
6	2.090	30.4	25.1	0.2	30.6	25.3	56.0	46.0	25.4	20.7	
7	4.315	33.7	25.0	0.3	34.0	25.3	56.0	46.0	22.0	20.7	
8	6.075	32.8	28.4	0.4	33.2	28.8	60.0	50.0	26.8	21.2	
9	12.795	34.5	30.3	0.7	35.2	31.0	60.0	50.0	24.8	19.0	
--- L1 Phase ---											
No.	Frequency	Reading QP	Reading AV	c.f	Result QP	Result AV	Limit QP	Limit AV	Margin QP	Margin AV	Remark
	[MHz]	[dB (μV)]	[dB (μV)]		[dB (μV)]	[dB (μV)]	[dB (μV)]	[dB (μV)]	[dB]	[dB]	
1	0.196	50.5	38.2	0.2	50.7	38.4	63.8	53.8	13.1	15.4	
2	0.325	41.3	33.5	0.2	41.5	33.7	59.6	49.6	18.1	15.9	
3	0.311	37.5	28.1	0.2	37.7	28.3	59.9	49.9	22.2	21.6	
4	0.421	32.0	25.9	0.2	32.2	26.1	57.4	47.4	25.2	21.3	
5	0.522	41.5	38.7	0.2	41.7	38.9	56.0	46.0	16.3	7.1	
6	1.959	30.2	24.5	0.3	30.5	24.8	56.0	46.0	25.5	21.2	
7	4.244	37.2	32.2	0.4	37.6	32.6	56.0	46.0	18.4	13.4	
8	4.572	37.2	31.3	0.4	37.6	31.7	56.0	46.0	18.4	14.3	
9	12.601	35.5	31.5	0.8	36.3	32.3	60.0	50.0	23.7	17.7	

AC Line Conducted Emissions (Graph)

Test Mode: 802.11g

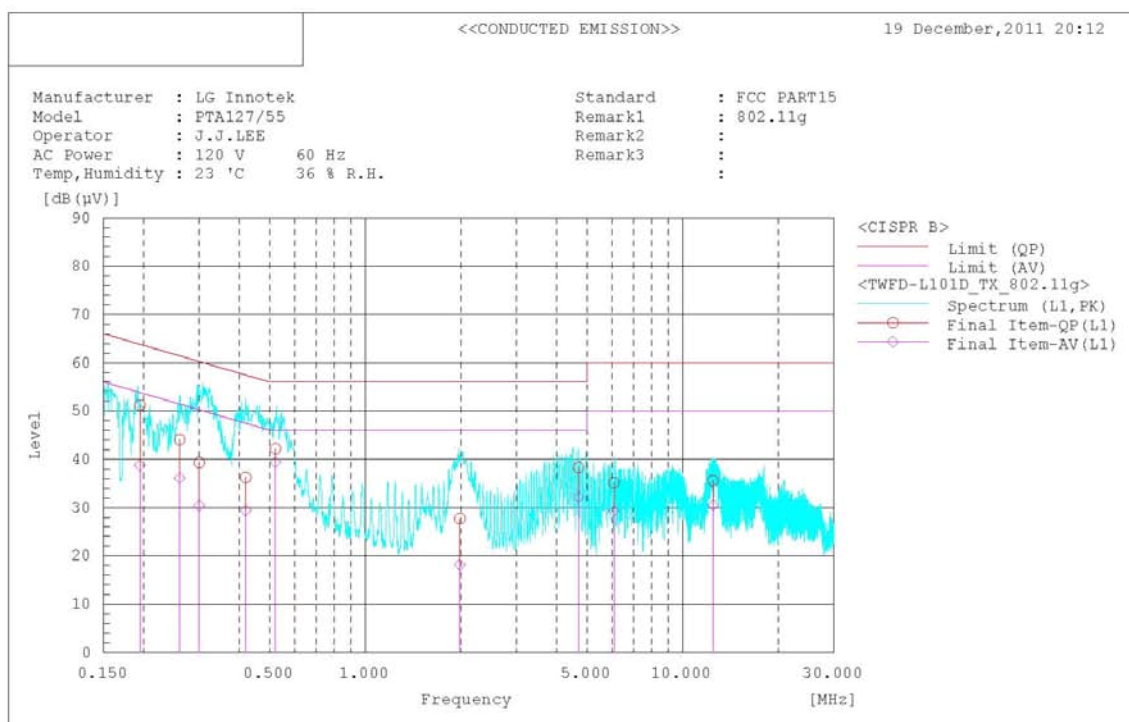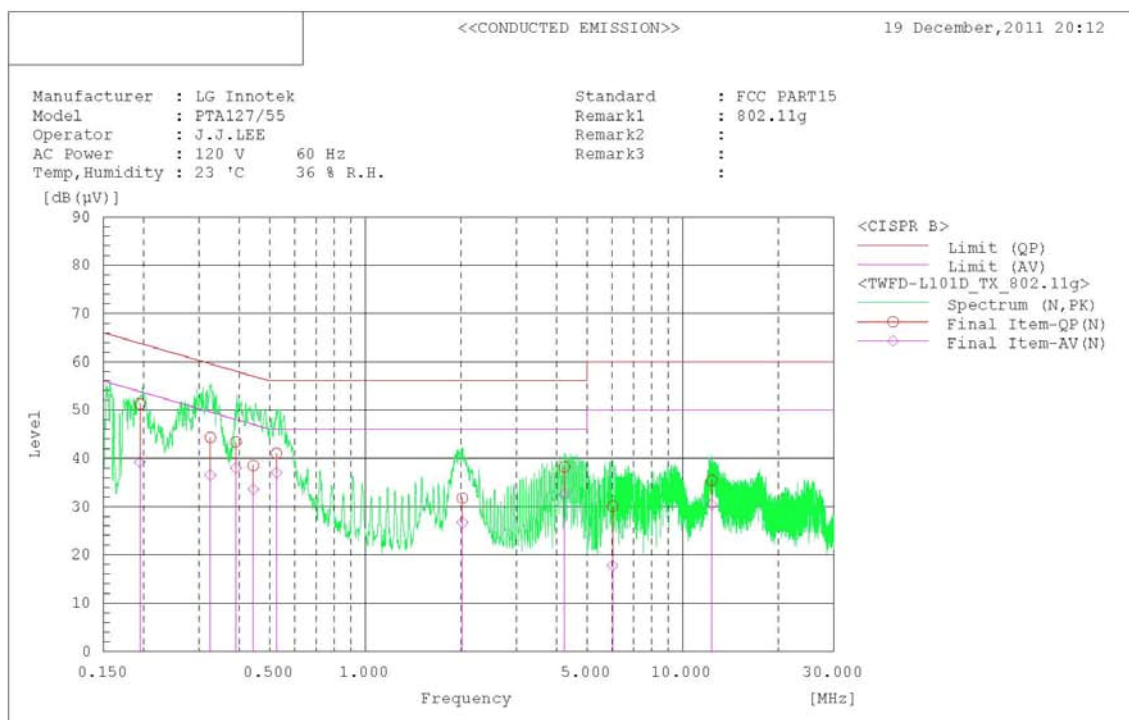

AC Line Conducted Emissions (Data List)

Test Mode: 802.11g

<<CONDUCTED EMISSION>>

19 December, 2011 20:12

Standard : FCC PART15

Manufacturer : LG Innotek

Model : FTAL27/55

Operator : J.J.LEE

AC Power : 120 V 60 Hz

Temp, Humidity : 23 'C 36 % R.H.

Remark1 : 802.11g

Remark2 :

Remark3 :

Final Result

--- N Phase ---



No.	Frequency	Reading QP	Reading AV	C.F	Result QP	Result AV	Limit QP	Limit AV	Margin QP	Margin AV	Remark
	[MHz]	[dB(μV)]	[dB(μV)]	[dB]	[dB(μV)]	[dB(μV)]	[dB(μV)]	[dB(μV)]	[dB]	[dB]	
1	0.195	51.2	39.1	0.1	51.3	39.2	63.8	53.8	12.5	14.6	
2	0.325	44.2	36.4	0.1	44.3	36.5	59.6	49.6	15.3	13.1	
3	0.391	43.3	37.9	0.1	43.4	38.0	58.0	48.0	14.6	10.0	
4	0.444	38.4	33.5	0.1	38.5	33.6	57.0	47.0	18.5	13.4	
5	0.525	40.9	36.9	0.1	41.0	37.0	56.0	46.0	15.0	9.0	
6	2.023	31.6	26.5	0.2	31.8	26.7	56.0	46.0	24.2	19.3	
7	4.243	37.9	32.3	0.3	38.2	32.6	56.0	46.0	17.8	13.4	
8	6.013	29.7	17.4	0.4	30.1	17.8	60.0	50.0	29.9	32.2	
9	12.335	34.7	29.7	0.7	35.4	30.4	60.0	50.0	24.6	19.6	

--- L1 Phase ---

No.	Frequency	Reading QP	Reading AV	C.F	Result QP	Result AV	Limit QP	Limit AV	Margin QP	Margin AV	Remark
	[MHz]	[dB(μV)]	[dB(μV)]	[dB]	[dB(μV)]	[dB(μV)]	[dB(μV)]	[dB(μV)]	[dB]	[dB]	
1	0.195	51.0	38.5	0.2	51.2	38.7	63.8	53.8	12.6	15.1	
2	0.260	43.9	35.9	0.2	44.1	36.1	61.4	51.4	17.3	15.3	
3	0.300	39.1	30.2	0.2	39.3	30.4	60.2	50.2	20.9	19.8	
4	0.420	36.0	29.2	0.2	36.2	29.4	57.4	47.4	21.2	18.0	
5	0.521	42.0	39.2	0.2	42.2	39.4	56.0	46.0	13.8	6.6	
6	1.986	27.4	17.8	0.3	27.7	18.1	56.0	46.0	28.3	27.9	
7	4.700	37.9	31.8	0.4	38.3	32.2	56.0	46.0	17.7	13.8	
8	6.073	34.7	28.8	0.5	35.2	29.3	60.0	50.0	24.8	20.7	
9	12.465	34.8	29.7	0.8	35.6	30.5	60.0	50.0	24.4	19.5	

AC Line Conducted Emissions (Graph)

Test Mode: 802.11n HT20

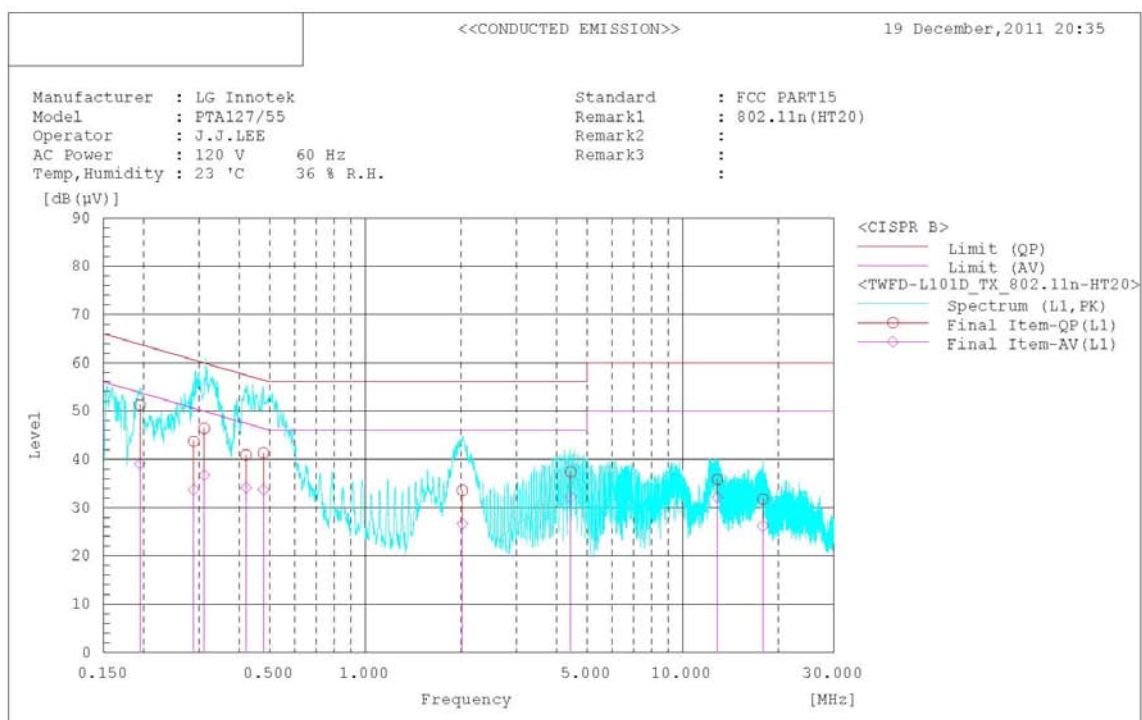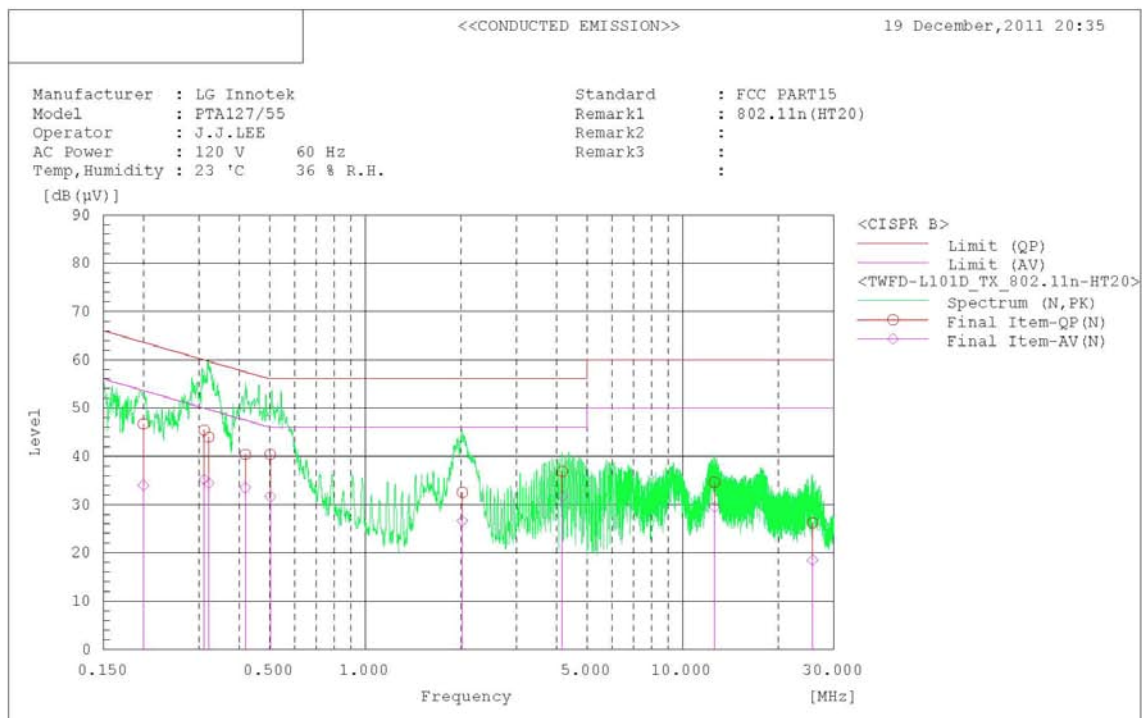



AC Line Conducted Emissions (Data List)

Test Mode: 802.11n HT20

<<CONDUCTED EMISSION>>											
19 December, 2011 20:35											
Standard : FCC PART15											
Manufacturer : LG Innotek											
Model : FTAL27/55											
Operator : J.J.LEE											
AC Power : 120 V 60 Hz											
Temp, Humidity : 23 'C 36 % R.H.											
Remark1 : 802.11n(HT20)											
Remark2 :											
Remark3 :											
Final Result											
--- N Phase ---											
No.	Frequency	Reading QP	Reading AV	c.f	Result QP	Result AV	Limit QP	Limit AV	Margin QP	Margin AV	Remark
	[MHz]	[dB (μV)]	[dB (μV)]		[dB (μV)]	[dB (μV)]	[dB (μV)]	[dB (μV)]	[dB]	[dB]	
1	0.200	46.6	33.9	0.1	46.7	34.0	63.6	53.6	16.9	19.6	
2	0.311	45.3	35.1	0.1	45.4	35.2	59.9	49.9	14.5	14.7	
3	0.321	43.9	34.3	0.1	44.0	34.4	59.7	49.7	15.7	15.3	
4	0.419	40.3	33.4	0.1	40.4	33.5	57.5	47.5	17.1	14.0	
5	0.502	40.3	31.6	0.1	40.4	31.7	56.0	46.0	15.6	14.3	
6	2.022	32.3	26.4	0.2	32.5	26.6	56.0	46.0	23.5	19.4	
7	4.178	36.6	31.5	0.3	36.9	31.8	56.0	46.0	19.1	14.2	
8	12.593	33.9	28.8	0.7	34.6	29.5	60.0	50.0	25.4	20.5	
9	25.656	24.9	17.2	1.3	26.2	18.5	60.0	50.0	33.8	31.5	
--- L1 Phase ---											
No.	Frequency	Reading QP	Reading AV	c.f	Result QP	Result AV	Limit QP	Limit AV	Margin QP	Margin AV	Remark
	[MHz]	[dB (μV)]	[dB (μV)]		[dB (μV)]	[dB (μV)]	[dB (μV)]	[dB (μV)]	[dB]	[dB]	
1	0.195	51.1	38.9	0.2	51.3	39.1	63.8	53.8	12.5	14.7	
2	0.311	46.2	36.6	0.2	46.4	36.8	59.9	49.9	13.5	13.1	
3	0.288	43.5	33.5	0.2	43.7	33.7	60.6	50.6	16.9	16.9	
4	0.478	41.1	33.5	0.2	41.3	33.7	56.4	46.4	15.1	12.7	
5	0.421	40.7	33.9	0.2	40.9	34.1	57.4	47.4	16.5	13.3	
6	4.439	37.0	31.7	0.4	37.4	32.1	56.0	46.0	18.6	13.9	
7	12.861	35.0	31.3	0.8	35.8	32.1	60.0	50.0	24.2	17.9	
8	2.022	33.3	26.3	0.3	33.6	26.6	56.0	46.0	22.4	19.4	
9	17.887	30.7	25.1	1.1	31.8	26.2	60.0	50.0	28.2	23.8	

AC Line Conducted Emissions (Graph)

Test Mode: 802.11n HT40

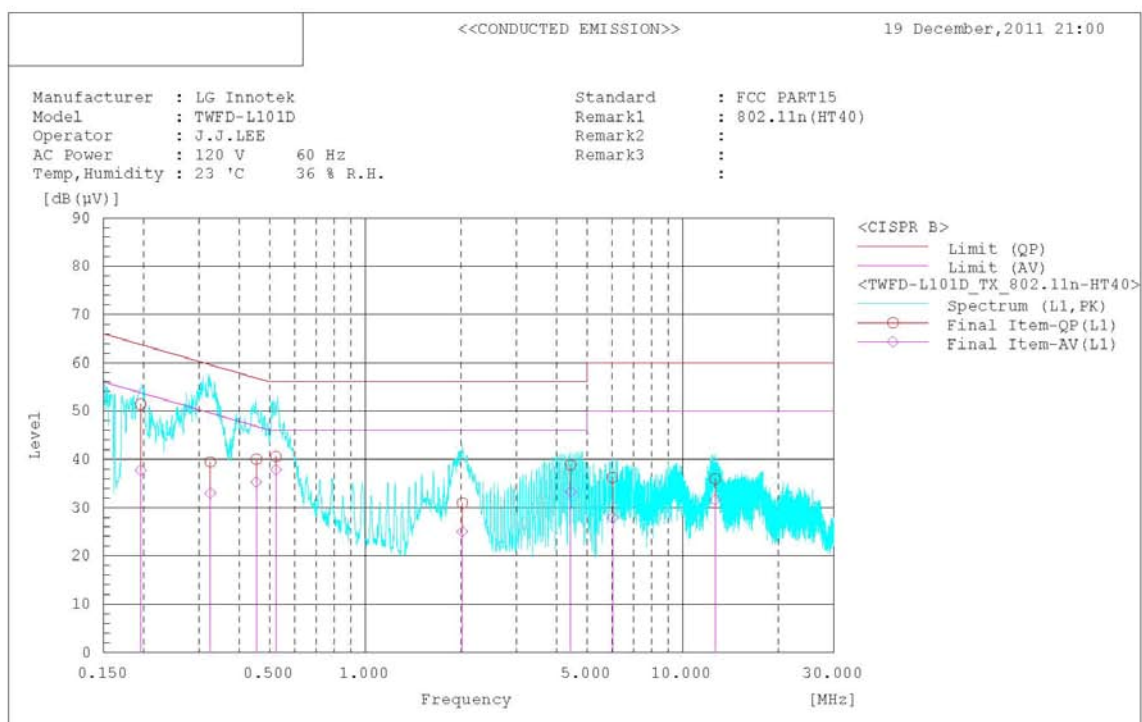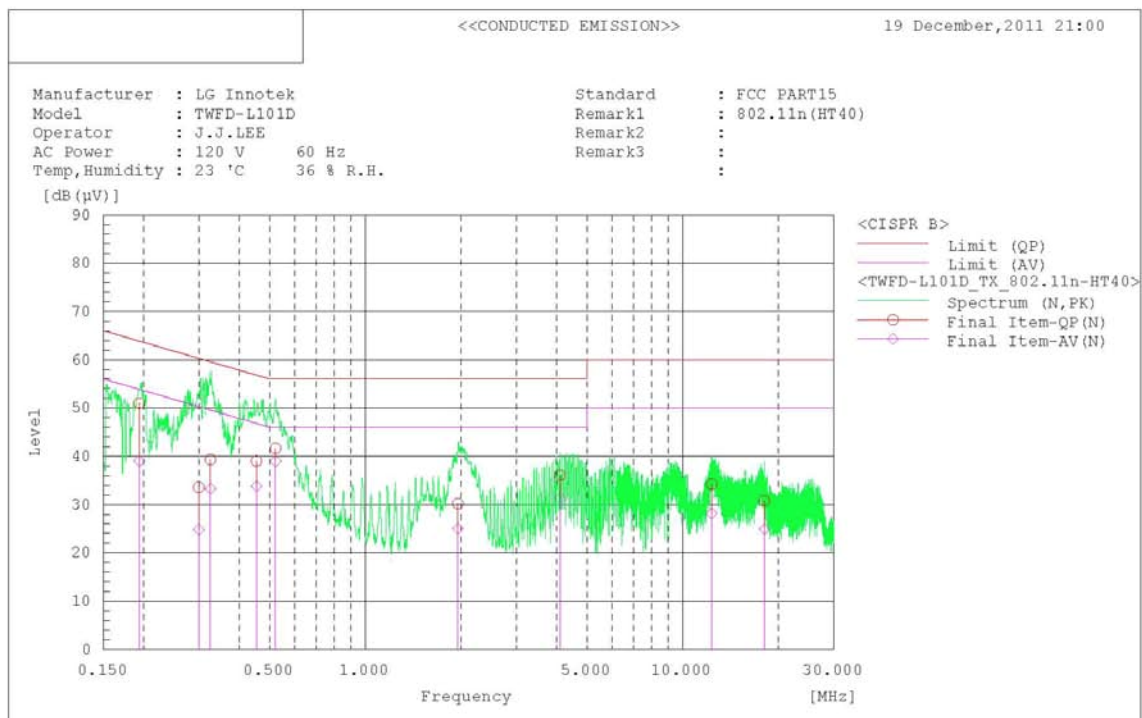

AC Line Conducted Emissions (Data List)

Test Mode: 802.11n HT40

<<CONDUCTED EMISSION>>

19 December, 2011 21:00

Standard

: FCC PART15

Manufacturer

: LG Innotek

Model

: TWFD-L101D

Operator

: J.J.LEE

AC Power

: 120 V 60 Hz

Temp./Humidity

: 23 °C 36 % R.H.

Remark1

: 802.11n(HT40)

Remark2

:

Remark3

:

Final Result

--- N Phase ---

No.	Frequency	Reading QP	Reading AV	c.f	Result QP	Result AV	Limit QP	Limit AV	Margin QP	Margin AV	Remark
	[MHz]	[dB(μV)]	[dB(μV)]		[dB(μV)]	[dB(μV)]	[dB(μV)]	[dB(μV)]	[dB]	[dB]	
1	0.194	50.9	38.9	0.1	51.0	39.0	63.9	53.9	12.9	14.9	
2	0.299	33.5	24.7	0.1	33.6	24.8	60.3	50.3	26.7	25.5	
3	0.325	39.2	33.2	0.1	39.3	33.3	59.6	49.6	20.3	16.3	
4	0.454	38.9	33.7	0.1	39.0	33.8	56.8	46.8	17.8	13.0	
5	0.522	41.5	38.9	0.1	41.6	39.0	56.0	46.0	14.4	7.0	
6	1.958	30.0	24.8	0.2	30.2	25.0	56.0	46.0	25.8	21.0	
7	4.109	35.8	31.0	0.3	36.1	31.3	56.0	46.0	19.9	14.7	
8	12.332	33.5	27.5	0.7	34.2	28.2	60.0	50.0	25.8	21.8	
9	18.084	29.8	23.9	1.0	30.8	24.9	60.0	50.0	29.2	25.1	

--- L1 Phase ---

No.	Frequency	Reading QP	Reading AV	c.f	Result QP	Result AV	Limit QP	Limit AV	Margin QP	Margin AV	Remark
	[MHz]	[dB(μV)]	[dB(μV)]		[dB(μV)]	[dB(μV)]	[dB(μV)]	[dB(μV)]	[dB]	[dB]	
1	0.196	51.2	37.5	0.2	51.4	37.7	63.8	53.8	12.4	16.1	
2	0.325	39.2	32.8	0.2	39.4	33.0	59.6	49.6	20.2	16.6	
3	0.454	39.8	35.1	0.2	40.0	35.3	56.8	46.8	16.8	11.5	
4	0.523	40.4	37.6	0.2	40.6	37.8	56.0	46.0	15.4	8.2	
5	2.023	30.6	24.7	0.3	30.9	25.0	56.0	46.0	25.1	21.0	
6	4.438	38.4	32.9	0.4	38.8	33.3	56.0	46.0	17.2	12.7	
7	6.009	35.7	27.4	0.5	36.2	27.9	60.0	50.0	23.8	22.1	
8	12.661	35.1	30.8	0.8	35.9	31.6	60.0	50.0	24.1	18.4	

3.2.7 Antenna Requirements

- Procedure:

Describe how the EUT complies with the requirement that either its antenna is permanently attached, or that it employs a unique antenna connector, for every antenna proposed for use with the EUT.

- Conclusion: Comply

The antenna is PCB antenna. (Refer to Internal Photo file.)

- Minimum Standard:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions.

APPENDIX

TEST EQUIPMENT FOR TESTS

To facilitate inclusion on each page of the test equipment used for related tests, each item of test equipment.

	Type	Manufacturer	Model	Cal.Date (yy/mm/dd)	Next.Cal.Date (yy/mm/dd)	S/N
☐	Spectrum Analyzer	Agilent	E4440A	11/09/30	12/09/30	MY45304199
☒	Spectrum Analyzer	Rohde Schwarz	FSQ26	12/01/09	13/01/09	200445
☐	Spectrum analyzer	Agilent	E4404B	11/03/08	12/03/08	US41061134
☐	Spectrum Analyzer(RE)	H.P	8563E	11/10/04	12/10/04	3551A04634
☒	MXA Signal Analyzer	Agilent Technologies, Inc	N9020A	12/01/09	13/01/09	MY49100833
☐	Power Meter	H.P	EPM-442A	11/07/01	12/07/01	GB37170413
☐	Power Sensor	H.P	8481A	11/07/01	12/07/01	3318A96332
☒	Wideband Power Sensor	Rohde Schwarz	NRP-Z81	11/06/04	12/06/04	1137.9009.02-101001
☒	Virtual Power Meter(S/W)	Rohde Schwarz	R&S Power Viewer Plus	-	-	V 4.1.0
☐	Power Divider	Agilent	11636B	11/09/30	12/09/30	56471
☐	4-Way Power Divider	ET Industries	D-0526-4	11/12/01	12/12/01	210195001
☐	Power Splitter	Anritsu	K241B	11/09/30	12/09/30	020611
☐	Power Splitter	Anritsu	K241B	11/07/01	12/07/01	017060
☐	Power Splitters & Dividers	Aeroflex/Weinschel	1594	11/02/21	12/02/21	1177
☐	Frequency Counter	H.P	5342A	11/07/01	12/07/01	2119A04450
☐	TEMP & HUMIDITY Chamber	JISCO	KR-100/J-RHC2	11/09/30	12/09/30	30604493/021031
☒	Digital Multimeter	H.P	34401A	11/03/07	12/03/07	3146A13475, US36122178
☐	Multifunction Synthesizer	HP	8904A	11/10/06	12/10/06	3633A08404
☒	Signal Generator	Rohde Schwarz	SMR20	11/03/08	12/03/08	101251
☐	Signal Generator	H.P	ESG-3000A	11/07/01	12/07/01	US37230529
☒	Vector Signal Generator	Rohde Schwarz	SMJ100A	12/01/09	13/01/09	100148
☐	Vector Signal Generator	Rohde Schwarz	SMBV100A	12/01/09	13/01/09	255571
☐	Audio Analyzer	H.P	8903B	11/07/02	12/07/02	3011A09448
☐	Modulation Analyzer	H.P	8901B	11/07/01	12/07/01	3028A03029
☐	8960 Series 10 Wireless Comms. Test Set	Agilent	E5515C	11/03/07	12/03/07	GB43461134
☐	Universal Radio communication Tester	Rohde Schwarz	CMU200	11/03/07	12/03/07	106760
☐	Bluetooth Tester	TESCOM	TC-3000B	11/07/01	12/07/01	3000B000268
☐	Thermo hygrometer	BODYCOM	BJ5478	11/01/13	12/01/13	090205-3
☒	Thermo hygrometer	BODYCOM	BJ5478	11/01/13	12/01/13	090205-2
☐	Thermo hygrometer	BODYCOM	BJ5478	11/01/13	12/01/13	090205-4
☐	AC Power supply	DAEKWANG	5KVA	11/03/08	12/03/08	20060321-1
☒	DC Power Supply	HP	6622A	11/03/07	12/03/07	3448A03760
☐	DC Power Supply	HP	6633A	11/03/07	12/03/07	3524A06634
☐	DC Power Supply	Protek	PWS-3010D	11/09/30	12/09/30	4072702
☐	DC Power Supply	SM techno	SDP30-5D	11/05/20	12/05/20	305DKA013
☐	BAND Reject Filter	Microwave Circuits	N0308372	11/09/30	12/09/30	3125-01DC0352
☐	BAND Reject Filter	Wainwright	WRCG1750	11/09/30	12/09/30	2
☐	High-Pass Filter	ANRITSU	MP526D	11/09/30	12/09/30	M27756

	Type	Manufacturer	Model	Cal.Date (yy/mm/dd)	Next.Cal.Date (yy/mm/dd)	S/N
☐	High-pass filter	Wainwright	WHNX2.1	11/09/30	12/09/30	1
☒	High-pass filter	Wainwright	WHNX3.0	11/09/30	12/09/30	9
☐	High-pass filter	Wainwright	WHNX5.0	11/09/19	12/09/19	8
☐	High-Pass Filter	Wainwright	WHKX8.5	11/09/19	12/09/19	1
☐	High-Pass Filter	Wainwright	WHKX1.0	11/09/30	12/09/30	9
☐	Tunable Notch Filter	Wainwright	WRCT800.0 /960.0-0.2/40-8SSK	N/A	N/A	32
☐	Tunable Notch Filter	Wainwright	WRCD1700.0 /2000.0-0.2/40-10SSK	N/A	N/A	53
☐	Tunable Notch Filter	Wainwright	WRCT1900.0/ 2200.0-5/40-10SSK	N/A	N/A	30
☐	HORN ANT	ETS	3115	11/09/06	12/09/06	21097
☒	HORN ANT	ETS	3115	11/03/22	12/03/22	6419
☒	HORN ANT	A.H.Systems	SAS-574	11/03/25	13/03/25	154
☐	HORN ANT	A.H.Systems	SAS-574	11/03/25	13/03/25	155
☐	HORN ANT	SCHWARZBECK	BBHA9120A	10/04/13	12/04/13	322
☐	Dipole Antenna	Schwarzbeck	VHA9103	11/11/22	12/11/22	2116
☐	Dipole Antenna	Schwarzbeck	VHA9103	11/11/22	12/11/22	2117
☐	Dipole Antenna	Schwarzbeck	UHA9105	11/11/22	12/11/22	2261
☐	Dipole Antenna	Schwarzbeck	UHA9105	11/11/22	12/11/22	2262
☐	LOOP Antenna	ETS	6502	10/10/29	12/10/29	3471
☐	Coaxial Fixed Attenuators	Agilent	8491B	11/07/02	12/07/02	MY39260700
☒	Attenuator (3dB)	WEINSCHEL	56-3	11/09/30	12/09/30	Y2342
☐	Attenuator (3dB)	WEINSCHEL	56-3	11/09/30	12/09/30	Y2370
☐	Attenuator (10dB)	WEINSCHEL	23-10-34	11/09/30	12/09/30	BP4386
☐	Attenuator (10dB)	WEINSCHEL	23-10-34	12/01/09	13/01/09	BP4387
☐	Attenuator (10dB)	WEINSCHEL	86-10-11	11/09/30	12/09/30	446
☐	Attenuator (10dB)	WEINSCHEL	86-10-11	11/09/30	12/09/30	408
☐	Attenuator (20dB)	WEINSCHEL	86-20-11	11/09/30	12/09/30	432
☐	Attenuator (30dB)	JFW	50FH-030-300	11/03/07	12/03/07	060320-1
☐	Attenuator (40dB)	WEINSCHEL	57-40-33	11/09/30	12/09/30	NN837
☐	Termination	H.P	HP-909D	11/07/02	12/07/02	02750
☐	Termination	H.P	HP-909D	11/07/02	12/07/02	02702
☐	Type N Coaxial CIRCULATOR	NOVA MICROWAVE	0088CAN	11/07/01	12/07/01	788
☐	Type N Coaxial CIRCULATOR	NOVA MICROWAVE	0185CAN	11/07/01	12/07/01	790
☐	Amplifier (30dB)	Agilent	8449B	11/03/07	12/03/07	3008A01590
☒	Amplifier (30dB)	H.P	8449B	11/03/07	12/03/07	3008A00370
☐	Amplifier	EMPOWER	BBS3Q7ELU	11/09/30	12/09/30	1020
☐	RF Power Amplifier	OPHIRRF	5069F	11/07/01	12/07/01	1006
☒	EMI TEST RECEIVER	R&S	ESU	12/01/09	13/01/09	100014

	Type	Manufacturer	Model	Cal.Date (yy/mm/dd)	Next.Cal.Date (yy/mm/dd)	S/N
☒	BILOG ANTENNA	SCHAFFNER	CBL6112B	10/07/14	12/07/14	2737
☒	Amplifier (22dB)	H.P	8447E	12/01/09	13/01/09	2945A02865
☐	EMI TEST RECEIVER	R&S	ESCI	11/03/08	12/03/08	100364
☐	BICONICAL ANT.	Schwarzbeck	VHA 9103	10/11/29	12/11/29	91032789
☐	LOG-PERIODIC ANT.	Schwarzbeck	UHALP9108A1	10/11/29	12/11/29	1098
☐	BICONICAL ANT.	Schwarzbeck	VHA 9103	10/12/21	12/12/21	91031946
☐	LOG-PERIODIC ANT.	Schwarzbeck	UHALP9108A1	10/07/07	12/07/07	0590
☐	Low Noise Pre Amplifier	TSJ	MLA-100K01-B01-2	11/03/07	12/03/07	1252741
☐	Low Noise Pre Amplifier	TSJ	MLA-00108-B02-36	12/01/09	13/01/09	1518831
☐	Amplifier (25dB)	Agilent	8447D	11/03/07	12/03/07	2944A10144
☐	Amplifier (25dB)	Agilent	8447D	11/07/01	12/07/01	2648A04922
☒	Spectrum Analyzer(CE)	H.P	8591E	11/03/07	12/03/07	3649A05889
☒	LISN	Kyoritsu	KNW-407	12/01/09	13/01/09	8-317-8
☒	LISN	Kyoritsu	KNW-242	11/07/02	12/07/02	8-654-15
☒	CVCF	NF Electronic	4420	11/09/15	12/19/15	304935/4420023
☒	50 ohm Terminator	HME	CT-01	12/01/09	13/01/09	N/A
☒	RFI/FIELD Intensity Meter	Kyoritsu	KNM-2402	11/07/02	12/07/02	4N-170-3
☐	EMI Test Receiver	R&S	ECSI	11/03/08	12/03/08	100364
☐	LISN	R&S	ESH2-Z5	11/09/30	12/09/30	8287391006
☐	CVCF	NF Electronic	4420	11/03/08	12/03/08	304935/337980
☐	RFI/FIELD Intensity Meter	ES4152	424059	11/09/30	12/09/30	424059
☐	Wideband Radio Communication Tester	R&S	CMW500	11/09/30	12/09/30	100989