

Appendix B: Test Results of 2.4GHz SRD

APPENDIX B: TEST RESULTS OF 2.4GHZ SRD	1
APPENDIX B.1: TEST RESULTS OF 20DB BANDWIDTH.....	2
Test Result.....	2
Test Graphs.....	3
APPENDIX B.2: TEST RESULTS OF 99% BANDWIDTH	5
Test Result.....	5
Test Graphs.....	6
APPENDIX B.3: TEST RESULTS OF CARRIER FREQUENCY SEPARATION	8
Test Result.....	8
Test Graphs.....	9
APPENDIX B.4: TEST RESULTS OF TIME OF OCCUPANCY.....	10
Test Result.....	10
Test Graphs.....	11
APPENDIX B.5: TEST RESULTS OF NUMBER OF HOPPING FREQUENCY	12
Test Result.....	12
Test Graphs.....	13
APPENDIX B.6: TEST RESULTS OF BAND EDGE MEASUREMENTS.....	14
Test Result.....	14
Test Graphs.....	15
APPENDIX B.7: TEST RESULTS OF CONDUCTED SPURIOUS EMISSION	17
Test Result.....	17
Test Graphs.....	18
APPENDIX B.8: TEST RESULTS OF RADIATED SPURIOUS EMISSIONS	22
30 MHz - 1GHz	22
1GHz - 18GHz.....	24
APPENDIX B.9: TEST RESULTS OF RADIATED EMISSIONS IN RESTRICTED BANDS	36
APPENDIX B.10: TEST RESULTS OF CONDUCTED EMISSION ON AC MAINS.....	40

Appendix B.1: Test Results of 20dB Bandwidth

Test Result

TestMode	Antenna	Channel	20db EBW[MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
2.4GHz SRD	Ant1	2402	2.076	2400.992	2403.068	---	PASS
		2440	2.082	2438.989	2441.071	---	PASS
		2480	2.079	2478.989	2481.068	---	PASS

Test Graphs






Appendix B.2: Test Results of 99% Bandwidth

Test Result

TestMode	Antenna	Channel	OCB [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
2.4GHz SRD	Ant1	2402	1.9716	2401.0299	2403.0015	---	PASS
		2440	1.9769	2439.0280	2441.0049	---	PASS
		2480	1.9713	2479.0280	2480.9993	---	PASS

Test Graphs

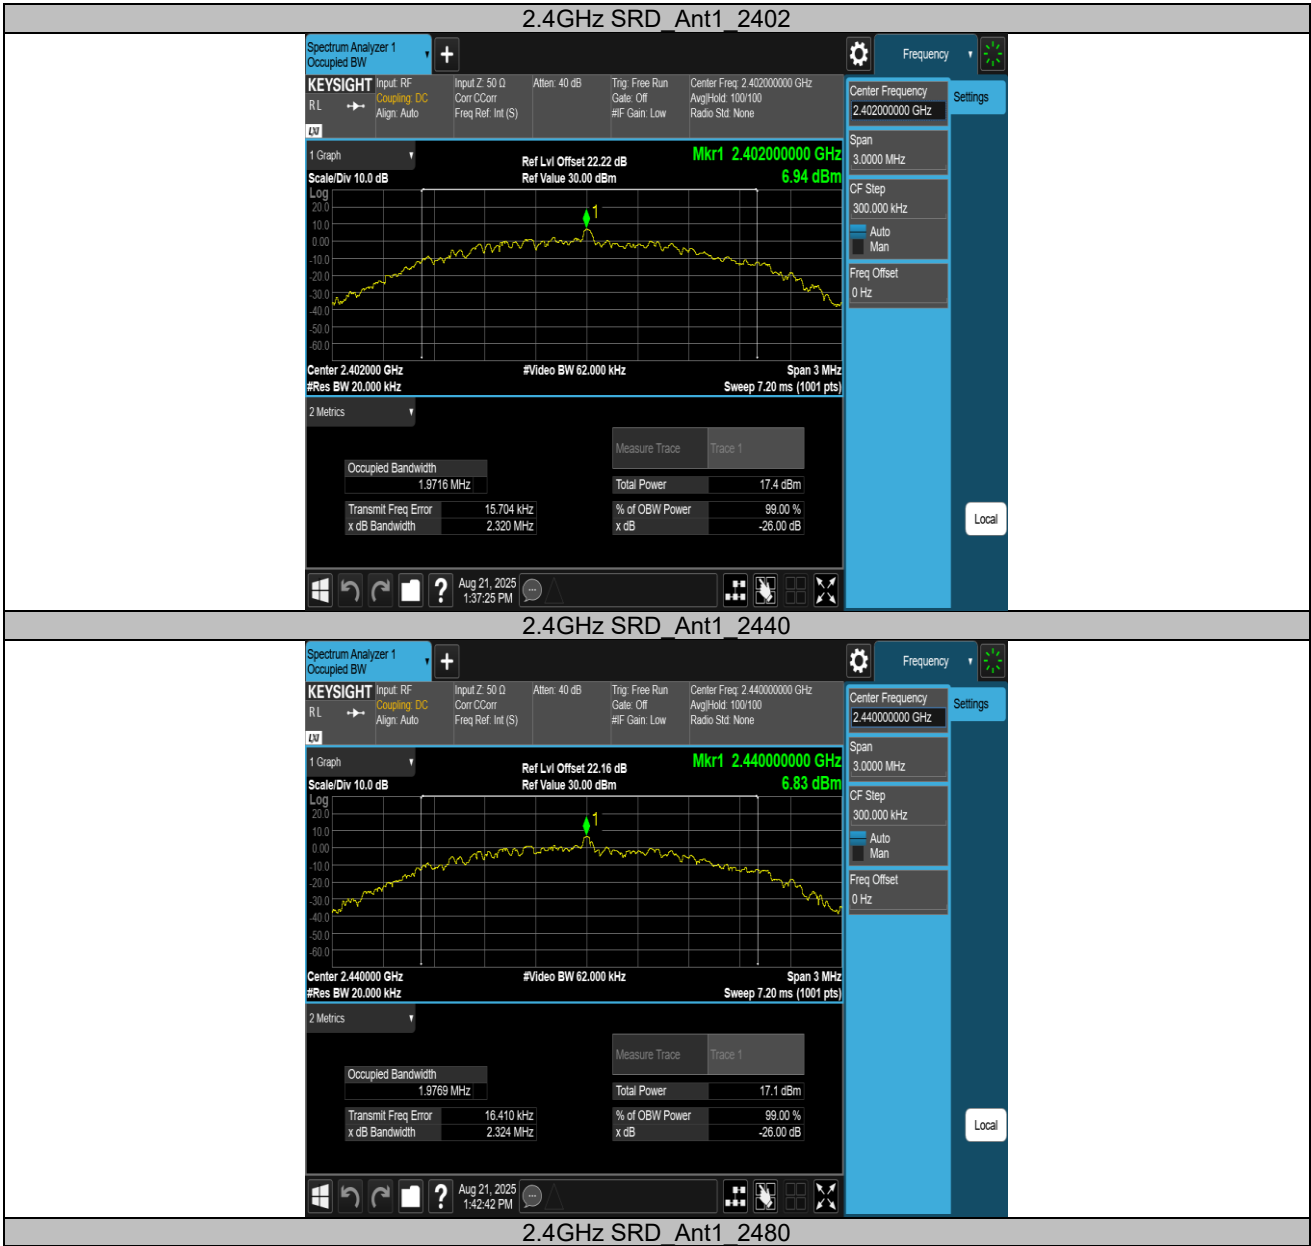



Appendix B.3: Test Results of Carrier Frequency Separation

Test Result

TestMode	Antenna	Channel	Result[MHz]	Limit[MHz]	Verdict
2.4GHz SRD	Ant1	Hop	2.000	≥1.386	PASS

Test Graphs



Appendix B.4: Test Results of Time of Occupancy

Test Result

TestMode	Antenna	Channel	BurstWidth [ms]	TotalHops [Num]	Result[s]	Limit[s]	Verdict
2.4GHz SRD	Ant1	Hop	1.079	68	0.0734	≤0.4	PASS

Test Graphs




Appendix B.5: Test Results of Number of Hopping Frequency

Test Result

TestMode	Antenna	Channel	Result[Num]	Limit[Num]	Verdict
2.4GHz SRD	Ant1	Hop	40	≥15	PASS

Test Graphs

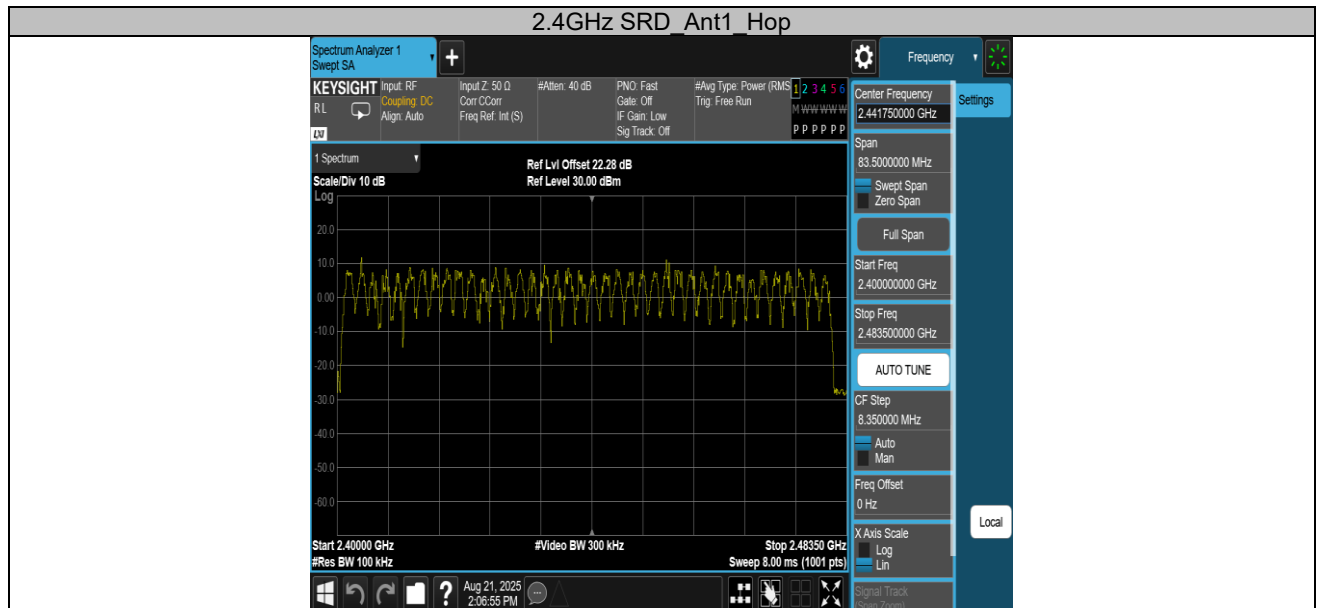

Appendix B.6: Test Results of Band Edge Measurements

Test Result

TestMode	Antenna	ChName	Channel	RefLevel [dBm]	Result [dBm]	Limit [dBm]	Verdict
2.4GHz SRD	Ant1	Low	2402	11.85	-29.24	≤-8.15	PASS
		High	2480	11.30	-39.75	≤-8.70	PASS
2.4GHz SRD	Ant1	Hopping	2402	10.77	-35.31	≤-9.23	PASS
		Hopping	2480	8.66	-37.57	≤-11.34	PASS

Test Graphs








Appendix B.7: Test Results of Conducted Spurious Emission


Test Result


TestMode	Antenna	Channel	FreqRange [MHz]	RefLevel [dBm]	Result [dBm]	Limit [dBm]	Verdict
2.4GHz SRD	Ant1	2402	Reference	10.07	10.07	---	PASS
			30~1000	10.07	-37.59	≤-9.93	PASS
			1000~26500	10.07	-28.48	≤-9.93	PASS
		2440	Reference	10.56	10.56	---	PASS
			30~1000	10.56	-38.06	≤-9.44	PASS
			1000~26500	10.56	-28.68	≤-9.44	PASS
		2480	Reference	8.38	8.38	---	PASS
			30~1000	8.38	-37.11	≤-11.62	PASS
			1000~26500	8.38	-28.07	≤-11.62	PASS

Test Graphs

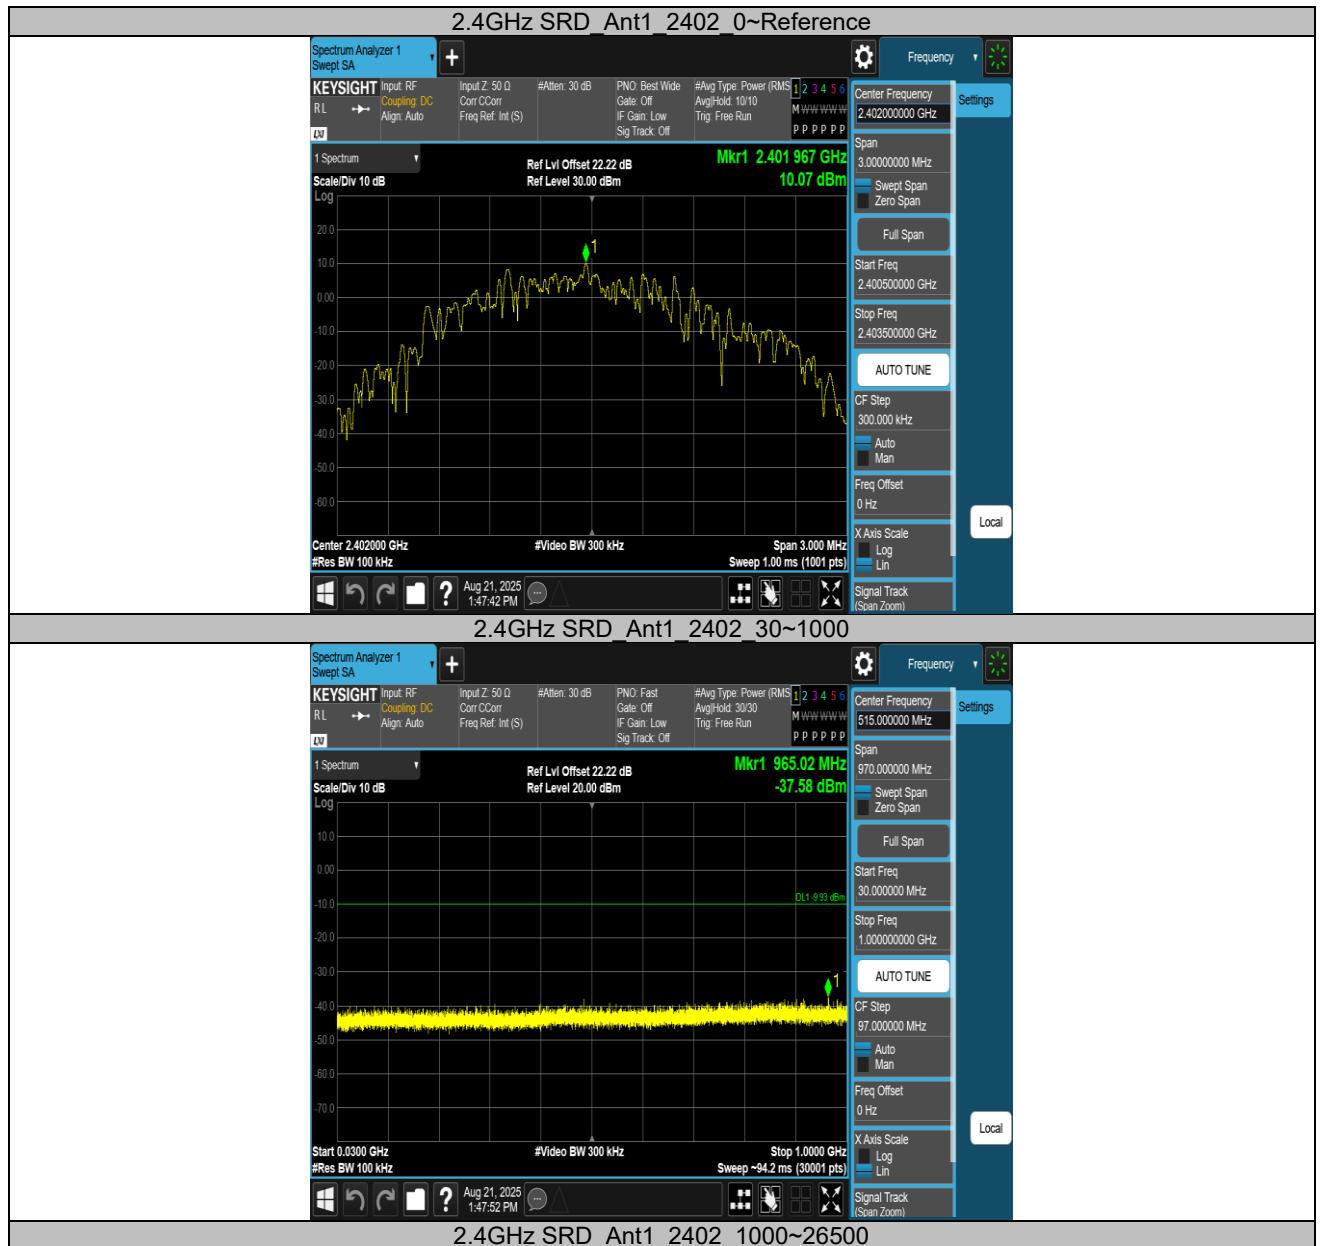

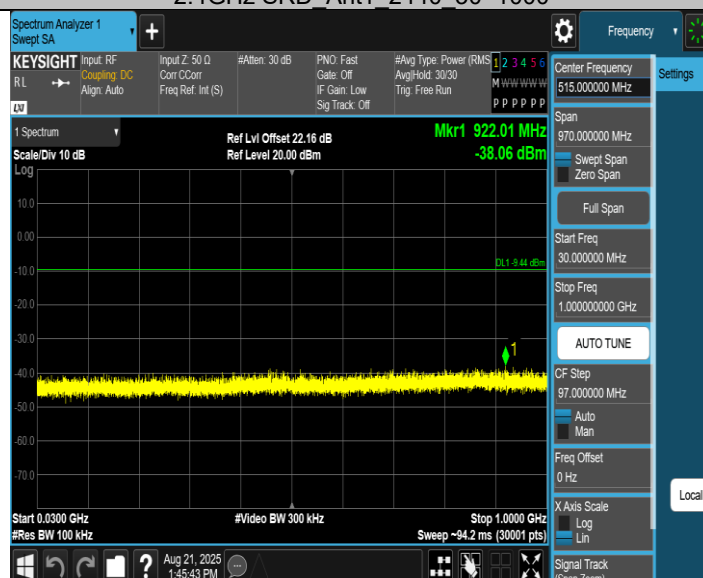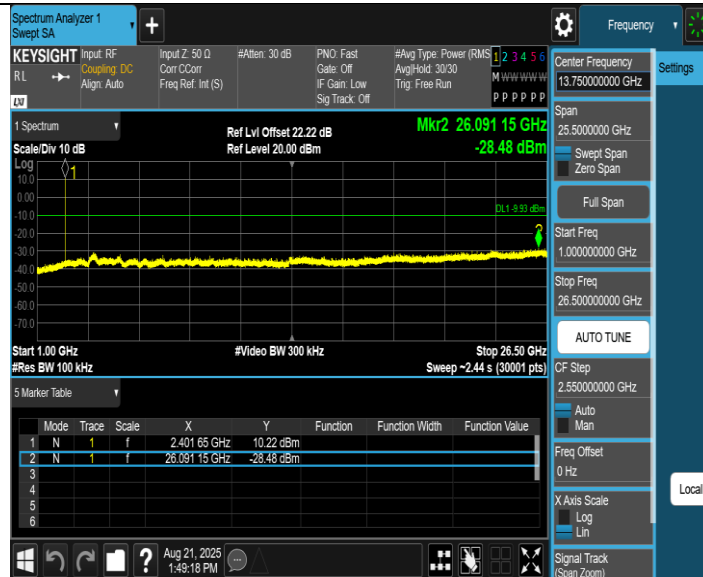

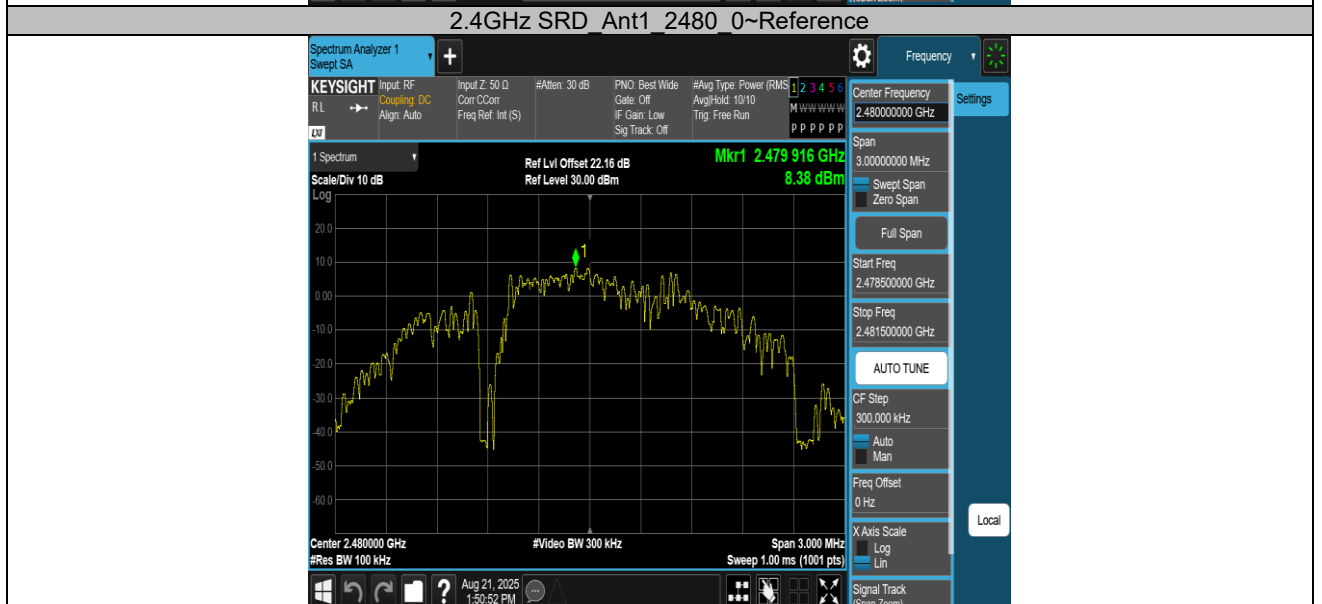

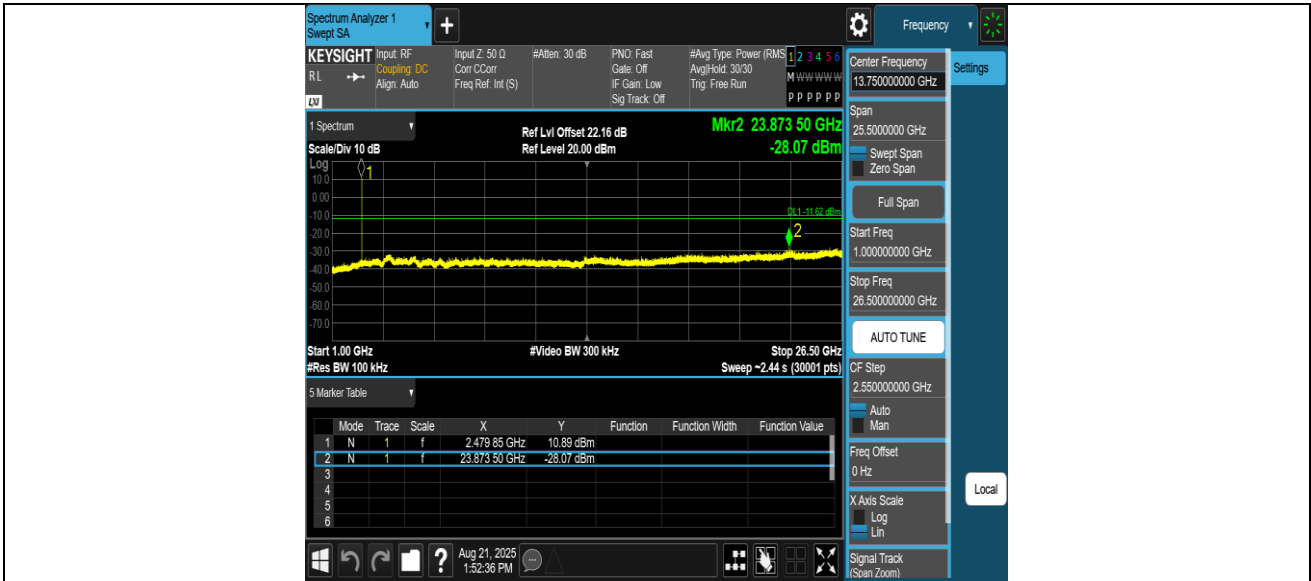

Appendix B.8: Test Results of Radiated Spurious Emissions


Note:

- 1) Testing was carried out within frequency range 9kHz to the tenth harmonics. The measurement results below 30MHz and 18GHz - 26.5GHz were greater than 20dB below the limit, so only the radiated spurious emissions from 30MHz to 18GHz were reported.

30 MHz - 1GHz

EUT Information

EUT Name:	Lenovo Dual-Mode Wireless ANC Headset 6550
Model:	LB310NC
Test Mode:	2.4GHz SRD_Mid channel
Order No/Sample No:	168562141/A004038636-001
Test Voltage:	Battery
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

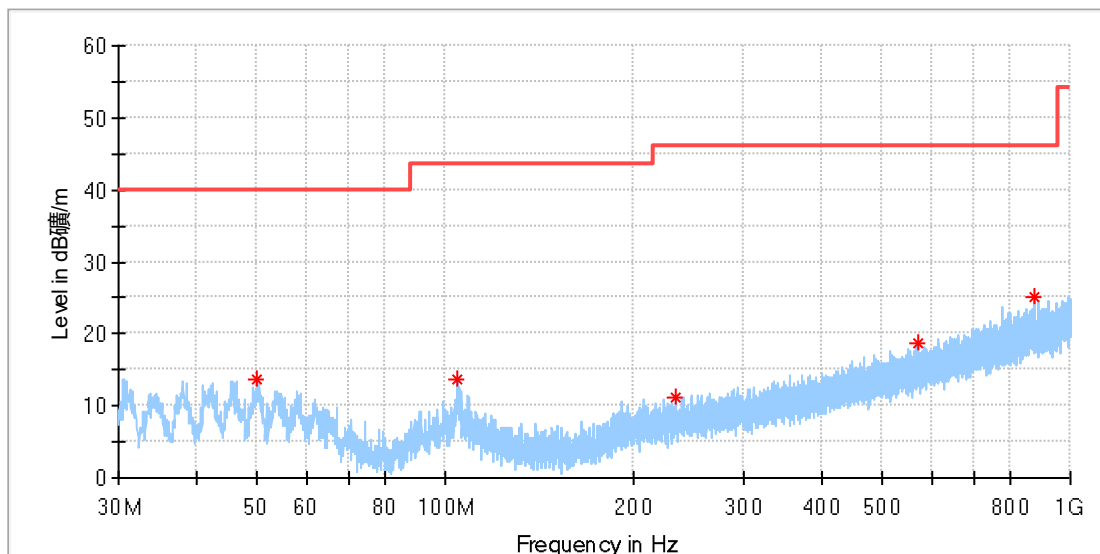

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
50.071539	13.78	40.00	26.22	100.0	H	232.0	-18.4
104.839231	13.70	43.50	29.80	100.0	H	0.0	-18.9
234.296923	11.17	46.00	34.83	100.0	H	0.0	-18.0
572.379231	18.56	46.00	27.44	100.0	H	6.0	-10.3
872.967308	24.99	46.00	21.01	100.0	H	36.0	-5.1

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name:	Lenovo Dual-Mode Wireless ANC Headset 6550
Model:	LB310NC
Test Mode:	2.4GHz SRD_Mid channel
Order No/Sample No:	168562141/A004038636-001
Test Voltage:	Battery
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

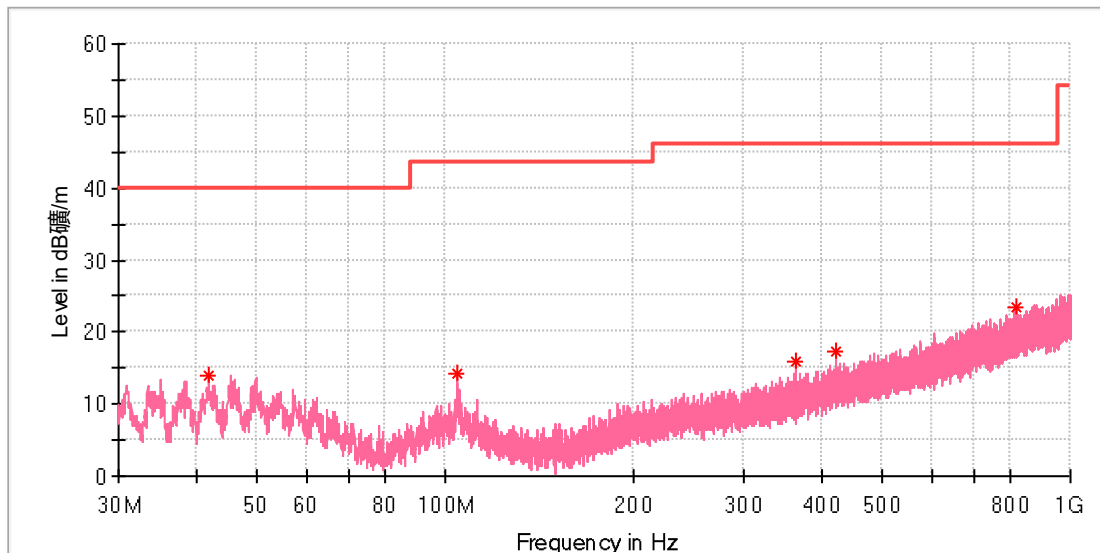

Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
41.751923	13.99	40.00	26.01	100.0	V	66.0	-19.7
104.652692	14.16	43.50	29.34	100.0	V	48.0	-18.9
362.598077	15.90	46.00	30.10	100.0	V	182.0	-14.6
422.700769	17.35	46.00	28.65	100.0	V	207.0	-13.2
821.482692	23.33	46.00	22.67	100.0	V	125.0	-5.8

Final Result


Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

1GHz - 18GHz

Note: The highest waveform in the figure is 2.4GHz SRD Fundamental.

EUT Information

EUT Name:	Lenovo Dual-Mode Wireless ANC Headset 6550
Model:	LB310NC
Test Mode:	2.4GHz SRD_Low channel
Order No/Sample No:	168562141/A004038636-001
Test Voltage:	Battery
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

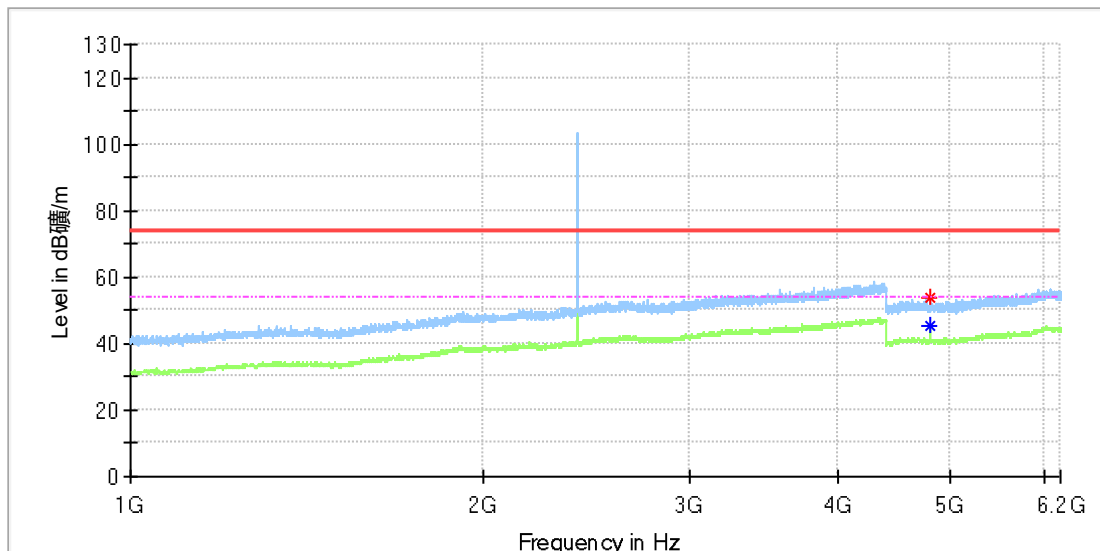

Critical_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4804.000000	53.76	---	74.00	20.24	150.0	H	252.0	13.3
4804.000000	---	45.33	54.00	8.67	150.0	H	252.0	13.3

Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---		---	---

EUT Information

EUT Name:	Lenovo Dual-Mode Wireless ANC Headset 6550
Model:	LB310NC
Test Mode:	2.4GHz SRD_Low channel
Order No/Sample No:	168562141/A004038636-001
Test Voltage:	Battery
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

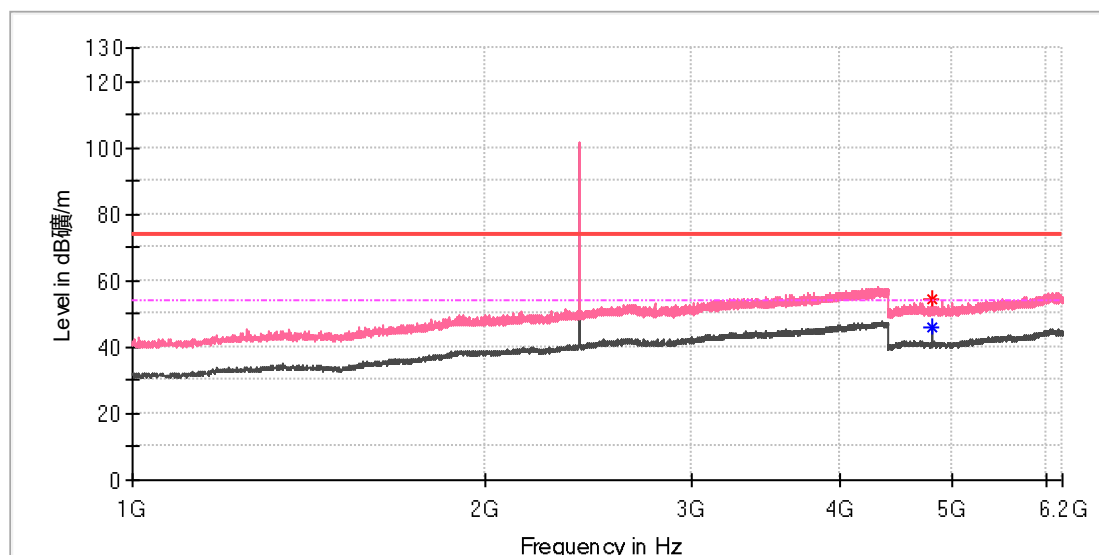

Critical_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4804.000000	54.43	---	74.00	19.57	150.0	V	324.0	13.3
4804.000000	---	45.88	54.00	8.12	150.0	V	324.0	13.3

Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---		---	---

EUT Information

EUT Name:	Lenovo Dual-Mode Wireless ANC Headset 6550
Model:	LB310NC
Test Mode:	2.4GHz SRD_Low channel
Order No/Sample No:	168562141/A004038636-001
Test Voltage:	Battery
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

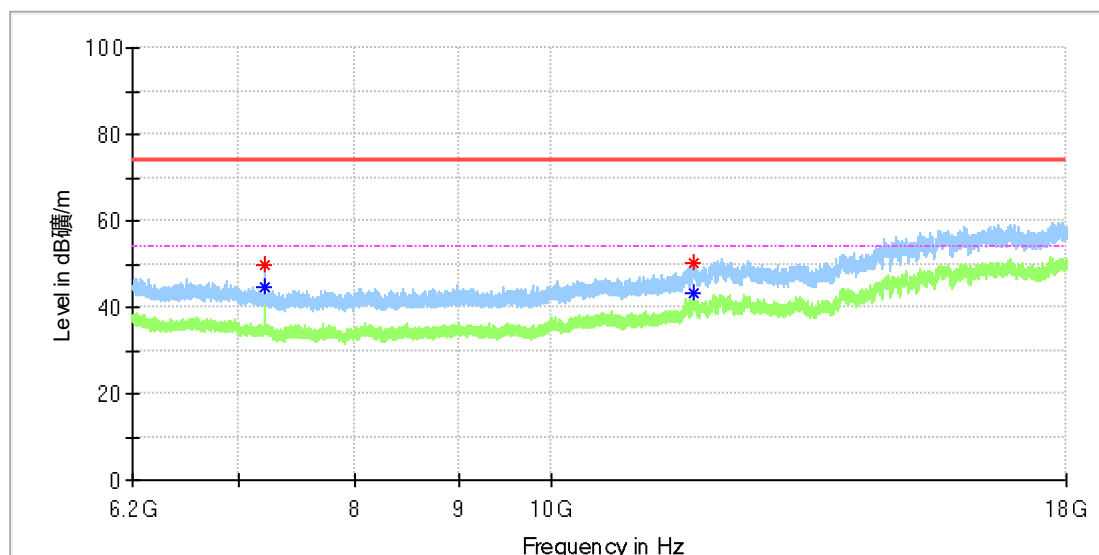

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7205.950000	49.96	---	74.00	24.04	150.0	H	241.0	8.8
7205.950000	---	44.83	54.00	9.17	150.0	H	241.0	8.8
11755.341667	---	43.14	54.00	10.86	150.0	H	106.0	15.5
11774.025000	50.11	---	74.00	23.89	150.0	H	258.0	15.2

Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---		---	---

EUT Information

EUT Name:	Lenovo Dual-Mode Wireless ANC Headset 6550
Model:	LB310NC
Test Mode:	2.4GHz SRD_Low channel
Order No/Sample No:	168562141/A004038636-001
Test Voltage:	Battery
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

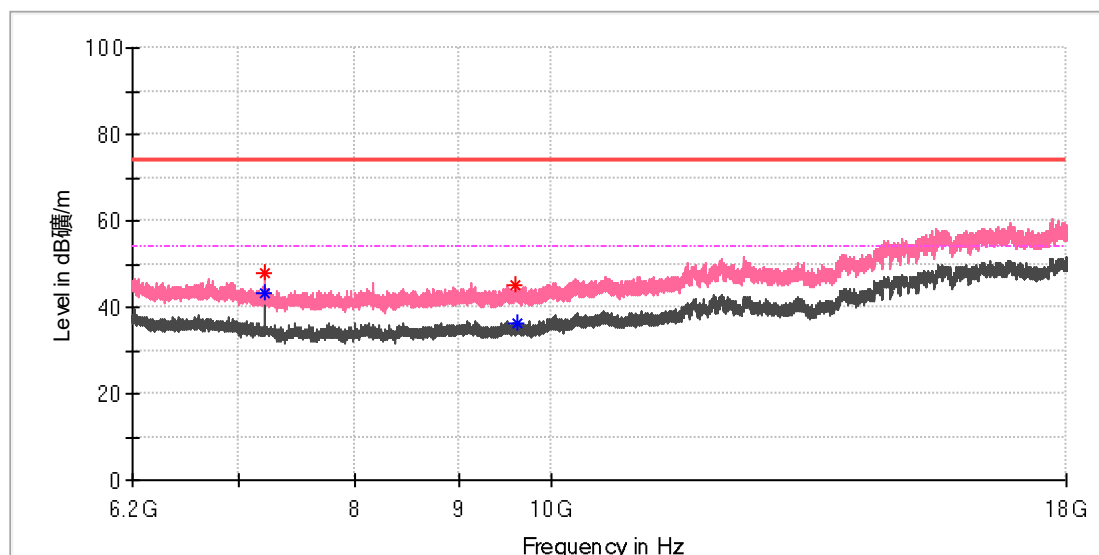

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7205.950000	47.79	---	74.00	26.21	150.0	V	187.0	8.8
7205.950000	---	43.04	54.00	10.96	150.0	V	187.0	8.8
9596.433333	45.11	---	74.00	28.89	150.0	V	325.0	10.3
9612.658333	---	36.26	54.00	17.74	150.0	V	309.0	10.4

Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---		---	---

EUT Information

EUT Name:	Lenovo Dual-Mode Wireless ANC Headset 6550
Model:	LB310NC
Test Mode:	2.4GHz SRD_Mid channel
Order No/Sample No:	168562141/A004038636-001
Test Voltage:	Battery
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

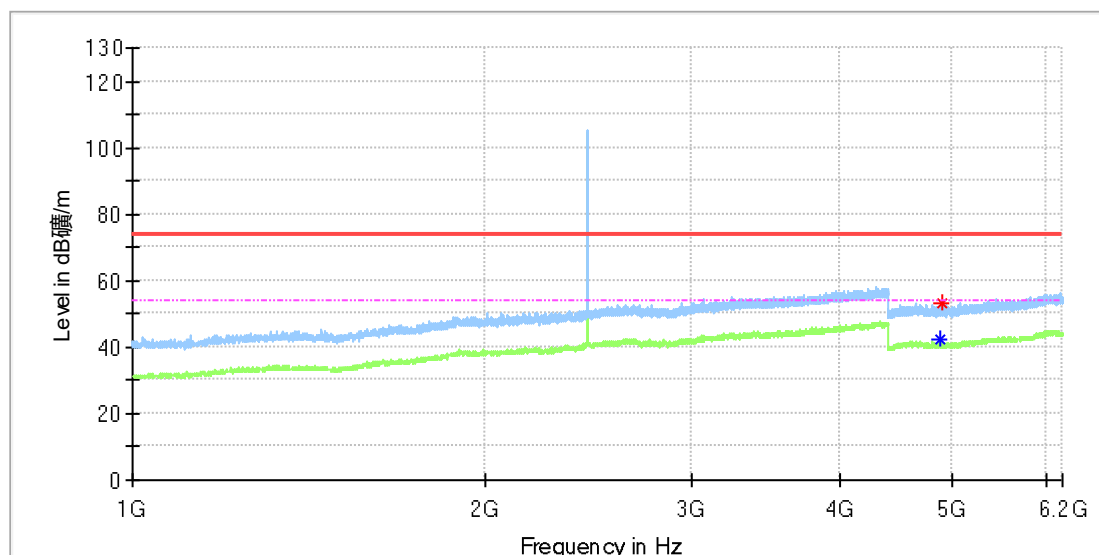

Critical_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4880.000000	---	42.39	54.00	11.61	150.0	H	240.0	13.3
4891.000000	53.09	---	74.00	20.91	150.0	H	206.0	13.3

Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---		---	---

EUT Information

EUT Name:	Lenovo Dual-Mode Wireless ANC Headset 6550
Model:	LB310NC
Test Mode:	2.4GHz SRD_Mid channel
Order No/Sample No:	168562141/A004038636-001
Test Voltage:	Battery
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

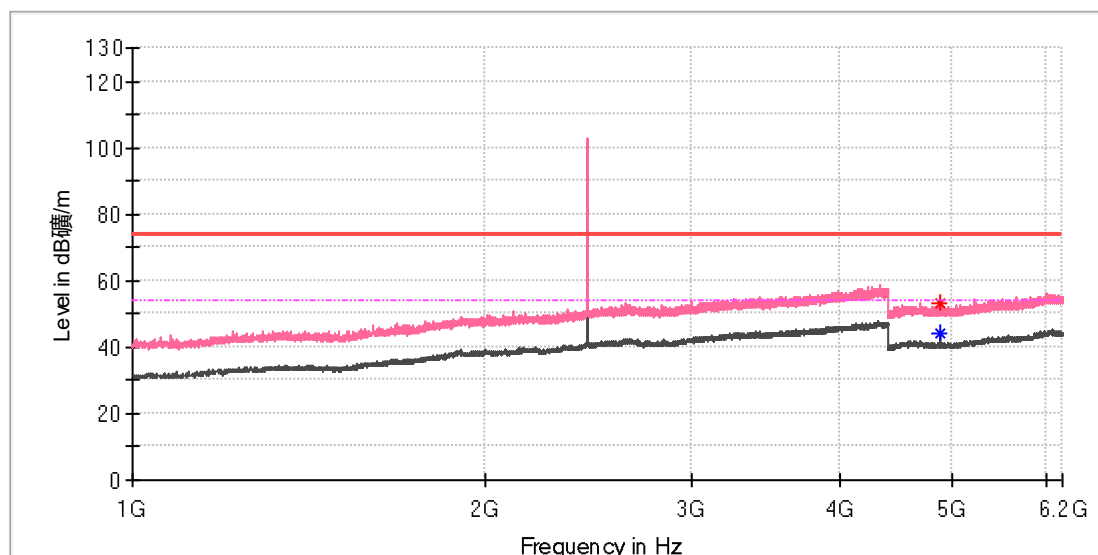

Critical_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4879.500000	53.32	---	74.00	20.68	150.0	V	318.0	13.3
4879.500000	---	44.06	54.00	9.94	150.0	V	318.0	13.3

Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---		---	---

EUT Information

EUT Name:	Lenovo Dual-Mode Wireless ANC Headset 6550
Model:	LB310NC
Test Mode:	2.4GHz SRD_Mid channel
Order No/Sample No:	168562141/A004038636-001
Test Voltage:	Battery
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

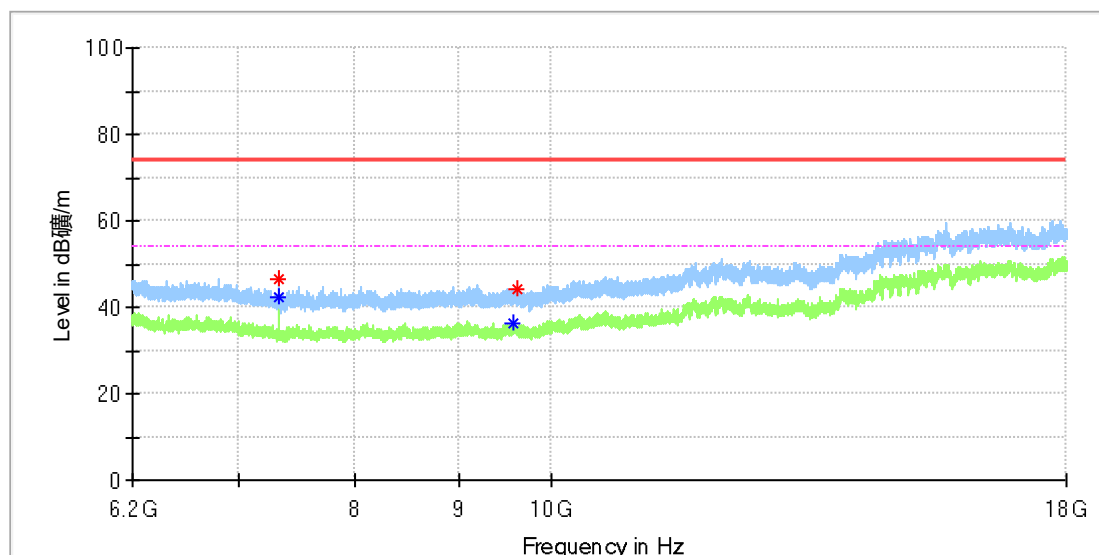

Critical_Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7319.033333	---	42.45	54.00	11.55	150.0	H	227.0	8.2
7319.525000	46.62	---	74.00	27.38	150.0	H	218.0	8.2
9578.733333	---	36.05	54.00	17.95	150.0	H	149.0	10.3
9621.508333	44.15	---	74.00	29.85	150.0	H	157.0	10.4


Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---		---	---

EUT Information

EUT Information

EUT Name:	Lenovo Dual-Mode Wireless ANC Headset 6550
Model:	LB310NC
Test Mode:	2.4GHz SRD_High channel
Order No/Sample No:	168562141/A004038636-001
Test Voltage:	Battery
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

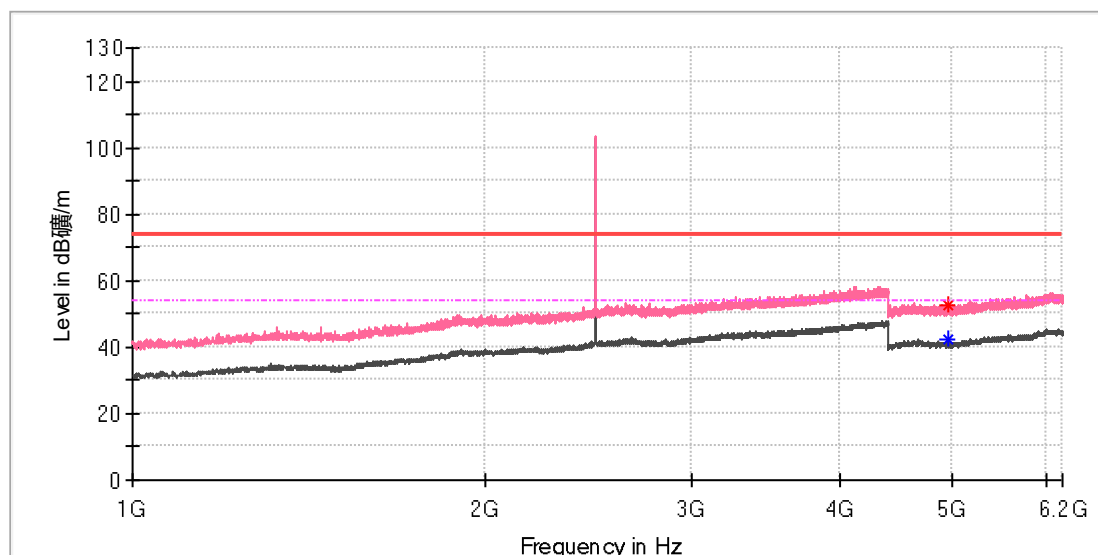

Critical_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4959.500000	52.49	---	74.00	21.51	150.0	V	256.0	13.3
4959.500000	---	42.31	54.00	11.69	150.0	V	256.0	13.3

Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---		---	---

EUT Information

EUT Name:	Lenovo Dual-Mode Wireless ANC Headset 6550
Model:	LB310NC
Test Mode:	2.4GHz SRD_High channel
Order No/Sample No:	168562141/A004038636-001
Test Voltage:	Battery
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

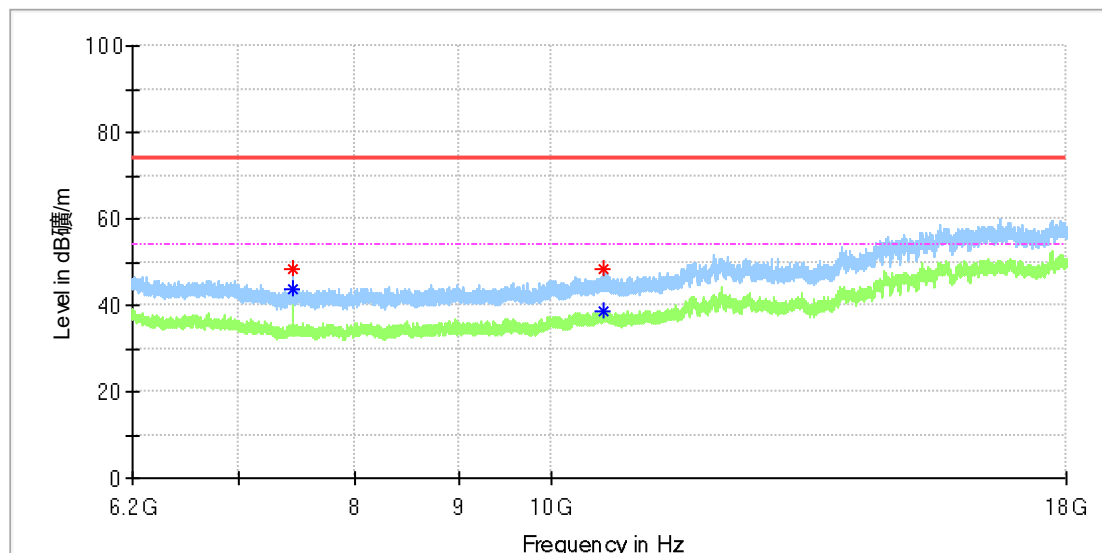

Critical_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7439.983333	48.28	---	74.00	25.72	150.0	H	256.0	8.4
7439.983333	---	43.90	54.00	10.10	150.0	H	256.0	8.4
10609.758333	---	38.63	54.00	15.37	150.0	H	247.0	12.1
10623.033333	48.14	---	74.00	25.86	150.0	H	282.0	12.0

Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---		---	---

EUT Information

EUT Name:	Lenovo Dual-Mode Wireless ANC Headset 6550
Model:	LB310NC
Test Mode:	2.4GHz SRD_High channel
Order No/Sample No:	168562141/A004038636-001
Test Voltage:	Battery
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

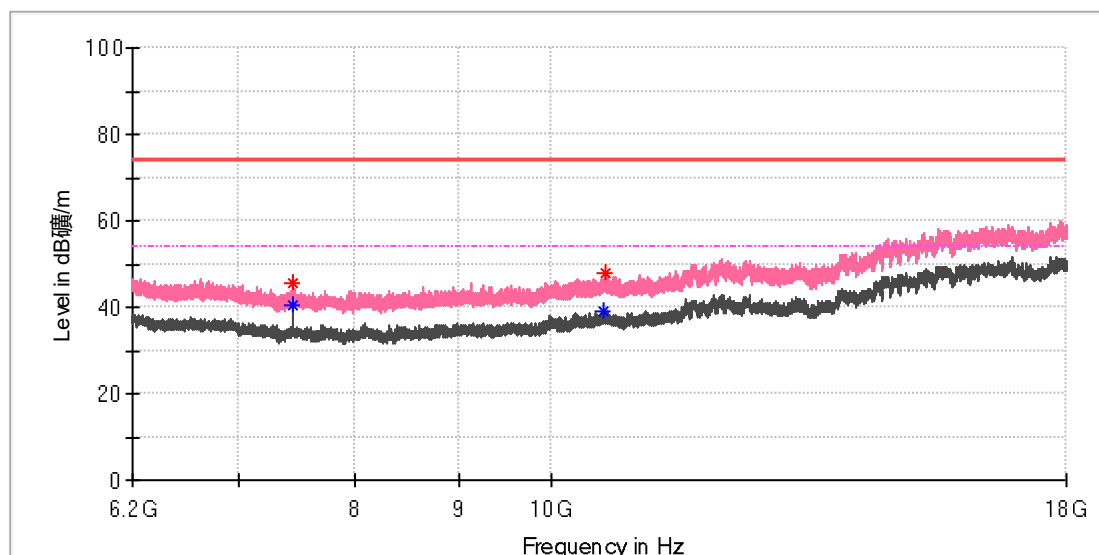

Critical_Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7439.983333	45.67	---	74.00	28.33	150.0	V	325.0	8.4
7439.983333	---	40.59	54.00	13.41	150.0	V	325.0	8.4
10606.316667	---	39.22	54.00	14.78	150.0	V	180.0	12.1
10634.833333	47.96	---	74.00	26.04	150.0	V	187.0	12.0


Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---		---	---

Appendix B.9: Test Results of Radiated Emissions in Restricted Bands

EUT Information

EUT Name:	Lenovo Dual-Mode Wireless ANC Headset 6550
Model:	LB310NC
Test Mode:	2.4GHz SRD_Low channel
Order No/Sample No:	168562141/A004038636-001
Test Voltage:	Battery
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

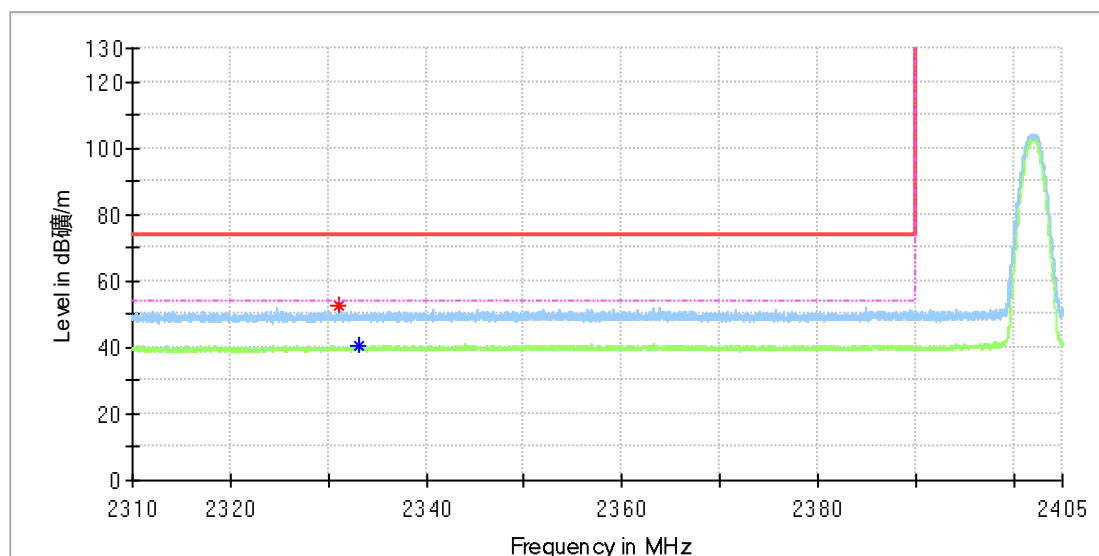

Critical Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2331.109559	52.35	---	74.00	21.65	150.0	H	91.0	8.3
2333.163235	---	40.79	54.00	13.21	150.0	H	26.0	8.3

Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
100.000000	100.000000	100.000000	100.000000	100.000000	100.000000		100.000000	

EUT Information

EUT Name:	Lenovo Dual-Mode Wireless ANC Headset 6550
Model:	LB310NC
Test Mode:	2.4GHz SRD_Low channel
Order No/Sample No:	168562141/A004038636-001
Test Voltage:	Battery
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

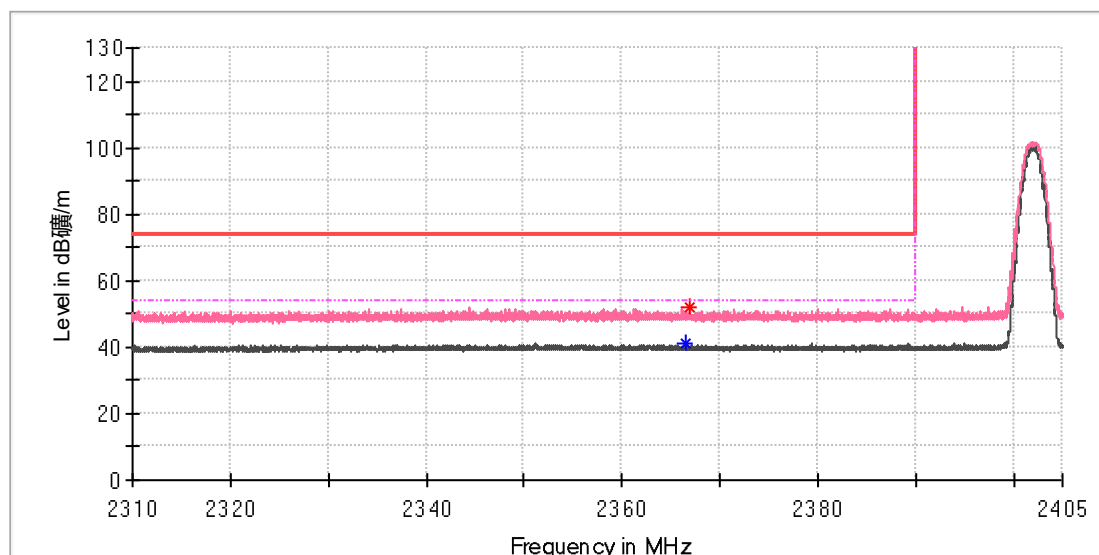

Critical_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2366.608824	---	40.84	54.00	13.16	150.0	V	343.0	8.5
2366.944118	51.95	---	74.00	22.05	150.0	V	292.0	8.5

Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---		---	---

EUT Information

EUT Name:	Lenovo Dual-Mode Wireless ANC Headset 6550
Model:	LB310NC
Test Mode:	2.4GHz SRD_High channel
Order No/Sample No:	168562141/A004038636-001
Test Voltage:	Battery
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

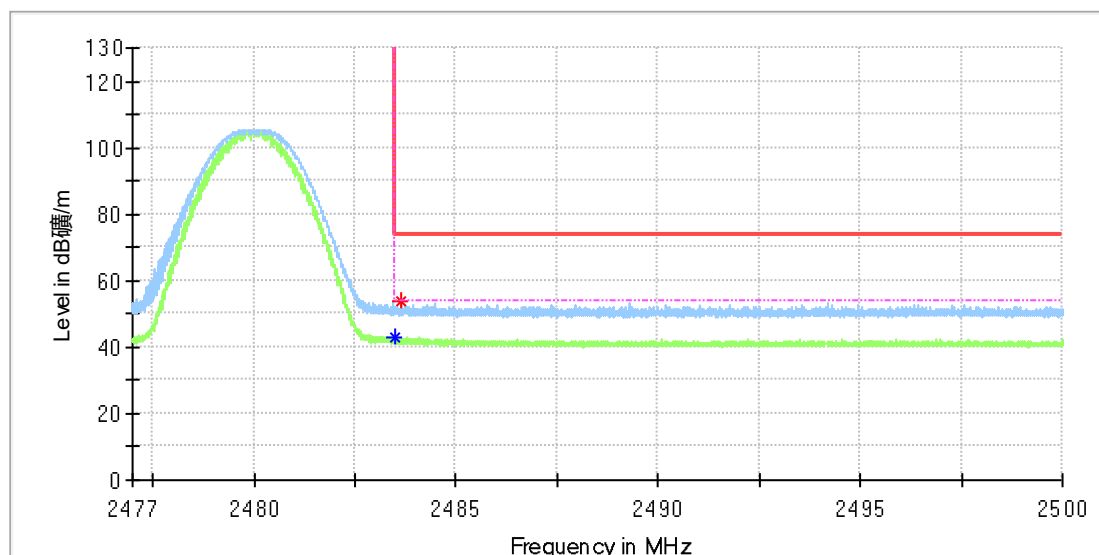

Critical_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2483.517794	---	42.89	54.00	11.11	150.0	H	268.0	9.0
2483.629412	53.61	---	74.00	20.39	150.0	H	78.0	9.0

Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---		---	---

EUT Information

EUT Name:	Lenovo Dual-Mode Wireless ANC Headset 6550
Model:	LB310NC
Test Mode:	2.4GHz SRD_High channel
Order No/Sample No:	168562141/A004038636-001
Test Voltage:	Battery
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

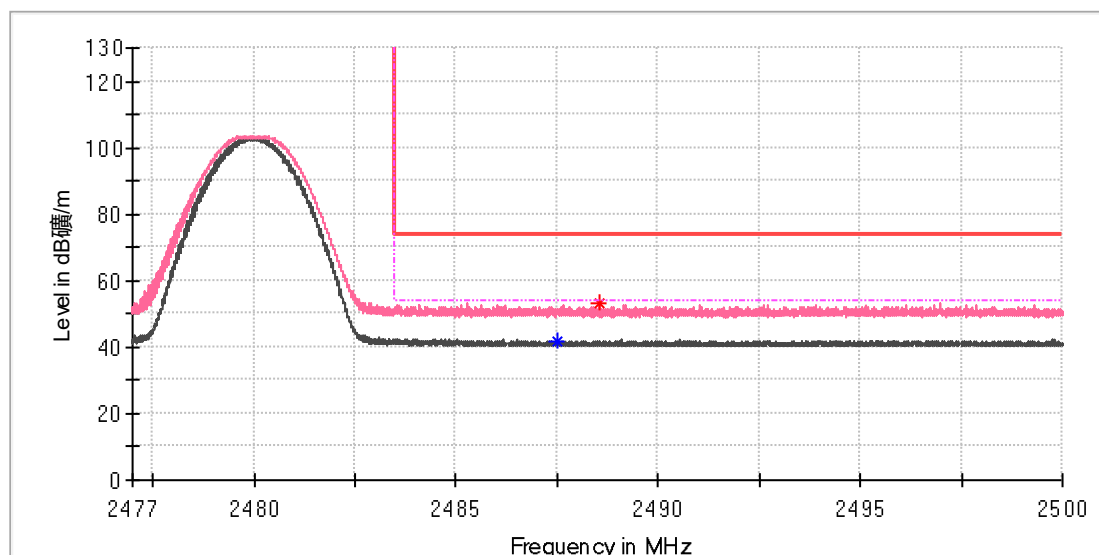

Critical_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2487.525882	---	41.75	54.00	12.25	150.0	V	249.0	9.0
2488.557500	52.99	---	74.00	21.01	150.0	V	350.0	9.0


Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---		---	---

[illegible]

EUT Information

EUT Name:	Lenovo Dual-Mode Wireless ANC Headset 6550
Order Number:	168562141 420
Model:	LB310NC
Test Mode:	Charging + 2.4G audio play+MIC
Test Voltage:	AC 120V/60Hz
Test Standard:	FCC Part 15
Test By:/Review By:	Soloman Wu/Murphy Chen
Tem./Hum./Pressure:	24.3°C/51.5%/101kPa
Remark:	SR2

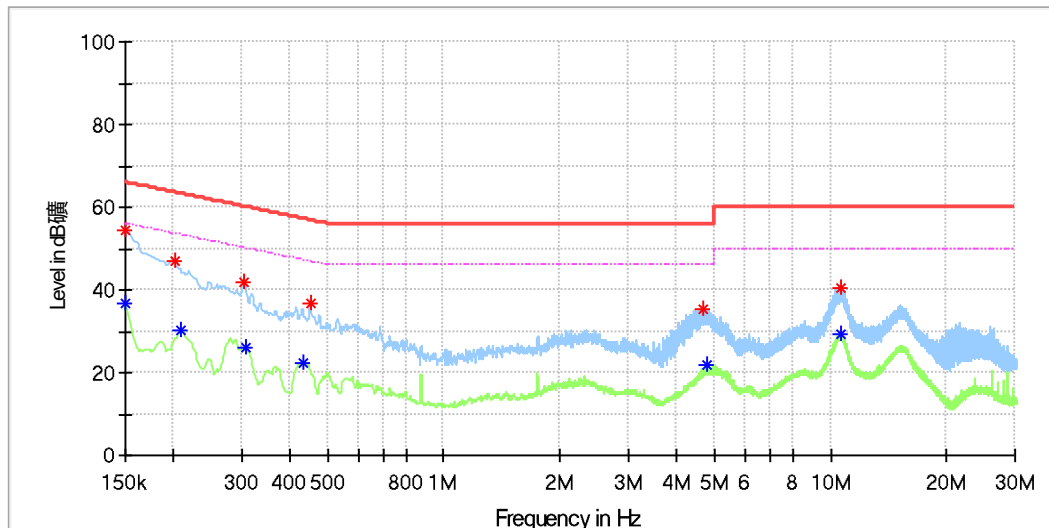

Critical_Freqs

Frequency (MHz)	MaxPeak (dBμV)	Average (dBμV)	Limit (dBμV)	Margin (dB)	Line	Corr. (dB)
0.150	54.64	---	66.00	11.36	N	10.2
0.150	---	36.85	56.00	19.15	N	10.2
0.201	47.11	---	63.55	16.44	N	10.2
0.208	---	30.25	53.28	23.03	N	10.2
0.304	41.84	---	60.13	18.29	N	10.2
0.308	---	26.07	50.04	23.97	N	10.2
0.435	---	22.29	47.15	24.86	N	10.2
0.452	36.61	---	56.84	20.23	N	10.2
4.677	35.48	---	56.00	20.52	N	10.4
4.798	---	21.67	46.00	24.33	N	10.4
10.601	40.65	---	60.00	19.35	N	10.6
10.639	---	29.42	50.00	20.58	N	10.6

Final Result

[illegible]