


NOTES:

- 1.01 MATERIAL: BRADYBONDZ(TM) B-423 THERMAL TRANSFER PRINTABLE GLOSSY WHITE POLYESTER LABEL OR SIMILAR APPROVED.
- 1.02 THICKNESS: ASTM D 1000, SUBSTRATE 2 MILS (0.0508mm) THICK, ADHESIVE 1 MIL (0.0254mm), TOTAL 3 MILS (0.0762 mm ± 0.02mm) THICK.
- 1.03 TACK: ASTM D 2979, POLYKEN(TM) PROBE TRACK, 1 SECOND DWELL, 26 OZ (800 GRAMS).
- 1.04 FONT SIZE MUST BE 6PT OR HIGHER FOR ALL TEXT IN THE LABEL.
- 1.05 DIELECTRIC STRENGTH: ASTM D 1000, 8400 VOLTS.
- 1.06 HIGH SERVICE TEMPERATURE 30 DAYS AT VARIOUS TEMPERATURES NO VISIBLE EFFECT TO LABEL AT 110°C.
- 1.07 SLIGHT DISCOLORATION AT 120°C; MODERATE DISCOLORATION AT 145°C AND LABEL IS STILL FUNCTIONAL.
- 1.08 LOW SERVICE TEMPERATURE 30 DAYS AT -70°C NO VISIBLE EFFECT.
- 1.09 SHORT TERM HIGH SERVICE TEMPERATURE 5 MINUTES AT VARIOUS TEMPERATURES NO VISIBLE EFFECT TO LABEL AT 180°C.
- 1.10 SLIGHT DISCOLORATION AND LABEL SHRINKAGE AT 200°C; LABEL IS FUNCTIONAL.
- 1.11 LABEL BECOMES NON-FUNCTIONAL AT 210°C DUE TO LABEL SHRINKAGE.
- 1.12 HUMIDITY RESISTANCE 30 DAYS AT 100°F (37°C) AND 95% RELATIVE HUMIDITY. NO VISIBLE EFFECT.
- 1.13 UV LIGHT RESISTANCE 30 DAYS IN UV SUNLIGHTER(TM) 100 SLIGHT DISCOLORATION.
- 1.14 WEATHERABILITY ASTM G155, CYCLE 130 DAYS IN XENON ARC WEATHEROMETER NO VISIBLE EFFECT.
- 1.15 SALT FOG RESISTANCE ASTM B 117.
- 1.16 30 DAYS IN 5% SALT FOG SOLUTION CHAMBER NO VISIBLE EFFECT.
- 1.17 BRADYBONDZ IS A TRADEMARK OF Brady Worldwide, Inc.
- 1.18 POLYKEN IS A TRADEMARK OF Testing Machines Inc.
- 1.19 SUNLIGHTER IS A TRADEMARK OF Test Lab Apparatus Company.
- 1.20 GENERAL TOLERANCES ± 0.50mm
- 1.21 SHALL COMPLY WITH WHIRLPOOL'S CURRENT SPECIFICATIONS, INCLUDING ITS RESTRICTED MATERIAL LIST SPECIFICATION GES0084

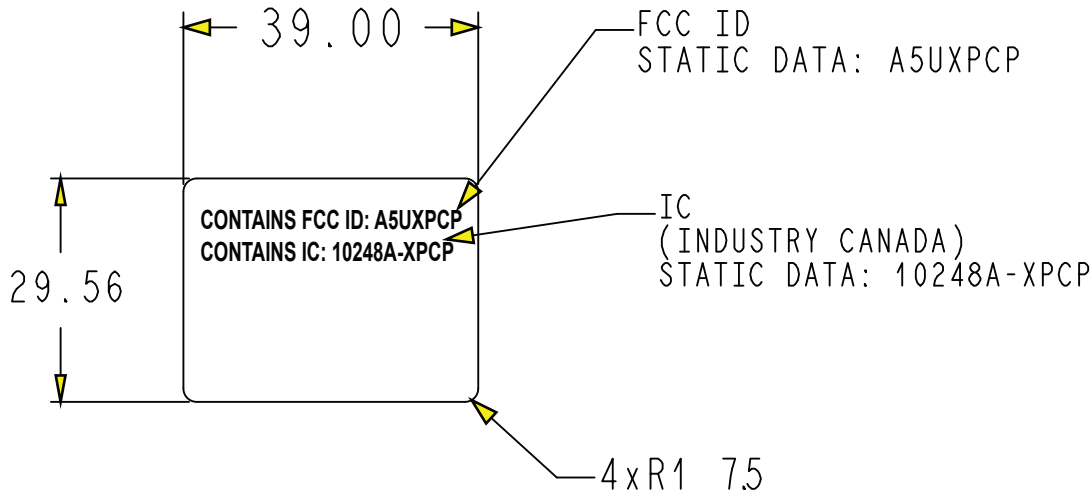

W10582003	A	SEE NOTES
PART NO.	REV	MATL DESC

REV	DESCRIPTION OF CHANGE	LOC	BY	E.N.	DATE
A	RELEASE P/N W10582003	---	THIMAMF	722699	18-FEB-2013
	CHECKED BY		GARYWJ		

**ADVANCE
PRINT
CONFIDENTIAL
19-MAR-2013**

PRELIMINARY

DO NOT USE FOR PRODUCTION

THIS DRAWING IS THE PROPERTY OF WHIRLPOOL CORP. IT CONTAINS CONFIDENTIAL INFORMATION BELONGING TO AND/OR ENTRUSTED TO WHIRLPOOL. IT IS DISCLOSED IN CONFIDENCE AND SHALL NOT BE HELD, REPRODUCED, DISCLOSED OR USED EXCEPT IN A MANNER AND FOR A PURPOSE EXPRESSLY PERMITTED BY WHIRLPOOL IN WRITING.

VENDORS SHALL NOT REVISE ANY PHYSICAL, DIMENSIONAL, OR PERFORMANCE CHARACTERISTICS UNLESS AUTHORIZED IN WRITING BY WHIRLPOOL ENGINEERING GROUP.

WHIRLPOOL TEST SPECIFICATIONS, IF ANY, ARE NOT INTENDED TO ASSUME ANY RESPONSIBILITY FOR SUBSEQUENT PROBLEMS WITH OR CAUSED BY THE PART, COMPONENT, OR ASSEMBLY PROVIDED BY THE SUPPLIER, AND DO NOT RELIEVE THE SUPPLIER OF ITS OBLIGATIONS INCLUDING, BUT NOT LIMITED TO, THE NEED TO PERFORM ITS OWN TESTING, INSPECTION AND ONGOING QUALITY CONTROL, AND ASSURING FITNESS FOR USE. ANY WHIRLPOOL RECOMMENDED TEST AND ITS OUTCOME DO NOT IN ANYWAY LIMIT OR CHANGE THE WARRANTY CONTAINED IN WHIRLPOOL'S PURCHASE ORDER OR SUPPLY AGREEMENT.

METRIC DIMENSIONS IN mm DEFAULT SCALE 1:1 DO NOT SCALE PRINT	THIRD ANGLE PROJECTION	INTERPRETATION PER ASME Y14.5M-1994	CREATION DATE 19-MAR-2013
		= SPECIAL CHARACTERISTIC	DRAWN BY THIMAMF
DESCRIPTION (ENGLISH) CERT LABEL - SAM ENCLOSURE			
DESCRIPTION (LOCAL)			
DRAWING SIZE A LETTER		SHEET 1 OF 1	DRAWING NUMBER W10582003
		DRAWING REV A	

