


INTERTEK TESTING SERVICES


Report No.: HK12050617-1

Sample No.:1/3

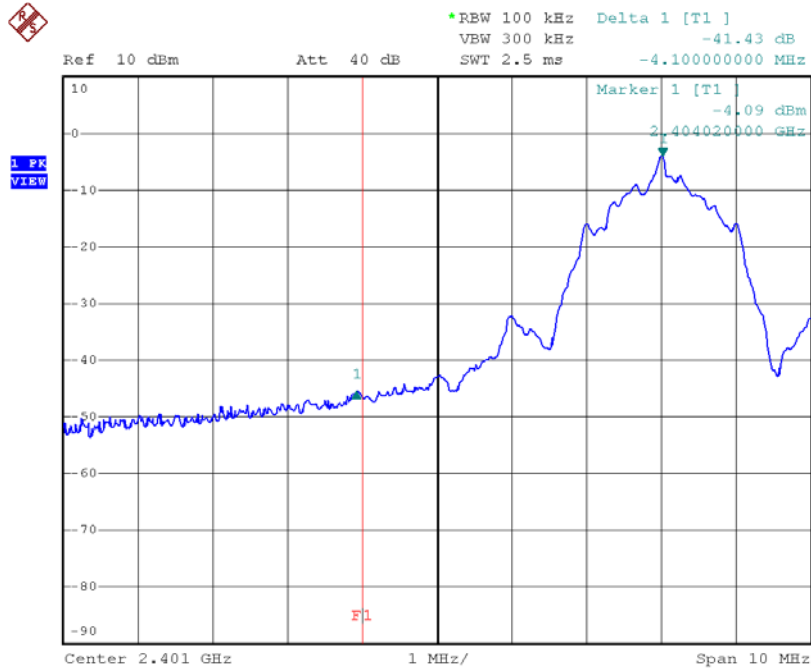

OATS = 111.00 dBuV/m
Field Strength (Peak)
= 111.00 – 41.43 dBuV/m
= 69.57 dBuV/m
(Limit: 74 dBuV/m)

Field Strength (Average)
= 69.57 – AF dBuV/m
= 69.57 – 29.40 dBuV/m
= 40.17 dBuV/m
(Limit: 54 dBuV/m)

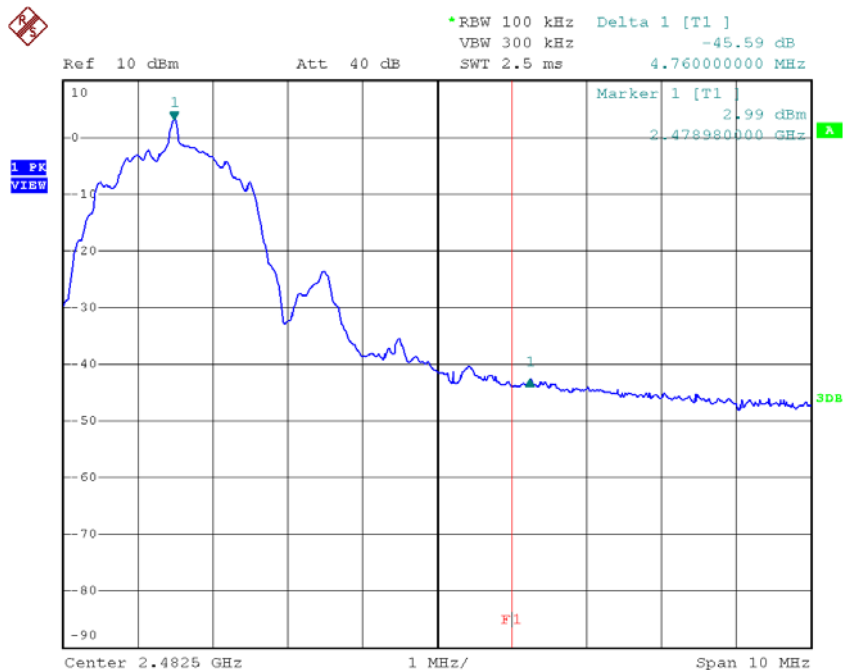

OATS = 113.00 dBuV/m
Field Strength (Peak)
= 113.00 – 45.59 dBuV/m
= 67.41 dBuV/m
(Limit: 74 dBuV/m)

Field Strength (Average)
= 67.41 – AF dBuV/m
= 67.41 – 29.40 dBuV/m
= 38.01 dBuV/m
(Limit: 54 dBuV/m)

Bandedge Plot – Pursuant to FCC Part 15 Section 15. 249 Requirement

(Pass)