


INTERTEK TESTING SERVICES


Report No.: HK12020934-1

Sample No.:1/3

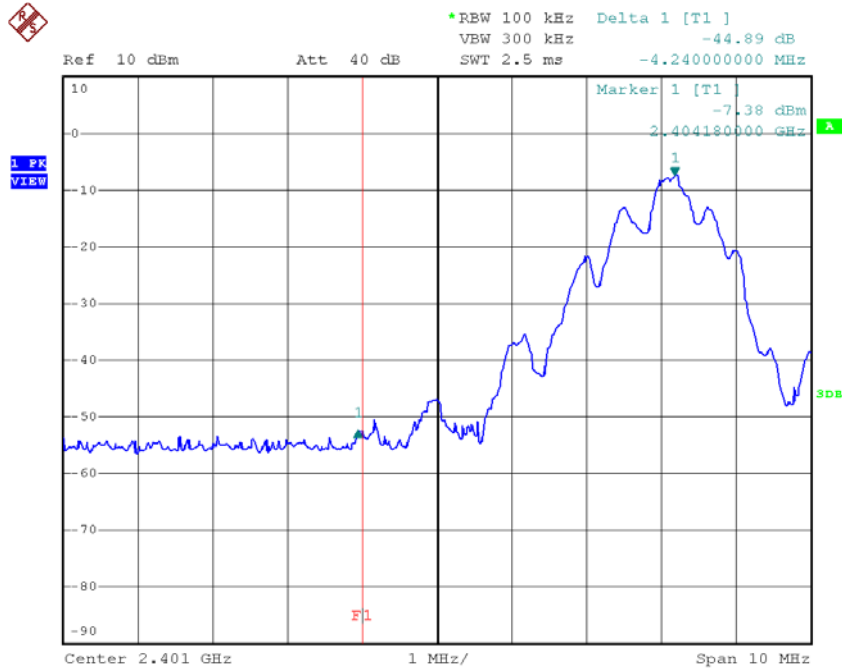

OATS = 111.10 dBuV/m
Field Strength (Peak)
= 111.10 – 44.89 dBuV/m
= 66.21 dBuV/m
(Limit: 74 dBuV/m)

Field Strength (Average)
= 66.21 – AF dBuV/m
= 66.21 – 25.50 dBuV/m
= 40.71 dBuV/m
(Limit: 54 dBuV/m)

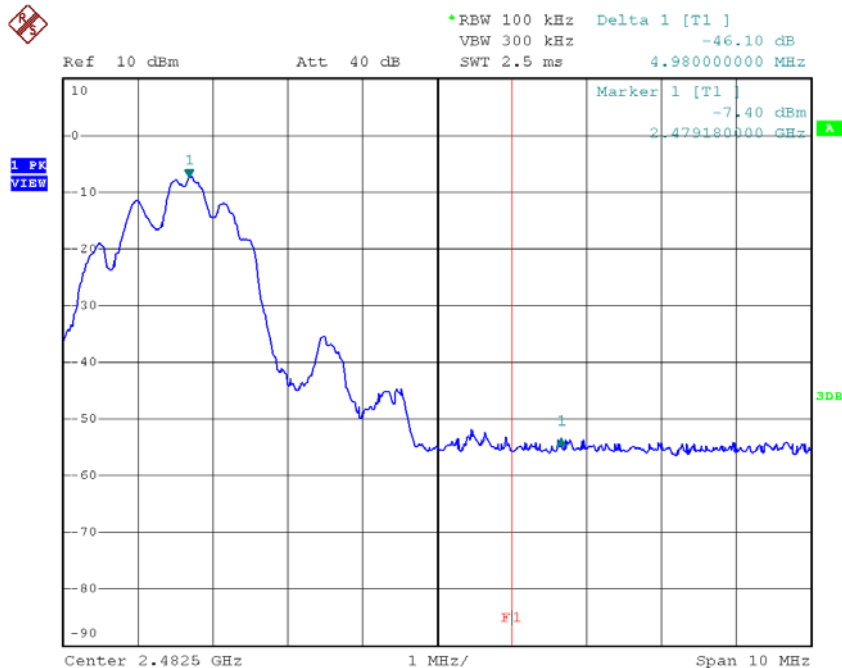

OATS = 110.80 dBuV/m
Field Strength (Peak)
= 110.80 – 46.10 dBuV/m
= 64.70 dBuV/m
(Limit: 74 dBuV/m)

Field Strength (Average)
= 64.70 – AF dBuV/m
= 64.70 – 25.50 dBuV/m
= 39.20 dBuV/m
(Limit: 54 dBuV/m)

Bandedge Plot – Pursuant to FCC Part 15 Section 15. 249 Requirement

(Pass/Fail)