

EMC TEST REPORT

**FCC 47 CFR Part 15B
Industry Canada ICES-003**

Electromagnetic compatibility - Unintentional radiators

Report Reference No.: G0M-1608-5788-EF0115B_S-V01

Testing Laboratory: Eurofins Product Service GmbH

Address: Storkower Str. 38c
15526 Reichenwalde
Germany

Accreditation:



A2LA Accredited Testing Laboratory, Certificate No.: 1983.01
FCC Filed Test Laboratory, Reg.-No.: 96970
IC OATS Filing assigned code: 3470A

Applicant's name: Schneider Schreibgeräte GmbH

Address: Unterm Dorf 184/1
78144 Schramberg
GERMANY

Test specification:

Standard.....: 47 CFR Part 15 Subpart B
ICES-003, Issue 6:2016
ANSI C63.4:2014

Equipment under test (EUT):

Product description	blukii module	
Model No.	S	
Additional Models	-	
Hardware version	3.0	
Firmware / Software version	None	
Contains	FCC-ID: A6C-104001	IC: N/A
Test result	Passed	

Test Report No.: G0M-1608-5788-EF0115B_S-V01

Eurofins Product Service GmbH
Storkower Str. 38c, D-15526 Reichenwalde, Germany

Possible test case verdicts:


- not applicable to test object: N/A
- test object does meet the requirement.....: P (Pass)
- test object does not meet the requirement.....: F (Fail)

Testing:

Date of receipt of test item: 2016-10-07

Date (s) of performance of tests: 2016-11-04

Compiled by: Sebastian Suckow

Tested by (+ signature).....: Sebastian Suckow / Andreas Pflug 

Approved by (+ signature): Jens Marquardt
Deputy Head of Lab 

Date of issue: 2016-11-30

Total number of pages: 21

General remarks:

The test results presented in this report relate only to the object tested.

The results contained in this report reflect the results for this particular model and serial number. It is the responsibility of the manufacturer to ensure that all production models meet the intent of the requirements detailed within this report.

This report shall not be reproduced, except in full, without the written approval of the issuing testing laboratory.

Additional comments:

Version History

Version	Issue Date	Remarks	Revised by
V01	2016-11-30	Initial Release	

REPORT INDEX

1 EQUIPMENT (TEST ITEM) DESCRIPTION	5
1.1 Photos – Equipment external	6
1.2 Photos – Equipment internal	7
1.3 Photos – Test setup	8
1.4 Supporting Equipment Used During Testing	9
1.5 Input / Output Ports	9
1.6 Operating Modes and Configurations	10
1.7 Test Equipment Used During Testing	11
1.8 Sample emission level calculation	12
2 RESULT SUMMARY	13
3 TEST CONDITIONS AND RESULTS	14
3.1 Test Conditions and Results – Radiated emissions	14

1 Equipment (Test item) Description

Description	blukii module
Model	S
Additional Models	-
Serial number	None
Hardware version	3.0
Software / Firmware version	None
Contains FCC-ID	N/A
Contains IC	N/A
Power supply	3 VDC via battery (non-rechargeable)
AC/DC-Adaptor	None
Manufacturer	Schneider Schreibgeräte GmbH Unterm Dorf 184/1 78144 Schramberg GERMANY
Highest emission frequency	48MHz
Device classification	Class B
Equipment type	Tabletop
Number of tested samples	1

1.4 Supporting Equipment Used During Testing

Product Type*	Device	Manufacturer	Model No.	Comments (e.g. serial no.)
AE	iPad	Apple	MD531FD/A	Used for signaling

***Note:** Use the following abbreviations:

AE : Auxiliary/Associated Equipment, or

SIM : Simulator (Not Subjected to Test)

CABL : Connecting cables

1.5 Input / Output Ports

Port #	Name	Type*	Max. Cable Length	Cable Shielded	Comments (e.g. Cat. of Cable)
-	-	-	-	-	-

***Note:** Use the following abbreviations:

AC : AC power port

DC : DC power port

N/E : Non electrical

I/O : Signal input or output port

TP : Telecommunication port

1.6 Operating Modes and Configurations

Mode #	Description
1	Bluetooth connection to iPad

Configuration #	EUT Configuration
1	Normal operation mode

1.7 Test Equipment Used During Testing

Measurement Software			
Description	Manufacturer	Name	Version
EMC Test Software	Dare Instruments	Radimation	2015.2.4

Radiated emissions – 10m Chamber					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Biconical Antenna	R&S	HK 116	EF00012	2016-05	2019-05
LPD-Antenne	R&S	HL 223	EF00187	2016-05	2019-05
Horn antenna	Schwarzbeck	BBHA 9120D	EF00018	2016-09	2019-09
EMI Test Receiver	Keysight	N9038A-526	EF01070	2016-08	2017-08
RF Cable	Huber & Suhner	Sucoflex 106	-	System Cal.	System Cal
RF Cable	Huber & Suhner	Multiflex 141	-	System Cal.	System Cal

1.8 Sample emission level calculation

The following is a description of terms and a sample calculation, as appears in the radiated emissions data table. The numbers used in the calculation are for example only. There is no direct correlation to the specific data taken for the product described in this document:

Reading:

This is the reading obtained on the spectrum analyzer in dB μ V. Any external preamplifiers used are taken into account through internal analyzer settings.

A.F.:

This is the antenna factor for the receiving antenna. It is a conversion factor, which converts electric fields strengths to voltages, which can be measured directly on the spectrum analyzer. It is treated as a loss in dB. Cable losses have been included with the A.F. to simplify the calculations. The antenna factor is used in calculations as follows:

$$\text{Reading on Analyzer (dB}\mu\text{V)} + \text{A.F. (dB)} = \text{Net field strength (dB}\mu\text{V/m)}$$

Net:

This is the net field strength measurement (as shown above).

Limit:

This is the FCC Class B radiated emission limit (in units of dB μ V/m). The FCC limits are given in units of μ V/m. The following formula is used to convert the units of μ V/m to dB μ V/m:

$$\text{Limit (dB}\mu\text{V/m)} = 20 * \log (\mu\text{V/m})$$

Margin:

This is the margin of compliance below the FCC limit. The units are given in dB. A negative margin indicates the emission was below the limit. A positive margin indicates that the emission exceeds the limit.

Example only:

$$\begin{array}{lll} \text{Reading} + \text{AF} = & \text{Net Reading} : & \text{Net reading - FCC limit} = \text{Margin} \\ 21.5 \text{ dB}\mu\text{V} + 26 \text{ dB} = & 47.5 \text{ dB}\mu\text{V/m} : & 47.5 \text{ dB}\mu\text{V/m} - 57.0 \text{ dB}\mu\text{V/m} = -9.5 \text{ dB} \end{array}$$

2 Result Summary

FCC 47 CFR Part 15B, Industry Canada ICES-003				
Product Specific Standard	Requirement – Test	Reference Method	Result	Remarks
47 CFR 15.109 ICES-003 Item 6.2	Radiated emissions	ANSI C 63.4	PASS	
47 CFR 15.107 ICES-003 Item 6.1	AC power line conducted emissions	ANSI C63.4	N/A	Non-rechargeable battery
Remarks:				

3 Test Conditions and Results

3.1 Test Conditions and Results – Radiated emissions

Radiated emissions acc. FCC 47 CFR 15.109 / ICES-003			Verdict: PASS			
Laboratory Parameters:	Required prior to the test		During the test			
Ambient Temperature	15 to 35 °C		22°C			
Relative Humidity	30 to 60 %		45%			
Test according referenced standards	Reference Method					
	ANSI C63.4					
Sample is tested with respect to the requirements of the equipment class	Equipment class					
	Class B					
Test frequency range determined from highest emission frequency	Highest emission frequency					
	Fmax [MHz] = 48					
Fully configured sample scanned over the following frequency range	Frequency range					
	30 MHz to 13 GHz					
Operating mode	1					
Configuration	1					
Limits and results Class B						
Frequency [MHz]	Quasi-Peak [dB μ V/m]	Result	Average [dB μ V/m]	Result	Peak [dB μ V/m]	Result
30 – 88	40	PASS	-		-	-
88 – 216	43.5	PASS	-		-	-
216 – 960	46	PASS	-		-	-
960 – 1000	54	PASS	-		-	-
> 1000	-	-	54	PASS	74	PASS
Comments:						

Test Procedure:

The test site is in accordance with ANSI C63.4:2014 requirements and is listed by FCC.
The measurement procedure is as follows:

Exploratory measurement:

- The EUT was placed on a non-conductive table at a height of 0.8m.
- The EUT and support equipment, if needed, were set up to simulate typical usage.
- Cables, of type and length specified by the manufacturer, were connected to at least one port of each type and were terminated by a device or simulating load of actual usage.
- The antenna was placed at a distance of 3 or 10 m.
- The received signal was monitored at the measurement receiver.
 - Cables not bundled were manipulated within the range of likely arrangements to produce the highest emission amplitude
 - To maximize the suspected emissions the EUT is rotated 360 degrees. If the signal exceeds the previous amplitude, go back to the corresponding azimuth and manipulate the cables again for maximizing the emissions if possible.
 - Move the antenna from 1 to 4m to maximize the suspected highest amplitude signal.
- This procedure has to be performed in both antenna polarizations, horizontal and vertical.
- The arrangement of the equipment with the maximum emission level is shown on the setup picture at item 1.3.

Final measurement:


- The EUT was placed on a 0.8 m non-conductive table at a 3 m distance from the receive antenna. The antenna output was connected to the measurement receiver
- A biconical antenna was used for the frequency range 30 – 200 MHz, a logarithmic periodical antenna was used for the frequency range from 200 – 1000 MHz. Above one 1 GHz a Double Ridged Broadband Horn antenna was used. The antenna was placed on an adjustable height antenna mast
- The EUT and cable arrangement were based on the exploratory measurement results
- Emissions were maximized at each frequency by rotating the EUT and adjusting the receive antenna height and polarization. The maximum values were recorded.
- The test data of the worst-case conditions were recorded and shown on the next pages.

Radiated emissions according to FCC 15B

Project number: G0M-1608-5788

Applicant: Schneider Schreibgeräte GmbH
EUT Name: blukii module
Model: S
Test Site: Eurofins Product Service GmbH
Operator: Mr. Handrik
Test Conditions: $T_{thom}: 20^{\circ}\text{C}$, $U_{nom}: 3 \text{ VDC}$
Antenna: HK 116, Vertical
Measurement distance: 10 m converted to 3 m
Mode: BT LE 2440 MHz
Test Date: 2016-11-04
Note:

Index 86

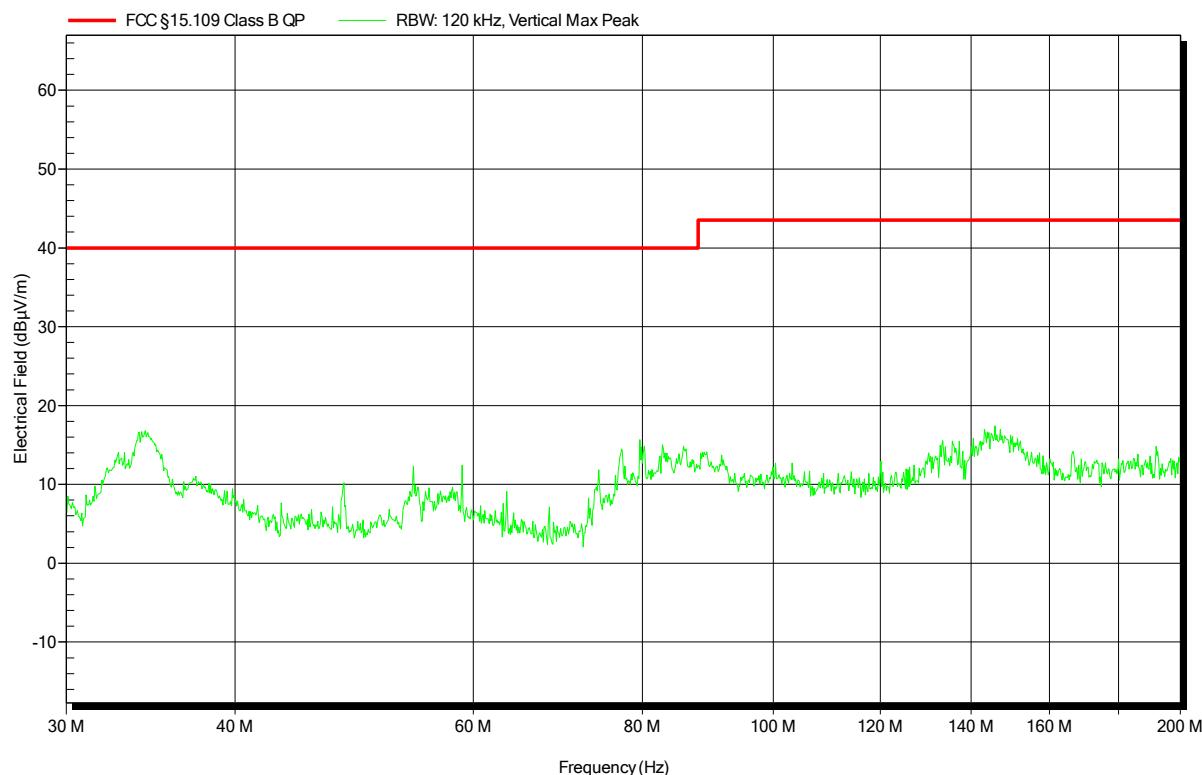

Test Report No.: G0M-1608-5788-EF0115B_S-V01

Eurofins Product Service GmbH
Storkower Str. 38c, D-15526 Reichenwalde, Germany


Page 16 of 21

Radiated emissions according to FCC 15B

Project number: G0M-1608-5788

Applicant: Schneider Schreibgeräte GmbH
EUT Name: blukii module
Model: S
Test Site: Eurofins Product Service GmbH
Operator: Mr. Handrik
Test Conditions: $T_{nom}: 20^{\circ}\text{C}$, $U_{nom}: 3 \text{ VDC}$
Antenna: HK 116, Horizontal
Measurement distance: 10 m converted to 3 m
Mode: BT LE 2440 MHz
Test Date: 2016-11-04
Note:

Index 85

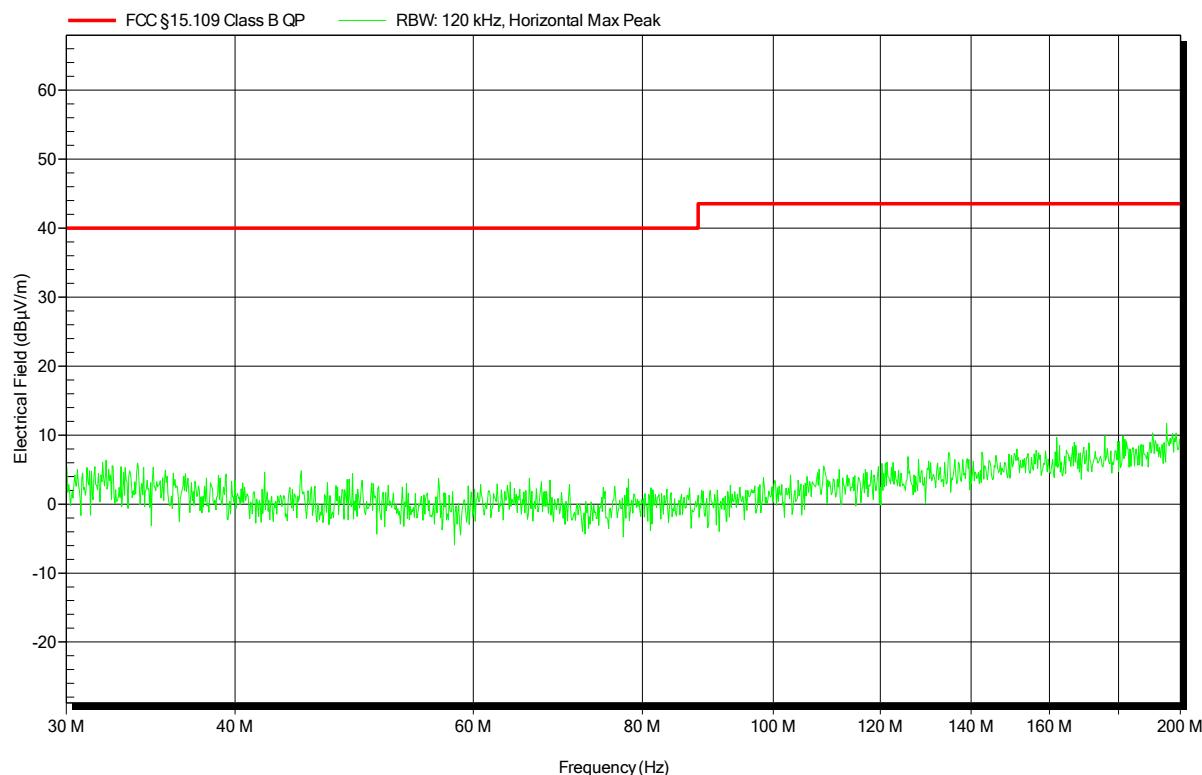

Test Report No.: G0M-1608-5788-EF0115B_S-V01

Eurofins Product Service GmbH
Storkower Str. 38c, D-15526 Reichenwalde, Germany


Page 17 of 21

Radiated emissions according to FCC 15B

Project number: G0M-1608-5788

Applicant: Schneider Schreibgeräte GmbH
EUT Name: blukii module
Model: S
Test Site: Eurofins Product Service GmbH
Operator: Mr. Handrik
Test Conditions: $T_{nom}: 20^{\circ}\text{C}$, $U_{nom}: 3 \text{ VDC}$
Antenna: HL 223, Vertical
Measurement distance: 10 m converted to 3 m
Mode: BT LE 2440 MHz
Test Date: 2016-11-04
Note:

Index 87

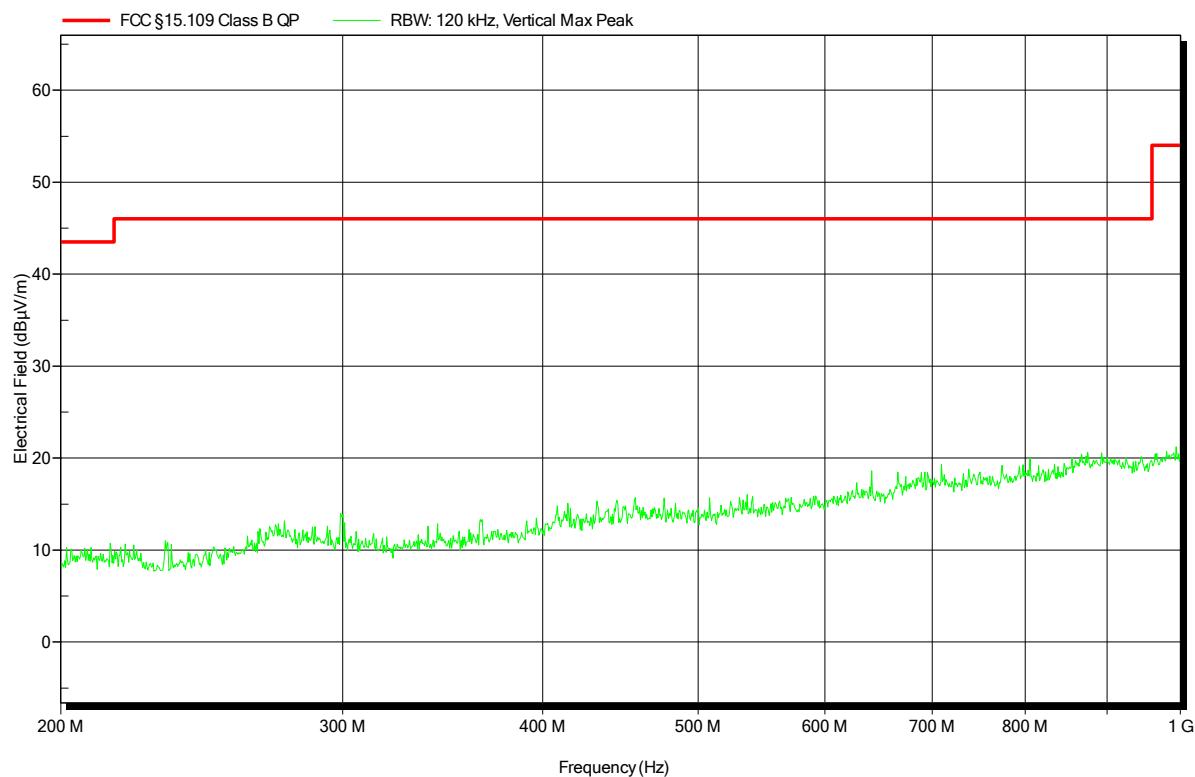


Radiated emissions according to FCC 15B

Project number: G0M-1608-5788

Applicant: Schneider Schreibgeräte GmbH
EUT Name: blukii module
Model: S
Test Site: Eurofins Product Service GmbH
Operator: Mr. Handrik
Test Conditions: $T_{nom}: 20^{\circ}\text{C}$, $U_{nom}: 3 \text{ VDC}$
Antenna: HL 223, Horizontal
Measurement distance: 10 m converted to 3 m
Mode: BT LE 2440 MHz
Test Date: 2016-11-04
Note:

Index 88

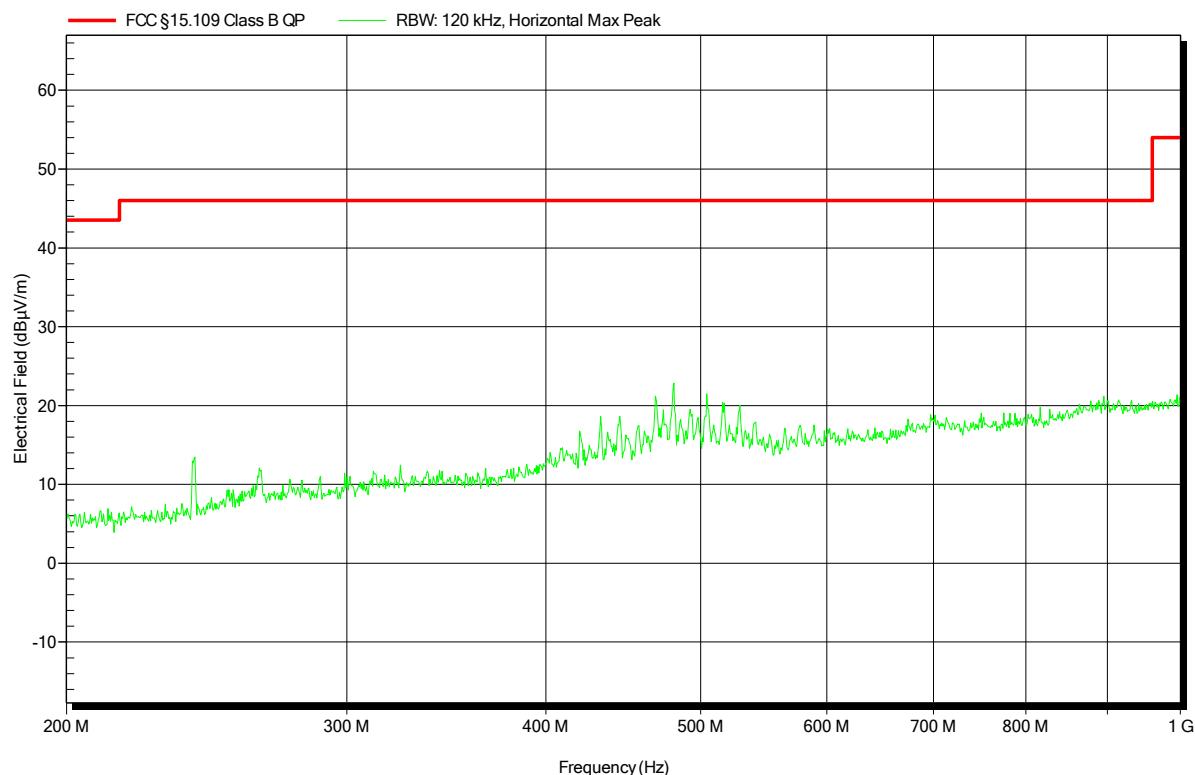

Test Report No.: G0M-1608-5788-EF0115B_S-V01

Eurofins Product Service GmbH
Storkower Str. 38c, D-15526 Reichenwalde, Germany


Page 19 of 21

Radiated emissions according to FCC 15B

Project number: G0M-1608-5788

Applicant: Schneider Schreibgeräte GmbH
EUT Name: blukii module
Model: S
Test Site: Eurofins Product Service GmbH
Operator: Mr. Handrik
Test Conditions: $T_{thom} = 20^\circ\text{C}$, $U_{nom} = 3 \text{ VDC}$
Antenna: ETS-Lindgren 3117, Vertical
Measurement distance: 3 m
Mode: BT LE 2440 MHz
Test Date: 2016-11-04
Note:

Index 84

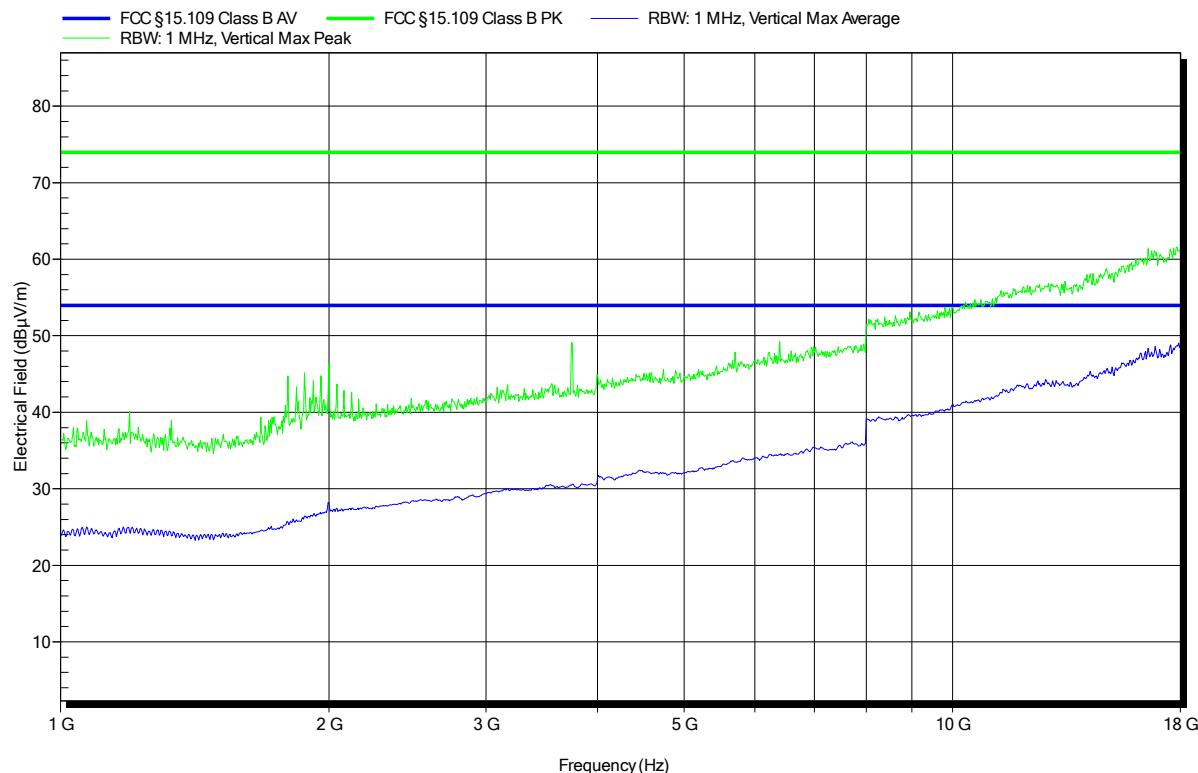

Test Report No.: G0M-1608-5788-EF0115B_S-V01

Eurofins Product Service GmbH
Storkower Str. 38c, D-15526 Reichenwalde, Germany


Page 20 of 21

Radiated emissions according to FCC 15B

Project number: G0M-1608-5788

Applicant: Schneider Schreibgeräte GmbH
EUT Name: blukii module
Model: S
Test Site: Eurofins Product Service GmbH
Operator: Mr. Handrik
Test Conditions: $T_{thom} = 20^\circ\text{C}$, $U_{nom} = 3 \text{ VDC}$
Antenna: ETS-Lindgren 3117, Horizontal
Measurement distance: 3 m
Mode: BT LE 2440 MHz
Test Date: 2016-11-04
Note:

Index 83

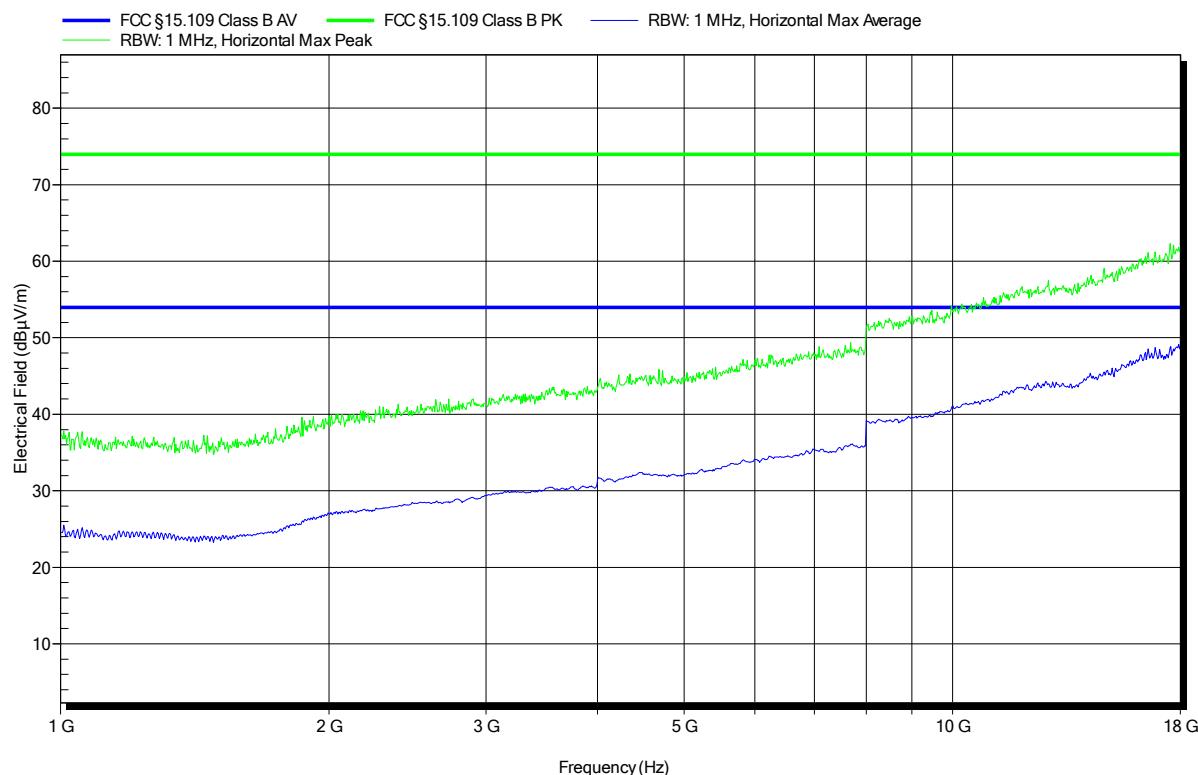

Test Report No.: G0M-1608-5788-EF0115B_S-V01

Eurofins Product Service GmbH
Storkower Str. 38c, D-15526 Reichenwalde, Germany

Page 21 of 21