

EMC TEST REPORT

**FCC 47 CFR Part 15B
Industry Canada ICES-003**

Electromagnetic compatibility - Unintentional radiators

Report Reference No.: G0M-1608-5788-EF0115B_L-V01

Testing Laboratory: Eurofins Product Service GmbH

Address: Storkower Str. 38c
15526 Reichenwalde
Germany

Accreditation:



A2LA Accredited Testing Laboratory, Certificate No.: 1983.01
FCC Filed Test Laboratory, Reg.-No.: 96970
IC OATS Filing assigned code: 3470A

Applicant's name: Schneider Schreibgeräte GmbH

Address: Unterm Dorf 184/1
78144 Schramberg
GERMANY

Test specification:

Standard.....: 47 CFR Part 15 Subpart B
ICES-003, Issue 6:2016
ANSI C63.4:2014

Equipment under test (EUT):

Product description blukii module

Model No. L

Additional Models

Hardware version 3.0

Firmware / Software version None

Contains FCC-ID: A6C-104001 IC: N/A

Test result Passed

Possible test case verdicts:

- not applicable to test object: N/A
- test object does meet the requirement: P (Pass)
- test object does not meet the requirement: F (Fail)

Testing:

Date of receipt of test item: 2016-10-07

Date (s) of performance of tests: 2016-11-04

Compiled by: Sebastian Suckow

Tested by (+ signature): Sebastian Suckow / Andreas Pflug



Approved by (+ signature): Jens Marquardt
Deputy Head of Lab



Date of issue: 2016-11-30

Total number of pages: 27

General remarks:

The test results presented in this report relate only to the object tested.

The results contained in this report reflect the results for this particular model and serial number. It is the responsibility of the manufacturer to ensure that all production models meet the intent of the requirements detailed within this report.

This report shall not be reproduced, except in full, without the written approval of the issuing testing laboratory.

Additional comments:

Version History

Version	Issue Date	Remarks	Revised by
V01	2016-11-30	Initial Release	

REPORT INDEX

1 EQUIPMENT (TEST ITEM) DESCRIPTION	5
1.1 Photos – Equipment external	6
1.2 Photos – Equipment internal	8
1.3 Photos – Test setup	9
1.4 Supporting Equipment Used During Testing	11
1.5 Input / Output Ports	11
1.6 Operating Modes and Configurations	12
1.7 Test Equipment Used During Testing	13
1.8 Sample emission level calculation	14
2 RESULT SUMMARY	15
3 TEST CONDITIONS AND RESULTS	16
3.1 Test Conditions and Results – Radiated emissions	16
3.2 Test Conditions and Results – AC power line conducted emissions	24

1 Equipment (Test item) Description

Description	blukii module
Model	L
Additional Models	-
Serial number	None
Hardware version	3.0
Software / Firmware version	None
Contains FCC-ID	N/A
Contains IC	N/A
Power supply	3 VDC via battery (non-rechargeable)
AC/DC-Adaptor	None
Manufacturer	Schneider Schreibgeräte GmbH Unterm Dorf 184/1 78144 Schramberg GERMANY
Highest emission frequency	48MHz
Device classification	Class B
Equipment type	Tabletop
Number of tested samples	1

1.4 Supporting Equipment Used During Testing

Product Type*	Device	Manufacturer	Model No.	Comments (e.g. serial no.)
AE	iPad	Apple	MD531FD/A	Used for signaling
AE	Laptop	DELL	Latitude E6420	AC/DC adaptor Modell: FA65NE0-00

***Note:** Use the following abbreviations:

AE : Auxiliary/Associated Equipment, or
 SIM : Simulator (Not Subjected to Test)
 CABL : Connecting cables

1.5 Input / Output Ports

Port #	Name	Type*	Max. Cable Length	Cable Shielded	Comments (e.g. Cat. of Cable)
1	USB	DC / I/O	-	-	For EUT L: UART to USB Service only

***Note:** Use the following abbreviations:

AC : AC power port
 DC : DC power port
 N/E : Non electrical
 I/O : Signal input or output port
 TP : Telecommunication port

1.6 Operating Modes and Configurations

Mode #	Description
1	Bluetooth connection to iPad

Configuration #	EUT Configuration
1	Normal operation mode

1.7 Test Equipment Used During Testing

Measurement Software					
Description	Manufacturer	Name		Version	
EMC Test Software	Dare Instruments	Radimation		2015.2.4	

Radiated emissions – 10m Chamber					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Biconical Antenna	R&S	HK 116	EF00012	2016-05	2019-05
LPD-Antenne	R&S	HL 223	EF00187	2016-05	2019-05
Horn antenna	Schwarzbeck	BBHA 9120D	EF00018	2016-09	2019-09
EMI Test Receiver	Keysight	N9038A-526	EF01070	2016-08	2017-08
RF Cable	Huber & Suhner	Sucoflex 106	-	System Cal.	System Cal
RF Cable	Huber & Suhner	Multiflex 141	-	System Cal.	System Cal

Conducted emissions					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
AMN	R&S	ESH2-Z5	EF00182	2014-11	2016-11
AMN	R&S	ESH3-Z5	EF00036	2014-12	2016-12
AMN	Schwarzbeck	NSLK 8128	EF00975	2015-12	2016-12
EMI Test Receiver	R&S	ESR7	EF00943	2016-10	2017-10
EMI Test Receiver	Keysight	N9038A-526	EF01070	2016-08	2017-08
Cable	-	RG58/U	-	System Cal.	System Cal.

1.8 Sample emission level calculation

The following is a description of terms and a sample calculation, as appears in the radiated emissions data table. The numbers used in the calculation are for example only. There is no direct correlation to the specific data taken for the product described in this document:

Reading:

This is the reading obtained on the spectrum analyzer in dB μ V. Any external preamplifiers used are taken into account through internal analyzer settings.

A.F.:

This is the antenna factor for the receiving antenna. It is a conversion factor, which converts electric fields strengths to voltages, which can be measured directly on the spectrum analyzer. It is treated as a loss in dB. Cable losses have been included with the A.F. to simplify the calculations. The antenna factor is used in calculations as follows:

$$\text{Reading on Analyzer (dB}\mu\text{V)} + \text{A.F. (dB)} = \text{Net field strength (dB}\mu\text{V/m)}$$

Net:

This is the net field strength measurement (as shown above).

Limit:

This is the FCC Class B radiated emission limit (in units of dB μ V/m). The FCC limits are given in units of μ V/m. The following formula is used to convert the units of μ V/m to dB μ V/m:

$$\text{Limit (dB}\mu\text{V/m)} = 20 * \log (\mu\text{V/m})$$

Margin:

This is the margin of compliance below the FCC limit. The units are given in dB. A negative margin indicates the emission was below the limit. A positive margin indicates that the emission exceeds the limit.

Example only:

$$\begin{array}{lll} \text{Reading} + \text{AF} = & \text{Net Reading} : & \text{Net reading} - \text{FCC limit} = \text{Margin} \\ 21.5 \text{ dB}\mu\text{V} + 26 \text{ dB} = & 47.5 \text{ dB}\mu\text{V/m} : & 47.5 \text{ dB}\mu\text{V/m} - 57.0 \text{ dB}\mu\text{V/m} = -9.5 \text{ dB} \end{array}$$

2 Result Summary

FCC 47 CFR Part 15B, Industry Canada ICES-003				
Product Specific Standard	Requirement – Test	Reference Method	Result	Remarks
47 CFR 15.109 ICES-003 Item 6.2	Radiated emissions	ANSI C 63.4	PASS	
47 CFR 15.107 ICES-003 Item 6.1	AC power line conducted emissions	ANSI C63.4	PASS	
Remarks:				

3 Test Conditions and Results

3.1 Test Conditions and Results – Radiated emissions

Radiated emissions acc. FCC 47 CFR 15.109 / ICES-003			Verdict: PASS			
Laboratory Parameters:	Required prior to the test		During the test			
Ambient Temperature	15 to 35 °C		22°C			
Relative Humidity	30 to 60 %		45%			
Test according referenced standards	Reference Method					
	ANSI C63.4					
Sample is tested with respect to the requirements of the equipment class	Equipment class					
	Class B					
Test frequency range determined from highest emission frequency	Highest emission frequency					
	48MHz					
Fully configured sample scanned over the following frequency range	Frequency range					
	30 MHz to 13 GHz					
Operating mode	1					
Configuration	1					
Limits and results Class B						
Frequency [MHz]	Quasi-Peak [dB μ V/m]	Result	Average [dB μ V/m]	Result	Peak [dB μ V/m]	Result
30 – 88	40	PASS	-		-	-
88 – 216	43.5	PASS	-		-	-
216 – 960	46	PASS	-		-	-
960 – 1000	54	PASS	-		-	-
> 1000	-	-	54	PASS	74	PASS
Comments:						

Test Procedure:

The test site is in accordance with ANSI C63.4:2014 requirements and is listed by FCC.
The measurement procedure is as follows:

Exploratory measurement:

- The EUT was placed on a non-conductive table at a height of 0.8m.
- The EUT and support equipment, if needed, were set up to simulate typical usage.
- Cables, of type and length specified by the manufacturer, were connected to at least one port of each type and were terminated by a device or simulating load of actual usage.
- The antenna was placed at a distance of 3 or 10 m.
- The received signal was monitored at the measurement receiver.
 - Cables not bundled were manipulated within the range of likely arrangements to produce the highest emission amplitude
 - To maximize the suspected emissions the EUT is rotated 360 degrees. If the signal exceeds the previous amplitude, go back to the corresponding azimuth and manipulate the cables again for maximizing the emissions if possible.
 - Move the antenna from 1 to 4m to maximize the suspected highest amplitude signal.
- This procedure has to be performed in both antenna polarizations, horizontal and vertical.
- The arrangement of the equipment with the maximum emission level is shown on the setup picture at item 1.3.

Final measurement:


- The EUT was placed on a 0.8 m non-conductive table at a 3 m distance from the receive antenna. The antenna output was connected to the measurement receiver
- A biconical antenna was used for the frequency range 30 – 200 MHz, a logarithmic periodical antenna was used for the frequency range from 200 – 1000 MHz. Above one 1 GHz a Double Ridged Broadband Horn antenna was used. The antenna was placed on an adjustable height antenna mast
- The EUT and cable arrangement were based on the exploratory measurement results
- Emissions were maximized at each frequency by rotating the EUT and adjusting the receive antenna height and polarization. The maximum values were recorded.
- The test data of the worst-case conditions were recorded and shown on the next pages.

Radiated emissions according to FCC 15B

Project number: G0M-1608-5788

Applicant: Schneider Schreibgeräte GmbH
EUT Name: blukii module
Model: L
Test Site: Eurofins Product Service GmbH
Operator: Mr. Handrik
Test Conditions: $T_{nom}: 20^{\circ}\text{C}$, $U_{nom}: 3 \text{ VDC}$
Antenna: HK 116, Vertical
Measurement distance: 10m converted to 3 m
Mode: BT LE 2440 MHz
Test Date: 2016-11-04
Note:

Index 70

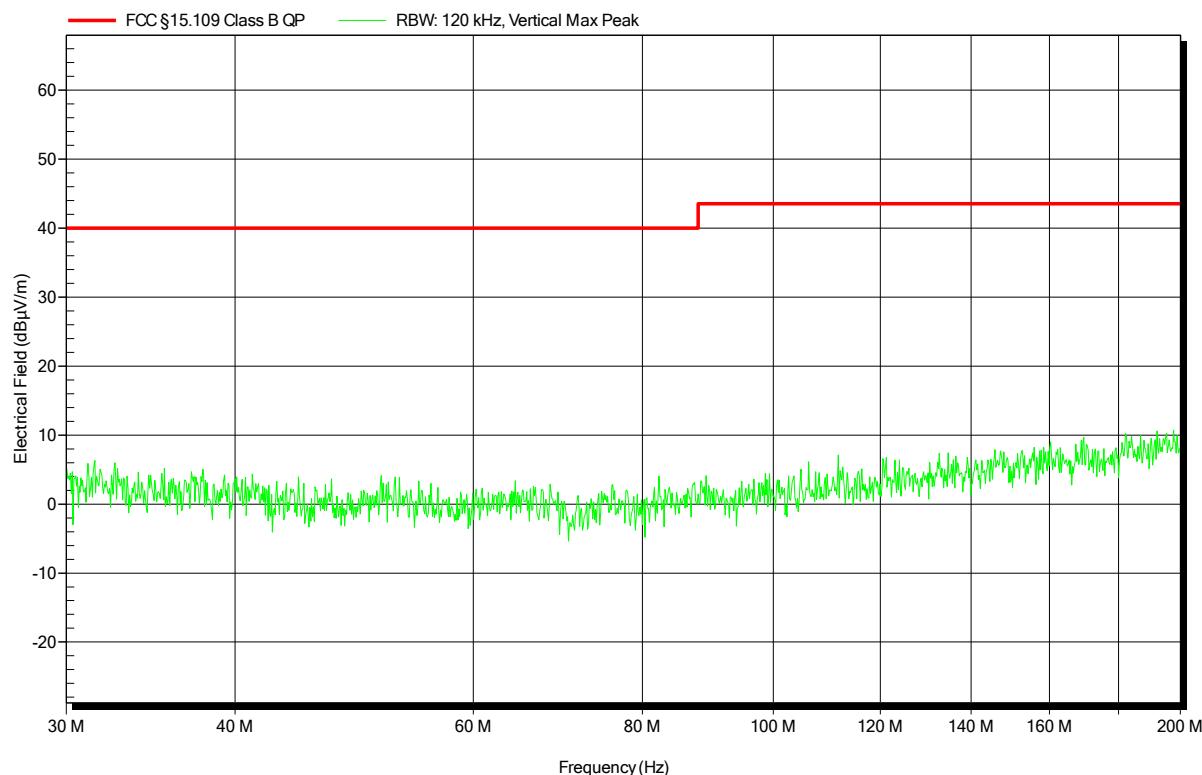

Test Report No.: G0M-1608-5788-EF0115B_L-V01

Eurofins Product Service GmbH
Storkower Str. 38c, D-15526 Reichenwalde, Germany


Page 18 of 27

Radiated emissions according to FCC 15B

Project number: G0M-1608-5788

Applicant: Schneider Schreibgeräte GmbH
EUT Name: blukii module
Model: L
Test Site: Eurofins Product Service GmbH
Operator: Mr. Handrik
Test Conditions: $T_{nom}: 20^{\circ}\text{C}$, $U_{nom}: 3 \text{ VDC}$
Antenna: HK 116, Horizontal
Measurement distance: 10m converted to 3 m
Mode: BT LE 2440 MHz
Test Date: 2016-11-04
Note:

Index 72

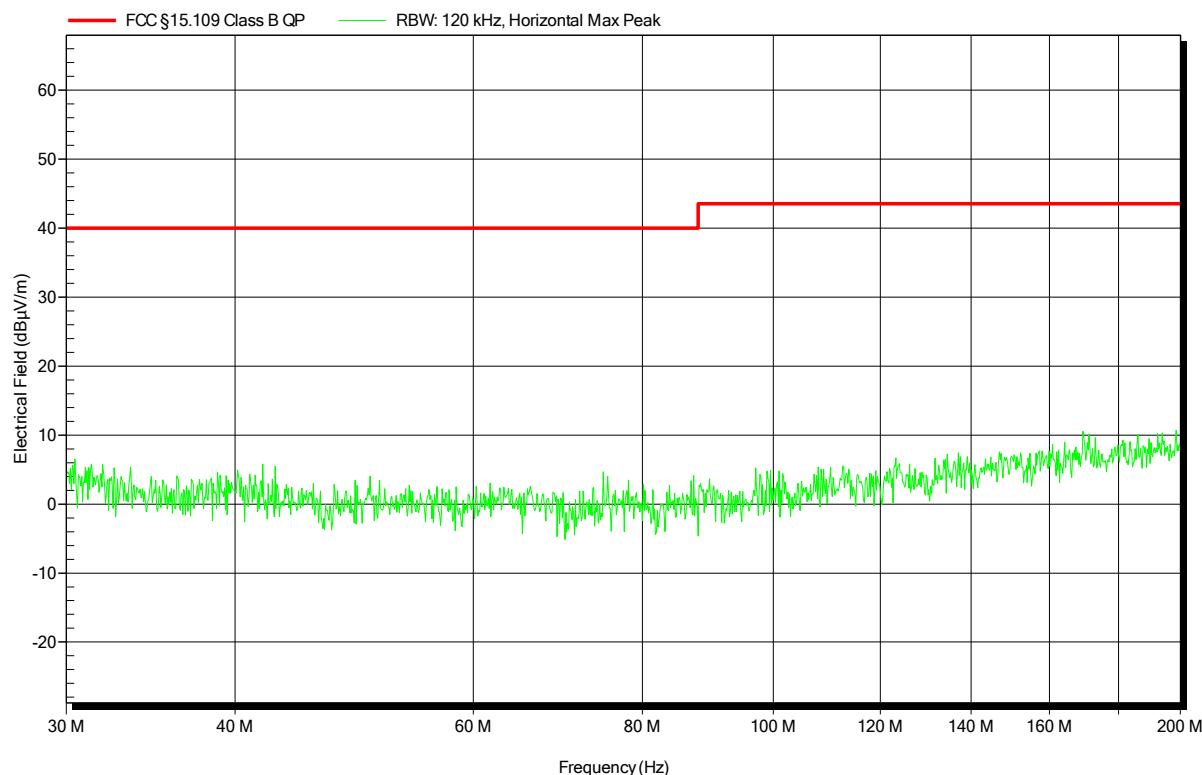

Test Report No.: G0M-1608-5788-EF0115B_L-V01

Eurofins Product Service GmbH
Storkower Str. 38c, D-15526 Reichenwalde, Germany


Page 19 of 27

Radiated emissions according to FCC 15B

Project number: G0M-1608-5788

Applicant: Schneider Schreibgeräte GmbH
EUT Name: blukii module
Model: L
Test Site: Eurofins Product Service GmbH
Operator: Mr. Handrik
Test Conditions: $T_{nom}: 20^{\circ}\text{C}$, $U_{nom}: 3 \text{ VDC}$
Antenna: HL 223, Vertical
Measurement distance: 10m converted to 3 m
Mode: BT LE 2440 MHz
Test Date: 2016-11-04
Note:

Index 74

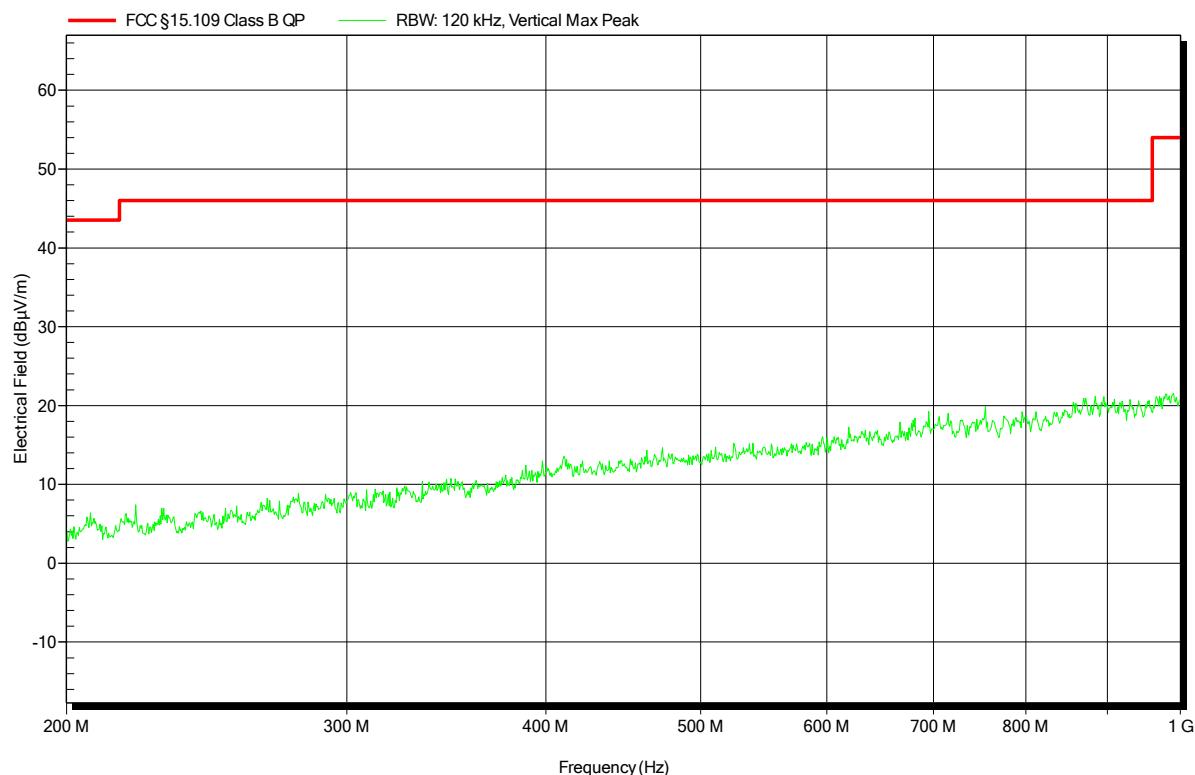


Radiated emissions according to FCC 15B

Project number: G0M-1608-5788

Applicant: Schneider Schreibgeräte GmbH
EUT Name: blukii module
Model: L
Test Site: Eurofins Product Service GmbH
Operator: Mr. Handrik
Test Conditions: $T_{nom}: 20^{\circ}\text{C}$, $U_{nom}: 3 \text{ VDC}$
Antenna: HL 223, Horizontal
Measurement distance: 10m converted to 3 m
Mode: BT LE 2440 MHz
Test Date: 2016-11-04
Note:

Index 73

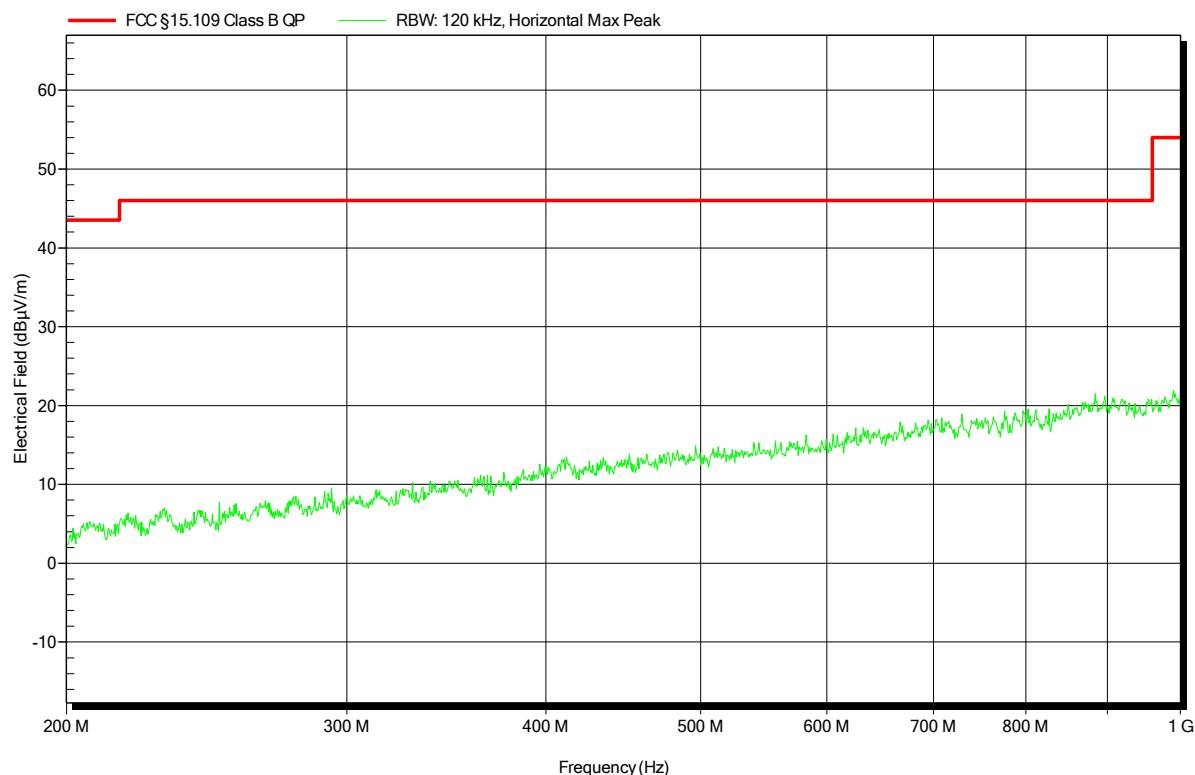

Test Report No.: G0M-1608-5788-EF0115B_L-V01

Eurofins Product Service GmbH
Storkower Str. 38c, D-15526 Reichenwalde, Germany


Page 21 of 27

Radiated emissions according to FCC 15B

Project number: G0M-1608-5788

Applicant: Schneider Schreibgeräte GmbH
EUT Name: blukii module
Model: L
Test Site: Eurofins Product Service GmbH
Operator: Mr. Handrik
Test Conditions: $T_{thom} = 20^\circ\text{C}$, $U_{nom} = 3 \text{ VDC}$
Antenna: ETS-Lindgren 3117, Vertical
Measurement distance: 3 m
Mode: BT LE 2440 MHz
Test Date: 2016-11-04
Note:

Index 76

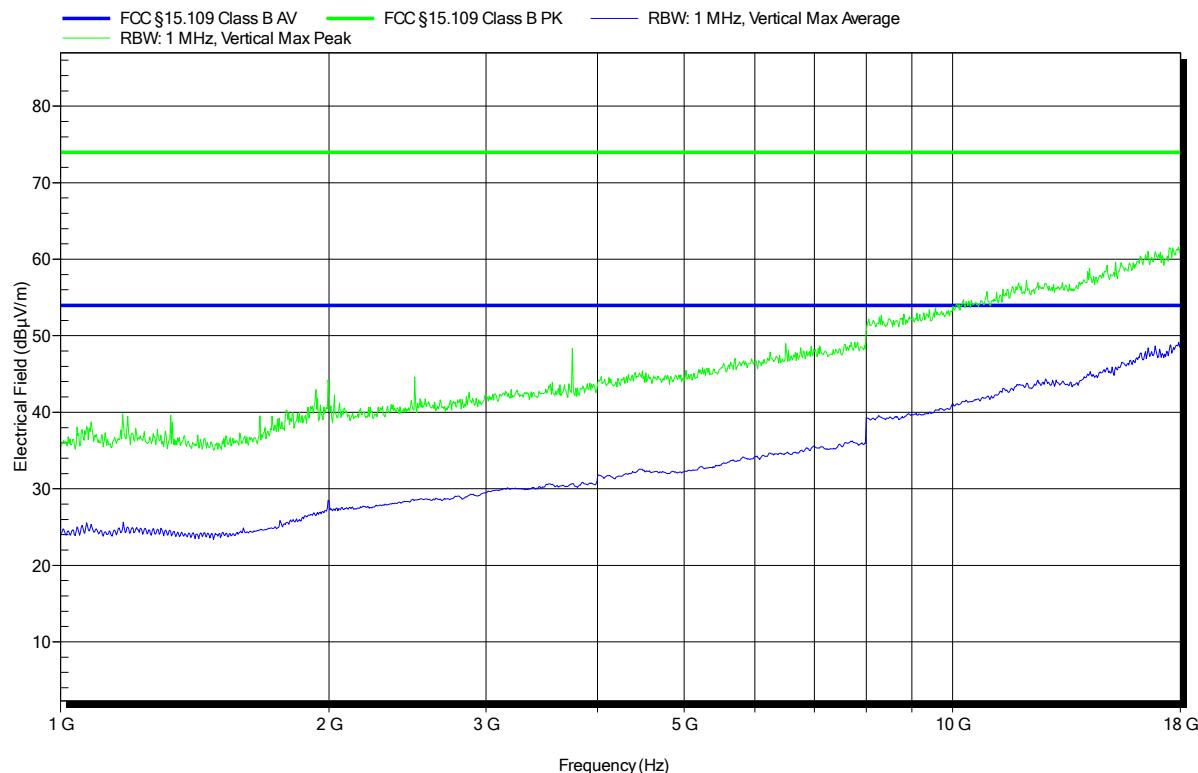

Test Report No.: G0M-1608-5788-EF0115B_L-V01

Eurofins Product Service GmbH
Storkower Str. 38c, D-15526 Reichenwalde, Germany


Page 22 of 27

Radiated emissions according to FCC 15B

Project number: G0M-1608-5788

Applicant: Schneider Schreibgeräte GmbH
EUT Name: blukii module
Model: L
Test Site: Eurofins Product Service GmbH
Operator: Mr. Handrik
Test Conditions: T_{nom}: 20°C, U_{nom}: 3 VDC
Antenna: ETS-Lindgren 3117, Horizontal
Measurement distance: 3 m
Mode: BT LE Standby Mode
Test Date: 2016-11-04
Note:

Index 75

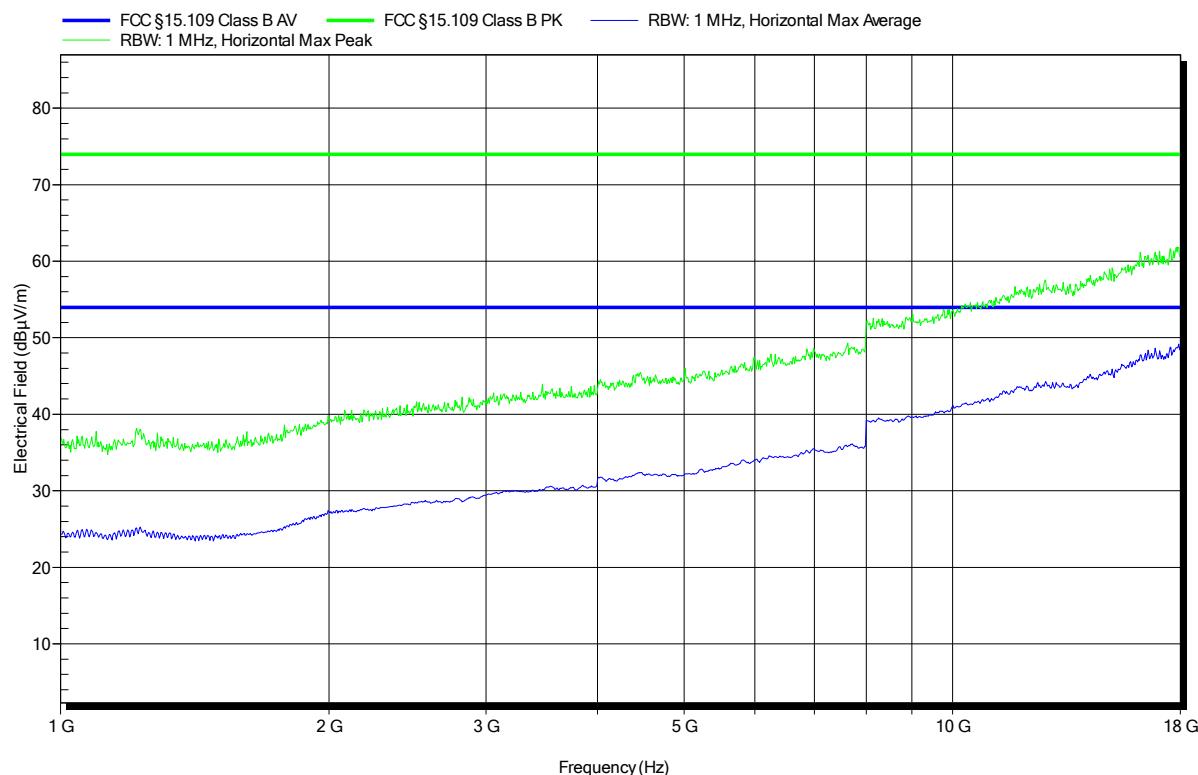

Test Report No.: G0M-1608-5788-EF0115B_L-V01

Eurofins Product Service GmbH
Storkower Str. 38c, D-15526 Reichenwalde, Germany

3.2 Test Conditions and Results – AC power line conducted emissions

Conducted emissions acc. FCC 47 CFR 15.107 / ICES-003			Verdict: PASS	
Laboratory Parameters:	Required prior to the test	During the test		
Ambient Temperature	15 to 35 °C	22°C		
Relative Humidity	30 to 60 %	35%		
Test according referenced standards	Reference Method			
	ANSI C63.4			
Fully configured sample scanned over the following frequency range	Frequency range			
	0.15 MHz to 30 MHz			
Sample is tested with respect to the requirements of the equipment class	Equipment class			
	Class B			
Points of Application	Application Interface			
AC Mains	LISN			
Operating mode	1			
Configuration	1			
Limits and results Class B				
Frequency [MHz]	Quasi-Peak [dB μ V]	Result	Average [dB μ V]	Result
0.15 to 5	66 to 56*	PASS	56 to 46*	PASS
0.5 to 5	56	PASS	46	PASS
5 to 30	60	PASS	50	PASS
Comments: * Limit decreases linearly with the logarithm of the frequency.				

Test Procedure:

The test site is in accordance with ANSI C63.4:2014 requirements and is listed by FCC.
The measurement procedure is as follows:

Exploratory measurement:

- The EUT was placed on a non conductive table 0.8 m above the reference ground plane and 0.4 m away from the vertical conducting plane (ANSI C63.4: 2014 item 7.3.1)
- The power cord that is normally supplied or recommended by the manufacturer was connected to the LISN.
- The distance between the outer edge of the EUT and the LISN shall be set to 0.8 m. A longer power cord shall be bundled to this length (bundling shall not exceed 40 cm in length).
- The LISN measurement port was connected to a measurement receiver
- I/O cables were bundled not longer than 0.4 m
- Measurement was performed in the frequency range 0.15 – 30MHz on each current-carrying conductor
- To maximize the emissions the cable positions were manipulated
- The worst configuration of EUT and cables is shown on a test setup picture at item 1.3

Test Procedure:

Final measurement:


- The EUT was placed on a non conductive table 0.8 m above the reference ground plane and 0.4 m away from the vertical conducting plane (ANSI C63.4: 2014 item 7.3.1)
- The power cord that is normally supplied or recommended by the manufacturer was connected to the LISN.
- The distance between the outer edge of the EUT and the LISN shall be set to 0.8 m. A longer power cord shall be bundled to this length (bundling shall not exceed 40 cm in length).
- The LISN measurement port was connected to a measurement receiver
- The EUT and cable arrangement were based on the exploratory measurement results
- The test data of the worst-case conditions were recorded and shown on the next pages.

EMI voltage test in the ac-mains according to FCC 15B

Project number: G0M-1608-5788

Applicant: Schneider Schreibgeräte GmbH
 EUT Name: blukii module
 Model: L (large)
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Suckow
 Test Conditions: $T_{thom} = 20^\circ\text{C}$, $U_{nom} = 120 \text{ VAC}$
 LISN: ESH2-Z5 N
 Mode: BTLE 2402 MHz Phase N
 Test Date: 2016-10-17
 Note:

Index 23

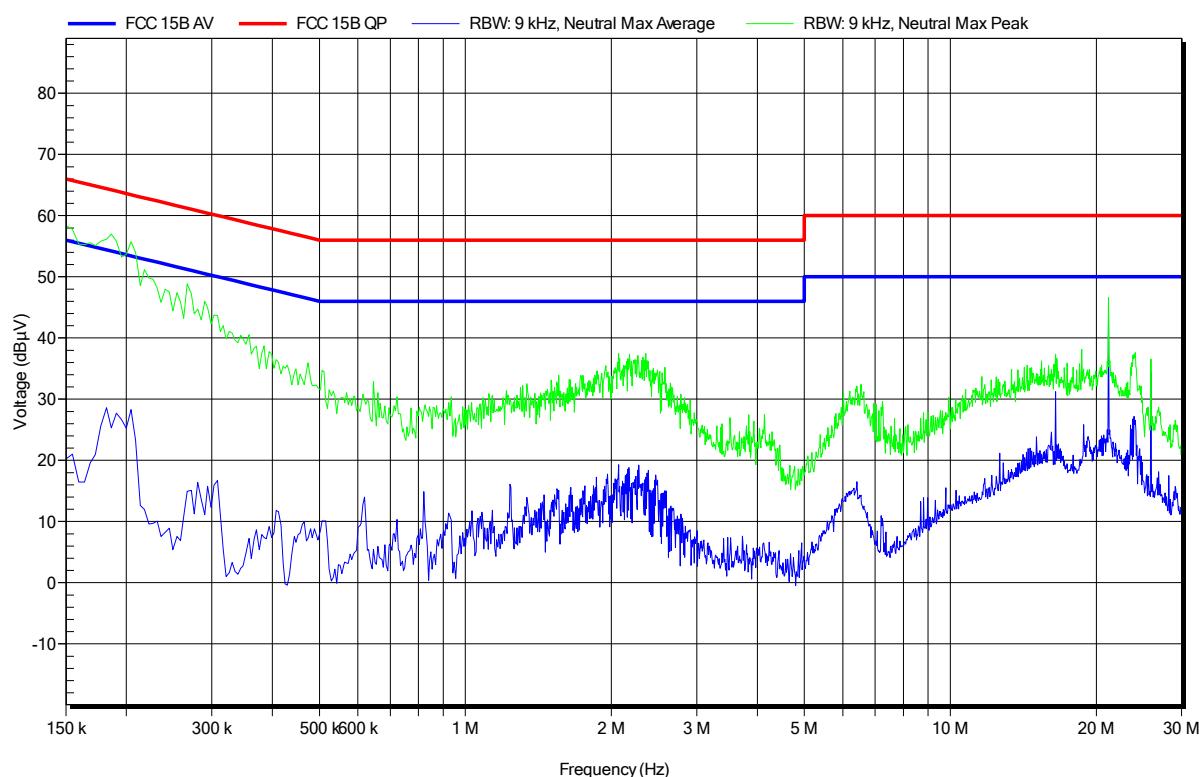

EMI voltage test in the ac-mains according to FCC 15B

Project number: G0M-1608-5788

Applicant: Schneider Schreibgeräte GmbH
 EUT Name: blukii module
 Model: L (large)
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Suckow
 Test Conditions: $T_{thom} = 20^\circ\text{C}$, $U_{nom} = 120 \text{ VAC}$
 LISN: ESH2-Z5 L
 Mode: BTLE 2402 MHz Phase L
 Test Date: 2016-10-17
 Note:

Index 24

