



BUREAU
VERITAS

Test Report No.: FVA210608W001



Certificate # 3939.01

EMC TEST REPORT

Applicant:	MUNIC
Address:	100 Avenue de Stalingrad 94800 Villejuif – France

Manufacturer or Supplier:	MUNIC
Address:	100 Avenue de Stalingrad 94800 Villejuif – France
Product:	Telematics Embedded System
Brand Name:	MUNIC
Model Name:	C4D-2GEUAB_V6
FCC ID:	A6GC4D-2GEUV6
Date of tests:	May. 18, 2021 ~ Jun. 07, 2021

The submitted sample of the above equipment has been tested for according to the requirements of the following standards:

FCC CFR Title 47-Telecommunication, Part 15, Subpart B, Class A
 FCC CFR Title 47-Telecommunication, Part 15, Subpart B, Class B
 ANSI C63.4:2014

CONCLUSION: The submitted sample was found to COMPLY with the test requirement

Prepared by Simon Wang Engineer / Mobile Department	Approved by Luke Lu Manager / Mobile Department

Date: Jun. 08, 2021

Date: Jun. 08, 2021

This report is governed by, and incorporates by reference, CPS Conditions of Service as posted at the date of issuance of this report at <http://www.bureauveritas.com/home/about-us/our-business/cps/about-us/terms-conditions> and is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. Measurement uncertainty is only provided upon request for accredited tests. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence or if you require measurement uncertainty; provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute you unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.



BUREAU
VERITAS

Test Report No.: FVA210608W001

TABLE OF CONTENTS

RELEASE CONTROL RECORD	3
1 GENERAL INFORMATION.....	4
1.1 GENERAL DESCRIPTION OF EUT.....	4
1.2 SUMMARY OF TEST RESULTS.....	5
1.3 MEASUREMENT UNCERTAINTY	6
1.4 DESCRIPTION OF TEST MODES.....	7
1.5 DESCRIPTION OF SUPPORT UNITS.....	8
2 EMISSION TEST	9
2.1 CONDUCTED EMISSION MEASUREMENT	9
2.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT	9
2.1.2 TEST INSTRUMENTS.....	9
2.1.3 TEST PROCEDURES	10
2.1.4 DEVIATION FROM TEST STANDARD	10
2.1.5 TEST SETUP	11
2.1.6 EUT OPERATING CONDITIONS.....	11
2.1.7 TEST RESULTS	12
2.2 RADIATED EMISSION MEASUREMENT.....	14
2.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT	14
2.2.2 TEST INSTRUMENTS.....	15
2.2.3 TEST PROCEDURE.....	16
2.2.4 DEVIATION FROM TEST STANDARD	17
2.2.5 TEST SETUP	18
2.2.6 EUT OPERATING CONDITIONS.....	18
2.2.7 TEST RESULTS	19
3 APPENDIX A – MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB	23



BUREAU
VERITAS

Test Report No.: FVA210608W001

RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
FVA210608W001	Original release	Jun. 08, 2021



BUREAU
VERITAS

Test Report No.: FVA210608W001

1 GENERAL INFORMATION

1.1 GENERAL DESCRIPTION OF EUT

PRODUCT	Telematics Embedded System	
BRAND NAME	MUNIC	
MODEL NAME	C4D-2GEUAB_V6	
NOMINAL VOLTAGE	13.7Vdc (adapter or host equipment) 4.2Vdc (Li-ion, battery)	
MODULATION TYPE	GPRS	GMSK
OPERATING FREQUENCY	GPRS	824.2MHz ~ 848.8MHz (FOR GSM 850) 1850.2MHz ~ 1909.8MHz (FOR GSM 1900)
HW VERSION	HC4D-2GEUAB_V6.01	
SW VERSION	SC4D-2GEUAB_V6.01	
I/O PORTS	Refer to user's manual	
CABLE SUPPLIED	N/A	
ACCESSORY DEVICES	Refer to note as below	

NOTE:

1. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.
2. For the test results, the EUT had been tested with all conditions. But only the worst case was shown in test report.
3. The EUT incorporates a SISO function. Physically, the EUT provides one completed transmitter and one receiver.

MODULATION MODE	TX FUNCTION
GPRS	1TX/1RX diversity

List of Accessory:

ACCESSORIES	BRAND	MODEL	SPECIFICATION
Battery 1	Howell	Li-polymer 552535H	Capacity: 4.2vdc 450mAh



BUREAU
VERITAS

Test Report No.: FVA210608W001

1.2 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC Part 15, Subpart B			
Standard Section	Test Item	Result	Test lab*
FCC Part 15, Subpart B, Class B ANSI C63.4:2014	Conducted Test	Compliance	A
	Radiated Emission Test (30MHz ~ 1GHz)	Compliance	A
	Radiated Emission Test (Above 1GHz)	Compliance	A

*Test Lab Information Reference

Lab A:

BV 7Layers Communications Technology (Shenzhen) Co. Ltd

Lab Address:

No.B102, Dazu Chuangxin Mansion, North of Beihuan Avenue, North Area, Hi-Tech Industrial Park, Nanshan District, Shenzhen, Guangdong, China

Accredited Test Lab Cert 3939.01



BUREAU
VERITAS

Test Report No.: FVA210608W001

1.3 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

MEASUREMENT	FREQUENCY	UNCERTAINTY
Conducted emissions	150kHz ~ 30MHz	±2.70dB
Radiated emissions	30MHz~1GHz	±4.98dB
	1GHz ~6GHz	±4.70dB
	6GHz ~18GHz	±4.60dB



BUREAU
VERITAS

Test Report No.: FVA210608W001

1.4 DESCRIPTION OF TEST MODES

Test Mode	Test Condition
Radiated emission test	
1	DC13.7V+ GSM850 Idle+GPS RX
2	DC13.7V+GSM1900 Idle+Glonass RX
3	DC13.7V+ GSM850 Link +GPS RX
4	DC13.7V+GSM1900 Link+Glonass RX

Conducted emission test	
1	DC13.7V+ GSM850 Idle+GPS RX
2	DC13.7V+GSM1900 Idle+Glonass RX
3	DC13.7V+ GSM850 Link +GPS RX
4	DC13.7V+GSM1900 Link+Glonass RX

NOTE:

1. For conducted emission test, test mode 3 was the verification case and only this mode was presented in this report.
2. For radiated emission test, test mode 3 was the verification case and only this mode was presented in this report



BUREAU
VERITAS

Test Report No.: FVA210608W001

1.5 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

FOR ALL TESTS

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	GPS Simulator +Antenna	TOJOIN	GNSS-5000A	E1-010-010119	N/A
2	Universal radio communication tester	Rohde&Schwarz	CMW500	N/A	N/A
3	DC source	LONG WEI	PS-6403D	010934269	N/A

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	N/A
2	N/A
3	N/A



BUREAU
VERITAS

Test Report No.: FVA210608W001

2 EMISSION TEST

2.1 CONDUCTED EMISSION MEASUREMENT

2.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

TEST STANDARD: FCC Part 15, Subpart B (Section: 15.107 a CLASS B)

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dB μ V)	
	Quasi-peak	Average
0.15 ~ 0.5	66 to 56	56 to 46
0.5 ~ 5	56	46
5 ~ 30	60	50

TEST STANDARD: FCC Part 15, Subpart B (Section: 15.107 b CLASS A)

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dB μ V)	
	Quasi-peak	Average
0.15 ~ 0.5	79	66
0.5 ~ 30	73	60

NOTE: 1. The lower limit shall apply at the transition frequencies.
2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.
3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

2.1.2 TEST INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
EMI Test Receiver	Rohde&Schwarz	ESR3	101900	Mar. 03,21	Mar. 02,22
EMC32 test software	Rohde&Schwarz	EMC32	NA	NA	NA
LISN network	Rohde&Schwarz	ENV216	101922	Feb. 25,21	Feb. 24,22

NOTE: 1. The test was performed in CE shielded room.



BUREAU
VERITAS

Test Report No.: FVA210608W001

2.1.3 TEST PROCEDURES

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150 kHz to 30MHz was searched. Emission levels under (Limit - 20dB) were not recorded.

NOTE: All modes of operation were investigated and the worst-case emissions are reported.

2.1.4 DEVIATION FROM TEST STANDARD


No deviation.



BUREAU
VERITAS

Test Report No.: FVA210608W001

2.1.5 TEST SETUP

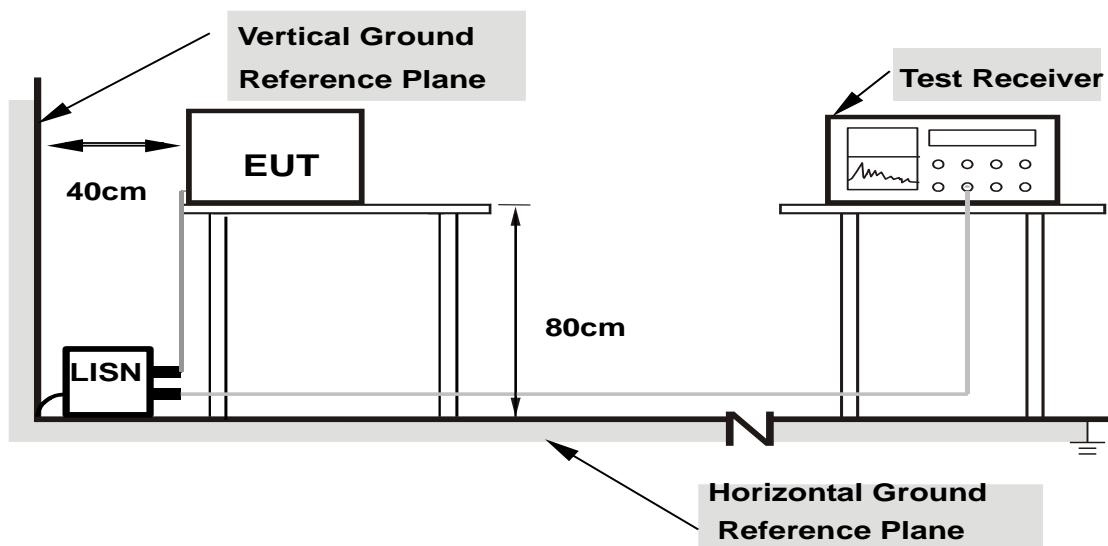

Note:

1. Support units were connected to second LISN.
2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

For the actual test configuration, please refer to the attached file (Test Setup Photo).

2.1.6 EUT OPERATING CONDITIONS

- a. Turned on the power and connected of all equipment.
- b. EUT was operated according to the use type described in the manufacturer's specifications or the user's manual.

BUREAU
VERITAS

Test Report No.: FVA210608W001

2.1.7 TEST RESULTS


TEST VOLTAGE	DC 13.7V From Adapter Input 120 Vac, 60 Hz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9 kHz
ENVIRONMENTAL CONDITIONS	25deg. C, 55%RH	TESTED BY	Carl xie

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.200000	---	30.08	53.53	23.45	L1	ON	9.7
0.202000	31.17	---	63.53	32.36	L1	ON	9.7
0.204000	---	29.39	53.45	24.05	L1	ON	9.7
0.204000	30.46	---	63.45	32.98	L1	ON	9.7
0.508000	---	10.86	46.00	35.14	L1	ON	9.7
0.508000	18.85	---	56.00	37.15	L1	ON	9.7
0.884000	---	23.19	46.00	22.81	L1	ON	9.8
0.884000	23.45	---	56.00	32.55	L1	ON	9.8
1.284000	---	17.35	46.00	28.65	L1	ON	9.8
1.284000	19.78	---	56.00	36.22	L1	ON	9.8
22.508000	---	13.34	50.00	36.66	L1	ON	9.8
22.508000	20.03	---	60.00	39.97	L1	ON	9.8

REMARKS: 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.

2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value
5. Correction factor = Insertion loss + Cable loss
6. Emission Level = Correction Factor + Reading Value.

Full Spectrum

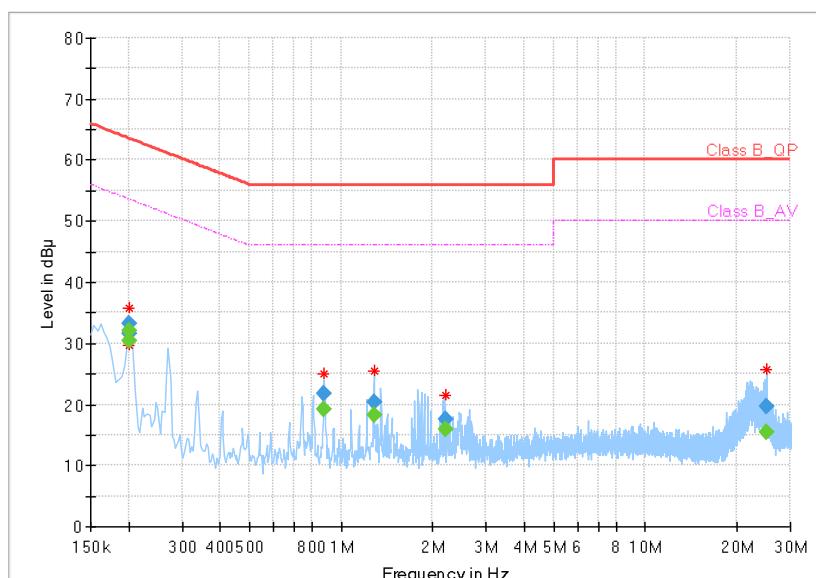

BUREAU
VERITAS

Test Report No.: FVA210608W001


TEST VOLTAGE	DC 13.7V From Adapter Input 120 Vac, 60 Hz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9 kHz
ENVIRONMENTAL CONDITIONS	25deg. C, 55%RH	TESTED BY	Carl xie

Frequency (MHz)	QuasiPeak (dB ⁺ IV)	CAverage (dB ⁺ IV)	Limit (dB ⁺ IV)	Margin (dB)	Line	Filter	Corr. (dB)
0.200000	---	30.16	53.61	23.45	N	ON	9.8
0.200000	31.23	---	63.61	32.38	N	ON	9.8
0.268000	---	25.40	51.18	25.77	N	ON	9.8
0.268000	26.87	---	61.18	34.31	N	ON	9.8
0.744000	---	17.44	46.00	28.56	N	ON	9.8
0.744000	19.40	---	56.00	36.60	N	ON	9.8
1.284000	---	18.30	46.00	27.70	N	ON	9.8
1.284000	20.68	---	56.00	35.32	N	ON	9.8
8.532000	---	4.80	50.00	45.20	N	ON	10.0
8.532000	6.51	---	60.00	53.49	N	ON	10.0
24.700000	---	14.81	50.00	35.19	N	ON	10.3
24.700000	19.15	---	60.00	40.85	N	ON	10.3

REMARKS: 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.

2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value
5. Correction factor = Insertion loss + Cable loss
6. Emission Level = Correction Factor + Reading Value.

Full Spectrum

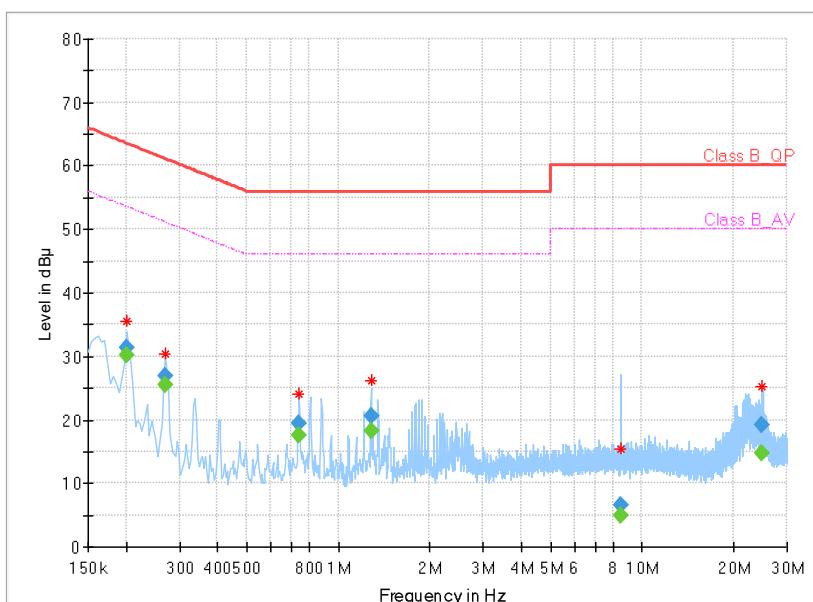



BUREAU
VERITAS

Test Report No.: FVA210608W001

2.2 RADIATED EMISSION MEASUREMENT

2.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

TEST STANDARD: FCC Part 15, Subpart B (Section: 15.109)

Emissions radiated outside of the specified bands, shall be according to the general radiated limits as following:

Radiated Emissions Limits at 10 meters (dB μ V/m)		
Frequencies (MHz)	FCC 15B Class A	FCC 15B Class B
30-88	39	29.5
88-216	43.5	33.1
216-230		
230-960	46.4	35.6
960-1000	49.5	43.5

Radiated Emissions Limits at 3 meters (dB μ V/m)		
Frequencies (MHz)	FCC 15B Class A	FCC 15B Class B
1000-3000	Avg: 60	Avg: 54
3000+	Peak: 80	Peak: 74

Frequency Range (For unintentional radiators)

Highest frequency generated or used in the device or on which the device operates or tunes (MHz)	Upper frequency of measurement range (MHz)
Below 1.705	30
1.705-108	1000
108-500	2000
500-1000	5000
Above 1000	5 th harmonic of the highest frequency or 40GHz, whichever is lower

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dB μ V/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.
4. QP detector shall be applied if not specified.



BUREAU
VERITAS

Test Report No.: FVA210608W001

2.2.2 TEST INSTRUMENTS

Frequency range below 1GHz

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
3m Semi-anechoic Chamber	ETS-LINDGREN	9m*6m*6m	Euroshieldpn-CT0001143-1216	May. 19,20	May. 18,23
Bilog Antenna	ETS-LINDGREN	3143B	00161965	Mar. 05,21	Mar. 04,22
MXE EMI Receiver	KEYSIGHT	N9038A-544	MY54450026	Apr. 22,21	Apr. 21,22
Signal Pre-Amplifier	EMSI	EMC 9135	980249	Jun. 02,20	Jun. 01,21
Signal Pre-Amplifier	EMSI	EMC 9135	980249	Jun. 01,21	May. 31,22

Frequency range above 1GHz

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
3m Semi-anechoic Chamber	ETS-LINDGREN	9m*6m*6m	Euroshieldpn-CT0001143-1216	May. 19,20	May. 18,23
Horn Antenna	ETS-LINDGREN	3117	00168728	Apr. 02,21	Apr. 01,22
MXE EMI Receiver	KEYSIGHT	N9038A-544	MY54450026	Apr. 22,21	Apr. 21,22
Signal Pre-Amplifier	EMSI	EMC 012645B	980257	Jun. 02,20	Jun. 01,21
Signal Pre-Amplifier	EMSI	EMC 012645B	980257	Jun. 01,21	May. 31,22

NOTE: 1. The test was performed in 3m chamber.
2. The calibration interval of the above test instruments is 12 months or 24 months and the calibrations are traceable to CEPREI/CHINA, GRRG/CHINA and NIM/CHINA.
3. The FCC Site Registration No. is 525120; The Designation No. is CN1171.



BUREAU
VERITAS

Test Report No.: FVA210608W001

2.2.3 TEST PROCEDURE

<Frequency Range below 1GHz>

The basic test procedure was in accordance with ANSI C63.4:2014 (section 12).

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 10 meter semi-anechoic chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from 1 meter to 4 meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1GHz.

NOTE:

1. The resolution bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
3. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) (if the raw value not contains the amplifier);
4. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) – Amplifier Gain(dB) (if the raw value contains the amplifier).
5. Margin value = Emission level – Limit value.



BUREAU
VERITAS

Test Report No.: FVA210608W001

<Frequency Range above 1GHz>

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter fully-anechoic chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. The bore sight should be used during the test above 1GHz.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz

NOTE:

1. The resolution bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth is 1MHz and video bandwidth of test receiver/spectrum analyzer is 3MHz for Peak detection at frequency above 1GHz. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and video bandwidth of test receiver/spectrum analyzer is 1Hz for Average detection (AV) at frequency above 1GHz.
3. For measurement of frequency above 1000 MHz, the EUT was set 3 meters away from the receiver antenna.
4. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
5. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) (if the raw value not contains the amplifier);
6. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) – Amplifier Gain(dB) (if the raw value contains the amplifier)
7. Margin value = Emission level – Limit value.


2.2.4 DEVIATION FROM TEST STANDARD

No deviation.




2.2.5 TEST SETUP

<Frequency Range below 1GHz>

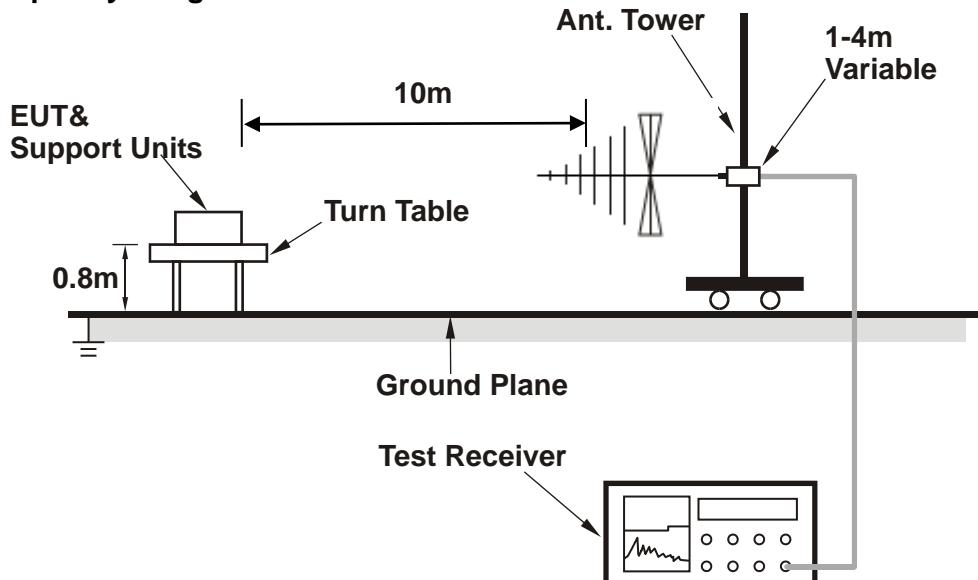

<Frequency Range above 1GHz>

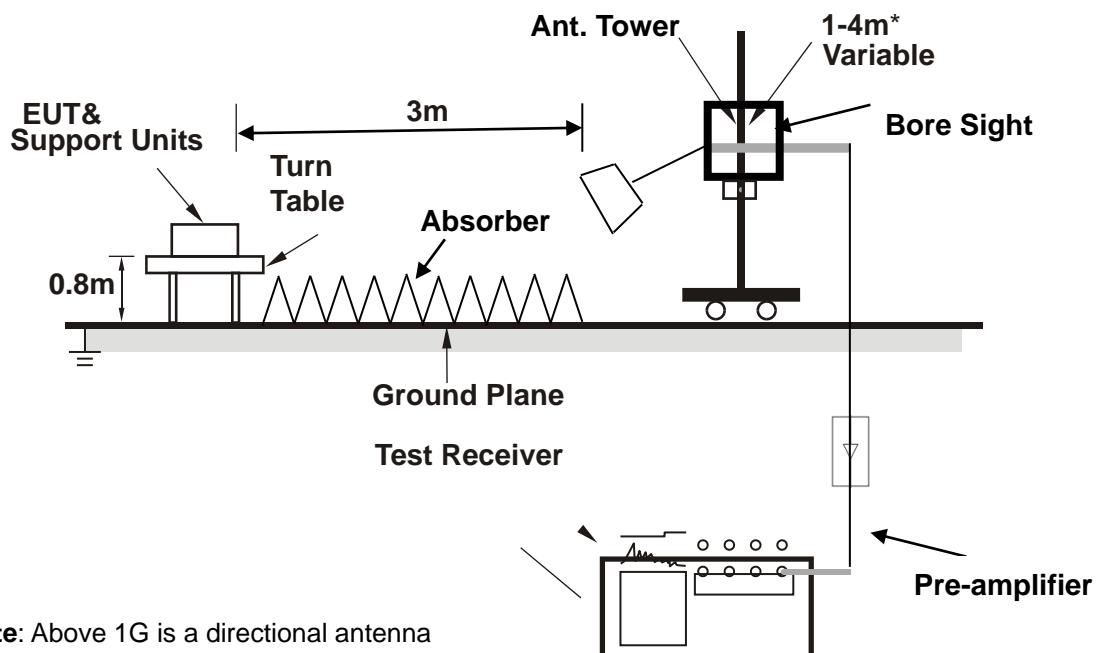

Note: Above 1G is a directional antenna

depends on the EUT height and the antenna 3dB bandwidth both, refer to section 7.3 of CISPR 16-2-3.

2.2.6 EUT OPERATING CONDITIONS

Same as item 2.1.6.



BUREAU
VERITAS

Test Report No.: FVA210608W001


2.2.7 TEST RESULTS

TEST VOLTAGE	DC 13.7V	FREQUENCY RANGE	30-1000 MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70 %RH	DETECTOR FUNCTION & RESOLUTION BANDWIDTH	Quasi-Peak, 120 kHz
TESTED BY	Jace Hu		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
44.55	30.57	56.51	40	-9.43	11.48	0	37.42	200	0	Peak
113.42	31.94	61.05	43.5	-11.56	8	0	37.11	200	0	Peak
138.64	21.6	50.43	43.5	-21.9	8.09	0	36.92	200	0	Peak
306.45	26.76	49.33	46	-19.24	14.19	0	36.76	200	0	Peak
487.84	31.79	50.29	46	-14.21	18.48	0	36.98	200	0	Peak
621.7	28.6	44.87	46	-17.4	21.13	0	37.4	200	0	Peak

REMARKS:

1. Peak detector quick scan is showed on the graph and final quasi-peak detector data is measured corresponding to relevant limit and recorded in the data table.
2. Negative sign (-) in the margin column signify levels below the limit.
3. Frequency range scanned: 30MHz to 1000MHz.
4. Only emissions significantly above equipment noise floor are reported.

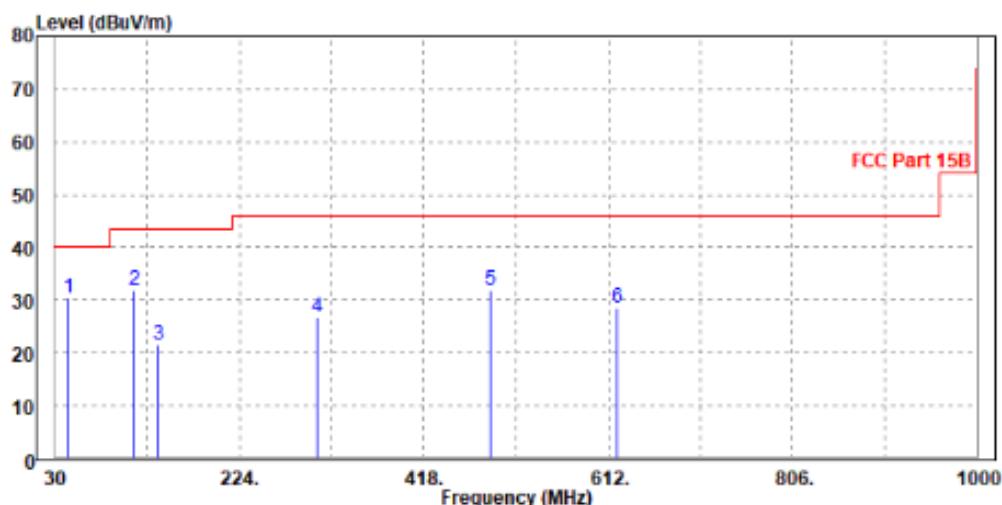



BUREAU
VERITAS


Test Report No.: FVA210608W001

TEST VOLTAGE	DC 13.7V	FREQUENCY RANGE	30-1000 MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70 %RH	DETECTOR FUNCTION & RESOLUTION BANDWIDTH	Quasi-Peak, 120 kHz
TESTED BY	Jace Hu		

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
44.55	29.22	55.9	40	-10.78	10.74	0	37.42	200	0	Peak
113.42	27.83	56.74	43.5	-15.67	8.2	0	37.11	200	0	Peak
277.35	20.5	42.74	46	-25.5	14.46	0	36.7	200	0	Peak
377.26	22.53	42.64	46	-23.47	16.7	0	36.81	200	0	Peak
472.32	33.5	51.88	46	-12.5	18.57	0	36.95	200	0	Peak
619.76	25.3	41.52	46	-20.7	21.18	0	37.4	200	0	Peak

REMARKS:

1. Peak detector quick scan is showed on the graph and final quasi-peak detector data is measured corresponding to relevant limit and recorded in the data table.
2. Negative sign (-) in the margin column signify levels below the limit.
3. Frequency range scanned: 30MHz to 1000MHz.
4. Only emissions significantly above equipment noise floor are reported.

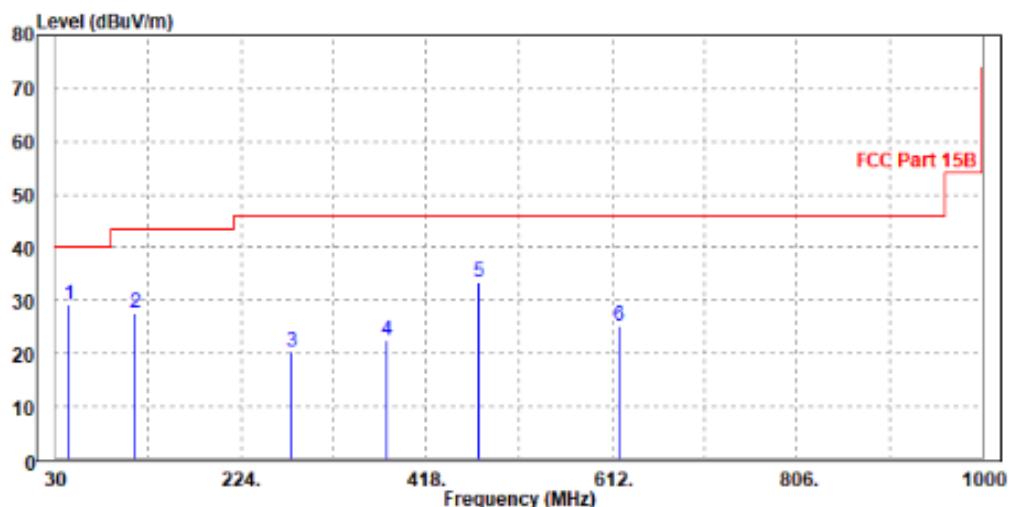



BUREAU
VERITAS


Test Report No.: FVA210608W001

TEST VOLTAGE	DC 13.7V	FREQUENCY RANGE	1-18 GHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70 %RH	DETECTOR FUNCTION & RESOLUTION BANDWIDTH	Peak/Average, 1 MHz
TESTED BY	Jace Hu		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
3669	51.81	57.6	74	-22.19	33.1	7.49	46.38	100	0	Peak
3669	36.57	42.36	54	-17.43	33.1	7.49	46.38	100	0	Average
5743	55.93	55.75	74	-18.07	35.09	11.27	46.18	100	0	Peak
5743	44.51	44.33	54	-9.49	35.09	11.27	46.18	100	0	Average
8395	51.1	47.93	74	-22.9	35.76	12.87	45.46	100	0	Peak
8395	43.28	40.11	54	-10.72	35.76	12.87	45.46	100	0	Average

REMARKS:

1. Peak detector quick scan is showed on the graph and final quasi-peak detector data is measured corresponding to relevant limit and recorded in the data table.
2. Negative sign (-) in the margin column signify levels below the limit.
3. Frequency range scanned: 1GHz to 18GHz.
4. Only emissions significantly above equipment noise floor are reported.

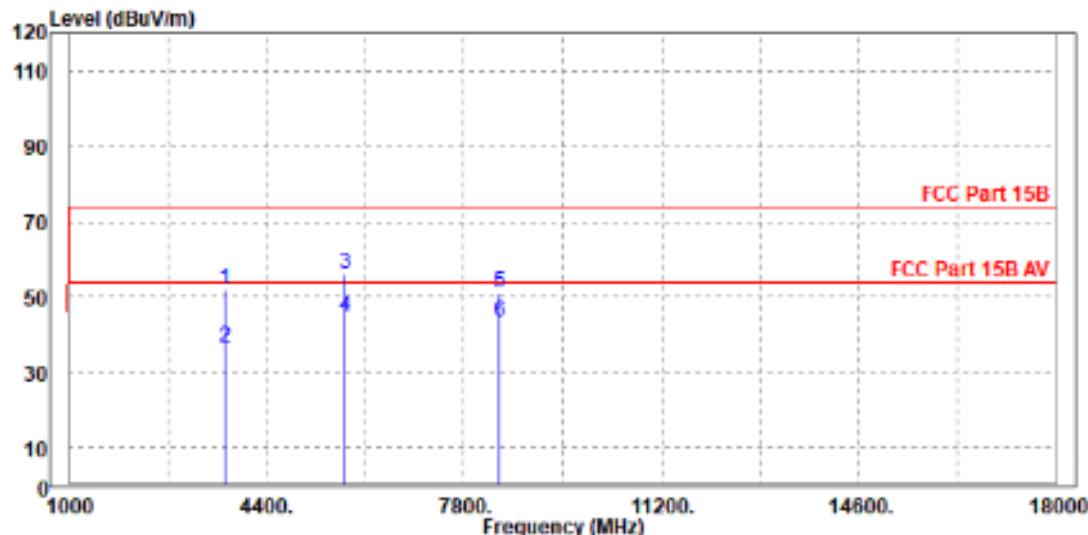

BUREAU
VERITAS


Test Report No.: FVA210608W001

TEST VOLTAGE	DC 13.7V	FREQUENCY RANGE	1-18 GHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70 %RH	DETECTOR FUNCTION & RESOLUTION BANDWIDTH	Peak/Average, 1 MHz
TESTED BY	Jace Hu		

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
3601	51.17	57.3	74	-22.83	32.96	7.29	46.38	200	0	Peak
3601	31.42	37.55	54	-22.58	32.96	7.29	46.38	200	0	Average
6576	52.3	49.87	74	-21.7	35.85	12.53	45.95	200	0	Peak
6576	42.95	40.52	54	-11.05	35.85	12.53	45.95	200	0	Average
9772	51.92	46.67	74	-22.08	37.37	13.09	45.21	200	0	Peak
9772	44.47	39.22	54	-9.53	37.37	13.09	45.21	200	0	Average

REMARKS:

1. Peak detector quick scan is showed on the graph and final quasi-peak detector data is measured corresponding to relevant limit and recorded in the data table.
2. Negative sign (-) in the margin column signify levels below the limit.
3. Frequency range scanned: 1GHz to 18GHz.
4. Only emissions significantly above equipment noise floor are reported.

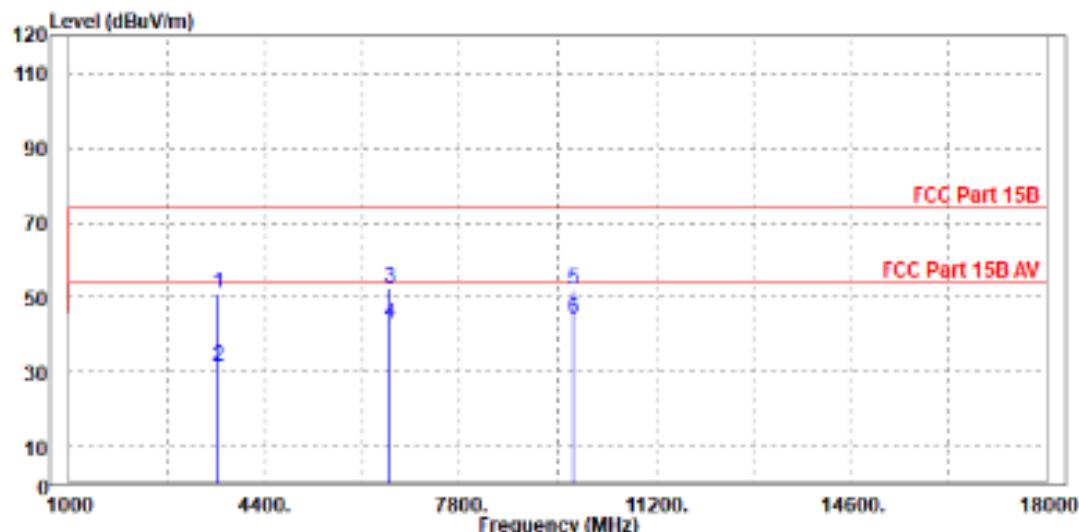



**BUREAU
VERITAS** Test Report No.: FVA210608W001

3 APPENDIX A – MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No any modifications were made to the EUT by the lab during the test.

---END---