



FCC RF Test Report

APPLICANT : Mobile Devices Ingénierie
EQUIPMENT : Telematics embedded system
BRAND NAME : Mobile Devices Ingenierie /MUNIC
MODEL NAME : C4D-4G4USAA_V6+
MARKETING NAME : C4D-4G4USAA_V6+
FCC ID : A6GC4D-4G4USV6
STANDARD : 47 CFR Part 2, 22(H), 24(E), 27(L), 27(H), 27(F)
CLASSIFICATION : PCS Licensed Transmitter (PCB)

The product was received on Sep. 25, 2018 and completely tested on Oct. 11, 2018. We, Sporton International (Shenzhen) Inc., would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.26-2015 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International (Shenzhen) Inc., the test report shall not be reproduced except in full.



Approved by: Eric Shih / Manager

Sporton International (Shenzhen) Inc.

***1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan Shenzhen City
Guangdong Province 518055 China***



TABLE OF CONTENTS

REVISION HISTORY	3
SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION	5
1.1 Applicant	5
1.2 Manufacturer	5
1.3 Product Feature of Equipment Under Test	5
1.4 Product Specification of Equipment Under Test	6
1.5 Modification of EUT	6
1.6 Maximum ERP/EIRP Power, Frequency Tolerance, and Emission Designator	7
1.7 Testing Location	9
1.8 Applicable Standards	9
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST	10
2.1 Test Mode	10
2.2 Connection Diagram of Test System	12
2.3 Support Unit used in test configuration and system	12
2.4 Measurement Results Explanation Example	12
2.5 Frequency List of Low/Middle/High Channels	13
3 CONDUCTED TEST ITEMS	15
3.1 Measuring Instruments	15
3.2 Test Setup	15
3.3 Test Result of Conducted Test	15
3.4 Conducted Output Power and ERP/EIRP	16
3.5 Peak-to-Average Ratio	17
3.6 Occupied Bandwidth	18
3.7 Conducted Band Edge	19
3.8 Conducted Spurious Emission	21
3.9 Frequency Stability	22
4 RADIATED TEST ITEMS	23
4.1 Measuring Instruments	23
4.2 Test Setup	23
4.3 Test Result of Radiated Test	23
4.4 Radiated Spurious Emission	24
5 LIST OF MEASURING EQUIPMENT	25
6 UNCERTAINTY OF EVALUATION	26
APPENDIX A. TEST RESULTS OF CONDUCTED TEST	
APPENDIX B. TEST RESULTS OF RADIATED TEST	
APPENDIX C. TEST SETUP PHOTOGRAPHS	



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FG892506B	Rev. 01	Initial issue of report	Oct. 19, 2018

SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.4	§2.1046	Conducted Output Power	Reporting Only	PASS	-
	§22.913(a)(5)	Effective Radiated Power (Band 5)	ERP < 7 Watt	PASS	-
	§27.50(b)(10) §27.50(c)(10)	Effective Radiated Power (Band 12) (Band 13)	ERP < 3 Watt	PASS	-
	§24.232(c)	Equivalent Isotropic Radiated Power (Band 2)	EIRP < 2Watt	PASS	-
	§27.50(d)(4)	Equivalent Isotropic Radiated Power (Band 4)	EIRP < 1Watt	PASS	-
3.5	§24.232(d)	Peak-to-Average Ratio	<13 dB	PASS	-
3.6	§2.1049	Occupied Bandwidth	Reporting Only	PASS	-
3.7	§2.1051 §22.917(a) §24.238(a) §27.53(c)(2)(4) §27.53(g) §27.53(h)	Conducted Band Edge Measurement (Band 2) (Band 4) (Band 5) (Band 12) (Band 13)	< 43+10log ₁₀ (P[Watts])	PASS	-
3.8	§2.1051 §22.917(a) §24.238(a) §27.53(c)(2) §27.53(g) §27.53(h)	Conducted Spurious Emission (Band 2) (Band 4) (Band 5) (Band 12) (Band 13)	< 43+10log ₁₀ (P[Watts])	PASS	-
3.9	§2.1055 §22.355	Frequency Stability Temperature & Voltage	< 2.5 ppm for Part 22	PASS	-
	§2.1055 §24.235 §27.54		Within Authorized Band		
4.4	§2.1053 §22.917(a) §24.238(a) §27.53(c)(2) §27.53(f) §27.53(g) §27.53(h)	Radiated Spurious Emission (Band 2) (Band 4) (Band 5) (Band 12) (Band 13)	< 43+10log ₁₀ (P[Watts])	PASS	Under limit 1.13 dB at 1559.50 MHz



1 General Description

1.1 Applicant

Mobile Devices Ingénierie

100 Avenue de Stalingrad 94800 Villejuif FRANCE

1.2 Manufacturer

Mobile Devices Ingénierie

100 Avenue de Stalingrad 94800 Villejuif FRANCE

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Telematics embedded system
Brand Name	Mobile Devices Ingenierie /MUNIC
Model Name	C4D-4G4USAA_V6+
Marketing Name	C4D-4G4USAA_V6+
FCC ID	A6GC4D-4G4USV6
EUT supports Radios application	WCDMA/HSPA/LTE WLAN 2.4GHz 802.11b/g/n HT20 Bluetooth LE
IMEI Code	Conducted: 358148061168279 Radiation: N/A
HW Version	SAP00362+SAP00398
SW Version	V2093
EUT Stage	Identical Prototype

1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx Frequency	LTE Band 2 : 1850.7 MHz ~ 1909.3 MHz LTE Band 4 : 1710.7 MHz ~ 1754.3 MHz LTE Band 5 : 824.7 MHz ~ 848.3 MHz LTE Band 12 : 699.7 MHz ~ 715.3 MHz LTE Band 13 : 779.5 MHz ~ 784.5 MHz
Rx Frequency	LTE Band 2 : 1930.7 MHz ~ 1989.3 MHz LTE Band 4 : 2110.7 MHz ~ 2154.3 MHz LTE Band 5 : 869.7 MHz ~ 893.3 MHz LTE Band 12 : 729.7 MHz ~ 745.3 MHz LTE Band 13 : 748.5 MHz ~ 753.5 MHz
Bandwidth	LTE Band 2 : 1.4MHz / 3MHz / 5MHz / 10MHz / 15MHz / 20MHz LTE Band 4 : 1.4MHz / 3MHz / 5MHz / 10MHz / 15MHz / 20MHz LTE Band 5 : 1.4MHz / 3MHz / 5MHz / 10MHz LTE Band 12 : 1.4MHz / 3MHz / 5MHz / 10MHz LTE Band 13 : 5MHz / 10MHz
Maximum Output Power to Antenna	LTE Band 2 : 22.50 dBm LTE Band 4 : 22.10 dBm LTE Band 5 : 22.44 dBm LTE Band 12 : 23.01 dBm LTE Band 13 : 22.35 dBm
Antenna Gain	LTE Band 2 : 1.00 dBi LTE Band 4 : 1.00 dBi LTE Band 5 : 0.50 dBi LTE Band 12 : 0.50 dBi LTE Band 13 : 0.50 dBi
Type of Modulation	QPSK / 16QAM

1.5 Modification of EUT

No modifications are made to the EUT during all test items.



1.6 Maximum ERP/EIRP Power, Frequency Tolerance, and Emission Designator

LTE Band 2		QPSK			16QAM		
BW (MHz)	Frequency Range (MHz)	Emission Designator (99%OBW)	Frequency Tolerance (ppm)	Maximum EIRP(W)	Emission Designator (99%OBW)	Frequency Tolerance (ppm)	Maximum EIRP(W)
1.4	1850.7 ~ 1909.3	1M10G7D	-	0.2037	1M10W7D	-	0.1687
3	1851.5 ~ 1908.5	2M73G7D	-	0.1963	2M75W7D	-	0.1824
5	1852.5 ~ 1907.5	4M51G7D	-	0.1968	4M49W7D	-	0.1730
10	1855.0 ~ 1905.0	9M07G7D	0.0115	0.2133	9M13W7D	-	0.1866
15	1857.5 ~ 1902.5	13M5G7D	-	0.2188	13M4W7D	-	0.1866
20	1860.0 ~ 1900.0	18M4G7D	-	0.2239	18M5W7D	-	0.1995
LTE Band 4		QPSK			16QAM		
BW (MHz)	Frequency Range (MHz)	Emission Designator (99%OBW)	Frequency Tolerance (ppm)	Maximum EIRP(W)	Emission Designator (99%OBW)	Frequency Tolerance (ppm)	Maximum EIRP(W)
1.4	1710.7 ~ 1754.3	1M11G7D	-	0.2023	1M10W7D	-	0.1816
3	1711.5 ~ 1753.5	2M73G7D	-	0.1982	2M72W7D	-	0.1648
5	1712.5 ~ 1752.5	4M50G7D	-	0.2004	4M49W7D	-	0.1837
10	1715.0 ~ 1750.0	9M07G7D	0.0102	0.2014	9M07W7D	-	0.1972
15	1717.5 ~ 1747.5	13M5G7D	-	0.2028	13M5W7D	-	0.1959
20	1720.0 ~ 1745.0	18M4G7D	-	0.2042	18M4W7D	-	0.1824
LTE Band 5		QPSK			16QAM		
BW (MHz)	Frequency Range (MHz)	Emission Designator (99%OBW)	Frequency Tolerance (ppm)	Maximum ERP(W)	Emission Designator (99%OBW)	Frequency Tolerance (ppm)	Maximum ERP(W)
1.4	824.7 ~ 848.3	1M10G7D	-	0.1180	1M10W7D	-	0.0948
3	825.5 ~ 847.5	2M73G7D	-	0.1143	2M75W7D	-	0.1012
5	826.5 ~ 846.5	4M50G7D	-	0.1146	4M49W7D	-	0.1047
10	829.0 ~ 844.0	9M11G7D	0.0031	0.1199	9M07W7D	-	0.1016
LTE Band 12		QPSK			16QAM		
BW (MHz)	Frequency Range (MHz)	Emission Designator (99%OBW)	Frequency Tolerance (ppm)	Maximum ERP(W)	Emission Designator (99%OBW)	Frequency Tolerance (ppm)	Maximum ERP(W)
1.4	699.7 ~ 715.3	1M10G7D	-	0.1358	1M10W7D	-	0.1148
3	700.5 ~ 714.5	2M74G7D	-	0.1337	2M72W7D	-	0.1225
5	701.5 ~ 713.5	4M52G7D	-	0.1355	4M49W7D	-	0.1135
10	704.0 ~ 711.0	9M19G7D	0.0133	0.1368	9M07W7D	-	0.1211



LTE Band 13		QPSK			16QAM		
BW (MHz)	Frequency Range (MHz)	Emission Designator (99%OBW)	Frequency Tolerance (ppm)	Maximum ERP(W)	Emission Designator (99%OBW)	Frequency Tolerance (ppm)	Maximum ERP(W)
5	779.5 ~ 784.5	4M52G7D	-	0.1151	4M51W7D	-	0.1096
10	782.0	9M05G7D	0.0189	0.1175	9M17W7D	-	0.1064

1.7 Testing Location

Sporton Lab is accredited to ISO 17025 by National Voluntary Laboratory Accreditation Program (NVLAP code: 600156-0).

Test Site	Sporton International (Shenzhen) Inc.		
Test Site Location	1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen City, Guangdong Province 518055, China TEL: +86-755-8637-9589 FAX: +86-755-8637-9595		
Test Site No.	Sporton Site No.	FCC designation No.	FCC Test Firm Registration No.
	TH01-SZ	CN5018	337463

Test Site	Sporton International (Shenzhen) Inc.		
Test Site Location	No. 3 Bldg the third floor of south, Shahe River west, Fengzeyuan Warehouse, Nanshan District, Shenzhen City, Guangdong Province 518055, China TEL: +86-755- 3320-2398		
Test Site No.	Sporton Site No.	FCC designation No.	FCC Test Firm Registration No.
	03CH02-SZ	CN5019	577730

1.8 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 2, 22(H), 24(E), 27(L), 27(H), 27(F)
- ♦ ANSI C63.26-2015
- ♦ FCC KDB 971168 D01 Power Meas License Digital Systems v03r01
- ♦ FCC KDB 412172 D01 Determining ERP and EIRP v01r01

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



2 Test Configuration of Equipment Under Test

2.1 Test Mode

Antenna port conducted and radiated test items listed below are performed according to KDB 971168 D01 Power Meas License Digital Systems v03r01 with maximum output power.


Radiated measurements are performed by rotating the EUT in three different orthogonal test planes to find the maximum emission.

Test Items	Band	Bandwidth (MHz)						Modulation			RB #			Test Channel		
		1.4	3	5	10	15	20	QPSK	16QAM	64QAM	1	Half	Full	L	M	H
Max. Output Power	2	v	v	v	v	v	v	v	v		v	v	v	v	v	v
	4	v	v	v	v	v	v	v	v		v	v	v	v	v	v
	5	v	v	v	v	-	-	v	v		v	v	v	v	v	v
	12	v	v	v	v	-	-	v	v		v	v	v	v	v	v
	13	-	-	v		-	-	v	v		v	v	v	v	v	v
	13	-	-		v	-	-	v	v		v	v	v		v	
Peak-to-Average Ratio	2						v	v	v		v		v	v	v	v
	4						v	v	v		v		v	v	v	v
	5				v	-	-	v	v		v		v	v	v	v
	12				v	-	-	v	v		v		v	v	v	v
	13	-	-		v	-	-	v	v		v		v	v	v	v
26dB and 99% Bandwidth	2	v	v	v	v	v	v	v	v				v	v	v	v
	4	v	v	v	v	v	v	v	v				v	v	v	v
	5	v	v	v	v	-	-	v	v				v	v	v	v
	12	v	v	v	v	-	-	v	v				v	v	v	v
	13	-	-	v		-	-	v	v				v	v	v	v
	13	-	-		v	-	-	v	v				v		v	
Conducted Band Edge	2	v	v	v	v	v	v	v	v		v		v	v		v
	4	v	v	v	v	v	v	v	v		v		v	v		v
	5	v	v	v	v	-	-	v	v		v		v	v		v
	12	v	v	v	v	-	-	v	v		v		v	v		v
	13	-	-	v		-	-	v	v		v		v	v		v
	13	-	-		v	-	-	v	v		v		v		v	



Test Items	Band	Bandwidth (MHz)						Modulation			RB #			Test Channel		
		1.4	3	5	10	15	20	QPSK	16QAM	64QAM	1	Half	Full	L	M	H
Conducted Spurious Emission	2	v	v	v	v	v	v	v	v		v			v	v	v
	4	v	v	v	v	v	v	v	v		v			v	v	v
	5	v	v	v	v	-	-	v	v		v			v	v	v
	12	v	v	v	v	-	-	v	v		v			v	v	v
	13	-	-	v		-	-	v	v		v			v	v	v
	13	-	-		v	-	-	v	v		v				v	
Frequency Stability	2				v			v					v		v	
	4				v			v					v		v	
	5				v	-	-	v					v		v	
	12				v	-	-	v					v		v	
	13	-	-		v	-	-	v					v		v	
E.R.P / E.I.R.P	2	v	v	v	v	v	v	v	v		v			v	v	v
	4	v	v	v	v	v	v	v	v		v			v	v	v
	5	v	v	v	v	-	-	v	v		v			v	v	v
	12	v	v	v	v	-	-	v	v		v			v	v	v
	13	-	-	v		-	-	v	v		v			v	v	v
	13	-	-		v	-	-	v	v		v				v	
Radiated Spurious Emission	2	v	v	v	v	v	v	v			v				v	
	4	v	v	v	v	v	v	v			v				v	
	5	v	v	v	v	-	-	v			v				v	
	12	v	v	v	v	-	-	v			v				v	
	13	-	-	v	v	-	-	v			v				v	
Note	- The mark "v" means that this configuration is chosen for testing - The mark "-" means that this bandwidth is not supported. - The device is investigated from 30MHz to 10 times of fundamental signal for radiated spurious emission test under different RB size/offset and modulations in exploratory test. Subsequently, only the worst case emissions are reported.															

2.2 Connection Diagram of Test System

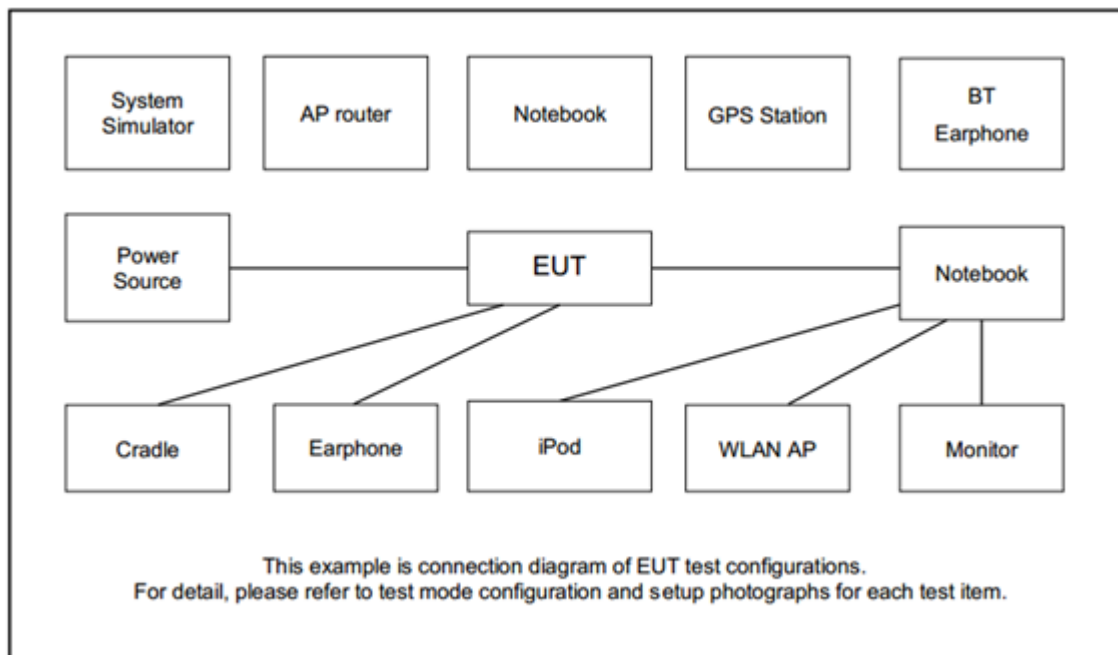

2.3 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model No.	FCC ID	Data Cable	Power Cord
1.	LTE Base Station	Anritsu	MT8820C	N/A	N/A	Unshielded, 1.8 m
2.	DC Power Supply	Topward	3303DR	N/A	N/A	Unshielded, 1.8m

2.4 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 4.5 dB and 10dB attenuator.

Example :

$$\begin{aligned}
 \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)}. \\
 &= 4.5 + 10 = 14.5 \text{ (dB)}
 \end{aligned}$$



2.5 Frequency List of Low/Middle/High Channels

LTE Band 2 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
20	Channel	18700	18900	19100
	Frequency	1860	1880	1900
15	Channel	18675	18900	19125
	Frequency	1857.5	1880	1902.5
10	Channel	18650	18900	19150
	Frequency	1855	1880	1905
5	Channel	18625	18900	19175
	Frequency	1852.5	1880	1907.5
3	Channel	18615	18900	19185
	Frequency	1851.5	1880	1908.5
1.4	Channel	18607	18900	19193
	Frequency	1850.7	1880	1909.3

LTE Band 4 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
20	Channel	20050	20175	20300
	Frequency	1720	1732.5	1745
15	Channel	20025	20175	20325
	Frequency	1717.5	1732.5	1747.5
10	Channel	20000	20175	20350
	Frequency	1715	1732.5	1750
5	Channel	19975	20175	20375
	Frequency	1712.5	1732.5	1752.5
3	Channel	19965	20175	20385
	Frequency	1711.5	1732.5	1753.5
1.4	Channel	19957	20175	20393
	Frequency	1710.7	1732.5	1754.3



LTE Band 5 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
10	Channel	20450	20525	20600
	Frequency	829	836.5	844
5	Channel	20425	20525	20625
	Frequency	826.5	836.5	846.5
3	Channel	20415	20525	20635
	Frequency	825.5	836.5	847.5
1.4	Channel	20407	20525	20643
	Frequency	824.7	836.5	848.3

LTE Band 12 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
10	Channel	23060	23095	23130
	Frequency	704	707.5	711
5	Channel	23035	23095	23155
	Frequency	701.5	707.5	713.5
3	Channel	23025	23095	23165
	Frequency	700.5	707.5	714.5
1.4	Channel	23017	23095	23173
	Frequency	699.7	707.5	715.3

LTE Band 13 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
10	Channel	-	23230	-
	Frequency	-	782	-
5	Channel	23205	23230	23255
	Frequency	779.5	782	784.5


3 Conducted Test Items

3.1 Measuring Instruments


See list of measuring instruments of this test report.

3.2 Test Setup

3.2.1 Conducted Output Power



3.2.2 Peak-to-Average Ratio, Occupied Bandwidth ,Conducted Band-Edge and Conducted Spurious Emission

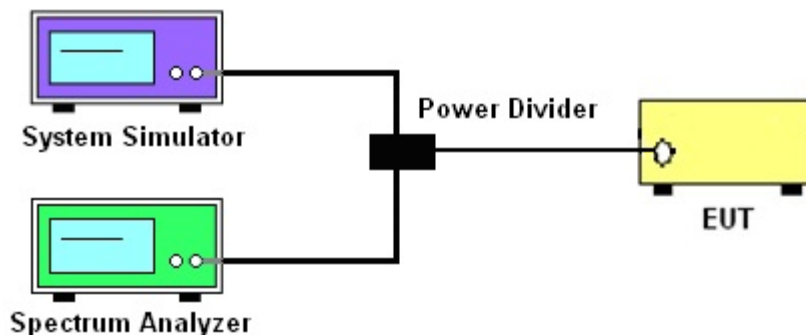

3.2.3 Frequency Stability



3.3 Test Result of Conducted Test

Please refer to Appendix A.

3.4 Conducted Output Power and ERP/EIRP

3.4.1 Description of the Conducted Output Power Measurement and ERP/EIRP Measurement

A system simulator was used to establish communication with the EUT. Its parameters were set to force the EUT transmitting at maximum output power. The measured power in the radio frequency on the transmitter output terminals shall be reported.

The ERP of mobile transmitters must not exceed 7 Watts for LTE Band 5.

The ERP of mobile transmitters must not exceed 3 Watts for LTE Band 12 and Band 13.

The EIRP of mobile transmitters must not exceed 2 Watts for LTE Band 2.

The EIRP of mobile transmitters must not exceed 1 Watts for LTE Band 4.

According to KDB 412172 D01 Power Approach,

$EIRP = P_T + G_T - L_C$, $ERP = EIRP - 2.15$, where

P_T = transmitter output power in dBm

G_T = gain of the transmitting antenna in dBi

L_C = signal attenuation in the connecting cable between the transmitter and antenna in dB

3.4.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.2
2. The transmitter output port was connected to the system simulator.
3. Set EUT at maximum power through the system simulator.
4. Select lowest, middle, and highest channels for each band and different modulation.
5. Measure and record the power level from the system simulator.

3.5 Peak-to-Average Ratio

3.5.1 Description of the PAR Measurement

Power Complementary Cumulative Distribution Function (CCDF) curves provide a means for characterizing the power peaks of a digitally modulated signal on a statistical basis. A CCDF curve depicts the probability of the peak signal amplitude exceeding the average power level. Most contemporary measurement instrumentation include the capability to produce CCDF curves for an input signal provided that the instrument's resolution bandwidth can be set wide enough to accommodate the entire input signal bandwidth. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

3.5.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.2.3.4 (CCDF).
2. The EUT was connected to spectrum and system simulator via a power divider.
3. Set the CCDF (Complementary Cumulative Distribution Function) option in spectrum analyzer.
4. The highest RF powers were measured and recorded the maximum PAPR level associated with a probability of 0.1 %.
5. Record the deviation as Peak to Average Ratio.

3.6 Occupied Bandwidth

3.6.1 Description of Occupied Bandwidth Measurement

The occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

The 26 dB emission bandwidth is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated 26 dB below the maximum in-band spectral density of the modulated signal. Spectral density (power per unit bandwidth) is to be measured with a detector of resolution bandwidth equal to approximately 1.0% of the emission bandwidth.

3.6.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.4
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the spectrum analyzer shall be between two and five times the anticipated OBW.
4. The nominal resolution bandwidth (RBW) shall be in the range of 1 to 5 % of the anticipated OBW, and the VBW shall be at least 3 times the RBW.
5. Set the detection mode to peak, and the trace mode to max hold.
6. Determine the reference value: Set the EUT to transmit a modulated signal. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace.
(this is the reference value)
7. Determine the “-26 dB down amplitude” as equal to (Reference Value – X).
8. Place two markers, one at the lowest and the other at the highest frequency of the envelope of the spectral display such that each marker is at or slightly below the “-X dB down amplitude” determined in step 6. If a marker is below this “-X dB down amplitude” value it shall be placed as close as possible to this value. The OBW is the positive frequency difference between the two markers.
9. Use the 99 % power bandwidth function of the spectrum analyzer and report the measured bandwidth.

3.7 Conducted Band Edge

3.7.1 Description of Conducted Band Edge Measurement

22.917(a)

For operations in the 824 – 849 MHz band, the FCC limit is $43 + 10\log_{10}(P[\text{Watts}])$ dB below the transmitter power $P(\text{Watts})$ in a 100kHz bandwidth. However, in the 1MHz bands immediately outside and adjacent to the licensee's frequency block, a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

24.238 (a)

For operations in the 1850-1910 and 1930-1990 MHz band, the FCC limit is $43 + 10\log_{10}(P[\text{Watts}])$ dB below the transmitter power $P(\text{Watts})$ in a 1MHz bandwidth. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

27.53 (c)

For operations in the 776-788 MHz band, the FCC limit is $43 + 10\log_{10}(P[\text{Watts}])$ dB below the transmitter power $P(\text{Watts})$ in a 100 kHz bandwidth. However, in the 100 kHz bands immediately outside and adjacent to the frequency block, a resolution bandwidth of at least 30 kHz may be employed. In addition, the power of any unwanted emissions in any 6.25 kHz bandwidth for all frequencies between 763-775 MHz and 793-806 MHz shall be attenuated below the transmitter power, P (dBW), by at least $65 + 10 \log_{10} p(\text{watts})$, dB, for mobile and portable equipment.

27.53 (g)

For operations in the 600MHz band and 698 -746 MHz band, the FCC limit is $43 + 10\log_{10}(P[\text{Watts}])$ dB below the transmitter power $P(\text{Watts})$ in a 100 kHz bandwidth. However, in the 100 kilohertz bands immediately outside and adjacent to a licensee's frequency block, a resolution bandwidth of at least 30 kHz may be employed.

27.53 (h)

For operations in the 1710 – 1755 MHz band, the FCC limit is $43 + 10\log_{10}(P[\text{Watts}])$ dB below the transmitter power $P(\text{Watts})$ in a 1 MHz bandwidth. However, in the 1MHz bands immediately outside and adjacent to the licensee's frequency block, a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

3.7.2 Test Procedures

1. The testing follows ANSI C63.26 section 5.7
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The band edges of low and high channels for the highest RF powers were measured.
4. Set RBW $\geq$ 1% EBW in the 1MHz band immediately outside and adjacent to the band edge.
5. Beyond the 1 MHz band from the band edge, RBW=1MHz was used.
6. Set spectrum analyzer with RMS detector.
7. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
8. Checked that all the results comply with the emission limit line.

Example:

The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)

$= P(W) - [43 + 10\log(P)]$ (dB)

$= [30 + 10\log(P)]$ (dBm) - $[43 + 10\log(P)]$ (dB) = -13dBm.

3.8 Conducted Spurious Emission

3.8.1 Description of Conducted Spurious Emission Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.

It is measured by means of a calibrated spectrum analyzer and scanned from 30 MHz up to a frequency including its 10th harmonic.

3.8.2 Test Procedures

1. The testing follows ANSI C63.26 section 5.7
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator.
The path loss was compensated to the results for each measurement.
4. The middle channel for the highest RF power within the transmitting frequency was measured.
5. The conducted spurious emission for the whole frequency range was taken.
6. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz.
7. Set spectrum analyzer with RMS detector.
8. Taking the record of maximum spurious emission.
9. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
10. The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)
= $P(W) - [43 + 10\log(P)]$ (dB)
= $[30 + 10\log(P)]$ (dBm) - $[43 + 10\log(P)]$ (dB)
= -13dBm.

3.9 Frequency Stability

3.9.1 Description of Frequency Stability Measurement

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within $\pm 0.00025\%$ ($\pm 2.5\text{ppm}$) of the center frequency.

3.9.2 Test Procedures for Temperature Variation

1. The testing follows ANSI C63.26 section 5.6.4
2. The EUT was set up in the thermal chamber and connected with the system simulator.
3. With power OFF, the temperature was decreased to -30°C and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute.
4. With power OFF, the temperature was raised in 10°C step up to 50°C . The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

3.9.3 Test Procedures for Voltage Variation

1. The testing follows ANSI C63.26 section 5.6.5
2. The EUT was placed in a temperature chamber at $20\pm 5^{\circ}\text{C}$ and connected with the system simulator.
3. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value for other than hand carried battery equipment.
4. For hand carried, battery powered equipment, reduce the primary ac or dc supply voltage to the battery operating end point, which shall be specified by the manufacturer.
5. The variation in frequency was measured for the worst case.


4 Radiated Test Items

4.1 Measuring Instruments


See list of measuring instruments of this test report.

4.2 Test Setup

4.2.1 For radiated test from 30MHz to 1GHz

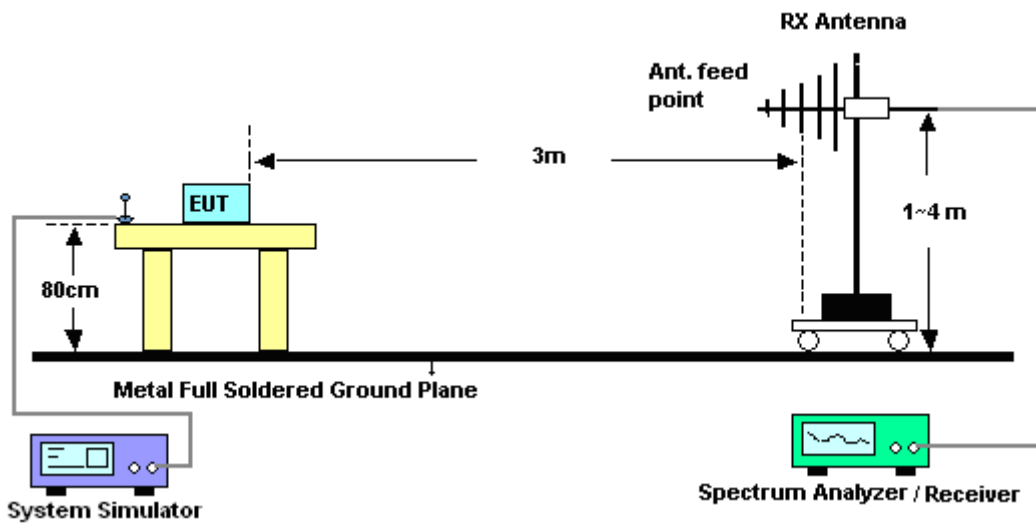

4.2.2 For radiated test above 1GHz

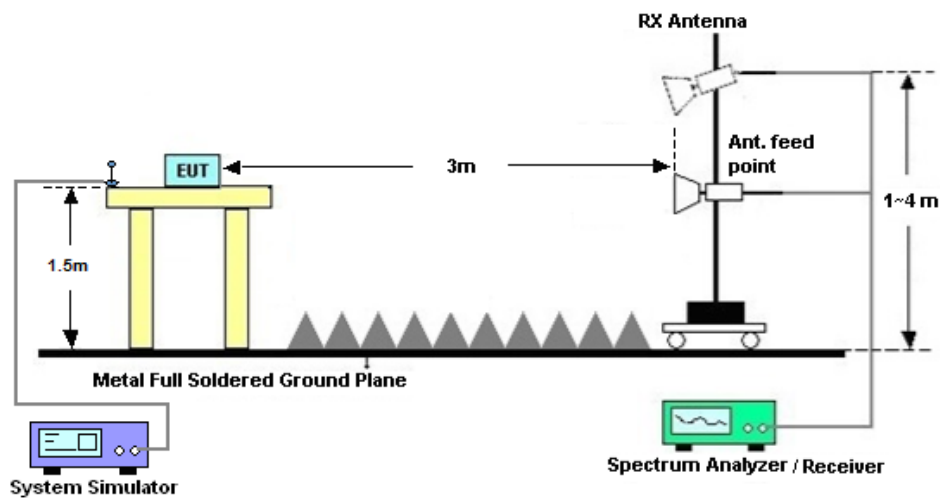

4.3 Test Result of Radiated Test

Please refer to Appendix B.



4.4 Radiated Spurious Emission

4.4.1 Description of Radiated Spurious Emission

The radiated spurious emission was measured by substitution method according to ANSI C63.26. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.

For LTE Band 13

For operations in the 746-758 MHz, 775-788 MHz, and 805-806 MHz bands, emissions in the band 1559-1610 MHz shall be limited to -70 dBW/MHz equivalent isotropically radiated power (EIRP) for wideband signals, and -80 dBW EIRP for discrete emissions of less than 700 Hz bandwidth.

The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

4.4.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.5
2. The EUT was placed on a turntable with 0.8 meter height for frequency below 1GHz and 1.5 meter height for frequency above 1GHz respectively above ground.
3. The EUT was set 3 meters from the receiving antenna mounted on the antenna tower.
4. The table was rotated 360 degrees to determine the position of the highest spurious emission.
5. The height of the receiving antenna is varied between 1m to 4m to search the maximum spurious emission for both horizontal and vertical polarizations.
6. During the measurement, the system simulator parameters were set to force the EUT transmitting at maximum output power.
7. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking the record of maximum spurious emission.
8. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
9. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
10. $EIRP \text{ (dBm)} = S.G. \text{ Power} - Tx \text{ Cable Loss} + Tx \text{ Antenna Gain}$
11. $ERP \text{ (dBm)} = EIRP - 2.15$
12. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)
= $P(W) - [43 + 10\log(P)] \text{ (dB)}$
= $[30 + 10\log(P)] \text{ (dBm)} - [43 + 10\log(P)] \text{ (dB)}$
= -13dBm.



5 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101078	9kHz~40GHz	Apr. 19, 2018	Oct. 03, 2018~ Oct. 11, 2018	Apr. 18, 2019	Conducted (TH01-SZ)
Thermal Chamber	Ten Billion Hongzhangroup	LP-150U	H2014081803	-40~+150°C	Dec. 26, 2017	Oct. 03, 2018~ Oct. 11, 2018	Dec. 25, 2018	Conducted (TH01-SZ)
Spectrum Analyzer	R&S	FSV40	101041	10kHz~40GHz;Ma x 30dBm	Oct. 19, 2017	Sep. 30, 2018~ Oct. 01, 2018	Oct. 18, 2018	Radiation (03CH02-SZ)
Bilog Antenna	TeseQ	CBL6112D	35407	30MHz-2GHz	May 10, 2018	Sep. 30, 2018~ Oct. 01, 2018	May 09, 2019	Radiation (03CH02-SZ)
Double Ridge Horn Antenna	SCHWARZBECK	BBHA 9120D	9120D-1285	1GHz~18GHz	Dec. 13, 2017	Sep. 30, 2018~ Oct. 01, 2018	Dec. 12, 2018	Radiation (03CH02-SZ)
SHF-EHF Horn	com-power	AH-840	101071	18Ghz-40GHz	Mar. 30, 2018	Sep. 30, 2018~ Oct. 01, 2018	Mar. 29, 2019	Radiation (03CH02-SZ)
LF Amplifier	Burgeon	BPA-530	102211	0.01~3000Mhz	Oct. 19, 2017	Sep. 30, 2018~ Oct. 01, 2018	Oct. 18, 2018	Radiation (03CH02-SZ)
HF Amplifier	Agilent	8449B	3008A01023	1GHz~26.5GHz	Oct. 19, 2017	Sep. 30, 2018~ Oct. 01, 2018	Oct. 18, 2018	Radiation (03CH02-SZ)
HF Amplifier	MITEQ	TTA1840-35-HG	1871923	18GHz~40GHz	Jul. 30, 2018	Sep. 30, 2018~ Oct. 01, 2018	Jul. 29, 2019	Radiation (03CH02-SZ)
AC Power Source	Chroma	61601	616010002470	N/A	NCR	Sep. 30, 2018~ Oct. 01, 2018	NCR	Radiation (03CH02-SZ)
Turn Table	Chaintek	T-200	N/A	0~360 degree	NCR	Sep. 30, 2018~ Oct. 01, 2018	NCR	Radiation (03CH02-SZ)
Antenna Mast	Chaintek	MBS-400	N/A	1 m~4 m	NCR	Sep. 30, 2018~ Oct. 01, 2018	NCR	Radiation (03CH02-SZ)

NCR: No Calibration Required



6 Uncertainty of Evaluation

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.5dB
---	-------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	3.3dB
---	-------

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	3.7dB
---	-------



Appendix A. Test Results of Conducted Test

Conducted Output Power(Average power)

LTE Band 2 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
20	1	0	QPSK	22.50	22.38	22.37
20	1	49		21.82	21.60	21.63
20	1	99		21.58	21.70	21.50
20	50	0		21.21	21.28	21.21
20	50	24		20.90	20.93	20.85
20	50	50		20.85	20.93	20.83
20	100	0		21.12	21.04	20.97
20	1	0	16-QAM	21.95	22.00	21.63
20	1	49		21.53	21.15	21.00
20	1	99		21.27	21.33	20.82
20	50	0		20.83	20.74	20.70
20	50	24		20.58	20.28	20.34
20	50	50		20.46	20.28	20.21
20	100	0		20.62	20.41	20.40
15	1	0	QPSK	22.40	22.36	22.30
15	1	37		21.98	21.74	21.80
15	1	74		21.98	21.83	21.68
15	36	0		21.31	21.27	21.13
15	36	20		21.06	20.94	20.86
15	36	39		21.04	20.93	20.84
15	75	0		21.19	21.10	21.02
15	1	0	16-QAM	21.71	21.44	21.47
15	1	37		21.16	20.77	20.83
15	1	74		21.08	20.94	20.96
15	36	0		20.83	20.71	20.64
15	36	20		20.58	20.45	20.39
15	36	39		20.61	20.39	20.30
15	75	0		20.65	20.44	20.44



LTE Band 2 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
10	1	0	QPSK	22.29	22.23	22.13
10	1	25		21.98	21.82	21.72
10	1	49		21.99	21.83	21.65
10	25	0		21.17	21.09	20.99
10	25	12		20.99	20.88	20.81
10	25	25		20.93	20.87	20.78
10	50	0		21.08	20.94	20.96
10	1	0	16-QAM	21.71	21.66	21.59
10	1	25		21.42	21.26	21.17
10	1	49		21.44	21.21	21.15
10	25	0		20.56	20.51	20.44
10	25	12		20.48	20.30	20.35
10	25	25		20.38	20.28	20.30
10	50	0		20.57	20.44	20.44
5	1	0	QPSK	21.94	21.84	21.76
5	1	12		21.84	21.68	21.71
5	1	24		21.70	21.61	21.60
5	12	0		21.10	20.99	20.94
5	12	7		21.05	20.92	20.83
5	12	13		20.96	20.85	20.80
5	25	0		21.05	20.85	20.81
5	1	0	16-QAM	21.38	21.24	21.04
5	1	12		21.24	21.01	21.02
5	1	24		21.14	21.02	20.91
5	12	0		20.53	20.39	20.31
5	12	7		20.48	20.40	20.27
5	12	13		20.44	20.22	20.21
5	25	0		20.51	20.38	20.40



LTE Band 2 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
3	1	0	QPSK	21.93	21.83	21.75
3	1	8		21.89	21.73	21.65
3	1	14		21.84	21.69	21.68
3	8	0		21.08	21.01	20.93
3	8	4		20.99	20.91	20.85
3	8	7		21.02	20.82	20.77
3	15	0		21.04	20.85	20.85
3	1	0	16-QAM	21.61	21.30	21.31
3	1	8		21.55	21.21	21.22
3	1	14		21.52	21.16	21.19
3	8	0		20.54	20.46	20.37
3	8	4		20.50	20.36	20.28
3	8	7		20.55	20.32	20.33
3	15	0		20.50	20.46	20.40
1.4	1	0	QPSK	21.95	21.86	21.67
1.4	1	3		21.96	21.85	21.68
1.4	1	5		21.96	21.70	21.74
1.4	3	0		22.09	21.94	21.78
1.4	3	1		22.08	21.97	21.30
1.4	3	3		21.64	21.93	21.28
1.4	6	0		20.95	20.82	20.76
1.4	1	0	16-QAM	21.27	21.07	20.96
1.4	1	3		21.19	21.02	20.99
1.4	1	5		21.19	20.99	20.92
1.4	3	0		21.12	20.79	20.69
1.4	3	1		21.11	21.02	20.70
1.4	3	3		21.09	20.99	20.65
1.4	6	0		20.56	20.40	20.33



LTE Band 4 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
20	1	0	QPSK	21.71	21.75	22.10
20	1	49		21.28	21.36	21.61
20	1	99		21.06	21.30	21.35
20	50	0		21.14	21.21	21.38
20	50	24		20.80	20.96	21.09
20	50	50		20.82	21.04	20.92
20	100	0		20.97	21.09	21.21
20	1	0	16-QAM	21.25	21.46	21.61
20	1	49		20.74	21.00	21.12
20	1	99		20.64	21.04	20.96
20	50	0		20.64	20.66	20.85
20	50	24		20.42	20.41	20.59
20	50	50		20.33	20.46	20.54
20	100	0		20.42	20.53	20.68
15	1	0	QPSK	21.70	21.74	22.07
15	1	37		21.35	21.87	21.97
15	1	74		21.27	22.02	21.53
15	36	0		21.06	21.22	21.32
15	36	20		20.89	20.96	21.07
15	36	39		20.86	21.03	20.93
15	75	0		20.99	21.02	21.13
15	1	0	16-QAM	21.70	21.74	21.92
15	1	37		21.42	21.42	21.47
15	1	74		21.24	21.46	21.43
15	36	0		20.48	20.76	20.89
15	36	20		20.36	20.50	20.59
15	36	39		20.28	20.49	20.44
15	75	0		20.45	20.58	20.66



LTE Band 4 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
10	1	0	QPSK	21.88	22.04	21.95
10	1	25		21.60	21.80	21.86
10	1	49		21.65	21.88	21.95
10	25	0		21.00	21.12	21.16
10	25	12		20.85	21.04	21.03
10	25	25		20.85	20.94	21.01
10	50	0		20.90	21.09	21.11
10	1	0	16-QAM	21.31	21.48	21.95
10	1	25		21.02	21.24	21.58
10	1	49		21.02	21.19	21.63
10	25	0		20.48	20.67	20.74
10	25	12		20.29	20.46	20.56
10	25	25		20.34	20.47	20.55
10	50	0		20.38	20.57	20.60
5	1	0	QPSK	21.89	22.02	21.95
5	1	12		21.74	21.92	21.87
5	1	24		21.68	21.84	21.89
5	12	0		20.88	21.04	21.15
5	12	7		20.83	21.01	21.13
5	12	13		20.80	21.00	21.11
5	25	0		20.82	20.97	21.11
5	1	0	16-QAM	21.49	21.61	21.32
5	1	12		21.41	21.64	21.27
5	1	24		21.26	21.44	21.25
5	12	0		20.49	20.65	20.67
5	12	7		20.44	20.51	20.69
5	12	13		20.35	20.45	20.61
5	25	0		20.34	20.54	20.47



LTE Band 4 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
3	1	0	QPSK	21.83	21.97	21.94
3	1	8		21.70	21.96	21.94
3	1	14		21.67	21.87	21.96
3	8	0		20.84	21.13	21.17
3	8	4		20.91	21.00	21.11
3	8	7		20.89	20.98	21.08
3	15	0		20.78	21.02	21.16
3	1	0	16-QAM	21.02	21.17	21.06
3	1	8		20.97	21.16	20.98
3	1	14		20.88	21.08	21.06
3	8	0		20.29	20.54	20.65
3	8	4		20.30	20.41	20.51
3	8	7		20.26	20.43	20.62
3	15	0		20.24	20.56	20.67
1.4	1	0	QPSK	21.88	21.95	22.01
1.4	1	3		21.75	21.90	22.06
1.4	1	5		21.78	21.94	22.06
1.4	3	0		21.78	21.99	22.01
1.4	3	1		21.76	21.94	22.02
1.4	3	3		21.74	21.92	22.02
1.4	6	0		20.86	21.01	21.06
1.4	1	0	16-QAM	21.01	21.20	21.55
1.4	1	3		21.04	21.21	21.59
1.4	1	5		20.99	21.15	21.53
1.4	3	0		20.99	21.16	21.25
1.4	3	1		20.98	21.18	21.26
1.4	3	3		20.94	21.15	21.21
1.4	6	0		20.35	20.54	20.61



LTE Band 5 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
10	1	0	QPSK	22.27	22.31	22.18
10	1	25		22.18	22.44	22.14
10	1	49		22.13	22.19	22.19
10	25	0		21.12	21.18	21.18
10	25	12		20.99	21.19	21.10
10	25	25		21.05	20.98	20.96
10	50	0		21.02	21.15	20.97
10	1	0	16-QAM	21.72	21.54	21.30
10	1	25		21.57	21.71	21.37
10	1	49		21.46	21.41	21.17
10	25	0		20.64	20.59	20.69
10	25	12		20.58	20.74	20.47
10	25	25		20.59	20.53	20.59
10	50	0		20.44	20.76	20.59
5	1	0	QPSK	22.24	22.00	22.13
5	1	12		22.06	22.13	22.22
5	1	24		21.99	21.89	22.22
5	12	0		21.20	21.13	21.19
5	12	7		21.15	21.19	21.16
5	12	13		21.16	21.13	21.15
5	25	0		21.12	21.11	21.13
5	1	0	16-QAM	21.47	21.36	21.76
5	1	12		21.47	21.43	21.85
5	1	24		21.34	21.65	21.76
5	12	0		20.83	20.57	20.77
5	12	7		20.64	20.69	20.81
5	12	13		20.78	20.63	20.66
5	25	0		20.67	20.75	20.79



LTE Band 5 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
3	1	0	QPSK	22.16	22.12	22.21
3	1	8		22.16	22.23	22.14
3	1	14		22.08	22.13	22.15
3	8	0		21.11	21.15	21.16
3	8	4		21.08	21.13	21.20
3	8	7		21.05	21.14	21.13
3	15	0		21.10	21.13	21.22
3	1	0	16-QAM	21.70	21.27	21.38
3	1	8		21.62	21.48	21.35
3	1	14		21.57	21.29	21.25
3	8	0		20.69	20.68	20.72
3	8	4		20.68	20.69	20.67
3	8	7		20.70	20.69	20.64
3	15	0		20.80	20.72	20.69
1.4	1	0	QPSK	22.26	22.29	22.34
1.4	1	3		22.16	22.31	22.32
1.4	1	5		22.26	22.35	22.37
1.4	3	0		22.18	22.16	22.13
1.4	3	1		22.14	22.14	22.14
1.4	3	3		22.18	22.23	22.25
1.4	6	0		21.32	21.21	21.12
1.4	1	0	16-QAM	21.39	21.40	21.16
1.4	1	3		21.38	21.17	21.17
1.4	1	5		21.34	21.35	21.18
1.4	3	0		21.10	21.23	21.42
1.4	3	1		21.18	21.36	21.41
1.4	3	3		21.09	21.40	21.40
1.4	6	0		20.73	20.69	20.68



LTE Band 12 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
10	1	0	QPSK	22.91	22.85	22.88
10	1	25		22.88	22.93	23.01
10	1	49		22.80	22.92	22.92
10	25	0		21.89	21.88	21.86
10	25	12		21.82	21.78	21.93
10	25	25		21.95	21.83	21.99
10	50	0		21.80	21.88	21.82
10	1	0	16-QAM	22.07	22.32	22.48
10	1	25		22.26	22.27	22.44
10	1	49		22.21	22.39	22.38
10	25	0		21.36	21.35	21.31
10	25	12		21.28	21.33	21.32
10	25	25		21.33	21.37	21.68
10	50	0		21.35	21.45	21.52
5	1	0	QPSK	22.74	22.74	22.84
5	1	12		22.77	22.84	22.97
5	1	24		22.61	22.79	22.85
5	12	0		21.92	21.86	21.97
5	12	7		21.84	21.91	21.98
5	12	13		21.77	21.84	21.97
5	25	0		21.86	21.80	21.91
5	1	0	16-QAM	22.14	22.07	22.20
5	1	12		22.18	22.11	22.19
5	1	24		22.00	22.01	22.04
5	12	0		21.54	21.48	21.44
5	12	7		21.42	21.46	21.44
5	12	13		21.43	21.26	21.43
5	25	0		21.40	21.30	21.52



LTE Band 12 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
3	1	0	QPSK	22.81	22.75	22.91
3	1	8		22.86	22.82	22.90
3	1	14		22.85	22.81	22.88
3	8	0		21.87	21.84	21.94
3	8	4		21.95	21.82	21.89
3	8	7		21.85	21.79	21.90
3	15	0		21.87	21.76	21.90
3	1	0	16-QAM	22.44	22.24	22.29
3	1	8		22.53	22.35	22.40
3	1	14		22.33	22.25	22.05
3	8	0		21.42	21.36	21.56
3	8	4		21.54	21.44	21.53
3	8	7		21.43	21.37	21.49
3	15	0		21.58	21.41	21.51
1.4	1	0	QPSK	22.80	22.92	22.92
1.4	1	3		22.85	22.82	22.83
1.4	1	5		22.98	22.90	22.98
1.4	3	0		22.72	22.78	22.81
1.4	3	1		22.79	22.82	22.97
1.4	3	3		22.79	22.82	22.95
1.4	6	0		21.83	21.85	21.89
1.4	1	0	16-QAM	22.06	22.08	21.97
1.4	1	3		22.01	22.07	21.80
1.4	1	5		22.08	22.14	21.87
1.4	3	0		21.76	21.83	22.13
1.4	3	1		21.76	21.72	22.10
1.4	3	3		21.77	21.80	22.25
1.4	6	0		21.29	21.38	21.48



LTE Band 13 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
10	1	0	QPSK		22.14	
10	1	25			22.35	
10	1	49			21.86	
10	25	0			21.86	
10	25	12			21.75	
10	25	25			21.76	
10	50	0			21.74	
10	1	0	16-QAM		21.92	
10	1	25			21.88	
10	1	49			21.57	
10	25	0			20.90	
10	25	12			20.61	
10	25	25			20.72	
10	50	0			20.78	
5	1	0	QPSK	22.24	22.26	22.26
5	1	12		22.34	22.23	22.23
5	1	24		22.07	22.16	22.24
5	12	0		21.82	21.82	21.79
5	12	7		21.85	21.73	21.68
5	12	13		21.82	21.74	21.69
5	25	0		21.83	21.69	21.65
5	1	0		21.97	22.05	21.87
5	1	12		22.04	21.92	21.91
5	1	24		21.90	21.80	21.78
5	12	0	16-QAM	20.83	20.91	20.83
5	12	7		20.91	20.85	20.74
5	12	13		20.79	20.76	20.68
5	25	0		20.92	20.86	20.85

**ERP/EIRP**

LTE Band 2 (GT - LC = 1.00 dB) QPSK									
Bandwidth	1.4M			3M			5M		
Channel	18607	18900	19193	18615	18900	19185	18625	18900	19175
	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)
Frequency	1850.7	1880	1909.3	1851.5	1880	1908.5	1852.5	1880	1907.5
(MHz)									
Conducted Power (dBm)	22.09	21.94	21.78	21.93	21.83	21.75	21.94	21.84	21.76
Conducted Power (Watts)	0.1618	0.1563	0.1507	0.1560	0.1524	0.1496	0.1563	0.1528	0.1500
EIRP(dBm)	23.09	22.94	22.78	22.93	22.83	22.75	22.94	22.84	22.76
EIRP(Watts)	0.2037	0.1968	0.1897	0.1963	0.1919	0.1884	0.1968	0.1923	0.1888

LTE Band 2 (GT - LC = 1.00 dB) QPSK									
Bandwidth	10M			15M			20M		
Channel	18650	18900	19150	18675	18900	19125	18650	18900	19100
	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)
Frequency	1855	1880	1905	1857.5	1880	1902.5	1860	1880	1900
(MHz)									
Conducted Power (dBm)	22.29	22.23	22.13	22.40	22.36	22.30	22.50	22.38	22.37
Conducted Power (Watts)	0.1694	0.1671	0.1633	0.1738	0.1722	0.1698	0.1778	0.1730	0.1726
EIRP(dBm)	23.29	23.23	23.13	23.40	23.36	23.30	23.50	23.38	23.37
EIRP(Watts)	0.2133	0.2104	0.2056	0.2188	0.2168	0.2138	0.2239	0.2178	0.2173



LTE Band 2 (GT - LC = 1.00 dB) 16QAM									
Bandwidth	1.4M			3M			5M		
Channel	18607	18900	19193	18615	18900	19185	18625	18900	19175
	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)
Frequency	1850.7	1880	1909.3	1851.5	1880	1908.5	1852.5	1880	1907.5
(MHz)									
Conducted Power (dBm)	21.27	21.07	20.96	21.61	21.30	21.31	21.38	21.24	21.04
Conducted Power (Watts)	0.1340	0.1279	0.1247	0.1449	0.1349	0.1352	0.1374	0.1330	0.1271
EIRP(dBm)	22.27	22.07	21.96	22.61	22.30	22.31	22.38	22.24	22.04
EIRP(Watts)	0.1687	0.1611	0.1570	0.1824	0.1698	0.1702	0.1730	0.1675	0.1600

LTE Band 2 (GT - LC = 1.00 dB) 16QAM									
Bandwidth	10M			15M			20M		
Channel	18650	18900	19150	18675	18900	19125	18650	18900	19100
	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)
Frequency	1855	1880	1905	1857.5	1880	1902.5	1860	1880	1900
(MHz)									
Conducted Power (dBm)	21.71	21.66	21.59	21.71	21.44	21.47	21.95	22.00	21.63
Conducted Power (Watts)	0.1483	0.1466	0.1442	0.1483	0.1393	0.1403	0.1567	0.1585	0.1455
EIRP(dBm)	22.71	22.66	22.59	22.71	22.44	22.47	22.95	23.00	22.63
EIRP(Watts)	0.1866	0.1845	0.1816	0.1866	0.1754	0.1766	0.1972	0.1995	0.1832



LTE Band 4 (GT - LC = 1.00 dB) QPSK									
Bandwidth	1.4M			3M			5M		
Channel	19957	20175	20393	19965	20175	20385	19975	20175	20375
	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)
Frequency	1710.7	1732.5	1754.3	1711.5	1732.5	1753.5	1712.5	1732.5	1752.5
(MHz)									
Conducted Power (dBm)	21.75	21.90	22.06	21.83	21.97	21.94	21.89	22.02	21.95
Conducted Power (Watts)	0.1496	0.1549	0.1607	0.1524	0.1574	0.1563	0.1545	0.1592	0.1567
EIRP(dBm)	22.75	22.90	23.06	22.83	22.97	22.94	22.89	23.02	22.95
EIRP(Watts)	0.1884	0.1950	0.2023	0.1919	0.1982	0.1968	0.1945	0.2004	0.1972

LTE Band 4 (GT - LC = 1.00 dB) QPSK									
Bandwidth	10M			15M			20M		
Channel	20000	20175	20350	20025	20175	20325	20050	20175	20300
	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)
Frequency	1715	1732.5	1750	1717.5	1732.5	1747.5	1720	1732.5	1745
(MHz)									
Conducted Power (dBm)	21.88	22.04	21.95	21.70	21.74	22.07	21.71	21.75	22.10
Conducted Power (Watts)	0.1542	0.1600	0.1567	0.1479	0.1493	0.1611	0.1483	0.1496	0.1622
EIRP(dBm)	22.88	23.04	22.95	22.70	22.74	23.07	22.71	22.75	23.10
EIRP(Watts)	0.1941	0.2014	0.1972	0.1862	0.1879	0.2028	0.1866	0.1884	0.2042



LTE Band 4 (GT - LC = 1.00 dB) 16QAM									
Bandwidth	1.4M			3M			5M		
Channel	19957	20175	20393	19965	20175	20385	19975	20175	20375
	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)
Frequency	1710.7	1732.5	1754.3	1711.5	1732.5	1753.5	1712.5	1732.5	1752.5
(MHz)									
Conducted Power (dBm)	21.04	21.21	21.59	21.02	21.17	21.06	21.41	21.64	21.27
Conducted Power (Watts)	0.1271	0.1321	0.1442	0.1265	0.1309	0.1276	0.1384	0.1459	0.1340
EIRP(dBm)	22.04	22.21	22.59	22.02	22.17	22.06	22.41	22.64	22.27
EIRP(Watts)	0.1600	0.1663	0.1816	0.1592	0.1648	0.1607	0.1742	0.1837	0.1687

LTE Band 4 (GT - LC = 1.00 dB) 16QAM									
Bandwidth	10M			15M			20M		
Channel	20000	20175	20350	20025	20175	20325	20050	20175	20300
	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)
Frequency	1715	1732.5	1750	1717.5	1732.5	1747.5	1720	1732.5	1745
(MHz)									
Conducted Power (dBm)	21.31	21.48	21.95	21.70	21.74	21.92	21.25	21.46	21.61
Conducted Power (Watts)	0.1352	0.1406	0.1567	0.1479	0.1493	0.1556	0.1334	0.1400	0.1449
EIRP(dBm)	22.31	22.48	22.95	22.70	22.74	22.92	22.25	22.46	22.61
EIRP(Watts)	0.1702	0.1770	0.1972	0.1862	0.1879	0.1959	0.1679	0.1762	0.1824

LTE Band 5 (GT - LC = 0.50 dB) QPSK									
Bandwidth	1.4M			3M			5M		
Channel	20407	20525	20643	20415	20525	20635	20425	20525	20625
	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)
Frequency	824.7	836.5	848.3	825.5	836.5	847.5	826.5	836.5	846.5
(MHz)									
Conducted Power (dBm)	22.26	22.35	22.37	22.16	22.23	22.14	22.24	22.00	22.13
Conducted Power (Watts)	0.1683	0.1718	0.1726	0.1644	0.1671	0.1637	0.1675	0.1585	0.1633
ERP(dBm)	20.61	20.70	20.72	20.51	20.58	20.49	20.59	20.35	20.48
ERP(Watts)	0.1151	0.1175	0.1180	0.1125	0.1143	0.1119	0.1146	0.1084	0.1117

LTE Band 5 (GT - LC = 0.50 dB) QPSK			
Bandwidth	10M		
Channel	20450	20525	20600
	(Low)	(Mid)	(High)
Frequency	829	836.5	844
(MHz)			
Conducted Power (dBm)	22.18	22.44	22.14
Conducted Power (Watts)	0.1652	0.1754	0.1637
ERP(dBm)	20.53	20.79	20.49
ERP(Watts)	0.1130	0.1199	0.1119

LTE Band 5 (GT - LC = 0.50 dB) 16QAM									
Bandwidth	1.4M			3M			5M		
Channel	20407	20525	20643	20415	20525	20635	20425	20525	20625
	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)
Frequency	824.7	836.5	848.3	825.5	836.5	847.5	826.5	836.5	846.5
(MHz)									
Conducted Power (dBm)	21.10	21.23	21.42	21.70	21.27	21.38	21.47	21.43	21.85
Conducted Power (Watts)	0.1288	0.1327	0.1387	0.1479	0.1340	0.1374	0.1403	0.1390	0.1531
ERP(dBm)	19.45	19.58	19.77	20.05	19.62	19.73	19.82	19.78	20.20
ERP(Watts)	0.0881	0.0908	0.0948	0.1012	0.0916	0.0940	0.0959	0.0951	0.1047

LTE Band 5 (GT - LC = 0.50 dB) 16QAM			
Bandwidth	10M		
Channel	20450	20525	20600
	(Low)	(Mid)	(High)
Frequency	829	836.5	844
(MHz)			
Conducted Power (dBm)	21.72	21.54	21.30
Conducted Power (Watts)	0.1486	0.1426	0.1349
ERP(dBm)	20.07	19.89	19.65
ERP(Watts)	0.1016	0.0975	0.0923



LTE Band 12 (GT - LC = 0.50 dB) QPSK									
Bandwidth	1.4M			3M			5M		
Channel	23017	23095	23173	23025	23095	23165	23035	23095	23155
	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)
Frequency	699.7	707.5	715.3	700.5	707.5	714.5	701.5	707.5	713.5
(MHz)									
Conducted Power (dBm)	22.98	22.90	22.98	22.81	22.75	22.91	22.77	22.84	22.97
Conducted Power (Watts)	0.1986	0.1950	0.1986	0.1910	0.1884	0.1954	0.1892	0.1923	0.1982
ERP(dBm)	21.33	21.25	21.33	21.16	21.10	21.26	21.12	21.19	21.32
ERP(Watts)	0.1358	0.1334	0.1358	0.1306	0.1288	0.1337	0.1294	0.1315	0.1355

LTE Band 12 (GT - LC = 0.50 dB) QPSK			
Bandwidth	10M		
Channel	23060	23095	23130
	(Low)	(Mid)	(High)
Frequency	704	707.5	711
(MHz)			
Conducted Power (dBm)	22.88	22.93	23.01
Conducted Power (Watts)	0.1941	0.1963	0.2000
ERP(dBm)	21.23	21.28	21.36
ERP(Watts)	0.1327	0.1343	0.1368



LTE Band 12 (GT - LC = 0.50 dB) 16QAM									
Bandwidth	1.4M			3M			5M		
Channel	23017	23095	23173	23025	23095	23165	23035	23095	23155
	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)
Frequency (MHz)	699.7	707.5	715.3	700.5	707.5	714.5	701.5	707.5	713.5
Conducted Power (dBm)	21.77	21.80	22.25	22.53	22.35	22.40	22.14	22.07	22.20
Conducted Power (Watts)	0.1503	0.1514	0.1679	0.1791	0.1718	0.1738	0.1637	0.1611	0.1660
ERP(dBm)	20.12	20.15	20.60	20.88	20.70	20.75	20.49	20.42	20.55
ERP(Watts)	0.1028	0.1035	0.1148	0.1225	0.1175	0.1189	0.1119	0.1102	0.1135

LTE Band 12 (GT - LC = 0.50 dB) 16QAM			
Bandwidth	10M		
Channel	23060	23095	23130
	(Low)	(Mid)	(High)
Frequency (MHz)	704	707.5	711
Conducted Power (dBm)	22.07	22.32	22.48
Conducted Power (Watts)	0.1611	0.1706	0.1770
ERP(dBm)	20.42	20.67	20.83
ERP(Watts)	0.1102	0.1167	0.1211



LTE Band 13 (GT - LC = 0.50 dB) QPSK						
Bandwidth	5M			10M		
Channel	23205	23230	23255	23230		
	(Low)	(Mid)	(High)	-	(Mid)	-
Frequency	779.5	782	784.5	-	782	-
(MHz)						
Conducted Power (dBm)	22.24	22.26	22.26	-	22.35	-
Conducted Power (Watts)	0.1675	0.1683	0.1683	-	0.1718	-
ERP(dBm)	20.59	20.61	20.61	-	20.70	-
ERP(Watts)	0.1146	0.1151	0.1151	-	0.1175	-

LTE Band 13 (GT - LC = 0.50 dB) 16QAM						
Bandwidth	5M			10M		
Channel	23205	23230	23255	23230		
	(Low)	(Mid)	(High)	-	(Mid)	-
Frequency	779.5	782	784.5	-	782	-
(MHz)						
Conducted Power (dBm)	21.97	22.05	21.87	-	21.92	-
Conducted Power (Watts)	0.1574	0.1603	0.1538	-	0.1556	-
ERP(dBm)	20.32	20.40	20.22	-	20.27	-
ERP(Watts)	0.1076	0.1096	0.1052	-	0.1064	-

**Peak-to-Average Ratio**

Mode	LTE Band 2 / 20MHz				
Mod.	QPSK		16QAM		Limit: 13dB
RB Size	1RB	Full RB	1RB	Full RB	Result
Lowest CH	5.04	5.42	5.59	6.32	PASS
Middle CH	4.99	4.87	5.59	5.86	
Highest CH	5.51	5.22	6.09	6.17	

Mode	LTE Band 4 / 20MHz				
Mod.	QPSK		16QAM		Limit: 13dB
RB Size	1RB	Full RB	1RB	Full RB	Result
Lowest CH	5.39	5.25	6.26	6.14	PASS
Middle CH	5.25	5.30	6.17	6.09	
Highest CH	5.22	5.25	5.86	6.09	

Mode	LTE Band 5 / 10MHz				
Mod.	QPSK		16QAM		Limit: 13dB
RB Size	1RB	Full RB	1RB	Full RB	Result
Lowest CH	5.88	5.39	6.72	6.38	PASS
Middle CH	5.36	5.86	6.67	6.43	
Highest CH	5.36	5.65	6.72	6.32	


Mode	LTE Band 12 / 10MHz				
Mod.	QPSK		16QAM		Limit: 13dB
RB Size	1RB	Full RB	1RB	Full RB	Result
Lowest CH	5.57	5.3	6.35	6.03	PASS
Middle CH	5.51	5.13	6.41	6.03	
Highest CH	5.25	5.3	5.8	6	

Mode	LTE Band 13 / 10MHz				
Mod.	QPSK		16QAM		Limit: 13dB
RB Size	1RB	Full RB	1RB	Full RB	Result
Lowest CH	-	-	-	-	PASS
Middle CH	4.81	4.87	5.13	5.62	
Highest CH	-	-	-	-	




LTE Band 2 / 20MHz / QPSK


Lowest Channel / 1RB

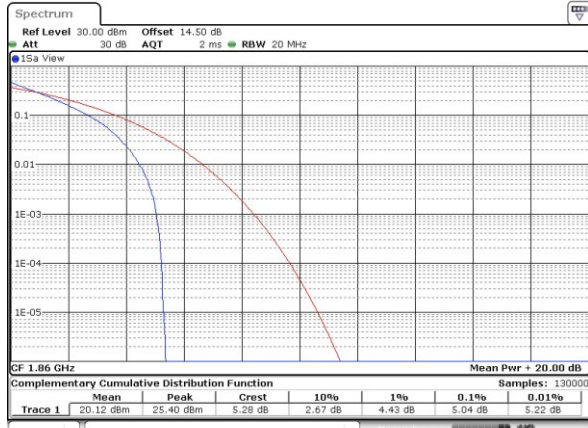


Lowest Channel / Full RB

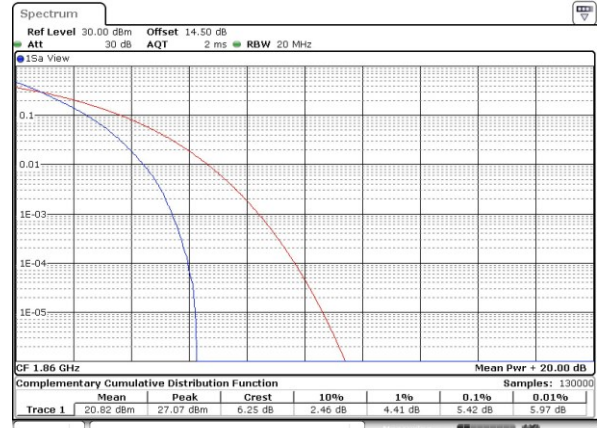


Middle Channel / 1RB

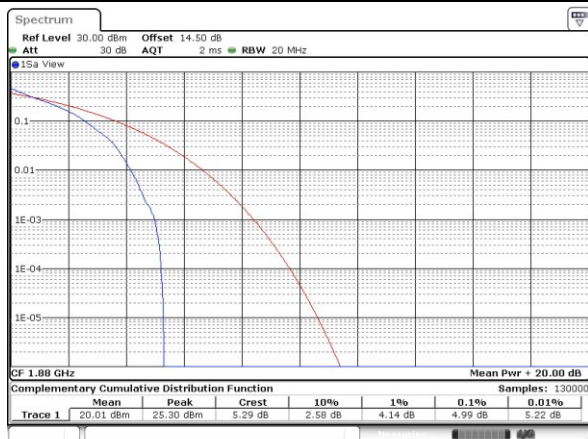


Middle Channel / Full RB

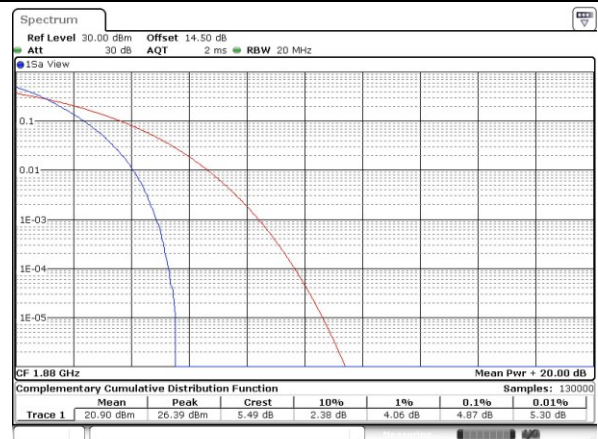

Highest Channel / 1RB

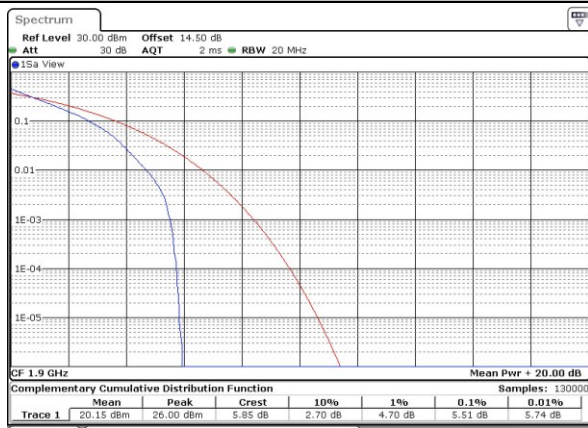


Highest Channel / Full RB

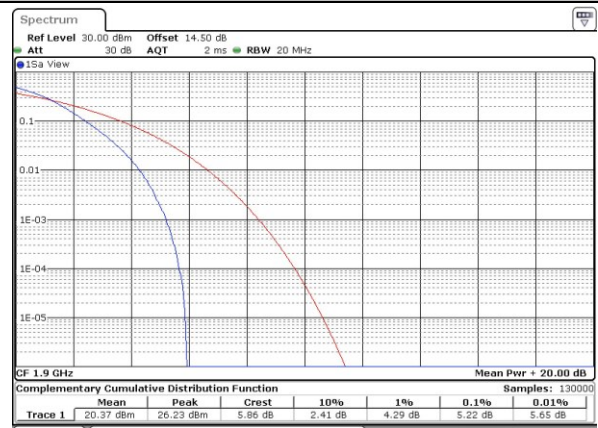


LTE Band 2 / 20MHz / 16QAM


Lowest Channel / 1RB

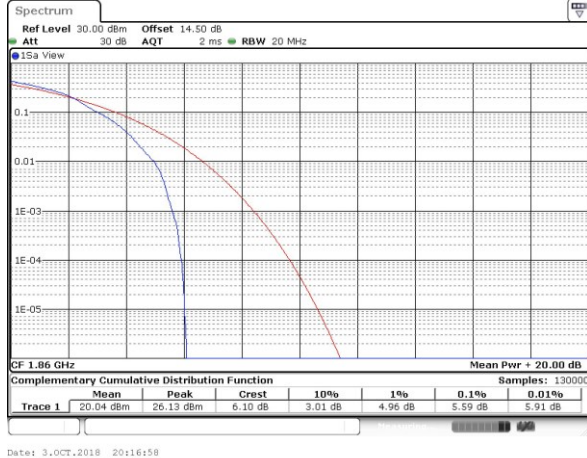


Lowest Channel / Full RB

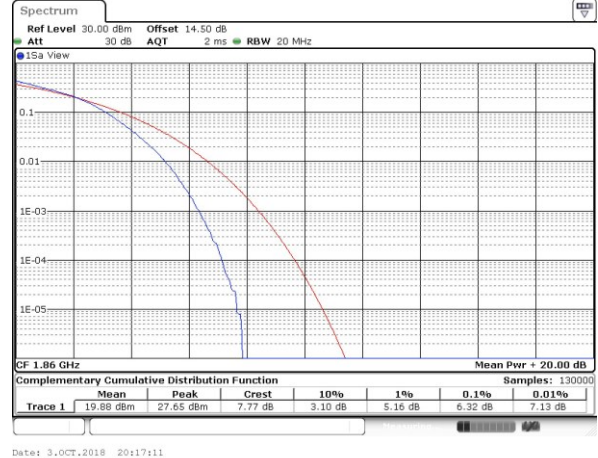


Middle Channel / 1RB

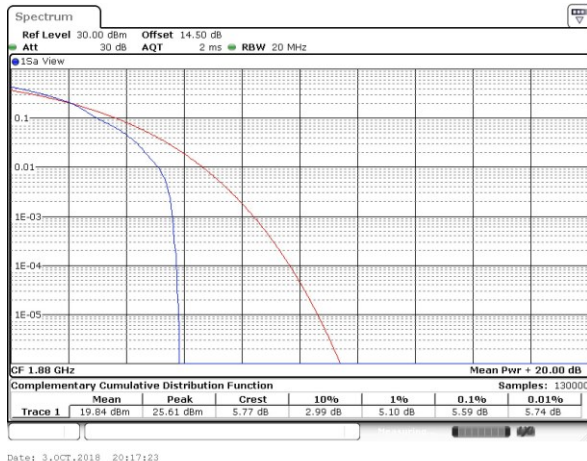


Middle Channel / Full RB

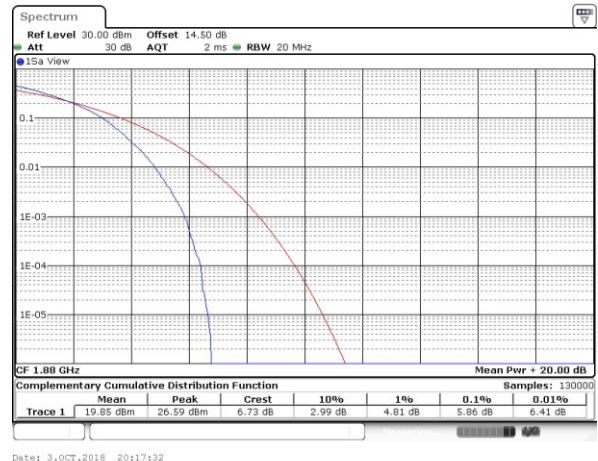

Highest Channel / 1RB

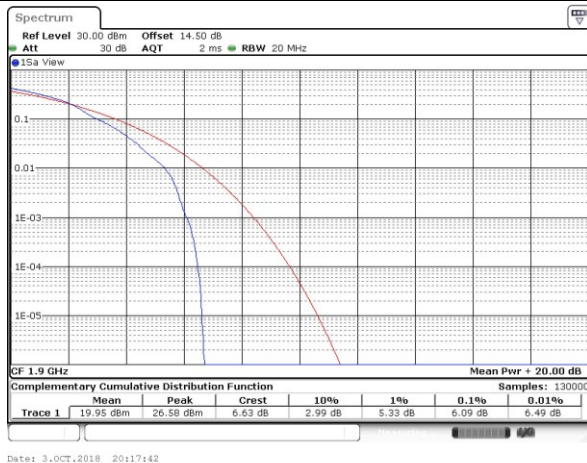


Highest Channel / Full RB

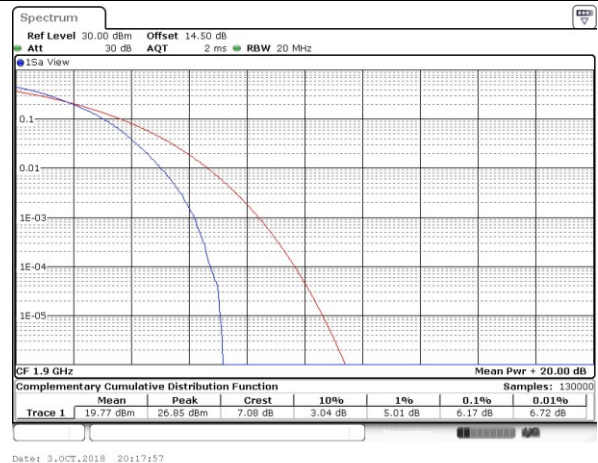




LTE Band 4 / 20MHz / QPSK


Lowest Channel / 1RB

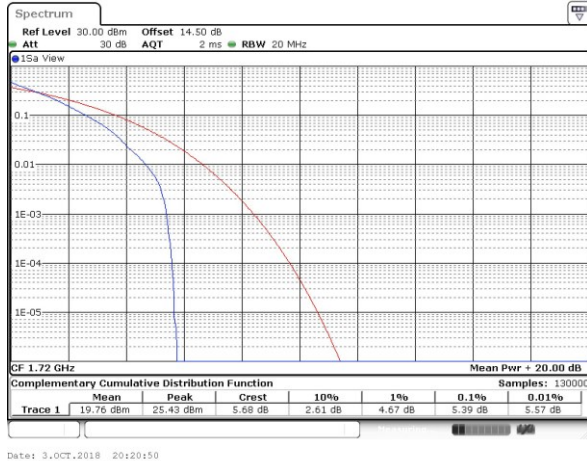


Lowest Channel / Full RB

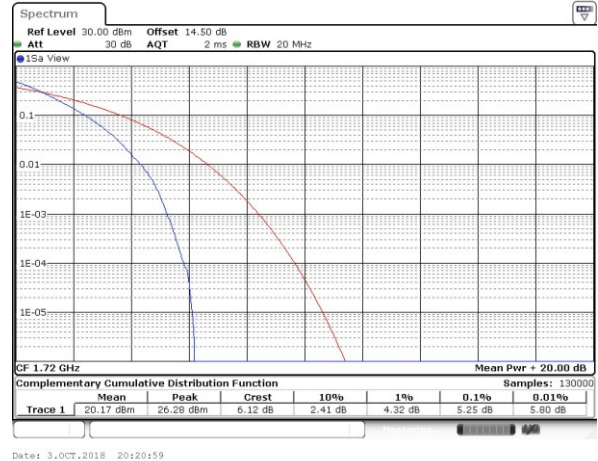


Middle Channel / 1RB

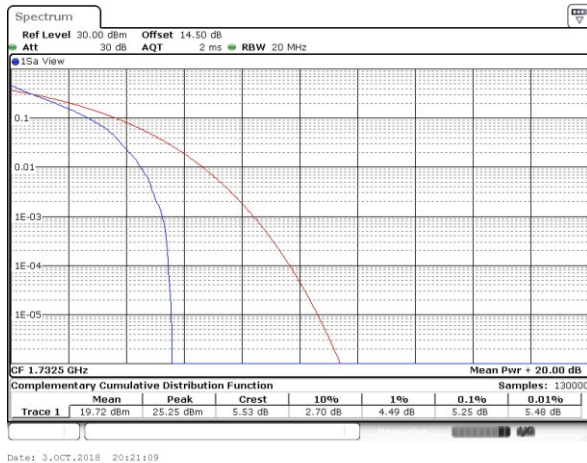


Middle Channel / Full RB

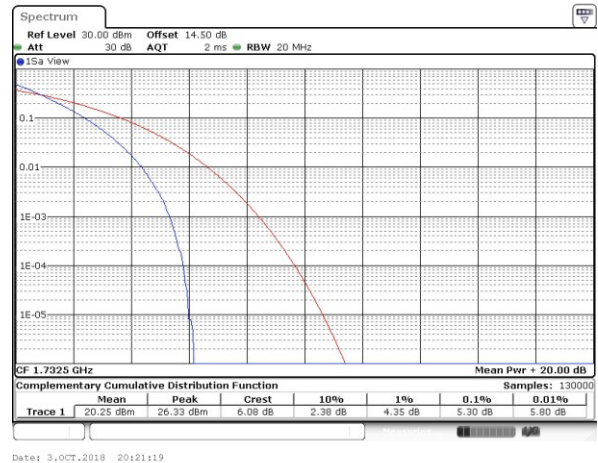

Highest Channel / 1RB

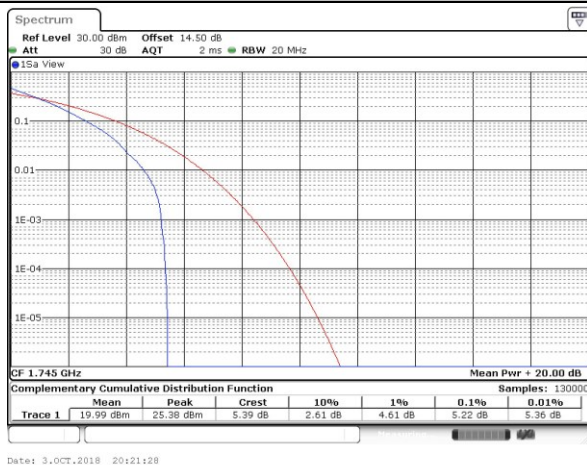


Highest Channel / Full RB

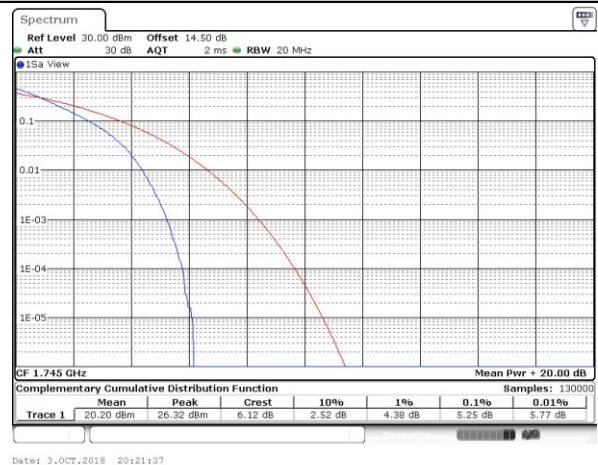




LTE Band 4 / 20MHz / 16QAM


Lowest Channel / 1RB

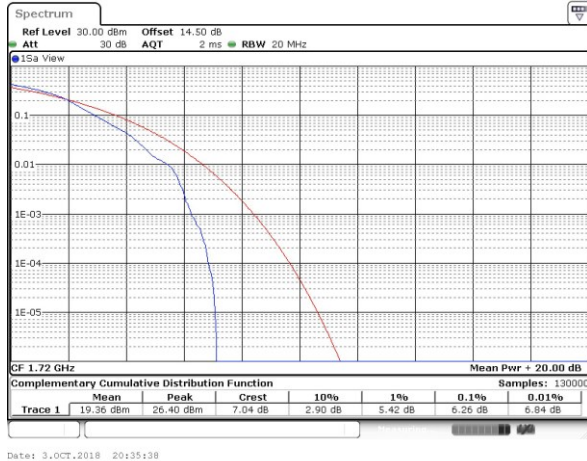


Lowest Channel / Full RB

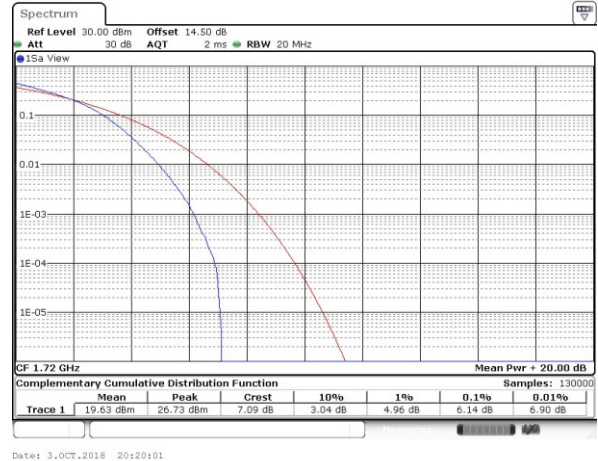


Middle Channel / 1RB

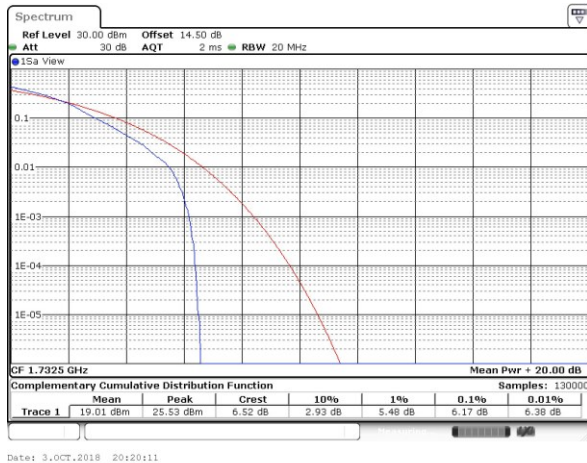


Middle Channel / Full RB

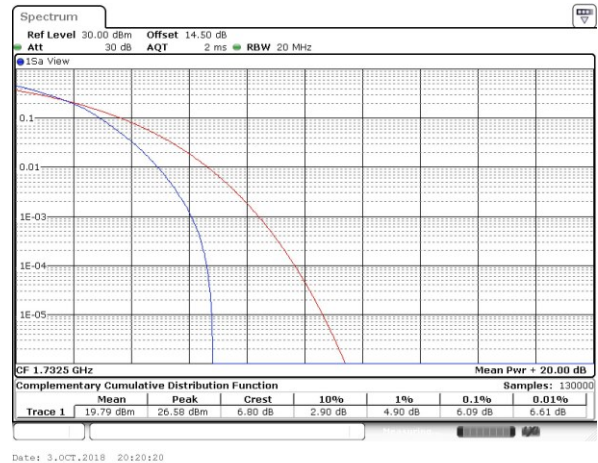

Highest Channel / 1RB

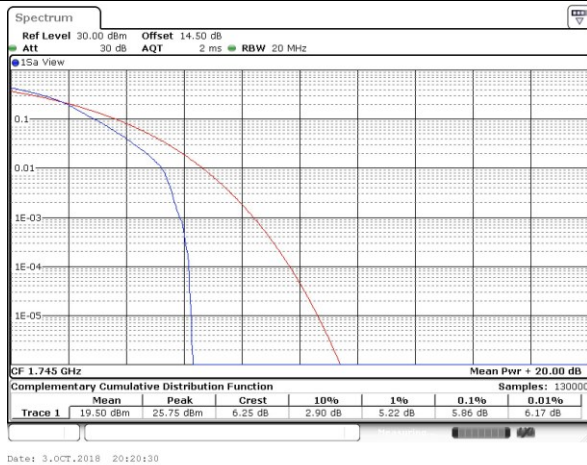


Highest Channel / Full RB

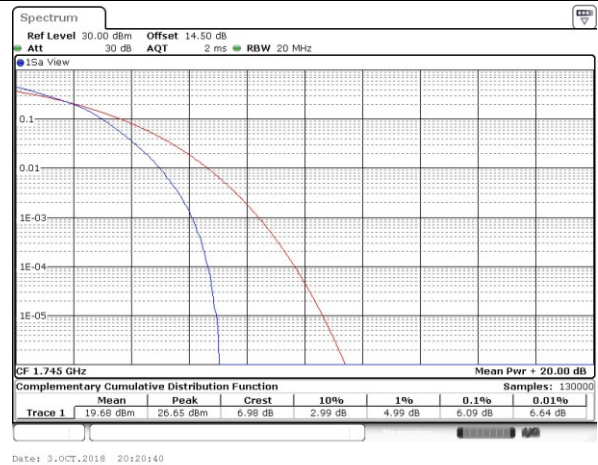




LTE Band 5 / 10MHz / QPSK

Lowest Channel / 1RB

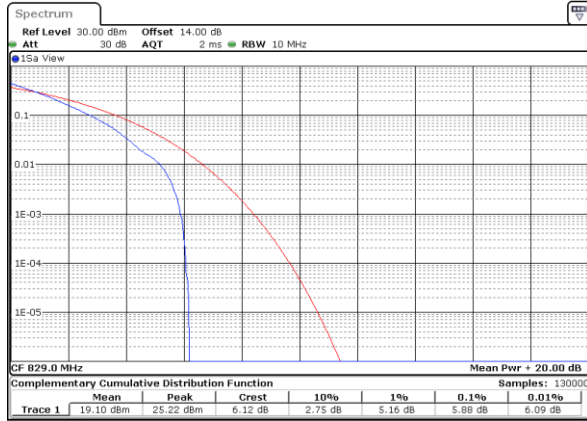


Date: 11.OCT.2018 13:38:35

Lowest Channel / Full RB

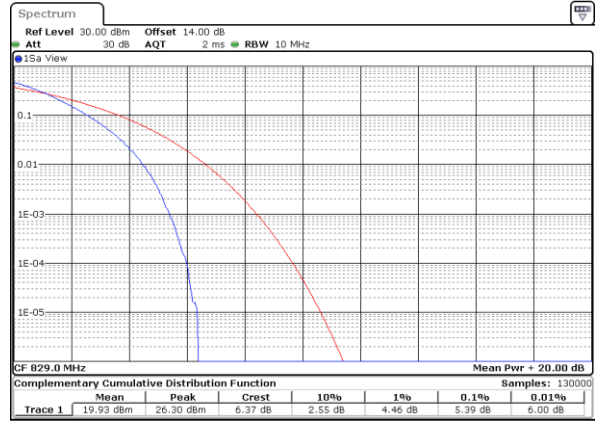


Date: 11.OCT.2018 13:38:55

Middle Channel / 1RB

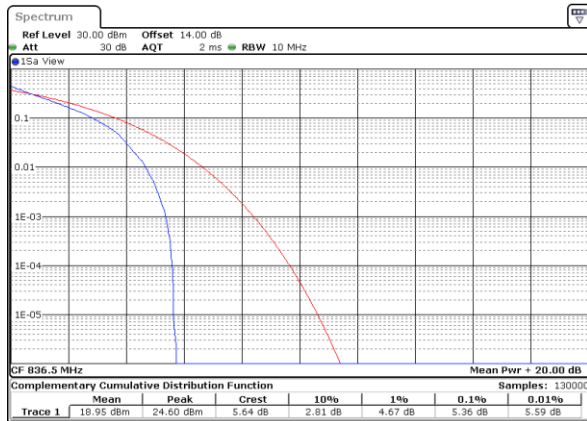

Date: 11.OCT.2018 13:39:27

Middle Channel / Full RB

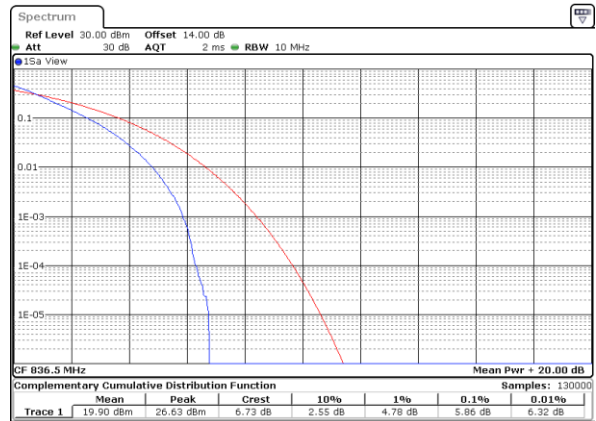

Date: 11.OCT.2018 13:41:55

Highest Channel / 1RB



Date: 11.OCT.2018 13:42:23

Highest Channel / Full RB



Date: 11.OCT.2018 13:42:35



LTE Band 5 / 10MHz / 16QAM


Lowest Channel / 1RB




Lowest Channel / Full RB



Middle Channel / 1RB

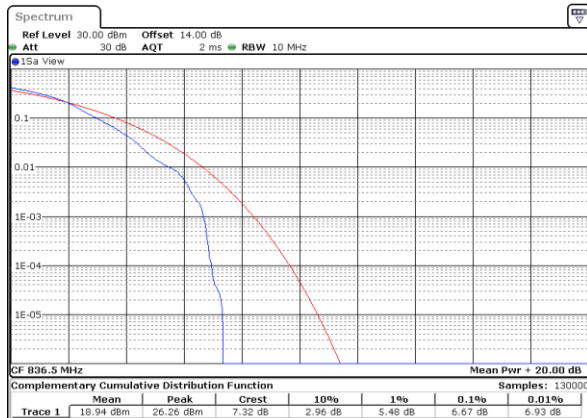

Middle Channel / Full RB

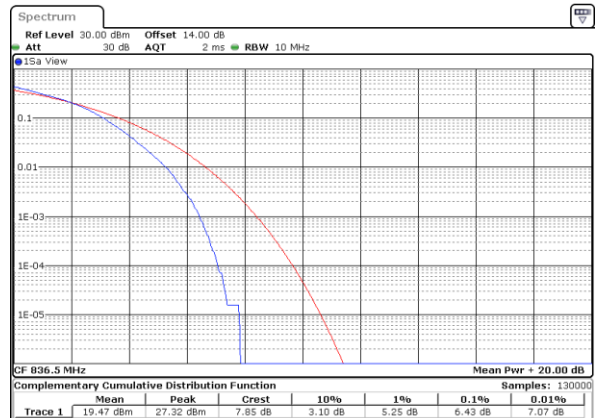

Highest Channel / 1RB




Highest Channel / Full RB






LTE Band 12 / 10MHz / QPSK


Lowest Channel / 1RB

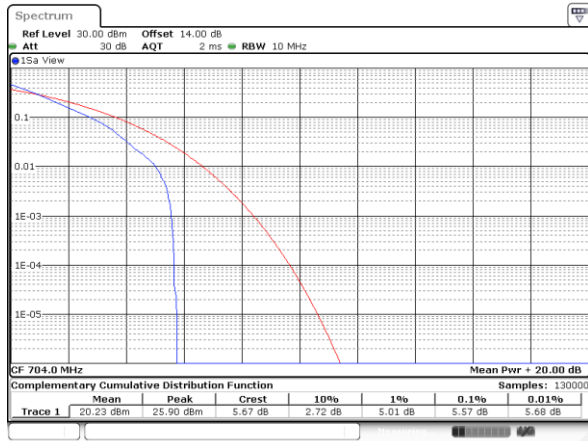


Lowest Channel / Full RB

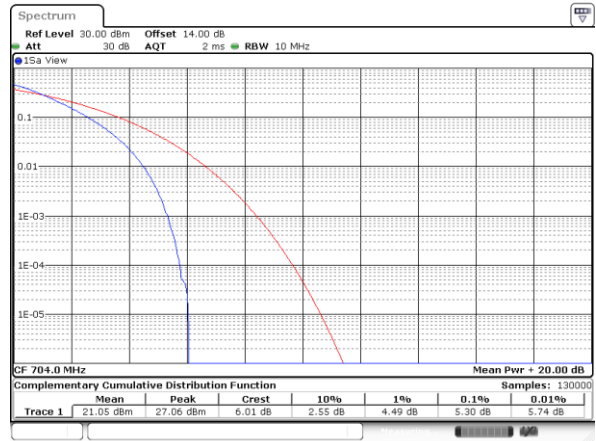


Middle Channel / 1RB

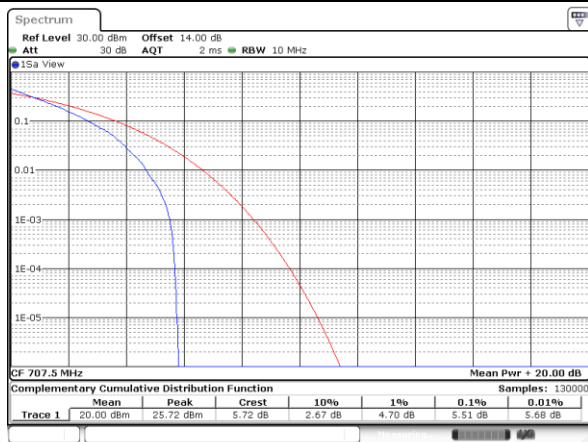


Middle Channel / Full RB

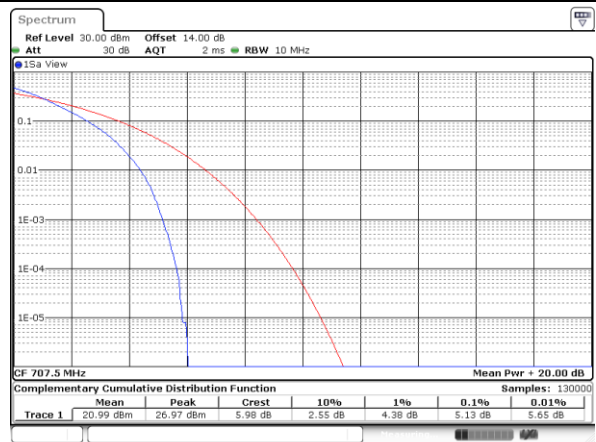

Highest Channel / 1RB

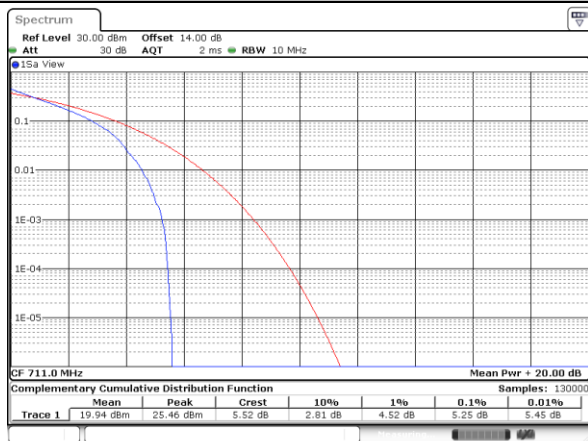


Highest Channel / Full RB

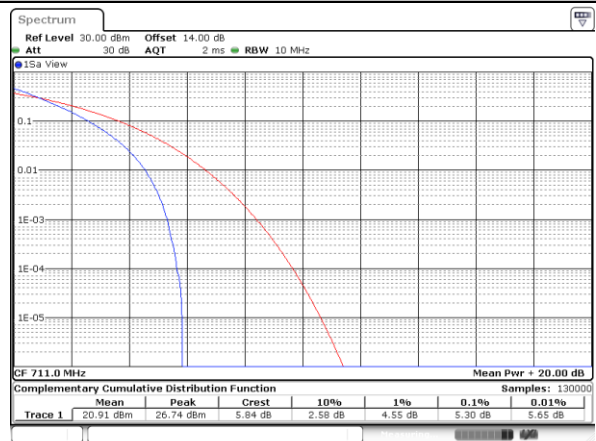




LTE Band 12 / 10MHz / 16QAM


Lowest Channel / 1RB

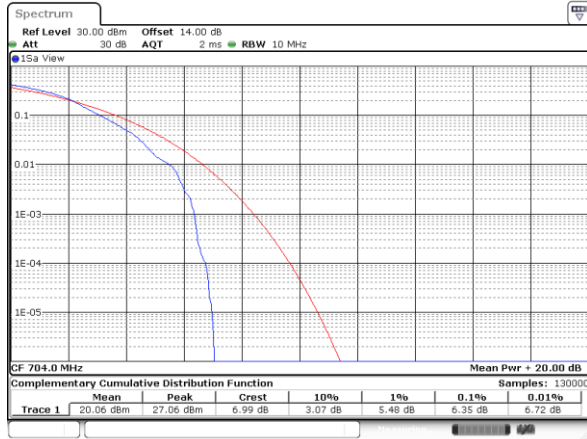

Lowest Channel / Full RB

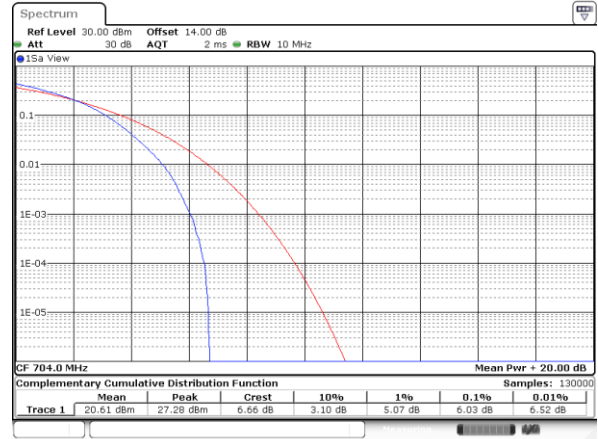


Middle Channel / 1RB

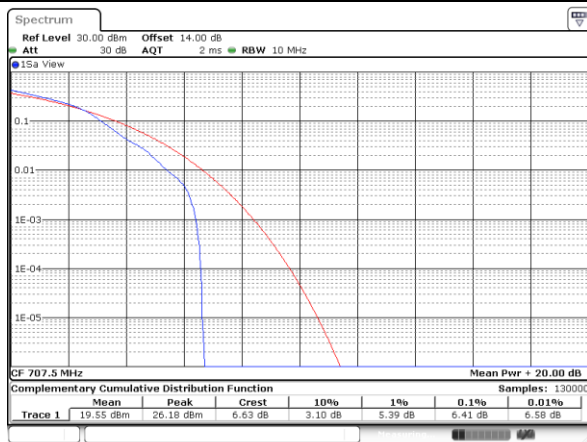


Middle Channel / Full RB



Highest Channel / 1RB

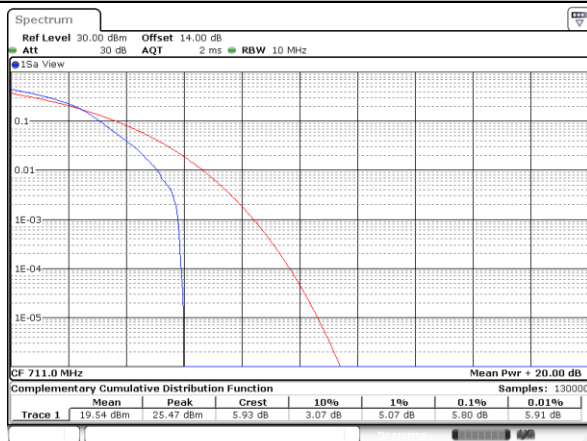


Highest Channel / Full RB

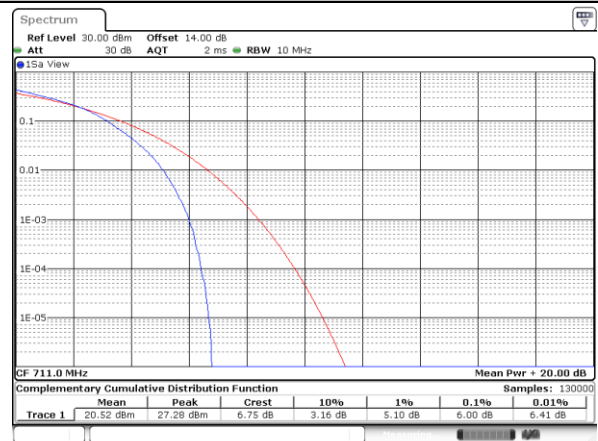




LTE Band 13 / 10MHz / QPSK

Middle Channel/ 1RB

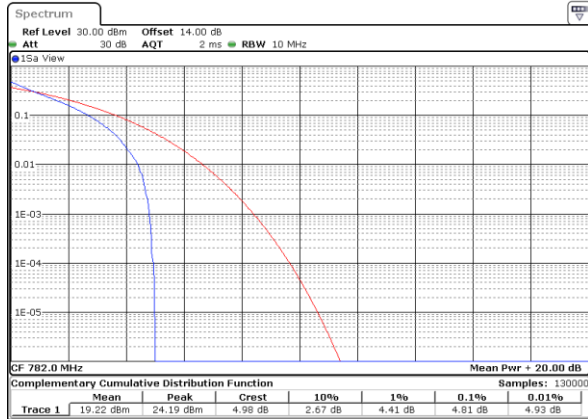

Date: 11.OCT.2018 17:56:39


Middle Channel / Full RB

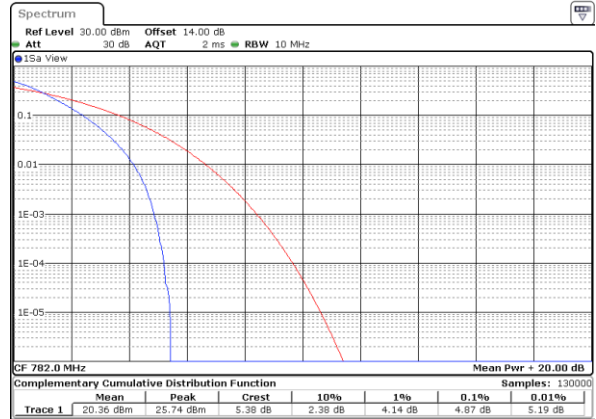

Date: 11.OCT.2018 17:56:54


LTE Band 13 / 10MHz / 16QAM

Middle Channel/ 1RB

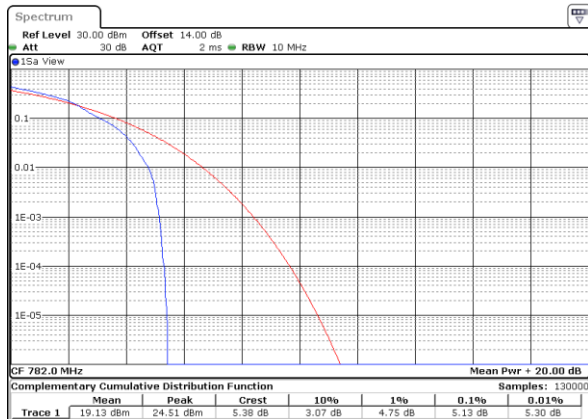

Date: 11.OCT.2018 17:56:19

Middle Channel / Full RB

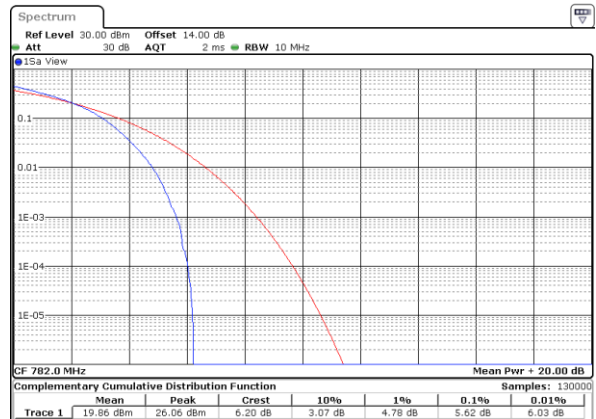

Date: 11.OCT.2018 17:56:30

**26dB Bandwidth**

Mode	LTE Band 2 : 26dB BW(MHz)											
BW	1.4MHz		3MHz		5MHz		10MHz		15MHz		20MHz	
Mod.	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Lowest CH	1.346	1.323	3.063	3.081	4.805	4.915	9.93	10.03	14.715	14.565	20.5	20.42
Middle CH	1.315	1.326	2.949	3.075	4.975	4.975	10.19	10.19	14.386	14.236	20.46	20.34
Highest CH	1.343	1.323	3.057	3.051	5.035	4.995	9.91	10.03	14.446	14.685	20.34	20.14

Mode	LTE Band 4 : 26dB BW(MHz)											
BW	1.4MHz		3MHz		5MHz		10MHz		15MHz		20MHz	
Mod.	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Lowest CH	1.27	1.318	3.015	3.087	4.955	5.055	9.95	9.69	14.206	14.416	20.46	20.26
Middle CH	1.343	1.326	3.033	2.991	4.885	4.925	10.25	9.89	14.775	14.565	20.5	20.3
Highest CH	1.318	1.295	2.991	3.021	4.995	4.885	9.71	9.91	14.356	14.955	20.539	20.46

Mode	LTE Band 5 : 26dB BW(MHz)											
BW	1.4MHz		3MHz		5MHz		10MHz		15MHz		20MHz	
Mod.	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Lowest CH	1.309	1.317	3.111	3.015	4.905	4.905	10.13	9.63	-	-	-	-
Middle CH	1.315	1.326	3.057	3.045	5.045	4.965	10.05	10.35	-	-	-	-
Highest CH	1.334	1.32	3.051	3.075	5.025	4.915	10.13	9.99	-	-	-	-


Mode	LTE Band 12 : 26dB BW(MHz)											
BW	1.4MHz		3MHz		5MHz		10MHz		15MHz		20MHz	
Mod.	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Lowest CH	1.34	1.306	3.027	2.925	5.015	4.945	9.95	10.17	-	-	-	-
Middle CH	1.32	1.329	3.033	3.063	4.905	4.965	9.93	9.93	-	-	-	-
Highest CH	1.292	1.351	2.985	3.009	4.955	5.125	10.19	9.79	-	-	-	-

Mode	LTE Band 13 : 26dB BW(MHz)											
BW	1.4MHz		3MHz		5MHz		10MHz		15MHz		20MHz	
Mod.	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Lowest CH	-	-	-	-	4.925	5.115	-	-	-	-	-	-
Middle CH	-	-	-	-	4.895	4.975	9.67	9.91	-	-	-	-
Highest CH	-	-	-	-	4.905	4.935	-	-	-	-	-	-




LTE Band 2

Lowest Channel / 1.4MHz / QPSK

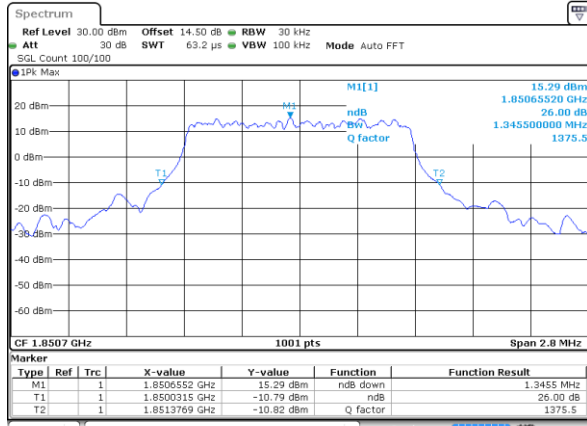


Date: 9 OCT 2018 10:40:14

Lowest Channel / 1.4MHz / 16QAM

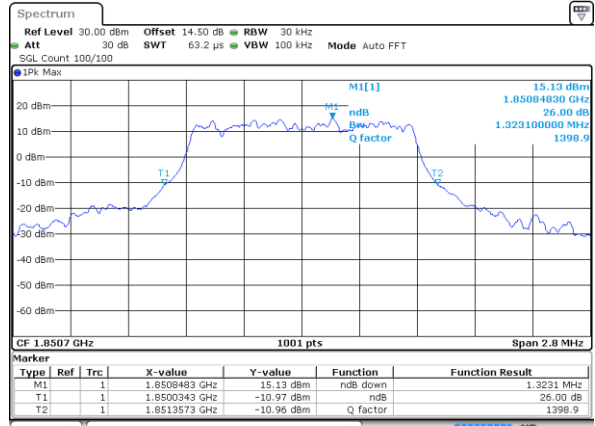


Date: 9 OCT 2018 10:40:24

Middle Channel / 1.4MHz / QPSK

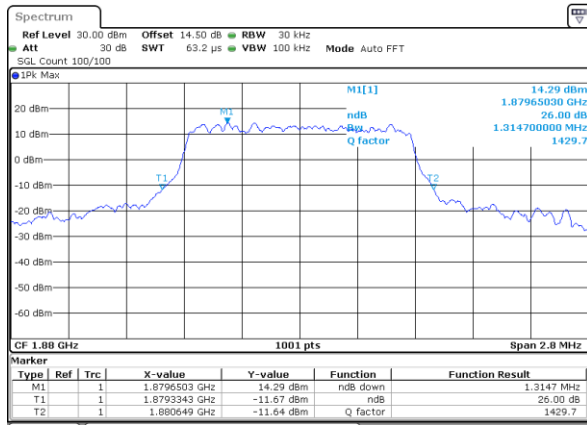


Date: 9 OCT 2018 10:47:12

Middle Channel / 1.4MHz / 16QAM

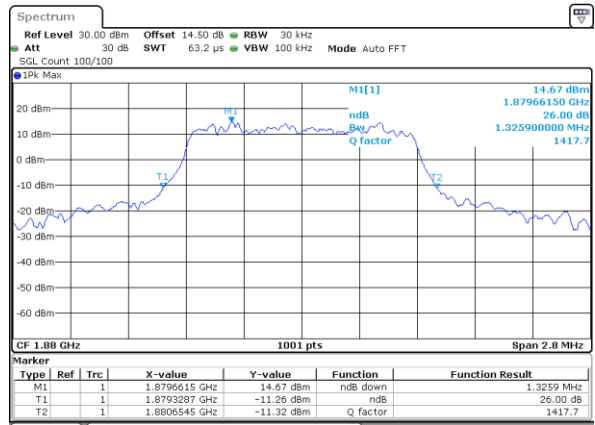


Date: 9 OCT 2018 10:47:22

Highest Channel / 1.4MHz / QPSK

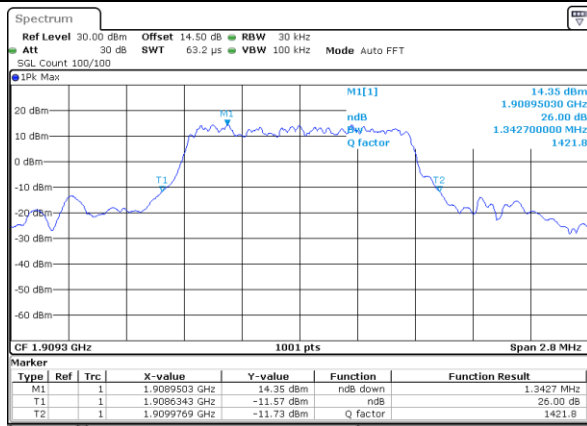

Date: 9 OCT 2018 10:49:38

Highest Channel / 1.4MHz / 16QAM

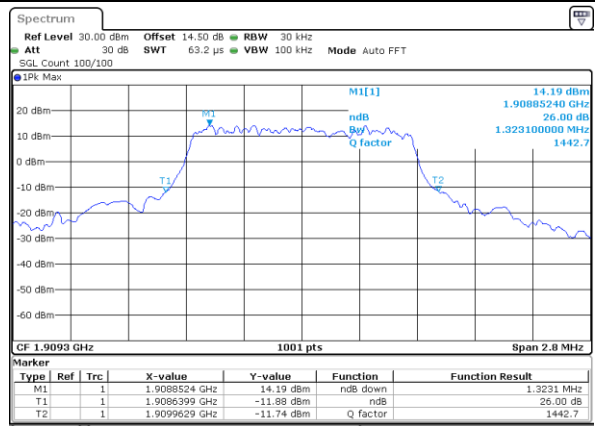


Date: 9 OCT 2018 10:49:48




LTE Band 2

Lowest Channel / 3MHz / QPSK

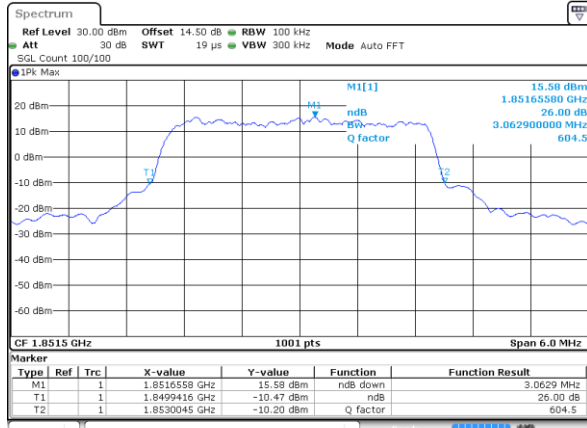


Date: 9 OCT 2018 10:56:36

Lowest Channel / 3MHz / 16QAM

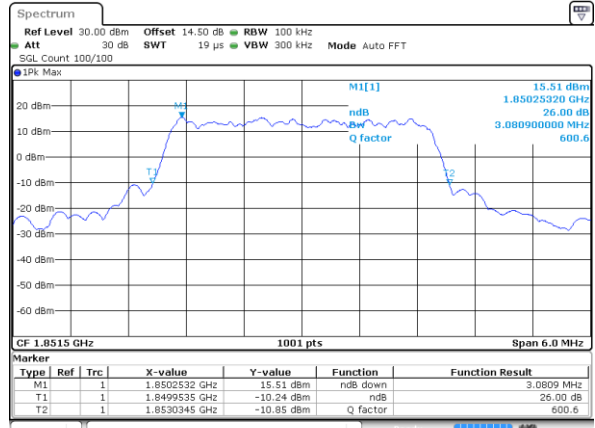


Date: 9 OCT 2018 10:56:46

Middle Channel / 3MHz / QPSK

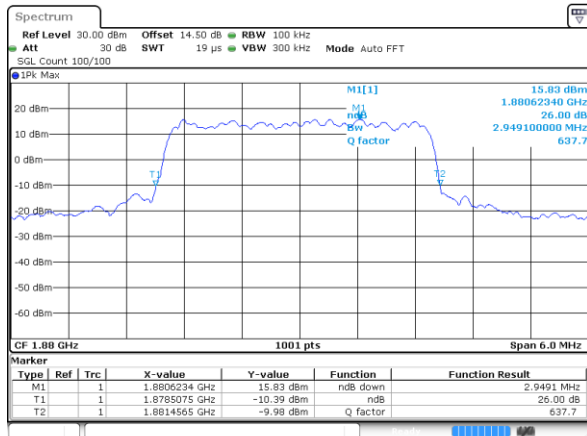


Date: 9 OCT 2018 11:03:33

Middle Channel / 3MHz / 16QAM

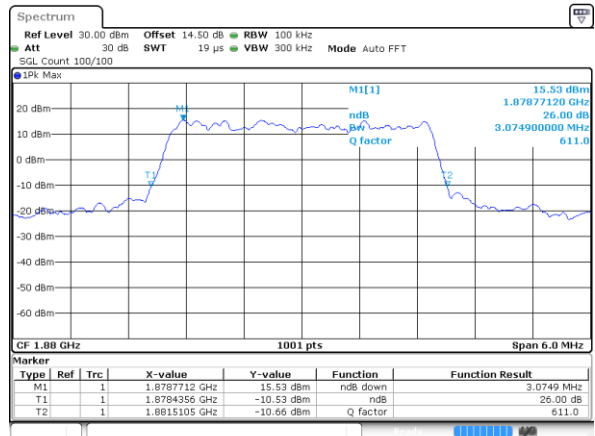


Date: 9 OCT 2018 11:03:43

Highest Channel / 3MHz / QPSK

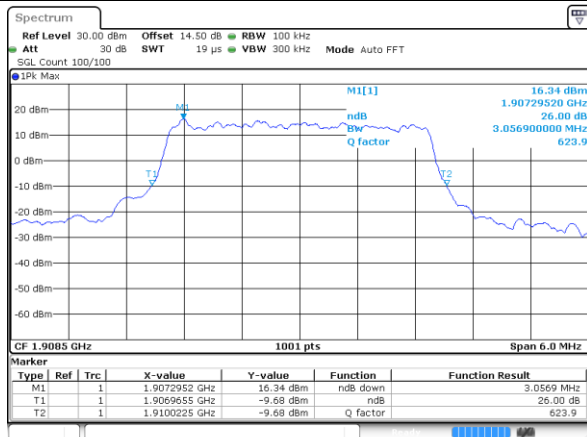

Date: 9 OCT 2018 11:05:59

Highest Channel / 3MHz / 16QAM

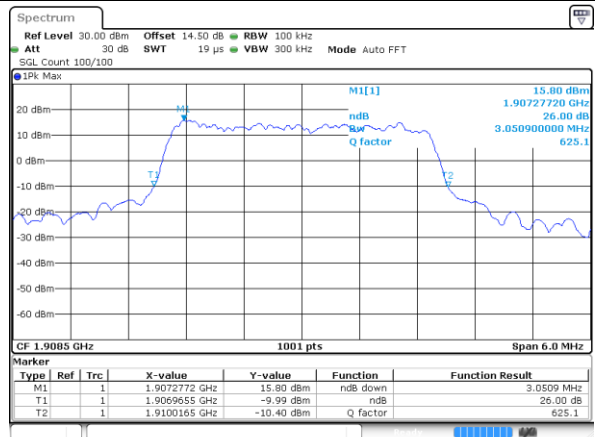


Date: 9 OCT 2018 11:06:09




LTE Band 2

Lowest Channel / 5MHz / QPSK

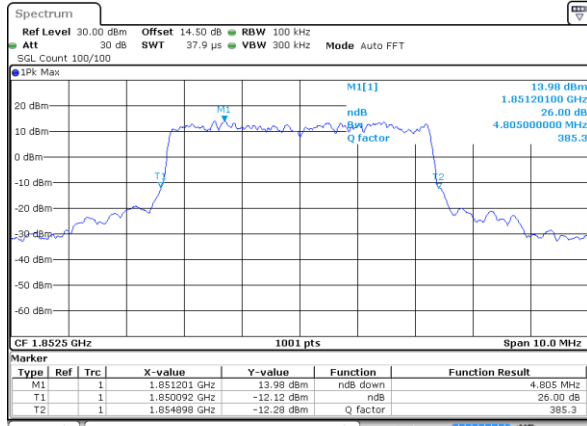


Date: 9.OCT.2018 11:12:56

Lowest Channel / 5MHz / 16QAM

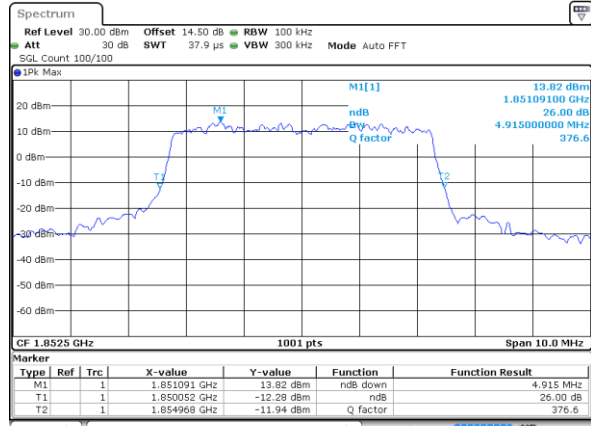


Date: 9.OCT.2018 11:13:06

Middle Channel / 5MHz / QPSK

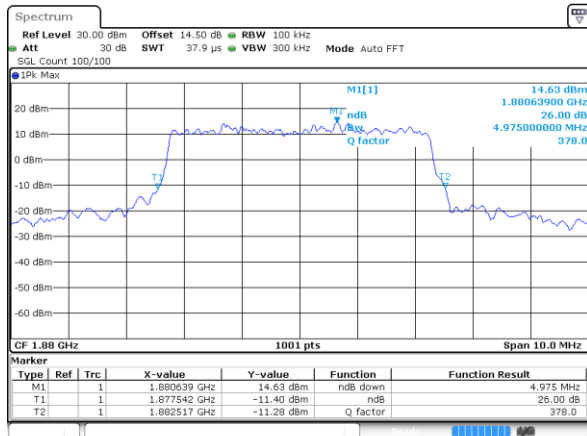


Date: 9.OCT.2018 11:19:54

Middle Channel / 5MHz / 16QAM

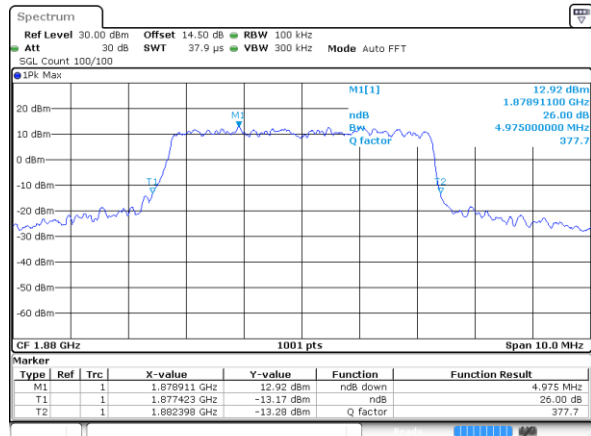


Date: 9.OCT.2018 11:20:03

Highest Channel / 5MHz / QPSK

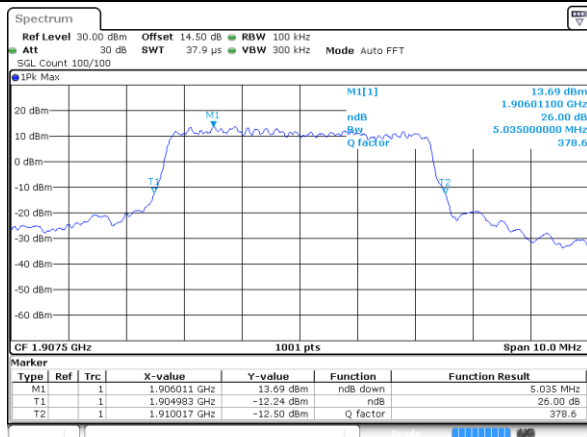

Date: 9.OCT.2018 11:22:19

Highest Channel / 5MHz / 16QAM

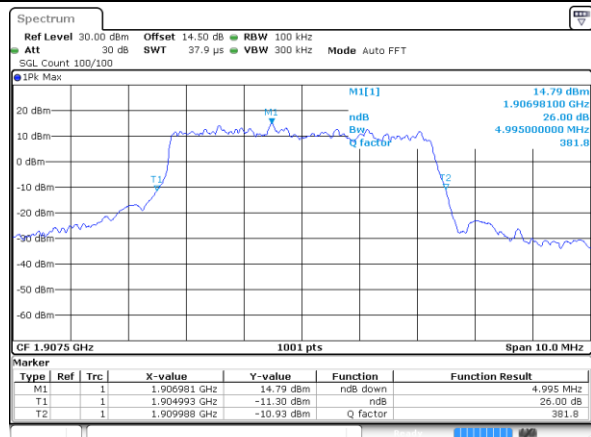

Date: 9.OCT.2018 11:22:29