

FCC TEST REPORT

(PART 22)


Applicant:	MUNIC
Address:	100 Avenue de Stalingrad 94800 Villejuif – France

Manufacturer or Supplier:	MUNIC
Address:	100 Avenue de Stalingrad 94800 Villejuif – France
Product:	telematics embedded system
Brand Name:	MUNIC
Model Name:	C4D-4G4USAB_V8+
FCC ID:	A6GC4D-4G4USV8-2
Date of tests:	May. 05, 2021 ~ May. 16, 2022

The tests have been carried out according to the requirements of the following standard:

- ☒ **FCC PART 22, Subpart H** ☒ **FCC Part 2**
☒ **ANSI/TIA/EIA-603-D** ☒ **ANSI C63.26-2015**
☒ **ANSI/TIA/EIA-603-E**

CONCLUSION: The submitted sample was found to COMPLY with the test requirement

Prepared by Simon Wang Engineer / Mobile Department	Approved by Luke Lu Manager / Mobile Department
	
Date: May. 16, 2022	Date: May. 16, 2022

This report is governed by, and incorporates by reference, CPS Conditions of Service as posted at the date of issuance of this report at <http://www.bureauveritas.com/home/about-us/our-business/cps/about-us/terms-conditions> and is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. Measurement uncertainty is only provided upon request for accredited tests. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence or if you require measurement uncertainty; provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.

TABLE OF CONTENTS

RELEASE CONTROL RECORD	4
1 SUMMARY OF TEST RESULTS.....	5
1.1 MEASUREMENT UNCERTAINTY	5
1.2 TEST SITE AND INSTRUMENTS	6
2 GENERAL INFORMATION	7
2.1 GENERAL DESCRIPTION OF EUT	7
2.2 CONFIGURATION OF SYSTEM UNDER TEST	9
2.3 DESCRIPTION OF SUPPORT UNITS	10
2.4 TEST ITEM AND TEST CONFIGURATION.....	10
2.5 EUT OPERATING CONDITIONS	13
2.6 GENERAL DESCRIPTION OF APPLIED STANDARDS	14
3 TEST TYPES AND RESULTS.....	15
3.1 OUTPUT POWER MEASUREMENT	15
3.1.1 LIMITS OF OUTPUT POWER MEASUREMENT	15
3.1.2 TEST PROCEDURES	15
3.1.3 TEST SETUP	16
3.1.4 TEST RESULTS	16
3.2 FREQUENCY STABILITY MEASUREMENT	21
3.2.1 LIMITS OF FREQUENCY STABILITY MEASUREMENT	21
3.2.2 TEST PROCEDURE	21
3.2.3 TEST SETUP	21
3.2.4 TEST RESULTS	22
3.3 OCCUPIED BANDWIDTH MEASUREMENT	23
3.3.1 TEST PROCEDURES	23
3.3.2 TEST SETUP	23
3.3.3 TEST RESULTS	24
3.4 BAND EDGE MEASUREMENT	25
3.4.1 LIMITS OF BAND EDGE MEASUREMENT	25
3.4.2 TEST SETUP	25
3.4.3 TEST PROCEDURES	26
3.4.4 TEST RESULTS	26
3.5 CONDUCTED SPURIOUS EMISSIONS.....	27
3.5.1 LIMITS OF CONDUCTED SPURIOUS EMISSIONS MEASUREMENT	27
3.5.2 TEST PROCEDURE	27
3.5.3 TEST SETUP	27
3.5.4 TEST RESULTS	28
3.6 RADIATED EMISSION MEASUREMENT	29
3.6.1 LIMITS OF RADIATED EMISSION MEASUREMENT	29
3.6.2 TEST PROCEDURES	29
3.6.3 DEVIATION FROM TEST STANDARD	29
3.6.4 TEST SETUP	30



Test Report No.: W7L-P22040029RF04

3.6.5	TEST RESULTS	32
3.7	PEAK TO AVERAGE RATIO	46
3.7.1	LIMITS OF PEAK TO AVERAGE RATIO MEASUREMENT	46
3.7.2	TEST SETUP	46
3.7.3	TEST PROCEDURES	46
3.7.4	TEST RESULTS	47
4	PHOTOGRAPHS OF THE TEST CONFIGURATION	48
5	INFORMATION ON THE TESTING LABORATORIES	49
6	MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB	50
	APPENDIX A	51
	PEAK-TO-AVERAGE RATIO(CCDF)	51
	TEST RESULT	51
	TEST GRAPHS	53
	26DB BANDWIDTH AND OCCUPIED BANDWIDTH	70
	TEST RESULT	70
	TEST GRAPHS	71
	BAND EDGE	80
	TEST RESULT	80
	TEST GRAPHS	80
	CONDUCTED SPURIOUS EMISSION	92
	TEST RESULT	92
	TEST GRAPHS	93
	FREQUENCY STABILITY	110
	TEST RESULT	110



Test Report No.: W7L-P22040029RF04

RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
W7L-P22040029RF04	Original release	May. 16, 2022

1 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC Part 22 & Part 2		
STANDARD SECTION	TEST TYPE	RESULT
§2.1046	Conducted Output Power	Compliance
§22.913 (a)(5)	Effective Radiated Power	Compliance
§2.1055 §22.355	Frequency Stability	Compliance
§2.1049	Occupied Bandwidth	Compliance
§22.913 (d)	Peak to average ratio*	Compliance
§22.917(a)	Band Edge Measurements	Compliance
§2.1051 §22.917(a)	Conducted Spurious Emissions	Compliance
§2.1053 §22.917(a)	Radiated Spurious Emissions	Compliance

* Refer to KDB 971168 D01 Power Meas License Digital Systems v03r01.

1.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

MEASUREMENT	UNCERTAINTY
Maximum Peak Output Power	±2.06dB
Frequency Stability	±76.97Hz
Radiated emissions (30MHz~1GMHz)	±4.98dB
Radiated emissions (1GMHz ~6GMHz)	±4.70dB
Radiated emissions (6GMHz ~18GMHz)	±4.60dB
Radiated emissions (18GMHz ~40GMHz)	±4.12dB
Conducted emissions	±4.01dB
Occupied Channel Bandwidth	±43.58KHz
Band Edge Measurements	±4.70dB
Peak to average ratio	±0.76dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.



1.2 TEST SITE AND INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
MXE EMI Receiver	KEYSIGHT	N9038A-544	MY54450026	Apr. 29,22	Apr. 30,23
EXA Signal Analyzer	KEYSIGHT	N9010A-544	MY54510355	Jun. 03,21	Jun. 02,22
Loop Antenna	Schwarzbeck	FMZB 1519B	00173	Sep.05,21	Sep.04,22
Bilog Antenna	ETS-LINDGRE N	3143B	00161964	Feb. 24,22	Feb. 23,23
Horn Antenna	ETS-LINDGRE N	3117	00168692	Mar. 06,22	Mar. 05,23
Horn Antenna (18GHz-40GHz)	N/A	QWH-SL-18-40-K- SG/QMS-00361	15433	Aug. 25, 21	Aug. 24, 22
Radio Communication Analyzer	ANRITSU	MT8820C	6201465426	Feb. 15,22	Feb. 14,23
Signal Pre-Amplifier	EMSI	EMC 9135	980249	Jun. 02,21	Jun. 01,22
Signal Pre-Amplifier	EMSI	EMC 012645B	980257	Jun. 03,21	Jun. 02,22
Signal Pre-Amplifier	EMSI	EMC 184045B	980259	Apr. 21,22	Apr. 22,23
3m Semi-anechoic Chamber	ETS-LINDGRE N	9m*6m*6m	Euroshieldpn- CT0001143-121 6	May. 19,20	May. 18,23
Test Software	E3	V 9.160323	N/A	N/A	N/A
Test Software	ADT	ADT_Radiated_V 7.6.15.9.2	N/A	N/A	N/A
10dB Attenuator	JFW/USA	50HF-010-SMA	1505	Jun. 03,21	Jun. 02,22
Power Meter	Anritsu	N1914A	MY52180044	Feb.19,22	Feb.18,23
Power Sensor	Agilent	E9304A H18	MY52050011	Feb.20,22	Feb.19,23
Temperature Chamber	ESPEC	SH-242	93000855	Jun. 02,21	Jun. 01,22
MXG Analog Microwave Signal Generator	KEYSIGHT	N5183A	MY50143024	Mar. 04,22	Mar. 03,23
Power Divider	MCLI/USA	PS2-15	24880	N/A	N/A

- NOTE:**
1. The calibration interval of the above test instruments is 12 months or 36 months and the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.
 2. The test was performed in 3m Semi-anechoic Chamber and RF Oven Room.
 3. The horn antenna is used only for the measurement of emission frequency above 1GHz if tested.
 4. The FCC Site Registration No. is 525120; The Designation No. is CN1171.



2 GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

PRODUCT	telematics embedded system	
BRAND NAME	MUNIC	
MODEL NAME	C4D-4G4USAB_V8+	
NOMINAL VOLTAGE	DC13.7V	
MODULATION TYPE	LTE	QPSK, 16QAM
FREQUENCY RANGE	LTE Band 5 (Channel Bandwidth: 1.4MHz)	824.7MHz ~ 848.3MHz
	LTE Band 5 (Channel Bandwidth: 3MHz)	825.5MHz ~ 847.5MHz
	LTE Band 5 (Channel Bandwidth: 5MHz)	826.5MHz ~ 846.5MHz
	LTE Band 5 (Channel Bandwidth: 10MHz)	829MHz ~ 844MHz
MAX. ERP POWER	LTE Band 5 (Channel Bandwidth: 1.4MHz)	547.02mW
	LTE Band 5 (Channel Bandwidth: 3MHz)	550.81mW
	LTE Band 5 (Channel Bandwidth: 5MHz)	548.28mW
	LTE Band 5 (Channel Bandwidth: 10MHz)	553.35mW
EMISSION DESIGNATOR GOGN	LTE Band 5 (Channel Bandwidth: 1.4MHz)	QPSK: 1M10G7D
		16QAM: 1M09W7D
	LTE Band 5 (Channel Bandwidth: 3MHz)	QPSK: 2M70G7D
		16QAM: 2M70W7D
	LTE Band 5 (Channel Bandwidth: 5MHz)	QPSK: 4M50G7D
		16QAM: 4M51W7D
	LTE Band 5 (Channel Bandwidth: 10MHz)	QPSK: 8M98G7D
		16QAM: 8M97W7D
ANTENNA TYPE	Fixed Internal Antenna with 5.54dBi gain for LTE B5	
HW VERSION	HW.01	
SW VERSION	SW.01	
I/O PORTS	Refer to user's manual	
CABLE SUPPLIED	N/A	
EXTREME TEMPERATURE	-20-50 °C	
EXTREME VOLTAGE	DC8V - DC18V	

NOTE:

1. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.
2. The EUT incorporates a SISO function. Physically, the EUT provides one completed transmitter and one receiver.


MODULATION MODE	TX FUNCTION
LTE	1TX/1RX

3. For the test results, the EUT had been tested with all conditions. But only the worst case was shown in test report.

List of Accessory:

ACCESSORIES	BRAND	MODEL	SPECIFICATION
Battery 1	Howell	Li-polymer 552535H	Capacity : Li-ion, 270mAh
Battery 2	Akkutronics	382530-PTL	Capacity : Li-ion, 270mAh

2.2 CONFIGURATION OF SYSTEM UNDER TEST FOR RADIATION EMISSION

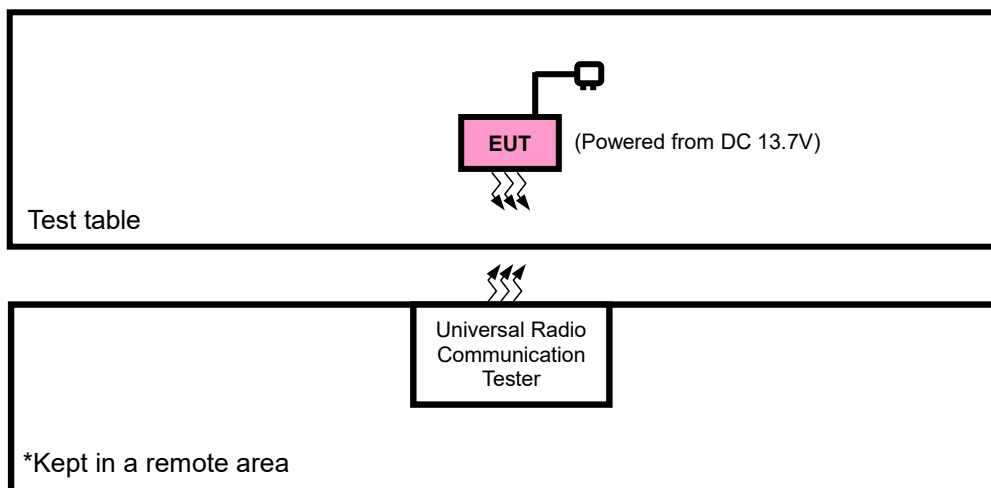

2.3 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	DC source	Kikusui/JP	PMX18-5A	0000001	N/A

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	DC Line: Unshielded, Detachable 1.0m

2.4 TEST ITEM AND TEST CONFIGURATION

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports. The worst case in ERP and radiated emission was found when positioned on X-plane for GSM /EDGE /LTE. Following channel(s) was (were) selected for the final test as listed below:

EUT CONFIGURE MODE	DESCRIPTION
A	EUT + DC Source with LTE link



**BUREAU
VERITAS**

Test Report No.: W7L-P22040029RF04

LTE BAND 5 MODE

EUT CONFIGURE MODE	TEST ITEM	Available Channel	Tested Channel	Channel bandwidth	modulation	mode
A	ERP	20407 to 20643	20407, 20525, 20643	1.4MHz	QPSK,16QAM	1 RB / 0 RB Offset
		20415 to 20635	20415, 20525, 20635	3MHz	QPSK,16QAM	1 RB / 0 RB Offset
		20425 to 20625	20425, 20525, 20625	5MHz	QPSK,16QAM	1 RB / 0 RB Offset
		20450 to 20600	20450, 20525, 20600	10MHz	QPSK,16QAM	1 RB / 0 RB Offset
A	FREQUENCY STABILITY	20407 to 20643	20407, 20525, 20643	1.4MHz	QPSK,16QAM	6 RB / 0 RB Offset
		20415 to 20635	20415, 20525, 20635	3MHz	QPSK,16QAM	15 RB / 0 RB Offset
		20425 to 20625	20425, 20525, 20625	5MHz	QPSK,16QAM	25 RB / 0 RB Offset
		20450 to 20600	20450, 20525, 20600	10MHz	QPSK,16QAM	50 RB / 0 RB Offset
A	OCCUPIED BANDWIDTH	20407 to 20643	20407, 20525, 20643	1.4MHz	QPSK,16QAM	6 RB / 0 RB Offset
		20415 to 20635	20415, 20525, 20635	3MHz	QPSK,16QAM	15 RB / 0 RB Offset
		20425 to 20625	20425, 20525, 20625	5MHz	QPSK,16QAM	25 RB / 0 RB Offset
		20450 to 20600	20450, 20525, 20600	10MHz	QPSK,16QAM	50 RB / 0 RB Offset
A	BAND EDGE	20407 to 20643	20407	1.4 MHz	QPSK,16QAM	1 RB / 0 RB Offset
						6 RB / 0 RB Offset
		20407 to 20643	20643	1.4 MHz	QPSK,16QAM	1 RB / 5 RB Offset
						6 RB / 0 RB Offset
		20415 to 20635	20415	3 MHz	QPSK,16QAM	1 RB / 0 RB Offset
						15 RB / 0 RB Offset
		20415 to 20635	20635	3 MHz	QPSK,16QAM	1 RB / 14 RB Offset
						15 RB / 0 RB Offset
		20425 to 20625	20425	5MHz	QPSK,16QAM	1 RB / 0 RB Offset
						25 RB / 0 RB Offset
		20425 to 20625	20625	5MHz	QPSK,16QAM	1 RB / 24 RB Offset
						25 RB / 0 RB Offset
		20450 to 20600	20450	10MHz	QPSK,16QAM	1 RB / 0 RB Offset
						50 RB / 0 RB Offset
		20450 to 20600	20600	10MHz	QPSK,16QAM	1 RB / 49 RB Offset
						50 RB / 0 RB Offset

A	CONDUCTED EMISSION	20407 to 20643	20407, 20525, 20643	1.4MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		20415 to 20635	20415, 20525, 20635	3MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		20425 to 20625	20425, 20525, 20625	5MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		20450 to 20600	20450, 20525, 20600	10MHz	QPSK, 16QAM	1 RB / 0 RB Offset
A	RADIATED EMISSION	20407 to 20643	20525	1.4MHz	QPSK	1 RB / 0 RB Offset
		20415 to 20635	20525	3MHz	QPSK	1 RB / 0 RB Offset
		20425 to 20625	20525	5MHz	QPSK	1 RB / 0 RB Offset
		20450 to 20600	20450, 20525, 20600	10MHz	QPSK	1 RB / 0 RB Offset
A	PEAK TO AVERAGE RATIO	20407 to 20643	20407, 20525, 20643	1.4MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		20415 to 20635	20415, 20525, 20635	3MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		20425 to 20625	20425, 20525, 20625	5MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		20450 to 20600	20450, 20525, 20600	10MHz	QPSK, 16QAM	1 RB / 0 RB Offset

Note: This device was tested under all bandwidths, RB configurations and modulations. The worst case was found in QPSK modulation.

TEST CONDITION:

TEST ITEM	ENVIRONMENTAL CONDITIONS	INPUT POWER	TESTED BY
ERP	23deg. C, 70%RH	DC 13.7V	Jace Hu
FREQUENCY STABILITY	23deg. C, 70%RH	DC 13.7V	James Fu
OCCUPIED BANDWIDTH	23deg. C, 70%RH	DC 13.7V	James Fu
BAND EDGE	23deg. C, 70%RH	DC 13.7V	James Fu
CONDUCTED EMISSION	23deg. C, 70%RH	DC 13.7V	James Fu
RADIATED EMISSION	23deg. C, 70%RH	DC 13.7V	Jace Hu
PEAK TO AVERAGE RATIO	23deg. C, 70%RH	DC 13.7V	James Fu

2.5 EUT OPERATING CONDITIONS

The EUT makes a call to the communication simulator. The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency



Test Report No.: W7L-P22040029RF04

2.6 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC 47 CFR Part 2

FCC 47 CFR Part 22

KDB 971168 D01 Power Meas License Digital Systems v03r01

ANSI/TIA/EIA-603-D

ANSI/TIA/EIA-603-E

ANSI C63.26-2015

NOTE: All test items have been performed and recorded as per the above standards.

3 TEST TYPES AND RESULTS

3.1 OUTPUT POWER MEASUREMENT

3.1.1 LIMITS OF OUTPUT POWER MEASUREMENT

Mobile / Portable station are limited to 7 watts e.r.p.

3.1.2 TEST PROCEDURES

EIRP / ERP MEASUREMENT:

Per KDB 971168 D01 Power Meas License Digital Systems v03r01 or subclause 5.2.5.5 of ANSI C63.26-2015, the relevant equation for determining the ERP or EIRP from the conducted RF output power measured using the guidance provided above is:

$$\text{ERP or EIRP} = P_{\text{Meas}} + G_{\text{T}} - L_{\text{C}}$$

Where:

ERP or EIRP = effective radiated power or equivalent isotropically radiated power, respectively

(expressed in the same units as P_{Meas} , typically dBW or dBm);

P_{Meas} = measured transmitter output power or PSD, in dBm or dBW;

G_{T} = gain of the transmitting antenna, in dBd (ERP) or dBi (EIRP);

L_{C} = signal attenuation in the connecting cable between the transmitter and antenna, in dB.


CONDUCTED POWER MEASUREMENT:

The EUT was set up for the maximum power with WCDMA link data modulation and link up with simulator. Set the EUT to transmit under low, middle and high channel and record the power level shown on simulator.

3.1.3 TEST SETUP

EIRP / ERP Measurement:

CONDUCTED POWER MEASUREMENT:



3.1.4 TEST RESULTS

CONDUCTED OUTPUT POWER (dBm)



LTE Band 5

Band/BW	Modulation	RB Size	RB Offset	Low CH 20407	Mid CH 20525	High CH 20643	MPR
				Frequency 824.7 MHz	Frequency 836.5 MHz	Frequency 848.3 MHz	
5/ 1.4	QPSK	1	0	23.84	23.72	23.96	0
		1	2	23.79	23.78	23.99	0
		1	5	23.79	23.66	23.97	0
		3	0	23.73	23.68	23.95	0
		3	1	23.74	23.69	23.95	0
		3	3	23.57	23.64	23.80	0
		6	0	22.69	22.56	22.89	1
	16QAM	1	0	22.60	22.60	22.78	1
		1	2	22.63	22.63	22.85	1
		1	5	22.25	22.27	22.50	1
		3	0	22.47	22.34	22.65	1
		3	1	22.54	22.52	22.76	1
		3	3	22.51	22.55	22.70	1
		6	0	21.58	21.56	21.85	2

Band/BW	Modulation	RB Size	RB Offset	Low CH 20415	Mid CH 20525	High CH 20635	MPR
				Frequency 825.5 MHz	Frequency 836.5 MHz	Frequency 847.5 MHz	
5/ 3	QPSK	1	0	23.79	23.71	23.96	0
		1	7	23.77	23.80	24.02	0
		1	14	23.73	23.72	23.95	0
		8	0	22.70	22.75	22.94	1
		8	3	22.74	22.69	22.92	1
		8	7	22.57	22.64	22.83	1
		15	0	22.68	22.56	22.86	1
	16QAM	1	0	22.64	22.54	22.82	1
		1	7	22.62	22.64	22.82	1
		1	14	22.30	22.23	22.53	1
		8	0	21.47	21.35	21.62	2
		8	3	21.56	21.50	21.82	2
		8	7	21.56	21.55	21.68	2
		15	0	21.58	21.56	21.80	2

Band/BW	Modulation	RB Size	RB Offset	Low CH 20425	Mid CH 20525	High CH 20625	MPR
				Frequency 826.5 MHz	Frequency 836.5 MHz	Frequency 846.5 MHz	
5/ 5	QPSK	1	0	23.81	23.73	23.96	0
		1	12	23.76	23.84	23.99	0
		1	24	23.77	23.69	24.00	0
		12	0	22.72	22.74	22.91	1
		12	6	22.71	22.69	22.98	1
		12	13	22.57	22.63	22.80	1
		25	0	22.71	22.53	22.88	1
	16QAM	1	0	22.58	22.56	22.75	1
		1	12	22.64	22.66	22.81	1
		1	24	22.26	22.24	22.53	1
		12	0	21.43	21.35	21.62	2
		12	6	21.55	21.53	21.82	2
		12	13	21.49	21.55	21.70	2
		25	0	21.55	21.63	21.84	2

Band/BW	Modulation	RB Size	RB Offset	Low CH 20450	Mid CH 20525	High CH 20600	MPR
				Frequency 829 MHz	Frequency 836.5 MHz	Frequency 844 MHz	
5/ 10	QPSK	1	0	23.85	23.78	24.01	0
		1	24	23.84	23.85	24.04	0
		1	49	23.81	23.74	24.01	0
		25	0	22.78	22.76	22.96	1
		25	12	22.78	22.74	23.00	1
		25	25	22.65	22.65	22.85	1
		50	0	22.73	22.61	22.90	1
	16QAM	1	0	22.66	22.62	22.83	1
		1	24	22.70	22.68	22.87	1
		1	49	22.33	22.29	22.55	1
		25	0	21.49	21.42	21.67	2
		25	12	21.62	21.58	21.84	2
		25	25	21.57	21.57	21.76	2
		50	0	21.63	21.64	21.86	2

ERP POWER (dBm)

LTE BAND 5

CHANNEL BANDWIDTH: 1.4MHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _C (dB)	ERP (dBm)	ERP (mW)	Limit (W)
20407	824.7	23.84	5.54	27.23	528.45	7
20525	836.5	23.78	5.54	27.17	521.19	7
20643	848.3	23.99	5.54	27.38	547.02	7

CHANNEL BANDWIDTH: 1.4MHz 16QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _C (dB)	ERP (dBm)	ERP (mW)	Limit (W)
20407	824.7	22.63	5.54	26.02	399.94	7
20525	836.5	22.63	5.54	26.02	399.94	7
20643	848.3	22.85	5.54	26.24	420.73	7

CHANNEL BANDWIDTH: 3MHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _C (dB)	ERP (dBm)	ERP (mW)	Limit (W)
20415	825.5	23.79	5.54	27.18	522.4	7
20525	836.5	23.8	5.54	27.19	523.6	7
20635	847.5	24.02	5.54	27.41	550.81	7

CHANNEL BANDWIDTH: 3MHz 16QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _C (dB)	ERP (dBm)	ERP (mW)	Limit (W)
20415	825.5	22.64	5.54	26.03	400.87	7
20525	836.5	22.64	5.54	26.03	400.87	7
20635	847.5	22.82	5.54	26.21	417.83	7

CHANNEL BANDWIDTH: 5MHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _C (dB)	ERP (dBm)	ERP (mW)	Limit (W)
20425	826.5	23.81	5.54	27.2	524.81	7
20525	836.5	23.84	5.54	27.23	528.45	7
20625	846.5	24	5.54	27.39	548.28	7

CHANNEL BANDWIDTH: 5MHz 16QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _C (dB)	ERP (dBm)	ERP (mW)	Limit (W)
20425	826.5	22.64	5.54	26.03	400.87	7
20525	836.5	22.66	5.54	26.05	402.72	7
20625	846.5	22.81	5.54	26.2	416.87	7

CHANNEL BANDWIDTH: 10MHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _C (dB)	ERP (dBm)	ERP (mW)	Limit (W)
20450	829.0	23.85	5.54	27.24	529.66	7
20525	836.5	23.85	5.54	27.24	529.66	7
20600	844.0	24.04	5.54	27.43	553.35	7

CHANNEL BANDWIDTH: 10MHz 16QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _C (dB)	ERP (dBm)	ERP (mW)	Limit (W)
20450	829.0	22.7	5.54	26.09	406.44	7
20525	836.5	22.68	5.54	26.07	404.58	7
20600	844.0	22.87	5.54	26.26	422.67	7

3.2 FREQUENCY STABILITY MEASUREMENT

3.2.1 LIMITS OF FREQUENCY STABILITY MEASUREMENT


1.5 ppm is for base and fixed station. 2.5 ppm is for mobile station.

3.2.2 TEST PROCEDURE

- Device is placed at the oven room. The oven room could control the temperatures and humidity. Power warm up is at least 15 min and power applied should perform before recording frequency error.
- EUT is connected the external power supply to control the DC input power. The test voltage range is from minimum to maximum working voltage. Each step shall be record the frequency error rate.
- The temperature range step is 10 degrees in this test items. All temperature levels shall be hold the $\pm 0.5^{\circ}\text{C}$ during the measurement testing. The each temperature step shall be at least 0.5 hours, consider the EUT could be test under the stability condition.

NOTE: The frequency error was recorded frequency error from the communication simulator.

3.2.3 TEST SETUP

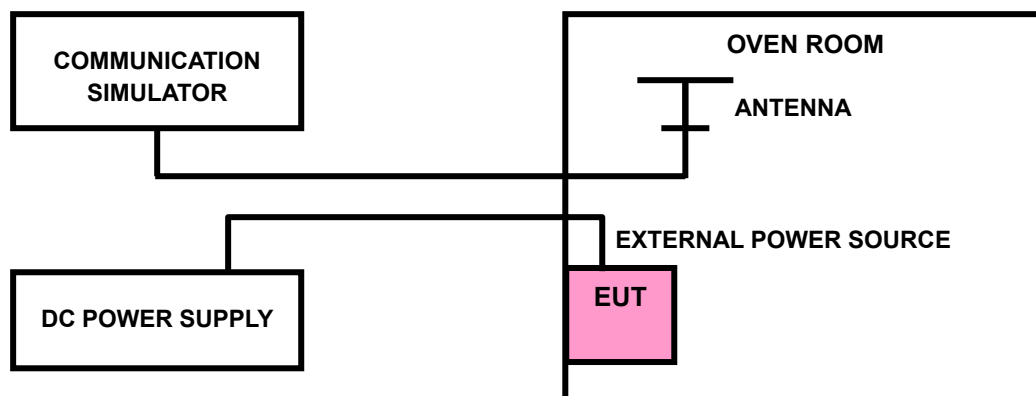



Test Report No.: W7L-P22040029RF04

3.2.4 TEST RESULTS


Please Refer to Appendix A Of this test report.

3.3 OCCUPIED BANDWIDTH MEASUREMENT

3.3.1 TEST PROCEDURES

The EUT makes a call to the communication simulator. All measurements were done at low, middle and high operational frequency range. The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency. Use OBW measurement function of Spectrum analyzer to measure 99 % occupied bandwidth.

3.3.2 TEST SETUP

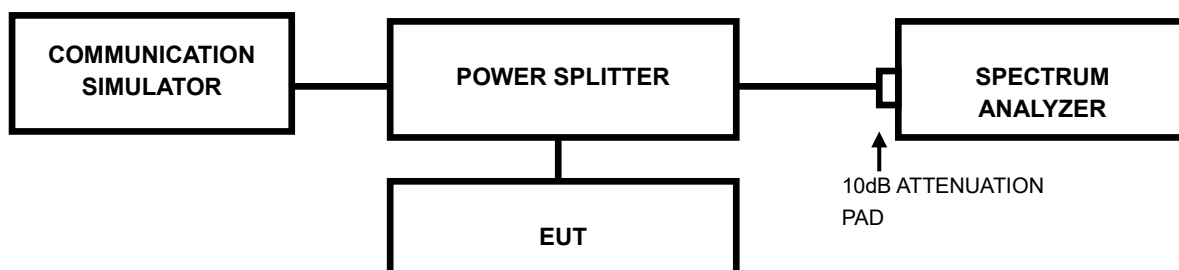



Test Report No.: W7L-P22040029RF04

3.3.3 TEST RESULTS


Please Refer to Appendix A Of this test report.

3.4 BAND EDGE MEASUREMENT

3.4.1 LIMITS OF BAND EDGE MEASUREMENT

Power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

3.4.2 TEST SETUP

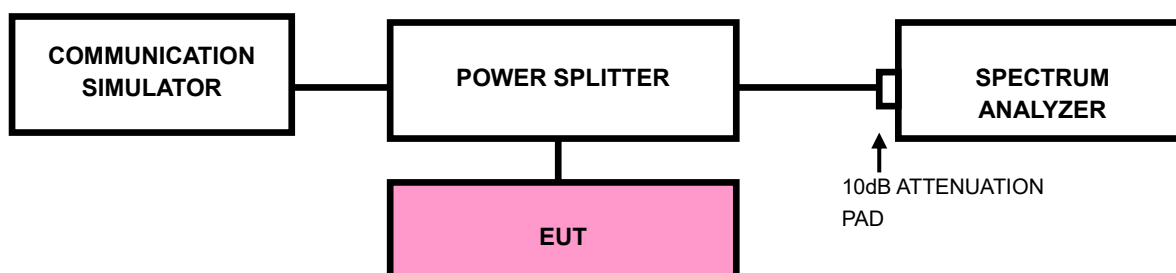



Test Report No.: W7L-P22040029RF04

3.4.3 TEST PROCEDURES

- a. All measurements were done at low and high operational frequency range.
- b. The center frequency of spectrum is the band edge frequency and span is 1~5 MHz.
RBW of the spectrum is 10kHz and VBW of the spectrum is 30kHz (LTE bandwidth for (1.4M/3M/5M/10M)1RB/0RB&1RB/MAXRB).
- c. The center frequency of spectrum is the band edge frequency and span is 1~5 MHz.
RBW of the spectrum is $\geq 1\% \cdot \text{EBW}$ kHz and VBW of the spectrum is $3 \cdot \text{RBW}$ kHz. (LTE bandwidth 1.4M/3M/5M/10M).
- d. Record the max trace plot into the test report.

3.4.4 TEST RESULTS

Please Refer to Appendix A Of this test report.

3.5 CONDUCTED SPURIOUS EMISSIONS


3.5.1 LIMITS OF CONDUCTED SPURIOUS EMISSIONS MEASUREMENT

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. The emission limit equal to -13dBm .

3.5.2 TEST PROCEDURE

- a. The EUT makes a phone call to the communication simulator. All measurements were done at low, middle and high operational frequency range.
- b. Measuring frequency range is from 9kHz up to a frequency including its 10th harmonic. 10dB attenuation pad is connected with spectrum. RBW=1MHz and VBW=3MHz is used for conducted emission measurement.

3.5.3 TEST SETUP

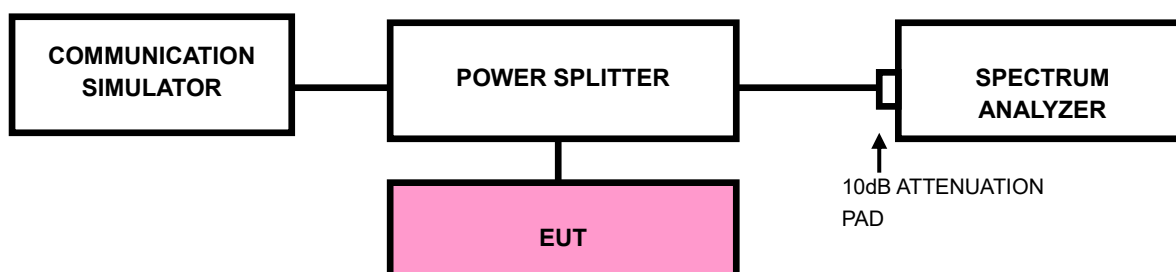



Test Report No.: W7L-P22040029RF04

3.5.4 TEST RESULTS

NOTE : The 9K~30MHz amplitude of spurious emissions attenuated more than 20 dB below the permissible value is not required in the report.

Please Refer to Appendix A Of this test report.

3.6 RADIATED EMISSION MEASUREMENT

3.6.1 LIMITS OF RADIATED EMISSION MEASUREMENT

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. The emission limit equal to -13dBm .

3.6.2 TEST PROCEDURES

- a. Substitution method is used for E.I.R.P measurement. In the semi-anechoic chamber, EUT placed on the 0.8m height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum polar radiated power. The "Read Value" is the spectrum reading the maximum power value.
- b. The substitution horn antenna is substituted for EUT at the same position and signals generator export the CW signal to the substitution antenna via a TX cable. Rotated the Turn Table and moved receiving antenna to find the maximum radiation power. Adjust output power level of S.G to get a Value of spectrum reading equal to "Read Value " of step a. Record the power level of S.G
- c. $\text{EIRP} = \text{Output power level of S.G} - \text{TX cable loss} + \text{Antenna gain of substitution horn}.$
- d. E.R.P power can be calculated form E.I.R.P power by subtracting the gain of dipole,
 $\text{E.R.P power} = \text{E.I.P.R power} - 2.15\text{dBi}.$


NOTE: The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1MHz/3MHz.

3.6.3 DEVIATION FROM TEST STANDARD


No deviation

3.6.4 TEST SETUP


< Frequency Range below 30MHz >

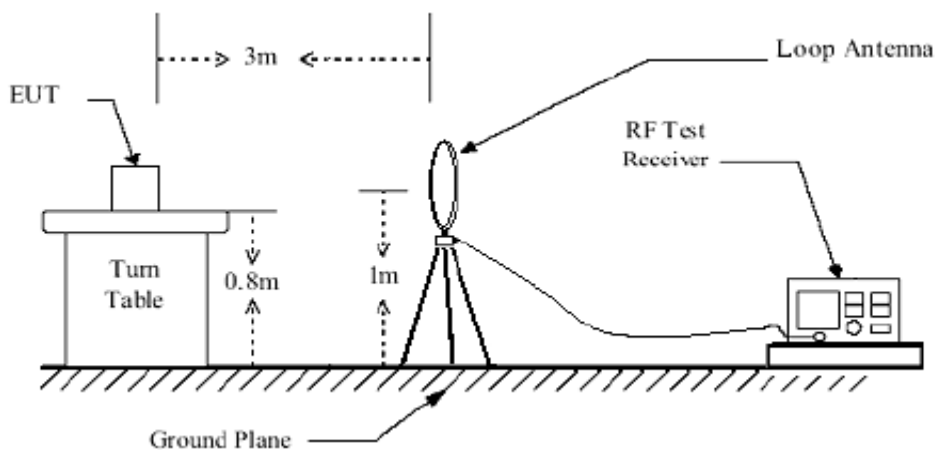

< Frequency Range 30MHz~1GHz >

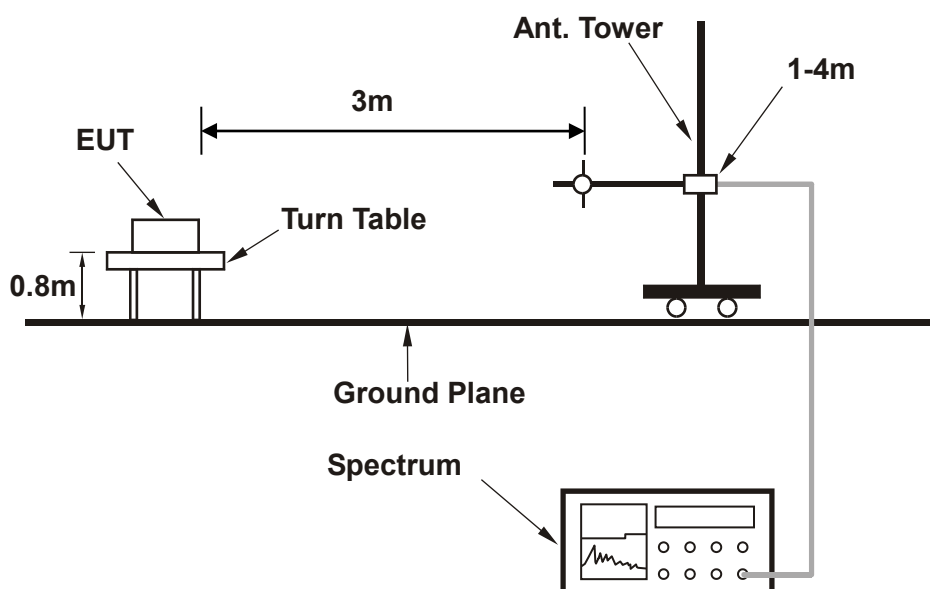

<Frequency Range above 1GHz>

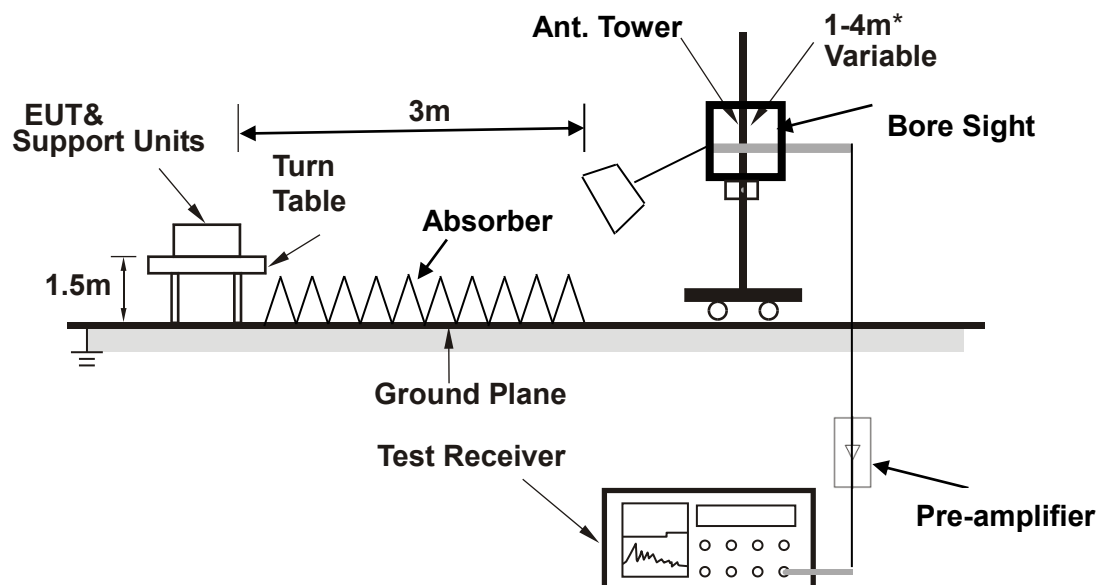

Note: Above 1G is a directional antenna

Depends on the EUT height and the antenna 3dB beamwidth both, refer to section 7.3 of CISPR 16-2-3.

For the actual test configuration, please refer to the attached file (Test Setup Photo).

3.6.5 TEST RESULTS

NOTE : The 9K~30MHz amplitude of spurious emissions attenuated more than 20 dB below the permissible value is not required in the report.

BELOW 1GHz WORST-CASE DATA


30 MHz – 1GHz data:

LTEB5

CHANNEL BANDWIDTH: 10MHz / QPSK


MODE	TX channel 20600	FREQUENCY RANGE	Below 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC13.7V
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	56.190	-44.90	-54.48	-13.00	-31.90	9.58	Peak	Horizontal
2	113.420	-26.64	-36.40	-13.00	-13.64	9.76	Peak	Horizontal
3	189.080	-34.52	-45.87	-13.00	-21.52	11.35	Peak	Horizontal
4 PP	302.570	-23.11	-37.17	-13.00	-10.11	14.06	Peak	Horizontal
5	465.530	-38.57	-56.02	-13.00	-25.57	17.45	Peak	Horizontal
6	563.500	-39.55	-58.67	-13.00	-26.55	19.12	Peak	Horizontal

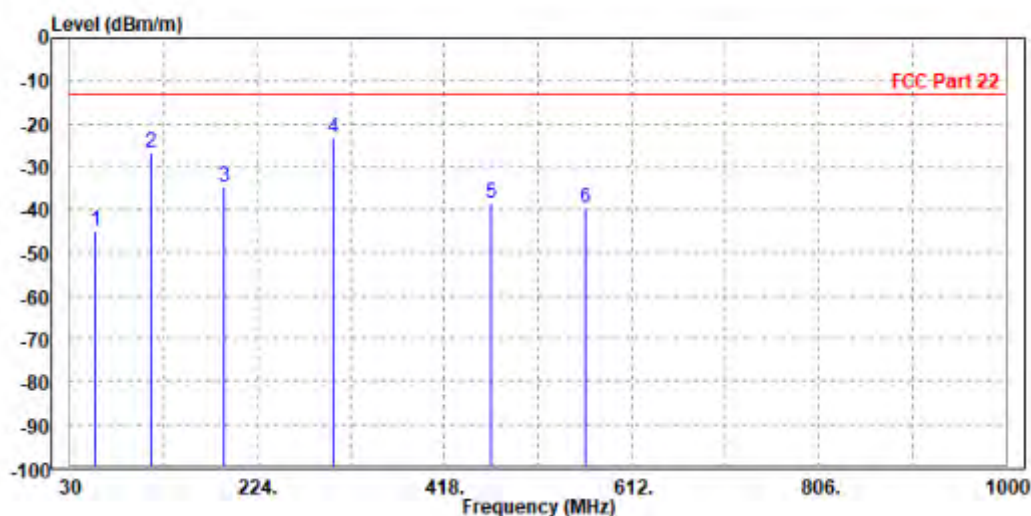

MODE	TX channel 20600	FREQUENCY RANGE	Below 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC13.7V
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	42.610	-40.77	-52.60	-13.00	-27.77	11.83	Peak	Vertical
2 PP	113.420	-31.89	-40.59	-13.00	-18.89	8.70	Peak	Vertical
3	189.080	-39.88	-51.22	-13.00	-26.88	11.34	Peak	Vertical
4	301.600	-35.07	-49.11	-13.00	-22.07	14.04	Peak	Vertical
5	464.560	-37.51	-54.65	-13.00	-24.51	17.14	Peak	Vertical
6	551.860	-38.73	-57.37	-13.00	-25.73	18.64	Peak	Vertical

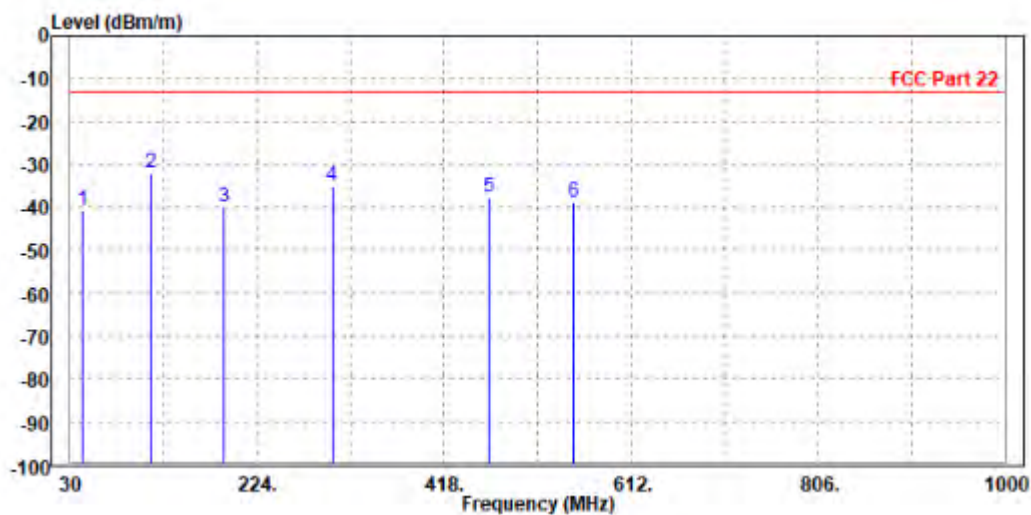



**BUREAU
VERITAS**

Test Report No.: W7L-P22040029RF04

ABOVE 1GHz DATA


Note: For higher frequency, the emission is too low to be detected.

LTE Band 5

CHANNEL BANDWIDTH: 1.4MHz / QPSK


MODE	TX channel 20525	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC13.7V
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	1673.000	-51.74	-55.30	-13.00	-38.74	3.56	Peak	Horizontal
2 PP	2512.000	-32.49	-40.55	-13.00	-19.49	8.06	Peak	Horizontal

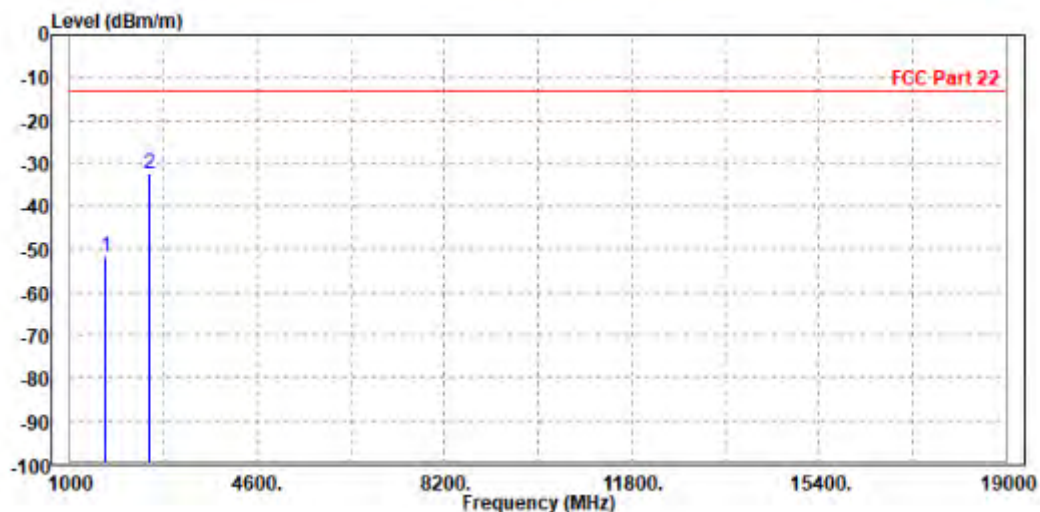

MODE	TX channel 20525	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC13.7V
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			


	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	1666.000	-52.03	-55.57	-13.00	-39.03	3.54	Peak	Vertical
2 PP	2509.500	-33.05	-40.15	-13.00	-20.05	7.10	Peak	Vertical

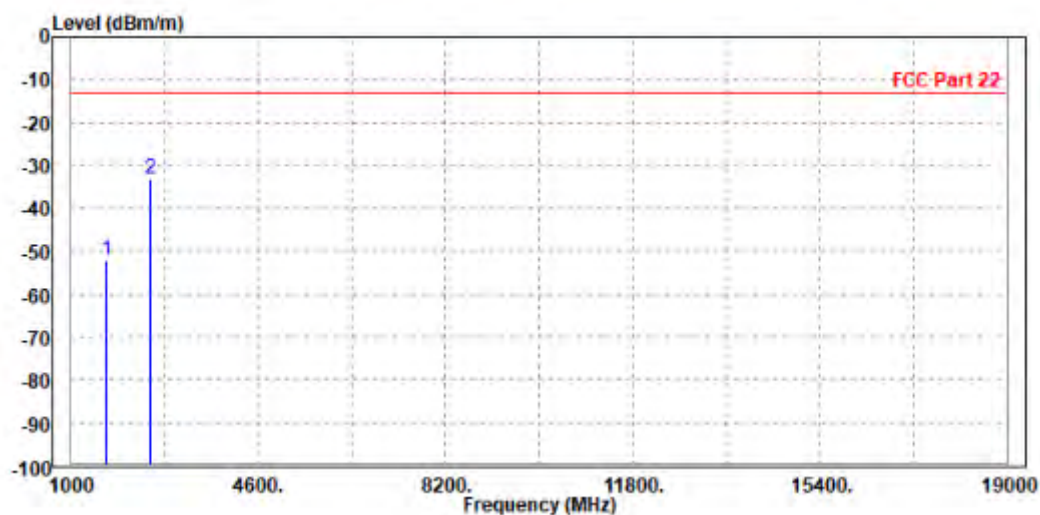

CHANNEL BANDWIDTH: 3MHz / QPSK


MODE	TX channel 20525	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC13.7V
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	1666.000	-52.36	-55.83	-13.00	-39.36	3.47	Peak	Horizontal
2 PP	2509.500	-32.14	-40.20	-13.00	-19.14	8.06	Peak	Horizontal

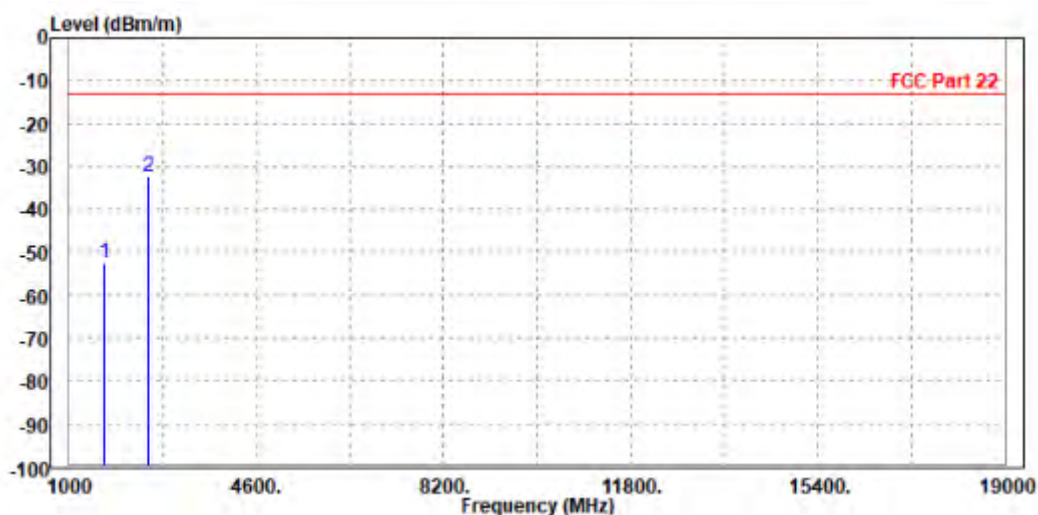

MODE	TX channel 20525	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC13.7V
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			


	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	1673.000	-51.95	-55.56	-13.00	-38.95	3.61	Peak	Vertical
2 PP	2512.000	-33.80	-40.91	-13.00	-20.80	7.11	Peak	Vertical

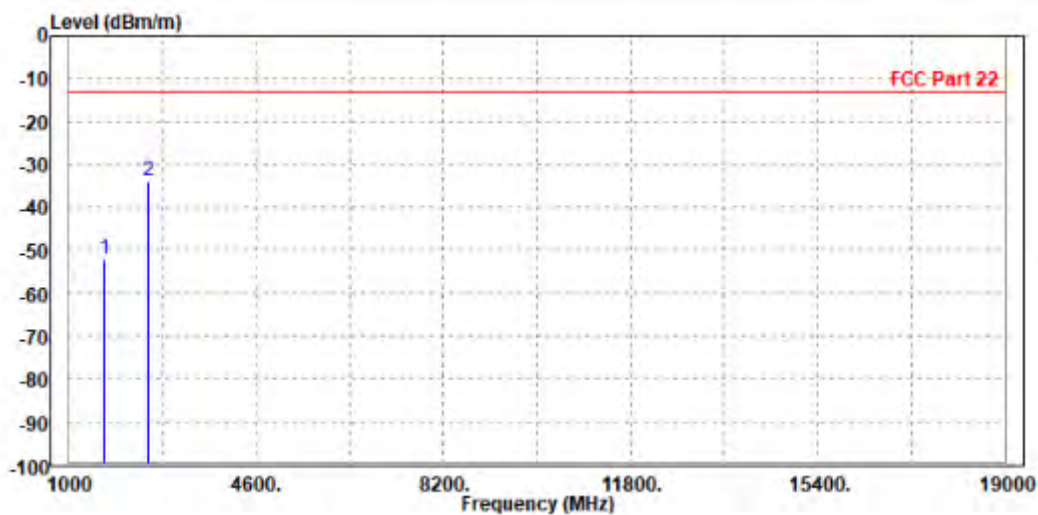

CHANNEL BANDWIDTH: 5MHz / QPSK


MODE	TX channel 20525	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC13.7V
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	1673.000	-51.14	-54.70	-13.00	-38.14	3.56	Peak	Horizontal
2 PP	2512.000	-33.17	-41.23	-13.00	-20.17	8.06	Peak	Horizontal

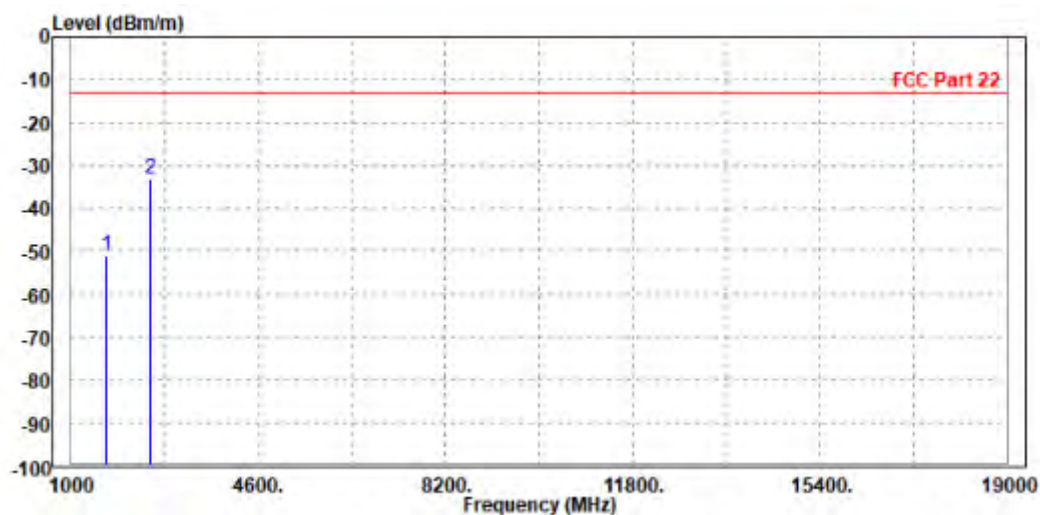

MODE	TX channel 20525	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC13.7V
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	1666.000	-51.94	-55.48	-13.00	-38.94	3.54	Peak	Vertical
2 PP	2509.500	-33.87	-40.97	-13.00	-20.87	7.10	Peak	Vertical

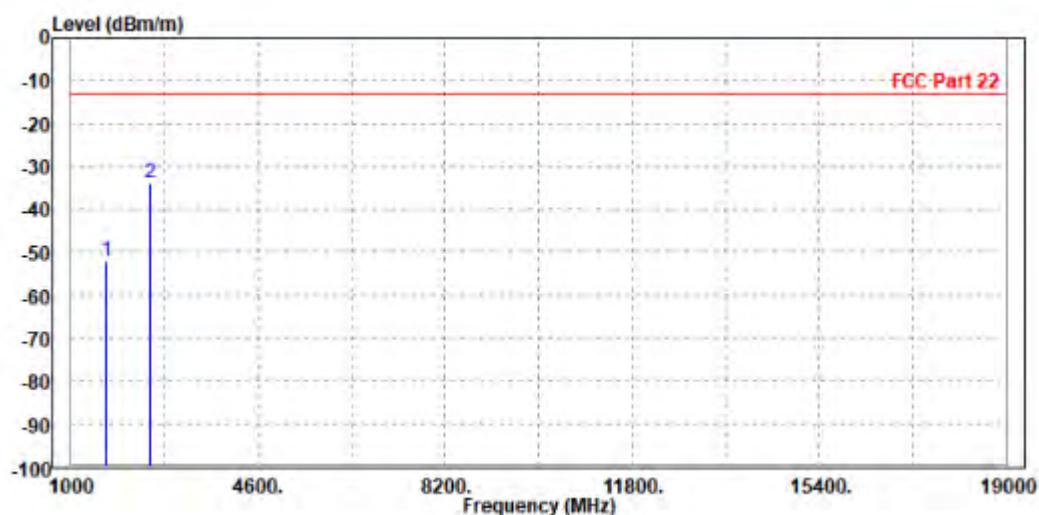



BUREAU
VERITAS


Test Report No.: W7L-P22040029RF04

CHANNEL BANDWIDTH: 10MHz / QPSK

CH20450:


MODE	TX channel 20450	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC13.7V
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	1666.000	-53.18	-56.65	-13.00	-40.18	3.47	Peak	Horizontal
2 PP	2487.000	-47.79	-55.83	-13.00	-34.79	8.04	Peak	Horizontal

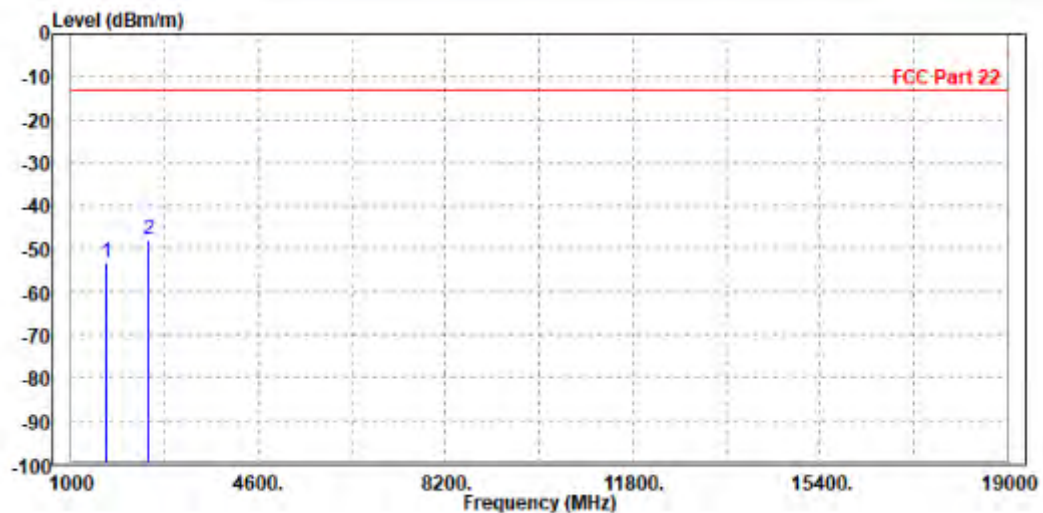

MODE	TX channel 20450	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC13.7V
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	1666.000	-51.74	-55.28	-13.00	-38.74	3.54	Peak	Vertical
2 PP	2487.000	-48.77	-55.82	-13.00	-35.77	7.05	Peak	Vertical

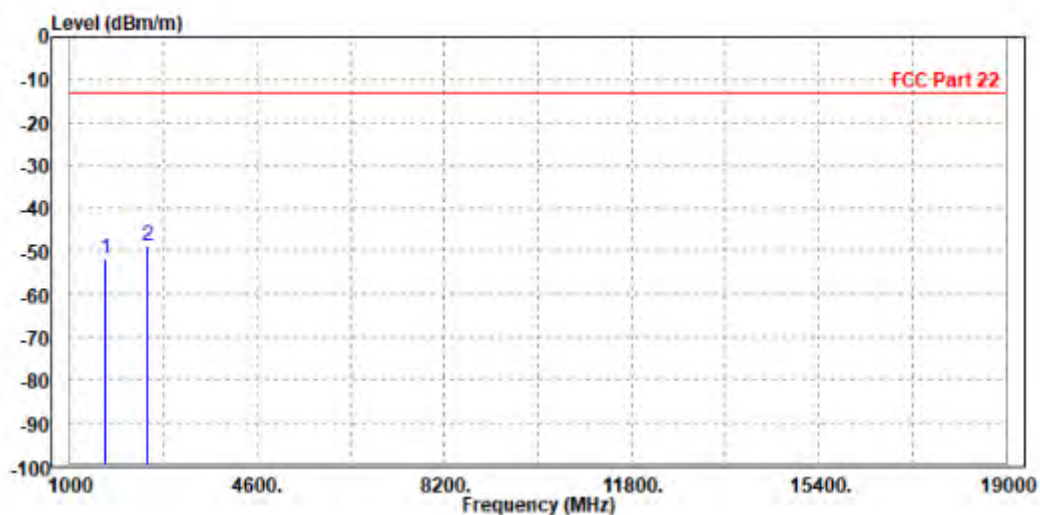




BUREAU
VERITAS

Test Report No.: W7L-P22040029RF04

CH20525:


MODE	TX channel 20525	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC13.7V
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	1666.000	-52.35	-55.82	-13.00	-39.35	3.47	Peak	Horizontal
2 PP	2509.500	-31.83	-39.89	-13.00	-18.83	8.06	Peak	Horizontal

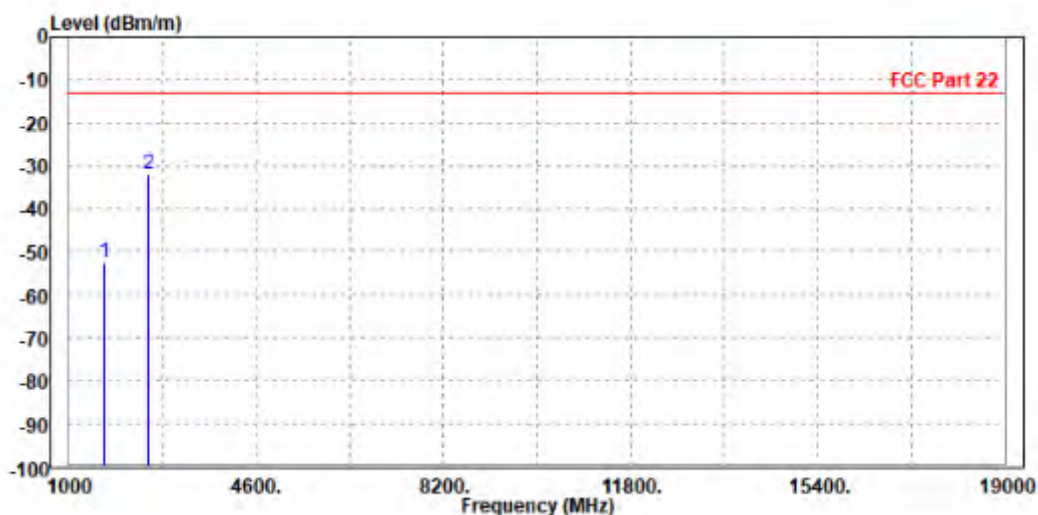

MODE	TX channel 20525	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC13.7V
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	1673.000	-50.43	-54.04	-13.00	-37.43	3.61	Peak	Vertical
2 PP	2512.000	-33.99	-41.10	-13.00	-20.99	7.11	Peak	Vertical

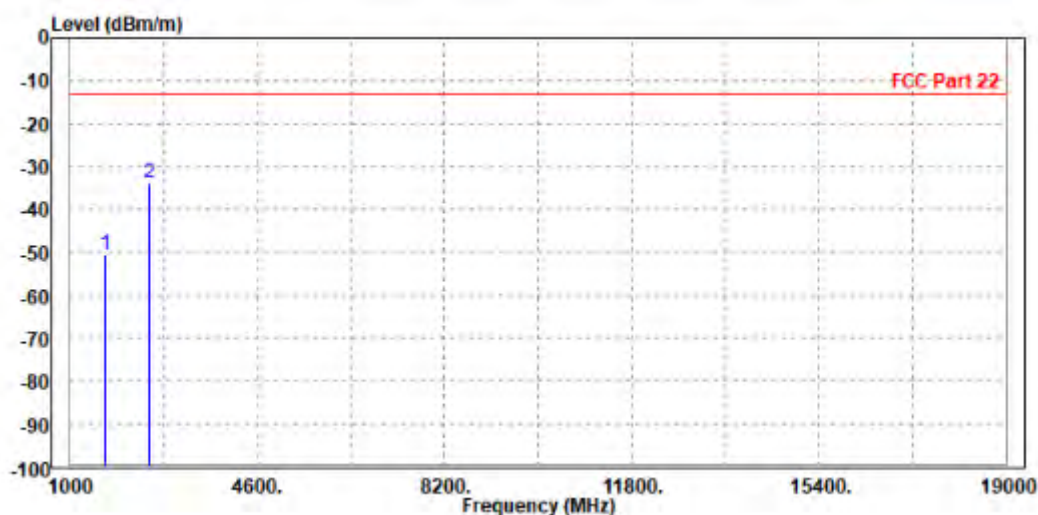




BUREAU
VERITAS

Test Report No.: W7L-P22040029RF04

CH20600:


MODE	TX channel 20600	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC13.7V
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	1688.000	-49.69	-53.43	-13.00	-36.69	3.74	Peak	Horizontal
2 PP	2530.000	-34.29	-42.38	-13.00	-21.29	8.09	Peak	Horizontal

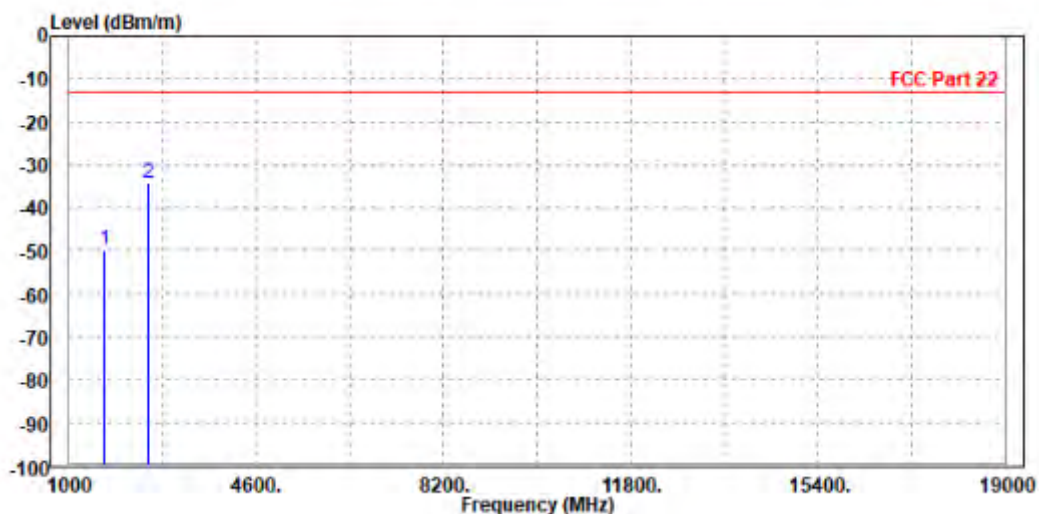

MODE	TX channel 20600	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC13.7V
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	1684.000	-50.22	-53.93	-13.00	-37.22	3.71	Peak	Vertical
2 PP	2532.000	-34.04	-41.21	-13.00	-21.04	7.17	Peak	Vertical

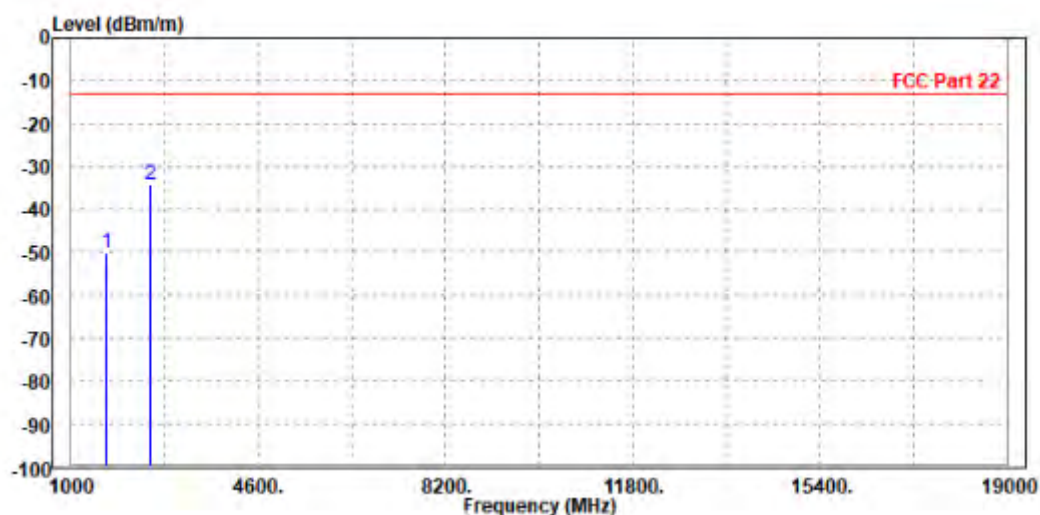


3.7 PEAK TO AVERAGE RATIO

3.7.1 LIMITS OF PEAK TO AVERAGE RATIO MEASUREMENT

In measuring transmissions in this band using an average power technique, the peak to-average ratio (PAR) of the transmission may not exceed 13 dB

3.7.2 TEST SETUP

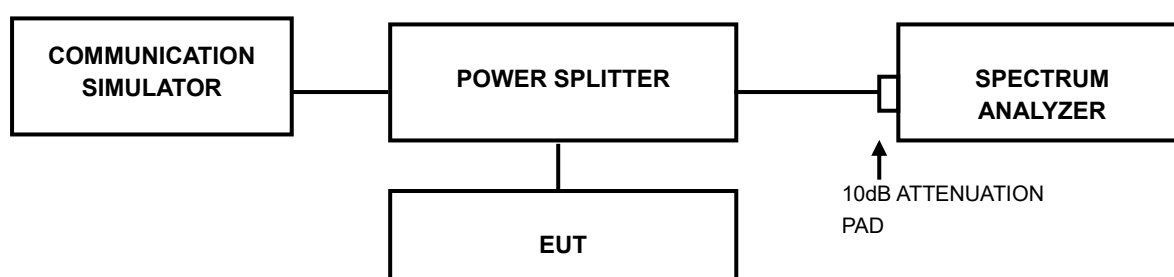

3.7.3 TEST PROCEDURES

1. Set resolution/measurement bandwidth $\geq$ signal's occupied bandwidth;
2. Set the number of counts to a value that stabilizes the measured CCDF curve;
3. Record the maximum PAPR level associated with a probability of 0.1%.



Test Report No.: W7L-P22040029RF04

3.7.4 TEST RESULTS

Please Refer to Appendix A Of this test report.



Test Report No.: W7L-P22040029RF04

4 PHOTOGRAPHS OF THE TEST CONFIGURATION

Please refer to the attached file (Test Setup Photo).



Test Report No.: W7L-P22040029RF04

5 INFORMATION ON THE TESTING LABORATORIES

We, BV 7LAYERS COMMUNICATIONS TECHNOLOGY (SHENZHEN) CO. LTD., were founded in 2015 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Shenzhen EMC/RF Lab:

Tel: +86-755-88696566

Fax: +86-755-88696577

Email: customerservice.sw@bureauveritas.com

Web Site: www.adt.com.tw

The address and road map of all our labs can be found in our web site also.

6 MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No any modifications are made to the EUT by the lab during the test.

NOTE: Please Refer to Appendix A Of this test report.

APPENDIX A

PEAK-TO-AVERAGE RATIO(CCDF)

Test Result

Band	Bandwidth	Modulation	Channel	RB Configuration	Result(dB)	Limit(dB)	Verdict
Band5	1.4MHz	QPSK	20407	1RB#0	3.80	13	PASS
Band5	1.4MHz	QPSK	20407	6RB#0	4.46	13	PASS
Band5	1.4MHz	QPSK	20525	1RB#0	4.41	13	PASS
Band5	1.4MHz	QPSK	20525	6RB#0	5.13	13	PASS
Band5	1.4MHz	QPSK	20643	1RB#0	4.17	13	PASS
Band5	1.4MHz	QPSK	20643	6RB#0	4.91	13	PASS
Band5	1.4MHz	16QAM	20407	1RB#0	4.40	13	PASS
Band5	1.4MHz	16QAM	20407	6RB#0	5.37	13	PASS
Band5	1.4MHz	16QAM	20525	1RB#0	5.38	13	PASS
Band5	1.4MHz	16QAM	20525	6RB#0	5.95	13	PASS
Band5	1.4MHz	16QAM	20643	1RB#0	5.11	13	PASS
Band5	1.4MHz	16QAM	20643	6RB#0	5.77	13	PASS
Band5	3MHz	QPSK	20415	1RB#0	3.84	13	PASS
Band5	3MHz	QPSK	20415	15RB#0	4.56	13	PASS
Band5	3MHz	QPSK	20525	1RB#0	4.51	13	PASS
Band5	3MHz	QPSK	20525	15RB#0	5.15	13	PASS
Band5	3MHz	QPSK	20635	1RB#0	3.97	13	PASS
Band5	3MHz	QPSK	20635	15RB#0	4.96	13	PASS
Band5	3MHz	16QAM	20415	1RB#0	4.62	13	PASS
Band5	3MHz	16QAM	20415	15RB#0	5.49	13	PASS
Band5	3MHz	16QAM	20525	1RB#0	5.36	13	PASS
Band5	3MHz	16QAM	20525	15RB#0	6.03	13	PASS
Band5	3MHz	16QAM	20635	1RB#0	4.81	13	PASS
Band5	3MHz	16QAM	20635	15RB#0	5.83	13	PASS
Band5	5MHz	QPSK	20425	1RB#0	3.82	13	PASS
Band5	5MHz	QPSK	20425	25RB#0	4.69	13	PASS
Band5	5MHz	QPSK	20525	1RB#0	4.59	13	PASS
Band5	5MHz	QPSK	20525	25RB#0	5.13	13	PASS
Band5	5MHz	QPSK	20625	1RB#0	3.57	13	PASS
Band5	5MHz	QPSK	20625	25RB#0	4.86	13	PASS
Band5	5MHz	16QAM	20425	1RB#0	4.54	13	PASS
Band5	5MHz	16QAM	20425	25RB#0	5.47	13	PASS
Band5	5MHz	16QAM	20525	1RB#0	5.56	13	PASS
Band5	5MHz	16QAM	20525	25RB#0	5.98	13	PASS
Band5	5MHz	16QAM	20625	1RB#0	4.40	13	PASS
Band5	5MHz	16QAM	20625	25RB#0	5.70	13	PASS
Band5	10MHz	QPSK	20450	1RB#0	3.80	13	PASS
Band5	10MHz	QPSK	20450	50RB#0	5.07	13	PASS
Band5	10MHz	QPSK	20525	1RB#0	4.54	13	PASS
Band5	10MHz	QPSK	20525	50RB#0	4.95	13	PASS
Band5	10MHz	QPSK	20600	1RB#0	3.79	13	PASS
Band5	10MHz	QPSK	20600	50RB#0	4.78	13	PASS




Test Report No.: W7L-P22040029RF04


Band5	10MHz	16QAM	20450	1RB#0	4.65	13	PASS
Band5	10MHz	16QAM	20450	50RB#0	5.91	13	PASS
Band5	10MHz	16QAM	20525	1RB#0	5.34	13	PASS
Band5	10MHz	16QAM	20525	50RB#0	5.89	13	PASS
Band5	10MHz	16QAM	20600	1RB#0	4.37	13	PASS
Band5	10MHz	16QAM	20600	50RB#0	5.60	13	PASS

Test Graphs

Band5-1.4MHz-QPSK-20407-1RB#0

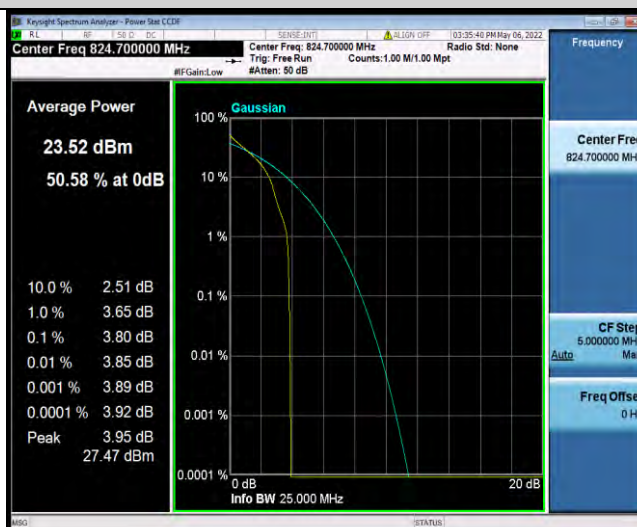

Band5-1.4MHz-QPSK-20407-6RB#0

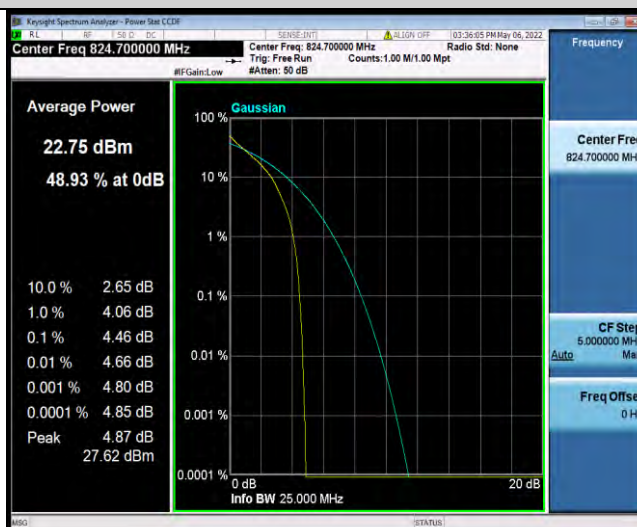


Band5-1.4MHz-QPSK-20525-1RB#0




BUREAU
VERITAS

Test Report No.: W7L-P22040029RF04

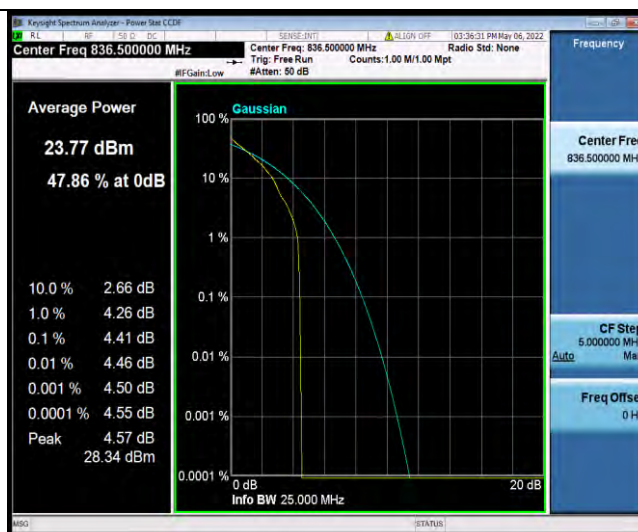

Band5-1.4MHz-QPSK-20525-6RB#0

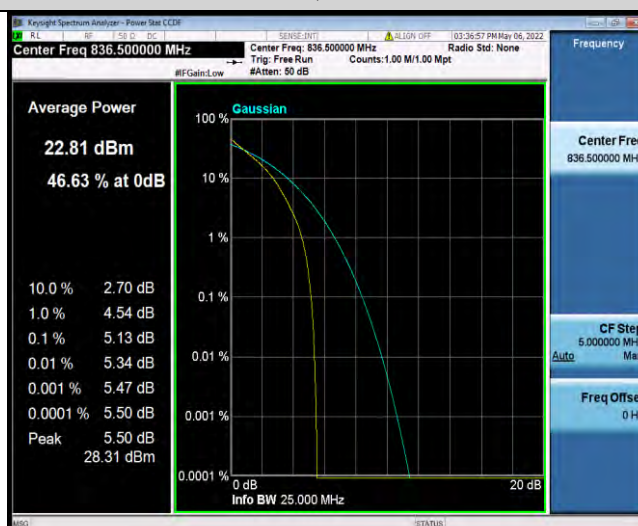

Band5-1.4MHz-QPSK-20643-1RB#0




Band5-1.4MHz-QPSK-20643-6RB#0



BUREAU
VERITAS


Test Report No.: W7L-P22040029RF04

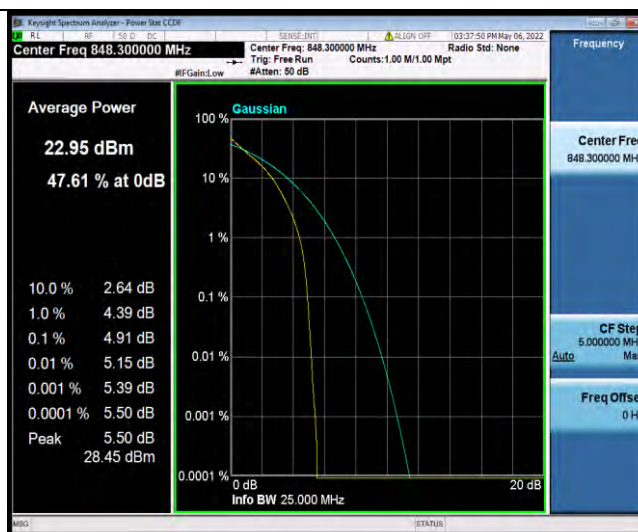

Band5-1.4MHz-16QAM-20407-1RB#0



Band5-1.4MHz-16QAM-20407-6RB#0

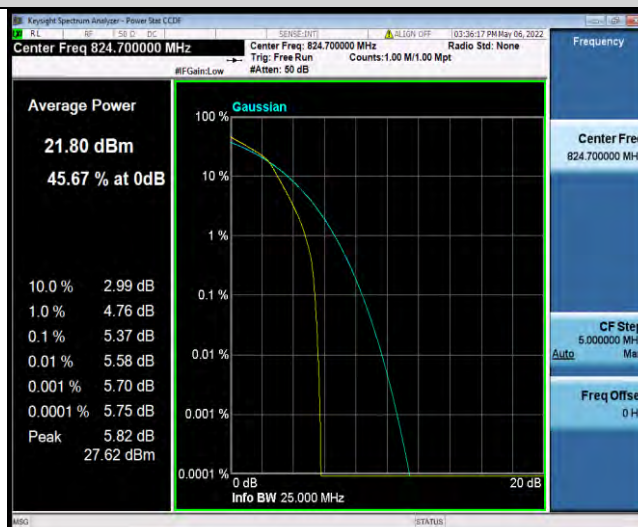


Band5-1.4MHz-16QAM-20525-1RB#0




BUREAU
VERITAS


Test Report No.: W7L-P22040029RF04

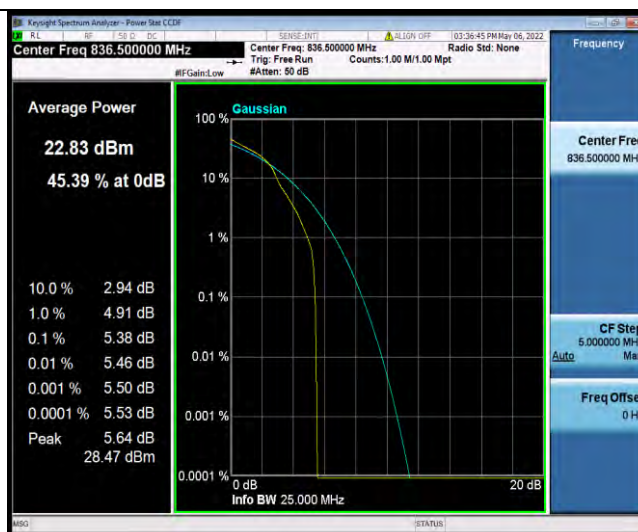

Band5-1.4MHz-16QAM-20525-6RB#0

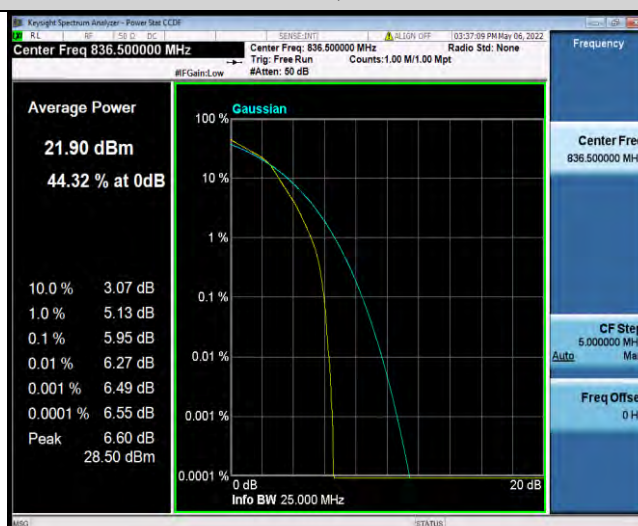

Band5-1.4MHz-16QAM-20643-1RB#0

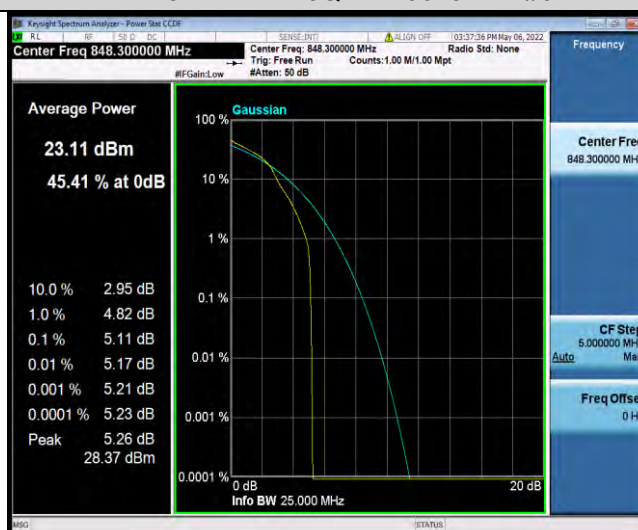


Band5-1.4MHz-16QAM-20643-6RB#0




BUREAU
VERITAS

Test Report No.: W7L-P22040029RF04

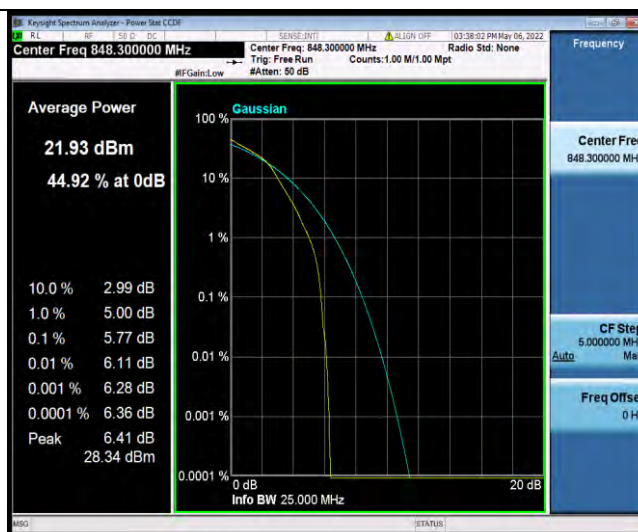

Band5-3MHz-QPSK-20415-1RB#0

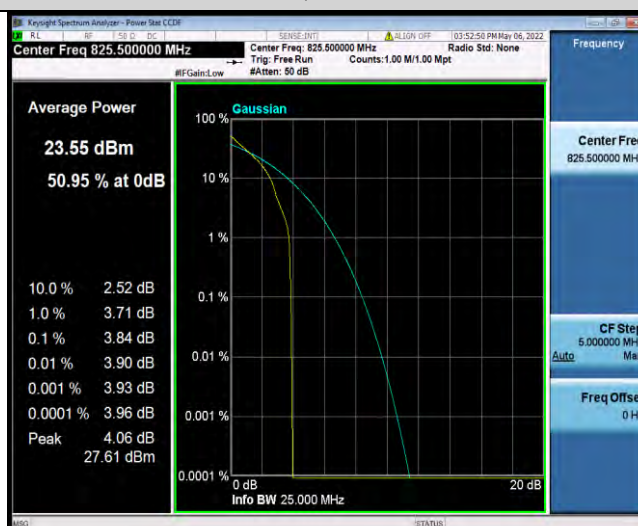

Band5-3MHz-QPSK-20415-15RB#0




Band5-3MHz-QPSK-20525-1RB#0



BUREAU
VERITAS


Test Report No.: W7L-P22040029RF04

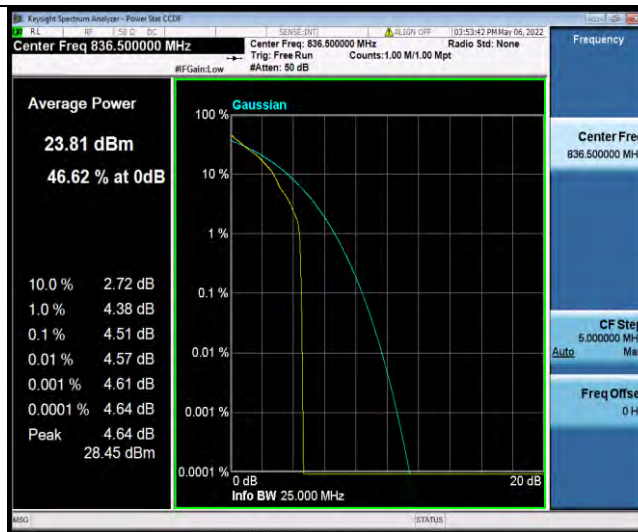

Band5-3MHz-QPSK-20525-15RB#0



Band5-3MHz-QPSK-20635-1RB#0

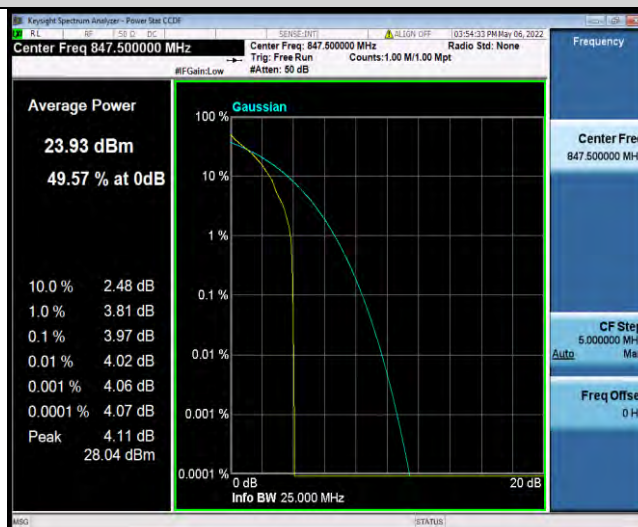

Band5-3MHz-QPSK-20635-15RB#0




BUREAU
VERITAS


Test Report No.: W7L-P22040029RF04



Band5-3MHz-16QAM-20415-1RB#0

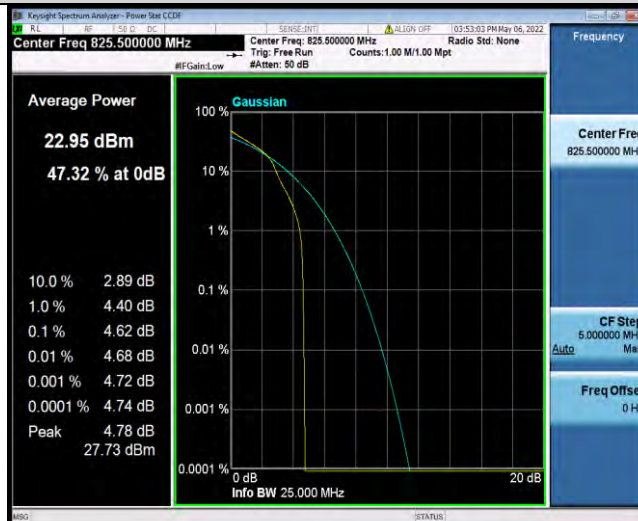

Band5-3MHz-16QAM-20415-15RB#0

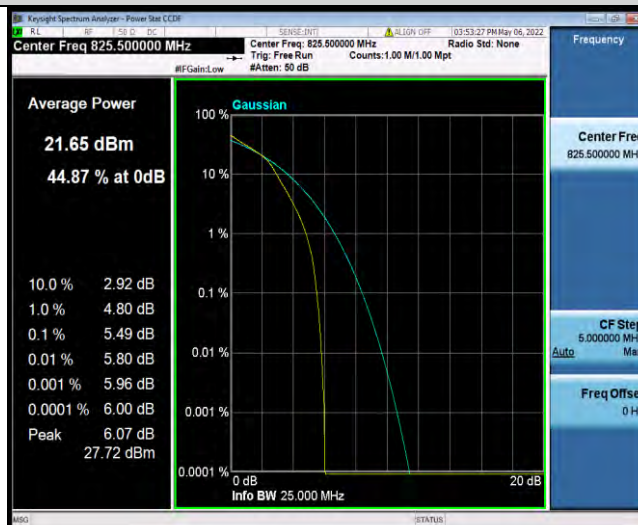


Band5-3MHz-16QAM-20525-1RB#0



BUREAU
VERITAS


Test Report No.: W7L-P22040029RF04

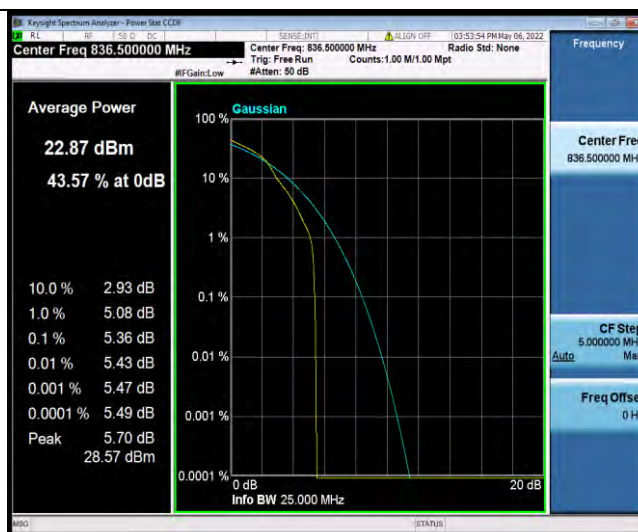

Band5-3MHz-16QAM-20525-15RB#0



Band5-3MHz-16QAM-20635-1RB#0

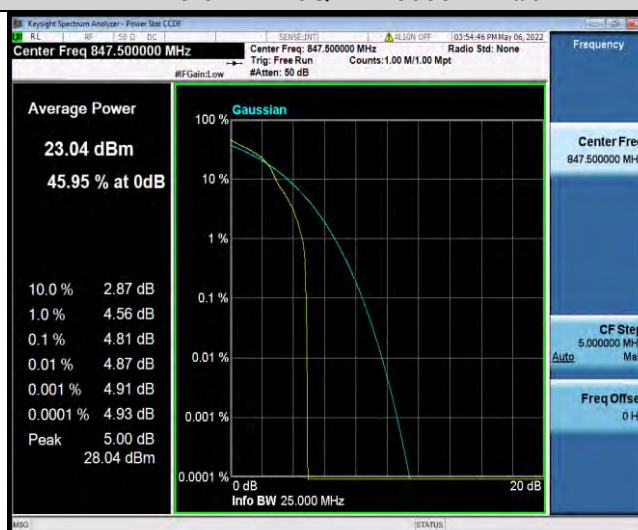


Band5-3MHz-16QAM-20635-15RB#0




BUREAU
VERITAS

Test Report No.: W7L-P22040029RF04

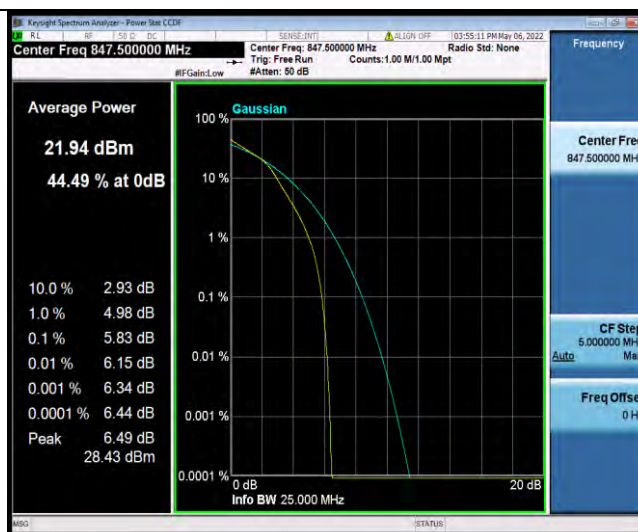

Band5-5MHz-QPSK-20425-1RB#0

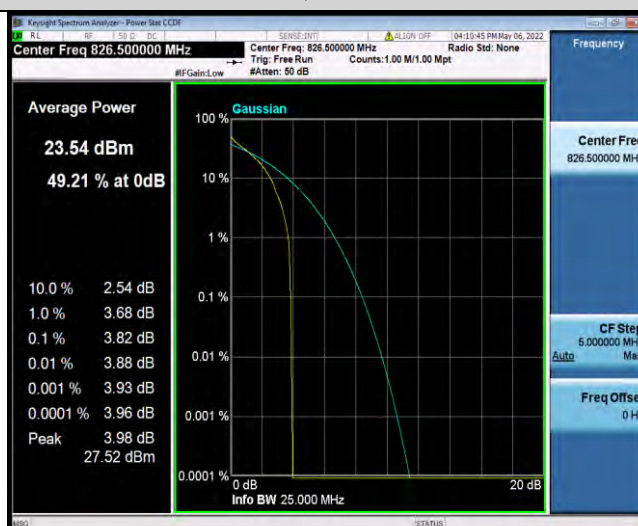

Band5-5MHz-QPSK-20425-25RB#0




Band5-5MHz-QPSK-20525-1RB#0



BUREAU
VERITAS


Test Report No.: W7L-P22040029RF04

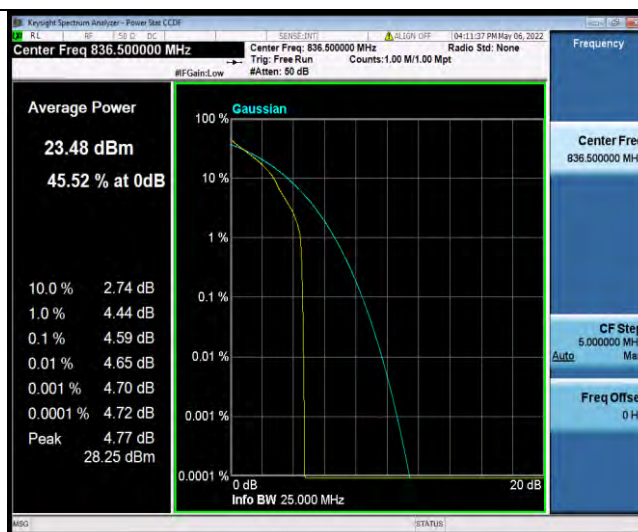

Band5-5MHz-QPSK-20525-25RB#0



Band5-5MHz-QPSK-20625-1RB#0

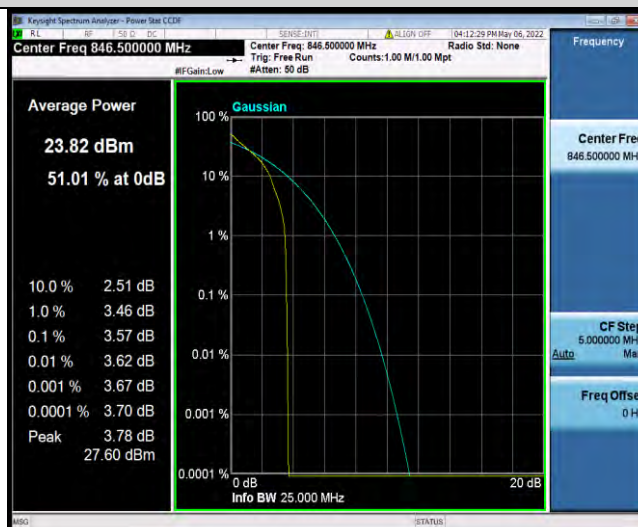

Band5-5MHz-QPSK-20625-25RB#0



BUREAU
VERITAS


Test Report No.: W7L-P22040029RF04



Band5-5MHz-16QAM-20425-1RB#0



Band5-5MHz-16QAM-20425-25RB#0

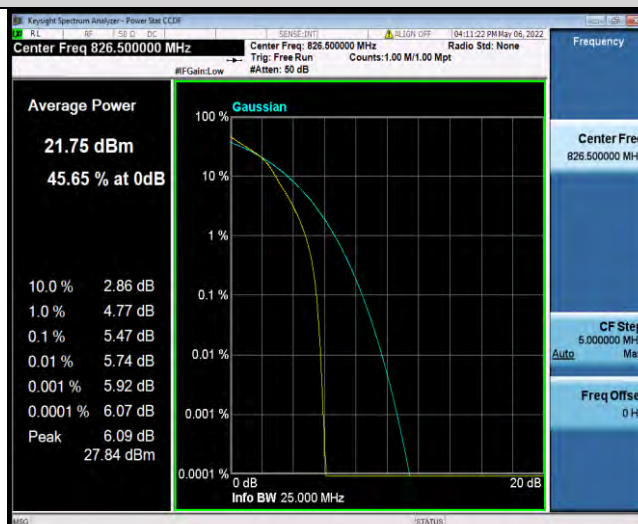


Band5-5MHz-16QAM-20525-1RB#0




BUREAU
VERITAS


Test Report No.: W7L-P22040029RF04

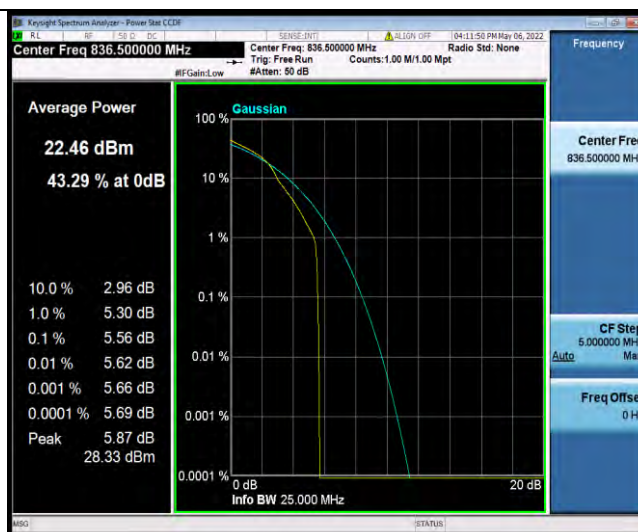

Band5-5MHz-16QAM-20525-25RB#0

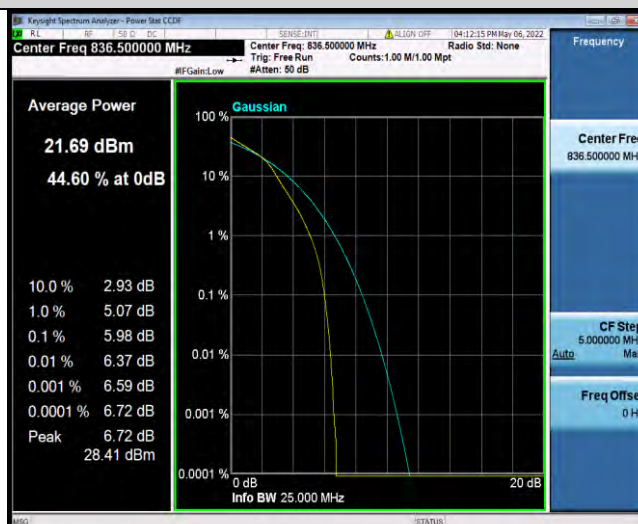

Band5-5MHz-16QAM-20625-1RB#0

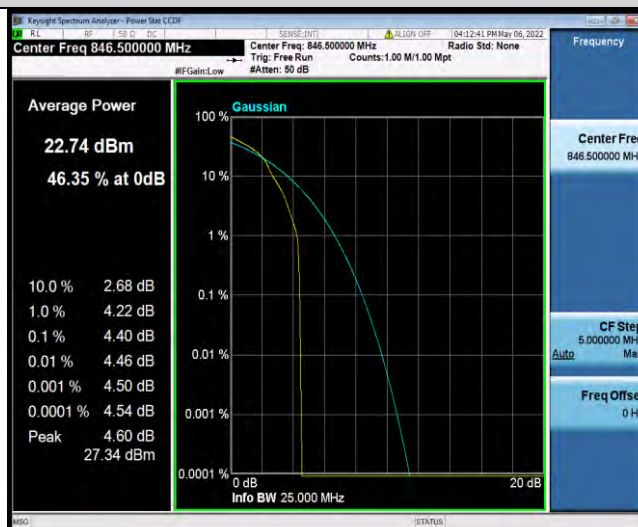


Band5-5MHz-16QAM-20625-25RB#0



BUREAU
VERITAS


Test Report No.: W7L-P22040029RF04

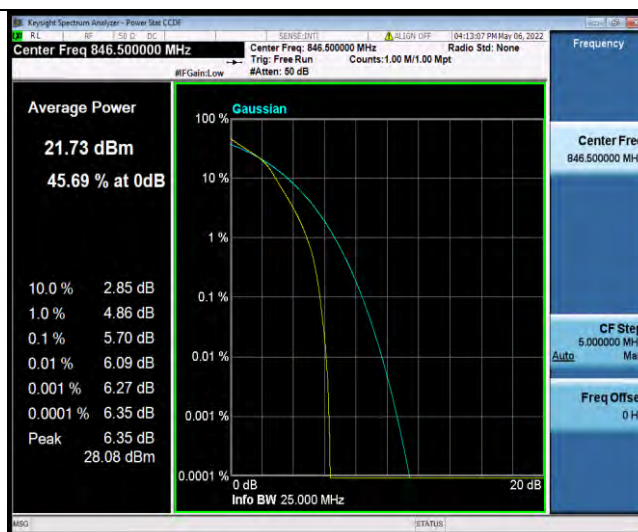

Band5-10MHz-QPSK-20450-1RB#0



Band5-10MHz-QPSK-20450-50RB#0

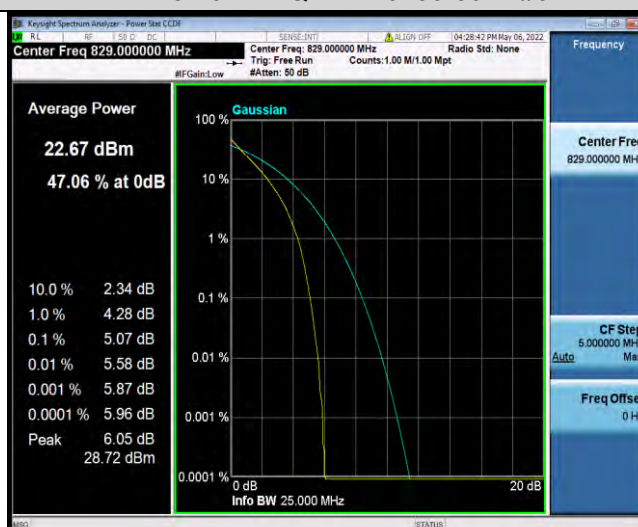


Band5-10MHz-QPSK-20525-1RB#0




BUREAU
VERITAS


Test Report No.: W7L-P22040029RF04

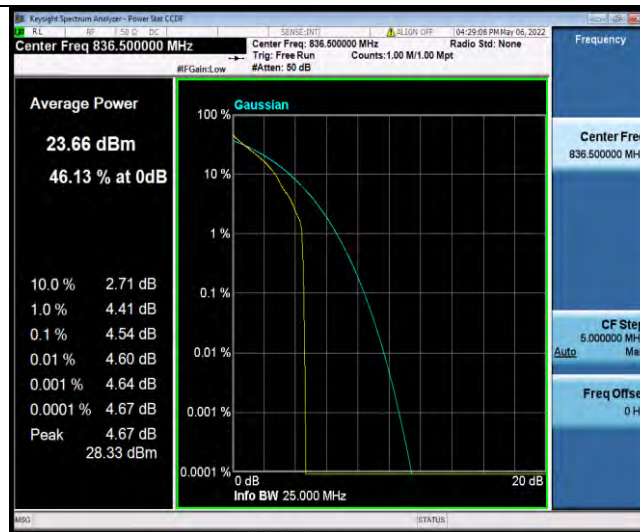

Band5-10MHz-QPSK-20525-50RB#0

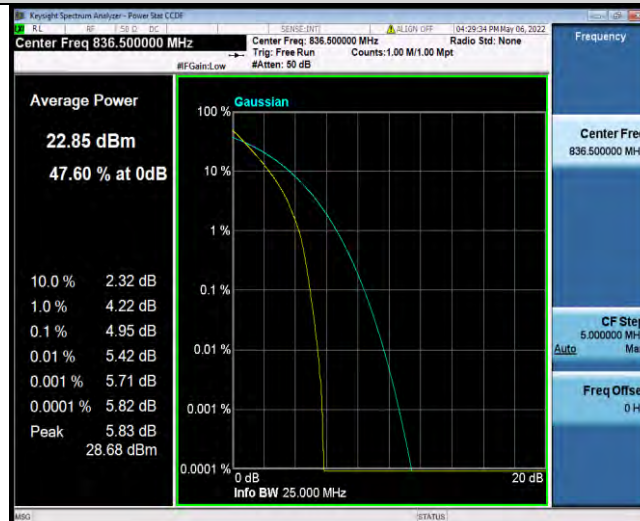

Band5-10MHz-QPSK-20600-1RB#0

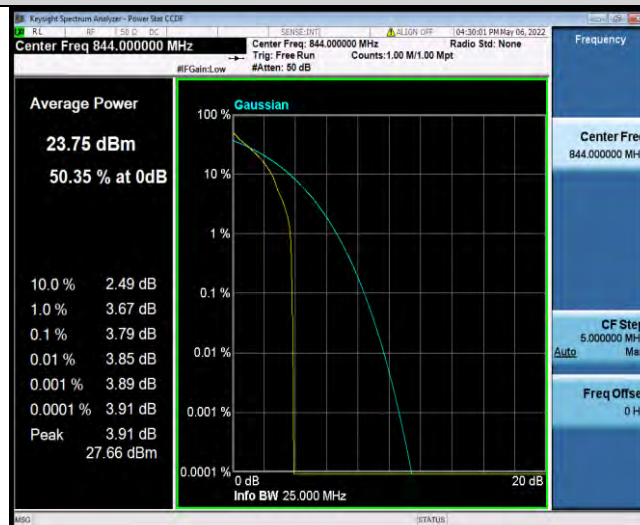

Band5-10MHz-QPSK-20600-50RB#0




BUREAU
VERITAS


Test Report No.: W7L-P22040029RF04



Band5-10MHz-16QAM-20450-1RB#0

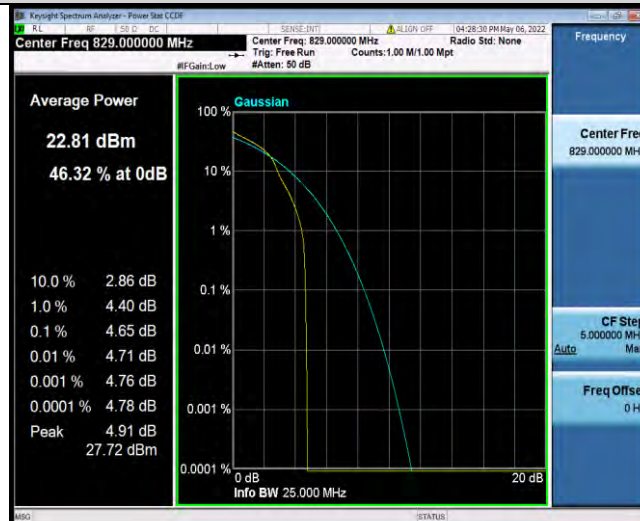

Band5-10MHz-16QAM-20450-50RB#0

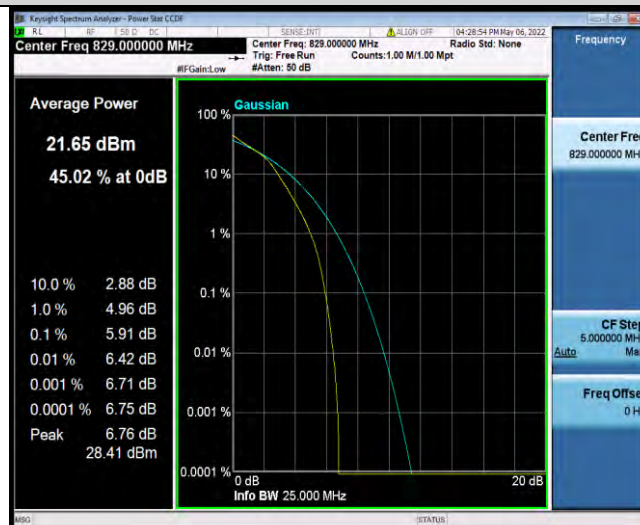


Band5-10MHz-16QAM-20525-1RB#0



BUREAU
VERITAS


Test Report No.: W7L-P22040029RF04

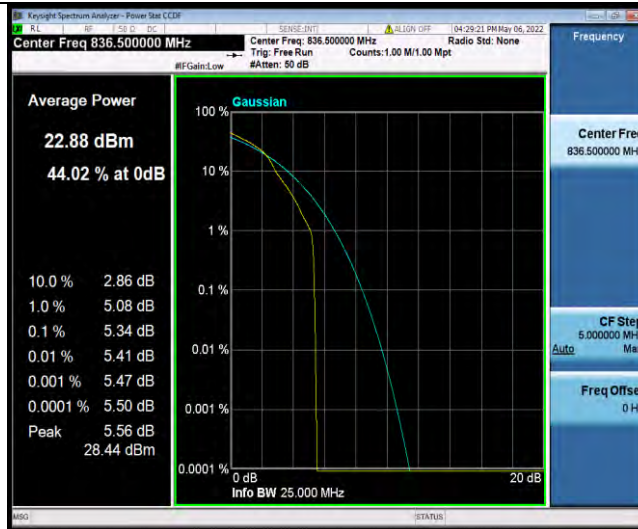

Band5-10MHz-16QAM-20525-50RB#0



Band5-10MHz-16QAM-20600-1RB#0

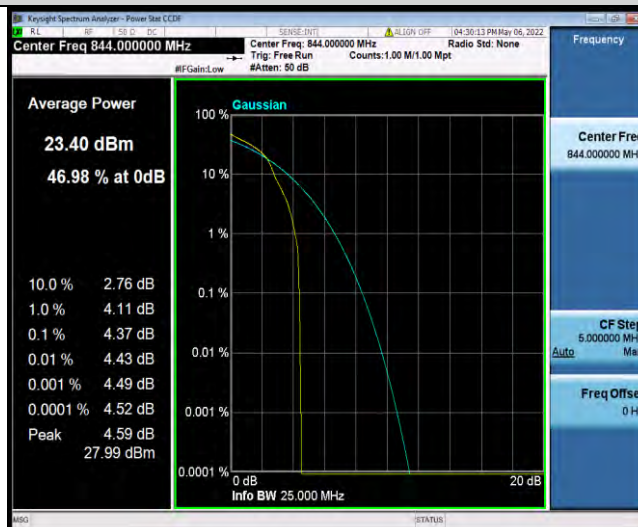


Band5-10MHz-16QAM-20600-50RB#0



BUREAU
VERITAS

Test Report No.: W7L-P22040029RF04

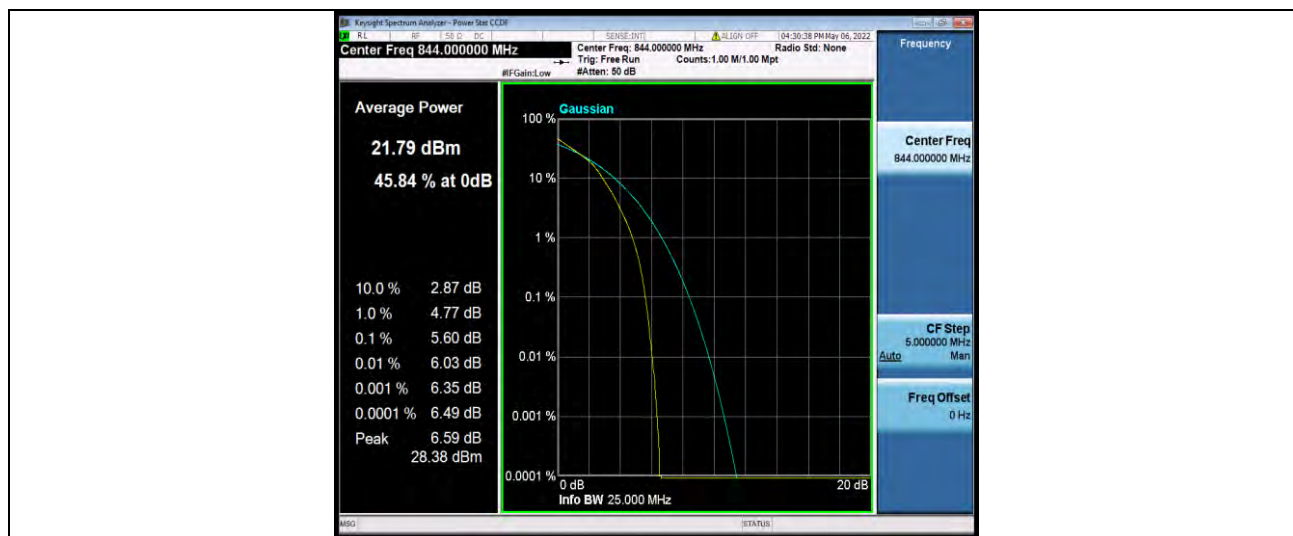

26DB BANDWIDTH AND OCCUPIED BANDWIDTH

Test Result

Band	Bandwidth	Modulation	Channel	RB Configuration	Occupied Bandwidth (MHz)	26dB Bandwidth (MHz)	Verdict
Band5	1.4MHz	QPSK	20407	6RB#0	1.0908	1.252	PASS
Band5	1.4MHz	QPSK	20525	6RB#0	1.0891	1.263	PASS
Band5	1.4MHz	QPSK	20643	6RB#0	1.0954	1.247	PASS
Band5	1.4MHz	16QAM	20407	6RB#0	1.0895	1.231	PASS
Band5	1.4MHz	16QAM	20525	6RB#0	1.0918	1.250	PASS
Band5	1.4MHz	16QAM	20643	6RB#0	1.0902	1.261	PASS
Band5	3MHz	QPSK	20415	15RB#0	2.6939	2.895	PASS
Band5	3MHz	QPSK	20525	15RB#0	2.6974	2.922	PASS
Band5	3MHz	QPSK	20635	15RB#0	2.6941	2.919	PASS
Band5	3MHz	16QAM	20415	15RB#0	2.6965	2.917	PASS
Band5	3MHz	16QAM	20525	15RB#0	2.6895	2.918	PASS
Band5	3MHz	16QAM	20635	15RB#0	2.6948	2.894	PASS
Band5	5MHz	QPSK	20425	25RB#0	4.4957	4.907	PASS
Band5	5MHz	QPSK	20525	25RB#0	4.4961	4.874	PASS
Band5	5MHz	QPSK	20625	25RB#0	4.4993	4.872	PASS
Band5	5MHz	16QAM	20425	25RB#0	4.5028	4.879	PASS
Band5	5MHz	16QAM	20525	25RB#0	4.5019	4.898	PASS
Band5	5MHz	16QAM	20625	25RB#0	4.5071	4.898	PASS
Band5	10MHz	QPSK	20450	50RB#0	8.9829	9.583	PASS
Band5	10MHz	QPSK	20525	50RB#0	8.9598	9.518	PASS
Band5	10MHz	QPSK	20600	50RB#0	8.9709	9.556	PASS
Band5	10MHz	16QAM	20450	50RB#0	8.9667	9.537	PASS
Band5	10MHz	16QAM	20525	50RB#0	8.9581	9.526	PASS
Band5	10MHz	16QAM	20600	50RB#0	8.9728	9.522	PASS


Test Graphs





BUREAU
VERITAS


Test Report No.: W7L-P22040029RF04

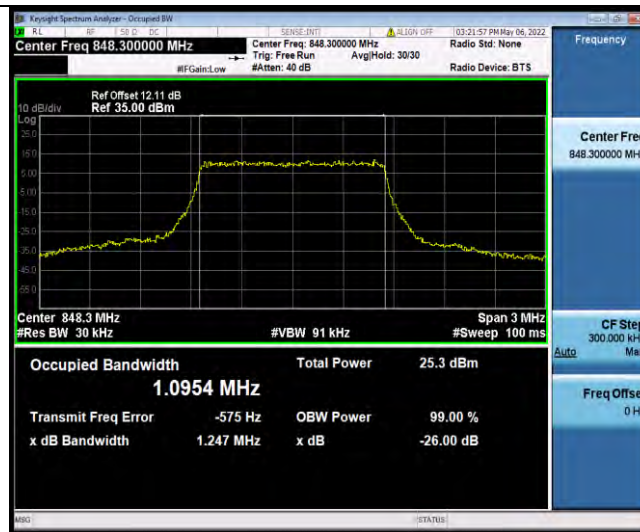

Band5-1.4MHz-16QAM-20407-6RB#0



Band5-1.4MHz-16QAM-20525-6RB#0

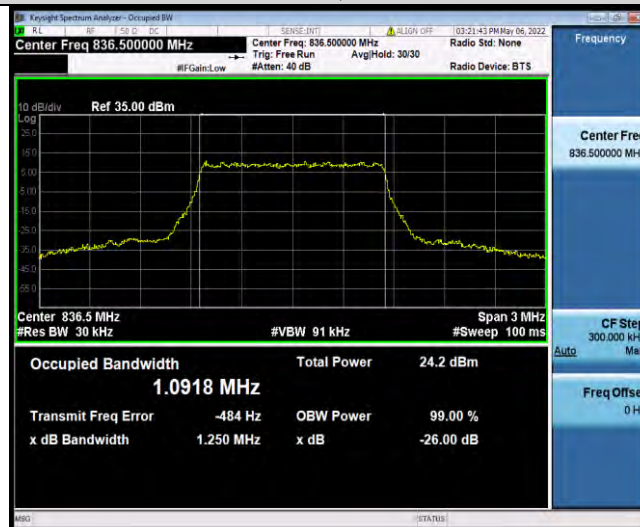


Band5-1.4MHz-16QAM-20643-6RB#0



BUREAU
VERITAS


Test Report No.: W7L-P22040029RF04

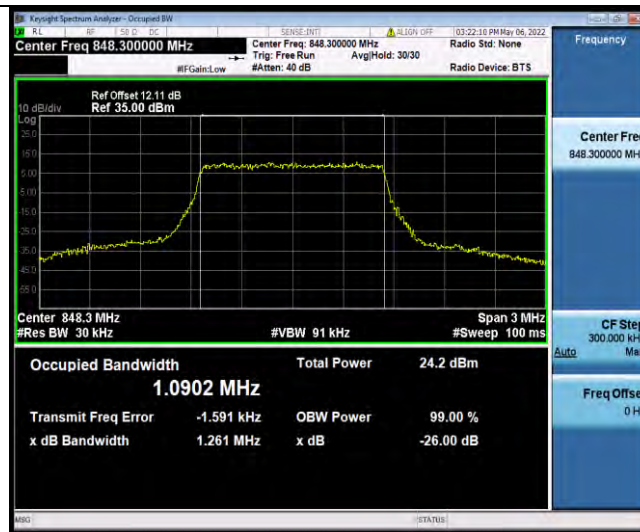

Band5-3MHz-QPSK-20415-15RB#0



Band5-3MHz-QPSK-20525-15RB#0

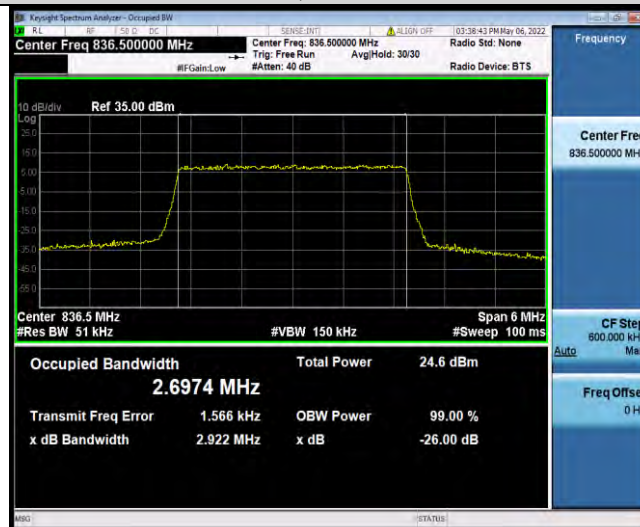


Band5-3MHz-QPSK-20635-15RB#0



BUREAU
VERITAS

Test Report No.: W7L-P22040029RF04

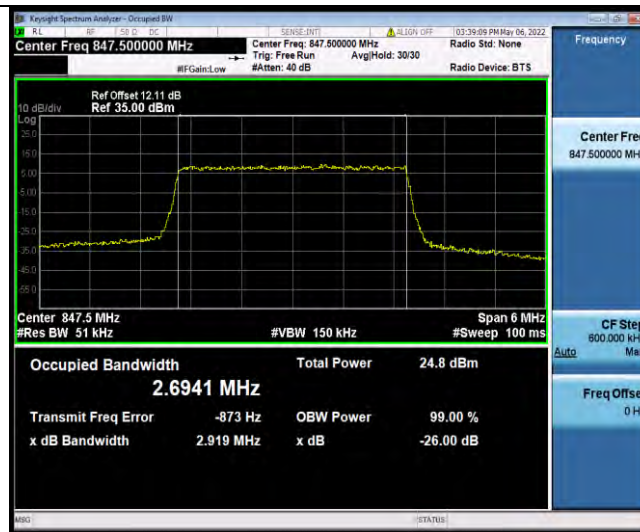

Band5-3MHz-16QAM-20415-15RB#0



Band5-3MHz-16QAM-20525-15RB#0




Band5-3MHz-16QAM-20635-15RB#0



BUREAU
VERITAS


Test Report No.: W7L-P22040029RF04

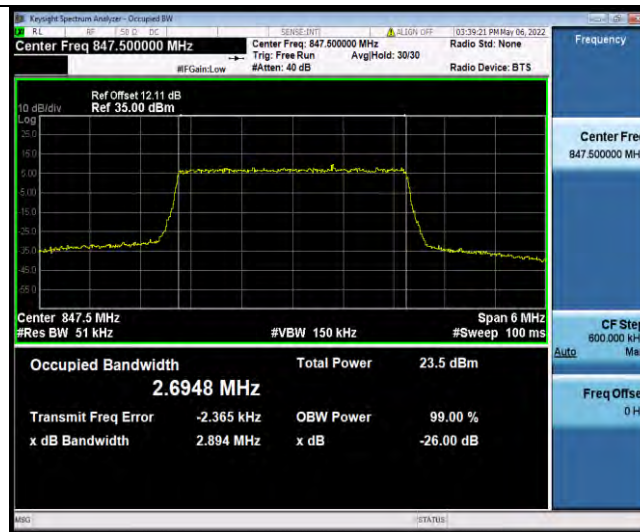

Band5-5MHz-QPSK-20425-25RB#0



Band5-5MHz-QPSK-20525-25RB#0

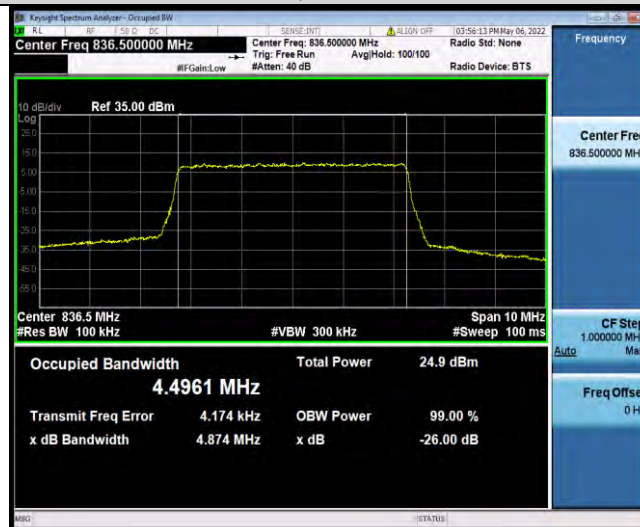

Band5-5MHz-QPSK-20625-25RB#0




BUREAU
VERITAS

Test Report No.: W7L-P22040029RF04



Band5-5MHz-16QAM-20425-25RB#0

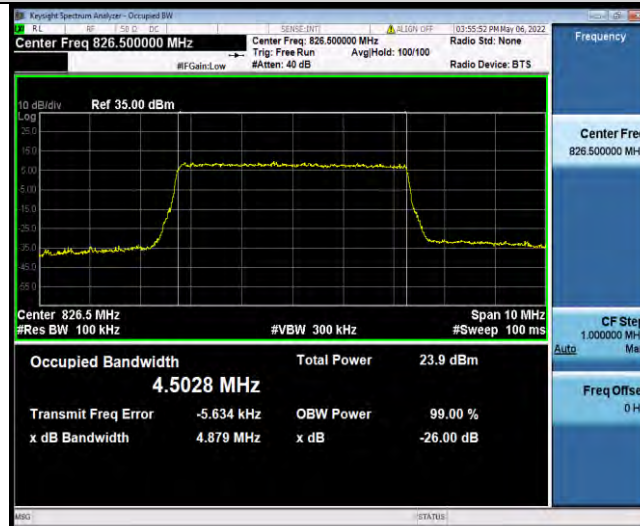

Band5-5MHz-16QAM-20525-25RB#0




Band5-5MHz-16QAM-20625-25RB#0



BUREAU
VERITAS

Test Report No.: W7L-P22040029RF04

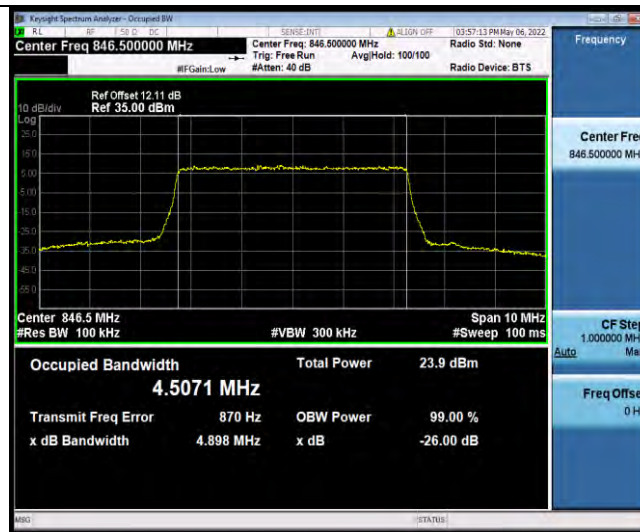

Band5-10MHz-QPSK-20450-50RB#0



Band5-10MHz-QPSK-20525-50RB#0



Band5-10MHz-QPSK-20600-50RB#0



BUREAU
VERITAS

Test Report No.: W7L-P22040029RF04



Band5-10MHz-16QAM-20450-50RB#0



Band5-10MHz-16QAM-20525-50RB#0



Band5-10MHz-16QAM-20600-50RB#0



BUREAU
VERITAS

Test Report No.: W7L-P22040029RF04



**BAND EDGE****Test Result**

Band	Bandwidth	Modulation	Channel	RB Configuration	Result(dBm)	Verdict
Band5	1.4MHz	QPSK	20407	1RB#0	-17.53	PASS
Band5	1.4MHz	QPSK	20407	6RB#0	-21.32	PASS
Band5	1.4MHz	QPSK	20643	1RB#5	-15.28	PASS
Band5	1.4MHz	QPSK	20643	6RB#0	-22.96	PASS
Band5	1.4MHz	16QAM	20407	1RB#0	-17.00	PASS
Band5	1.4MHz	16QAM	20407	6RB#0	-24.49	PASS
Band5	1.4MHz	16QAM	20643	1RB#5	-14.30	PASS
Band5	1.4MHz	16QAM	20643	6RB#0	-26.75	PASS
Band5	3MHz	QPSK	20415	1RB#0	-17.98	PASS
Band5	3MHz	QPSK	20415	15RB#0	-20.14	PASS
Band5	3MHz	QPSK	20635	1RB#14	-14.37	PASS
Band5	3MHz	QPSK	20635	15RB#0	-21.15	PASS
Band5	3MHz	16QAM	20415	1RB#0	-20.64	PASS
Band5	3MHz	16QAM	20415	15RB#0	-21.93	PASS
Band5	3MHz	16QAM	20635	1RB#14	-16.00	PASS
Band5	3MHz	16QAM	20635	15RB#0	-22.54	PASS
Band5	5MHz	QPSK	20425	1RB#0	-23.57	PASS
Band5	5MHz	QPSK	20425	25RB#0	-20.69	PASS
Band5	5MHz	QPSK	20625	1RB#24	-13.77	PASS
Band5	5MHz	QPSK	20625	25RB#0	-21.40	PASS
Band5	5MHz	16QAM	20425	1RB#0	-23.91	PASS
Band5	5MHz	16QAM	20425	25RB#0	-22.51	PASS
Band5	5MHz	16QAM	20625	1RB#24	-14.22	PASS
Band5	5MHz	16QAM	20625	25RB#0	-20.62	PASS
Band5	10MHz	QPSK	20450	1RB#0	-20.68	PASS
Band5	10MHz	QPSK	20450	50RB#0	-24.42	PASS
Band5	10MHz	QPSK	20600	1RB#49	-20.85	PASS
Band5	10MHz	QPSK	20600	50RB#0	-23.57	PASS
Band5	10MHz	16QAM	20450	1RB#0	-20.48	PASS
Band5	10MHz	16QAM	20450	50RB#0	-27.07	PASS
Band5	10MHz	16QAM	20600	1RB#49	-20.39	PASS
Band5	10MHz	16QAM	20600	50RB#0	-25.31	PASS


Test Graphs

Band5-1.4MHz-QPSK-20407-1RB#0



BUREAU
VERITAS


Test Report No.: W7L-P22040029RF04

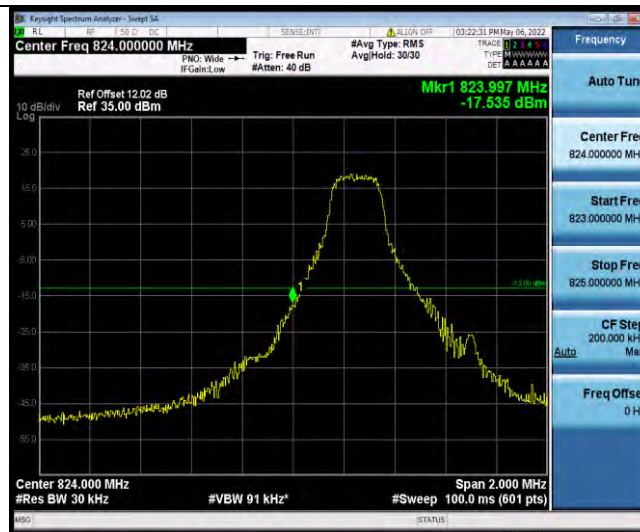

Band5-1.4MHz-QPSK-20407-6RB#0



Band5-1.4MHz-QPSK-20643-1RB#5

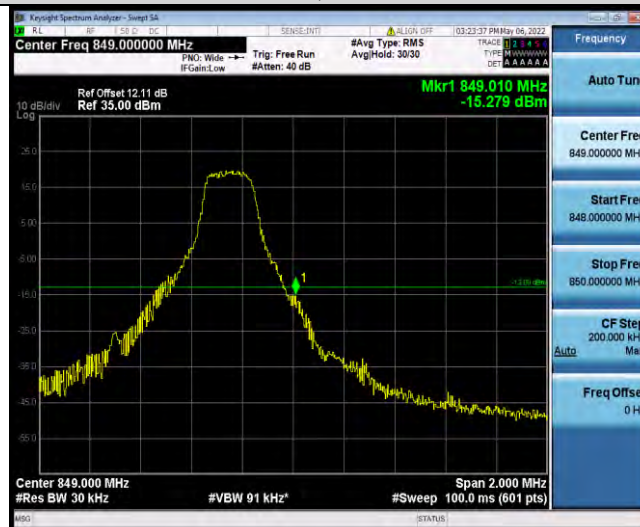

Band5-1.4MHz-QPSK-20643-6RB#0




BUREAU
VERITAS

Test Report No.: W7L-P22040029RF04



Band5-1.4MHz-16QAM-20407-1RB#0

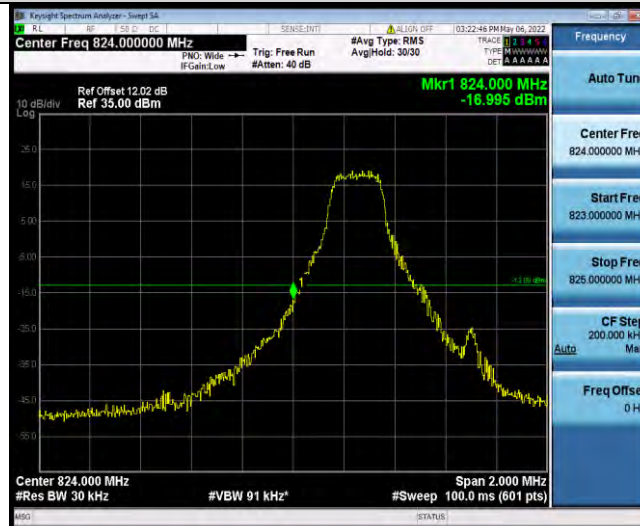

Band5-1.4MHz-16QAM-20407-6RB#0




Band5-1.4MHz-16QAM-20643-1RB#5



BUREAU
VERITAS


Test Report No.: W7L-P22040029RF04

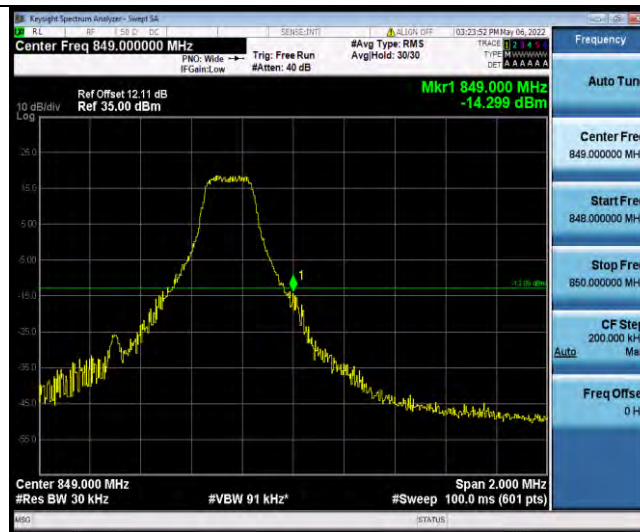

Band5-1.4MHz-16QAM-20643-6RB#0



Band5-3MHz-QPSK-20415-1RB#0

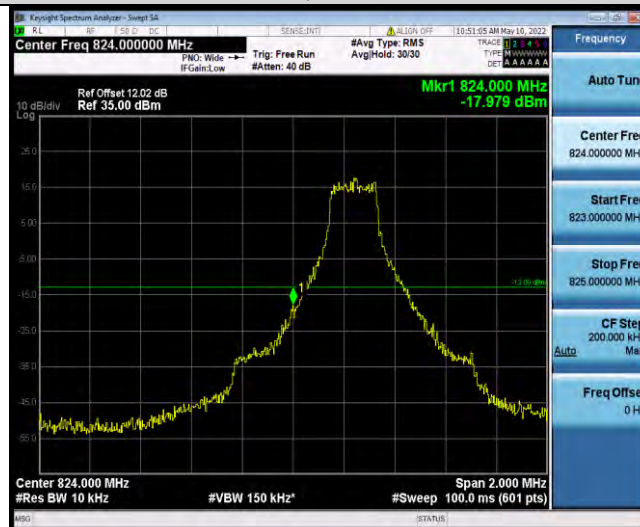


Band5-3MHz-QPSK-20415-15RB#0



Test Report No.: W7L-P22040029RF04



Band5-3MHz-QPSK-20635-1RB#14

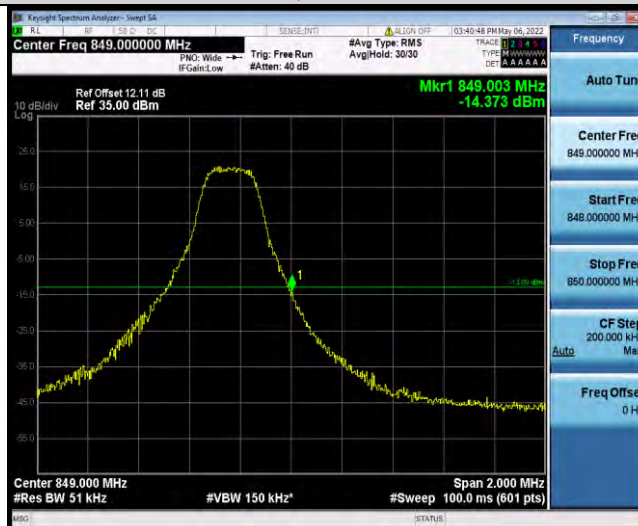

Band5-3MHz-QPSK-20635-15RB#0




Band5-3MHz-16QAM-20415-1RB#0



BUREAU
VERITAS


Test Report No.: W7L-P22040029RF04

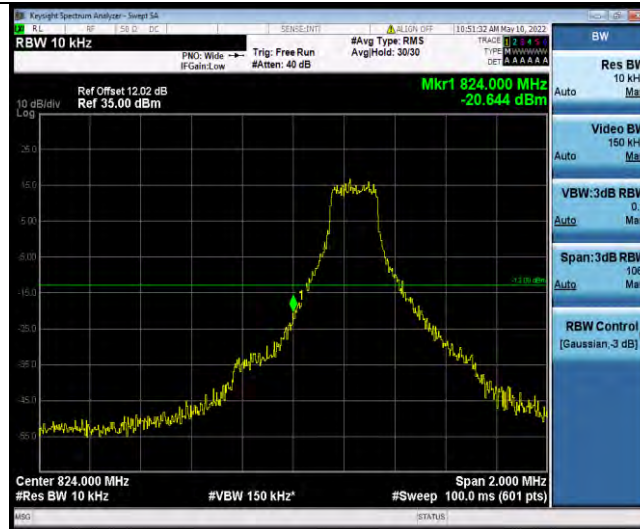

Band5-3MHz-16QAM-20415-15RB#0



Band5-3MHz-16QAM-20635-1RB#14

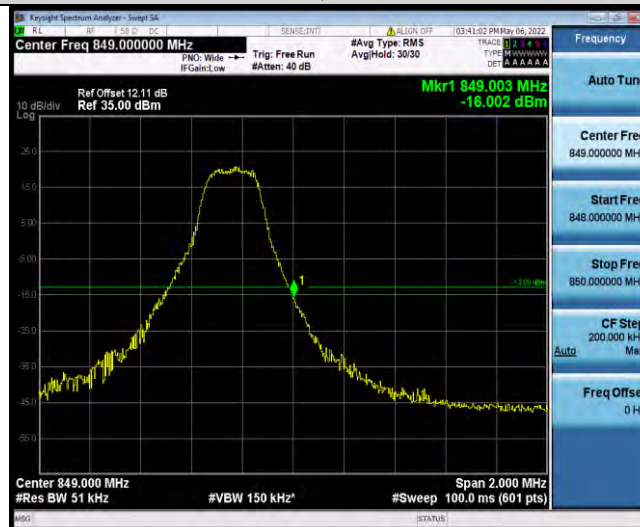

Band5-3MHz-16QAM-20635-15RB#0



BUREAU
VERITAS

Test Report No.: W7L-P22040029RF04



Band5-5MHz-QPSK-20425-1RB#0



Band5-5MHz-QPSK-20425-25RB#0




Band5-5MHz-QPSK-20625-1RB#24



BUREAU
VERITAS


Test Report No.: W7L-P22040029RF04

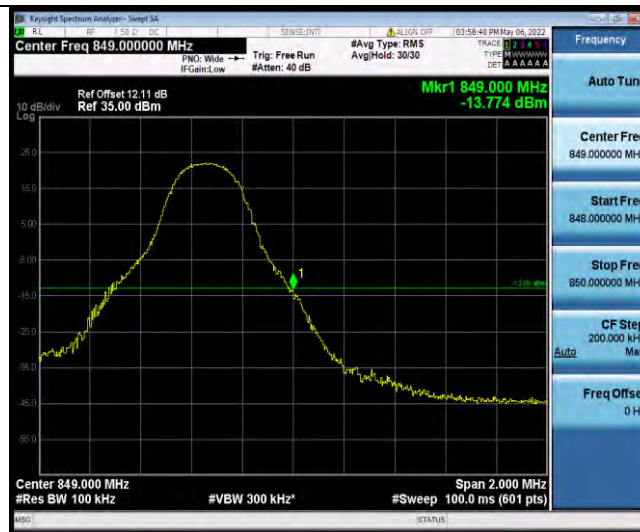

Band5-5MHz-QPSK-20625-25RB#0



Band5-5MHz-16QAM-20425-1RB#0

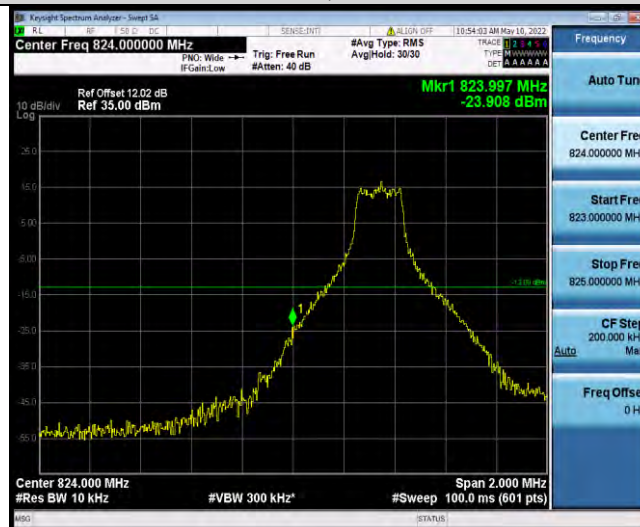

Band5-5MHz-16QAM-20425-25RB#0