

FCC TEST REPORT

(PART 24)


Applicant:	MUNIC
Address:	100 Avenue de Stalingrad 94800 Villejuif – France

Manufacturer or Supplier:	MUNIC
Address:	100 Avenue de Stalingrad 94800 Villejuif – France
Product:	telematics embedded system
Brand Name:	MUNIC
Model Name:	C4D-4G4USAB_V8+
FCC ID:	A6GC4D-4G4USV8-2
Date of tests:	May. 05, 2021 ~ May. 16, 2022

The tests have been carried out according to the requirements of the following standard:

☒ **FCC PART 24, Subpart E** ☒ **FCC PART 2**
☒ **ANSI/TIA/EIA-603-D** ☒ **ANSI/TIA/EIA-603-E** ☒ **ANSI C63.26-2015**

CONCLUSION: The submitted sample was found to COMPLY with the test requirement

Prepared by Simon Wang Engineer / Mobile Department	Approved by Luke Lu Manager / Mobile Department
	
Date: May. 16, 2022	Date: May. 16, 2022

This report is governed by, and incorporates by reference, CPS Conditions of Service as posted at the date of issuance of this report at <http://www.bureauveritas.com/home/about-us/our-business/cps/about-us/terms-conditions> and is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. Measurement uncertainty is only provided upon request for accredited tests. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence or if you require measurement uncertainty; provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.



TABLE OF CONTENTS

RELEASE CONTROL RECORD	4
1 SUMMARY OF TEST RESULTS	5
1.1 MEASUREMENT UNCERTAINTY	5
1.2 TEST SITE AND INSTRUMENTS	6
2 GENERAL INFORMATION	7
2.1 GENERAL DESCRIPTION OF EUT	7
2.2 CONFIGURATION OF SYSTEM UNDER TEST	9
2.3 DESCRIPTION OF SUPPORT UNITS	10
2.4 TEST ITEM AND TEST CONFIGURATION.....	10
2.5 EUT OPERATING CONDITIONS	13
2.6 GENERAL DESCRIPTION OF APPLIED STANDARDS	13
3 TEST TYPES AND RESULTS	14
3.1 OUTPUT POWER MEASUREMENT	14
3.1.1 LIMITS OF OUTPUT POWER MEASUREMENT	14
3.1.2 TEST PROCEDURES	14
3.1.3 TEST SETUP	15
3.1.4 TEST RESULTS	15
3.2 FREQUENCY STABILITY MEASUREMENT	22
3.2.1 LIMITS OF FREQUENCY STABILITY MEASUREMENT	22
3.2.2 TEST PROCEDURE	22
3.2.3 TEST SETUP	22
3.2.4 TEST RESULTS	23
3.3 OCCUPIED BANDWIDTH MEASUREMENT	24
3.3.1 TEST PROCEDURES	24
3.3.2 TEST SETUP	24
3.3.3 TEST RESULTS	25
3.4 BAND EDGE MEASUREMENTC	26
3.4.1 LIMITS OF BAND EDGE MEASUREMENT	26
3.4.2 TEST SETUP	26
3.4.3 TEST PROCEDURES	27
3.4.4. TEST RESULTS	27
3.5 CONDUCTED SPURIOUS EMISSIONS	28
3.5.1 LIMITS OF CONDUCTED SPURIOUS EMISSIONS MEASUREMENT	28
3.5.2 TEST PROCEDURE	28
3.5.3 TEST SETUP	28
3.5.4 TEST RESULTS	29
3.6 RADIATED EMISSION MEASUREMENT	30
3.6.1 LIMITS OF RADIATED EMISSION MEASUREMENT	30
3.6.2 TEST PROCEDURES	30
3.6.3 DEVIATION FROM TEST STANDARD	30



Test Report No.: W7L-P22040029RF05

3.6.4 TEST SETUP	31
3.6.5 TEST RESULTS	33
3.7 PEAK TO AVERAGE RATIO	51
3.7.1 LIMITS OF PEAK TO AVERAGE RATIO MEASUREMENT	51
3.7.2 TEST SETUP	51
3.7.3 TEST PROCEDURES	51
3.7.4 TEST RESULTS	52
4 INFORMATION ON THE TESTING LABORATORIES	53
5 MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB.....	54
APPENDIX A.....	55
PEAK-TO-AVERAGE RATIO(CCDF)	55
TEST RESULT	55
TEST GRAPHS	57
26DB BANDWIDTH AND OCCUPIED BANDWIDTH	82
TEST RESULT	82
TEST GRAPHS	83
BAND EDGE	96
TEST RESULT	96
TEST GRAPHS	97
CONDUCTED SPURIOUS EMISSION	114
TEST RESULT	114
TEST GRAPHS	115
FREQUENCY STABILITY	140
TEST RESULT	140



Test Report No.: W7L-P22040029RF05

RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
W7L-P22040029RF05	Original release	May. 16, 2022



1 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC Part 24 & Part 2		
STANDARD SECTION	TEST TYPE	RESULT
§2.1046	Coducted Output Power	Compliance
§24.232(c)	Equivalent Isotropic Radiated Power	Compliance
§2.1055 §24.235	Frequency Stability	Compliance
§2.1049	Occupied Bandwidth	Compliance
§24.232(d)	Peak to average ratio	Compliance
§24.238(a)(b)	Band Edge Measurements	Compliance
§2.1051 §24.238(a)(b)	Conducted Spurious Emissions	Compliance
§2.1053 §24.238(a)(b)	Radiated Spurious Emissions	Compliance

1.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

MEASUREMENT	UNCERTAINTY
Frequency Stability	$\pm 76.97\text{Hz}$
Radiated emissions & Radiated Power (30MHz~1GMHz)	$\pm 4.98\text{dB}$
Radiated emissions & Radiated Power (1GMHz ~6GMHz)	$\pm 4.70\text{dB}$
Radiated emissions (6GMHz ~18GMHz)	$\pm 4.60\text{dB}$
Radiated emissions (18GMHz ~40GMHz)	$\pm 4.12\text{dB}$
Conducted emissions	$\pm 4.01\text{dB}$
Occupied Channel Bandwidth	$\pm 43.58\text{KHz}$
Conducted Output power	$\pm 2.06\text{dB}$
Band Edge Measurements	$\pm 4.70\text{dB}$
Peak to average ratio	$\pm 0.76\text{dB}$

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.



1.2 TEST SITE AND INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
MXE EMI Receiver	KEYSIGHT	N9038A-544	MY54450026	Apr. 29,22	Apr. 30,23
EXA Signal Analyzer	KEYSIGHT	N9010A-544	MY54510355	Jun. 03,21	Jun. 02,22
Loop Antenna	Schwarzbeck	FMZB 1519B	00173	Sep.05,21	Sep.04,22
Bilog Antenna	ETS-LINDGRE N	3143B	00161964	Feb. 24,22	Feb. 23,23
Horn Antenna	ETS-LINDGRE N	3117	00168692	Mar. 06,22	Mar. 05,23
Horn Antenna (18GHz-40GHz)	N/A	QWH-SL-18-40-K- SG/QMS-00361	15433	Aug. 25, 21	Aug. 24, 22
Radio Communication Analyzer	ANRITSU	MT8820C	6201465426	Feb. 15,22	Feb. 14,23
Signal Pre-Amplifier	EMSI	EMC 9135	980249	Jun. 02,21	Jun. 01,22
Signal Pre-Amplifier	EMSI	EMC 012645B	980257	Jun. 03,21	Jun. 02,22
Signal Pre-Amplifier	EMSI	EMC 184045B	980259	Apr. 21,22	Apr. 22,23
3m Semi-anechoic Chamber	ETS-LINDGRE N	9m*6m*6m	Euroshieldpn- CT0001143-121 6	May. 19,20	May. 18,23
Test Software	E3	V 9.160323	N/A	N/A	N/A
Test Software	ADT	ADT_Radiated_V 7.6.15.9.2	N/A	N/A	N/A
10dB Attenuator	JFW/USA	50HF-010-SMA	1505	Jun. 03,21	Jun. 02,22
Power Meter	Anritsu	N1914A	MY52180044	Feb.19,22	Feb.18,23
Power Sensor	Agilent	E9304A H18	MY52050011	Feb.20,22	Feb.19,23
Temperature Chamber	ESPEC	SH-242	93000855	Jun. 02,21	Jun. 01,22
MXG Analog Microvave Signal Generator	KEYSIGHT	N5183A	MY50143024	Mar. 04,22	Mar. 03,23
Power Divider	MCLI/USA	PS2-15	24880	N/A	N/A

NOTE: 1. The calibration interval of the above test instruments is 12 months or 36 months and the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.

2. The test was performed in 3m Semi-anechoic Chamber and RF Oven Room.

3. The horn antenna is used only for the measurement of emission frequency above 1GHz if tested.

4. The FCC Site Registration No. is 525120; The Designation No. is CN1171.

2 GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

PRODUCT	telematics embedded system	
BRAND NAME	MUNIC	
MODEL NAME	C4D-4G4USAB_V8+	
NOMINAL VOLTAGE	DC13.7V	
MODULATION TYPE	LTE Band 2: QPSK, 16QAM	
FREQUENCY RANGE	LTE Band 2 Channel Bandwidth: 1.4MHz	1850.7MHz ~ 1909.3MHz
	LTE Band 2 Channel Bandwidth: 3MHz	1851.5MHz ~ 1908.5MHz
	LTE Band 2 Channel Bandwidth: 5MHz	1852.5MHz ~ 1907.5MHz
	LTE Band 2 Channel Bandwidth: 10MHz	1855.0MHz ~ 1905.0MHz
	LTE Band 2 Channel Bandwidth: 15MHz	1857.5MHz ~ 1902.5MHz
	LTE Band 2 Channel Bandwidth: 20MHz	1860.0MHz ~ 1900.0MHz
MAX. EIRP POWER	LTE Band 2 Channel Bandwidth: 1.4MHz	685.49mW
	LTE Band 2 Channel Bandwidth: 3MHz	687.07mW
	LTE Band 2 Channel Bandwidth: 5MHz	679.20mW
	LTE Band 2 Channel Bandwidth: 10MHz	683.91mW
	LTE Band 2 Channel Bandwidth: 15MHz	687.07mW
	LTE Band 2 Channel Bandwidth: 20MHz	690.24mW
EMISSION DESIGNATOR	LTE Band 2 Channel Bandwidth: 1.4MHz	QPSK: 1M09G7D
		16QAM: 1M09W7D
	LTE Band 2 Channel Bandwidth: 3MHz	QPSK: 2M70G7D
		16QAM: 2M70W7D
	LTE Band 2 Channel Bandwidth: 5MHz	QPSK: 4M50G7D
		16QAM: 4M50W7D
	LTE Band 2	QPSK: 8M97G7D



	Channel Bandwidth: 10MHz	16QAM: 8M95W7D
	LTE Band 2	QPSK: 13M4G7D
	Channel Bandwidth: 15MHz	16QAM: 13M4W7D
	LTE Band 2	QPSK: 17M9G7D
	Channel Bandwidth: 20MHz	16QAM: 17M9W7D
ANTENNA TYPE	Fixed Internal Antenna with 5.54dBi gain for LTE B2	
HW VERSION	HW.01	
SW VERSION	SW.01	
I/O PORTS	Refer to user's manual	
CABLE SUPPLIED	N/A	
EXTREME TEMPERATURE	-20-50 °C	
EXTREME VOLTAGE	DC8V - DC18V	

NOTE:

- For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.
- The EUT incorporates a SISO function. Physically, the EUT provides one completed transmitter and one receiver.

MODULATION MODE	TX FUNCTION
LTE	1TX/1RX

- For the test results, the EUT had been tested with all conditions. But only the worst case was shown in test report.


List of Accessory:

ACCESSORIES	BRAND	MODEL	SPECIFICATION
Battery 1	Howell	Li-polymer 552535H	Capacity : Li-ion, 270mAh
Battery 2	Akkutronics	382530-PTL	Capacity : Li-ion, 270mAh



2.2 CONFIGURATION OF SYSTEM UNDER TEST

FOR RADIATION EMISSION TEST

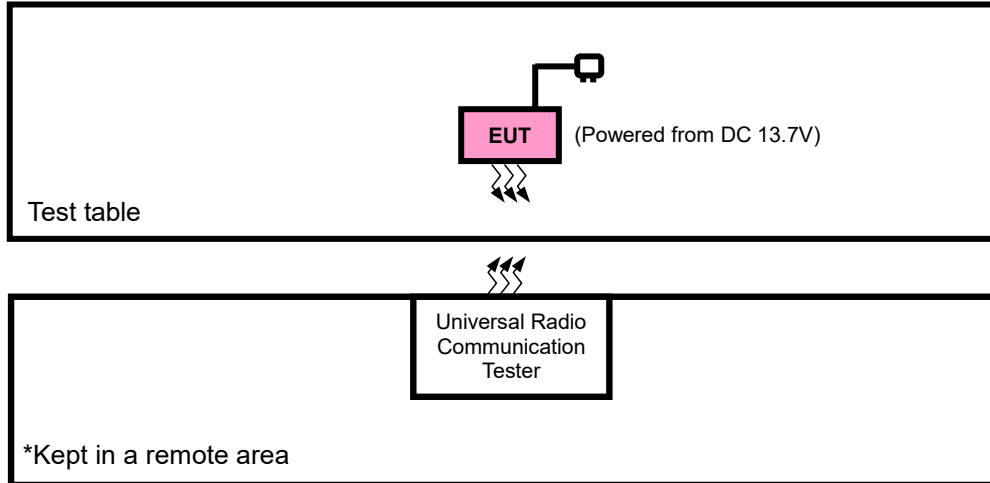



2.3 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	DC source	Kikusui/JP	PMX18-5A	0000001	N/A

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	DC Line: Unshielded, Detachable 1.0m

2.4 TEST ITEM AND TEST CONFIGURATION

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports. The worst case in EIRP and radiated emission was found when positioned on X-plane for GSM/EDGE/ LTE. Following channel(s) was (were) selected for the final test as listed below:

EUT CONFIGURE MODE	DESCRIPTION
A	EUT + DC Source with LTE link

LTE BAND 2 MODE

EUT CONFIGURE MODE	TEST ITEM	AVAILABLE CHANNEL	TESTED CHANNEL	CHANNEL BANDWIDTH	MODULATION	MODE
A	EIRP	18607 to 19193	18607, 18900, 19193	1.4MHz	QPSK,16QAM	1 RB / 0 RB Offset
		18615 to 19185	18615, 18900, 19185	3MHz	QPSK,16QAM	1 RB / 0 RB Offset
		18625 to 19175	18625, 18900, 19175	5MHz	QPSK,16QAM	1 RB / 0 RB Offset
		18650 to 19150	18650, 18900, 19150	10MHz	QPSK,16QAM	1 RB / 0 RB Offset
		18675 to 19125	18675, 18900, 19125	15MHz	QPSK,16QAM	1 RB / 0 RB Offset
		18700 to 19100	18700, 18900, 19100	20MHz	QPSK,16QAM	1 RB / 0 RB Offset
A	FREQUENCY STABILITY	18607 to 19193	18607, 18900, 19193	1.4MHz	QPSK,16QAM	6 RB / 0 RB Offset
		18615 to 19185	18615, 18900, 19185	3MHz	QPSK,16QAM	15 RB / 0 RB Offset
		18625 to 19175	18625, 18900, 19175	5MHz	QPSK,16QAM	25 RB / 0 RB Offset
		18650 to 19150	18650, 18900, 19150	10MHz	QPSK,16QAM	50 RB / 0 RB Offset
		18675 to 19125	18675, 18900, 19125	15MHz	QPSK,16QAM	75 RB / 0 RB Offset
		18700 to 19100	18700, 18900, 19100	20MHz	QPSK,16QAM	100 RB / 0 RB Offset
A	OCCUPIED BANDWIDTH	18607 to 19193	18607, 18900, 19193	1.4MHz	QPSK,16QAM	6 RB / 0 RB Offset
		18615 to 19185	18615, 18900, 19185	3MHz	QPSK,16QAM	15 RB / 0 RB Offset
		18625 to 19175	18625, 18900, 19175	5MHz	QPSK,16QAM	25 RB / 0 RB Offset
		18650 to 19150	18650, 18900, 19150	10MHz	QPSK,16QAM	50 RB / 0 RB Offset
		18675 to 19125	18675, 18900, 19125	15MHz	QPSK,16QAM	75 RB / 0 RB Offset
		18700 to 19100	18700, 18900, 19100	20MHz	QPSK,16QAM	100 RB / 0 RB Offset
A	PEAK TO AVERAGE RATIO	18607 to 19193	18607, 18900, 19193	1.4MHz	QPSK,16QAM	1 RB / 0 RB Offset
		18615 to 19185	18615, 18900, 19185	3MHz	QPSK,16QAM	1 RB / 0 RB Offset
		18625 to 19175	18625, 18900, 19175	5MHz	QPSK,16QAM	1 RB / 0 RB Offset
		18650 to 19150	18650, 18900, 19150	10MHz	QPSK,16QAM	1 RB / 0 RB Offset
		18675 to 19125	18675, 18900, 19125	15MHz	QPSK,16QAM	1 RB / 0 RB Offset
		18700 to 19100	18700, 18900, 19100	20MHz	QPSK,16QAM	1 RB / 0 RB Offset

A	BAND EDGE	18607 to 19193	18607	1.4MHz	QPSK,16QAM	1 RB / 0 RB Offset
			19193	1.4MHz	QPSK,16QAM	6 RB / 0 RB Offset
		18615 to 19185	18615	3MHz	QPSK,16QAM	1 RB / 5 RB Offset
			19185	3MHz	QPSK,16QAM	6 RB / 0 RB Offset
		18625 to 19175	18625	5MHz	QPSK,16QAM	1 RB / 0 RB Offset
			19175	5MHz	QPSK,16QAM	15 RB / 0 RB Offset
		18650 to 19150	18650	10MHz	QPSK,16QAM	1 RB / 14 RB Offset
			19150	10MHz	QPSK,16QAM	15 RB / 0 RB Offset
		18675 to 19125	18675	15MHz	QPSK,16QAM	1 RB / 0 RB Offset
			19125	15MHz	QPSK,16QAM	25 RB / 0 RB Offset
		18700 to 19100	18700	20MHz	QPSK,16QAM	1 RB / 24 RB Offset
			19100	20MHz	QPSK,16QAM	25 RB / 0 RB Offset
A	CONDCUDED EMISSION	18607 to 19193	18607, 18900, 19193	1.4MHz	QPSK,16QAM	1 RB / 0 RB Offset
		18615 to 19185	18615, 18900, 19185	3MHz	QPSK,16QAM	1 RB / 0 RB Offset
		18625 to 19175	18625, 18900, 19175	5MHz	QPSK,16QAM	1 RB / 0 RB Offset
		18650 to 19150	18650, 18900, 19150	10MHz	QPSK,16QAM	1 RB / 0 RB Offset
		18675 to 19125	18675, 18900, 19125	15MHz	QPSK,16QAM	1 RB / 0 RB Offset
		18700 to 19100	18700, 18900, 19100	20MHz	QPSK,16QAM	1 RB / 0 RB Offset
A	RADIATED EMISSION	18607 to 19193	18900	1.4MHz	QPSK	1 RB / 0 RB Offset
		18615 to 19185	18900	3MHz	QPSK	1 RB / 0 RB Offset
		18625 to 19175	18900	5MHz	QPSK	1 RB / 0 RB Offset
		18650 to 19150	18607, 18900, 19193	10MHz	QPSK	1 RB / 0 RB Offset
		18675 to 19125	18900	15MHz	QPSK	1 RB / 0 RB Offset
		18700 to 19100	18900	20MHz	QPSK	1 RB / 0 RB Offset

TEST CONDITION:

TEST ITEM	ENVIRONMENTAL CONDITIONS	INPUT POWER	TESTED BY
EIRP	25deg. C, 57%RH	DC 13.7V	Jace Hu
FREQUENCY STABILITY	23deg. C, 61%RH	DC 13.7V	James Fu
OCCUPIED BANDWIDTH	23deg. C, 61%RH	DC 13.7V	James Fu
PEAK TO AVERAGE RATIO	23deg. C, 61%RH	DC 13.7V	James Fu
BAND EDGE	23deg. C, 61%RH	DC 13.7V	James Fu
CONDCUDED EMISSION	23deg. C, 61%RH	DC 13.7V	James Fu
RADIATED EMISSION	23deg. C, 70%RH	DC 13.7V	Jace Hu

2.5 EUT OPERATING CONDITIONS

The EUT makes a call to the communication simulator. The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency

2.6 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC 47 CFR Part 2

FCC 47 CFR Part 24

KDB 971168 D01 Power Meas License Digital Systems v03r01

ANSI/TIA/EIA-603-D

ANSI/TIA/EIA-603-E

ANSI C63.26-2015

NOTE: All test items have been performed and recorded as per the above standards.

3 TEST TYPES AND RESULTS

3.1 OUTPUT POWER MEASUREMENT

3.1.1 LIMITS OF OUTPUT POWER MEASUREMENT

Mobile and portable stations are limited to 2 watts EIRP.

3.1.2 TEST PROCEDURES

EIRP MEASUREMENT:

Per KDB 971168 D01 Power Meas License Digital Systems v03r01 or subclause 5.2.5.5 of ANSI C63.26-2015, the relevant equation for determining the ERP or EIRP from the conducted RF output power measured using the guidance provided above is:

$$\text{ERP or EIRP} = P_{\text{Meas}} + G_T - L_C$$

Where:

ERP or EIRP = effective radiated power or equivalent isotropically radiated power, respectively

(expressed in the same units as P_{Meas} , typically dBW or dBm);

P_{Meas} = measured transmitter output power or PSD, in dBm or dBW;

G_T = gain of the transmitting antenna, in dBd (ERP) or dBi (EIRP);

L_C = signal attenuation in the connecting cable between the transmitter and antenna, in dB.


CONDUCTED POWER MEASUREMENT:

The EUT was set up for the maximum power with WCDMA link data modulation and link up with simulator. Set the EUT to transmit under low, middle and high channel and record the power level shown on simulator.

3.1.3 TEST SETUP

EIRP / ERP Measurement:

CONDUCTED POWER MEASUREMENT:



3.1.4 TEST RESULTS

CONDUCTED OUTPUT POWER (dBm)



LTE BAND 2

Band/BW	Modulation	RB Size	RB Offset	Low CH 18607	Mid CH 18900	High CH 19193	MPR
				Frequency 1850.7 MHz	Frequency 1880 MHz	Frequency 1909.3 MHz	
2/ 1.4	QPSK	1	0	22.72	22.74	22.55	0
		1	2	22.82	22.71	22.65	0
		1	5	22.50	22.43	22.27	0
		3	0	22.67	22.56	22.49	0
		3	1	22.79	22.72	22.51	0
		3	3	22.61	22.50	22.41	0
		6	0	21.81	21.69	21.50	1
	16QAM	1	0	21.27	21.18	21.05	1
		1	2	21.96	21.81	21.74	1
		1	5	21.23	21.09	21.01	1
		3	0	21.67	21.58	21.47	1
		3	1	21.71	21.66	21.52	1
		3	3	21.61	21.58	21.44	1
		6	0	20.68	20.60	20.47	2

Band/BW	Modulation	RB Size	RB Offset	Low CH 18615	Mid CH 18900	High CH 19185	MPR
				Frequency 1851.5 MHz	Frequency 1880 MHz	Frequency 1908.5 MHz	
2/ 3	QPSK	1	0	22.75	22.71	22.55	0
		1	7	22.83	22.69	22.65	0
		1	14	22.47	22.42	22.31	0
		8	0	21.69	21.59	21.46	1
		8	3	21.77	21.73	21.54	1
		8	7	21.62	21.53	21.46	1
		15	0	21.76	21.73	21.47	1
	16QAM	1	0	21.25	21.20	21.08	1
		1	7	21.90	21.87	21.71	1
		1	14	21.26	21.09	21.00	1
		8	0	20.63	20.57	20.44	2
		8	3	20.73	20.65	20.51	2
		8	7	20.58	20.58	20.43	2
		15	0	20.68	20.55	20.47	2

Band/BW	Modulation	RB Size	RB Offset	Low CH 18625	Mid CH 18900	High CH 19175	MPR
				Frequency 1852.5 MHz	Frequency 1880 MHz	Frequency 1907.5 MHz	
2/ 5	QPSK	1	0	22.74	22.76	22.54	0
		1	12	22.78	22.72	22.65	0
		1	24	22.46	22.43	22.27	0
		12	0	21.66	21.59	21.49	1
		12	6	21.77	21.72	21.53	1
		12	13	21.58	21.57	21.45	1
		25	0	21.78	21.70	21.44	1
	16QAM	1	0	21.24	21.24	21.08	1
		1	12	21.93	21.84	21.72	1
		1	24	21.26	21.09	21.01	1
		12	0	20.63	20.59	20.47	2
		12	6	20.76	20.61	20.55	2
		12	13	20.63	20.56	20.40	2
		25	0	20.68	20.54	20.50	2

Band/BW	Modulation	RB Size	RB Offset	Low CH 18650	Mid CH 18900	High CH 19150	MPR
				Frequency 1855 MHz	Frequency 1880 MHz	Frequency 1905 MHz	
2/ 10	QPSK	1	0	22.79	22.74	22.52	0
		1	24	22.81	22.74	22.61	0
		1	49	22.50	22.49	22.28	0
		25	0	21.67	21.59	21.50	1
		25	12	21.84	21.72	21.54	1
		25	25	21.58	21.51	21.45	1
		50	0	21.81	21.71	21.49	1
	16QAM	1	0	21.29	21.24	21.04	1
		1	24	21.94	21.84	21.74	1
		1	49	21.22	21.15	20.99	1
		25	0	20.69	20.55	20.51	2
		25	12	20.71	20.63	20.52	2
		25	25	20.62	20.57	20.43	2
		50	0	20.73	20.57	20.44	2

Band/BW	Modulation	RB Size	RB Offset	Low CH 18675	Mid CH 18900	High CH 19125	MPR
				Frequency 1857.5 MHz	Frequency 1880 MHz	Frequency 1902.5 MHz	
2/ 15	QPSK	1	0	22.72	22.74	22.55	0
		1	37	22.83	22.69	22.66	0
		1	74	22.44	22.46	22.27	0
		36	0	21.70	21.58	21.49	1
		36	19	21.83	21.67	21.54	1
		36	39	21.60	21.50	21.45	1
		75	0	21.81	21.73	21.44	1
	16QAM	1	0	21.25	21.17	21.04	1
		1	37	21.95	21.83	21.74	1
		1	74	21.26	21.10	20.97	1
		36	0	20.65	20.55	20.50	2
		36	19	20.77	20.59	20.56	2
		36	39	20.57	20.59	20.40	2
		75	0	20.72	20.54	20.51	2

Band/BW	Modulation	RB Size	RB Offset	Low CH 18700	Mid CH 18900	High CH 19100	MPR
				Frequency 1860 MHz	Frequency 1880 MHz	Frequency 1900 MHz	
2/ 20	QPSK	1	0	22.80	22.78	22.60	0
		1	50	22.85	22.77	22.67	0
		1	99	22.52	22.50	22.32	0
		50	0	21.73	21.64	21.51	1
		50	25	21.85	21.74	21.59	1
		50	50	21.66	21.58	21.47	1
		100	0	21.82	21.75	21.52	1
	16QAM	1	0	21.32	21.25	21.10	1
		1	50	21.98	21.89	21.76	1
		1	99	21.28	21.17	21.02	1
		50	0	20.71	20.63	20.52	2
		50	25	20.79	20.67	20.57	2
		50	50	20.65	20.63	20.45	2
		100	0	20.74	20.62	20.52	2



BUREAU
VERITAS

Test Report No.: W7L-P22040029RF05

EIRP POWER (dBm)

LTE BAND 2

CHANNEL BANDWIDTH: 1.4MHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _C (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
18607	1850.7	22.82	5.54	28.36	685.49	2
18900	1880.0	22.74	5.54	28.28	672.98	2
19193	1908.3	22.65	5.54	28.19	659.17	2

CHANNEL BANDWIDTH: 1.4MHz 16QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _C (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
18607	1850.7	21.96	5.54	27.5	562.34	2
18900	1880.0	21.81	5.54	27.35	543.25	2
19193	1908.3	21.74	5.54	27.28	534.56	2

CHANNEL BANDWIDTH: 3MHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _C (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
18615	1851.5	22.83	5.54	28.37	687.07	2
18900	1880.0	22.71	5.54	28.25	668.34	2
19185	1908.5	22.65	5.54	28.19	659.17	2

CHANNEL BANDWIDTH: 3MHz 16QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _C (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
18615	1851.5	21.9	5.54	27.44	554.63	2
18900	1880.0	21.87	5.54	27.41	550.81	2
19185	1908.5	21.71	5.54	27.25	530.88	2



BUREAU
VERITAS

Test Report No.: W7L-P22040029RF05

CHANNEL BANDWIDTH: 5MHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
18625	1852.5	22.78	5.54	28.32	679.20	2
18900	1880.0	22.76	5.54	28.3	676.08	2
19175	1907.5	22.65	5.54	28.19	659.17	2

CHANNEL BANDWIDTH: 5MHz 16QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
18625	1852.5	21.93	5.54	27.47	558.47	2
18900	1880.0	21.84	5.54	27.38	547.02	2
19175	1907.5	21.72	5.54	27.26	532.11	2

CHANNEL BANDWIDTH: 10MHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
18650	1855.0	22.81	5.54	28.35	683.91	2
18900	1880.0	22.74	5.54	28.28	672.98	2
19150	1905.0	22.61	5.54	28.15	653.13	2

CHANNEL BANDWIDTH: 10MHz 16QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
18650	1855.0	21.94	5.54	27.48	559.76	2
18900	1880.0	21.84	5.54	27.38	547.02	2
19150	1905.0	21.74	5.54	27.28	534.56	2



BUREAU
VERITAS

Test Report No.: W7L-P22040029RF05

CHANNEL BANDWIDTH: 15MHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _{T-L_C} (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
18675	1857.5	22.83	5.54	28.37	687.07	2
18900	1880.0	22.74	5.54	28.28	672.98	2
19125	1902.5	22.66	5.54	28.2	660.69	2

CHANNEL BANDWIDTH: 15MHz 16QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _{T-L_C} (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
18675	1857.5	21.95	5.54	27.49	561.05	2
18900	1880.0	21.83	5.54	27.37	545.76	2
19125	1902.5	21.74	5.54	27.28	534.56	2

CHANNEL BANDWIDTH: 20MHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _{T-L_C} (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
18700	1860	22.85	5.54	28.39	690.24	2
18900	1880	22.78	5.54	28.32	679.2	2
19100	1900	22.67	5.54	28.21	662.22	2

CHANNEL BANDWIDTH: 20MHz 16QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _{T-L_C} (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
18700	1860	21.98	5.54	27.52	564.94	2
18900	1880	21.89	5.54	27.43	553.35	2
19100	1900	21.76	5.54	27.3	537.03	2



3.2 FREQUENCY STABILITY MEASUREMENT

3.2.1 LIMITS OF FREQUENCY STABILITY MEASUREMENT


The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

3.2.2 TEST PROCEDURE

- Device is placed at the oven room. The oven room could control the temperatures and humidity. Power warm up is at least 15 min and power applied should perform before recording frequency error.
- EUT is connected the external power supply to control the DC input power. The test voltage range is from minimum to maximum working voltage. Each step shall be record the frequency error rate.
- The temperature range step is 10 degrees in this test items. All temperature levels shall be hold the $\pm 0.5^{\circ}\text{C}$ during the measurement testing. The each temperature step shall be at least 0.5 hours, consider the EUT could be test under the stability condition.

NOTE: The frequency error was recorded frequency error from the communication simulator.

3.2.3 TEST SETUP

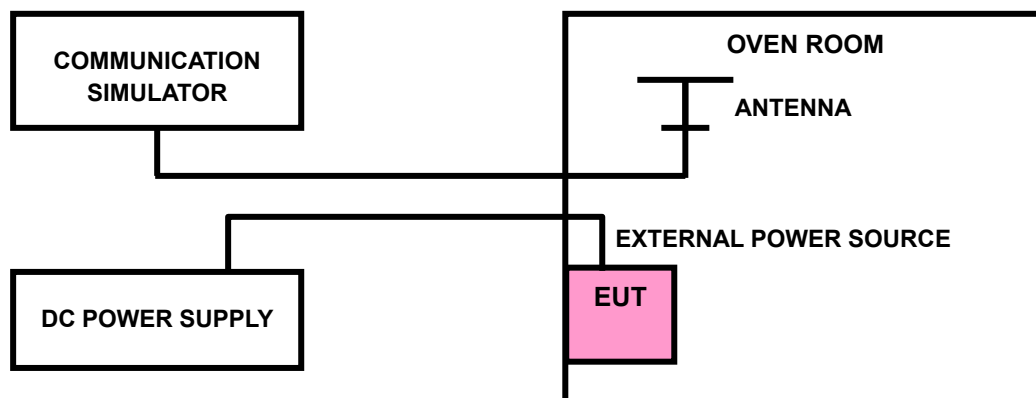



Test Report No.: W7L-P22040029RF05

3.2.4 TEST RESULTS

Please Refer to Appendix A Of this test report.




3.3 OCCUPIED BANDWIDTH MEASUREMENT

3.3.1 TEST PROCEDURES

The EUT makes a call to the communication simulator. All measurements were done at low, middle and high operational frequency range. The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency. Use OBW measurement function of Spectrum analyzer to measure 99 % occupied bandwidth.

3.3.2 TEST SETUP

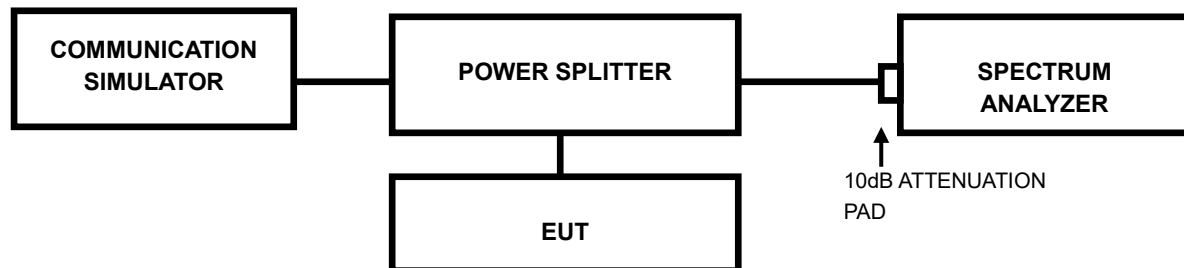



Test Report No.: W7L-P22040029RF05

3.3.3 TEST RESULTS

Please Refer to Appendix A Of this test report.




3.4 BAND EDGE MEASUREMENTC

3.4.1 LIMITS OF BAND EDGE MEASUREMENT

Power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

3.4.2 TEST SETUP

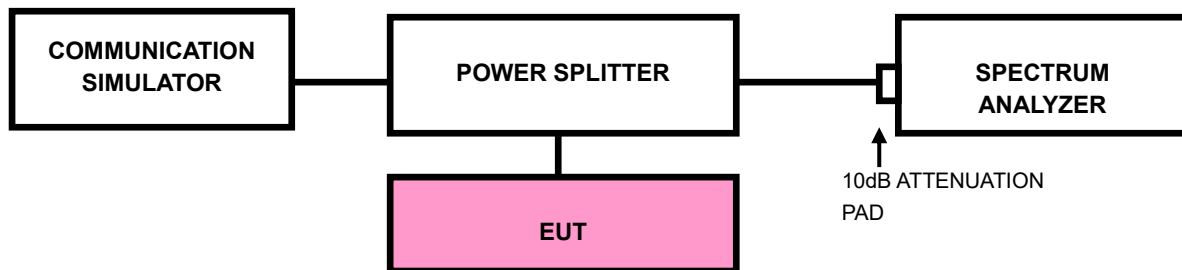

3.4.3 TEST PROCEDURES

- a. All measurements were done at low and high operational frequency range.
- b. The center frequency of spectrum is the band edge frequency and span is 1~5 MHz.
RBW of the spectrum is 10kHz and VBW of the spectrum is 30kHz (LTE bandwidth for (1.4M/3M/5M/10M/15M/20M)1RB/0RB&1RB/MAXRB).
- c. The center frequency of spectrum is the band edge frequency and span is 1~5 MHz.
RBW of the spectrum is $\geq 1\% \cdot \text{EBW kHz}$ and VBW of the spectrum is $3 \cdot \text{RBW kHz}$. (LTE bandwidth 1.4M/3M/5M/10M/15M/20MHz).
- d. Record the max trace plot into the test report.

3.4.4. TEST RESULTS

Please Refer to Appendix A Of this test report.



3.5 CONDUCTED SPURIOUS EMISSIONS


3.5.1 LIMITS OF CONDUCTED SPURIOUS EMISSIONS MEASUREMENT

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. The emission limit equal to -13dBm .

3.5.2 TEST PROCEDURE

- The EUT makes a phone call to the communication simulator. All measurements were done at low, middle and high operational frequency range.
- Measuring frequency range is from 30MHz up to a frequency including its 10th harmonic. 10dB attenuation pad is connected with spectrum. RBW=1MHz and VBW=3MHz is used for conducted emission measurement.

3.5.3 TEST SETUP

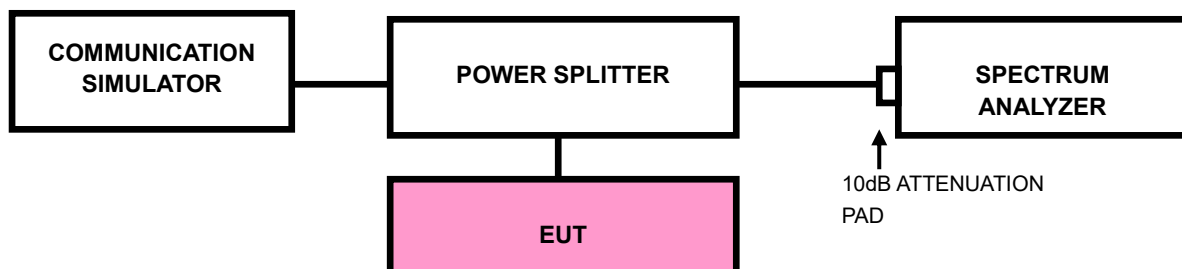



Test Report No.: W7L-P22040029RF05

3.5.4 TEST RESULTS

NOTE : The 9K~30MHz amplitude of spurious emissions attenuated more than 20 dB below the permissible value is not required in the report.

Please Refer to Appendix A Of this test report.

3.6 RADIATED EMISSION MEASUREMENT

3.6.1 LIMITS OF RADIATED EMISSION MEASUREMENT

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. The emission limit equal to -13dBm .

3.6.2 TEST PROCEDURES

- a. Substitution method is used for E.I.R.P measurement. In the semi-anechoic chamber, EUT placed on the 0.8m height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum polar radiated power. The "Read Value" is the spectrum reading the maximum power value.
- b. The substitution horn antenna is substituted for EUT at the same position and signals generator export the CW signal to the substitution antenna via a TX cable. Rotated the Turn Table and moved receiving antenna to find the maximum radiation power. Adjust output power level of S.G to get a Value of spectrum reading equal to "Read Value " of step a. Record the power level of S.G
- c. $\text{EIRP} = \text{Output power level of S.G} - \text{TX cable loss} + \text{Antenna gain of substitution horn}.$


NOTE: The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1MHz/3MHz.

3.6.3 DEVIATION FROM TEST STANDARD


No deviation

3.6.4 TEST SETUP


< Frequency Range below 30MHz >

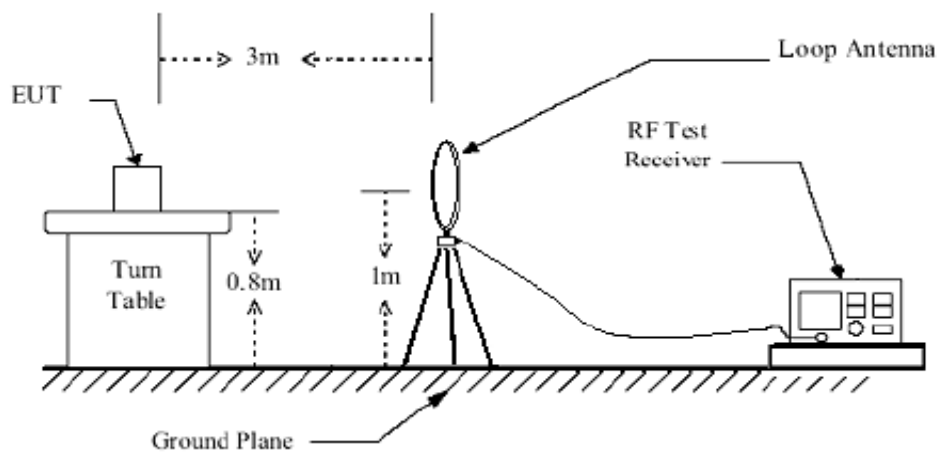

< Frequency Range 30MHz~1GHz >

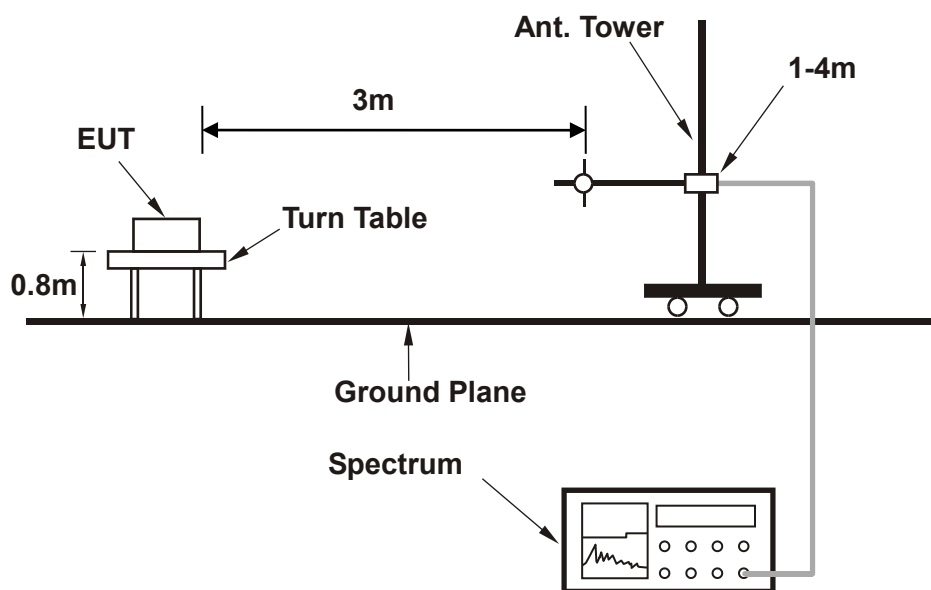

<Frequency Range above 1GHz>

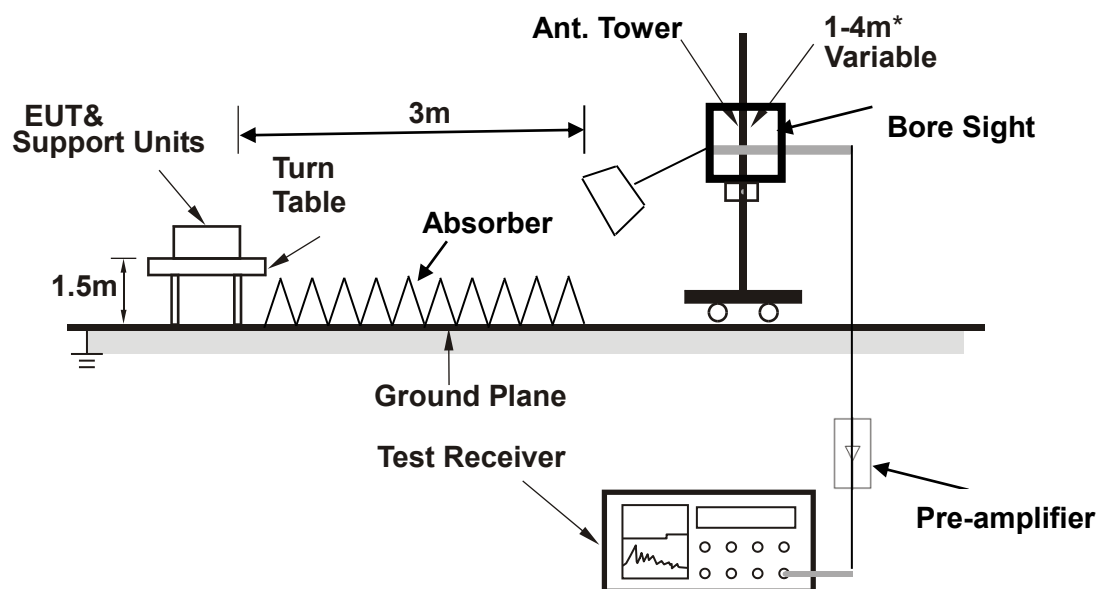

Note: Above 1G is a directional antenna depends on the EUT height and the antenna 3dB beamwidth both, refer to section 7.3 of CISPR 16-2-3.

For the actual test configuration, please refer to the attached file (Test Setup Photo).



3.6.5 TEST RESULTS

NOTE : The 9K~30MHz amplitude of spurious emissions attenuated more than 20 dB below the permissible value is not required in the report.

BELOW 1GHz WORST-CASE DATA


30 MHz – 1GHz data:

LTE Band 2

CHANNEL BANDWIDTH: 10MHz / QPSK


MODE	TX channel 19150	FREQUENCY RANGE	Below 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC13.7V
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	57.160	-45.46	-54.94	-13.00	-32.46	9.48	Peak	Horizontal
2	112.450	-26.62	-36.44	-13.00	-13.62	9.82	Peak	Horizontal
3	189.080	-34.68	-46.03	-13.00	-21.68	11.35	Peak	Horizontal
4 PP	301.600	-23.16	-37.20	-13.00	-10.16	14.04	Peak	Horizontal
5	465.530	-38.84	-56.29	-13.00	-25.84	17.45	Peak	Horizontal
6	562.530	-38.21	-57.31	-13.00	-25.21	19.10	Peak	Horizontal

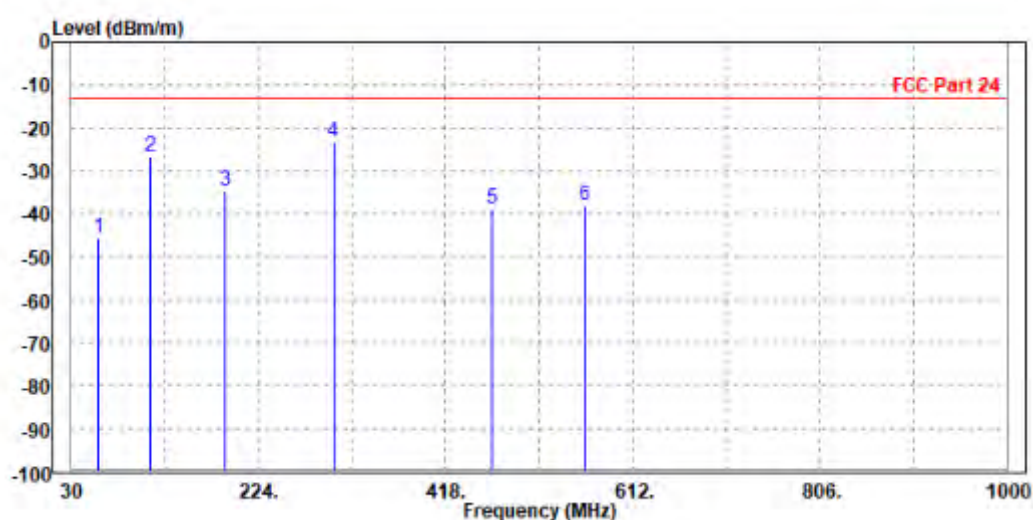

MODE	TX channel 19150	FREQUENCY RANGE	Below 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC13.7V
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	41.640	-40.59	-52.56	-13.00	-27.59	11.97	Peak	Vertical
2 PP	113.420	-31.62	-40.32	-13.00	-18.62	8.70	Peak	Vertical
3	189.080	-40.24	-51.58	-13.00	-27.24	11.34	Peak	Vertical
4	301.600	-34.41	-48.45	-13.00	-21.41	14.04	Peak	Vertical
5	464.560	-37.23	-54.37	-13.00	-24.23	17.14	Peak	Vertical
6	555.740	-39.32	-58.03	-13.00	-26.32	18.71	Peak	Vertical

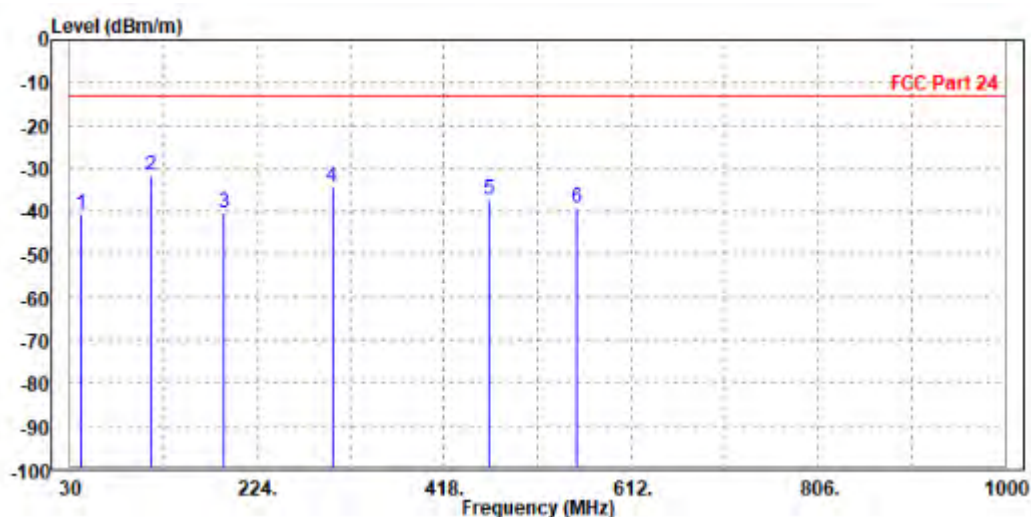



**BUREAU
VERITAS**

Test Report No.: W7L-P22040029RF05

ABOVE 1GHz DATA

Note: For higher frequency, the emission is too low to be detected.


WORST-CASE DATA

LTE Band 2

CHANNEL BANDWIDTH: 1.4MHz / QPSK


MODE	TX channel 18900	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC13.7V
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3755.000	-49.88	-58.73	-13.00	-36.88	8.85	Peak	Horizontal
2 PP	5640.000	-48.89	-59.37	-13.00	-35.89	10.48	Peak	Horizontal

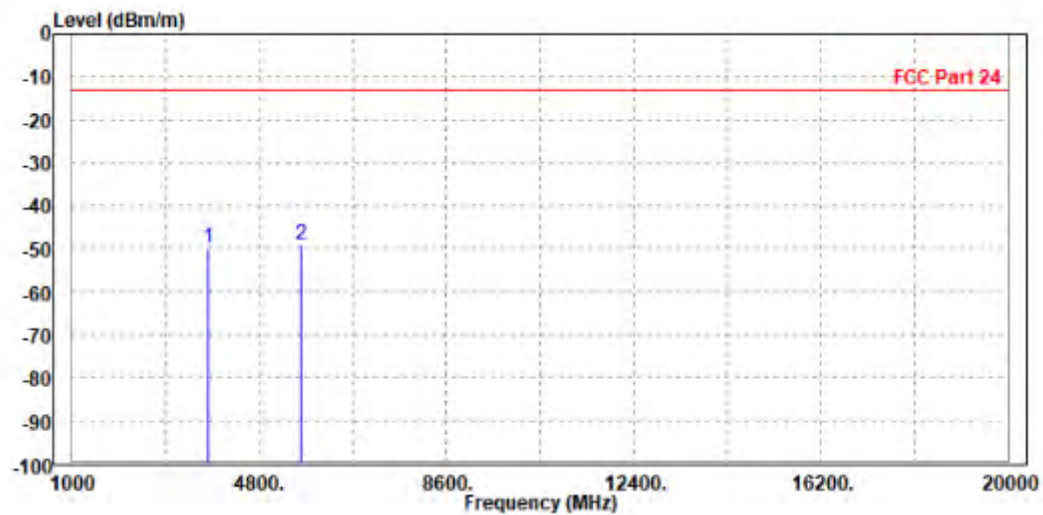

MODE	TX channel 18900	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC13.7V
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP 3760.000	-48.91	-58.18	-13.00	-35.91	9.27	Peak	Vertical
2	5636.000	-49.31	-59.54	-13.00	-36.31	10.23	Peak	Vertical

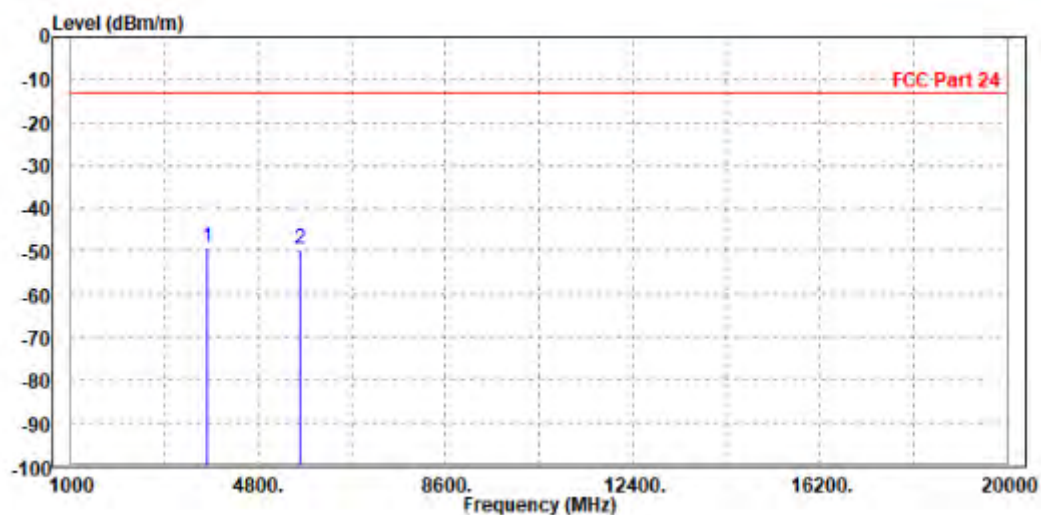




BUREAU
VERITAS

Test Report No.: W7L-P22040029RF05

CHANNEL BANDWIDTH: 3MHz / QPSK


MODE	TX channel 18900	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC13.7V
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3755.000	-49.13	-57.98	-13.00	-36.13	8.85	Peak	Horizontal
2 PP	5640.000	-47.01	-57.49	-13.00	-34.01	10.48	Peak	Horizontal

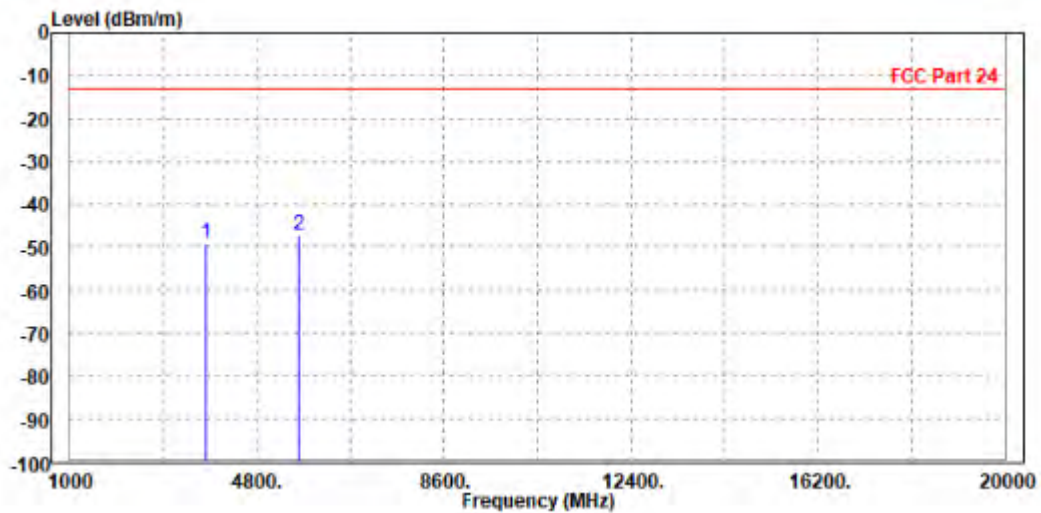

MODE	TX channel 18900	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC13.7V
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

		Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
		MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP	3755.000	-48.88	-58.15	-13.00	-35.88	9.27	Peak	Vertical
2		5640.000	-49.46	-59.71	-13.00	-36.46	10.25	Peak	Vertical

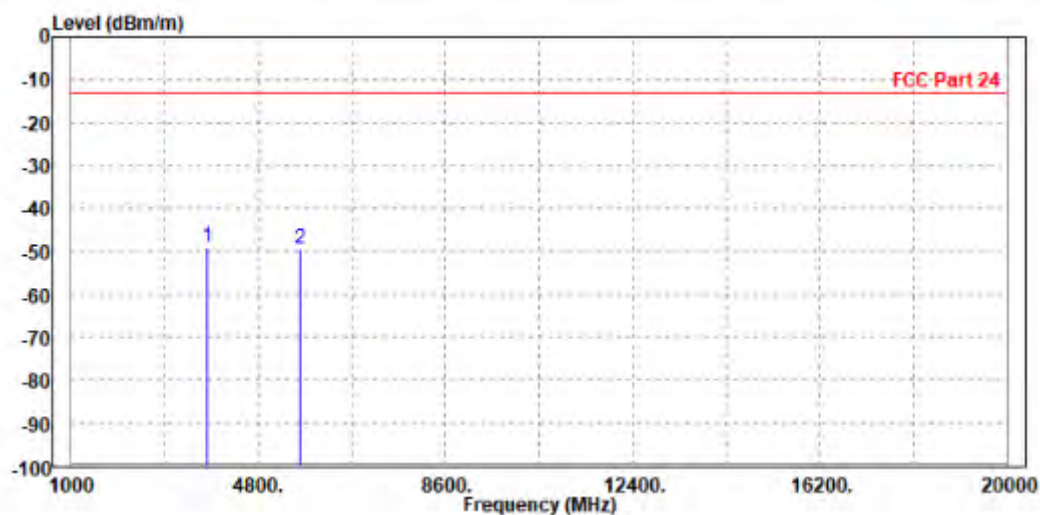




BUREAU
VERITAS

Test Report No.: W7L-P22040029RF05

CHANNEL BANDWIDTH: 5MHz / QPSK


MODE	TX channel 18900	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC13.7V
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3755.000	-49.75	-58.60	-13.00	-36.75	8.85	Peak	Horizontal
2 PP	5640.000	-47.16	-57.64	-13.00	-34.16	10.48	Peak	Horizontal

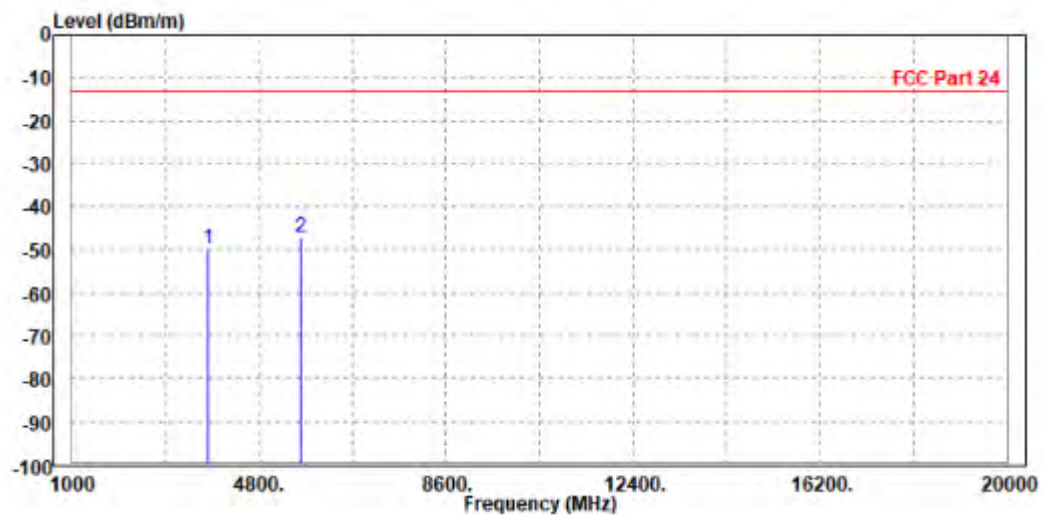

MODE	TX channel 18900	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC13.7V
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3760.000	-49.38	-58.65	-13.00	-36.38	9.27	Peak	Vertical
2 PP	5636.000	-47.52	-57.75	-13.00	-34.52	10.23	Peak	Vertical

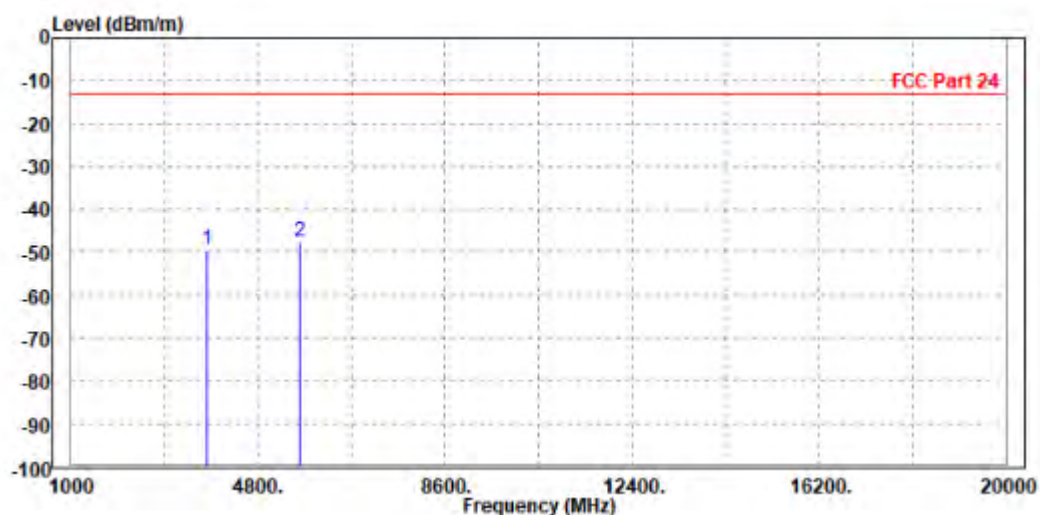



BUREAU
VERITAS


Test Report No.: W7L-P22040029RF05

CHANNEL BANDWIDTH: 10MHz / QPSK

CH18650


MODE	TX channel 18650	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC13.7V
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3717.000	-48.94	-57.75	-13.00	-35.94	8.81	Peak	Horizontal
2 PP	5565.000	-47.22	-57.46	-13.00	-34.22	10.24	Peak	Horizontal

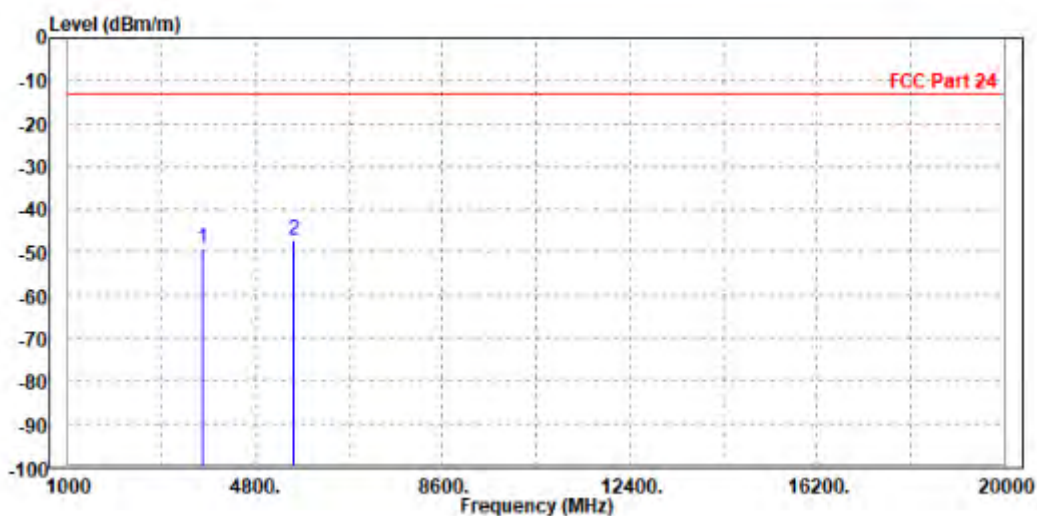

MODE	TX channel 18650	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC13.7V
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP 3717.000	-48.85	-58.11	-13.00	-35.85	9.26	Peak	Vertical
2	5565.000	-48.94	-58.90	-13.00	-35.94	9.96	Peak	Vertical

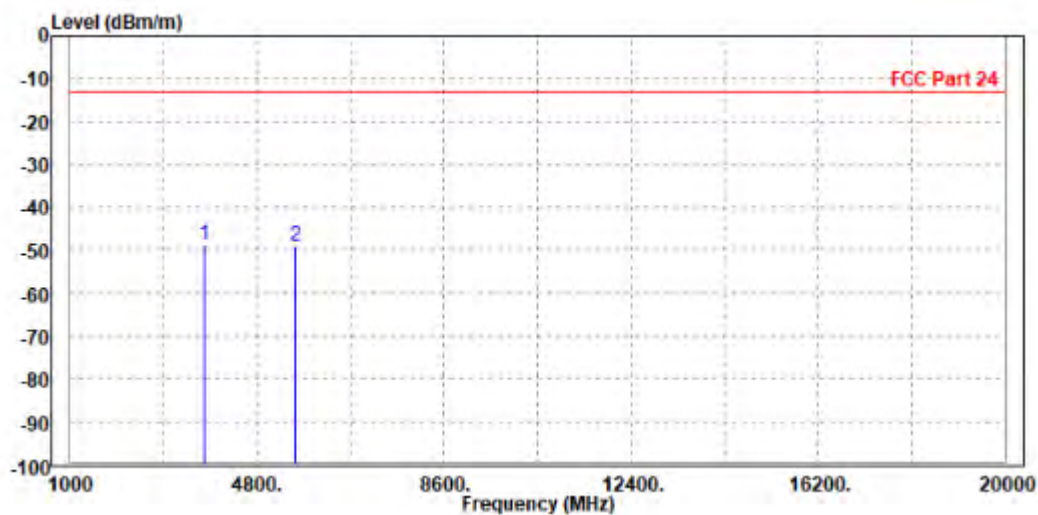




BUREAU
VERITAS

Test Report No.: W7L-P22040029RF05

CH18900


MODE	TX channel 18900	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC13.7V
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3760.000	-49.61	-58.46	-13.00	-36.61	8.85	Peak	Horizontal
2 PP	5636.000	-45.80	-56.27	-13.00	-32.80	10.47	Peak	Horizontal

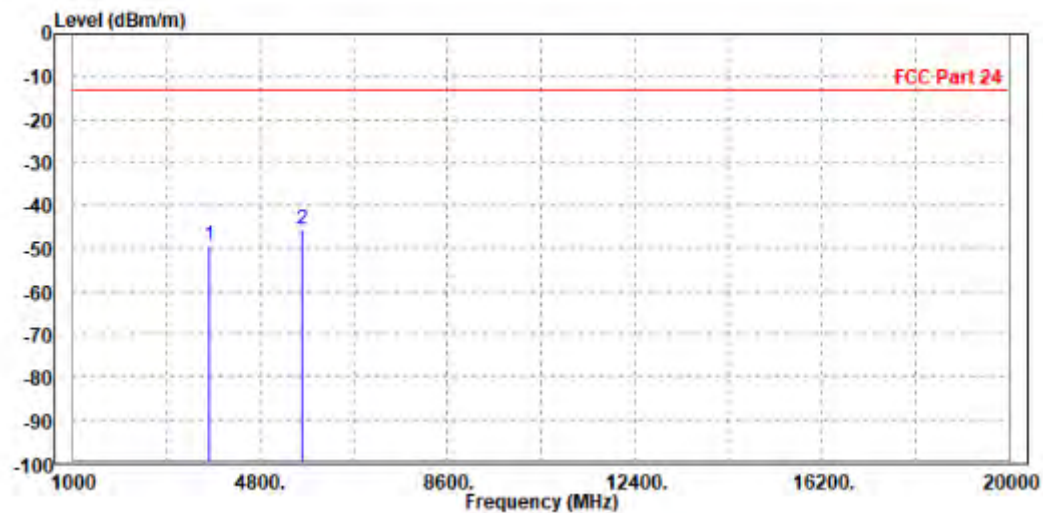

MODE	TX channel 18900	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC13.7V
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3755.000	-48.98	-58.25	-13.00	-35.98	9.27	Peak	Vertical
2 PP	5640.000	-44.03	-54.28	-13.00	-31.03	10.25	Peak	Vertical

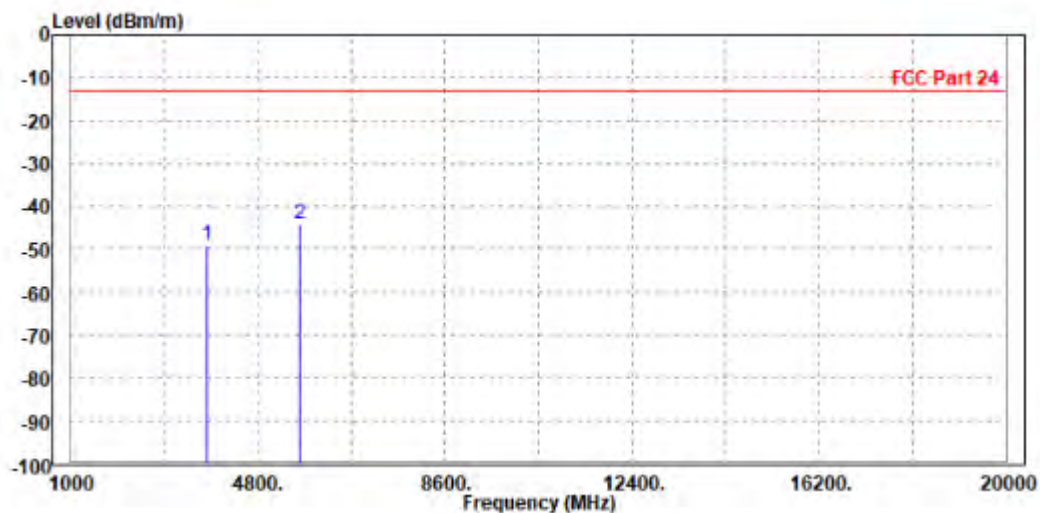




**BUREAU
VERITAS**

Test Report No.: W7L-P22040029RF05

CH19150


MODE	TX channel 19150	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC13.7V
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3810.000	-49.45	-58.35	-13.00	-36.45	8.90	Peak	Horizontal
2 PP	5715.000	-33.22	-43.95	-13.00	-20.22	10.73	Peak	Horizontal

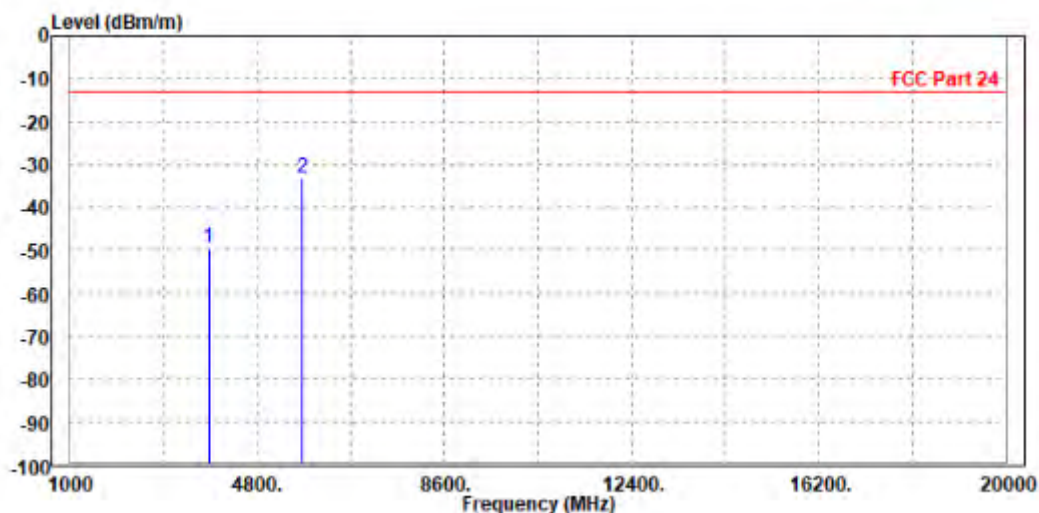

MODE	TX channel 19150	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC13.7V
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3810.000	-48.24	-57.53	-13.00	-35.24	9.29	Peak	Vertical
2 PP	5715.000	-33.80	-44.34	-13.00	-20.80	10.54	Peak	Vertical

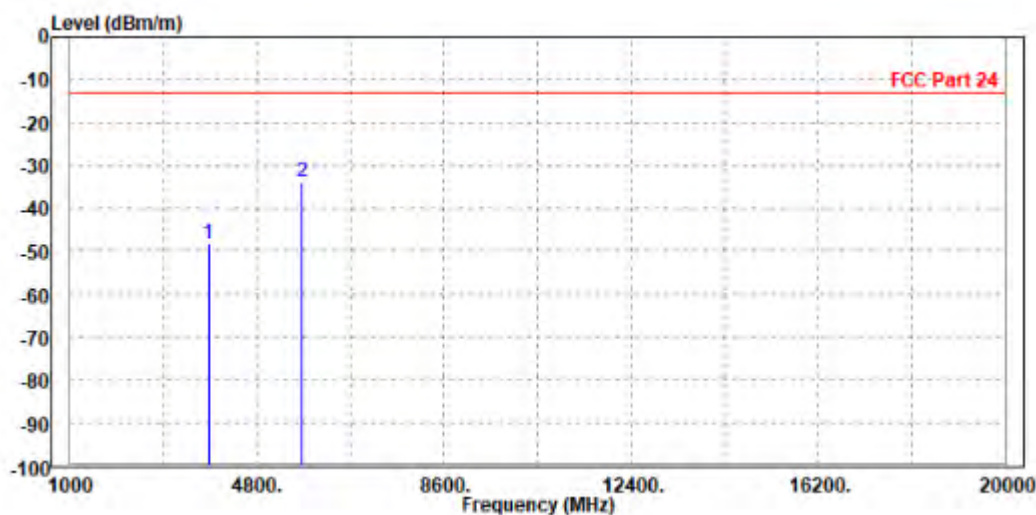




BUREAU
VERITAS

Test Report No.: W7L-P22040029RF05

CHANNEL BANDWIDTH: 15MHz / QPSK


MODE	TX channel 18900	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC13.7V
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3760.000	-48.94	-57.79	-13.00	-35.94	8.85	Peak	Horizontal
2 PP	5636.000	-48.94	-59.41	-13.00	-35.94	10.47	Peak	Horizontal

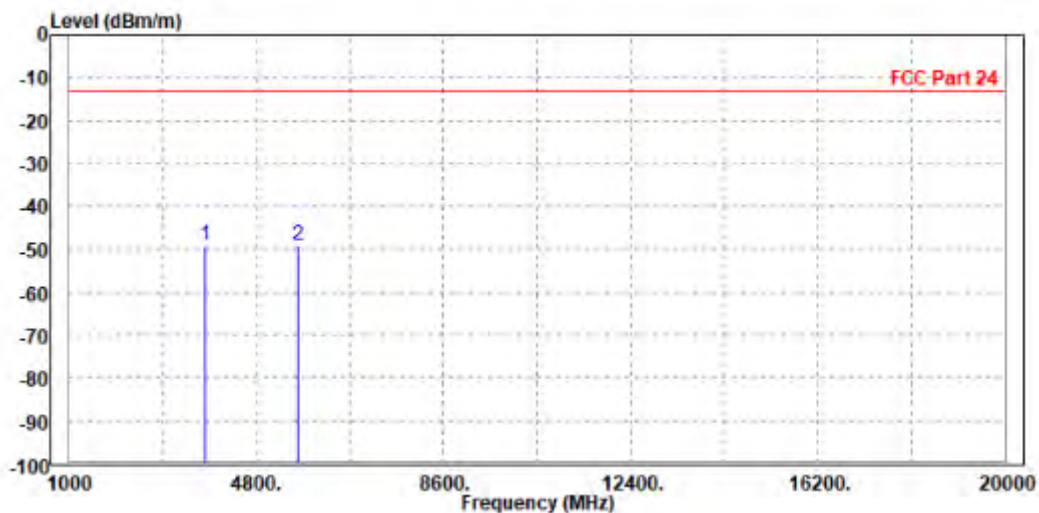

MODE	TX channel 18900	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC13.7V
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			


		Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
		MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP	3755.000	-49.19	-58.46	-13.00	-36.19	9.27	Peak	Vertical
2		5640.000	-49.33	-59.58	-13.00	-36.33	10.25	Peak	Vertical

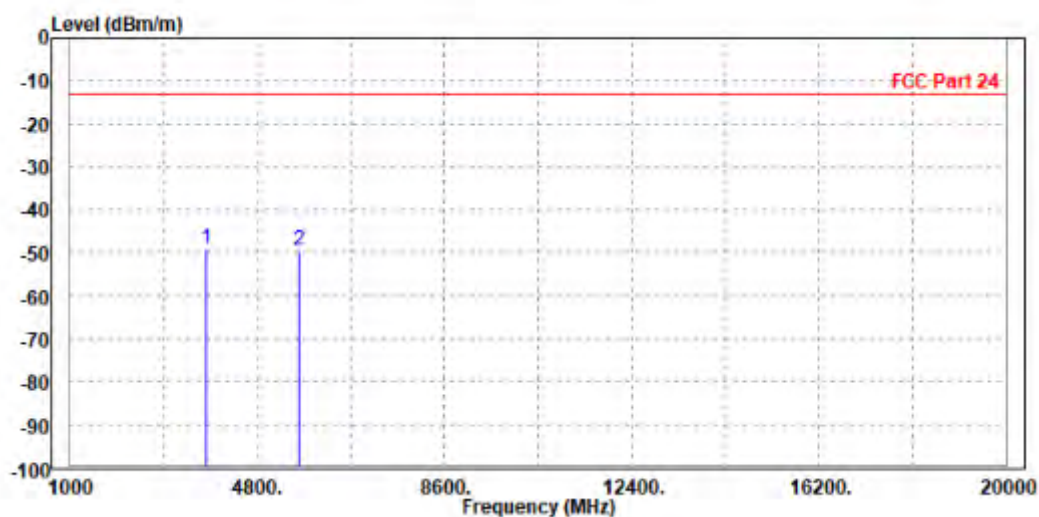

CHANNEL BANDWIDTH: 20MHz / QPSK


MODE	TX channel 18900	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC13.7V
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3755.000	-49.23	-58.08	-13.00	-36.23	8.85	Peak	Horizontal
2 PP	5640.000	-48.41	-58.89	-13.00	-35.41	10.48	Peak	Horizontal

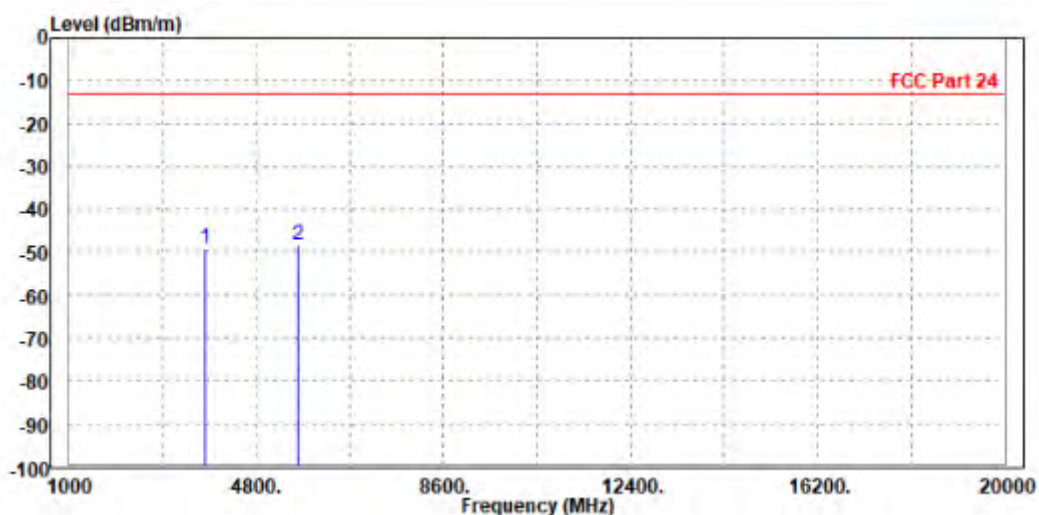

MODE	TX channel 18900	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC13.7V
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

		Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
		MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP	3760.000	-48.37	-57.64	-13.00	-35.37	9.27	Peak	Vertical
2		5636.000	-48.84	-59.07	-13.00	-35.84	10.23	Peak	Vertical

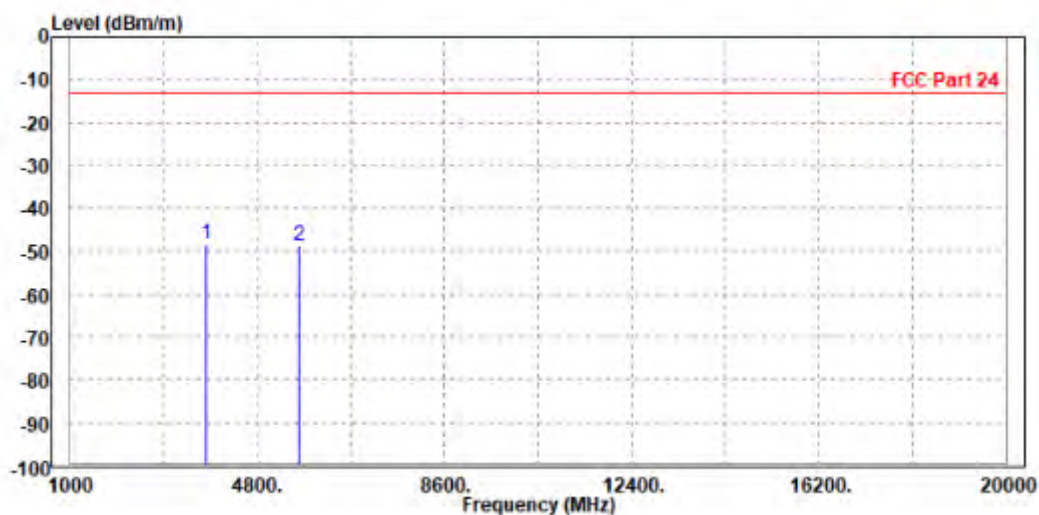


3.7 PEAK TO AVERAGE RATIO

3.7.1 LIMITS OF PEAK TO AVERAGE RATIO MEASUREMENT

In measuring transmissions in this band using an average power technique, the peak to-average ratio (PAR) of the transmission may not exceed 13 dB

3.7.2 TEST SETUP

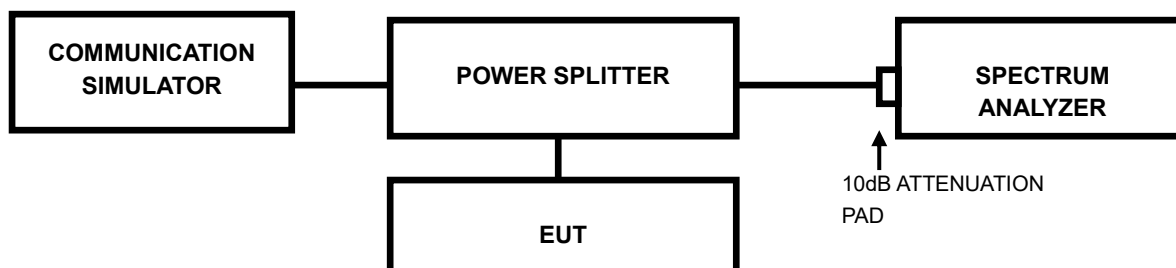

3.7.3 TEST PROCEDURES

1. Set resolution/measurement bandwidth $\geq$ signal's occupied bandwidth;
2. Set the number of counts to a value that stabilizes the measured CCDF curve;
3. Record the maximum PAPR level associated with a probability of 0.1%.



Test Report No.: W7L-P22040029RF05

3.7.4 TEST RESULTS

Please Refer to Appendix A Of this test report.



BUREAU
VERITAS

Test Report No.: W7L-P22040029RF05

4 INFORMATION ON THE TESTING LABORATORIES

We, BV 7LAYERS COMMUNICATIONS TECHNOLOGY (SHENZHEN) CO. LTD., were founded in 2015 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Shenzhen EMC/RF Lab:

Tel: +86-755-88696566

Fax: +86-755-88696577

Email: customerservice.sw@bureauveritas.com

Web Site: www.adt.com.tw

The address and road map of all our labs can be found in our web site also.



Test Report No.: W7L-P22040029RF05

5 MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No any modifications are made to the EUT by the lab during the test.

NOTE: Please Refer to Appendix A Of this test report.

APPENDIX A

PEAK-TO-AVERAGE RATIO(CCDF)

Test Result

Band	Bandwidth	Modulation	Channel	RB Configuration	Result(dB)	Limit(dB)	Verdict
Band2	1.4MHz	QPSK	18607	1RB#0	4.59	13	PASS
Band2	1.4MHz	QPSK	18607	6RB#0	5.31	13	PASS
Band2	1.4MHz	QPSK	18900	1RB#0	4.33	13	PASS
Band2	1.4MHz	QPSK	18900	6RB#0	5.02	13	PASS
Band2	1.4MHz	QPSK	19193	1RB#0	4.19	13	PASS
Band2	1.4MHz	QPSK	19193	6RB#0	4.98	13	PASS
Band2	1.4MHz	16QAM	18607	1RB#0	5.46	13	PASS
Band2	1.4MHz	16QAM	18607	6RB#0	6.14	13	PASS
Band2	1.4MHz	16QAM	18900	1RB#0	5.35	13	PASS
Band2	1.4MHz	16QAM	18900	6RB#0	5.86	13	PASS
Band2	1.4MHz	16QAM	19193	1RB#0	5.01	13	PASS
Band2	1.4MHz	16QAM	19193	6RB#0	5.86	13	PASS
Band2	3MHz	QPSK	18615	1RB#0	4.61	13	PASS
Band2	3MHz	QPSK	18615	15RB#0	5.36	13	PASS
Band2	3MHz	QPSK	18900	1RB#0	4.39	13	PASS
Band2	3MHz	QPSK	18900	15RB#0	5.15	13	PASS
Band2	3MHz	QPSK	19185	1RB#0	4.15	13	PASS
Band2	3MHz	QPSK	19185	15RB#0	4.98	13	PASS
Band2	3MHz	16QAM	18615	1RB#0	5.51	13	PASS
Band2	3MHz	16QAM	18615	15RB#0	6.15	13	PASS
Band2	3MHz	16QAM	18900	1RB#0	5.22	13	PASS
Band2	3MHz	16QAM	18900	15RB#0	5.95	13	PASS
Band2	3MHz	16QAM	19185	1RB#0	5.00	13	PASS
Band2	3MHz	16QAM	19185	15RB#0	5.84	13	PASS
Band2	5MHz	QPSK	18625	1RB#0	4.61	13	PASS
Band2	5MHz	QPSK	18625	25RB#0	5.39	13	PASS
Band2	5MHz	QPSK	18900	1RB#0	4.38	13	PASS
Band2	5MHz	QPSK	18900	25RB#0	5.19	13	PASS
Band2	5MHz	QPSK	19175	1RB#0	4.17	13	PASS
Band2	5MHz	QPSK	19175	25RB#0	5.03	13	PASS
Band2	5MHz	16QAM	18625	1RB#0	5.64	13	PASS
Band2	5MHz	16QAM	18625	25RB#0	6.14	13	PASS
Band2	5MHz	16QAM	18900	1RB#0	5.23	13	PASS
Band2	5MHz	16QAM	18900	25RB#0	5.93	13	PASS
Band2	5MHz	16QAM	19175	1RB#0	4.93	13	PASS
Band2	5MHz	16QAM	19175	25RB#0	5.84	13	PASS
Band2	10MHz	QPSK	18650	1RB#0	4.64	13	PASS
Band2	10MHz	QPSK	18650	50RB#0	5.31	13	PASS
Band2	10MHz	QPSK	18900	1RB#0	4.33	13	PASS
Band2	10MHz	QPSK	18900	50RB#0	5.16	13	PASS




BUREAU
VERITAS

Test Report No.: W7L-P22040029RF05


Band2	10MHz	QPSK	19150	1RB#0	4.22	13	PASS
Band2	10MHz	QPSK	19150	50RB#0	4.98	13	PASS
Band2	10MHz	16QAM	18650	1RB#0	5.45	13	PASS
Band2	10MHz	16QAM	18650	50RB#0	6.16	13	PASS
Band2	10MHz	16QAM	18900	1RB#0	5.08	13	PASS
Band2	10MHz	16QAM	18900	50RB#0	5.96	13	PASS
Band2	10MHz	16QAM	19150	1RB#0	5.16	13	PASS
Band2	10MHz	16QAM	19150	50RB#0	5.81	13	PASS
Band2	15MHz	QPSK	18675	1RB#0	4.54	13	PASS
Band2	15MHz	QPSK	18675	75RB#0	5.35	13	PASS
Band2	15MHz	QPSK	18900	1RB#0	4.26	13	PASS
Band2	15MHz	QPSK	18900	75RB#0	5.30	13	PASS
Band2	15MHz	QPSK	19125	1RB#0	4.35	13	PASS
Band2	15MHz	QPSK	19125	75RB#0	5.12	13	PASS
Band2	15MHz	16QAM	18675	1RB#0	5.30	13	PASS
Band2	15MHz	16QAM	18675	75RB#0	6.10	13	PASS
Band2	15MHz	16QAM	18900	1RB#0	5.15	13	PASS
Band2	15MHz	16QAM	18900	75RB#0	6.02	13	PASS
Band2	15MHz	16QAM	19125	1RB#0	5.24	13	PASS
Band2	15MHz	16QAM	19125	75RB#0	5.87	13	PASS
Band2	20MHz	QPSK	18700	1RB#0	4.54	13	PASS
Band2	20MHz	QPSK	18700	100RB#0	5.13	13	PASS
Band2	20MHz	QPSK	18900	1RB#0	4.35	13	PASS
Band2	20MHz	QPSK	18900	100RB#0	5.14	13	PASS
Band2	20MHz	QPSK	19100	1RB#0	4.52	13	PASS
Band2	20MHz	QPSK	19100	100RB#0	5.00	13	PASS
Band2	20MHz	16QAM	18700	1RB#0	5.48	13	PASS
Band2	20MHz	16QAM	18700	100RB#0	5.95	13	PASS
Band2	20MHz	16QAM	18900	1RB#0	5.14	13	PASS
Band2	20MHz	16QAM	18900	100RB#0	5.93	13	PASS
Band2	20MHz	16QAM	19100	1RB#0	5.34	13	PASS
Band2	20MHz	16QAM	19100	100RB#0	5.84	13	PASS

Test Graphs

Band2-1.4MHz-QPSK-18607-1RB#0

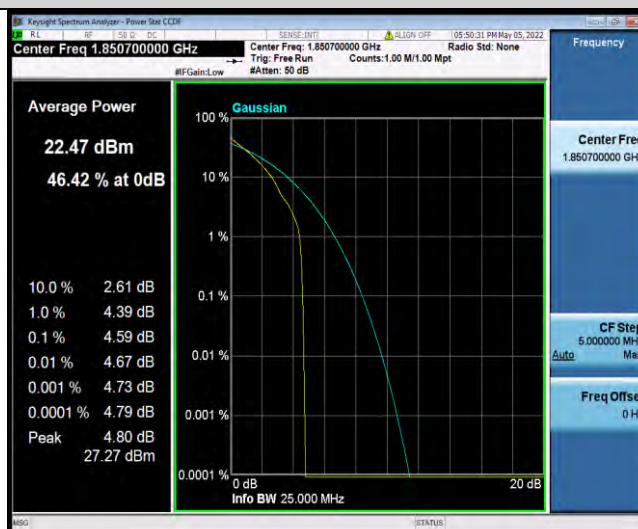

Band2-1.4MHz-QPSK-18607-6RB#0

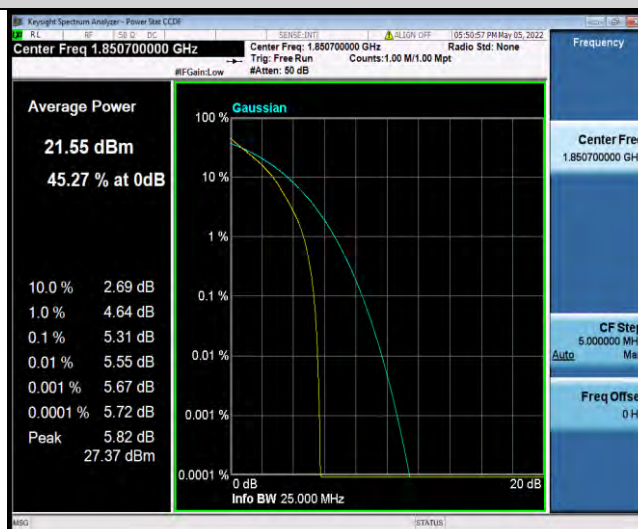


Band2-1.4MHz-QPSK-18900-1RB#0



BUREAU
VERITAS


Test Report No.: W7L-P22040029RF05

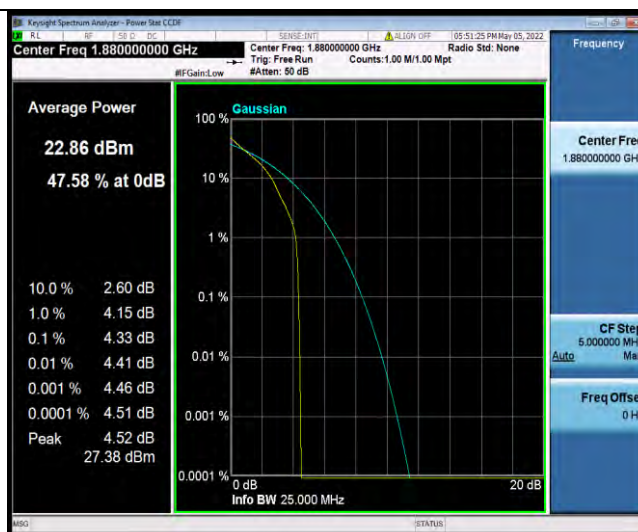

Band2-1.4MHz-QPSK-18900-6RB#0



Band2-1.4MHz-QPSK-19193-1RB#0

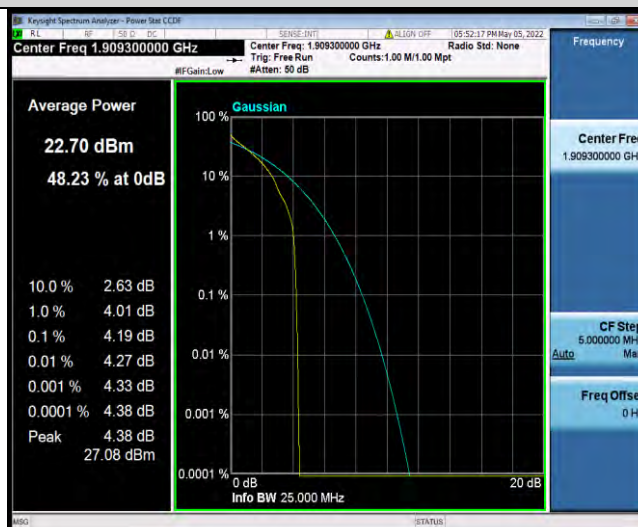


Band2-1.4MHz-QPSK-19193-6RB#0




BUREAU
VERITAS

Test Report No.: W7L-P22040029RF05

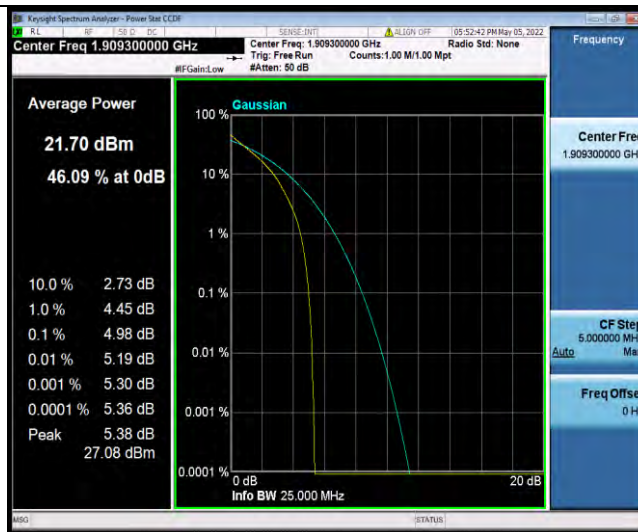

Band2-1.4MHz-16QAM-18607-1RB#0

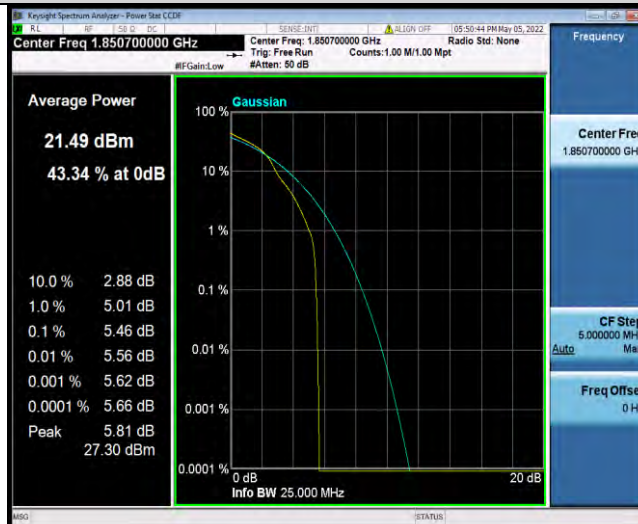

Band2-1.4MHz-16QAM-18607-6RB#0




Band2-1.4MHz-16QAM-18900-1RB#0



BUREAU
VERITAS

Test Report No.: W7L-P22040029RF05

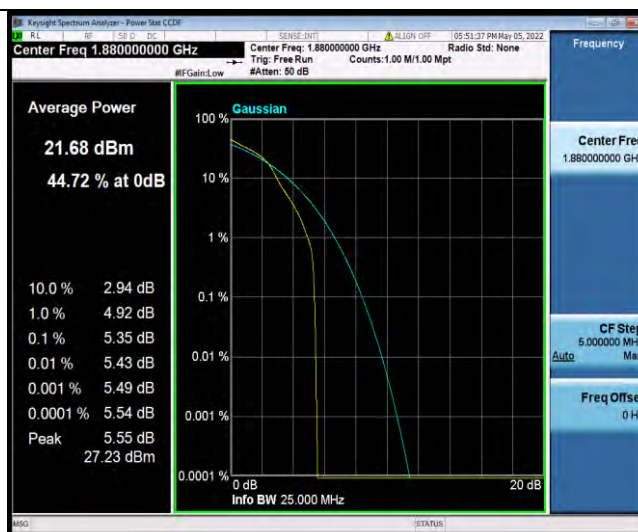

Band2-1.4MHz-16QAM-18900-6RB#0



Band2-1.4MHz-16QAM-19193-1RB#0



Band2-1.4MHz-16QAM-19193-6RB#0




BUREAU
VERITAS

Test Report No.: W7L-P22040029RF05



Band2-3MHz-QPSK-18615-1RB#0

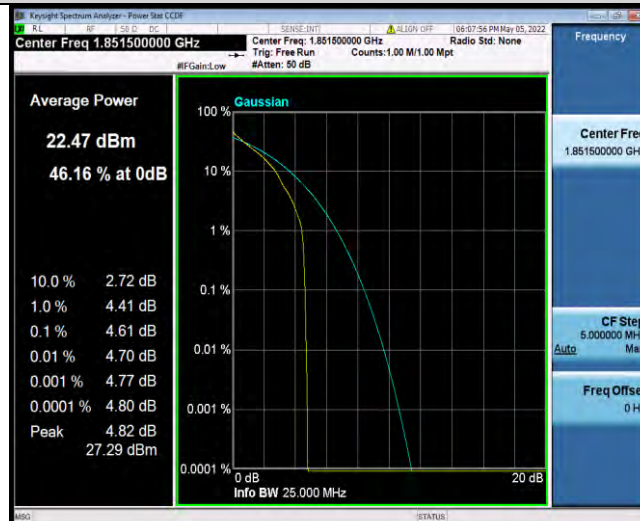

Band2-3MHz-QPSK-18615-15RB#0



Band2-3MHz-QPSK-18900-1RB#0



BUREAU
VERITAS

Test Report No.: W7L-P22040029RF05



Band2-3MHz-QPSK-18900-15RB#0



Band2-3MHz-QPSK-19185-1RB#0



Band2-3MHz-QPSK-19185-15RB#0




BUREAU
VERITAS


Test Report No.: W7L-P22040029RF05



Band2-3MHz-16QAM-18615-1RB#0

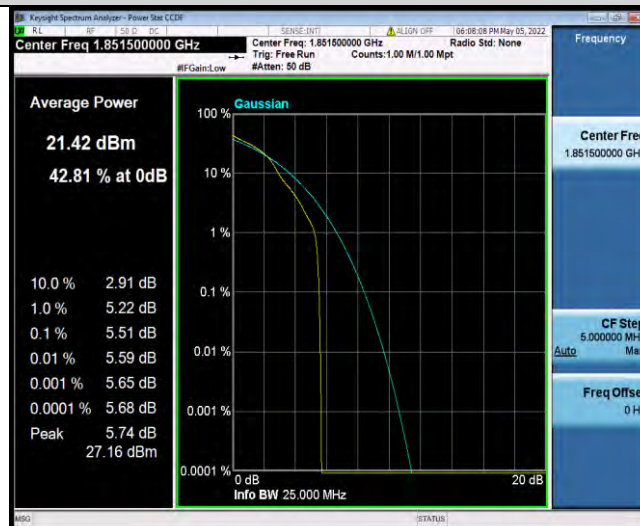

Band2-3MHz-16QAM-18615-15RB#0

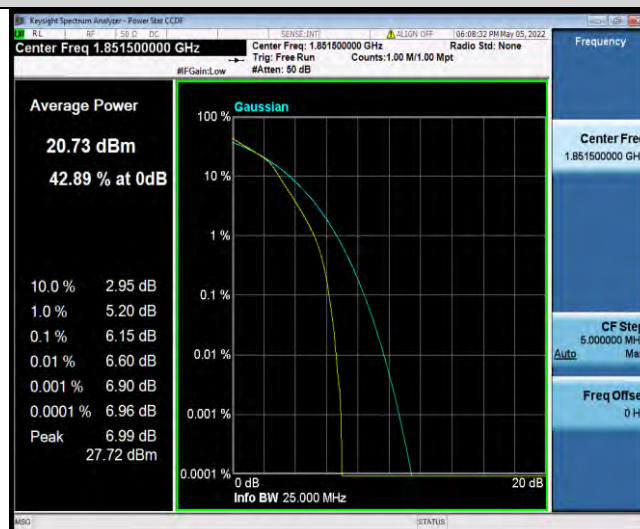


Band2-3MHz-16QAM-18900-1RB#0



BUREAU
VERITAS

Test Report No.: W7L-P22040029RF05

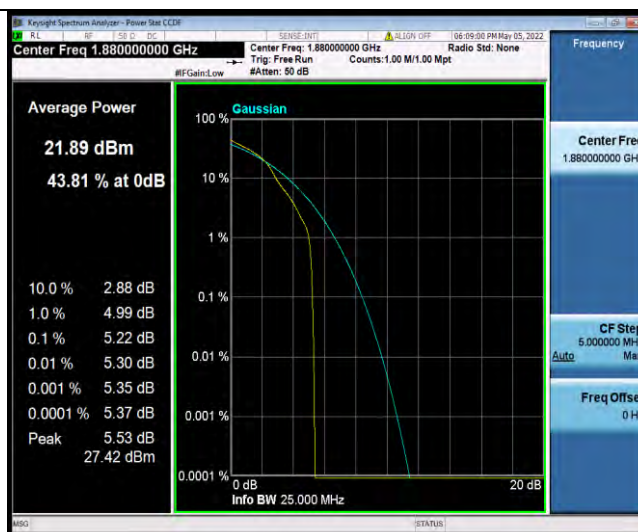

Band2-3MHz-16QAM-18900-15RB#0



Band2-3MHz-16QAM-19185-1RB#0




Band2-3MHz-16QAM-19185-15RB#0



BUREAU
VERITAS

Test Report No.: W7L-P22040029RF05

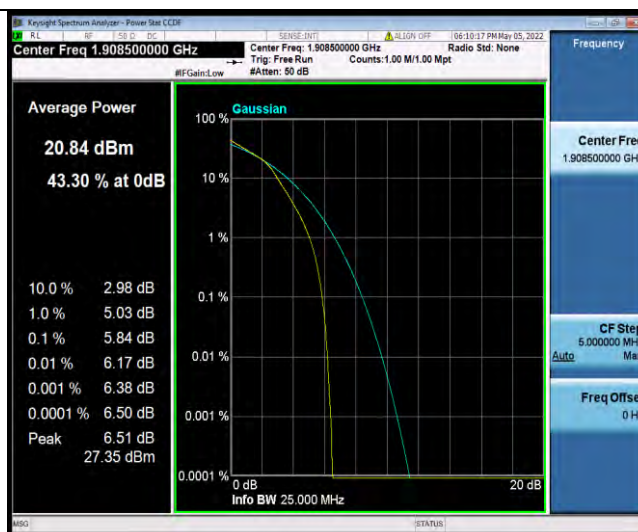

Band2-5MHz-QPSK-18625-1RB#0



Band2-5MHz-QPSK-18625-25RB#0




Band2-5MHz-QPSK-18900-1RB#0




BUREAU
VERITAS

Test Report No.: W7L-P22040029RF05

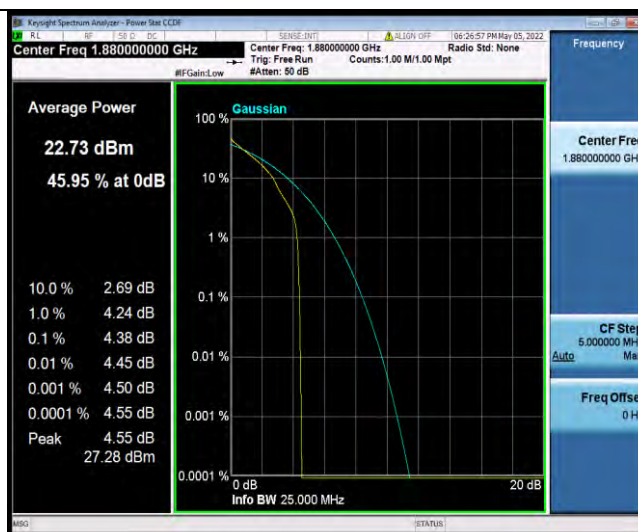

Band2-5MHz-QPSK-18900-25RB#0

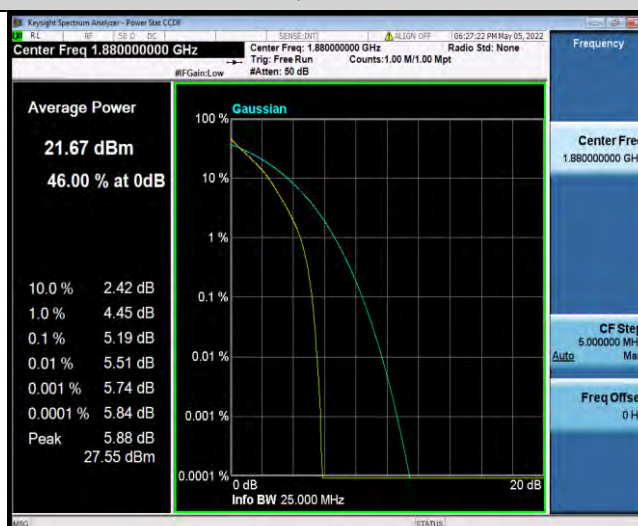

Band2-5MHz-QPSK-19175-1RB#0



Band2-5MHz-QPSK-19175-25RB#0




BUREAU
VERITAS


Test Report No.: W7L-P22040029RF05



Band2-5MHz-16QAM-18625-1RB#0

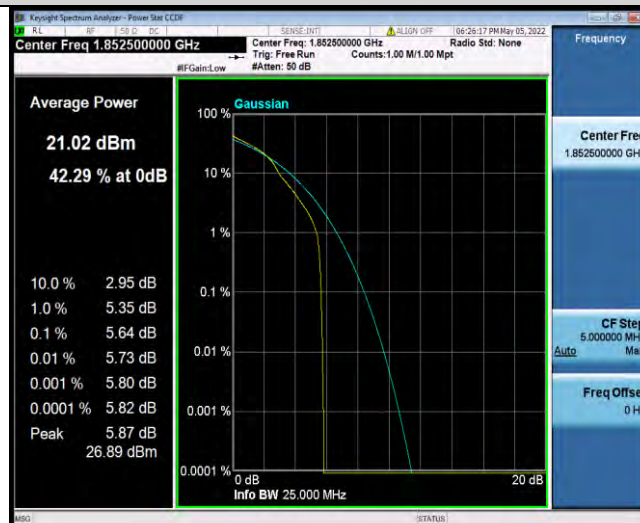

Band2-5MHz-16QAM-18625-25RB#0

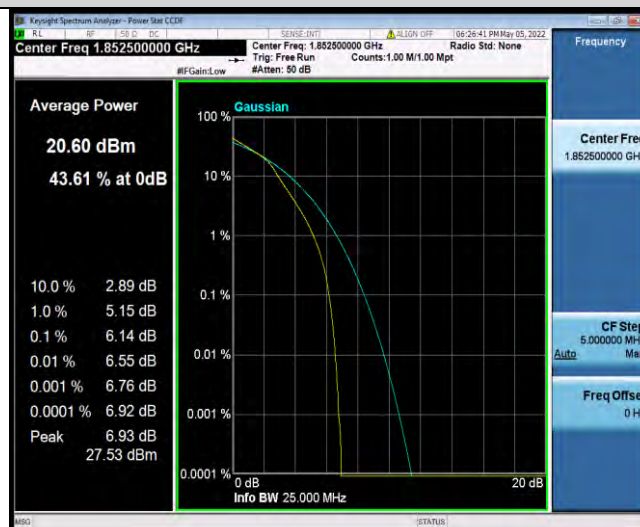

Band2-5MHz-16QAM-18900-1RB#0




BUREAU
VERITAS


Test Report No.: W7L-P22040029RF05



Band2-5MHz-16QAM-18900-25RB#0

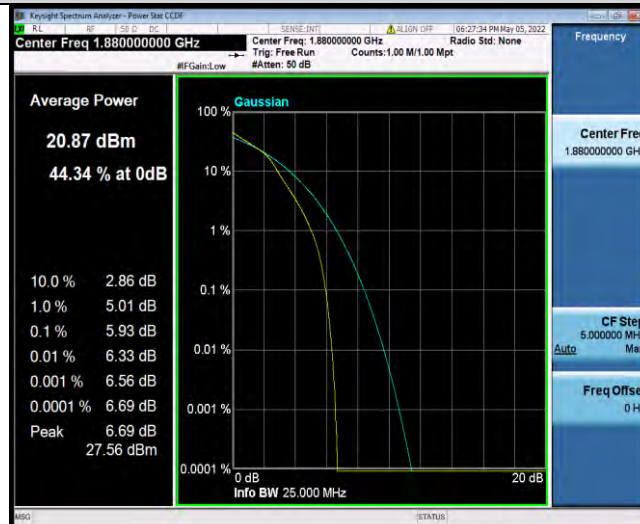

Band2-5MHz-16QAM-19175-1RB#0

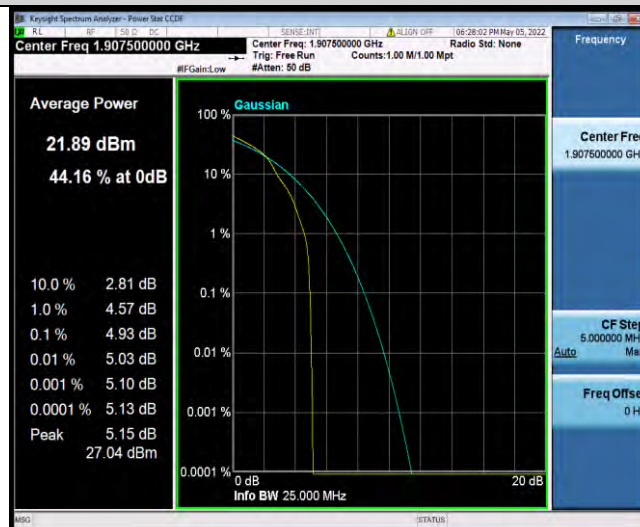

Band2-5MHz-16QAM-19175-25RB#0




BUREAU
VERITAS


Test Report No.: W7L-P22040029RF05



Band2-10MHz-QPSK-18650-1RB#0

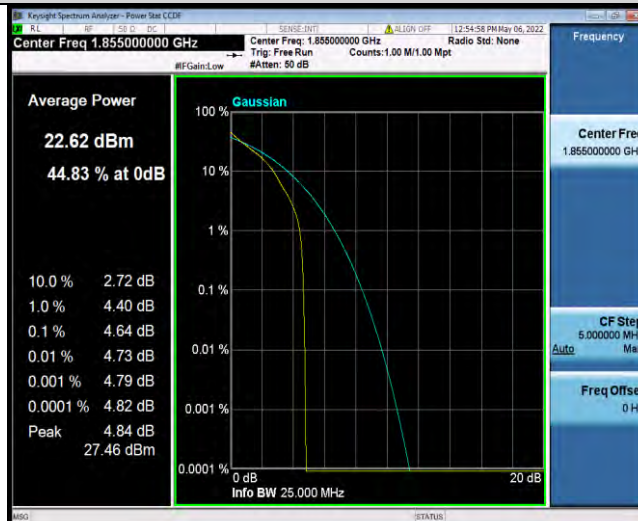

Band2-10MHz-QPSK-18650-50RB#0

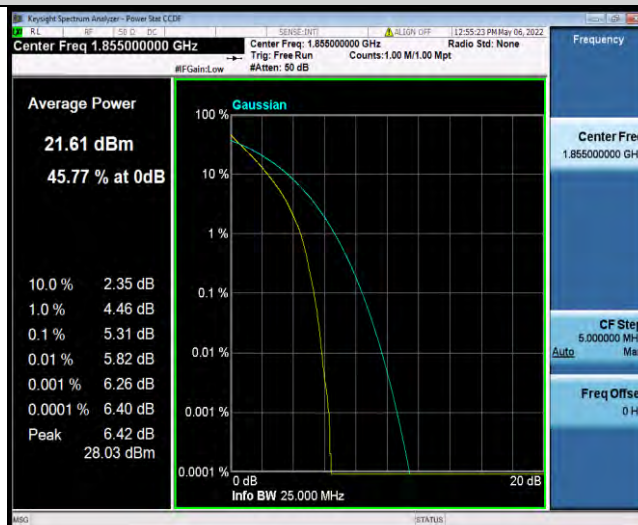


Band2-10MHz-QPSK-18900-1RB#0



BUREAU
VERITAS


Test Report No.: W7L-P22040029RF05

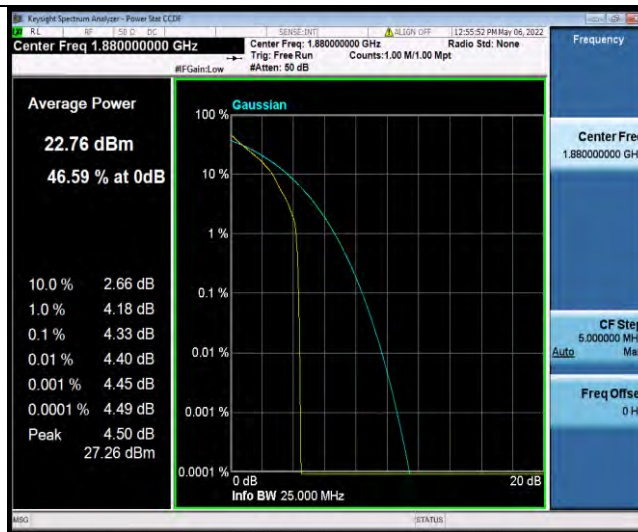

Band2-10MHz-QPSK-18900-50RB#0



Band2-10MHz-QPSK-19150-1RB#0

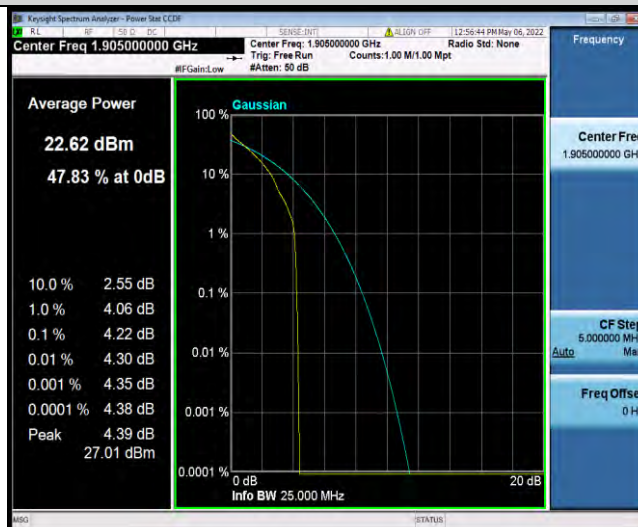


Band2-10MHz-QPSK-19150-50RB#0




BUREAU
VERITAS


Test Report No.: W7L-P22040029RF05

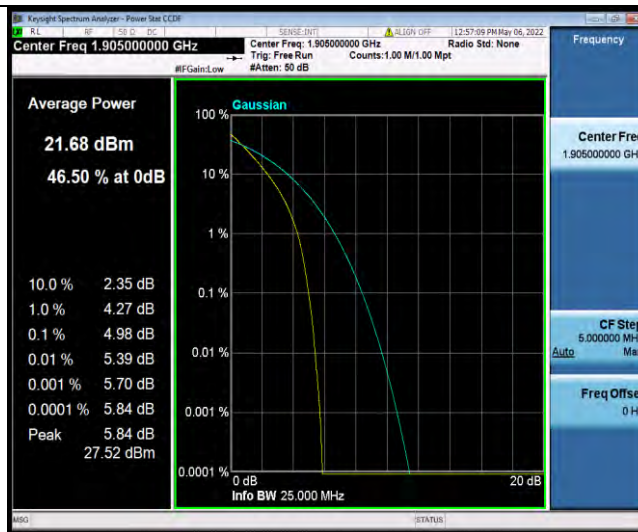

Band2-10MHz-16QAM-18650-1RB#0

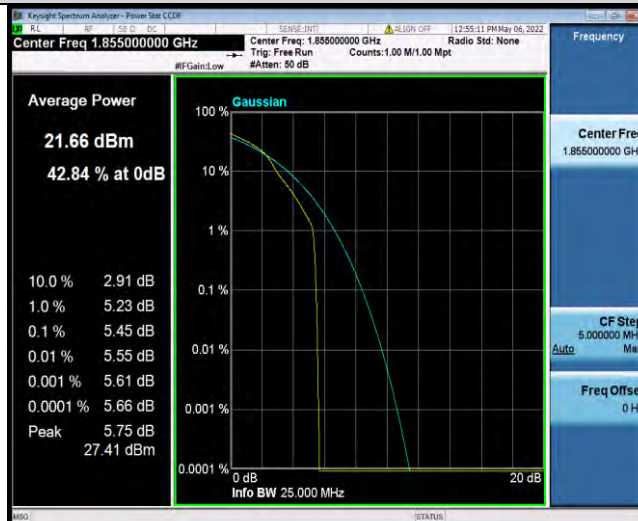

Band2-10MHz-16QAM-18650-50RB#0

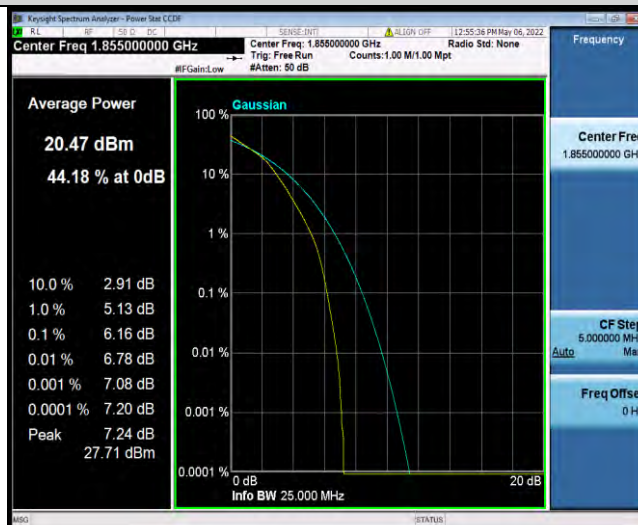

Band2-10MHz-16QAM-18900-1RB#0



BUREAU
VERITAS


Test Report No.: W7L-P22040029RF05



Band2-10MHz-16QAM-18900-50RB#0



Band2-10MHz-16QAM-19150-1RB#0

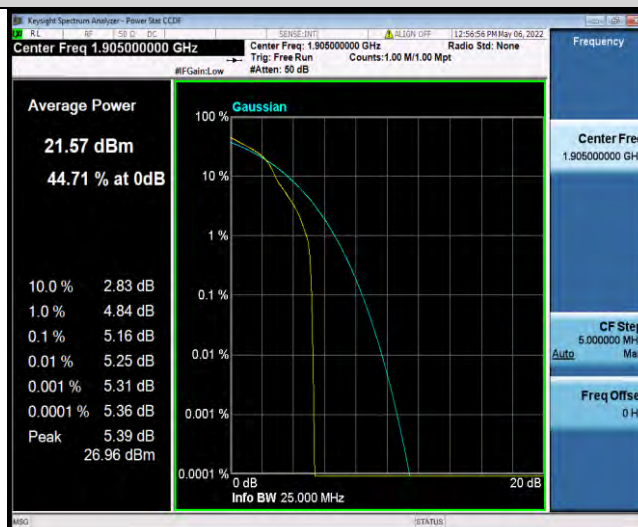


Band2-10MHz-16QAM-19150-50RB#0




BUREAU
VERITAS


Test Report No.: W7L-P22040029RF05

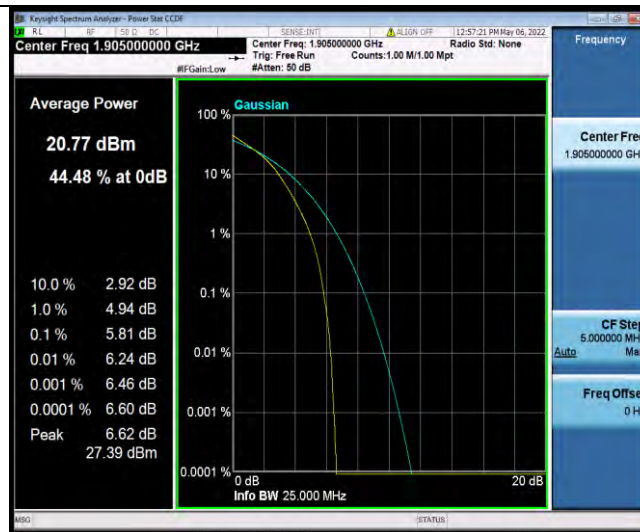

Band2-15MHz-QPSK-18675-1RB#0

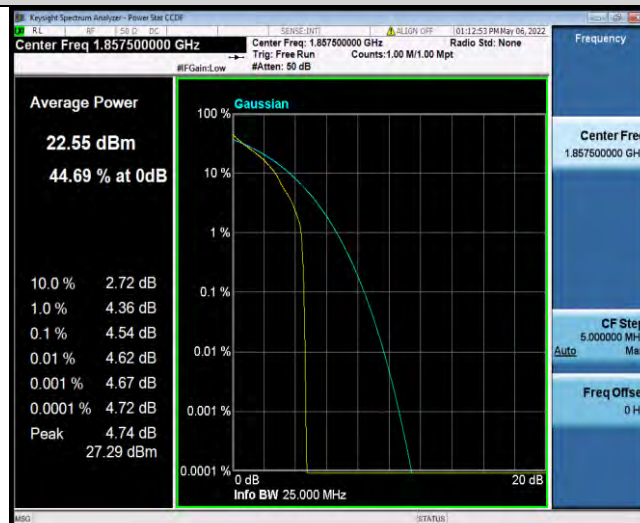

Band2-15MHz-QPSK-18675-75RB#0

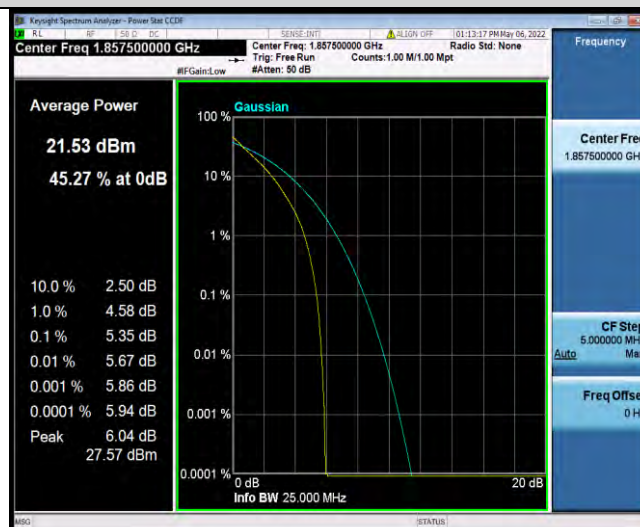

Band2-15MHz-QPSK-18900-1RB#0




BUREAU
VERITAS

Test Report No.: W7L-P22040029RF05



Band2-15MHz-QPSK-18900-75RB#0

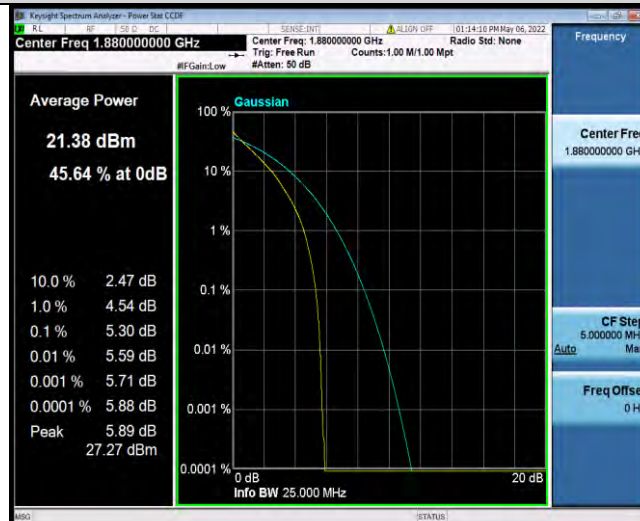

Band2-15MHz-QPSK-19125-1RB#0



Band2-15MHz-QPSK-19125-75RB#0




BUREAU
VERITAS


Test Report No.: W7L-P22040029RF05



Band2-15MHz-16QAM-18675-1RB#0

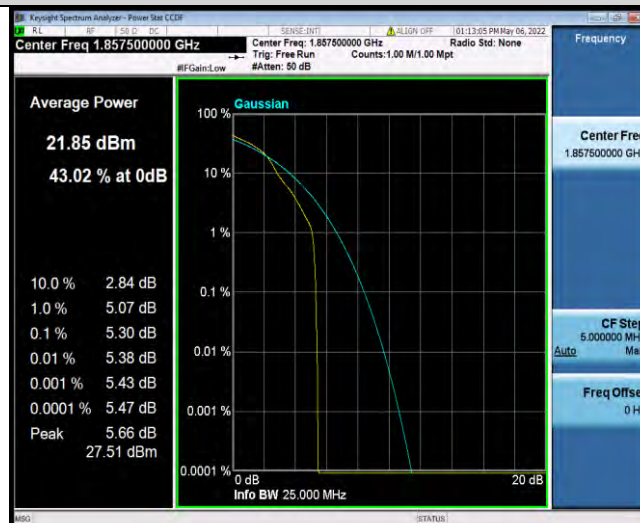

Band2-15MHz-16QAM-18675-75RB#0

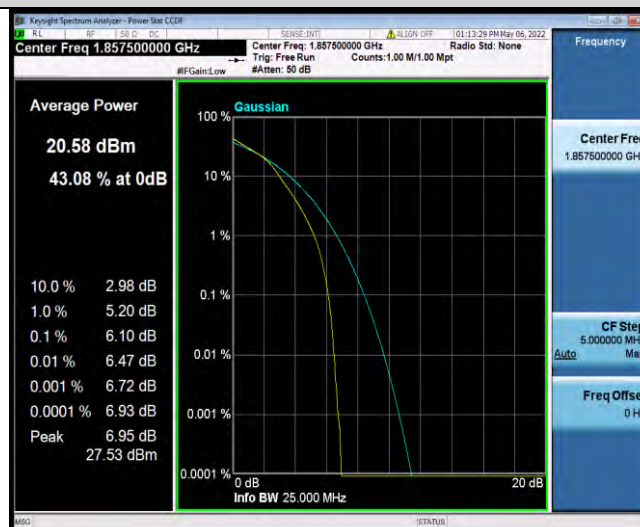


Band2-15MHz-16QAM-18900-1RB#0




BUREAU
VERITAS


Test Report No.: W7L-P22040029RF05

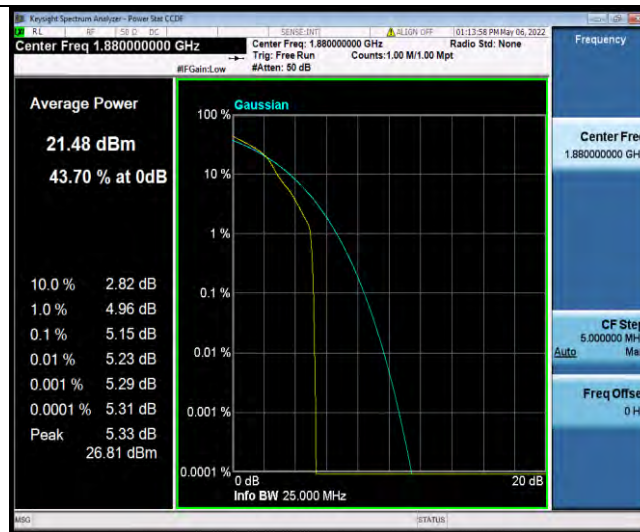

Band2-15MHz-16QAM-18900-75RB#0

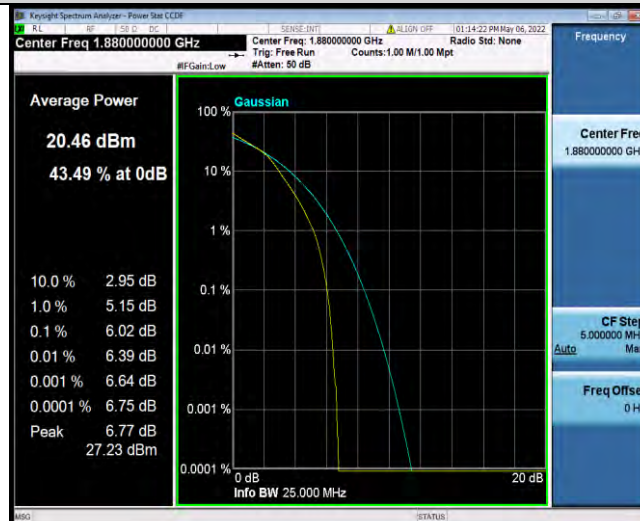

Band2-15MHz-16QAM-19125-1RB#0

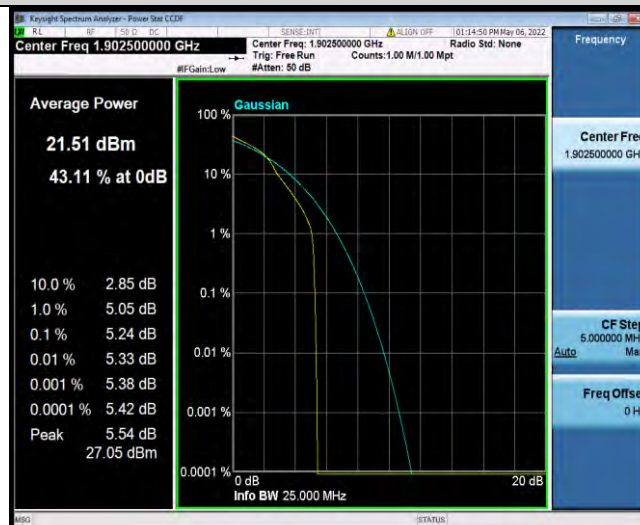

Band2-15MHz-16QAM-19125-75RB#0



BUREAU
VERITAS


Test Report No.: W7L-P22040029RF05



Band2-20MHz-QPSK-18700-1RB#0



Band2-20MHz-QPSK-18700-100RB#0

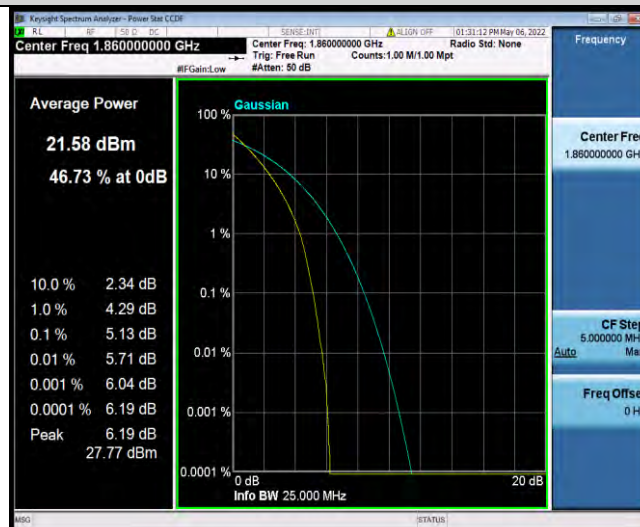


Band2-20MHz-QPSK-18900-1RB#0




BUREAU
VERITAS


Test Report No.: W7L-P22040029RF05

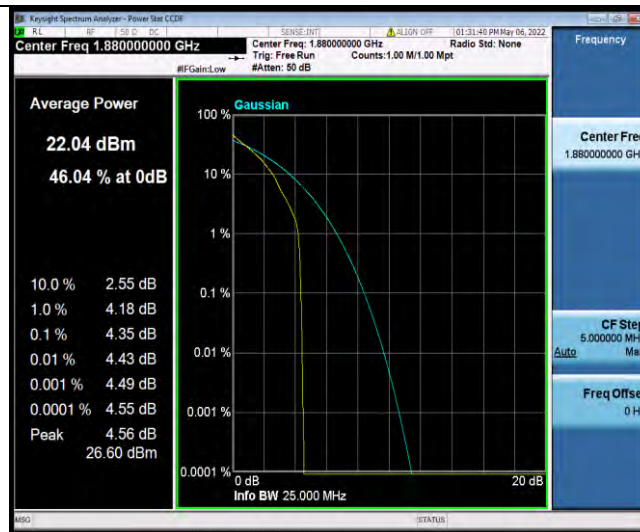

Band2-20MHz-QPSK-18900-100RB#0

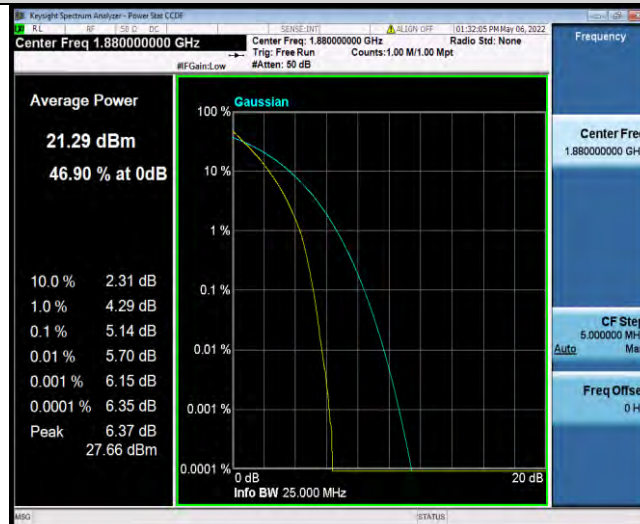

Band2-20MHz-QPSK-19100-1RB#0

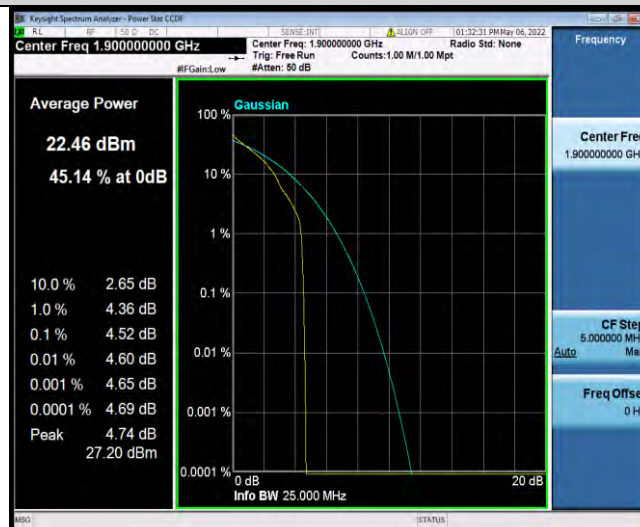

Band2-20MHz-QPSK-19100-100RB#0




BUREAU
VERITAS


Test Report No.: W7L-P22040029RF05



Band2-20MHz-16QAM-18700-1RB#0

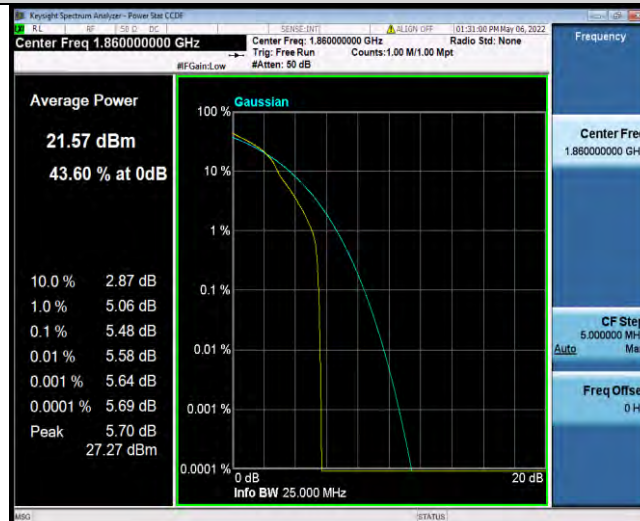

Band2-20MHz-16QAM-18700-100RB#0

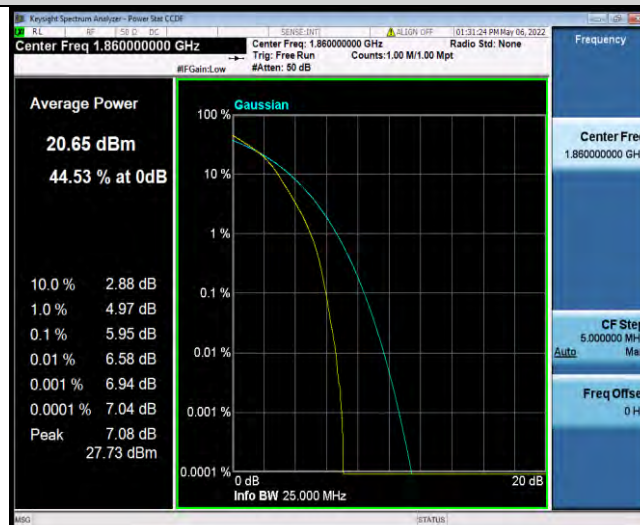

Band2-20MHz-16QAM-18900-1RB#0




BUREAU
VERITAS


Test Report No.: W7L-P22040029RF05



Band2-20MHz-16QAM-18900-100RB#0

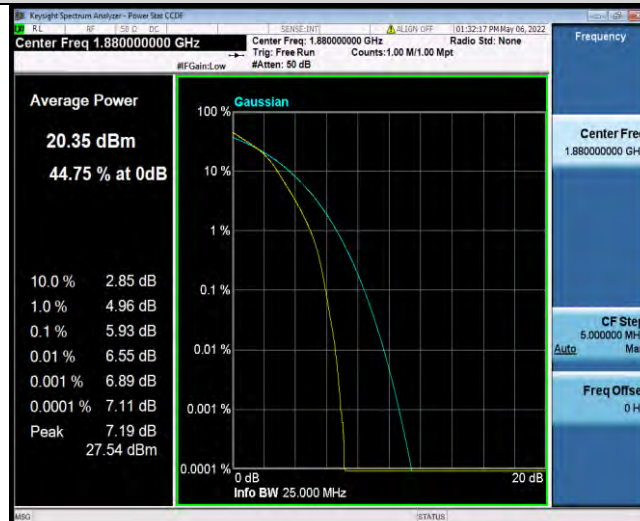

Band2-20MHz-16QAM-19100-1RB#0

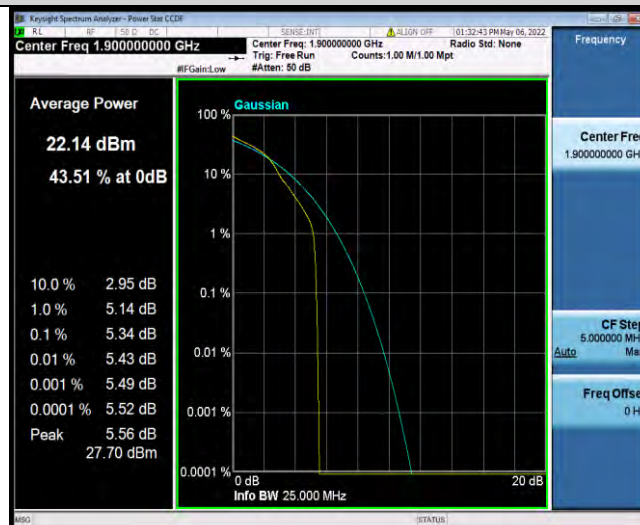


Band2-20MHz-16QAM-19100-100RB#0



BUREAU
VERITAS


Test Report No.: W7L-P22040029RF05

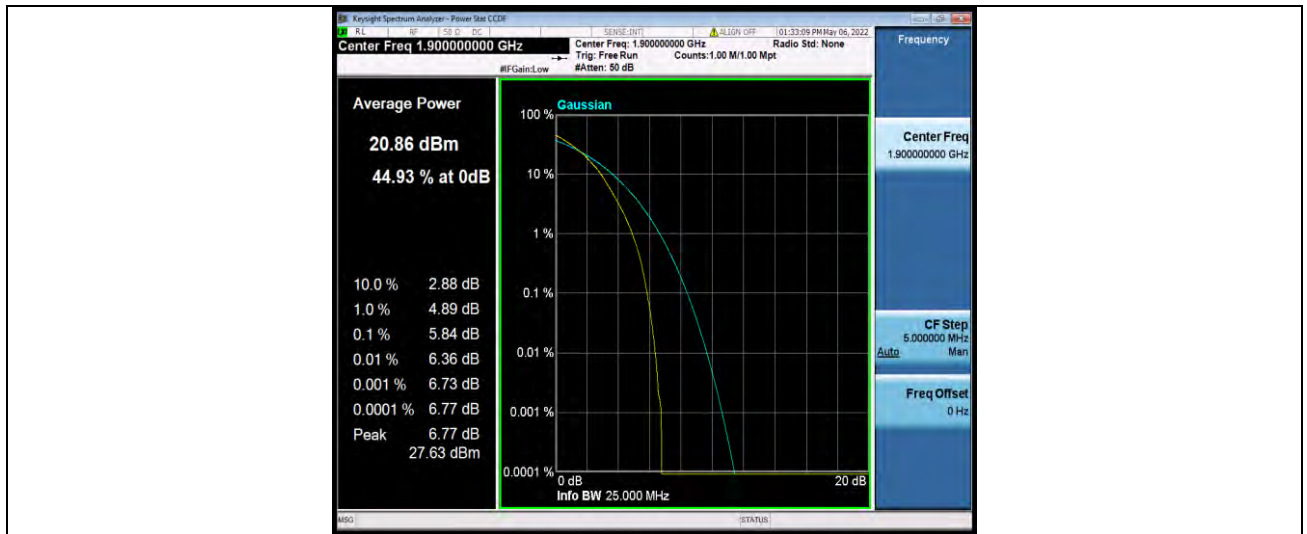

**26DB BANDWIDTH AND OCCUPIED BANDWIDTH****Test Result**

Band	Bandwidth	Modulation	Channel	RB Configuration	Occupied Bandwidth (MHz)	26dB Bandwidth (MHz)	Verdict
Band2	1.4MHz	QPSK	18607	6RB#0	1.0879	1.254	PASS
Band2	1.4MHz	QPSK	18900	6RB#0	1.0897	1.264	PASS
Band2	1.4MHz	QPSK	19193	6RB#0	1.0906	1.268	PASS
Band2	1.4MHz	16QAM	18607	6RB#0	1.0914	1.262	PASS
Band2	1.4MHz	16QAM	18900	6RB#0	1.0918	1.250	PASS
Band2	1.4MHz	16QAM	19193	6RB#0	1.0895	1.231	PASS
Band2	3MHz	QPSK	18615	15RB#0	2.6970	2.905	PASS
Band2	3MHz	QPSK	18900	15RB#0	2.6970	2.915	PASS
Band2	3MHz	QPSK	19185	15RB#0	2.6975	2.923	PASS
Band2	3MHz	16QAM	18615	15RB#0	2.6985	2.945	PASS
Band2	3MHz	16QAM	18900	15RB#0	2.6882	2.900	PASS
Band2	3MHz	16QAM	19185	15RB#0	2.6941	2.906	PASS
Band2	5MHz	QPSK	18625	25RB#0	4.5003	4.897	PASS
Band2	5MHz	QPSK	18900	25RB#0	4.5008	4.920	PASS
Band2	5MHz	QPSK	19175	25RB#0	4.4985	4.880	PASS
Band2	5MHz	16QAM	18625	25RB#0	4.5037	4.860	PASS
Band2	5MHz	16QAM	18900	25RB#0	4.5028	4.875	PASS
Band2	5MHz	16QAM	19175	25RB#0	4.5017	4.912	PASS
Band2	10MHz	QPSK	18650	50RB#0	8.9641	9.569	PASS
Band2	10MHz	QPSK	18900	50RB#0	8.9660	9.560	PASS
Band2	10MHz	QPSK	19150	50RB#0	8.9576	9.515	PASS
Band2	10MHz	16QAM	18650	50RB#0	8.9532	9.521	PASS
Band2	10MHz	16QAM	18900	50RB#0	8.9493	9.517	PASS
Band2	10MHz	16QAM	19150	50RB#0	8.9500	9.525	PASS
Band2	15MHz	QPSK	18675	75RB#0	13.433	14.29	PASS
Band2	15MHz	QPSK	18900	75RB#0	13.434	14.28	PASS
Band2	15MHz	QPSK	19125	75RB#0	13.396	14.24	PASS
Band2	15MHz	16QAM	18675	75RB#0	13.422	14.26	PASS
Band2	15MHz	16QAM	18900	75RB#0	13.428	14.27	PASS
Band2	15MHz	16QAM	19125	75RB#0	13.397	14.24	PASS
Band2	20MHz	QPSK	18700	100RB#0	17.875	18.92	PASS
Band2	20MHz	QPSK	18900	100RB#0	17.893	18.94	PASS
Band2	20MHz	QPSK	19100	100RB#0	17.832	18.91	PASS
Band2	20MHz	16QAM	18700	100RB#0	17.879	18.92	PASS
Band2	20MHz	16QAM	18900	100RB#0	17.900	18.96	PASS
Band2	20MHz	16QAM	19100	100RB#0	17.849	18.94	PASS

Test Graphs

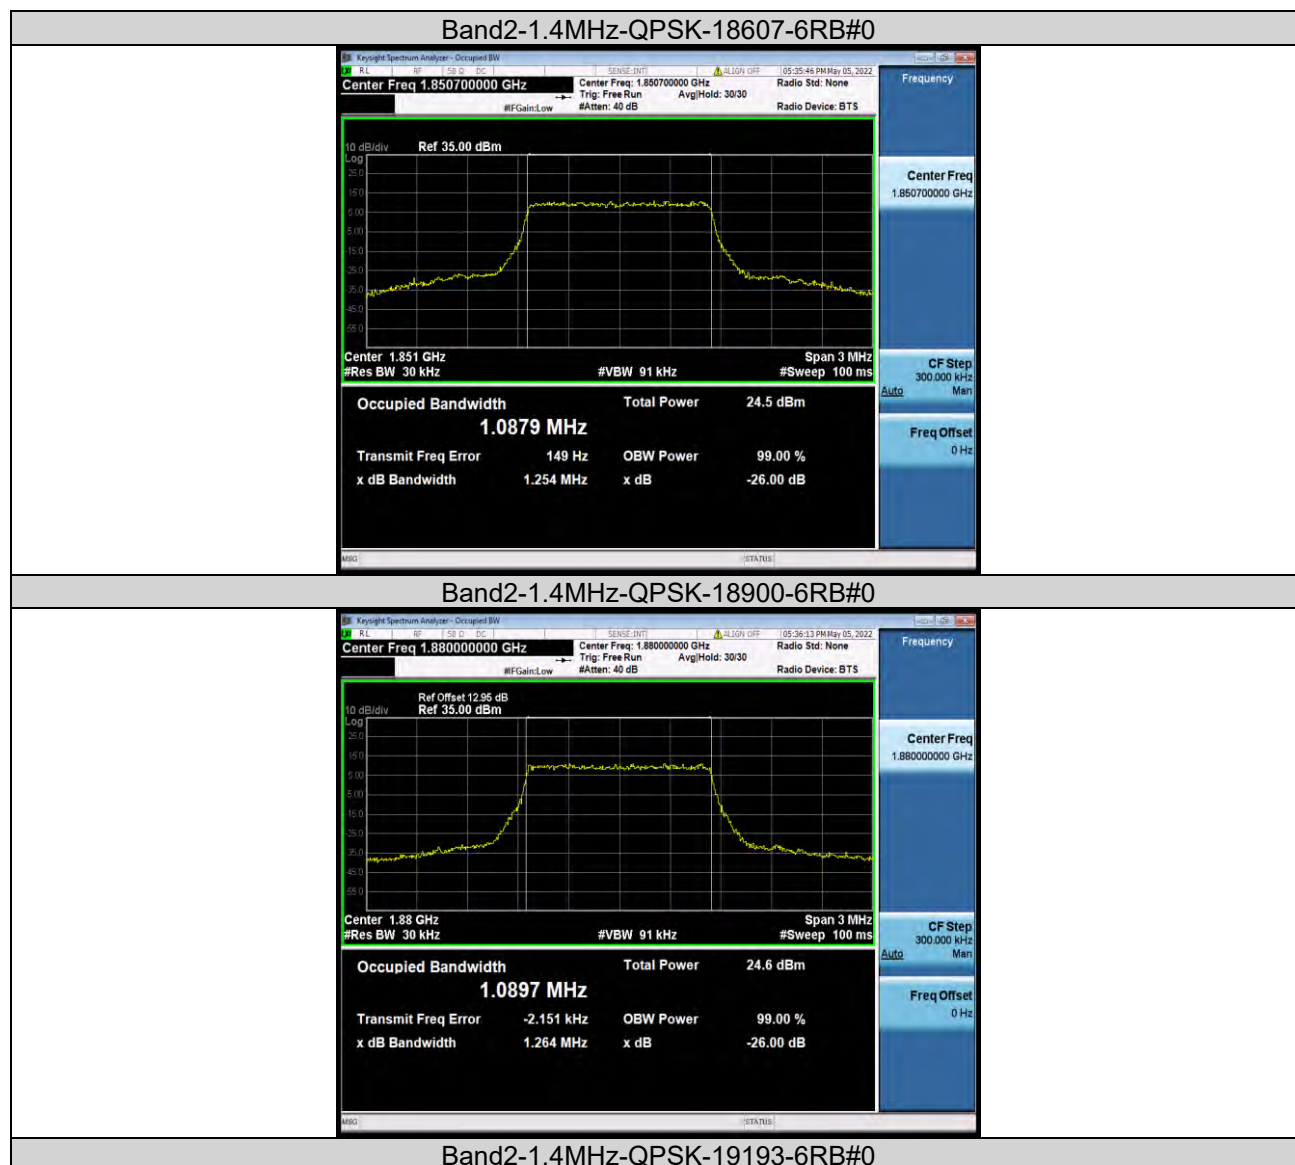




BUREAU
VERITAS

Test Report No.: W7L-P22040029RF05



Band2-1.4MHz-16QAM-18607-6RB#0

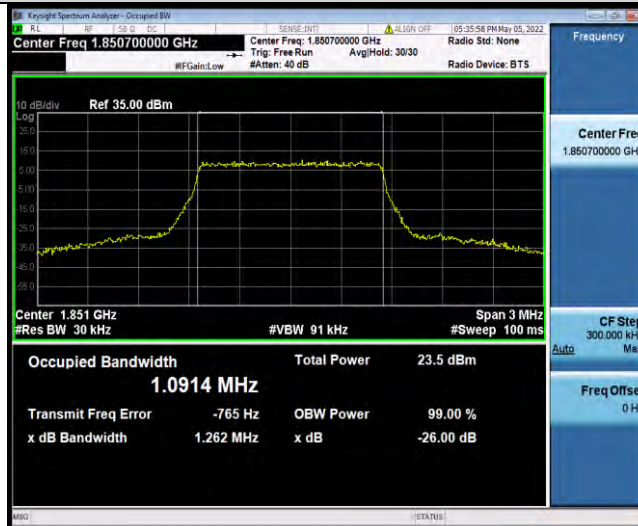

Band2-1.4MHz-16QAM-18900-6RB#0




Band2-1.4MHz-16QAM-19193-6RB#0



BUREAU
VERITAS

Test Report No.: W7L-P22040029RF05

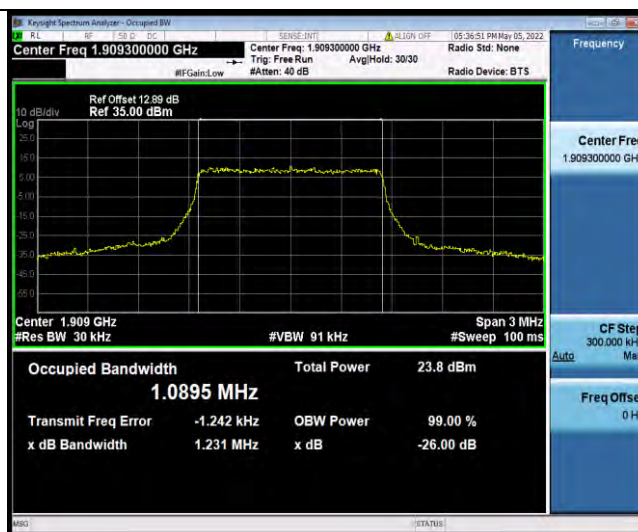

Band2-3MHz-QPSK-18615-15RB#0



Band2-3MHz-QPSK-18900-15RB#0




Band2-3MHz-QPSK-19185-15RB#0



BUREAU
VERITAS


Test Report No.: W7L-P22040029RF05

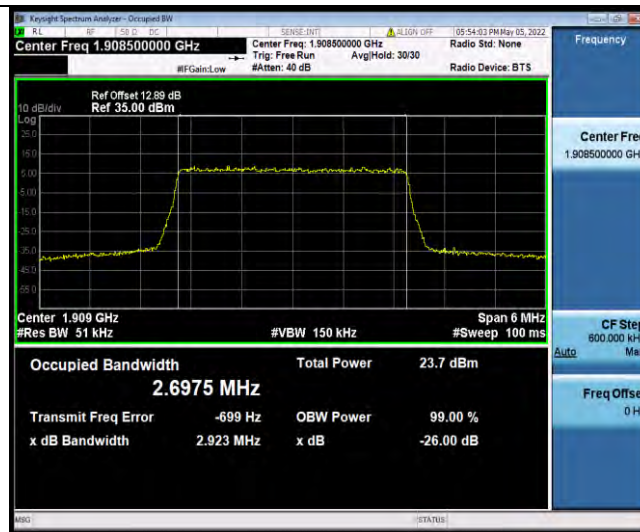

Band2-3MHz-16QAM-18615-15RB#0



Band2-3MHz-16QAM-18900-15RB#0

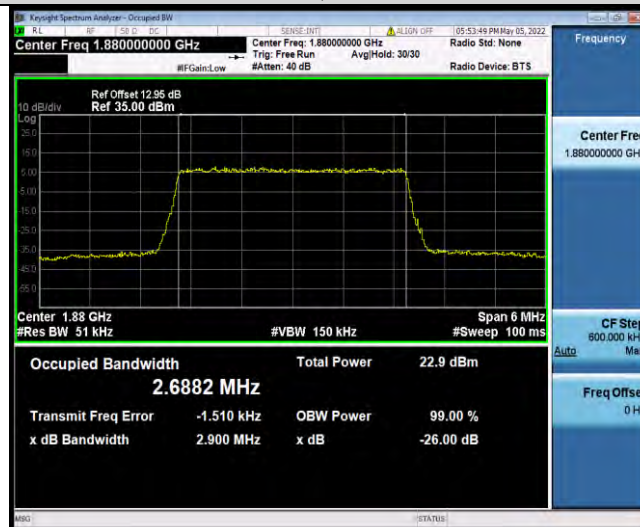


Band2-3MHz-16QAM-19185-15RB#0




BUREAU
VERITAS

Test Report No.: W7L-P22040029RF05

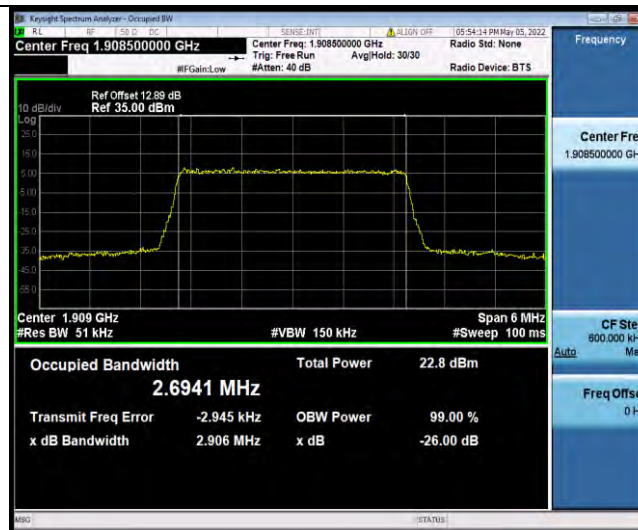

Band2-5MHz-QPSK-18625-25RB#0

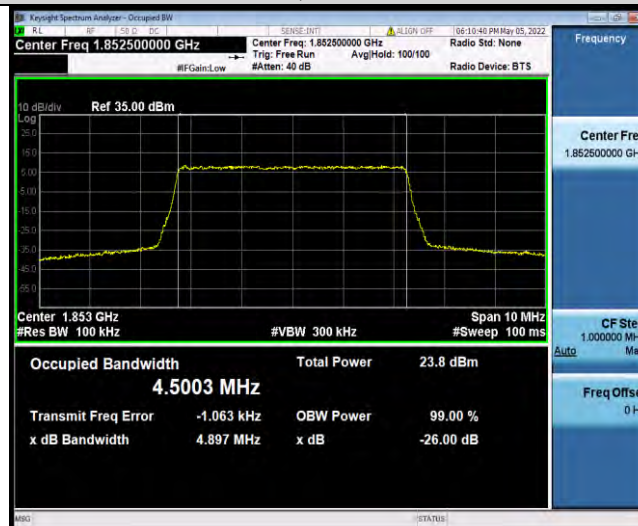

Band2-5MHz-QPSK-18900-25RB#0



Band2-5MHz-QPSK-19175-25RB#0