



No. 1 Workshop, M-10, Middle section, Science & Technology Park, Shenzhen,
Guangdong, China 518057

Telephone: +86 (0) 755 2601 2053
Fax: +86 (0) 755 2671 0594
Email: sgs_internet_operations@sgs.com

Report No.: SZEM111200538001
Page : 1 of 71

FCC REPORT

Application No: SZEM1112005380RF
Applicant: WINLITE INTERNATIONAL (HK) LTD
Product Name: Portable Multi-functional Speaker
Operation Frequency: 2402MHz to 2480MHz
FCC ID: A6JDIN1001
Standards: FCC CFR Title 47 Part 15 Subpart C Section 15.247:2010
Date of Receipt: 2011-12-14
Date of Test: 2011-12-16 to 2012-01-11
Date of Issue: 2012-01-30

Test Result :	PASS *
----------------------	---------------

* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:



Jack Zhang
EMC Laboratory Manager

The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of SGS International Electrical Approvals or testing done by SGS International Electrical Approvals in connection with, distribution or use of the product described in this report must be approved by SGS International Electrical Approvals in writing.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. All test results in this report can be traceable to National or International Standards.

"This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



2 Contents

	Page
1 COVER PAGE	1
2 CONTENTS	2
3 TEST SUMMARY	3
4 GENERAL INFORMATION	4
4.1 CLIENT INFORMATION	4
4.2 GENERAL DESCRIPTION OF E.U.T.	4
4.3 E.U.T OPERATION MODE	6
4.4 DESCRIPTION OF SUPPORT UNITS	6
4.5 TEST FACILITY	7
4.6 TEST LOCATION	7
4.7 OTHER INFORMATION REQUESTED BY THE CUSTOMER	7
4.8 TEST INSTRUMENTS LIST	8
5 TEST RESULTS AND MEASUREMENT DATA	10
5.1 ANTENNA REQUIREMENT:	10
5.2 CONDUCTED EMISSIONS	11
5.3 CONDUCTED PEAK OUTPUT POWER	14
5.4 20dB OCCUPY BANDWIDTH	21
5.5 CARRIER FREQUENCIES SEPARATION	27
5.6 HOPPING CHANNEL NUMBER	34
5.7 DWELL TIME	37
5.8 BAND EDGE	43
5.9 RF ANTENNA CONDUCTED SPURIOUS EMISSIONS	50
5.10 PSEUDORANDOM FREQUENCY HOPPING SEQUENCE	56
5.11 RADIATED EMISSION	57
5.11.1 Radiated emission below 1GHz	59
5.11.2 Transmitter emission above 1GHz	61
5.11.3 Band edge (Radiated Emission)	64-71



3 Test Summary

Test Item	Section in CFR 47	Result
Antenna Requirement	15.203/15.247 (c)	Pass
AC Power Line Conducted Emission	15.207	Pass
Conducted Peak Output Power	15.247 (b)(1)	Pass
20dB Occupied Bandwidth	15.247 (a)(1)	Pass
Carrier Frequencies Separation	15.247 (a)(1)	Pass
Hopping Channel Number	15.247 (b)	Pass
Dwell Time	15.247 (a)(1)	Pass
Pseudorandom Frequency Hopping Sequence	15.247(b)(4)&TCB Exclusion List (7 July 2002)	Pass
Radiated Emission	15.205/15.209	Pass
Band Edge	15.247(d)	Pass

Remark: Pass: The EUT complies with the essential requirements in the standard.

Fail: The EUT does not comply with the essential requirements in the standard.



4 General Information

4.1 Client Information

Applicant:	WINLITE INTERNATIONAL (HK) LTD
Address of Applicant:	Room 1401,Tower A, Tian An Cyber Times, Shennan West Road, Futian District Shenzhen City, P.R. China
Manufacturer:	WINLITE INTERNATIONAL (HK) LTD
Address of Manufacturer:	Room 1401,Tower A, Tian An Cyber Times, Shennan West Road, Futian District Shenzhen City, P.R. China
Factory:	WINLITE INTERNATIONAL (HK) LTD
Address of Factory:	Room 1401,Tower A, Tian An Cyber Times, Shennan West Road, Futian District Shenzhen City, P.R. China

4.2 General Description of EUT

Product Name:	Portable Multi-functional Speaker
Model No.:	DIN1001, ISOUND-1658 Only the model No. DIN1001 was tested, since the electrical circuit design, layout, components used and internal wiring were identical for all above models, only different on model number and color.
Operation Frequency:	2402MHz~2480MHz
Bluetooth Version:	V2.1+EDR
Channel Spacing:	1MHz
Channel Numbers:	79
Modulation Type:	GFSK, $\pi/4$ DQPSK, 8DPSK
Antenna Type:	Integral
Antenna Gain:	2dBi
EUT power supply:	PC USB supply
Battery:	3.7V 800mAh Lithium battery



Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2402MHz	21	2422MHz	41	2442MHz	61	2462MHz
2	2403MHz	22	2423MHz	42	2443MHz	62	2463MHz
3	2404MHz	23	2424MHz	43	2444MHz	63	2464MHz
4	2405MHz	24	2425MHz	44	2445MHz	64	2465MHz
5	2406MHz	25	2426MHz	45	2446MHz	65	2466MHz
6	2407MHz	26	2427MHz	46	2447MHz	66	2467MHz
7	2408MHz	27	2428MHz	47	2448MHz	67	2468MHz
8	2409MHz	28	2429MHz	48	2449MHz	68	2469MHz
9	2410MHz	29	2430MHz	49	2450MHz	69	2470MHz
10	2411MHz	30	2431MHz	50	2451MHz	70	2471MHz
11	2412MHz	31	2432MHz	51	2452MHz	71	2472MHz
12	2413MHz	32	2433MHz	52	2453MHz	72	2473MHz
13	2414MHz	33	2434MHz	53	2454MHz	73	2474MHz
14	2415MHz	34	2435MHz	54	2455MHz	74	2475MHz
15	2416MHz	35	2436MHz	55	2456MHz	75	2476MHz
16	2417MHz	36	2437MHz	56	2457MHz	76	2477MHz
17	2418MHz	37	2438MHz	57	2458MHz	77	2478MHz
18	2419MHz	38	2439MHz	58	2459MHz	78	2479MHz
19	2420MHz	39	2440MHz	59	2460MHz	79	2480MHz
20	2421MHz	40	2441MHz	60	2461MHz		

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel for testing see below:

Channel	Frequency
Lowest channel	2402MHz
Middle channel	2441MHz
Highest channel	2480MHz

4.3 E.U.T Operation mode

Operating Environment:	
Temperature:	25.0 °C
Humidity:	50 % RH
Atmospheric Pressure:	1025mbar
Test mode:	
Charge + Transmitting mode:	Keep the EUT in transmitting mode at low channel, middle channel and high channel with 100% duty cycle and PC charge to EUT.
Transmitting mode:	Keep the EUT in transmitting mode at low channel, middle channel and high channel with 100% duty cycle.

4.4 Description of Support Units

The EUT was tested with associated equipment as below:

Description	Manufacturer	Model No.
PC	DELL	OPTIPLEX 755
LCD-displaying	DELL	E1909WF
KEYBOARD	DELL	SK-8115
MOUSE	DELL	MOC5110
PC	DELL	OPTIDLEX 330
LCD-displaying	DELL	SP2208WFPT
KEYBOARD	DELL	SK-8115
MOUSE	DELL	MOC5110
Coder	HengTong ELECTRON	HT4000
Printer	Canon	BJC-1000SP



4.5 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **CNAS (No. CNAS L2929)**
CNAS has accredited SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch EMC Lab to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration Laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing.
- **VCCI**
The 3m Semi-anechoic chamber, Full-anechoic Chamber and Shielded Room (7.5m x 4.0m x 3.0m) of SGS-CSTC Standards Technical Services Co., Ltd. have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: R-2197, G-416, T-1153 and C-2383 respectively.
- **FCC – Registration No.: 556682**
SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No.: 556682.
- **Industry Canada (IC)**
The 3m Semi-anechoic chamber of SGS-CSTC Standards Technical Services Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 4620C-1.

4.6 Test Location

All tests were performed at:

SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch E&E Lab

No. 1 Workshop, M-10, Middle section, Science & Technology Park, Shenzhen, Guangdong, China 518057

Telephone: +86 (0) 755 2601 2053 Fax: +86 (0) 755 2671 0594

No tests were sub-contracted.

4.7 Other Information Requested by the Customer

None.



4.8 Test Instruments list

RE in Chamber					
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Due date (yyyy-mm-dd)
1	3m Semi-Anechoic Chamber	ETS-LINDGREN	N/A	SEL0017	2012-06-10
2	EMI Test Receiver	Rohde & Schwarz	ESIB26	SEL0023	2012-05-26
3	EMI Test software	AUDIX	E3	SEL0050	N/A
4	Coaxial cable	SGS	N/A	SEL0028	2012-05-29
5	BiConiLog Antenna (26-3000MHz)	ETS-LINDGREN	3142C	SEL0015	2012-10-29
6	Double-ridged horn (1-18GHz)	ETS-LINDGREN	3117	SEL0006	2012-10-29
7	Horn Antenna (18-26GHz)	ETS-LINDGREN	3160	SEL0076	2012-10-29
8	Pre-amplifier (0.1-1300MHz)	Agilent Technologies	8447D	SEL0053	2012-05-26
9	Pre-Amplifier (0.1-26.5GHz)	Compliance Directions Systems Inc.	PAP-0126	SEL0168	2012-10-26
11	Band filter	Amindeon	82346	SEL0094	2012-05-26

Conducted Emission					
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Due date (yyyy-mm-dd)
1	Shielding Room	ZhongYu Electron	GB-88	SEL0042	2012-06-10
2	LISN	Rohde & Schwarz	ENV216	SEL0152	2012-10-23
3	Two-Line V-Network	ETS-LINDGREN	3816/2	SEL0021	2012-05-26
4	EMI Test Receiver	Rohde & Schwarz	ESCI	SEL0022	2012-05-26
5	Coaxial Cable	SGS	N/A	SEL0024	2012-05-29


RF conducted					
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Due date (yyyy-mm-dd)
1	Spectrum Analyzer	Rohde & Schwarz	FSP 30	SEL0154	2012-10-23
2	Coaxial cable	SGS	N/A	SEL0028	2012-05-29




General used equipment					
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Due date (yyyy-mm-dd)
1	Humidity/ Temperature Indicator	Shanghai	ZJ1-2B	SEL0102 to SEL0103	2012-10-27
2	Humidity/ Temperature Indicator	Shanghai	ZJ1-2B	SEL0101	2012-10-27
3	Barometer	ChangChun	DYM3	SEL0088	2012-05-18

5 Test results and Measurement Data

5.1 Antenna requirement:

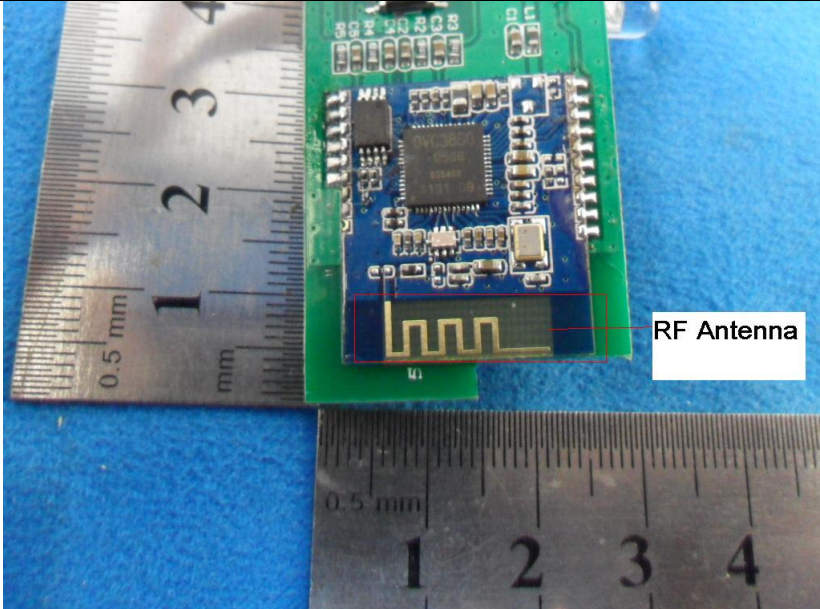Standard requirement:	FCC Part15 C Section 15.203 /247(c)
15.203 requirement: <i>An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.</i> 15.247(c) (1)(i) requirement: <i>(i) Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.</i>	
E.U.T Antenna:	
The antenna is integrated on the main PCB and no consideration of replacement. The best gain of the antenna is 2dBi.	
	

5.2 Conducted Emissions

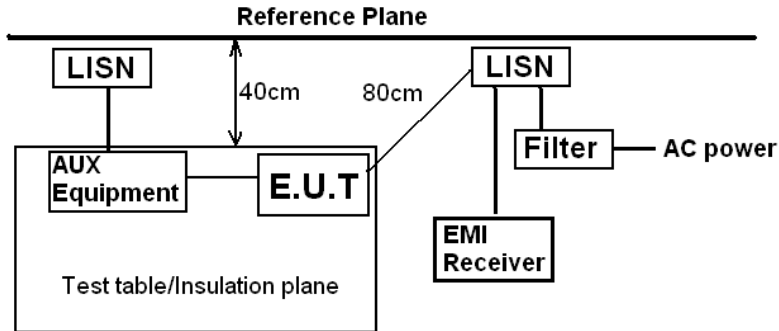Test Requirement:	FCC Part15 C Section 15.207		
Test Method:	ANSI C63.10: 2009		
Test Frequency Range:	150kHz to 30MHz		
Class / Severity:	Class B		
Limit:	Frequency range (MHz)	Limit (dBuV)	
		Quasi-peak	Average
	0.15-0.5	66 to 56*	56 to 46*
	0.5-5	56	46
	5-30	60	50
* Decreases with the logarithm of the frequency.			
Test procedure	The E.U.T and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.).The provide a 50ohm/50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refers to the block diagram of the test setup and photographs). Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10: 2009 on conducted measurement.		
Test setup:	 <i>Remark:</i> E.U.T: Equipment Under Test LISN: Line Impedance Stabilization Network Test table height=0.8m		
Test Instruments:	Refer to section 4.8 for details.		
Test mode:	Charge+ transmitting mode		
Test results:	Pass		


Measurement Data

An initial pre-scan was performed on the live and neutral lines with peak detector.

Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission were detected.




Live line:
Data: 267
Level (dBuV)

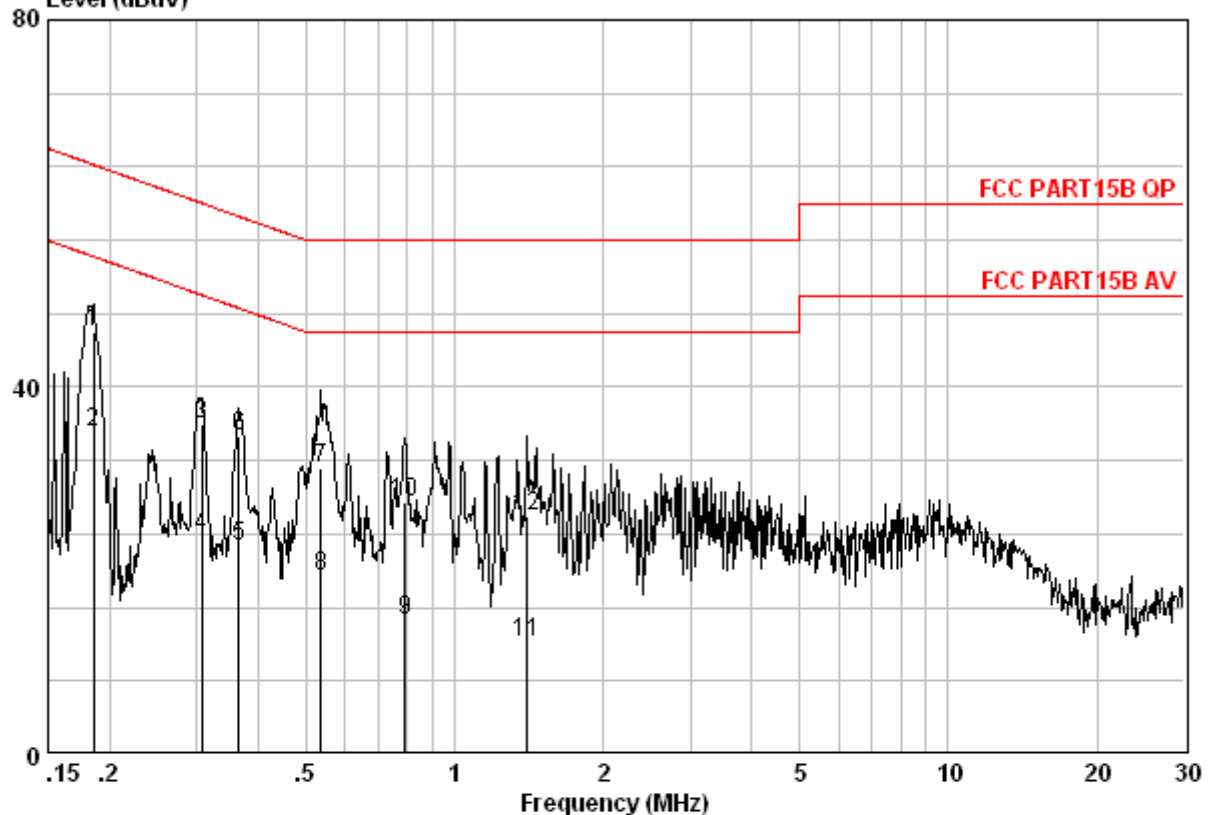

	Freq	Cable Loss	LISN Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB	dBuV	dBuV	dBuV	dB	
1	0.18541	0.14	9.60	36.32	46.06	64.24	-18.18	QP
2	0.18541	0.14	9.60	25.32	35.06	54.24	-19.18	Average
3	0.30671	0.16	9.60	26.11	35.87	60.06	-24.19	QP
4	0.30671	0.16	9.60	14.11	23.87	50.06	-26.19	Average
5	0.36531	0.16	9.60	12.96	22.72	48.61	-25.88	Average
6	0.36531	0.16	9.60	24.96	34.72	58.61	-23.88	QP
7	0.53498	0.16	9.62	21.30	31.08	56.00	-24.92	QP
8	0.53498	0.16	9.62	9.70	19.48	46.00	-26.52	Average
9	0.79180	0.18	9.70	4.80	14.68	46.00	-31.32	Average
10	0.79180	0.18	9.70	17.60	27.48	56.00	-28.52	QP
11	1.403	0.20	9.70	2.20	12.10	46.00	-33.90	Average
12	1.403	0.20	9.70	16.10	26.00	56.00	-30.00	QP


Neutral line:

Data: 268
Level (dBuV)

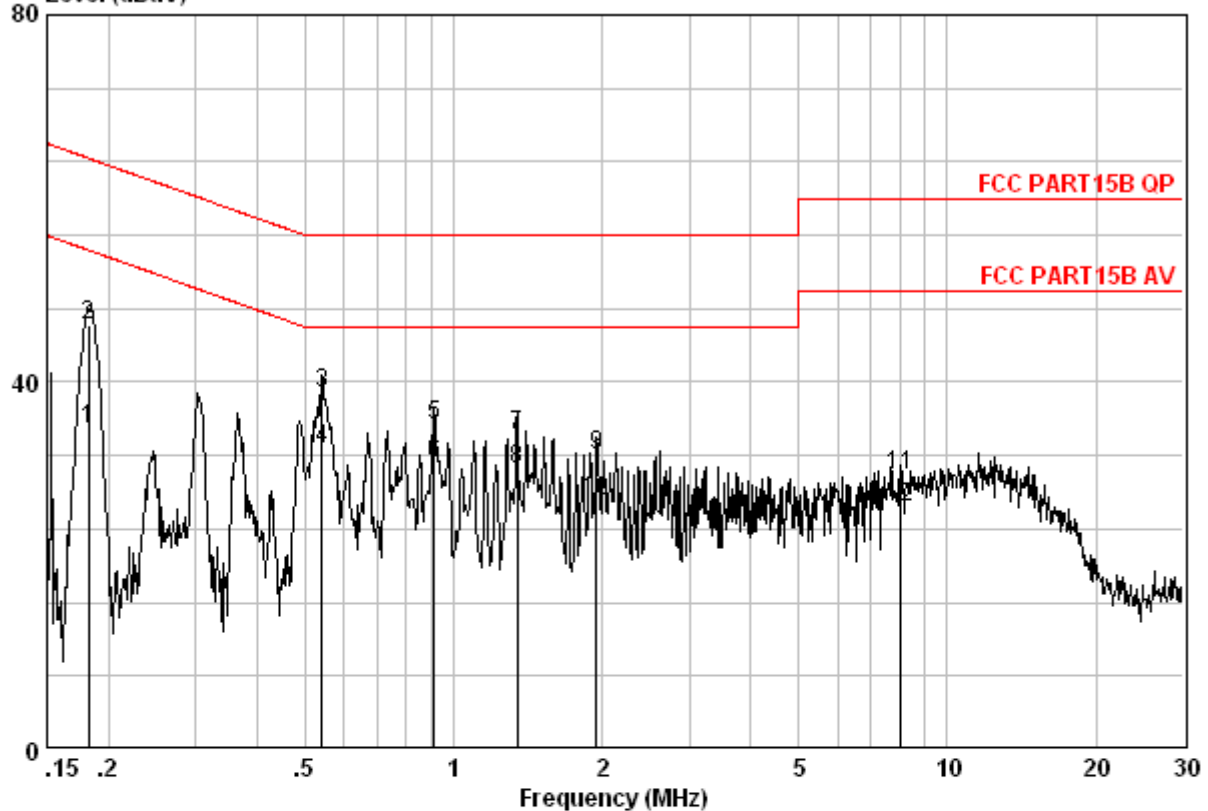

	Freq	Cable Loss	LISN Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB	dBuV	dBuV	dBuV	dB	
1	0.18249	0.14	9.60	25.24	34.98	54.37	-19.39	Average
2 @	0.18249	0.14	9.60	36.58	46.32	64.37	-18.05	QP
3 @	0.54068	0.16	9.62	29.00	38.78	56.00	-17.22	QP
4 @	0.54068	0.16	9.62	22.89	32.68	46.00	-13.32	Average
5	0.91357	0.19	9.70	25.42	35.32	56.00	-20.68	QP
6 @	0.91357	0.19	9.70	21.23	31.12	46.00	-14.88	Average
7	1.345	0.20	9.70	24.37	34.27	56.00	-21.73	QP
8 @	1.345	0.20	9.70	20.56	30.46	46.00	-15.54	Average
9	1.949	0.20	9.70	22.11	32.01	56.00	-23.99	QP
10	1.949	0.20	9.70	17.12	27.02	46.00	-18.98	Average
11	8.062	0.25	9.86	19.82	29.94	60.00	-30.06	QP
12	8.062	0.25	9.86	16.20	26.32	50.00	-23.68	Average

5.3 Conducted Peak Output Power

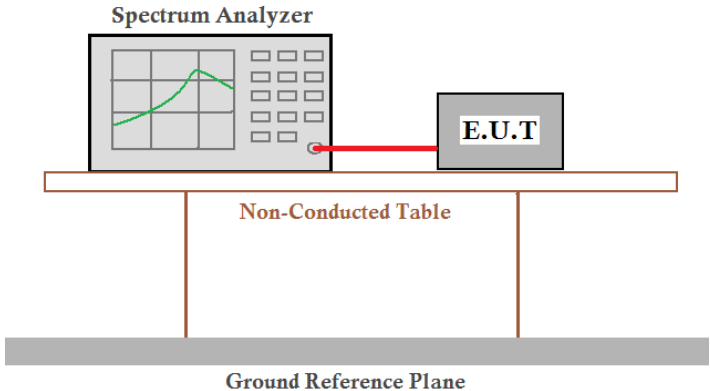Test Requirement:	FCC Part15 C Section 15.247 (b)(1)
Test Method:	ANSI C63.10:2009
Limit:	30dBm
Test setup:	 <i>Remark: Offset the High-Frequency cable loss 1.5dB in the spectrum analyzer.</i>
Test Instruments:	Refer to section 4.8 for details.
Test state:	Non-hopping transmitting with all kinds of modulation.
Test results:	Pass


**Measurement Data**

GFSK mode			
Test channel	Peak Output Power (dBm)	Limit (dBm)	Result
Lowest	5.07	30.00	Pass
Middle	5.96	30.00	Pass
Highest	4.77	30.00	Pass
$\pi/4$ DQPSK mode			
Test channel	Peak Output Power (dBm)	Limit (dBm)	Result
Lowest	6.44	30.00	Pass
Middle	7.01	30.00	Pass
Highest	6.01	30.00	Pass
8DPSK mode			
Test channel	Peak Output Power (dBm)	Limit (dBm)	Result
Lowest	6.28	30.00	Pass
Middle	6.92	30.00	Pass
Highest	6.28	30.00	Pass




Test plot as follows:

Test mode:	GFSK	Test channel:	Lowest
------------	------	---------------	--------

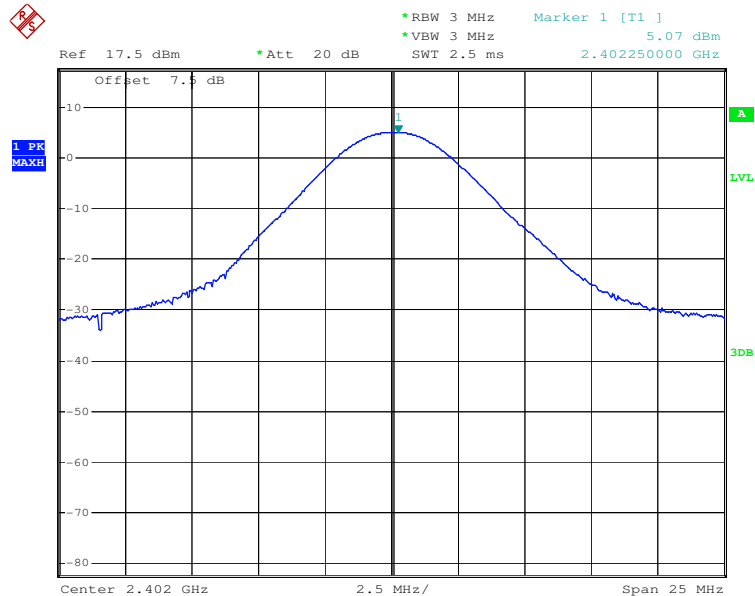


Test mode:	GFSK	Test channel:	Middle
------------	------	---------------	--------

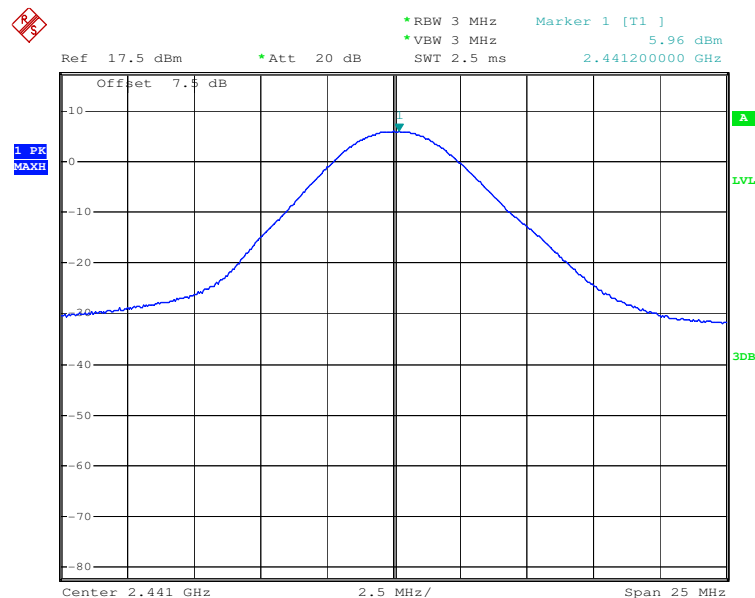




Test mode:	GFSK	Test channel:	Highest
------------	------	---------------	---------

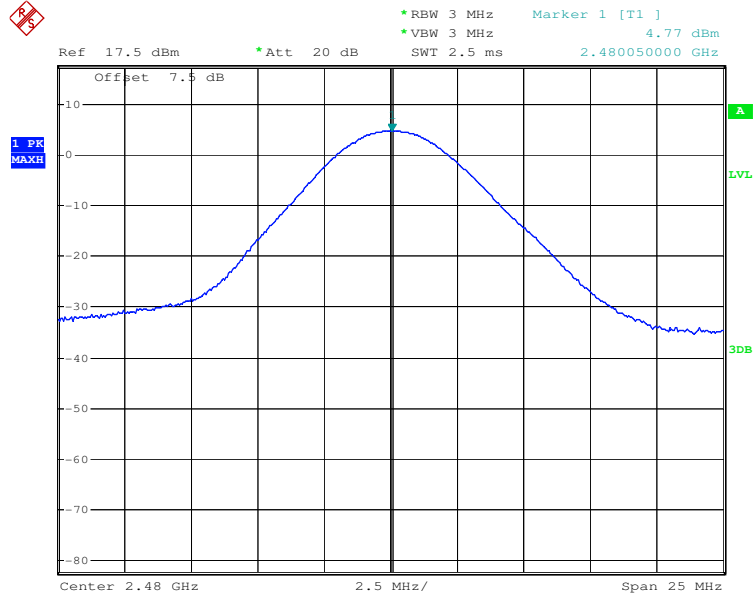


Test mode:	$\pi/4$ DQPSK	Test channel:	Lowest
------------	---------------	---------------	--------

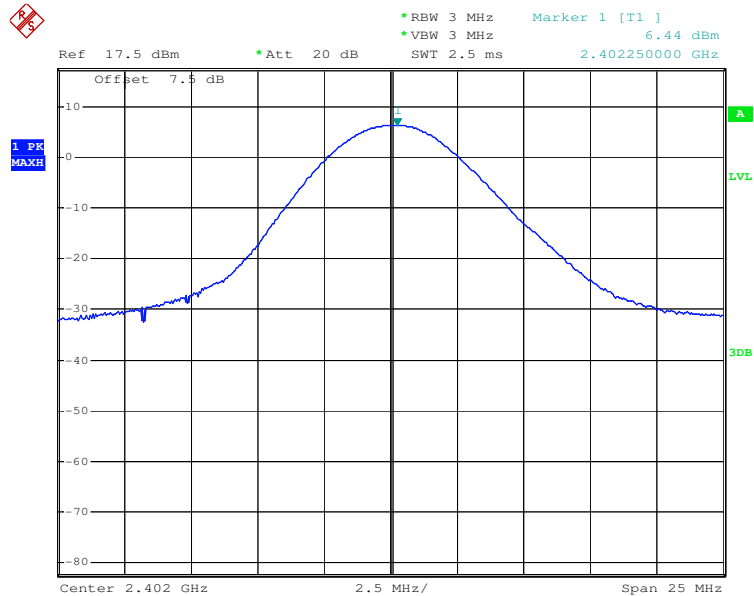




Test mode:	$\pi/4$ DQPSK	Test channel:	Middle
------------	---------------	---------------	--------

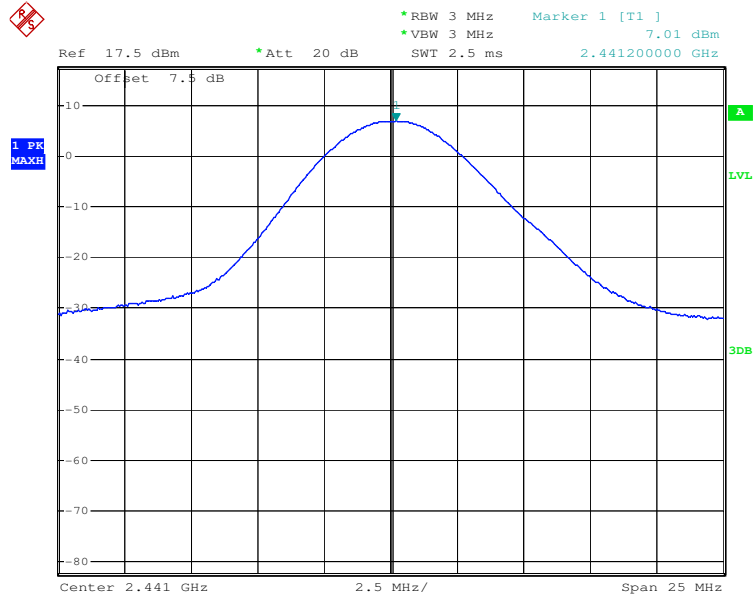


Test mode:	$\pi/4$ DQPSK	Test channel:	Highest
------------	---------------	---------------	---------

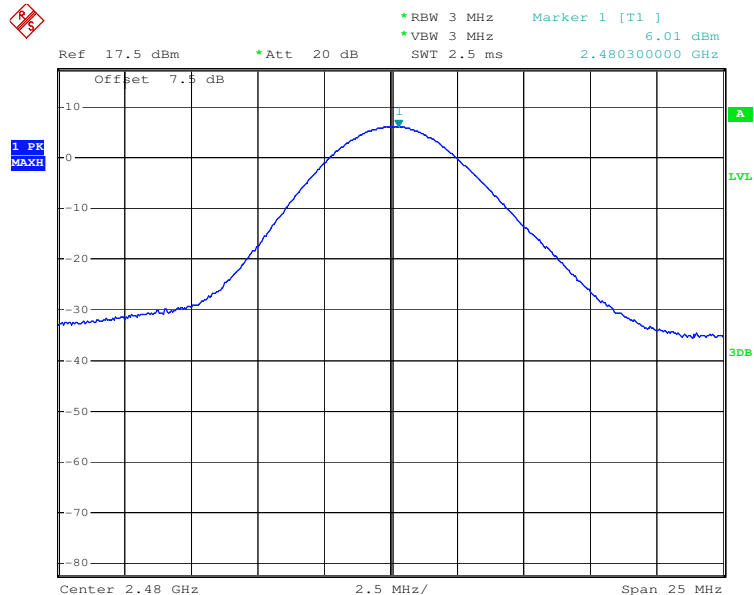




Test mode:	8DPSK	Test channel:	Lowest
------------	-------	---------------	--------

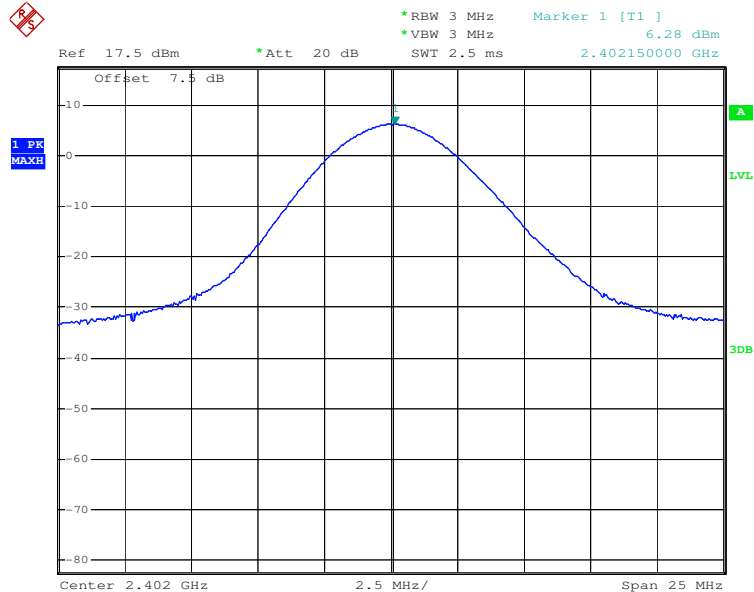


Test mode:	8DPSK	Test channel:	Middle
------------	-------	---------------	--------

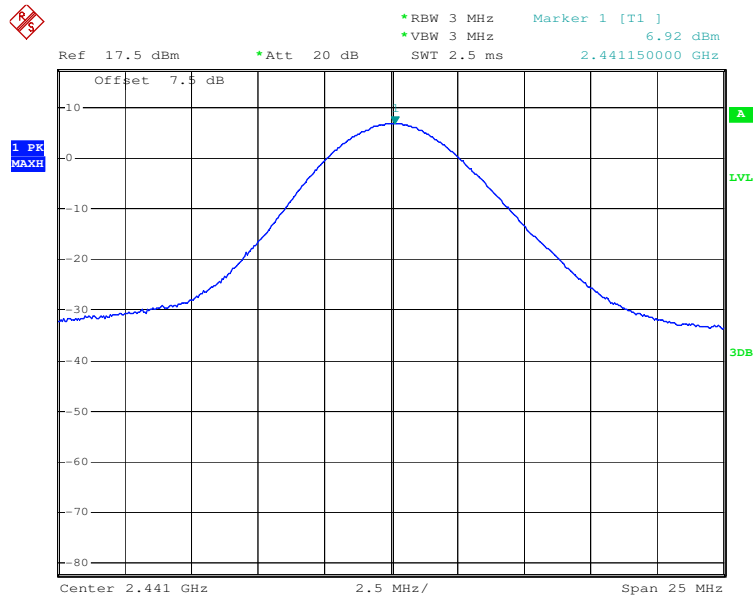




Test mode:	8DPSK	Test channel:	Highest
------------	-------	---------------	---------

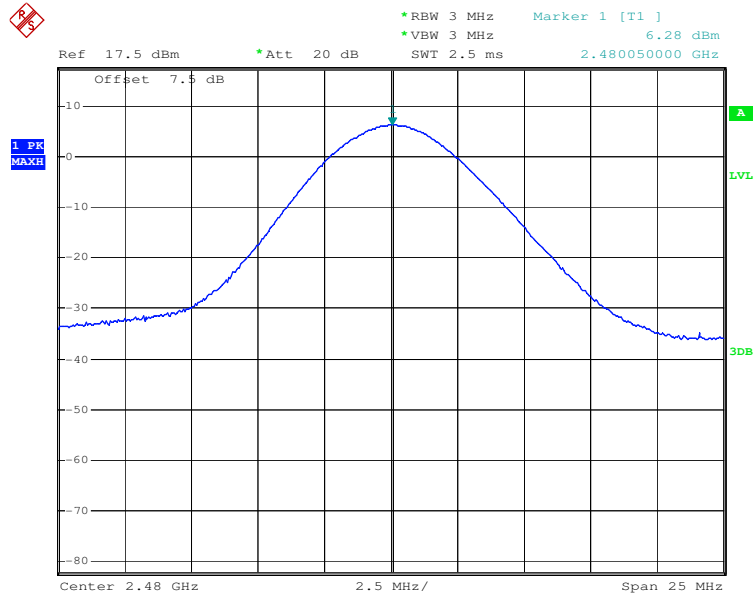

5.4 20dB Occupy Bandwidth

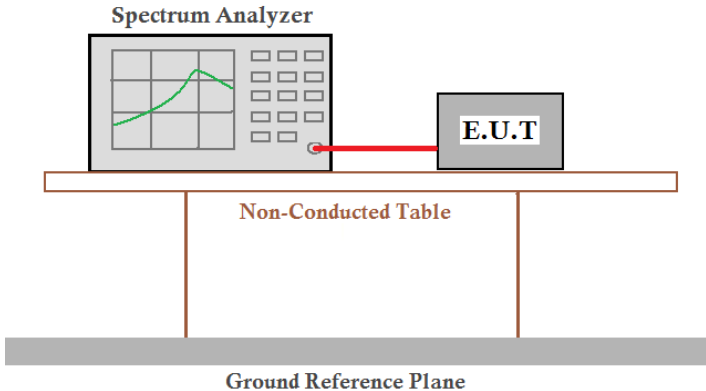Test Requirement:	FCC Part15 C Section 15.247 (a)(1)
Test Method:	ANSI C63.10:2009
Limit:	NA
Test setup:	
Test Instruments:	Refer to section 4.8 for details.
Test state:	Non-hopping transmitting with all kinds of modulation.

Measurement Data


Test channel	20dB Occupy Bandwidth (kHz)		
	GFSK	$\pi/4$ DQPSK	8DPSK
Lowest	904	1260	1256
Middle	904	1260	1264
Highest	900	1260	1256






Test plot as follows:

Test mode:	GFSK	Test channel:	Lowest
------------	------	---------------	--------

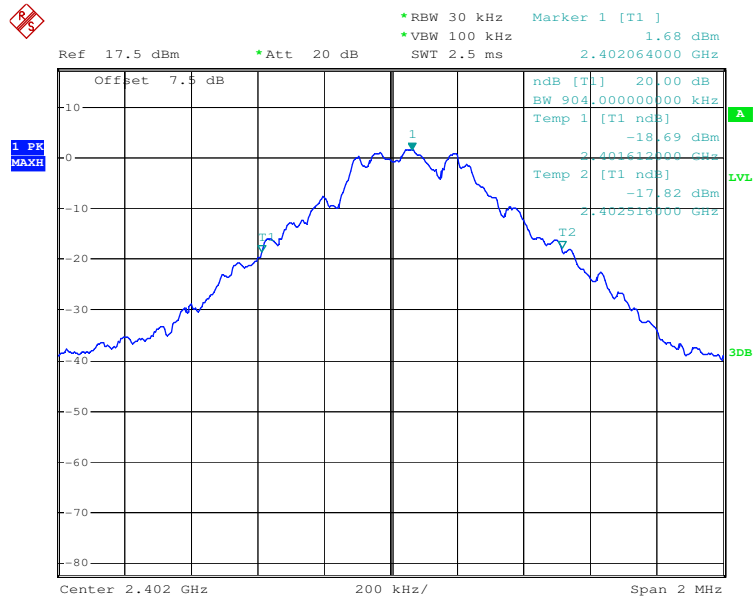


Test mode:	GFSK	Test channel:	Middle
------------	------	---------------	--------

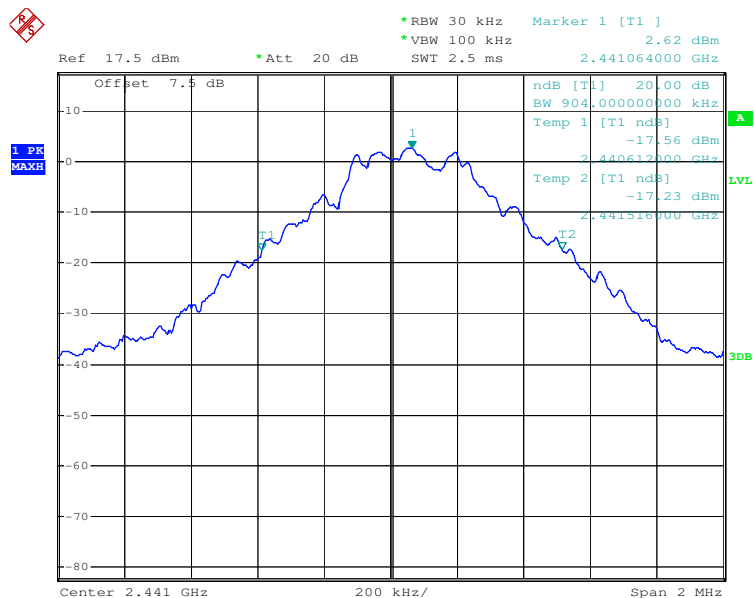




Test mode:	GFSK	Test channel:	Highest
------------	------	---------------	---------

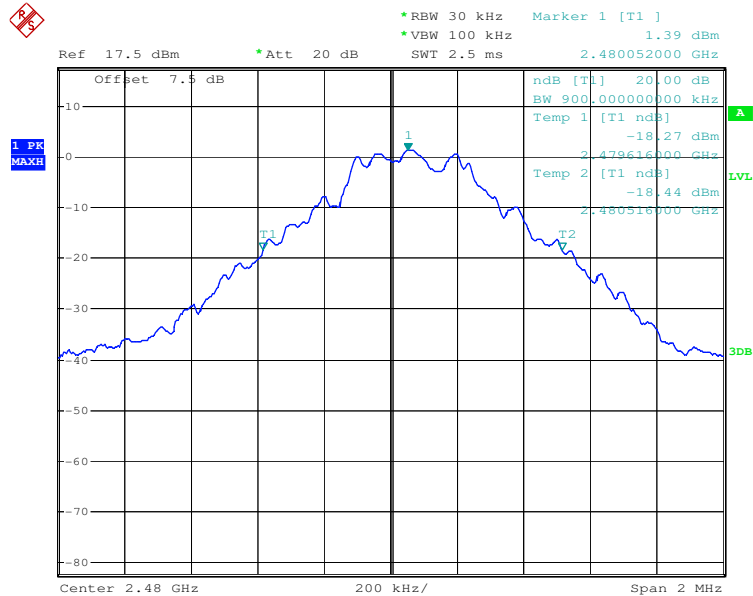


Test mode:	$\pi/4$ DQPSK	Test channel:	Lowest
------------	---------------	---------------	--------

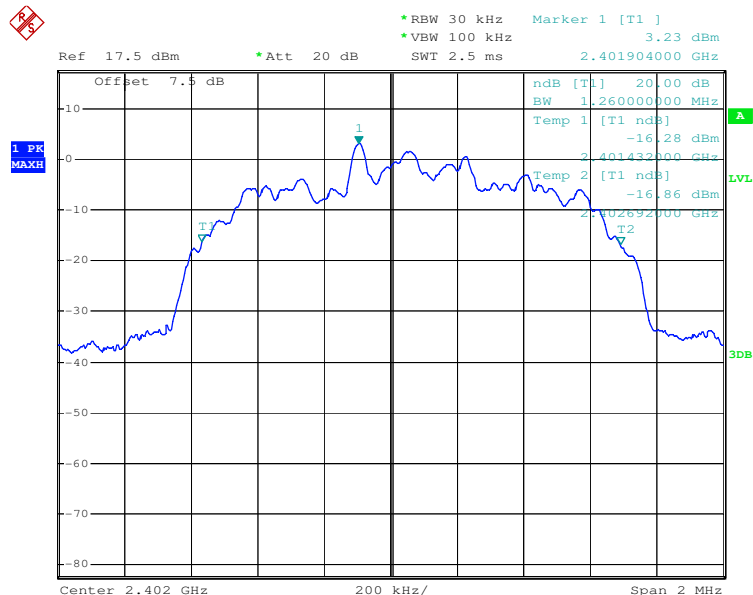




Test mode:	$\pi/4$ DQPSK	Test channel:	Middle
------------	---------------	---------------	--------

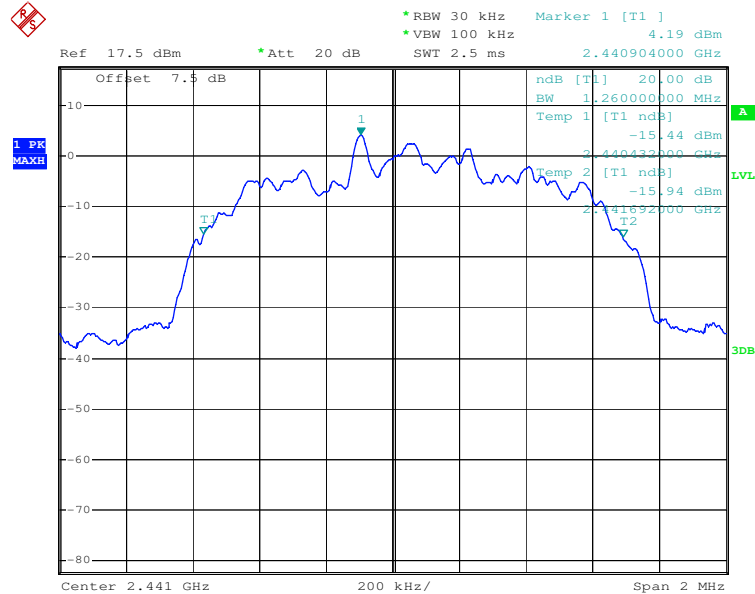


Test mode:	$\pi/4$ DQPSK	Test channel:	Highest
------------	---------------	---------------	---------

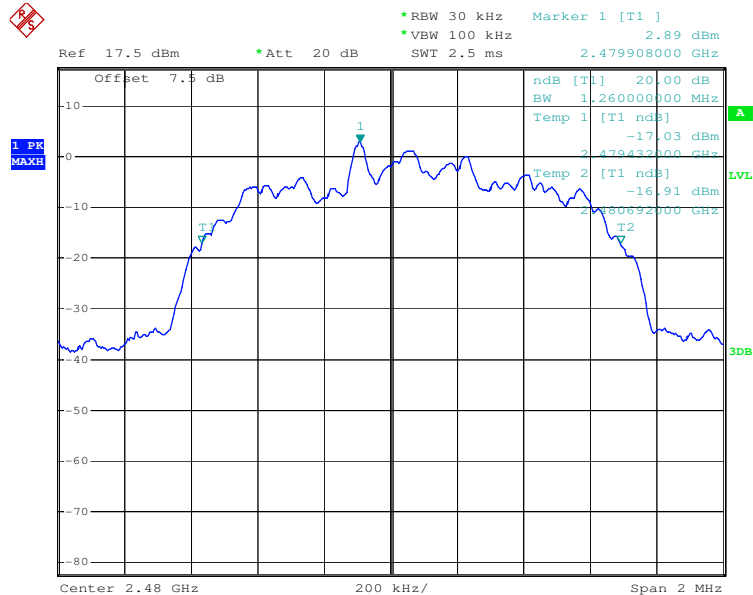




Test mode:	8DPSK	Test channel:	Lowest
------------	-------	---------------	--------

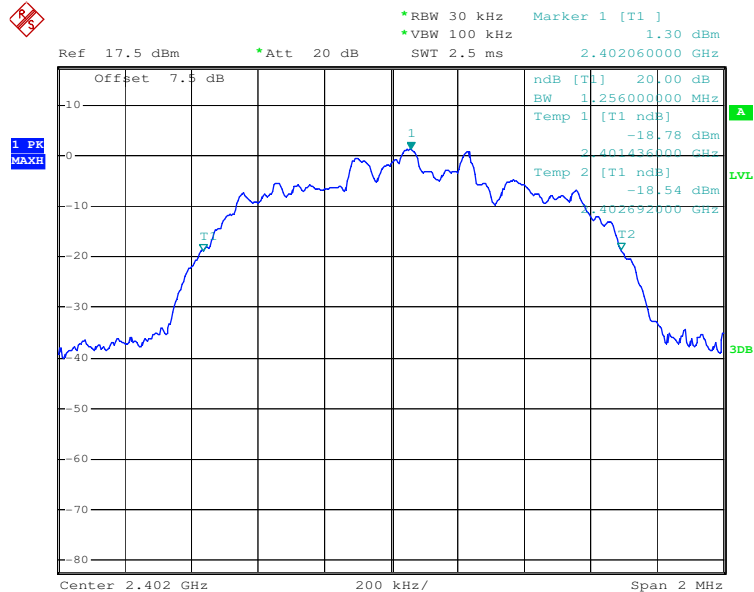




Test mode:	8DPSK	Test channel:	Highest
------------	-------	---------------	---------

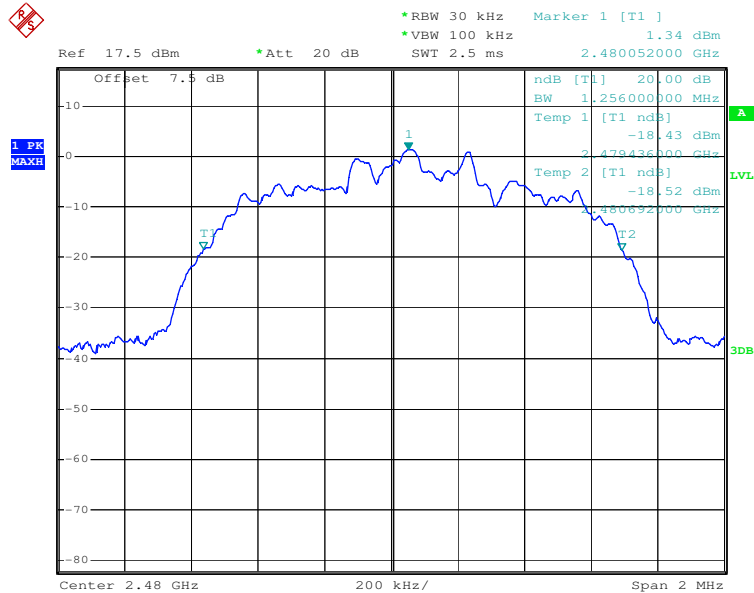

5.5 Carrier Frequencies Separation

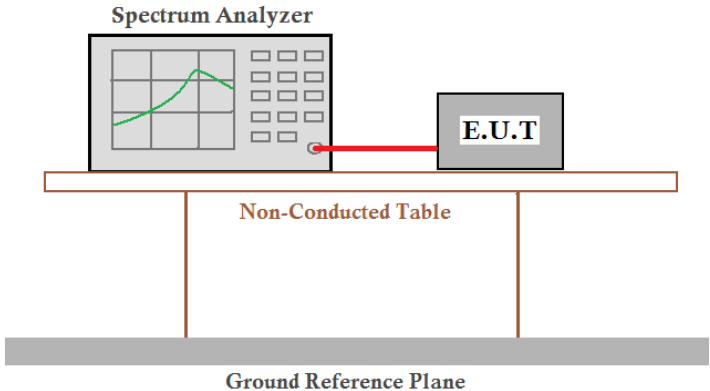Test Requirement:	FCC Part15 C Section 15.247 (a)(1)
Test Method:	ANSI C63.10:2009
Test state:	Hopping transmitting with all kind of modulation.
Test setup:	 The diagram illustrates the test setup. A Spectrum Analyzer, shown with a grid and a green curve, is connected to an E.U.T. (Equipment Under Test) box by a red cable. Both the Spectrum Analyzer and the E.U.T. are positioned on a 'Non-Conducted Table', which is depicted as a rectangular platform supported by two vertical legs. Below this table is a 'Ground Reference Plane', represented by a thick grey horizontal bar.
Test Instruments:	Refer to section 4.8 for details.
Limit:	0.025MHz or 2/3 of the 20dB bandwidth (whichever is greater)
Test results:	Pass

**Measurement Data**

GFSK mode			
Test channel	Carrier Frequencies Separation (KHz)	Limit (KHz)	Result
Lowest	1004	≥ 843	Pass
Middle	1008	≥ 843	Pass
Highest	1000	≥ 843	Pass
$\pi/4$ DQPSK mode			
Test channel	Carrier Frequencies Separation (KHz)	Limit (KHz)	Result
Lowest	1000	≥ 843	Pass
Middle	1000	≥ 843	Pass
Highest	1000	≥ 843	Pass
8DPSK mode			
Test channel	Carrier Frequencies Separation (KHz)	Limit (KHz)	Result
Lowest	1008	≥ 843	Pass
Middle	1000	≥ 843	Pass
Highest	1004	≥ 843	Pass


Note: According to section 5.4,

Mode	20dB bandwidth (KHz) (worse case)	Limit (KHz) (Carrier Frequencies Separation)
GFSK	904	603
$\pi/4$ DQPSK	1260	840
8DPSK	1264	843




Test plot as follows:

Test mode:	GFSK	Test channel:	Lowest
------------	------	---------------	--------

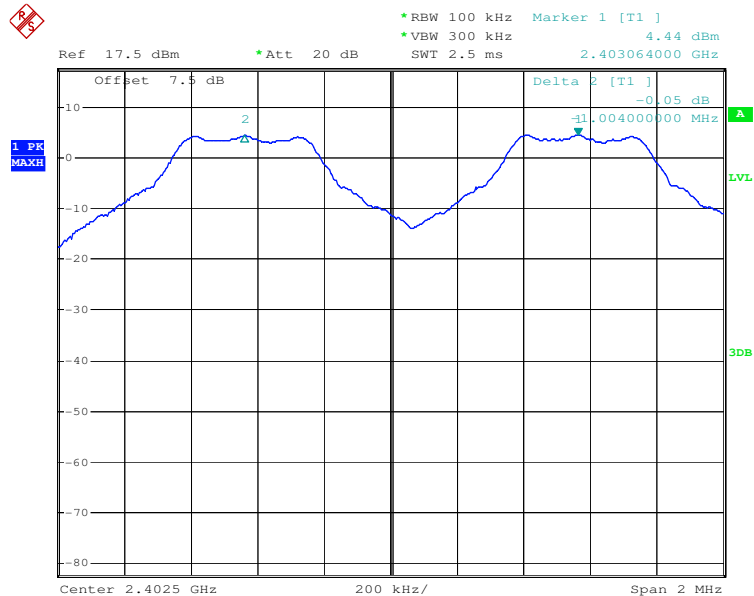


Test mode:	GFSK	Test channel:	Middle
------------	------	---------------	--------

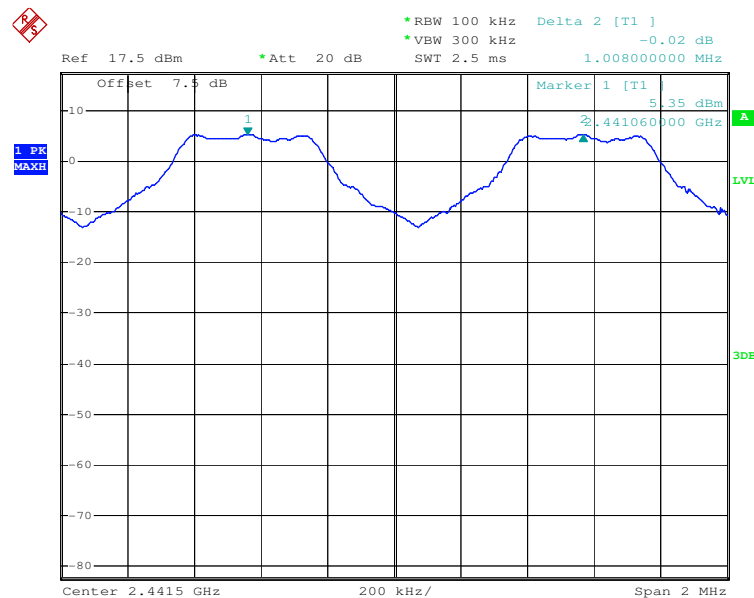




Test mode:	GFSK	Test channel:	Highest
------------	------	---------------	---------

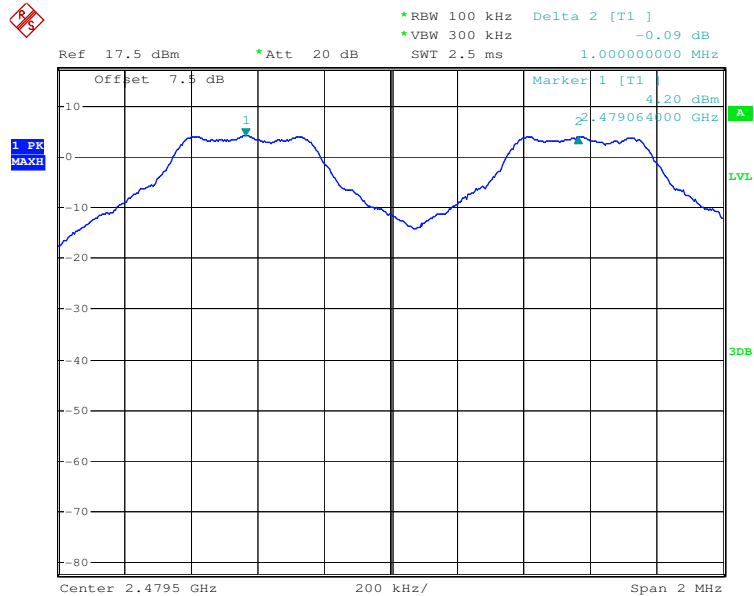


Test mode:	$\pi/4$ DQPSK	Test channel:	Lowest
------------	---------------	---------------	--------

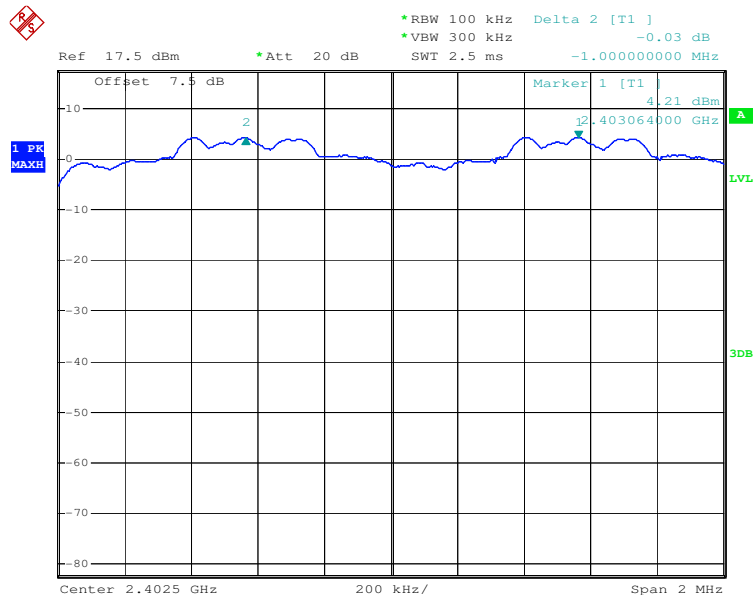




Test mode:	$\pi/4$ DQPSK	Test channel:	Middle
------------	---------------	---------------	--------

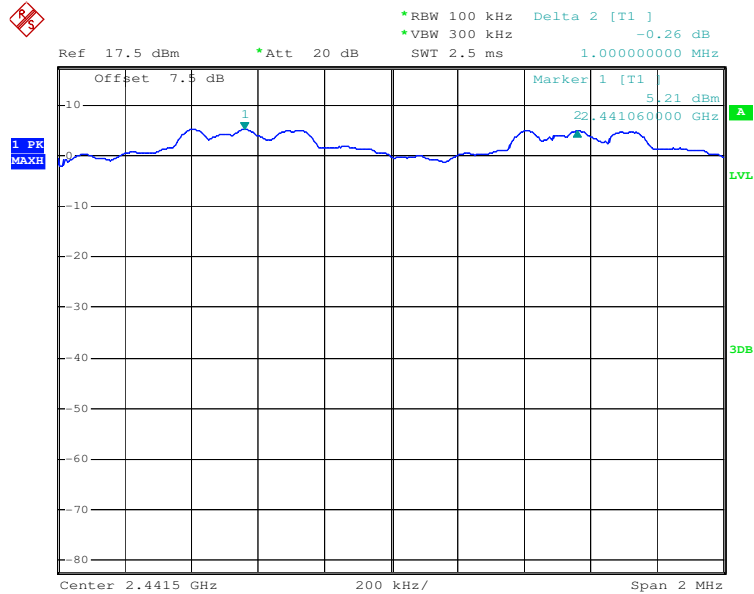


Test mode:	$\pi/4$ DQPSK	Test channel:	Highest
------------	---------------	---------------	---------

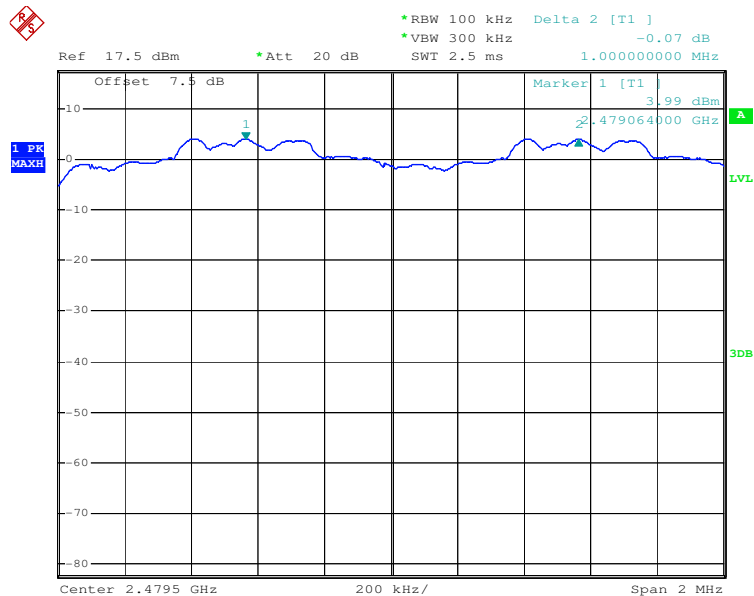




Test mode:	8DPSK	Test channel:	Lowest
------------	-------	---------------	--------

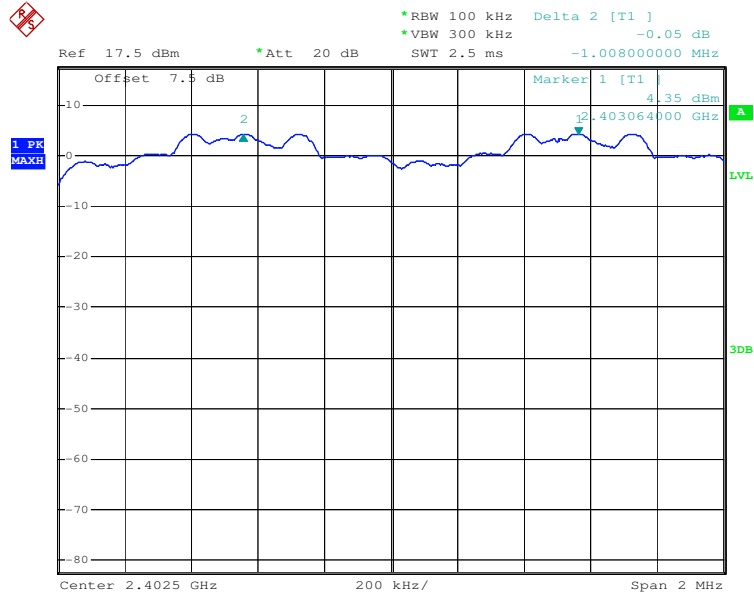


Test mode:	8DPSK	Test channel:	Middle
------------	-------	---------------	--------

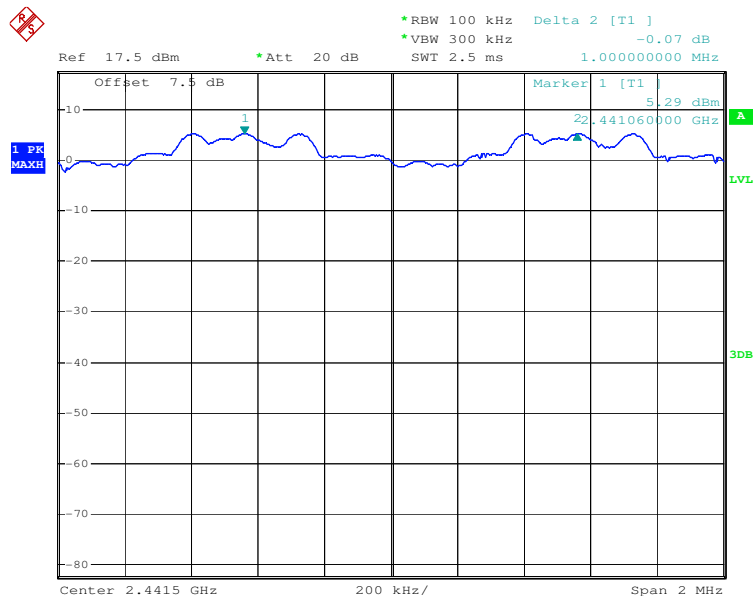




Test mode:	8DPSK	Test channel:	Highest
------------	-------	---------------	---------

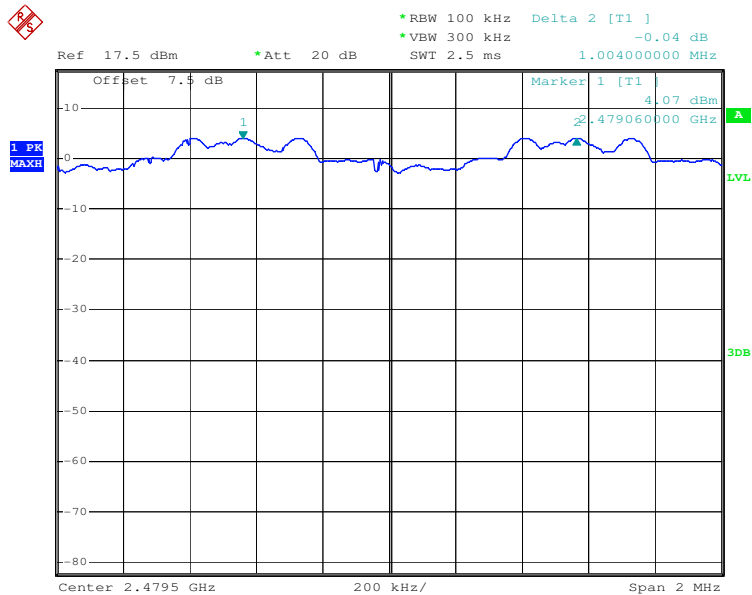

"This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."

5.6 Hopping Channel Number

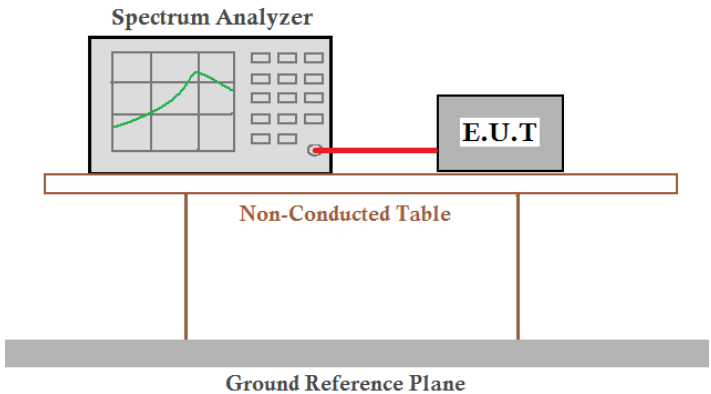Test Requirement:	FCC Part15 C Section 15.247 (b)
Test Method:	ANSI C63.10:2009
Requirement:	≥ 75 channels
Test setup:	 The diagram illustrates the test setup. A Spectrum Analyzer is connected to an E.U.T. (Equipment Under Test) via a red cable. Both the Spectrum Analyzer and the E.U.T. are placed on a Non-Conducted Table. The table is supported by a Ground Reference Plane.
Test Instruments:	Refer to section 4.8 for details.
Test state:	Hopping transmitting with all kind of modulation.
Test results:	Pass


Measurement Data

Mode	Hopping channel	Requirement
GFSK	79	≥ 75
$\pi/4$ DQPSK	79	≥ 75
8DPSK	79	≥ 75




Test plot as follows

Test mode:	GFSK	
------------	------	--

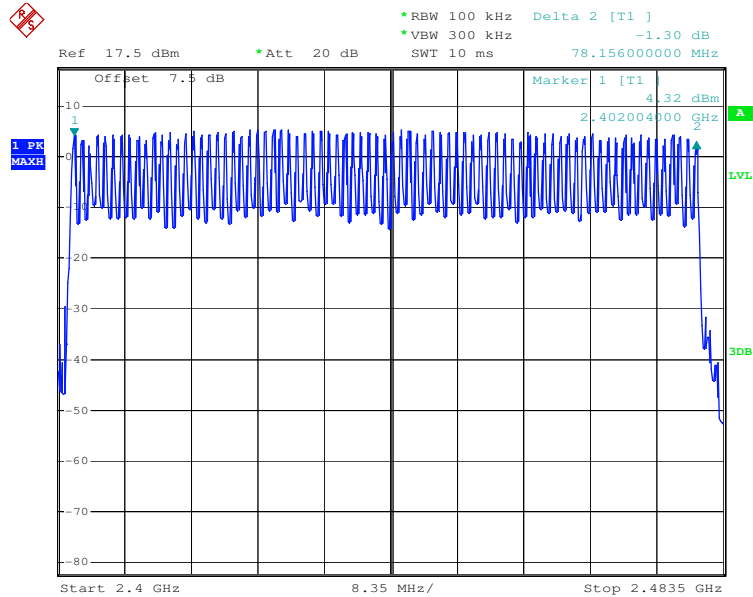


Test mode:	$\pi/4$ DQPSK	
------------	---------------	--

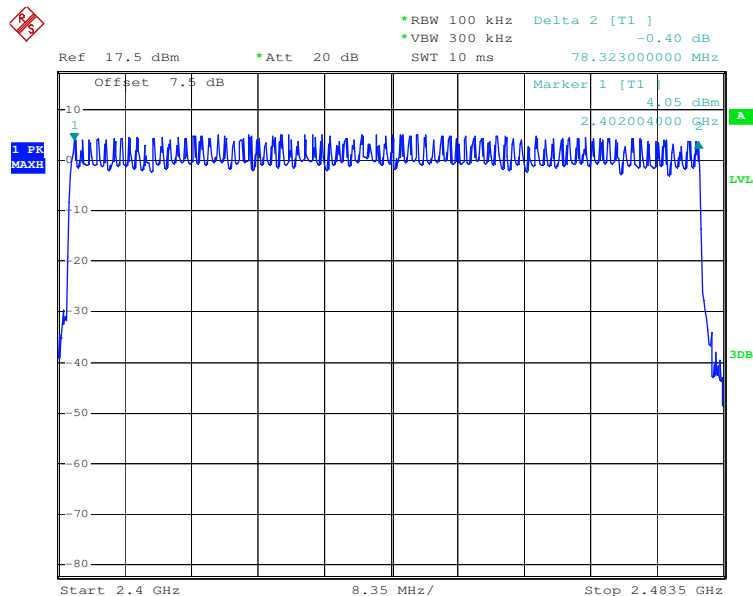




Test mode:	8DPSK	
------------	-------	--

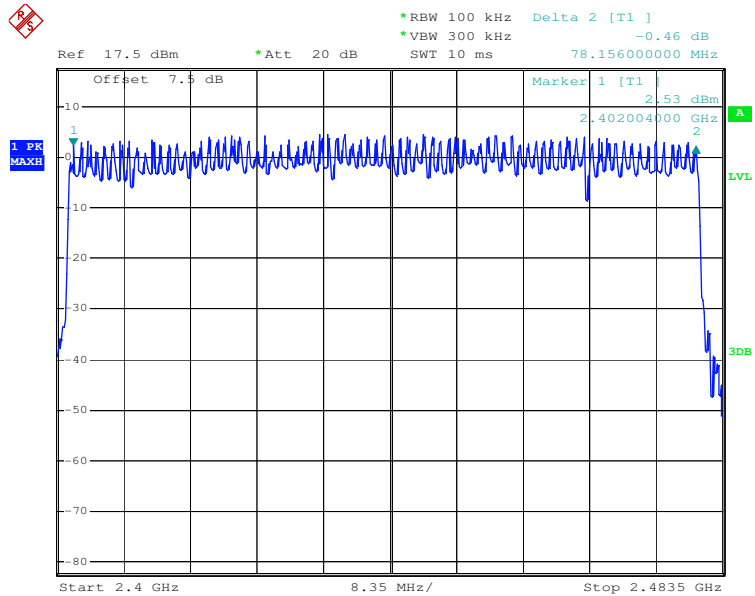

"This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."

5.7 Dwell Time

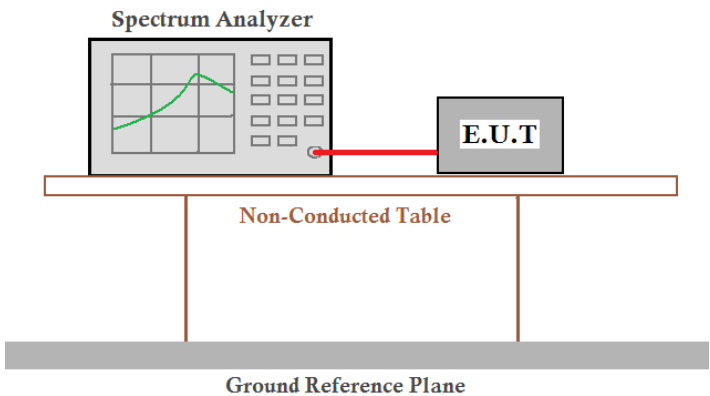Test Requirement:	FCC Part15 C Section 15.247 (a)(1)
Test Method:	ANSI C63.10:2009
Limit:	≤ 0.4 Second
Test setup:	
Test Instruments:	Refer to section 4.8 for details.
Test state:	Hopping transmitting with all kind of modulation.
Test results:	Pass

Measurement Data

Mode	Packet	Dwell time (second)	Limit (second)
GFSK	DH1	0.1392	≤ 0.4
	DH3	0.2720	≤ 0.4
	DH5	0.3177	≤ 0.4
$\pi/4$ DQPSK	2-DH1	0.1408	≤ 0.4
	2-DH3	0.2752	≤ 0.4
	2-DH5	0.3134	≤ 0.4
8DPSK	3-DH1	0.1424	≤ 0.4
	3-DH3	0.2736	≤ 0.4
	3-DH5	0.3177	≤ 0.4

Test Result:

The test period: $T = 0.4 \text{ Second/Channel} \times 79 \text{ Channel} = 31.6 \text{ s}$

The lowest channel (2402MHz), middle channel (2441MHz), highest channel (2480MHz) as below

DH1 time slot = $0.435(\text{ms}) \times (1600 / (2 \times 79)) \times 31.6 = 139.2 \text{ ms}$


DH3 time slot = $1.700(\text{ms}) \times (1600 / (4 \times 79)) \times 31.6 = 272.0 \text{ ms}$

DH5 time slot = $2.98(\text{ms}) \times (1600 / (6 \times 79)) \times 31.6 = 317.7 \text{ ms}$




Test plot as follows

Test mode:	GFSK	Test Packet:	DH1
------------	------	--------------	-----

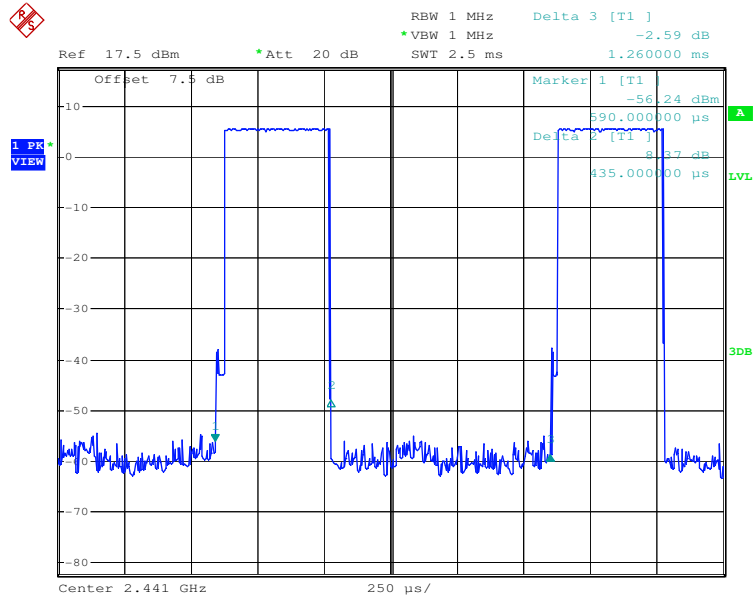


Test mode:	GFSK	Test Packet:	DH3
------------	------	--------------	-----

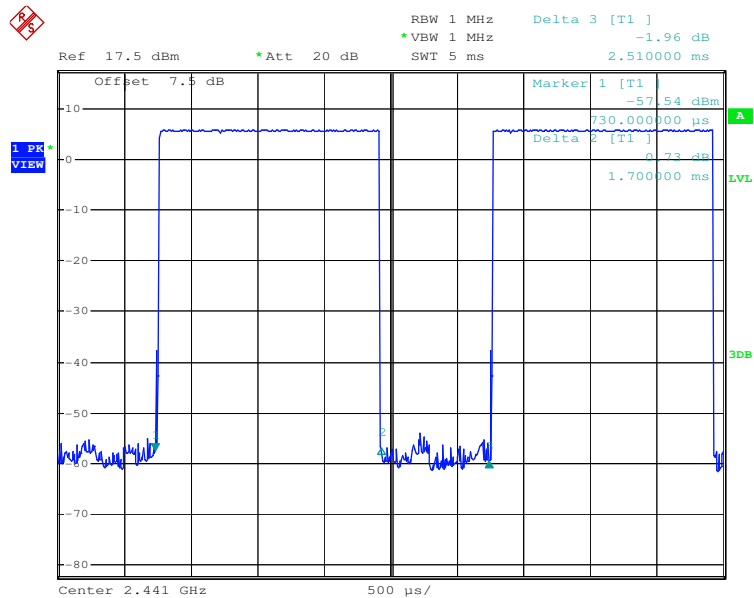




Test mode:	GFSK	Test Packet:	DH5
------------	------	--------------	-----

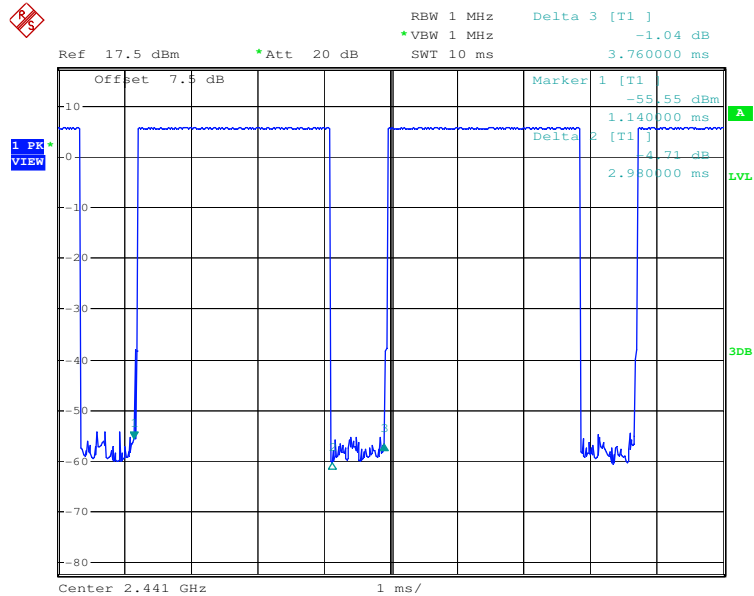


Test mode:	$\pi/4$ DQPSK	Test Packet:	2-DH1
------------	---------------	--------------	-------

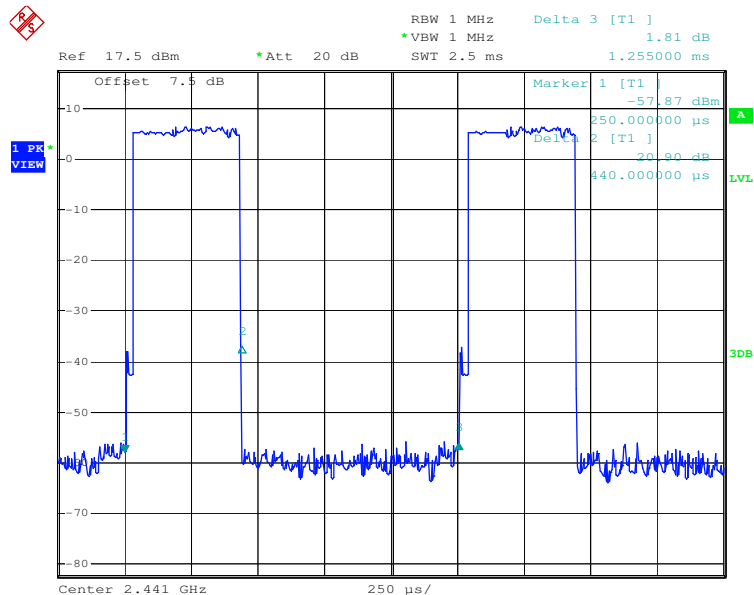




Test mode:	$\pi/4$ DQPSK	Test Packet:	2-DH3
------------	---------------	--------------	-------

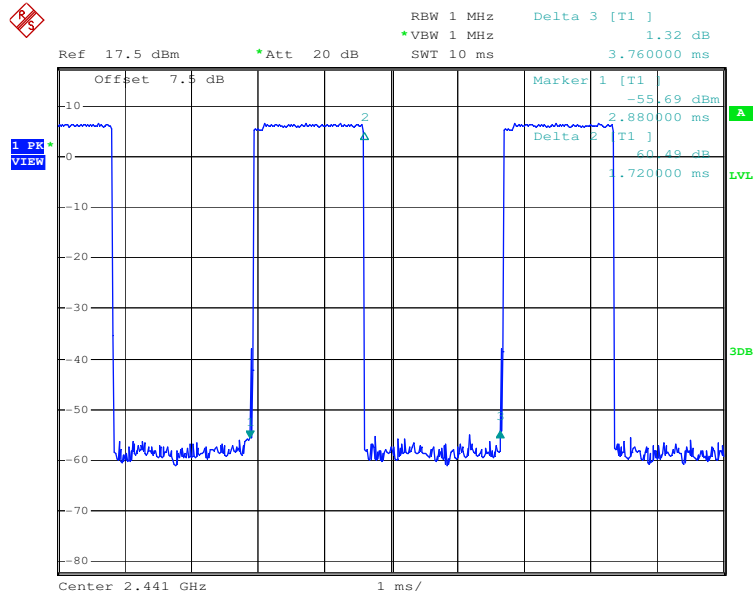


Test mode:	$\pi/4$ DQPSK	Test Packet:	2-DH5
------------	---------------	--------------	-------

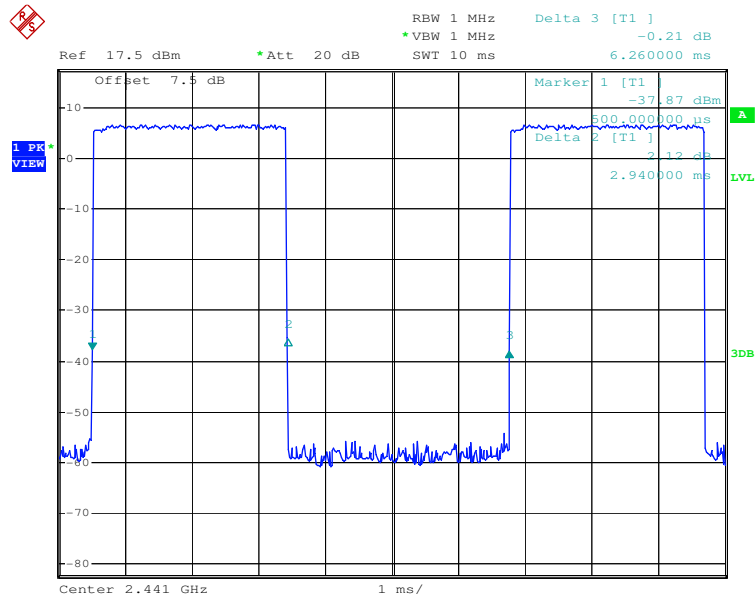




Test mode:	8DPSK	Test Packet:	3-DH1
------------	-------	--------------	-------

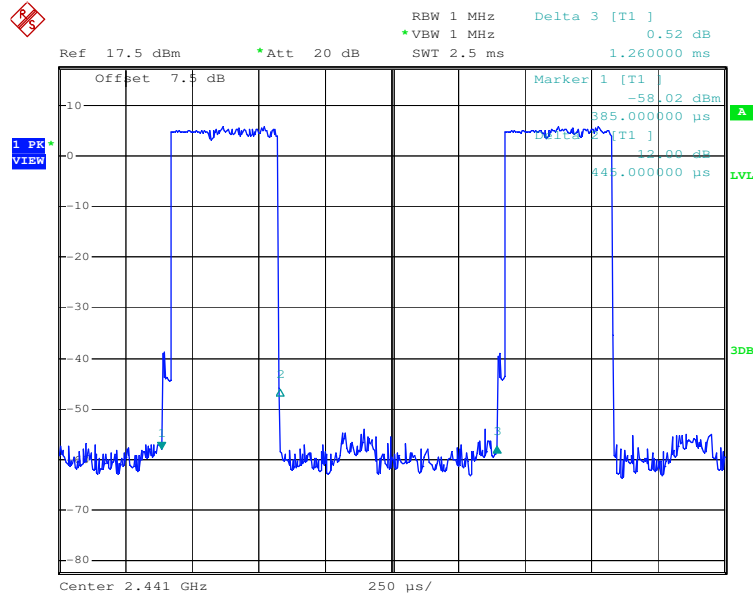


Test mode:	8DPSK	Test Packet:	3-DH3
------------	-------	--------------	-------

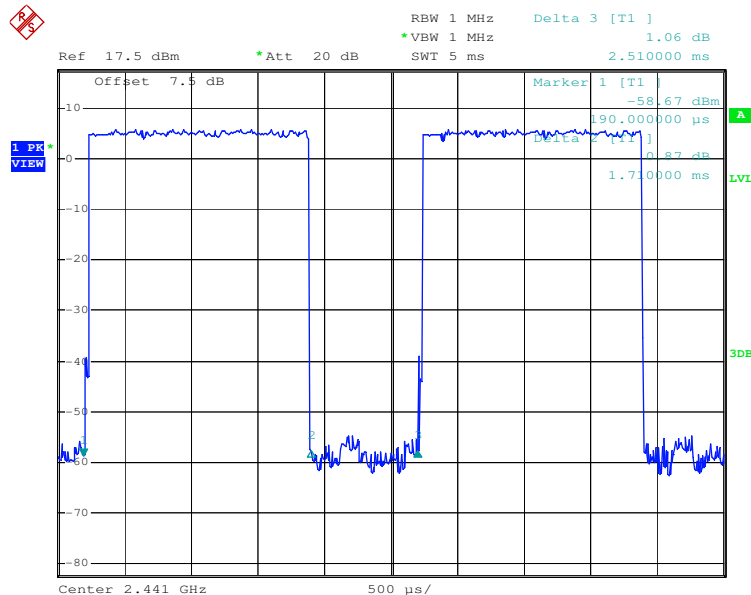




Test mode:	8DPSK	Test Packet:	3-DH5
------------	-------	--------------	-------

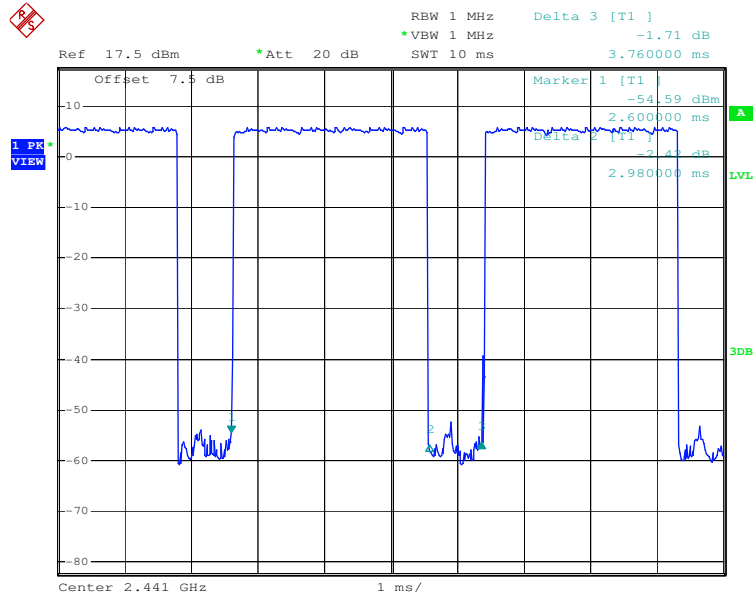



5.8 Band Edge

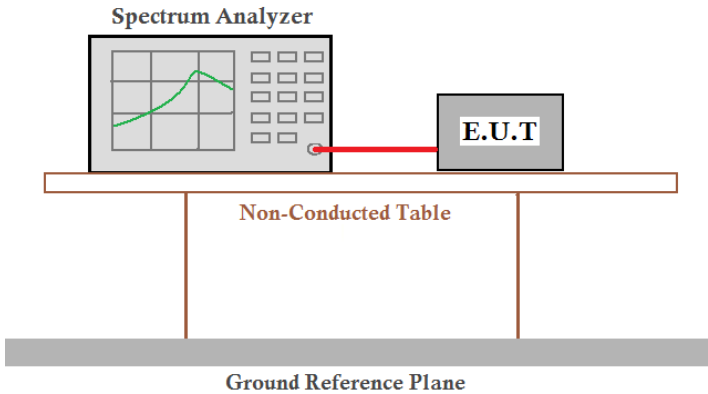Test Requirement:	FCC Part15 C Section 15.247 (d)
Test Method:	ANSI C63.10:2009
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.
Test setup:	 <i>Remark:</i> <i>Offset the High-Frequency cable loss 1.5dB in the spectrum analyzer.</i>
Test Instruments:	Refer to section 4.8 for details.
Test results:	Pass





Test plot as follows:

Test mode:	GFSK	Test channel:	Lowest
------------	------	---------------	--------

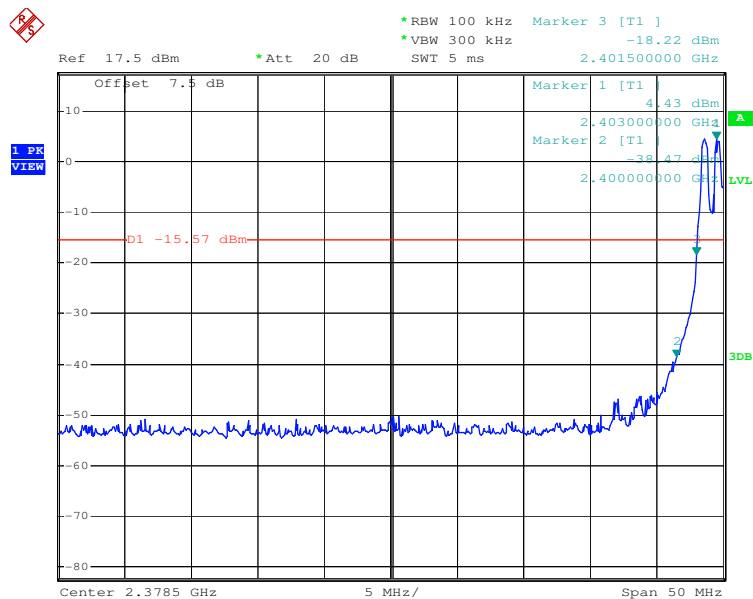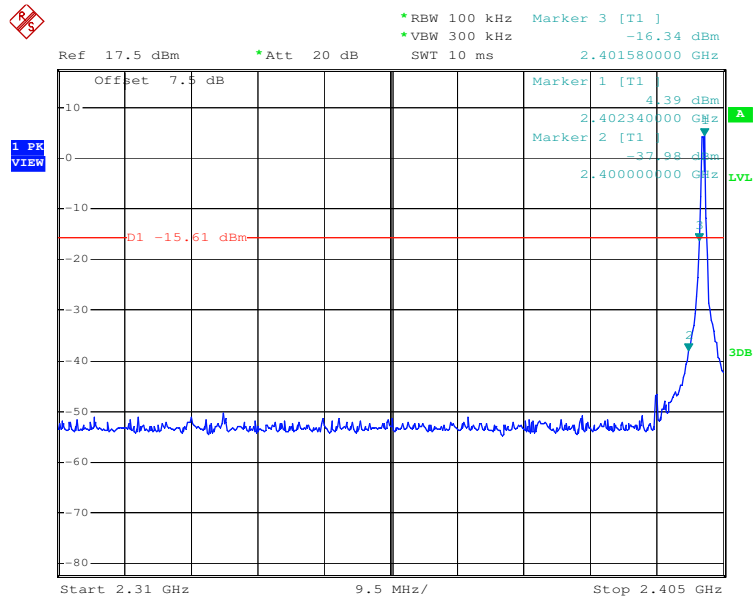





Test mode:	GFSK	Test channel:	Highest
------------	------	---------------	---------

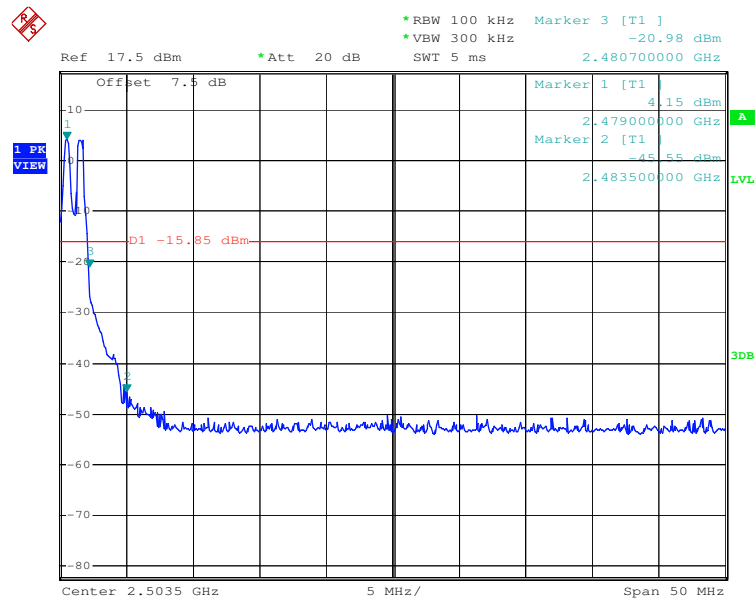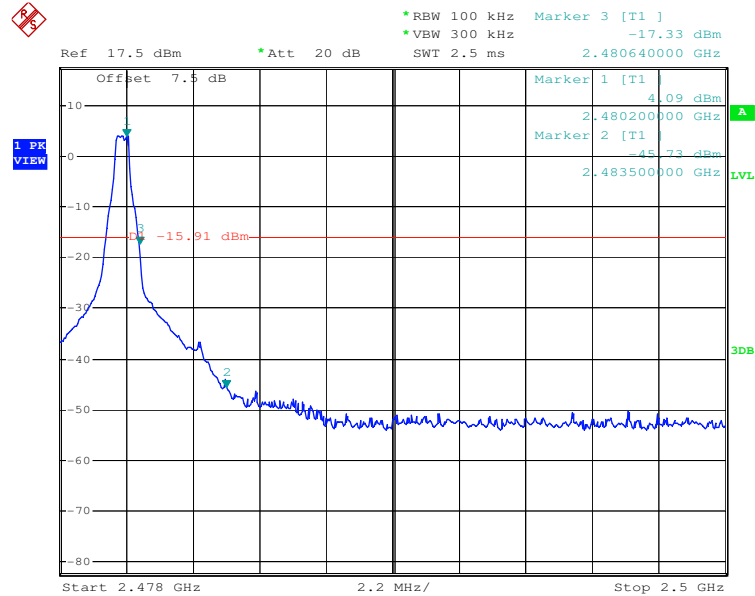





Test mode:	$\pi/4$ DQPSK	Test channel:	Lowest
------------	---------------	---------------	--------

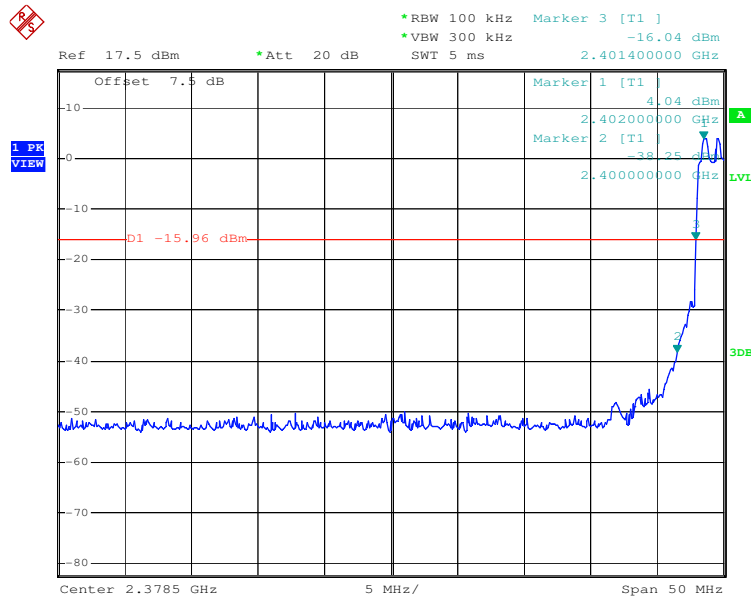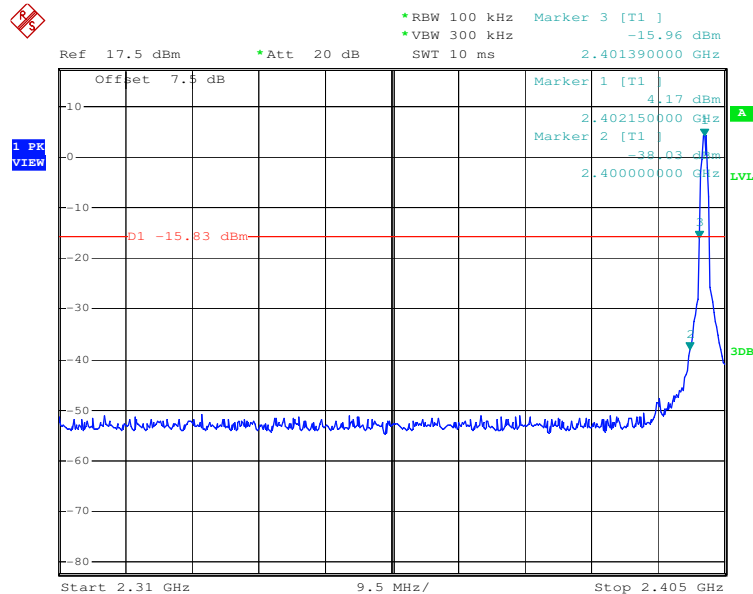





Test mode:	$\pi/4$ DQPSK	Test channel:	Highest
------------	---------------	---------------	---------

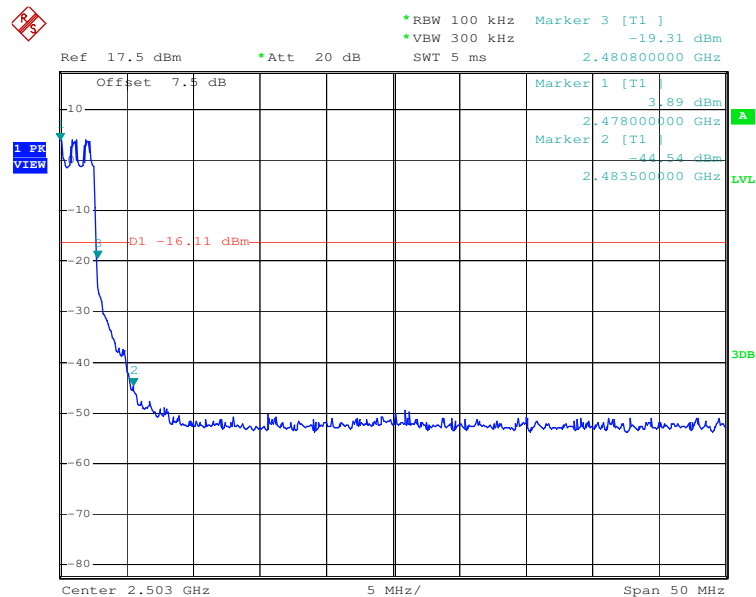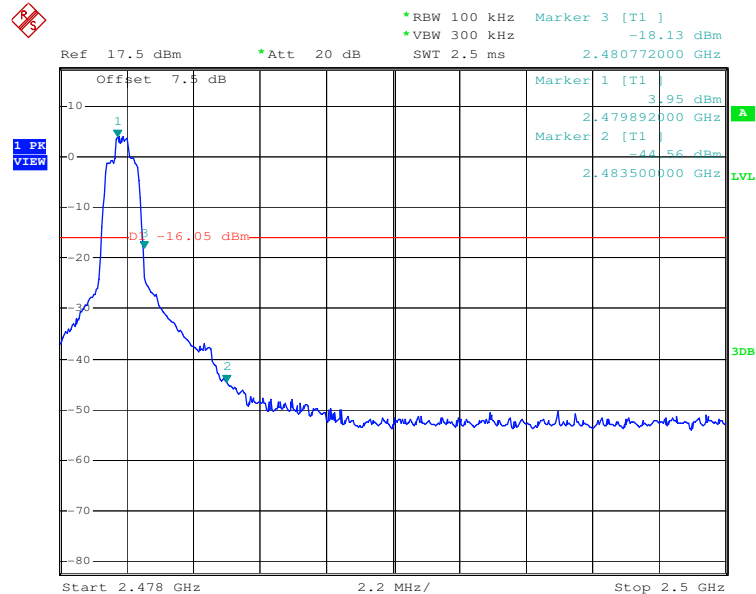





Test mode:	8DPSK	Test channel:	Lowest
------------	-------	---------------	--------

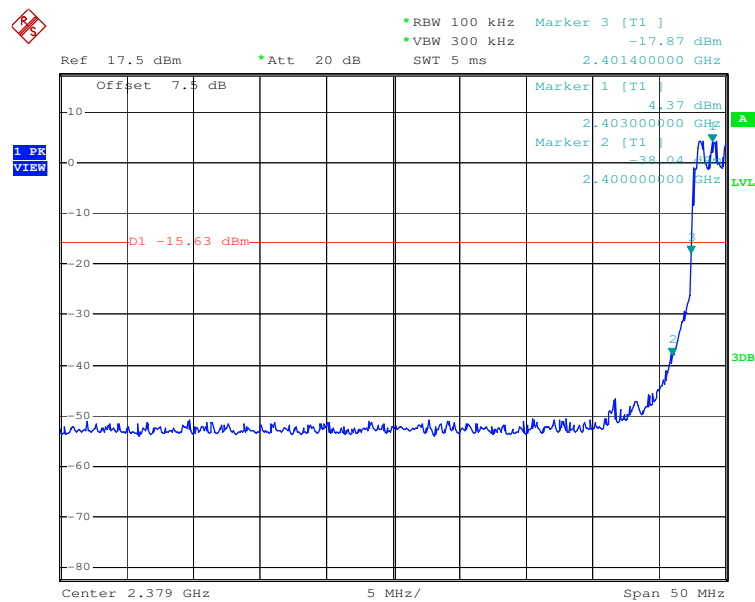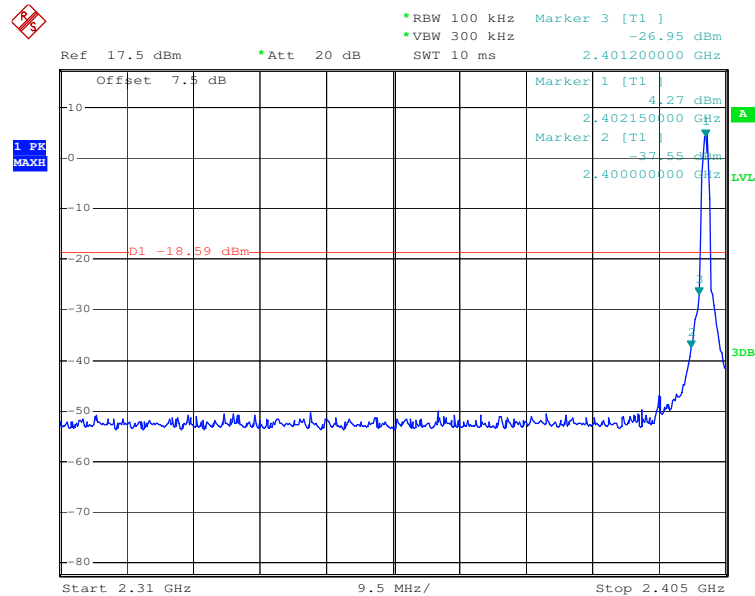




Test mode:	8DPSK	Test channel:	Highest
------------	-------	---------------	---------

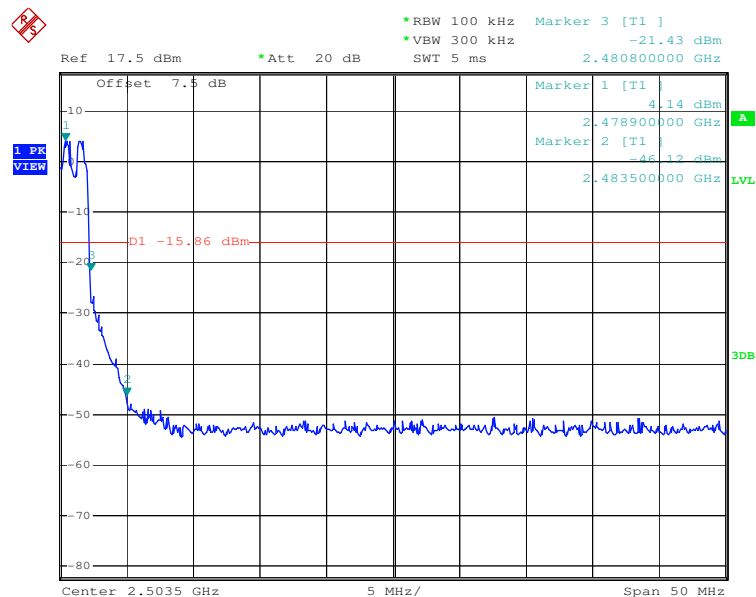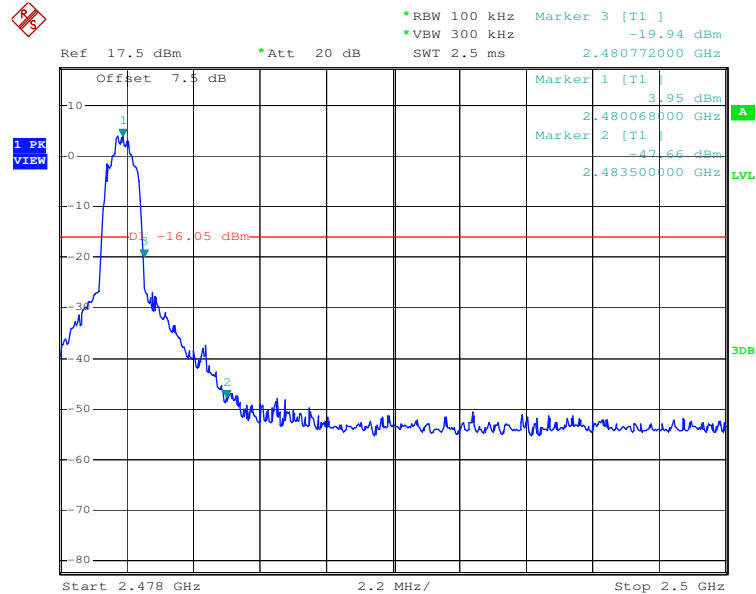


5.9 RF Antenna Conducted spurious emissions

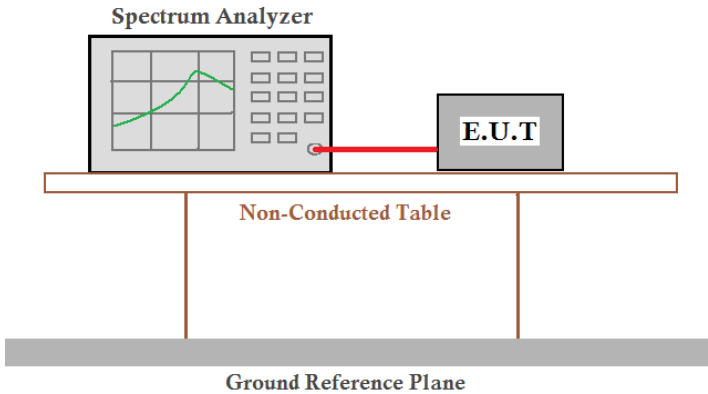
Test Requirement:	FCC Part15 C Section 15.247 (d)
Test Method:	ANSI C63.10:2009
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.
Test setup:	 <i>Remark:</i> <i>Offset the High-Frequency cable loss 1.5dB in the spectrum analyzer.</i>
Test Instruments:	Refer to section 4.8 for details.
Test results:	Pass



Test mode:	GFSK	Test channel:	Lowest
------------	------	---------------	--------

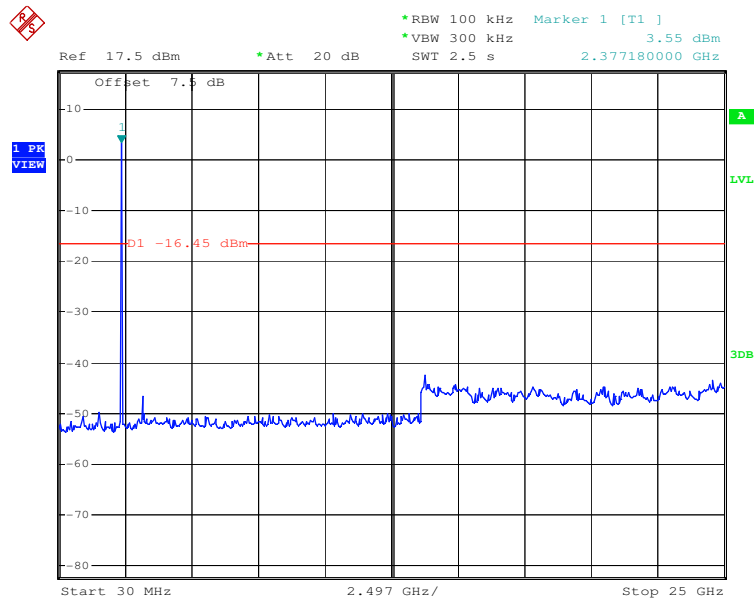


Test mode:	GFSK	Test channel:	Middle
------------	------	---------------	--------

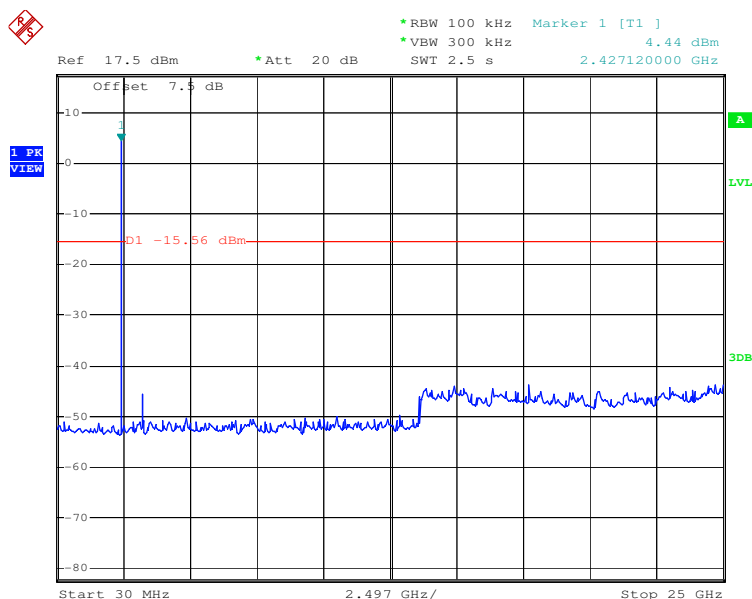




Test mode:	GFSK	Test channel:	Highest
------------	------	---------------	---------

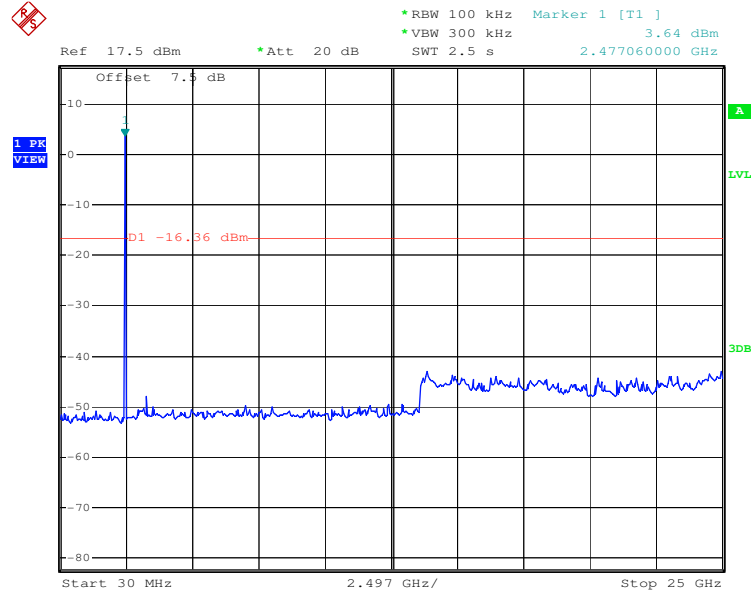


Test mode:	$\pi/4$ DQPSK	Test channel:	Lowest
------------	---------------	---------------	--------

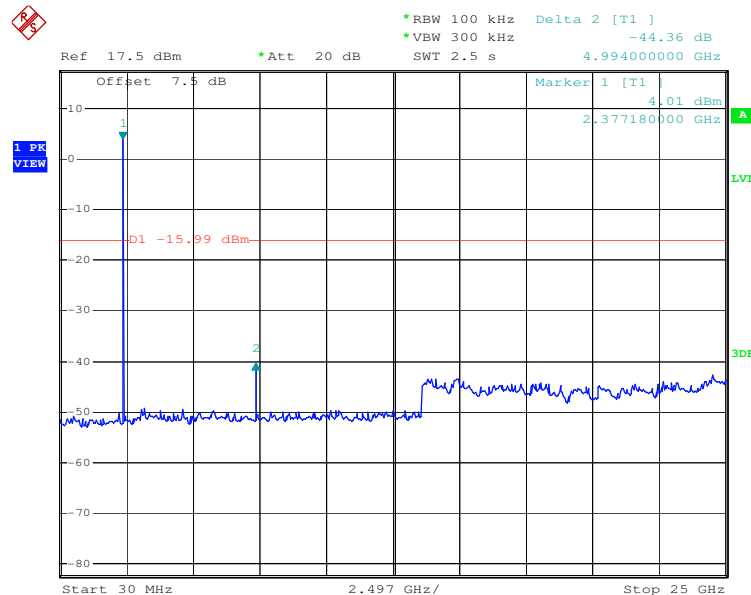




Test mode:	$\pi/4$ DQPSK	Test channel:	Middle
------------	---------------	---------------	--------

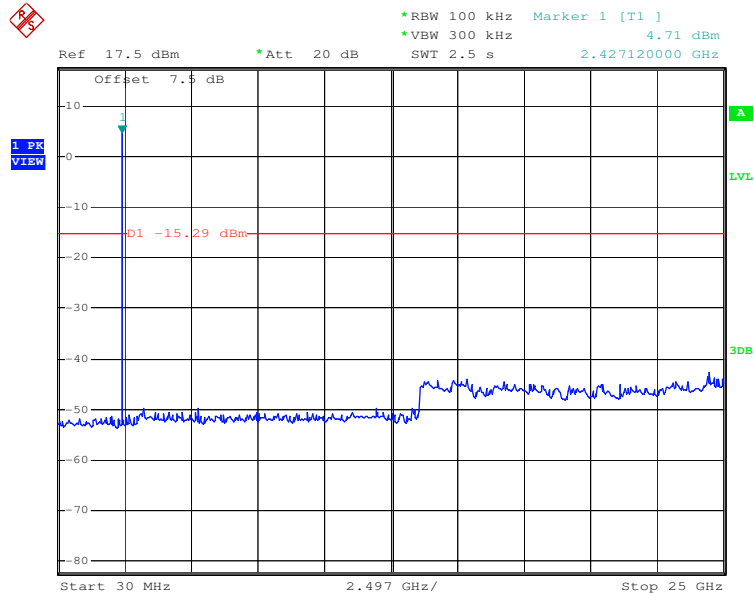


Test mode:	$\pi/4$ DQPSK	Test channel:	Highest
------------	---------------	---------------	---------

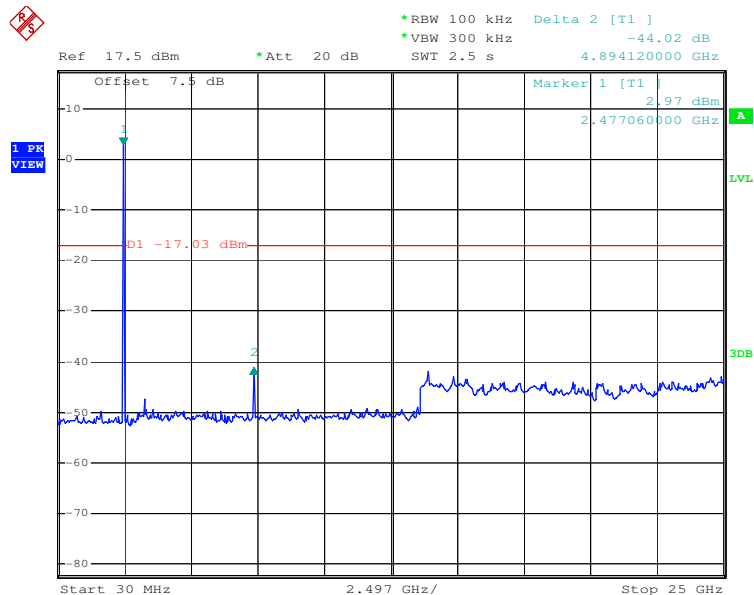




Test mode:	8DPSK	Test channel:	Lowest
------------	-------	---------------	--------

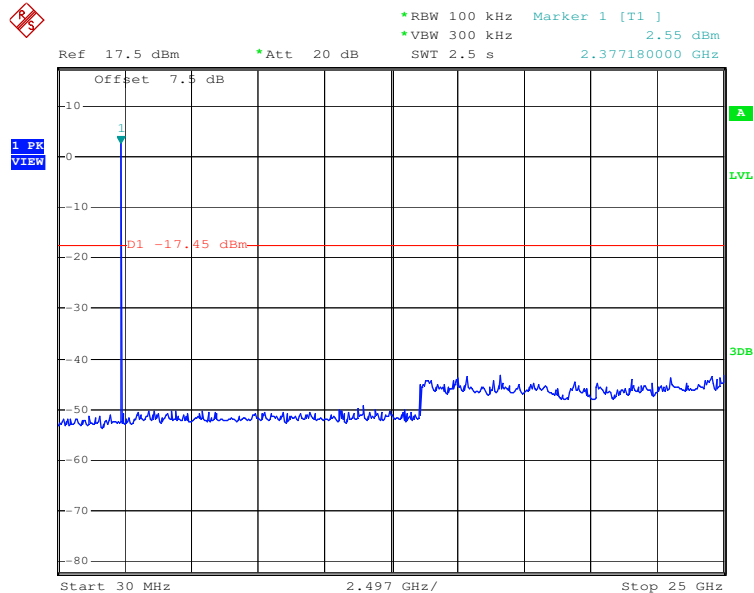


Test mode:	8DPSK	Test channel:	Middle
------------	-------	---------------	--------


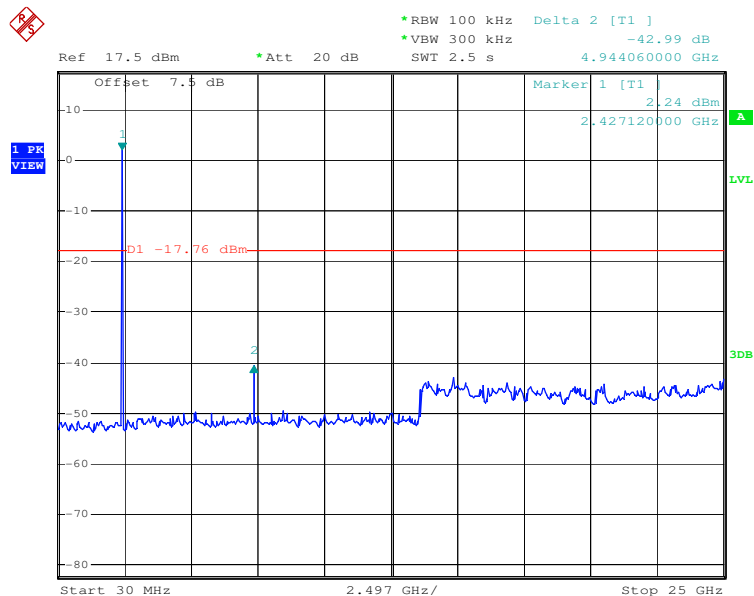




Test mode:	8DPSK	Test channel:	Highest
------------	-------	---------------	---------


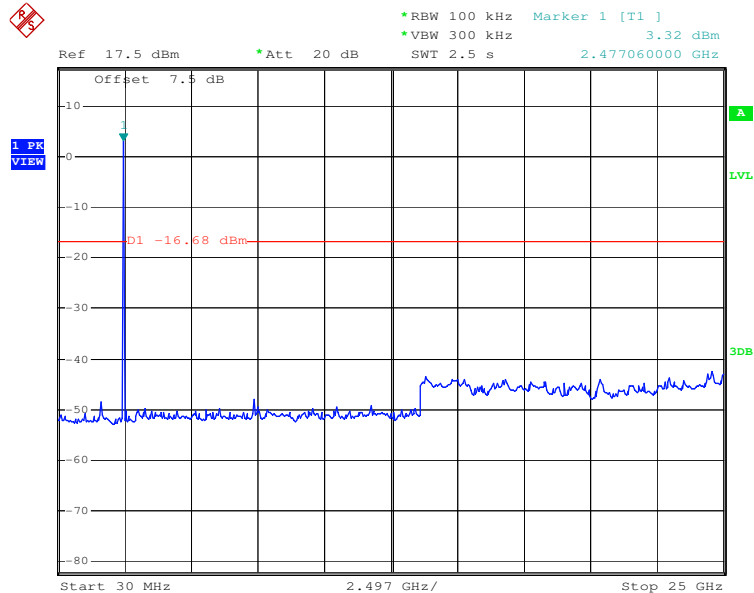


5.10 Pseudorandom Frequency Hopping Sequence

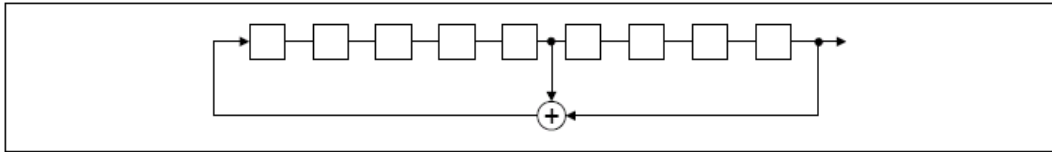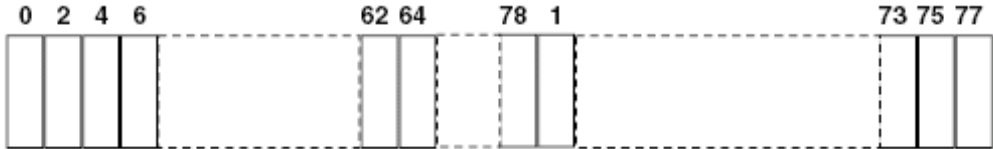Test Requirement:	FCC Part15 C Section 15.247 (a)(1) requirement:
Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively. Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a Pseudorandom ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.	
EUT Pseudorandom Frequency Hopping Sequence	
The pseudorandom sequence may be generated in a nine-stage shift register whose 5th and 9th stage outputs are added in a modulo-two addition stage. And the result is fed back to the input of the first stage. The sequence begins with the first ONE of 9 consecutive ONES; i.e. the shift register is initialized with nine ones. • Number of shift register stages: 9 • Length of pseudo-random sequence: $2^9 - 1 = 511$ bits • Longest sequence of zeros: 8 (non-inverted signal)  <i>Linear Feedback Shift Register for Generation of the PRBS sequence</i> An example of Pseudorandom Frequency Hopping Sequence as follow:  Each frequency used equally on the average by each transmitter. The system receivers have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shift frequencies in synchronization with the transmitted signals.	

5.11 Radiated Emission

Test Requirement:	FCC Part15 C Section 15.209 and 15.205				
Test Method:	ANSI C63.10: 2009				
Test Frequency Range:	30MHz to 25GHz				
Test site:	Measurement Distance: 3m (Semi-Anechoic Chamber)				
Receiver setup:	Frequency	Detector	RBW	VBW	Remark
	30MHz-1GHz	Quasi-peak	100KHz	300KHz	Quasi-peak Value
	Above 1GHz	Peak	1MHz	3MHz	Peak Value
		Peak	1MHz	10Hz	Average Value
Limit:	Frequency		Limit (dBuV/m @3m)		Remark
	30MHz-88MHz		40.0		Quasi-peak Value
	88MHz-216MHz		43.5		Quasi-peak Value
	216MHz-960MHz		46.0		Quasi-peak Value
	960MHz-1GHz		54.0		Quasi-peak Value
	Above 1GHz		54.0		Average Value
			74.0		Peak Value
Test Procedure:	a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic camber. The table was rotated 360 degrees to determine the position of the highest radiation.				
	b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.				
	c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.				
	d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.				
	e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.				
	f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet. The radiation measurements are performed in X, Y, Z axis positioning. Only the worst case is shown in the report.				
Test Instruments:	Refer to section 4.8 for details.				

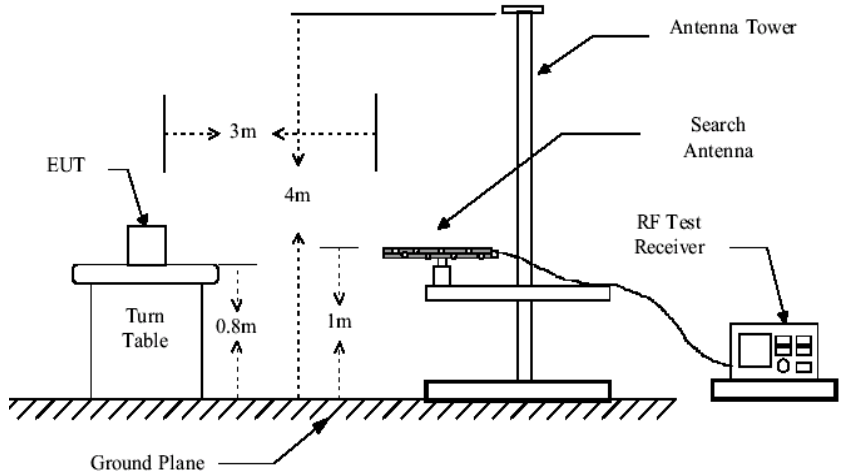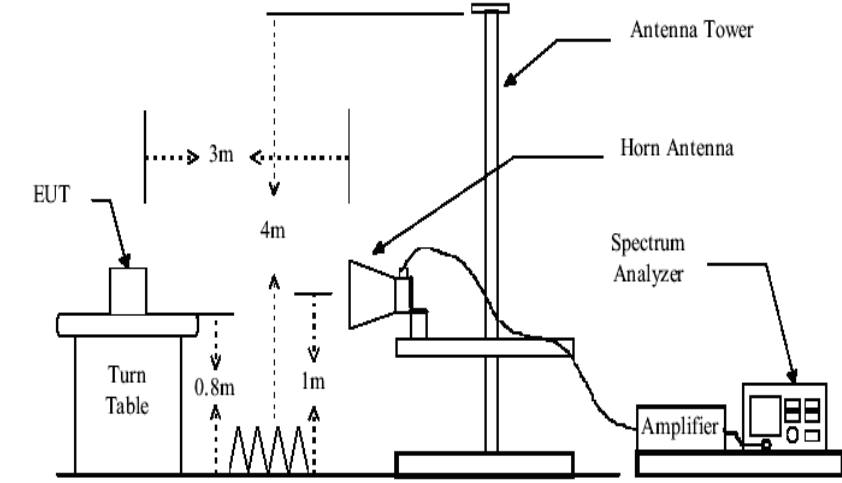Test mode:	Non-hopping transmitting with modulation. 1. Pre-scan the EUT in GFSK, $\pi/4$DQPSK and 8DPSK modes and find out the worst case is GFSK mode. 2. Pre-scan was performed on the EUT on Transmitting mode and Charge + transmitting mode, and then found the worst case mode is Charge + transmitting mode. Only the worst case data was displayed.
Test results:	Pass
Test setup:	Below 1GHz  Above 1GHz 

Note:


The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

$$\text{Final Test Level} = \text{Receiver Reading} + \text{Antenna Factor} + \text{Cable Factor} - \text{Preamplifier Factor}$$

5.11.1 Radiated emission below 1GHz

Vertical


Data: 10
Level (dBuV/m)

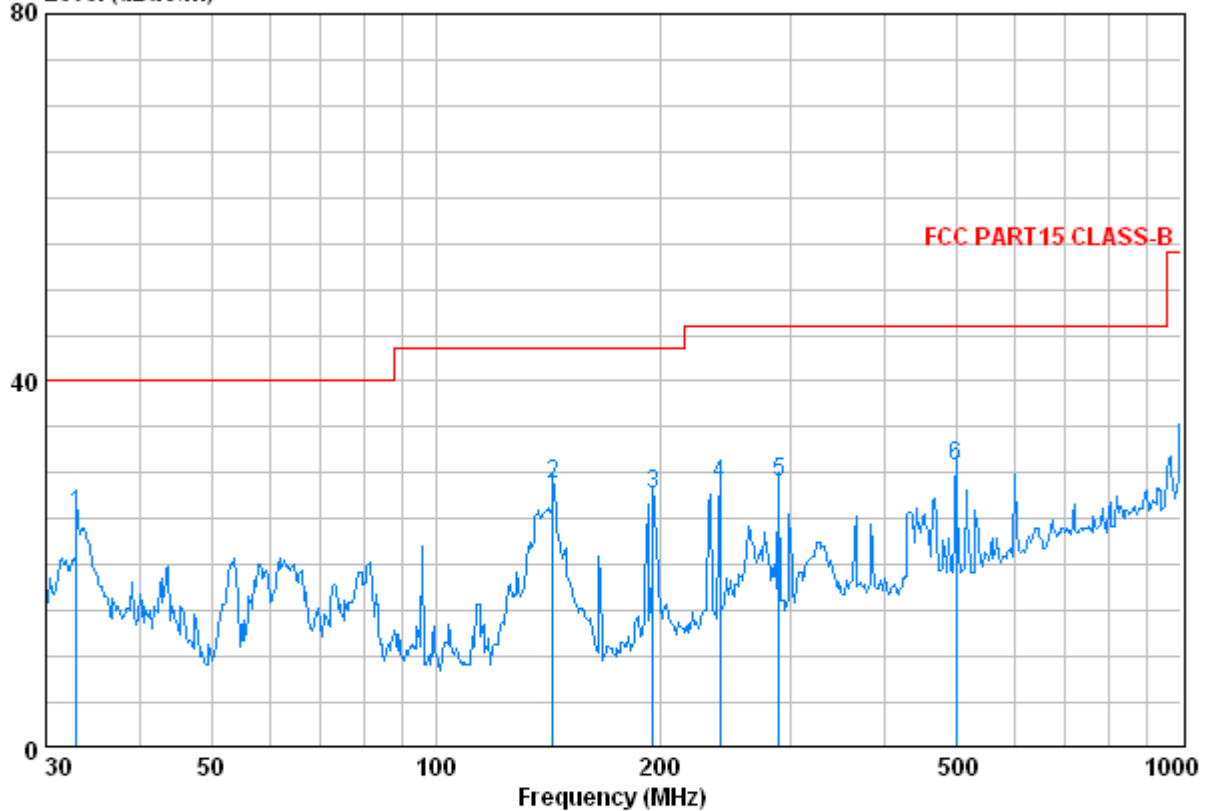

	Freq	Cable Loss	Antenna Factor	Preamplifier Factor	Read Level	Level	Limit	Over
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	32.979	0.60	13.91	27.34	38.41	25.58	40.00	-14.42
2	143.830	1.31	8.43	26.94	45.97	28.77	43.50	-14.73
3	195.822	1.39	10.16	26.71	42.81	27.65	43.50	-15.85
4	240.830	1.63	12.01	26.56	41.61	28.69	46.00	-17.31
5	289.002	1.85	13.40	26.43	40.18	29.00	46.00	-17.00
6	499.425	2.60	17.80	27.70	38.03	30.73	46.00	-15.27

Horizontal

Data: 9
Level (dBuV/m)

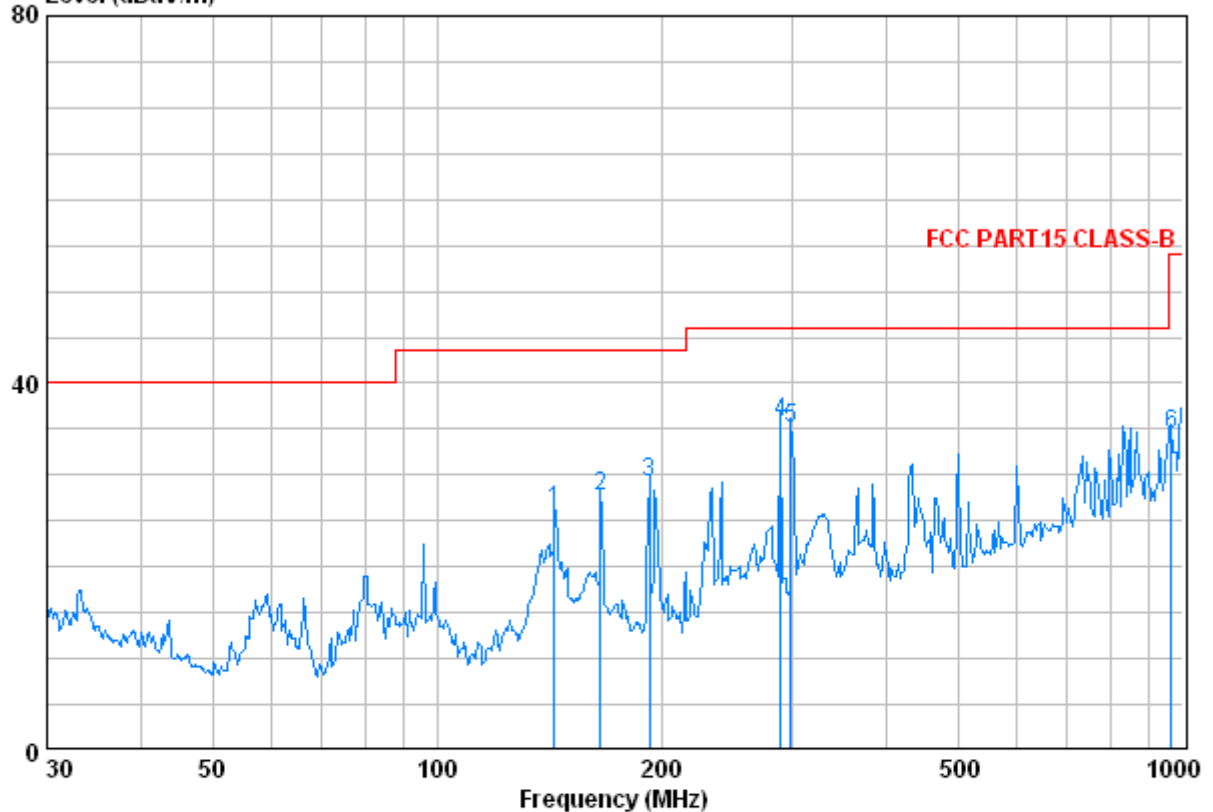

	Freq	Cable	Antenna	Preamp	Read	Limit	Over
		Loss	Factor	Factor	Level	Line	Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dB
1	143.830	1.31	8.43	26.94	43.42	26.22	43.50 -17.28
2	165.487	1.35	9.55	26.83	43.52	27.58	43.50 -15.92
3	192.419	1.39	10.12	26.73	44.32	29.11	43.50 -14.39
4 @	289.002	1.85	13.40	26.43	46.95	35.77	46.00 -10.23
5	298.268	1.89	13.81	26.41	45.83	35.13	46.00 -10.87
6	965.542	3.67	23.70	26.47	33.66	34.55	54.00 -19.45

**5.11.2 Transmitter emission above 1GHz**

Worst case mode:		GFSK		Test channel:		Lowest		Remark:	Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Emission Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Antenna polarization	
1575.750	2.57	28.72	39.38	52.27	44.18	74.00	-29.82	Vertical	
4548.500	4.53	35.12	41.44	49.94	48.15	74.00	-25.85	Vertical	
5805.750	5.06	35.40	41.09	49.93	49.30	74.00	-24.70	Vertical	
7568.250	6.19	36.00	39.56	49.52	52.15	74.00	-21.85	Vertical	
9389.500	6.04	37.08	37.98	47.19	52.33	74.00	-21.67	Vertical	
11128.500	6.25	38.47	37.91	46.43	53.24	74.00	-20.76	Vertical	
1493.500	2.51	28.10	39.35	54.77	46.03	74.00	-27.97	Horizontal	
3655.500	3.87	33.39	40.79	48.90	45.37	74.00	-28.63	Horizontal	
4783.500	4.68	34.73	41.61	51.20	49.00	74.00	-25.00	Horizontal	
6346.250	5.22	36.10	40.63	50.29	50.98	74.00	-23.02	Horizontal	
7897.250	6.21	36.00	39.28	49.58	52.51	74.00	-21.49	Horizontal	
10482.250	6.09	38.28	37.65	45.70	52.42	74.00	-21.58	Horizontal	

Worst case mode:		GFSK		Test channel:		Lowest		Remark:	Average
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Emission Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Antenna polarization	
1575.750	2.57	28.72	39.38	42.14	34.05	54.00	-19.95	Vertical	
4548.500	4.53	35.12	41.44	38.94	37.15	54.00	-16.85	Vertical	
5817.500	5.06	35.40	41.07	40.95	40.34	54.00	-13.66	Vertical	
7568.250	6.19	36.00	39.56	39.58	42.21	54.00	-11.79	Vertical	
9389.500	6.04	37.08	37.98	37.19	42.33	54.00	-11.67	Vertical	
11128.500	6.25	38.47	37.91	38.62	45.43	54.00	-8.57	Vertical	
1493.500	2.51	28.10	39.35	45.23	36.49	54.00	-17.51	Horizontal	
3655.500	3.87	33.39	40.79	39.90	36.37	54.00	-17.63	Horizontal	
4783.500	4.68	34.73	41.61	42.15	39.95	54.00	-14.05	Horizontal	
6346.250	5.22	36.10	40.63	41.29	41.98	54.00	-12.02	Horizontal	
7897.250	6.21	36.00	39.28	38.58	41.51	54.00	-12.49	Horizontal	
10482.250	6.09	38.28	37.65	39.53	46.25	54.00	-7.75	Horizontal	



"This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



SGS-CSTC Standards Technical Services Ltd.

Report No.: SZEM111200538001

Page : 62 of 71

Worst case mode:		GFSK		Test channel:		Middle		Remark:	Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Emission Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Antenna polarization	
1622.750	2.59	29.09	39.41	49.24	41.51	74.00	-32.49	Vertical	
4031.500	4.18	33.89	41.07	50.56	47.56	74.00	-26.44	Vertical	
5241.750	4.86	34.65	41.58	49.79	47.72	74.00	-26.28	Vertical	
6922.000	5.47	35.89	40.12	49.39	50.63	74.00	-23.37	Vertical	
8778.500	6.17	36.43	38.52	46.98	51.06	74.00	-22.94	Vertical	
11199.000	6.27	38.46	37.95	45.39	52.17	74.00	-21.83	Vertical	
1493.500	2.51	28.10	39.35	51.61	42.87	74.00	-31.13	Horizontal	
3761.250	3.96	33.51	40.86	49.16	45.77	74.00	-28.23	Horizontal	
4560.250	4.53	35.12	41.44	49.92	48.13	74.00	-25.87	Horizontal	
5782.250	5.05	35.34	41.10	50.90	50.19	74.00	-23.81	Horizontal	
8496.500	6.18	36.20	38.75	48.55	52.18	74.00	-21.82	Horizontal	
11692.500	6.39	38.59	38.15	46.62	53.45	74.00	-20.55	Horizontal	

Worst case mode:		GFSK		Test channel:		Middle		Remark:	Average
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Emission Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Antenna polarization	
1622.750	2.59	29.09	39.41	38.35	30.62	54.00	-23.38	Vertical	
4031.500	4.18	33.89	41.07	39.63	36.63	54.00	-17.37	Vertical	
5241.750	4.86	34.65	41.58	38.68	36.61	54.00	-17.39	Vertical	
6922.000	5.47	35.89	40.12	39.91	41.15	54.00	-12.85	Vertical	
8778.500	6.17	36.43	38.52	38.23	42.31	54.00	-11.69	Vertical	
11199.000	6.27	38.46	37.95	38.22	45.00	54.00	-9.00	Vertical	
1493.500	2.51	28.10	39.35	42.12	33.38	54.00	-20.62	Horizontal	
3761.250	3.96	33.51	40.86	41.16	37.77	54.00	-16.23	Horizontal	
4548.500	4.53	35.12	41.44	41.25	39.46	54.00	-14.54	Horizontal	
5782.250	5.05	35.34	41.10	43.12	42.41	54.00	-11.59	Horizontal	
8496.500	6.18	36.20	38.75	39.55	43.18	54.00	-10.82	Horizontal	
11692.500	6.39	38.59	38.15	38.35	45.18	54.00	-8.82	Horizontal	

"This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



SGS-CSTC Standards Technical Services Ltd.

Report No.: SZEM111200538001

Page : 63 of 71

Worst case mode:		GFSK		Test channel:		Highest		Remark:	Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Emission Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Antenna polarization	
1634.500	2.60	29.09	39.41	52.96	45.24	74.00	-28.76	Vertical	
3620.250	3.84	33.34	40.76	48.83	45.25	74.00	-28.75	Vertical	
5335.750	4.89	34.73	41.50	50.24	48.36	74.00	-25.64	Vertical	
6663.500	5.30	36.14	40.35	50.36	51.45	74.00	-22.55	Vertical	
8120.500	6.20	36.05	39.08	49.19	52.36	74.00	-21.64	Vertical	
11081.500	6.24	38.48	37.90	46.75	53.57	74.00	-20.43	Vertical	
1493.500	2.51	28.10	39.35	53.52	44.78	74.00	-29.22	Horizontal	
3385.250	3.64	33.25	40.59	49.55	45.85	74.00	-28.15	Horizontal	
4736.500	4.65	34.81	41.58	50.38	48.26	74.00	-25.74	Horizontal	
6428.500	5.24	36.20	40.55	51.00	51.89	74.00	-22.11	Horizontal	
8120.500	6.20	36.05	39.08	49.21	52.38	74.00	-21.62	Horizontal	
11516.250	6.35	38.42	38.07	46.99	53.69	74.00	-20.31	Horizontal	


Worst case mode:		GFSK		Test channel:		Highest		Remark:	Average
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Emission Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Antenna polarization	
1634.500	2.60	29.09	39.41	42.05	34.33	54.00	-19.67	Vertical	
3620.250	3.84	33.34	40.76	38.83	35.25	54.00	-18.75	Vertical	
5347.500	4.90	34.75	41.48	40.40	38.57	54.00	-15.43	Vertical	
6663.500	5.30	36.14	40.35	39.26	40.35	54.00	-13.65	Vertical	
8120.500	6.20	36.05	39.08	38.19	41.36	54.00	-12.64	Vertical	
11081.500	6.24	38.48	37.90	38.25	45.07	54.00	-8.93	Vertical	
1493.500	2.51	28.10	39.35	45.61	36.87	54.00	-17.13	Horizontal	
3385.250	3.64	33.25	40.59	39.55	35.85	54.00	-18.15	Horizontal	
4736.500	4.65	34.81	41.58	39.51	37.39	54.00	-16.61	Horizontal	
6428.500	5.24	36.20	40.55	42.00	42.89	54.00	-11.11	Horizontal	
8120.500	6.20	36.05	39.08	42.11	45.28	54.00	-8.72	Horizontal	
11516.250	6.35	38.42	38.07	39.99	46.69	54.00	-7.31	Horizontal	

Remark: The disturbance above 12GHz was very low (>20dB below the limit), and the above harmonics were the highest point could be found when testing, so only the above harmonics have been displayed.

"This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."

**5.11.3 Band edge (Radiated Emission)**

Test mode:	Transmitting	Test channel:	Lowest	Remark:	Peak	Vertical
------------	--------------	---------------	--------	---------	------	----------

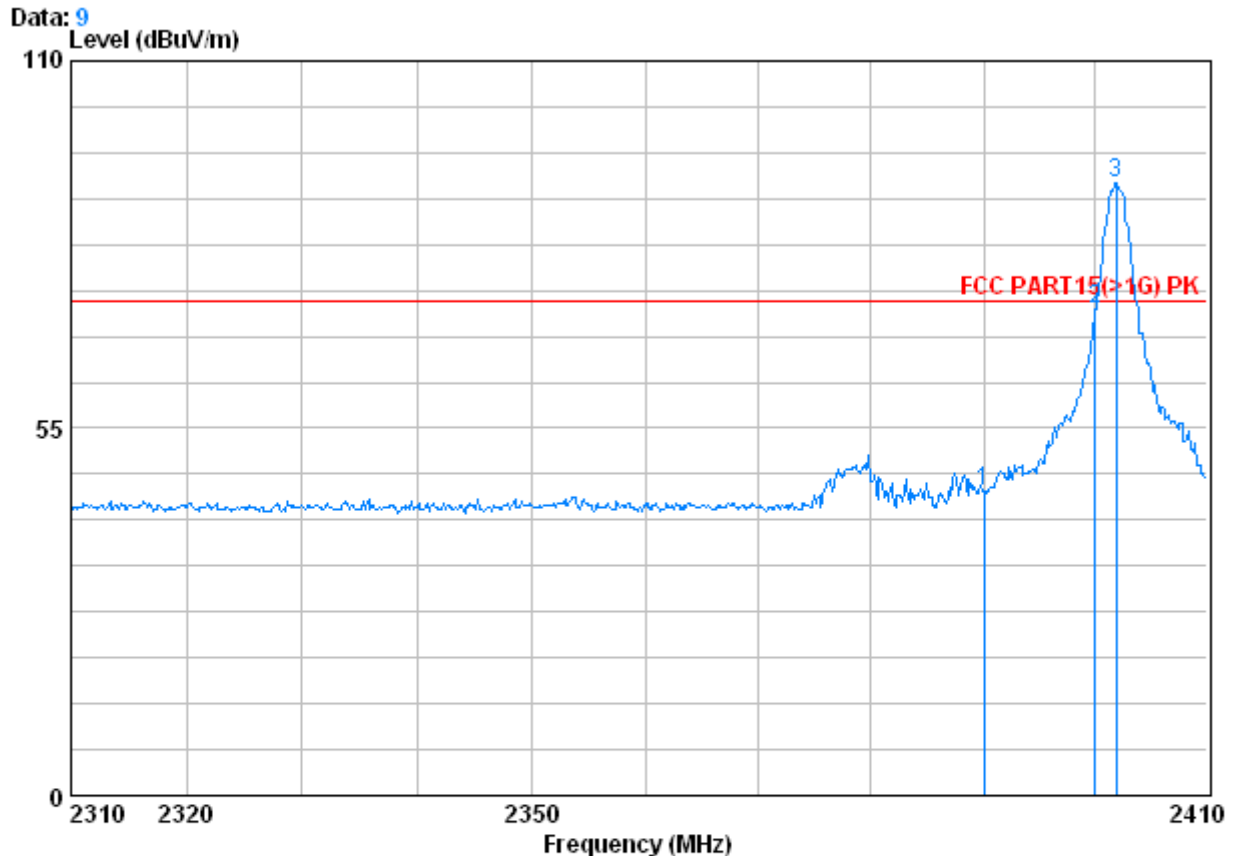


	Freq	Cable Loss	Antenna Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	2390.000	2.98	32.51	39.85	49.89	45.54	74.00	-28.46
2	2400.000	2.98	32.51	39.86	77.14	72.77	74.00	-1.23
3 X	2401.900	2.98	32.51	39.86	95.98	91.61	74.00	17.61



Test mode:	Transmitting	Test channel:	Lowest	Remark:	Peak	Horizontal
------------	--------------	---------------	--------	---------	------	------------

Data: 8
Level (dBuV/m)

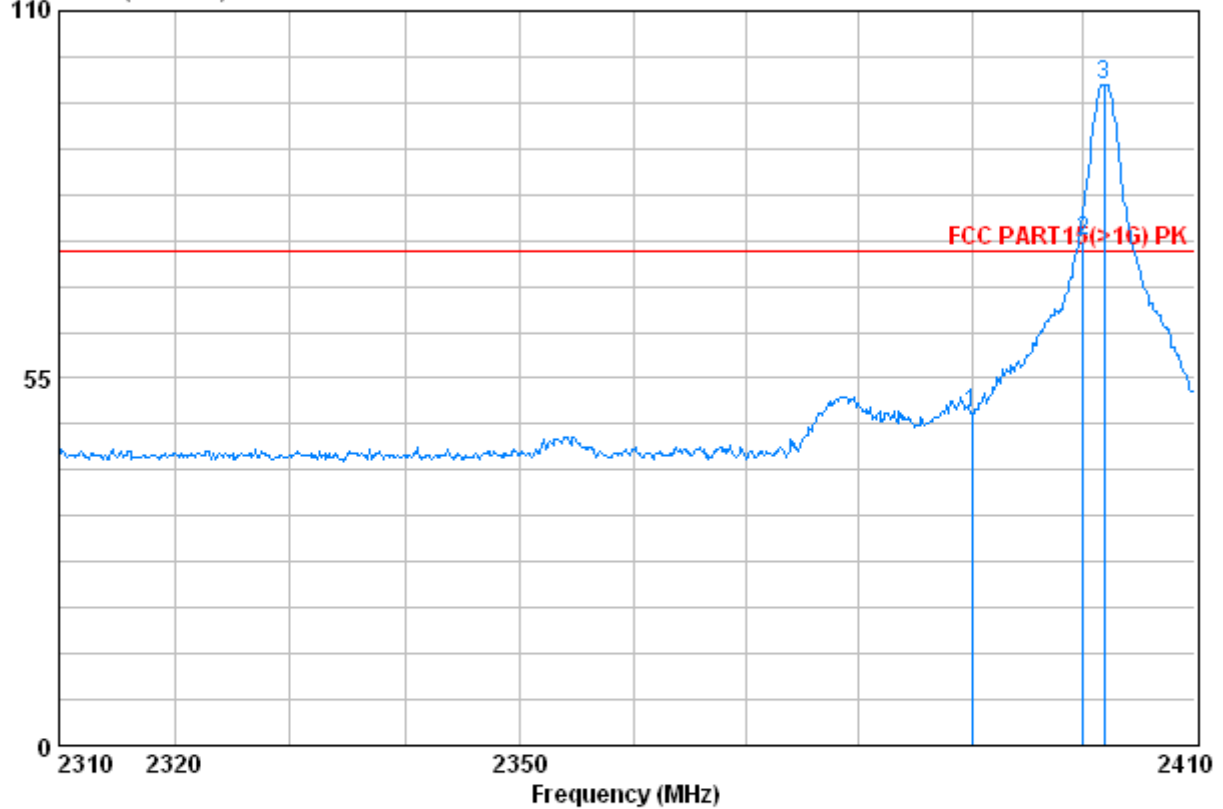


		Cable	Antenna	Preamp	Read		Limit	Over
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	2390.000	2.98	32.51	39.85	54.21	49.86	74.00	-24.14
2 X	2400.000	2.98	32.51	39.86	79.81	75.44	74.00	1.44
3 X	2401.900	2.98	32.51	39.86	103.28	98.91	74.00	24.91



Test mode:	Transmitting	Test channel:	Lowest	Remark:	Average	Vertical
------------	--------------	---------------	--------	---------	---------	----------


Data: 10
Level (dBuV/m)

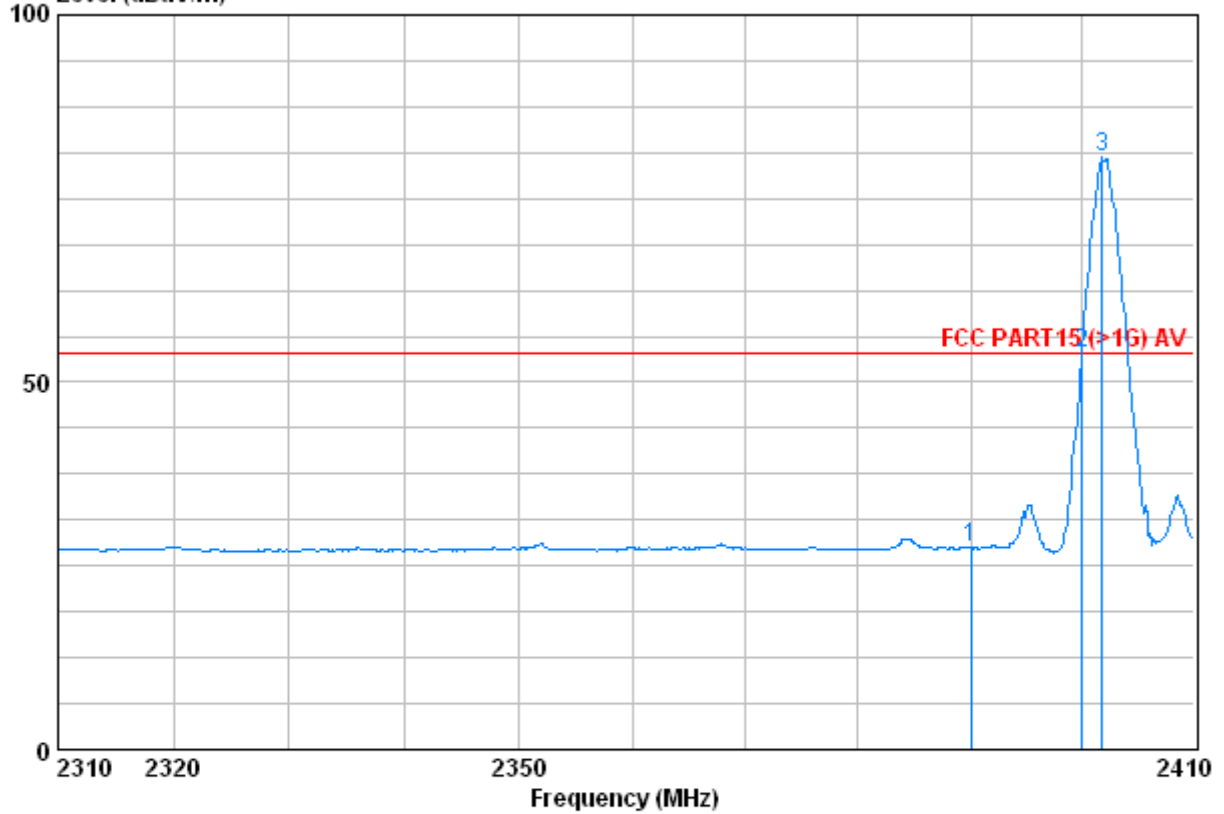

	Freq	Cable	Antenna	Preamp	Read	Limit	Over
	MHz	Loss	Factor	Factor	Level	Line	Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m
1	2390.000	2.98	32.51	39.85	31.79	27.43	54.00
2	2400.000	2.98	32.51	39.86	58.26	53.89	54.00
3 X	2401.800	2.98	32.51	39.86	84.91	80.54	54.00



Test mode:	Transmitting	Test channel:	Lowest	Remark:	Average	Horizontal
------------	--------------	---------------	--------	---------	---------	------------

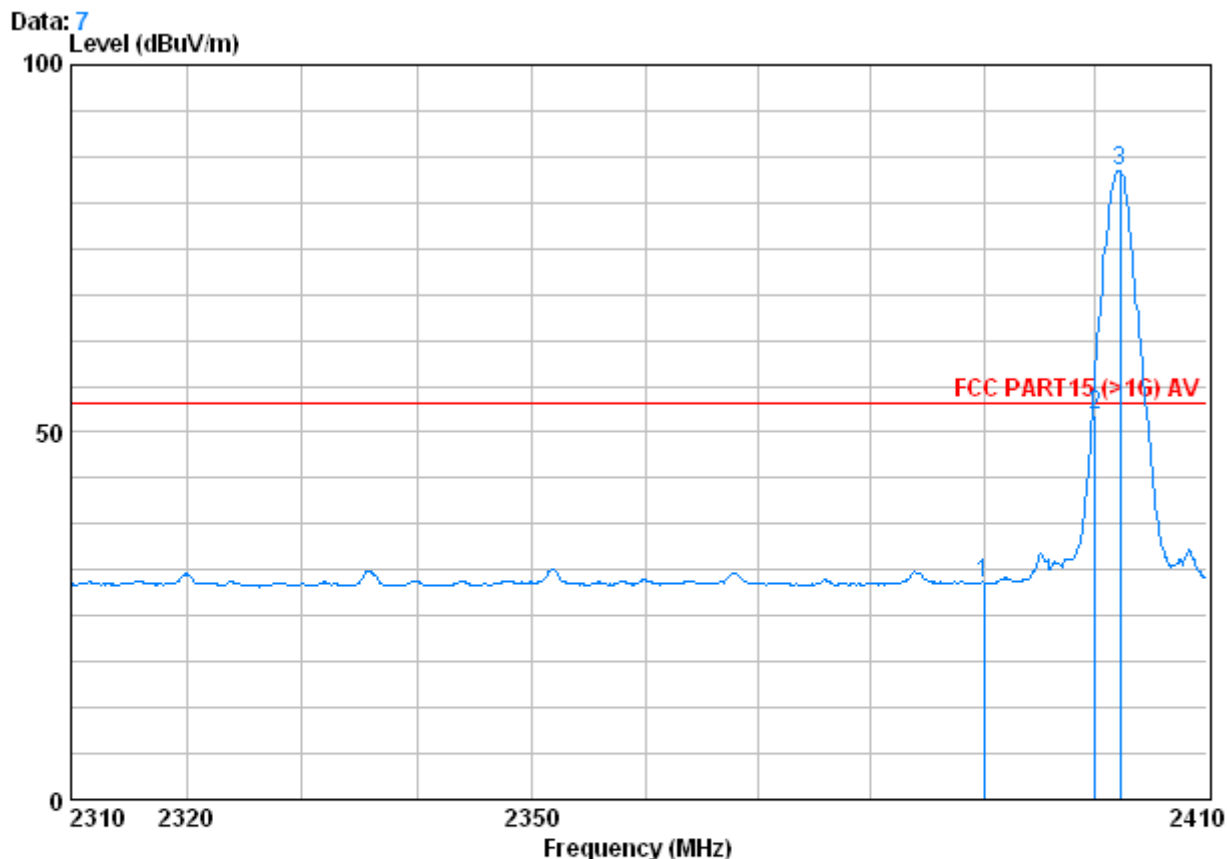


	Freq	Cable Loss	Antenna Factor	Preamplifier Factor	Read Level	Level	Limit Line	Over Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	2390.000	2.98	32.51	39.85	33.91	29.55	54.00	-24.45
2	2400.000	2.98	32.51	39.86	56.55	52.19	54.00	-1.81
3	2402.200	2.98	32.51	39.86	89.84	85.47	54.00	31.47



Test mode:	Transmitting	Test channel:	Highest	Remark:	Peak	Vertical
------------	--------------	---------------	---------	---------	------	----------

Data: 12
Level (dBuV/m)

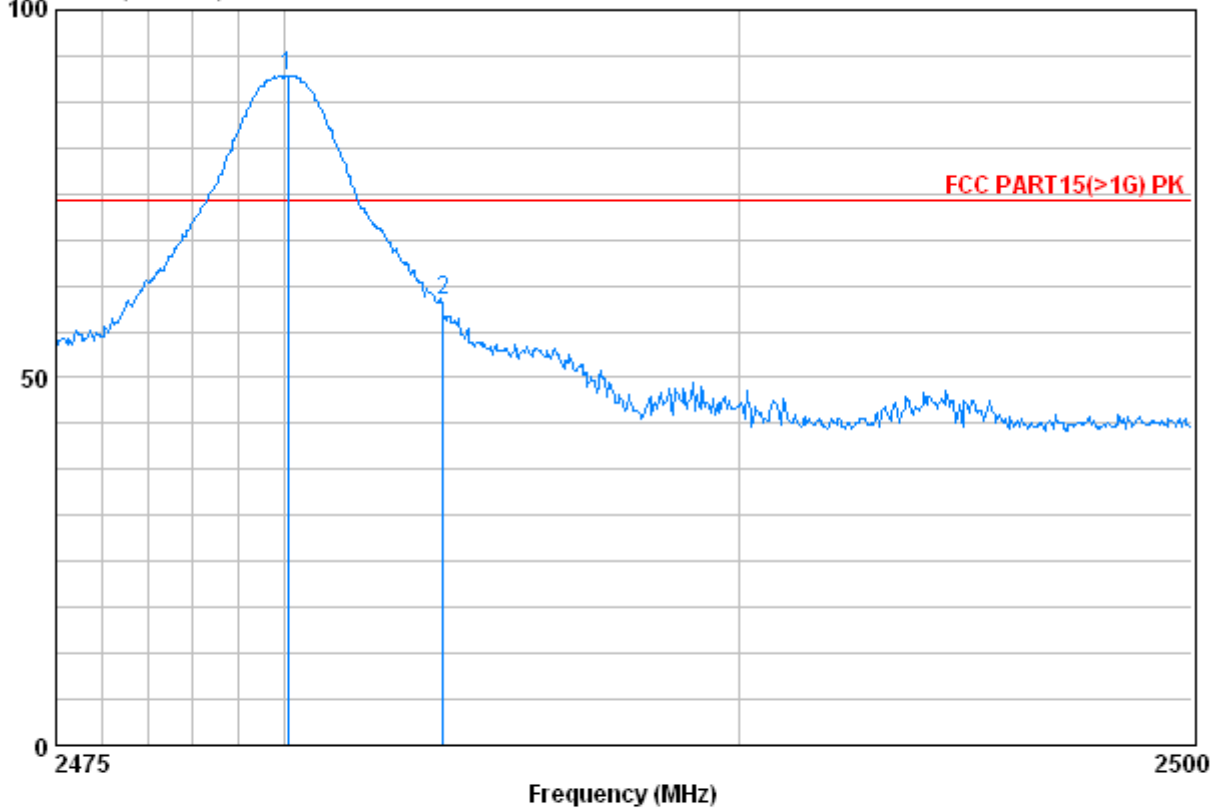


		Cable	Antenna	Preamp	Read		Limit	Over	
		Freq	Loss	Factor	Factor	Level	Level	Line	Limit
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	X	2480.075	3.03	32.67	39.92	95.24	91.02	74.00	17.02
2		2483.500	3.03	32.67	39.92	64.83	60.61	74.00	-13.39



Test mode:	Transmitting	Test channel:	Highest	Remark:	Peak	Horizontal
------------	--------------	---------------	---------	---------	------	------------

Data: 13
Level (dBuV/m)

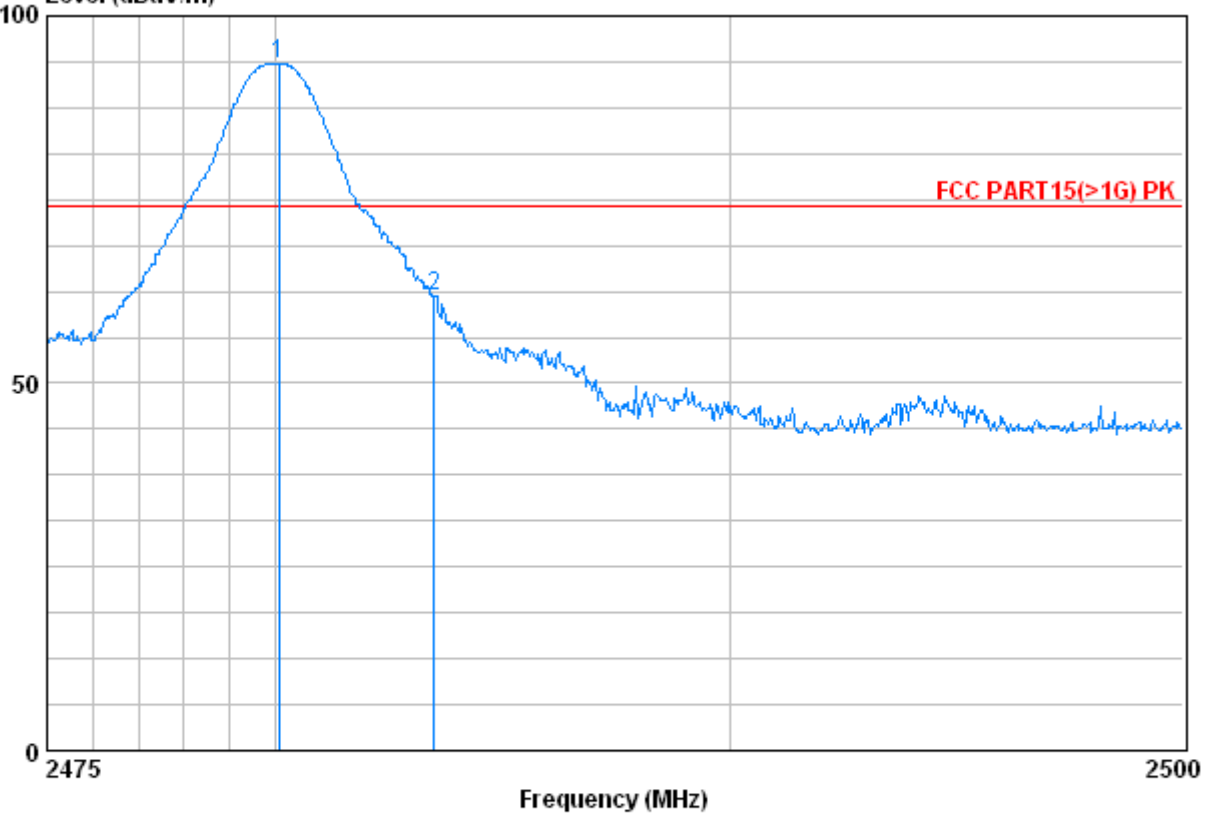


		Cable	Antenna	Preamp	Read		Limit	Over	
		Freq	Loss	Factor	Factor	Level	Level	Line	Limit
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	X	2480.075	3.03	32.67	39.92	97.74	93.52	74.00	19.52
2		2483.500	3.03	32.67	39.92	65.95	61.73	74.00	-12.27



Test mode:	Transmitting	Test channel:	Highest	Remark:	Average	Vertical
------------	--------------	---------------	---------	---------	---------	----------

Data: 11


Level (dBuV/m)

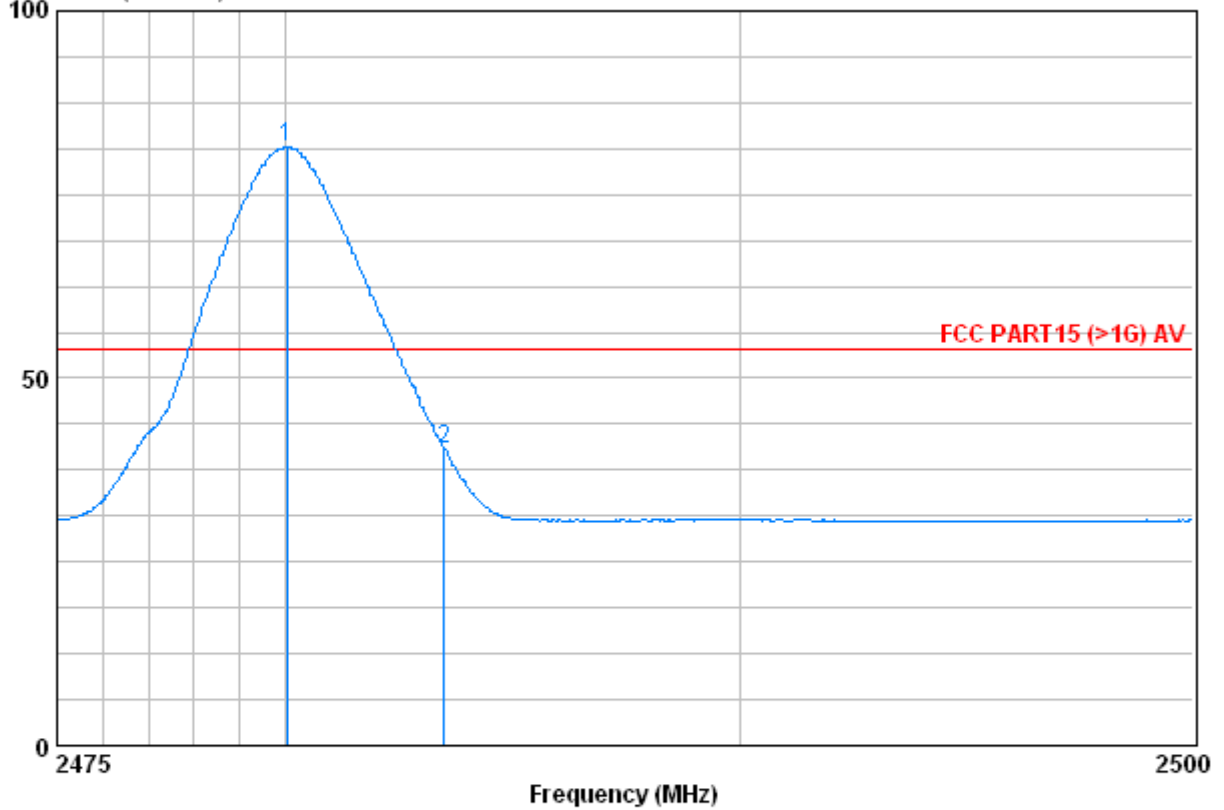

		Cable	Antenna	Preamp	Read		Limit	Over	
		Freq	Loss	Factor	Factor	Level	Level	Line	Limit
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	X	2480.050	3.03	32.67	39.92	85.65	81.44	54.00	27.44
2		2483.500	3.03	32.67	39.92	44.48	40.26	54.00	-13.74



Test mode:	Transmitting	Test channel:	Highest	Remark:	Average	Horizontal
------------	--------------	---------------	---------	---------	---------	------------

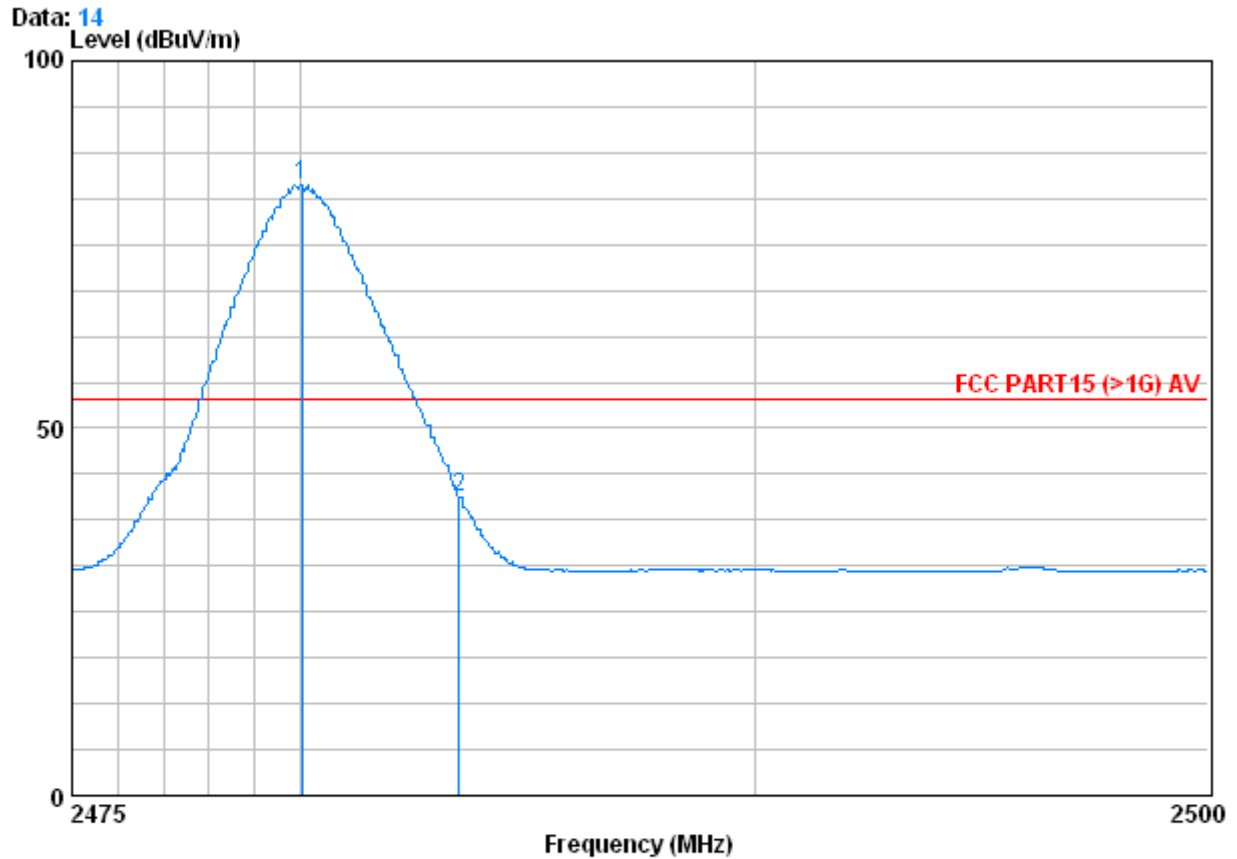

	Freq	Cable Loss	Antenna Factor	Preamplifier Factor	Read Level	Level	Limit	Over Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 X	2480.050	3.03	32.67	39.92	87.42	83.20	54.00	29.20
2	2483.500	3.03	32.67	39.92	44.90	40.68	54.00	-13.32

