

# **EMISSION TEST REPORT**

**Test Report No. : 17F0032-02-1  
Yamaha Corporation, Model: CRW4216E  
FCC Part 15 Subpart B**

1. This test report shall not be reproduced except in full, without the written approval of A-Pex International Co., Ltd.
2. This test report does not constitute an endorsement by NIST/NVLAP or U.S. Government.
3. This equipment is in compliance with above regulation. We hereby certify that the data are contain a true representation of the emission profile.
4. The results in this report apply only to the sample tested.
5. This test report clearly shows that EUT, CRW4216E, CD-Rewritable Drive is in compliance with FCC Part 15 Subpart B Class B, and Industry Canada ICES-003 Issue 3, CSA C108.8 Class B, specification.

**Date of test:** June 15, 1998

**Issued date:** June 30, 1998

**Tested by:** \_\_\_\_\_

Naoki Sakamoto

EMC section

**Approved by:** \_\_\_\_\_

Tetsuya Hashimoto

Group Leader of EMC section

Form Version No. 1



This laboratory is registered by the NIST/NVLAP, U.S.A. The tests reported herein have been performed in accordance with its terms of registration.

Testing Laboratory

**A-pex International Co., Ltd.**

108 Yokowa-cho, Ise-shi Mie-ken 516-1106 JAPAN

Telephone: +81 596 39 1485

Facsimile: +81 596 39 0232

## Table of Contents

	<b>Page</b>
<b>1 GENERAL INFORMATION</b>	<b>3</b>
1.1 Product Description	4
1.2 Tested System Details	5
1.3 Tested Methodology	6
1.4 Tested Facility	6
<b>2 SYSTEM TEST CONFIGURATION</b>	<b>7</b>
2.1 Operation Environment	7
2.2 Justification	7
2.3 EUT Exercise Software	7
2.4 Test Procedure	8
Figure 2.1 Configuration of Tested System	9
<b>3 CONDUCTED AND RADIATED MEASUREMENT PHOTOS</b>	<b>11</b>
Figure 3.1 Conducted Measurement Photos	11
Figure 3.2 Radiated Measurement Photos	12
3.1 Measurement Uncertainty	13
<b>4 CONDUCTED EMISSION DATA</b>	<b>14</b>
<b>5 RADIATED EMISSION DATA</b>	<b>15</b>
5.1 Field Strength Calculation	16
<b>6 TEST EQUIPMENT</b>	<b>17</b>
<b>APPENDIX</b>	<b>18</b>
A:Test Data	<b>A1 - A11</b>

Testing Laboratory

**A-pex International Co., Ltd.**

108 Yokowa-cho, Ise-shi Mie-ken 516-1106 JAPAN

Telephone: +81 596 39 1485

Facsimile: +81 596 39 0232

## 1 GENERAL INFORMATION

APPLICANT : Yamaha Corporation

ADDRESS : 203 Matsunokijima, Toyooka-mura, Iwata-gun,  
Shizuoka-ken, 438-0192 Japan  
Tel: +81-539-62-5348  
Fax: +81-539-62-5138

REGULATION(S) : FCC Part 15 Subpart B, Class B

MODEL NUMBER : CRW4216E, CRW2216E,  
CRW4416E (YAMAHA)  
CRW4216E-NB, CRW2216E-NB,  
CRW4416E-NB (Non-Brand)  
CDRW-2216 (Memorex)

SERIAL NUMBER : -

KIND OF EQUIPMENT : CD-Rewritable Drive

TESTED DATE : June 15, 1998

TEST REPORT NUMBER : 17F0032-02-1

TEST SITE : A-PEX Yokowa NO.3 Open Test Site

Testing Laboratory

**A-pex International Co., Ltd.**

108 Yokowa-cho, Ise-shi Mie-ken 516-1106 JAPAN

Telephone: +81 596 39 1485

Facsimile: +81 596 39 0232

Test report  
FCC ID : A6RCRW4216E  
Our reference : 17F0032-02-1  
Page : 4 of 18  
Issued date : 98-06-30

## 1.1 Product Description

Yamaha Corporation, Model CRW4216E/CRW2216E (YAMAHA), CRW4216E-NB/CRW2216E-NB (Non-Brand) (referred to as the EUT in this report) is a CD-Rewritable Drive.

The clock frequency used in the EUT is 33.8688MHz.

Power Supply is DC 5V/ 2A, 12V/2.2A

I/O terminal Front : Headphone

Rear : IDE Interface, DC Input and Audio Output

Model No.	Maximum Speed			Interface
	CD-R	CD-RW	Reading	
CRW4216E, CRW4216E-NB	4	2	16	IDE
CRW2216E, CRW2216E-NB	2	2	16	

Testing Laboratory

**A-pex International Co., Ltd.**

108 Yokowa-cho, Ise-shi Mie-ken 516-1106 JAPAN

Telephone: +81 596 39 1485

Facsimile: +81 596 39 0232

**Test report**  
**FCC ID** : A6RCRW4216E  
**Our reference** : 17F0032-02-1  
**Page** : 5 of 18  
**Issued date** : 98-06-30

## 1.2 Tested System Details

The FCC IDs for all equipment, plus description of all cables used in the tested system are:

<u>Model</u> <u>Material</u>	<u>FCC ID</u>	<u>Description</u>	<u>Cable description</u>	<u>Backshell</u>
(1) YAMAHA M/N: CRW4216E (EUT)	A6RCRW4216E	CD-Rewritable Drive		P.V.C.
(2) DELL M/N: DPM S/N: JLNY7	E2KXPS590XND	PC	Unshielded AC Power Cable	P.V.C.
(3) Sound Blaster M/N: SBS37	N/A	Speaker	Unshielded Speaker Cable	P.V.C.
(4) DELL M/N: SK-D100M S/N: K9412-040116	CYUM93SK	Keyboard	Shielded Keyboard Cable	P.V.C.
(5) Microsoft M/N: 31660 S/N: 151768	C3K5K5400PS2	Mouse	Shielded Mouse Cable	P.V.C.
(6) Digital M/N: pcxcv-ga S/N: 1k34015842	BEJCQ472	CRT	Shielded Video Cable Unshielded AC Power Cable	P.V.C. P.V.C.
(7) EPSON M/N: P18MA S/N: OFG1007634	BKM5DEP18MA	Printer	Unshielded AC Power Cable Shielded Printer Cable	P.V.C. P.V.C.
(8) EPSON M/N: C202A S/N: 10309	BKM552C202A	Modem	Shielded Modem Cable Unshielded DC Power Cable	P.V.C. P.V.C.
(9) EPSON M/N: PAZ244OU S/N: -	N/A	AC Adaptor	Unshielded DC Power Cable	P.V.C.

Testing Laboratory

**A-pex International Co., Ltd.**

108 Yokowa-cho, Ise-shi Mie-ken 516-1106 JAPAN

Telephone: +81 596 39 1485

Facsimile: +81 596 39 0232

Test report  
FCC ID : A6RCRW4216E  
Our reference : 17F0032-02-1  
Page : 6 of 18  
Issued date : 98-06-30

### 1.3 Tested Methodology

Both conducted and radiated testing were performed according to the procedures in FCC/ANSI C63.4(1992). Radiated testing was performed at a distance of 3 meters from the antenna to EUT .

### 1.4 Test Facility

The open area test site and conducted measurement facility used to collect the radiated data is located on 108, Yokowa-cho, Ise-shi, Mie-ken, 516-1106 Japan.  
This site has been fully described in a report dated Aug. 1, 1997 submitted to FCC office, and accepted in a letter dated Sep. 16, 1997 (31040/SIT 1300F2).

Testing Laboratory

**A-pex International Co., Ltd.**

108 Yokowa-cho, Ise-shi Mie-ken 516-1106 JAPAN

Telephone: +81 596 39 1485

Facsimile: +81 596 39 0232

Test report  
FCC ID : A6RCRW4216E  
Our reference : 17F0032-02-1  
Page : 7 of 18  
Issued date : 98-06-30

## 2 SYSTEM TEST CONFIGURATION

### 2.1 Operation Environment

Conduction	Radiation
Temperature : 24	: 23
Humidity : 67%	: 65%
Power supply: AC 120V/60Hz (DC 5V)	: AC 120V/60Hz (DC 5V)

### 2.2 Justification

The system was configured in typical fashion (as a customer would normally use it) for testing.

### 2.3 EUT Exercise Software

The EUT exercise program used during radiated and conducted testing was designed to exercise the various system components in a manner similar to typical use.

The sequence is used:

Operation: Reading mode  
Writing mode

Reading : Playback the recorded CD then display "H" on the CRT display continuously.

Writing : Write the data to compact disc four times speed.

Flash "W" on the CRT display.

Testing Laboratory

**A-pex International Co., Ltd.**

108 Yokowa-cho, Ise-shi Mie-ken 516-1106 JAPAN

Telephone: +81 596 39 1485

Facsimile: +81 596 39 0232

## 2.4 Test Procedure

### 2.4.1 Tabletop Equipment Conducted Emissions

EUT was placed on a platform of nominal size, 1m by 1.5m, raised 80cm above the conducting ground plane. The rear of tabletop was located 40cm to the vertical conducting plane. The rear of EUT, including peripherals aligned and flush with rear of tabletop. All other surfaces of tabletop was at least 80cm from any other grounded conducting surface. I/O cables and AC cables that were connected to the peripherals were bundled in center. They were folded back and forth forming a bundle 30cm to 40cm long and were hanged at a 40cm height to the ground plane. Each EUT current-carrying power lead, except the ground (safety) lead, were individually connected through a LISN to the input power source. All unused 50 connectors of the LISN were resistively terminated in 50 when not connected to the measuring equipment.

### 2.4.2 Tabletop Equipment Radiated Emissions

EUT was placed on a platform of nominal size, 1m by 1.5m, raised 80cm above the conducting ground plane. The rear of EUT, including peripherals was aligned and flush with rear of tabletop. I/O cables that were connected to the peripherals were bundled in center. They were folded back and forth forming a bundle 30cm to 40cm long and were hanged 40cm height to the ground plane. Test was made with the antenna positioned in both the horizontal and vertical planes of polarization. The measurement antenna was varied in height above the conducting ground plane to obtain the maximum signal strength. The measurement distance was 3m.

Testing Laboratory

**A-pex International Co., Ltd.**

108 Yokowa-cho, Ise-shi Mie-ken 516-1106 JAPAN

Telephone: +81 596 39 1485

Facsimile: +81 596 39 0232

Test report  
FCC ID : A6RCRW4216E  
Our reference : 17F0032-02-1  
Page : 9 of 18  
Issued date : 98-06-30

## Figure2.1 Configuration of Tested System

### Front View

\* Cabling was taken into consideration and test data was taken under worst case conditions.

Testing Laboratory

**A-pex International Co., Ltd.**

108 Yokowa-cho, Ise-shi Mie-ken 516-1106 JAPAN

Telephone: +81 596 39 1485

Facsimile: +81 596 39 0232

Test report  
FCC ID : A6RCRW4216E  
Our reference : 17F0032-02-1  
Page : 10 of 18  
Issued date : 98-06-30

Top View

\* Cabling was taken into consideration and test data was taken under worst case conditions.

Testing Laboratory

**A-pex International Co., Ltd.**

108 Yokowa-cho, Ise-shi Mie-ken 516-1106 JAPAN


Telephone: +81 596 39 1485

Facsimile: +81 596 39 0232

Test report  
FCC ID : A6RCRW4216E  
Our reference : 17F0032-02-1  
Page : 11 of 18  
Issued date : 98-06-30

### 3 CONDUCTED AND RADIATED MEASUREMENT PHOTOS

Figure 3.1 Conducted Measurement Photos

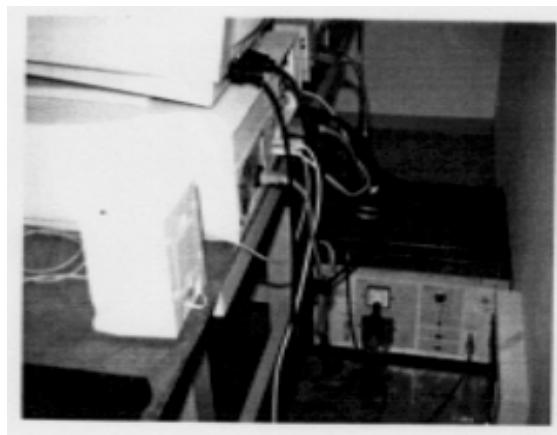

Testing Laboratory

**A-pex International Co., Ltd.**


108 Yokowa-cho, Ise-shi Mie-ken 516-1106 JAPAN

Telephone: +81 596 39 1485

Facsimile: +81 596 39 0232

Test report  
FCC ID : A6RCRW4216E  
Our reference : 17F0032-02-1  
Page : 12 of 18  
Issued date : 98-06-30

**Figure 3.2 Radiated Measurement Photos**

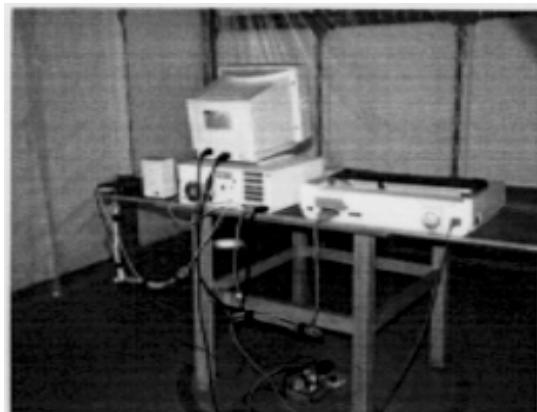

Testing Laboratory

**A-pex International Co., Ltd.**

108 Yokowa-cho, Ise-shi Mie-ken 516-1106 JAPAN

Telephone: +81 596 39 1485

Facsimile: +81 596 39 0232

### 3.1 Measurement Uncertainty

#### Radiated Emission Test

The measurement uncertainty (with a 95% confidence level) for this test was 3.3dB.

The data listed in this test report may exceed the test limit because it does not have enough margin (more than 3.3dB).

The data listed in this test report has enough margin, more than 3.3dB.

#### Conducted Emission Test

The measurement uncertainty (with a 95% confidence level) for this test was 2.0dB.

The data listed in this test report may exceed the test limit because it does not have enough margin (more than 2.0dB).

The data listed in this test report has enough margin, more than 2.0dB.

Testing Laboratory

**A-pex International Co., Ltd.**

108 Yokowa-cho, Ise-shi Mie-ken 516-1106 JAPAN

Telephone: +81 596 39 1485

Facsimile: +81 596 39 0232

**Test report**  
FCC ID : A6RCRW4216E  
Our reference : 17F0032-02-1  
Page : 14 of 18  
Issued date : 98-06-30

## 4 CONDUCTED EMISSION DATA

The initial step in collecting conducted data is a spectrum analyzer peak scan of the measurement range(450KHz-30MHz).  
The final data represents worst-case emissions. (Writing mode)  
The minimum margin to the limit is as follows :

Frequency (MHz)	Line (N/L)	Measured (dBV)	LISN Factor(dB)	Limit (dBV)	Margin (dBV)
0.5000	N/L	48.2	-3.4	48.0	3.2

\* All readings are quasi-peak mode.

Testing Laboratory

**A-pex International Co., Ltd.**

108 Yokowa-cho, Ise-shi Mie-ken 516-1106 JAPAN

Telephone: +81 596 39 1485

Facsimile: +81 596 39 0232

**Test report**  
**FCC ID** : A6RCRW4216E  
**Our reference** : 17F0032-02-1  
**Page** : 15 of 18  
**Issued date** : 98-06-30

## 5 RADIATED EMISSION DATA

The initial step in collecting radiated data was a spectrum analyzer peak scan of the measurement range(30MHz-1000MHz).  
The final data was reported in the worst-case emissions. (Writing mode)  
The minimum margin to the limit is as follows :

Frequency (MHz)	Receiver Reading (dBV)	Correction Factor (dBV)	Field Strength (dBV/m)	Limit (dBV/m)	Margin (dBV)
37.58	42.6	-6.1	36.5	40.0	3.5

\* 30MHz-1000MHz : All readings are quasi-peak mode.

Testing Laboratory

**A-pex International Co., Ltd.**

108 Yokowa-cho, Ise-shi Mie-ken 516-1106 JAPAN

Telephone: +81 596 39 1485

Facsimile: +81 596 39 0232

**Test report**  
**FCC ID** : A6RCRW4216E  
**Our reference** : 17F0032-02-1  
**Page** : 16 of 18  
**Issued date** : 98-06-30

## 5.1 Field Strength Calculation

The field strength is calculated by adding the Antenna Factor, Cable Factor and Antenna Pad, and subtracting the Amplifier Gain from the measured reading. The sample calculation is as follows :

$$FS = RA + AF + CF + AT - AG$$

where FS = Field Strength

RA = Receiver Amplitude

AF = Antenna Factor

CF = Cable Factor

AT = Antenna Pad

AG = Amplifier Gain

Assume a receiver reading of 42.6 dBV is obtained. The antenna Factor of 14.9 dB, Cable Factor of 1.1 dB and Antenna Pad of 6.0 dB is added. The Amplifier Gain of 28.1 dB is subtracted, giving a field strength of 36.5 dBV/m.

$$FS = 42.6 + 14.9 + 1.1 + 6.0 - 28.1 = 36.5 \text{ dBV/m}$$

Testing Laboratory

**A-pex International Co., Ltd.**

108 Yokowa-cho, Ise-shi Mie-ken 516-1106 JAPAN

Telephone: +81 596 39 1485

Facsimile: +81 596 39 0232

**Test report**  
**FCC ID** : A6RCRW4216E  
**Our reference** : 17F0032-02-1  
**Page** : 17 of 18  
**Issued date** : 98-06-30

## 6 TEST EQUIPMENT USED

INSTRUMENTS	Mfr.	MODEL	C/N	Calibrated Until
Pre Amplifier	Hewlett Packard	8447D	AP1	July 6, 1998
Pre Amplifier	Anritsu	MH648A	AP2	July 6, 1998
Biconical Antenna	Schwarzbeck	BBA9106	BA1	April 3, 1999
Biconical Antenna	Schwarzbeck	BBA9106	BA2	July 19, 1998
Biconical Antenna	Schwarzbeck	BBA9106	BA5	July 19, 1998
Logperiodic Antenna	Schwarzbeck	UHALP9108A	LA5	July 19, 1998
Logperiodic Antenna	Schwarzbeck	UHALP9108A	LA6	July 19, 1998
Logperiodic Antenna	Schwarzbeck	UKLP9104-ALA7		May 3, 1999
LISN	Rohde & Schwarz	ESH2-Z5	LS1	July 6, 1998
LISN	Rohde & Schwarz	ESH3-Z5	LS2	July 6, 1998
LISN	Schwarzbeck	NSLK8127	LS3	July 6, 1998
LISN	Rohde & Schwarz	ESH3-Z5	LS4	July 6, 1998
LISN	Schwarzbeck	NNLK8121	LS5	July 6, 1998
LISN	Rolf Heine	NNB-4/200	LS6	July 6, 1998
LISN	Schwarzbeck	NNLK8126	LS7	July 6, 1998
Spectrum Analyzer	Hewlett Packard	8567A	SA1	July 6, 1998
Spectrum Analyzer	Hewlett Packard	8560A	SA2	July 6, 1998
Spectrum Analyzer	Hewlett Packard	8567A	SA4	July 6, 1998
Spectrum Analyzer	Hewlett Packard	R3271	YTS1	July 24, 1998
Test Receiver	Rohde & Schwarz	ESHS-20	TR1	April 3, 1999
Test Receiver	Rohde & Schwarz	ESVS-30	TR2	July 8, 1998
Test Receiver	Rohde & Schwarz	ESHS-30	TR3	July 27, 1998
Test Receiver	Rohde & Schwarz	ESVS-10	TR4	July 17, 1998
Test Receiver	Rohde & Schwarz	ESHS-10	TR5	October 14, 1998
Test Receiver	Rohde & Schwarz	ESVS-10	TR6	October 14, 1998
Electro Magnetic Interference Receiver	Meb Messelektronik Berlin	SMV41	-	September 14, 1998

indicates EMI Test Equipment used.

\*All measurement equipment is traceable to national standard.

Testing Laboratory

**A-pex International Co., Ltd.**

108 Yokowa-cho, Ise-shi Mie-ken 516-1106 JAPAN

Telephone: +81 596 39 1485

Facsimile: +81 596 39 0232

Test report  
FCC ID : A6RCRW4216E  
Our reference : 17F0032-02-1  
Page : 18 of 18  
Issued date : 98-06-30

## APPENDIX

### **A : Test Data**

Conducted emissions A1 - A7

Radiated emissions A8 - A11

Testing Laboratory

**A-pex International Co., Ltd.**

108 Yokowa-cho, Ise-shi Mie-ken 516-1106 JAPAN

Telephone: +81 596 39 1485

Facsimile: +81 596 39 0232

### DATA OF CONDUCTION TEST

A - P E X INTERNATIONAL CO., LTD.  
YOKOHA NO.3 SITE

COMPANY : YAMAHA CORPORATION  
TRADE NAME : YAMAHA  
EQUIPMENT : CD-ReWritable Drive  
MODEL : CRW4216E  
POWER : AC120V/60Hz (DC5V)  
DESCRIPTION : Reading  
REMARKS :

REPORT NO. : 17F0032-02-1  
REGULATION : FCC Part 15 Subpart B  
CLASS : CLASS B  
DATE : 06/15/1998  
LISN TYPE : LISN(C/N:LS-01)  
ECC ID : A68RCRN4216E

ENGINEER : NAOKI SAKAMOTO

No	FREQ [MHz]	N		L		LISN FACTOR [dB]	RESULT		LIMITS		MARGIN	
		QP [dB $\mu$ V]	AV	QP [dB $\mu$ V]	AV		QP [dB $\mu$ V]	AV	QP [dB $\mu$ V]	AV	QP [dB $\mu$ V]	AV
1	0.4991	47.0	-	46.5	-	-3.4	43.5	-	48.0	-	4.4	-
2	0.5618	47.7	-	47.3	-	-3.4	44.3	-	48.0	-	3.7	-
3	0.7507	46.2	-	46.2	-	-3.4	42.8	-	48.0	-	5.2	-
4	1.1260	40.1	-	39.7	-	-3.2	36.9	-	48.0	-	11.1	-
5	2.5044	37.0	-	37.5	-	-3.3	34.2	-	48.0	-	13.8	-
6	6.2620	33.7	-	33.3	-	-2.9	30.8	-	48.0	-	17.2	-
7	12.5261	36.6	-	36.0	-	-2.1	34.5	-	48.0	-	13.5	-
8	14.6571	39.2	-	38.7	-	-1.8	37.5	-	48.0	-	10.6	-
9	19.3227	29.6	-	29.4	-	-1.5	28.1	-	48.0	-	19.9	-

#### SAMPLE CALCULATION :

RESULT = READING(higher data of N/L) + LISM FACTOR(include cable loss)

Except for the above table : adequate margin data below the limits.

Page A 1


## Testing Laboratory

A-pex International Co., Ltd.

108 Yokowa-cho, Ise-shi Mie-ken 516-1106 JAPAN

Telephone: +81 596 39 1485

Facsimile: +81 596 39 0232

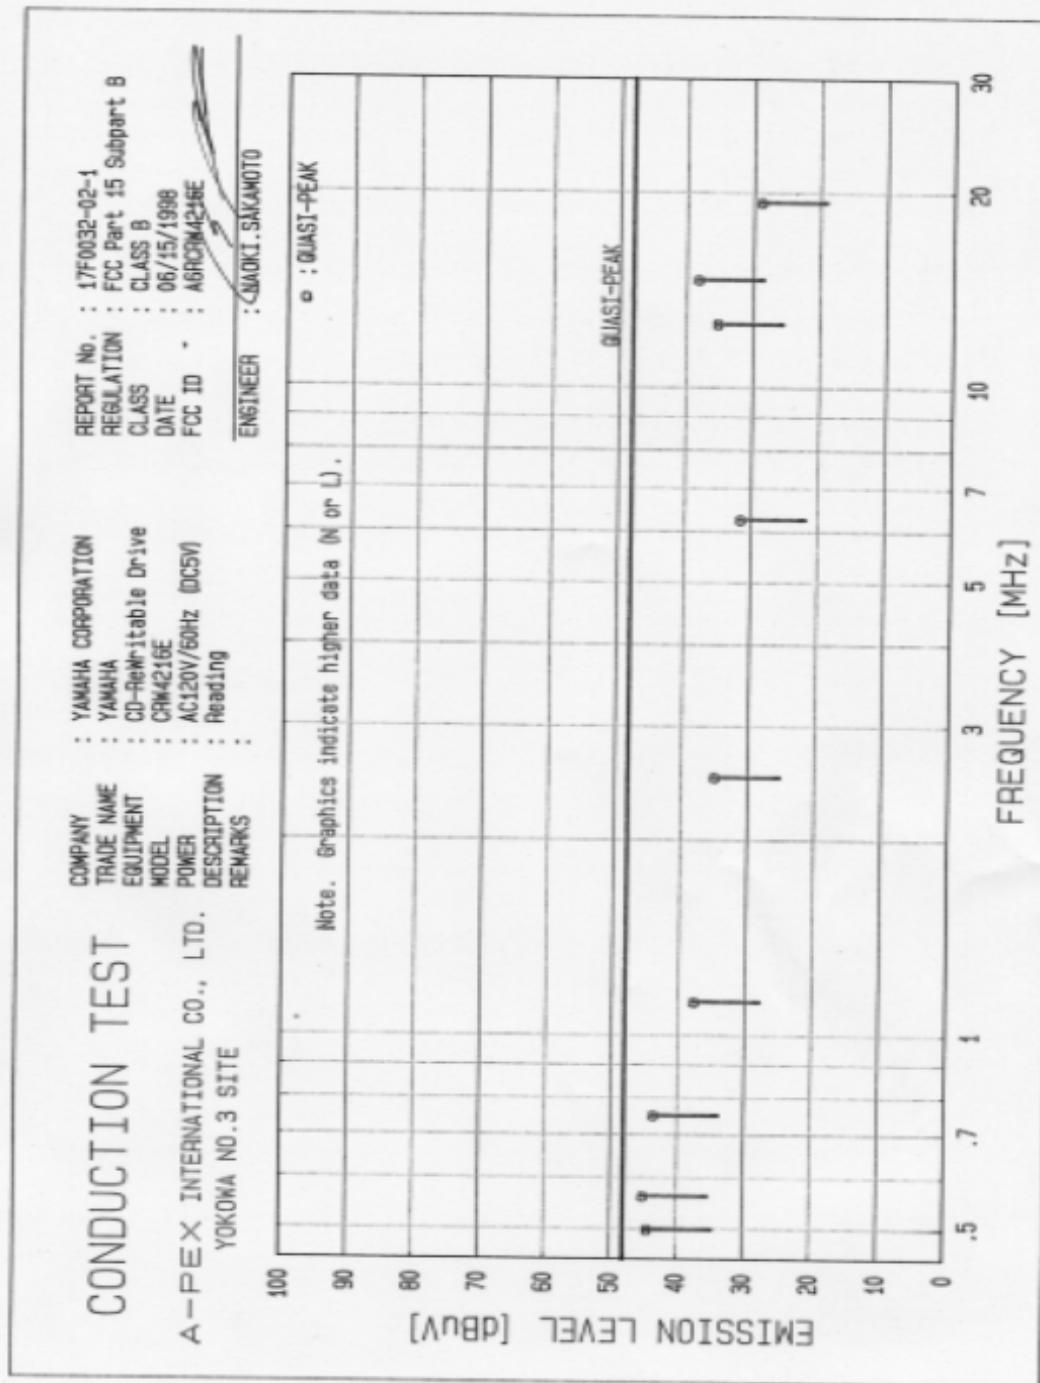

Page A2

Testing Laboratory

**A-pex International Co., Ltd.**

108 Yokowa-cho, Ise-shi Mie-ken 516-1106 JAPAN


Telephone: +81 596 39 1485

Facsimile: +81 596 39 0232

INTERFERENCE VOLTAGE TEST  
A-PEX INTERNATIONAL CO., LTD.  
YOKOWA NO.3 SITE

FCC Part 15 Subpart B


06/15/1998

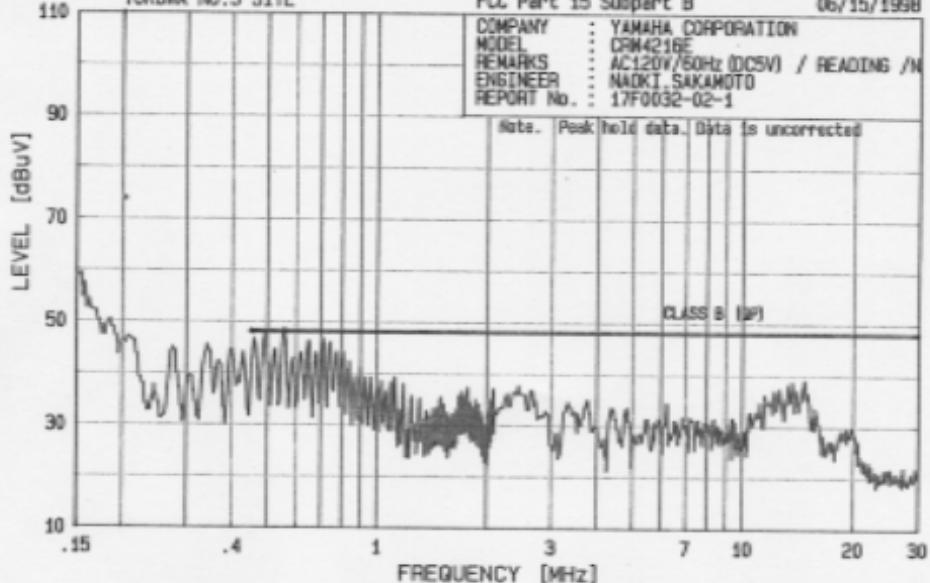

INTERFERENCE VOLTAGE TEST  
A-PEX INTERNATIONAL CO., LTD.  
YOKOWA NO.3 SITE

FCC Part 15 Subpart B

06/15/1998

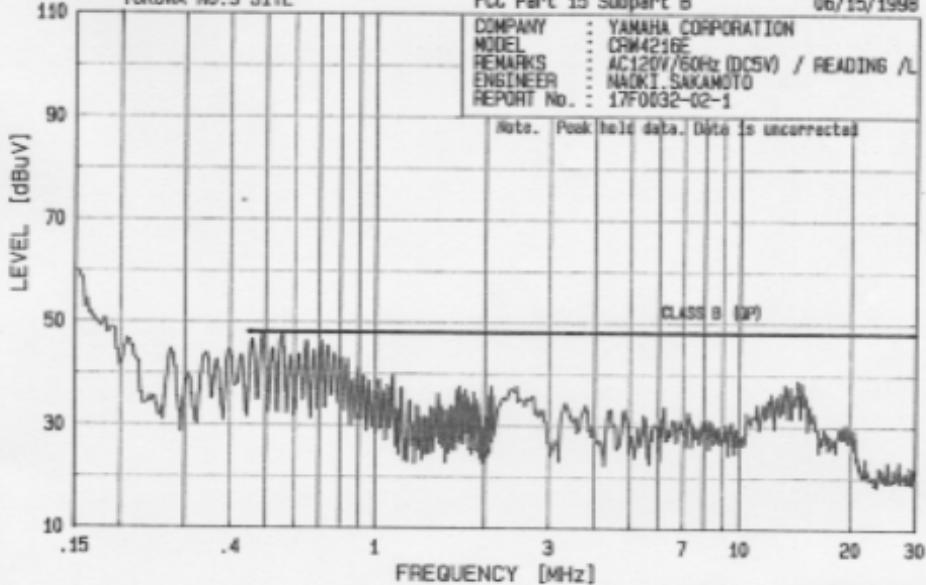

Name:  Page: **A 3**

Testing Laboratory

**A-pex International Co., Ltd.**


108 Yokowa-cho, Ise-shi Mie-ken 516-1106 JAPAN

Telephone: +81 596 39 1485

Facsimile: +81 596 39 0232

DATA OF CONSIDERATION "PC-03"

A - P E X INTERNATIONAL CO., LTD.  
YOKOWA NO.3 SITE

COMPANY : YAMAHA CORPORATION  
TRADE NAME : YAMAHA  
EQUIPMENT : CD-ReWritable Drive  
MODEL : CBN4216E  
POWER : AC120V/60Hz (DC5V)  
DESCRIPTION : Writing  
REMARKS : 

REPORT NO. : 17F0032-02-1  
REGULATION : FCC Part 15 Subpart B  
CLASS : CLASS B  
DATE : 06/15/1998  
LISN TYPE : LISN(C/N:LS-01)  
FCC ID : A6RCRW4216E

ENGINEER :   
NAOKI.SAKAMOTO

No	FREQ [MHz]	N		L		LISN FACTOR [dB]	RESULT		LIMITS		MARGIN	
		QP [dB $\mu$ V]	AV	QP [dB $\mu$ V]	AV		QP [dB $\mu$ V]	AV	QP [dB $\mu$ V]	AV	QP [dB]	AV
1	0.5000	48.2	-	48.2	-	-3.4	44.8	-	48.0	-	3.2	-
2	0.5617	48.1	-	47.9	-	-3.4	44.7	-	48.0	-	3.3	-
3	0.7515	47.3	-	47.1	-	-3.4	43.9	-	48.0	-	4.1	-
4	1.1279	40.7	-	40.7	-	-3.2	37.5	-	48.0	-	10.5	-
5	2.3778	37.3	-	37.5	-	-3.3	34.2	-	48.0	-	13.8	-
6	7.2655	32.5	-	32.4	-	-2.7	29.8	-	48.0	-	18.2	-
7	13.5295	39.6	-	39.3	-	-1.9	37.7	-	48.0	-	10.3	-
8	14.5928	40.1	-	40.1	-	-1.8	38.3	-	48.0	-	9.7	-
9	19.5423	30.1	-	30.1	-	-1.5	28.6	-	48.0	-	19.4	-

SAMPLE CALCULATION :

RESULT = READING(higher data of N/L) + LISN FACTOR(include cable loss)

Except for the above table : adequate margin data below the limits.

Page A4

Testing Laboratory

**A-pex International Co., Ltd.**

108 Yokowa-cho, Ise-shi Mie-ken 516-1106 JAPAN


Telephone: +81 596 39 1485

Facsimile: +81 596 39 0232

## CONDUCTION TEST

COMPANY : YAMAHA CORPORATION  
TRADE NAME : YAMAHA  
EQUIPMENT : CD-Rewritable Drive  
MODEL : CRM216E  
POWER : AC120V/60Hz (DCSV)  
DESCRIPTION : Writing  
REMARKS :  
A-PEX INTERNATIONAL CO., LTD.  
YOKOWA NO.3 SITE

REPORT No. : 17F0032-02-1  
REGULATION : FCC Part 15 Subpart B  
CLASS : CLASS B  
DATE : 06/15/1998  
FCC ID : 2ABDN4246E  
ENGINEER : NAOKI.SAKAMOTO

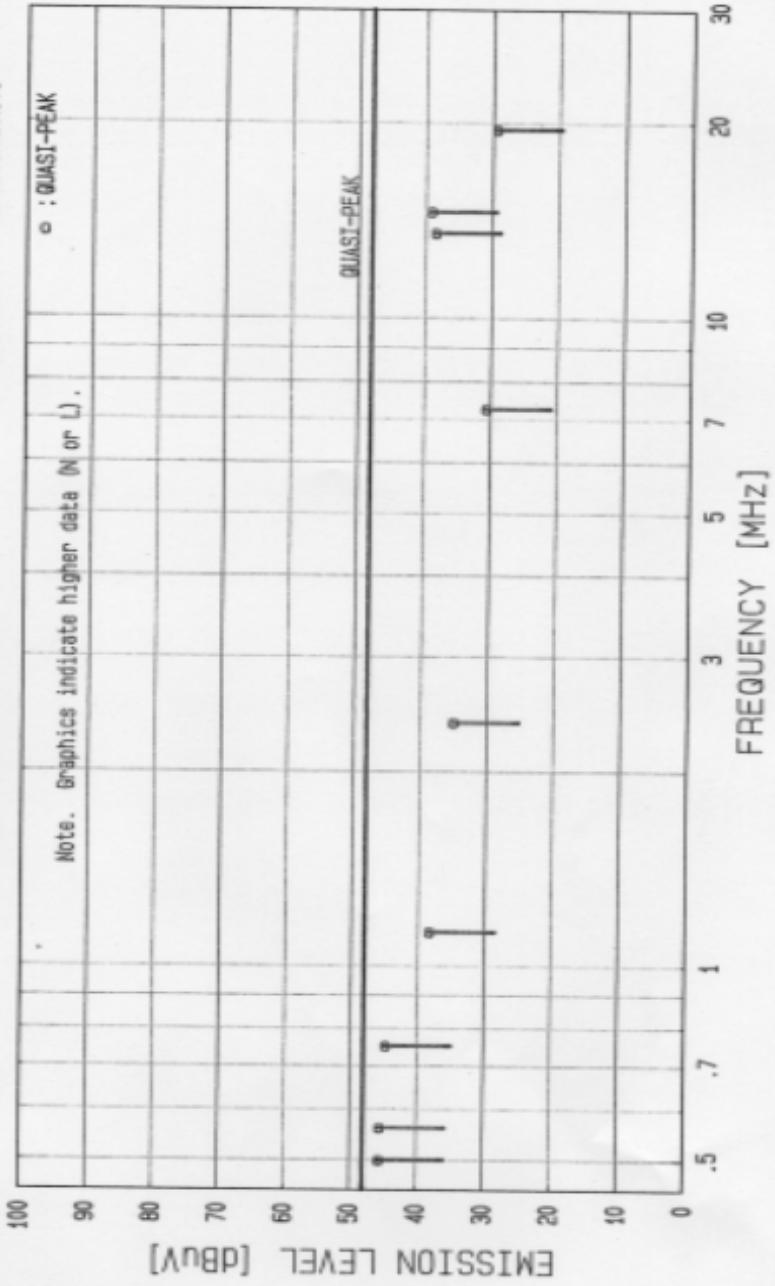

Page A5

Testing Laboratory

**A-pex International Co., Ltd.**

108 Yokowa-cho, Ise-shi Mie-ken 516-1106 JAPAN


Telephone: +81 596 39 1485

Facsimile: +81 596 39 0232

INTERFERENCE VOLTAGE TEST  
A-PEX INTERNATIONAL CO., LTD.  
YOKOWA NO.3 SITE

FCC Part 15 Subpart B


06/15/1998

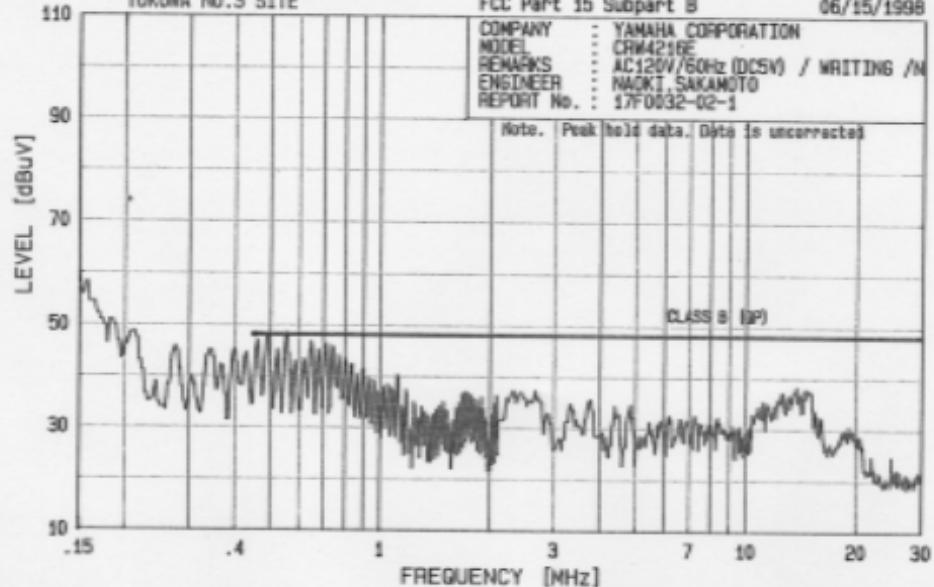

INTERFERENCE VOLTAGE TEST  
A-PEX INTERNATIONAL CO., LTD.  
YOKOWA NO.3 SITE

FCC Part 15 Subpart B

06/15/1998

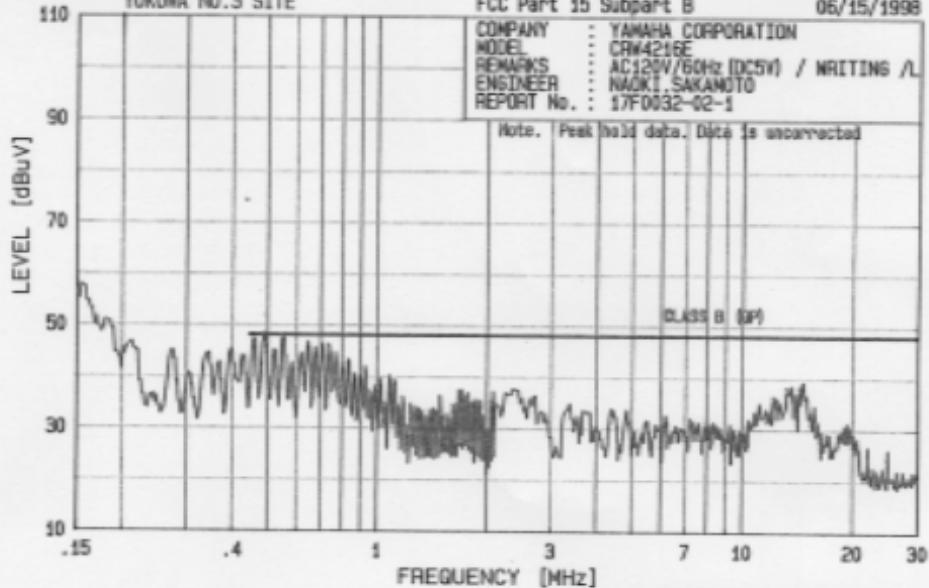

Name \_\_\_\_\_  
Page \_\_\_\_\_  
A 6

Testing Laboratory

**A-pex International Co., Ltd.**

108 Yokowa-cho, Ise-shi Mie-ken 516-1106 JAPAN


Telephone: +81 596 39 1485

Facsimile: +81 596 39 0232

INTERFERENCE VOLTAGE TEST  
A-PEX INTERNATIONAL CO., LTD.  
YOKOWA NO.3 SITE

FCC Part 15 Subpart B


06/15/1998

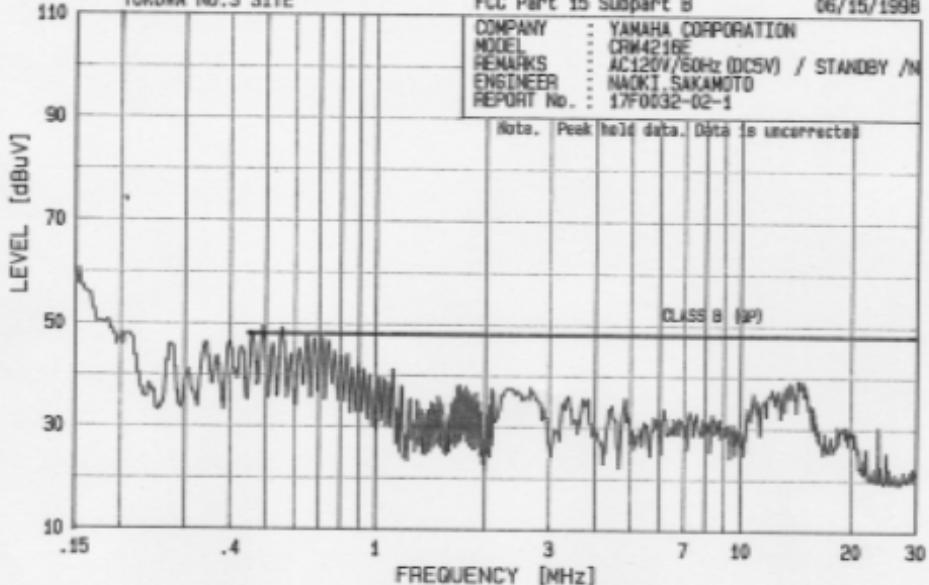

INTERFERENCE VOLTAGE TEST  
A-PEX INTERNATIONAL CO., LTD.  
YOKOWA NO.3 SITE

FCC Part 15 Subpart B

06/15/1998

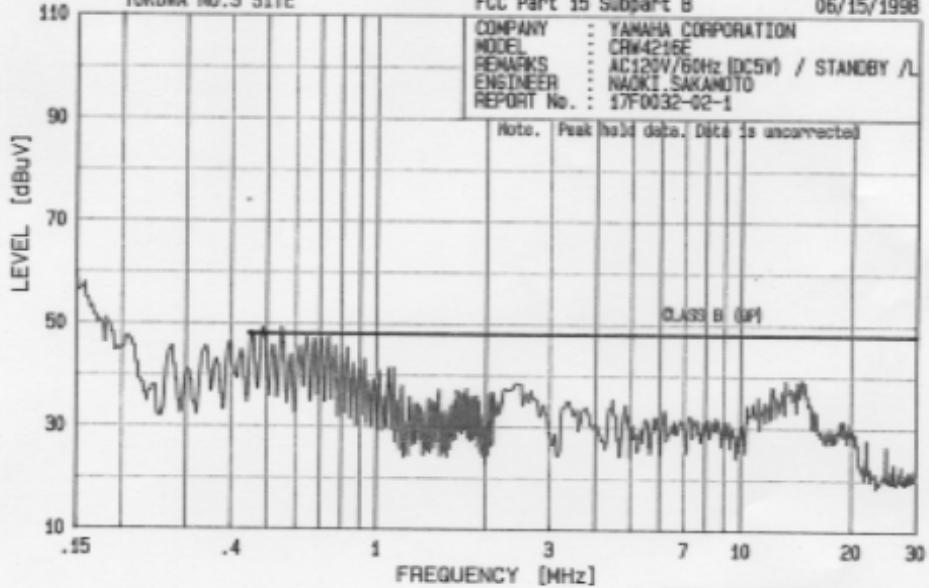

Name \_\_\_\_\_ Page \_\_\_\_\_  
A 7

Testing Laboratory

**A-pex International Co., Ltd.**

108 Yokowa-cho, Ise-shi Mie-ken 516-1106 JAPAN

Telephone: +81 596 39 1485


Facsimile: +81 596 39 0232

DATA OF RADIATION "TEST"

A - P E X INTERNATIONAL CO., LTD.  
YOKOWA NO.3 SITE

COMPANY : YAMAHA CORPORATION  
TRADE NAME : YAMAHA  
EQUIPMENT : CD-ReWritable Drive  
MODEL : CRW4216E  
POWER : AC120V/60Hz (DC5V)  
DESCRIPTION : Reading  
REMARKS :  
DATE : 06/15/1998

REPORT NO. : 17F0032-02-1  
REGULATION : FCC Part 15 Subpart B  
CLASS : CLASS B  
TEST DISTANCE : 3m  
ATTENUATOR : 6dB  
FCC ID : A6RCHN4216E

ENGINEER  NAOKI.SAKAMOTO

No	FREQ [MHz]	ANT TYPE	READING HOR [dB $\mu$ V] 3m	ANT FACTOR	CABLE LOSS [dB]	AMP GAIN [dB]	RESULT HOR [dB $\mu$ V/m] 3m		FCC LIMITS HOR [dB $\mu$ V/m] 3m	MARGIN HOR [dB] 3m	
							VER	3m		VER	3m
1	37.58	BC	26.7	42.5	14.9	1.1	28.1	20.6	36.4	40.0	19.4
2	53.69	BC	35.5	46.5	9.6	1.5	28.1	24.5	35.5	40.0	15.5
3	67.64	BC	46.6	44.0	5.6	1.6	28.1	31.7	29.1	40.0	8.3
4	84.53	BC	47.7	44.5	6.9	1.8	28.1	34.3	31.1	40.0	5.7
5	118.35	BC	43.0	37.9	11.7	2.3	28.1	34.9	29.8	43.5	8.6
6	142.54	BC	40.7	40.4	13.9	2.5	28.0	35.1	34.8	43.5	8.4
7	168.02	BC	39.0	35.7	15.6	2.7	28.0	35.3	32.0	43.5	8.2
8	175.43	BC	40.8	36.9	16.0	2.7	28.0	37.5	33.6	43.5	6.0
9	185.98	BC	31.2	27.9	16.6	2.8	28.0	28.6	25.3	43.5	14.9
10	219.80	BC	41.0	31.7	17.3	3.1	27.8	39.6	30.3	46.0	6.4
11	300.72	LP	40.4	38.3	16.8	3.7	27.8	39.1	37.0	46.0	6.9
12	321.24	LP	39.4	32.7	16.3	3.8	27.8	37.7	31.0	46.0	8.3

SAMPLE CALCULATION :

RESULT = READING + ANT.FACTOR + CABLE LOSS - AMP.GAIN + ATTN.

Except for the above table : adequate margin data below the limits.

A 8  
Page \_\_\_\_\_

Testing Laboratory

**A-pex International Co., Ltd.**

108 Yokowa-cho, Ise-shi Mie-ken 516-1106 JAPAN

Telephone: +81 596 39 1485


Facsimile: +81 596 39 0232

## RADIATION TEST

A-PEX INTERNATIONAL CO., LTD.  
YOKOWA NO.3 SITE

COMPANY	YAMAHA CORPORATION
TRADE NAME	YAMAHA
EQUIPMENT	CD-Rewritable Drive
MODEL	CRW4216E
POWER	AC120V/50Hz [DC5V]
DESCRIPTION	Reading
REMARKS	

REPORT No.	17F0032-02-1
DATE	06/15/1998
REGULATION	FCC Part 15 Subpart B
CLASS	CLASS B
DISTANCE	3m
FCC ID	2ABRN4216E
ENGINEER	NAOKI SAKAMOTO

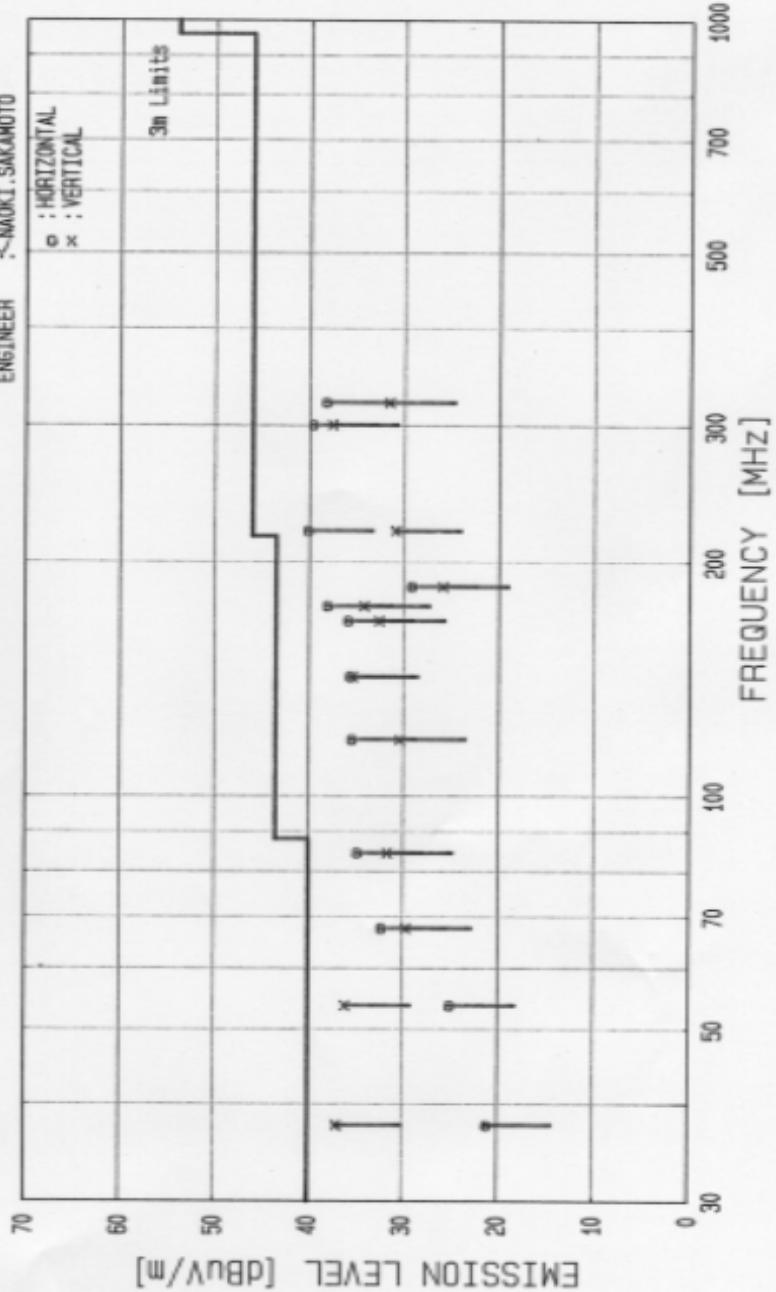

Page A9

Testing Laboratory

**A-pex International Co., Ltd.**

108 Yokowa-cho, Ise-shi Mie-ken 516-1106 JAPAN

Telephone: +81 596 39 1485

Facsimile: +81 596 39 0232

DATA OF IRRADIATION TEST

A - P E X INTERNATIONAL CO., LTD.  
YOKOWA NO.3 SITE

COMPANY : YAMAHA CORPORATION  
TRADE NAME : YAMAHA  
EQUIPMENT : CD-ReWritable Drive  
MODEL : CRW4216E  
POWER : AC120V/60Hz (DC5V)  
DESCRIPTION : Writing  
REMARKS :  
DATE : 06/15/1998

REPORT NO. : 17F0032-02-1  
REGULATION : FCC Part 15 Subpart B  
CLASS : CLASS B  
TEST DISTANCE : 3m  
ATTENUATOR : 6dB  
FCC ID : A6BCRW4216E

ENGINEER :   
NAOKI.SAKAMOTO

No	FREQ [MHz]	ANT TYPE	READING		ANT FACTOR	CABLE LOSS	AMP GAIN	RESULT		FCC LIMITS	MARGIN	
			HOR [dB $\mu$ V]	VER [dB]				HOR 3m	VER 3m		HOR [dB $\mu$ V/m]	VER [dB $\mu$ V/m]
1	37.58	BC	27.1	42.6	14.9	1.1	28.1	21.0	36.5	40.0	19.0	3.5
2	53.67	BC	34.5	47.0	9.6	1.5	28.1	23.5	36.0	40.0	16.5	4.0
3	67.65	BC	45.7	43.2	5.6	1.6	28.1	30.8	28.3	40.0	9.2	11.7
4	84.54	BC	47.6	43.4	6.9	1.8	28.1	34.2	30.0	40.0	5.8	10.0
5	118.35	BC	44.0	37.6	11.7	2.3	28.1	35.9	29.5	43.5	7.6	14.0
6	142.52	BC	41.2	37.8	13.9	2.5	28.0	35.6	32.2	43.5	7.9	11.3
7	168.01	BC	38.3	34.7	15.6	2.7	28.0	34.6	31.0	43.5	8.9	12.5
8	175.42	BC	39.8	37.2	16.0	2.7	28.0	36.5	33.9	43.5	7.0	9.6
9	185.99	BC	37.2	28.9	16.6	2.8	28.0	34.6	26.3	43.5	8.9	17.2
10	219.80	BC	38.8	32.0	17.3	3.1	27.8	37.4	30.6	46.0	8.6	15.4
11	300.73	LP	41.4	37.1	16.8	3.7	27.8	40.1	35.8	46.0	5.9	10.2
12	321.24	LP	39.9	31.4	16.3	3.8	27.8	38.2	29.7	46.0	7.8	16.3

SAMPLE CALCULATION :

RESULT = READING + ANT.FACTOR + CABLE LOSS - AMP.GAIN + ATTN.

Except for the above table : adequate margin data below the limits.

A 1 0  
Page \_\_\_\_\_

Testing Laboratory

**A-pex International Co., Ltd.**

108 Yokowa-cho, Ise-shi Mie-ken 516-1106 JAPAN

Telephone: +81 596 39 1485


Facsimile: +81 596 39 0232

## RADIATION TEST

A-PEX INTERNATIONAL CO., LTD.  
YOKOWA NO.3 SITE

COMPANY : YAMAHA CORPORATION  
TRADE NAME : YAMAHA  
EQUIPMENT : CD-Rewritable Drive  
MODEL : CRW216E  
POWER : AC220V/50Hz (DC5V)  
DESCRIPTION : Writing  
REMARKS :

REPORT No. : 17F0032-02-1  
DATE : 06/15/1998  
REGULATION : FCC Part 15 Subpart B  
CLASS : CLASS B  
DISTANCE : 3m  
FCC ID : 2ABCN4216E  
ENGINEER : NAKAI, SAKAMOTO

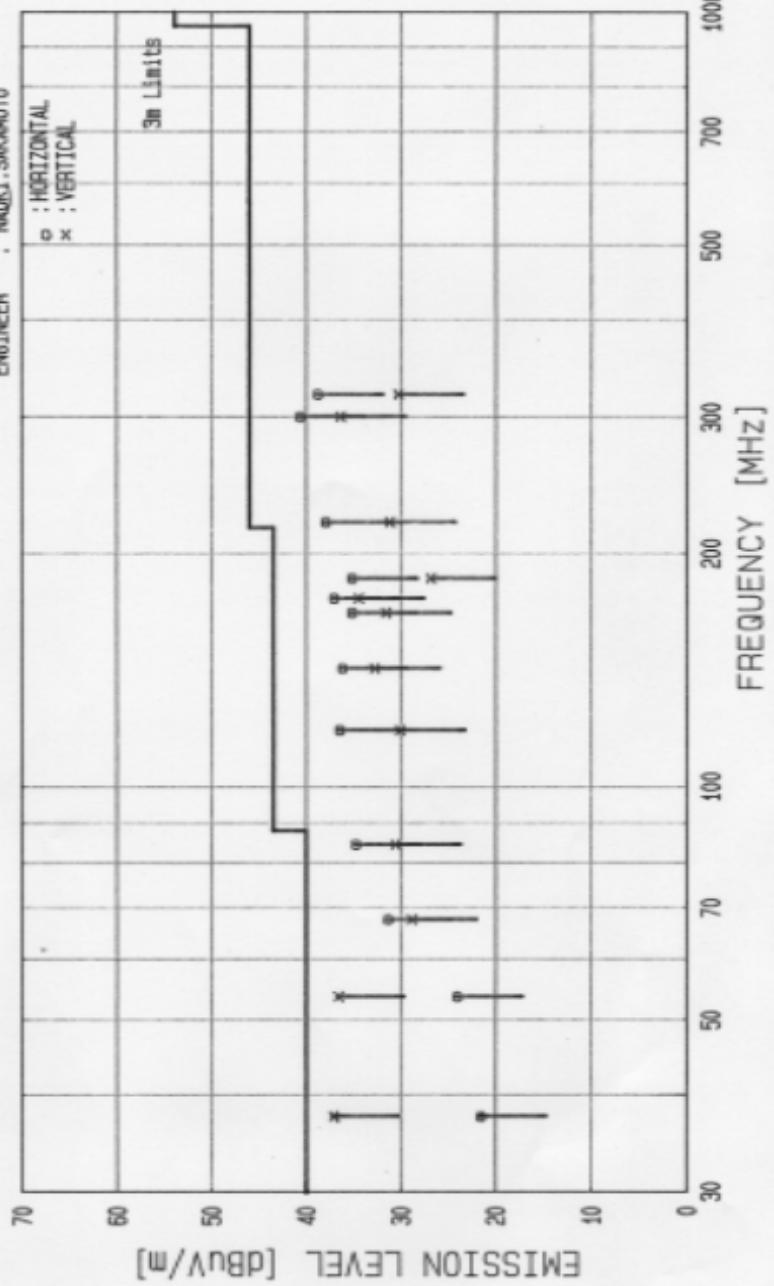

A 11  
Page

Testing Laboratory

**A-pex International Co., Ltd.**

108 Yokowa-cho, Ise-shi Mie-ken 516-1106 JAPAN

Telephone: +81 596 39 1485

Facsimile: +81 596 39 0232