

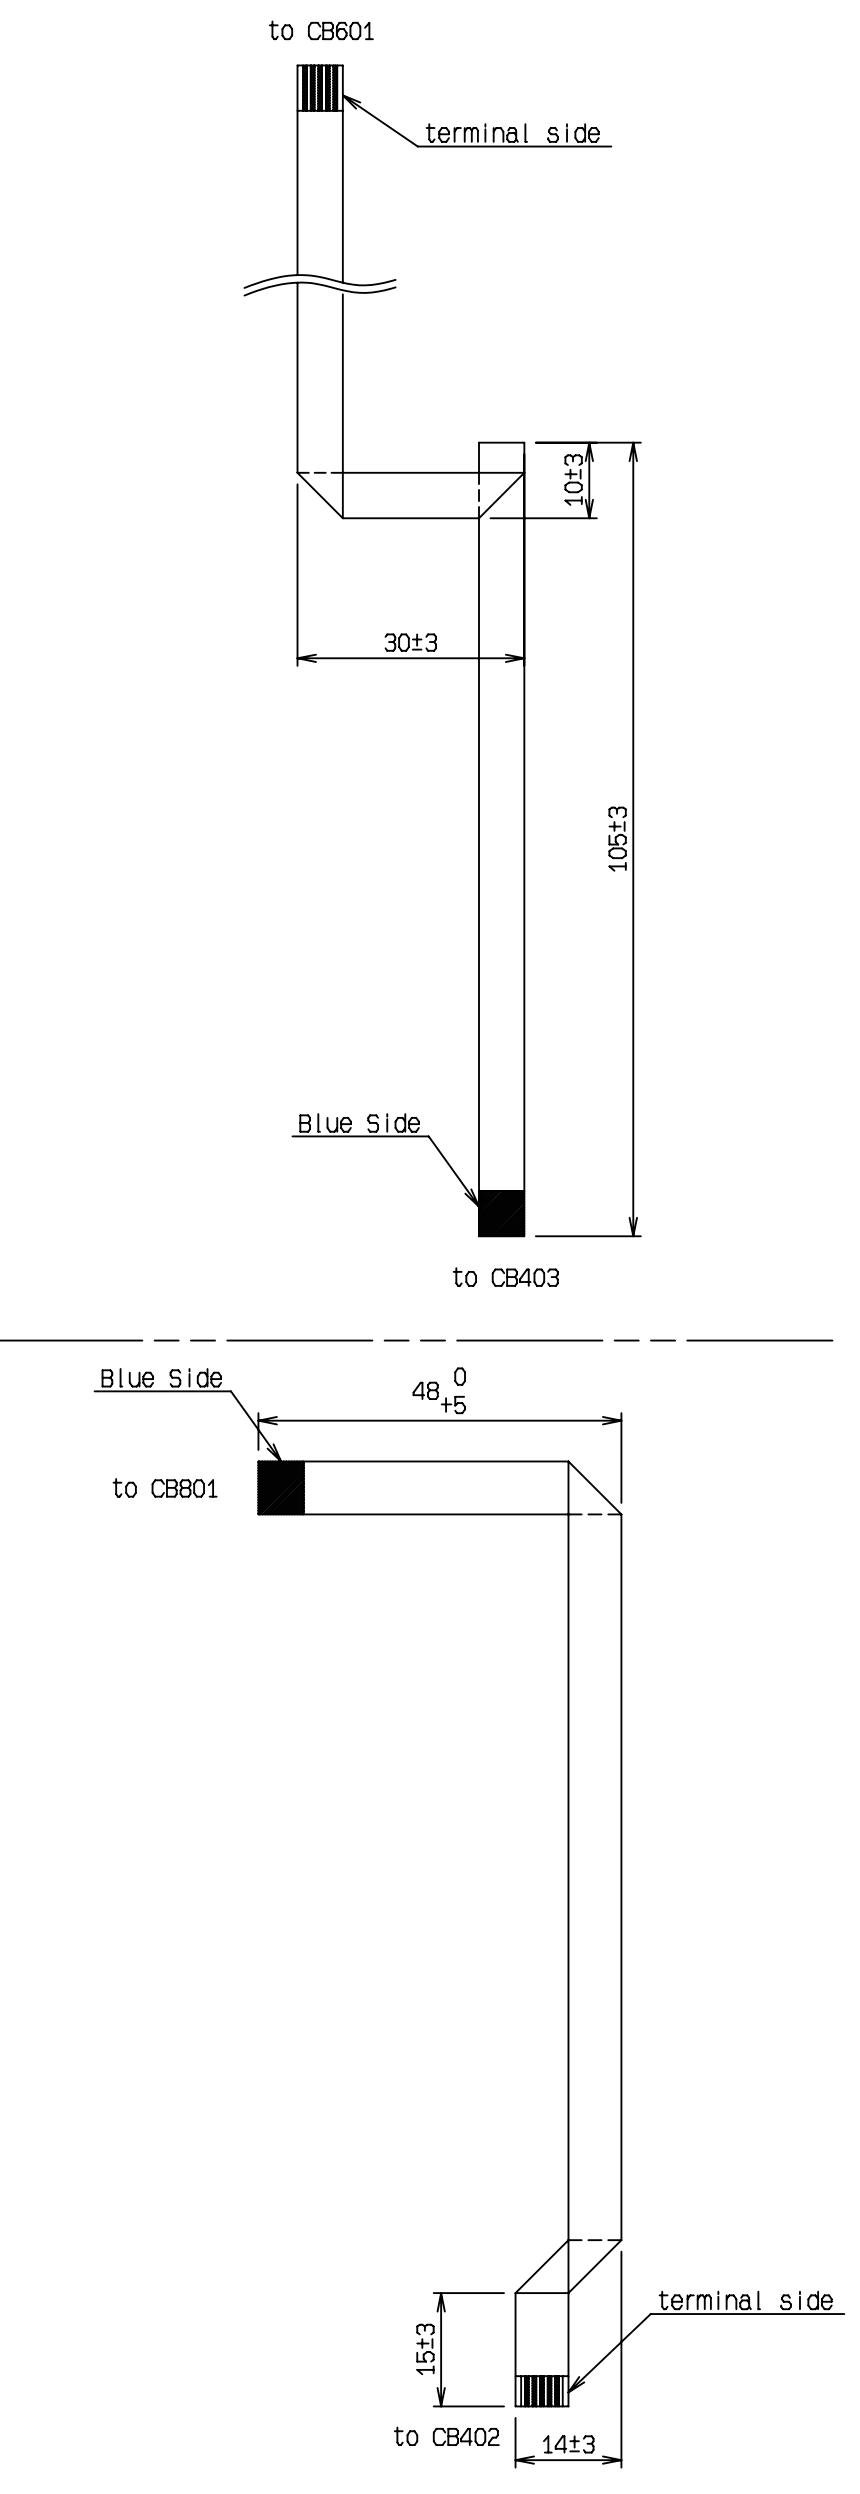
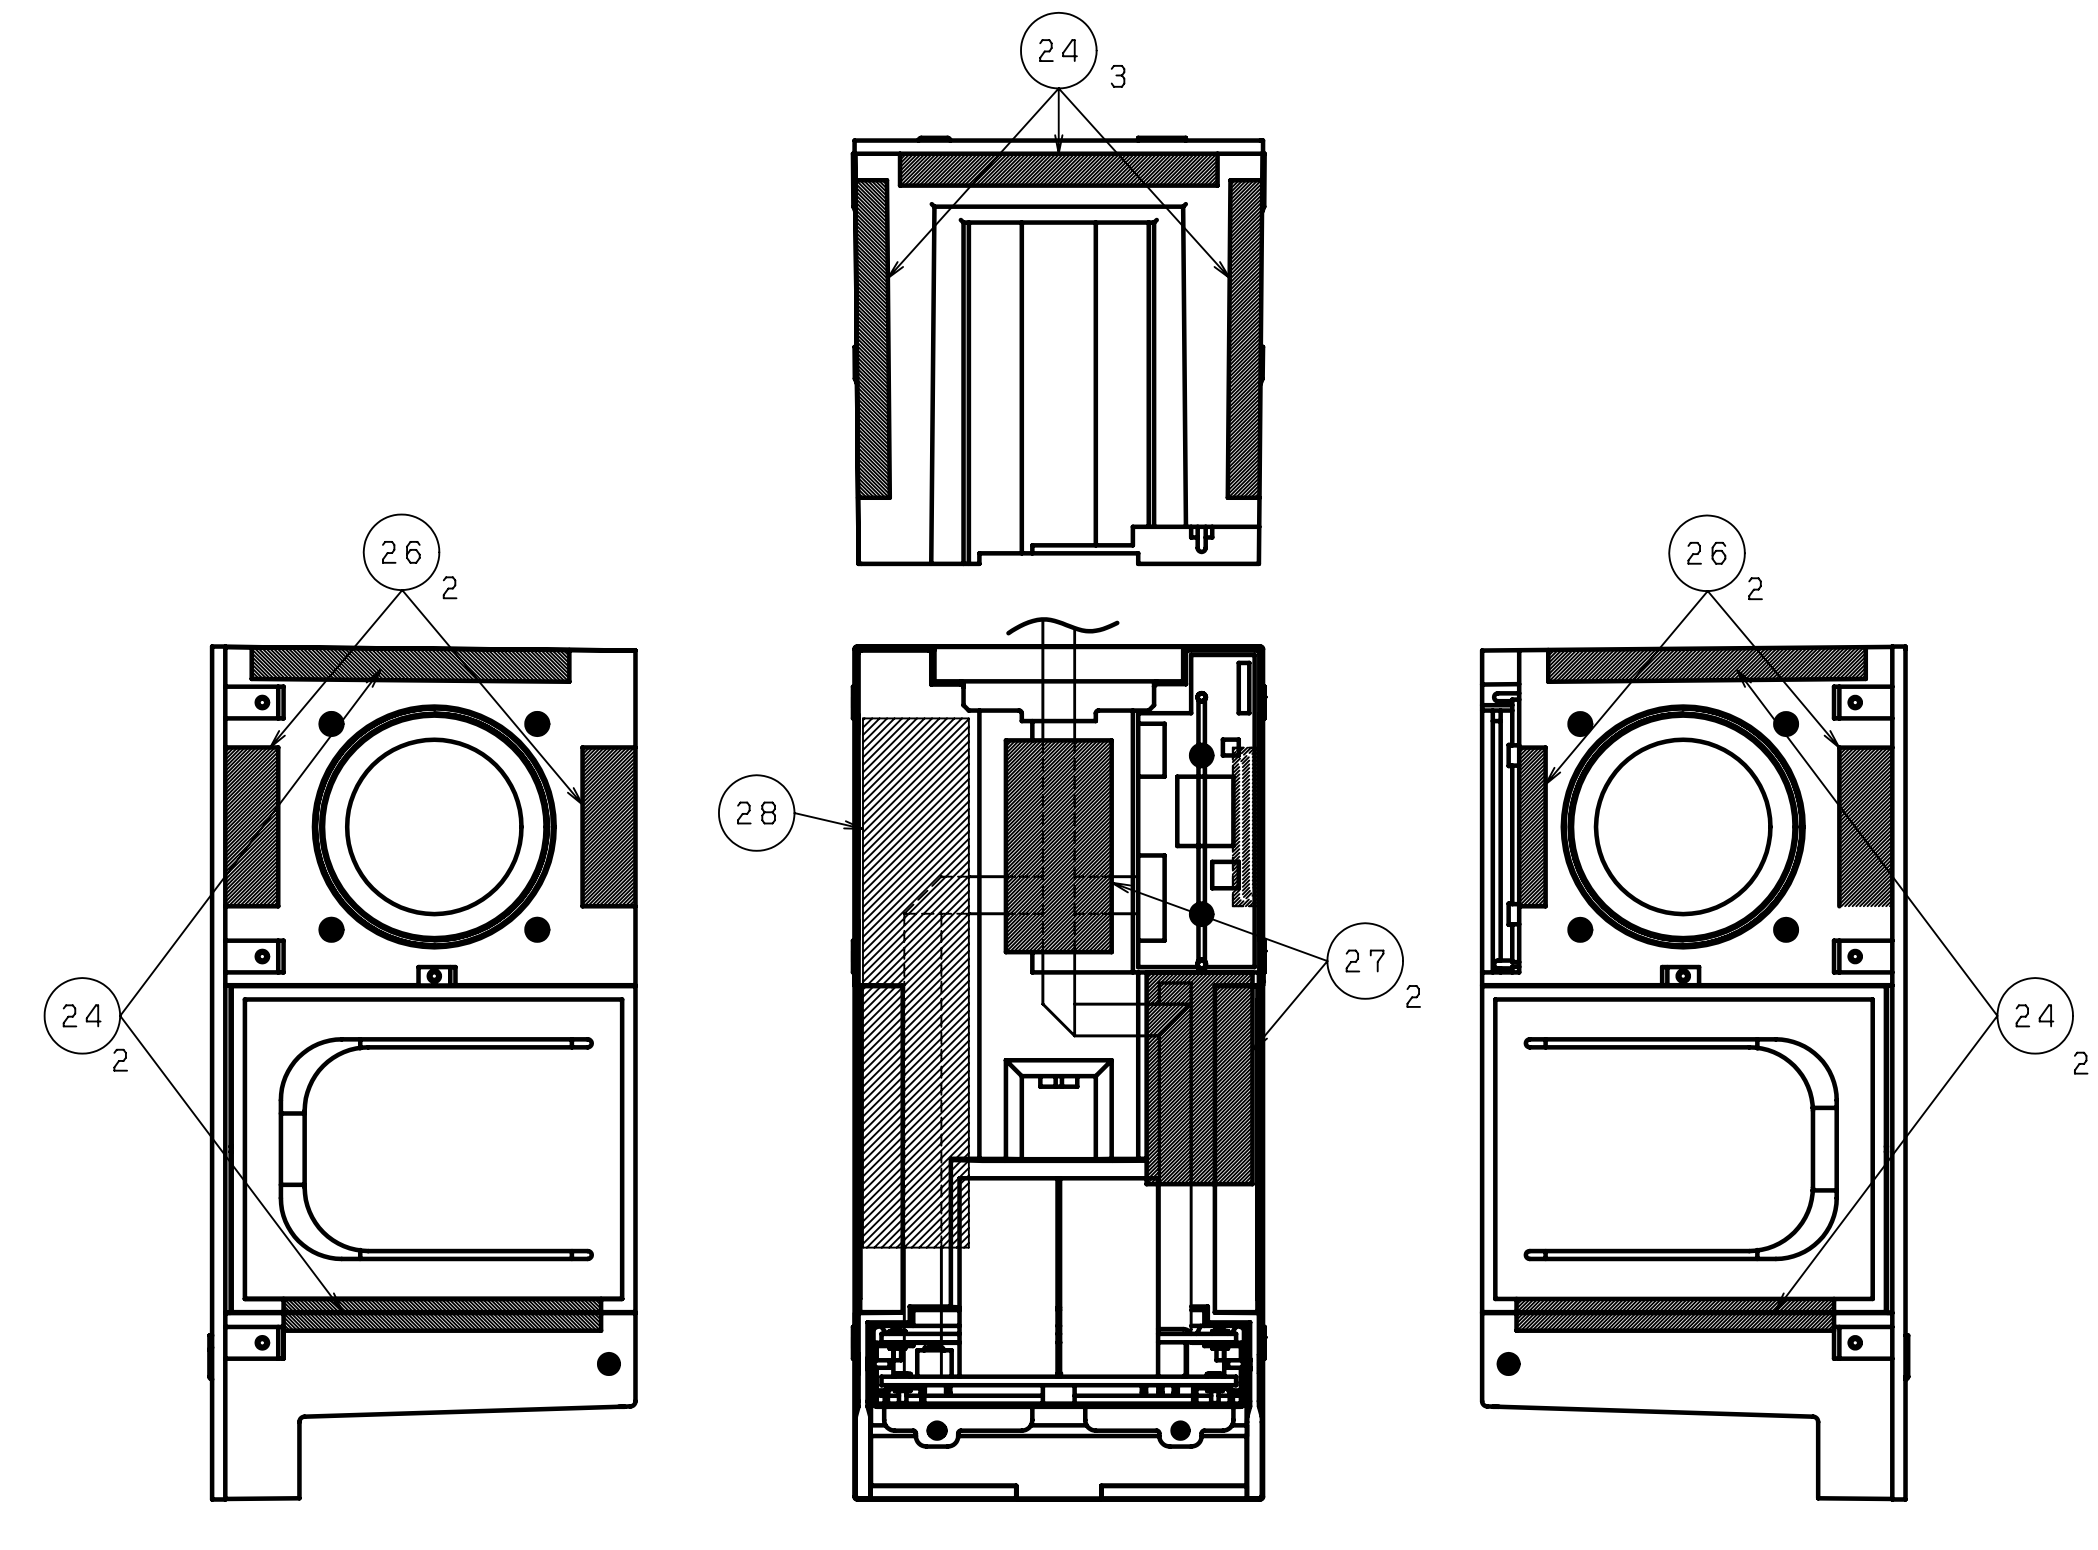


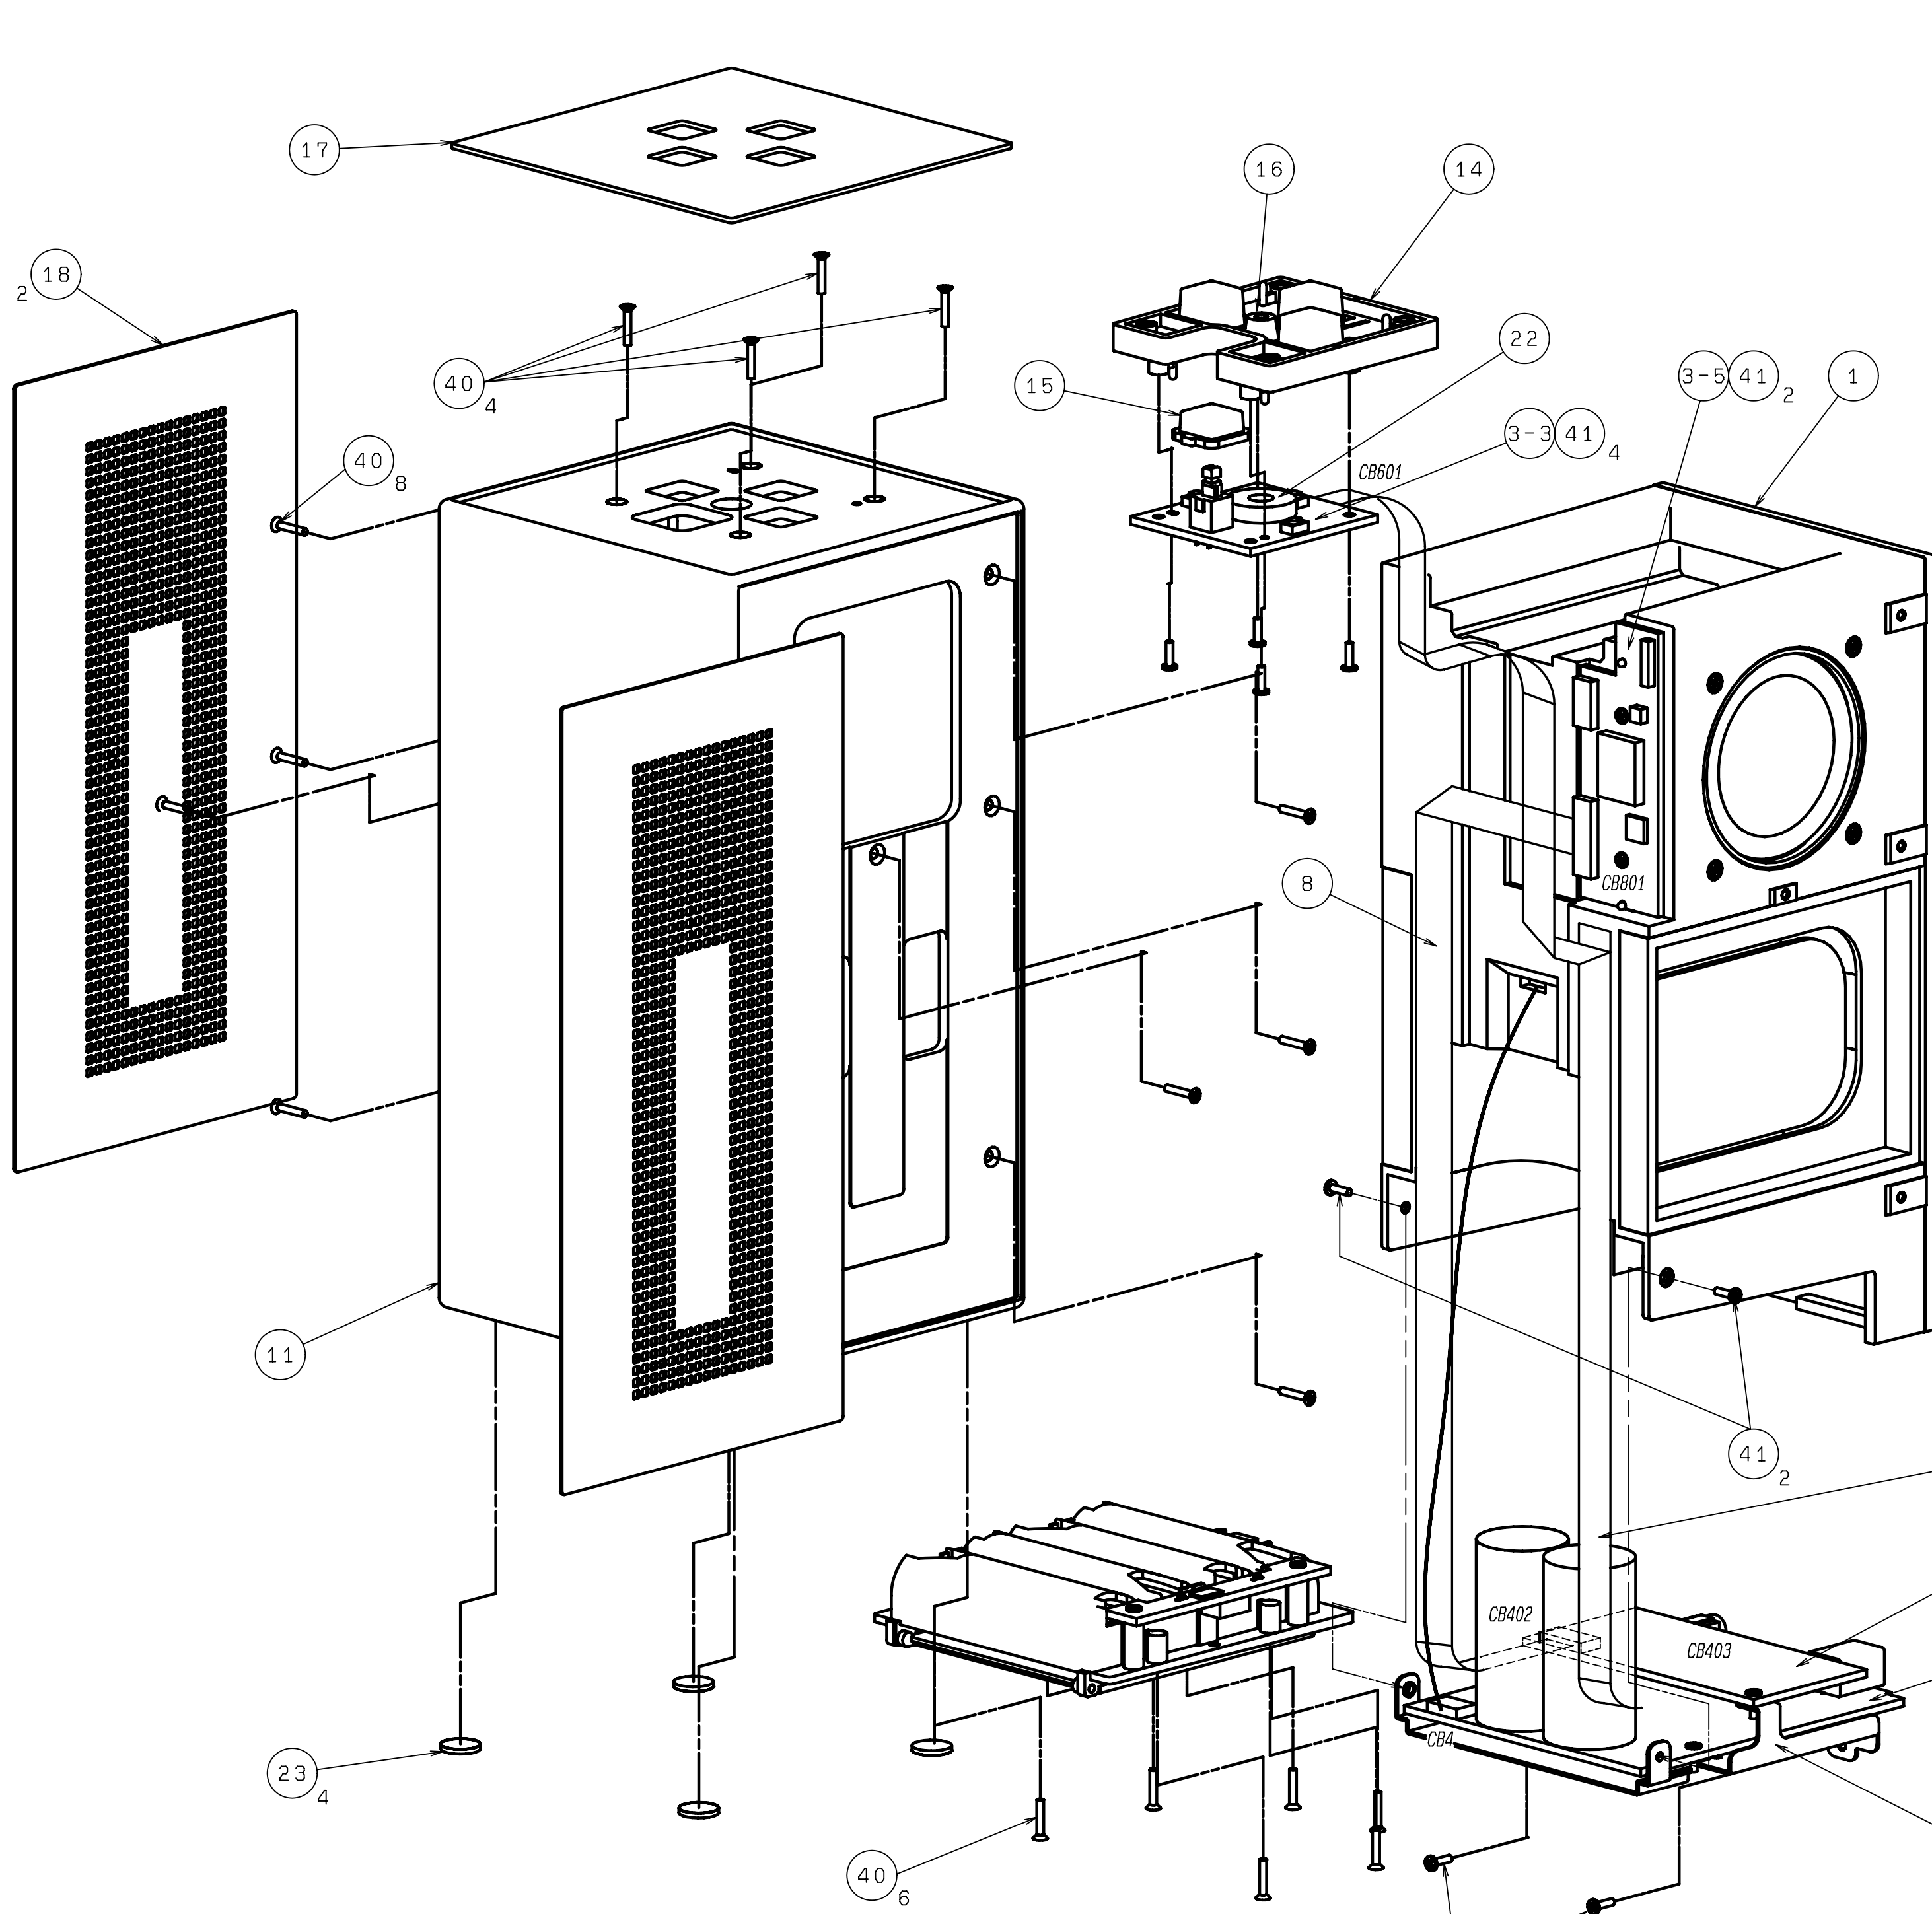


No.	version	before passed	after passed	note
34	B. G	✓		CE mark must be masked
34	B. G	✓		EMC mark must be masked
34	V	✓		ARROW mark must be masked
35	T		✓	CCC mark must be stickered

LABEL INTRODUCTION

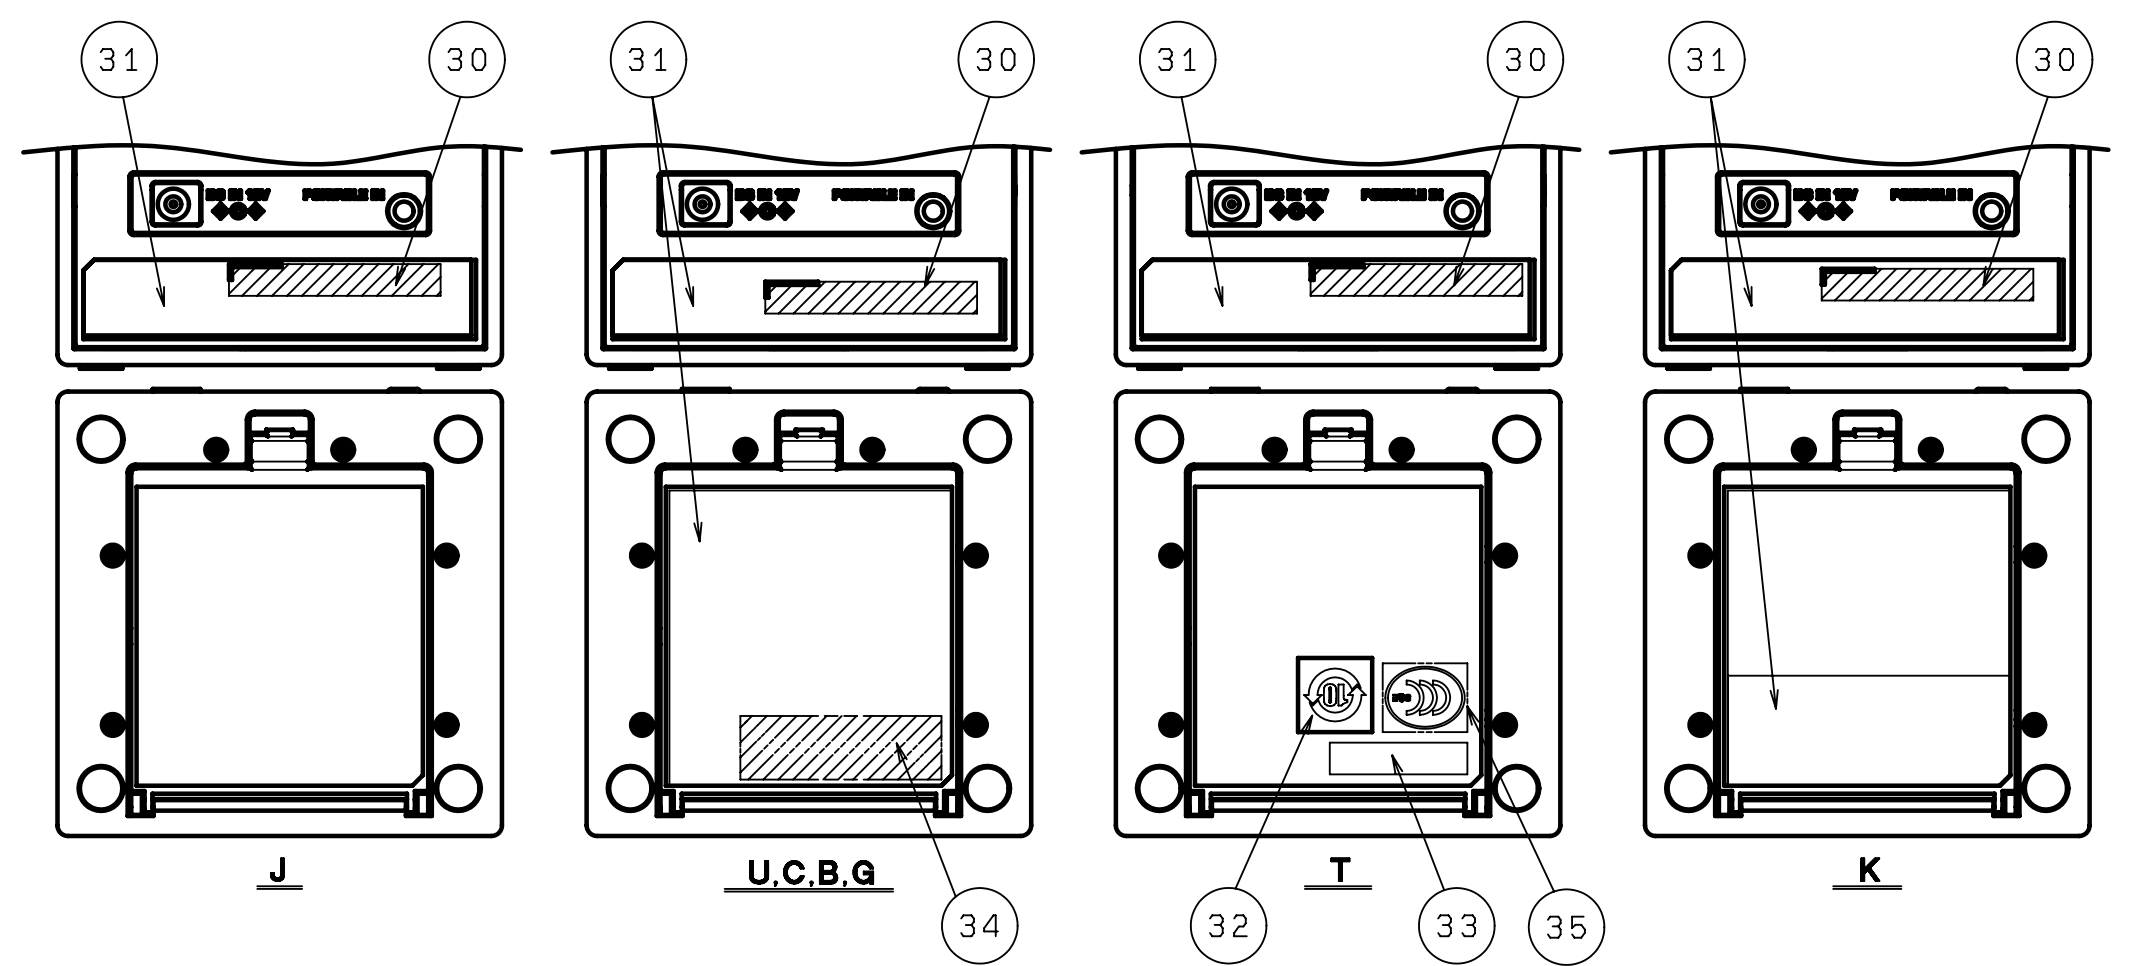

NX-B02SZ			
	BL	WH	RE
mark	part No.	part No.	part No.
J	WM54290	WM54330	WM54360
UCBG	WM54300	WM54340	WM54370
T	WM54310	WM54350	
K	WM54320		

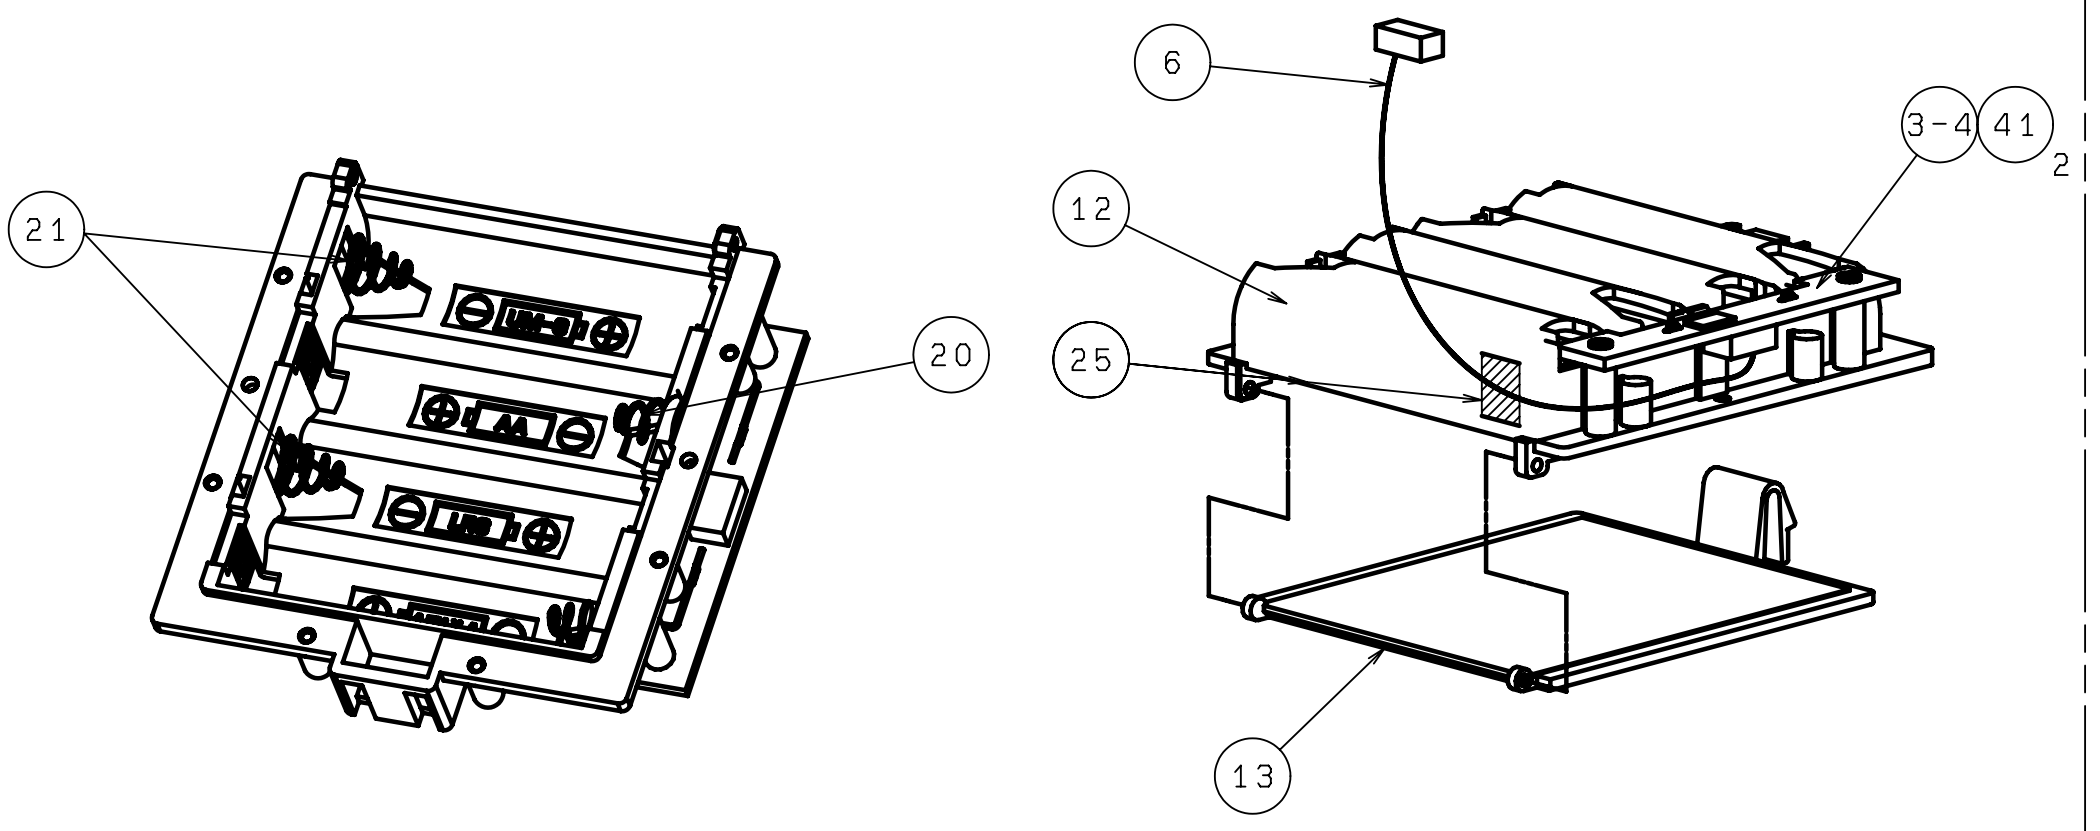

note) Torque follows process chart. If screws become unusable or cannot be tightened completely, it may be change to optimum torque.

REV. CODE	COUNT	NO.	REVISION DESCRIPTION	DATE	DRAWN
0	1	1	New issue 新規（初版）発行		H.SATO

							ORIGINAL MODEL	NX-B02SZ								
L		TOLERANCE	DOC SIZE	A1	APPROVED BY DATE		MATERIAL									
UP TO 30		±0.3	UNIT	mm	CHECKED BY DATE		FINISH, TREATMENT									
OVER 30 ~ 80		±0.4														
80 ~ 180		±0.6	SCALE /	TRIGONOMETRY	DESIGNED BY DATE		DOCUMENT NAME(E)	ACTIVE SP FINAL ASSY					DOC GROUP			
180 ~ 310		±0.8			H. SATOH 09 AUG '07		DRAWN BY DATE		DOCUMENT NAME(J)	アクティブSP総組立					DOC CLASS	62NCO
310 ~ 500		±1.0			H. SATOH 09 AUG '07											
500 ~		±1.3														
DOC NO.		200,102,79,74			SORT NO.		ORIGINAL PART NO.		WM54290		PAGE CONTROL NO.	REV 0.0.0		PAGE		