

---

# FCC Test Report

---

Report No.: AGC055111001-4F1

**FCC ID** : A6XUHF-4200  
**PRODUCT DESIGNATION** : Wireless Receiver  
**BRAND NAME** : GEMINI  
**MODEL NAME** : UHF-4200  
**CLIENT** : GCI Technologies Corporation  
**DATE OF ISSUE** : Dec.29, 2011  
**STANDARD(S)** : FCC Part 15 Rules

Attestation of Global Compliance Co., Ltd.

**CAUTION: This report shall not be reproduced except in full without the written permission of the test laboratory and shall not be quoted out of context.**

## TABLE OF CONTENTS

<b>TABLE OF CONTENTS.....</b>	1
<b>1. GENERAL INFORMATION.....</b>	2
<b>2. PRODUCT INFORMATION .....</b>	3
<b>3. TEST FACILITY .....</b>	4
<b>5. SUPPORT EQUIPMENT LIST.....</b>	6
<b>6. SYSTEM DESCRIPTION .....</b>	6
<b>7 FCC LINE CONDUCTED EMISSION TEST .....</b>	7
7.1 LIMITS OF LINE CONDUCTED EMISSION TEST .....	7
7.2 BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST .....	7
7.3 PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST .....	8
7.4 FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST .....	8
7.5 TEST RESULT OF LINE CONDUCTED EMISSION TEST.....	9
<b>8. FCC RADIATED EMISSION TEST.....</b>	11
8.1. LIMITS OF RADIATED EMISSION TEST .....	11
8.2 BLOCK DIAGRAM OF RADIATED EMISSION TEST .....	11
8.3 PROCEDURE OF RADIATED EMISSION TEST.....	13
8.4 TEST RESULT OF RADIATED EMISSION TEST .....	14
<b>APPENDIX 1.....</b>	18
<b>PHOTOGRAPHS OF TEST SETUP .....</b>	18
<b>APPENDIX 2.....</b>	19
<b>PHOTOGRAPHS OF EUT .....</b>	19

## 1. GENERAL INFORMATION

<b>Applicant:</b>	GCI Technologies Corporation 280 Raritan Center Parkway, Edison, New Jersey 08837 USA
<b>Manufacturer:</b>	PROAUDIO ELECTRONICS CO.,LIMITED Office No.3 10/F Witty Commercial Building 1A-1L Tung Choi Street, Mongkok, Kowloon Hong Kong
<b>Product Designation:</b>	Wireless Receiver
<b>Brand name:</b>	GEMINI
<b>Model Name:</b>	UHF-4200
<b>Frequency Range:</b>	682.15MHz to 697MHz
<b>FCC ID:</b>	A6XUHF-4200
<b>Type of Test:</b>	FCC Class B
<b>Measurement Procedure:</b>	ANSI C63.4: 2003
<b>File Number:</b>	AGC055111001-3F1
<b>Date of test:</b>	Dec.21 to Dec.29, 2011
<b>Deviation:</b>	None
<b>Condition of Test Sample:</b>	Normal

The above equipment was tested by Attestation Of Global Compliance Co., Ltd. For compliance with the requirements set forth in the FCC Rules and Regulations Part 15, the measurement procedure according to ANSI C63.4:2003 This said equipment in the configuration described in this report shows the maximum emission levels emanating from equipment are within the compliance requirements.

The test results of this report relate only to the tested sample identified in this report.

Test By:




Angela Li Dec.29, 2011

Reviewed By:



Forrest Lei Dec.29, 2011

Authorized By:



Solger Zhang Dec.29, 2011

## 2. PRODUCT INFORMATION

**Housing Type:** Plastic

**Rating Voltage:** AC100-240V,50-60Hz

### I/O Port Information (Applicable Not Applicable)

I/O Port of EUT			
I/O Port Type	Q'TY	Cable	Tested with
AF output port	1	0	1
Balanced XLR output port	2	0	0
DC input port	1	0	1

### 3. TEST FACILITY

<b>Site:</b>	Attestation of Global Compliance Co., Ltd.
<b>Location:</b>	1F, No.2 Building, Huafeng No.1 Technical Industrial Park, Sanwei, Xixiang, Baoan District, Shenzhen, China
<b>Description:</b>	There is one 3m semi-anechoic chamber for final test, the Line Conducted labs are constructed and calibrated to meet the FCC requirements in documents ANSI C63.4 and CISPR 22/EN 55022 requirements.
<b>Site Filing:</b>	Accredited by FCC, June 28, 2010 The Certificate Registration Number is 259865
<b>Instrument</b>	All measuring equipment is in accord with ANSI C63.4 requirements that meet industry
<b>Tolerance:</b>	regulatory agency and accreditation agency requirement.
<b>Ground Plane:</b>	Two conductive reference ground planes were used during the Line Conducted Emission, one in vertical and the other in horizontal. The dimensions of these ground planes are as below. The vertical ground plane was placed distancing 40 cm to the rear of the wooden test table on where the EUT and the support equipment were placed during test. The horizontal ground plane projected 50 cm beyond the footprint of the EUT system and distanced 80 cm to the wooden test table. For radiated emission test, one horizontal conductive ground plane extended at least 1m beyond the periphery of the EUT and the largest measuring antenna, and covered the entire area between the EUT and the antenna. It has no holes or gaps having longitudinal dimensions larger than one-tenth of a wavelength at the highest frequency of measurement up to 1GHz.

#### 4. TEST EQUIPMENT LIST

##### Equipment used during the tests:

Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Spectrum Analyzer	Agilent	E4440A	N/A	06/27/2011	06/26/2012
TEST RECEIVER	R&S	ESCI	N/A	06/27/2011	06/26/2012
ANTENNA	A.H.	SAS-521-4	N/A	06/27/2011	06/26/2012
Power Splitter 11636A	Agilent	N/A	N/A	06/27/2011	06/26/2012
LISN	R&S	ESH3-Z5	N/A	06/27/2011	06/26/2012

The calibrations of the measuring instruments, including any accessories that may affect such calibration, are checked frequently to assure their accuracy. Adjustments are made and correction factors applied in accordance with instructions contained in the manual for the measuring instrument.

## 5. SUPPORT EQUIPMENT LIST

Device Type	Manufacturer	Model Name	Serial No.	Data Cable	Power Cable
Speaker	WEL-DON	T-805	N/A	--	--

\*\*Note: All the above equipment/cables were placed in worse case positions to maximize emission signals during emission test.

Grounding: Grounding was in accordance with the manufacturer's requirements and conditions for the intended use.

## 6. SYSTEM DESCRIPTION

### **EUT test procedure:**

1. Connect EUT and peripheral devices.
2. Power on the EUT, the EUT begins to work.
3. Make sure the EUT operates normally during the test.

### **Test mode:**

Mode 1: standby  
Mode 2: receiving

## 7 FCC LINE CONDUCTED EMISSION TEST


### 7.1 LIMITS OF LINE CONDUCTED EMISSION TEST

Frequency	Maximum RF Line Voltage	
	Q.P.( dBuV)	Average( dBuV)
150kHz~500kHz	66-56	56-46
500kHz~5MHz	56	46
5MHz~30MHz	60	50

\*\*Note: 1. The lower limit shall apply at the transition frequency.

2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz

### 7.2 BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST

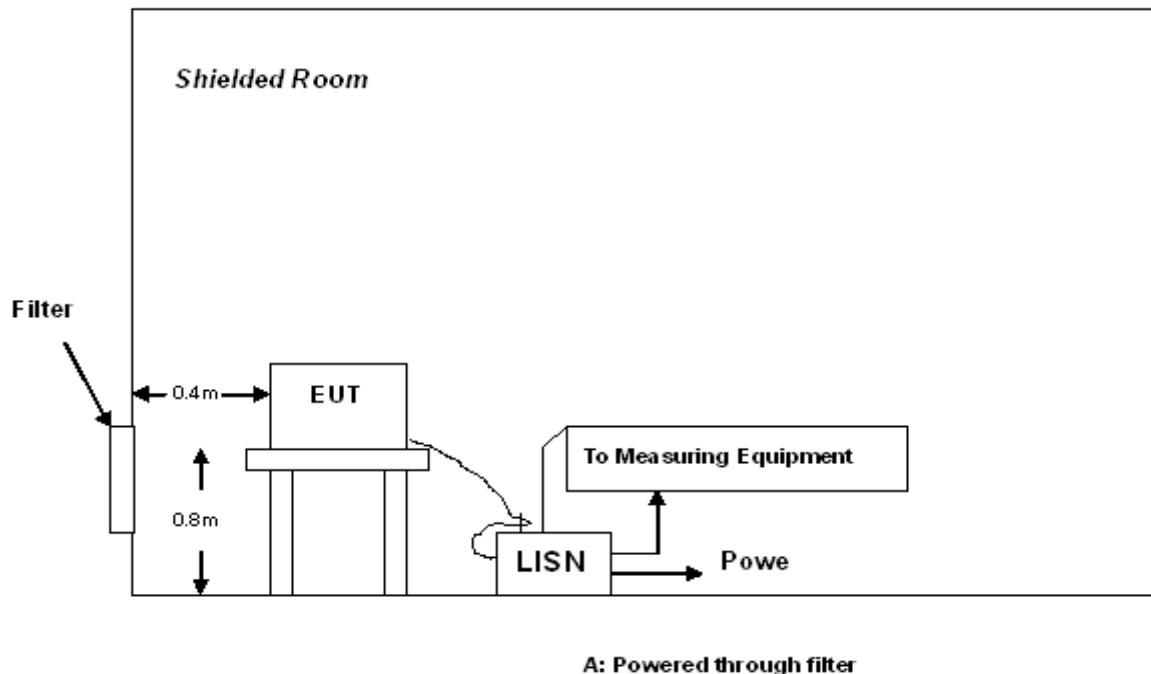

### **7.3 PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST**


- 1) The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.4 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
- 2) Support equipment, if needed, was placed as per ANSI C63.4.
- 3) All I/O cables were positioned to simulate typical actual usage as per ANSI C63.4.
- 4) The EUT received AC120V/60Hz by power supply . All support equipments received AC120V/60Hz power from a LISN, if any.
- 5) The test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 6) Analyzer / Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.
- 7) During the above scans, the emissions were maximized by cable manipulation.
- 8) The following test mode(s) were scanned during the preliminary test:

### **7.4 FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST**

- 1) EUT and support equipment was set up on the test bench as per step 2 of the preliminary test.
- 2) A scan was taken on both power lines, Line 1 and Line 2, recording at least the six highest emissions. Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. If EUT emission level was less -2dB to the A.V. limit in Peak mode, then the emission signal was re-checked using Q.P and Average detector.

## 7.5 TEST RESULT OF LINE CONDUCTED EMISSION TEST


### TEST RESULT OF LINE CONDUCTED EMISSION TEST –LINE LINE

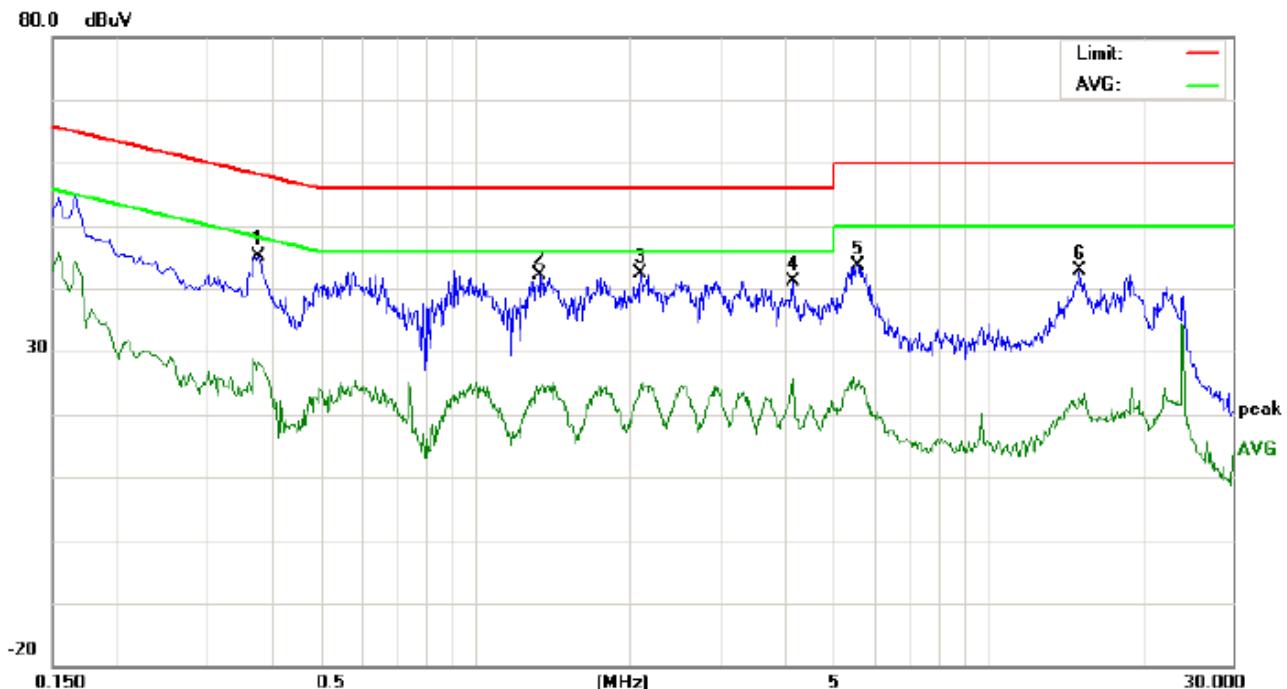

Site: Conduction Phase: **L1** Temperature: 26  
 Limit: FCC Class B Conduction(QP) Power: AC 120V/60Hz Humidity: 60 %  
 EUT: Wireless Receiver  
 M/N: UHF-4200  
 Mode:Receiving  
 Note:

No.	Freq. (MHz)	Reading_Level (dBuV)			Correct Factor	Measurement (dBuV)			Limit (dBuV)		Margin (dB)		P/F	Comment
		Peak	QP	AVG		Peak	QP	AVG	QP	AVG	QP	AVG		
1	0.3780	34.84		18.15	10.32	45.16		28.47	58.32	48.32	-13.16	-19.85	P	
2	1.3420	31.65		13.59	10.38	42.03		23.97	56.00	46.00	-13.97	-22.03	P	
3	2.1060	32.17		14.73	10.26	42.43		24.99	56.00	46.00	-13.57	-21.01	P	
4	4.1579	30.66		15.25	10.36	41.02		25.61	56.00	46.00	-14.98	-20.39	P	
5	5.5739	33.44		14.23	10.25	43.69		24.48	60.00	50.00	-16.31	-25.52	P	
6	15.0979	32.77		12.39	10.12	42.89		22.51	60.00	50.00	-17.11	-27.49	P	

TEST RESULT OF LINE CONDUCTED EMISSION TEST-NEUTRAL LINE

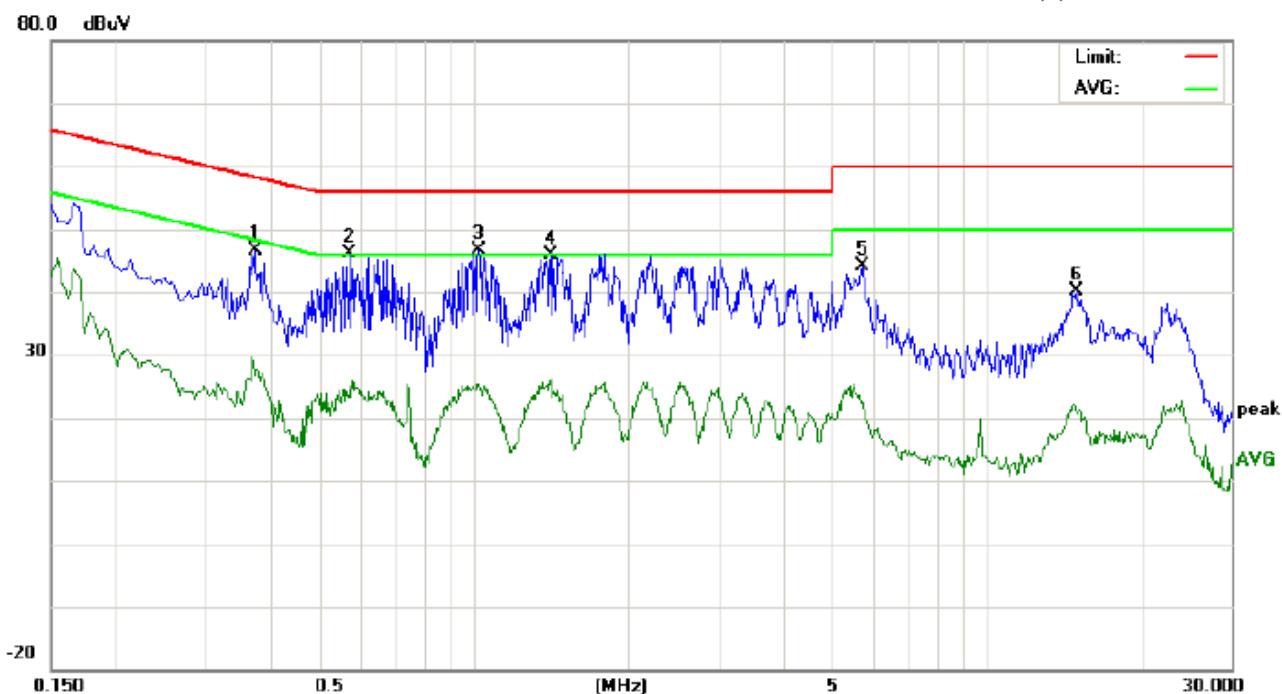

Site: Conduction

Phase: *N*

Temperature: 26

Limit: FCC Class B Conduction(QP)

Power: AC 120V/60Hz

Humidity: 60 %

EUT: Wireless Receiver

M/N: UHF-4200

Mode: Receiving

Note:

No.	Freq. (MHz)	Reading_Level (dBuV)			Correct Factor	Measurement (dBuV)			Limit (dBuV)		Margin (dB)		P/F	Comment
		Peak	QP	Avg		dB	Peak	QP	Avg	QP	Avg	QP	Avg	
1	0.3740	36.34		16.46	10.32	46.66		26.78	58.41	48.41	-11.75	-21.63	P	
2	0.5740	35.75		14.70	10.33	46.08		25.03	56.00	46.00	-9.92	-20.97	P	
3	1.0260	36.34		14.93	10.37	46.71		25.30	56.00	46.00	-9.29	-20.70	P	
4	1.4140	35.61		15.63	10.38	45.99		26.01	56.00	46.00	-10.01	-19.99	P	
5	5.7299	33.81		12.18	10.26	44.07		22.44	60.00	50.00	-15.93	-27.56	P	
6	15.0299	30.10		10.43	10.12	40.22		20.55	60.00	50.00	-19.78	-29.45	P	


## 8. FCC RADIATED EMISSION TEST

### 8.1. LIMITS OF RADIATED EMISSION TEST


Frequency (MHz)	Distance (m)	Maximum Field Strength Limit (dBuV/m/ Q.P.)
30~88	3	40.0
88~216	3	43.5
216~960	3	46.0
Above 960	3	54.0

\*\*Note: The lower limit shall apply at the transition frequency.


### 8.2 BLOCK DIAGRAM OF RADIATED EMISSION TEST

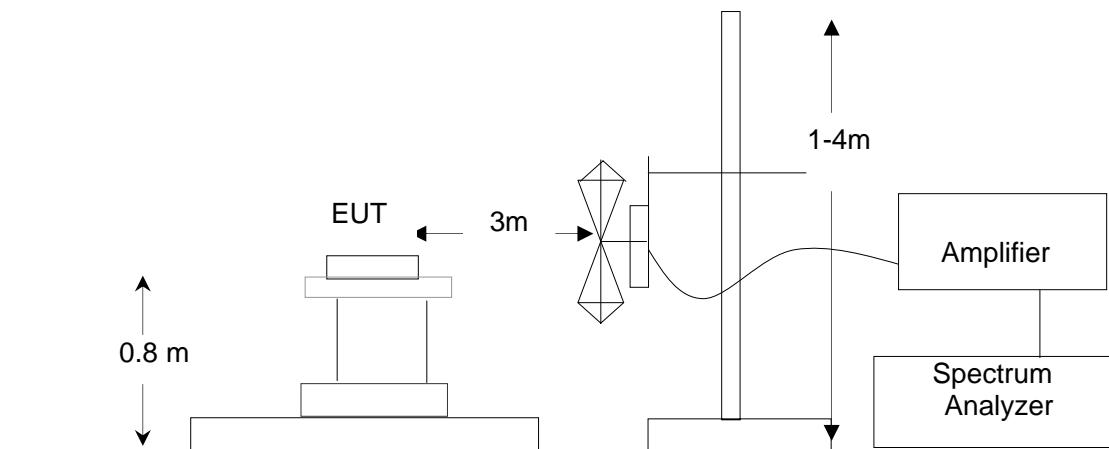

**BELLOW 1GHz**

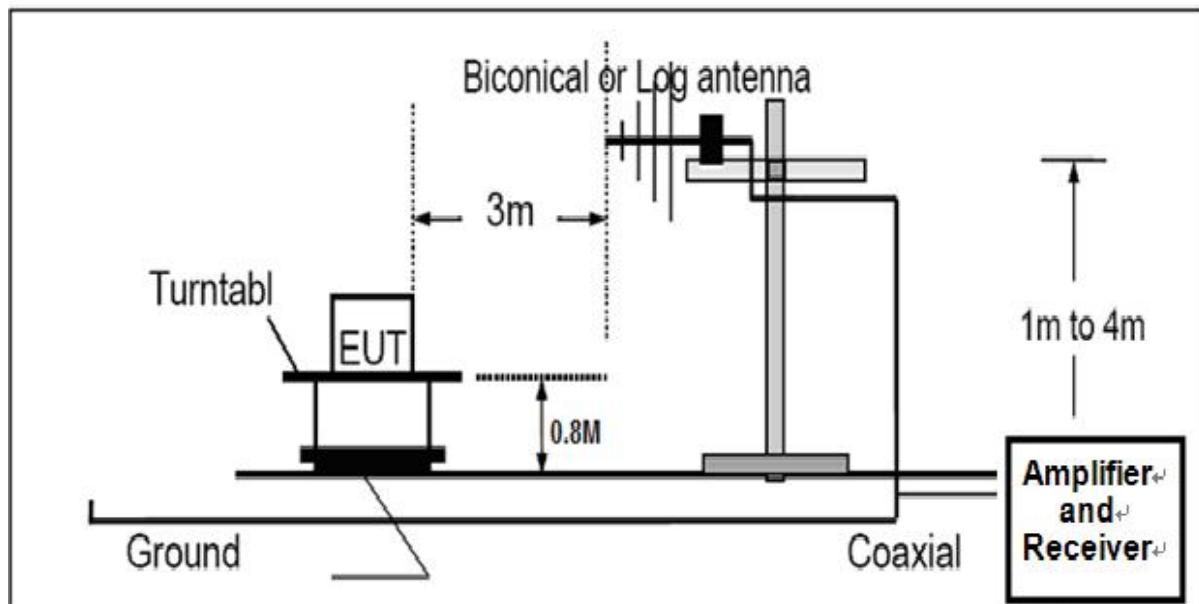

**ABOVE 1GHz**

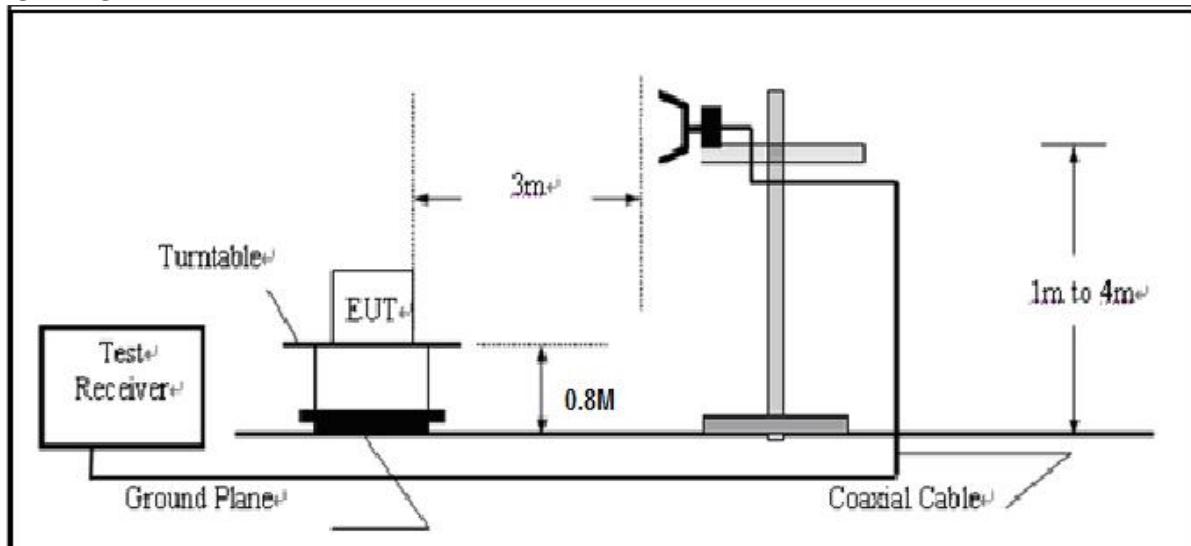

### **8.3 PROCEDURE OF RADIATED EMISSION TEST**

- 1) The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden turntable with a height of 0.8 meters is used which is placed on the ground plane as per ANSI C63.4 (see Test Facility for the dimensions of the ground plane used). When the EUT is floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
- 2) Support equipment, if needed, was placed as per ANSI C63.4.
- 3) All I/O cables were positioned to simulate typical actual usage as per ANSI C63.4.
- 4) The EUT received AC120V/60Hz power supply. All support equipments received AC 120V/60Hz power from socket under the turntable, if any.
- 5) The antenna was placed at 3 meter away from the EUT as stated in FCC Part 15. The antenna connected to the Analyzer via a cable and at times a pre-amplifier would be used.
- 6) The Analyzer / Receiver quickly scanned from 30MHz to 5GHz. The EUT test program was started. Emissions were scanned and measured rotating the EUT to 360 degrees and positioning the antenna 1 to 4 meters above the ground plane, in both the vertical and the horizontal polarization, to maximize the emission reading level.
- 7) The test mode(s) were scanned during the test:
- 8) Recorded at least the six highest emissions. Emission frequency, amplitude, antenna position, polarization and turntable position were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit and Q.P./Peak reading is presented.
- 9) The test data of the worst case condition(s) was reported on the Summary Data page.


**8.4 TEST RESULT OF RADIATED EMISSION TEST  
BELLOW 1GHZ  
HORIZONTAL**



Site: site #1 Polarization: **Horizontal** Temperature: 26  
 Limit: FCC Class B 3M Radiation Power: Humidity: 60 %  
 EUT: Wireless Receiver Distance: 3m  
 M/N: UHF-4200  
 Mode: mode one  
 Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		38.0833	17.80	8.98	26.78	40.00	-13.22	peak			
2		94.6667	15.19	15.06	30.25	43.50	-13.25	peak			
3	*	170.6500	17.67	16.03	33.70	43.50	-9.80	peak			
4		219.1500	18.89	14.15	33.04	46.00	-12.96	peak			
5		259.5667	13.60	16.48	30.08	46.00	-15.92	peak			
6		498.8333	5.01	22.88	27.89	46.00	-18.11	peak			

VERTICAL

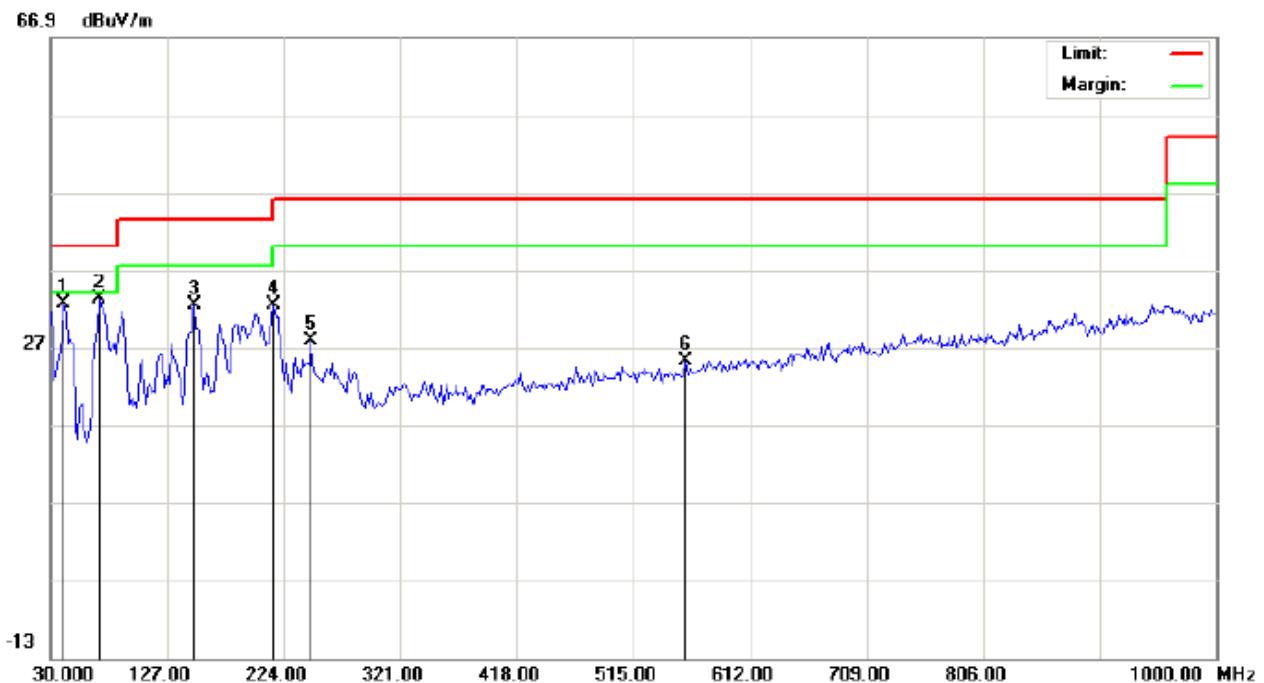



---

Site: site #1	Polarization: <b>Vertical</b>	Temperature: 26
Limit: FCC Class B 3M Radiation	Power:	Humidity: 60 %
EUT: Wireless Receiver	Distance: 3m	
M/N: UHF-4200		
Mode: mode one		
Note:		

---

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		41.3166	27.34	5.32	32.66	40.00	-7.34	peak			
2	*	70.4167	29.08	4.09	33.17	40.00	-6.83	peak			
3		149.6331	13.38	19.00	32.38	43.50	-11.12	peak			
4		215.9166	17.77	14.56	32.33	43.50	-11.17	peak			
5		246.6332	10.54	17.23	27.77	46.00	-18.23	peak			
6		558.6499	1.26	23.97	25.23	46.00	-20.77	peak			

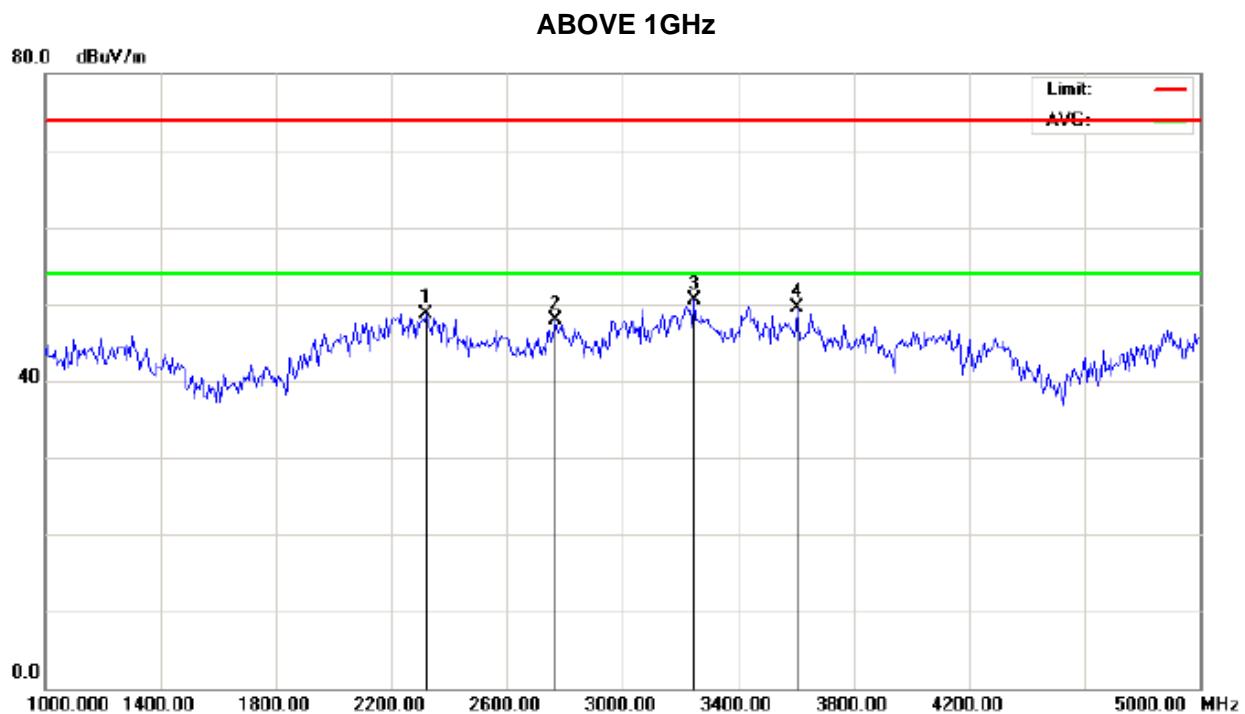

---

Site: site #1      Polarization: **Horizontal**      Temperature: 26  
Limit: FCC Class B 3M Radiation above 1GHZ(PK)      Power:      Humidity: 60 %  
EUT: Wireless Receiver      Distance: 3m  
M/N: UHF-4200  
Mode: mode one  
Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2320.000	38.50	10.23	48.73	74.00	-25.27	peak			
2		2766.667	36.73	11.08	47.81	74.00	-26.19	peak			
3	*	3246.667	38.60	11.87	50.47	74.00	-23.53	peak			
4		3606.667	36.67	12.77	49.44	74.00	-24.56	peak			



Site: site #1 Polarization: **Vertical** Temperature: 26  
Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: Humidity: 60 %  
EUT: Wireless Receiver Distance: 3m  
M/N: UHF-4200  
Mode: mode one  
Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		1826.667	39.55	8.06	47.61	74.00	-26.39	peak			
2		2060.000	36.78	9.95	46.73	74.00	-27.27	peak			
3	*	3133.333	40.60	11.77	52.37	74.00	-21.63	peak			
4		3820.000	32.43	14.08	46.51	74.00	-27.49	peak			

**APPENDIX 1**  
**PHOTOGRAPHS OF TEST SETUP**  
**CONDUCTED EMISSION TEST SETUP**



**RADIATED EMISSION TEST SETUP**




**APPENDIX 2**  
**PHOTOGRAPHS OF EUT**

**TOTAL VIEW OF EUT**



**TOP VIEW OF EUT-1**

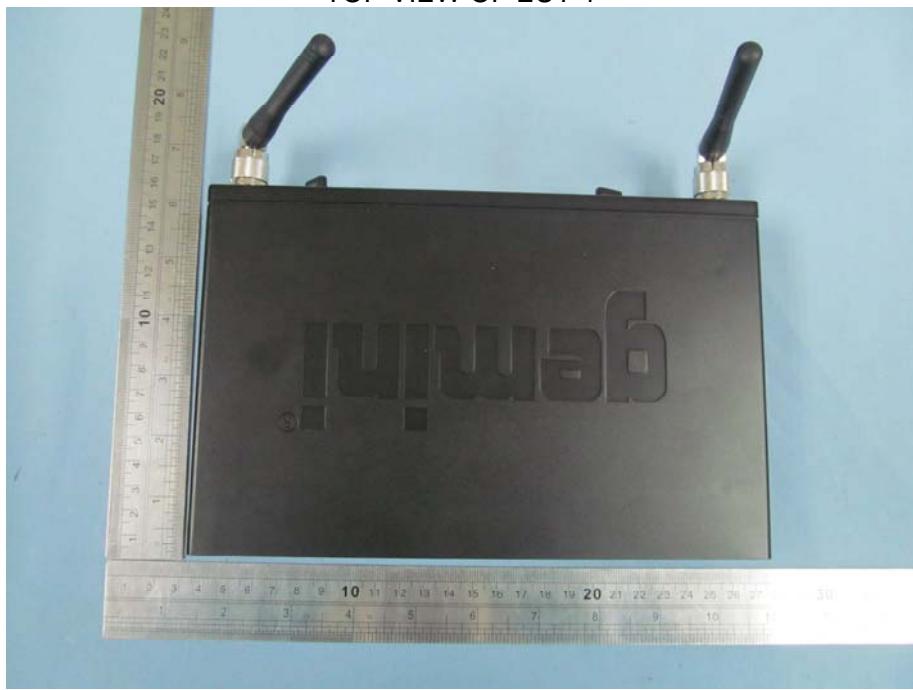

BOTTOM VIEW OF EUT-2



FRONT VIEW OF EUT



BACK VIEW OF EUT



LEFT VIEW OF EUT




RIGHT VIEW OF EUT




OPEN VIEW OF EUT




INTERNAL VIEW OF EUT-1

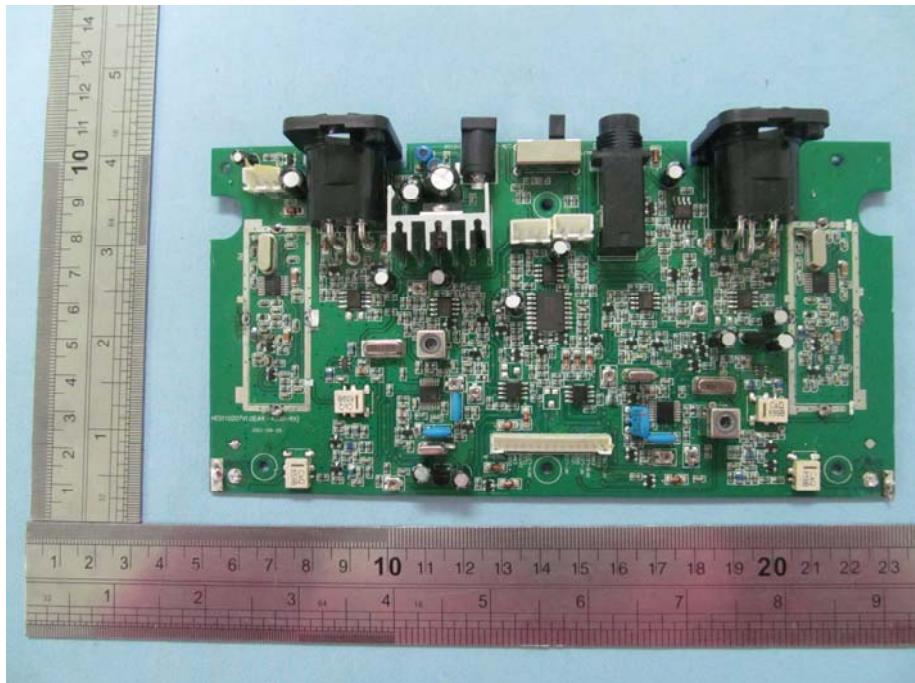


INTERNAL VIEW OF EUT-2

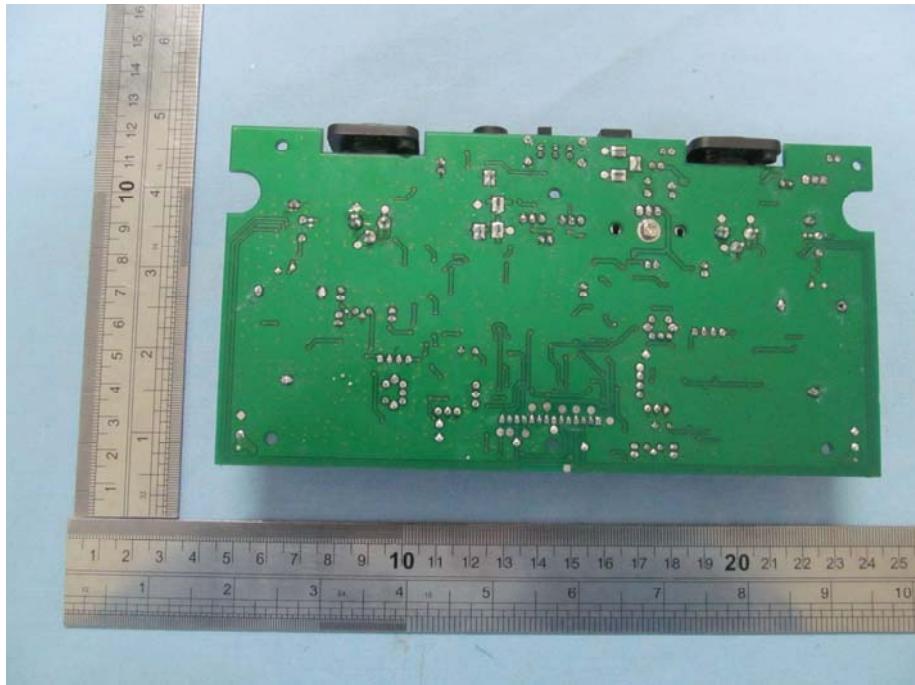

INTERNAL VIEW OF EUT-3

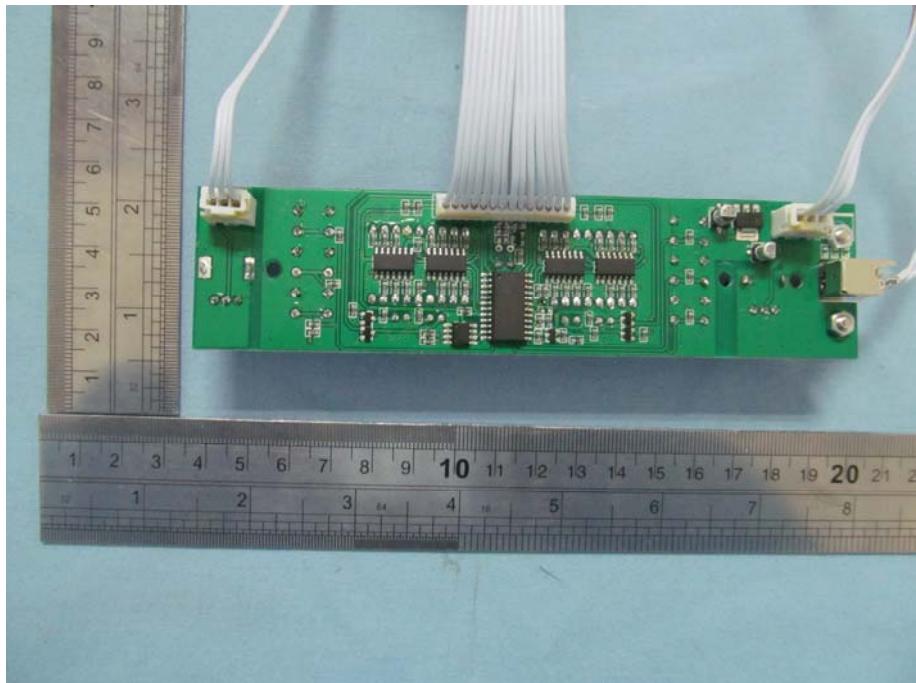

INTERNAL VIEW OF EUT-4

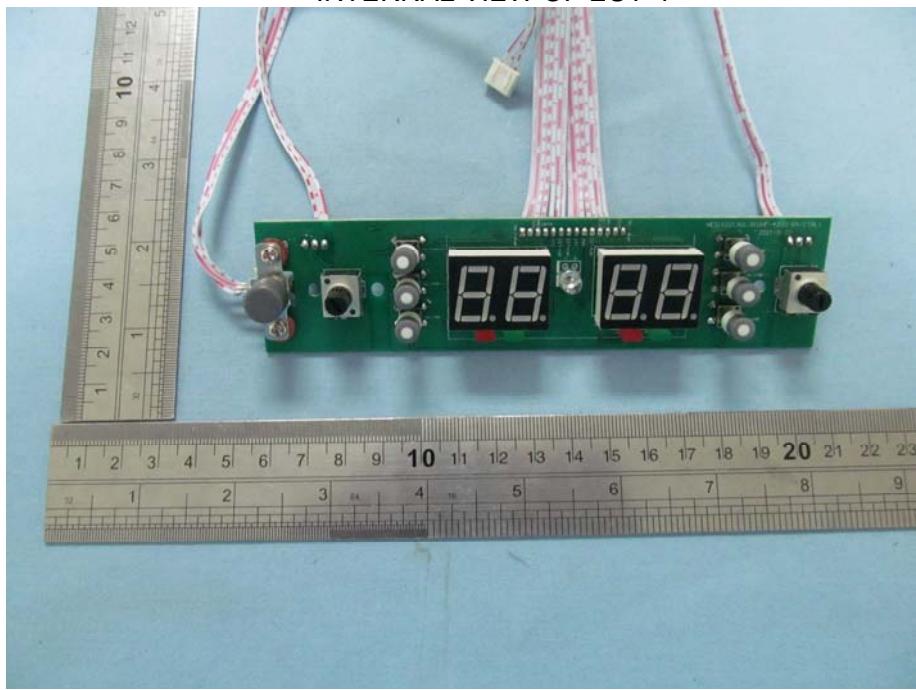

-----END OF REPORT-----