



FCC 47 CFR PART 15 SUBPART B

TEST REPORT

For

Applicant: AEG Telecomunicações, S.A.

Address: Rua João Saraiva, 4, 1700-249 Lisboa, Portugal

Product Name: Mobile Phone

Model Name: QSX400

Brand Name: AEG

FCC ID: A72-QSX400

Report No.: STS120307F1

Date of Issue: April. 7, 2012

Issued by: Most Technology Service Co., Ltd.

**Address: No.5, 2nd Langshan Road, North District, Hi-tech Industrial Park,
Nanshan, Shenzhen, Guangdong, China**

Tel: 86-755-8617 0306

Fax: 86-755-8617 0310

The report consists 50 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by MOST. The test results in the report only apply to the tested sample. The test report shall be invalid without all the signatures of testing engineers, reviewer and approver.

TABLE OF CONTENTS

1. VERIFICATION OF CONFORMITY	3
2. GENERAL INFORMATION.....	4
2.1 PRODUCT INFORMATION.....	4
2.2 OBJECTIVE	5
2.3 TEST STANDARDS AND RESULTS.....	5
2.4 ENVIRONMENTAL CONDITIONS	5
3. TEST FACILITY	6
4. TEST EQUIPMENT LIST	7
5. 47 CFR PART 15B REQUIREMENTS	8
5.1 GENERAL INFORMATION.....	8
6. LINE CONDUCTED EMISSION TEST.....	10
6.1. LIMITS OF LINE CONDUCTED EMISSION TEST	10
6.2. BLOCK DIAGRAM OF TEST SETUP.....	10
6.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST	11
6.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST	11
6.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST	12
7. RADIATED EMISSION TEST	22
7.1. LIMITS OF RADIATED DISTURBANCES AT 3M DISTANCES FOR CLASS B	22
7.2 TEST DESCRIPTION.....	22
7.3 TEST RESULT	24
APPENDIX 1.....	36
PHOTOGRAPHS OF TEST SETUP	36
APPENDIX 2.....	40
PHOTOGRAPHS OF EUT	40

1. VERIFICATION OF CONFORMITY

Equipment Under Test: Mobile Phone
Brand Name: AEG
Model Number: QSX400
Series Model Name: N/A
Difference description: N/A
FCC ID: A72-QSX400
Applicant: AEG Telecomunicações, S.A.
Rua João Saraiva, 4, 1700-249 Lisboa, Portugal
Manufacturer: Hong Kong Sharp Technology Limited
Room 604,Guoren Mansion , Sic-tech 3rd Road, Sic-tech park, NanShan, SZ
Technical Standards: FCC Part 15 B
File Number: STS120307F1
Date of test: March. 26,2012 ~ April. 6, 2012
Deviation: None
Condition of Test Sample: Normal
Test Result: PASS

The above equipment was tested by MOST Technology Service Co., Ltd. for compliance with the requirements set forth in FCC Part 15 and the Technical Standards mentioned above. This said equipment in the configuration described in this report shows the maximum emission levels emanating from equipment and the level of the immunity endurance of the equipment are within the compliance requirements.

The test results of this report relate only to the tested sample identified in this report.

Tested by (+ signature):



Zhang Ling

April. 7, 2012


Review by (+ signature):



July Wen

April. 7, 2012

Approved by (+ signature):



Terry Yang

April. 7, 2012

2. GENERAL INFORMATION

2.1 PRODUCT INFORMATION

EUT1- Mobile Phone	
Description:	Mobile Phone
Model Name:	QSX400
Serial No.:	N/A
Model Difference description:	N/A
IMEI No.:	354208045142578/354208045142586
Frequency:	GSM 850MHz/1900MHz
Hardware Version:	X911_V5.0
Software Version:	X911_PORTUGUESE_AEG_X3A_V01_GC2015GC0309_WIFI_MT5921_ILI9342_HX8368A_20111013
EUT2- Battery	
Description:	Lithium-ion Battery
Model Name:	QSX400
Brand Name:	AEG
Manufacturer:	Shenzhen Haiping Electronic Technology Co., Ltd.
Capacitance:	1000 mAh
Rated Voltage:	3.7V
Charge Limit:	4.2V
EUT3 – Power Supply	
Description:	Travel Charger
Model Name:	QSX400
Brand Name:	AEG
Manufacturer:	Shenzhen Huida Electronic Co., Ltd.
Rated Input:	AC 100-240V, 50/60Hz, 0.12A
Rated Output:	DC 5V, 0.5A
Length of USB cable:	1.0m

NOTE:

1. The EUT is a model of GSM Portable Mobile Station (MS). It consists of **hand telephone set**, **Lithium battery**, **USB cable**, **headphone** and **Charger** as listed above.
2. Please refer to Appendix 2 for the photographs of the EUT. For a more detailed features description about the EUT, please refer to User's Manual.

2.2 OBJECTIVE

Perform FCC Part 15 Subpart B tests for FCC Marking.

2.3 TEST STANDARDS AND RESULTS

Test items and the results are as bellow:

EMISSION				
Standard	Item		Result	Remarks
FCC 47 CFR Part 15 Subpart B (10-1-05 Edition)	§15.107	Conducted Emission	PASS	Meet Class B limit
	§15.109	Radiated Emission	PASS	Meet Class B limit

Note: 1. The test result judgment is decided by the limit of measurement standard
2. The information of measurement uncertainty is available upon the customer's request.

2.4 ENVIRONMENTAL CONDITIONS

During the measurement the environmental conditions were within the listed ranges:

- Temperature: 15-35°C
- Humidity: 30-60 %
- Atmospheric pressure: 86-106 kPa

3. TEST FACILITY

Test Site:	Most Technology Service Co., Ltd.
Location:	No.5, Langshan 2nd Rd., North Hi-Tech Industrial park, Nanshan, Shenzhen, Guangdong ,China
Description:	There is one 3m semi-anechoic an area test sites and two line conducted labs for final test. The Open Area Test Sites and the Line Conducted labs are constructed and calibrated to meet the FCC requirements in documents ANSI C63.4:2009 and CISPR 16 requirements. The FCC Registration Number is 490827. The CNAS Registration Number is CNAS L3573.
Site Filing:	The site description is on file with the Federal Communications Commission, 7435 Oakland Mills Road, Columbia, MD 21046.
Instrument Tolerance:	All measuring equipment is in accord with ANSI C63.4:2009 and CISPR 16 requirements that meet industry regulatory agency and accreditation agency requirement.
Ground Plane:	Two conductive reference ground planes were used during the Line Conducted Emission, one in vertical and the other in horizontal. The dimensions of these ground planes are as below. The vertical ground plane was placed distancing 40 cm to the rear of the wooden test table on where the EUT and the support equipment were placed during test. The horizontal ground plane projected 50 cm beyond the footprint of the EUT system and distanced 80 cm to the wooden test table. For Radiated Emission Test, one horizontal conductive ground plane extended at least 1m beyond the periphery of the EUT and the largest measuring antenna, and covered the entire area between the EUT and the antenna. It has no holes or gaps having longitudinal dimensions larger than one-tenth of a wavelength at the highest frequency of measurement up to 1GHz.

4. TEST EQUIPMENT LIST

Instrumentation: The following list contains equipment used at MOST for testing. The equipment conforms to the CISPR 16-1 / ANSI C63.2 Specifications for Electromagnetic Interference and Field Strength Instrumentation from 10 kHz to 1.0 GHz or above.

No.	Equipment	Manufacturer	Model No.	S/N	Calibration date	Calibration due date
1	Test Receiver	Rohde & Schwarz	ESCI	100492	2012/03/14	2013/03/14
2	L.I.S.N.	Rohde & Schwarz	ENV216	100093	2012/03/14	2013/03/14
3	Coaxial Switch	Anritsu Corp	MP59B	6200283933	2012/03/14	2013/03/14
4	Terminator	Hubersuhner	50Ω	No.1	2012/03/14	2013/03/14
5	RF Cable	SchwarzBeck	N/A	No.1	2012/03/14	2013/03/14
6	Test Receiver	Rohde & Schwarz	ESPI	101202	2012/03/14	2013/03/14
7	Bilog Antenna	Sunol	JB3	A121206	2012/03/14	2013/03/14
8	Test Antenna - Horn	Schwarzbeck	BBHA 9120C	--	2012/03/14	2013/03/14
9	Test Antenna - LOOP	Schwarzbeck	VULB 9163	--	2012/03/14	2013/03/14
10	Cable	Resenberger	N/A	NO.1	2012/03/14	2013/03/14
11	Cable	SchwarzBeck	N/A	NO.2	2012/03/14	2013/03/14
12	Cable	SchwarzBeck	N/A	NO.3	2012/03/14	2013/03/14
13	DC Power Filter	DuoJi	DL2×30B	N/A	2012/03/14	2013/03/14
14	Single Phase Power Line Filter	DuoJi	FNF 202B30	N/A	2012/03/14	2013/03/14
15	3 Phase Power Line Filter	DuoJi	FNF 402B30	N/A	2012/03/14	2013/03/14
16	Spectrum Analyzer	Agilent	4408B	MY41440460	2012/03/14	2013/03/14
17	Absorbing Clamp	Luthi	MDS21	3635	2012/03/14	2013/03/14
18	Coaxial Switch	Anritsu Corp	MP59B	6200283933	2012/03/14	2013/03/14
19	AC Power Source	Kikusui	AC40MA	LM003232	2012/03/14	2013/03/14
20	Test Analyzer	Kikusui	KHA1000	LM003720	2012/03/14	2013/03/14
21	Line Impedence Network	Kikusui	LIN40MA-PCR-L	LM002352	2012/03/14	2013/03/14
22	ESD Tester	Kikusui	KES4021	LM003537	2012/03/14	2013/03/14
23	EMC PRO System	EM Test	UCS-500-M4	V0648102026	2012/03/14	2013/03/14
24	Signal Generator	IFR	2032	203002/100	2012/03/14	2013/03/14
25	Amplifier	A&R	150W1000	301584	2012/03/14	2013/03/14
26	CDN	FCC	FCC-801-M2-25	47	2012/03/14	2013/03/14
27	CDN	FCC	FCC-801-M3-25	107	2012/03/14	2013/03/14
28	EM Injection Clamp	FCC	F-203I-23mm	403	2012/03/14	2013/03/14
29	RF Cable	MIYAZAKI	N/A	No.1/No.2	2012/03/14	2013/03/14
30	Universal Radio Communication Tester	ROHDE&SCHWARZ	CMU200	0304789	2012/03/14	2013/03/14
31	Telecommunication Antenna	European Antennas	PSA 75301R/170	0304213	2012/03/14	2013/03/14
32	Temperature Chamber	Guangzhou Gongwen	GDS-250	N/A	2012/03/14	2013/03/14

NOTE: Equipments listed above have been calibrated and are in the period of validation.

5. 47 CFR PART 15B REQUIREMENTS

5.1 GENERAL INFORMATION

EUT Function and Test Mode

Mode 1: Idle Mode

The MS was registered to the base station simulator but no call was set up.

The EUT configuration of the emission test was **MS + Battery+ Charger**.

Mode 2: Call Mode

Before the measurement, the lithium battery was completely discharge.

During the measurement, the lithium battery and the charger were installed, and the MS were in charging state. A communication link was established between the MS and a System Simulator (SS). The MS operated at GSM 850/1900MHz mid ARFCN and maximum output power.

The EUT configuration of the emission test was **MS + Battery+ Charger**.

Mode 3: GPRS Mode

During the test, the MS was playing the GPRS function continuously.

The EUT configuration of the emission test was **MS + Battery+ Charger**.

Mode 4: Bluetooth Mode

During the test, the MS was playing the Bluetooth function continuously.

The EUT configuration of the emission test was **MS + Battery+ Charger**.

Mode 5: MP3/MP4 Mode

During the test, the MS was playing the MP3/MP4 function continuously.

The EUT configuration of the emission test was **MS + Battery + Charger**.

Mode 6: Camera Mode

During the test, the MS was playing the camera function continuously.

The EUT configuration of the emission test was **MS + Battery+ Charger**.

Mode 7: FM Mode

During the test, the MS was playing the FM function continuously.

The EUT configuration of the emission test was **MS + Battery + Earphone**.

Mode 8: WIFI Mode

During the test, the MS was playing the WIFI function continuously.

The EUT configuration of the emission test was **MS + Battery+ Charger**.

Mode 9: USB Mode

During the test, the MS was connected with the notebook and made the data transmission function continuously.

The EUT configuration of the emission test was **MS + Battery + USB Cable + Notebook** (MSi-MS-1224).

Mode 10: TV Mode

During the test, the MS was playing the TV function continuously.

The EUT configuration of the emission test was **MS + Battery+ Charger**.

6. LINE CONDUCTED EMISSION TEST


6.1. LIMITS OF LINE CONDUCTED EMISSION TEST

Frequency	Maximum RF Line Voltage	
	Q.P.(dBuV)	Average(dBuV)
150kHz-500kHz	66-56	56-46
500kHz-5MHz	56	46
5MHz-30MHz	60	50

****Note:** 1. the lower limit shall apply at the transition frequency.

2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz

6.2. BLOCK DIAGRAM OF TEST SETUP

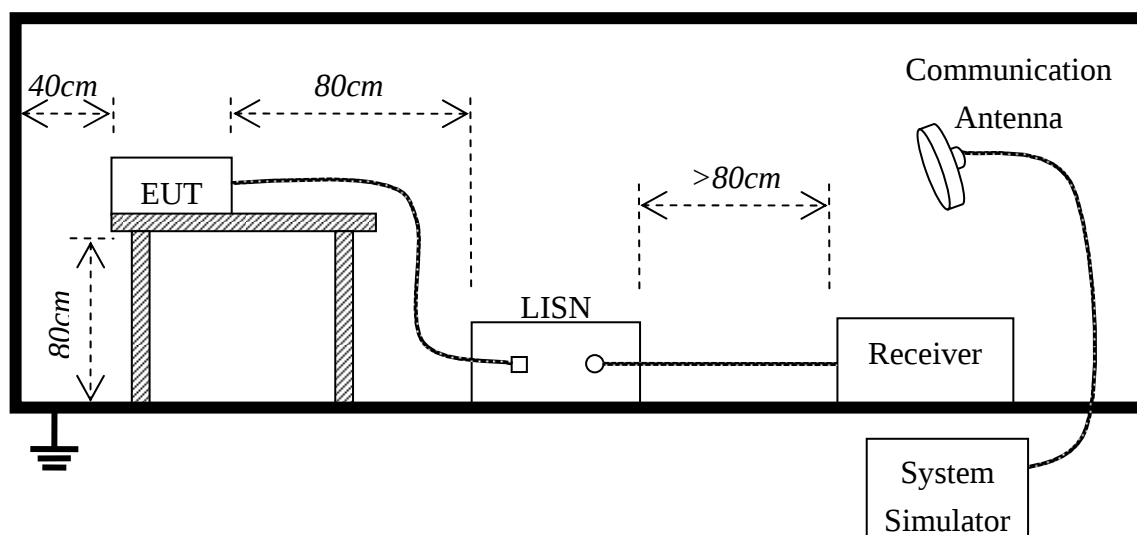

6.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST

- 1) The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per FCC Part 15 (see Test Facility for the dimensions of the ground plane used). When the EUT is floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
- 2) Support equipment, if needed, was placed as per FCC Part 15.
- 3) All I/O cables were positioned to simulate typical actual usage as per FCC Part 15.
- 4) The EUT received DC 5V by AC/DC adapter which through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.
- 5) All support equipments received power from a second LISN supplying power of AC 120V/60Hz, if any.
- 6) The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 7) Analyzer / Receiver scanned from 150 kHz to 30 MHz for emissions in each of the test modes.
- 8) During the above scans, the emissions were maximized by cable manipulation.
- 9) The following test mode(s) were scanned during the preliminary test:

Preliminary Conducted Emission Test				
Frequency Range Investigated		150KHz TO 30 MHz		
Mode of operation	Date	Report No.	Data#	Worst Mode
Idle Mode	2012-4-6	STS120307F1	QSX400_1_(L, N)	☐
Call Mode	2012-4-6	STS120307F1	QSX400_2_(L, N)	☐
GPRS Mode	2012-4-6	STS120307F1	QSX400_3_(L, N)	☐
Bluetooth Mode	2012-4-6	STS120307F1	QSX400_4_(L, N)	☐
MP3/MP4 Mode	2012-4-6	STS120307F1	QSX400_5_(L, N)	☐
Camera Mode	2012-4-5	STS120307F1	QSX400_6_(L, N)	☒
FM Mode	2012-4-6	STS120307F1	QSX400_7_(L, N)	☐
WIFI Mode	2012-4-6	STS120307F1	QSX400_8_(L, N)	☐
USB Mode	2012-4-5	STS120307F1	QSX400_9_(L, N)	☐

Then, the EUT configuration and cable configuration of the above highest emission level were recorded for reference of final testing.

6.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST

EUT and support equipment was set up on the test bench as per step 9 of the preliminary test.

A scan was taken on both power lines, Line 1 and Line 2, recording at least the six highest emissions. Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. If EUT emission level was less -2dB to the A.V. limit in Peak mode, then the emission signal was re-checked using Q.P and Average detector.

The test data of the worst case condition(s) was reported on the Summary Data page.

6.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST



Address: No.5, Langshan 2nd Rd., North Hi-Tech Industrial park
Guangdong, China
Tel: 0755-86170306 Fax: 0755-86170310

Conducted Emission Measurement


File: QSX400

Data: #1

Date: 2012/04/05/

Time: 12:05:13

00.0 dBuV

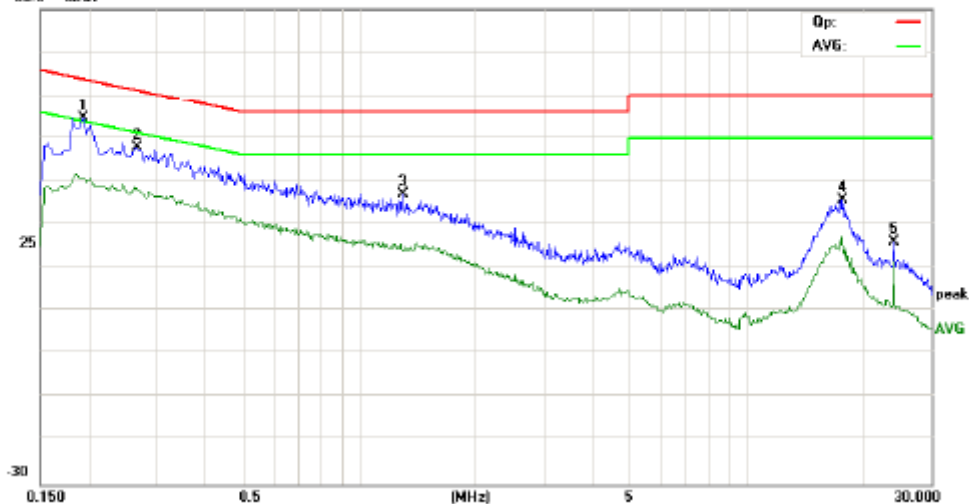

Site: site #1

Phase: N

Temperature: 26

Limit: FCC Part15 B Class B QP

Power: DC 5V From PC Input
AC 120V/60Hz

Humidity: 60 %

EUT: Mobile Phone

M/N: QSX400

Mode: USB

Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1	*	0.1940	43.05	11.84	54.89	63.86	-9.17	peak	
2		0.2680	36.25	11.56	47.81	61.24	-13.43	peak	
3		1.2900	27.33	9.71	37.04	56.00	-18.96	peak	
4		17.5780	26.58	9.00	35.58	60.00	-24.42	peak	
5		23.9980	17.05	9.00	26.05	60.00	-33.95	peak	

*:Maximum data x:Over limit !:over margin



Address: No.5, Langshan 2nd Rd., North Hi-Tech Industrial park
Guangdong, China
Tel: 0755-86170306 Fax: 0755-86170310

Conducted Emission Measurement


File: QSX400

Data: #2

Date: 2012/04/05/

Time: 12:07:07

99.0 dBuV

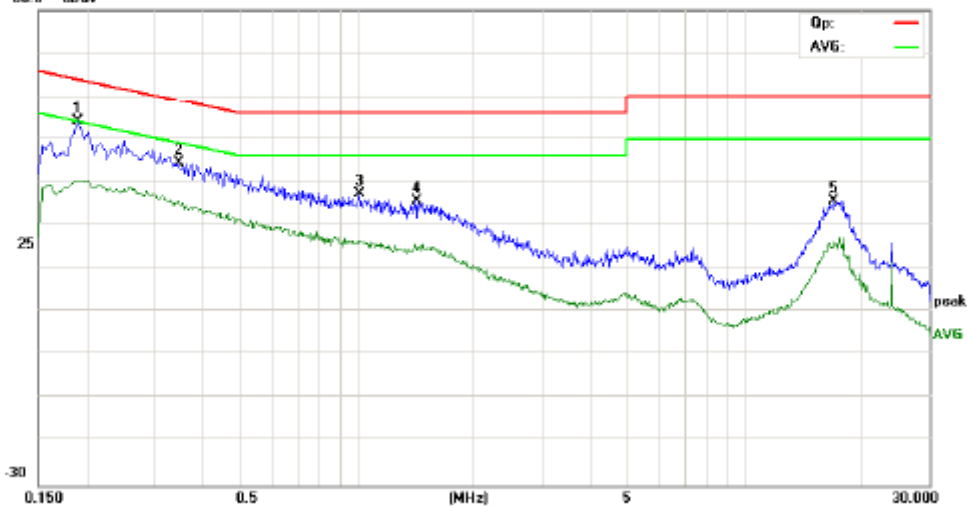

Site site #1

Phase: L1

Temperature: 26

Limit: FCC Part15 B Class B QP

Power: DC 5V From PC Input
AC120V/60Hz

Humidity: 60 %

EUT: Mobile Phone

M/N: QSX400

Mode: USB

Note:

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over		
		MHz	Level	Factor	ment			Detector	Comment
			dBuV	dB	dBuV	dBuV	dB		
1	*	0.1900	42.61	11.40	54.01	64.04	-10.03	peak	
2		0.3460	33.38	11.03	44.41	59.06	-14.65	peak	
3		1.0140	27.27	9.99	37.26	56.00	-18.74	peak	
4		1.4140	25.88	9.59	35.47	56.00	-20.53	peak	
5		16.9500	26.53	9.00	35.53	60.00	-24.47	peak	

*:Maximum data x:Over limit !:over margin



Address: No.5, Langshan 2nd Rd., North Hi-Tech Industrial park
Guangdong, China
Tel: 0755-86170306 Fax: 0755-86170310

Conducted Emission Measurement


File: QSX400

Data #15

Date: 2012/04/05/

Time: 15:39:25

60.0 dBuV

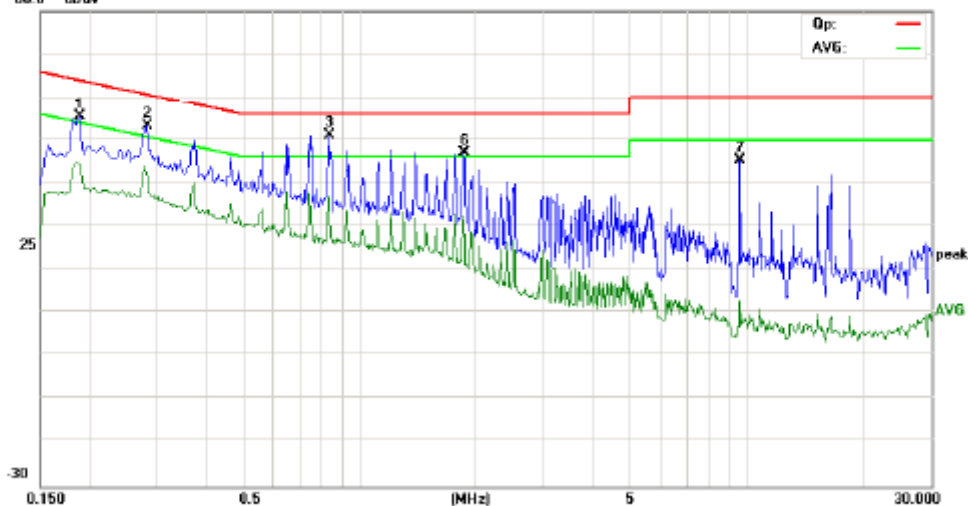

Site site #1

Phase: **N**

Temperature: 26

Limit: EN55022 Class B QP

Power: AC 120V/60Hz

Humidity: 60 %

EUT: Mobile Phone

M/N: QSX400

Mode: CAMERA

Note:

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over		
		MHz	Level	Factor	ment			Detector	Comment
			dBuV	dB	dBuV	dBuV	dB		
1		0.1900	44.10	11.40	55.50	64.04	-8.54	peak	
2		0.2820	41.78	11.45	53.23	60.76	-7.53	peak	
3	*	0.8380	41.12	10.00	51.12	56.00	-4.88	peak	
4		0.8380	26.94	10.00	36.94	46.00	-9.06	AVG	
5		1.8580	23.18	9.14	32.32	46.00	-13.68	AVG	
6		1.8620	37.72	9.14	46.86	56.00	-9.14	peak	
7		9.6140	38.11	9.23	45.34	60.00	-14.66	peak	
8		9.6140	3.65	9.23	12.88	50.00	-37.12	AVG	

*:Maximum data x:Over limit !:over margin



Address: No.5, Langshan 2nd Rd., North Hi-Tech Industrial park
Guangdong, China
Tel: 0755-86170306 Fax: 0755-86170310

Conducted Emission Measurement


File: QSX400

Data: #16

Date: 2012/04/05

Time: 15:41:15

80.0 dBuV

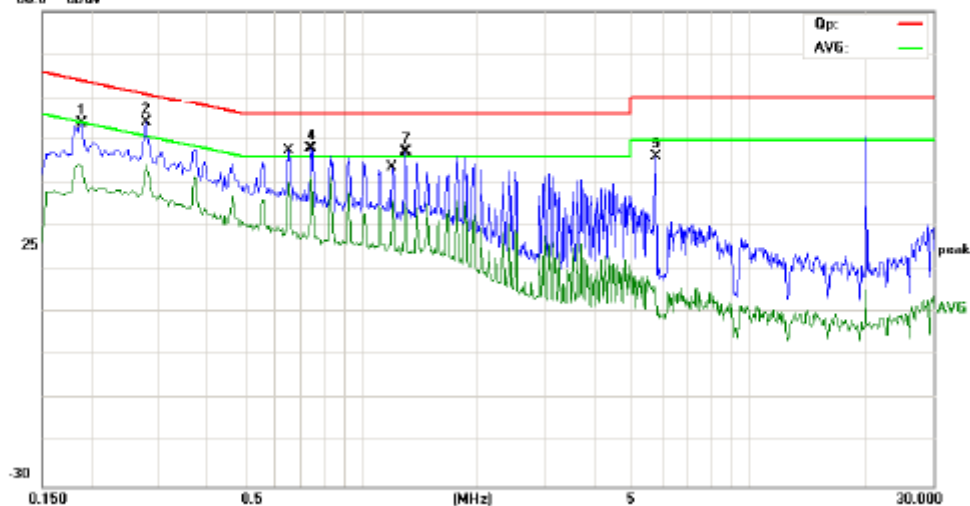

Site site #1

Phase: L1

Temperature: 26

Limit: EN55022 Class B QP

Power: AC 120V/60Hz

Humidity: 60 %

EUT: Mobile Phone

M/N: QSX400

Mode: CAMERA

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV	dBuV	dB		
1		0.1900	42.41	11.40	53.81	64.04	-10.23	peak	
2		0.2780	42.46	11.48	53.94	60.88	-6.94	peak	
3		0.8500	29.91	10.00	39.91	46.00	-6.09	AVG	
4		0.7420	37.97	10.00	47.97	56.00	-8.03	peak	
5	*	0.7420	31.23	10.00	41.23	46.00	-4.77	AVG	
6		1.2060	26.13	9.79	35.92	46.00	-10.08	AVG	
7		1.3020	37.52	9.70	47.22	56.00	-8.78	peak	
8		1.3020	25.74	9.70	35.44	46.00	-10.56	AVG	
9		5.7340	34.60	11.56	46.16	60.00	-13.84	peak	

*:Maximum data x:Over limit !:over margin



Address: No.5, Langshan 2nd Rd., North Hi-Tech Industrial park
Guangdong, China
Tel: 0755-86170306 Fax: 0755-86170310

Conducted Emission Measurement


File: QSX400

Data: #17

Date: 12/04/06/

Time: 9/23/37

99.0 dBuV

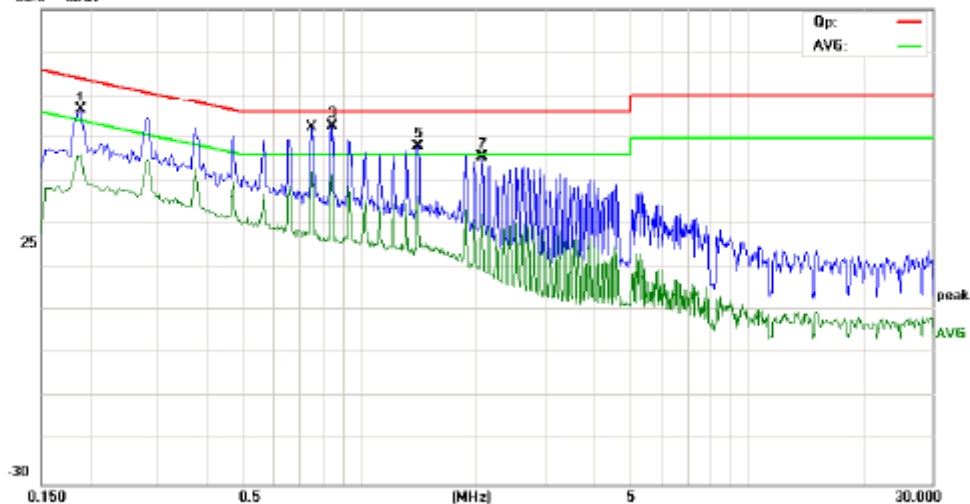

Site site #1

Phase: L1

Temperature: 26

Limit: FCC Part15 B Class B QP

Power: AC 120V/60Hz

Humidity: 60 %

EUT: Mobile Phone

M/N: QSX400

Mode: CALL

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV	dBuV	dB		
1		0.1900	45.17	11.40	56.57	64.04	-7.47	peak	
2		0.7500	32.08	10.00	42.08	48.00	-3.94	AVG	
3	*	0.8480	42.78	10.00	52.78	58.00	-3.24	peak	
4		0.8480	31.45	10.00	41.45	48.00	-4.55	AVG	
5		1.4060	38.48	9.59	48.07	58.00	-7.93	peak	
6		1.4060	28.71	9.59	38.30	48.00	-9.70	AVG	
7		2.0620	36.32	9.06	45.38	58.00	-10.62	peak	
8		2.0620	23.30	9.06	32.36	48.00	-13.64	AVG	

*:Maximum data x:Over limit !:over margin



Address: No.5, Langshan 2nd Rd., North Hi-Tech Industrial park
Guangdong, China
Tel: 0755-86170306 Fax: 0755-86170310

Conducted Emission Measurement


File: QSX400

Data #18

Date: 12/04/06/

Time: 9/25/53

80.0 dBuV

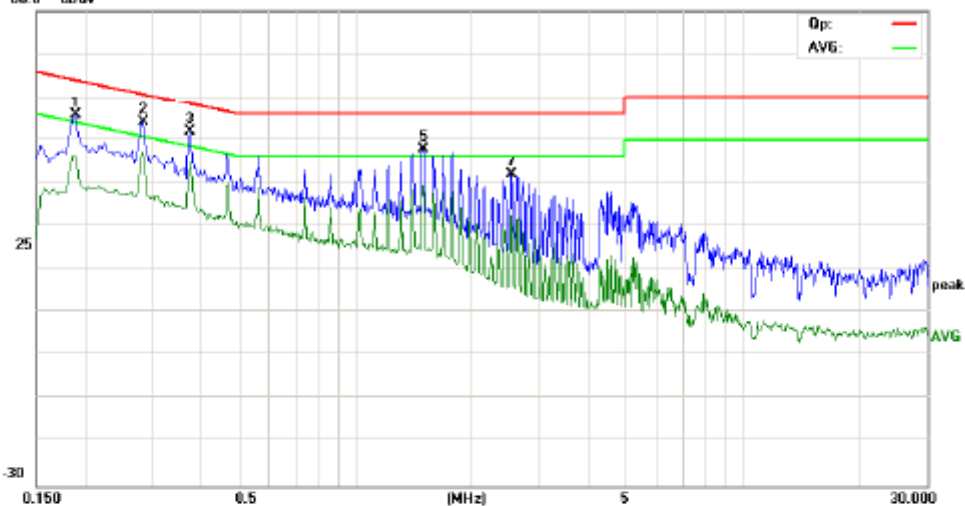

Site site #1

Phase: N

Temperature: 26

Limit: FCC Part15 B Class B QP

Power: AC 120V/60Hz

Humidity: 60 %

EUT: Mobile Phone

M/N: QSX400

Mode: CALL

Note:

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over		
		MHz	Level	Factor	ment			Detector	Comment
			dBuV	dB	dBuV	dBuV	dB		
1		0.1900	44.27	11.40	55.67	64.04	-8.37	peak	
2		0.2820	42.62	11.45	54.07	60.76	-6.69	peak	
3		0.3740	41.11	10.84	51.95	58.41	-6.46	peak	
4	*	0.3740	34.14	10.84	44.98	48.41	-3.43	AVG	
5		1.5020	38.18	9.50	47.68	56.00	-8.32	peak	
6		1.5020	29.88	9.50	39.38	46.00	-6.62	AVG	
7		2.5300	32.44	9.53	41.97	56.00	-14.03	peak	
8		2.5300	22.65	9.53	32.18	46.00	-13.82	AVG	

*:Maximum data x:Over limit !:over margin



Address: No.5, Langshan 2nd Rd., North Hi-Tech Industrial park
Guangdong, China
Tel: 0755-86170308 Fax: 0755-86170310

Conducted Emission Measurement


File: QSX400

Data: #19

Date: 12/04/06/

Time: 9/32/43

80.0 dBuV

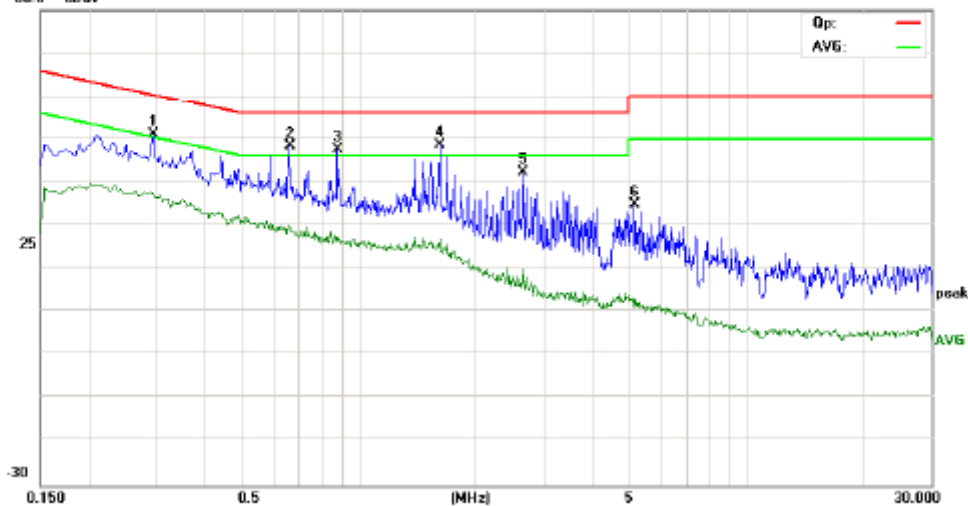

Site site #1

Phase: L1

Temperature: 26

Limit: FCC Part15 B Class B QP

Power: AC 120V/60Hz

Humidity: 60 %

EUT: Mobile Phone

M/N: QSX400

Mode: BLUETOOTH

Note:

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over		
		MHz	Level	Factor	ment			Detector	Comment
			dBuV	dB	dBuV	dBuV	dB		
1		0.2940	39.67	11.37	51.04	60.41	-9.37	peak	
2		0.6580	38.33	10.00	48.33	58.00	-7.67	peak	
3		0.8780	37.42	10.00	47.42	58.00	-8.58	peak	
4	*	1.6140	39.26	9.39	48.65	58.00	-7.35	peak	
5		2.6380	32.50	9.64	42.14	58.00	-13.86	peak	
6		5.1380	22.78	11.92	34.70	60.00	-25.30	peak	

*:Maximum data x:Over limit !:over margin



Address: No.5, Langshan 2nd Rd., North Hi-Tech Industrial park
Guangdong, China
Tel: 0755-88170306 Fax: 0755-88170310

Conducted Emission Measurement


File: QSX400

Data: #20

Date: 12/04/06

Time: 9/34/33

80.0 dBuV

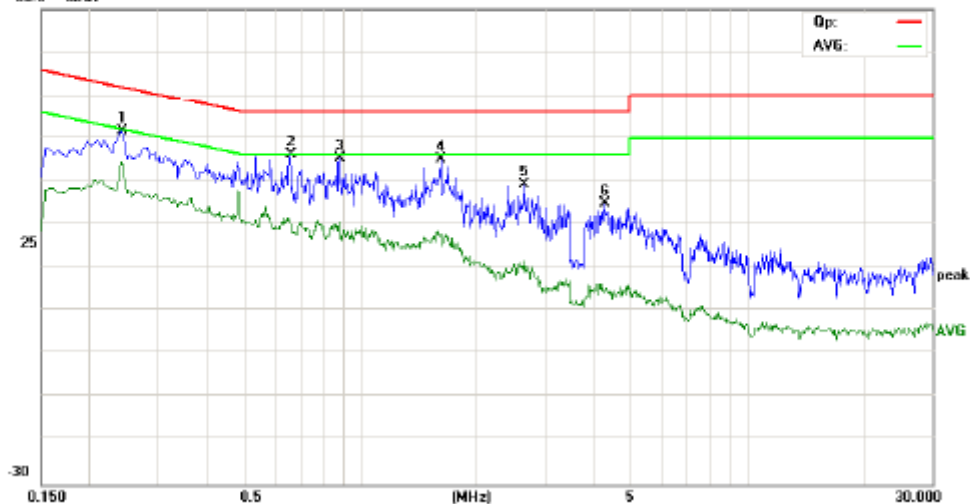

Site site #1

Phase: N

Temperature: 26

Limit: FCC Part15 B Class B QP

Power: AC 120V/60Hz

Humidity: 60 %

EUT: Mobile Phone

M/N: QSX400

Mode: BLUETOOTH

Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.2420	39.93	11.72	51.65	62.03	-10.38	peak	
2	*	0.6580	38.03	10.00	48.03	58.00	-9.97	peak	
3		0.8820	35.28	10.00	45.28	58.00	-10.74	peak	
4		1.8180	35.49	9.38	44.87	58.00	-11.13	peak	
5		2.6460	29.48	9.65	39.13	58.00	-16.87	peak	
6		4.2620	23.62	11.26	34.88	58.00	-21.12	peak	

*:Maximum data x:Over limit !:over margin



Address: No. 5, Langshan 2nd Rd., North Hi-Tech Industrial park
Guangdong, China
Tel: 0755-86170306 Fax: 0755-86170310

Conducted Emission Measurement


File: QSX400

Data: #21

Date: 12/04/06/

Time: 9/36/12

99.0 dBuV

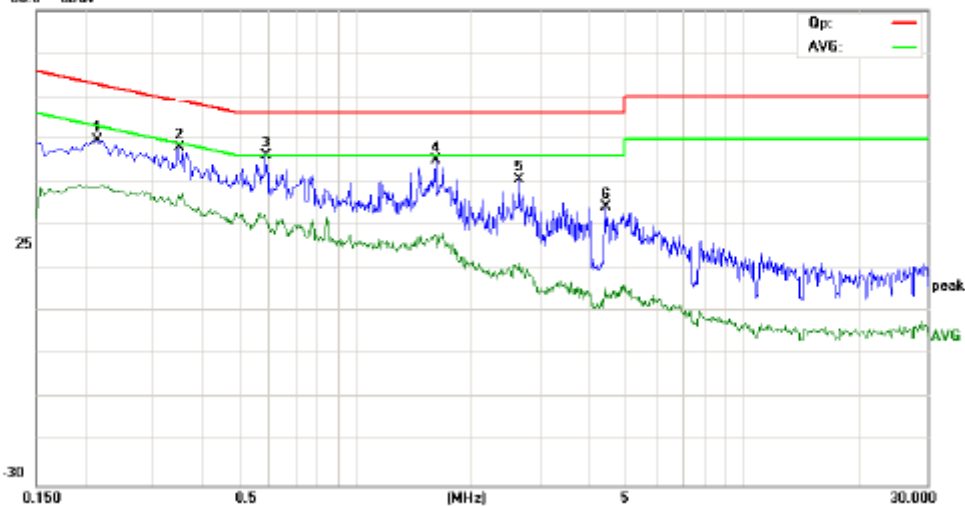

Site site #1

Phase: N

Temperature: 26

Limit: FCC Part15 B Class B QP

Power: AC 120V/60Hz

Humidity: 60 %

EUT: Mobile Phone

M/N: QSX400

Mode: WIFI

Note:

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over		
		MHz	Level	Factor	ment			Detector	Comment
			dBuV	dB	dBuV	dBuV	dB		
1		0.2140	37.81	11.91	49.72	63.05	-13.33	peak	
2		0.3500	37.02	11.00	48.02	58.98	-10.94	peak	
3	*	0.5860	35.98	10.00	45.98	56.00	-10.02	peak	
4		1.6140	35.66	9.39	45.05	56.00	-10.95	peak	
5		2.6380	30.93	9.64	40.57	56.00	-15.43	peak	
6		4.4140	22.87	11.41	34.28	56.00	-21.72	peak	

*:Maximum data x:Over limit !:over margin



Address: No.5, Langshan 2nd Rd., North Hi-Tech Industrial park
Guangdong, China
Tel: 0755-86170306 Fax: 0755-86170310

Conducted Emission Measurement


File: QSX400

Data #22

Date: 12/04/06/

Time: 9/38/01

80.0 dBuV

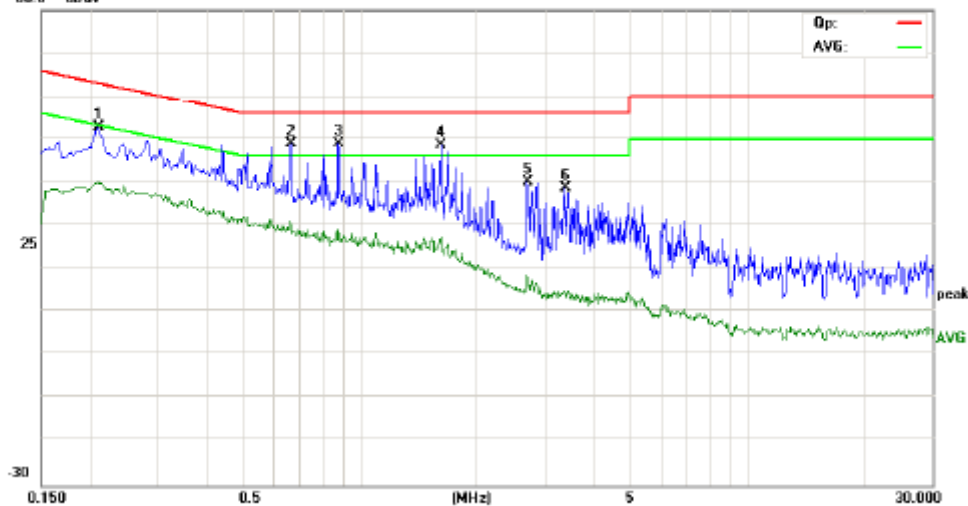

Site site #1

Phase: L1

Temperature: 26

Limit: FCC Part15 B Class B QP

Power: AC 120V/60Hz

Humidity: 60 %

EUT: Mobile Phone

M/N: QSX400

Mode: WIFI

Note:

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1	0.2100	40.59	11.93	52.52	63.21	-10.69	peak	
2	0.6620	38.69	10.00	48.69	58.00	-7.31	peak	
3 *	0.8780	38.76	10.00	48.76	58.00	-7.24	peak	
4	1.6180	39.09	9.38	48.47	58.00	-7.53	peak	
5	2.7060	30.31	9.71	40.02	58.00	-15.98	peak	
6	3.3740	28.33	10.37	38.70	58.00	-17.30	peak	

*:Maximum data x:Over limit !:over margin

7. RADIATED EMISSION TEST

7.1. LIMITS OF RADIATED DISTURBANCES AT 3M DISTANCES FOR CLASS B

According to FCC section 15.109, except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:


Frequency (MHz)	Field Strength ($\mu\text{V/m}$)	Measurement Distance (m)
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

NOTE:

1. Field Strength ($\text{dB}\mu\text{V/m}$) = $20 \cdot \log[\text{Field Strength } (\mu\text{V/m})]$.
2. In the emission tables above, the tighter limit applies at the band edges.

7.2 TEST DESCRIPTION

Test Setup:

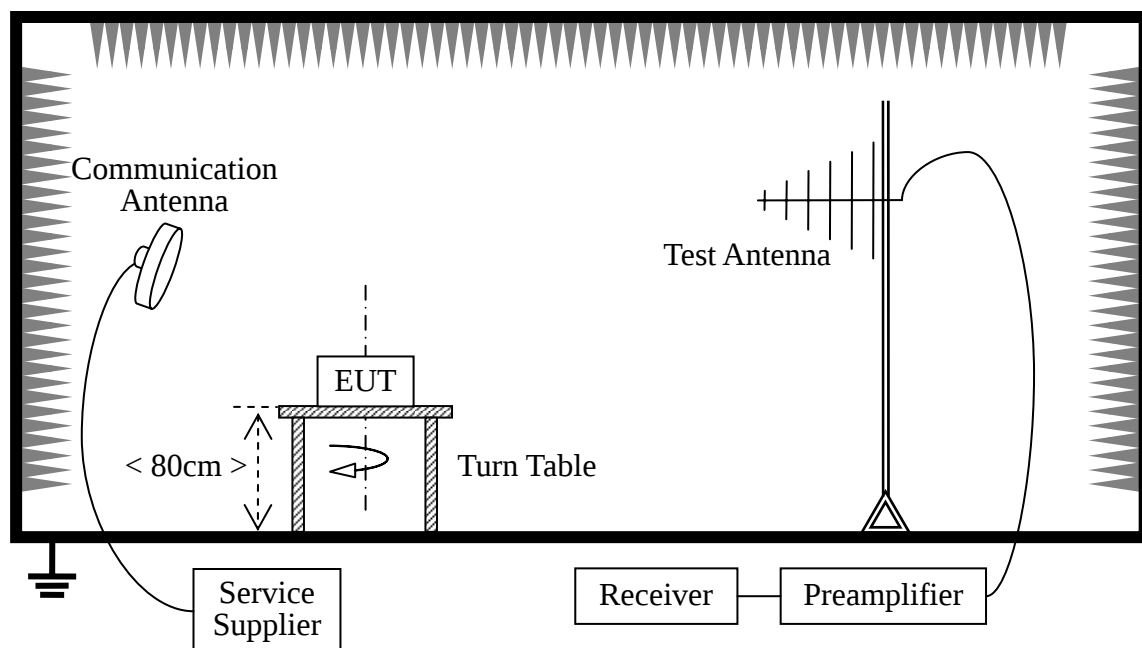

The EUT is powered by the Battery charged with the AC Adapter which is powered by 120V, 60Hz AC mains supply. The Module is located in a 3m Semi-Anechoic Chamber; the antenna factors, cable loss and so on of the site as factors are calculated to correct the reading. During the measurement, the EUT is activated and transmitting with the other Bluetooth device (Supply by the Applicant) during the test.

For the Test Antenna:

(a) In the frequency range of 9 kHz to 30MHz, magnetic field is measured with Loop Test Antenna. The Test Antenna is positioned with its plane vertical at 1m distance from the EUT. The center of the Loop Test Antenna is 1m above the ground. During the measurement the Loop Test Antenna rotates about its vertical axis for maximum response at each azimuth about the EUT.

(b) In the frequency range above 30MHz, Bi-Log Test Antenna (30MHz to 1GHz) and Horn Test Antenna (above 1GHz) are used. Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength. The emission levels at both horizontal and vertical polarizations should be tested.

Preliminary Radiated Emission Test				
Frequency Range Investigated			30 MHz TO 1000 MHz	
Mode of operation	Date	Report No.	Data#	Worst Mode
Idle Mode	2012-3-29	STS120307F1	QSX400_1_(H, V)	☐
Call Mode	2012-3-29	STS120307F1	QSX400_2_(H, V)	☐
GPRS Mode	2012-3-29	STS120307F1	QSX400_3_(H, V)	☐
Bluetooth Mode	2012-3-29	STS120307F1	QSX400_4_(H, V)	☐
MP3/MP4 Mode	2012-3-29	STS120307F1	QSX400_5_(H, V)	☐
Camera Mode	2012-3-29	STS120307F1	QSX400_6_(H, V)	☒
FM Mode	2012-3-29	STS120307F1	QSX400_7_(H, V)	☐
WIFI Mode	2012-3-29	STS120307F1	QSX400_8_(H, V)	☐
USB Mode	2012-3-29	STS120307F1	QSX400_9_(H, V)	☐

5.1.4 TEST RESULT**Form 9 KHz to 30MHz:**

Freq. (MHz)	Ant. Pol H/V	Peak Reading (dBuV)	AV Reading (dBuV)	Ant. / CL CF (dB)	Actual Fs		Peak Limit (dBuV/m)	AV Limit (dBuV/m)	AV Margin (dB)
					Peak (dBuV/m)	AV (dBuV/m)			
N/A	H								>20
N/A	V								>20

Note: No test data was detected in below 30MHz.

Form 30MHz to 1GHz:



Address: No.5, Langshan 2nd Rd., North Hi-Tech Industrial park
Guangdong, China
Tel: 0755-86170306 Fax: 0755-86170310

Radiated Emission Measurement


File: QSX400

Data: #1

Date: 2012-3-29

Time: 1:22:46

70.0 dBuV/m

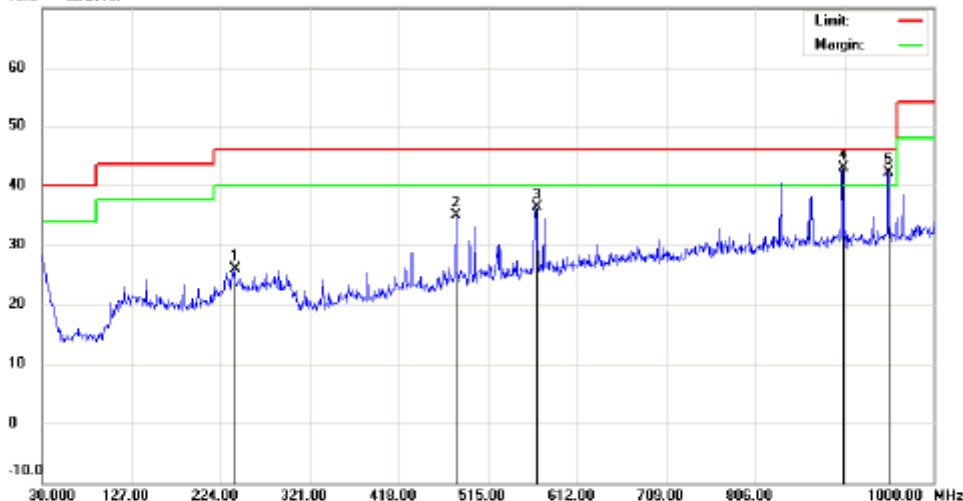

Site site #1

Polarization: **Horizontal**

Temperature: 26

Limit: FCC Part15 B 3M Radiation

Power: DC 5V From PC

Humidity: 61 %

EUT: Mobile Phone

Distance:

M/N: QSX400

Mode: USB

Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree degree	Comment
1		239.5200	8.74	17.17	25.91	46.00	-20.09	peak		
2		480.0800	13.25	21.70	34.95	46.00	-11.05	peak		
3		567.3800	13.55	22.82	36.37	46.00	-9.63	peak		
4	*	901.0800	15.41	27.42	42.83	46.00	-3.17	peak		
5	!	950.5300	14.20	27.92	42.12	46.00	-3.88	peak		

*:Maximum data x:Over limit !:over margin



Address: No.5, Langshan 2nd Rd., North Hi-Tech Industrial park
Guangdong, China
Tel: 0755-88170306 Fax: 0755-88170310

Radiated Emission Measurement


File: QSX400

Data: #2

Date: 2012-3-29

Time: 1:23:17

70.0 dBuV/m

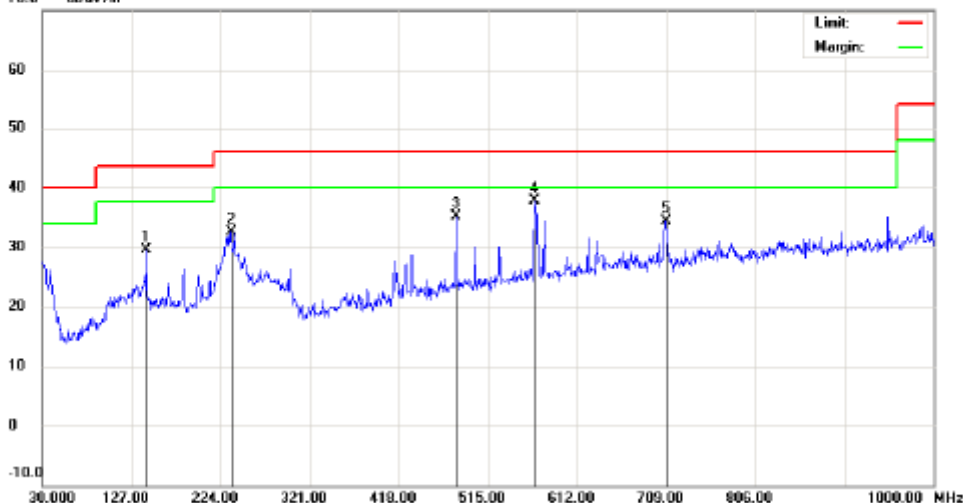

Site site #1

Polarization: **Vertical**

Temperature: 26

Limit: FCC Part15 B 3M Radiation

Power: DC 5V From PC

Humidity: 61 %

EUT: Mobile Phone

Distance:

M/N: QSX400

Mode: USB

Note:

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table	
		MHz	Level	Factor	ment			Height	Degree	Comment
			dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1		143.4900	12.60	16.99	29.59	43.50	-13.91	peak		
2		234.8700	15.59	16.83	32.42	46.00	-13.58	peak		
3		480.0800	13.47	21.70	35.17	46.00	-10.83	peak		
4	*	566.4099	15.01	22.79	37.80	46.00	-8.20	peak		
5		708.0300	9.54	24.68	34.22	46.00	-11.78	peak		

*:Maximum data x:Over limit !:over margin



Address: No.5, Langshan 2nd Rd., North Hi-Tech Industrial park
Guangdong, China
Tel: 0755-86170306 Fax: 0755-86170310

Radiated Emission Measurement


File: QSX400

Data: #3

Date: 2012-3-29

Time: 1:26:58

70.0 dBuV/m

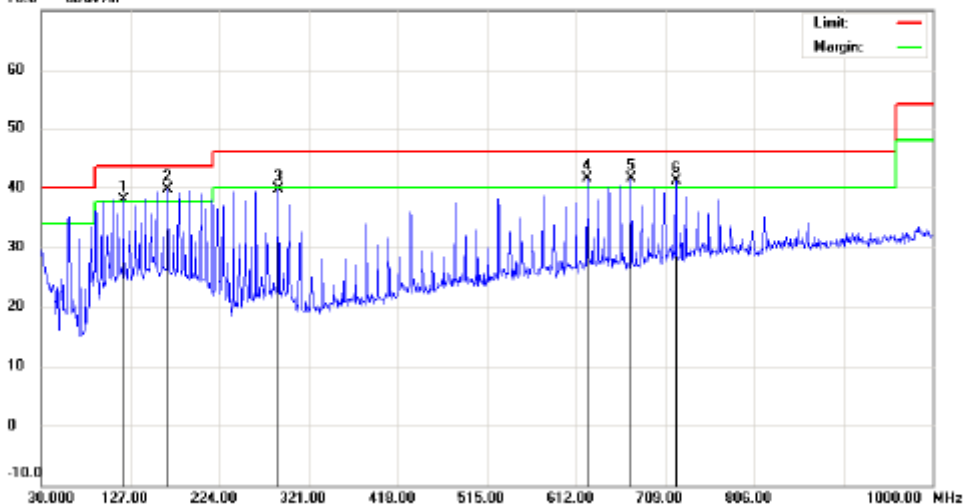

Site site #1

Polarization: **Vertical**

Temperature: 26

Limit: FCC Part15 B 3M Radiation

Power: AC 120V/60Hz

Humidity: 61 %

EUT: Mobile Phone

Distance:

M/N: QSX400

Mode: CAMERA

Note:

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table	
		MHz	Level	Factor	ment			Height	Degree	Comment
			dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1	!	119.2399	20.50	17.42	37.92	43.50	-5.58	peak		
2	*	167.7400	22.53	17.20	39.73	43.50	-3.77	peak		
3		288.0199	20.22	19.42	39.64	46.00	-6.36	peak		
4	!	624.6100	17.94	23.59	41.53	46.00	-4.47	peak		
5	!	672.1399	17.04	24.52	41.56	46.00	-4.44	peak		
6	!	720.6399	16.35	24.71	41.06	46.00	-4.94	peak		

!:Maximum data x:Over limit !:over margin



Address: No. 5, Langshan 2nd Rd., North Hi-Tech Industrial park
Guangdong, China
Tel: 0755-86170306 Fax: 0755-86170310

Radiated Emission Measurement


File: QSX400

Data: #4

Date: 2012-3-29

Time: 1:31:57

70.0 dBuV/m

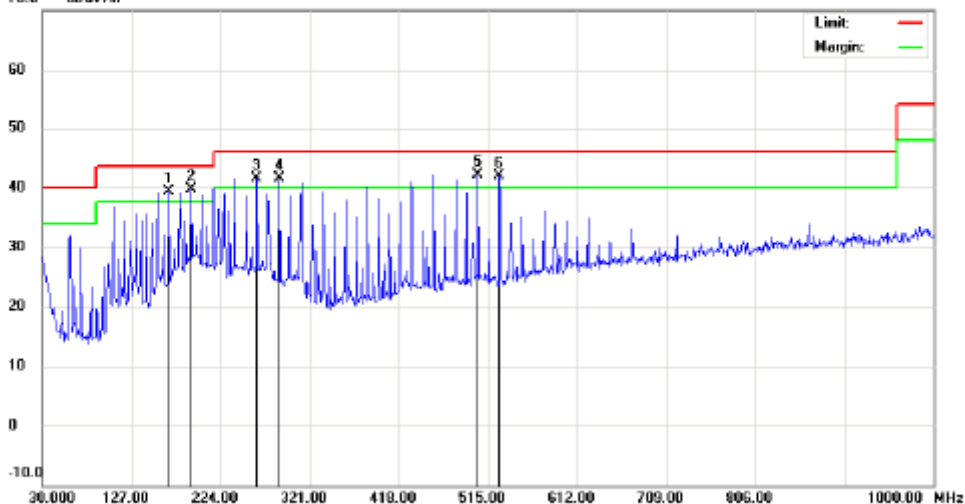

Site site #1

Polarization: *Horizontal*

Temperature: 26

Limit: FCC Part15 B 3M Radiation

Power: AC 120V/60Hz

Humidity: 61 %

EUT: Mobile Phone

Distance:

M/N: QSX400

Mode: CAMERA

Note:

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table	
		MHz	Level	Factor	ment			Height	Degree	Comment
			dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1	!	167.7400	22.20	17.20	39.40	43.50	-4.10	peak		
2	*	191.9900	22.93	16.70	39.63	43.50	-3.87	peak		
3	!	263.7699	23.41	18.09	41.50	46.00	-4.50	peak		
4	!	288.0199	22.00	19.42	41.42	46.00	-4.58	peak		
5	!	504.3299	20.65	21.40	42.05	46.00	-3.95	peak		
6	!	527.8100	19.79	22.08	41.87	46.00	-4.13	peak		

!: Maximum data x: Over limit !: over margin



Address: No. 5, Langshan 2nd Rd., North Hi-Tech Industrial park
Guangdong, China
Tel: 0755-86170306 Fax: 0755-86170310

Radiated Emission Measurement


File: QSX400

Data: #5

Date: 2012-3-29

Time: 1:44:51

70.0 dBuV/m

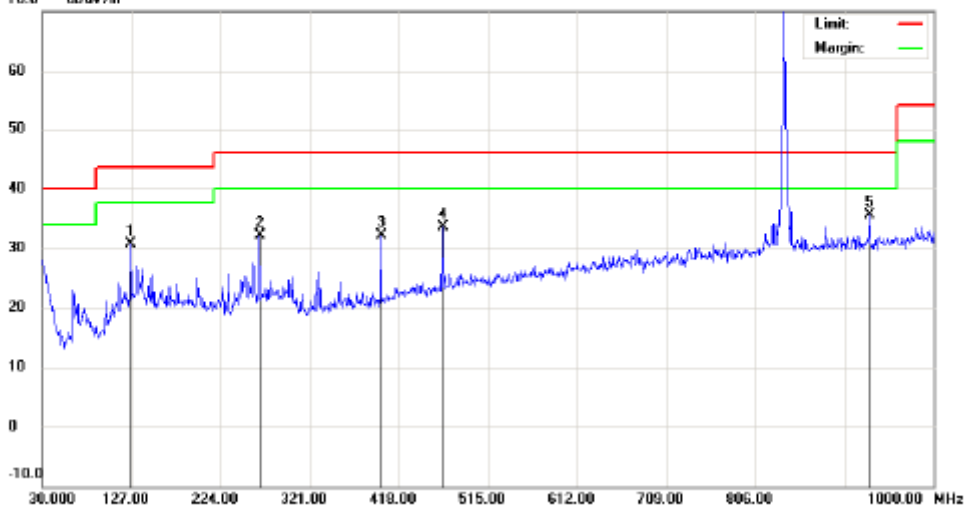

Site site #1

Polarization: *Horizontal*

Temperature: 26

Limit: FCC Part15 B 3M Radiation

Power: AC 120V/60Hz

Humidity: 61 %

EUT: Mobile Phone

Distance:

M/N: QSX400

Mode: CALL

Note:

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table	
		MHz	dBuV	Factor	ment	dBuV/m	dB	Height	Degree	Comment
1		126.0300	13.02	17.70	30.72	43.50	-12.78	peak		
2		285.7100	13.69	18.35	32.04	46.00	-13.96	peak		
3		398.6000	13.35	18.66	32.01	46.00	-13.99	peak		
4		485.5300	12.44	20.98	33.42	46.00	-12.58	peak		
5	*	930.1800	8.18	27.40	35.58	46.00	-10.42	peak		

*:Maximum data x:Over limit !:over margin



Address: No.5, Langshan 2nd Rd., North Hi-Tech Industrial park
Guangdong, China
Tel: 0755-86170306 Fax: 0755-86170310

Radiated Emission Measurement


File: QSX400

Data: #6

Date: 2012-3-29

Time: 1:46:21

70.0 dBuV/m

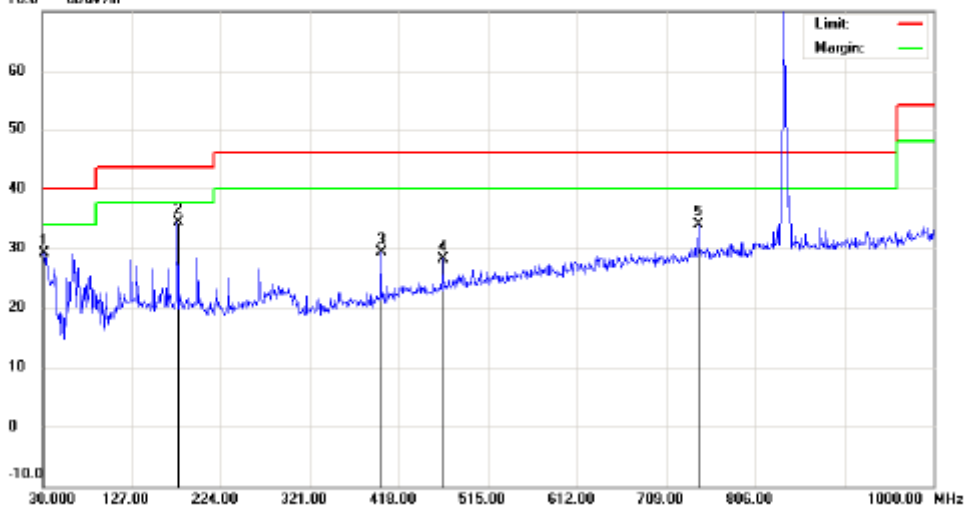

Site site #1

Polarization: **Vertical**

Temperature: 26

Limit: FCC Part15 B 3M Radiation

Power: AC 120V/60Hz

Humidity: 61 %

EUT: Mobile Phone

Distance:

M/N: QSX400

Mode: CALL

Note:

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table	
		MHz	Level	Factor	ment			Height	Degree	Comment
			dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1		31.9400	5.77	23.31	29.08	40.00	-10.92	peak		
2	*	176.4700	17.52	16.88	34.40	43.50	-9.10	peak		
3		398.6000	10.69	18.66	29.35	46.00	-16.65	peak		
4		485.5300	7.22	20.98	28.20	46.00	-17.80	peak		
5		743.9200	8.17	25.74	33.91	46.00	-12.09	peak		

*:Maximum data x:Over limit !:over margin



Address: No.5, Langshan 2nd Rd., North Hi-Tech Industrial park
Guangdong, China
Tel: 0755-86170306 Fax: 0755-86170310

Radiated Emission Measurement


File: QSX400

Data: #7

Date: 2012-3-29

Time: 1:56:10

70.0 dBuV/m

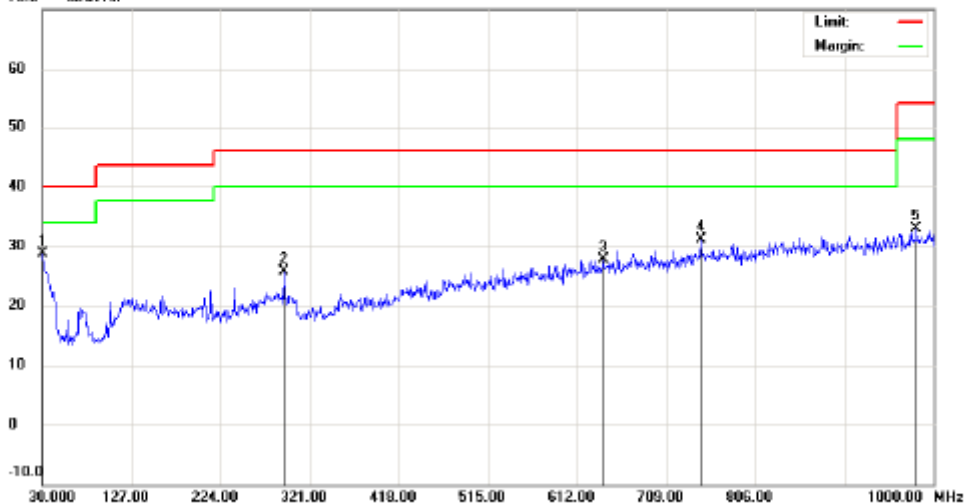

Site site #1

Polarization: **Vertical**

Temperature: 26

Limit: FCC Part15 B 3M Radiation

Power: AC 120V/60Hz

Humidity: 61 %

EUT: Mobile Phone

Distance:

M/N: QSX400

Mode: wifi

Note:

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table	
		MHz	Level	Factor	ment			Height	Degree	Comment
			dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1	*	30.0000	3.81	24.80	28.61	40.00	-11.39	peak		
2		292.8700	6.41	19.34	25.75	46.00	-20.25	peak		
3		640.1300	3.68	24.00	27.68	46.00	-18.32	peak		
4		746.8300	5.31	25.80	31.11	46.00	-14.89	peak		
5		991.5700	4.16	28.73	32.89	54.00	-21.11	peak		

*:Maximum data x:Over limit !:over margin



Address: No.5, Langshan 2nd Rd., North Hi-Tech Industrial park
Guangdong, China
Tel: 0755-86170306 Fax: 0755-86170310

Radiated Emission Measurement


File: QSX400

Data: #8

Date: 2012-3-29

Time: 1:58:52

70.0 dBuV/m

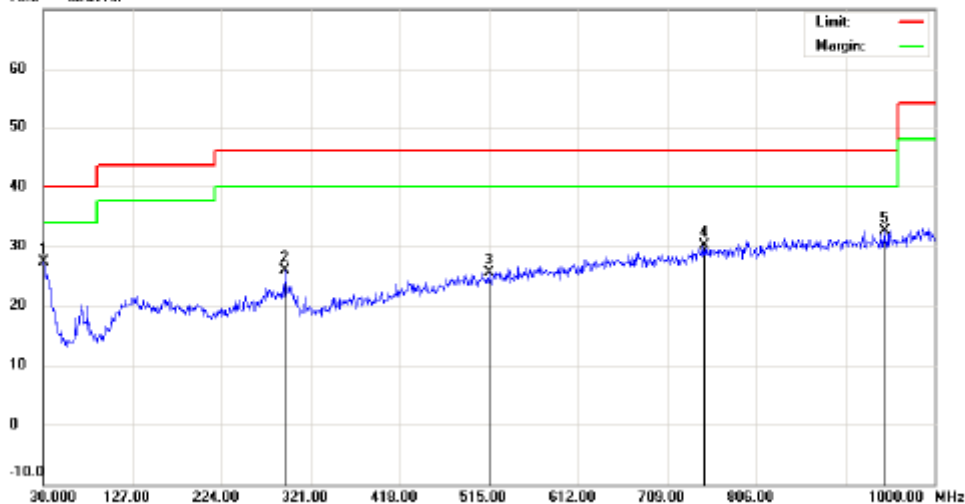

Site: site #1

Polarization: *Horizontal*

Temperature: 26

Limit: FCC Part15 B 3M Radiation

Power: AC 120V/60Hz

Humidity: 61%

EUT: Mobile Phone

Distance:

M/N: QSX400

Mode: wifi

Note:

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table	
		MHz	Level	Factor	ment			Height	Degree	Comment
			dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1	*	30.0000	2.52	24.80	27.32	40.00	-12.68	peak		
2		292.8700	6.51	19.34	25.85	46.00	-20.15	peak		
3		515.0000	3.95	21.60	25.55	46.00	-20.45	peak		
4		748.7700	4.28	25.80	30.08	46.00	-15.92	peak		
5		945.6800	4.84	27.73	32.57	46.00	-13.43	peak		

*:Maximum data x:Over limit !:over margin



Address: No. 5, Langshan 2nd Rd., North Hi-Tech Industrial park
Guangdong, China
Tel: 0755-86170306 Fax: 0755-86170310

Radiated Emission Measurement


File: QSX400

Data: #9

Date: 2012-3-29

Time: 2:07:28

70.0 dBuV/m

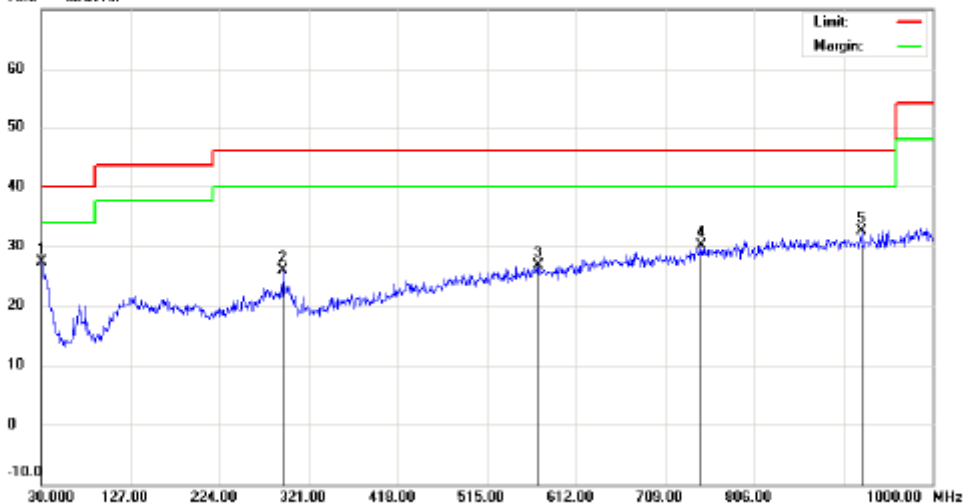

Site site #1

Polarization: **Horizontal**

Temperature: 26

Limit: FCC Part15 B 3M Radiation

Power: AC 120V/60Hz

Humidity: 61 %

EUT: Mobile Phone

Distance:

M/N: QSX400

Mode: bluetooth

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	30.0000	2.62	24.80	27.32	40.00	-12.68	peak		
2		292.8700	6.51	19.34	25.85	46.00	-20.15	peak		
3		570.2899	3.74	22.89	26.63	46.00	-19.37	peak		
4		748.7698	4.28	25.80	30.08	46.00	-15.92	peak		
5		922.3999	4.88	27.58	32.46	46.00	-13.54	peak		

*:Maximum data x:Over limit !:over margin



Address: No.5, Langshan 2nd Rd., North Hi-Tech Industrial park
Guangdong, China
Tel: 0755-86170306 Fax: 0755-86170310

Radiated Emission Measurement


File: QSX400

Data: #10

Date: 2012-3-29

Time: 2:10:08

70.0 dBuV/m

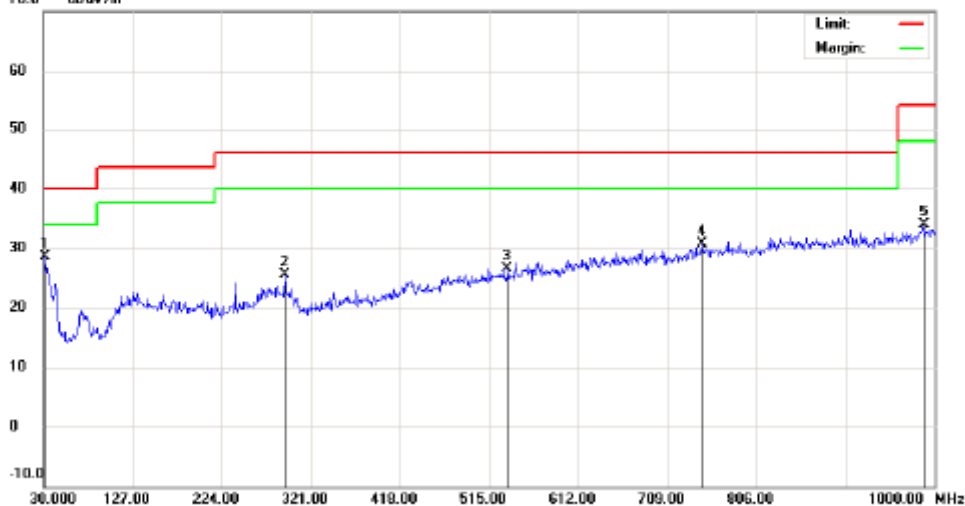

Site site #1

Polarization: **Vertical**

Temperature: 26

Limit: FCC Part15 B 3M Radiation

Power: AC 120V/60Hz

Humidity: 61 %

EUT: Mobile Phone

Distance:

M/N: QSX400

Mode: bluetooth

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	30.9700	4.45	24.05	28.50	40.00	-11.50	peak		
2		292.8700	6.11	19.34	25.45	46.00	-20.55	peak		
3		535.3700	4.25	22.24	26.49	46.00	-19.51	peak		
4		746.8300	4.88	25.80	30.68	46.00	-15.32	peak		
5		987.3900	4.76	29.05	33.81	54.00	-20.19	peak		

*:Maximum data x:Over limit !:over margin

Notes: The spikes which exceed the limit should be ignored because they are MS and SS carrier frequency.

The worst test data above 1 GHz was showed as the follow:

Operation Mode:	CALL(850MHz)	Test Date:	March.29, 2012
Temperature:	24°C	Tested by:	Habby Guo
Humidity:	70 % RH	Polarity:	Ver. / Hor.

Freq. (MHz)	Ant. Pol H/V	Peak Reading (dBuV)	AV Reading (dBuV)	Ant. / CL CF (dB)	Actual Fs		Peak Limit (dBuV/m)	AV Limit (dBuV/m)	AV Margin (dB)
					Peak (dBuV/m)	AV (dBuV/m)			
1717.50	H	56.64	37.39	9.06	65.70	46.45	74.00	54.00	-7.55
2765.50	H	56.12	36.94	9.13	65.25	46.07	74.00	54.00	-7.93
N/A									>20
1717.50	V	56.87	36.82	9.06	65.93	45.88	74.00	54.00	-8.12
2765.50	V	55.04	34.88	9.13	64.17	44.01	74.00	54.00	-9.99
N/A									>20

Notes:



1. Measuring frequencies from 1 GHz to 6GHz.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
3. The frequency that above 3GHz is mainly from the environment noise.



APPENDIX 1
PHOTOGRAPHS OF TEST SETUP

CE TEST SETUP



RE TEST SETUP

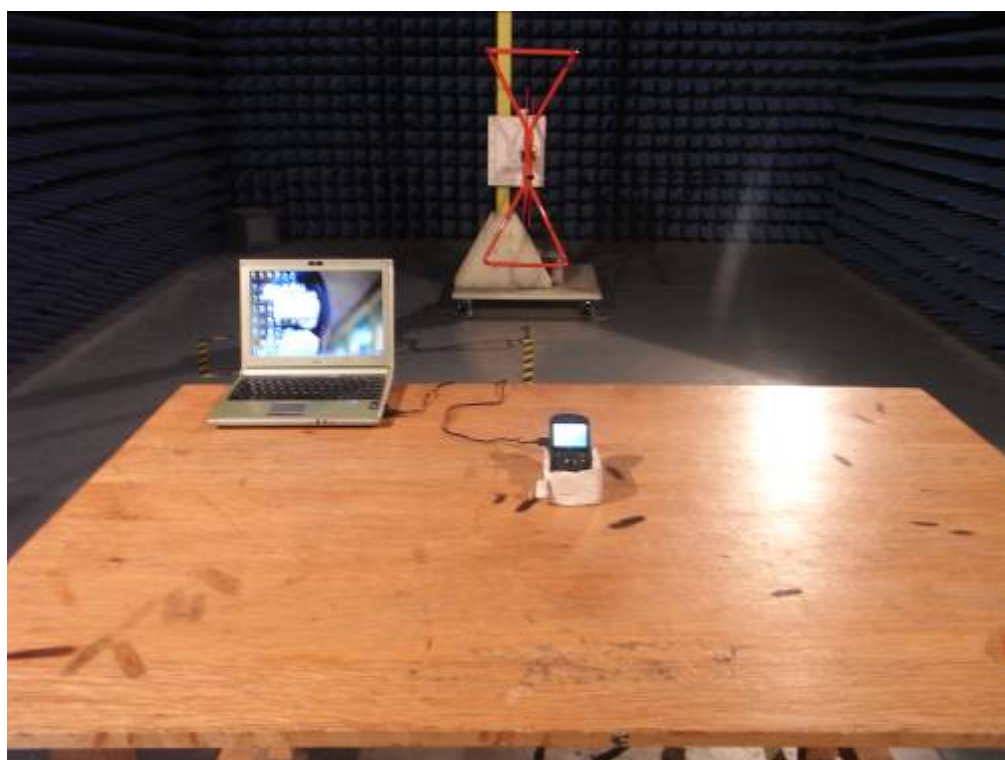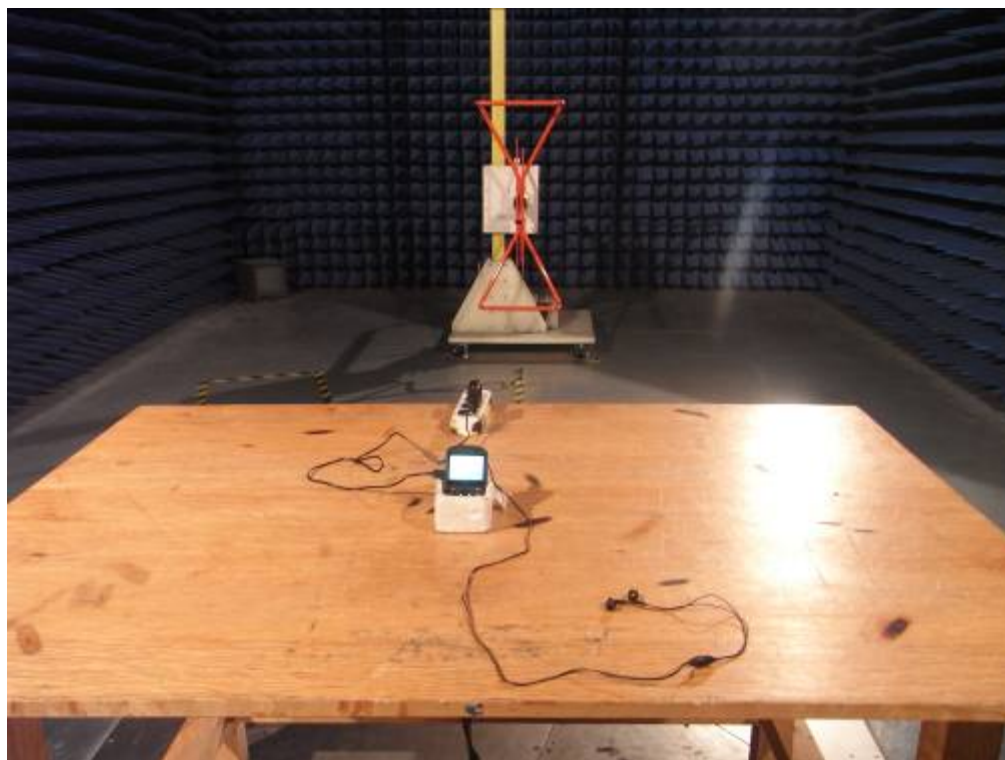

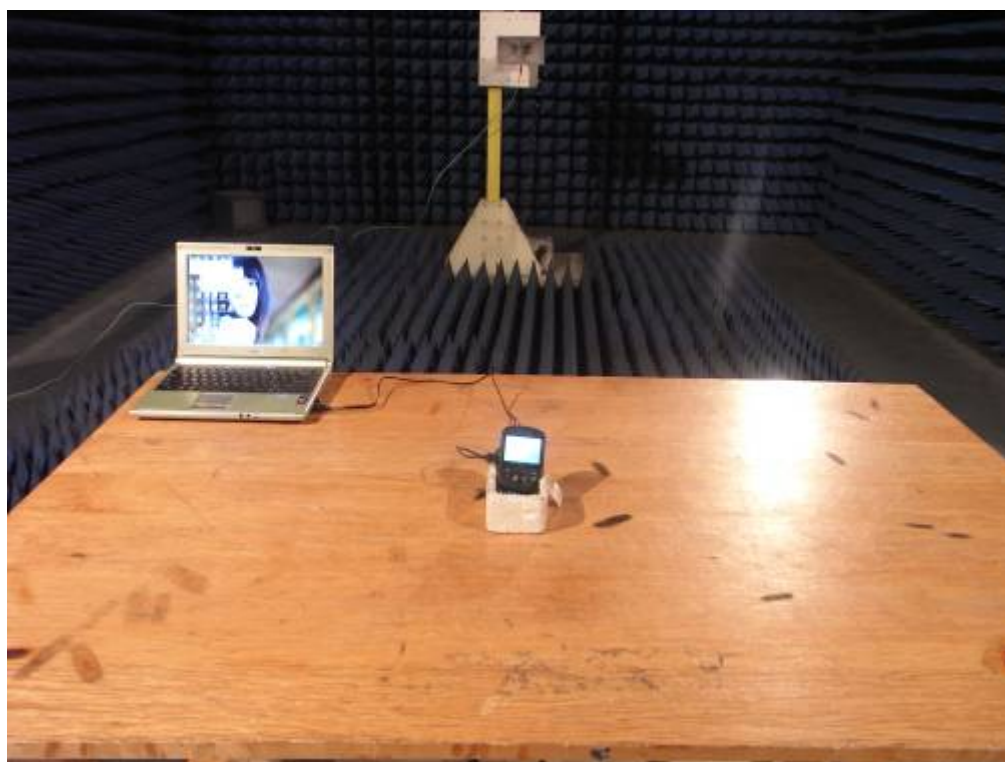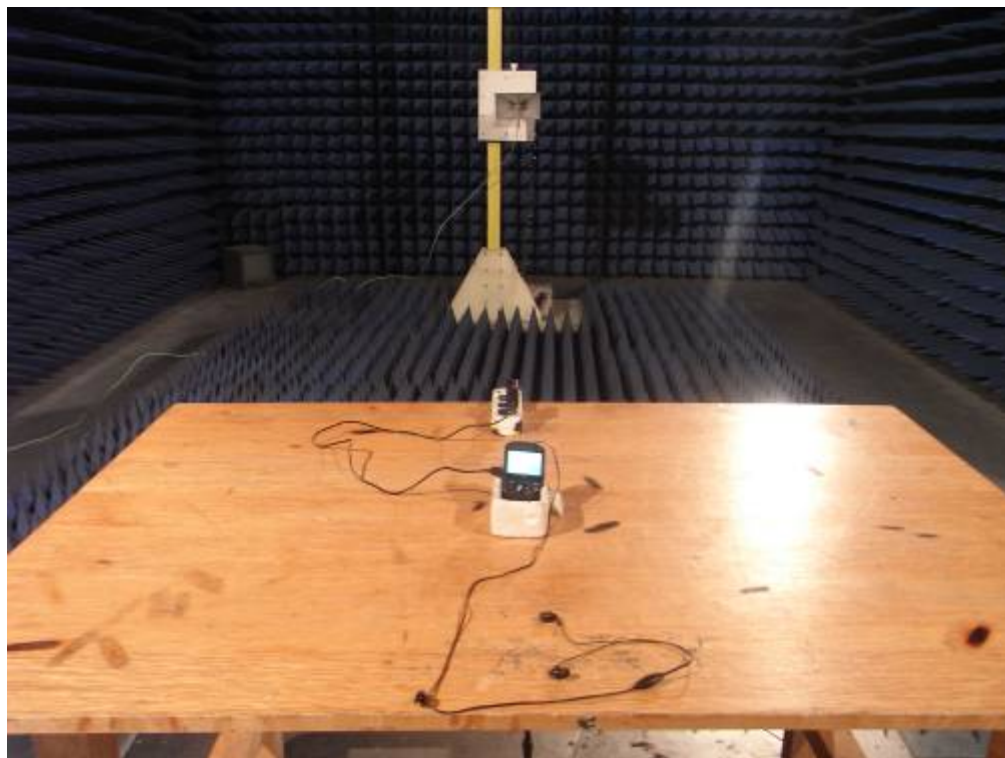

APPENDIX 2
PHOTOGRAPHS OF EUT

FRONT VIEW OF SAMPLE



BACK VIEW OF SAMPLE



LEFT VIEW OF SAMPLE



RIGHT VIEW OF SAMPLE



TOP VIEW OF SAMPLE



BOTTOM VIEW OF SAMPLE



PHOTO OF EARPHONE



PHOTO OF USB CABLE



PHOTO OF POWER SUPPLY



PHOTO OF BATTERY



PHOTO OF THE ENTIRE SAMPLE




INTERNAL PHOTO OF SAMPLE – 1




INTERNAL PHOTO OF SAMPLE – 2




INTERNAL PHOTO OF SAMPLE –3

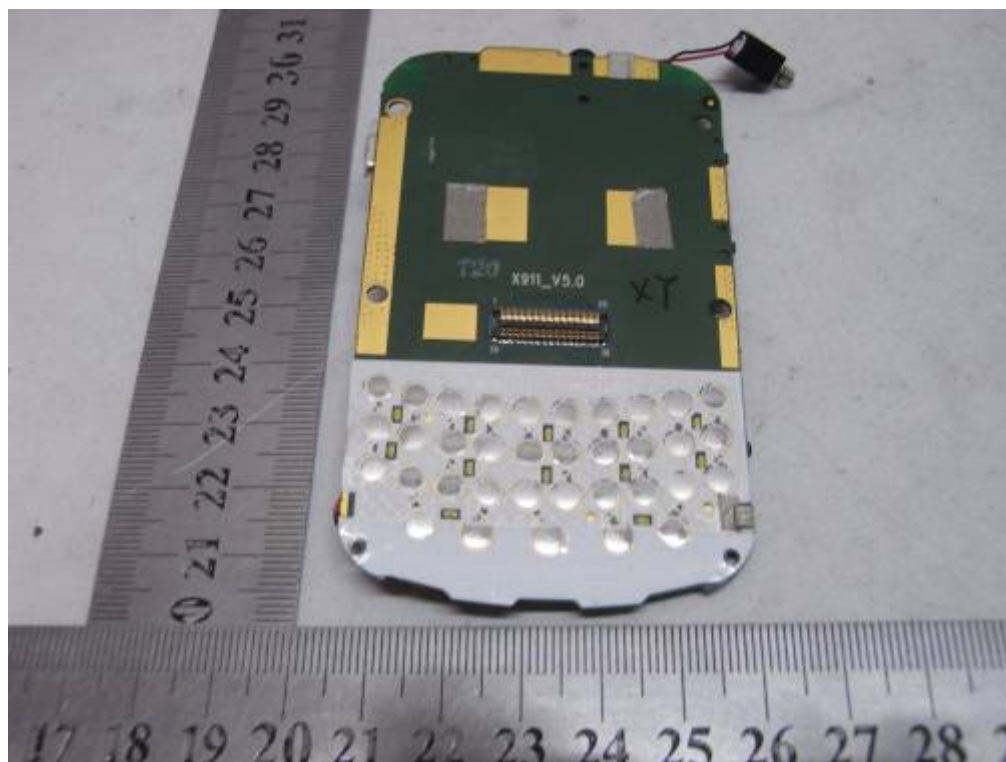


INTERNAL PHOTO OF SAMPLE -4

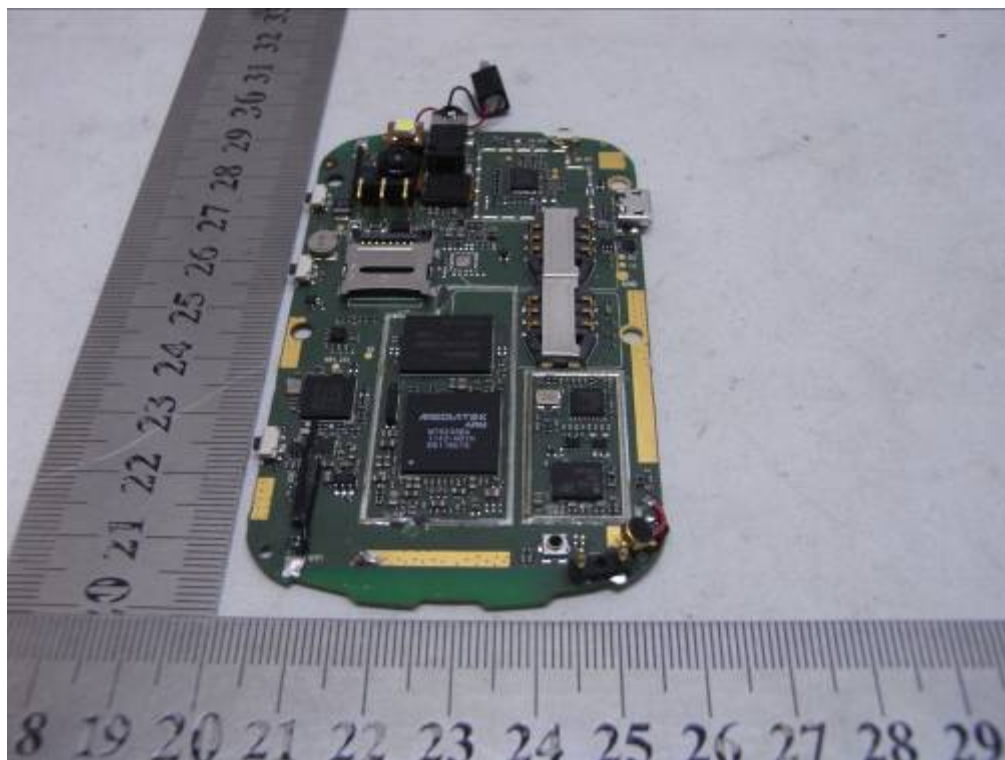


INTERNAL PHOTO OF SAMPLE -5

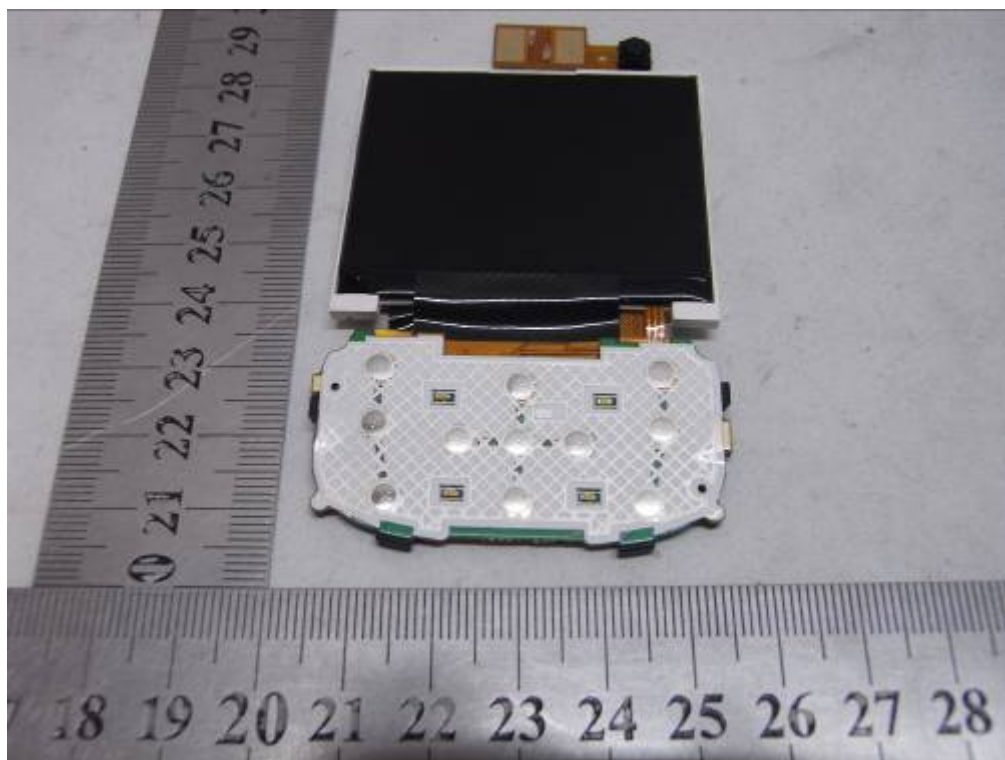


INTERNAL PHOTO OF SAMPLE -6

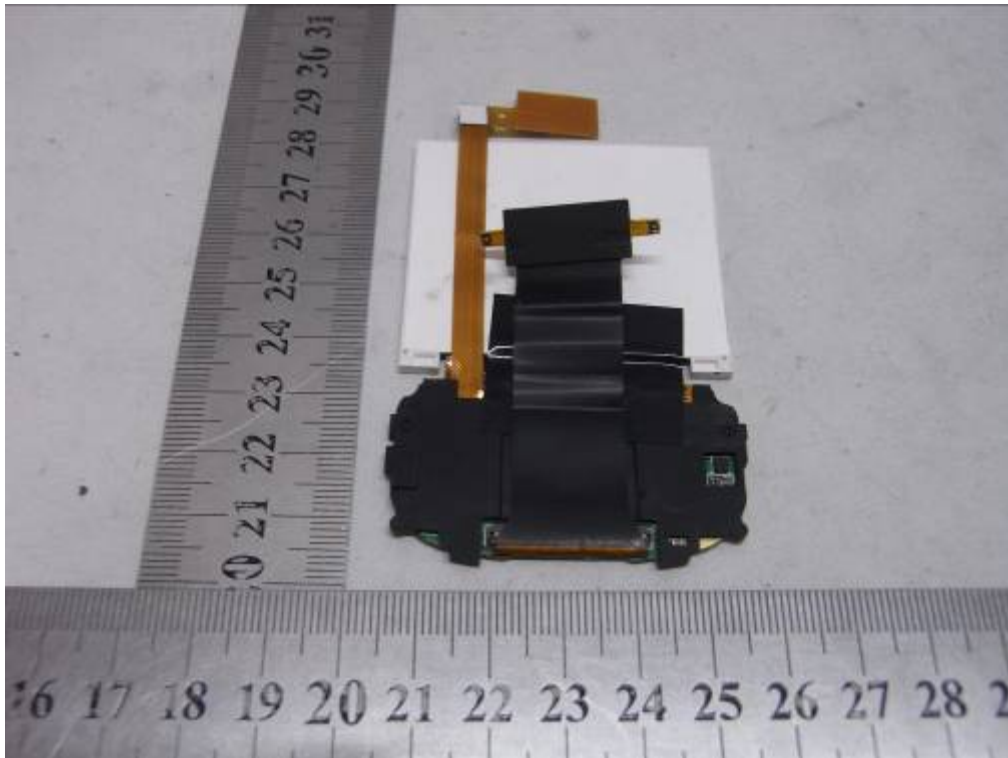


INTERNAL PHOTO OF SAMPLE -7

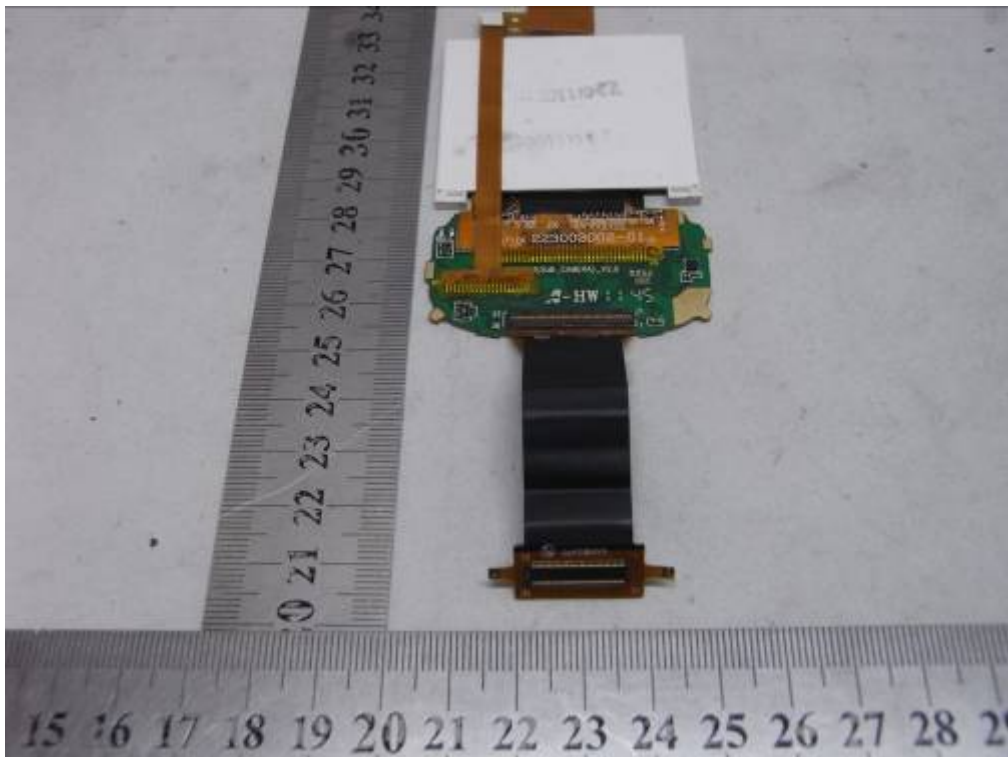

INTERNAL PHOTO OF POWER SUPPLY-1

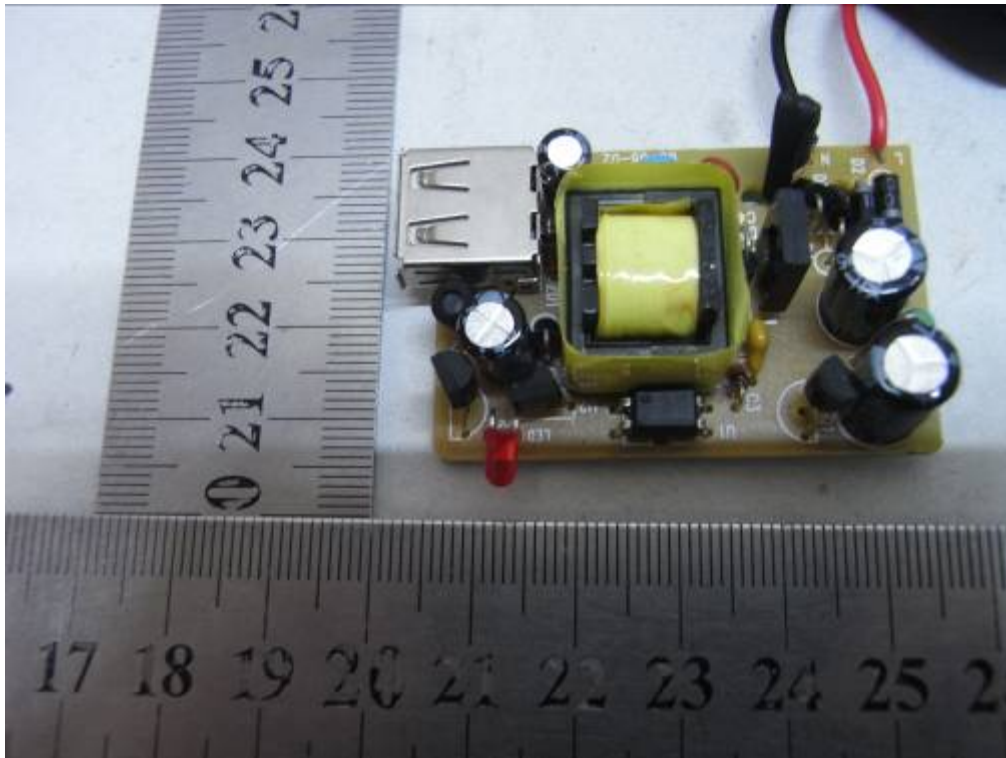

INTERNAL PHOTO OF POWER SUPPLY-2

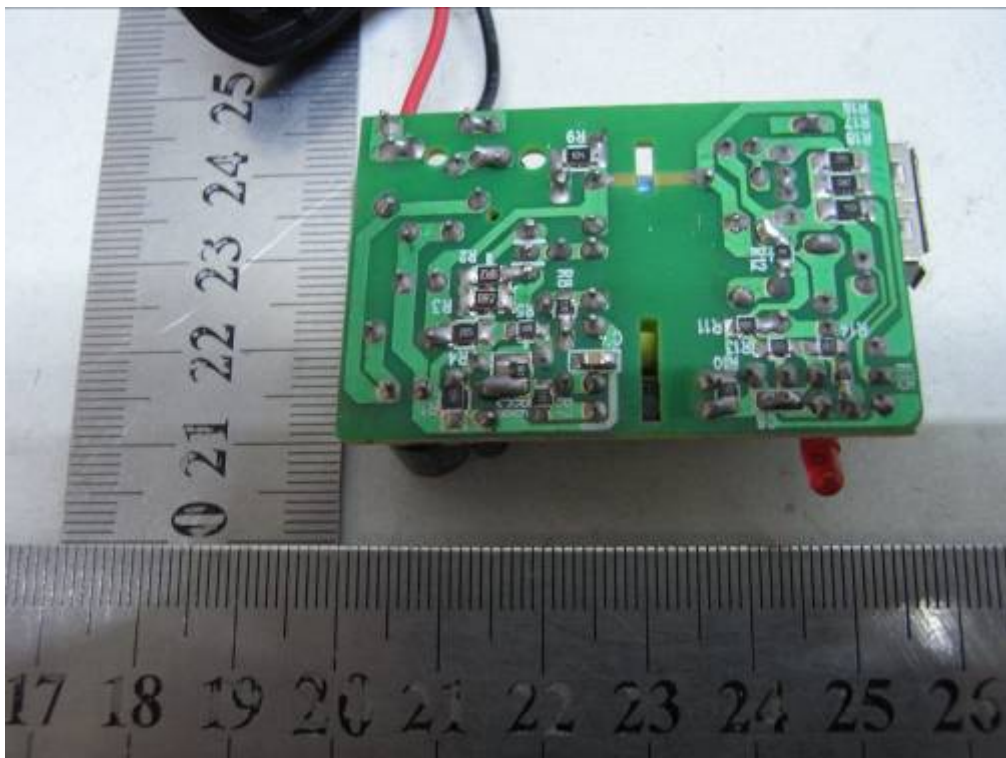

-----END OF REPORT-----