

Date of Test:	March 25 & April 11, 2013	Temperature:	25°C
EUT:	HDMI WI-FI Smart TV Stick	Humidity:	50%
Model No.:	ST-W	Power Supply:	AC 120V/60Hz
Test Mode:	802.11g Channel High 2462MHz	Test Engineer:	Pei

For Below 30MHz

Frequency (MHz)	Reading (dBμV/m)	Factor(dB) Corr.	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
	QP		QP	QP	QP	
-	-	-	-	-	-	X
-	-	-	-	-	-	Y
-	-	-	-	-	-	Z

For 30MHz-1000MHz

Corrected Factor = Antenna Factor + Cable Loss – Amplifier Gain

Frequency (MHz)	Reading (dBμV/m)	Factor Corr. (dB)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
	QP		QP	QP	QP	
428.0192	46.92	-14.22	32.70	46.00	-13.30	Vertical
866.0878	43.79	-6.69	37.10	46.00	-8.90	
962.1622	40.08	-5.23	34.85	54.00	-19.15	
396.2414	44.57	-15.67	28.90	46.00	-17.10	Horizontal
866.0878	45.02	-6.69	38.33	46.00	-7.67	
962.1622	41.52	-5.23	36.29	54.00	-17.71	

For 1GHz-25GHz

Corrected Factor = Antenna Factor + Cable Loss – Amplifier Gain

Frequency (MHz)	Reading(dBμV/m)		Factor Corr. (dB)	Result(dBμV/m)		Limit(dBμV/m)		Margin(dBμV/m)		Polarization
	AV	PEAK		AV	PEAK	AV	PEAK	AV	PEAK	
-	-	-	-	-	-	-	-	-	-	Vertical
-	-	-	-	-	-	-	-	-	-	Horizontal

Note: 1. Emissions attenuated more than 20 dB below the permissible value are not reported.**2. *: Denotes restricted band of operation.****3. The fundamental radiated emissions were reduced by Band Reject Filter in the attached plots.**

Date of Test:	March 25 & April 11, 2013	Temperature:	25°C
EUT:	HDMI WI-FI Smart TV Stick	Humidity:	50%
Model No.:	ST-W	Power Supply:	AC 120V/60Hz
Test Mode:	802.11n Channel Low 2412MHz (20MHz)	Test Engineer:	Pei

For Below 30MHz

Frequency (MHz)	Reading (dBμV/m)	Factor(dB) Corr.	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
	QP		QP	QP	QP	
-	-	-	-	-	-	X
-	-	-	-	-	-	Y
-	-	-	-	-	-	Z

For 30MHz-1000MHz

Corrected Factor = Antenna Factor + Cable Loss – Amplifier Gain

Frequency (MHz)	Reading (dBμV/m)	Factor Corr. (dB)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
	QP		QP	QP	QP	
432.5457	48.89	-14.15	34.74	46.00	-11.26	Vertical
866.0879	43.81	-6.69	37.12	46.00	-8.88	
962.1623	41.77	-5.23	36.54	54.00	-17.46	
385.2805	46.24	-15.77	30.47	46.00	-15.53	Horizontal
824.5968	47.46	-7.39	40.07	46.00	-5.93	
866.0879	45.07	-6.69	38.38	46.00	-7.62	

For 1GHz-25GHz

Corrected Factor = Antenna Factor + Cable Loss – Amplifier Gain

Frequency (MHz)	Reading(dBμV/m)		Factor Corr. (dB)	Result(dBμV/m)		Limit(dBμV/m)		Margin(dBμV/m)		Polarization
	AV	PEAK		AV	PEAK	AV	PEAK	AV	PEAK	
-	-	-	-	-	-	-	-	-	-	Vertical
-	-	-	-	-	-	-	-	-	-	Horizontal

Note: 1. Emissions attenuated more than 20 dB below the permissible value are not reported.**2. *: Denotes restricted band of operation.****3. The fundamental radiated emissions were reduced by Band Reject Filter in the attached plots.**

Date of Test:	March 25 & April 11, 2013	Temperature:	25°C
EUT:	HDMI WI-FI Smart TV Stick	Humidity:	50%
Model No.:	ST-W	Power Supply:	AC 120V/60Hz
Test Mode:	802.11n Channel Middle 2437MHz (20MHz)	Test Engineer:	Pei

For Below 30MHz

Frequency (MHz)	Reading (dBμV/m)	Factor(dB) Corr.	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
	QP		QP	QP	QP	
-	-	-	-	-	-	X
-	-	-	-	-	-	Y
-	-	-	-	-	-	Z

For 30MHz-1000MHz

Corrected Factor = Antenna Factor + Cable Loss – Amplifier Gain

Frequency (MHz)	Reading (dBμV/m)	Factor Corr. (dB)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
	QP		QP	QP	QP	
437.1198	49.10	-14.10	35.00	46.00	-11.00	Vertical
866.0878	44.10	-6.69	37.41	46.00	-8.59	
962.1622	41.77	-5.23	36.54	54.00	-17.46	
674.6225	43.97	-15.82	28.15	46.00	-17.85	Horizontal
813.1115	49.49	-7.55	41.64	46.00	-4.36	
866.0879	44.42	-6.69	37.73	46.00	-8.27	

For 1GHz-25GHz

Corrected Factor = Antenna Factor + Cable Loss – Amplifier Gain

Frequency (MHz)	Reading(dBμV/m)		Factor Corr. (dB)	Result(dBμV/m)		Limit(dBμV/m)		Margin(dBμV/m)		Polarization
	AV	PEAK		AV	PEAK	AV	PEAK	AV	PEAK	
-	-	-	-	-	-	-	-	-	-	Vertical
-	-	-	-	-	-	-	-	-	-	Horizontal

Note: 1. Emissions attenuated more than 20 dB below the permissible value are not reported.**2. *: Denotes restricted band of operation.****3. The fundamental radiated emissions were reduced by Band Reject Filter in the attached plots.**

Date of Test:	March 25 & April 11, 2013	Temperature:	25°C
EUT:	HDMI WI-FI Smart TV Stick	Humidity:	50%
Model No.:	ST-W	Power Supply:	AC 120V/60Hz
Test Mode:	802.11n Channel High 2462MHz (20MHz)	Test Engineer:	Pei

For Below 30MHz

Frequency (MHz)	Reading (dBμV/m)	Factor(dB) Corr.	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
	QP		QP	QP	QP	
-	-	-	-	-	-	X
-	-	-	-	-	-	Y
-	-	-	-	-	-	Z

For 30MHz-1000MHz

Corrected Factor = Antenna Factor + Cable Loss – Amplifier Gain

Frequency (MHz)	Reading (dBμV/m)	Factor Corr. (dB)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
	QP		QP	QP	QP	
432.5457	48.86	-14.15	34.71	46.00	-11.29	Vertical
866.0879	44.66	-6.69	37.97	46.00	-8.03	
962.1623	41.11	-5.23	35.88	54.00	-18.12	
370.7022	43.85	-15.85	28.00	46.00	-18.00	Horizontal
866.0878	45.27	-6.69	38.58	46.00	-7.42	
962.1622	41.02	-5.23	35.79	54.00	-18.21	

For 1GHz-25GHz

Corrected Factor = Antenna Factor + Cable Loss – Amplifier Gain

Frequency (MHz)	Reading(dBμV/m)		Factor Corr. (dB)	Result(dBμV/m)		Limit(dBμV/m)		Margin(dBμV/m)		Polarization
	AV	PEAK		AV	PEAK	AV	PEAK	AV	PEAK	
-	-	-	-	-	-	-	-	-	-	Vertical
-	-	-	-	-	-	-	-	-	-	Horizontal

Note: 1. Emissions attenuated more than 20 dB below the permissible value are not reported.**2. *: Denotes restricted band of operation.****3. The fundamental radiated emissions were reduced by Band Reject Filter in the attached plots.**

Date of Test:	March 25 & April 11, 2013	Temperature:	25°C
EUT:	HDMI WI-FI Smart TV Stick	Humidity:	50%
Model No.:	ST-W	Power Supply:	AC 120V/60Hz
Test Mode:	802.11n Channel Low 2422MHz (40MHz)	Test Engineer:	Pei

For Below 30MHz

Frequency (MHz)	Reading (dBμV/m)	Factor(dB) Corr.	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
	QP		QP	QP	QP	
-	-	-	-	-	-	X
-	-	-	-	-	-	Y
-	-	-	-	-	-	Z

For 30MHz-1000MHz

Corrected Factor = Antenna Factor + Cable Loss – Amplifier Gain

Frequency (MHz)	Reading (dBμV/m)	Factor Corr. (dB)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
	QP		QP	QP	QP	
432.5457	48.47	-14.15	34.32	46.00	-11.68	Vertical
866.0878	43.68	-6.69	36.99	46.00	-9.01	
962.1622	41.77	-5.23	36.54	54.00	-17.46	
364.2595	43.58	-15.88	27.70	46.00	-18.30	Horizontal
866.0879	44.94	-6.69	38.25	46.00	-7.75	
962.1623	40.97	-5.23	35.74	54.00	-18.26	

For 1GHz-25GHz

Corrected Factor = Antenna Factor + Cable Loss – Amplifier Gain

Frequency (MHz)	Reading(dBμV/m)		Factor Corr. (dB)	Result(dBμV/m)		Limit(dBμV/m)		Margin(dBμV/m)		Polarization
	AV	PEAK		AV	PEAK	AV	PEAK	AV	PEAK	
-	-	-	-	-	-	-	-	-	-	Vertical
-	-	-	-	-	-	-	-	-	-	Horizontal

Note: 1. Emissions attenuated more than 20 dB below the permissible value are not reported.**2. *: Denotes restricted band of operation.****3. The fundamental radiated emissions were reduced by Band Reject Filter in the attached plots.**

Date of Test:	March 25 & April 11, 2013	Temperature:	25°C
EUT:	HDMI WI-FI Smart TV Stick	Humidity:	50%
Model No.:	ST-W	Power Supply:	AC 120V/60Hz
Test Mode:	802.11n Channel Middle 2437MHz (40MHz)	Test Engineer:	Pei

For Below 30MHz

Frequency (MHz)	Reading (dBμV/m)	Factor(dB) Corr.	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
	QP		QP	QP	QP	
-	-	-	-	-	-	X
-	-	-	-	-	-	Y
-	-	-	-	-	-	Z

For 30MHz-1000MHz

Corrected Factor = Antenna Factor + Cable Loss – Amplifier Gain

Frequency (MHz)	Reading (dBμV/m)	Factor Corr. (dB)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
	QP		QP	QP	QP	
437.1198	49.20	-14.10	35.10	46.00	-10.90	Vertical
866.0878	44.60	-6.69	37.91	46.00	-8.09	
962.1622	41.24	-5.23	36.01	54.00	-17.99	
368.1116	46.85	-15.86	30.99	46.00	-15.01	Horizontal
866.0878	44.89	-6.69	38.20	46.00	-7.80	
962.1622	40.38	-5.23	35.15	54.00	-18.85	

For 1GHz-25GHz

Corrected Factor = Antenna Factor + Cable Loss – Amplifier Gain

Frequency (MHz)	Reading(dBμV/m)		Factor Corr. (dB)	Result(dBμV/m)		Limit(dBμV/m)		Margin(dBμV/m)		Polarization
	AV	PEAK		AV	PEAK	AV	PEAK	AV	PEAK	
-	-	-	-	-	-	-	-	-	-	Vertical
-	-	-	-	-	-	-	-	-	-	Horizontal

Note: 1. Emissions attenuated more than 20 dB below the permissible value are not reported.**2. *: Denotes restricted band of operation.****3. The fundamental radiated emissions were reduced by Band Reject Filter in the attached plots.**

Date of Test:	March 25 & April 11, 2013	Temperature:	25°C
EUT:	HDMI WI-FI Smart TV Stick	Humidity:	50%
Model No.:	ST-W	Power Supply:	AC 120V/60Hz
Test Mode:	802.11n Channel High 2452MHz (40MHz)	Test Engineer:	Pei

For Below 30MHz

Frequency (MHz)	Reading (dBμV/m)	Factor(dB) Corr.	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
	QP		QP	QP	QP	
-	-	-	-	-	-	X
-	-	-	-	-	-	Y
-	-	-	-	-	-	Z

For 30MHz-1000MHz

Corrected Factor = Antenna Factor + Cable Loss – Amplifier Gain

Frequency (MHz)	Reading (dBμV/m)	Factor Corr. (dB)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
	QP		QP	QP	QP	
437.1198	49.39	-14.10	35.29	46.00	-10.71	Vertical
866.0878	43.95	-6.69	37.26	46.00	-8.74	
962.1622	41.30	-5.23	36.07	54.00	-17.93	
365.5391	46.17	-15.88	30.29	46.00	-15.71	Horizontal
866.0879	44.79	-6.69	38.10	46.00	-7.90	
962.1623	40.95	-5.23	35.72	54.00	-18.28	

For 1GHz-25GHz

Corrected Factor = Antenna Factor + Cable Loss – Amplifier Gain

Frequency (MHz)	Reading(dBμV/m)		Factor Corr. (dB)	Result(dBμV/m)		Limit(dBμV/m)		Margin(dBμV/m)		Polarization
	AV	PEAK		AV	PEAK	AV	PEAK	AV	PEAK	
-	-	-	-	-	-	-	-	-	-	Vertical
-	-	-	-	-	-	-	-	-	-	Horizontal

- Note:** 1. Emissions attenuated more than 20 dB below the permissible value are not reported.
2. *: Denotes restricted band of operation.
3. The fundamental radiated emissions were reduced by Band Reject Filter in the attached plots.


ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: STAR #297

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 26 C / 55 %

EUT: HDMI WI-FI Smart TV Stick

Mode: TX Channel 1 (802.11b)

Model: ST-W

Manufacturer: NEWMI

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 13/03/25/

Time: 8/44/00

Engineer Signature: STAR

Distance: 3m

Note: Report No.:ATE20130457

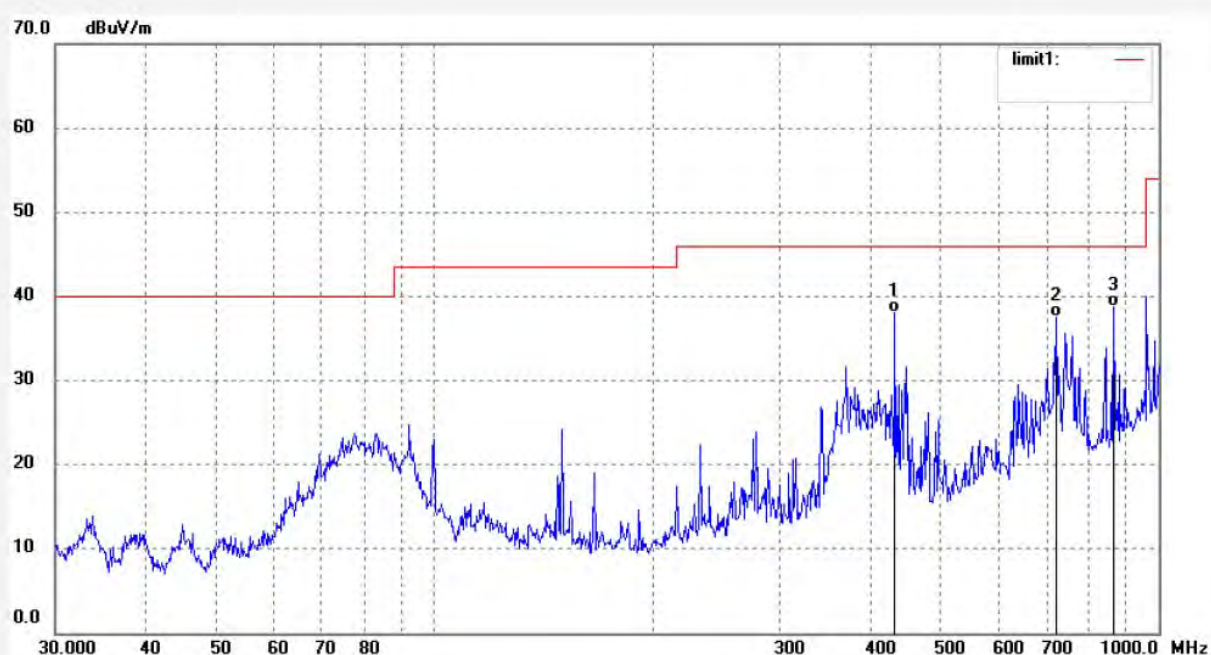

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	432.5457	53.19	-15.10	38.09	46.00	-7.91	QP			
2	721.7259	46.75	-9.28	37.47	46.00	-8.53	QP			
3	866.0878	45.47	-6.69	38.78	46.00	-7.22	QP			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: STAR #298

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 26 C / 55 %

EUT: HDMI WI-FI Smart TV Stick

Mode: TX Channel 1 (802.11b)

Model: ST-W

Manufacturer: NEWMI

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 13/03/25/

Time: 8/48/14

Engineer Signature: STAR

Distance: 3m

Note: Report No.:ATE20130457

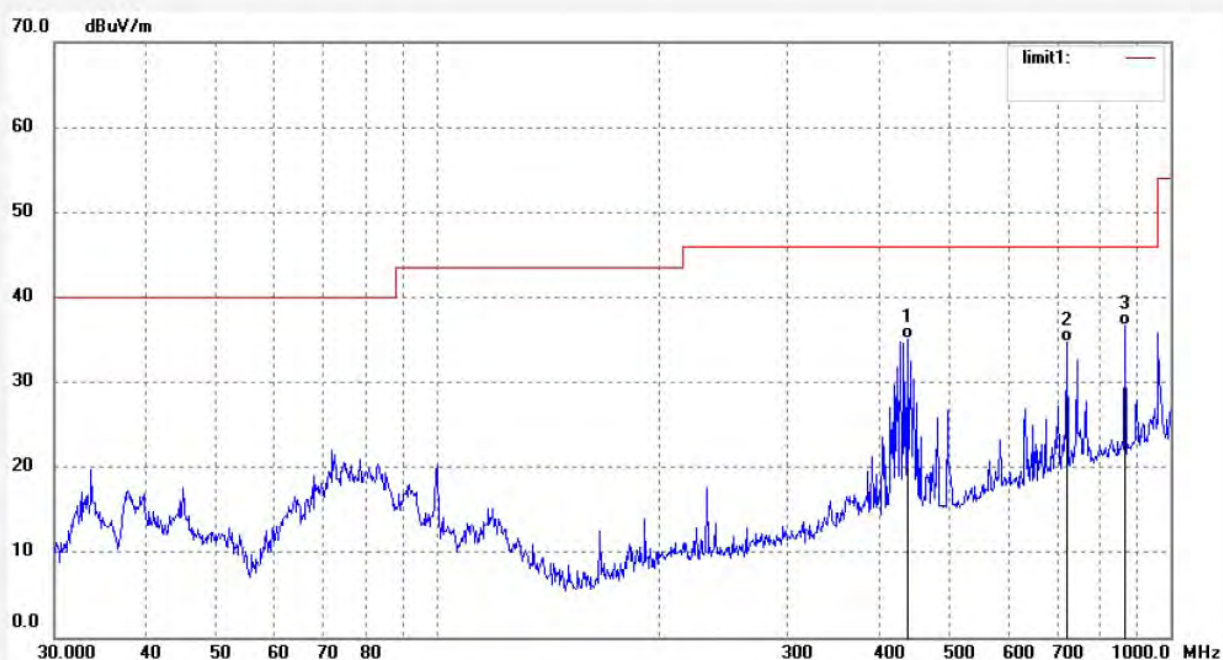

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	437.1199	49.23	-14.10	35.13	46.00	-10.87	QP			
2	721.7259	44.08	-9.28	34.80	46.00	-11.20	QP			
3	866.0879	43.31	-6.69	36.62	46.00	-9.38	QP			


ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: STAR #4060

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 55 %

EUT: HDMI WI-FI Smart TV Stick

Mode: TX Channel 1 (802.11b)

Model: ST-W

Manufacturer: NEWMII

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 2013-4-11

Time: 15:17:27

Engineer Signature:

Distance: 3m

Note: Report No.:ATE20130457

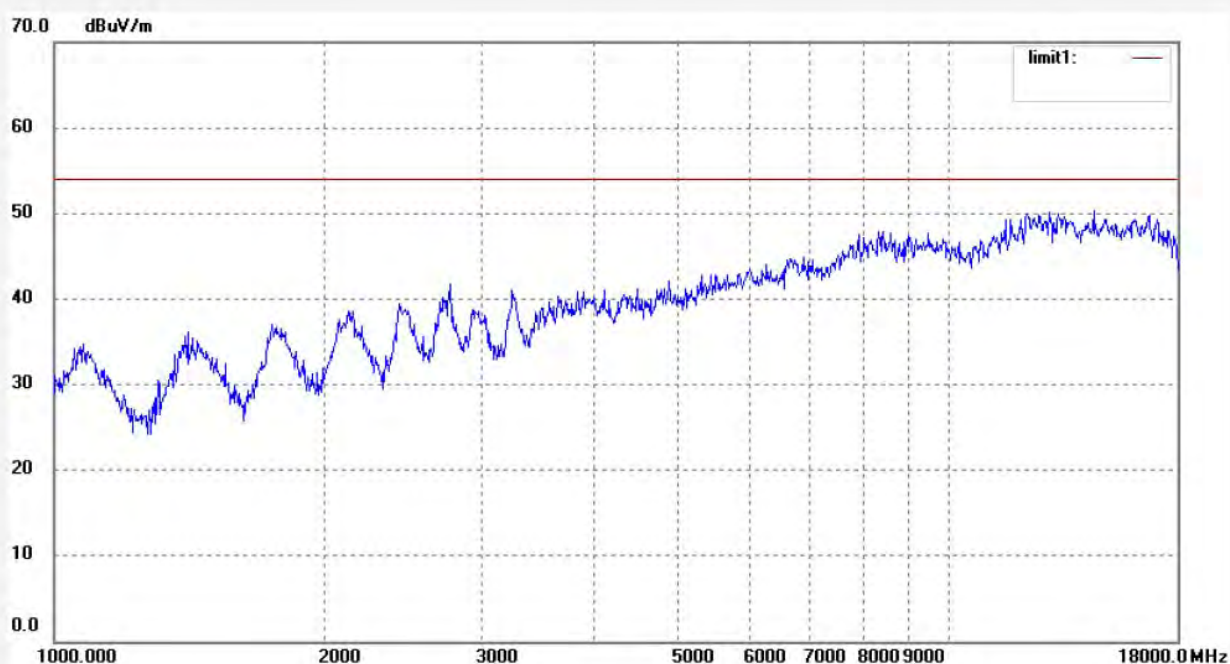

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: STAR #4061

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 55 %

EUT: HDMI WI-FI Smart TV Stick

Mode: TX Channel 1 (802.11b)

Model: ST-W

Manufacturer: NEWMI

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 2013-4-11

Time: 15:20:49

Engineer Signature:

Distance: 3m

Note: Report No.:ATE20130457

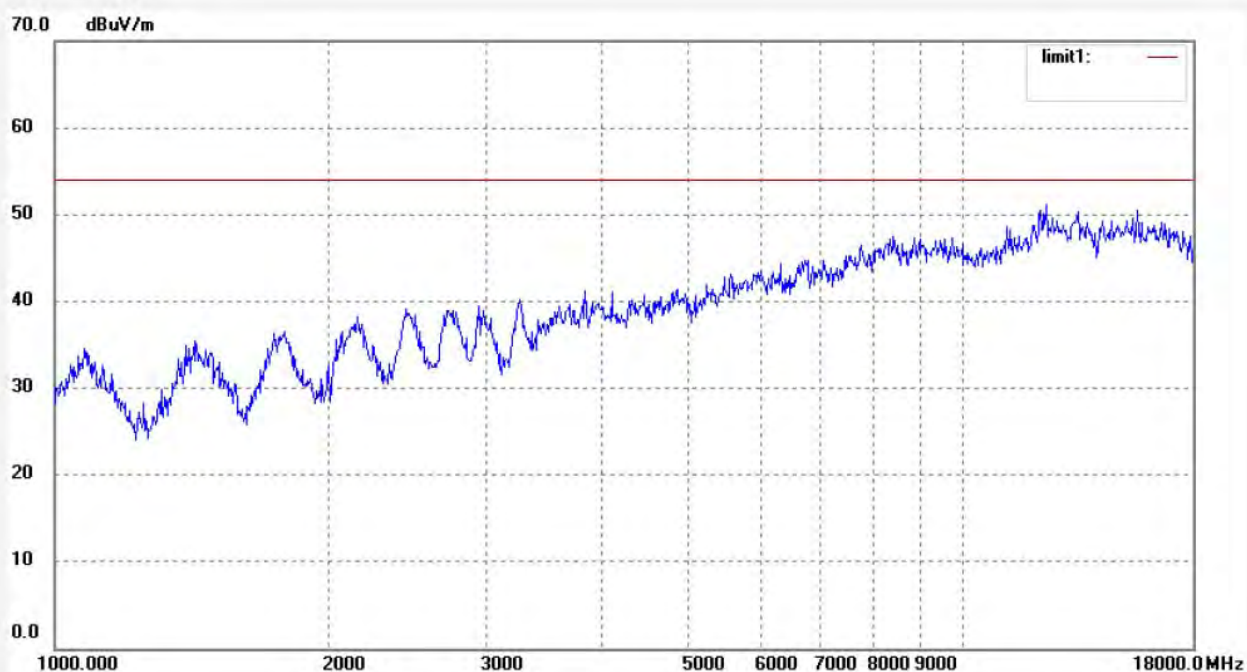

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: star #345

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 26 C / 55 %

EUT: HDMI WI-FI Smart TV Stick

Mode: TX Channel 1 (802.11b)

Model: ST-W

Manufacturer: NEWMI

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 13/03/25/

Time: 10/33/26

Engineer Signature: STAR

Distance: 3m

Note: Report No.:ATE20130457

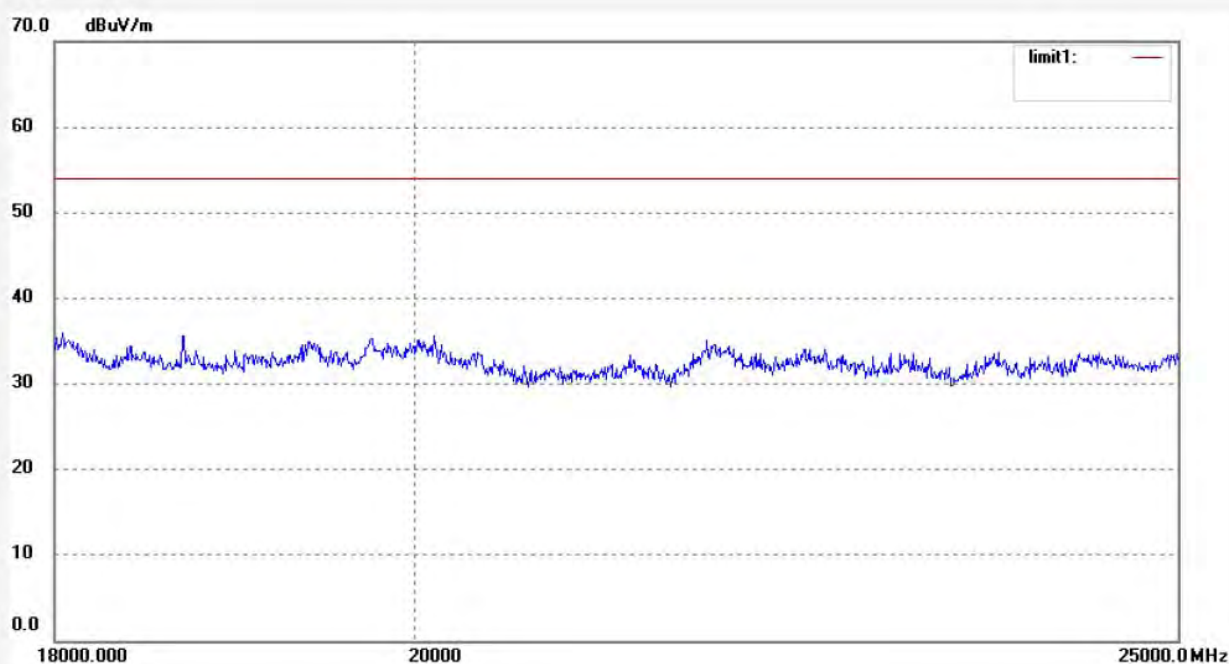

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------


ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: star #346

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 26 C / 55 %

EUT: HDMI WI-FI Smart TV Stick

Mode: TX Channel 1 (802.11b)

Model: ST-W

Manufacturer: NEWMI

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 13/03/25/

Time: 10/35/51

Engineer Signature: STAR

Distance: 3m

Note: Report No.:ATE20130457

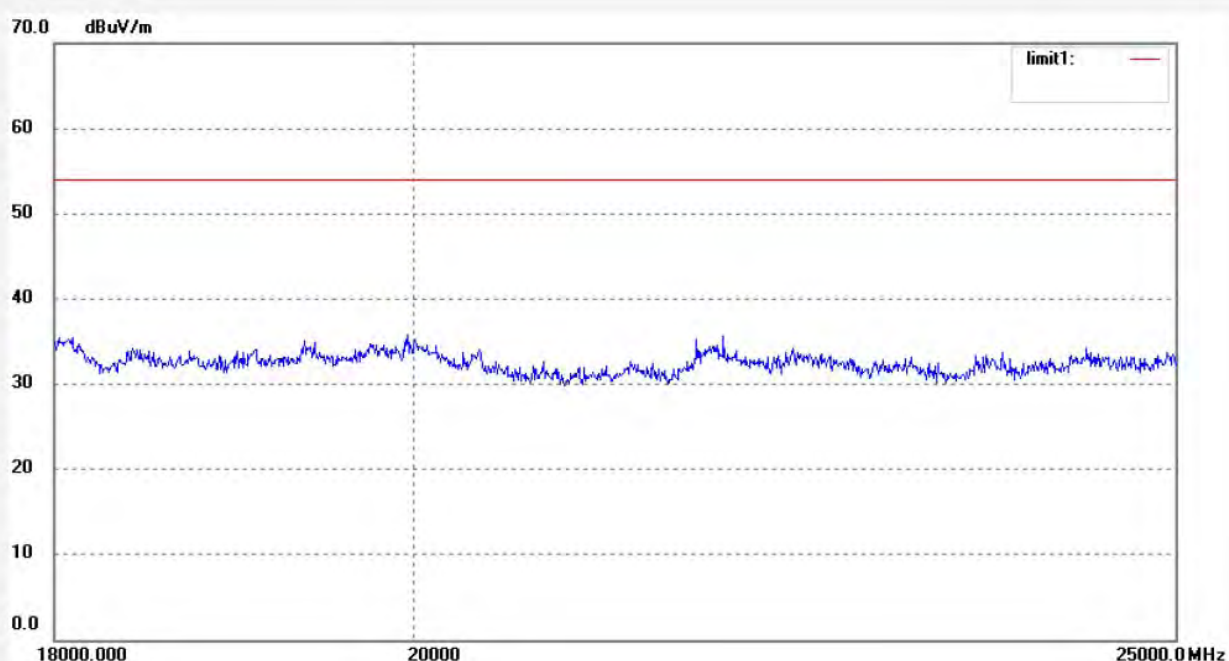

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: STAR #300

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 26 C / 55 %

EUT: HDMI WI-FI Smart TV Stick

Mode: TX Channel 6 (802.11b)

Model: ST-W

Manufacturer: NEWMI

Polarization: Horizontal

Power Source: AC 120V/60Hz

Date: 13/03/25/

Time: 8/55/05

Engineer Signature: STAR

Distance: 3m

Note: Report No.:ATE20130457



No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	370.7022	43.59	-15.85	27.74	46.00	-18.26	QP			
2	866.0878	44.30	-6.69	37.61	46.00	-8.39	QP			
3	962.1622	42.06	-5.23	36.83	54.00	-17.17	QP			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: STAR #299

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 26 C / 55 %

EUT: HDMI WI-FI Smart TV Stick

Mode: TX Channel 6 (802.11b)

Model: ST-W

Manufacturer: NEWMi

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 13/03/25/

Time: 8/52/07

Engineer Signature: STAR

Distance: 3m

Note: Report No.:ATE20130457

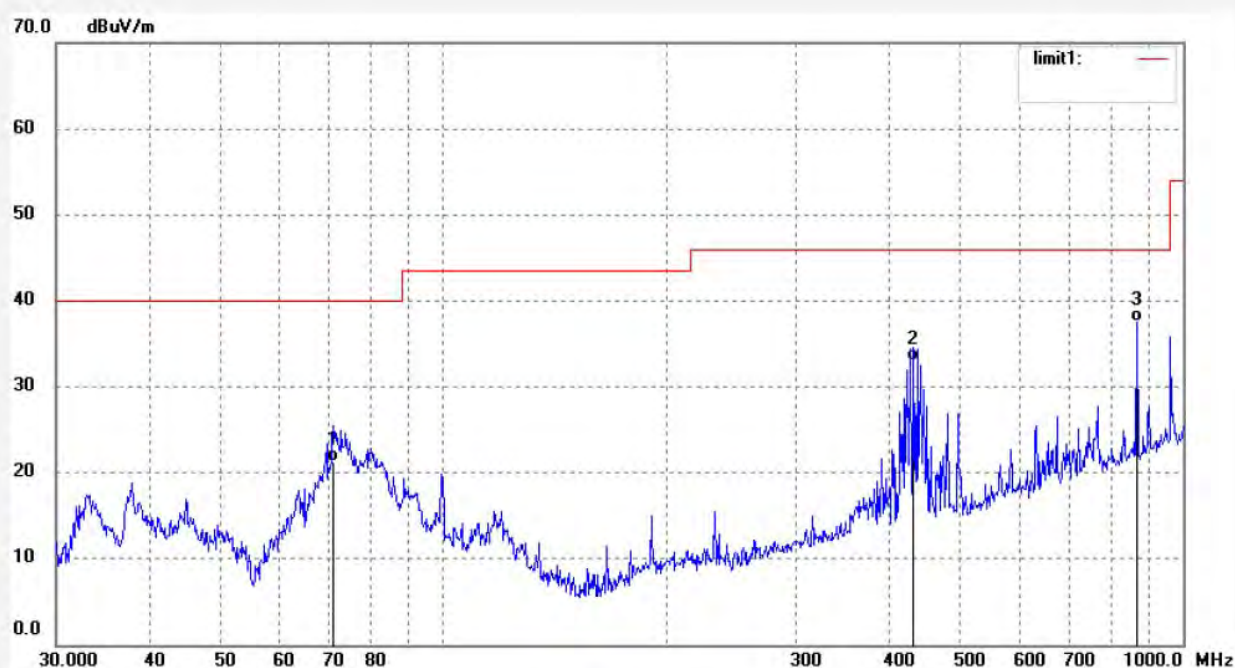

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	71.0802	43.50	-22.31	21.19	40.00	-18.81	QP			
2	432.5457	47.20	-14.15	33.05	46.00	-12.95	QP			
3	866.0879	44.18	-6.69	37.49	46.00	-8.51	QP			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: STAR #4063

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 55 %

EUT: HDMI WI-FI Smart TV Stick

Mode: TX Channel 6 (802.11b)

Model: ST-W

Manufacturer: NEWMI

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 2013-4-11

Time: 15:28:30

Engineer Signature:

Distance: 3m

Note: Report No.:ATE20130457

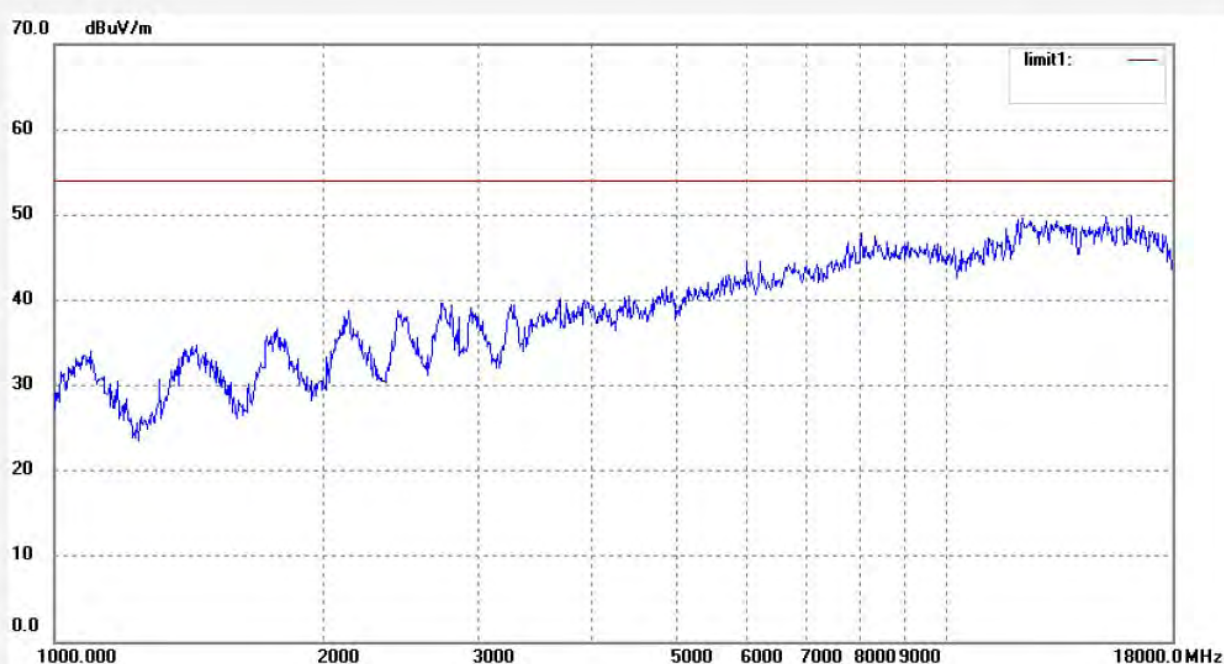

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: STAR #4062

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 55 %

EUT: HDMI WI-FI Smart TV Stick

Mode: TX Channel 6 (802.11b)

Model: ST-W

Manufacturer: NEWMI

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 2013-4-11

Time: 15:23:08

Engineer Signature:

Distance: 3m

Note: Report No.:ATE20130457

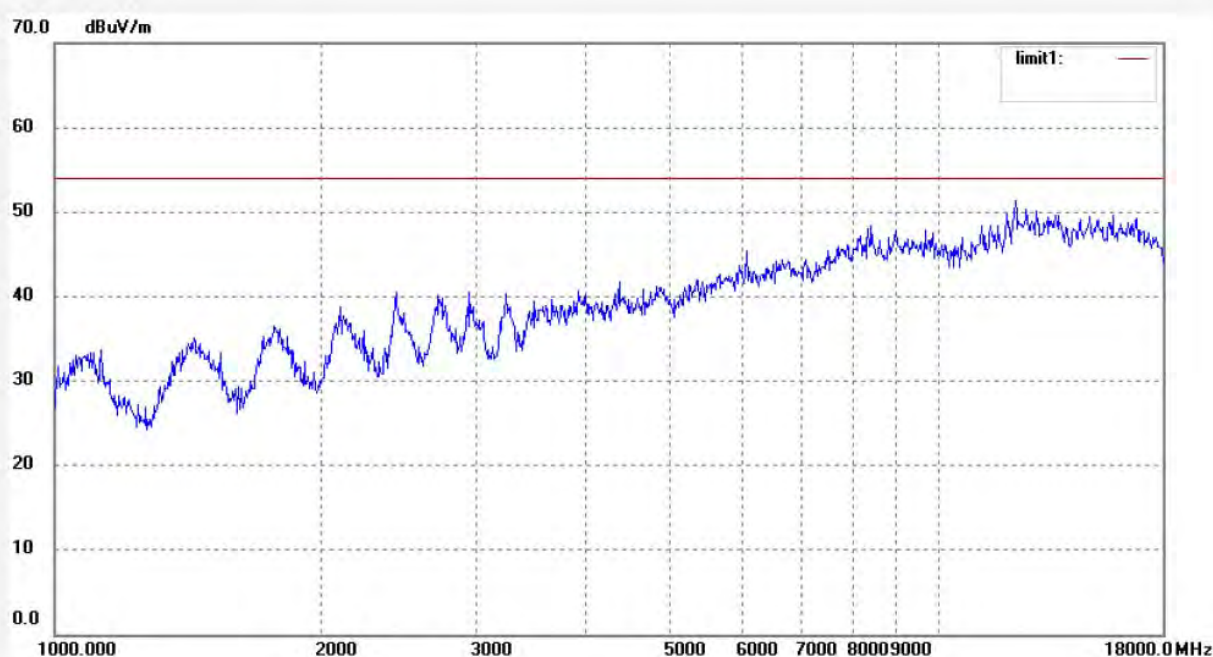

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------


ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: star #348

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 26 C / 55 %

EUT: HDMI WI-FI Smart TV Stick

Mode: TX Channel 6 (802.11b)

Model: ST-W

Manufacturer: NEWMI

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 13/03/25/

Time: 10/42/27

Engineer Signature: STAR

Distance: 3m

Note: Report No.:ATE20130457

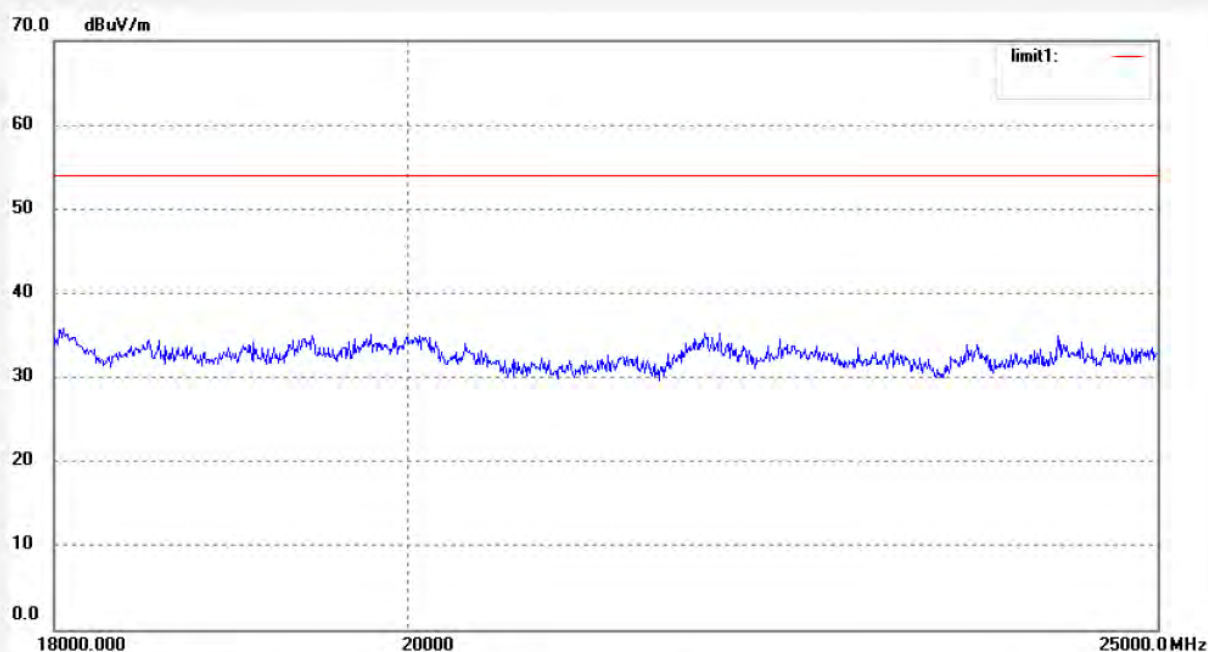

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------


ACCURATE TECHNOLOGY CO., LTD.

 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: star #347

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 26 C / 55 %

EUT: HDMI WI-FI Smart TV Stick

Mode: TX Channel 6 (802.11b)

Model: ST-W

Manufacturer: NEWMI

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 13/03/25/

Time: 10/38/06

Engineer Signature: STAR

Distance: 3m

Note: Report No.:ATE20130457

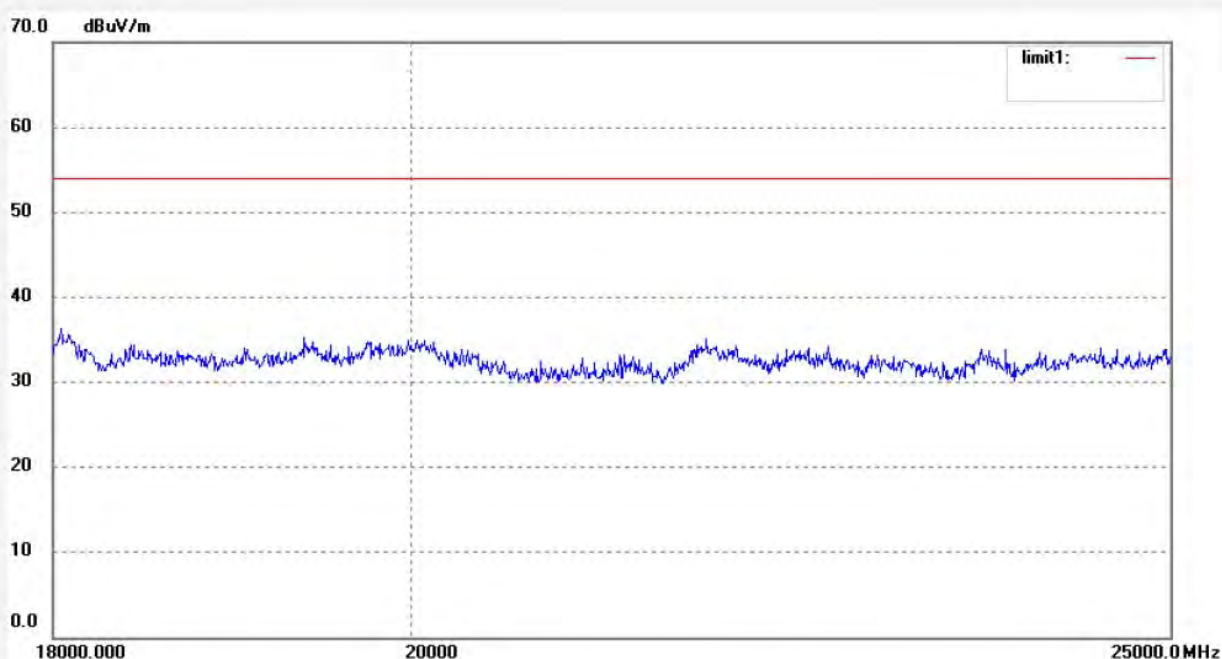

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------


ACCURATE TECHNOLOGY CO., LTD.

 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: STAR #301

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 26 C / 55 %

EUT: HDMI WI-FI Smart TV Stick

Mode: TX Channel 11 (802.11b)

Model: ST-W

Manufacturer: NEWMII

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 13/03/25/

Time: 8/59/41

Engineer Signature: STAR

Distance: 3m

Note: Report No.:ATE20130457

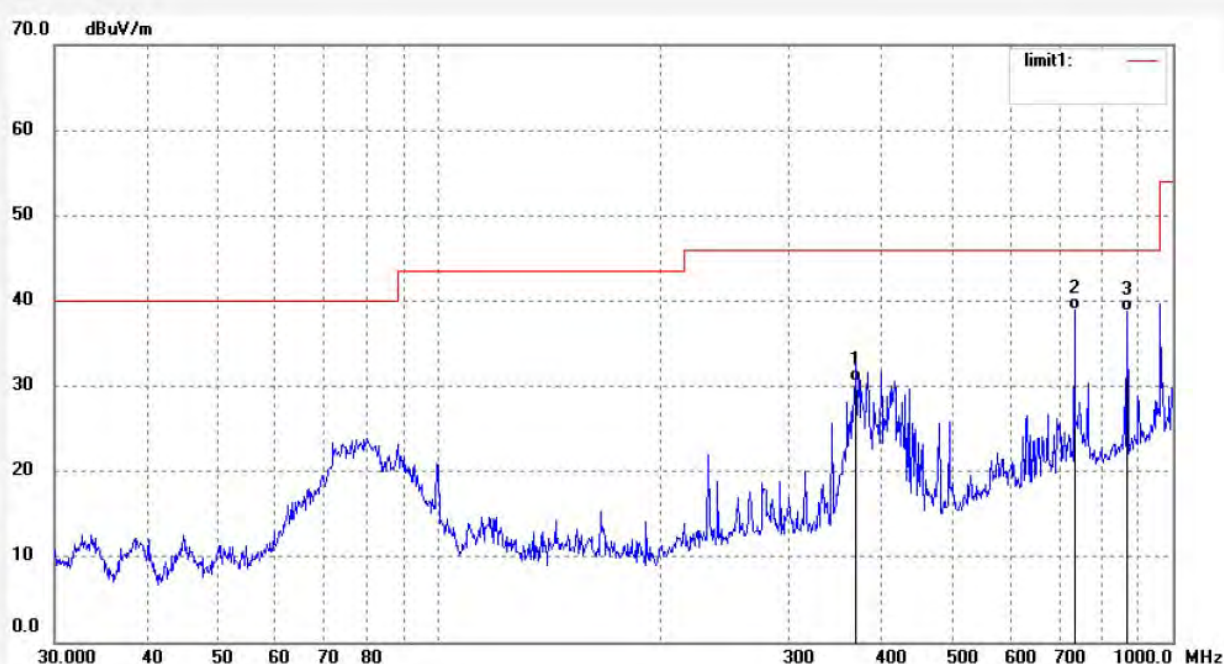

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	370.7022	46.36	-15.85	30.51	46.00	-15.49	QP			
2	734.4913	47.99	-8.98	39.01	46.00	-6.99	QP			
3	866.0878	45.38	-6.69	38.69	46.00	-7.31	QP			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: STAR #302

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 26 C / 55 %

EUT: HDMI WI-FI Smart TV Stick

Mode: TX Channel 11 (802.11b)

Model: ST-W

Manufacturer: NEWMi

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 13/03/25/

Time: 9/02/41

Engineer Signature: STAR

Distance: 3m

Note: Report No.:ATE20130457

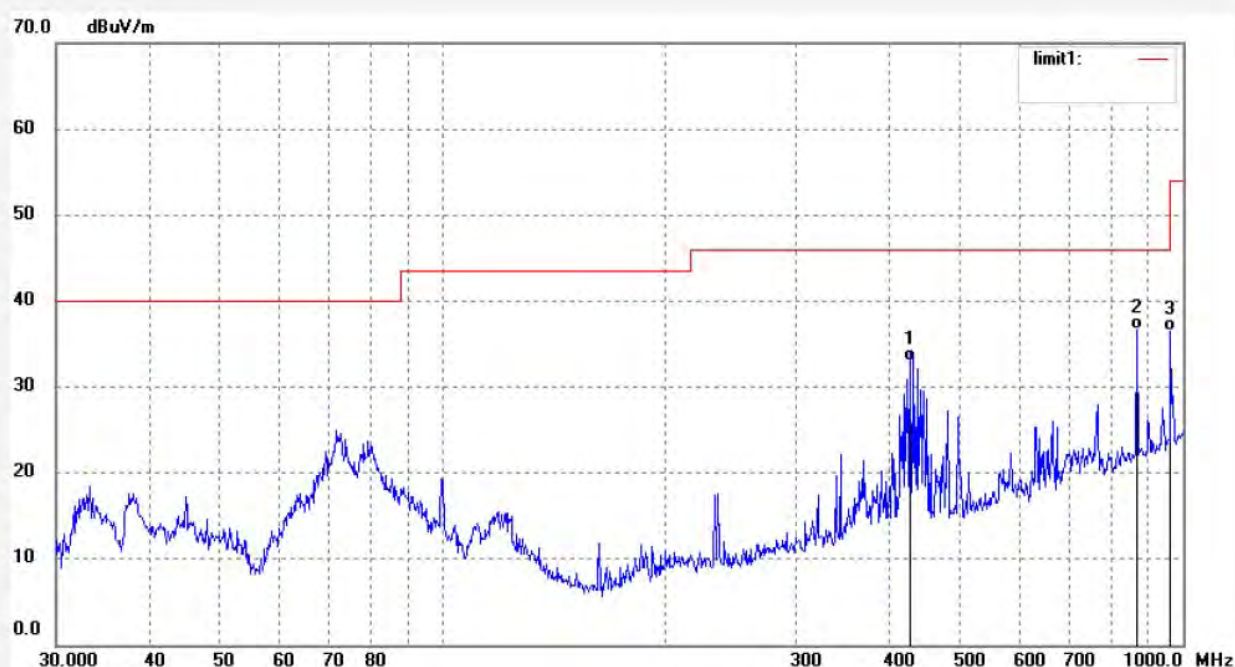

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	428.0193	47.15	-14.22	32.93	46.00	-13.07	QP			
2	866.0879	43.40	-6.69	36.71	46.00	-9.29	QP			
3	962.1623	41.71	-5.23	36.48	54.00	-17.52	QP			


ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: STAR #4064

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 55 %

EUT: HDMI WI-FI Smart TV Stick

Mode: TX Channel 11 (802.11b)

Model: ST-W

Manufacturer: NEWMI

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 2013-4-11

Time: 15:32:50

Engineer Signature:

Distance: 3m

Note: Report No.:ATE20130457

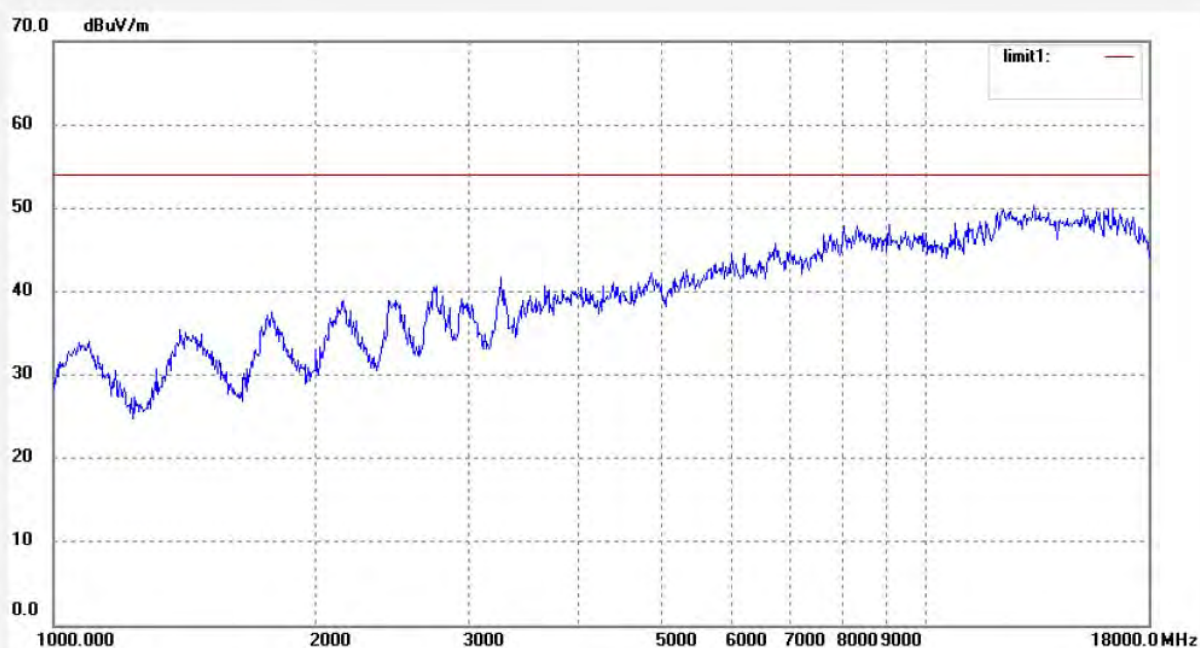

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------


ACCURATE TECHNOLOGY CO., LTD.

 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: STAR #4065

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 55 %

EUT: HDMI WI-FI Smart TV Stick

Mode: TX Channel 11 (802.11b)

Model: ST-W

Manufacturer: NEWMI

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 2013-4-11

Time: 15:35:15

Engineer Signature:

Distance: 3m

Note: Report No.:ATE20130457

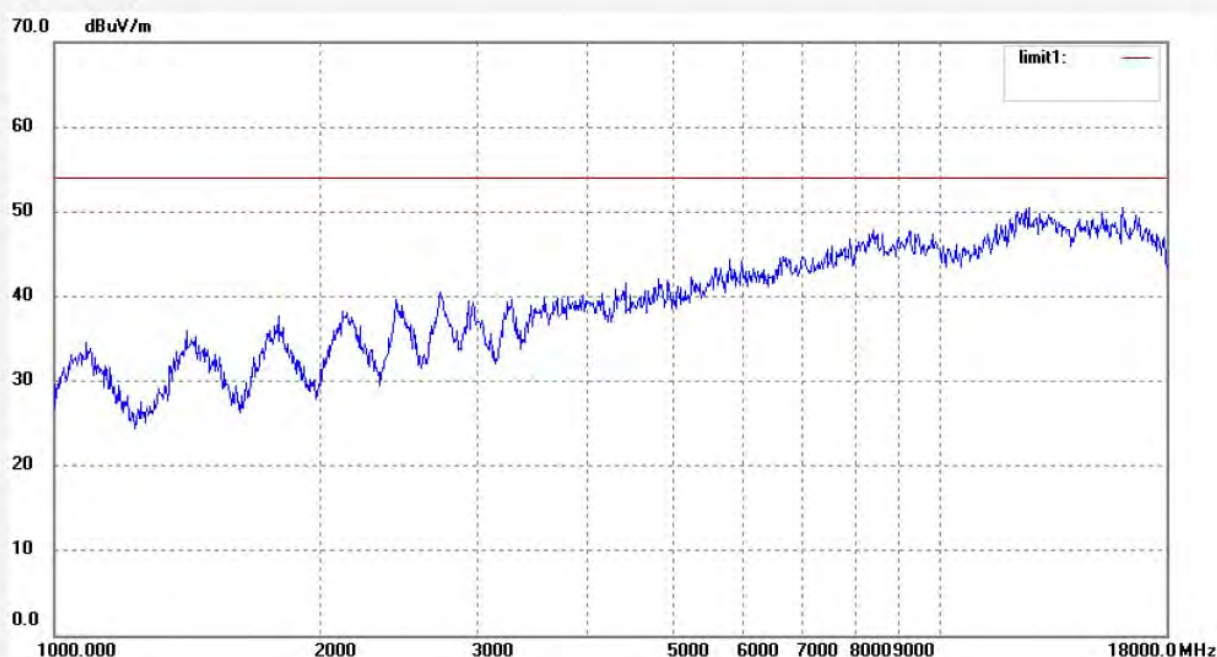

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------


ACCURATE TECHNOLOGY CO., LTD.

 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: star #349

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 26 C / 55 %

EUT: HDMI WI-FI Smart TV Stick

Mode: TX Channel 11 (802.11b)

Model: ST-W

Manufacturer: NEWMI

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 13/03/25/

Time: 10/45/50

Engineer Signature: STAR

Distance: 3m

Note: Report No.:ATE20130457

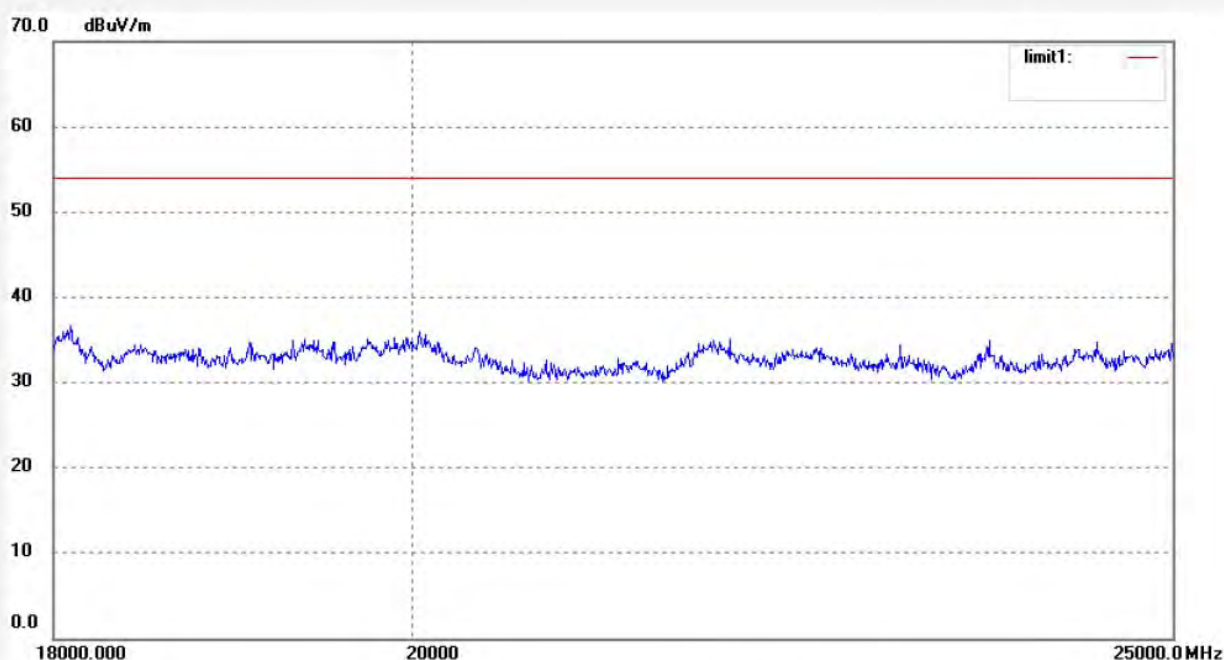

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: star #350

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 26 C / 55 %

EUT: HDMI WI-FI Smart TV Stick

Mode: TX Channel 11 (802.11b)

Model: ST-W

Manufacturer: NEWMI

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 13/03/25/

Time: 10/48/09

Engineer Signature: STAR

Distance: 3m

Note: Report No.:ATE20130457

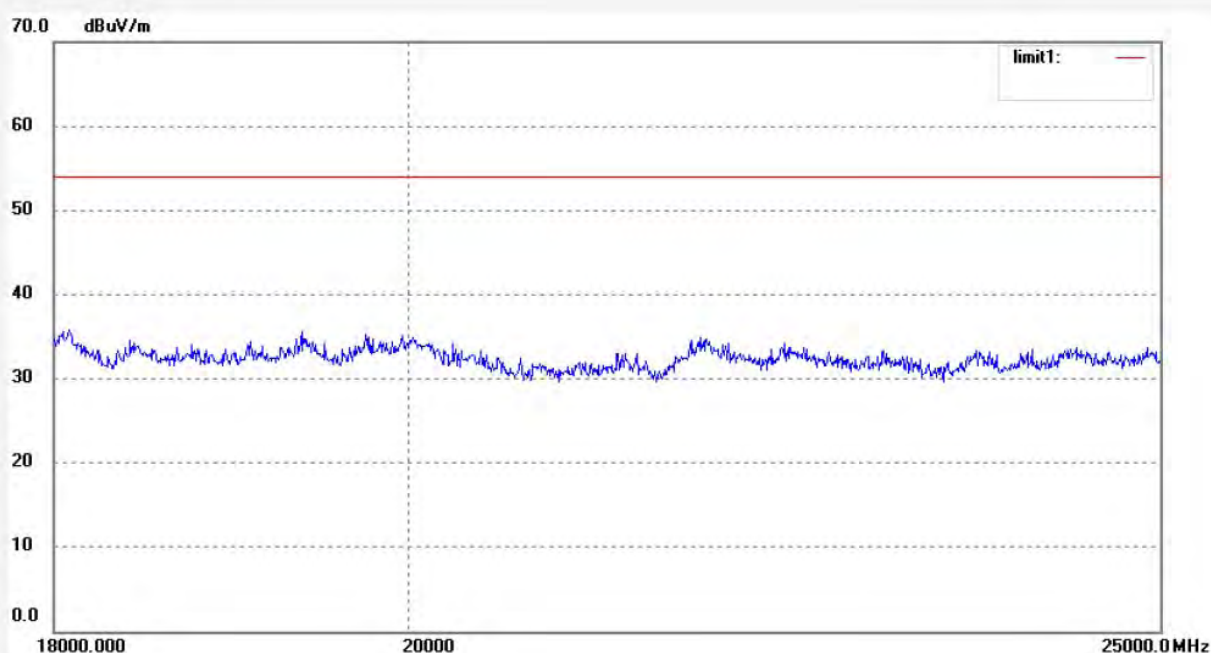

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: STAR #304

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 26 C / 55 %

EUT: HDMI WI-FI Smart TV Stick

Mode: TX Channel 1 (802.11g)

Model: ST-W

Manufacturer: NEWMI

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 13/03/25/

Time: 9/12/22

Engineer Signature: STAR

Distance: 3m

Note: Report No.:ATE20130457

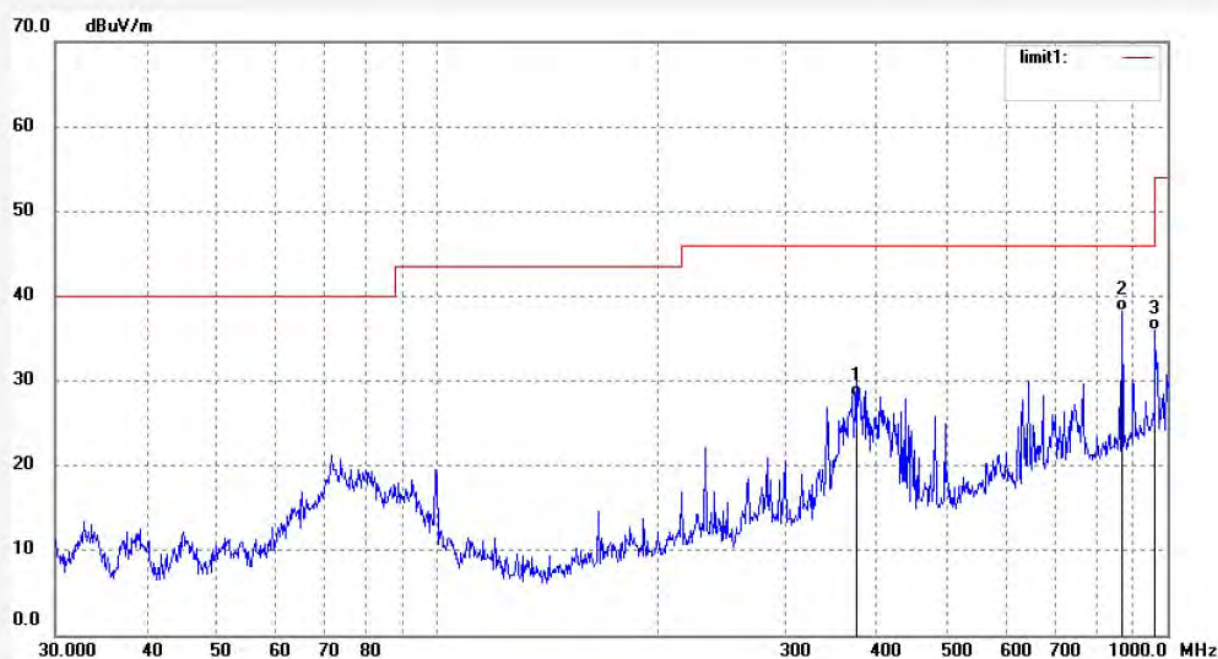

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	374.6225	43.89	-15.82	28.07	46.00	-17.93	QP			
2	866.0878	44.98	-6.69	38.29	46.00	-7.71	QP			
3	962.1622	41.22	-5.23	35.99	54.00	-18.01	QP			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: STAR #303

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 26 C / 55 %

EUT: HDMI WI-FI Smart TV Stick

Mode: TX Channel 1 (802.11g)

Model: ST-W

Manufacturer: NEWMI

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 13/03/25/

Time: 9/05/17

Engineer Signature: STAR

Distance: 3m

Note: Report No.:ATE20130457

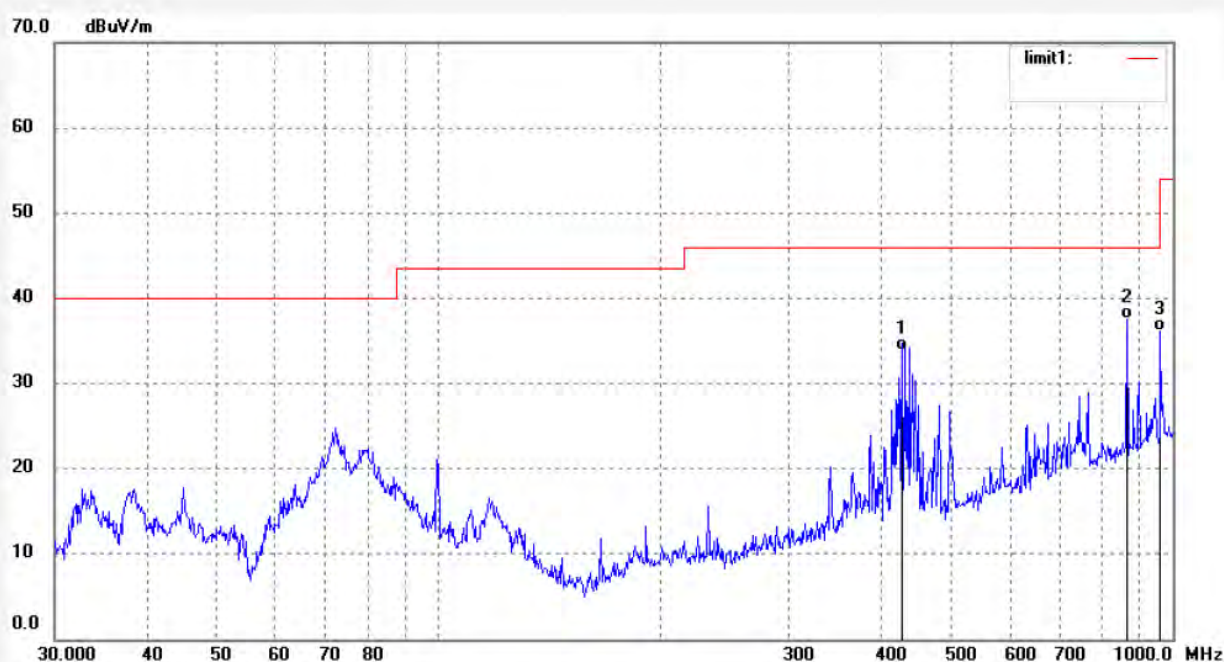

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	428.0192	48.00	-14.22	33.78	46.00	-12.22	QP			
2	866.0878	44.17	-6.69	37.48	46.00	-8.52	QP			
3	962.1622	41.43	-5.23	36.20	54.00	-17.80	QP			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: STAR #4067

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 55 %

EUT: HDMI WI-FI Smart TV Stick

Mode: TX Channel 1 (802.11g)

Model: ST-W

Manufacturer: NEWMI

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 2013-4-11

Time: 15:43:24

Engineer Signature:

Distance: 3m

Note: Report No.:ATE20130457

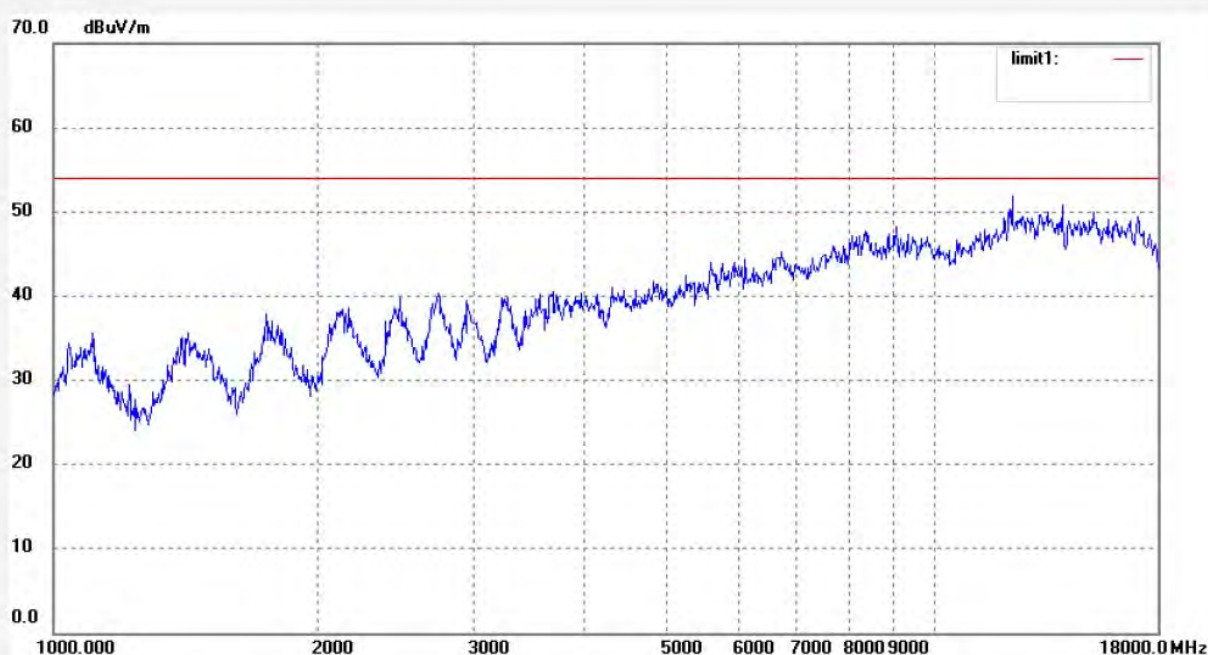

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: STAR #4066

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 55 %

EUT: HDMI WI-FI Smart TV Stick

Mode: TX Channel 1 (802.11g)

Model: ST-W

Manufacturer: NEWMII

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 2013-4-11

Time: 15:39:53

Engineer Signature:

Distance: 3m

Note: Report No.:ATE20130457

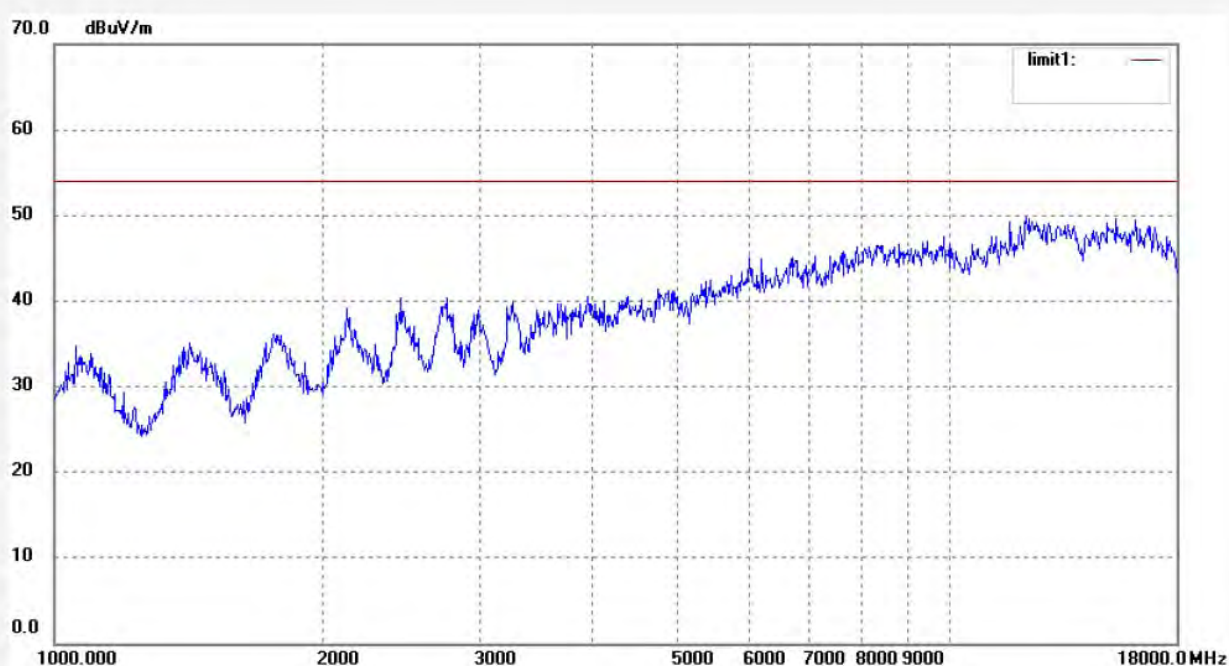

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: star #352

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 26 C / 55 %

EUT: HDMI WI-FI Smart TV Stick

Mode: TX Channel 1 (802.11g)

Model: ST-W

Manufacturer: NEWMI

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 13/03/25/

Time: 10/55/51

Engineer Signature: STAR

Distance: 3m

Note: Report No.:ATE20130457

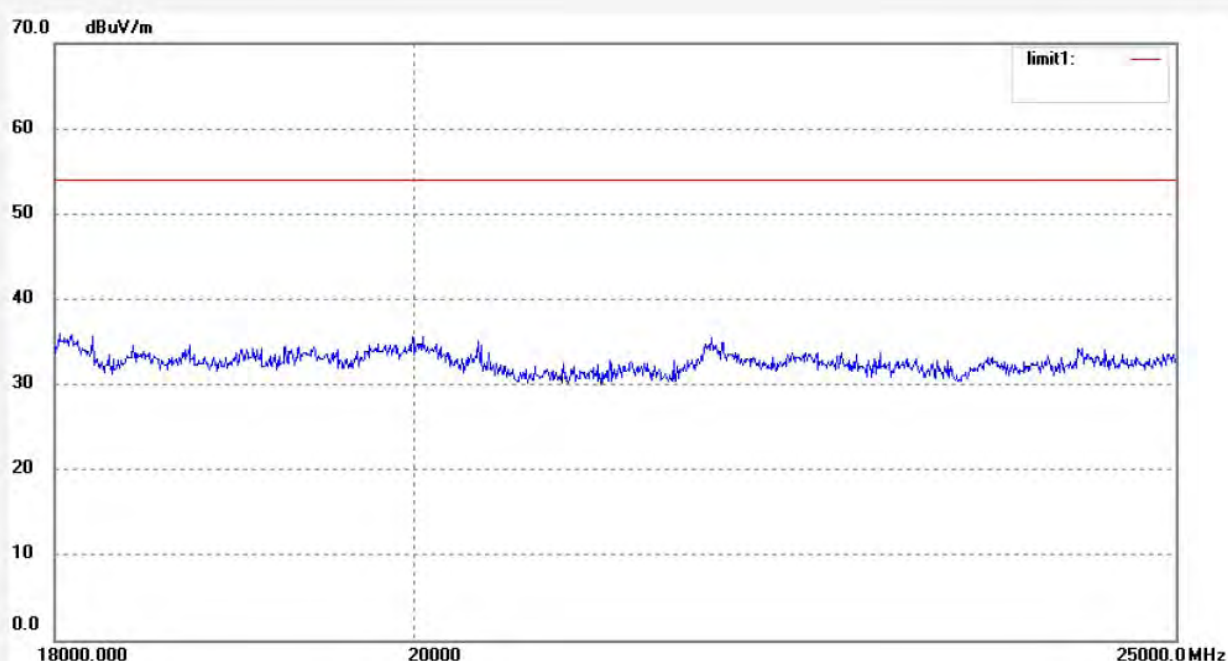

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: star #351

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 26 C / 55 %

EUT: HDMI WI-FI Smart TV Stick

Mode: TX Channel 1 (802.11g)

Model: ST-W

Manufacturer: NEWMI

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 13/03/25/

Time: 10/51/28

Engineer Signature: STAR

Distance: 3m

Note: Report No.:ATE20130457

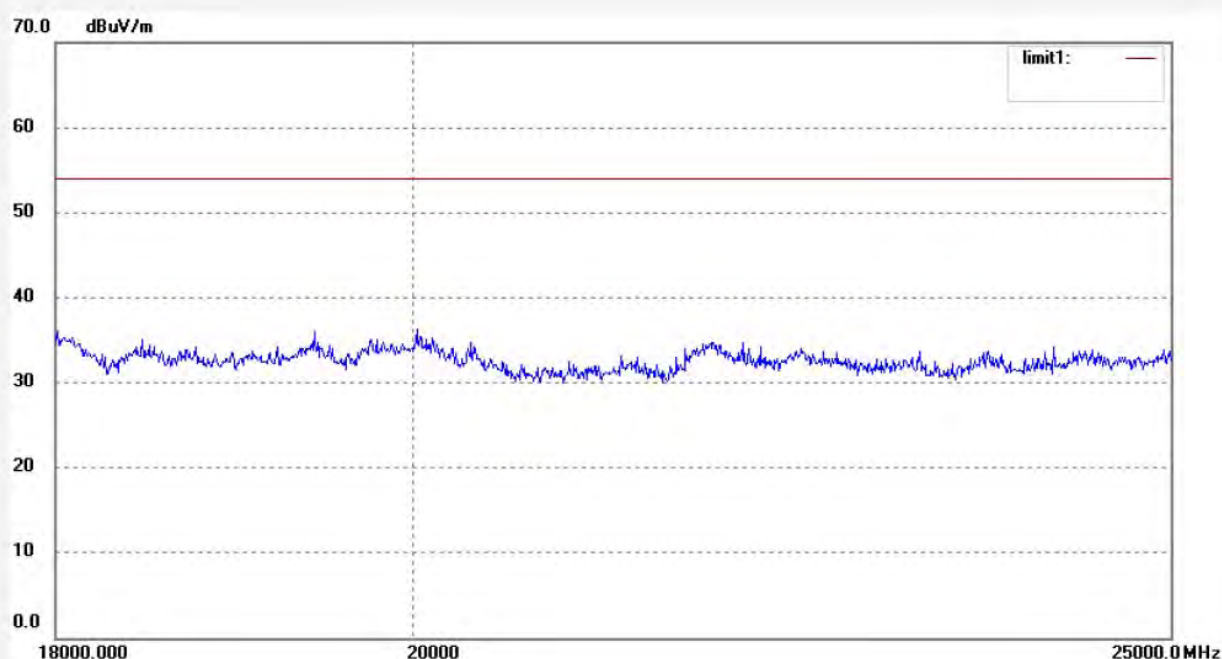

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: STAR #305

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 26 C / 55 %

EUT: HDMI WI-FI Smart TV Stick

Mode: TX Channel 6 (802.11g)

Model: ST-W

Manufacturer: NEWMI

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 13/03/25/

Time: 9/15/03

Engineer Signature: STAR

Distance: 3m

Note: Report No.:ATE20130457

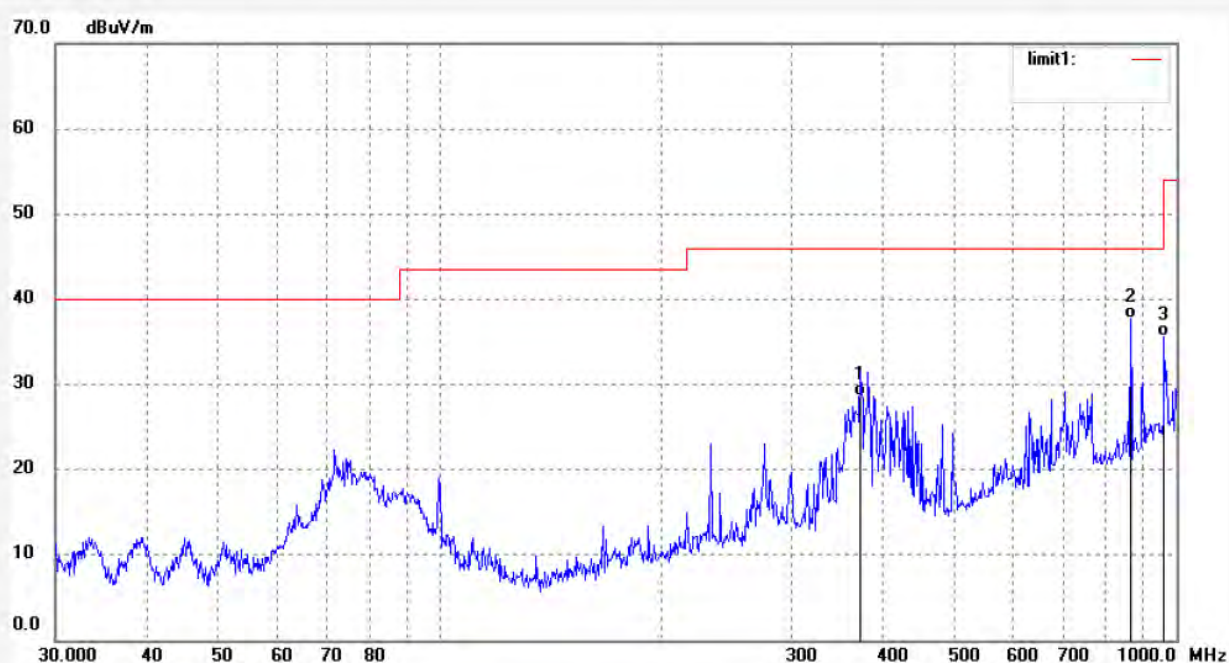

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	372.0045	44.46	-15.84	28.62	46.00	-17.38	QP			
2	866.0879	44.41	-6.69	37.72	46.00	-8.28	QP			
3	962.1623	40.89	-5.23	35.66	54.00	-18.34	QP			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: STAR #306

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 26 C / 55 %

EUT: HDMI WI-FI Smart TV Stick

Mode: TX Channel 6 (802.11g)

Model: ST-W

Manufacturer: NEWMI

Polarization: Vertical

Power Source: AC 120V/60Hz

Date: 13/03/25/

Time: 9/18/46

Engineer Signature: STAR

Distance: 3m

Note: Report No.:ATE20130457



No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	428.0192	46.89	-14.22	32.67	46.00	-13.33	QP			
2	866.0878	44.47	-6.69	37.78	46.00	-8.22	QP			
3	962.1622	41.25	-5.23	36.02	54.00	-17.98	QP			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: STAR #4068

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 55 %

EUT: HDMI WI-FI Smart TV Stick

Mode: TX Channel 6 (802.11g)

Model: ST-W

Manufacturer: NEWMI

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 2013-4-11

Time: 15:47:45

Engineer Signature:

Distance: 3m

Note: Report No.:ATE20130457

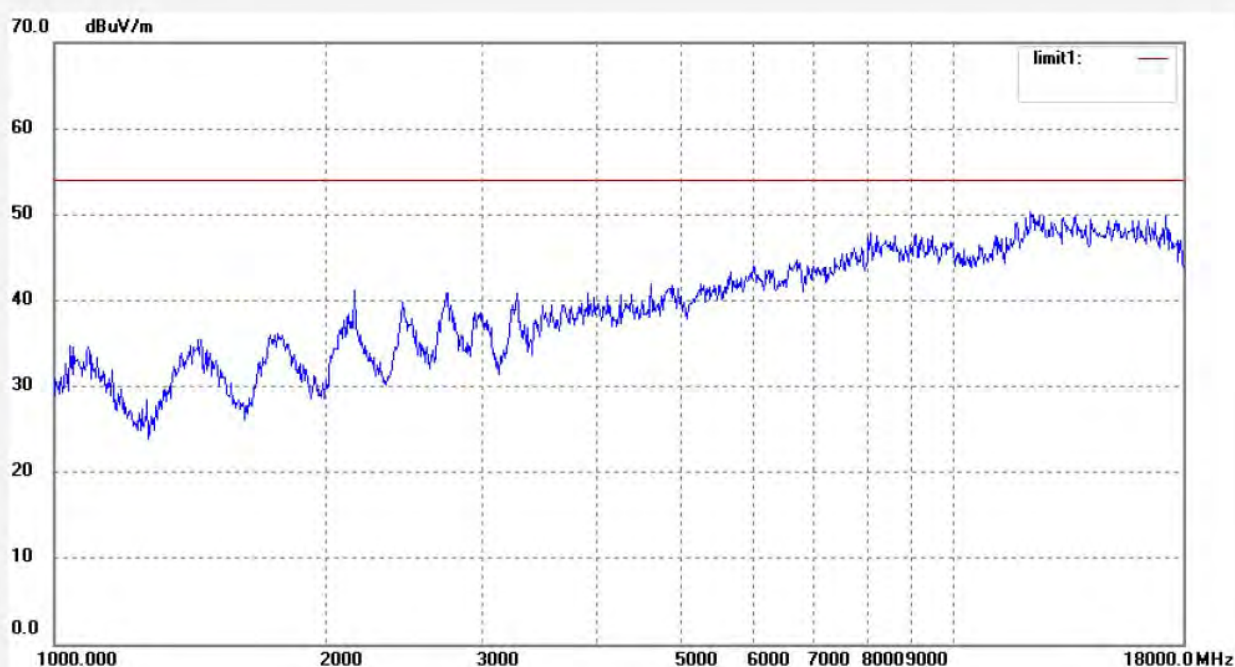

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: STAR #4069

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 55 %

EUT: HDMI WI-FI Smart TV Stick

Mode: TX Channel 6 (802.11g)

Model: ST-W

Manufacturer: NEWMII

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 2013-4-11

Time: 15:50:08

Engineer Signature:

Distance: 3m

Note: Report No.:ATE20130457

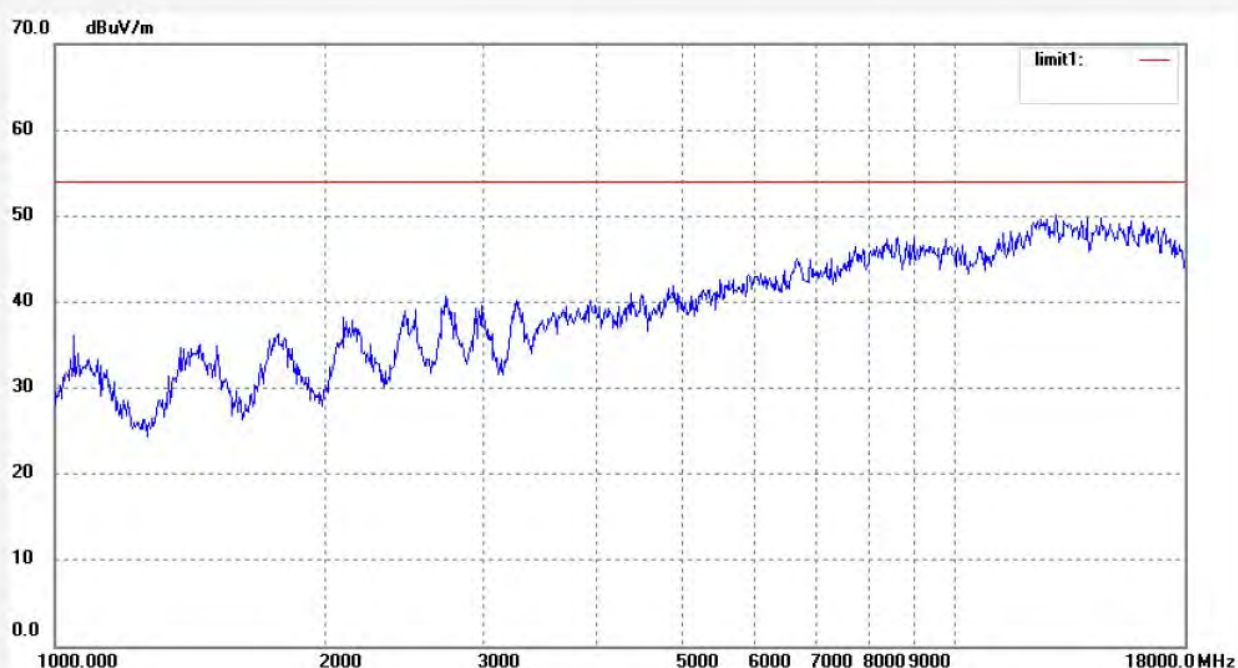

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------


ACCURATE TECHNOLOGY CO., LTD.

 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: star #353

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 26 C / 55 %

EUT: HDMI WI-FI Smart TV Stick

Mode: TX Channel 6 (802.11g)

Model: ST-W

Manufacturer: NEWMI

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 13/03/25/

Time: 10/58/10

Engineer Signature: STAR

Distance: 3m

Note: Report No.:ATE20130457

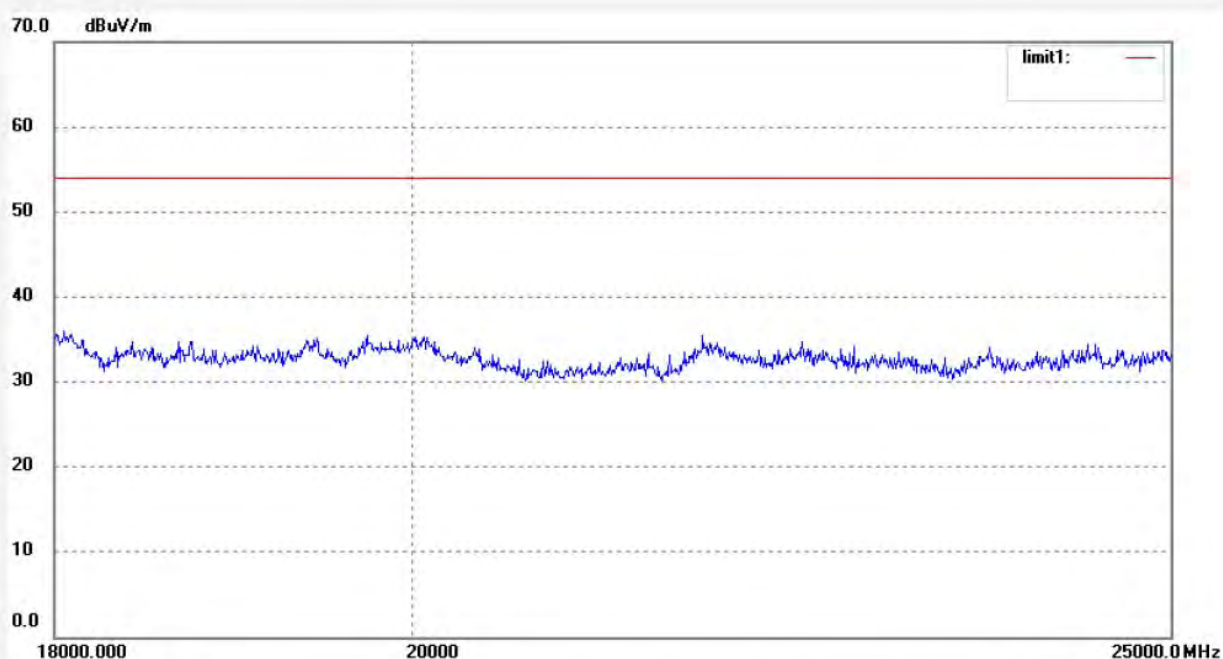

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: star #354

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 26 C / 55 %

EUT: HDMI WI-FI Smart TV Stick

Mode: TX Channel 6 (802.11g)

Model: ST-W

Manufacturer: NEWMI

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 13/03/25/

Time: 11/02/36

Engineer Signature: STAR

Distance: 3m

Note: Report No.:ATE20130457

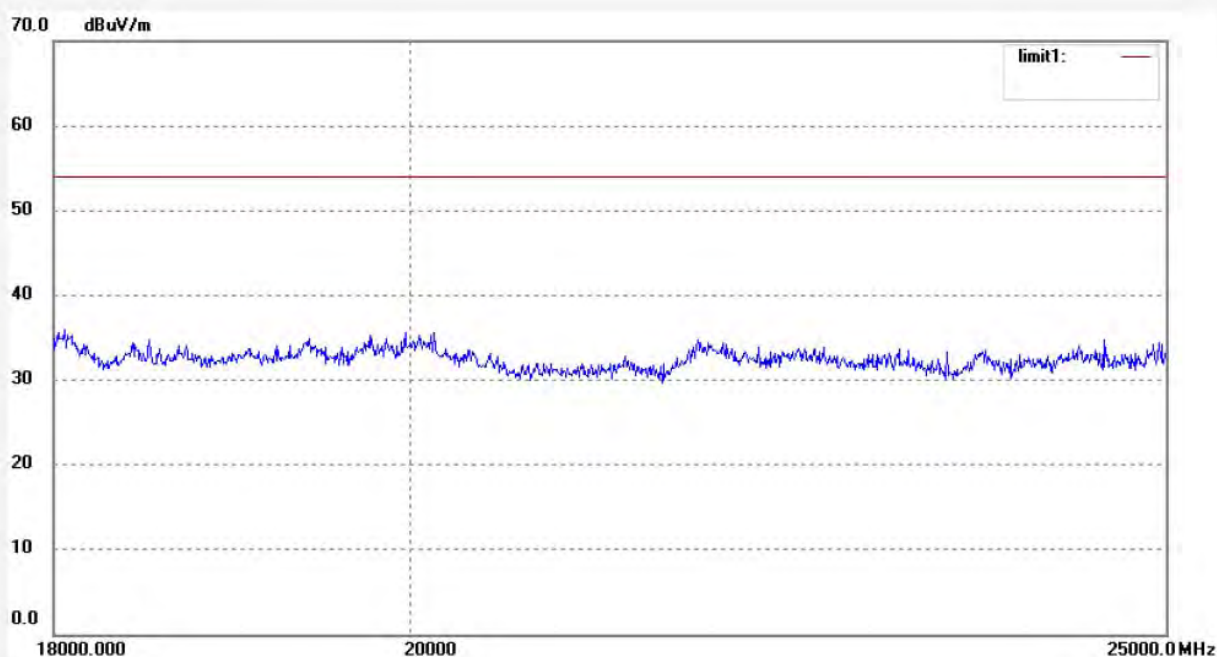

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: STAR #308

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 26 C / 55 %

EUT: HDMI WI-FI Smart TV Stick

Mode: TX Channel 11 (802.11g)

Model: ST-W

Manufacturer: NEWMI

Polarization: Horizontal

Power Source: AC 120V/60Hz

Date: 13/03/25/

Time: 9/26/16

Engineer Signature: STAR

Distance: 3m

Note: Report No.:ATE20130457



No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	396.2414	44.57	-15.67	28.90	46.00	-17.10	QP			
2	866.0878	45.02	-6.69	38.33	46.00	-7.67	QP			
3	962.1622	41.52	-5.23	36.29	54.00	-17.71	QP			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: STAR #307

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 26 C / 55 %

EUT: HDMI WI-FI Smart TV Stick

Mode: TX Channel 11 (802.11g)

Model: ST-W

Manufacturer: NEWMI

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 13/03/25/

Time: 9/23/24

Engineer Signature: STAR

Distance: 3m

Note: Report No.:ATE20130457

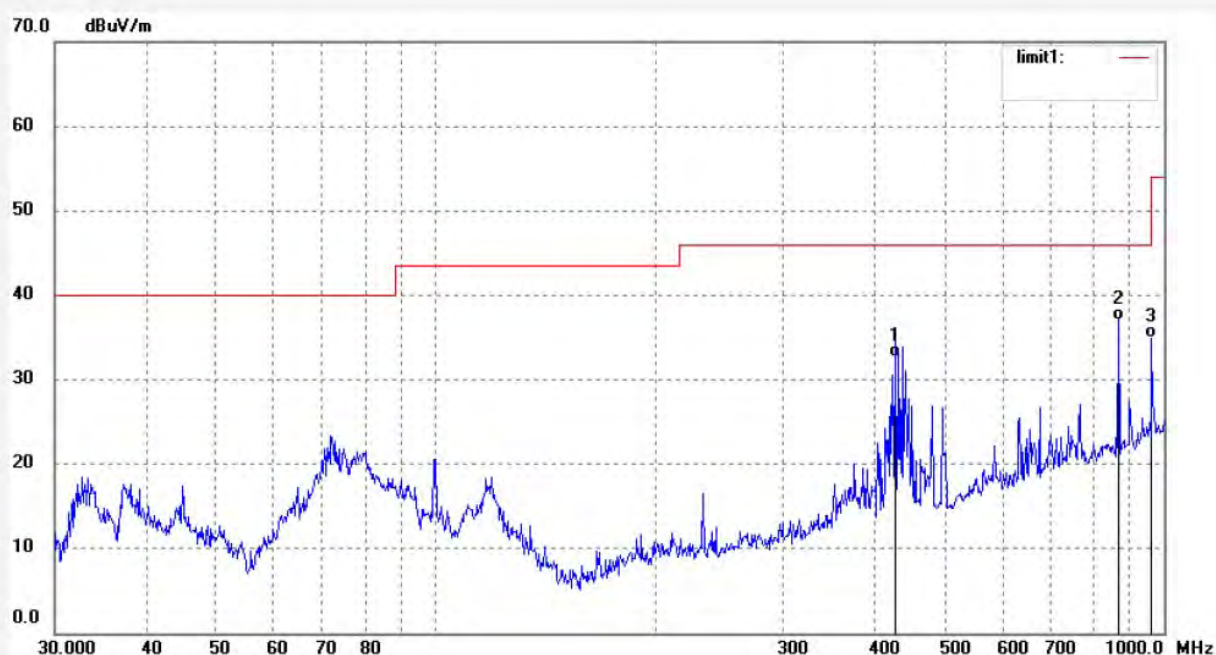

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	428.0192	46.92	-14.22	32.70	46.00	-13.30	QP			
2	866.0878	43.79	-6.69	37.10	46.00	-8.90	QP			
3	962.1622	40.08	-5.23	34.85	54.00	-19.15	QP			


ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: STAR #4071

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 55 %

EUT: HDMI WI-FI Smart TV Stick

Mode: TX Channel 11 (802.11g)

Model: ST-W

Manufacturer: NEWMI

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 2013-4-11

Time: 15:56:03

Engineer Signature:

Distance: 3m

Note: Report No.:ATE20130457

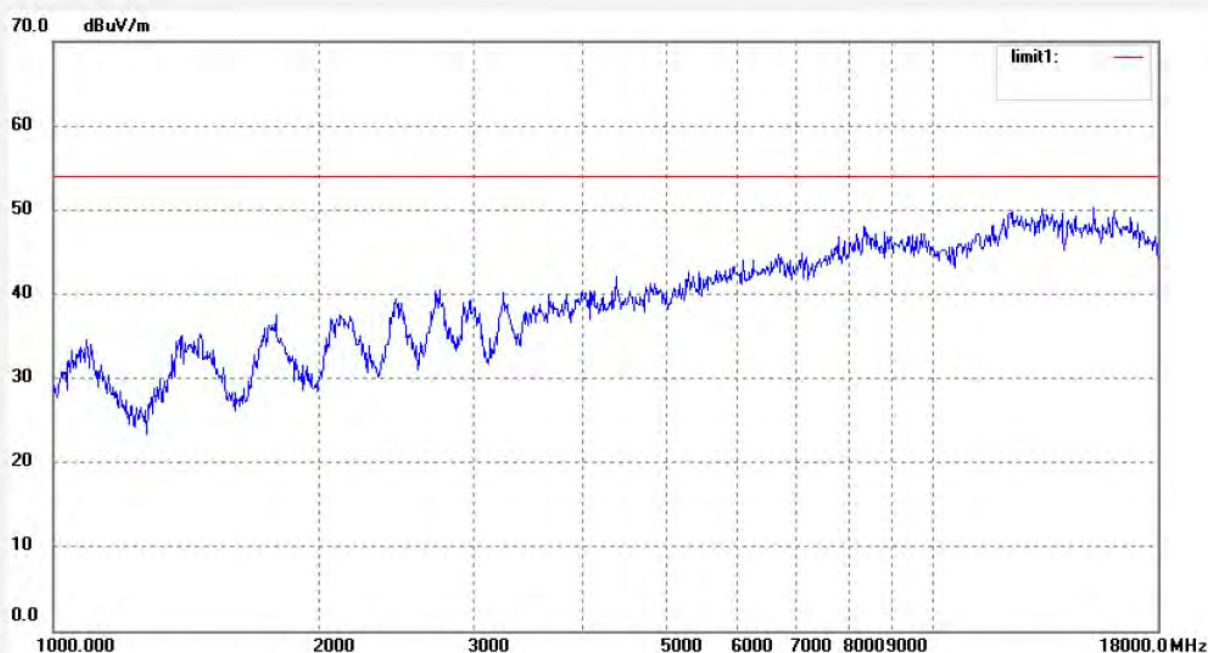

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------


ACCURATE TECHNOLOGY CO., LTD.

 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: STAR #4070

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 55 %

EUT: HDMI WI-FI Smart TV Stick

Mode: TX Channel 11 (802.11g)

Model: ST-W

Manufacturer: NEWMI

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 2013-4-11

Time: 15:53:41

Engineer Signature:

Distance: 3m

Note: Report No.:ATE20130457

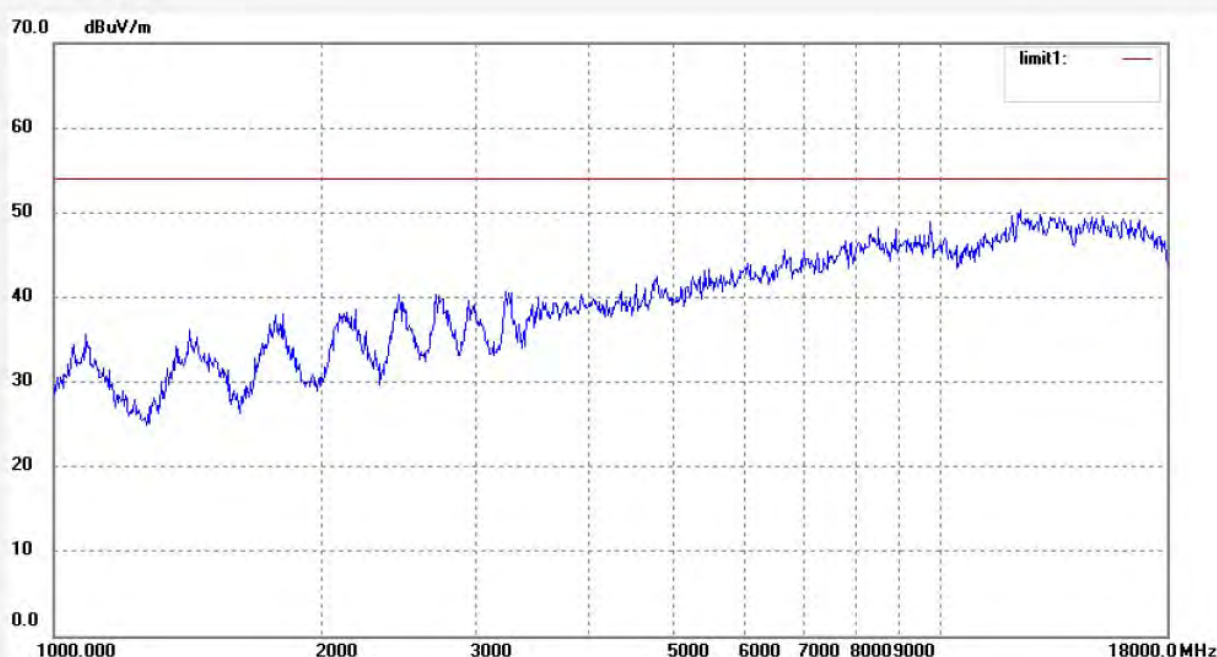

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------


ACCURATE TECHNOLOGY CO., LTD.

 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: star #356

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 26 C / 55 %

EUT: HDMI WI-FI Smart TV Stick

Mode: TX Channel 11 (802.11g)

Model: ST-W

Manufacturer: NEWMI

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 13/03/25/

Time: 11/09/40

Engineer Signature: STAR

Distance: 3m

Note: Report No.: ATE20130457

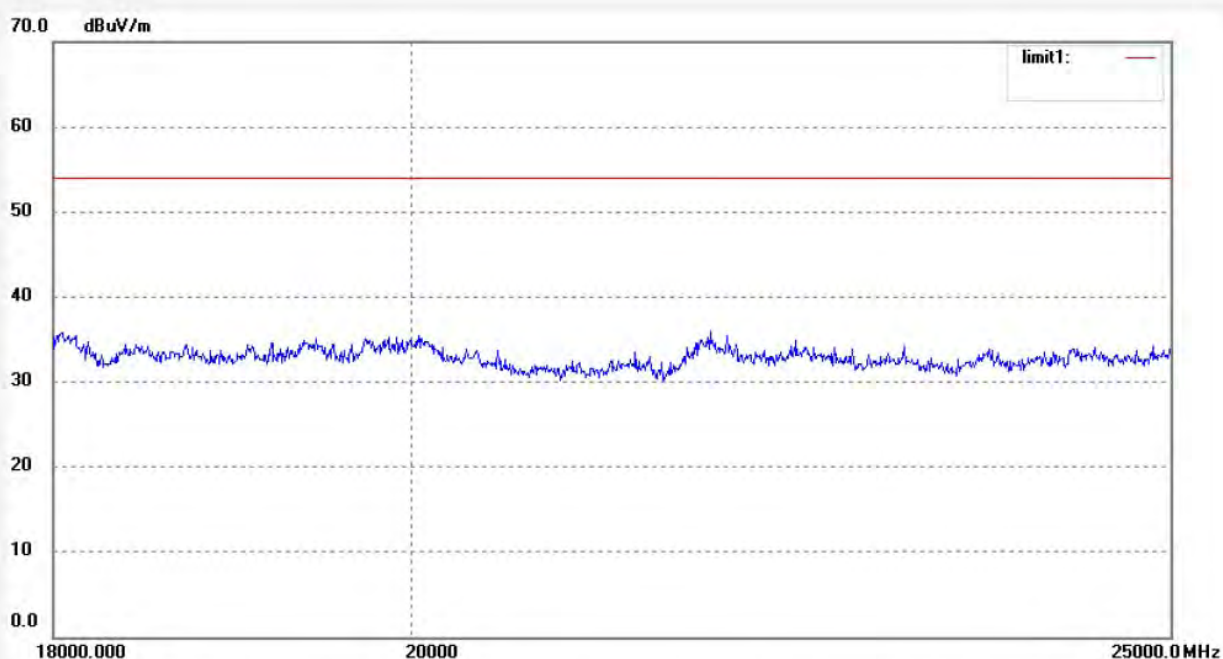

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: star #355

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 26 C / 55 %

EUT: HDMI WI-FI Smart TV Stick

Mode: TX Channel 11 (802.11g)

Model: ST-W

Manufacturer: NEWMI

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 13/03/25/

Time: 11/05/03

Engineer Signature: STAR

Distance: 3m

Note: Report No.:ATE20130457

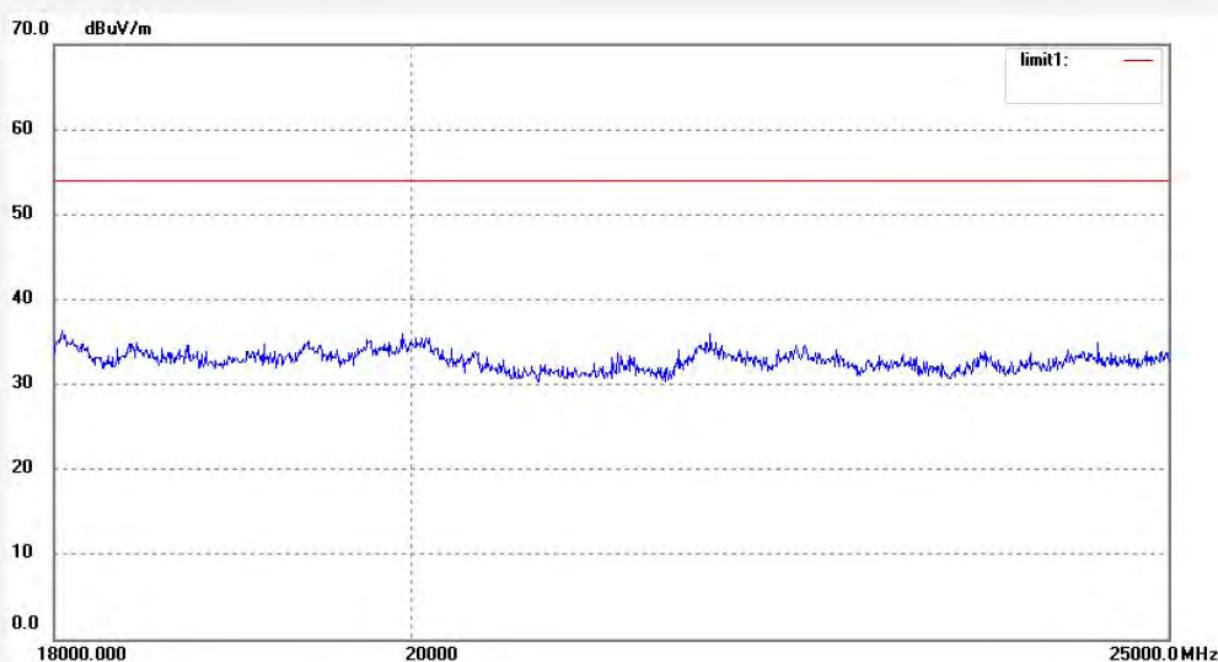

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------


ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: STAR #309

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 26 C / 55 %

EUT: HDMI WI-FI Smart TV Stick

Mode: TX Channel 1 (802.11n)

Model: ST-W

Manufacturer: NEWMI

Polarization: Horizontal

Power Source: AC 120V/60Hz

Date: 13/03/25/

Time: 9/30/55

Engineer Signature: STAR

Distance: 3m

Note: Report No.:ATE20130457



No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	385.2805	46.24	-15.77	30.47	46.00	-15.53	QP			
2	824.5968	47.46	-7.39	40.07	46.00	-5.93	QP			
3	866.0879	45.07	-6.69	38.38	46.00	-7.62	QP			


ACCURATE TECHNOLOGY CO., LTD.

 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: STAR #310

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 26 C / 55 %

EUT: HDMI WI-FI Smart TV Stick

Mode: TX Channel 1 (802.11n)

Model: ST-W

Manufacturer: NEWMI

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 13/03/25/

Time: 9/33/41

Engineer Signature: STAR

Distance: 3m

Note: Report No.:ATE20130457

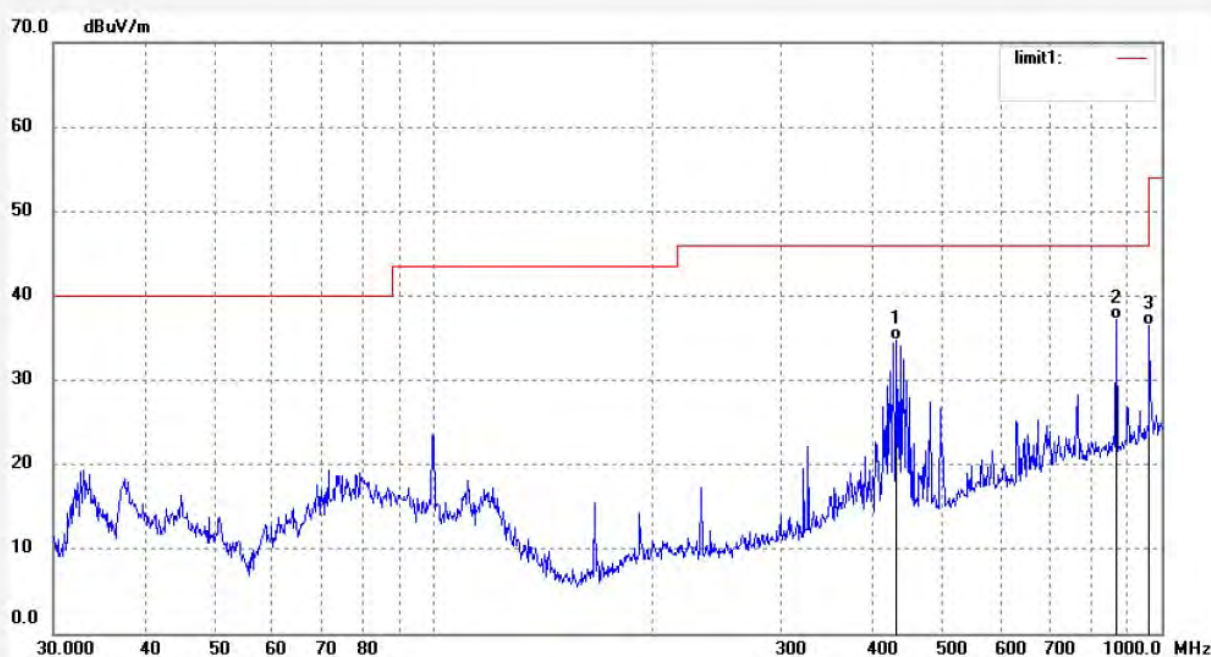

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	432.5457	48.89	-14.15	34.74	46.00	-11.26	QP			
2	866.0879	43.81	-6.69	37.12	46.00	-8.88	QP			
3	962.1623	41.77	-5.23	36.54	54.00	-17.46	QP			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: STAR #4072

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 55 %

EUT: HDMI WI-FI Smart TV Stick

Mode: TX Channel 1 (802.11n)

Model: ST-W

Manufacturer: NEWMI

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 2013-4-11

Time: 16:01:49

Engineer Signature:

Distance: 3m

Note: Report No.:ATE20130457

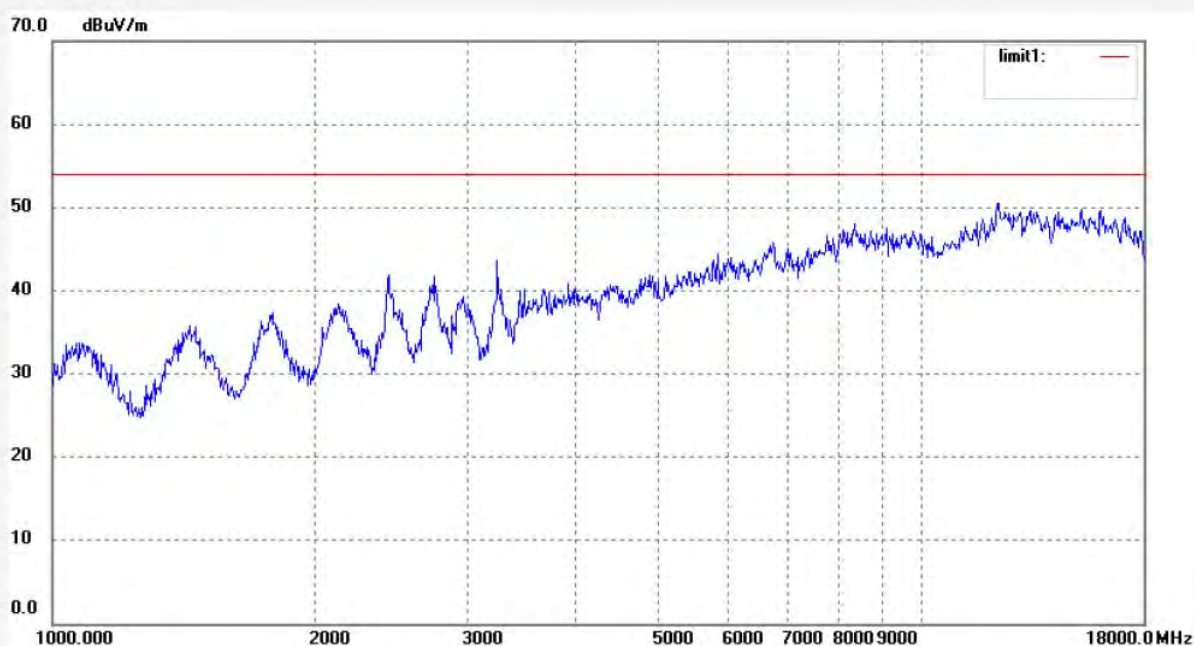

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------


ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: STAR #4073

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 55 %

EUT: HDMI WI-FI Smart TV Stick

Mode: TX Channel 1 (802.11n)

Model: ST-W

Manufacturer: NEWMI

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 2013-4-11

Time: 16:05:21

Engineer Signature:

Distance: 3m

Note: Report No.:ATE20130457

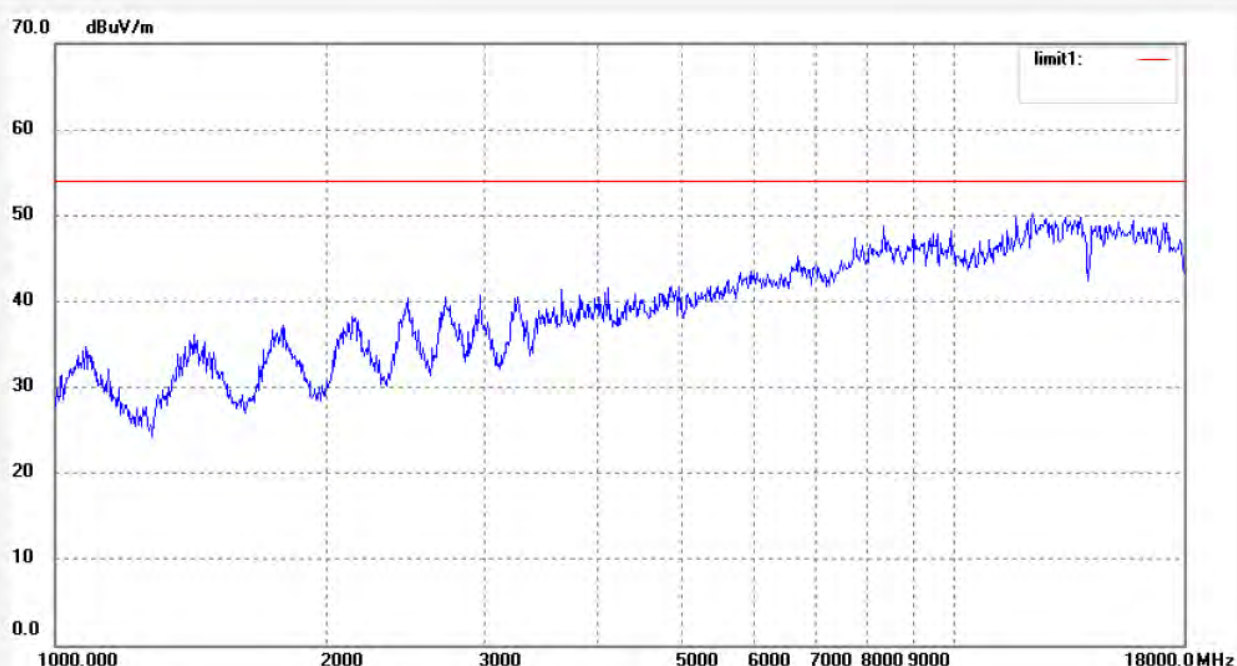

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------


ACCURATE TECHNOLOGY CO., LTD.

 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: star #357

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 26 C / 55 %

EUT: HDMI WI-FI Smart TV Stick

Mode: TX Channel 1 (802.11n)

Model: ST-W

Manufacturer: NEWMI

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 13/03/25/

Time: 11/12/57

Engineer Signature: STAR

Distance: 3m

Note: Report No.:ATE20130457

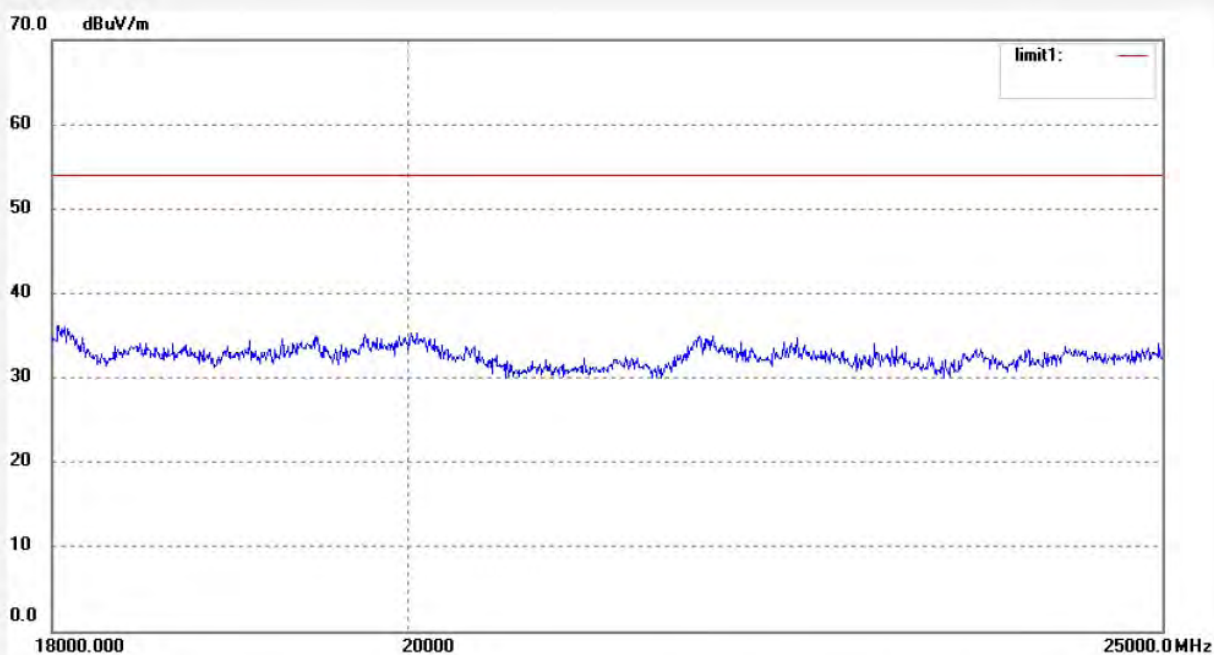

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: star #358	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 13/03/25/
Temp.(C)/Hum.(%) 26 C / 55 %	Time: 11/15/19
EUT: HDMI WI-FI Smart TV Stick	Engineer Signature: STAR
Mode: TX Channel 1 (802.11n)	Distance: 3m
Model: ST-W	
Manufacturer: NEWMI	

Note: Report No.:ATE20130457

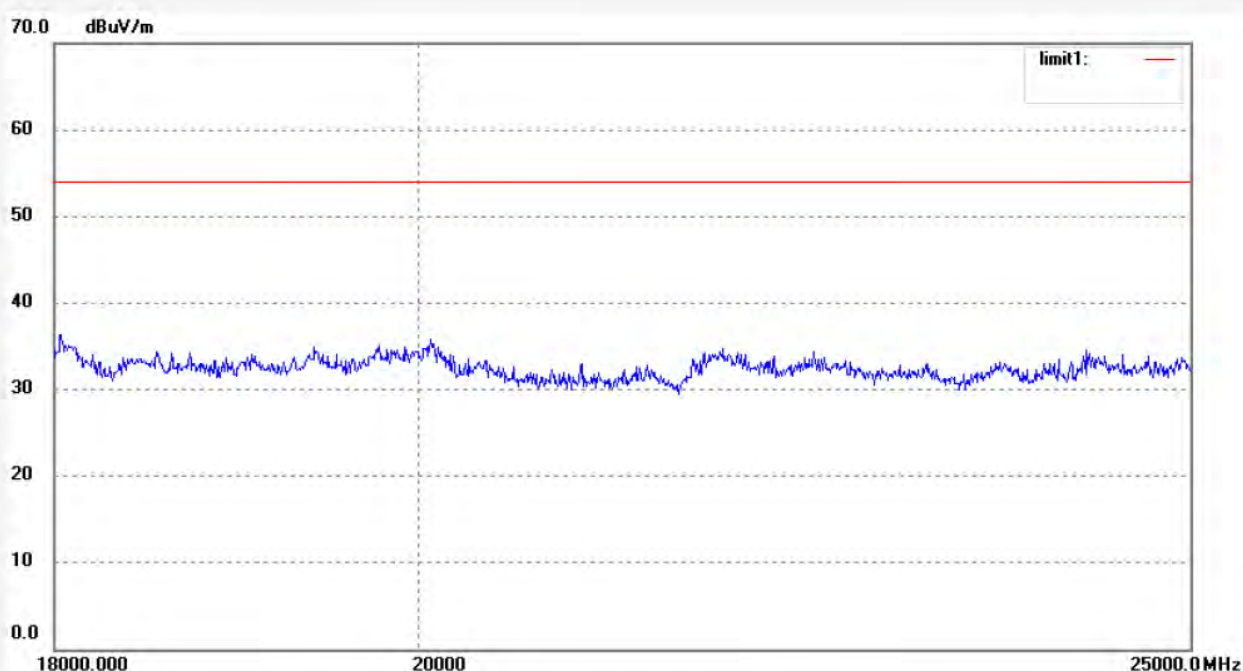

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: STAR #312

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 26 C / 55 %

EUT: HDMI WI-FI Smart TV Stick

Mode: TX Channel 6 (802.11n)

Model: ST-W

Manufacturer: NEWMI

Polarization: Horizontal

Power Source: AC 120V/60Hz

Date: 13/03/25/

Time: 9/39/10

Engineer Signature: STAR

Distance: 3m

Note: Report No.:ATE20130457



No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	374.6225	43.97	-15.82	28.15	46.00	-17.85	QP			
2	813.1115	49.19	-7.55	41.64	46.00	-4.36	QP			
3	866.0879	44.42	-6.69	37.73	46.00	-8.27	QP			