

承 認 書

SPECIFICATION FOR APPROVAL

客 戶:
CUSTOMER: **Shenzhen Aodehong Technology Co., LTD**

客 戶 料 號:
CUST P/N:

料 號:
FINE P/N: **G4511-6.5uH 单线圈 0.08*105P*12TS**

產 品 型 號:
DESC: **Φ43.5MMX5.0MMX0.8MM 双槽**

日 期:
DATE: **2022/11/01**

版 本:
Version: **A.0**

擬制 PREPARED BY	審核 CHECKED BY	批准 APPROVED BY	客戶承認 CUSTOMER APPROVE
黃燕銘	寧元安	黃錦華	

Shenzhen Songdao Technology Co., LTD

Factory address: 8th Floor, Building 2, Sanjia High-tech Industrial Park, No.123

Junfa Third Road, Dongkeng Town, Dongguan City

TEL: 13728755750

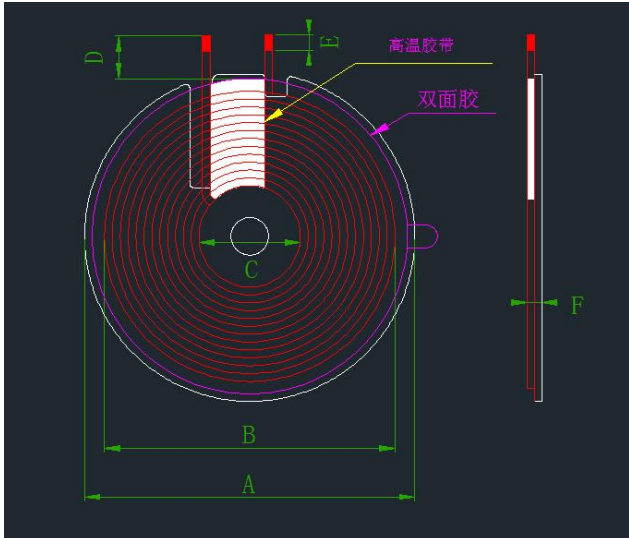
FAX: 0755-84526500

E-mail: 506388681@qq.com

[illegible]

SPECIFICATION

产 品 型 号: DESC	Φ 13.5x39-6.5uH-0.08x105P-20mm-43.5C	版本 Rev: A.0	客 户 CUST: 客户料号 CUST P/N:	XXX
------------------	---	----------------	-----------------------------	-----

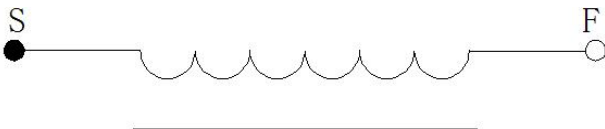
一、尺寸 DIMENSION:(mm)		A	43. 5. 0±0. 5
		B	39±1
		C	13. 5±0. 5
		D	20±2
		E	3±2
		F	2±0. 2

注:

1. Cross out wire;

2. Wrap 8mm(ref) width high-temperature adhesive paper 1-2Ts around the outlet position;

3. The coil is attached to the circular hard magnetic disc with groove, the magnetic disc size is 43.5±0.5mm, the inner hole is 5.3mm, the thickness is 0.8±0.2mm, and the glue is backed.

二、原理图 SCHEMATIC DIAGRAM:				
				

三、绕线参数 Winding Specification:					
序号 NO.	端子 TERMINAL		线径 WIRE	圈数 Turns	绕线方向 Winding Direction
1	S	F	Silk-covered wire 0.08*105P	12Ts	CCW

四、电气特性 ELECTRICAL CHARACTERISTICS:					
温度 TEMPERATURE:25±10℃, 湿度 RELATIVE HUMIDITY:65±20%					
序号 NO.	项目 ITEM	端子 TERMINAL	标准 SPECIFICATION	测试条件 TEST FREQUENCY	测试仪器 TEST EQUIPMENTS
1	IND.	S-F	3.8uH ±20% individual coil	100KHz/1.0V	LCZ METER 1062B
2	IND.	S-F	6.5uH ±10% plus diskettes	100KHz/1.0V	LCZ METER 1062B
3	Q 值	S-F	≥55		
4	DCR	S-F	≤48m Ω		LCZ METER 502B

拟制/日期 PREPARED BY/DATE	审核/日期 CHECKED BY/DATE
------------------------	-----------------------

黄燕铭 2022/11/01	黄锦华 2022/11/01
----------------	----------------