

FCC Test Report

E4270267602KY1

Type / Model Name: Beam360

Product Description: Remote control having RF interface

Applicant: Beam Matrix Limited

FCC ID: A8CBEAM360

FCC --- T E S T R E P O R T

Test Report No. :	E4270267602KY1	Feb 13, 2012
<hr/>		Date of issue

Type / Model Name: Beam360

Product Description : Remote control having RF interface

Applicant : Beam Matrix Limited

Address : Unit 12, 7th floor, Block B,

Tak Lee Industrial Building,

8 Tsing Yeung Circuit , Tuen Mun,

Hong Kong

Test Result according to the standards listed in clause 1 test standards:	POSITIVE
--	-----------------

The test report merely corresponds to the test sample.

It is not permitted to copy extracts of these test results without the written permission of the test laboratory.

File No. **E4270267602KY1**

emitel (Shenzhen)Limited, Building 2, No.171 Meihua Road , Futian District, Shenzhen, P.R.China.

Phone: +86 (755) 8318 2012 Fax: +86 (755) 8312 3810 Email: info@emitel.com.cn

4_F510_25_Rev2_0 / Date of release: 05-01-2009 / Author: Kidd Yang

Page 2 of 17

Contents

1 TEST STANDARDS	4
2 SUMMARY	5
3 EQUIPMENT UNDER TEST	6
3.1 PHOTO DOCUMENTATION OF THE EUT	6
3.2 POWER SUPPLY SYSTEM UTILISED	7
3.3 SHORT DESCRIPTION OF THE EQUIPMENT UNDER TEST (EUT)	7
4 TEST ENVIRONMENT	8
4.1 ADDRESS OF THE TEST LABORATORY	8
4.2 ENVIRONMENTAL CONDITIONS	8
4.3 STATEMENT OF THE MEASUREMENT UNCERTAINTY	8
5 TEST CONDITIONS AND RESULTS	9
5.1 ANTENNA REQUIREMENT	9
5.2 RADIATED EMISSION	10
5.3 BAND EDGE	15
6 USED TEST EQUIPMENT AND ACCESSORIES	17

File No. **E4270267602KY1**

emitel (Shenzhen)Limited, Building 2, No.171 Meihua Road , Futian District, Shenzhen, P.R.China.

Phone: +86 (755) 8318 2012 Fax: +86 (755) 8312 3810 Email: info@emitel.com.cn

4_F510_25_Rev2_0 / Date of release: 05-01-2009 / Author: Kidd Yang

Page 3 of 17

1 TEST STANDARDS

The tests were performed according to following standards:

FCC Part 15:2010-10-01

Federal Communications Commission, Part 15 – Radio Frequency Device

ANSI C63.4:2003

Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz

File No. **E4270267602KY1**

emitel (Shenzhen)Limited, Building 2, No.171 Meihua Road , Futian District, Shenzhen, P.R.China.

Phone: +86 (755) 8318 2012 Fax: +86 (755) 8312 3810 Email: info@emitel.com.cn

4_F510_25_Rev2_0 / Date of release: 05-01-2009 / Author: Kidd Yang

Page 4 of 17

2 SUMMARY

GENERAL REMARKS:

N/A

FINAL ASSESSMENT:

The equipment under test fulfils the FCC requirements cited in test standard listed in section 1.

Date of receipt of test sample : Jan 03, 2012

Testing commenced on : Jan 03, 2012

Testing concluded on : Feb 13, 2012

Checked by:



Ivan
Toa

Ivan Toa
Technical Manager

Tested by:

Kidd Yang
Engineer

File No. **E4270267602KY1**

emitel (Shenzhen)Limited, Building 2, No.171 Meihua Road , Futian District, Shenzhen, P.R.China.

Phone: +86 (755) 8318 2012 Fax: +86 (755) 8312 3810 Email: info@emitel.com.cn

4_F510_25_Rev2_0 / Date of release: 05-01-2009 / Author: Kidd Yang

Page 5 of 17

3 EQUIPMENT UNDER TEST

3.1 Photo documentation of the EuT



Top View



Bottom View

File No. **E4270267602KY1**

emitel (Shenzhen)Limited, Building 2, No.171 Meihua Road , Futian District, Shenzhen, P.R.China.

Phone: +86 (755) 8318 2012 Fax: +86 (755) 8312 3810 Email: info@emitel.com.cn

4_F510_25_Rev2_0 / Date of release: 05-01-2009 / Author: Kidd Yang

Page 6 of 17

3.2 Power supply system utilised

Power supply voltage: DC 3V(2×AAA batteries)

3.3 Short description of the Equipment under Test (EuT)

The Equipment under test (EUT) is a 2.4GHz transceiver. When the buttons are pressed, the EuT will transmit the RF signal to corresponding receiver to change the status of the receiver. When the corresponding receiver is powered up at the first 10 seconds, the EuT will receive the pairing response RF signal from the bulb at the pairing frequency.

Tested samples: One Set (model:Beam360)

Serial number: Not Labelled

Dimensions: L: 9.0 cm W: 5.2 cm H: 1.5 cm

EuT operation mode:

The equipment under test was operated during the measurement under the following conditions:

- Operation mode 1: Transmitting mode

EuT configuration:

The following interface cables and peripheral devices were connected during the measurements:

Interface cables:

Interface cable	Length	Type	Line	Line termination
	[m]		shielded	unshielded
N/A				

Peripheral devices:

Kind of equipment		Model and/or Manufacturer
N/A		

4 TEST ENVIRONMENT

4.1 Address of the test laboratory

emitel (Shenzhen) Limited
Building 2, 171 Meihua Road,
Futian District, Shenzhen,
P.R. China

Laboratory registration numbers:

FCC Registration number: 746887

4.2 Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature: 15-35 ° C

Humidity: 30-60 %

Atmospheric pressure: 860-1060 mbar

4.3 Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16-4-2 /11.2003 "Uncertainties, statistics and limit modelling – Uncertainty in EMC measurements" and is documented in the quality system acc. to ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer does have the sole responsibility for the continued compliance of the device.


File No. E4270267602KY1

5 TEST CONDITIONS AND RESULTS

5.1 Antenna Requirement

According to §15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

The EuT has component antenna, which accordance to the above sections, is considered sufficient to comply with the provisions of these sections. Please see EuT photos for details.

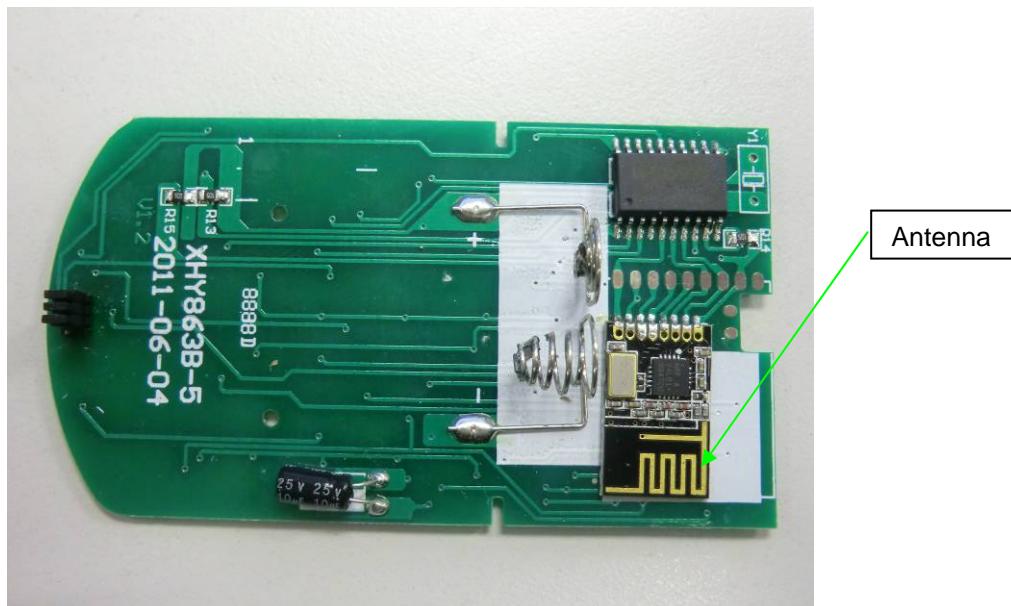

The requirements of section 15.203 are **FULFILLED**.

Remarks: _____

File No. **E4270267602KY1**

5.2 Radiated Emission


For test instruments and accessories used see section 6.

5.2.1 Description of the test location

Test location: Semi-anechoic Chamber

Test distance: 3m

5.2.2 Photo documentation of test

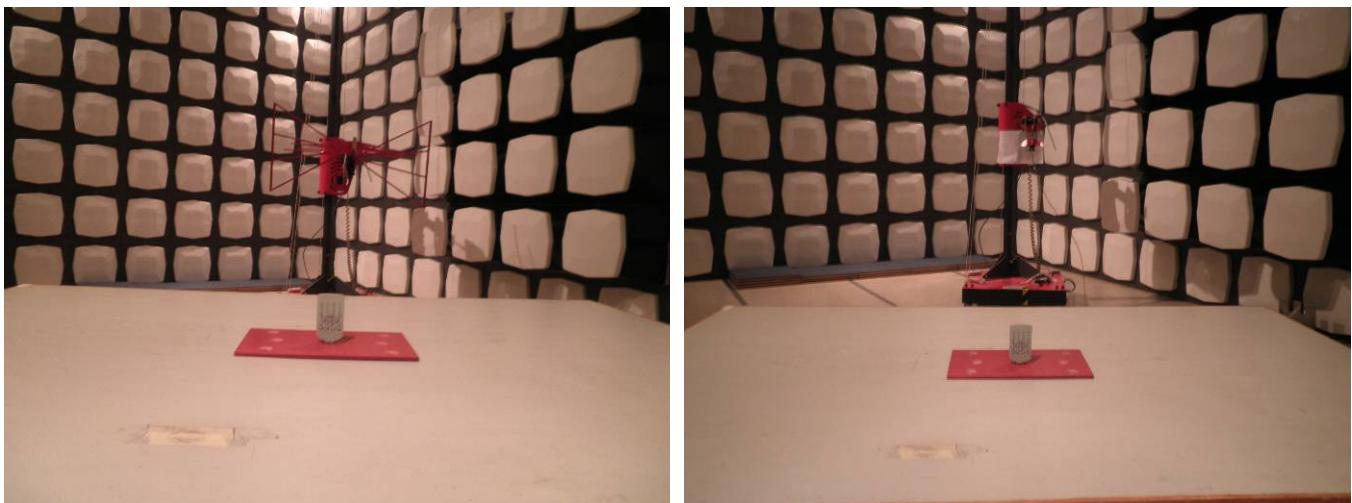

5.2.3 Test result

Frequency range: 30MHz to 24800MHz

Min. limit margin: -10.8dB

The requirements of section 15.209(a) and 15.249(a) are **FULFILLED**.

Remarks:


1) The emissions lower than 20dB below the limit are not measured.

2) Testing is include the rotation of the EUT through three orthogonal axes to determine the maximum emission.

5.2.4 Test protocol

Product Description:	Remote control having RF interface	Result:	PASS
Operation mode:	Transmitting mode		
Date:	Jan 09, 2012		
Tested by:	Kidd Yang		
Operation frequency:	2402MHz(worst case)		
Polarization:	Horizontal		

Start frequency [MHZ]	Stop frequency [MHZ]	Resolution bandwidth	Video bandwidth	step size	Measurement time	Detector
30	1000	120 KHz	1 MHz	40 KHz	100ms	Peak

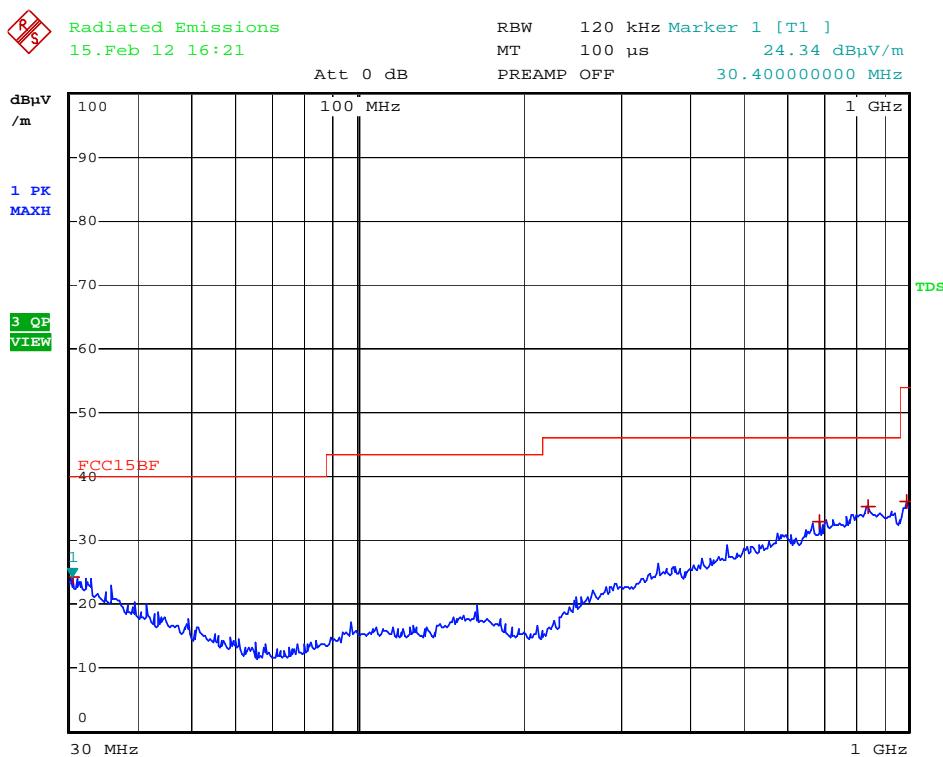

Date: 15.FEB.2012 16:21:01

Polarization	Frequency (MHz)	Read Value (dB μ V/m)	Factor (dB)	Measured Result dB μ V/m	limit (dB μ V/m)	margin (dB)
H	30.40	7.5	16.8	24.3	40.0	-15.7
H	688.92	10.2	22.6	32.8	46.0	-13.2
H	846.68	9.5	25.7	35.2	46.0	-10.8
H	990.72	9.2	26.9	36.1	54.0	-17.9

Note: The Lowest, middle and highest operation frequency are measured and the worst case data is reported above.

File No. E4270267602KY1

emitel (Shenzhen)Limited, Building 2, No.171 Meihua Road , Futian District, Shenzhen, P.R.China.


Phone: +86 (755) 8318 2012 Fax: +86 (755) 8312 3810 Email: info@emitel.com.cn

4_F510_25_Rev2_0 / Date of release: 05-01-2009 / Author: Kidd Yang

Page 11 of 17

Product Description:	Remote control having RF interface	Result:	PASS
Operation mode:	Transmitting mode		
Date:	Jan 09, 2012		
Tested by:	Kidd Yang		
Operation frequency:	2402MHz(worst case)		
Polarization:	Vertical		

Start frequency [MHZ]	Stop frequency [MHZ]	Resolution bandwidth	Video bandwidth	step size	Measurement time	Detector
30	1000	120 KHz	1 MHz	40 KHz	100ms	Peak

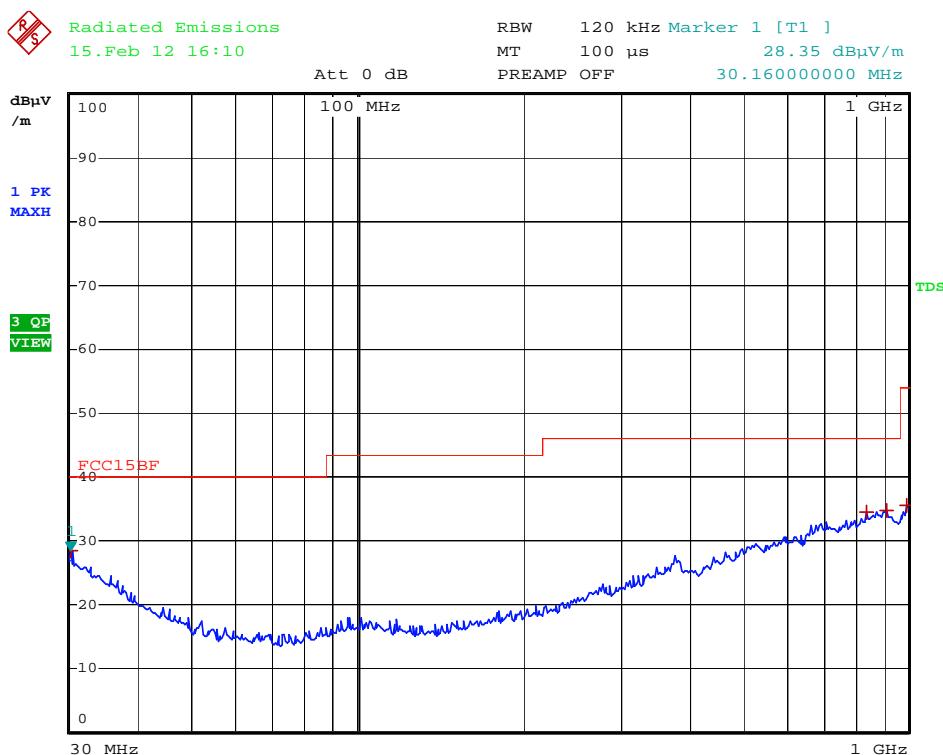

Date: 15.FEB.2012 16:10:32

Polarization	Frequency (MHz)	Read Value (dBuV/m)	Factor (dB)	Measured Result dBuV/m	limit (dBuV/m)	margin (dB)
V	30.16	8.3	20.1	28.4	40.0	-11.6
V	841.48	10.1	24.3	34.4	46.0	-11.6
V	910.00	9.6	25.1	34.7	46.0	-11.3
V	990.20	9.3	26.2	35.5	54.0	-18.5

Note: The Lowest, middle and highest operation frequency are measured and the worst case data is reported above.

File No. E4270267602KY1

Start frequency [MHZ]	Stop frequency [MHZ]	Resolution bandwidth	Video bandwidth	step size	Measurement time	Detector
1000	24800	1 MHz	3 MHz	400 KHz	100 ms	Peak

Fundamental emission

Polarization	Frequency (MHz)	Read Value (dBuV/m)	Factor (dB)	PK Measured Result (dBuV/m)	AV limit (dBuV/m)	margin (dB)
V	2402.0	43.9	36.7	80.6	94.0	-13.4
H	2402.0	24.5	36.0	60.5	94.0	-33.5
V	2441.0	44.2	37.2	81.4	94.0	-12.6
H	2441.0	19.3	35.9	55.2	94.0	-38.8
V	2480.0	40.6	37.2	77.8	94.0	-16.2
H	2480.0	19.2	37.1	56.3	94.0	-37.7

Note: Since the peak measured values are less than the average limit, it is deemed to comply without measuring the average value.

Harmonics and spurious emission

The lowest frequency: 2402.0MHz

Polarization	Frequency (MHz)	Read Value (dBuV/m)	Factor (dB)	PK Measured Result (dBuV/m)	AV limit (dBuV/m)	margin (dB)
V	4804.0	30.9	11.2	42.1	54.0	-11.9
H	4804.0	28.1	11.2	39.3	54.0	-14.7
V	7206.0	24.7	18.8	43.5	74.0	-30.5
H	7206.0	19.4	18.8	38.2	74.0	-35.8
V	9608.0	19.6	21.5	41.1	74.0	-32.9
H	9608.0	15.7	21.5	37.2	74.0	-36.8

The middle frequency: 2441.0MHz

Polarization	Frequency (MHz)	Read Value (dBuV/m)	Factor (dB)	PK Measured Result (dBuV/m)	AV limit (dBuV/m)	margin (dB)
V	4882.0	29.8	11.1	40.9	54.0	-13.1
H	4804.0	26.5	11.1	37.6	54.0	-16.4
V	7323.0	21.5	19.5	41.0	54.0	-13.0
H	7323.0	18.7	19.5	38.2	54.0	-15.8
V	9764.0	19.7	22.4	42.1	74.0	-31.9
H	9764.0	17.4	22.4	39.8	74.0	-34.2

File No. E4270267602KY1

The highest frequency: 2480MHz

Polarization	Frequency (MHz)	Read Value (dBuV/m)	Factor (dB)	PK Measured Result (dBuV/m)	AV limit (dBuV/m)	margin (dB)
V	4960.0	31.9	11.3	43.2	54.0	-10.8
H	4960.0	28.8	11.3	40.1	54.0	-13.9
V	7440.0	22.1	19.7	41.8	54.0	-12.2
H	7440.0	17.8	19.7	37.5	54.0	-16.5
V	9920.0	16.3	23.4	39.7	74.0	-34.3
H	9920.0	13.5	23.4	36.9	74.0	-37.1

Note: Since the peak measured values are less than the average limit, it is deemed to comply without measuring the average value.

File No. E4270267602KY1

emitel (Shenzhen)Limited, Building 2, No.171 Meihua Road , Futian District, Shenzhen, P.R.China.

Phone: +86 (755) 8318 2012 Fax: +86 (755) 8312 3810 Email: info@emitel.com.cn

4_F510_25_Rev2_0 / Date of release: 05-01-2009 / Author: Kidd Yang

Page 14 of 17

5.3 Band Edge

For test instruments and accessories used see section 6.


5.3.1 Description of the test location

Test location: Semi-anechoic Chamber

Test distance: 3m

5.3.2 Photo documentation of the test

Start frequency [MHZ]	Stop frequency [MHZ]	Resolution bandwidth	Video bandwidth	Measurement time	Detector
2310	2403	1 MHz	3 MHz	1 ms	Peak
2479	2572	1 MHz	3 MHz	1 ms	Peak

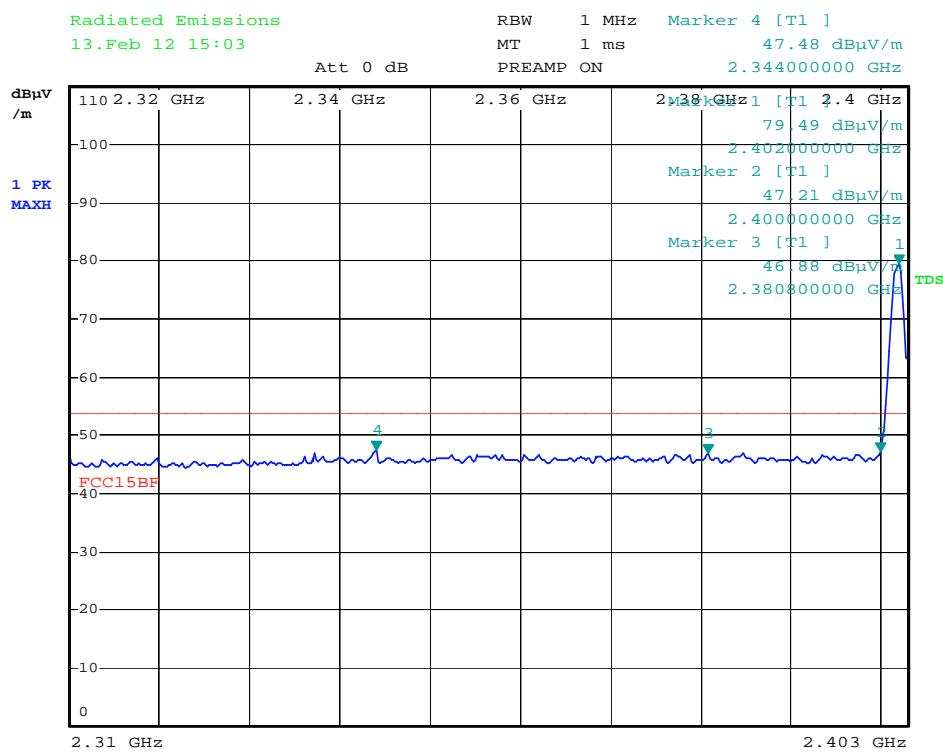

Date: 13.FEB.2012 15:03:39

Note: Both horizontal and vertical are measured and the worse case data is reported above.


File No. E4270267602KY1

emitel (Shenzhen)Limited, Building 2, No.171 Meihua Road , Futian District, Shenzhen, P.R.China.

Phone: +86 (755) 8318 2012 Fax: +86 (755) 8312 3810 Email: info@emitel.com.cn

4_F510_25_Rev2_0 / Date of release: 05-01-2009 / Author: Kidd Yang

Page 15 of 17

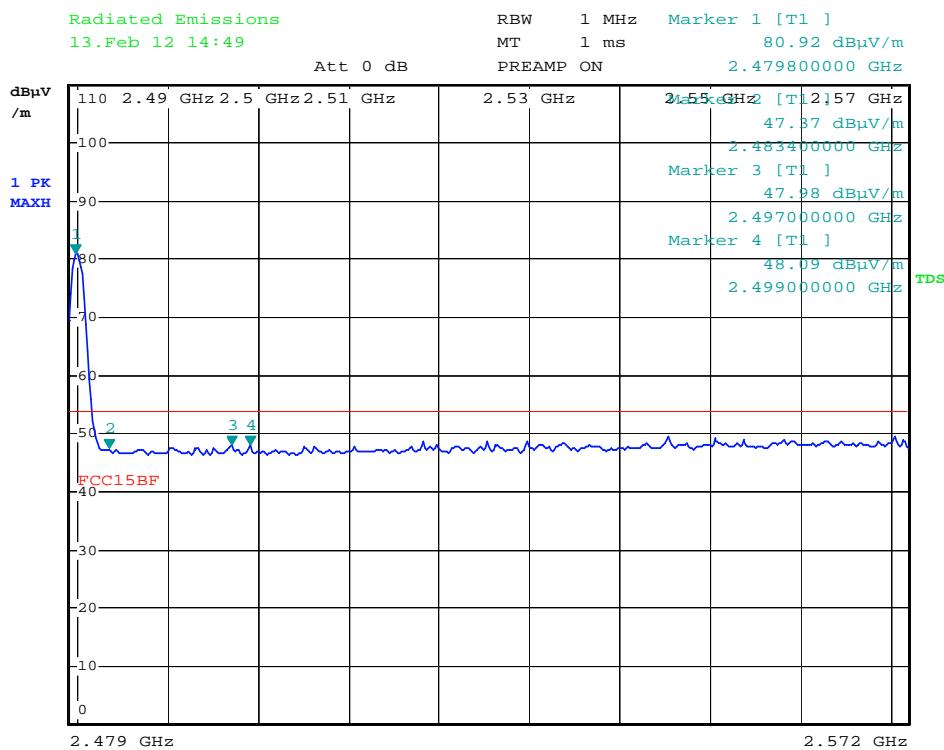

Date: 13.FEB.2012 14:49:48

Note: Both horizontal and vertical are measured and the worse case data is reported above.

5.3.3 Test result

Frequency Band	Test result
2310MHz to 2400MHz	<54.0 dB uV/m
2483.5MHz to 2500MHz	<54.0 dB uV/m

The requirements of section 15.249(d) are **FULFILLED**

Remarks: _____

File No. E4270267602KY1

6 USED TEST EQUIPMENT AND ACCESSORIES

All test instruments used, in addition to the test accessories, are calibrated and verified regularly.

Test Item	Model / Type	Kind of Equipment	Manufacturer	Next Cal. Date	Equipment No.
Radiated Emission	ESPI3	EMI Test Receiver	Rohde & Schwarz	Apr 26, 2012	04-02/03-06-002
	U3772	Spectrum Analyzer	Advantest	Apr 26, 2012	04-02/11-08-001
	3142C	Biconilog Antenna	EMCO	Mar 26, 2013	04-02/24-06-001
	3117	Horn Antenna	ETS Lindgren	Mar 26, 2013	04-02/24-07-001
	BBV 9718	Broadband Preamplifier	Rohde & Schwarz	Apr 26, 2012	04-02/17-09-001
Band edge	ESPI3	EMI Test Receiver	Rohde & Schwarz	Apr 26, 2012	04-02/03-06-002
	3117	Horn Antenna	ETS Lindgren	Mar 26, 2013	04-02/24-07-001

File No. E4270267602KY1

emitel (Shenzhen)Limited, Building 2, No.171 Meihua Road , Futian District, Shenzhen, P.R.China.

Phone: +86 (755) 8318 2012 Fax: +86 (755) 8312 3810 Email: info@emitel.com.cn

4_F510_25_Rev2_0 / Date of release: 05-01-2009 / Author: Kidd Yang

Page 17 of 17