

FCC Test Report

Report No.: RFBDYS-WTW-P21091150-1

FCC ID: A8J-SP938HC

Test Model: SP-938 HC

Series Model: DuraFon Roam HC (refer to item 3.1 for more details)

Received Date: Oct. 14, 2021

Test Date: Oct. 29 ~ Dec. 02, 2021

Issued Date: Feb. 10, 2022

Applicant: EnGenius Technologies, Inc.

Address: 1580 Scenic Avenue, Costa Mesa, CA92626

Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch
Lin Kou Laboratories

Lab Address: No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan

Test Location (1): No. 19, Hwa Ya 2nd Rd., Wen Hwa Vil., Kwei Shan Dist., Taoyuan City
33383, TAIWAN

Test Location (2): No. 70, Wenming Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C.)

FCC Registration / 788550 / TW0003
Designation Number (1):

FCC Registration / 281270 / TW0032
Designation Number (2):



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification.

Table of Contents

Release Control Record	4
1 Certificate of Conformity	5
2 Summary of Test Results	6
2.1 Measurement Uncertainty	6
2.2 Modification Record	6
3 General Information	7
3.1 General Description of EUT	7
3.2 Description of Test Modes	8
3.2.1 Test Mode Applicability and Tested Channel Detail	9
3.3 Duty Cycle of Test Signal	10
3.4 Description of Support Units	11
3.4.1 Configuration of System under Test	11
3.5 General Description of Applied Standards and References	11
4 Test Types and Results	12
4.1 Radiated Emission and Bandedge Measurement	12
4.1.1 Limits of Radiated Emission and Bandedge Measurement	12
4.1.2 Test Instruments	13
4.1.3 Test Procedures	14
4.1.4 Deviation from Test Standard	14
4.1.5 Test Setup	15
4.1.6 EUT Operating Conditions	16
4.1.7 Test Results	17
4.2 Conducted Emission Measurement	31
4.2.1 Limits of Conducted Emission Measurement	31
4.2.2 Test Instruments	31
4.2.3 Test Procedures	32
4.2.4 Deviation from Test Standard	32
4.2.5 Test Setup	32
4.2.6 EUT Operating Conditions	32
4.2.7 Test Results	33
4.3 Number of Hopping Frequency Used	41
4.3.1 Limits of Hopping Frequency Used Measurement	41
4.3.2 Test Setup	41
4.3.3 Test Instruments	41
4.3.4 Test Procedure	41
4.3.5 Deviation from Test Standard	41
4.3.6 Test Results	42
4.4 Dwell Time on Each Channel	43
4.4.1 Limits of Dwell Time on Each Channel Measurement	43
4.4.2 Test Setup	43
4.4.3 Test Instruments	43
4.4.4 Test Procedures	43
4.4.5 Deviation from Test Standard	43
4.4.6 Test Results	44
4.5 Channel Bandwidth	46
4.5.1 Limits of Channel Bandwidth Measurement	46
4.5.2 Test Setup	46
4.5.3 Test Instruments	46
4.5.4 Test Procedure	46
4.5.5 Deviation from Test Standard	46
4.5.6 EUT Operating Condition	46
4.5.7 Test Results	47
4.6 Hopping Channel Separation	48

4.6.1	Limits of Hopping Channel Separation Measurement.....	48
4.6.2	Test Setup.....	48
4.6.3	Test Instruments	48
4.6.4	Test Procedure	48
4.6.5	Deviation from Test Standard	48
4.6.6	Test Results	49
4.7	Maximum Output Power.....	50
4.7.1	Limits of Maximum Output Power Measurement	50
4.7.2	Test Setup.....	50
4.7.3	Test Instruments	50
4.7.4	Test Procedure	50
4.7.5	Deviation from Test Standard	50
4.7.6	EUT Operating Condition	50
4.7.7	Test Results	51
4.8	Conducted Out of Band Emission Measurement.....	52
4.8.1	Limits Of Conducted Out Of Band Emission Measurement.....	52
4.8.2	Test Instruments	52
4.8.3	Test Procedure	52
4.8.4	Deviation from Test Standard	52
4.8.5	EUT Operating Condition	52
4.8.6	Test Results	52
Annex A-	Band Edge Measurement.....	55
5	Pictures of Test Arrangements.....	56
Appendix –	Information of the Testing Laboratories	57

Release Control Record

Issue No.	Description	Date Issued
RFBDYS-WTW-P21091150-1	Original release	Feb. 10, 2022

1 Certificate of Conformity

Product: Digital Long Range SIP Cordless Telephone

Brand: EnGenius

Test Model: SP-938 HC

Series Model: DuraFon Roam HC (refer to item 3.1 for more details)


Sample Status: Engineering sample

Applicant: EnGenius Technologies, Inc.

Test Date: Oct. 29 ~ Dec. 02, 2021

Standards: 47 CFR FCC Part 15, Subpart C (Section 15.247)
ANSI C63.10:2013

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's RF characteristics under the conditions specified in this report.

Prepared by : , **Date:** Feb. 10, 2022
Polly Chien / Specialist

Approved by : , **Date:** Feb. 10, 2022
Jeremy Lin / Project Engineer

2 Summary of Test Results

47 CFR FCC Part 15, Subpart C (Section 15.247)			
FCC Clause	Test Item	Result	Remarks
15.207	AC Power Conducted Emission	Pass	Meet the requirement of limit. Minimum passing margin is -9.37dB at 0.44600MHz.
15.247(a)(1)(iii)	Number of Hopping Frequency Used	Pass	Meet the requirement of limit.
15.247(a)(1)(iii)	Dwell Time on Each Channel	Pass	Meet the requirement of limit.
15.247(a)(1)	1. Hopping Channel Separation 2. Spectrum Bandwidth of a Frequency Hopping Sequence Spread Spectrum System	Pass	Meet the requirement of limit.
15.247(b)	Maximum Peak Output Power	Pass	Meet the requirement of limit.
15.205 / 15.209 / 15.247(d)	Radiated Emissions and Band Edge Measurement	Pass	Meet the requirement of limit. Minimum passing margin is -3.69dB at 7206.00MHz.
15.247(d)	Antenna Port Emission	Pass	Meet the requirement of limit.
15.203	Antenna Requirement	Pass	No antenna connector is used.

Note:

1. If The Frequency Hopping System operating in 2400-2483.5MHz band and the output power less than 125mW. The hopping channel carrier frequencies separated by a minimum of 25kHz or two-thirds of the 20dB bandwidth of hopping channel whichever is greater.
2. For 2.4G band compliance with rule 15.247(d) of the band-edge items, the test plots were recorded in Annex A. Test Procedures refer to report 4.1.3.
3. Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Expanded Uncertainty (k=2) (±)
Conducted Emissions at mains ports	150kHz ~ 30MHz	2.79 dB
Radiated Emissions up to 1 GHz	9kHz ~ 30MHz	3.00 dB
	30MHz ~ 200MHz	2.91 dB
	200MHz ~ 1000MHz	2.93 dB
Radiated Emissions above 1 GHz	1GHz ~ 18GHz	1.76 dB
	18GHz ~ 40GHz	1.77 dB

2.2 Modification Record

There were no modifications required for compliance.

3 General Information

3.1 General Description of EUT

Product	Digital Long Range SIP Cordless Telephone
Brand	EnGenius
Test Model	SP-938 HC
Series Model	DuraFon Roam HC
Model Difference	Refer to note as below
Sample Status	Engineering sample
Power Supply Rating	5Vdc or 5.5Vdc from adapter 3.7Vdc from battery
Modulation Type	GFSK, $\pi/4$ -DQPSK, 8DPSK
Modulation Technology	FHSS
Transfer Rate	1/2/3Mbps
Operating Frequency	2402~2480MHz
Number of Channel	79
Output Power	4.477mW
Antenna Type	Refer to note
Antenna Connector	Refer to note
Accessory Device	Refer to note
Cable Supplied	NA

Note:

1. All models are listed as below.

Brand	Model	Difference
EnGenius	SP-938 HC	All models are electrically identical, different model names are for marketing purpose.
	DuraFon Roam HC	

2. The EUT contains following accessory devices.

Product	Brand	Model	Description
AC Adapter for Portable Handset Charger used 1	AOEM	ADS012T-W055150	I/P: 100-240 Vac, 50-60 Hz, 0.2 A O/P: 5.5 Vdc, 1.5 A DC Output Cable: 1.5 m cable w/o core attached on adapter
AC Adapter for Portable Handset Charger used 2	Powertron Electronics Corp.	PS1010-055HUB150	I/P: 100-240 Vac, 50-60 Hz, 0.4 A O/P: 5.5 Vdc, 1.5 A DC Output Cable: 1.5 m cable w/o core attached on adapter
Battery for Portable Handset used	EnGenius	N/A	3.7 Vdc, 1700 mAh
Charger Cradle for Portable Handset used	EnGenius	N/A	--

3. The EUT use following accessory devices. (Support unit)

Product	Brand	Model	Description
AC Adapter for Portable Handset Charger used 3	AOEM	ADS012T-W050200	I/P: 100-240 Vac, 50-60 Hz, 0.2 A O/P: 5 Vdc, 2 A DC Output Cable: 1.5 m cable w/o core attached on adapter
AC Adapter for Portable Handset Charger used 4	UNIFIVE	UV313-0520	I/P: 100-240 Vac, 50-60 Hz, 0.3 A O/P: 5 Vdc, 2 A DC Output Cable: 1.5 m cable w/o core attached on adapter
Earphone	N/A	N/A	0.6 m
Bluetooth Earphone	Plantronics	N20	--

4. The following antennas were provided to the EUT.

Antenna type	Connector	Brand	Model	Gain (dBi)
Chip on board	NA	Walsin Technology Corporation	RFANT5220110A0T	2

* The above Antenna information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications, the laboratory shall not be held responsible.

3.2 Description of Test Modes

79 channels are provided to this EUT:

Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)
0	2402	20	2422	40	2442	60	2462
1	2403	21	2423	41	2443	61	2463
2	2404	22	2424	42	2444	62	2464
3	2405	23	2425	43	2445	63	2465
4	2406	24	2426	44	2446	64	2466
5	2407	25	2427	45	2447	65	2467
6	2408	26	2428	46	2448	66	2468
7	2409	27	2429	47	2449	67	2469
8	2410	28	2430	48	2450	68	2470
9	2411	29	2431	49	2451	69	2471
10	2412	30	2432	50	2452	70	2472
11	2413	31	2433	51	2453	71	2473
12	2414	32	2434	52	2454	72	2474
13	2415	33	2435	53	2455	73	2475
14	2416	34	2436	54	2456	74	2476
15	2417	35	2437	55	2457	75	2477
16	2418	36	2438	56	2458	76	2478
17	2419	37	2439	57	2459	77	2479
18	2420	38	2440	58	2460	78	2480
19	2421	39	2441	59	2461		

3.2.1 Test Mode Applicability and Tested Channel Detail

EUT Configure Mode	Applicable to				Description
	RE $\geq$ 1G	RE<1G	PLC	APCM	
A1	√	√	√	√	EUT power from adapter 4
A2	-	√	√	-	EUT power from adapter 3
B1	-	√	√	-	EUT power from cradle + adapter 2
B2	-	√	√	-	EUT power from cradle + adapter 1

Where RE $\geq$ 1G: Radiated Emission above 1GHz & Bandedge Measurement

RE<1G: Radiated Emission below 1GHz

PLC: Power Line Conducted Emission

APCM: Antenna Port Conducted Measurement

Note:

1. The EUT had been pre-tested on the positioned of each 3 axis. The worst case was found when positioned on **Z-plane**.
2. Radiated emission test (below 1GHz) and power line conducted emission test items chosen the worst maximum power.
3. "-" means no effect.

Radiated Emission Test (Above 1GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Pakcet Type
A1	0 to 78	0, 39, 78	FHSS	GFSK	DH5
A1	0 to 78	0, 39, 78	FHSS	8DPSK	3DH5

Radiated Emission Test (Below 1GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Pakcet Type
A1, A2, B1, B2	0 to 78	78	FHSS	GFSK	DH5

Power Line Conducted Emission Test:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Pakcet Type
A1, A2, B1, B2	0 to 78	78	FHSS	GFSK	DH5

Antenna Port Conducted Measurement:

- ☒ This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.


EUT Configure Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Pakcet Type
A1	0 to 78	0, 39, 78	FHSS	GFSK	DH5
A1	0 to 78	0, 39, 78	FHSS	8DPSK	3DH5

Test Condition:

Applicable to	Environmental Conditions	Input Power	Tested by
RE $\geq$ 1G	23 deg. C, 66% RH	120Vac, 60Hz	Titan Hsu, Randy Wu
RE<1G	23 deg. C, 66% RH	120Vac, 60Hz	Adair Peng
PLC	25 deg. C, 75% RH	120Vac, 60Hz	Edson Wang
APCM	25 deg. C, 60% RH	120Vac, 60Hz	Chris Lin

3.3 Duty Cycle of Test Signal

Duty cycle = $0.380 \times 2 / 100 = 0.0076$, Duty factor = $20 \times \log(0.0076) = -42.38$

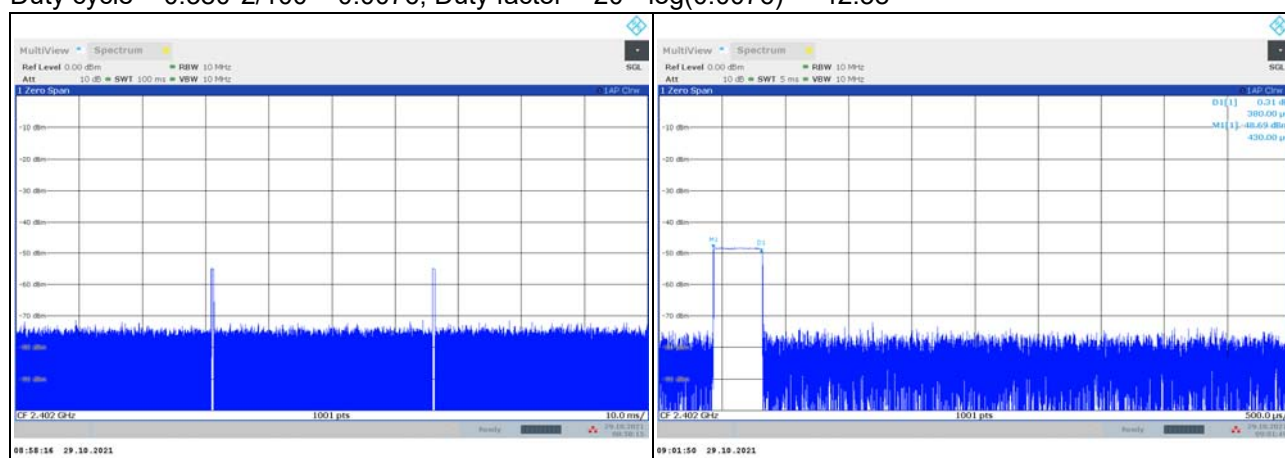

3.4 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.


ID	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
A.	Adapter	AOEM	ADS012T-W050200	N/A	N/A	Provided by client (For Mode A2)
	Adapter	UNIFIVE	UV313-0520	N/A	N/A	Provided by client (For Mode A1)

Note: All power cords of the above support units are non-shielded (1.8m).


ID	Cable Descriptions	Qty.	Length (m)	Shielding (Yes/No)	Cores (Qty.)	Remarks
1.	DC Cable	1	1.5	N	0	Provided by client

3.4.1 Configuration of System under Test

Mode A1, A2



Mode B1, B2

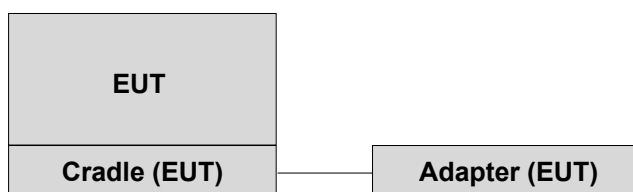

3.5 General Description of Applied Standards and References

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards and references:

Test Standard:

FCC Part 15, Subpart C (15.247)
ANSI C63.10:2013

All test items have been performed and recorded as per the above standards.

References Test Guidance:

KDB 558074 D01 15.247 Meas Guidance v05r02

All test items have been performed as a reference to the above KDB test guidance.

4 Test Types and Results

4.1 Radiated Emission and Bandedge Measurement

4.1.1 Limits of Radiated Emission and Bandedge Measurement

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 20dB below the highest level of the desired power:

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

Note:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

4.1.2 Test Instruments

Description & Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Due
Test Receiver Rohde & Schwarz	ESR3	102782	Dec. 21, 2020	Dec. 20, 2021
Spectrum Analyzer Rohde & Schwarz	FSW43	101582	Apr. 01, 2021	Mar. 31, 2022
BILOG Antenna SCHWARZBECK	VULB9168	9168-1213	Oct. 27, 2021	Oct. 26, 2022
HORN Antenna RF SPIN	DRH18-E	210103A18E	Jan. 08, 2021	Jan. 07, 2022
HORN Antenna SCHWARZBECK	BBHA 9170	9170-1048	Dec. 10, 2020	Dec. 09, 2021
Loop Antenna TESEQ	HLA 6121	45745	Jul. 21, 2021	Jul. 20, 2022
Preamplifier EMCI	EMC330N	980782	Jan. 19, 2021	Jan. 18, 2022
Preamplifier EMCI	EMC118A45SE	980808	Jan. 03, 2021	Jan. 02, 2022
Preamplifier EMCI	EMC184045SE	980788	Jan. 18, 2021	Jan. 17, 2022
RF signal cable EMCI	EMC104-SM-SM-(9000+2000+1000)	201243+ 201231+ 210102	Jan. 18, 2021	Jan. 17, 2022
RF signal cable EMCI	EMCCFD400-NM-NM-(9000+300+500)	201236+ 201235+ 201233	Jan. 18, 2021	Jan. 17, 2022
RF signal cable EMCI	EMC101G-KM-KM-(5000+3000+2000)	201260+201257+201254	Jan. 18, 2021	Jan. 17, 2022
Software BV ADT	ADT_Radiated_V7.6.15.9.5	NA	NA	NA
Antenna Tower Max-Full	MFT-151SS-0.5T	NA	NA	NA
Turn Table Max-Full	MF-7802BS	NA	NA	NA
Turn Table Controller Max-Full	MF-7802BS	MF780208674	NA	NA
Peak Power Analyzer KEYSIGHT	8990B	MY51000485	Jan. 19, 2021	Jan. 18, 2022
Wideband Power Sensor KEYSIGHT	N1923A	MY58020002	Jan. 11, 2021	Jan. 10, 2022
Spectrum Analyzer ROHDE & SCHWARZ	FSV40	100979	Mar. 29, 2021	Mar. 28, 2022

- Note: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in WM Chamber 8.
3. Radiated emissions test date: Oct. 29 ~ Nov. 03, 2021.
4. Except for the radiated emissions test items, the test date of other items: Nov. 11, 2021.

4.1.3 Test Procedures

For Radiated emission below 30MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. Parallel, perpendicular, and ground-parallel orientations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

Note:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9kHz at frequency below 30MHz.

For Radiated emission above 30MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters (for 30MHz ~ 1GHz) / 1.5 meters (for above 1GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

Note:


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) and Average detection (AV) at frequency above 1GHz. For fundamental and harmonic signal measurement, according to ANSI C63.10 section 7.5, the average value = peak value + duty cycle correction factor. The duty cycle correction factor refer to Chapter 3.3 of this report.
3. All modes of operation were investigated and the worst-case emissions are reported.

4.1.4 Deviation from Test Standard


No deviation.

4.1.5 Test Setup


For Radiated emission below 30MHz

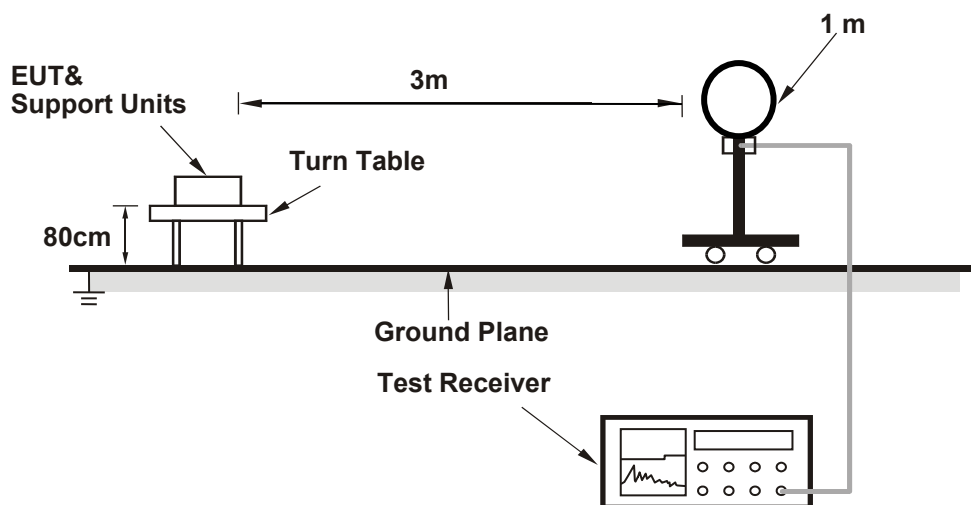

For Radiated emission 30MHz to 1GHz

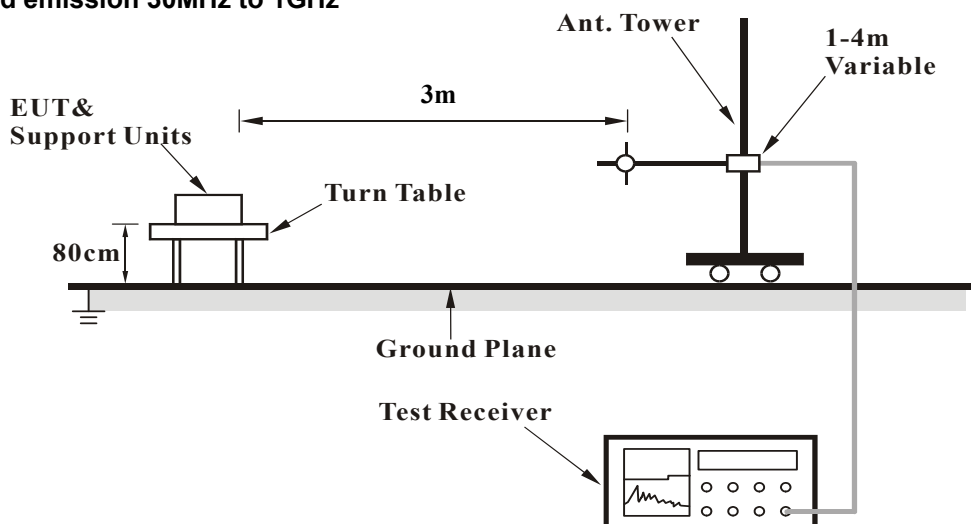

For Radiated emission above 1GHz

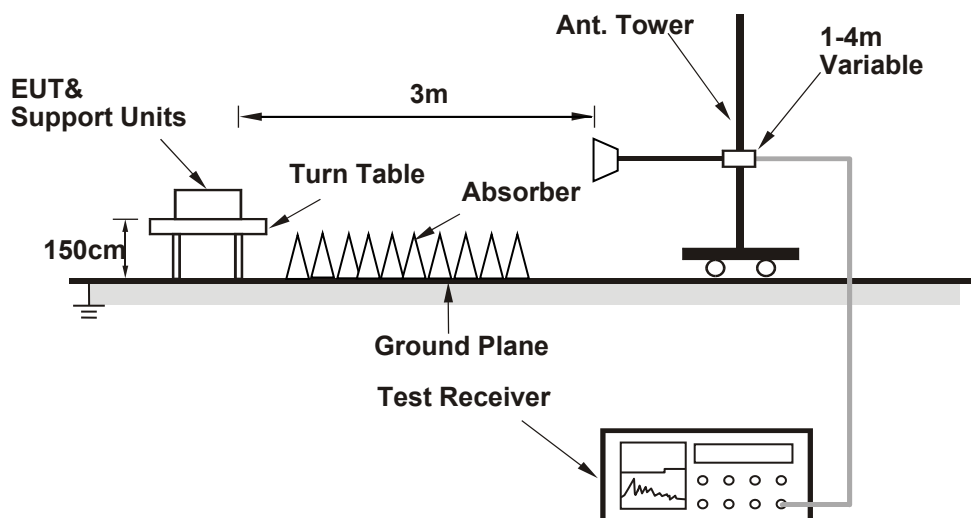

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.1.6 EUT Operating Conditions

- a. Set the EUT under transmission condition continuously at specific channel frequency.

4.1.7 Test Results

Above 1GHz data:

GFSK

CHANNEL	TX Channel 0	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	57.06 PK	74.00	-16.94	1.89 H	355	25.40	31.66
2	2390.00	44.86 AV	54.00	-9.14	1.89 H	355	13.20	31.66
3	*2402.00	93.78 PK			1.89 H	355	62.10	31.68
4	*2402.00	51.40 AV			1.89 H	355	19.72	31.68
5	4804.00	49.16 PK	74.00	-24.84	1.85 H	288	46.80	2.36
6	4804.00	6.78 AV	54.00	-47.22	1.85 H	288	4.42	2.36
7	#7206.00	70.09 PK	73.78	-3.69	1.47 H	205	62.20	7.89
8	#7206.00	27.71 AV	31.40	-3.69	1.47 H	205	19.82	7.89
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	56.46 PK	74.00	-17.54	3.99 V	286	24.80	31.66
2	2390.00	44.16 AV	54.00	-9.84	3.99 V	286	12.50	31.66
3	*2402.00	93.38 PK			3.99 V	286	61.70	31.68
4	*2402.00	51.00 AV			3.99 V	286	19.32	31.68
5	4804.00	48.86 PK	74.00	-25.14	2.02 V	199	46.50	2.36
6	4804.00	6.48 AV	54.00	-47.52	2.02 V	199	4.12	2.36
7	#7206.00	67.69 PK	73.38	-5.69	1.57 V	202	59.80	7.89
8	#7206.00	25.31 AV	31.00	-5.69	1.57 V	202	17.42	7.89

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.
7. for Fundamental frequency and bandedge & harmonic:
The average value of fundamental frequency is :average = peak value + 20log(Duty cycle)
where the duty factor is calculated from following formula:
 $20\text{Log}(\text{Duty cycle}) = 20 \log (0.380\text{ms}^2/100) = -42.38\text{dB}$ please refer to the plotted duty (see section 3.3)

CHANNEL	TX Channel 39	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2441.00	95.58 PK			1.98 H	355	63.80	31.78
2	*2441.00	53.20 AV			1.98 H	355	21.42	31.78
3	4882.00	49.14 PK	74.00	-24.86	1.89 H	293	46.60	2.54
4	4882.00	6.76 AV	54.00	-47.24	1.89 H	293	4.22	2.54
5	7323.00	68.11 PK	74.00	-5.89	1.59 H	203	60.00	8.11
6	7323.00	25.73 AV	54.00	-28.27	1.59 H	203	17.62	8.11
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2441.00	93.98 PK			3.90 V	298	62.20	31.78
2	*2441.00	51.60 AV			3.90 V	298	19.82	31.78
3	4882.00	49.04 PK	74.00	-24.96	2.11 V	203	46.50	2.54
4	4882.00	6.66 AV	54.00	-47.34	2.11 V	203	4.12	2.54
5	7323.00	69.61 PK	74.00	-4.39	1.63 V	191	61.50	8.11
6	7323.00	27.23 AV	54.00	-26.77	1.63 V	191	19.12	8.11

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. for Fundamental frequency and bandedge & harmonic:
The average value of fundamental frequency is :average = peak value + 20log(Duty cycle)
where the duty factor is calculated from following formula:
 $20\text{Log}(\text{Duty cycle}) = 20 \log (0.380\text{ms} \times 2/100) = -42.38\text{dB}$ please refer to the plotted duty (see section 3.3)

CHANNEL	TX Channel 78	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2480.00	93.78 PK			1.97 H	354	61.90	31.88
2	*2480.00	51.40 AV			1.97 H	354	19.52	31.88
3	2483.50	42.85 PK	74.00	-31.15	1.97 H	354	47.20	-4.35
4	2483.50	0.47 AV	54.00	-53.53	1.97 H	354	4.82	-4.35
5	4960.00	49.39 PK	74.00	-24.61	1.92 H	295	46.70	2.69
6	4960.00	7.01 AV	54.00	-46.99	1.92 H	295	4.32	2.69
7	7440.00	65.99 PK	74.00	-8.01	1.50 H	214	57.90	8.09
8	7440.00	23.61 AV	54.00	-30.39	1.50 H	214	15.52	8.09
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2480.00	90.88 PK			3.77 V	295	59.00	31.88
2	*2480.00	48.50 AV			3.77 V	295	16.62	31.88
3	2483.50	42.65 PK	74.00	-31.35	3.77 V	295	47.00	-4.35
4	2483.50	0.27 AV	54.00	-53.73	3.77 V	295	4.62	-4.35
5	4960.00	49.29 PK	74.00	-24.71	2.08 V	206	46.60	2.69
6	4960.00	6.91 AV	54.00	-47.09	2.08 V	206	4.22	2.69
7	7440.00	68.89 PK	74.00	-5.11	1.58 V	191	60.80	8.09
8	7440.00	26.51 AV	54.00	-27.49	1.58 V	191	18.42	8.09

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. for Fundamental frequency and bandedge & harmonic:
The average value of fundamental frequency is :average = peak value + 20log(Duty cycle)
where the duty factor is calculated from following formula:
 $20\text{Log}(\text{Duty cycle}) = 20 \log (0.380\text{ms}^2/100) = -42.38\text{dB}$ please refer to the plotted duty (see section 3.3)

8DPSK

CHANNEL	TX Channel 0	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	56.16 PK	74.00	-17.84	1.80 H	3	24.50	31.66
2	2390.00	43.76 AV	54.00	-10.24	1.80 H	3	12.10	31.66
3	*2402.00	95.18 PK			1.87 H	1	63.50	31.68
4	*2402.00	52.80 AV			1.87 H	1	21.12	31.68
5	4804.00	47.56 PK	74.00	-26.44	1.83 H	282	45.20	2.36
6	4804.00	5.18 AV	54.00	-48.82	1.83 H	282	2.82	2.36
7	#7206.00	70.29 PK	75.18	-4.89	1.54 H	215	62.40	7.89
8	#7206.00	27.91 AV	32.80	-4.89	1.54 H	215	20.02	7.89
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	56.13 PK	74.00	-17.87	2.00 V	299	24.47	31.66
2	2390.00	43.86 AV	54.00	-10.14	2.00 V	299	12.20	31.66
3	*2402.00	93.98 PK			2.08 V	303	62.30	31.68
4	*2402.00	51.60 AV			2.08 V	303	19.92	31.68
5	4804.00	48.26 PK	74.00	-25.74	1.93 V	188	45.90	2.36
6	4804.00	5.88 AV	54.00	-48.12	1.93 V	188	3.52	2.36
7	#7206.00	67.49 PK	73.98	-6.49	2.80 V	183	59.60	7.89
8	#7206.00	25.11 AV	31.60	-6.49	2.80 V	183	17.22	7.89

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.
7. for Fundamental frequency and bandedge & harmonic:
The average value of fundamental frequency is :average = peak value + 20log(Duty cycle)
where the duty factor is calculated from following formula:
 $20\text{Log}(\text{Duty cycle}) = 20 \log (0.380\text{ms}^2/100) = -42.38\text{dB}$ please refer to the plotted duty (see section 3.3)

CHANNEL	TX Channel 39	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2441.00	95.48 PK			1.92 H	4	63.70	31.78
2	*2441.00	53.10 AV			1.92 H	4	21.32	31.78
3	4884.00	47.85 PK	74.00	-26.15	1.78 H	277	45.30	2.55
4	4884.00	5.47 AV	54.00	-48.53	1.78 H	277	2.92	2.55
5	7323.00	69.81 PK	74.00	-4.19	1.39 H	213	61.70	8.11
6	7323.00	27.43 AV	54.00	-26.57	1.39 H	213	19.32	8.11
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2441.00	93.28 PK			2.78 V	306	61.50	31.78
2	*2441.00	50.90 AV			2.78 V	306	19.22	31.78
3	4882.00	48.64 PK	74.00	-25.36	1.89 V	296	46.10	2.54
4	4882.00	6.26 AV	54.00	-47.74	1.89 V	296	3.72	2.54
5	7323.00	68.51 PK	74.00	-5.49	1.66 V	182	60.40	8.11
6	7323.00	26.13 AV	54.00	-27.87	1.66 V	182	18.02	8.11

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. for Fundamental frequency and bandedge & harmonic:
The average value of fundamental frequency is :average = peak value + 20log(Duty cycle)
where the duty factor is calculated from following formula:
 $20\text{Log}(\text{Duty cycle}) = 20 \log (0.380\text{ms} \times 2/100) = -42.38\text{dB}$ please refer to the plotted duty (see section 3.3)

CHANNEL	TX Channel 78	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2480.00	93.88 PK			1.53 H	181	62.00	31.88
2	*2480.00	51.50 AV			1.53 H	181	19.62	31.88
3	2483.50	48.75 PK	74.00	-25.25	1.54 H	187	53.10	-4.35
4	2483.50	6.37 AV	54.00	-47.63	1.54 H	187	10.72	-4.35
5	4960.00	48.09 PK	74.00	-25.91	1.80 H	275	45.40	2.69
6	4960.00	5.71 AV	54.00	-48.29	1.80 H	275	3.02	2.69
7	7440.00	68.39 PK	74.00	-5.61	1.25 H	41	60.30	8.09
8	7440.00	26.01 AV	54.00	-27.99	1.25 H	41	17.92	8.09
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2480.00	92.78 PK			2.98 V	323	60.90	31.88
2	*2480.00	50.40 AV			2.98 V	323	18.52	31.88
3	2483.50	48.25 PK	74.00	-25.75	2.88 V	318	52.60	-4.35
4	2483.50	5.87 AV	54.00	-48.13	2.88 V	318	10.22	-4.35
5	4960.00	47.79 PK	74.00	-26.21	1.97 V	199	45.10	2.69
6	4960.00	5.41 AV	54.00	-48.59	1.97 V	199	2.72	2.69
7	7440.00	68.09 PK	74.00	-5.91	2.61 V	350	60.00	8.09
8	7440.00	25.71 AV	54.00	-28.29	2.61 V	350	17.62	8.09

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. for Fundamental frequency and bandedge & harmonic:
The average value of fundamental frequency is :average = peak value + 20log(Duty cycle)
where the duty factor is calculated from following formula:
 $20\text{Log}(\text{Duty cycle}) = 20 \log (0.380\text{ms}^2/100) = -42.38\text{dB}$ please refer to the plotted duty (see section 3.3)

Below 1GHz worst-case data:


GFSK

CHANNEL	TX Channel 78	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	9kHz ~ 1GHz	TEST MODE	A1

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	134.03	26.3 QP	43.5	-17.2	1.49 H	237	45.4	-19.1
2	150.90	29.6 QP	43.5	-13.9	1.99 H	222	47.6	-18.0
3	236.65	32.5 QP	46.0	-13.5	1.99 H	2	52.5	-20.0
4	287.26	19.6 QP	46.0	-26.4	1.00 H	261	37.5	-17.9
5	325.22	19.2 QP	46.0	-26.8	1.49 H	67	36.1	-16.9
6	666.83	22.4 QP	46.0	-23.6	1.00 H	288	32.1	-9.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit of frequency range 30MHz~1000MHz.
4. Margin value = Emission Level – Limit value
5. The emission levels were very low against the limit of frequency range 9kHz~30MHz: the amplitude of spurious emissions attenuated more than 20dB below the permissible value to be report.

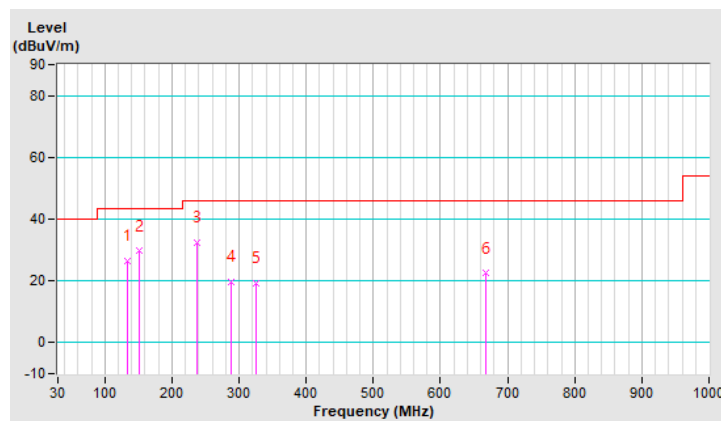


CHANNEL	TX Channel 78	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	9kHz ~ 1GHz	TEST MODE	A1

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	32.81	30.8 QP	40.0	-9.2	1.51 V	233	50.3	-19.5
2	48.28	24.1 QP	40.0	-15.9	1.01 V	156	42.2	-18.1
3	77.80	20.1 QP	40.0	-19.9	1.01 V	179	42.7	-22.6
4	134.03	27.0 QP	43.5	-16.5	1.01 V	80	46.1	-19.1
5	153.71	25.5 QP	43.5	-18.0	1.01 V	289	43.4	-17.9
6	236.65	30.8 QP	46.0	-15.2	2.00 V	110	50.8	-20.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit of frequency range 30MHz~1000MHz.
4. Margin value = Emission Level – Limit value
5. The emission levels were very low against the limit of frequency range 9kHz~30MHz: the amplitude of spurious emissions attenuated more than 20dB below the permissible value to be report.

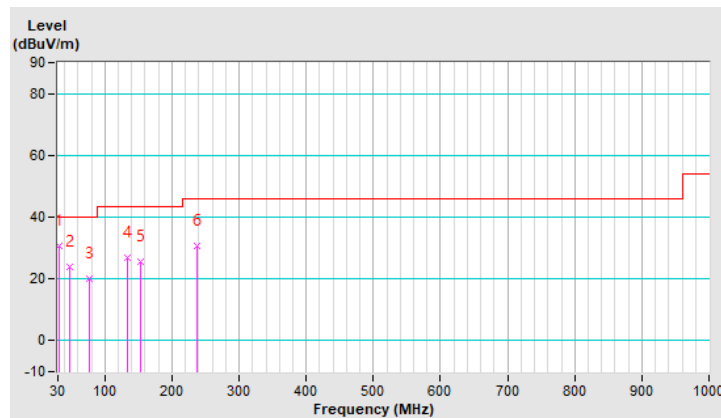


CHANNEL	TX Channel 78	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	9kHz ~ 1GHz	TEST MODE	A2

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	164.96	18.5 QP	43.5	-25.0	1.50 H	219	36.8	-18.3
2	236.65	34.9 QP	46.0	-11.1	1.50 H	66	54.9	-20.0
3	259.14	24.1 QP	46.0	-21.9	1.00 H	49	43.3	-19.2
4	312.57	20.8 QP	46.0	-25.2	1.00 H	60	38.1	-17.3
5	500.94	22.4 QP	46.0	-23.6	2.00 H	4	35.3	-12.9
6	668.23	21.8 QP	46.0	-24.2	1.00 H	164	31.5	-9.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit of frequency range 30MHz~1000MHz.
4. Margin value = Emission Level – Limit value
5. The emission levels were very low against the limit of frequency range 9kHz~30MHz: the amplitude of spurious emissions attenuated more than 20dB below the permissible value to be report.

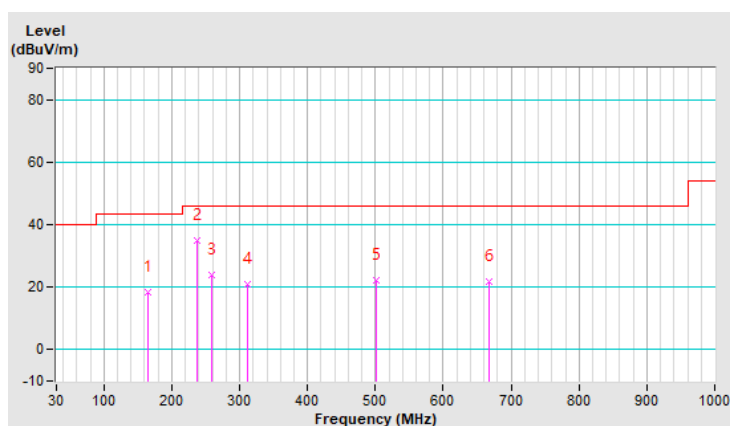


CHANNEL	TX Channel 78	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	9kHz ~ 1GHz	TEST MODE	A2

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	32.81	21.3 QP	40.0	-18.7	2.00 V	275	40.8	-19.5
2	80.61	14.5 QP	40.0	-25.5	1.00 V	143	37.8	-23.3
3	162.14	15.6 QP	43.5	-27.9	1.00 V	353	33.7	-18.1
4	236.65	31.2 QP	46.0	-14.8	1.50 V	189	51.2	-20.0
5	337.87	20.3 QP	46.0	-25.7	1.50 V	61	36.9	-16.6
6	666.83	22.9 QP	46.0	-23.1	1.00 V	82	32.6	-9.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit of frequency range 30MHz~1000MHz.
4. Margin value = Emission Level – Limit value
5. The emission levels were very low against the limit of frequency range 9kHz~30MHz: the amplitude of spurious emissions attenuated more than 20dB below the permissible value to be report.

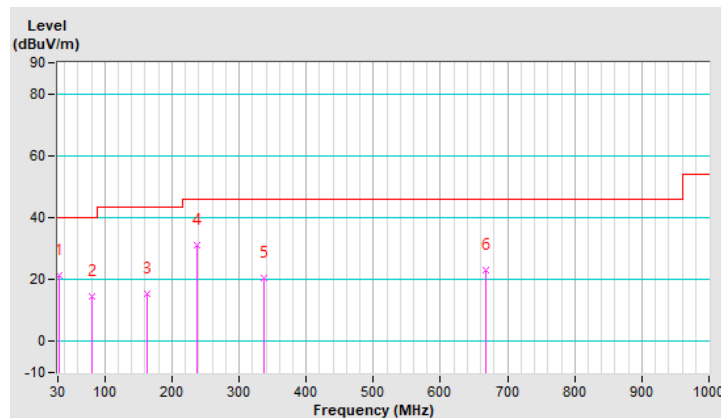


CHANNEL	TX Channel 78	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	9kHz ~ 1GHz	TEST MODE	B1

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	46.87	16.7 QP	40.0	-23.3	1.49 H	104	34.9	-18.2
2	129.81	19.9 QP	43.5	-23.6	1.49 H	120	39.4	-19.5
3	153.71	16.9 QP	43.5	-26.6	1.00 H	230	34.8	-17.9
4	236.65	32.1 QP	46.0	-13.9	2.00 H	254	52.1	-20.0
5	325.22	24.2 QP	46.0	-21.8	1.00 H	80	41.1	-16.9
6	575.45	20.8 QP	46.0	-25.2	1.49 H	193	32.0	-11.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit of frequency range 30MHz~1000MHz.
4. Margin value = Emission Level – Limit value
5. The emission levels were very low against the limit of frequency range 9kHz~30MHz: the amplitude of spurious emissions attenuated more than 20dB below the permissible value to be report.

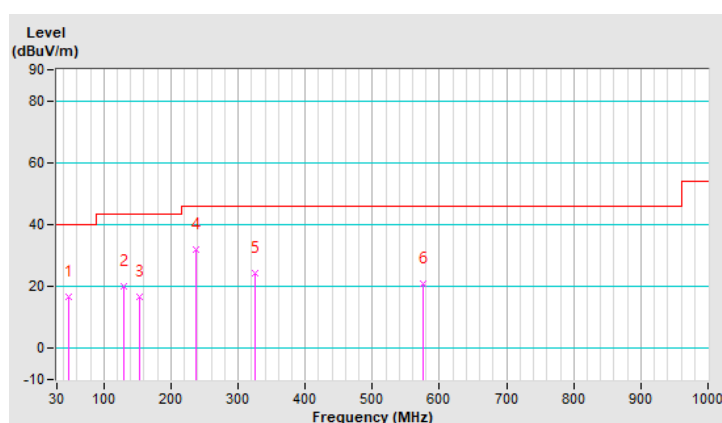


CHANNEL	TX Channel 78	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	9kHz ~ 1GHz	TEST MODE	B1

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	66.55	16.1 QP	40.0	-23.9	1.50 V	301	35.9	-19.8
2	143.87	15.8 QP	43.5	-27.7	1.50 V	121	34.1	-18.3
3	236.65	28.3 QP	46.0	-17.7	1.99 V	115	48.3	-20.0
4	325.22	23.8 QP	46.0	-22.2	1.99 V	310	40.7	-16.9
5	679.48	26.7 QP	46.0	-19.3	1.50 V	238	36.3	-9.6
6	777.88	26.4 QP	46.0	-19.6	1.50 V	217	34.2	-7.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit of frequency range 30MHz~1000MHz.
4. Margin value = Emission Level – Limit value
5. The emission levels were very low against the limit of frequency range 9kHz~30MHz: the amplitude of spurious emissions attenuated more than 20dB below the permissible value to be report.

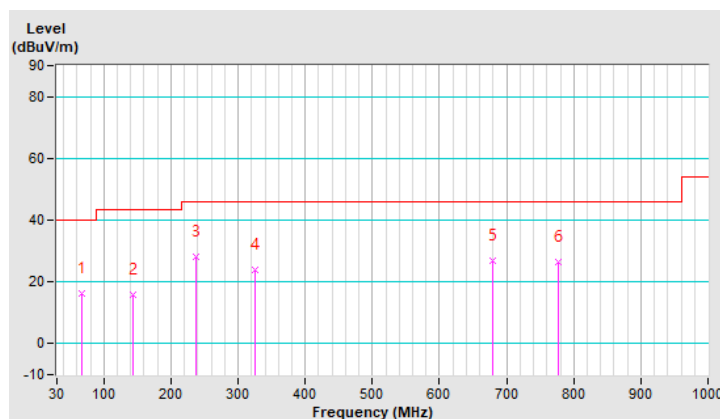


CHANNEL	TX Channel 78	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	9kHz ~ 1GHz	TEST MODE	B2

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	170.58	22.4 QP	43.5	-21.1	1.50 H	256	41.0	-18.6
2	236.65	30.1 QP	46.0	-15.9	1.00 H	233	50.1	-20.0
3	252.12	23.1 QP	46.0	-22.9	2.00 H	188	42.6	-19.5
4	301.32	22.7 QP	46.0	-23.3	1.50 H	151	40.3	-17.6
5	325.22	17.9 QP	46.0	-28.1	1.00 H	105	34.8	-16.9
6	675.26	21.5 QP	46.0	-24.5	1.00 H	117	31.1	-9.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit of frequency range 30MHz~1000MHz.
4. Margin value = Emission Level – Limit value
5. The emission levels were very low against the limit of frequency range 9kHz~30MHz: the amplitude of spurious emissions attenuated more than 20dB below the permissible value to be report.

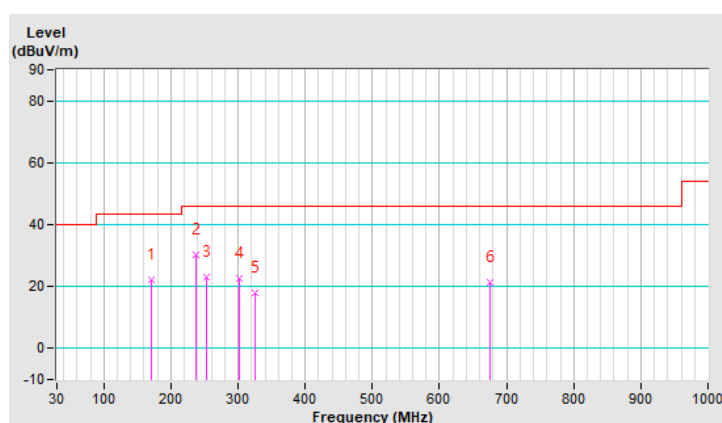


CHANNEL	TX Channel 78	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	9kHz ~ 1GHz	TEST MODE	B2

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	32.81	23.3 QP	40.0	-16.7	1.50 V	230	42.8	-19.5
2	73.58	15.3 QP	40.0	-24.7	1.00 V	163	36.9	-21.6
3	157.93	20.8 QP	43.5	-22.7	2.00 V	28	38.8	-18.0
4	236.65	28.9 QP	46.0	-17.1	1.00 V	3	48.9	-20.0
5	325.22	20.5 QP	46.0	-25.5	1.50 V	12	37.4	-16.9
6	671.04	25.7 QP	46.0	-20.3	1.00 V	122	35.4	-9.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit of frequency range 30MHz~1000MHz.
4. Margin value = Emission Level – Limit value
5. The emission levels were very low against the limit of frequency range 9kHz~30MHz: the amplitude of spurious emissions attenuated more than 20dB below the permissible value to be report.

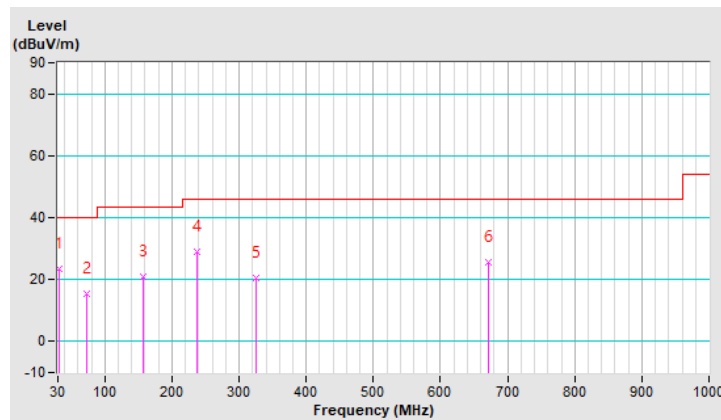

4.2 Conducted Emission Measurement

4.2.1 Limits of Conducted Emission Measurement

Frequency (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15 - 0.5	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

4.2.2 Test Instruments

Description & Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Due
Test Receiver ROHDE & SCHWARZ	ESR3	102783	Dec. 21, 2020	Dec. 20, 2021
RF signal cable (with 10dB PAD) Woken	5D-FB	Cable-cond2-01	Sep. 04, 2021	Sep. 03, 2022
LISN/AMN ROHDE & SCHWARZ (EUT)	ESH2-Z5	100100	Jan. 28, 2021	Jan. 27, 2022
LISN/AMN ROHDE & SCHWARZ (Peripheral)	ESH3-Z5	100312	Sep. 17, 2021	Sep. 16, 2022
Software ADT	BV ADT_Conc_ V7.3.7.4	NA	NA	NA

Note: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 2. The test was performed in HwaYa Shielded Room 2 (Conduction 2).
 3. The VCCI Site Registration No. is C-20407.
 4. Test Date: Nov. 11 ~ Dec. 02, 2021.

4.2.3 Test Procedures


- The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/50 uH of coupling impedance for the measuring instrument.
- Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- The frequency range from 150 kHz to 30 MHz was searched. Emission levels under (Limit – 20 dB) was not recorded.

Note: The resolution bandwidth and video bandwidth of test receiver is 9 kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15 MHz – 30 MHz.

4.2.4 Deviation from Test Standard

No deviation.

4.2.5 Test Setup

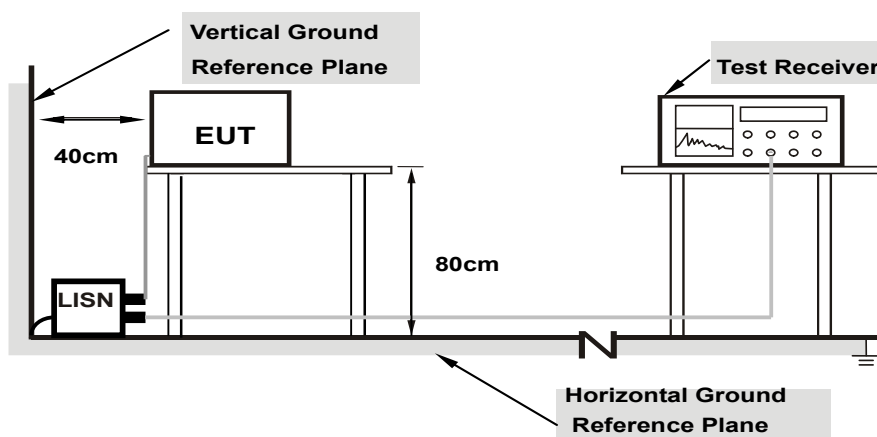

Note: 1.Support units were connected to second LISN.

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.2.6 EUT Operating Conditions

Same as 4.1.6.

4.2.7 Test Results

Worst-case data:


GFSK

Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
Test Mode	A1		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.17800	10.14	35.04	21.44	45.18	31.58	64.58	54.58	-19.40	-23.00
2	0.37400	10.21	29.80	21.11	40.01	31.32	58.41	48.41	-18.40	-17.09
3	0.44600	10.22	31.63	27.36	41.85	37.58	56.95	46.95	-15.10	-9.37
4	0.59400	10.24	27.38	20.11	37.62	30.35	56.00	46.00	-18.38	-15.65
5	6.21400	10.43	24.60	17.67	35.03	28.10	60.00	50.00	-24.97	-21.90
6	23.41400	10.57	14.74	8.85	25.31	19.42	60.00	50.00	-34.69	-30.58

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

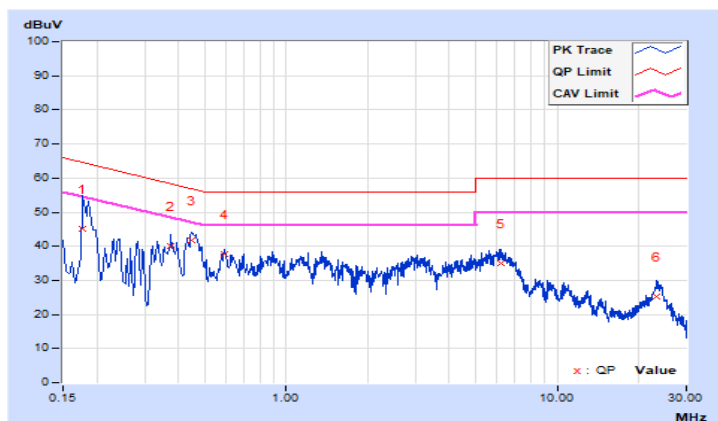


Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
Test Mode	A1		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.18180	10.16	41.85	33.53	52.01	43.69	64.40	54.40	-12.39	-10.71
2	0.23800	10.18	31.23	16.63	41.41	26.81	62.17	52.17	-20.76	-25.36
3	0.45356	10.24	29.81	24.87	40.05	35.11	56.81	46.81	-16.76	-11.70
4	2.91800	10.38	20.75	13.98	31.13	24.36	56.00	46.00	-24.87	-21.64
5	6.21400	10.47	22.87	17.01	33.34	27.48	60.00	50.00	-26.66	-22.52
6	22.97400	10.78	9.02	3.50	19.80	14.28	60.00	50.00	-40.20	-35.72

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

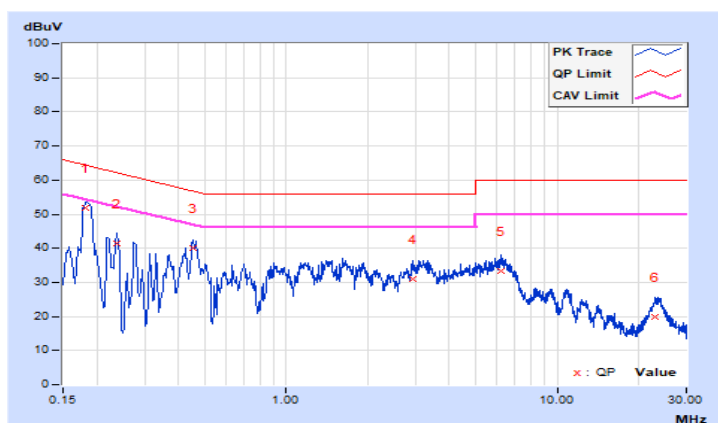


Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
Test Mode	A2		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.17400	10.13	31.69	23.50	41.82	33.63	64.77	54.77	-22.95	-21.14
2	0.20148	10.15	33.55	28.54	43.70	38.69	63.55	53.55	-19.85	-14.86
3	0.45356	10.23	29.89	23.84	40.12	34.07	56.81	46.81	-16.69	-12.74
4	1.30200	10.30	20.51	14.71	30.81	25.01	56.00	46.00	-25.19	-20.99
5	5.25000	10.41	23.07	16.44	33.48	26.85	60.00	50.00	-26.52	-23.15
6	8.75000	10.48	15.13	9.50	25.61	19.98	60.00	50.00	-34.39	-30.02

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

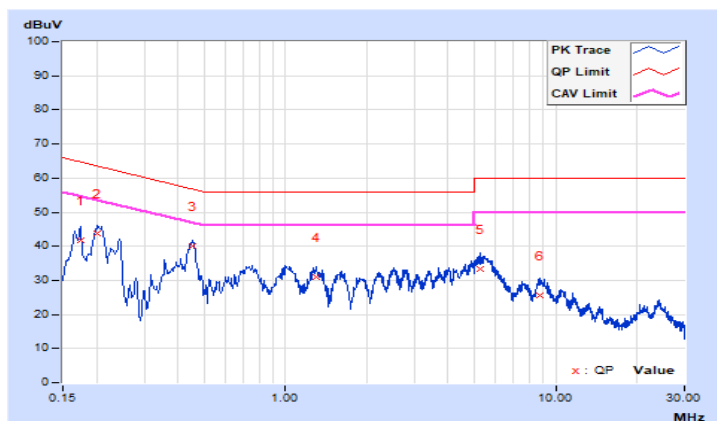


Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
Test Mode	A2		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.18600	10.16	27.14	18.59	37.30	28.75	64.21	54.21	-26.91	-25.46
2	0.23000	10.18	28.14	20.83	38.32	31.01	62.45	52.45	-24.13	-21.44
3	0.45356	10.24	26.92	20.97	37.16	31.21	56.81	46.81	-19.65	-15.60
4	0.73000	10.27	19.50	12.96	29.77	23.23	56.00	46.00	-26.23	-22.77
5	5.45400	10.45	22.08	15.77	32.53	26.22	60.00	50.00	-27.47	-23.78
6	8.85400	10.55	10.43	4.73	20.98	15.28	60.00	50.00	-39.02	-34.72

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

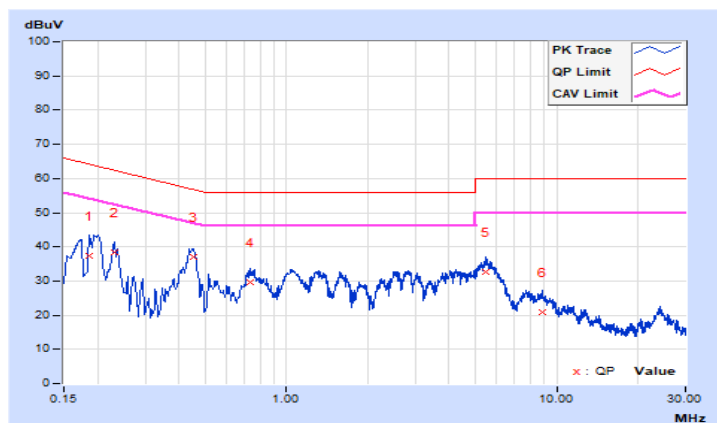


Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
Test Mode	B1		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.17800	10.14	18.68	9.96	28.82	20.10	64.58	54.58	-35.76	-34.48
2	0.27400	10.18	16.33	8.41	26.51	18.59	61.00	51.00	-34.49	-32.41
3	0.50200	10.23	16.18	6.96	26.41	17.19	56.00	46.00	-29.59	-28.81
4	0.76600	10.26	12.39	4.23	22.65	14.49	56.00	46.00	-33.35	-31.51
5	4.47000	10.40	10.33	0.92	20.73	11.32	56.00	46.00	-35.27	-34.68
6	12.48200	10.54	15.80	10.56	26.34	21.10	60.00	50.00	-33.66	-28.90

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

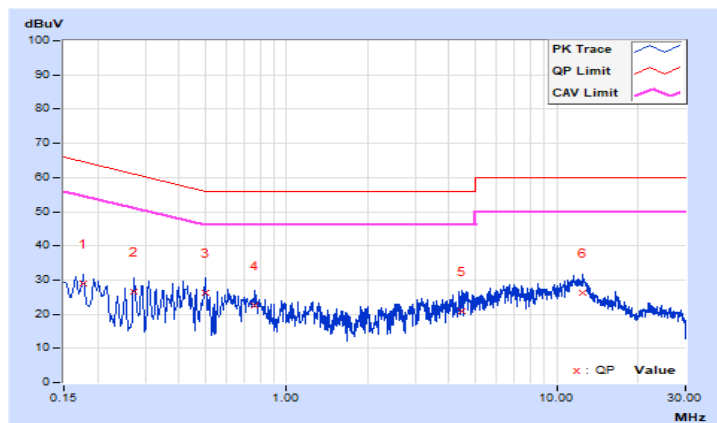


Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
Test Mode	B1		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.17384	10.15	20.17	13.58	30.32	23.73	64.77	54.77	-34.45	-31.04
2	0.20960	10.17	19.38	8.68	29.55	18.85	63.22	53.22	-33.67	-34.37
3	0.32200	10.21	14.68	2.70	24.89	12.91	59.66	49.66	-34.77	-36.75
4	0.50530	10.25	21.66	15.58	31.91	25.83	56.00	46.00	-24.09	-20.17
5	0.60600	10.26	14.55	7.19	24.81	17.45	56.00	46.00	-31.19	-28.55
6	12.02200	10.63	14.41	7.71	25.04	18.34	60.00	50.00	-34.96	-31.66

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

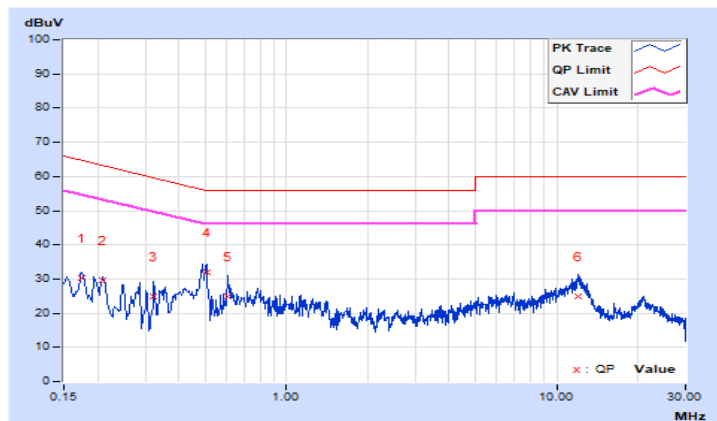


Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
Test Mode	B2		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.17708	10.14	37.55	32.81	47.69	42.95	64.62	54.62	-16.93	-11.67
2	0.21800	10.16	33.43	25.19	43.59	35.35	62.89	52.89	-19.30	-17.54
3	0.43800	10.22	29.94	24.96	40.16	35.18	57.10	47.10	-16.94	-11.92
4	5.43800	10.42	25.96	19.53	36.38	29.95	60.00	50.00	-23.62	-20.05
5	8.42600	10.47	20.68	14.76	31.15	25.23	60.00	50.00	-28.85	-24.77
6	10.39400	10.51	17.68	11.92	28.19	22.43	60.00	50.00	-31.81	-27.57

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

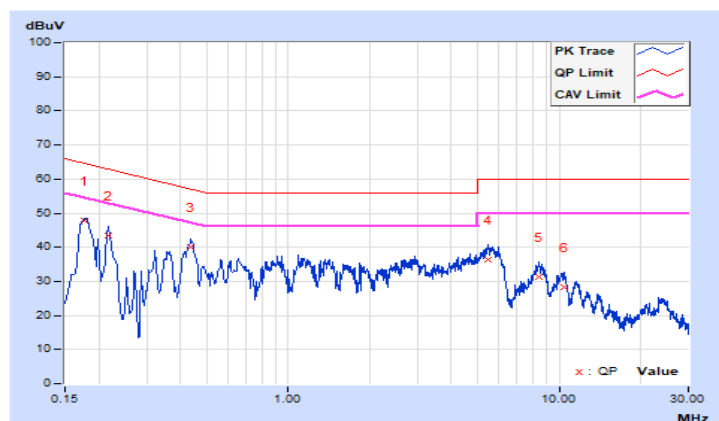


Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
Test Mode	B2		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15000	10.14	33.71	7.41	43.85	17.55	66.00	56.00	-22.15	-38.45
2	0.17800	10.16	35.72	31.08	45.88	41.24	64.58	54.58	-18.70	-13.34
3	0.21400	10.17	29.53	19.17	39.70	29.34	63.05	53.05	-23.35	-23.71
4	0.43370	10.24	28.21	21.70	38.45	31.94	57.18	47.18	-18.73	-15.24
5	1.61000	10.33	22.21	15.13	32.54	25.46	56.00	46.00	-23.46	-20.54
6	5.53000	10.45	23.43	17.35	33.88	27.80	60.00	50.00	-26.12	-22.20

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

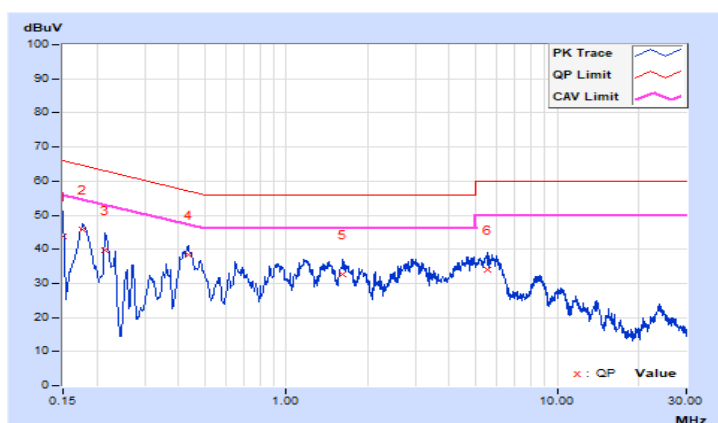

4.3 Number of Hopping Frequency Used

4.3.1 Limits of Hopping Frequency Used Measurement

At least 15 channels frequencies, and should be equally spaced.

4.3.2 Test Setup



4.3.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.3.4 Test Procedure


- Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
- Turn on the EUT and connect its antenna terminal to measurement via a low loss cable. Then set it to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.
- Set the SA on MaxHold Mode, and then keep the EUT in hopping mode. Record all the signals from each channel until each one has been recorded.
- Set the SA on View mode and then plot the result on SA screen.
- Repeat above procedures until all frequencies measured were complete.

4.3.5 Deviation from Test Standard

No deviation.

4.3.6 Test Results

There are 79 hopping frequencies in the hopping mode. Please refer to next page for the test result. On the plots, it shows that the hopping frequencies are equally spaced.

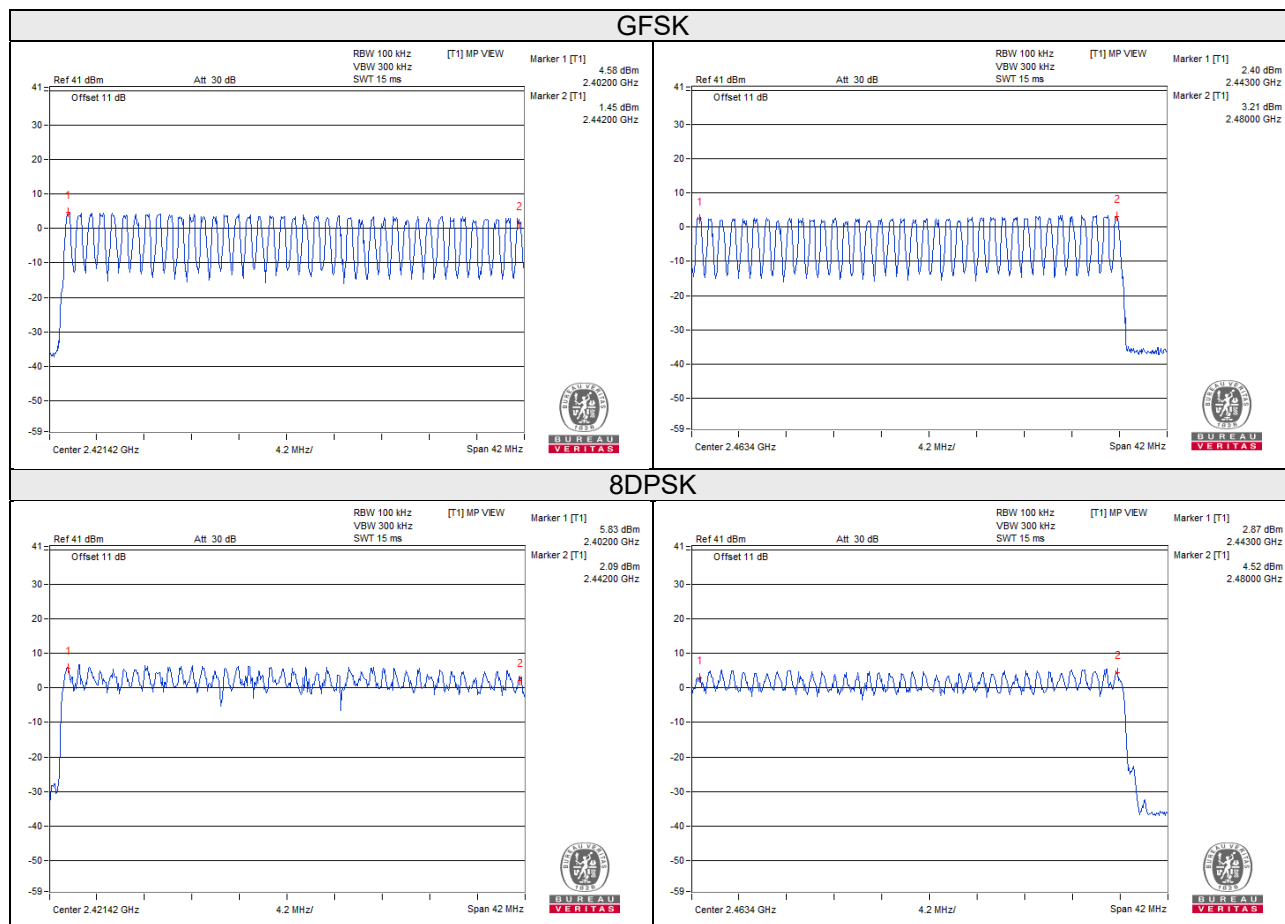

4.4 Dwell Time on Each Channel

4.4.1 Limits of Dwell Time on Each Channel Measurement

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

4.4.2 Test Setup



4.4.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.4.4 Test Procedures

- a. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
- b. Turn on the EUT and connect its antenna terminal to measurement via a low loss cable. Then set it to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.
- c. Adjust the center frequency of SA on any frequency be measured and set SA to zero span mode. And then, set RBW and VBW of spectrum analyzer to proper value.
- d. Measure the time duration of one transmission on the measured frequency. And then plot the result with time difference of this time duration.
- e. Repeat above procedures until all different time-slot modes have been completed.

4.4.5 Deviation from Test Standard

No deviation.

4.4.6 Test Results

GFSK

Mode	Number of transmission in a 31.6 (79Hopping*0.4)	Length of transmission time (msec)	Result (msec)	Limit (msec)
DH1	50 (times / 5 sec) * 6.32 = 316 times	0.440	139.040	400
DH3	27 (times / 5 sec) * 6.32 = 171 times	1.682	287.622	400
DH5	17 (times / 5 sec) * 6.32 = 108 times	3.010	325.080	400


Note: Test plots of the transmitting time slot are shown as below.



8DPSK

Mode	Number of transmission in a 31.6 (79Hopping*0.4)	Length of transmission time (msec)	Result (msec)	Limit (msec)
3DH1	50 (times / 5 sec) * 6.32 = 316 times	0.510	161.160	400
3DH3	26 (times / 5 sec) * 6.32 = 165 times	1.740	287.100	400
3DH5	17 (times / 5 sec) * 6.32 = 108 times	2.960	319.680	400

Note: Test plots of the transmitting time slot are shown as below.

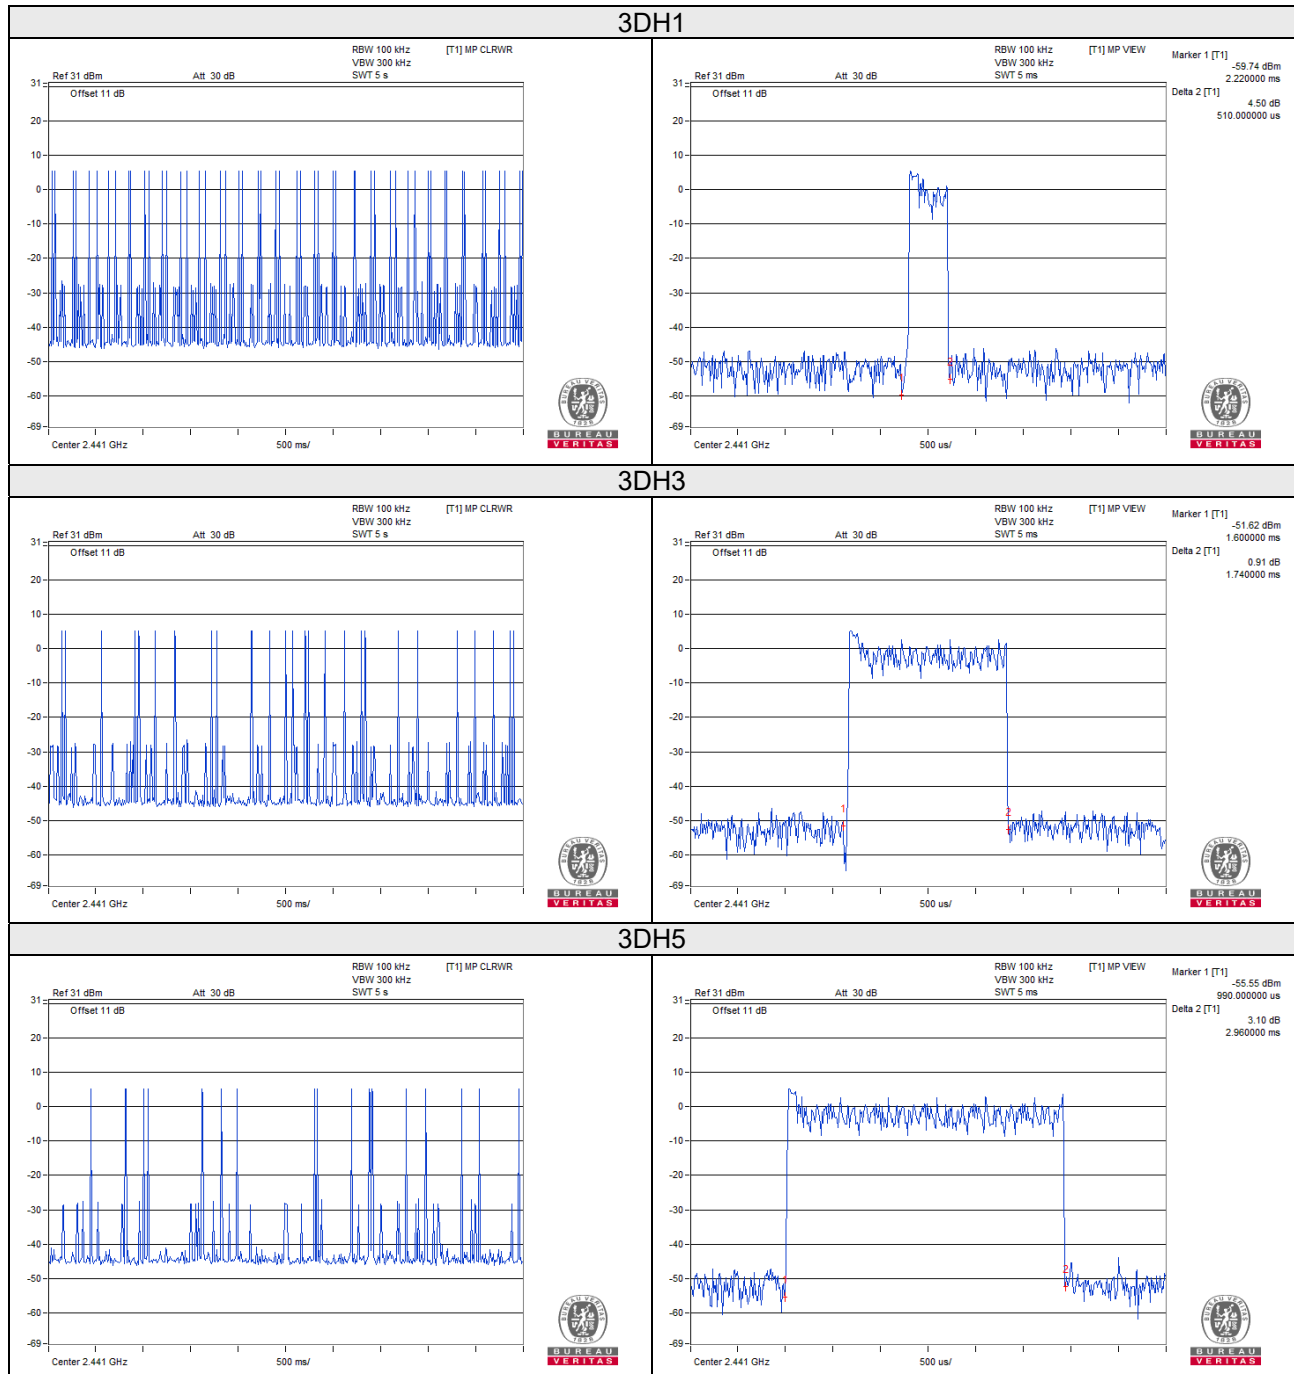


4.5 Channel Bandwidth

4.5.1 Limits of Channel Bandwidth Measurement

Maximum bandwidth is not specified.

4.5.2 Test Setup



4.5.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.5.4 Test Procedure

- Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
- Measure the frequency difference of two frequencies that were attenuated 20dB from the reference level. Record the frequency difference as the emission bandwidth.
- Repeat above procedures until all frequencies measured were complete.

4.5.5 Deviation from Test Standard


No deviation.

4.5.6 EUT Operating Condition

The software provided by client enabled the EUT to transmit and receive data at lowest, middle and highest channel frequencies individually.

4.5.7 Test Results

Channel	Frequency (MHz)	20dB Bandwidth (MHz)	
		GFSK	8DPSK
0	2402	0.90	1.25
39	2441	0.90	1.25
78	2480	0.89	1.27

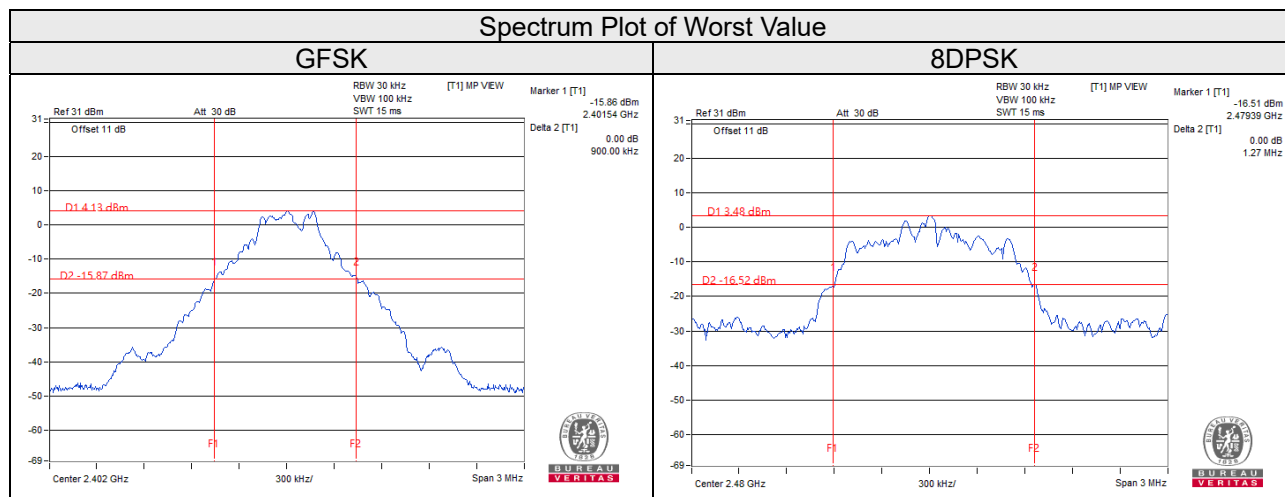

4.6 Hopping Channel Separation

4.6.1 Limits of Hopping Channel Separation Measurement

At least 25kHz or two-third of 20dB hopping channel bandwidth (whichever is greater).

4.6.2 Test Setup



4.6.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.6.4 Test Procedure

Measurement Procedure REF

- Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range.
- By using the MaxHold function record the separation of two adjacent channels.
- Measure the frequency difference of these two adjacent channels by SA MARK function. And then plot the result on SA screen.
- Repeat above procedures until all frequencies measured were complete.


4.6.5 Deviation from Test Standard

No deviation.

4.6.6 Test Results

Channel	Frequency (MHz)	Adjacent Channel Separation (MHz)		20dB Bandwidth (MHz)		Minimum Limit (MHz)		Pass / Fail
		GFSK	8DPSK	GFSK	8DPSK	GFSK	8DPSK	
0	2402	1.00	1.00	0.90	1.25	0.60	0.84	Pass
39	2441	1.00	1.00	0.90	1.25	0.60	0.84	Pass
78	2480	1.00	1.00	0.89	1.27	0.60	0.85	Pass

Note: The minimum limit is two-third 20dB bandwidth.

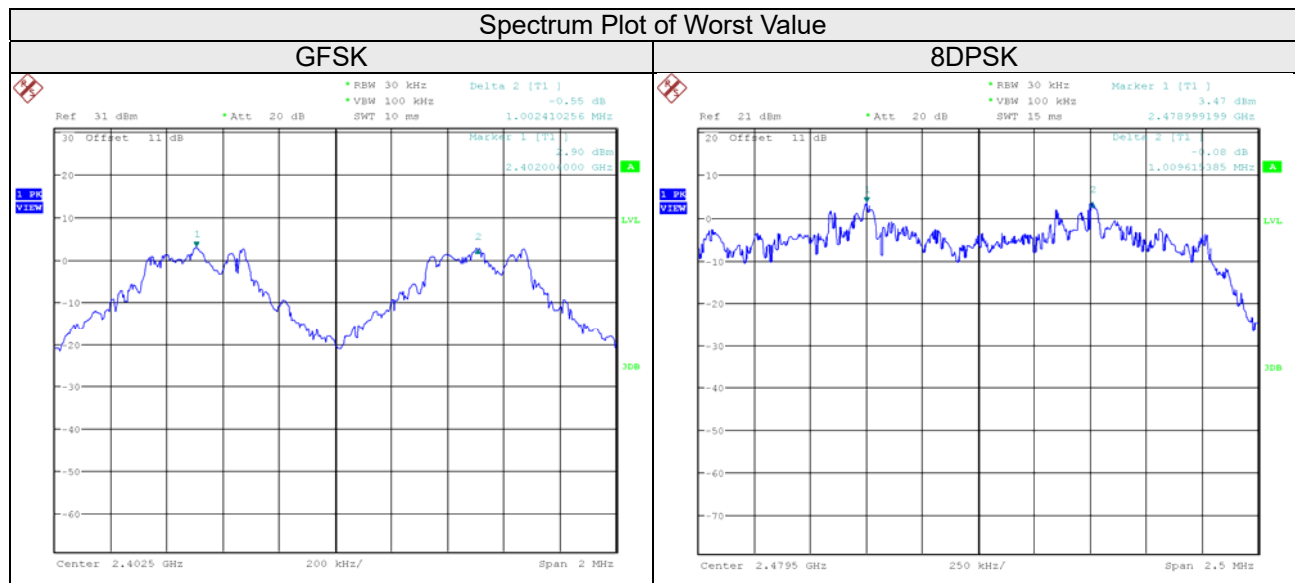


4.7 Maximum Output Power

4.7.1 Limits of Maximum Output Power Measurement

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels: 1 watt.

For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

4.7.2 Test Setup

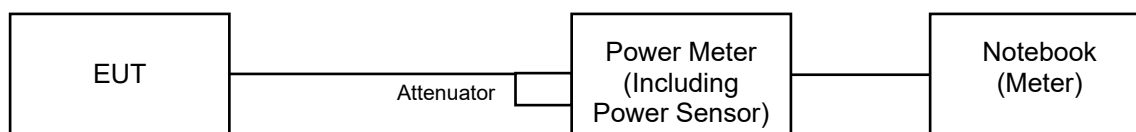

4.7.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.7.4 Test Procedure

For Peak Power

A peak power sensor was used on the output port of the EUT. A power meter was used to read the response of the peak power sensor. Record the power level.

For Average Power

Average power sensor was used to perform output power measurement, trigger and gating function of wide band power meter is enabled to measure max output power of TX on burst. Duty factor is not added to measured value.

4.7.5 Deviation from Test Standard

No deviation.

4.7.6 EUT Operating Condition

The software provided by client enabled the EUT to transmit and receive data at lowest, middle and highest channel frequencies individually.

4.7.7 Test Results

For Peak Power

Channel	Frequency (MHz)	Peak Power (mW)		Peak Power (dBm)		Power Limit (mW)	Pass / Fail
		GFSK	8DPSK	GFSK	8DPSK		
0	2402	3.954	4.325	5.97	6.36	125 / 1000 ^{Note}	Pass
39	2441	3.112	3.540	4.93	5.49	125 / 1000 ^{Note}	Pass
78	2480	4.477	3.622	6.51	5.59	125 / 1000 ^{Note}	Pass

Note: RF Output Power limit depends on the operating channel numbers, please refer to section 3.2 of the results.

For Average Power

Channel	Frequency (MHz)	Average Power (mW)		Average Power (dBm)	
		GFSK	8DPSK	GFSK	8DPSK
0	2402	3.890	3.963	5.90	5.98
39	2441	2.979	3.141	4.74	4.97
78	2480	4.355	3.126	6.39	4.95

4.8 Conducted Out of Band Emission Measurement

4.8.1 Limits Of Conducted Out Of Band Emission Measurement

Below 20dB of the highest emission level of operating band (in 100kHz RBW).

4.8.2 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.8.3 Test Procedure

The transmitter output was connected to the spectrum analyzer via a low lose cable. Set both RBW and VBW of spectrum analyzer to 100 kHz and 300 kHz with suitable frequency span including 100 MHz bandwidth from band edge. The band edges was measured and recorded.

4.8.4 Deviation from Test Standard

No deviation.

4.8.5 EUT Operating Condition


The software provided by client enabled the EUT to transmit and receive data at lowest, middle and highest channel frequencies individually.

4.8.6 Test Results


The spectrum plots are attached on the following images. D1 line indicates the highest level, D2 line indicates the 20dB offset below D1. It shows compliance with the requirement.

GFSK


Hopping disabled Low Channel

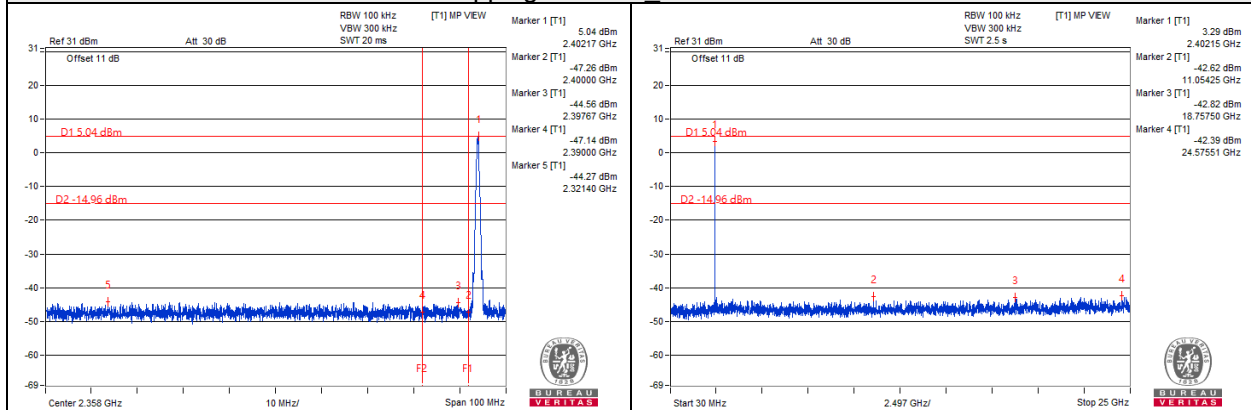


Hopping disabled High Channel

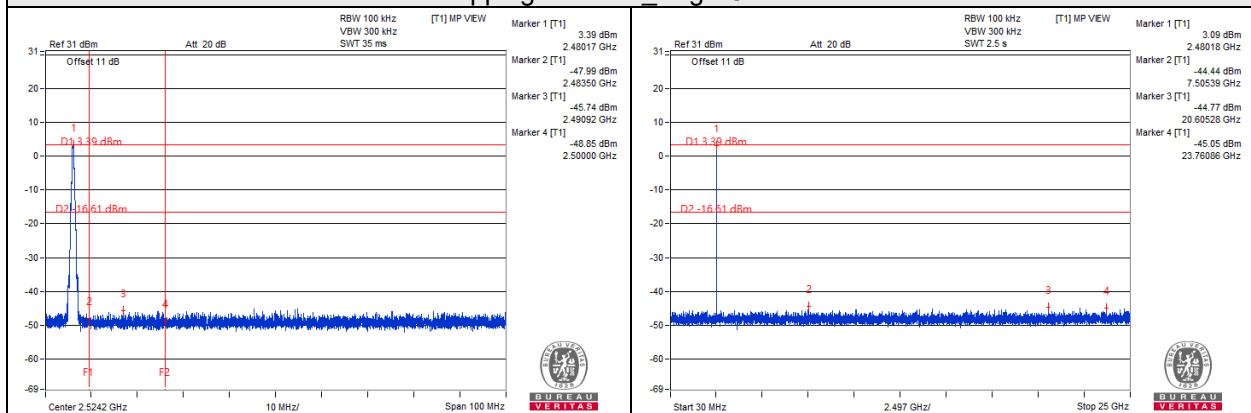

Hopping enabled Low Channel


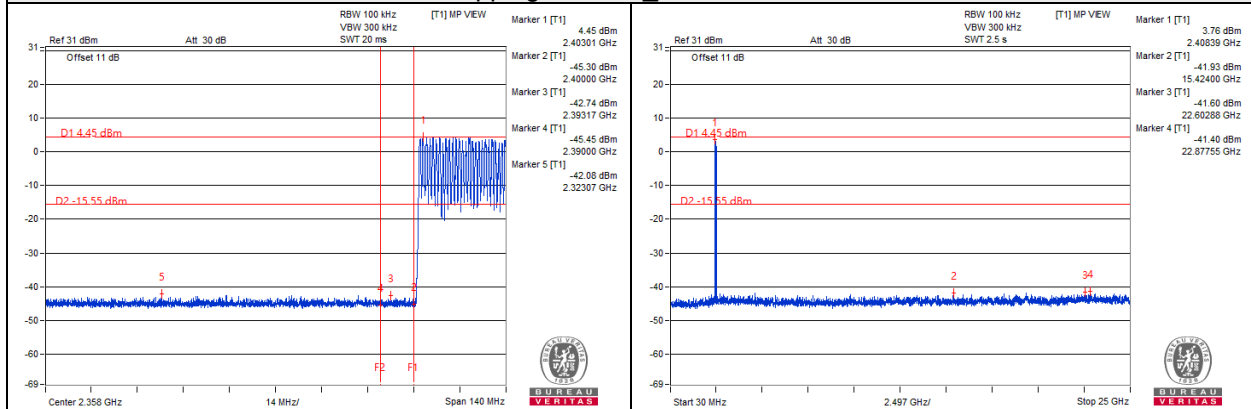


Hopping enabled High Channel


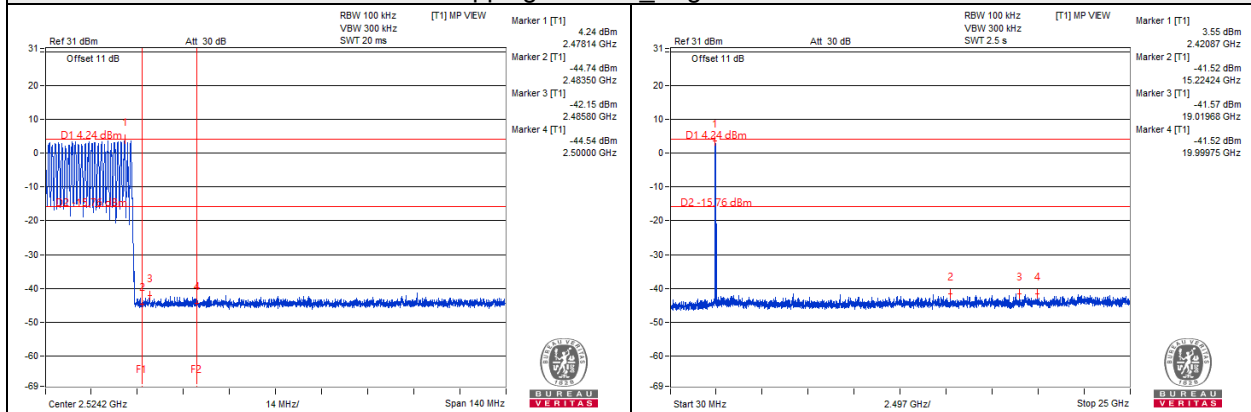


8DPSK



Hopping disabled Low Channel

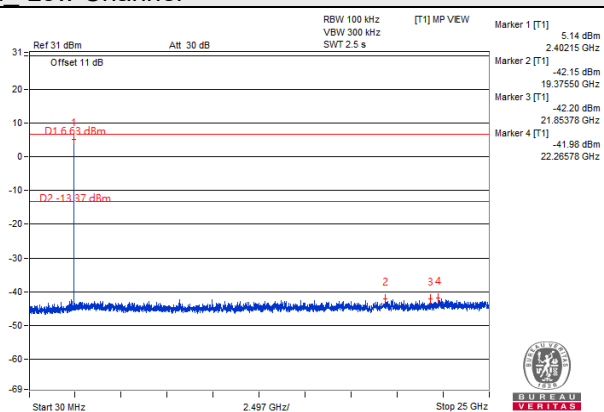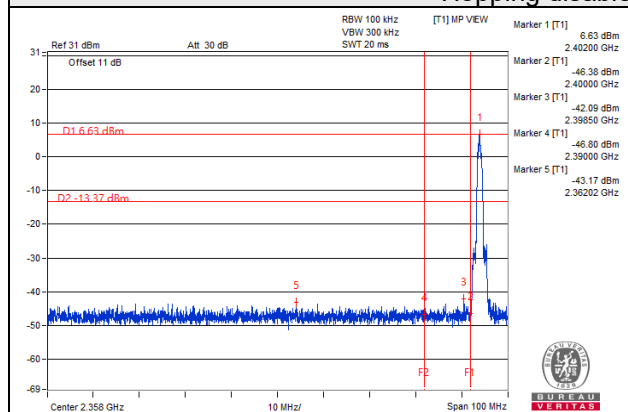



Hopping disabled High Channel

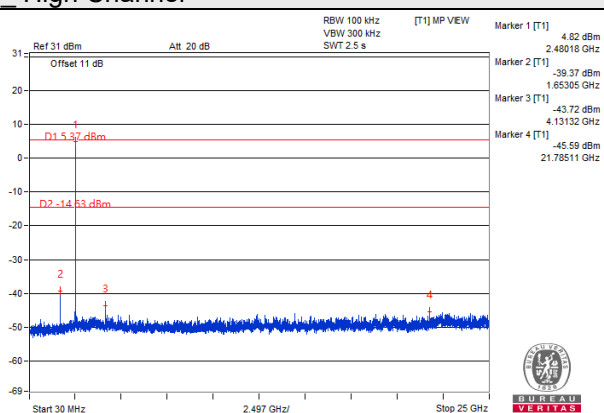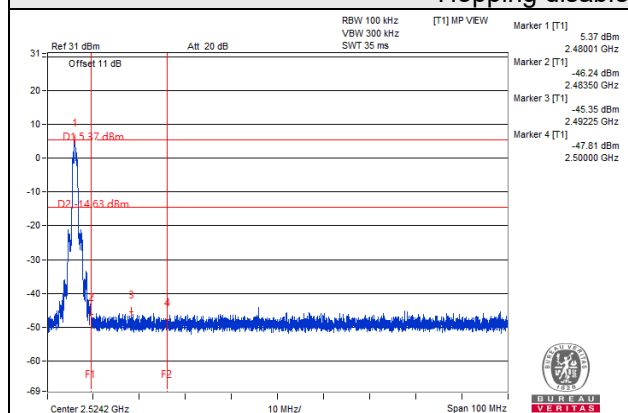


Hopping enabled Low Channel

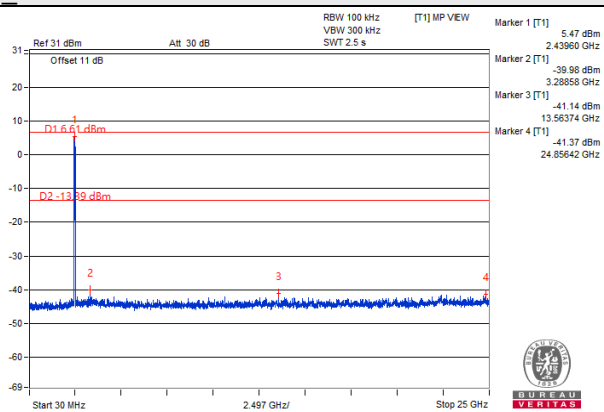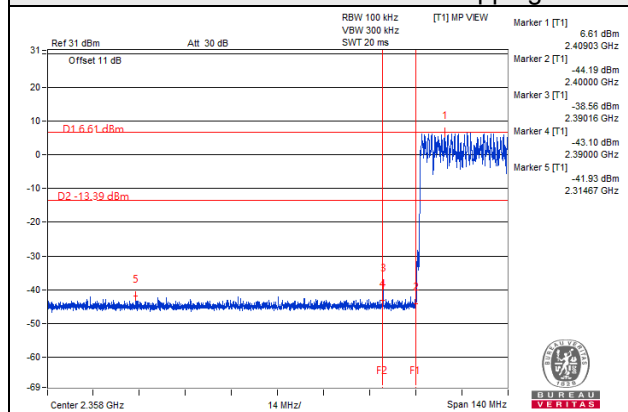

Hopping enabled High Channel

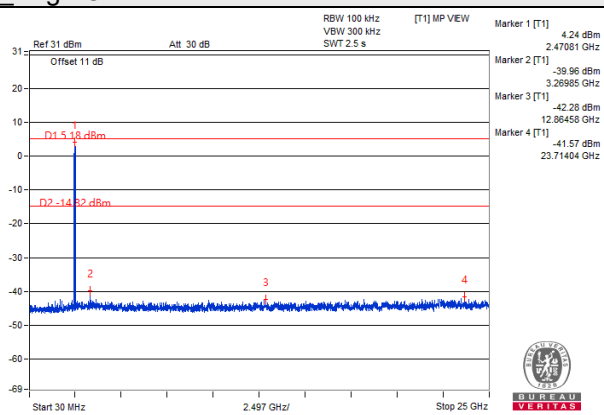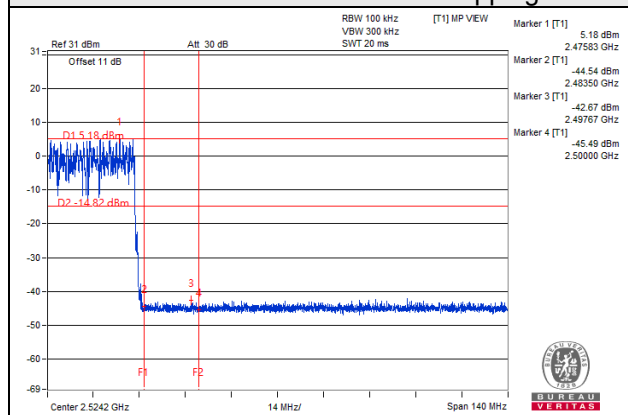

Annex A- Band Edge Measurement

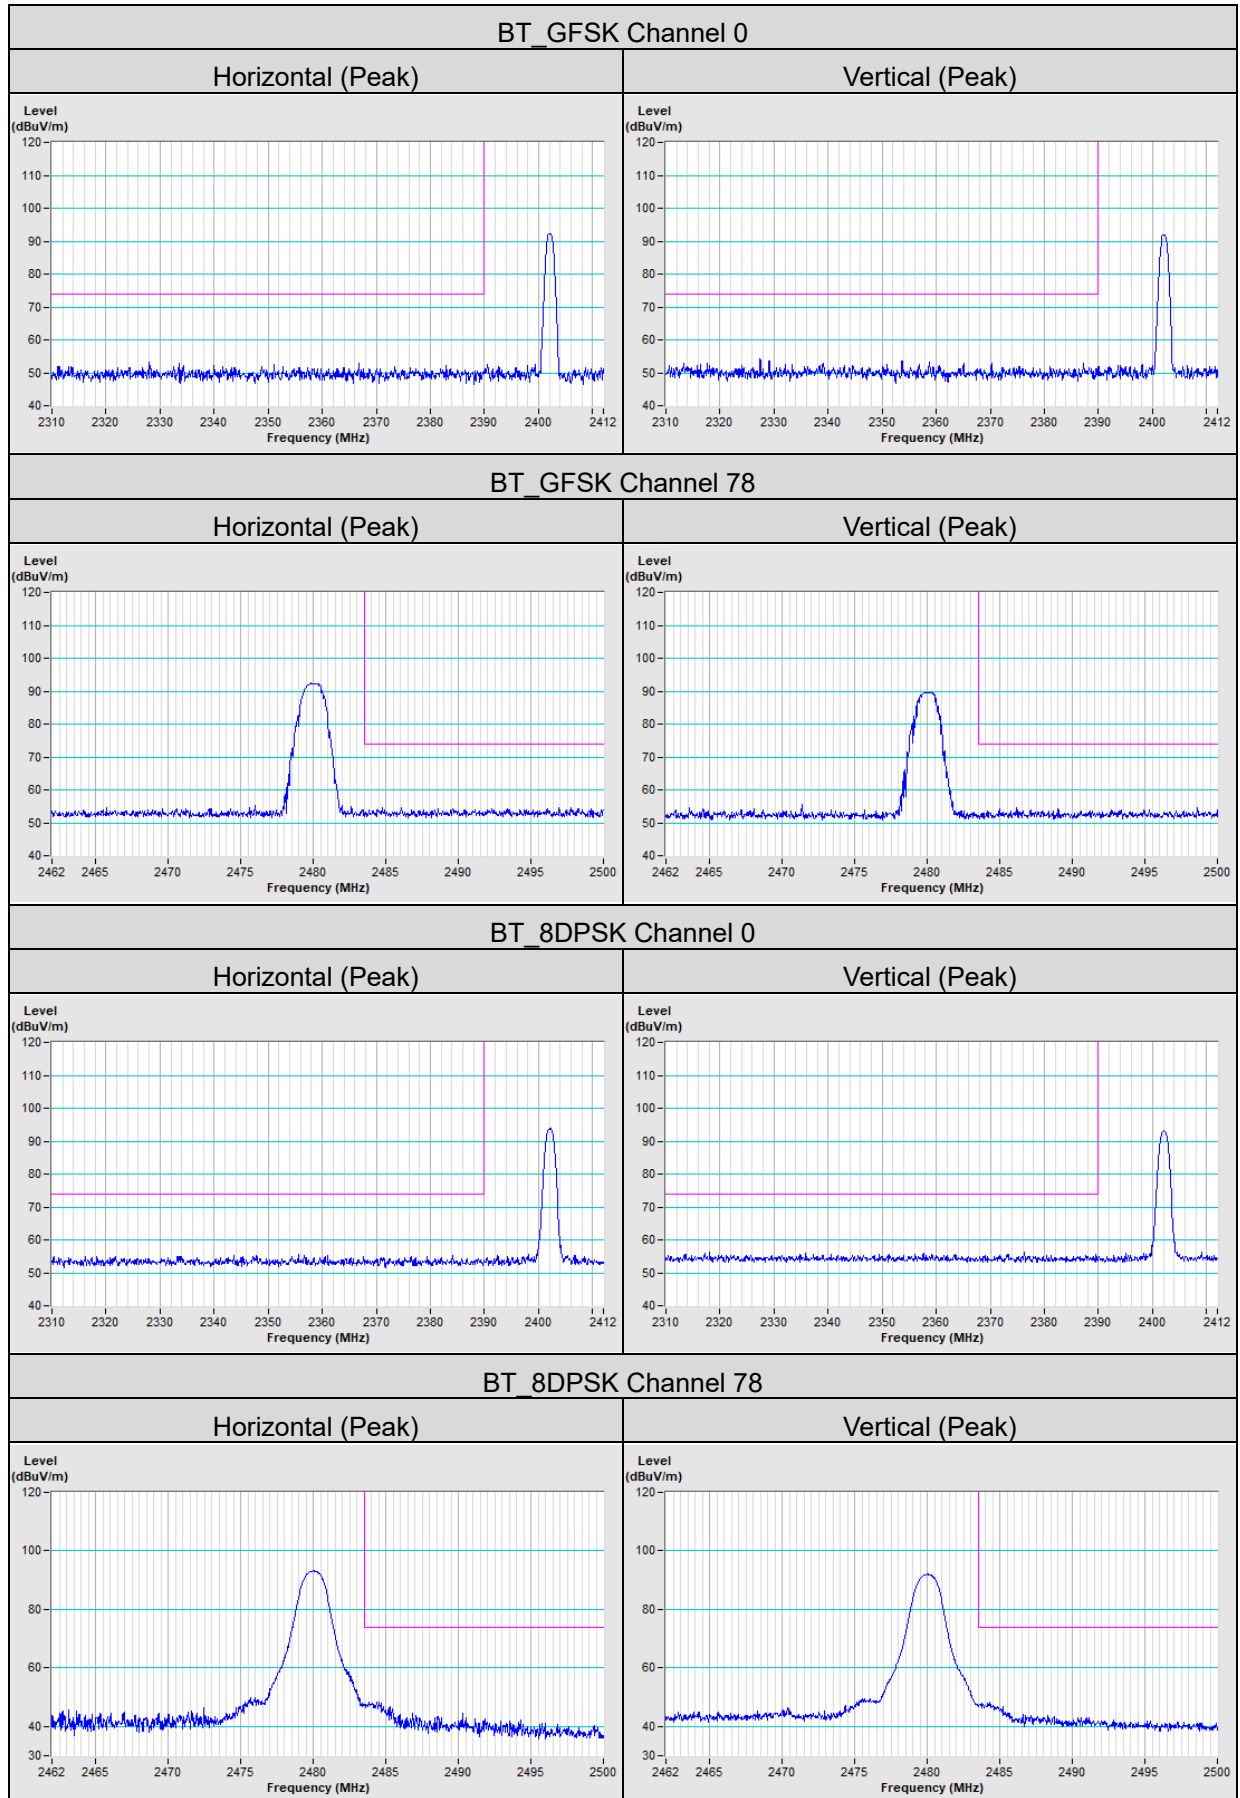

5 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo).

Appendix – Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Lin Kou EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com

Web Site: www.bureauveritas-adt.com

The address and road map of all our labs can be found in our web site also.

--- END ---